


# FCC Co-Location Test Report

**FCC ID** : 2AAS9-MO10  
**Equipment** : Wi-Fi 6 AX6600 Tri-Radio Outdoor Mesh Router  
**Model No.** : MO10  
**Brand Name** : PRISM  
**Applicant** : Browan Communications Incorporation  
**Address** : No.15-1, Zhonghua Rd., Hsinchu Industrial Park, Hukou Hsinchu Hsien Taiwan 303  
**Standard** : 47 CFR FCC Part 15.247  
47 CFR FCC Part 15.407  
**Received Date** : Oct. 12, 2021  
**Tested Date** : Nov. 03 ~ Nov. 23, 2021

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

  
\_\_\_\_\_  
Along Chen / Assistant Manager

Approved by:

  
\_\_\_\_\_  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	The Equipment List .....	6
1.3	Test Standards .....	7
1.4	Reference Guidance .....	7
1.5	Deviation from Test Standard and Measurement Procedure.....	7
1.6	Measurement Uncertainty .....	7
<b>2</b>	<b>TEST CONFIGURATION.....</b>	<b>8</b>
2.1	Testing Facility .....	8
2.2	The Worst Test Modes and Channel Details .....	8
<b>3</b>	<b>TRANSMITTER TEST RESULTS .....</b>	<b>9</b>
3.1	Unwanted Emissions into Restricted Frequency Bands .....	9
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>16</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR1O1201CO	Rev. 01	Initial issue	Dec. 16, 2021

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d) 15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 640.26MHz 42.72 (Margin -3.28dB) - QP	Pass

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

<b>Operating Frequency</b>	802.11b/g/n/ax: 2412 MHz ~ 2462 MHz 802.11a/n/ac/ax: 5180 MHz ~ 5240 MHz; 5745 ~ 5825 MHz
<b>Modulation Type</b>	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac/ax: OFDM/OFDMA (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

### 1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)		
				2400~2483.5 Radio 3	5150~5250 Radio 1 (L)	5725~5850 Radio 2 (H)
1	ANT3	Dipole	N type	5.6	4.3	--
2	ANT1	Dipole	N type	7.4	5.3	--
3	ANT6	Dipole	N type	--	--	4.9
4	ANT2	Dipole	N type	--	--	6.8
5	ANT5	Dipole	N type	--	--	4.8
6	ANT4	Dipole	N type	--	--	6.3

### 1.1.3 Radio Details

Radio	Function
1	5.15 GHz ~ 5.35 GHz, 2T2R
2	5.725 GHz ~ 5.85 GHz, 4T4R
3	2.4 GHz, 2T2R

### 1.1.4 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	56Vdc from POE I/P: 100-240V~ 1.5A, 50-60Hz O/P: 56V= 0.805A
--------------------------	--

Note: The above power supply is not bundled in market.

## 1.2 The Equipment List

Test Item	Radiated Emission Below 1GHz				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Nov. 23, 2021				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 12, 2021	Mar. 11, 2022
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 08, 2021	Nov. 07, 2022
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jun. 30, 2021	Jun. 29, 2022
Preamplifier	EMC	EMC02325	980225	Jun. 29, 2021	Jun. 28, 2022
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 05, 2021	Oct. 04, 2022
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 05, 2021	Oct. 04, 2022
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 05, 2021	Oct. 04, 2022
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 05, 2021	Oct. 04, 2022
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission Above 1GHz				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Nov. 03, 2021				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 04, 2020	Dec. 03, 2021
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 11, 2020	Dec. 10, 2021
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170508	Dec. 31, 2020	Dec. 30, 2021
Preamplifier	Agilent	83017A	MY39501308	Sep. 28, 2021	Sep. 27, 2022
Preamplifier	EMC	EMC184045B	980192	Jul. 14, 2021	Jul. 13, 2022
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 05, 2021	Oct. 04, 2022
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 05, 2021	Oct. 04, 2022
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Tested Date</b>	Nov. 15, 2021				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101498	Dec. 04, 2020	Dec. 03, 2021
Power Meter	Anritsu	ML2495A	1218007	Jan. 26, 2021	Jan. 25, 2022
Power Sensor	Anritsu	MA2411B	1207367	Jan. 26, 2021	Jan. 25, 2022
Measurement Software	Sporton	SENSE-15247_DTS	V5.10	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

### 1.3 Test Standards

47 CFR FCC Part 15.247  
47 CFR FCC Part 15.407  
ANSI C63.10-2013

### 1.4 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02  
FCC KDB 662911 D01 Multiple Transmitter Output v02r01  
FCC KDB 412172 D01 Determining ERP and EIRP v01r01  
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

### 1.5 Deviation from Test Standard and Measurement Procedure

None

### 1.6 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	Uncertainty
Radiated emission $\leq$ 1GHz	$\pm 3.41$ dB
Radiated emission $>$ 1GHz	$\pm 4.59$ dB

## 2 Test Configuration

### 2.1 Testing Facility

<b>Test Laboratory</b>	International Certification Corporation
<b>Test Site</b>	03CH01-WS, TH01-WS
<b>Address of Test Site</b>	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode
Radiated Emissions	2.4G 11g CH6(Radio 3) + 5G 11a CH36(Radio 1) + 5G 11a CH157(Radio 2)
Conducted Emissions	
<b>NOTE:</b> The selected channel is the maximum power channel of Wi-Fi mode.	



## 3 Transmitter Test Results

### 3.1 Unwanted Emissions into Restricted Frequency Bands

#### 3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
 Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
 Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

#### 3.1.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

**Note:**


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.1.3 Test Setup


#### Radiated Emissions below 1 GHz

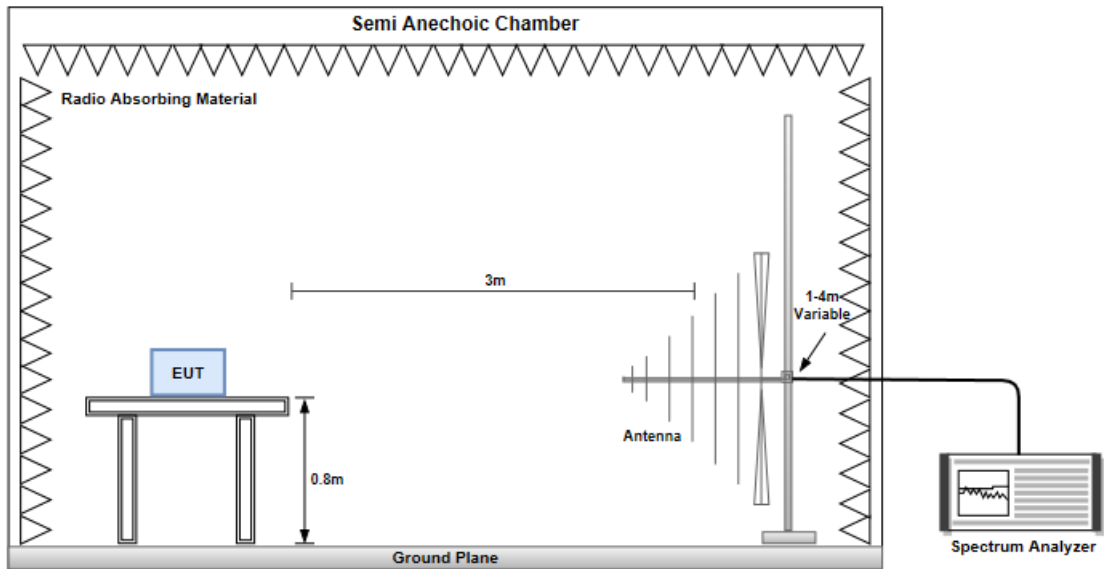


#### Radiated Emissions above 1 GHz

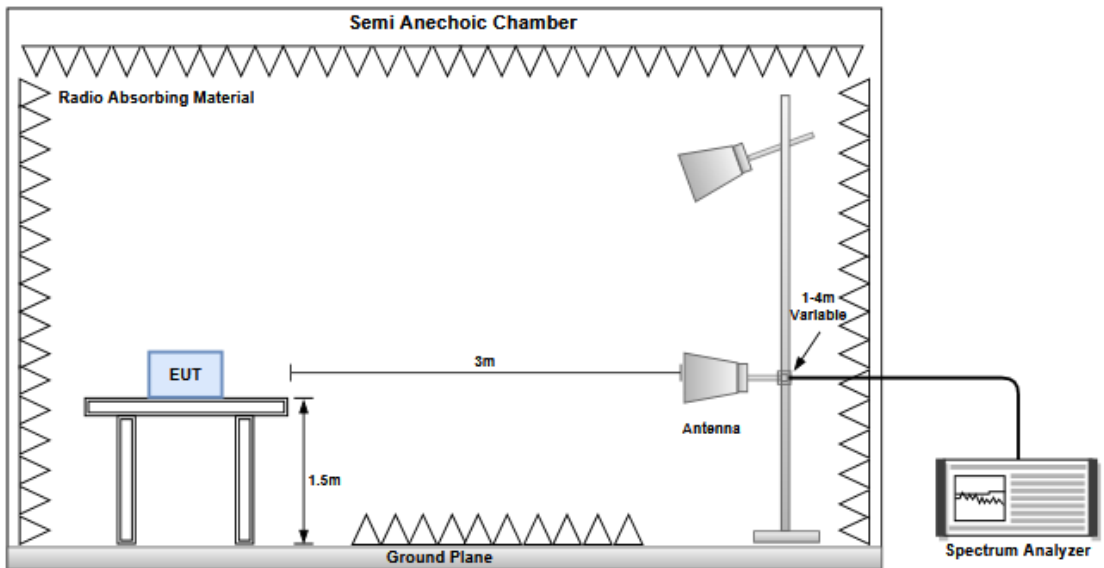

#### Transmitter Conducted Unwanted Emissions (30MHz~40GHz)

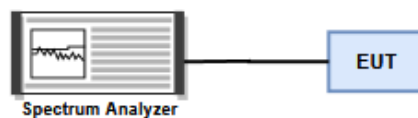


### 3.1.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)
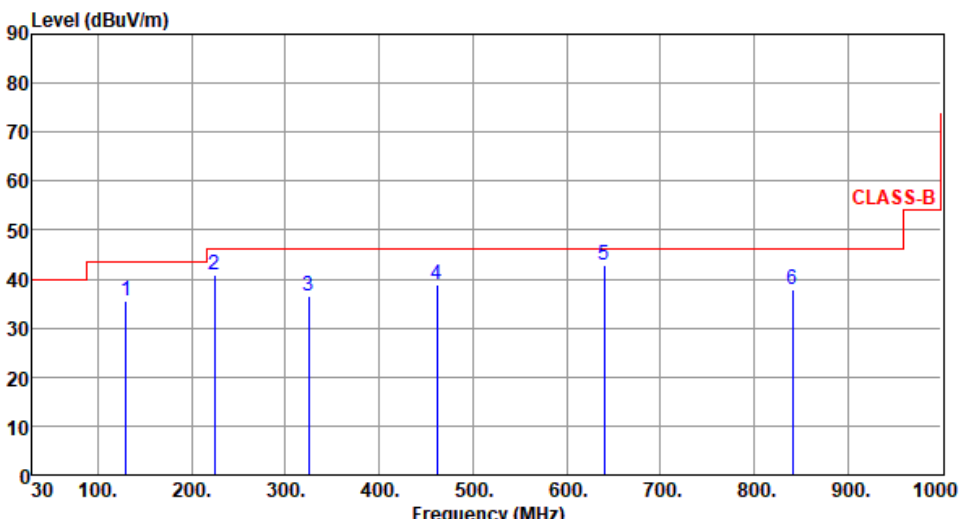
<b>Test Mode</b>	2.4G 11g CH6(Radio 3) + 5G 11a CH36(Radio 1) + 5G 11a CH157(Radio 2)									
<b>Polarization</b>	Horizontal									
Test By : Roger Lu			Temperature(°C): 23			Humidity(%): 65				
 <p>The graph plots Emission Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the CLASS-B limit, starting at 40 dBuV/m from 30 MHz to 100 MHz, rising to 45 dBuV/m at 100 MHz, 50 dBuV/m at 200 MHz, and 55 dBuV/m at 1000 MHz. Six blue vertical lines indicate measured peaks at frequencies 129.91, 224.00, 324.88, 461.65, 640.26, and 840.92 MHz, labeled 1 through 6 respectively.</p>										
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table	
		dBuV/m	dBuV/m		dBuV			cm	deg	
1	129.91	35.52	43.50	-7.98	45.30	-9.78	Peak	---	---	
2	224.00	40.80	46.00	-5.20	52.81	-12.01	Peak	---	---	
3	324.88	36.61	46.00	-9.39	44.07	-7.46	Peak	---	---	
4	461.65	38.79	46.00	-7.21	42.87	-4.08	Peak	---	---	
5	640.26	42.72	46.00	-3.28	43.14	-0.42	QP	165	115	
6	840.92	37.72	46.00	-8.28	35.21	2.51	Peak	---	---	

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Test Mode</b>	2.4G 11g CH6(Radio 3) + 5G 11a CH36(Radio 1) + 5G 11a CH157(Radio 2)
<b>Polarization</b>	Vertical

Test By :Roger Lu      Temperature(°C):23      Humidity(%):65

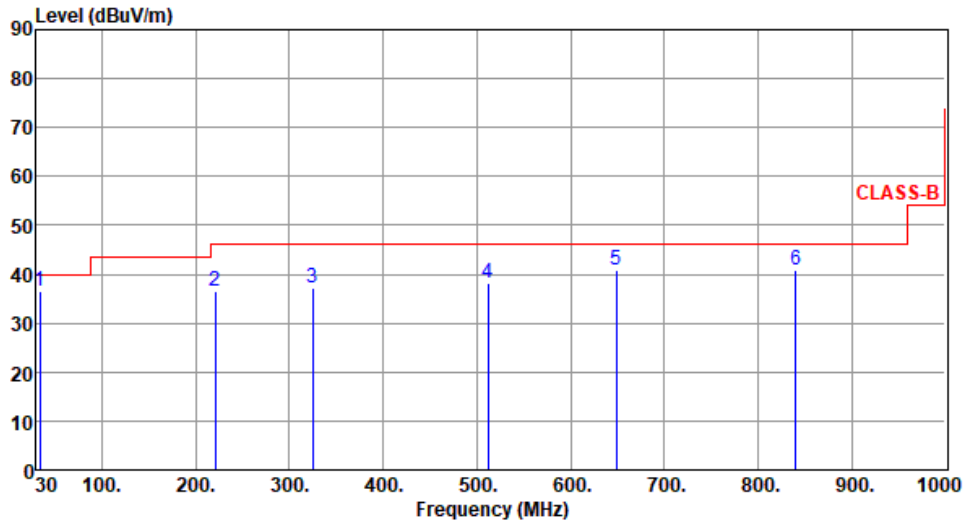

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	33.88	36.52	40.00	-3.48	46.02	-9.50	Peak	---	---
2	221.09	36.57	46.00	-9.43	48.53	-11.96	Peak	---	---
3	324.88	37.32	46.00	-8.68	44.78	-7.46	Peak	---	---
4	512.09	38.16	46.00	-7.84	41.18	-3.02	Peak	---	---
5	649.26	40.85	46.00	-5.15	41.26	-0.41	QP	100	256
6	839.95	40.80	46.00	-5.20	38.31	2.49	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.1.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)
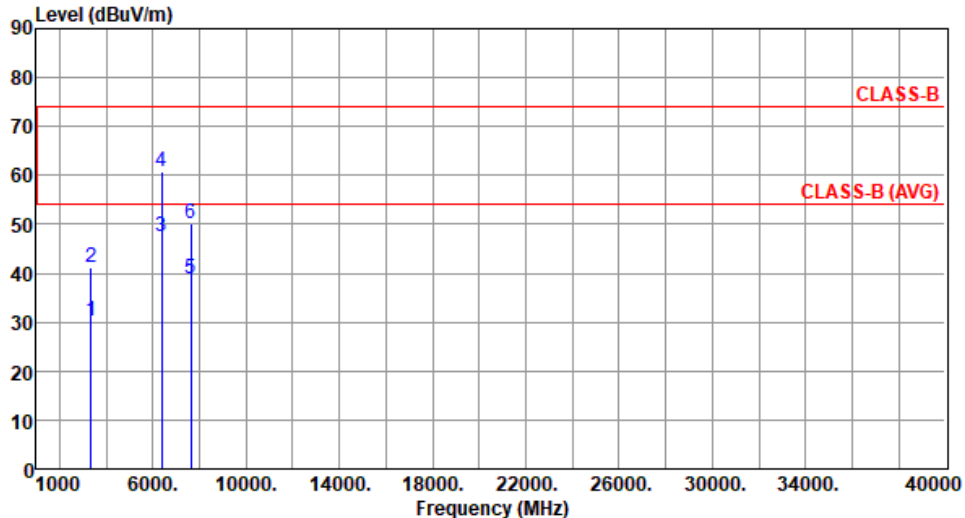
<b>Test Mode</b>	2.4G 11g CH6(Radio 3) + 5G 11a CH36(Radio 1) + 5G 11a CH157(Radio 2)									
<b>Polarization</b>	Horizontal									
Test By : Roger Lu			Temperature(°C): 25			Humidity(%): 63				
 <p>The graph displays the radiated unwanted emission levels in dBuV/m across a frequency range from 1000 MHz to 40000 MHz. Two horizontal red lines indicate the CLASS-B limit at approximately 75 dBuV/m and the CLASS-B (AVG) limit at approximately 55 dBuV/m. Six peaks are identified and labeled with numbers 1 through 6, corresponding to the data in the table below.</p>										
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table	
		dBuV/m			dBuV			cm	deg	
1	3348.00	30.27	54.00	-23.73	31.26	-0.99	Average	100	20	
2	3348.00	41.18	74.00	-32.82	42.17	-0.99	Peak	100	20	
3	6390.00	47.40	54.00	-6.60	41.02	6.38	Average	100	315	
4	6390.00	60.64	74.00	-13.36	54.26	6.38	Peak	100	315	
5	7617.00	39.00	54.00	-15.00	30.34	8.66	Average	100	40	
6	7617.00	50.21	74.00	-23.79	41.55	8.66	Peak	100	40	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)            *Factor includes antenna factor, cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>										

<b>Test Mode</b>	2.4G 11g CH6(Radio 3) + 5G 11a CH36(Radio 1) + 5G 11a CH157(Radio 2)
<b>Polarization</b>	Vertical

Test By :Roger Lu      Temperature(°C):25      Humidity(%):63

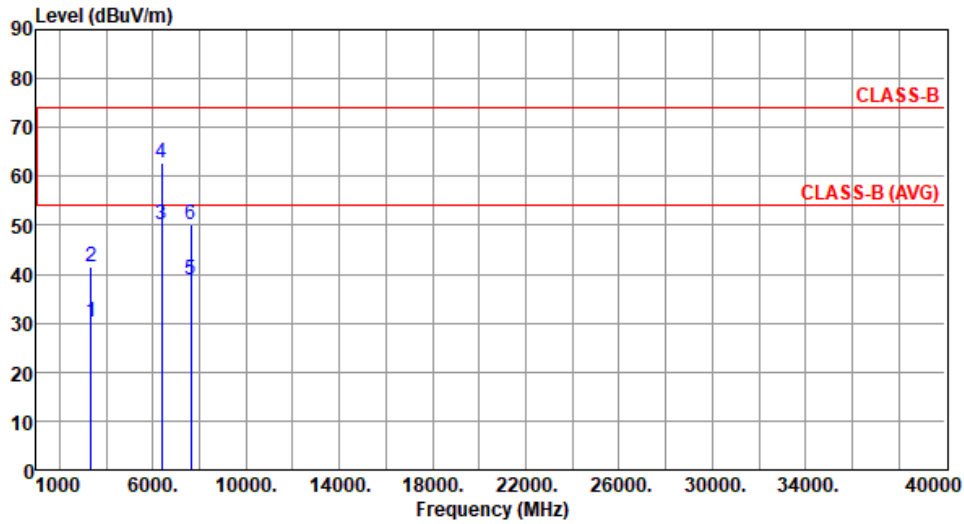

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	3348.00	30.38	54.00	-23.62	31.37	-0.99	Average	100	50
2	3348.00	41.48	74.00	-32.52	42.47	-0.99	Peak	100	50
3	6390.00	50.14	54.00	-3.86	43.76	6.38	Average	247	188
4	6390.00	62.72	74.00	-11.28	56.34	6.38	Peak	247	188
5	7617.00	38.81	54.00	-15.19	30.15	8.66	Average	100	80
6	7617.00	50.12	74.00	-23.88	41.46	8.66	Peak	100	80



Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.1.6 Conducted Emissions (30MHz~40GHz)

Ambient Condition	23°C / 63%	Tested By	Aska Huang
-------------------	------------	-----------	------------

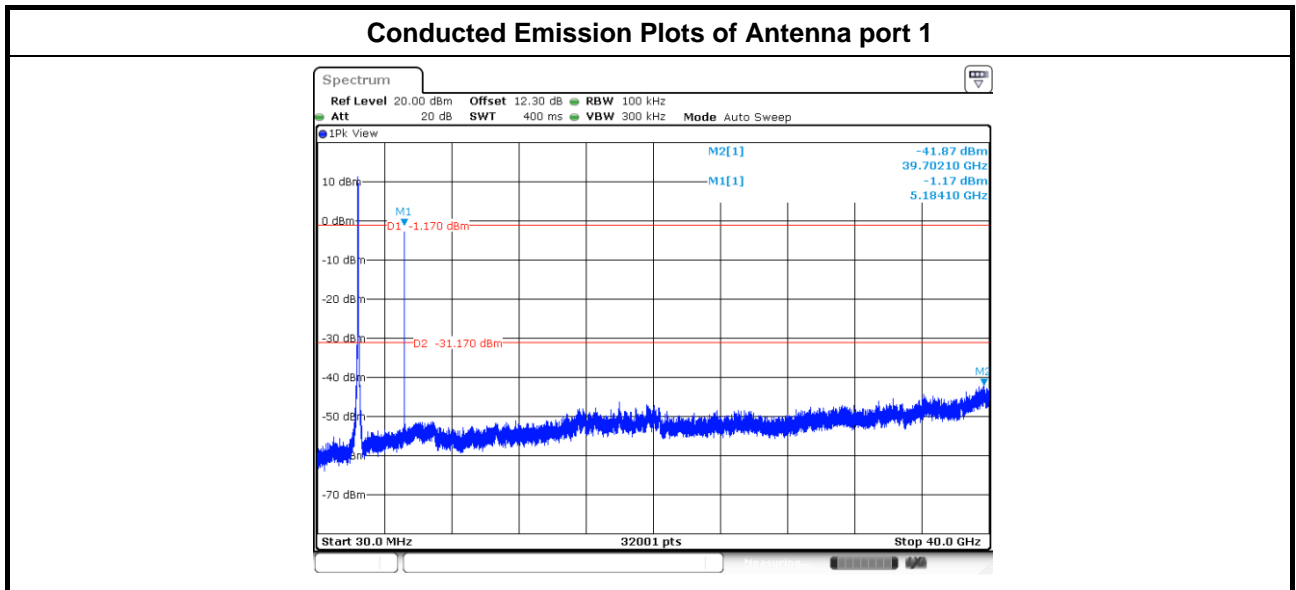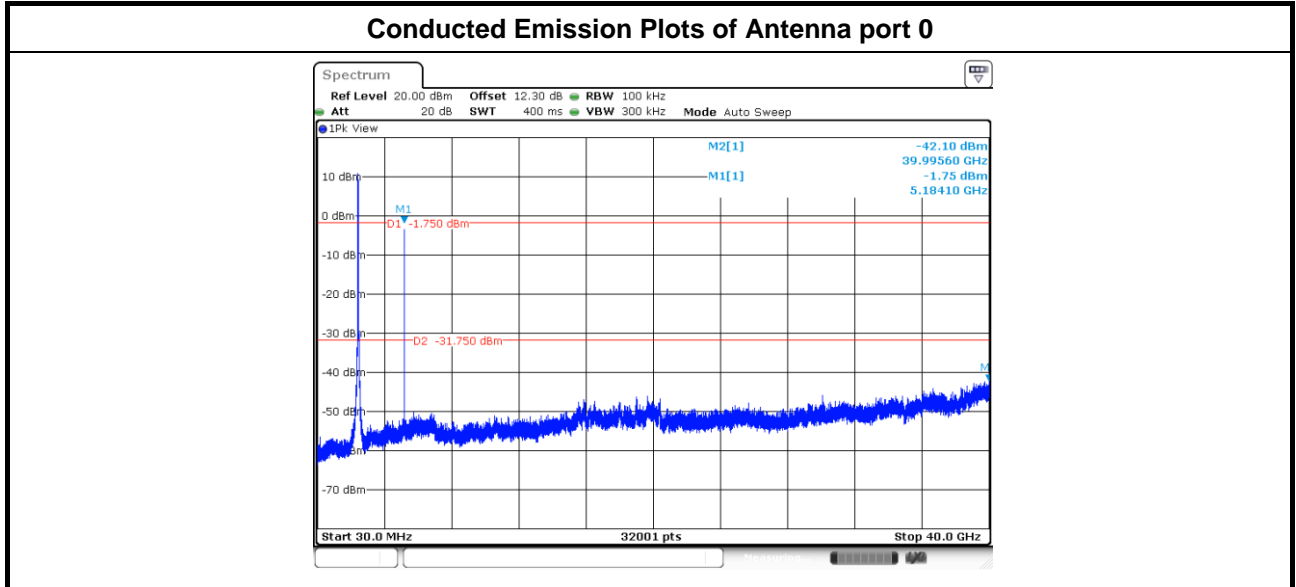

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan  
(R.O.C.)

### **Kwei Shan**

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)  
No.2-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC\_Service@icertifi.com.tw

==END==