



FCC RADIO TEST REPORT

Applicant : BROWAN Communications Inc.
Address : No.15-1, Zhonghua Rd., Hsinchu Industrial Park,
Hukou, Hsinchu, Taiwan, 30352.
Equipment : LoRa Module
Model No. : WMDS-183G2
Trade Name : BROWAN
FCC ID. : 2AAS9-WMDS183G2

I HEREBY CERTIFY THAT :

The sample was received on May. 30, 2022 and the testing was completed on Jul. 20, 2022 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Vic Hsiao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





CONTENTS

1. Summary of Test Procedure and Test Results	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment under Test	6
2.2 Carrier Frequency of Channes	7
2.3 Test Mode & Test Software	8
2.4 Description of Test System	9
2.5 General Information of Test	10
2.6 Measurement Uncertainty	11
3. Test Equipment and Ancillaries Used for Tests	12
4. Antenna Requirements	14
4.1 Standard Applicable	14
4.2 Antenna Construction and Directional Gain	14
5. Test of AC Power Line Conducted Emission	15
5.1 Test Limit	15
5.2 Test Procedures	15
5.3 Typical Test Setup	16
5.4 Test Result and Data	17
5.5 Test Photographs	19
6. Test of Radiated Spurious Emission	20
6.1 Test Limit	20
6.2 Test Procedures	20
6.3 Typical Test Setup	21
6.4 Test Result and Data (9kHz ~ 30MHz)	22
6.5 Test Result and Data (30MHz ~ 1GHz)	22
6.6 Test Result and Data (1GHz ~ 25GHz)	26
6.7 Test Photographs (30MHz ~ 1GHz)	31
6.8 Test Photographs (1GHz ~ 25GHz)	32
7. Test of Conducted Spurious Emission	34
7.1 Test Limit	34
7.2 Test Procedure	34
7.3 Test Setup Layout	34
7.4 Test Result and Data	34
8. On Time, Duty Cycle and Measurement methods	36
8.1 Test Limit	36
8.2 Test Procedure	36
8.3 Test Setup Layout	36
8.4 Test Result and Data	36
9. 6dB Bandwidth Measurement Data	38
9.1 Test Limit	38
9.2 Test Procedures	38
9.3 Test Setup Layout	38



9.4 Test Result and Data.....38

10. Maximum Peak Output Power40

10.1 Test Limit40

10.2 Test Procedures40

10.3 Test Setup Layout40

10.4 Test Result and Data.....40

11. Power Spectral Density41

11.1 Test Limit41

11.2 Test Procedures41

11.3 Test Setup Layout41

11.4 Test Result and Data.....41

12. Radio Frequency Exposure43

12.1 Applicable Standards43

12.2 EUT Specification.....44

12.3 Results44



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(1)	. Channel Carrier Frequencies Separation	PASS
15.247(a)(1)	. 20dB Bandwidth	PASS
15.247(a)(2)	. 6dB Bandwidth	PASS
15.247(a)(1)	. Dwell Time	PASS
15.247(b)	. Number of Hopping Channels	PASS
15.247(e)	. Power Spectral Density	PASS
15.247(b)	. Peak Output Power Measurement Data	PASS
2.1091	. Radio Frequency Exposure	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Operation Frequency Range	902-928MHz
Center Frequency Range	Lora 500K: 923.3~ 927.5 MHz
Modulation Type	Hybrid
Modulation Technology	DTS
Data Rate	500kbps
Antenna Type	Dipole Antenna
Max Antenna Gain	8 dBi
Cable (ipex cable)	Brand: Tengxiang Model: SMAFN8-3B0150-00X-P
Cable (N-Type to ipex)	Brand: TSKY Model: A8-A004-00189
Cable (N-Type to SMA)	Brand: KWANG HWA ELECT MATERIAL CO., LTD. Model: SL-NM-SMF-1M
Antenna 1	Brand: GSC Model: OMA-G01 Antenna Gain:8 dBi
Antenna 2	Brand: GSC Model: OMA-G03A Antenna Gain:5 dBi
Antenna 3	Brand: GSC Model: OMA-G04A Antenna Gain:3 dBi
Antenna 4	Brand: ASUS Model: A8-A003-00108 Antenna Gain:1.2 dBi
Antenna 5	Brand: Tengxiang Model: AB0915-4602RS-1P5M Antenna Gain: 0.61 dBi

Note: For more details, please refer to the User’s manual of the EUT.



2.2 Carrier Frequency of Channes

Lora 500K

Channel	Frequency (MHz)
*0	923.3
1	923.9
2	924.5
3	925.1
4	925.7
5	926.3
6	926.9
*7	927.5

Note: Channels remarked * are selected to perform test.



2.3 Test Mode & Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10
- b. The complete test system included Notebook and EUT for RF test.
- c. An executive program, "command" under Windows OS system was executed to transmit and receive data via Lora 500K.
- d. The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	Lora 500K From Adapter
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (30MHz ~ 1GHz)	
Test Mode	Operating Description
1	Lora 500K From Adapter
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	Lora 500K From Adapter
caused "Test Mode 1" generated the worst case, they were reported as the final data.	

Note:

- 1. There are two kinds of test voltage: AC 120V / 60Hz and AC 240V / 60Hz.
 For AC Power Line Conducted Emission, AC 120V / 60Hz is worst case.
 For Radiated Spurious Emission(30MHz ~ 1GHz & 1GHz ~ 25GHz), AC 120V / 60Hz is worst case.



2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	lenovo	S1GL2W	N/A	N/A
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
adapter	Frecom	F18L16-120150SPAU	1m/NS	N/A
Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
adapter	Frecom	F18L16-120150SPAU	1m/NS	N/A
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
adapter	Frecom	F18L16-120150SPAU	1m/NS	N/A



2.5 General Information of Test

Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 40,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

Lora 500K

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2022/6/8~2022/07/19	24.4~29.3°C / 44~57%	Dian Chen
Radiated Emissions	3M03-NK	2022/07/19~2022/07/20	22~25°C / 42~44%	Dian Chen
AC Power Line Conducted Emission	CON01-NK	2022/07/20	26°C / 60%	Dian Chen



2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.12dB
Radiated Spurious Emission(9KHz~30MHz)	±3.4dB
Radiated Spurious Emission(30MHz~1GHz)	±5.7dB
Radiated Spurious Emission(1GHz~25GHz)	±6.8dB
Conducted Spurious Emission	±1.8dB
6dB Bandwidth	±4.4%
20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.4%
Peak Output Power(Conducted Power Meter)	±1.1dB
Dwell Time / Deactivation Time	±1.2%
Power Spectral Density	±1.8dB
Duty Cycle	±1.2%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M03-NK)				
Bilog Antenna	Sunol	JB1	A020514-2	2022/6/2	2023/6/1
Active Loop Antenna	EMCO	6507	40855	2022/5/25	2023/5/24
Double Ridged Guide Horn Antenna	RF SPAN	DRH18-E	210309A18-ES	2021/11/9	2022/11/8
Horn Antenna	EMCO	3116	31974	2021/10/4	2022/10/3
EMI Receiver	ROHDE & SCHWARZ	ESCI	100821	2021/9/17	2022/9/16
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100219	2021/8/6	2022/8/5
Preamplifier	EM Electronics corp.	EM01G18G	60701	2022/5/12	2023/5/11
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2021/11/16	2022/11/15
Preamplifier	EM Electronics corp.	EM01M06G	60686	2021/10/28	2022/10/27
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130606	2022/3/21	2023/3/20
Cable-10m(30M-1G)	HUBER SUHNER	RG-214	01126M	2022/4/22	2023/4/21
Cable-4m(30M-1G)	HUBER SUHNER	RG-214	02953M	2022/4/22	2023/4/21
Cable-1m(30M-1G)	HUBER SUHNER	RG-214	01099M	2022/4/22	2023/4/21
Cable-6m(1G-26.5G)	HUBER SUHNER	SUCOFLEX 102	28417/2	2022/3/17	2023/3/16
Cable-0.5m(1G-18G)	EMEC	EM104-SMSM-0.5M	CCE1354	2022/5/26	2023/5/25
Cable-3m(1G-18G)	EMEC	EM104-SMSM-3M	CCE1355	2022/5/26	2023/5/25
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 102	MY4569/2	2021/9/3	2022/9/2
Cable-1m(1G-40G)	HUBER SUHNER	SUCOFLEX 102	MY5739/2	2021/9/3	2022/9/2
Cable-6m(1G-40G)	HUBER SUHNER	SUCOFLEX 102	MY5740/2	2021/9/3	2022/9/2
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100047	2022/03/04	2023/03/03
Attenuator	KEYSIGHT	8491B	MY39250703	2022/04/12	2023/04/11
Cable-0.5m(1G-26.5G)	HUBER SUHNER	SUCOFLEX 102	28422/2	2022/04/09	2023/04/08
Power Meter	Anritsu	ML2495A	1224005	2022/04/12	2023/04/11
Power Sensor	Anritsu	MA2411B	1207295	2022/04/12	2023/04/11
Switch Box	Theda	1-4	TW5451159	NA	NA



Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	101200	2021/08/30	2022/08/29
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-516	2021/10/05	2022/10/04
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101933	2021/09/15	2022/09/14
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2021/09/22	2022/09/21
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type		Antenna Gain
Antenna A	Dipole Antenna	8 dBi

Directional gain greater than 6dBi are used, the power limit shall be reduced by 2 dB.



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



5.3 Typical Test Setup

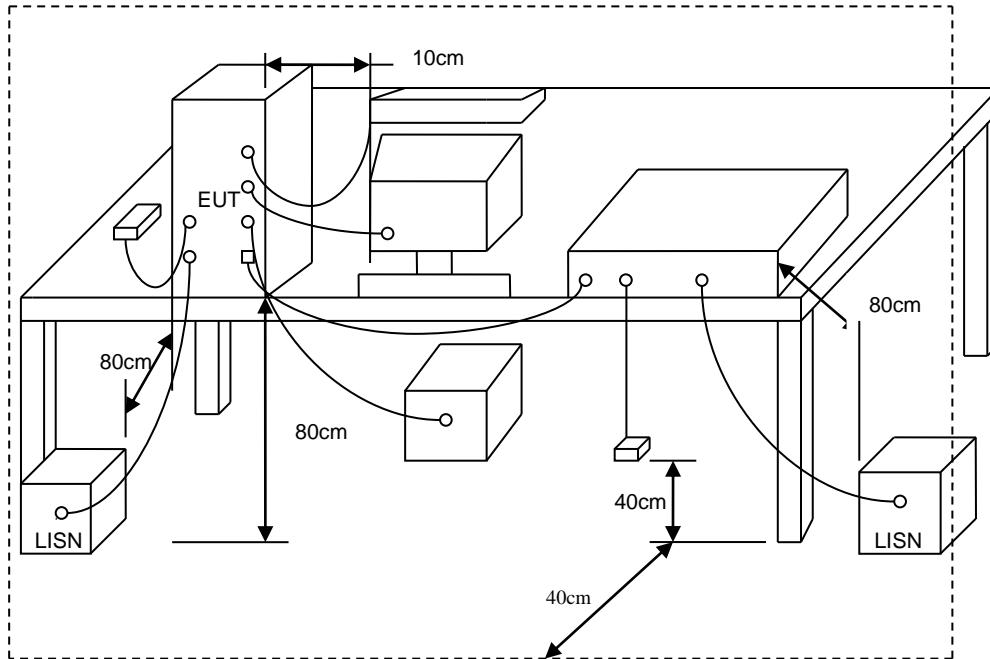




5.4 Test Result and Data

Lora 500K

Power	: AC 120V / 60Hz	Pol/Phase	: LINE
Test Mode	: Mode 1		:

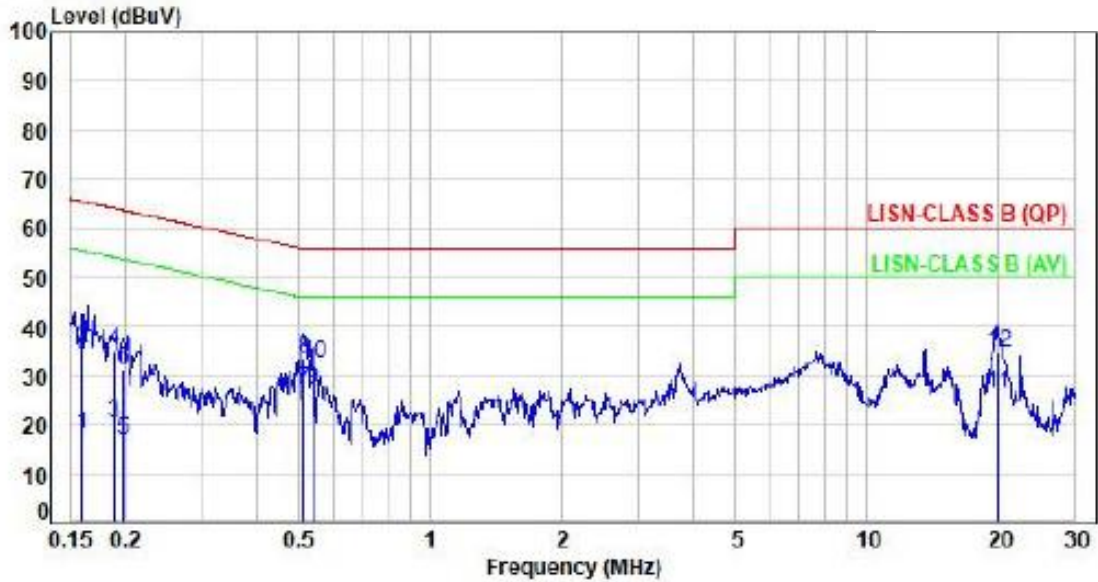


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.16	9.96	7.77	17.73	55.46	-37.73	Average	P
2	0.16	9.96	25.42	35.38	65.46	-30.08	QP	P
3	0.19	9.95	10.22	20.17	54.13	-33.96	Average	P
4	0.19	9.95	25.11	35.06	64.13	-29.07	QP	P
5	0.20	9.95	6.66	16.61	53.74	-37.13	Average	P
6	0.20	9.95	21.24	31.19	63.74	-32.55	QP	P
7	0.51	9.97	16.96	26.93	46.00	-19.07	Average	P
8	0.51	9.97	23.41	33.38	56.00	-22.62	QP	P
9	0.54	9.97	17.15	27.12	46.00	-18.88	Average	P
10	0.54	9.97	22.34	32.31	56.00	-23.69	QP	P
11	19.97	10.71	15.57	26.28	50.00	-23.72	Average	P
12	19.97	10.71	23.85	34.56	60.00	-25.44	QP	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Lora 500K

Power	: AC 120V / 60Hz	Pol/Phase	: NEUTRAL
Test Mode	: Mode 1		

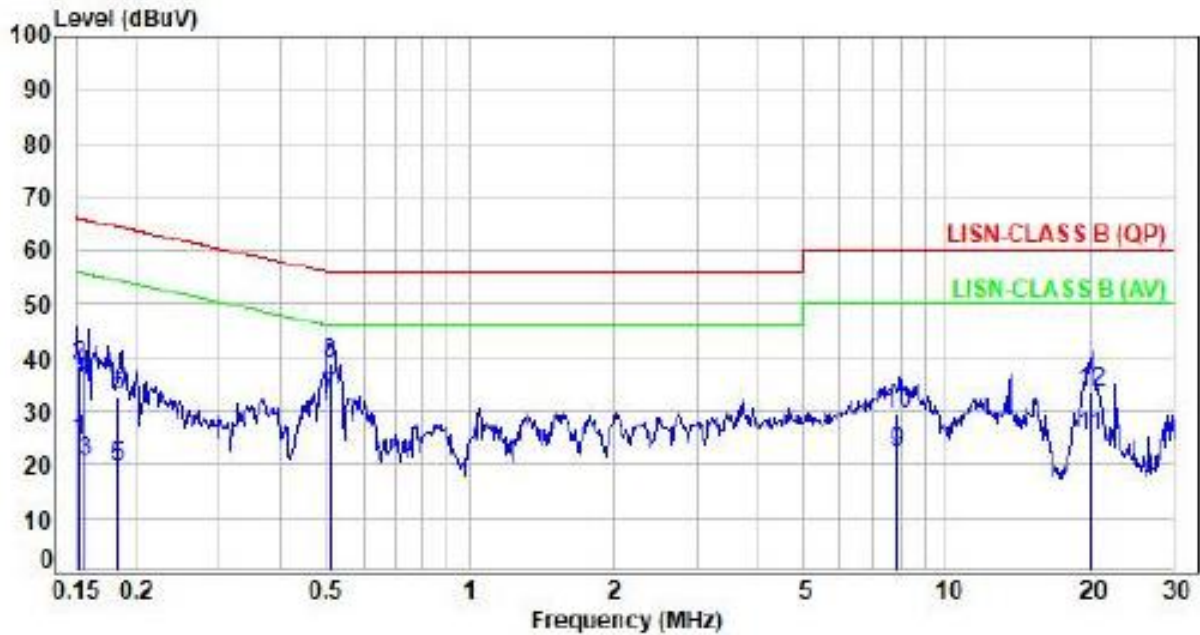

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.94	14.28	24.22	55.93	-31.71	Average	P
2	0.15	9.94	28.55	38.49	65.93	-27.44	QP	P
3	0.16	9.94	10.59	20.53	55.63	-35.10	Average	P
4	0.16	9.94	25.96	35.90	65.63	-29.73	QP	P
5	0.18	9.93	9.55	19.48	54.36	-34.88	Average	P
6	0.18	9.93	22.86	32.79	64.36	-31.57	QP	P
7	0.51	9.94	22.87	32.81	46.00	-13.19	Average	P
8	0.51	9.94	28.87	38.81	56.00	-17.19	QP	P
9	7.90	10.28	11.59	21.87	50.00	-28.13	Average	P
10	7.90	10.28	18.81	29.09	60.00	-30.91	QP	P
11	19.96	10.60	14.64	25.24	50.00	-24.76	Average	P
12	19.96	10.60	22.70	33.30	60.00	-26.70	QP	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Radiated Spurious Emission

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

6.2 Test Procedures


- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Note: The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
(Z-AXIS is the worst.)




6.3 Typical Test Setup


Below 30MHz test setup

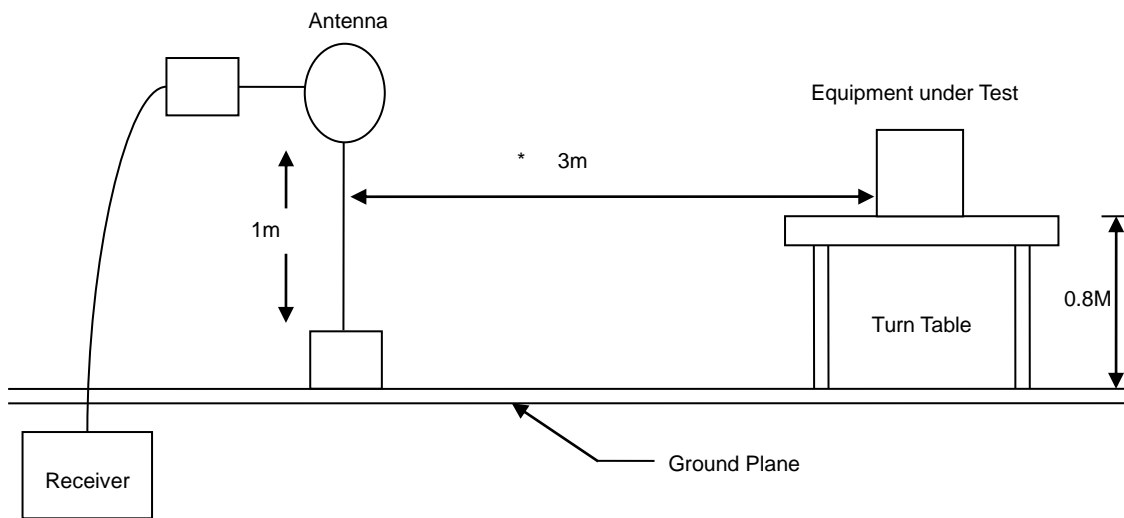

30MHz- 1GHz Test Setup

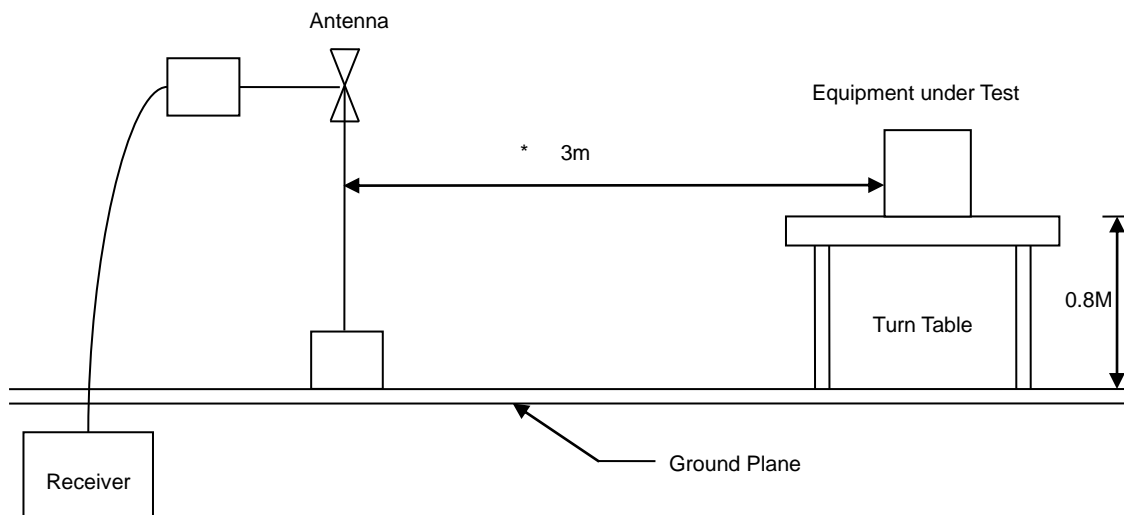

Above 1GHz Test Setup

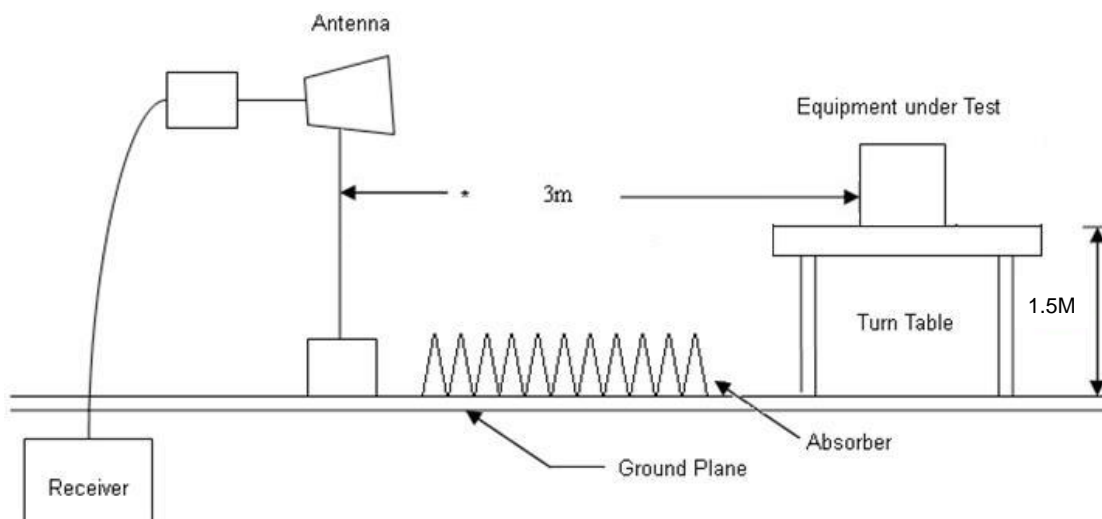




6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz-30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Lora 500K

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH00 923.3 (MHz)		

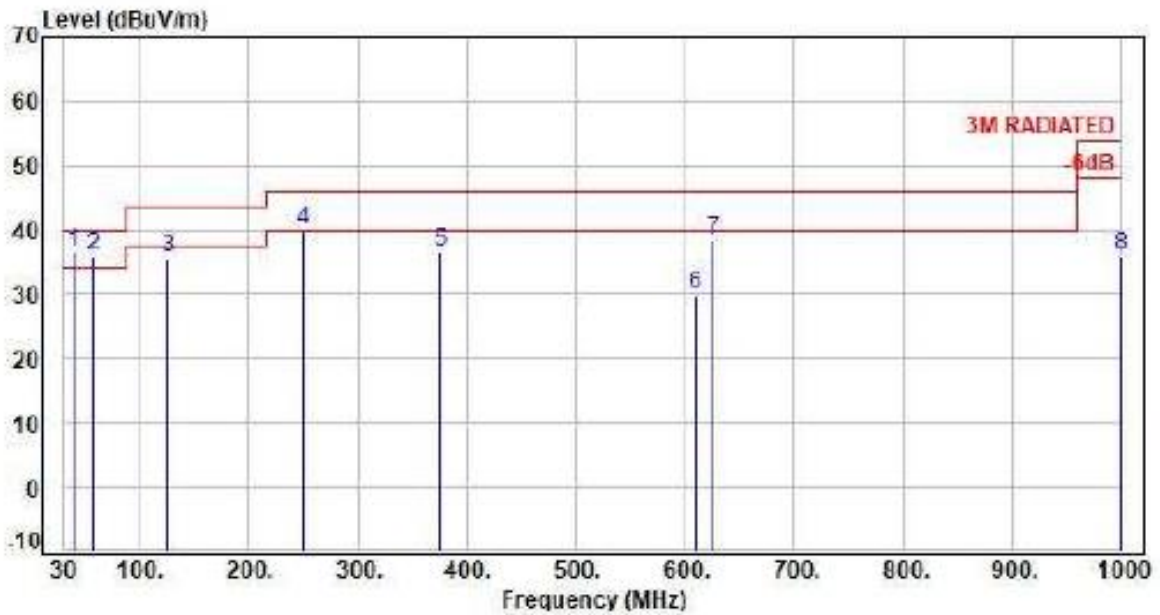

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	39.78	21.44	15.03	36.47	40.00	-3.53	QP	100	251	P
2	57.16	14.60	21.30	35.90	40.00	-4.10	Peak	400	360	P
3	125.06	21.45	14.19	35.64	43.50	-7.86	Peak	400	360	P
4	249.22	20.01	19.93	39.94	46.00	-6.06	Peak	400	360	P
5	375.32	23.98	12.42	36.40	46.00	-9.60	Peak	400	360	P
6	610.06	28.42	1.28	29.70	46.00	-16.30	Peak	400	360	P
7	625.58	28.97	9.38	38.35	46.00	-7.65	Peak	400	360	P
8	1000.00	34.58	1.26	35.84	54.00	-18.16	Peak	400	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Lora 500K

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH00 923.3 (MHz)		

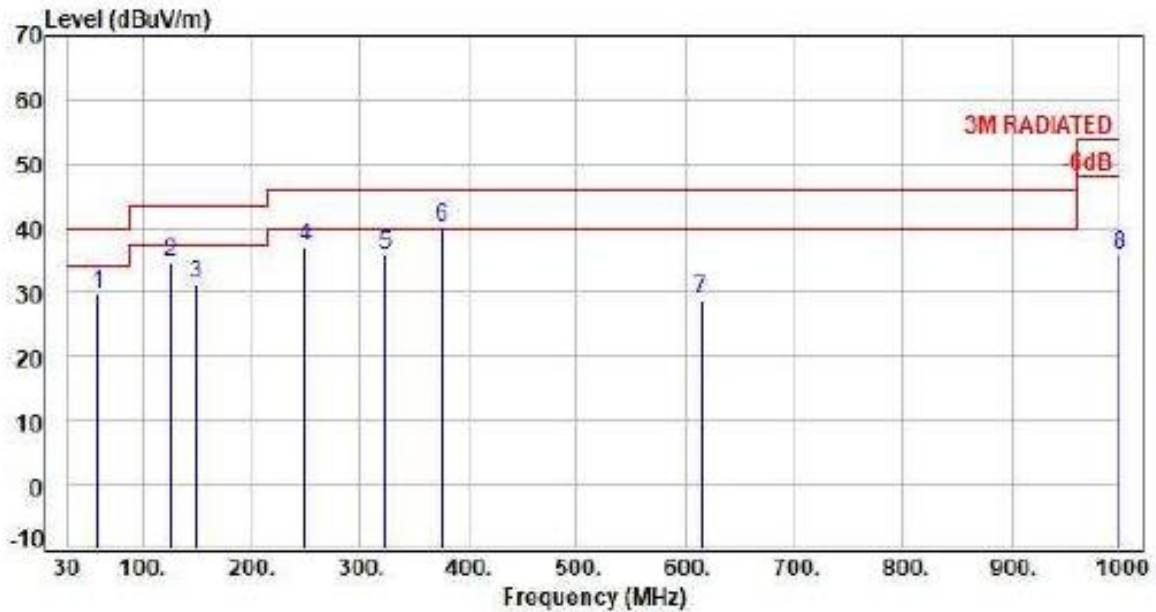


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	59.10	14.83	15.14	29.97	40.00	-10.03	Peak	400	0	P
2	125.06	21.45	13.14	34.59	43.50	-8.91	Peak	400	0	P
3	148.34	20.36	11.06	31.42	43.50	-12.08	Peak	400	0	P
4	249.22	20.01	17.26	37.27	46.00	-8.73	Peak	400	0	P
5	322.94	22.65	13.25	35.90	46.00	-10.10	Peak	400	0	P
6	375.32	23.98	16.33	40.31	46.00	-5.69	Peak	400	0	P
7	613.94	28.59	0.20	28.79	46.00	-17.21	Peak	400	0	P
8	1000.00	34.58	1.50	36.08	54.00	-17.92	Peak	400	0	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Lora 500K

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH07 927.5 (MHz)		:

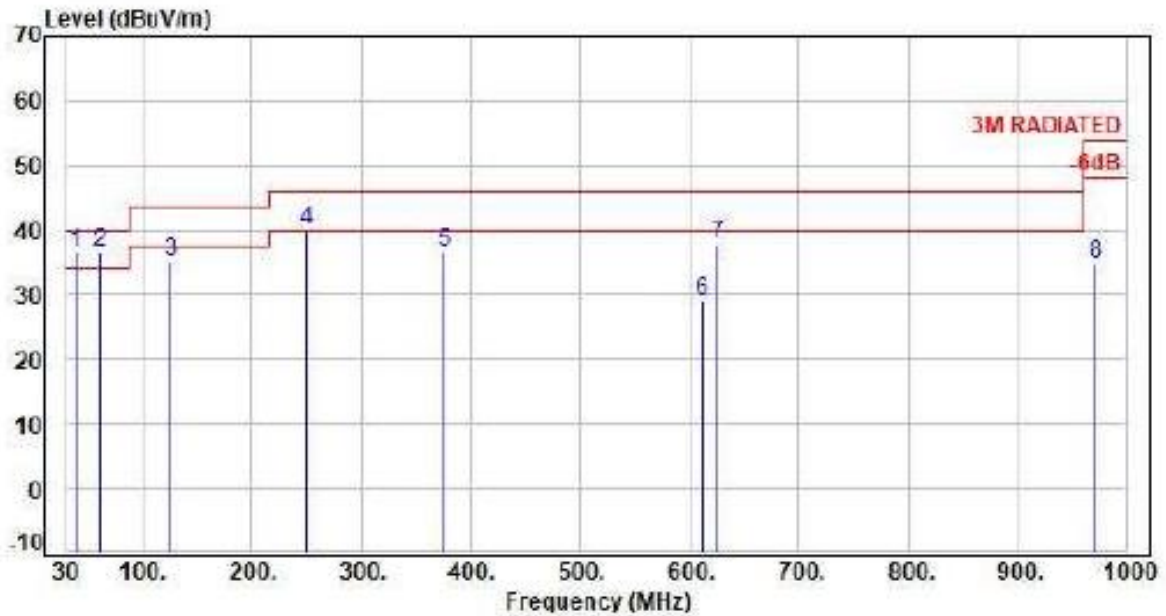

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	39.70	21.44	15.16	36.60	40.00	-3.40	QP	100	254	P
2	61.04	15.04	21.40	36.44	40.00	-3.56	Peak	400	0	P
3	125.06	21.45	13.54	34.99	43.50	-8.51	Peak	400	0	P
4	249.22	20.01	19.94	39.95	46.00	-6.05	Peak	400	0	P
5	375.32	23.98	12.64	36.62	46.00	-9.38	Peak	400	0	P
6	612.00	28.50	0.54	29.04	46.00	-16.96	Peak	400	0	P
7	625.50	28.97	0.64	37.61	46.00	-8.39	Peak	400	0	P
8	970.90	34.29	0.42	34.71	54.00	-19.29	Peak	400	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Lora 500K

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH07 927.5 (MHz)		

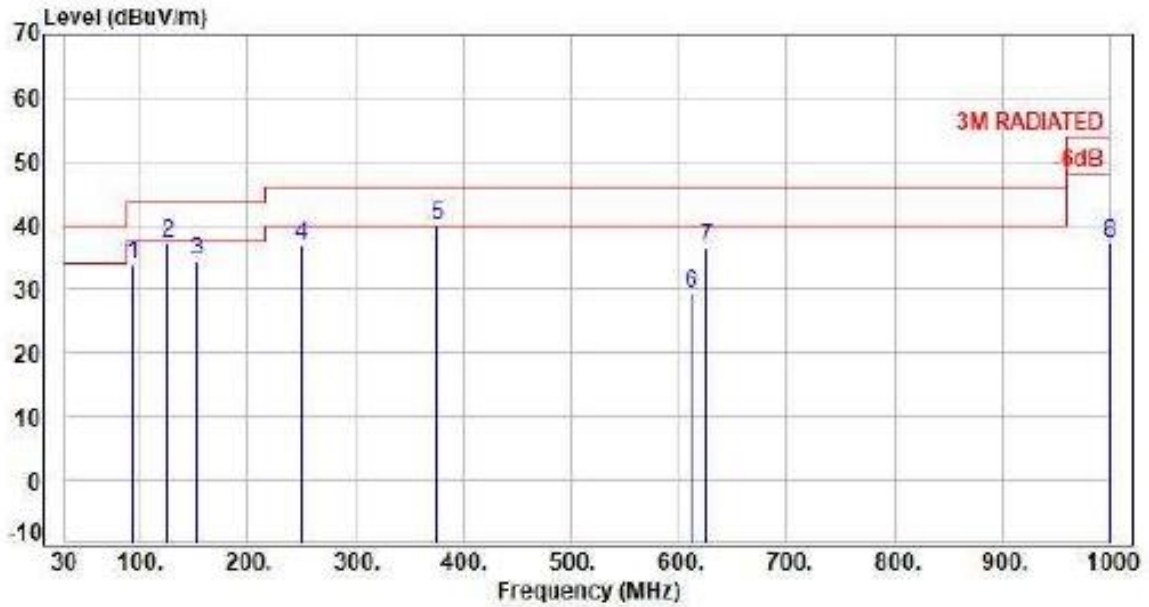

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	94.02	15.66	18.25	33.91	43.50	-9.59	Peak	400	0	P
2	125.06	21.45	15.55	37.00	43.50	-6.50	Peak	400	0	P
3	152.22	20.15	14.24	34.39	43.50	-9.11	Peak	400	0	P
4	249.22	20.01	16.80	36.81	46.00	-9.19	Peak	400	0	P
5	375.32	23.98	15.90	39.88	46.00	-6.12	Peak	400	0	P
6	612.00	28.50	0.86	29.36	46.00	-16.64	Peak	400	0	P
7	625.50	20.97	7.69	36.66	46.00	-9.34	Peak	400	0	P
8	1000.00	34.58	2.69	37.27	54.00	-16.73	Peak	400	0	P


Note: Level=Reading+Factor
 Margin=Level-limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Lora 500K

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH00 923.3 (MHz)		

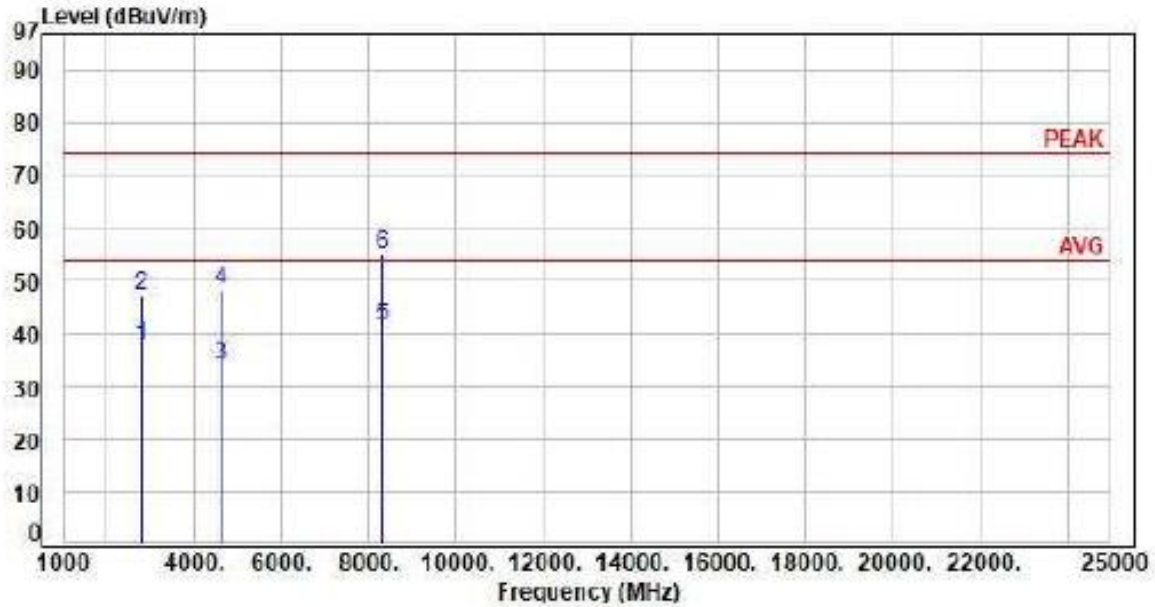


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2769.90	-28.26	65.89	37.63	54.00	-16.37	Average	251	360	P
2	2769.90	-28.26	75.32	47.06	74.00	-26.94	Peak	251	360	P
3	4616.50	-22.31	56.22	33.91	54.00	-20.09	Average	100	171	P
4	4616.50	-22.31	70.52	48.21	74.00	-25.79	Peak	100	171	P
5	8309.70	-14.24	55.50	41.26	54.00	-12.74	Average	100	308	P
6	8309.70	-14.24	69.38	55.14	74.00	-18.86	Peak	100	308	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Lora 500K

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH00 923.3 (MHz)		:

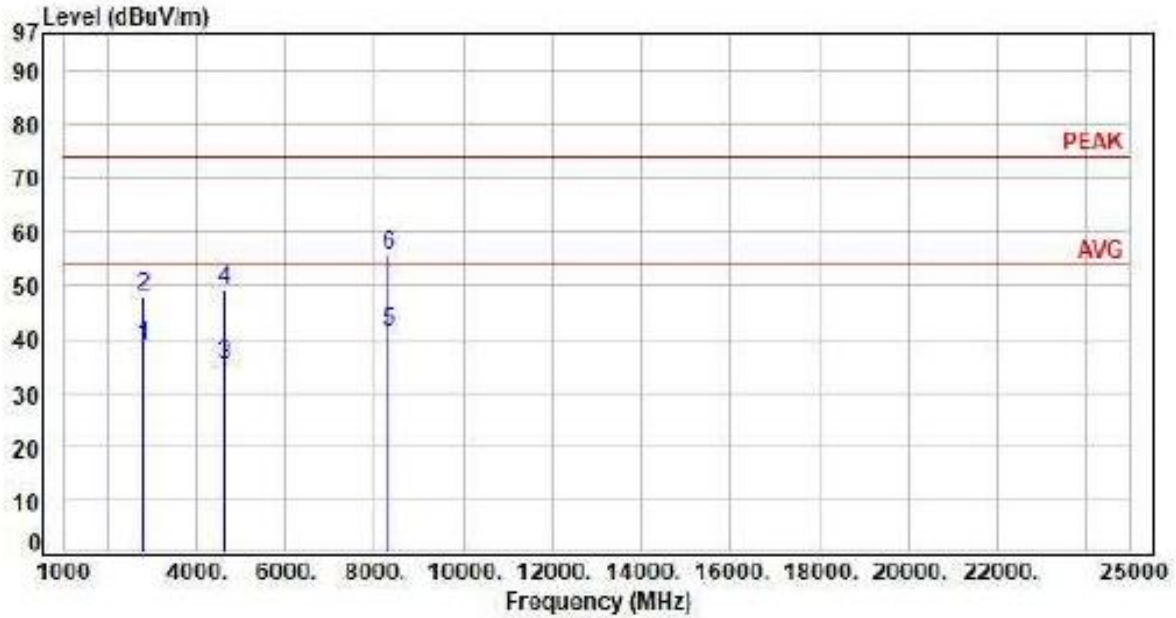


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2769.90	-28.26	67.16	38.90	54.00	-15.10	Average	100	65	P
2	2769.90	-28.26	76.21	47.95	74.00	-26.05	Peak	100	65	P
3	4616.50	-22.31	57.52	35.21	54.00	-18.79	Average	343	324	P
4	4616.50	-22.31	71.45	49.14	74.00	-24.86	Peak	343	324	P
5	8309.70	-14.24	55.48	41.24	54.00	-12.76	Average	100	244	P
6	8309.70	-14.24	69.87	55.63	74.00	-18.37	Peak	100	244	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Lora 500K

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH07 927.5 (MHz)		:

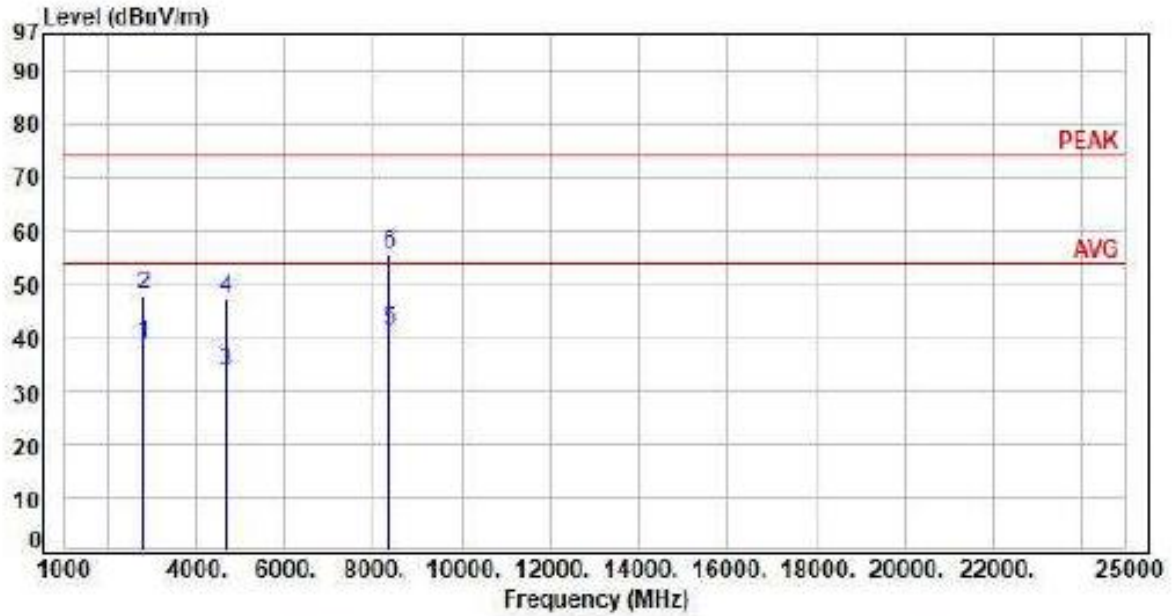


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2782.50	-28.17	66.90	38.73	54.00	-15.27	Average	259	360	P
2	2782.50	-28.17	75.99	47.82	74.00	-26.18	Peak	259	360	P
3	4637.50	-22.23	55.90	33.67	54.00	-20.33	Average	100	169	P
4	4637.50	-22.23	69.57	47.34	74.00	-26.66	Peak	100	169	P
5	8347.50	-14.13	55.36	41.23	54.00	-12.77	Average	100	321	P
6	8347.50	-14.13	69.87	55.74	74.00	-18.26	Peak	100	321	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Lora 500K

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH07 927.5 (MHz)		:

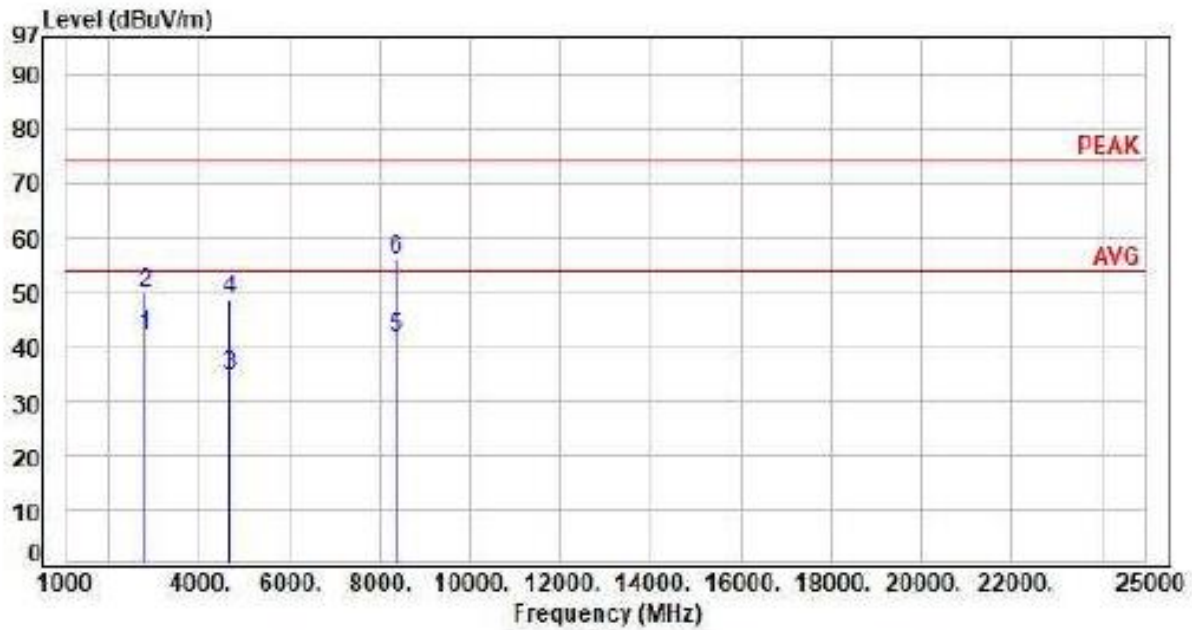

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2782.50	-28.17	70.09	41.92	54.00	-12.08	Average	100	66	P
2	2782.50	-28.17	78.05	49.88	74.00	-24.12	Peak	100	66	P
3	4637.50	-22.23	57.01	34.78	54.00	-19.22	Average	100	37	P
4	4637.50	-22.23	70.99	48.76	74.00	-25.24	Peak	100	37	P
5	8347.50	-14.13	55.67	41.54	54.00	-12.46	Average	100	228	P
6	8347.50	-14.13	70.10	55.97	74.00	-18.03	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Conducted Spurious Emission

7.1 Test Limit


According to the methods defined in ANSI C63.10-2013 Section 11.11.1
Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

7.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.11.2 & 11.11.3

- a. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- b. Set both RBW 100KHz and VBW 300 KHz of spectrum analyzer with convenient frequency span including 100 KHz bandwidth from band edge.
- c. The band edges was measured and recorded.

7.3 Test Setup Layout

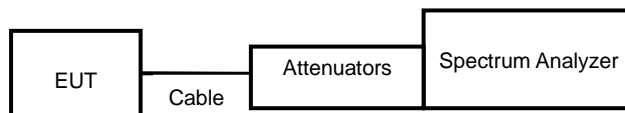


7.4 Test Result and Data


Note: Test plots refer to the following pages.





Modulation Type: Lora 500K
CH00

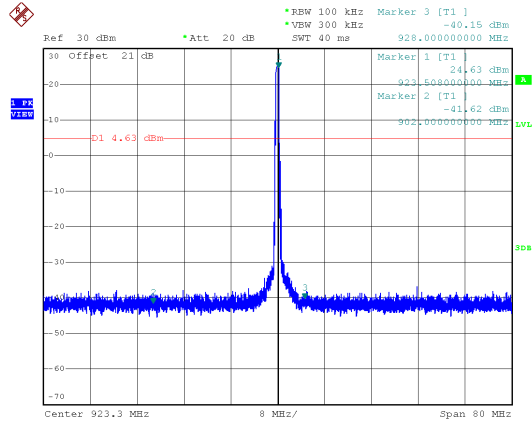

Modulation Type: Lora 500K
CH07

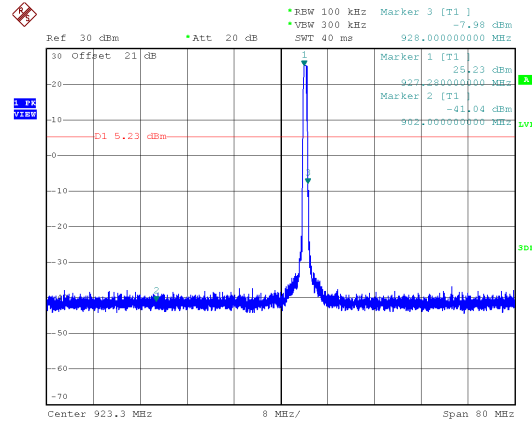

-4

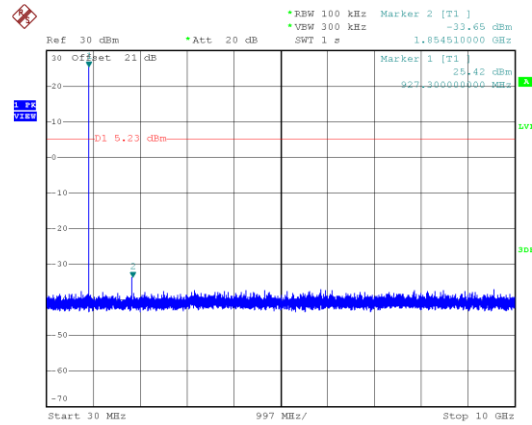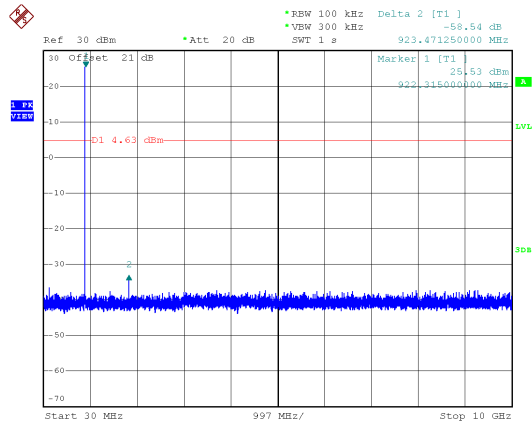



8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.6 Zero-Span Spectrum Analyzer Method.

8.3 Test Setup Layout

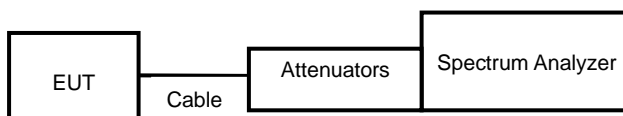


8.4 Test Result and Data

Modulation Mode	On Time (ms)	Period Time (ms)	Duty Cycle (%)
500 KHz	100.00	100.00	100.00%



Modulation Type: Lora 500K

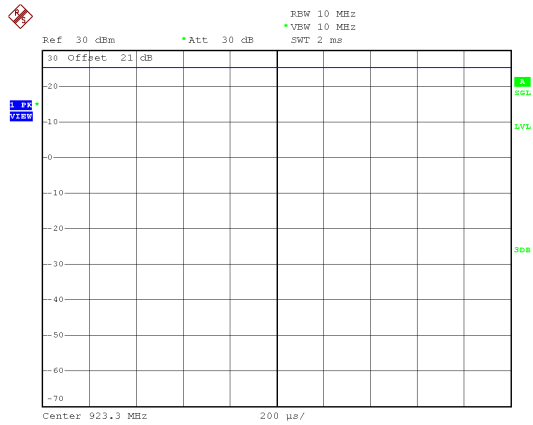



9. 6dB Bandwidth Measurement Data

9.1 Test Limit


The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

9.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.8

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- d. The 6dB Bandwidth was measured and recorded.

9.3 Test Setup Layout

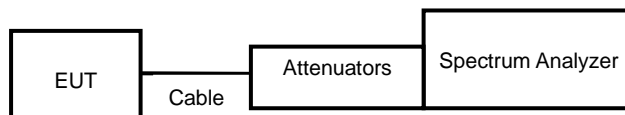


9.4 Test Result and Data


Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
500KHz	0	923.3	646.00	500
	7	927.5	612.00	500



Modulation Type: 500K
CH00

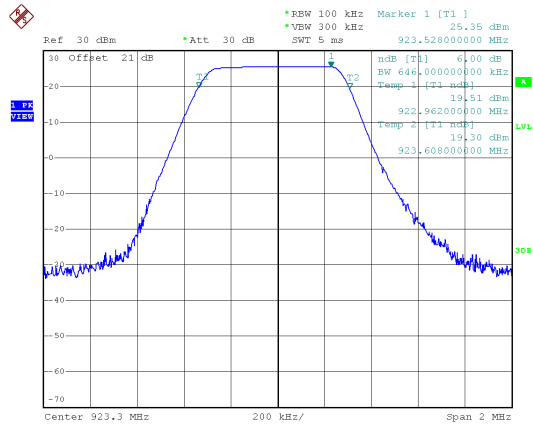

Modulation Type: 500K
CH07

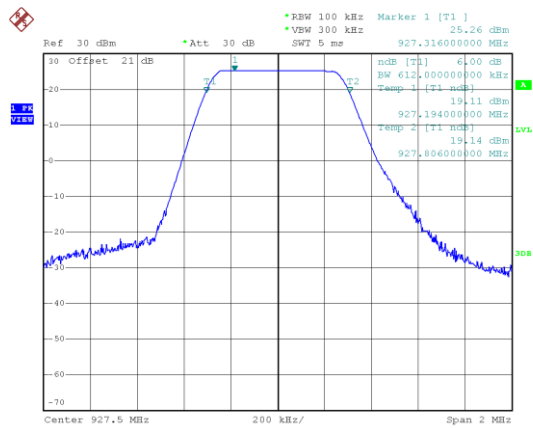



10. Maximum Peak Output Power

10.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.


10.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 7.8.5

The antenna port(RF output)of the EUT was connected to the input(RF input)of a power meter.

Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout

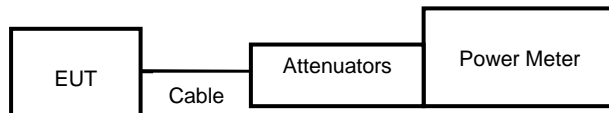

10.4 Test Result and Data

Lora 500K

Power Set	Modulation Type	Channel	Frequency (MHz)	Power Output (dBm)		Power Output (mW)		Powe Limit (dBm)	
				Peak	Average	Peak	Average	Peak	Average
12	500KHz	0	923.3	25.62	25.55	364.754	358.922	28.000	NA
12		7	927.5	25.34	25.17	341.979	328.852	28.000	NA

*Average Power is for reference only



11. Power Spectral Density

11.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.


If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

11.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.10.1

- a. The transmitter output was connected to spectrum analyzer.
- b. The spectrum analyzer’s resolution bandwidth were set at 3KHz RBW and 10KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- c. The power spectral density was measured and recorded.

11.3 Test Setup Layout

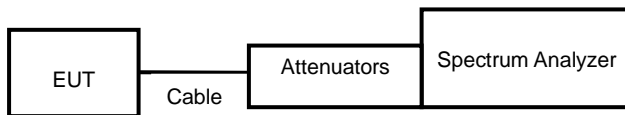


11.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)	Limit
500KHz	0	923.3	7.32	8.00
	7	927.5	7.42	8.00



Modulation Type: 500K
CH00

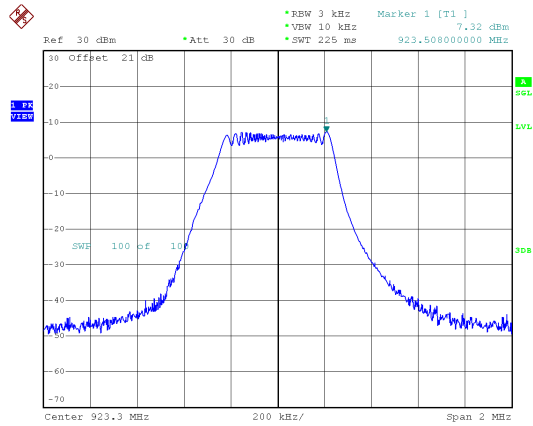

3

Modulation Type: 500K
CH07

