

# TEST REPORT

**Product Name** : WiFi/BT Module  
**Brand Mark** : FN-LINK  
**Model No.** : 6222C-PUC  
**FCC ID** : 2AATL-6222C-PUC  
**Report Number** : BLA-EMC-202106-A6603  
**Date of Sample Receipt** : 2021/6/23  
**Date of Test** : 2021/6/23 to 2021/7/31  
**Date of Issue** : 2021/7/31  
**Test Standard** : 47 CFR Part 15, Subpart C 15.247  
**Test Result** : Pass

Prepared for:

**HUNAN FN-LINK TECHNOLOGY LIMITED**  
**No.8, Litong Road, Liuyang Economic & Technical Development Zone,**  
**Changsha, Hunan, CHINA**

Prepared by:

**BlueAsia of Technical Services(Shenzhen) Co.,Ltd.**  
**Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,**  
**Shenzhen, Guangdong Province, China**  
**TEL: +86-755-23059481**

Compiled by:

*Jozu.*

Review by:

*Sueels*

Approved by:

*Bluezhong*

Date:

2021/7/31



**REPORT REVISE RECORD**

<b>Version No.</b>	<b>Date</b>	<b>Description</b>
00	2021/7/31	Original

BlueAsia

## TABLE OF CONTENTS

<b>1</b>	<b>TEST SUMMARY .....</b>	<b>5</b>
<b>2</b>	<b>GENERAL INFORMATION .....</b>	<b>6</b>
<b>3</b>	<b>GENERAL DESCRIPTION OF E.U.T. ....</b>	<b>6</b>
<b>4</b>	<b>BLOCK DIAGRAM OF EUT CONNECTION .....</b>	<b>6</b>
<b>5</b>	<b>TEST ENVIRONMENT .....</b>	<b>7</b>
<b>6</b>	<b>TEST MODE .....</b>	<b>7</b>
<b>7</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>7</b>
<b>8</b>	<b>DESCRIPTION OF SUPPORT UNIT.....</b>	<b>8</b>
<b>9</b>	<b>LABORATORY LOCATION.....</b>	<b>8</b>
<b>10</b>	<b>TEST INSTRUMENTS LIST .....</b>	<b>9</b>
<b>11</b>	<b>POWER SPECTRUM DENSITY.....</b>	<b>12</b>
11.1	LIMITS .....	12
11.2	BLOCK DIAGRAM OF TEST SETUP .....	12
11.3	TEST DATA.....	12
<b>12</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>13</b>
12.1	CONCLUSION .....	13
<b>13</b>	<b>RADIATED SPURIOUS EMISSIONS.....</b>	<b>14</b>
13.1	LIMITS .....	14
13.2	BLOCK DIAGRAM OF TEST SETUP .....	15
13.3	PROCEDURE .....	15
13.4	TEST DATA.....	17
<b>14</b>	<b>CONDUCTED PEAK OUTPUT POWER .....</b>	<b>25</b>
14.1	LIMITS .....	25
14.2	BLOCK DIAGRAM OF TEST SETUP .....	25
14.3	TEST DATA.....	26
<b>15</b>	<b>RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....</b>	<b>27</b>
15.1	LIMITS .....	27
15.2	BLOCK DIAGRAM OF TEST SETUP .....	28
15.3	PROCEDURE .....	28

15.4	TEST DATA.....	30
<b>16</b>	<b>CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>46</b>
16.1	LIMITS .....	46
16.2	BLOCK DIAGRAM OF TEST SETUP .....	46
16.3	TEST DATA.....	47
<b>17</b>	<b>CONDUCTED BAND EDGES MEASUREMENT.....</b>	<b>48</b>
17.1	LIMITS .....	48
17.2	BLOCK DIAGRAM OF TEST SETUP .....	48
17.3	TEST DATA.....	49
<b>18</b>	<b>MINIMUM 6DB BANDWIDTH .....</b>	<b>50</b>
18.1	LIMITS .....	50
18.2	BLOCK DIAGRAM OF TEST SETUP .....	50
18.3	TEST DATA.....	50
<b>19</b>	<b>CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ).....</b>	<b>51</b>
19.1	LIMITS .....	51
19.2	BLOCK DIAGRAM OF TEST SETUP .....	51
19.3	PROCEDURE .....	51
19.4	TEST DATA.....	53
<b>20</b>	<b>APPENDIX.....</b>	<b>55</b>
20.1	MAXIMUM CONDUCTED OUTPUT POWER .....	55
20.2	-6DB BANDWIDTH .....	68
20.3	OCCUPIED CHANNEL BANDWIDTH.....	81
20.4	MAXIMUM POWER SPECTRAL DENSITY LEVEL .....	94
20.5	BAND EDGE.....	107
20.6	CONDUCTED RF SPURIOUS EMISSION .....	124
	<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>149</b>
	<b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>	<b>151</b>

## 1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5 & Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(1) & 15.247(b)(3)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass


## 2 GENERAL INFORMATION

<b>Applicant</b>	HUNAN FN-LINK TECHNOLOGY LIMITED
<b>Address</b>	No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, CHINA
<b>Manufacturer</b>	HUNAN FN-LINK TECHNOLOGY LIMITED
<b>Address</b>	No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, CHINA
<b>Factory</b>	HUNAN FN-LINK TECHNOLOGY LIMITED
<b>Address</b>	No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, CHINA
<b>Product Name</b>	WiFi/BT Module
<b>Test Model No.</b>	6222C-PUC

## 3 GENERAL DESCRIPTION OF E.U.T.

<b>Hardware Version</b>	V2.0
<b>Software Version</b>	V2.0
<b>Operation Frequency:</b>	802.11b/g/n(HT20): 2412MHz to 2462MHz 802.11n(HT40): 2422MHz to 2452MHz
<b>Modulation Type:</b>	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
<b>Channel Spacing:</b>	5MHz
<b>Number of Channels:</b>	802.11b/g/n(HT20):11 802.11n(HT40):7
<b>Antenna Type:</b>	FPC Antenna
<b>Antenna Gain:</b>	2.35dBi

## 4 BLOCK DIAGRAM OF EUT CONNECTION

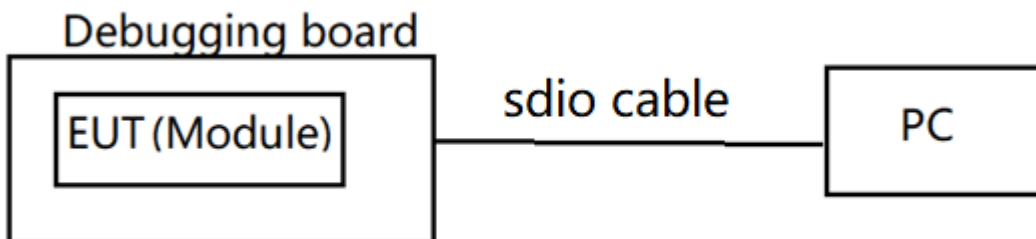

## 5 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3.3V

## 6 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode	Keep the EUT in continuously transmitting mode with modulation. (Duty cycle ≥ 98%)
Remark: Only the data of the worst mode would be recorded in this report.	

## 7 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

## 8 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	Lenovo	N/A	N/A	N/A

## 9 LABORATORY LOCATION

All tests were performed at:  
BlueAsia of Technical Services(Shenzhen) Co., Ltd.  
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province,  
China  
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673  
No tests were sub-contracted.



## 10 TEST INSTRUMENTS LIST

Test Equipment Of Power Spectrum Density					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Peak Output Power					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due

Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

**Test Equipment Of Radiated Emissions which fall in the restricted bands**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

**Test Equipment Of Conducted Spurious Emissions**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11

Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

**Test Equipment Of Conducted Band Edges Measurement**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

**Test Equipment Of Minimum 6dB Bandwidth**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

**Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2020/10/12	2021/10/11
LISN	R&S	ENV216	3560.6550.15	2020/10/12	2021/10/11
LISN	AT	AT166-2	AKK1806000003	2020/10/12	2021/10/11
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A


## 11 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

### 11.1 LIMITS

<b>Limit:</b>	$\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission
---------------	--

### 11.2 BLOCK DIAGRAM OF TEST SETUP

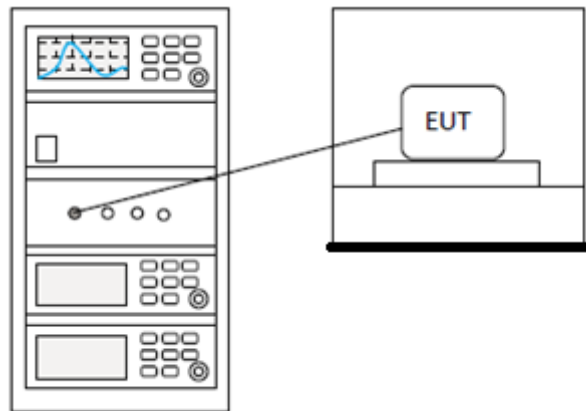

### 11.3 TEST DATA

<b>Pass: Please Refer To Appendix: Appendix1 For Details</b>
--

## 12 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


### 12.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.35dBi.

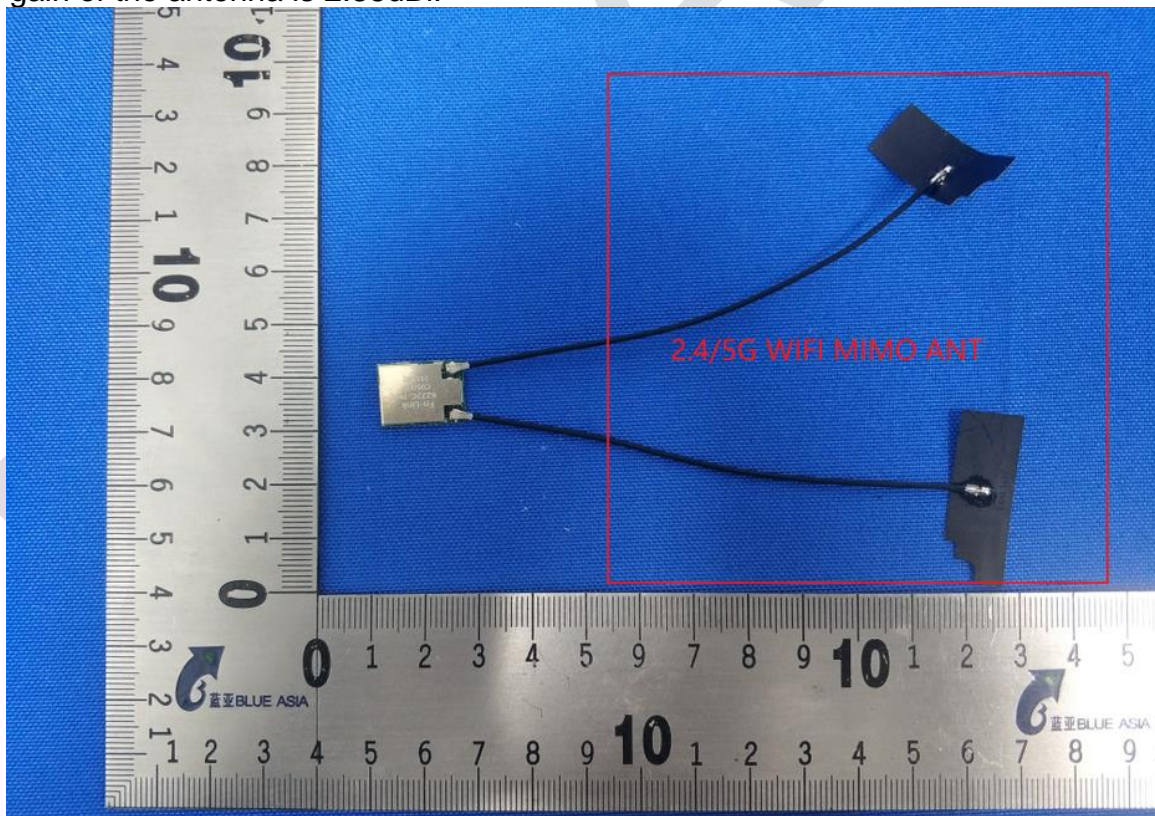

### 13 RADIATED SPURIOUS EMISSIONS


<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.4,6.5,6.6
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Jozu
<b>Temperature</b>	25°C
<b>Humidity</b>	60%

#### 13.1 LIMITS

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 13.2 BLOCK DIAGRAM OF TEST SETUP

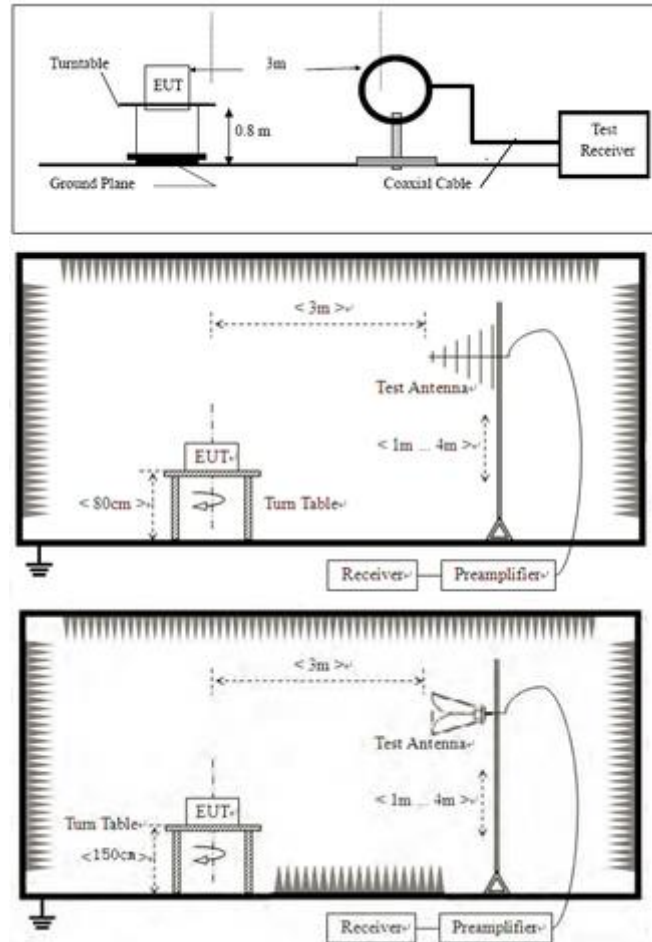

### 13.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:


- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



### 13.4 TEST DATA

Remark: During the test, pre-scan the 802.11b/g/n mode, and found the 802.11N40 mode which it is worse case.

[TestMode: TX 11N40 low channel]; [Polarity: Horizontal]

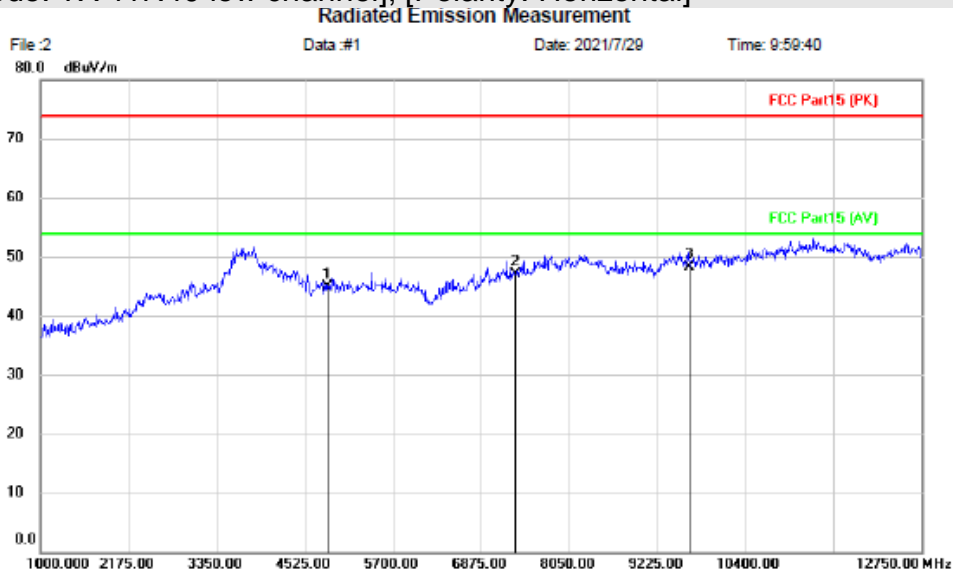


Site	Polarization: <i>Horizontal</i>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: WIFI/BT Module	Distance:	
M/N: 6222C-PUC		
Mode: 11n40-TX-L		
Note:		

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	4824.000	41.21	3.62	44.83	74.00	-29.17	peak			
2	7326.000	40.61	6.44	47.05	74.00	-26.95	peak			
3 *	9648.000	39.01	9.37	48.38	74.00	-25.62	peak			

**Test Result: Pass**

[TestMode: TX 11B low channel]; [Polarity: Vertical]

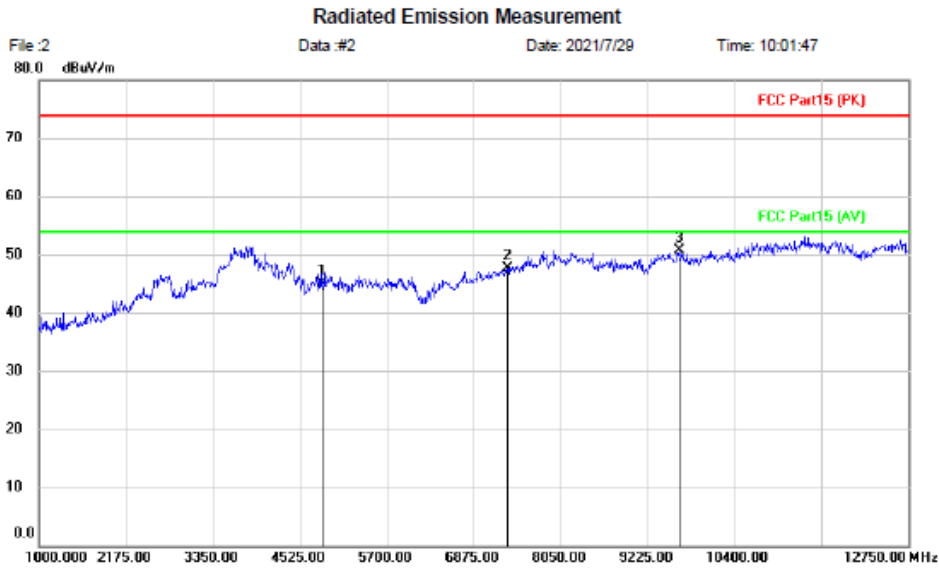

Site	Polarization: <i>Vertical</i>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: WIFI/BT Module	Distance:	
M/N: 6222C-PUC		
Mode: 11n40-TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4824.000	41.43	3.62	45.05	74.00	-28.95	peak		
2		7326.000	41.27	6.44	47.71	74.00	-26.29	peak		
3	*	9648.000	41.26	9.37	50.63	74.00	-23.37	peak		

**Test Result: Pass**

[TestMode: TX 11N40 mid channel]; [Polarity: Vertical]

Radiated Emission Measurement




File :2                      Data :#3                      Date: 2021/7/29                      Time: 10:03:42  
80.0 dBuV/m

Site    Polarization: *Vertical*                      Temperature:  
Limit: FCC Part15 (PK)                      Power:    Humidity: %  
EUT: WIFI/BT Module                      Distance:  
M/N: 6222C-PUC  
Mode: 11n40-TX-M  
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4874.000	42.18	3.39	45.57	74.00	-28.43	peak		
2		7311.000	40.42	6.37	46.79	74.00	-27.21	peak		
3	*	9748.000	40.03	9.59	49.62	74.00	-24.38	peak		

**Test Result: Pass**

[TestMode: TX 11N40 mid channel]; [Polarity: Horizontal]

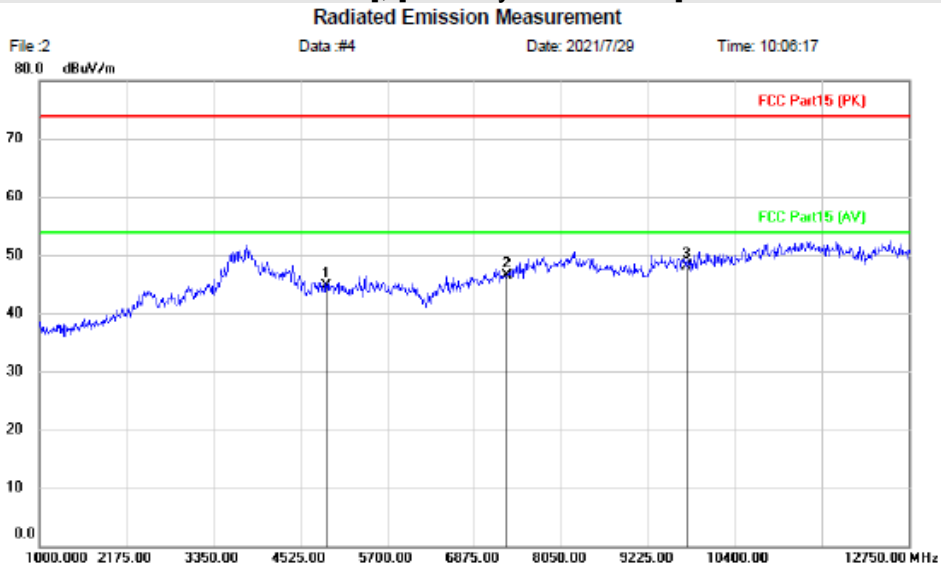


Site	Polarization: <i>Horizontal</i>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: WIFI/BT Module	Distance:	
M/N: 6222C-PUC		
Mode: 11n40-TX-M		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4874.000	41.24	3.39	44.63	74.00	-29.37	peak		
2		7311.000	40.18	6.37	46.55	74.00	-27.45	peak		
3	*	9748.000	38.44	9.59	48.03	74.00	-25.97	peak		

**Test Result: Pass**

[TestMode: TX 11N40 high channel]; [Polarity: Horizontal]

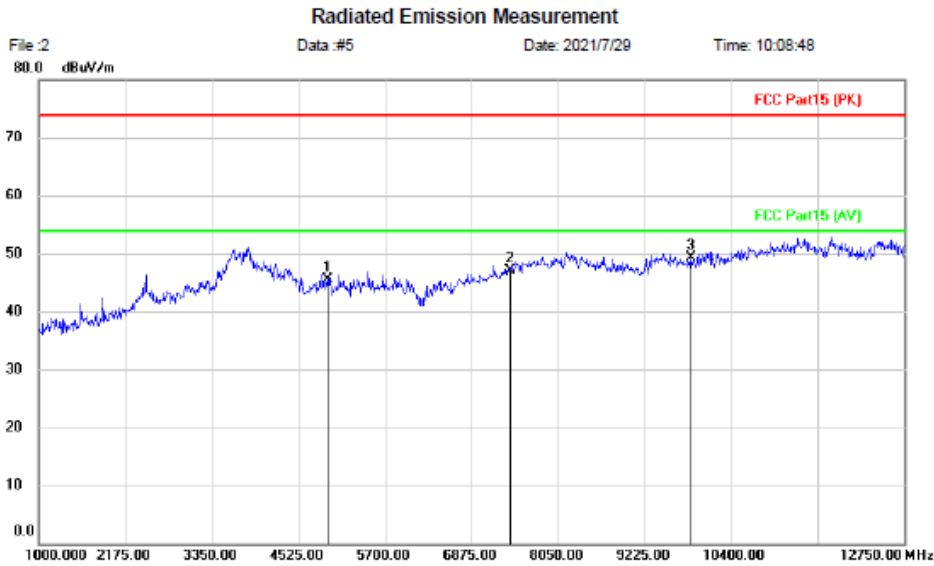


Site	Polarization: <i>Horizontal</i>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: WIFI/BT Module	Distance:	
M/N: 6222C-PUC		
Mode: 11n40-TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4924.000	42.10	3.46	45.56	74.00	-28.44	peak		
2		7386.000	40.42	6.68	47.10	74.00	-26.90	peak		
3	*	9848.000	39.38	9.88	49.26	74.00	-24.74	peak		


**Test Result: Pass**

[TestMode: TX 11N40 high channel]; [Polarity: Vertical]

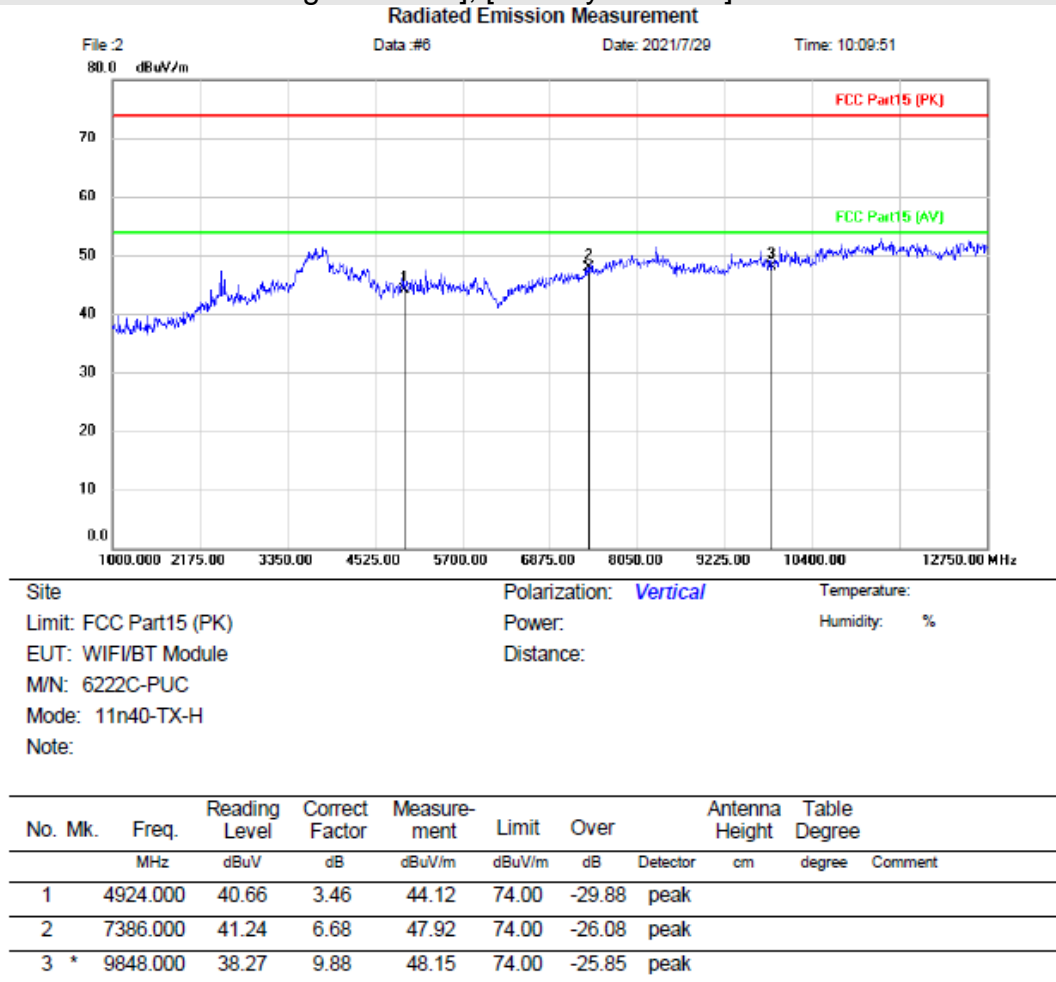

**Test Result: Pass**


[TestMode: TX mode (SE) below 1G]; [Polarity: Horizontal]

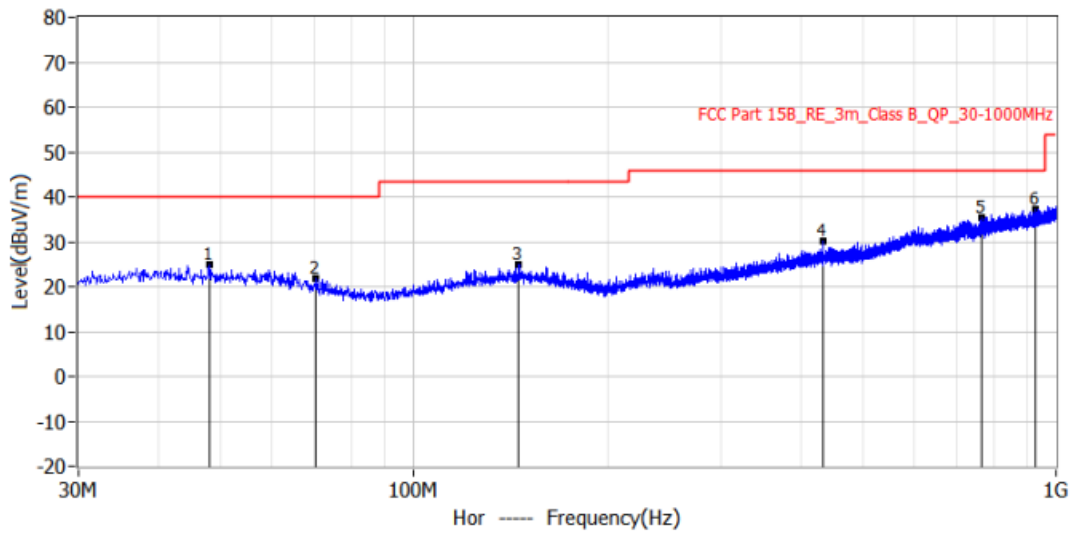

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	47.945MHz	40.0	24.9	-15.1	1.0	23.9	QP	Hor	100.0	257.0
2*	70.376MHz	40.0	22.0	-18.0	0.6	21.4	QP	Hor	100.0	176.0
3*	145.673MHz	43.5	24.9	-18.6	1.3	23.6	QP	Hor	100.0	315.0
4*	432.671MHz	46.0	30.2	-15.8	2.5	27.7	QP	Hor	100.0	4.0
5*	764.654MHz	46.0	35.3	-10.7	1.9	33.4	QP	Hor	100.0	93.0
6*	928.099MHz	46.0	37.3	-8.7	2.0	35.3	QP	Hor	100.0	331.0

**Test Result: Pass**

[TestMode: TX mode (SE) below 1G]; [Polarity: Vertical]

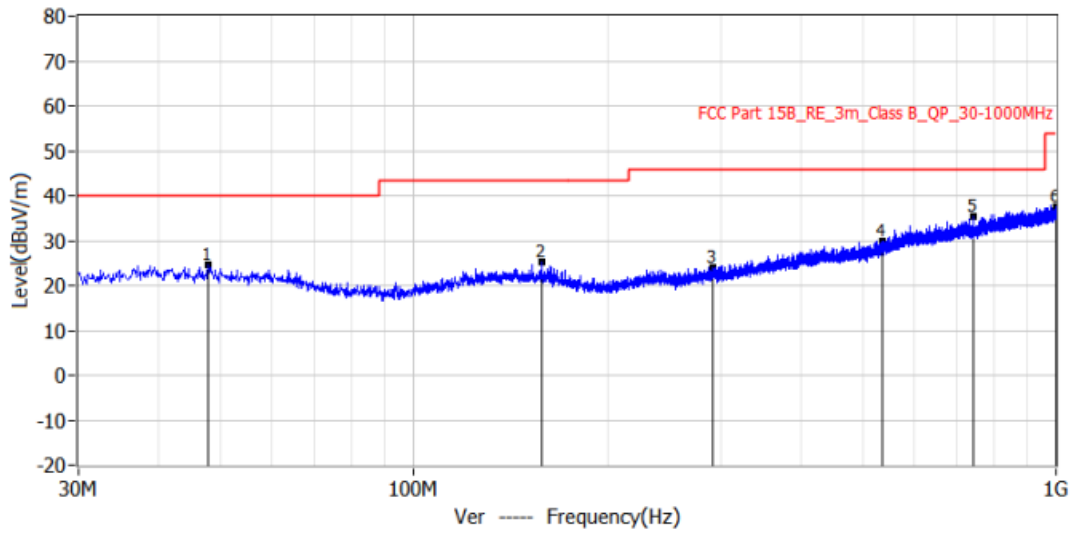

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	47.703MHz	40.0	24.7	-15.3	0.8	23.9	QP	Ver	100.0	35.0
2*	157.676MHz	43.5	25.2	-18.3	1.9	23.3	QP	Ver	100.0	64.0
3*	291.900MHz	46.0	24.1	-21.9	0.2	23.9	QP	Ver	100.0	264.0
4*	537.553MHz	46.0	29.8	-16.2	0.3	29.5	QP	Ver	100.0	238.0
5*	742.465MHz	46.0	35.5	-10.5	2.6	32.9	QP	Ver	100.0	67.0
6*	997.818MHz	54.0	37.5	-16.5	1.3	36.2	QP	Ver	100.0	289.0

**Test Result: Pass**




## 14 CONDUCTED PEAK OUTPUT POWER

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.5 & Section 11.9.1
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Jozu
<b>Temperature</b>	25°C
<b>Humidity</b>	60%

### 14.1 LIMITS

<b>Frequency range(MHz)</b>	<b>Output power of the intentional radiator(watt)</b>
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

### 14.2 BLOCK DIAGRAM OF TEST SETUP

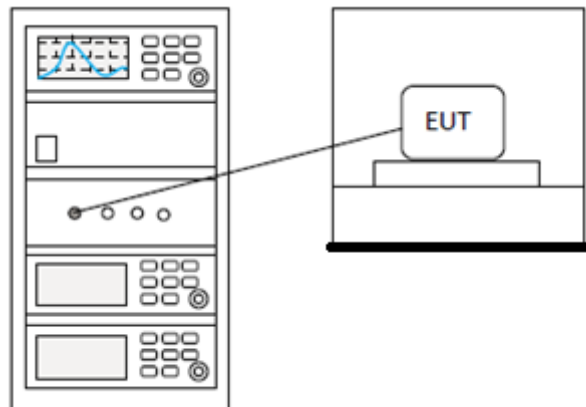

### 14.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia

## 15 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.10.5
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Jozu
<b>Temperature</b>	25°C
<b>Humidity</b>	60%

### 15.1 LIMITS

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

## 15.2 BLOCK DIAGRAM OF TEST SETUP

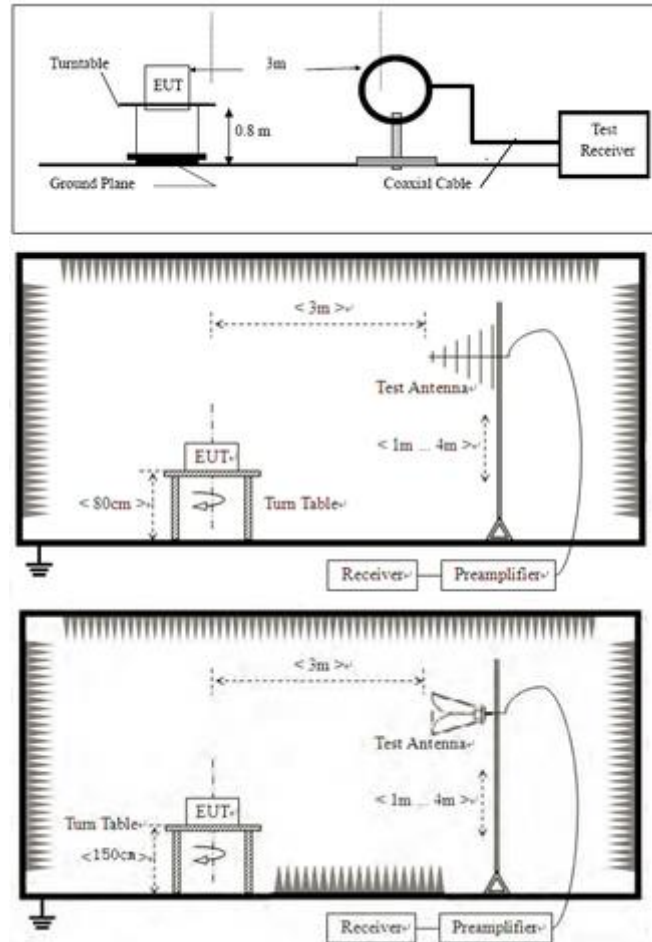

## 15.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1:  $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

### 15.4 TEST DATA

[TestMode: TX 11B high channel]; [Polarity: Horizontal]

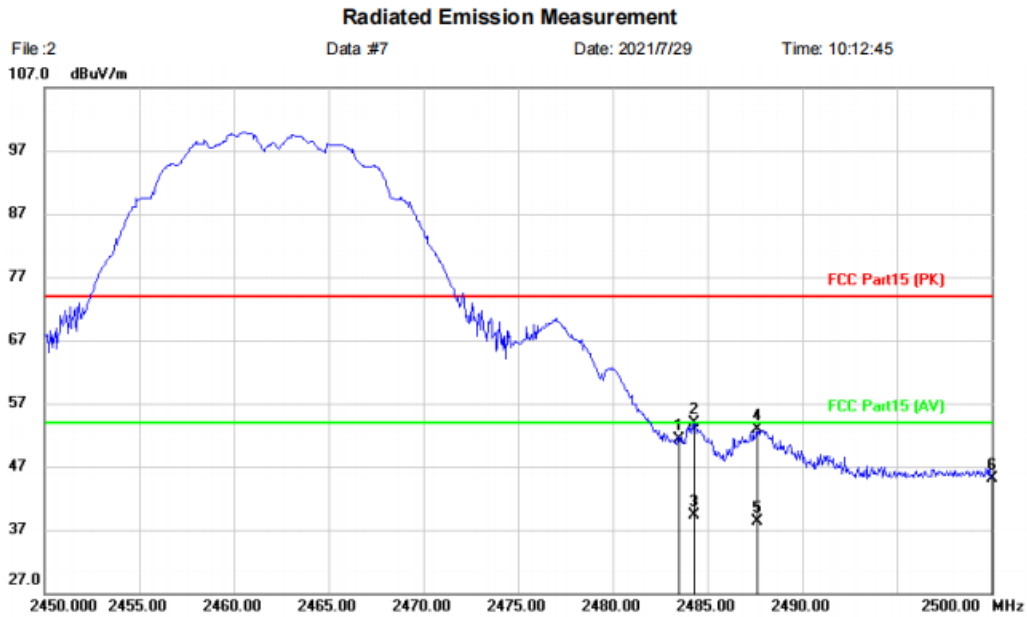

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: WIFI/BT Module	Distance:	
M/N: 6222C-PUC		
Mode: B-TX-H		
Note:		


No.	Mk.	Freq. MHz	Reading	Correct	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
			Level dBuV	Factor dB	dBuV/m						
1		2483.500	55.13	-3.84	51.29	74.00	-22.71	peak			
2		2484.300	57.77	-3.84	53.93	74.00	-20.07	peak			
3	*	2484.300	43.09	-3.84	39.25	54.00	-14.75	AVG			
4		2487.600	56.70	-3.84	52.86	74.00	-21.14	peak			
5		2487.600	42.17	-3.84	38.33	54.00	-15.67	AVG			
6		2500.000	48.93	-3.78	45.15	74.00	-28.85	peak			

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX 11B high channel]; [Polarity: Vertical]

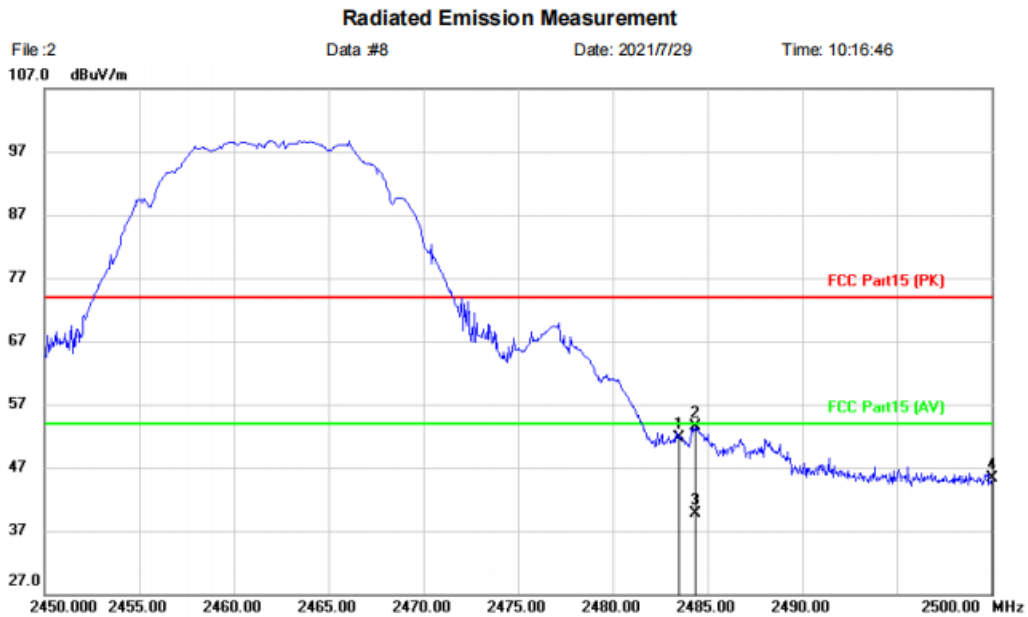

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: WIFI/BT Module	Distance:	
M/N: 6222C-PUC		
Mode: B-TX-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	55.50	-3.84	51.66	74.00	-22.34	peak		
2		2484.350	57.30	-3.84	53.46	74.00	-20.54	peak		
3	*	2484.350	43.51	-3.84	39.67	54.00	-14.33	AVG		
4		2500.000	49.06	-3.78	45.28	74.00	-28.72	peak		

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX 11B low channel]; [Polarity: Vertical]

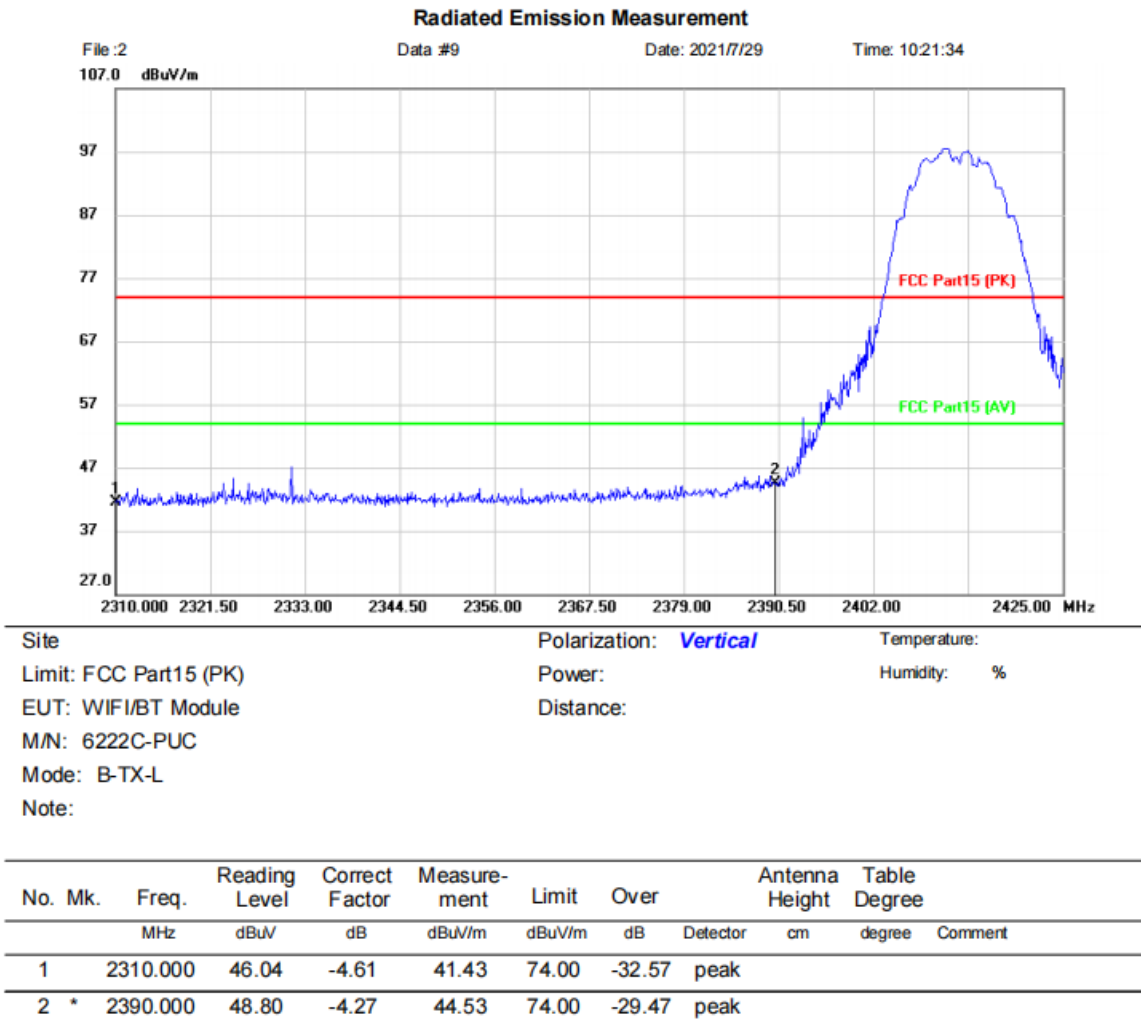


\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**



[TestMode: TX 11B low channel]; [Polarity: Horizontal]

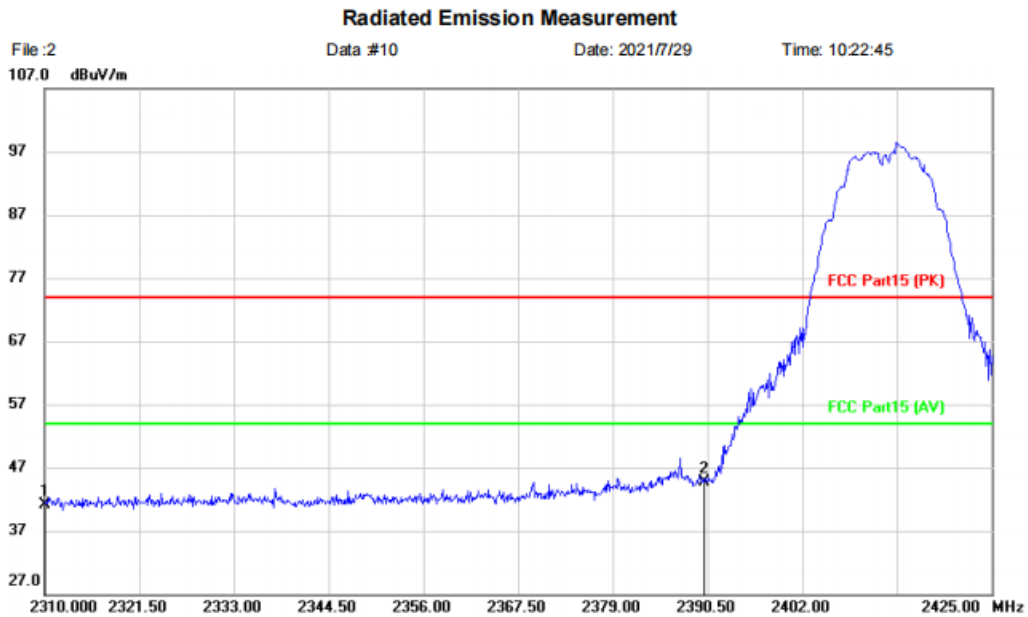

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: WIFI/BT Module	Distance:	
M/N: 6222C-PUC		
Mode: B-TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	45.70	-4.61	41.09	74.00	-32.91	peak		
2	*	2390.000	48.90	-4.27	44.63	74.00	-29.37	peak		

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX 11G low channel]; [Polarity: Horizontal]

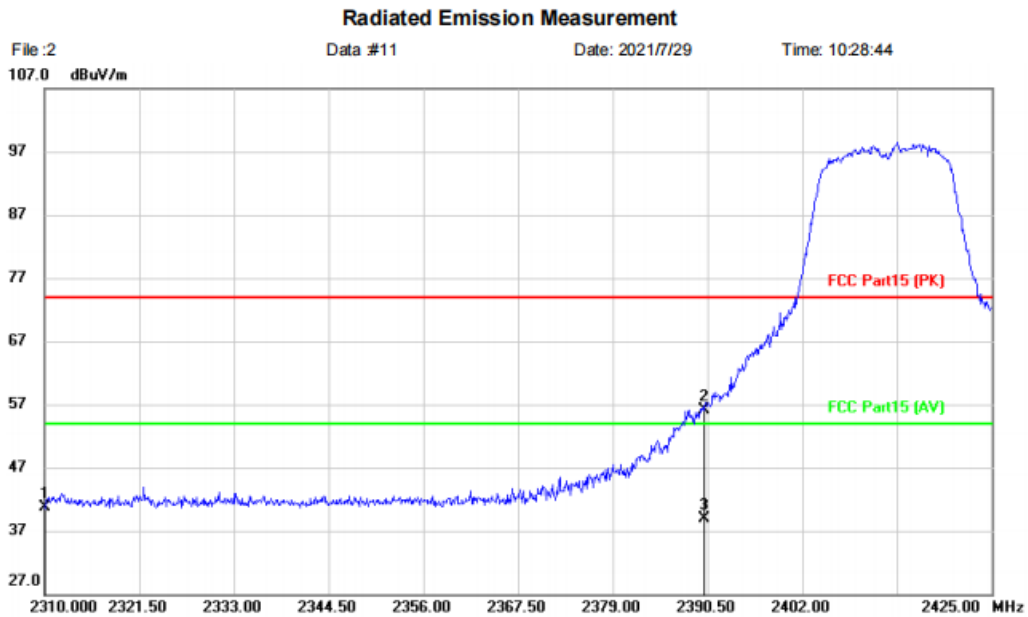

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: WIFI/BT Module	Distance:	
M/N: 6222C-PUC		
Mode: G-TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	45.34	-4.61	40.73	74.00	-33.27	peak		
2		2390.000	60.44	-4.27	56.17	74.00	-17.83	peak		
3	*	2390.000	43.26	-4.27	38.99	54.00	-15.01	AVG		

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX 11G low channel]; [Polarity: Vertical]

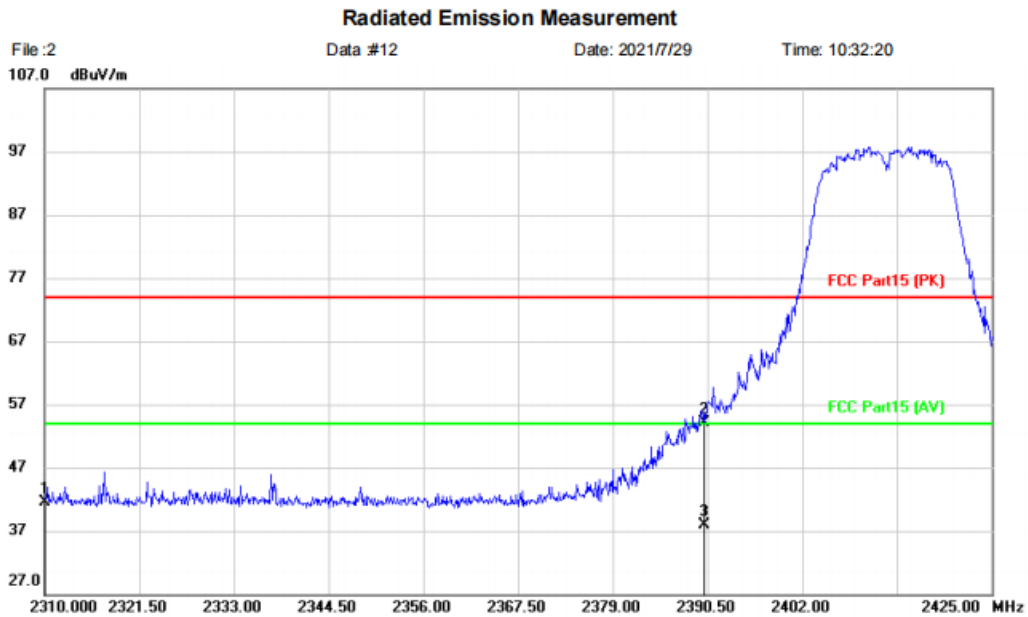

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: WIFI/BT Module	Distance:	
M/N: 6222C-PUC		
Mode: G-TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	46.10	-4.61	41.49	74.00	-32.51	peak		
2		2390.000	58.38	-4.27	54.11	74.00	-19.89	peak		
3	*	2390.000	42.23	-4.27	37.96	54.00	-16.04	AVG		

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX 11G high channel]; [Polarity: Vertical]

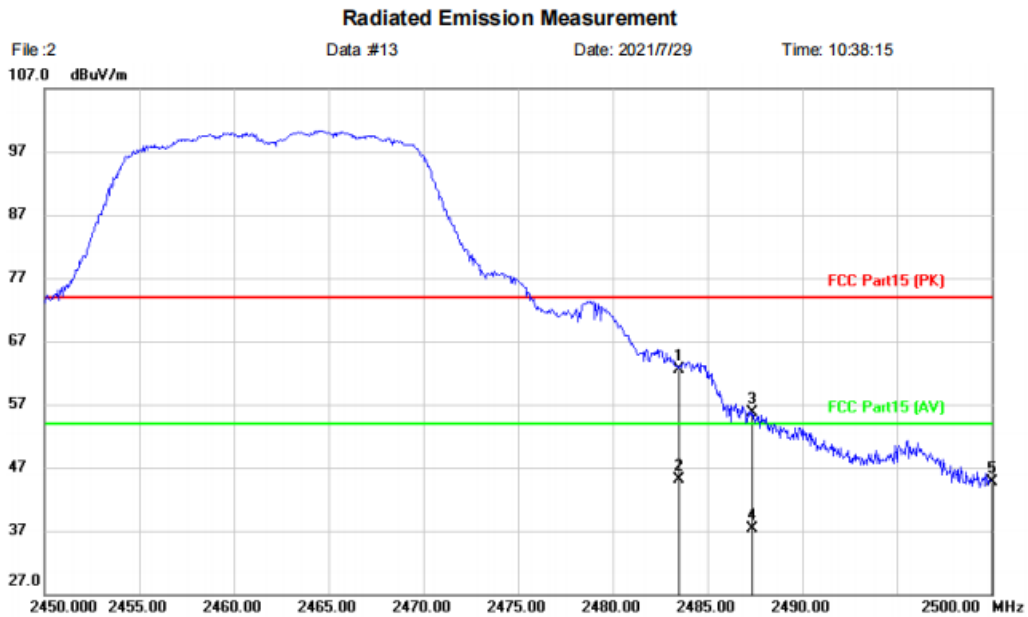

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: WIFI/BT Module	Distance:	
M/N: 6222C-PUC		
Mode: G-TX-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	66.44	-3.84	62.60	74.00	-11.40	peak		
2	*	2483.500	48.88	-3.84	45.04	54.00	-8.96	AVG		
3		2487.350	59.52	-3.84	55.68	74.00	-18.32	peak		
4		2487.350	41.10	-3.84	37.26	54.00	-16.74	AVG		
5		2500.000	48.50	-3.78	44.72	74.00	-29.28	peak		

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX 11G high channel]; [Polarity: Horizontal]

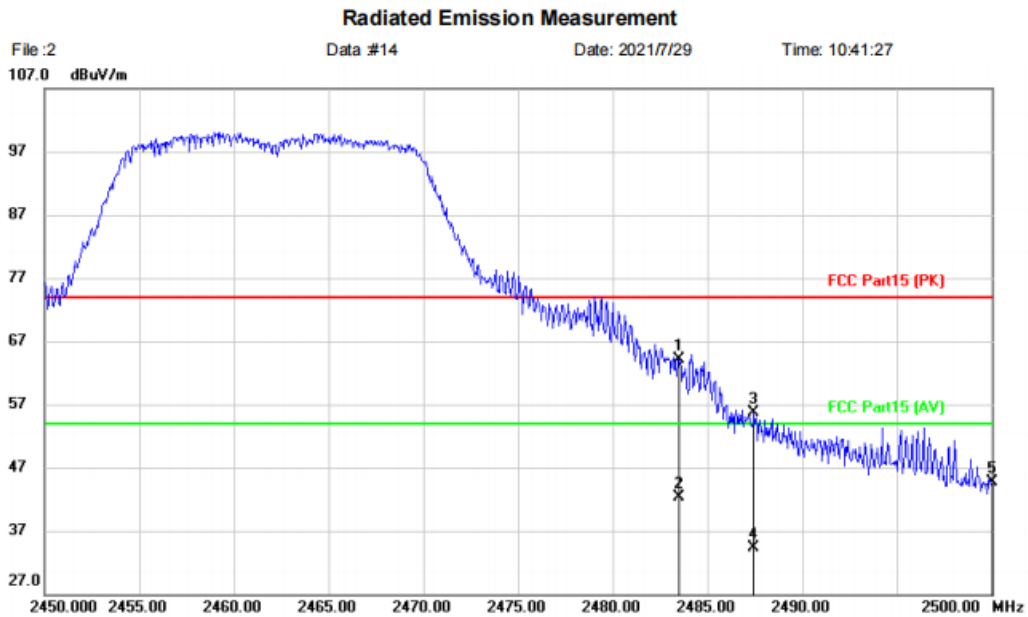

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: WIFI/BT Module	Distance:	
M/N: 6222C-PUC		
Mode: G-TX-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2483.500	68.03	-3.84	64.19	74.00	-9.81	peak		
2		2483.500	46.24	-3.84	42.40	54.00	-11.60	AVG		
3		2487.450	59.49	-3.84	55.65	74.00	-18.35	peak		
4		2487.450	38.09	-3.84	34.25	54.00	-19.75	AVG		
5		2500.000	48.40	-3.78	44.62	74.00	-29.38	peak		

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX N20 high channel]; [Polarity: Vertical]

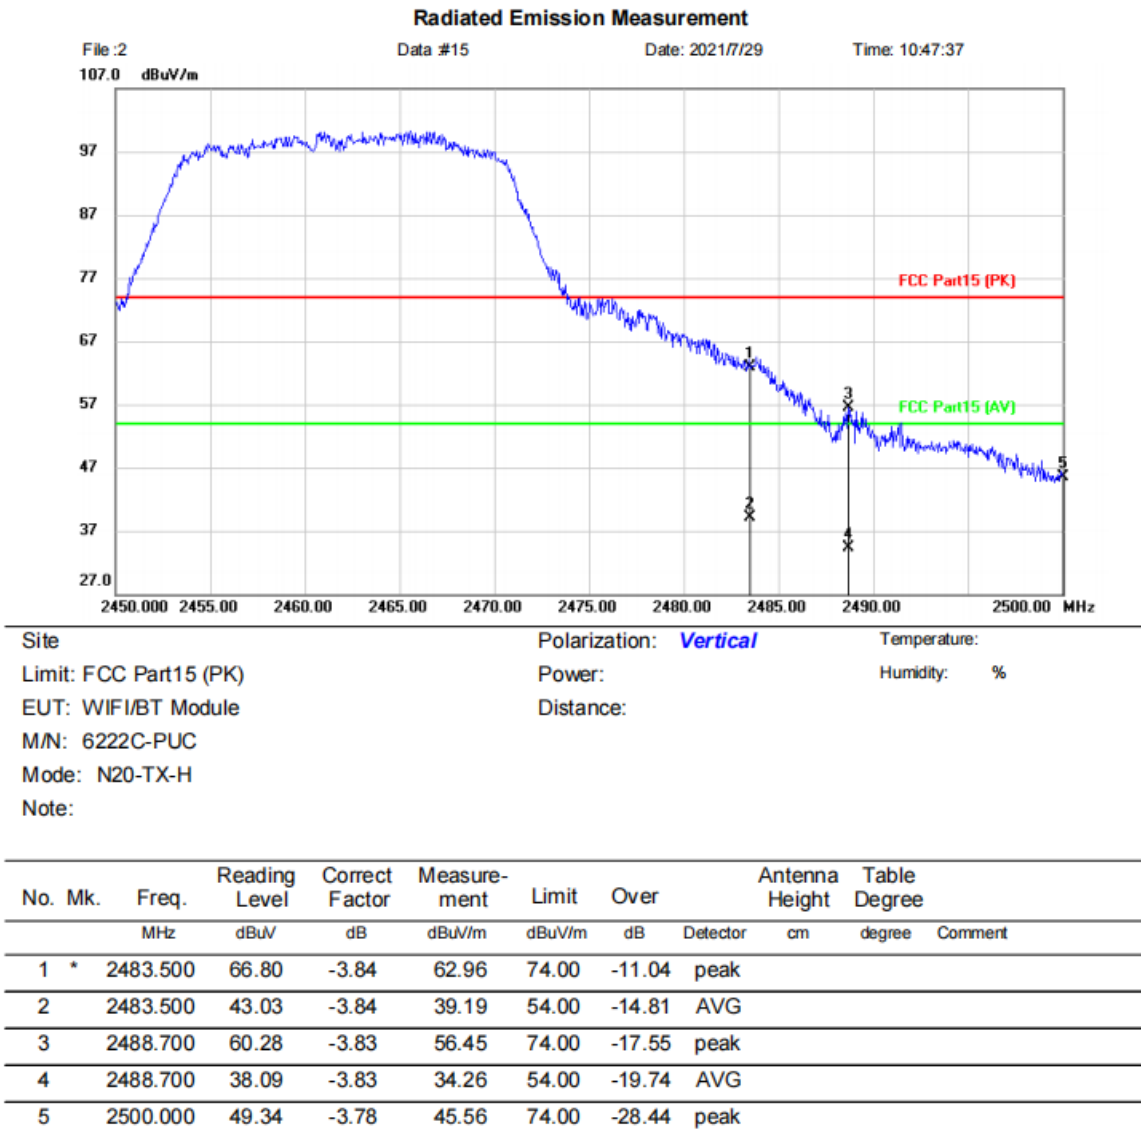


\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX N20 high channel]; [Polarity: Horizontal]

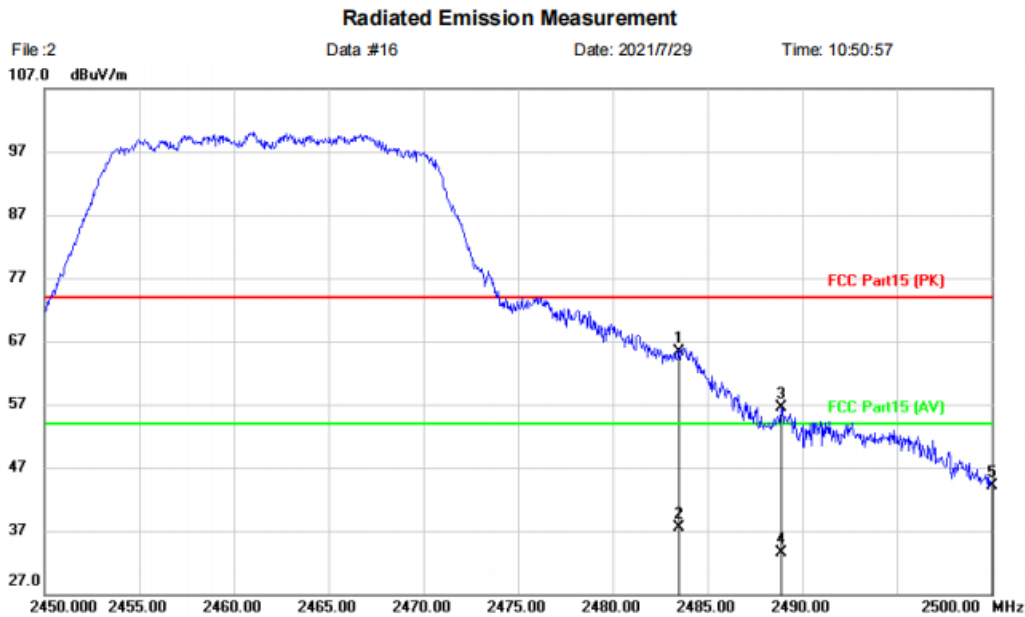

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: WIFI/BT Module	Distance:	
M/N: 6222C-PUC		
Mode: N20-TX-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2483.500	69.17	-3.84	65.33	74.00	-8.67	peak		
2		2483.500	41.43	-3.84	37.59	54.00	-16.41	AVG		
3		2488.900	60.41	-3.83	56.58	74.00	-17.42	peak		
4		2488.900	37.42	-3.83	33.59	54.00	-20.41	AVG		
5		2500.000	47.89	-3.78	44.11	74.00	-29.89	peak		

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX N20 low channel]; [Polarity: Horizontal]

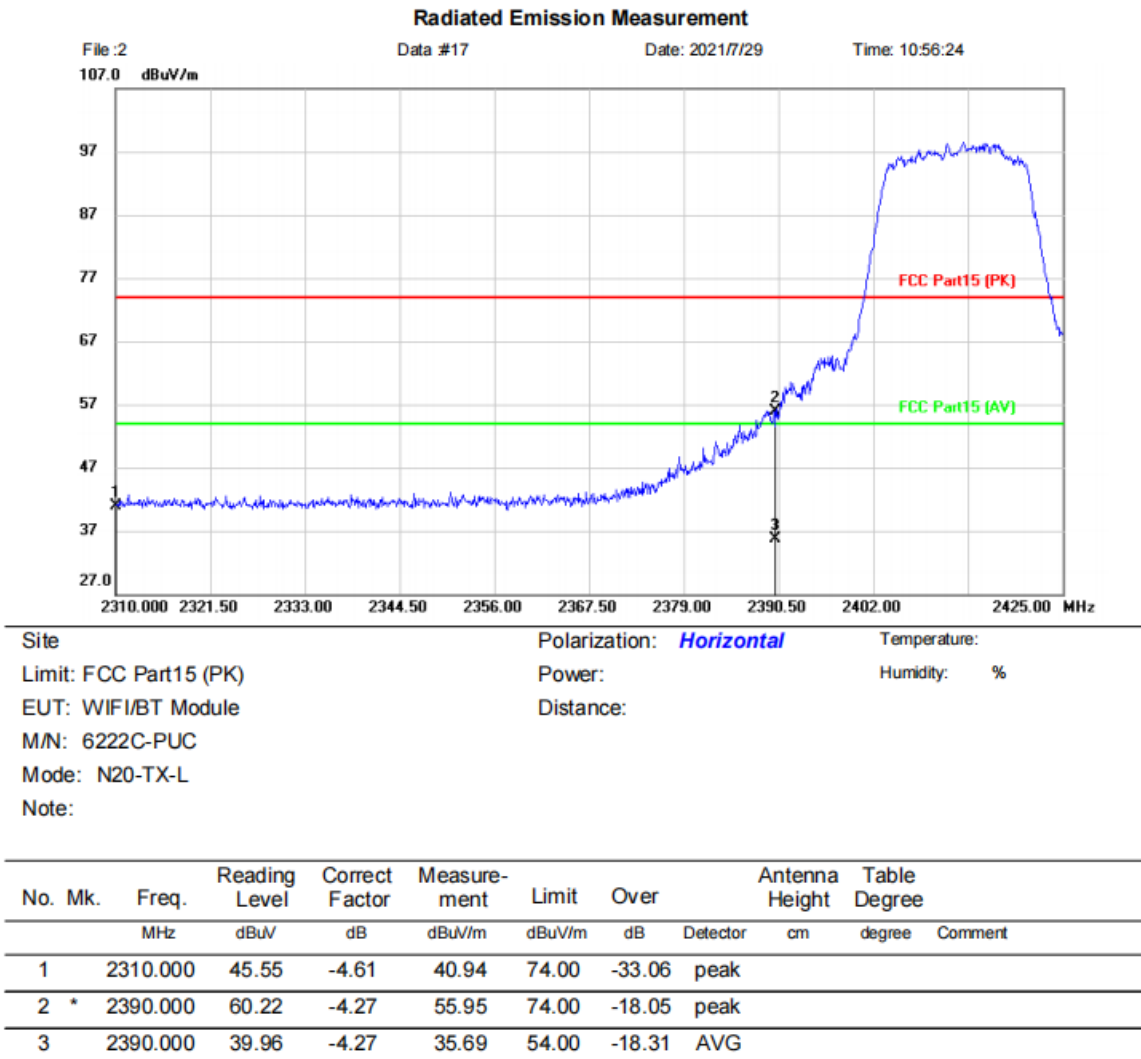


\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**



[TestMode: TX N20 low channel]; [Polarity: Vertical]

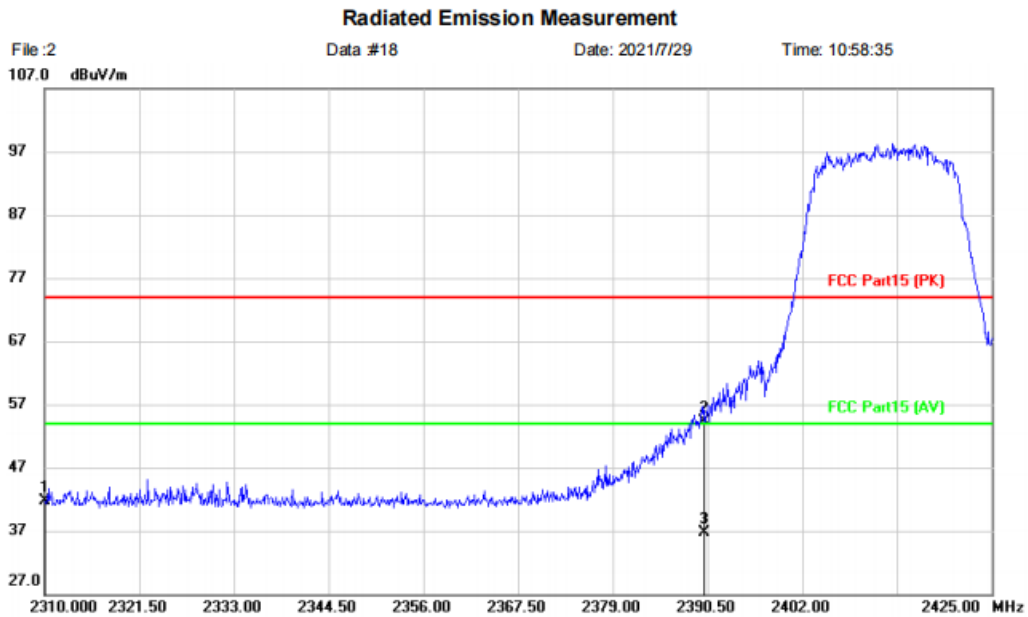

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: WIFI/BT Module	Distance:	
M/N: 6222C-PUC		
Mode: N20-TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	46.30	-4.61	41.69	74.00	-32.31	peak		
2		2390.000	58.50	-4.27	54.23	74.00	-19.77	peak		
3	*	2390.000	40.90	-4.27	36.63	54.00	-17.37	AVG		

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX N40 low channel]; [Polarity: Horizontal]

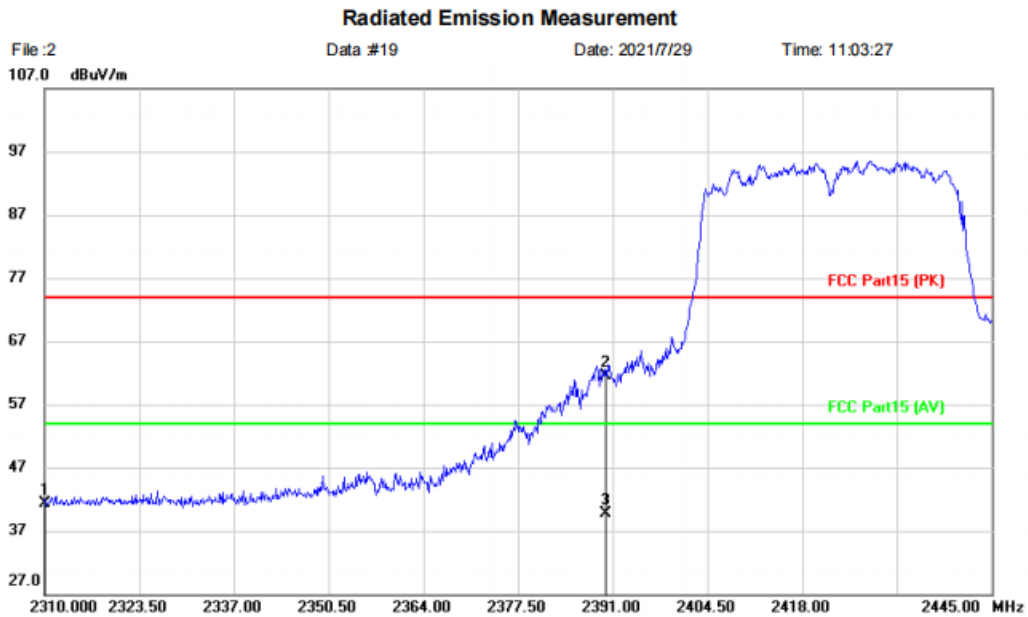

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: WIFI/BT Module	Distance:	
M/N: 6222C-PUC		
Mode: N40-TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	45.97	-4.61	41.36	74.00	-32.64	peak		
2	*	2390.000	65.73	-4.27	61.46	74.00	-12.54	peak		
3		2390.000	43.94	-4.27	39.67	54.00	-14.33	AVG		

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX N40 low channel]; [Polarity: Vertical]

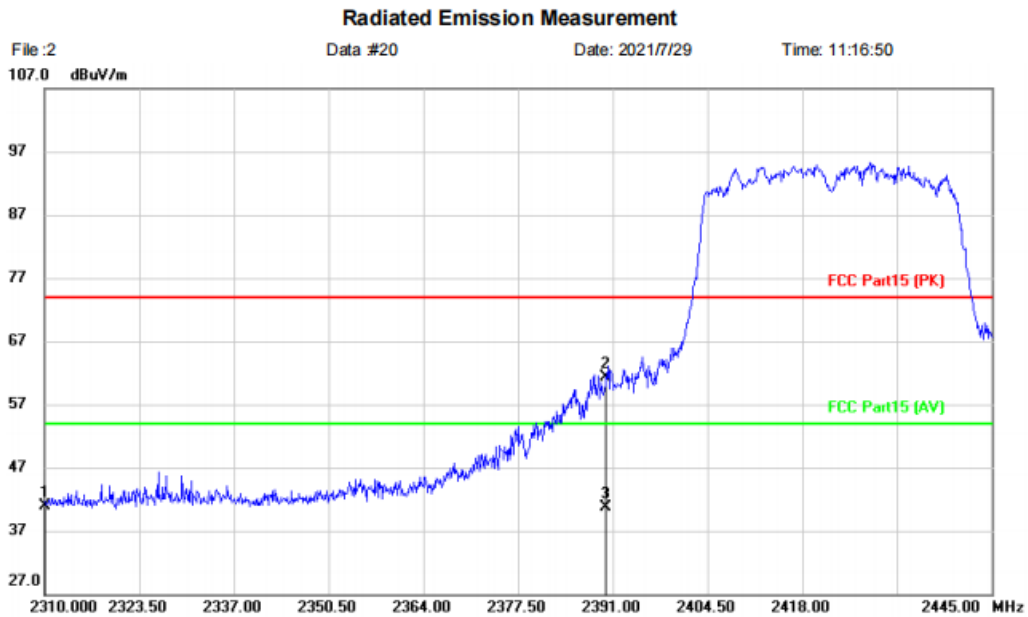

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: WIFI/BT Module	Distance:	
M/N: 6222C-PUC		
Mode: N40-TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	45.49	-4.61	40.88	74.00	-33.12	peak		
2	*	2390.000	65.66	-4.27	61.39	74.00	-12.61	peak		
3		2390.000	44.94	-4.27	40.67	54.00	-13.33	AVG		

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX N40 high channel]; [Polarity: Horizontal]

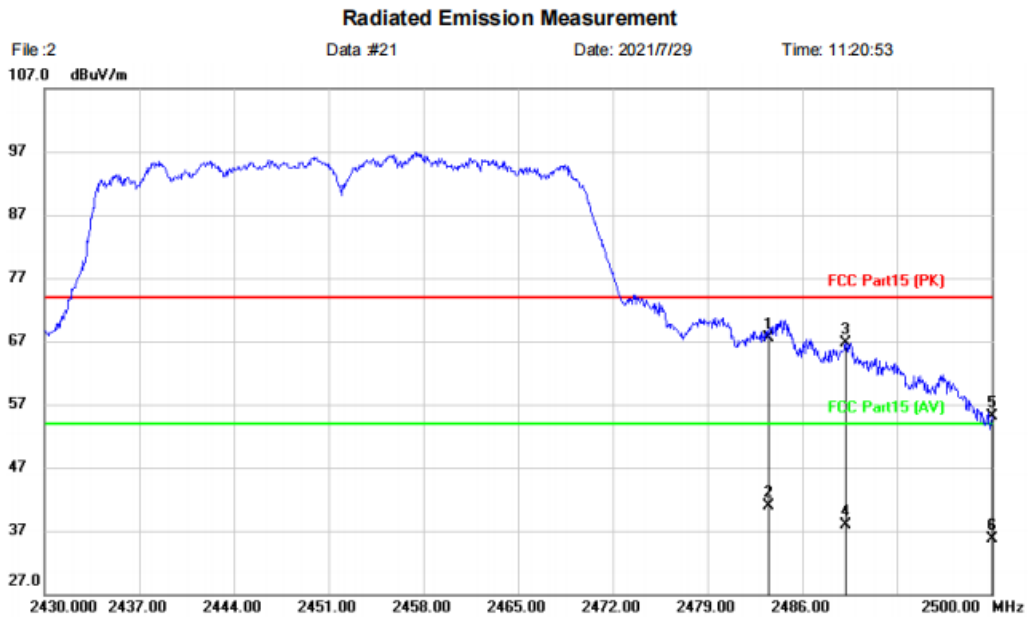

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: WIFI/BT Module	Distance:	
M/N: 6222C-PUC		
Mode: N40-TX-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2483.500	71.28	-3.84	67.44	74.00	-6.56	peak		
2		2483.500	44.72	-3.84	40.88	54.00	-13.12	AVG		
3		2489.220	70.55	-3.83	66.72	74.00	-7.28	peak		
4		2489.220	41.65	-3.83	37.82	54.00	-16.18	AVG		
5		2500.000	58.98	-3.78	55.20	74.00	-18.80	peak		
6		2500.000	39.50	-3.78	35.72	54.00	-18.28	AVG		

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX N40 high channel]; [Polarity: Vertical]

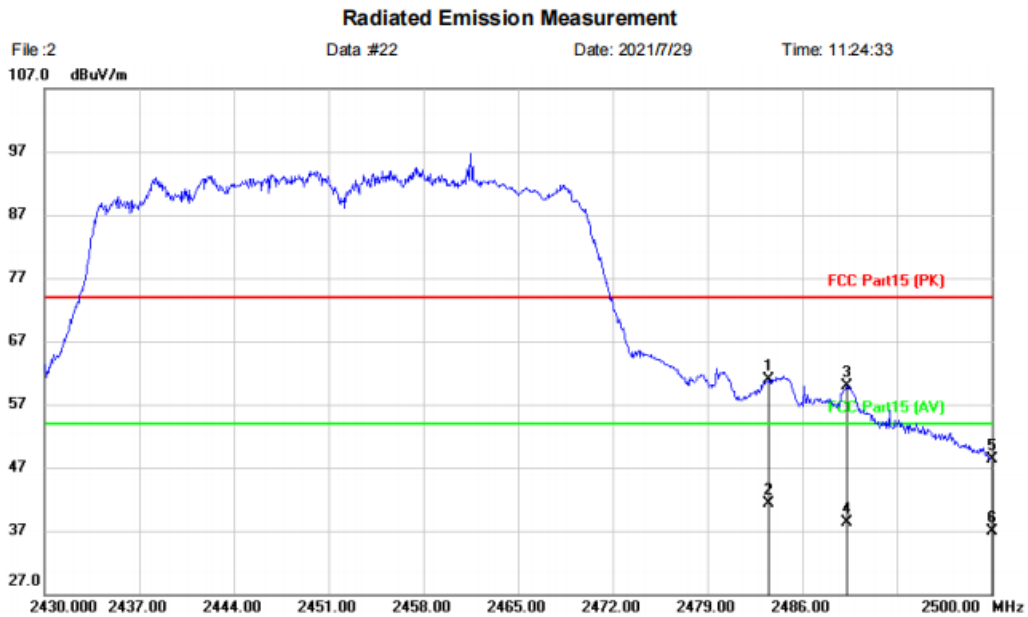

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: WIFI/BT Module	Distance:	
M/N: 6222C-PUC		
Mode: N40-TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	64.74	-3.84	60.90	74.00	-13.10	peak		
2	*	2483.500	45.09	-3.84	41.25	54.00	-12.75	AVG		
3		2489.290	63.74	-3.83	59.91	74.00	-14.09	peak		
4		2489.290	42.16	-3.83	38.33	54.00	-15.67	AVG		
5		2500.000	52.16	-3.78	48.38	74.00	-25.62	peak		
6		2500.000	40.76	-3.78	36.98	54.00	-17.02	AVG		

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**


## 16 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

### 16.1 LIMITS

<b>Limit:</b>	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

### 16.2 BLOCK DIAGRAM OF TEST SETUP

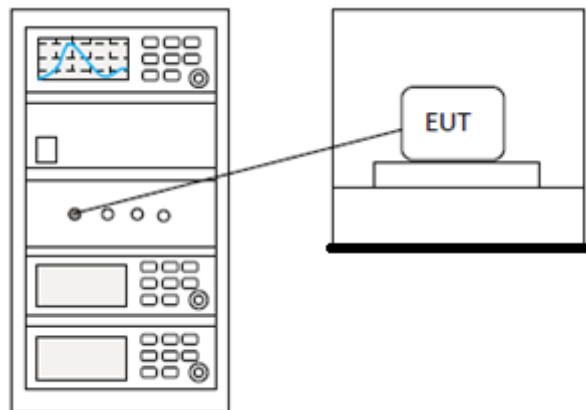

### 16.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia


## 17 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

### 17.1 LIMITS

<b>Limit:</b>	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

### 17.2 BLOCK DIAGRAM OF TEST SETUP

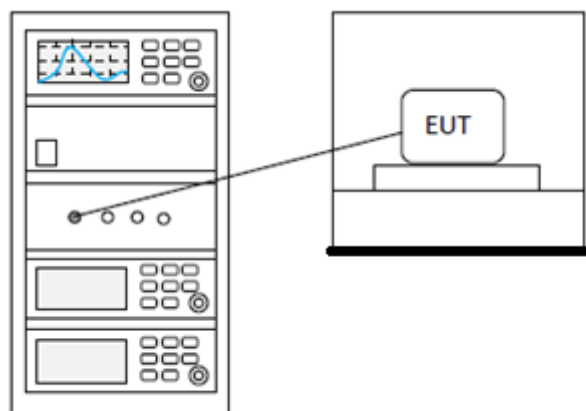



### 17.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia


## 18 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

### 18.1 LIMITS

<b>Limit:</b>	$\geq 500$ kHz
---------------	----------------

### 18.2 BLOCK DIAGRAM OF TEST SETUP

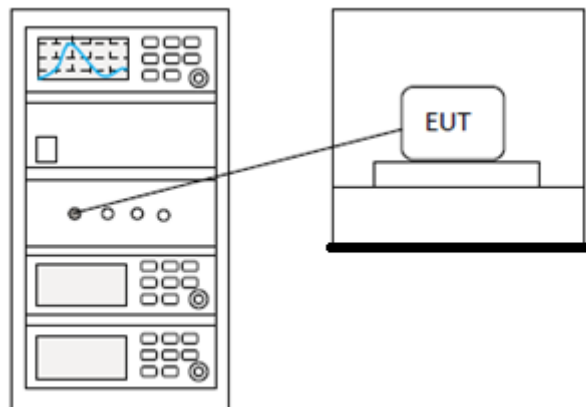

### 18.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**

## 19 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	Transmitting mode
Test Mode (Final Test)	Transmitting mode
Tester	Jozu
Temperature	25°C
Humidity	60%

### 19.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### 19.2 BLOCK DIAGRAM OF TEST SETUP

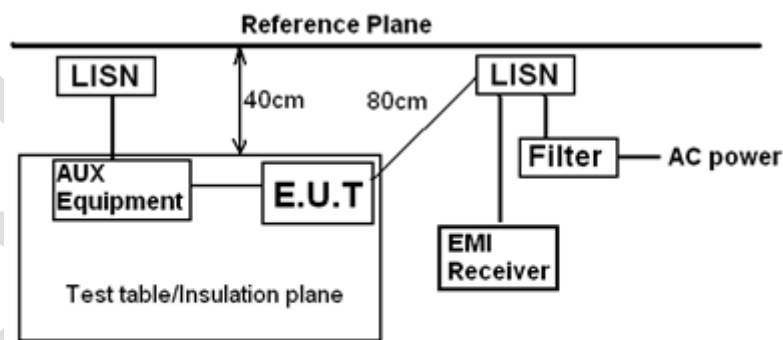

Remark  
 E.U.T: Equipment Under Test  
 LISN: Line Impedance Stabilization Network  
 Test table height=0.8m

### 19.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.


- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia

### 19.4 TEST DATA

[TestMode: Transmitting mode]; [Line: Neutral];[Power:AC120V/60Hz]

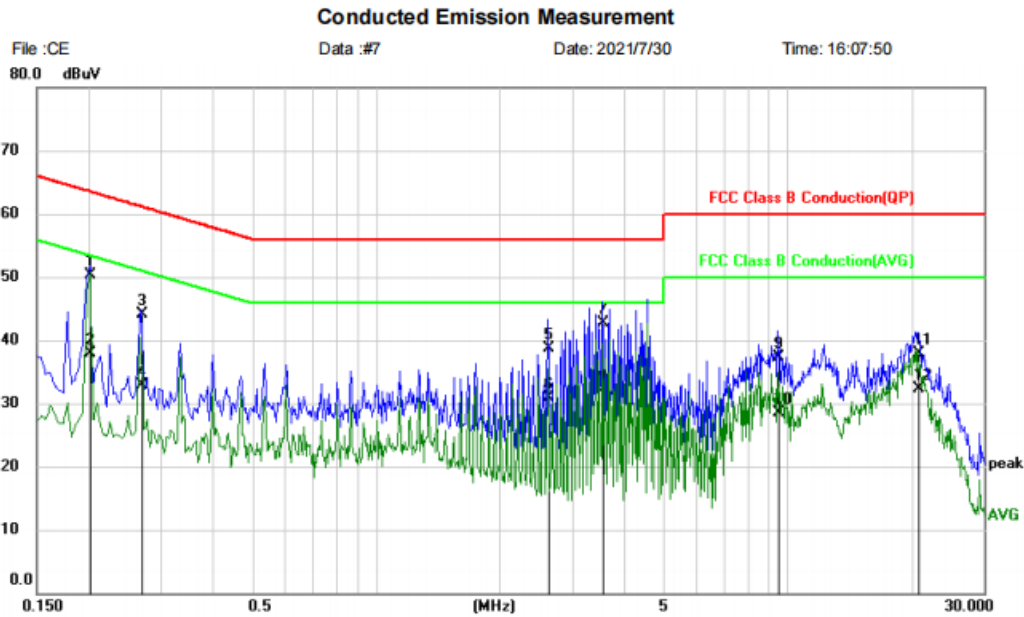

Site	Phase: <i>N</i>	Temperature:
Limit: FCC Class B Conduction(QP)	Power:	Humidity: %
EUT: WIFI/BT Module		
M/N: 6222C-PUC		
Mode: 2.4GWIFI mode		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.2020	40.59	9.75	50.34	63.53	-13.19	QP	
2		0.2020	28.14	9.75	37.89	53.53	-15.64	AVG	
3		0.2700	34.29	9.76	44.05	61.12	-17.07	QP	
4		0.2700	23.09	9.76	32.85	51.12	-18.27	AVG	
5		2.6180	28.79	9.89	38.68	56.00	-17.32	QP	
6		2.6180	20.94	9.89	30.83	46.00	-15.17	AVG	
7		3.5540	32.85	9.91	42.76	56.00	-13.24	QP	
8		3.5540	22.20	9.91	32.11	46.00	-13.89	AVG	
9		9.4660	27.11	10.13	37.24	60.00	-22.76	QP	
10		9.4660	18.36	10.13	28.49	50.00	-21.51	AVG	
11		20.8060	27.45	10.42	37.87	60.00	-22.13	QP	
12		20.8060	21.92	10.42	32.34	50.00	-17.66	AVG	


\*:Maximum data    x:Over limit    !:over margin

<Reference Only

**Test Result: Pass**

[TestMode: Transmitting mode]; [Line: Line] ;[Power:AC120V/60Hz]

**Conducted Emission Measurement**

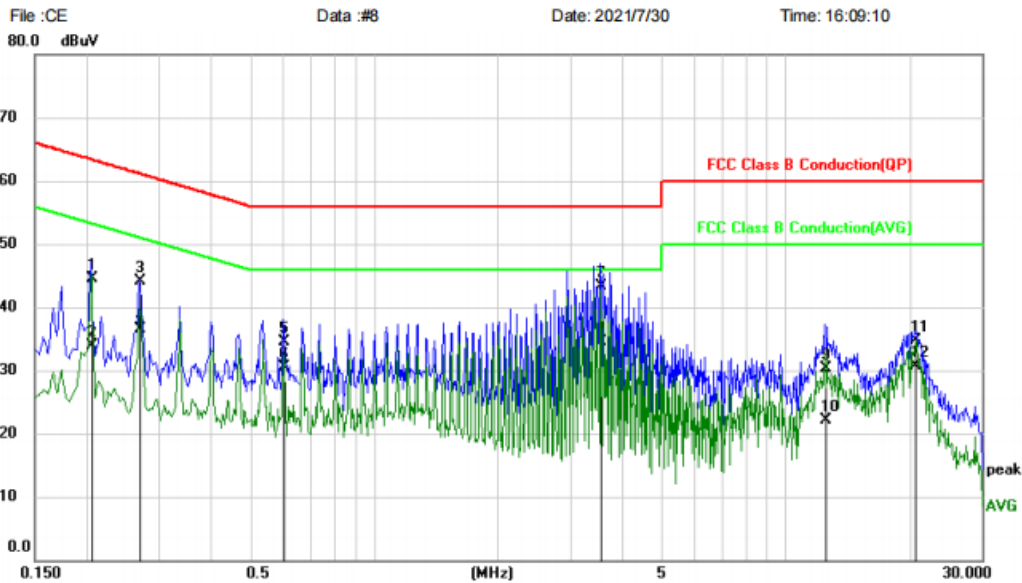

Site: \_\_\_\_\_ Phase: **L1** Temperature: \_\_\_\_\_  
 Limit: FCC Class B Conduction(QP) Power: \_\_\_\_\_ Humidity: %  
 EUT: WIFI/BT Module  
 M/N: 6222C-PUC  
 Mode: 2.4GWIFI mode  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2060	34.63	9.83	44.46	63.37	-18.91	QP	
2		0.2060	24.13	9.83	33.96	53.37	-19.41	AVG	
3		0.2700	34.17	9.84	44.01	61.12	-17.11	QP	
4		0.2700	26.64	9.84	36.48	51.12	-14.64	AVG	
5		0.6020	24.55	9.88	34.43	56.00	-21.57	QP	
6		0.6020	20.61	9.88	30.49	46.00	-15.51	AVG	
7		3.5540	33.38	9.98	43.36	56.00	-12.64	QP	
8	*	3.5540	24.44	9.98	34.42	46.00	-11.58	AVG	
9		12.4500	20.07	10.28	30.35	60.00	-29.65	QP	
10		12.4500	11.85	10.28	22.13	50.00	-27.87	AVG	
11		20.6100	24.27	10.42	34.69	60.00	-25.31	QP	
12		20.6100	20.36	10.42	30.78	50.00	-19.22	AVG	

\*:Maximum data x:Over limit !:over margin

(Reference Only)

**Test Result: Pass**

## 20 APPENDIX


### 20.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	10.551	0.26	10.811	30	Pass
NVNT	b	2412	Ant2	14.434	0.26	14.694	30	Pass
NVNT	b	2412	Sum	15.923	0.26	16.183	30	Pass
NVNT	b	2437	Ant1	10.776	0.26	11.036	30	Pass
NVNT	b	2437	Ant2	14.727	0.26	14.987	30	Pass
NVNT	b	2437	Sum	16.196	0.26	16.456	30	Pass
NVNT	b	2462	Ant1	10.803	0.24	11.043	30	Pass
NVNT	b	2462	Ant2	14.834	0.24	15.074	30	Pass
NVNT	b	2462	Sum	16.281	0.24	16.521	30	Pass
NVNT	g	2412	Ant1	12.807	1.33	14.137	30	Pass
NVNT	g	2412	Ant2	15.787	1.33	17.117	30	Pass
NVNT	g	2412	Sum	17.558	1.33	18.888	30	Pass
NVNT	g	2437	Ant1	12.874	1.31	14.184	30	Pass
NVNT	g	2437	Ant2	15.304	1.31	16.614	30	Pass
NVNT	g	2437	Sum	17.267	1.31	18.577	30	Pass
NVNT	g	2462	Ant1	12.806	1.34	14.146	30	Pass
NVNT	g	2462	Ant2	15.918	1.34	17.258	30	Pass
NVNT	g	2462	Sum	17.645	1.34	18.985	30	Pass
NVNT	n20	2412	Ant1	12.357	5.85	18.207	30	Pass
NVNT	n20	2412	Ant2	15.3	5.85	21.15	30	Pass
NVNT	n20	2412	Sum	17.083	5.85	22.933	30	Pass
NVNT	n20	2437	Ant1	12.313	5.85	18.163	30	Pass
NVNT	n20	2437	Ant2	15.155	5.85	21.005	30	Pass
NVNT	n20	2437	Sum	16.973	5.85	22.823	30	Pass
NVNT	n20	2462	Ant1	12.308	5.85	18.158	30	Pass
NVNT	n20	2462	Ant2	15.355	5.85	21.205	30	Pass
NVNT	n20	2462	Sum	17.104	5.85	22.954	30	Pass
NVNT	n40	2422	Ant1	11.802	7.43	19.232	30	Pass
NVNT	n40	2422	Ant2	15.273	7.43	22.703	30	Pass
NVNT	n40	2422	Sum	16.886	7.43	24.316	30	Pass
NVNT	n40	2437	Ant1	12.055	7.43	19.485	30	Pass
NVNT	n40	2437	Ant2	14.886	7.43	22.316	30	Pass
NVNT	n40	2437	Sum	16.708	7.43	24.138	30	Pass
NVNT	n40	2452	Ant1	12.007	7.42	19.427	30	Pass
NVNT	n40	2452	Ant2	15.046	7.42	22.466	30	Pass
NVNT	n40	2452	Sum	16.797	7.42	24.217	30	Pass

Power NVNT b 2412MHz Ant1




Power NVNT b 2412MHz Ant2

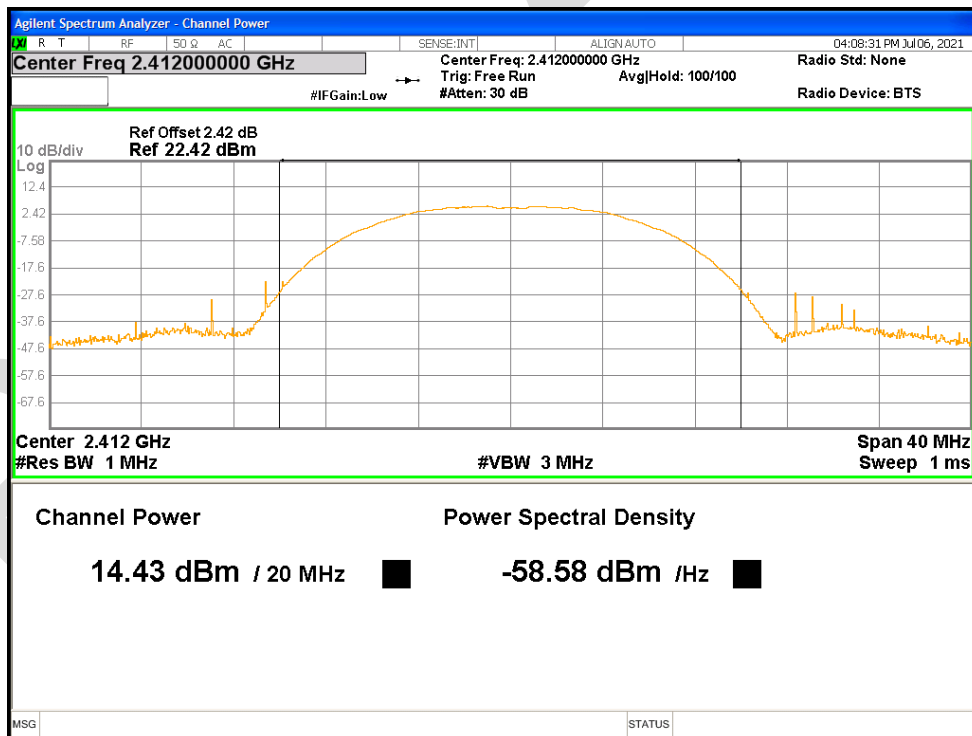


Power NVNT b 2437MHz Ant1




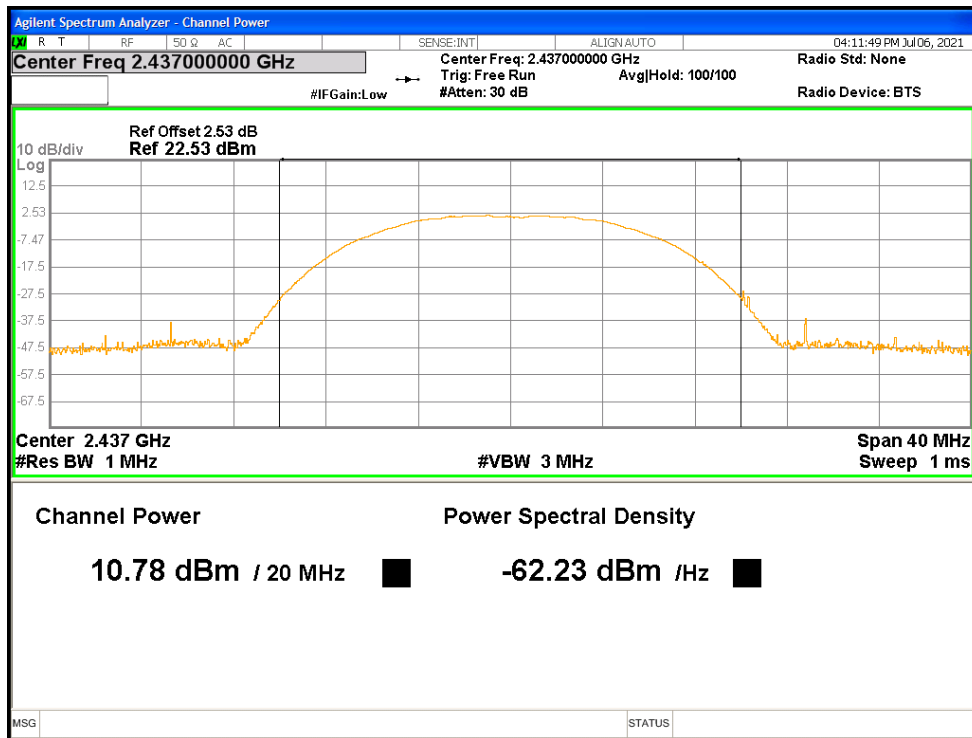


Power NVNT b 2437MHz Ant2

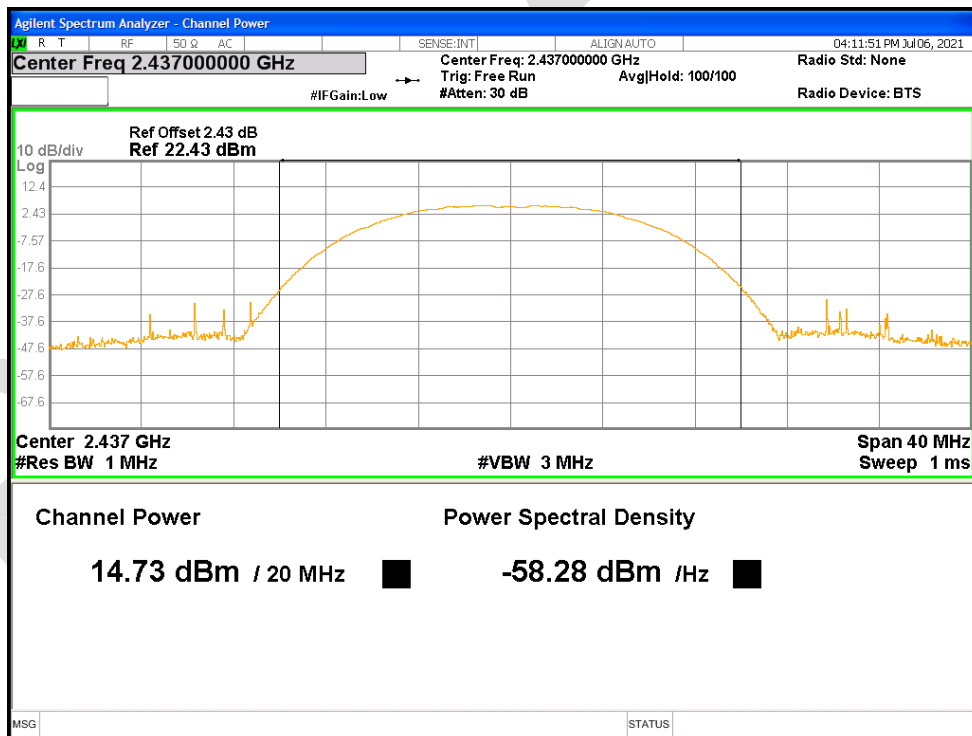


Power NVNT b 2462MHz Ant1

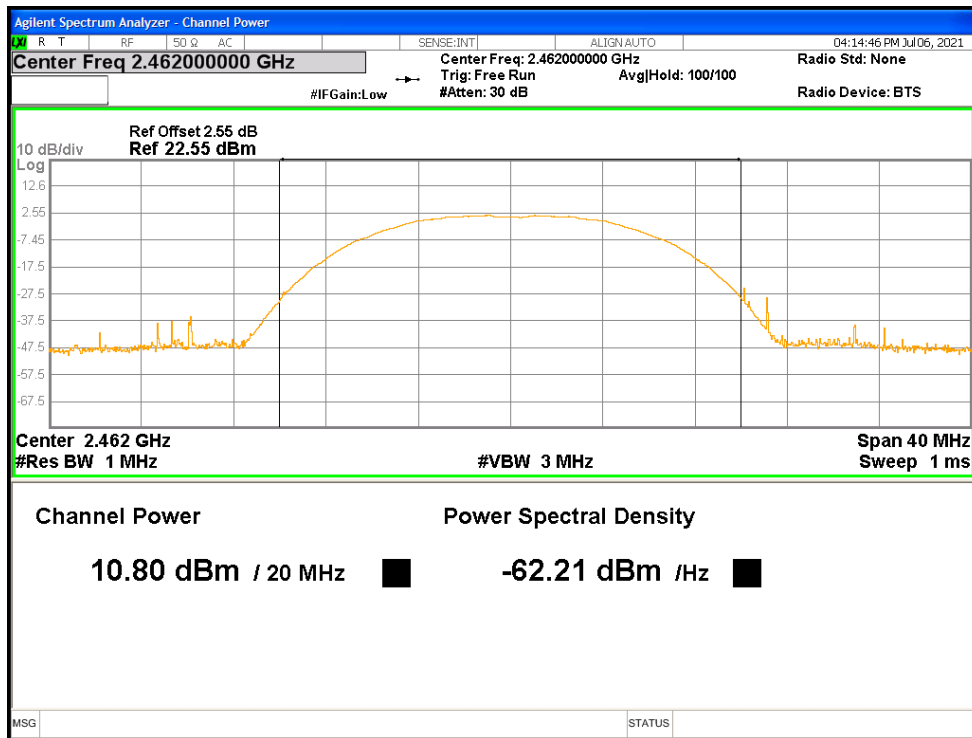


Power NVNT b 2462MHz Ant2

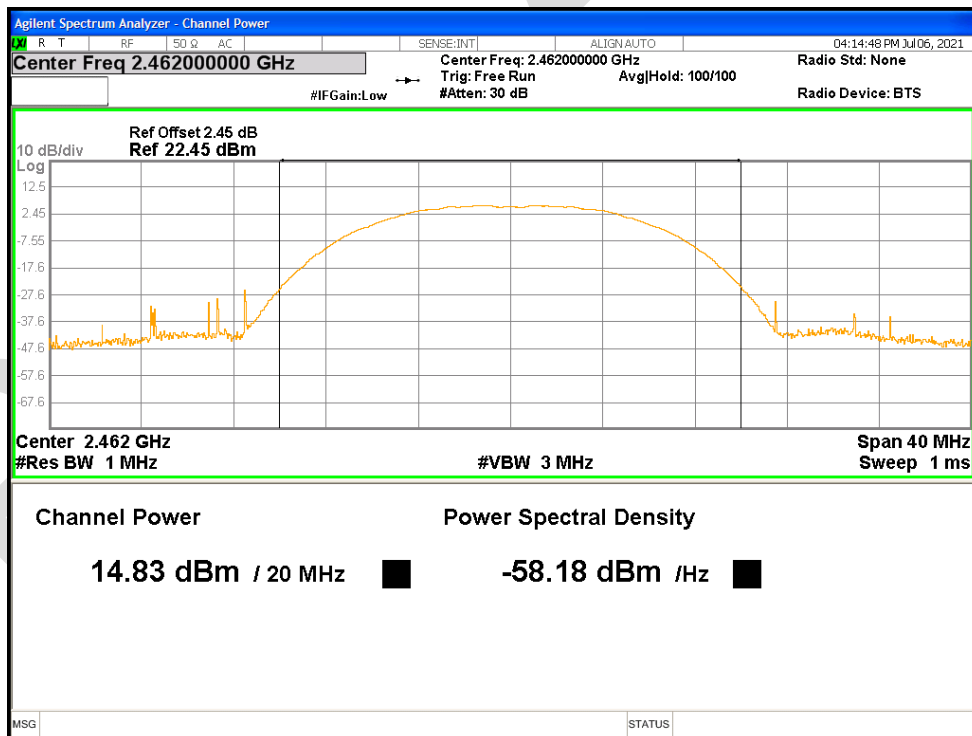


Power NVNT g 2412MHz Ant1

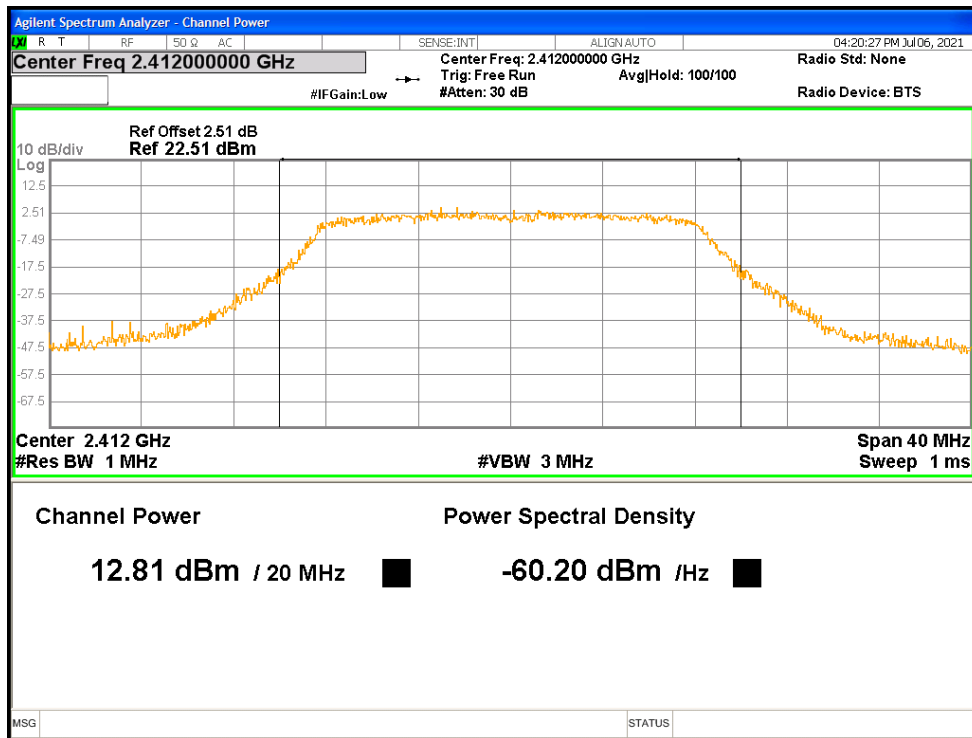


Power NVNT g 2412MHz Ant2

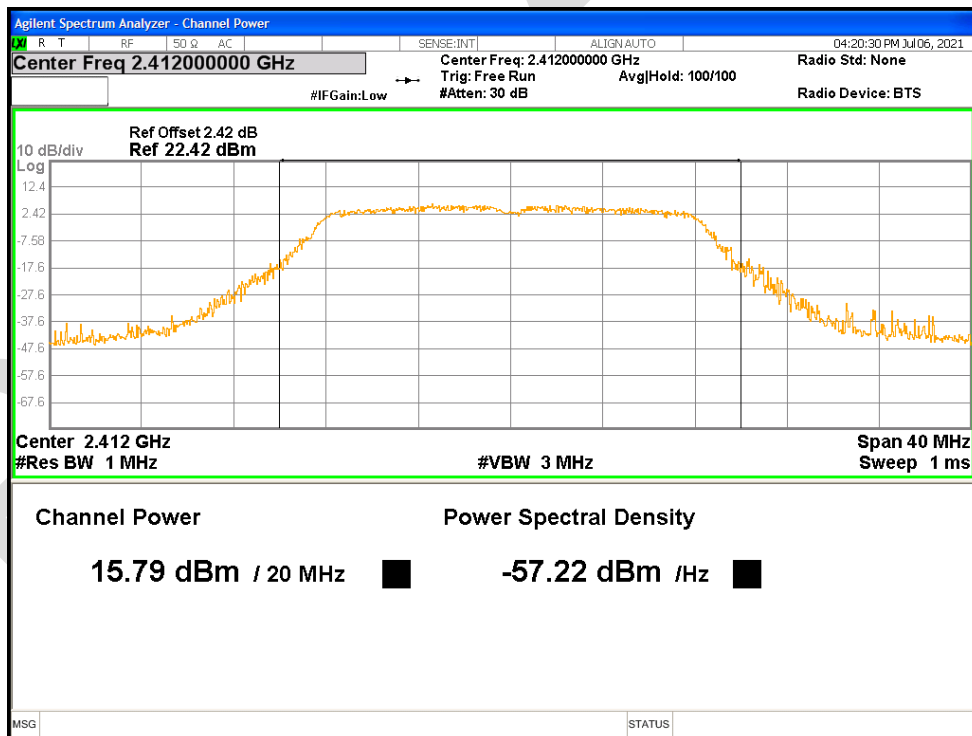


Power NVNT g 2437MHz Ant1

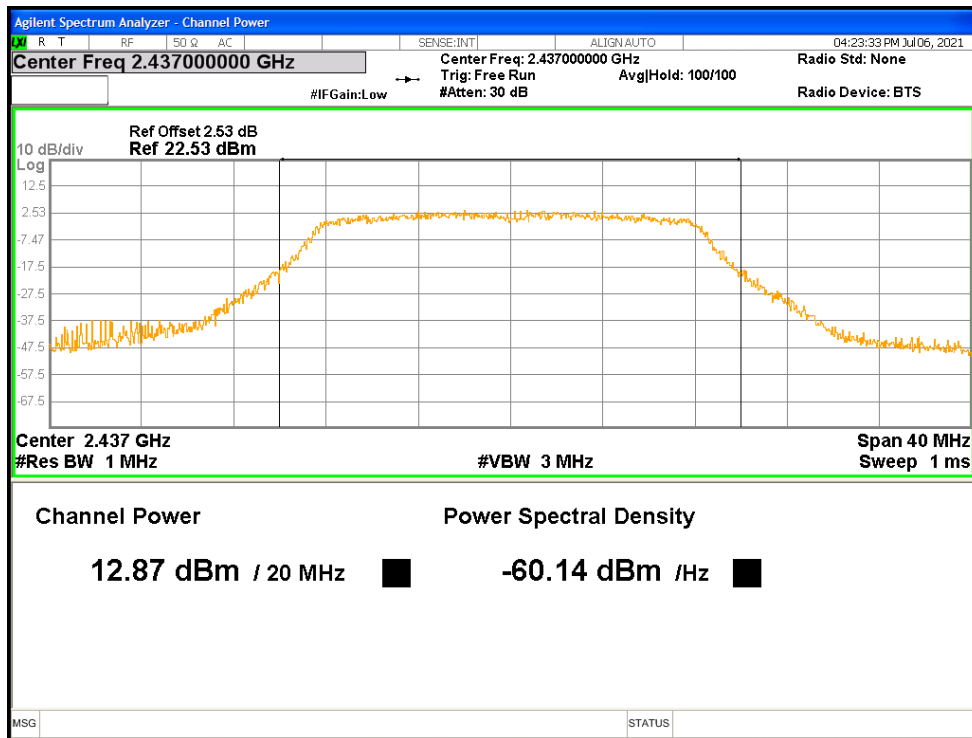


Power NVNT g 2437MHz Ant2

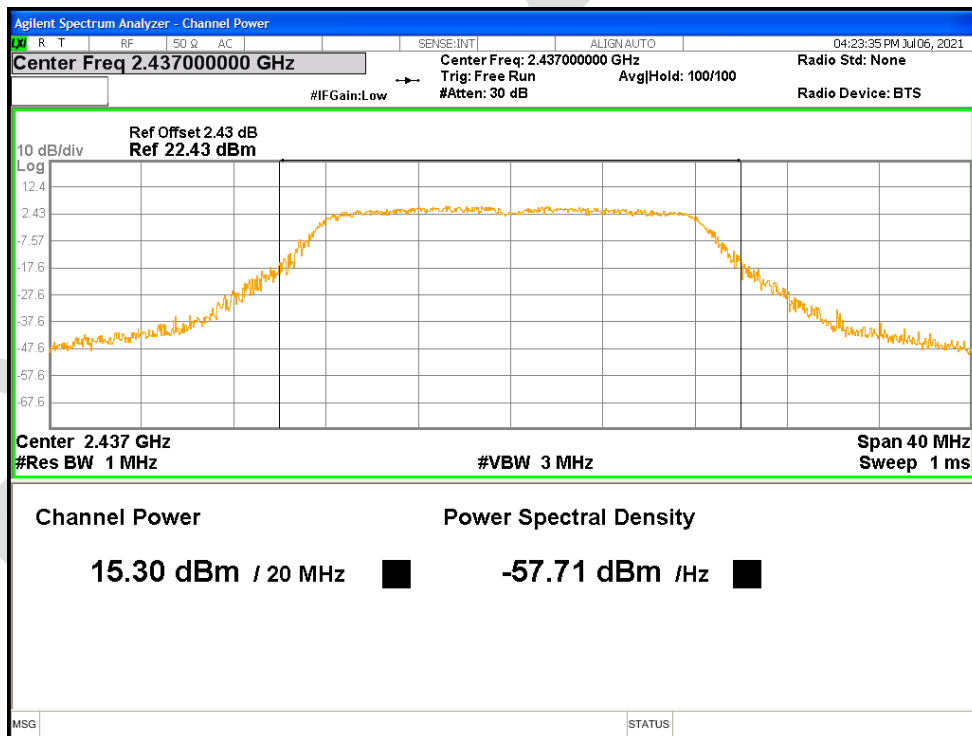


Power NVNT g 2462MHz Ant1

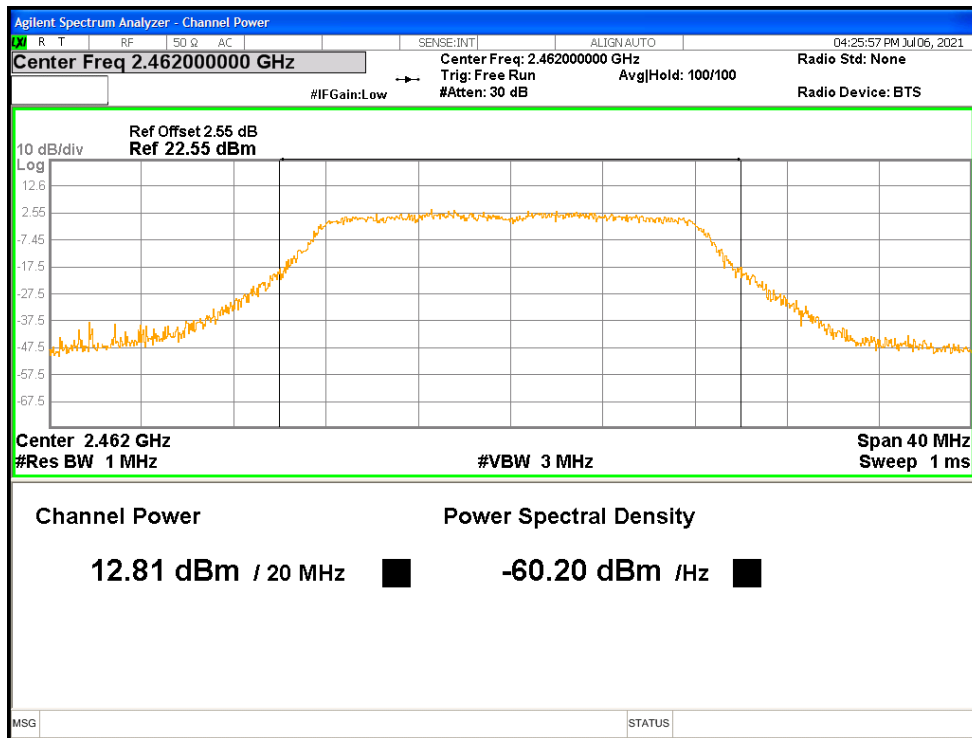


Power NVNT g 2462MHz Ant2

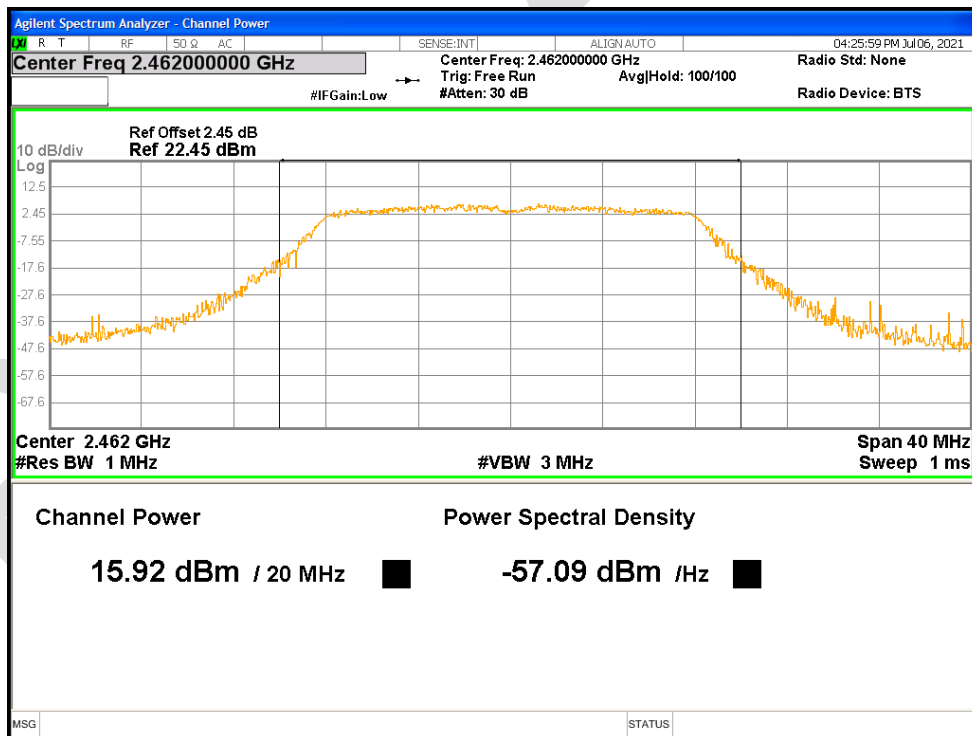


Power NVNT n20 2412MHz Ant1

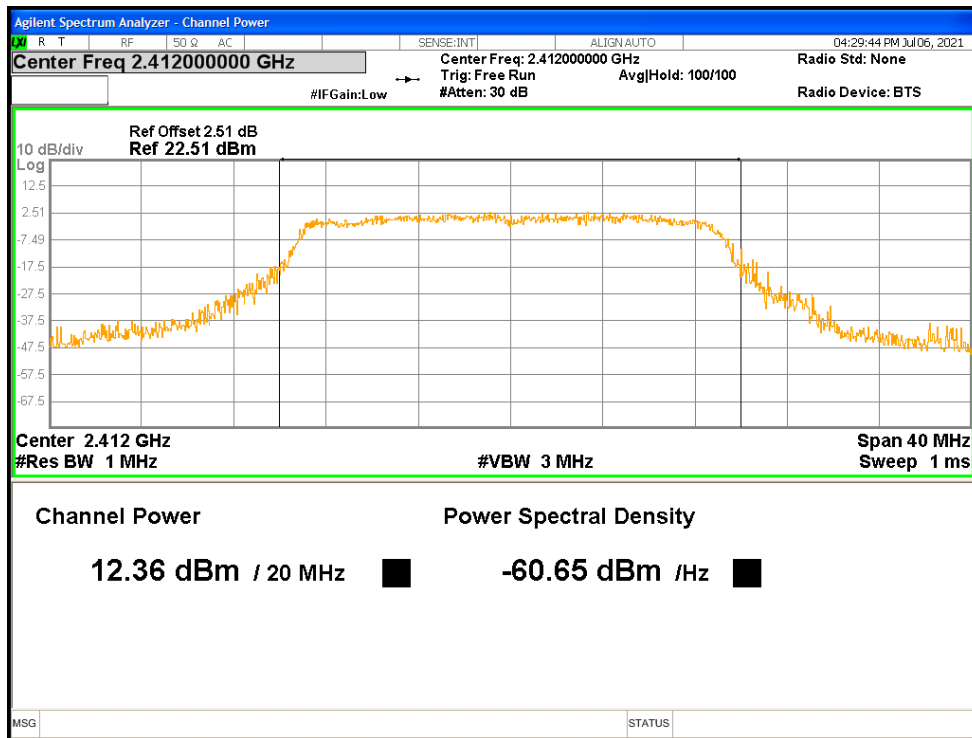


Power NVNT n20 2412MHz Ant2

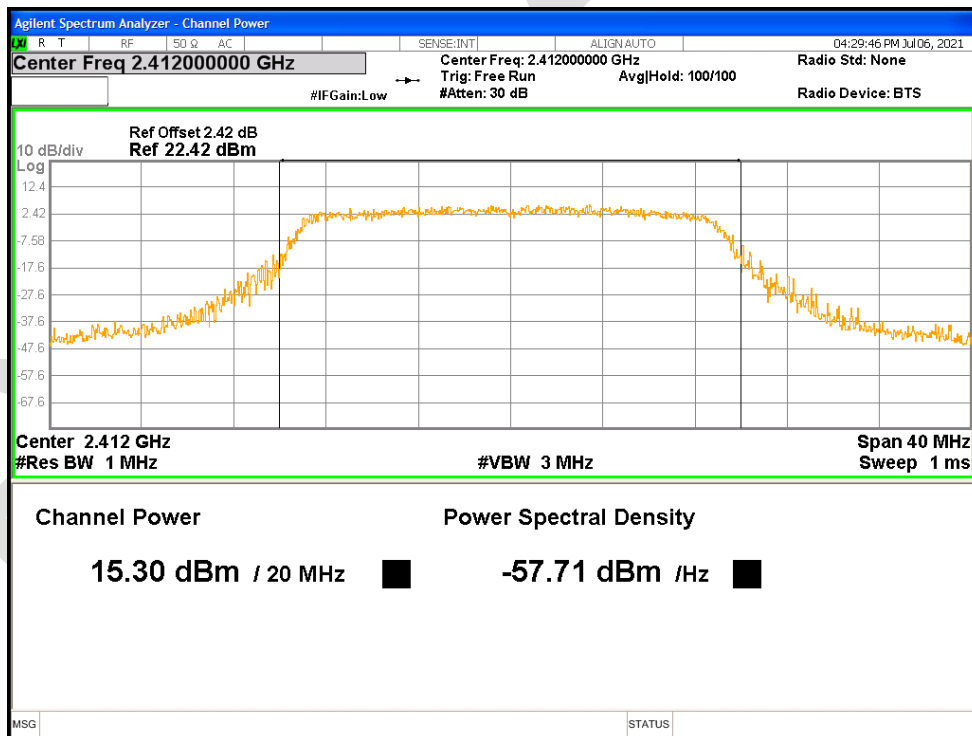


Power NVNT n20 2437MHz Ant1

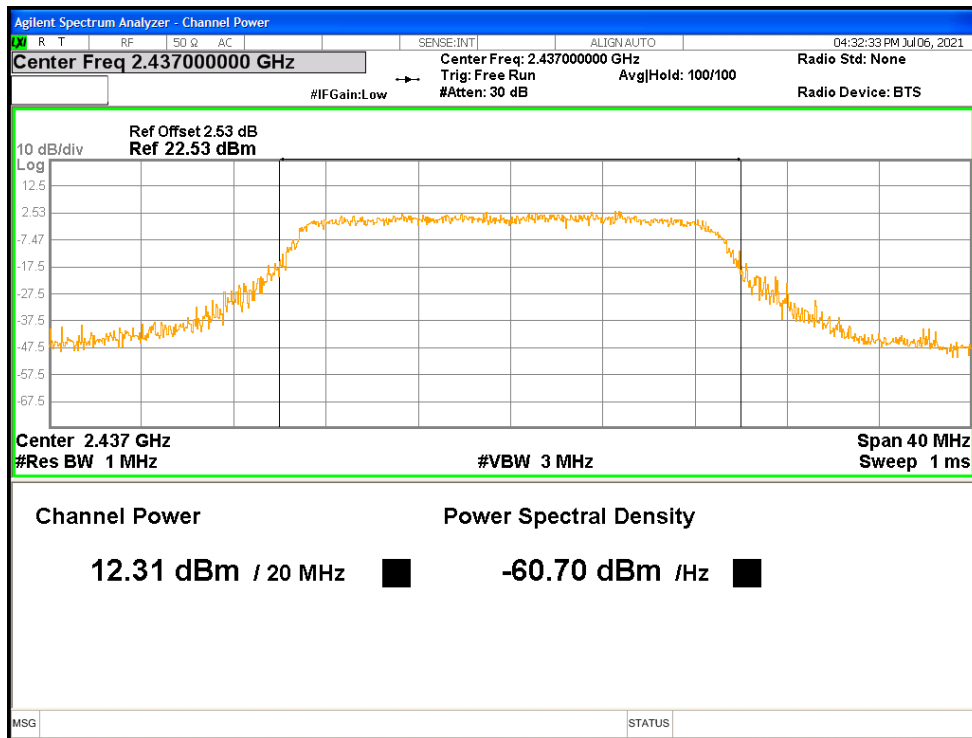


Power NVNT n20 2437MHz Ant2

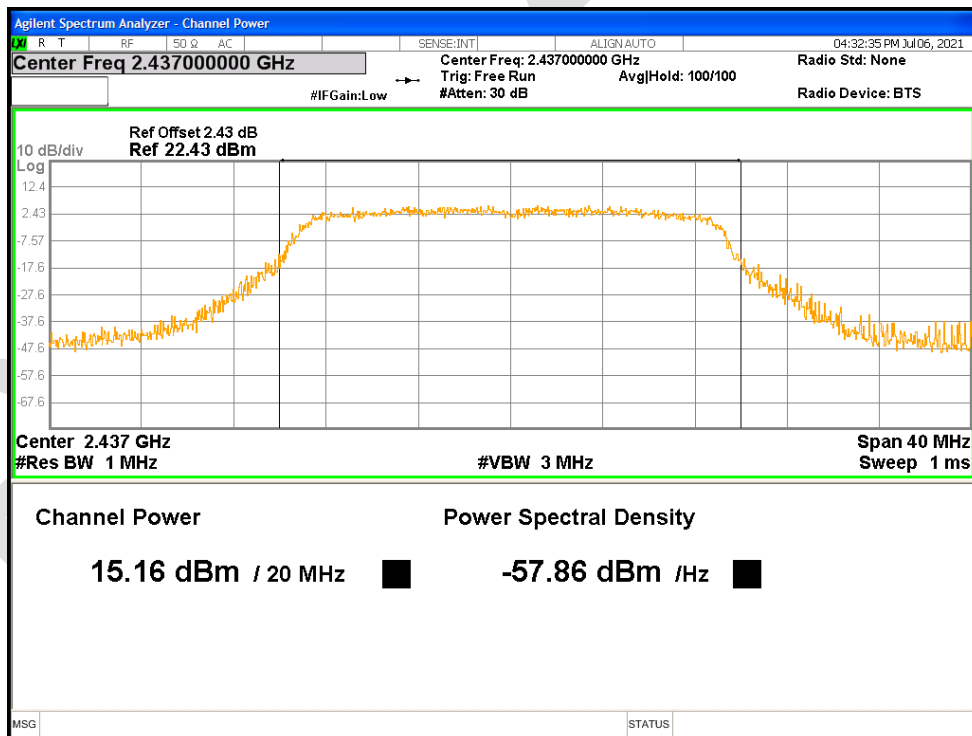

Power NVNT n20 2462MHz Ant1

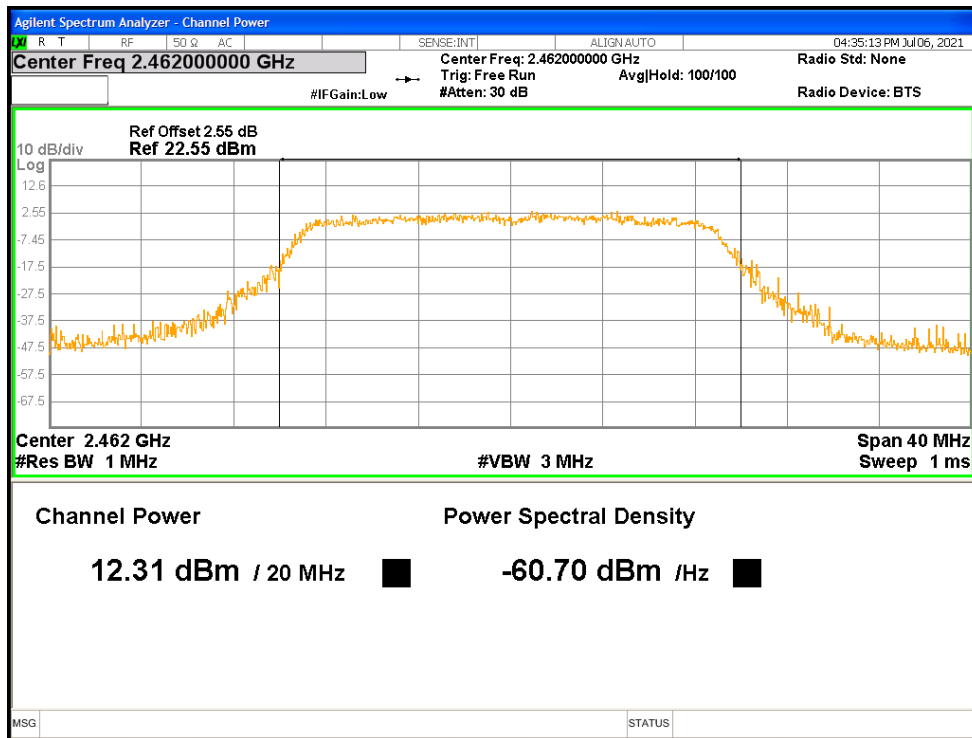


Power NVNT n20 2462MHz Ant2

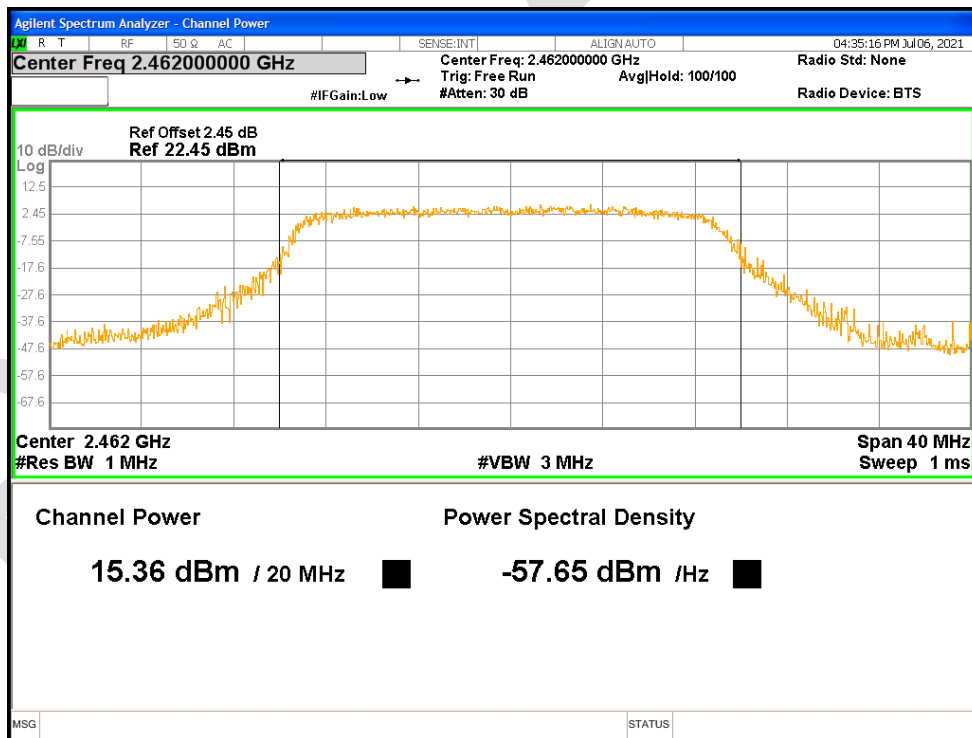


Power NVNT n40 2422MHz Ant1




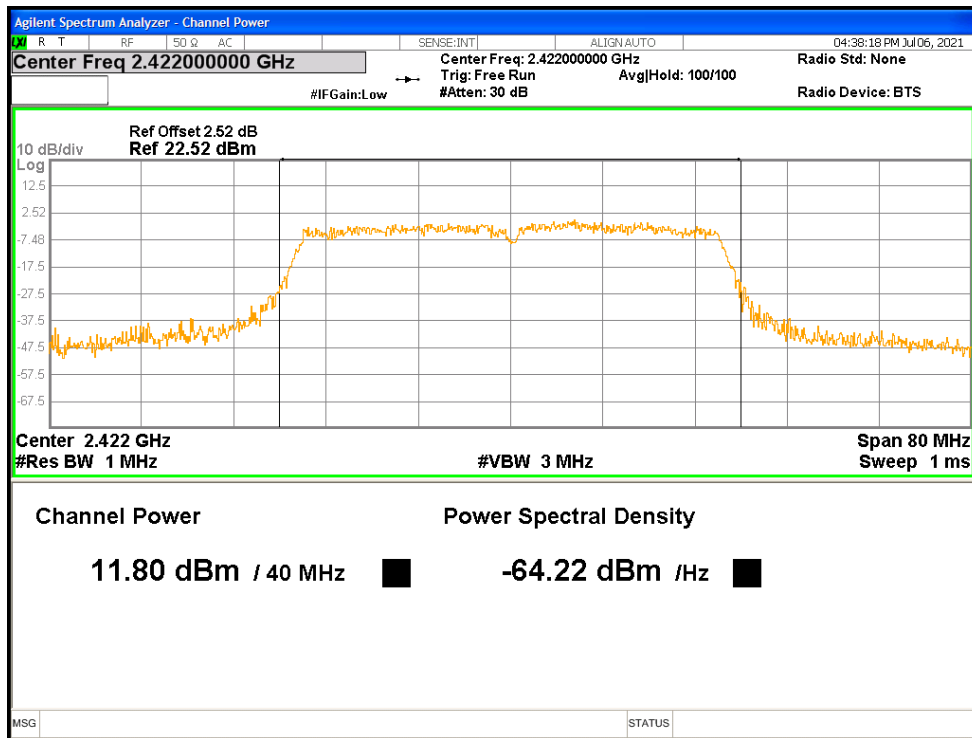


Power NVNT n40 2422MHz Ant2

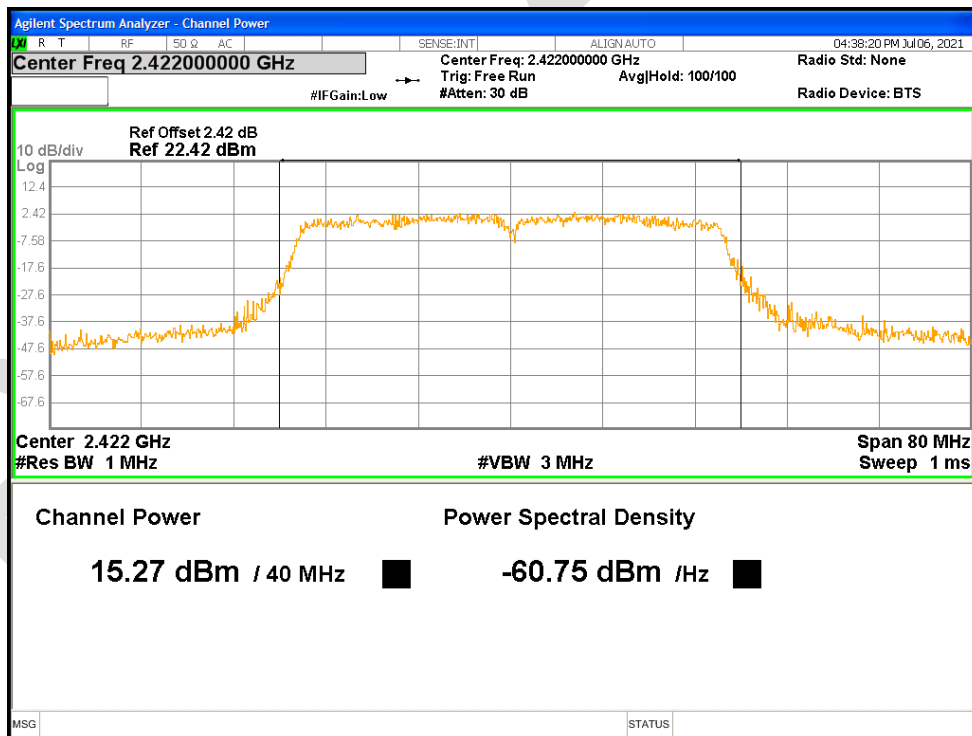


Power NVNT n40 2437MHz Ant1

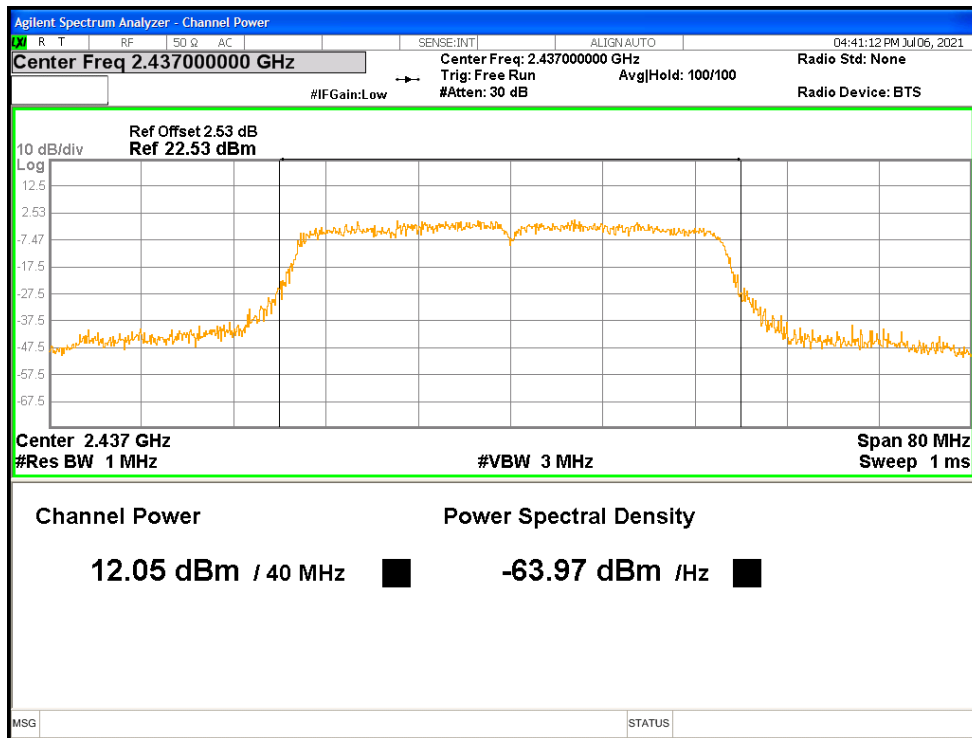


Power NVNT n40 2437MHz Ant2

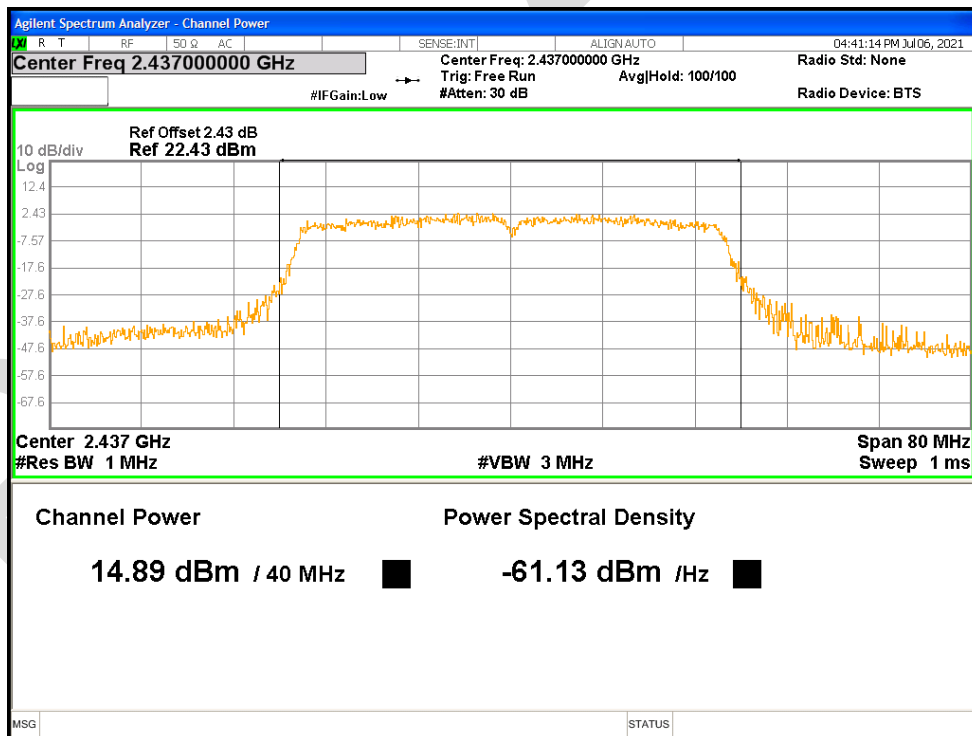

Power NVNT n40 2452MHz Ant1

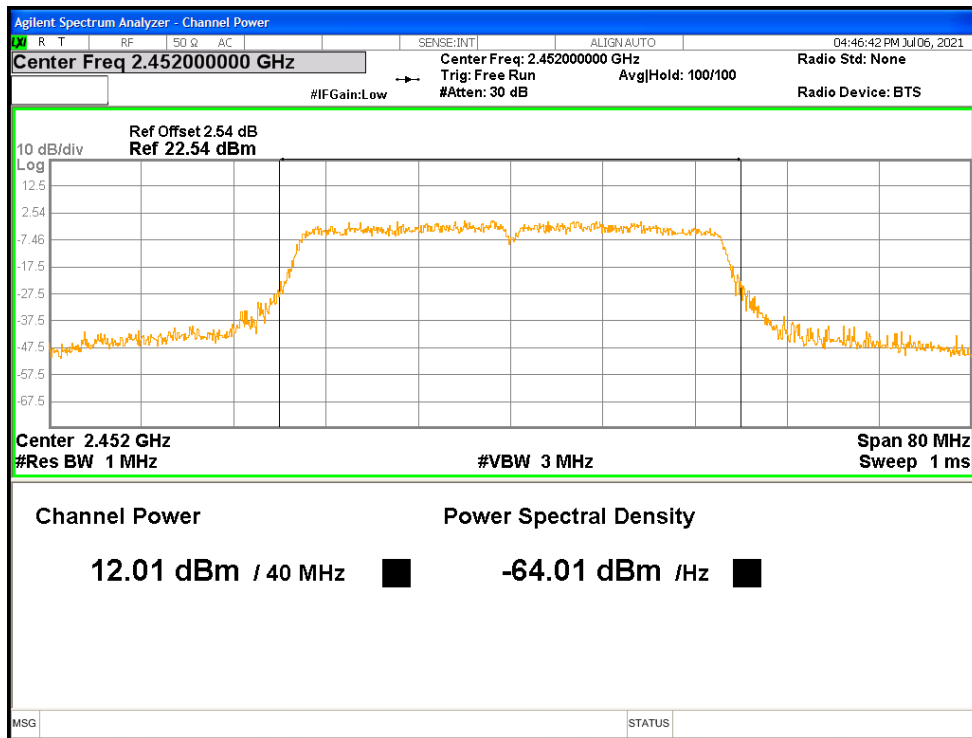


Power NVNT n40 2452MHz Ant2

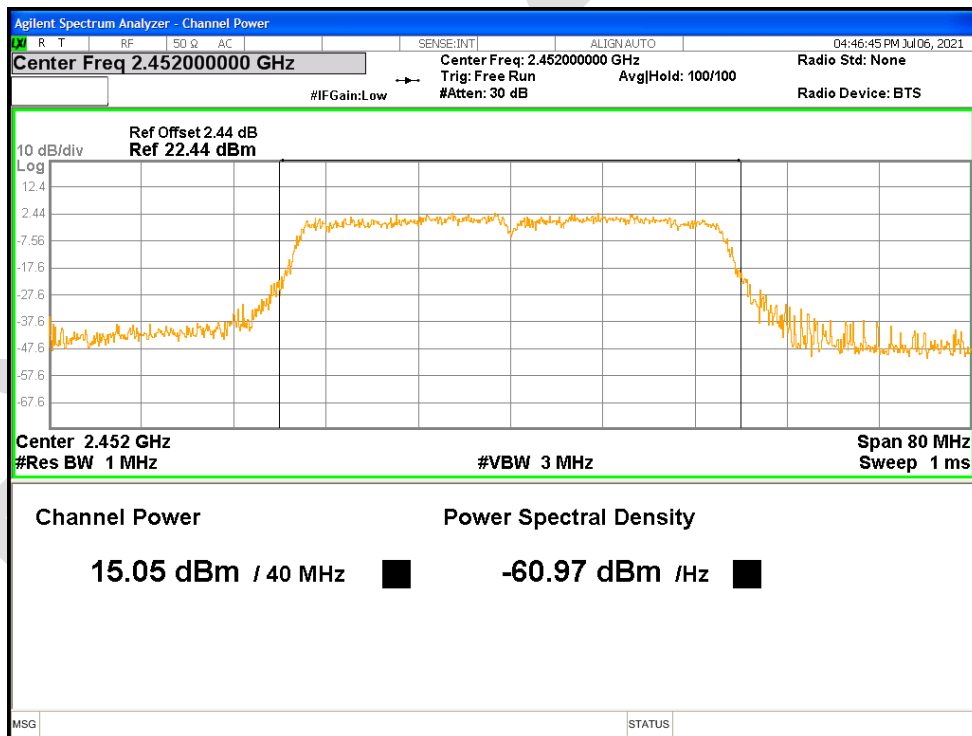


**20.2 -6DB BANDWIDTH**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	10.106	0.5	Pass
NVNT	b	2412	Ant2	10.093	0.5	Pass
NVNT	b	2437	Ant1	10.053	0.5	Pass
NVNT	b	2437	Ant2	10.085	0.5	Pass
NVNT	b	2462	Ant1	10.083	0.5	Pass
NVNT	b	2462	Ant2	10.097	0.5	Pass
NVNT	g	2412	Ant1	16.292	0.5	Pass
NVNT	g	2412	Ant2	16.286	0.5	Pass
NVNT	g	2437	Ant1	15.901	0.5	Pass
NVNT	g	2437	Ant2	15.624	0.5	Pass
NVNT	g	2462	Ant1	16.305	0.5	Pass
NVNT	g	2462	Ant2	15.072	0.5	Pass
NVNT	n20	2412	Ant1	16.54	0.5	Pass
NVNT	n20	2412	Ant2	16.37	0.5	Pass
NVNT	n20	2437	Ant1	17.355	0.5	Pass
NVNT	n20	2437	Ant2	16.506	0.5	Pass
NVNT	n20	2462	Ant1	16.335	0.5	Pass
NVNT	n20	2462	Ant2	16.533	0.5	Pass
NVNT	n40	2422	Ant1	35.099	0.5	Pass
NVNT	n40	2422	Ant2	35.1	0.5	Pass
NVNT	n40	2437	Ant1	35.115	0.5	Pass
NVNT	n40	2437	Ant2	35.131	0.5	Pass
NVNT	n40	2452	Ant1	35.071	0.5	Pass
NVNT	n40	2452	Ant2	35.083	0.5	Pass


-6dB Bandwidth NVNT b 2412MHz Ant1

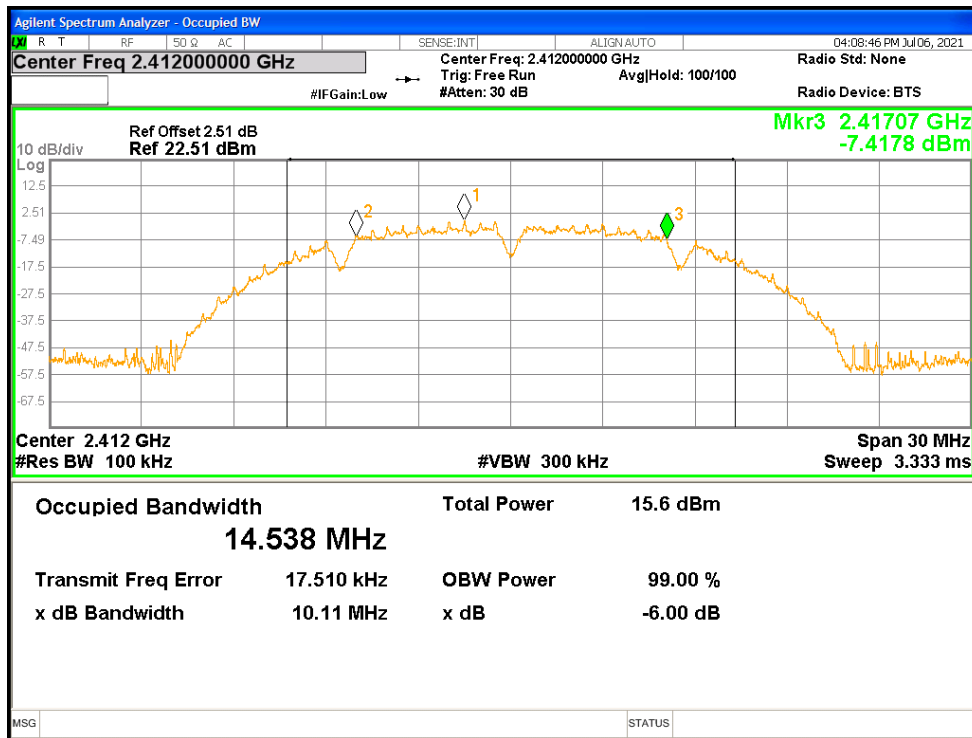


-6dB Bandwidth NVNT b 2412MHz Ant2

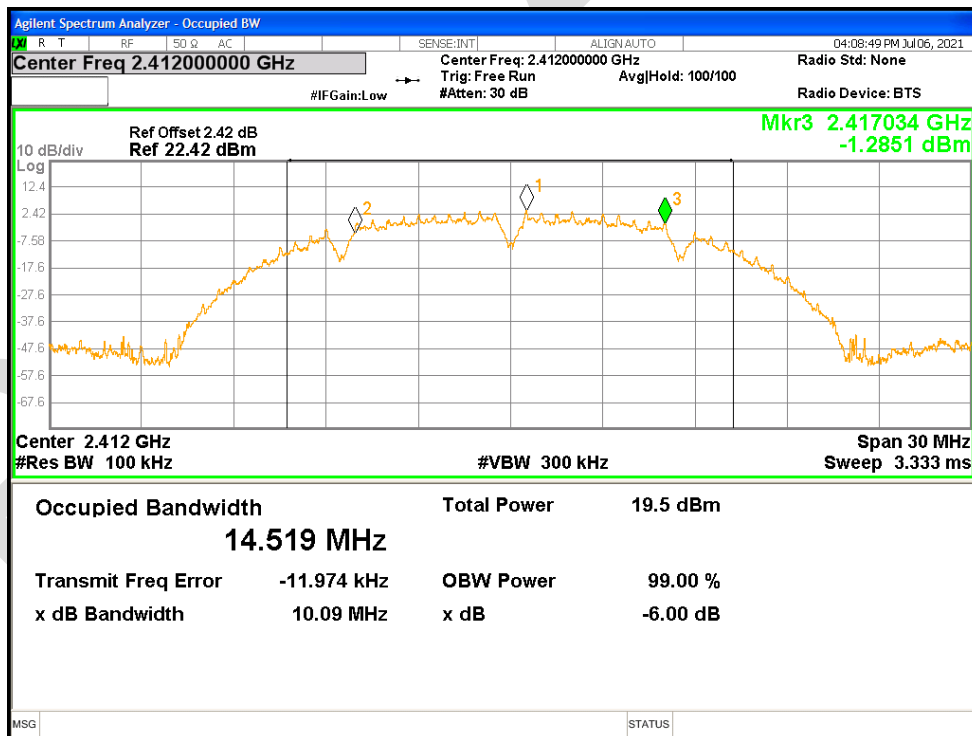


-6dB Bandwidth NVNT b 2437MHz Ant1

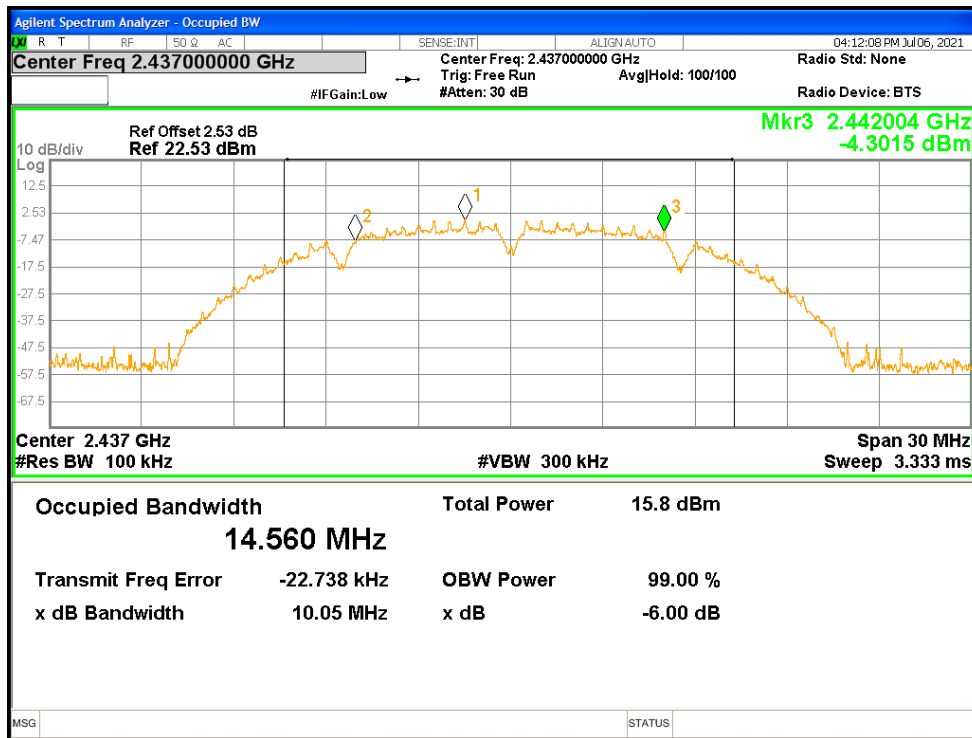


-6dB Bandwidth NVNT b 2437MHz Ant2

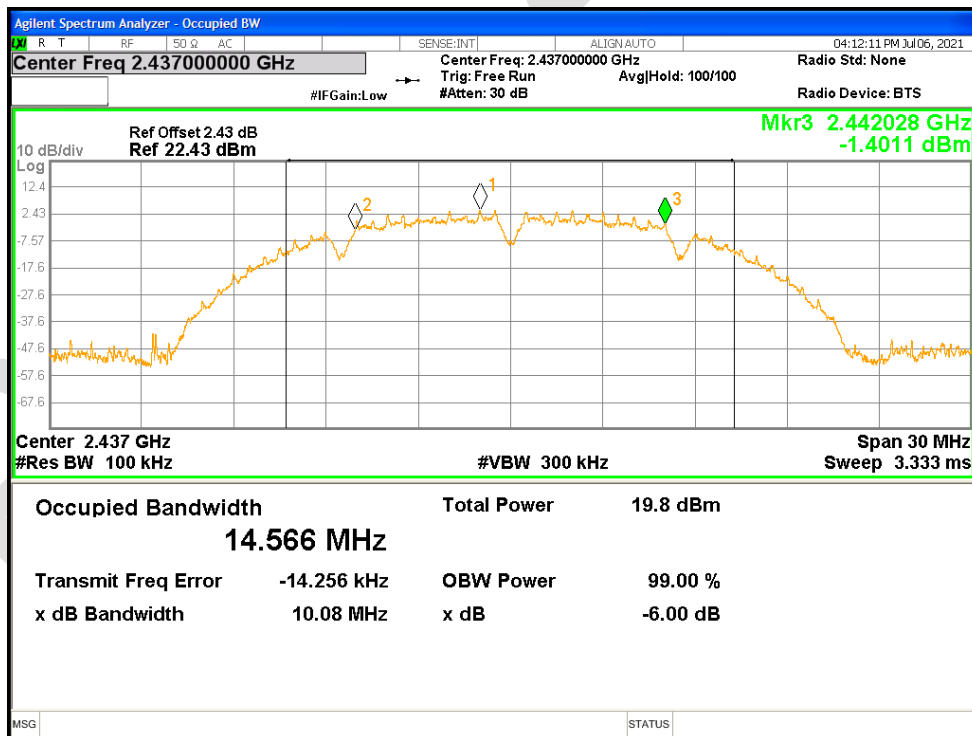


-6dB Bandwidth NVNT b 2462MHz Ant1

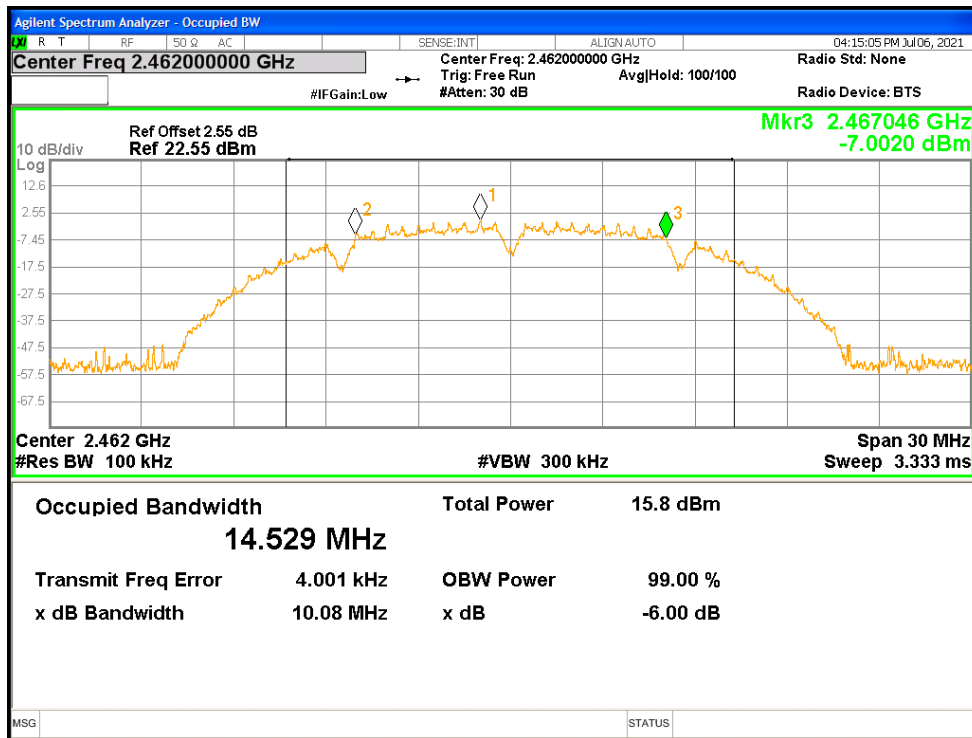


-6dB Bandwidth NVNT b 2462MHz Ant2

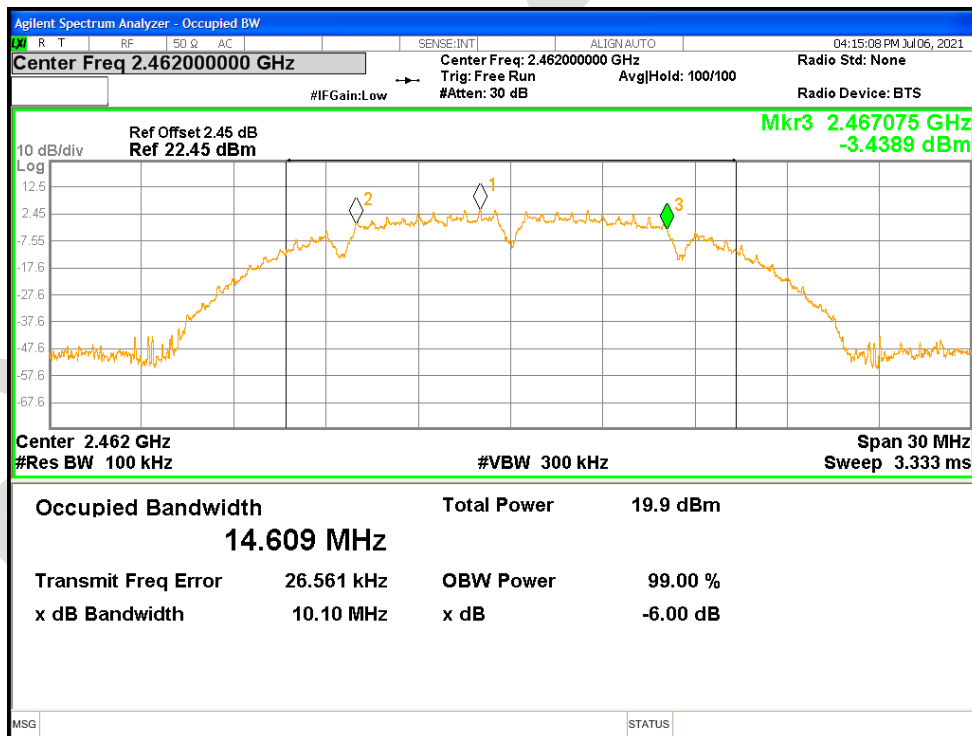

-6dB Bandwidth NVNT g 2412MHz Ant1

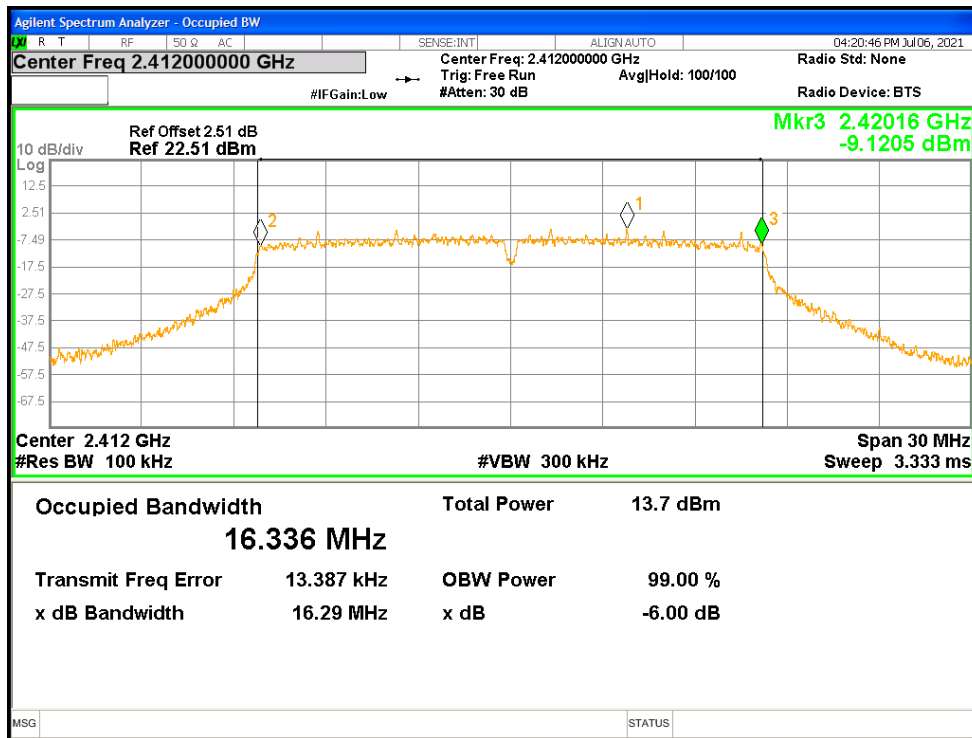


-6dB Bandwidth NVNT g 2412MHz Ant2

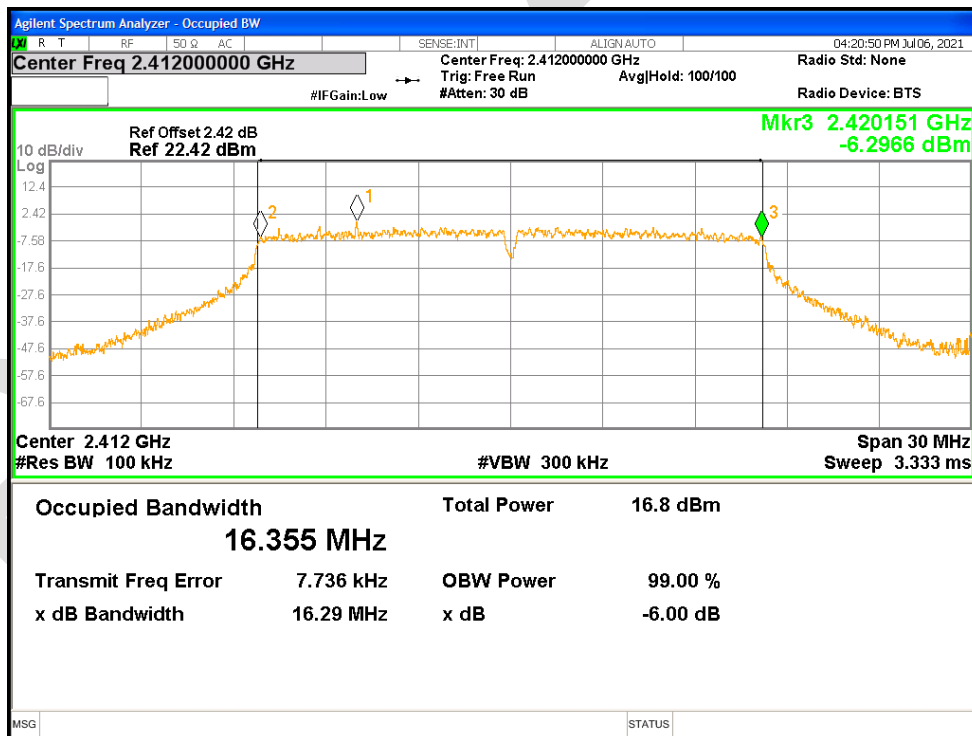


-6dB Bandwidth NVNT g 2437MHz Ant1




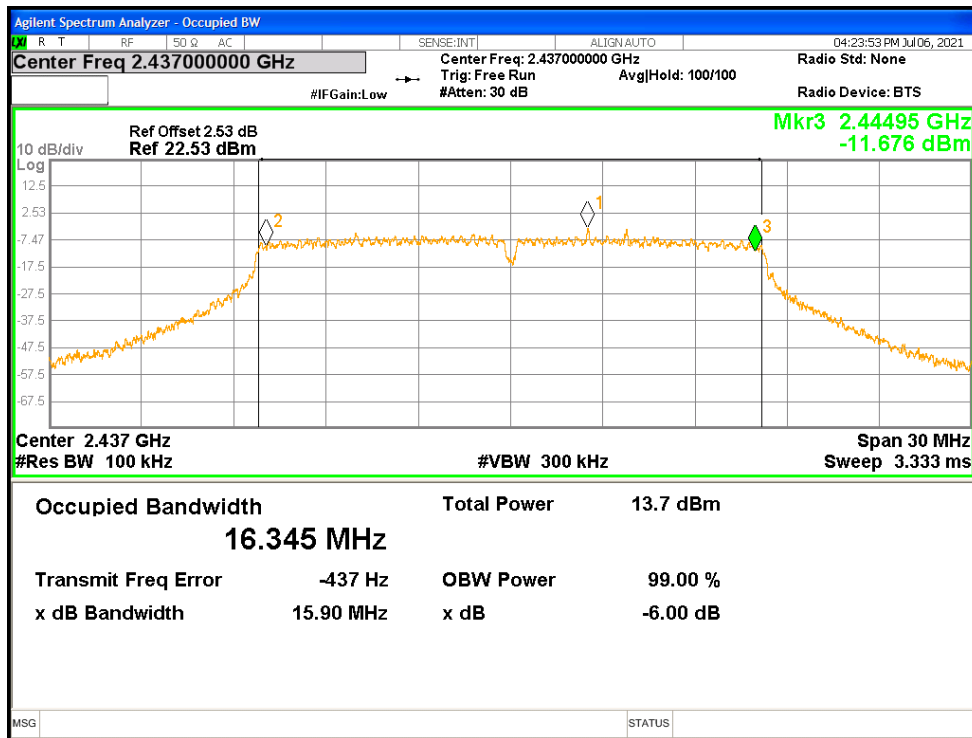


-6dB Bandwidth NVNT g 2437MHz Ant2

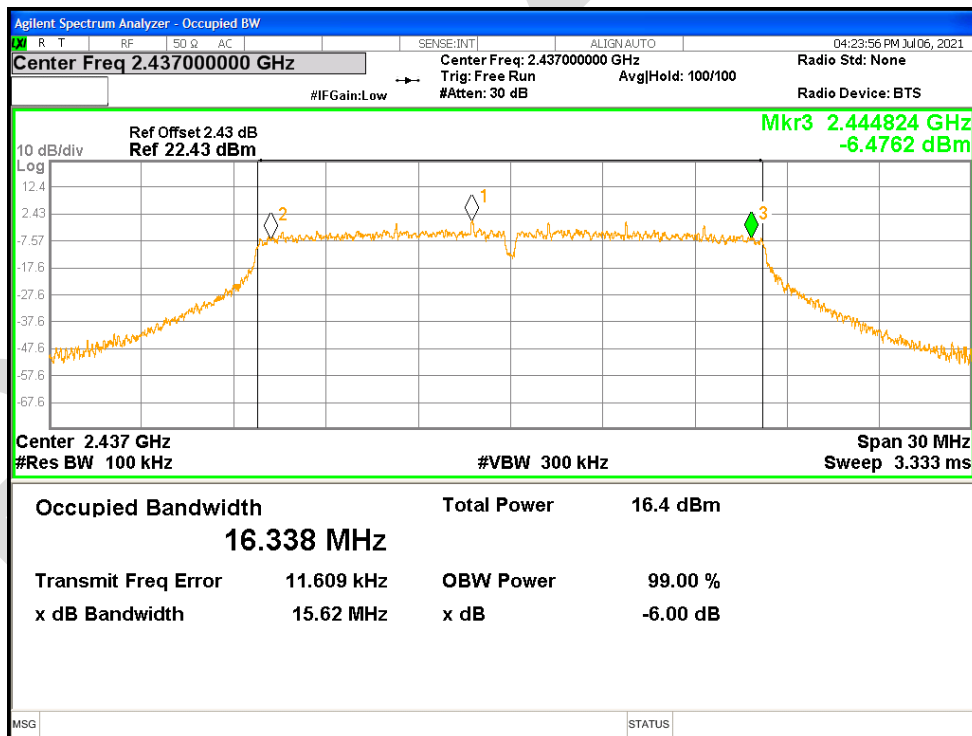


-6dB Bandwidth NVNT g 2462MHz Ant1

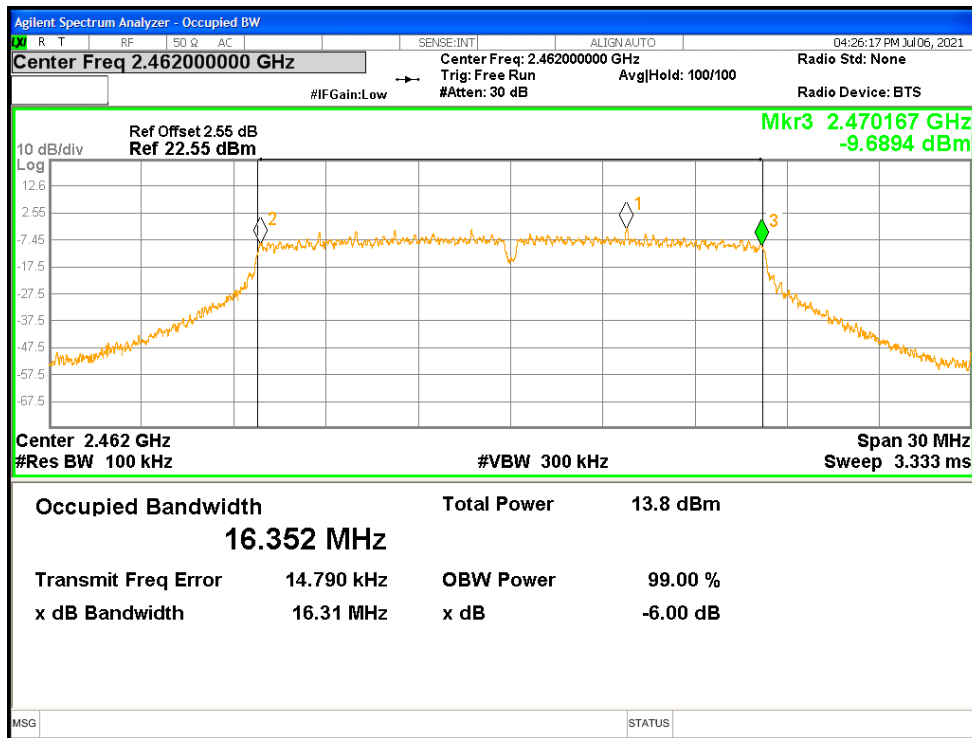


-6dB Bandwidth NVNT g 2462MHz Ant2

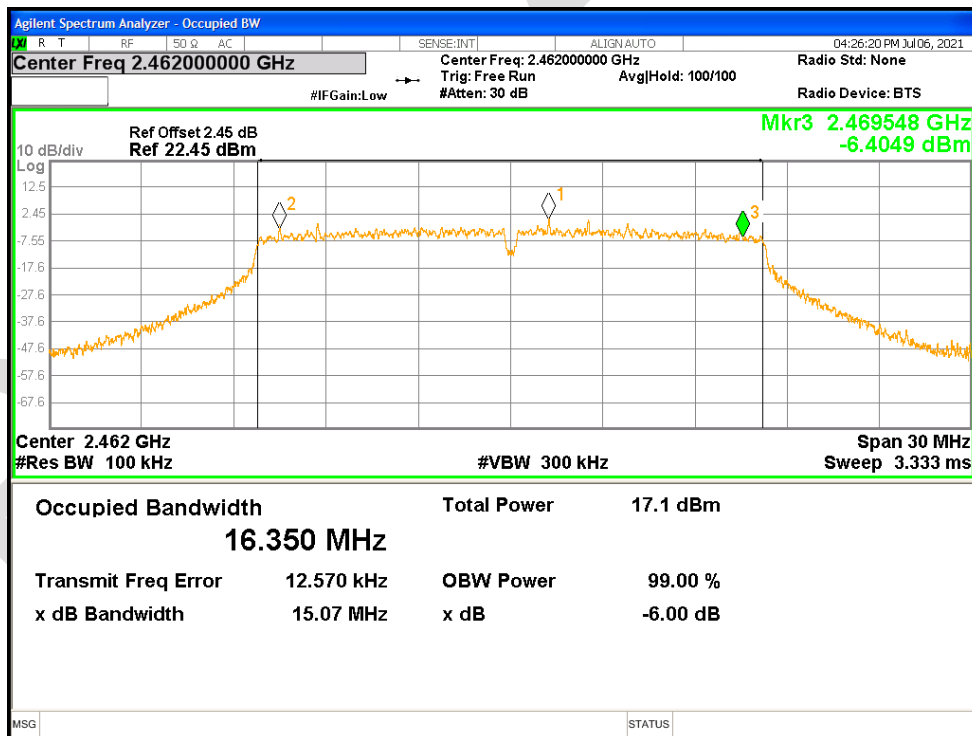

-6dB Bandwidth NVNT n20 2412MHz Ant1

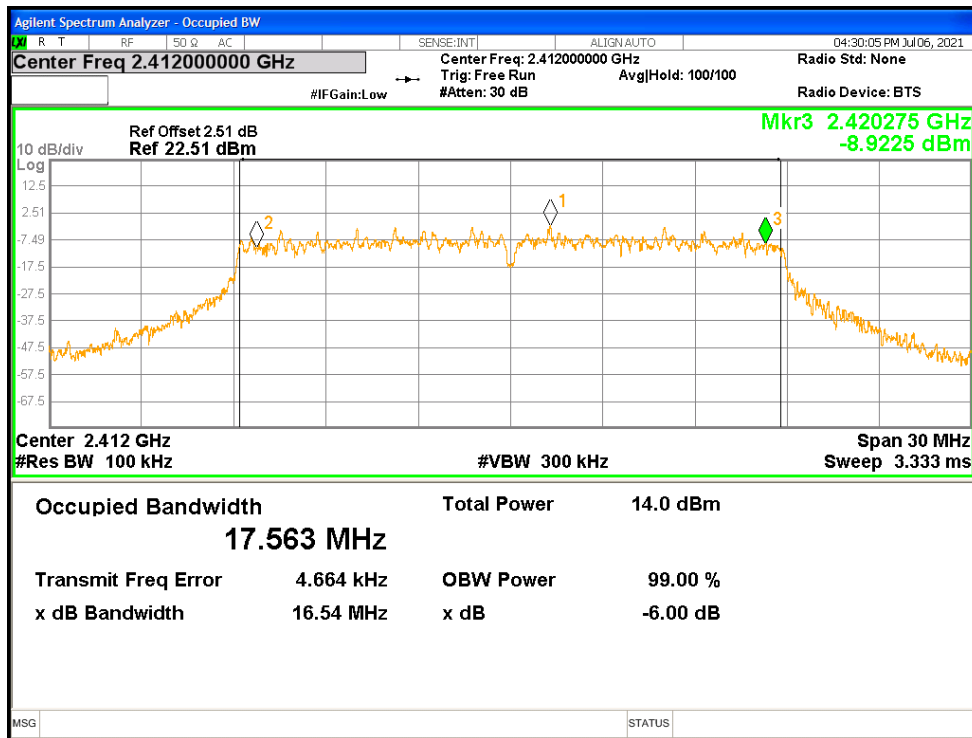

-6dB Bandwidth NVNT n20 2412MHz Ant2

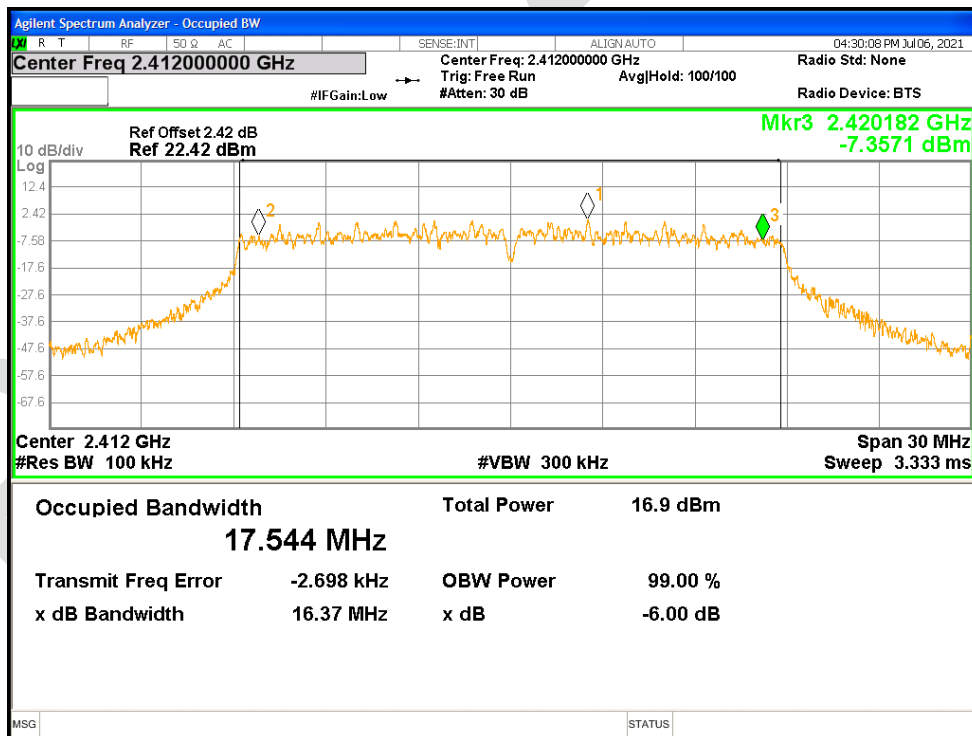

-6dB Bandwidth NVNT n20 2437MHz Ant1