

## RF Test Report

Applicant : FN-LINK TECHNOLOGY LIMITED

Product Name : WiFi+BT module

Trade Name : FN-LINK

Model Number : 6223A-SRD

Applicable Standard : FCC 47 CFR PART 15 SUBPART C  
ANSI C63.10:2013

Received Date : Oct. 09, 2024

Test Period : Oct. 24, 2024 ~ Oct. 25, 2024

Issued Date : Nov. 08, 2024

### Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 334025, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330  
Frequency Range: 9 kHz to 325 GHz  
Bade test site :  
Test Firm Registration Number: 226252  
Test Firm Designation Number: TW0010  
Wugu test site :  
Test Firm Registration Number: 191812  
Test Firm Designation Number: TW0034

#### Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

### Revision History

Rev.	Issued Date	Description	Revised by
00	Nov. 08, 2024	Initial Issue	Snow Wang

## Verification of Compliance

Applicant : FN-LINK TECHNOLOGY LIMITED

Product Name : WiFi+BT module

Trade Name : FN-LINK

Model Number : 6223A-SRD

FCC ID : 2AATL-6223ASRD

Applicable Standard : FCC 47 CFR PART 15 SUBPART C  
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 334025, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : \_\_\_\_\_

## TABLE OF CONTENTS

<b>1</b>	<b>General Information .....</b>	<b>5</b>
1.1.	Summary of Test Result .....	5
1.2.	Testing Location .....	6
1.3.	Measurement Uncertainty .....	6
1.4.	Test Site Environment.....	6
<b>2</b>	<b>EUT Description.....</b>	<b>7</b>
<b>3</b>	<b>Test Methodology.....</b>	<b>8</b>
3.1.	Mode of Operation.....	8
3.2.	EUT Test Step .....	9
3.3.	Configuration of Test System Details.....	9
3.4.	Test Instruments .....	10
<b>4</b>	<b>Measurement Procedure.....</b>	<b>12</b>
4.1.	AC Power Line Conducted Emission Measurement.....	12
4.2.	Radiated Emission Measurement.....	14
4.3.	Maximum Conducted Output Power Measurement.....	17
4.4.	6 dB RF Bandwidth Measurement.....	18
4.5.	Maximum Power Spectral Density Measurement.....	19
4.6.	Out of Band Conducted Emissions Measurement.....	20
4.7.	Antenna Measurement .....	21
<b>5</b>	<b>Test Results .....</b>	<b>22</b>
5.1.	Conducted Emission.....	22
5.2.	Radiated Emission Measurement.....	24
5.3.	Conducted Test Results.....	82

**Appendix A. Test Data**

**Appendix B. Test Plots**

**Appendix C. Test Setup Photographs**

# 1 General Information

## 1.1. Summary of Test Result

Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	----
15.247(d)	Transmitter Radiated Emissions	PASS	----
15.247(b)(3)	Max. Output Power	PASS	----
15.247(a)(2)	6 dB RF Bandwidth	PASS	----
15.247(e)	Maximum Power Spectral Density	PASS	----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	----
15.203	Antenna Requirement	PASS	----

Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 15.247 Meas Guidance v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

## 1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.  
 Site Address:  No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)  
 Site Address:  No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

## 1.3. Measurement Uncertainty

Test Item	Frequency	Uncertainty				
		BD	WG			
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB	2.6 dB			
Conducted Output Power		1.1 dB	1.1 dB			
RF Bandwidth		4.5 %	4.5 %			
Power Spectral Density		1.1 dB	1.1 dB			
Duty Cycle		0.3 %	0.3 %			
Test Item	Frequency	Uncertainty				
		96601-BD	96603-BD	96602-WG	96603-WG	96604-WG
Radiated Emission	9 kHz ~ 30 MHz	1.8 dB	1.8 dB	1.9 dB	1.9 dB	1.9 dB
	30 MHz ~ 1000 MHz	4.7 dB	4.7 dB	4.7 dB	4.7 dB	4.5 dB
	1000 MHz ~ 18000 MHz	4.7 dB	4.8 dB	4.6 dB	4.7 dB	5.1 dB
	18000 MHz ~ 26500 MHz	4.0 dB	4.1 dB	3.9 dB	4.1 dB	4.3 dB
	26500 MHz ~ 40000 MHz	4.2 dB	4.2 dB	4.2 dB	4.2 dB	4.6 dB

## 1.4. Test Site Environment

Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

(\*)The measurement ambient temperature is within this range.

## 2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity(except Max. RF Output Power).

Applicant	FN-LINK TECHNOLOGY LIMITED No.8,Litong Road,Liuyang Economic & Technical Development Zone,Changsha,Hunan,China			
Product Name	WiFi+BT module			
Trade Name	FN-LINK			
Model Number	6223A-SRD			
FCC ID	2AATL-6223ASRD			
Operate Freq. Band	Frequency Range (MHz)	Modulation	Channel Bandwidth	Data Rate (ns)
802.11b	2412 ~ 2462	DSSS	20 MHz	Up to 11 Mbps
802.11g	2412 ~ 2462	OFDM	20 MHz	Up to 54 Mbps
802.11n HT20	2412 ~ 2462	OFDM (64QAM)	20 MHz	Up to MCS7
802.11n HT40	2422 ~ 2452	OFDM (64QAM)	40 MHz	Up to MCS7
Antenna information	Type		Max. Gain (dBi)	
	FPC Antenna		1.7	
Antenna Delivery	See section 3.1			
Operate Temp. Range	-10 ~ +70 °C			
EUT Power Rating	DC 3.3 V			

Frequency Band	Max. RF Output Power (W)
802.11b	0.050
802.11g	0.024
802.11n HT20	0.020
802.11n HT40	0.020

BW 20M	CH	1	2	3	4	5	6	7	8	9	10	11	NA	NA
	Freq. (MHz)	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	NA	NA
BW 40M	CH	NA		3	4	5	6	7	8	9	NA	NA	NA	
	Freq. (MHz)	NA		2422	2427	2432	2437	2442	2447	2452	NA	NA		

### 3 Test Methodology

#### 3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode	Final-Test Mode
Transmit Mode	V
802.11b	V
802.11g	V
802.11n HT20	V
802.11n HT40	V

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that “Y axis” position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Test Mode	ANT-0
802.11b	V
802.11g	V
802.11n HT20	V
802.11n HT40	V

Test Mode	Antenna Delivery	Data Rate (Mbps)	Test Channel
802.11b	1TX	1	1, 6, 11
802.11g	1TX	6	1, 6, 11
802.11n HT20	1TX	6.5	1, 6, 11
802.11n HT40	1TX	13.5	3, 6, 9




### 3.2. EUT Test Step

1.	Setup the EUT shown on "Configuration of Test System Details".
2.	Turn on the power of all equipment.
3.	Turn on TX function.
4.	EUT run test program.

### 3.3. Configuration of Test System Details

Conduction Emission & Radiation Emission

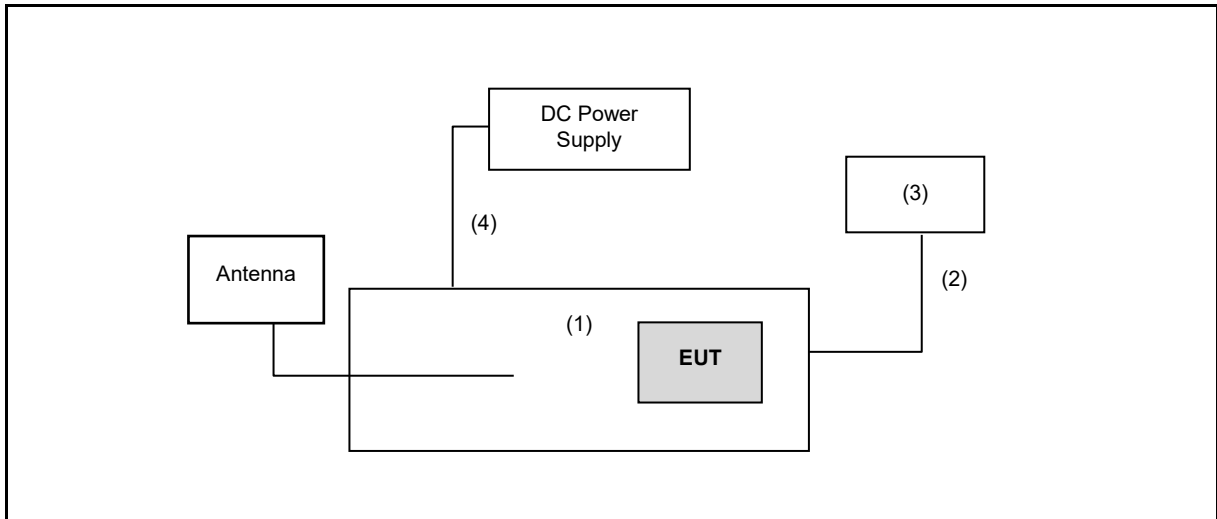

	Product	Manufacturer	Model Number
(1)	Fixture	FN-LINK	6223A-SRD
(2)	USB Cable	SAMSUNG	ECB-DU68WE
(3)	NB	ASUS	P1448U
(4)	DC Power Cable	Eurofins	001

### 3.4. Test Instruments

For Conducted Emission  
Test Period: Oct. 25, 2024  
Testing Engineer: Jayson Hsieh

Test Site		Conduction01-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCI	100367	May 21, 2024	1 year
<input type="checkbox"/>	Test Receiver	R&S	ESCI	100722	Oct. 26, 2023	1 year
<input type="checkbox"/>	Test Receiver	R&S	ESCI	101000	Nov. 23, 2023	1 year
<input checked="" type="checkbox"/>	LISN	R&S	ENV216	101040	Mar. 21, 2024	1 year
<input type="checkbox"/>	LISN	R&S	ENV216	101140	Jan. 15, 2024	1 year
<input checked="" type="checkbox"/>	RF Cable	Woken	00100D1380194M	TE-02-03	Jun. 05, 2024	1 year
<input checked="" type="checkbox"/>	Software	EZ EMC	1.1.4.3	N/A	N.C.R.	---

means with testing used ;  
 means without testing used  
 Note: N.C.R. = No Calibration Request.

For Conducted  
Test Period: Oct. 25, 2024  
Testing Engineer: John Chen, Peter Shui

Test Site		RF01-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input checked="" type="checkbox"/>	Power Sensor	Anritsu	MA2411B	1126022	Aug. 29, 2024	1 year
<input checked="" type="checkbox"/>	Power Meter	Anritsu	ML2495A	1135009	Aug. 29, 2024	1 year
<input checked="" type="checkbox"/>	Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	Aug. 28, 2024	1 year
<input checked="" type="checkbox"/>	Signal Generator	Keysight	N5182B	MY53052569	Apr. 18, 2024	1 year
<input checked="" type="checkbox"/>	Signal Generator	Keysight	N5182BX07	MY59360221	Apr. 18, 2024	1 year
<input checked="" type="checkbox"/>	Power Supply	KEITHLEY	2303	4045290	Jan. 04, 2024	1 year

Note: N.C.R. = No Calibration Request.

For Radiated Emissions

Test Period: Oct. 24, 2024 ~ Oct. 25, 2024

Testing Engineer: Jayson Hsieh,

Test Site		96601-BD				
Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input checked="" type="checkbox"/>	Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	Jan. 04, 2024	1 year
<input type="checkbox"/>	Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	Dec. 27, 2023	1 year
<input checked="" type="checkbox"/>	Amplifier (10 kHz~3 GHz)	Agilent	EMC001330	980862	Nov. 29, 2023	1 year
<input type="checkbox"/>	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A10961	Jul. 10, 2023	1 year
<input checked="" type="checkbox"/>	Pre Amplifier (1~26.5 GHz)	Agilent	8449B	3008A02455	Jul. 10, 2024	1 year
<input type="checkbox"/>	Preamplifier (26.5 GHz~40 GHz)	EMCI	EMC2654045	980028	Sep. 02, 2024	1 year
<input checked="" type="checkbox"/>	Loop Antenna (9 kHz~30 MHz)	COM-POWER CORPORATION	AL-130	121014	Mar. 27, 2024	1 year
<input type="checkbox"/>	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	01146	Jun. 28, 2024	1 year
<input checked="" type="checkbox"/>	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	416	Jun. 14, 2024	1 year
<input type="checkbox"/>	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	02207	Aug. 30, 2024	1 year
<input checked="" type="checkbox"/>	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	9120D-550	Jul. 22, 2024	1 year
<input checked="" type="checkbox"/>	Broadband Horn Antenna (18 GHz~40 GHz)	Schwarzbeck Mess-Elektronik	9170	9170-320	Jul. 22, 2024	1 year
<input checked="" type="checkbox"/>	Microwave Cable	EMCI	EMC104-SM-SM-13000	170814	Jan. 16, 2024	1 year
<input checked="" type="checkbox"/>	Microwave Cable	EMCI	EMCCFD400-NM-NM-6000	210902	Jan. 16, 2024	1 year
<input checked="" type="checkbox"/>	Microwave Cable	SUHNER	suflex104	313229/4	Jan. 16, 2024	1 year
<input type="checkbox"/>	Microwave Cable	EMCI	EMC102-KM-KM-14000	151001	Jan. 16, 2024	1 year
<input type="checkbox"/>	Bluetooth Tester	R&S	CBT	100350	Mar. 20, 2023	2 years
<input type="checkbox"/>	Wireless Connectivity Tester	R&S	CMW270	102208	Jun. 05, 2023	1 year
<input checked="" type="checkbox"/>	Power Supply	KEITHLEY	2303	4045290	Jan. 04, 2024	1 year
<input checked="" type="checkbox"/>	Software	EZ EMC	1.1.4.4	N/A	N.C.R.	---

 means with testing used ;

 means without testing used

Note: N.C.R. = No Calibration Request


## 4 Measurement Procedure

### 4.1. AC Power Line Conducted Emission Measurement

■ **Limit**

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ **Test Setup**

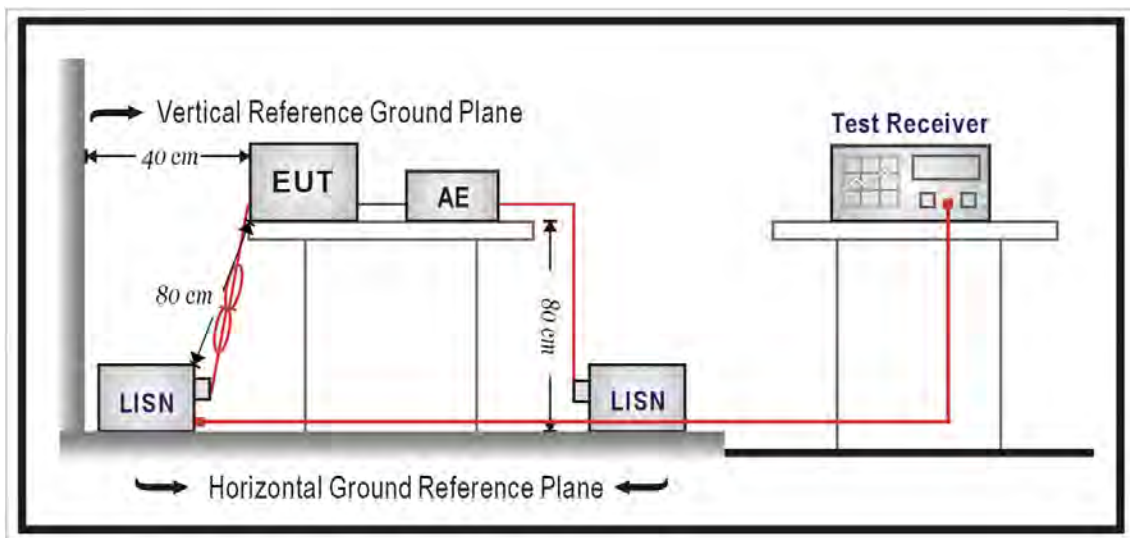

### ■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a  $50 \Omega // 50 \mu\text{H}$  coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a  $50 \Omega // 50 \mu\text{H}$  coupling impedance with  $50 \Omega$  termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All  $50 \Omega$  ports of the LISN shall be resistively terminated into  $50 \Omega$  loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

## 4.2. Radiated Emission Measurement

### ■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	$2400 / F$ (kHz)	300
0.490 – 1.705	$24000 / F$ (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

### ■ Setup


9 kHz ~ 30 MHz

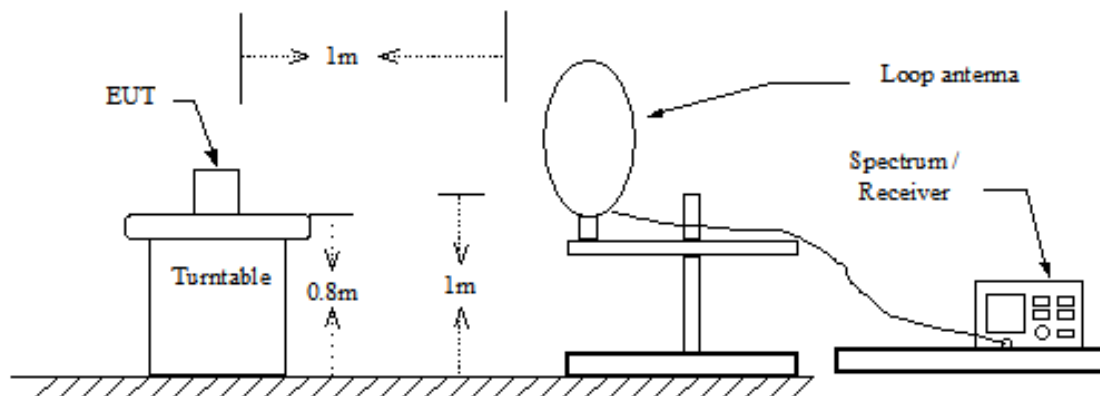

Below 1 GHz

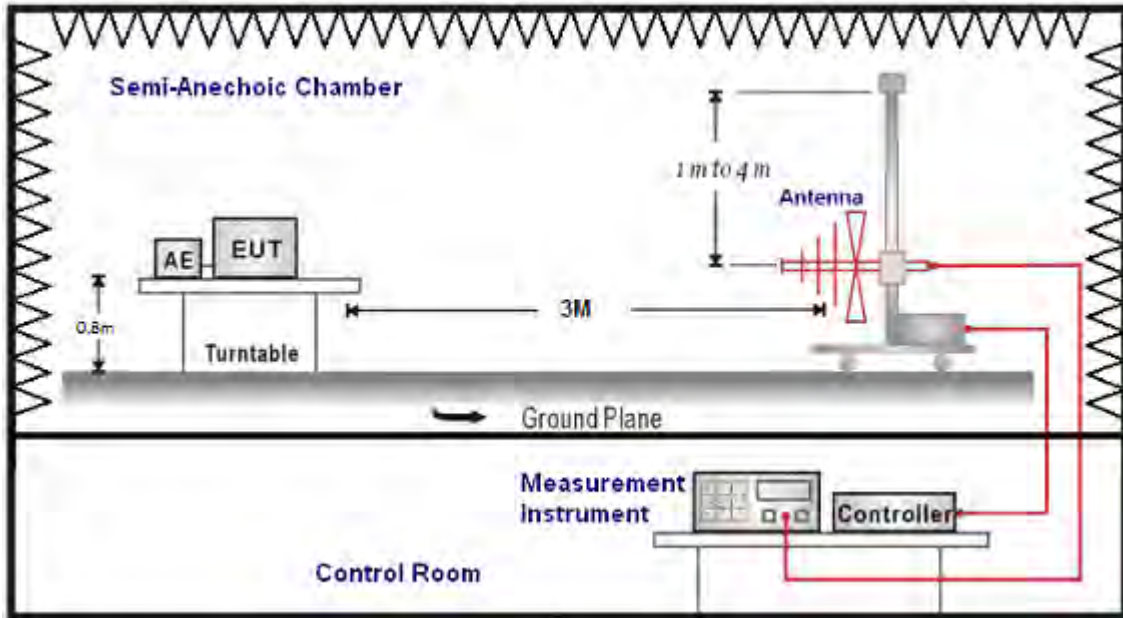

Above 1 GHz

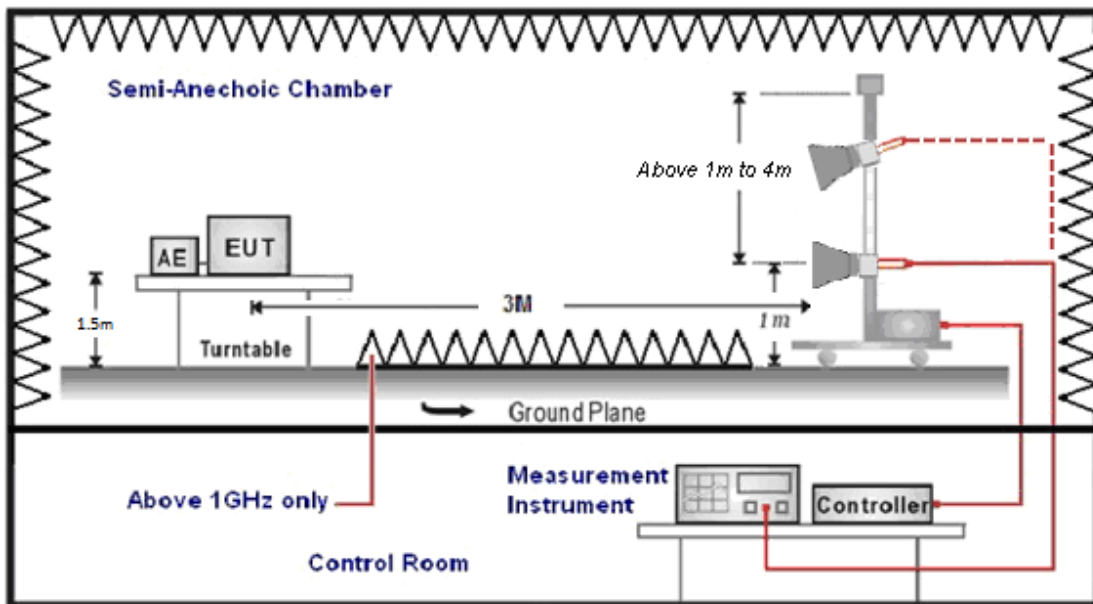

## ■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 30 MHz the resolution bandwidth is set to 10 kHz for peak detection measurements or 9 kHz for quasi-peak detection measurements. The video bandwidth is 3 times of the resolution bandwidth.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >0.98 / 1/T for average measurements when Duty cycle <0.98. A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.




### 4.3. Maximum Conducted Output Power Measurement

■ **Limit**

For systems using digital modulation in the 2400-2483.5 MHz, the limit for maximum output power is 30 dBm.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ **Test Setup**

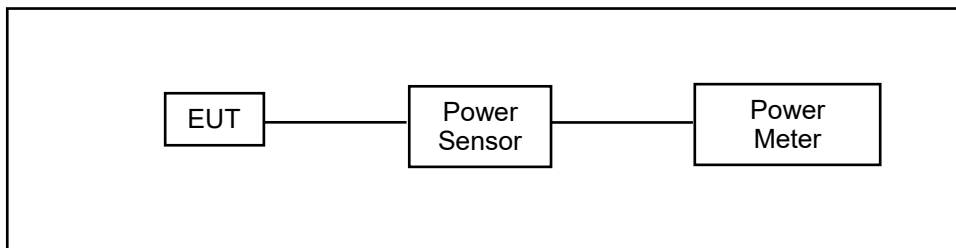

■ **Test Procedure**

The testing follows the Measurement Procedure of ANSI C63.10:2013 section 11.9.2.3.2 Method AVGPM.


The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor.

#### 4.4. 6 dB RF Bandwidth Measurement

■ **Limit**

6 dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

■ **Test Setup**

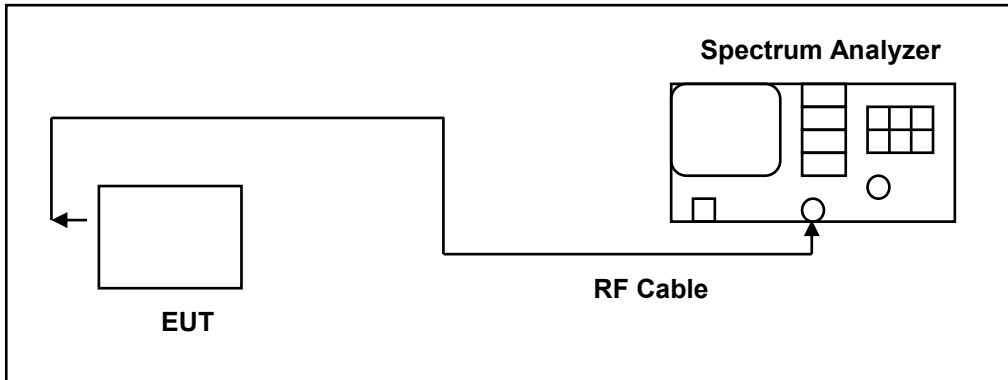

■ **Test Procedure**

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.8.2 option2 for compliance to FCC 47CFR 15.247 requirements.

6 dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.


The test was performed at 3 channels (Channel low, middle, high)

## 4.5. Maximum Power Spectral Density Measurement

### ■ Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### ■ Test Setup

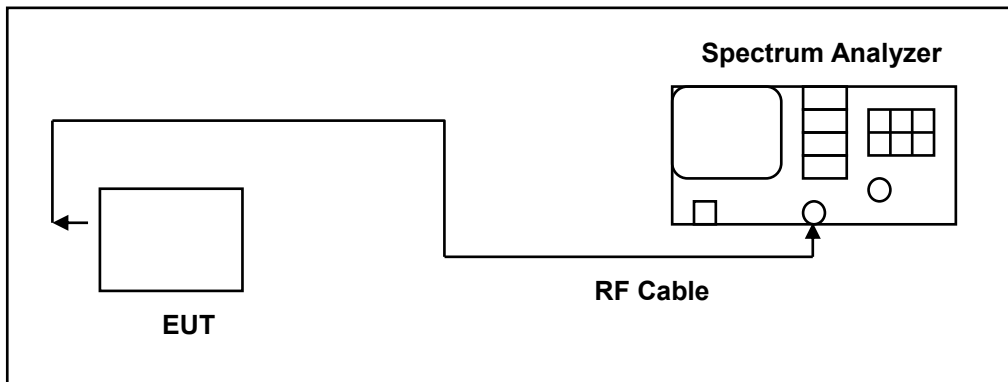

### ■ Test Procedure

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.10.2 Method PKPSD for compliance to FCC 47CFR 15.247 requirements.


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

## 4.6. Out of Band Conducted Emissions Measurement

### ■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### ■ Test Setup

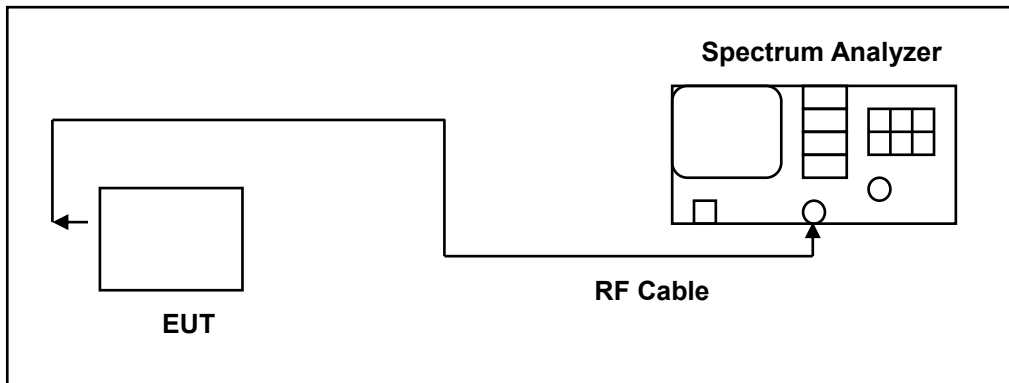

### ■ Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 30 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels.

## 4.7. Antenna Measurement

■ **Limit**

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ **Antenna Description**

See section 2 – antenna information.

■ **Directional Gain Calculated**

Test mode	Transmission Type	Antenna				Directional Gain	Directional Gain	Power	PSD
						for	for	Limit	Limit
		Ant-0	Ant-1	Ant-2	Ant-3	Power	PSD	Reduction	Reduction
		(dBi)	(dBi)	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
802.11b	Ant-0	1.70	-	-	-	1.70	1.70	0.00	0.00
802.11g	Ant-0	1.70	-	-	-	1.70	1.70	0.00	0.00
802.11n HT20 802.11n HT40 802.11n VHT20	Ant-0	1.70	-	-	-	1.70	1.70	0.00	0.00


If transmit signals are correlated, then Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / NANT]$

If all transmit signals are completely uncorrelated, then Directional gain =  $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / NANT]$

## 5 Test Results

### 5.1. Conducted Emission

Standard:	FCC Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Transmit Mode		
Description:			

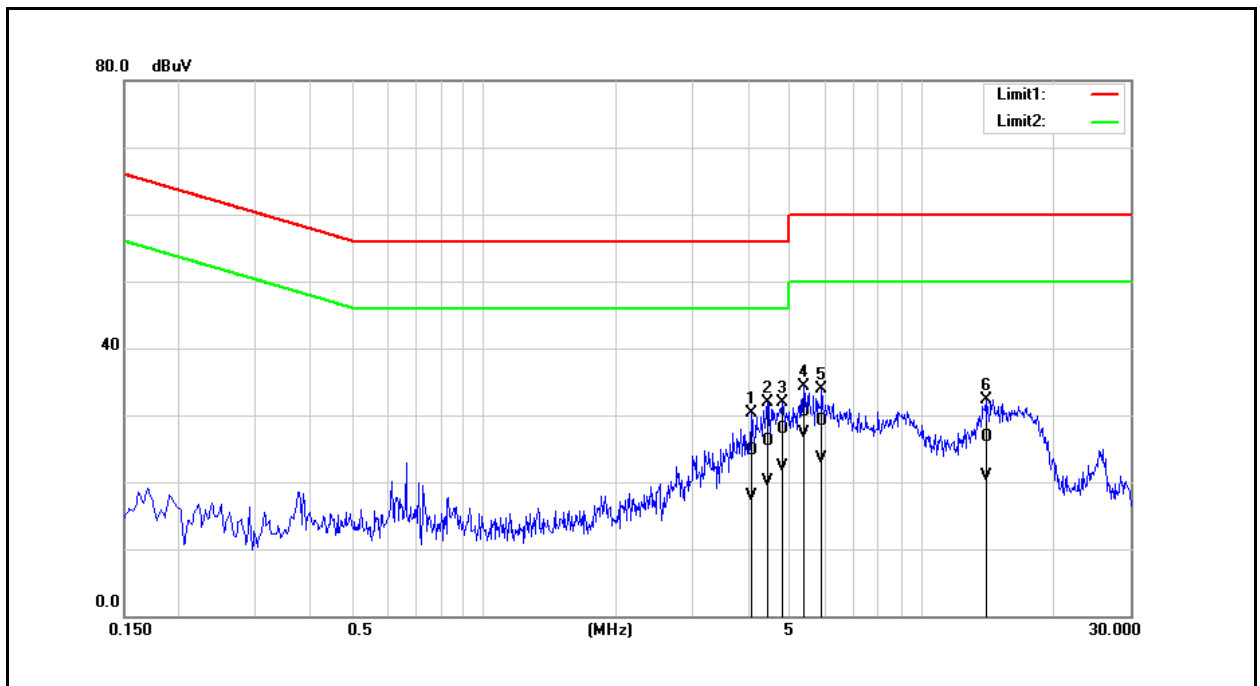


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	4.0900	15.03	8.06	9.76	24.79	17.82	56.00	46.00	-31.21	-28.18	Pass
2	4.4500	16.36	10.30	9.77	26.13	20.07	56.00	46.00	-29.87	-25.93	Pass
3	4.8060	18.09	12.42	9.79	27.88	22.21	56.00	46.00	-28.12	-23.79	Pass
4	5.3700	20.64	17.47	9.79	30.43	27.26	60.00	50.00	-29.57	-22.74	Pass
5	5.9060	19.30	13.61	9.80	29.10	23.41	60.00	50.00	-30.90	-26.59	Pass
6	14.0300	16.71	11.05	9.94	26.65	20.99	60.00	50.00	-33.35	-29.01	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Transmit Mode		
Description:			

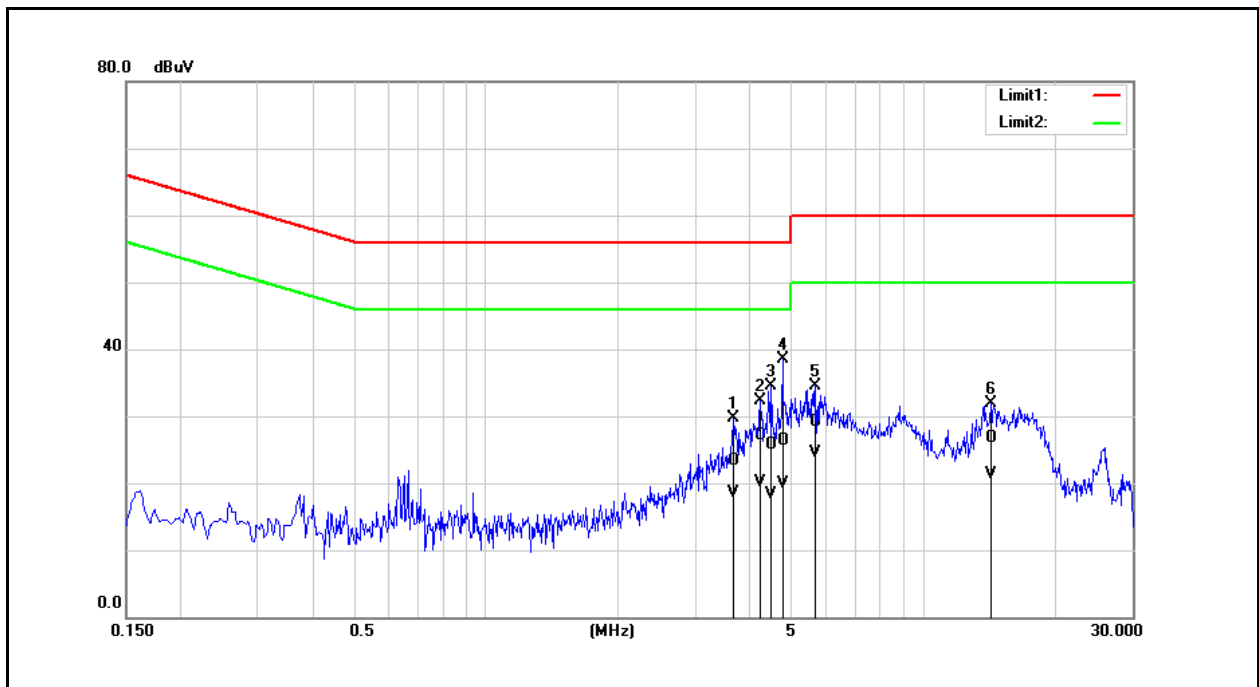


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	3.6660	13.53	8.73	9.76	23.29	18.49	56.00	46.00	-32.71	-27.51	Pass
2	4.2380	17.25	10.34	9.77	27.02	20.11	56.00	46.00	-28.98	-25.89	Pass
3	4.4980	15.84	8.58	9.78	25.62	18.36	56.00	46.00	-30.38	-27.64	Pass
4	4.7700	16.47	10.18	9.79	26.26	19.97	56.00	46.00	-29.74	-26.03	Pass
5	5.6660	19.37	14.64	9.81	29.18	24.45	60.00	50.00	-30.82	-25.55	Pass
6	14.2820	16.72	11.24	10.01	26.73	21.25	60.00	50.00	-33.27	-28.75	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).  
 2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

## 5.2. Radiated Emission Measurement

Below 1 GHz


Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Radiated Emission		
Mode:	802.11b		
Ant.Polar.:	Horizontal		

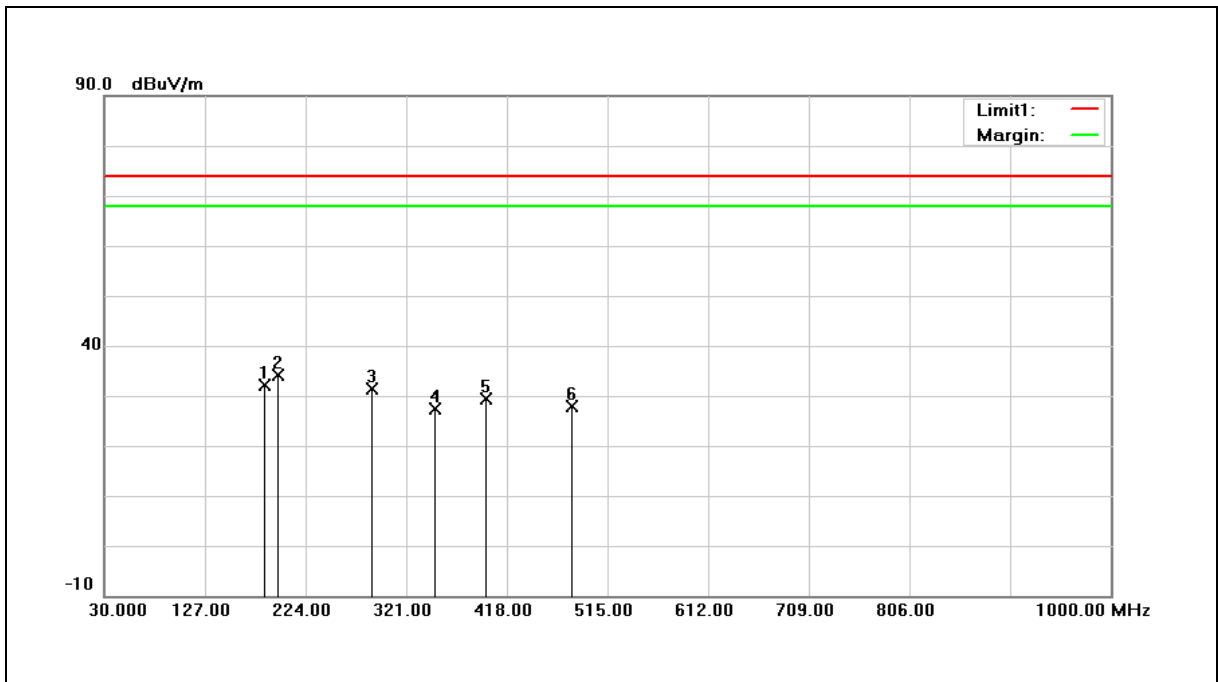

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	184.2300	43.88	-11.73	32.15	74.00	-41.85	QP
2	197.8100	46.88	-12.80	34.08	74.00	-39.92	QP
3	288.0200	40.27	-8.98	31.29	74.00	-42.71	QP
4	348.1600	34.87	-7.60	27.27	74.00	-46.73	QP
5	397.6300	35.24	-5.92	29.32	74.00	-44.68	QP
6	480.0800	31.63	-3.79	27.84	74.00	-46.16	QP



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Radiated Emission		
Mode:	802.11b		
Ant.Polar.:	Vertical		

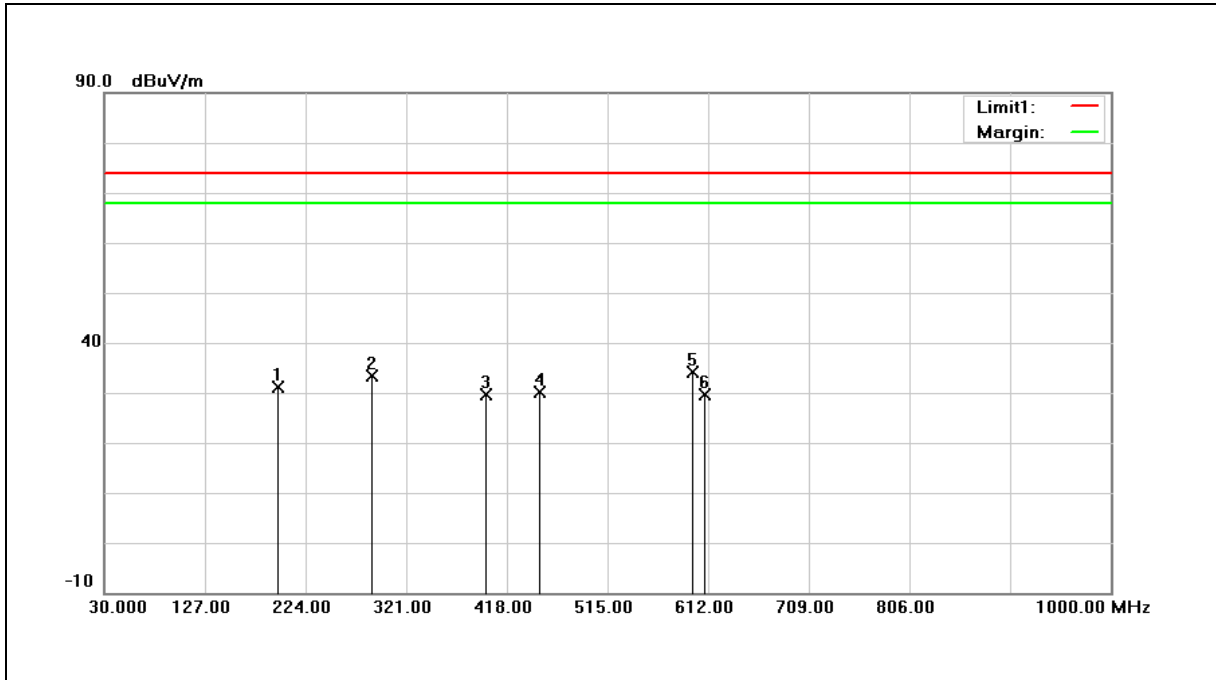


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	197.8100	43.90	-12.80	31.10	74.00	-42.90	QP
2	288.0200	42.45	-8.98	33.47	74.00	-40.53	QP
3	397.6300	35.48	-5.92	29.56	74.00	-44.44	QP
4	449.0400	34.37	-4.27	30.10	74.00	-43.90	QP
5	596.4800	35.08	-0.99	34.09	74.00	-39.91	QP
6	609.0900	30.13	-0.46	29.67	74.00	-44.33	QP

**Harmonic**


Above 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	802.11b		
Ant.Polar.:	Horizontal		

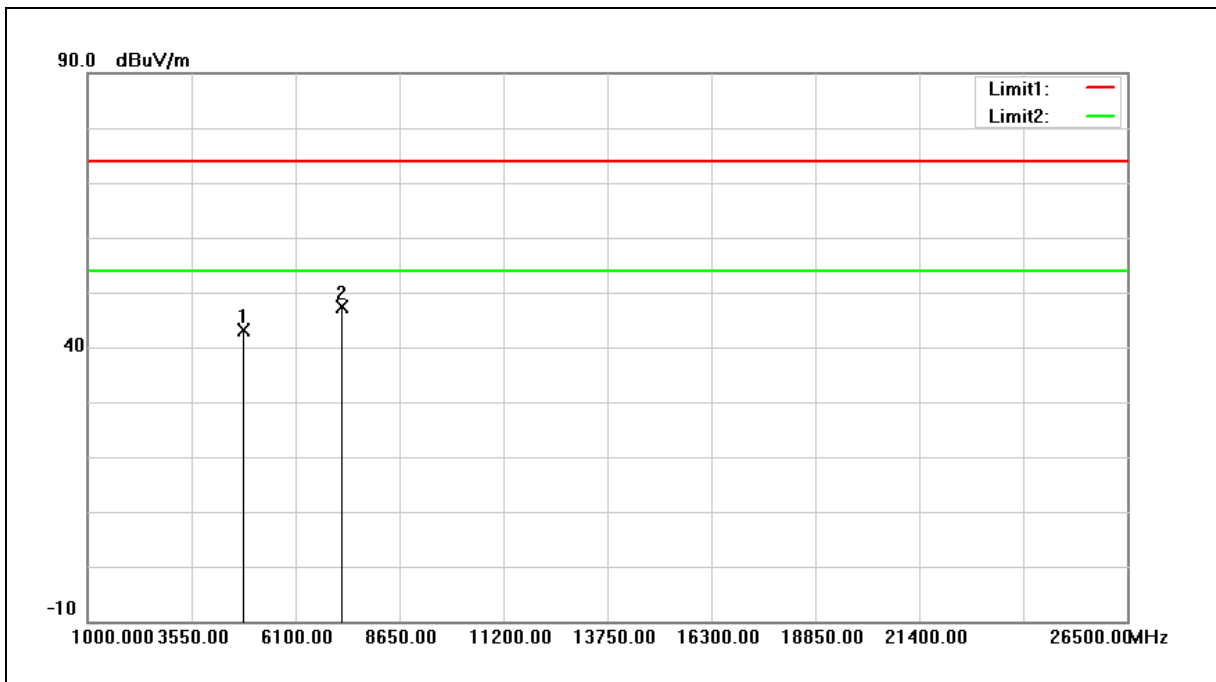


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	35.96	7.10	43.06	74.00	-30.94	peak
2	7236.000	33.87	13.47	47.34	74.00	-26.66	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	802.11b		
Ant.Polar.:	Vertical		

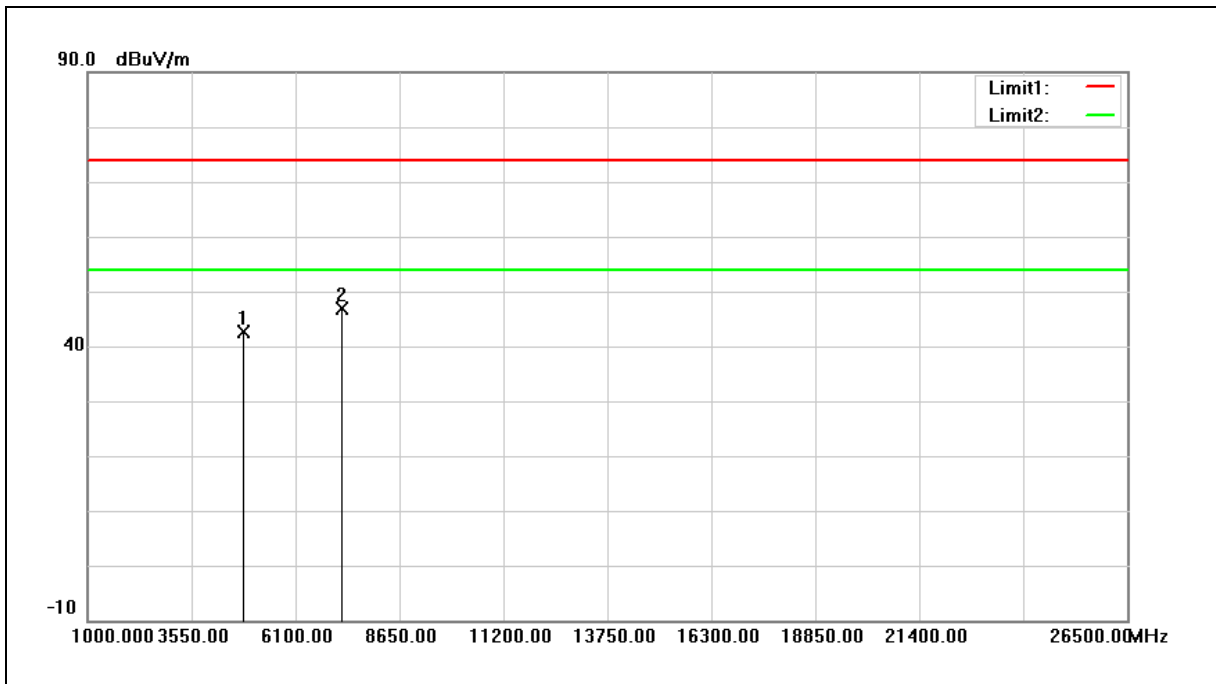


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	35.49	7.10	42.59	74.00	-31.41	peak
2	7236.000	33.37	13.47	46.84	74.00	-27.16	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	802.11b		
Ant.Polar.:	Horizontal		

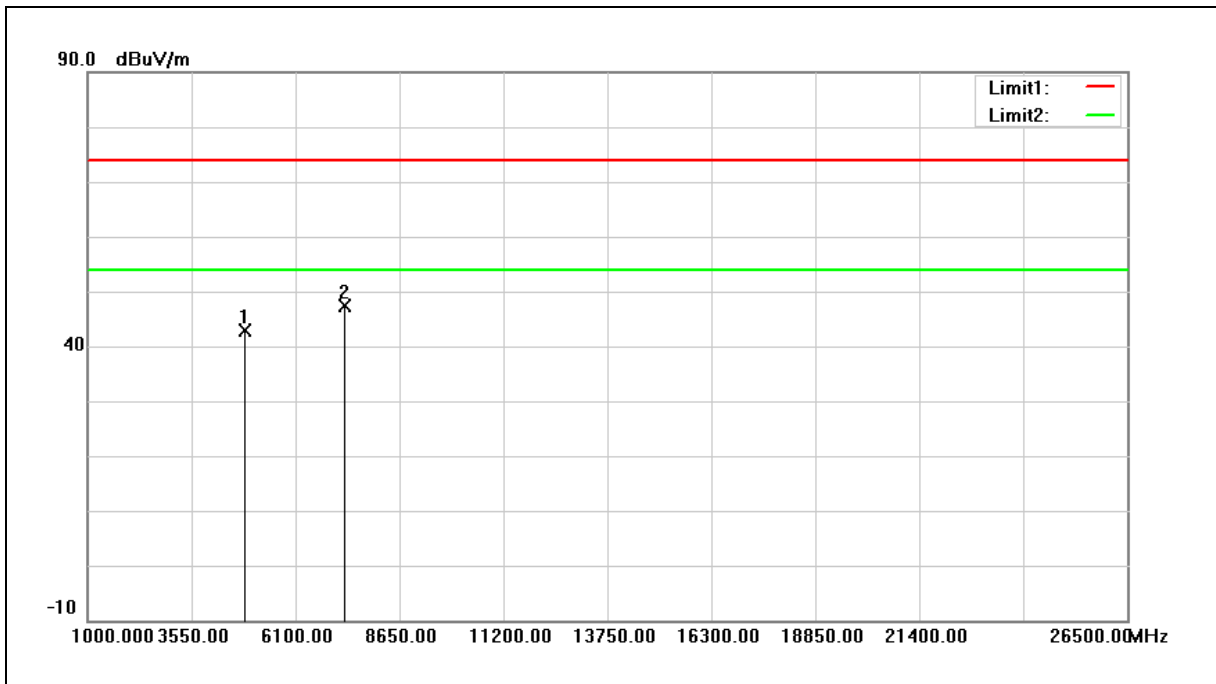


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.59	7.19	42.78	74.00	-31.22	peak
2	7311.000	33.93	13.37	47.30	74.00	-26.70	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	802.11b		
Ant.Polar.:	Vertical		

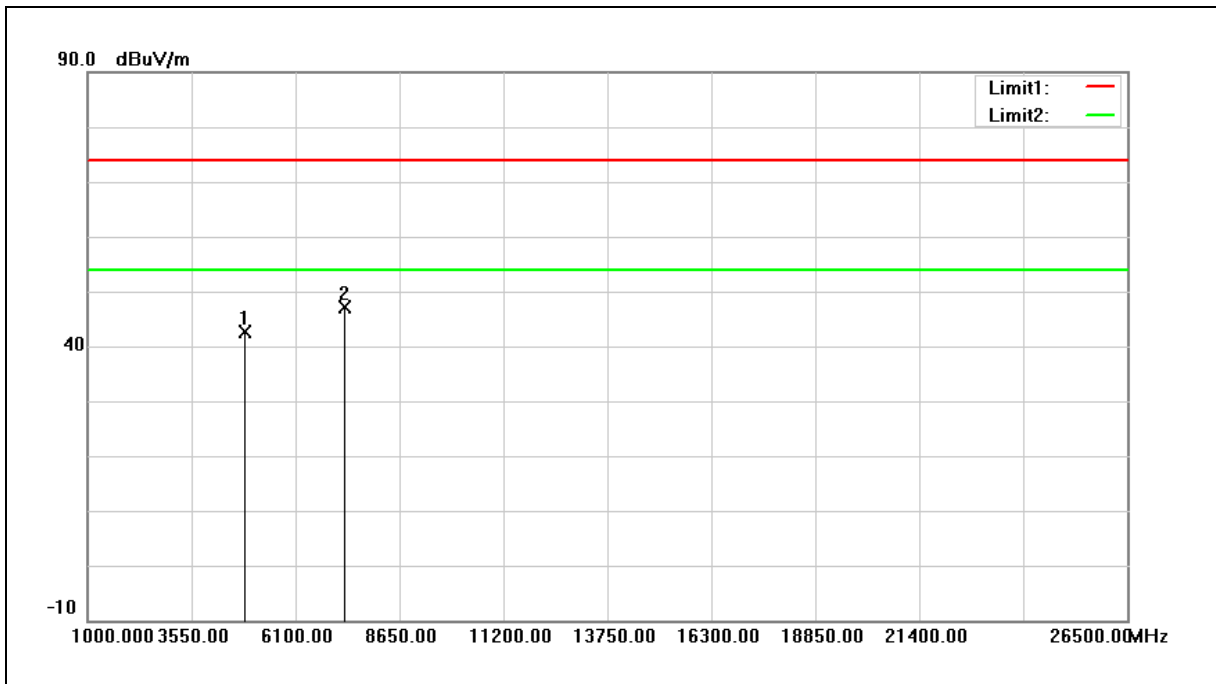


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.33	7.19	42.52	74.00	-31.48	peak
2	7311.000	33.82	13.37	47.19	74.00	-26.81	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	802.11b		
Ant.Polar.:	Horizontal		

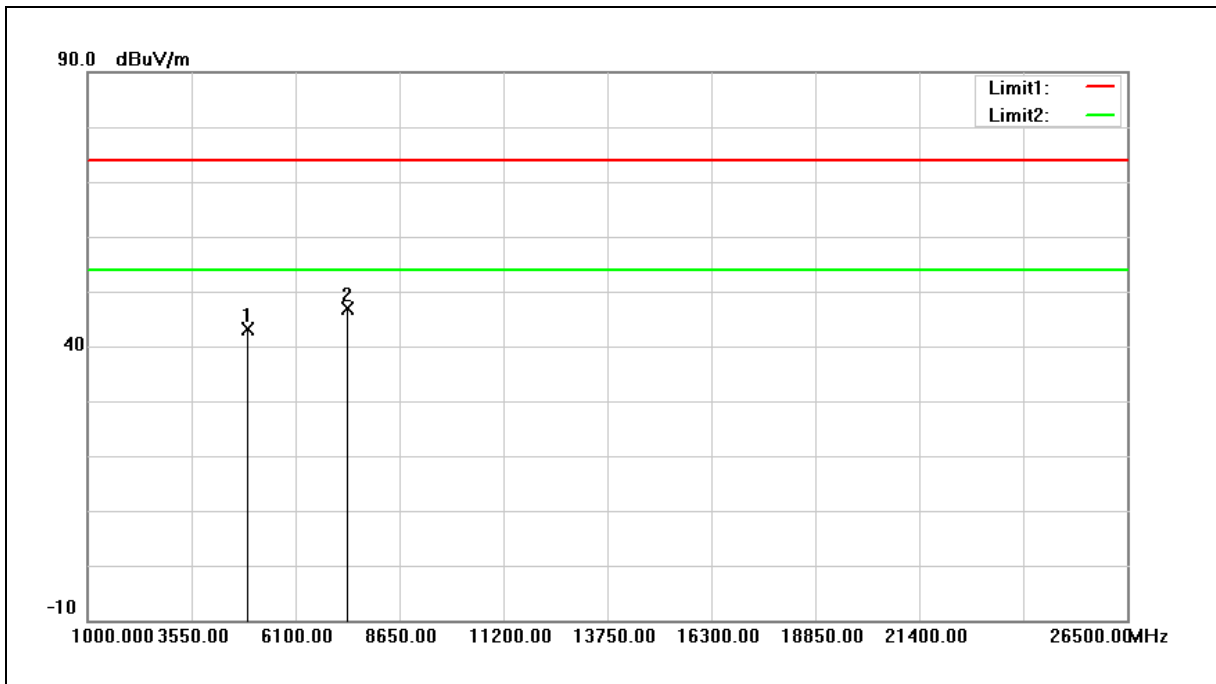


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.88	7.29	43.17	74.00	-30.83	peak
2	7386.000	33.40	13.50	46.90	74.00	-27.10	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	802.11b		
Ant.Polar.:	Vertical		

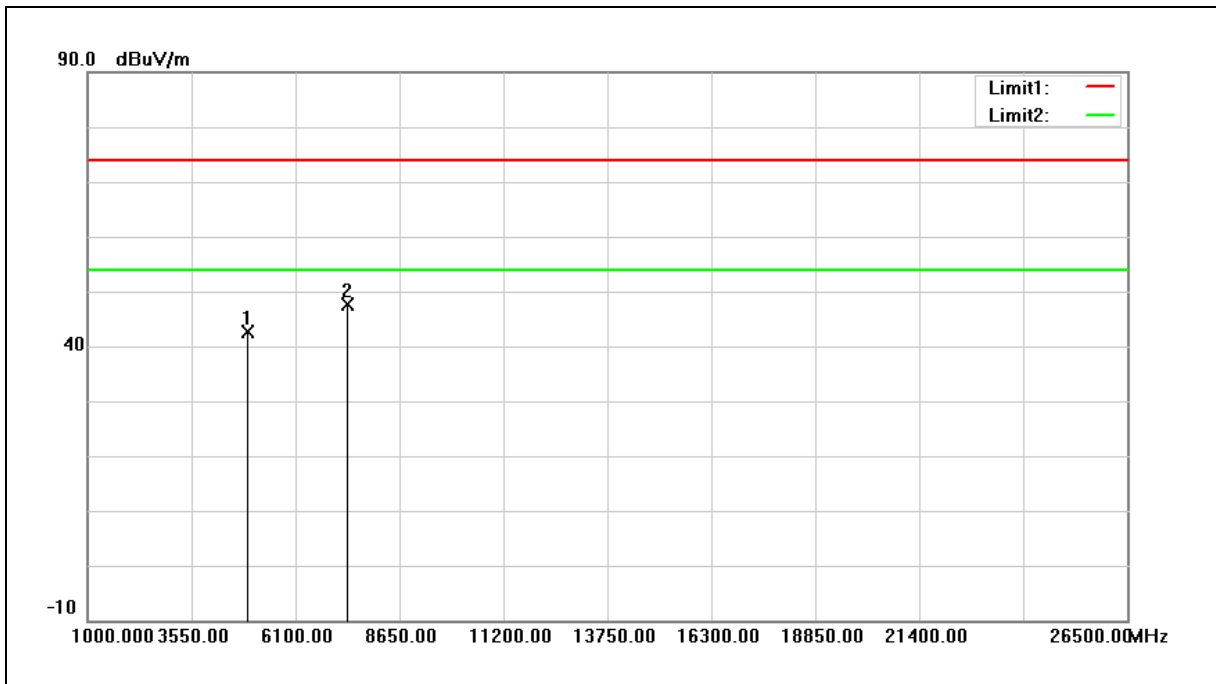

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.31	7.29	42.60	74.00	-31.40	peak
2	7386.000	34.16	13.50	47.66	74.00	-26.34	peak


Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	802.11g		
Ant.Polar.:	Horizontal		

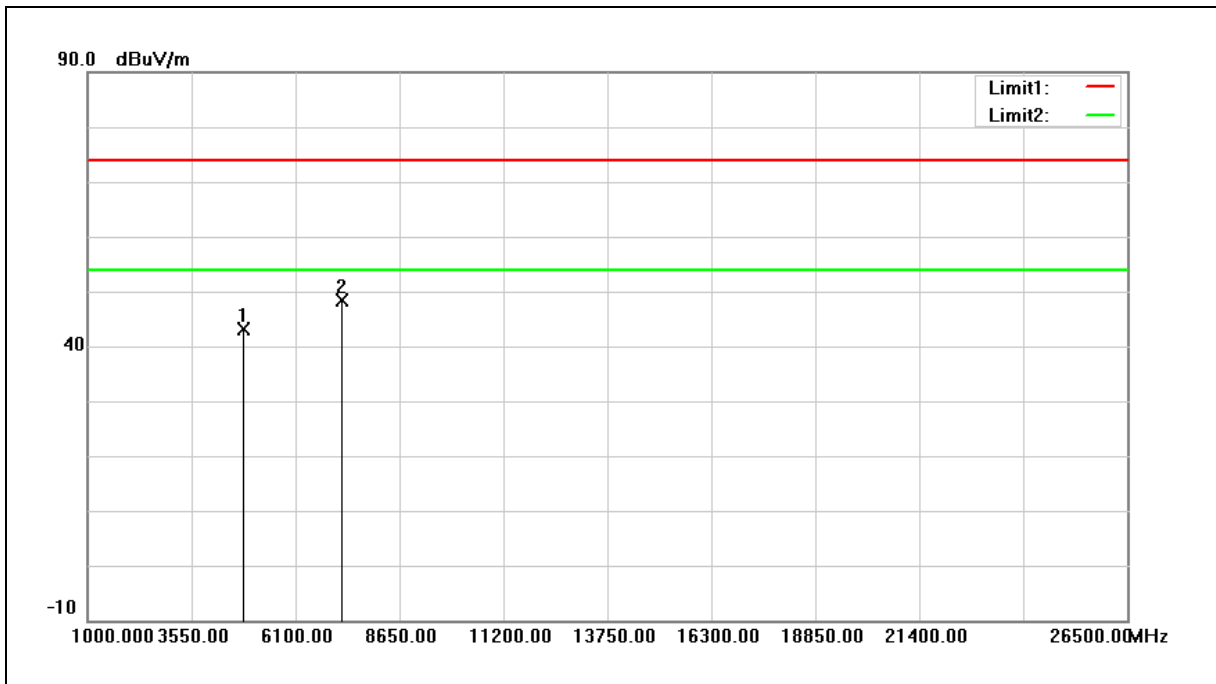

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	36.09	7.10	43.19	74.00	-30.81	peak
2	7236.000	34.88	13.47	48.35	74.00	-25.65	peak




Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	802.11g		
Ant.Polar.:	Vertical		

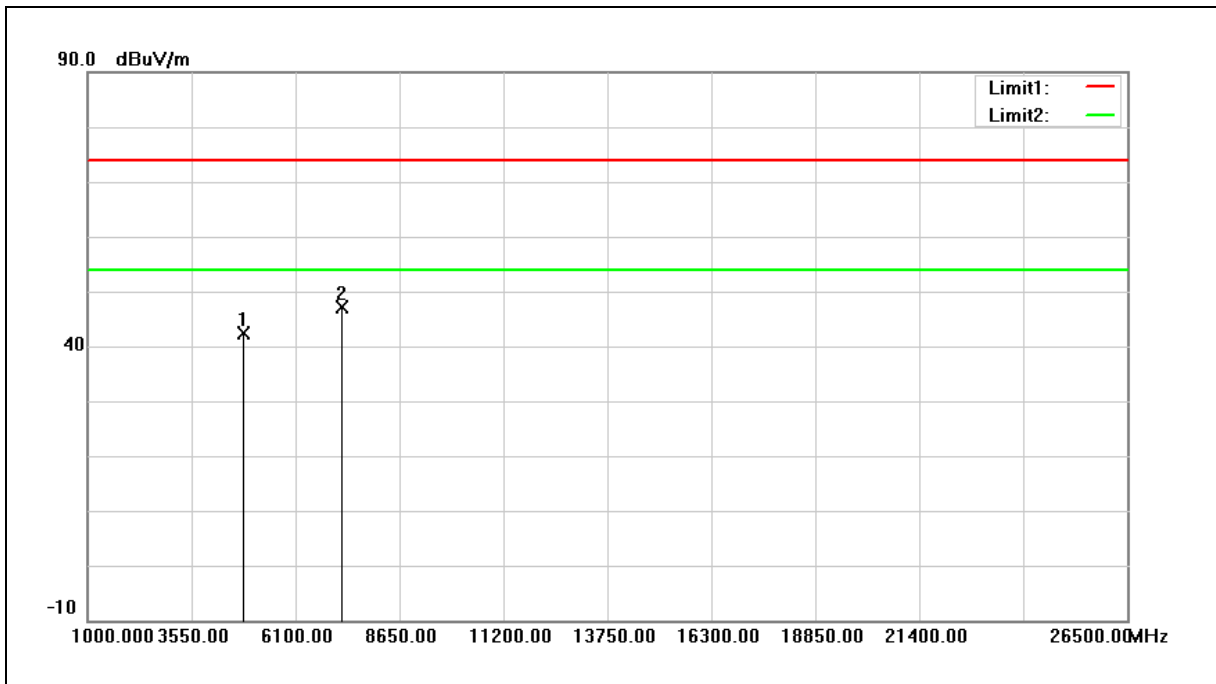


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	35.24	7.10	42.34	74.00	-31.66	peak
2	7236.000	33.77	13.47	47.24	74.00	-26.76	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	802.11g		
Ant.Polar.:	Horizontal		

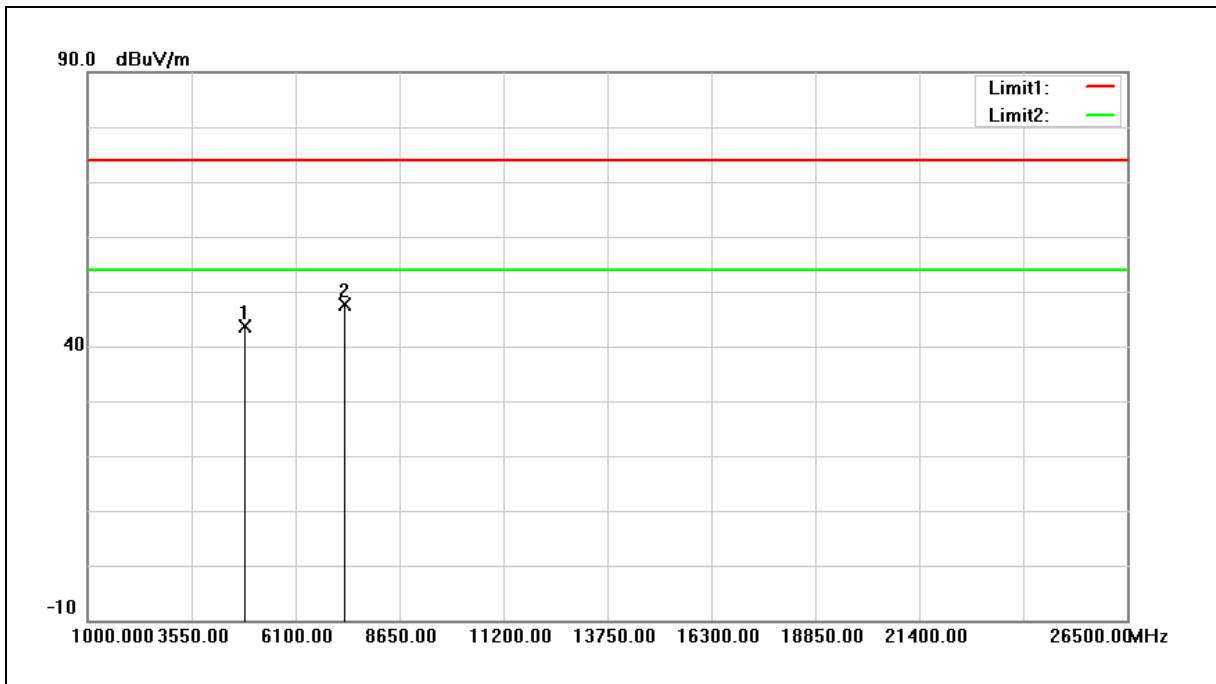


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	36.46	7.19	43.65	74.00	-30.35	peak
2	7311.000	34.36	13.37	47.73	74.00	-26.27	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	802.11g		
Ant.Polar.:	Vertical		

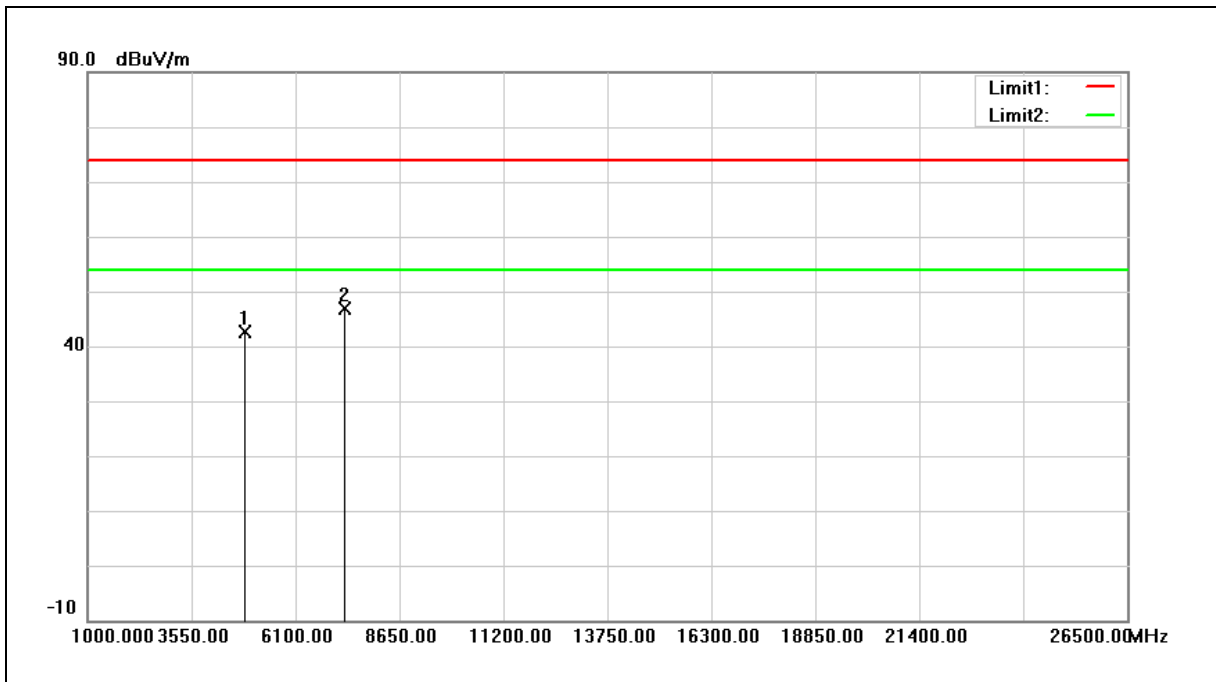


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.43	7.19	42.62	74.00	-31.38	peak
2	7311.000	33.54	13.37	46.91	74.00	-27.09	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	802.11g		
Ant.Polar.:	Horizontal		

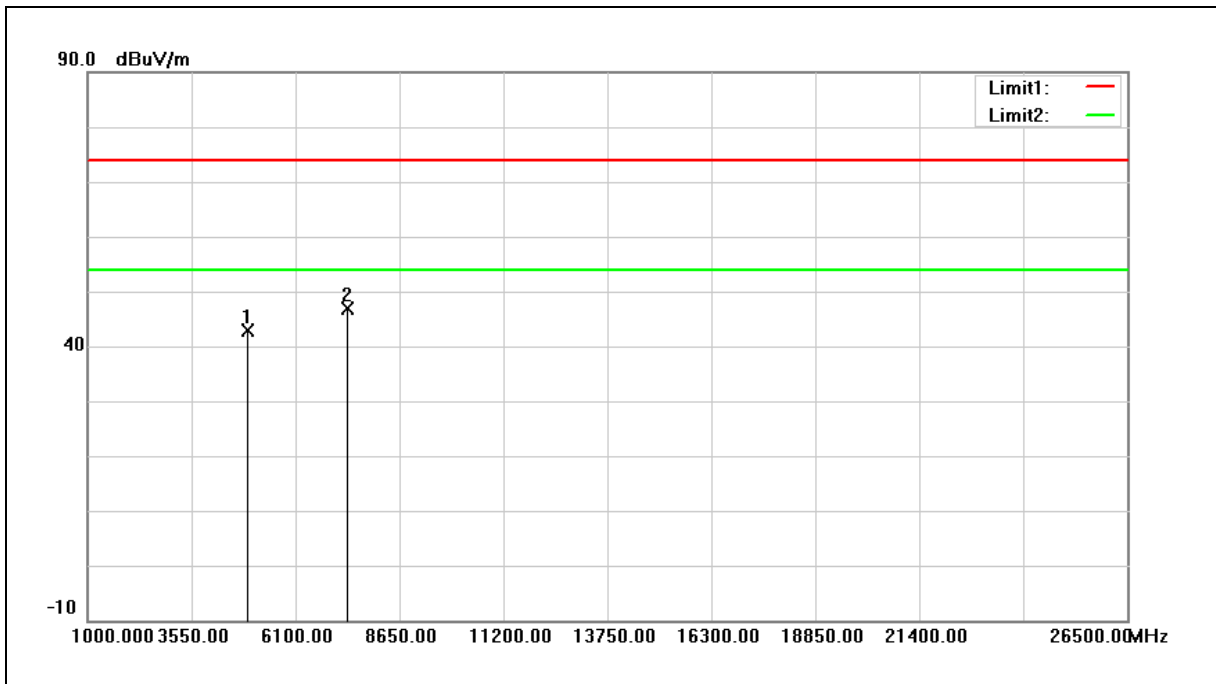


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.56	7.29	42.85	74.00	-31.15	peak
2	7386.000	33.36	13.50	46.86	74.00	-27.14	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	802.11g		
Ant.Polar.:	Vertical		

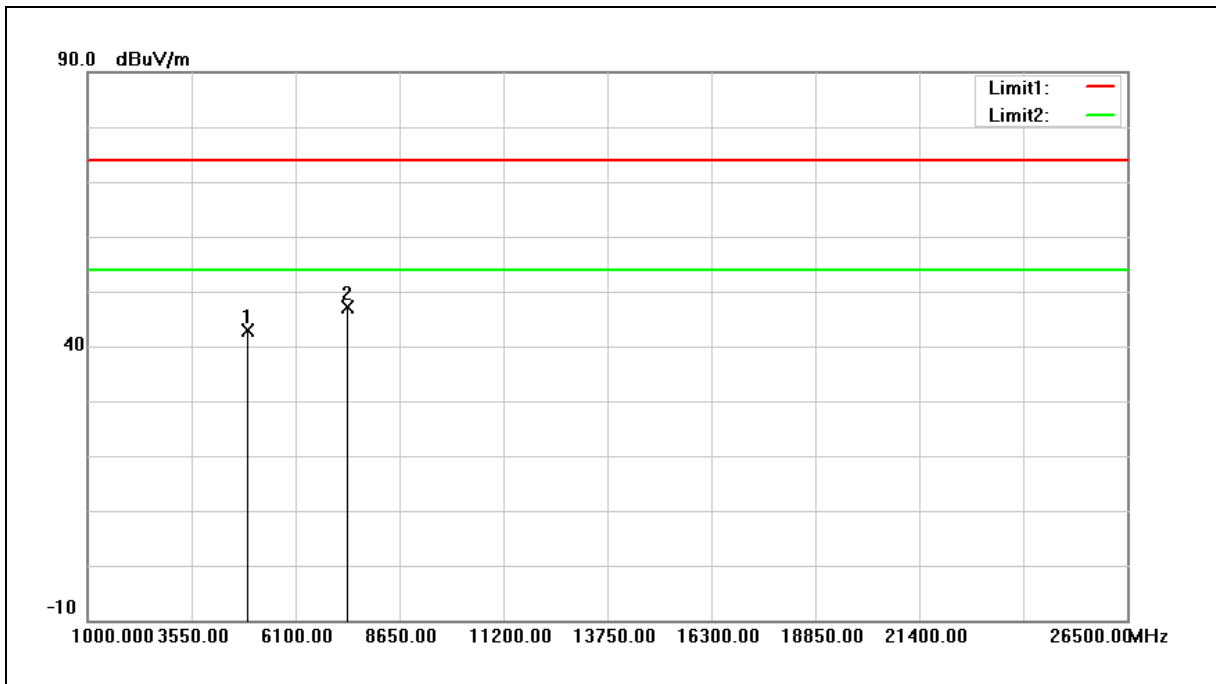


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.63	7.29	42.92	74.00	-31.08	peak
2	7386.000	33.58	13.50	47.08	74.00	-26.92	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	802.11n HT20		
Ant.Polar.:	Horizontal		

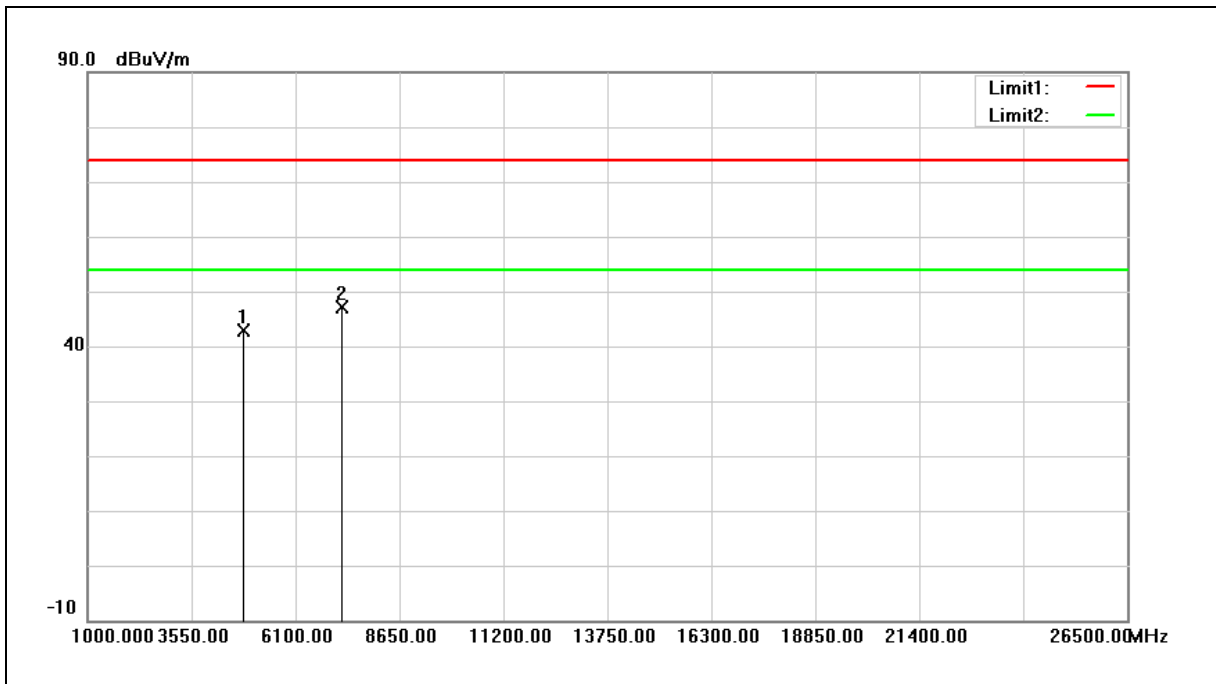


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	35.66	7.10	42.76	74.00	-31.24	peak
2	7236.000	33.57	13.47	47.04	74.00	-26.96	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	802.11n HT20		
Ant.Polar.:	Vertical		

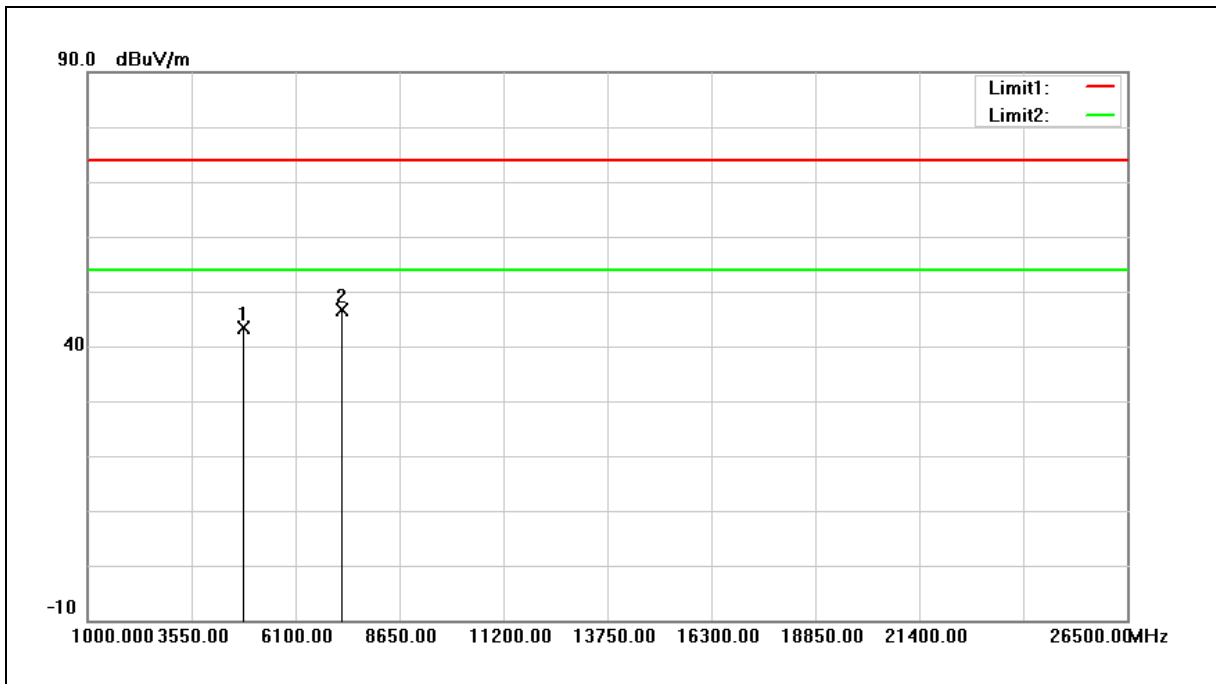

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	36.16	7.10	43.26	74.00	-30.74	peak
2	7236.000	33.05	13.47	46.52	74.00	-27.48	peak


Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	802.11n HT20		
Ant.Polar.:	Horizontal		

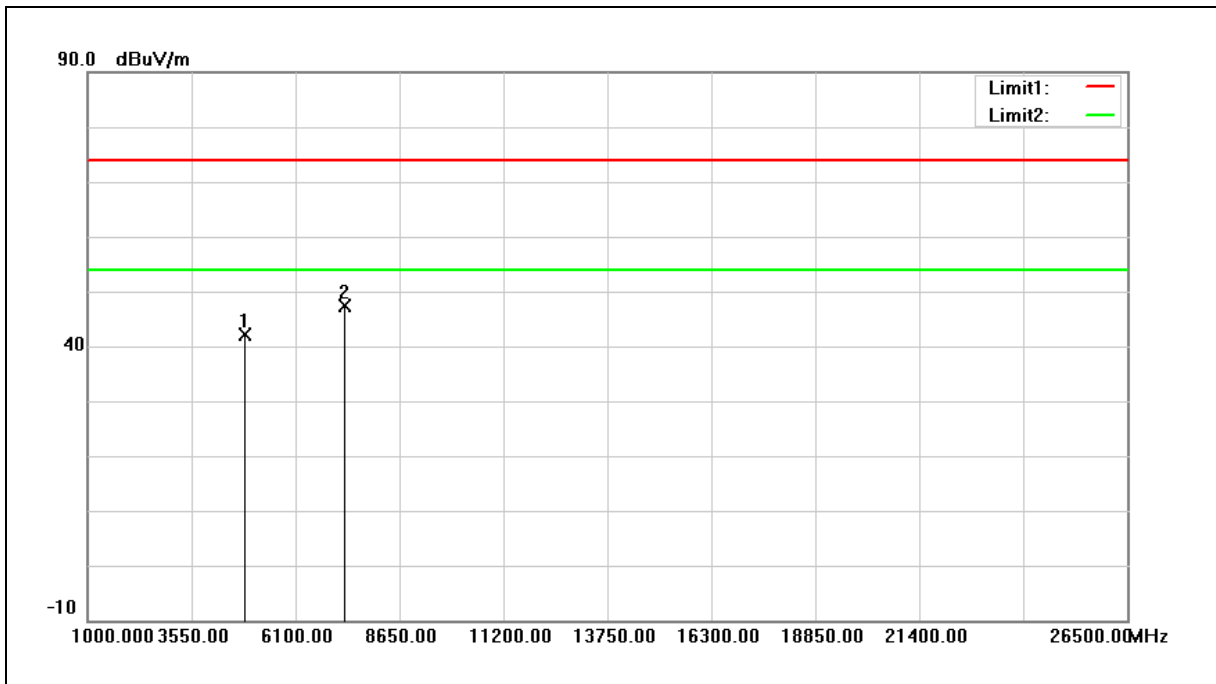

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.96	7.19	42.15	74.00	-31.85	peak
2	7311.000	34.07	13.37	47.44	74.00	-26.56	peak




Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	802.11n HT20		
Ant.Polar.:	Vertical		

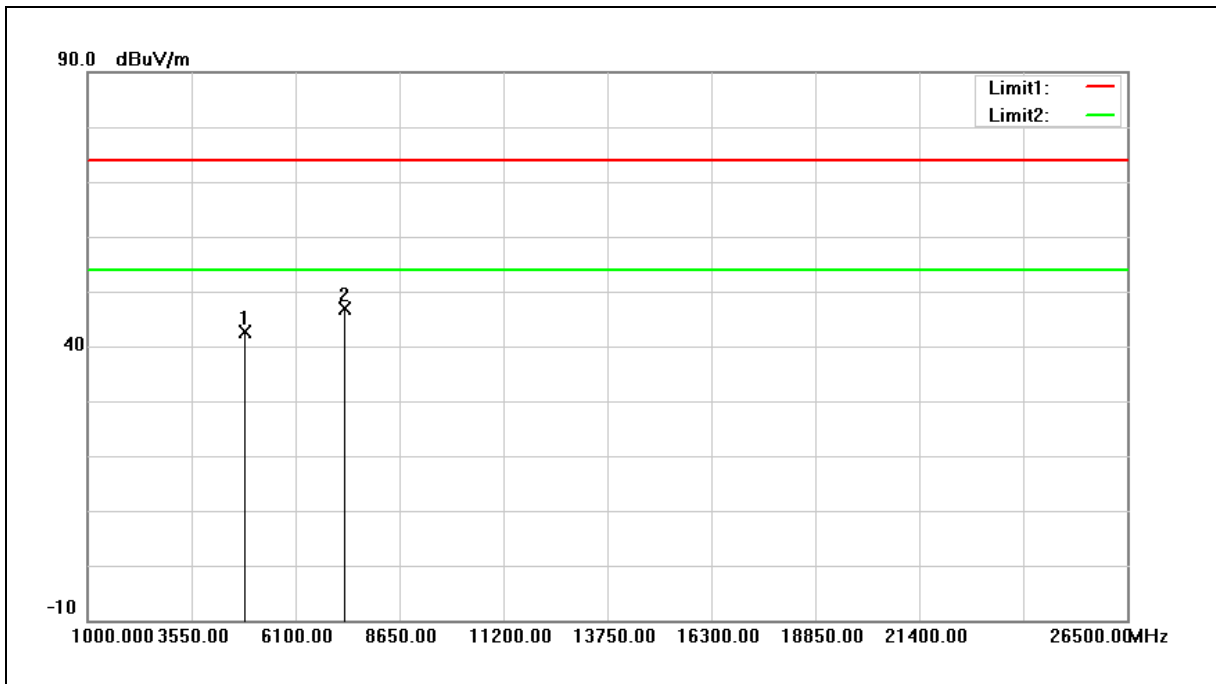


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.38	7.19	42.57	74.00	-31.43	peak
2	7311.000	33.39	13.37	46.76	74.00	-27.24	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	802.11n HT20		
Ant.Polar.:	Horizontal		

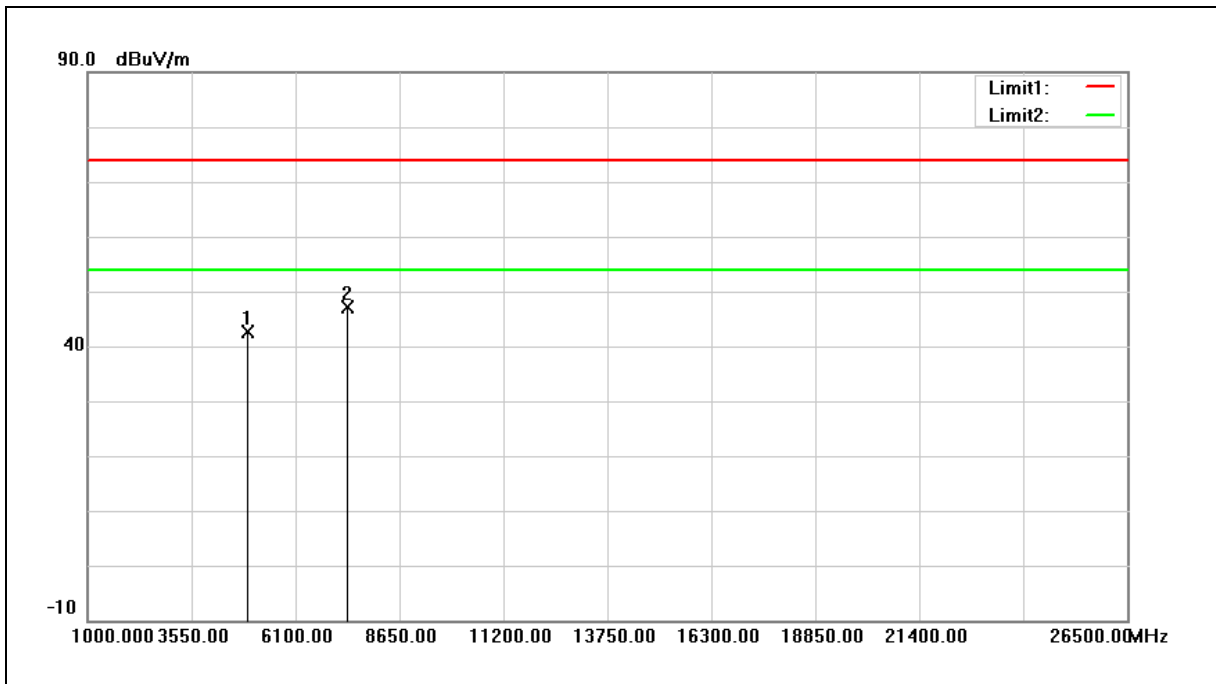


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.39	7.29	42.68	74.00	-31.32	peak
2	7386.000	33.74	13.50	47.24	74.00	-26.76	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	802.11n HT20		
Ant.Polar.:	Vertical		

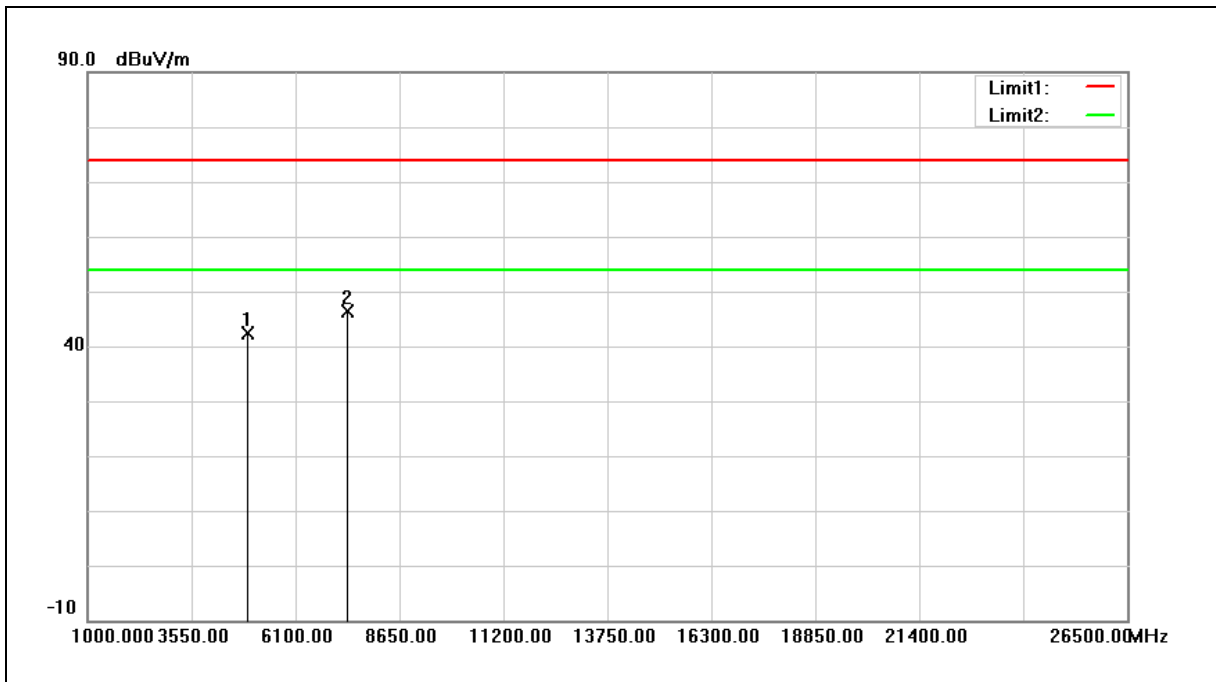


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.07	7.29	42.36	74.00	-31.64	peak
2	7386.000	32.78	13.50	46.28	74.00	-27.72	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2422 MHz		
Mode:	802.11n HT40		
Ant.Polar.:	Horizontal		

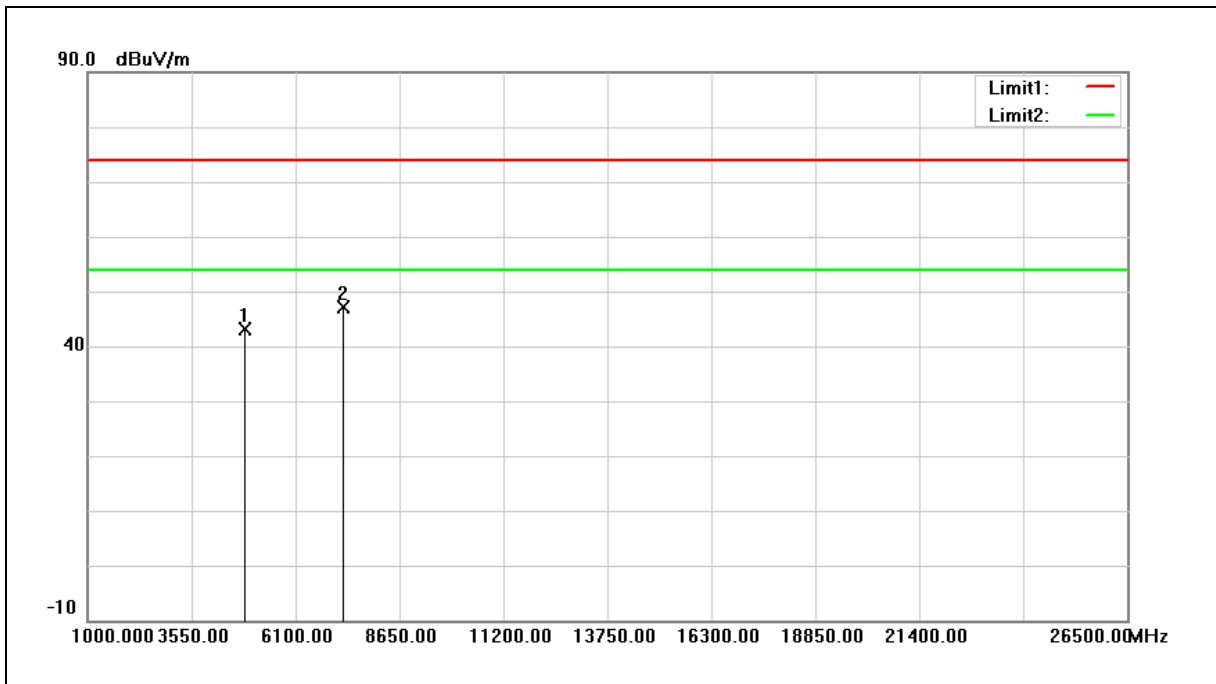


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	36.00	7.11	43.11	74.00	-30.89	peak
2	7266.000	33.68	13.49	47.17	74.00	-26.83	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2422 MHz		
Mode:	802.11n HT40		
Ant.Polar.:	Vertical		

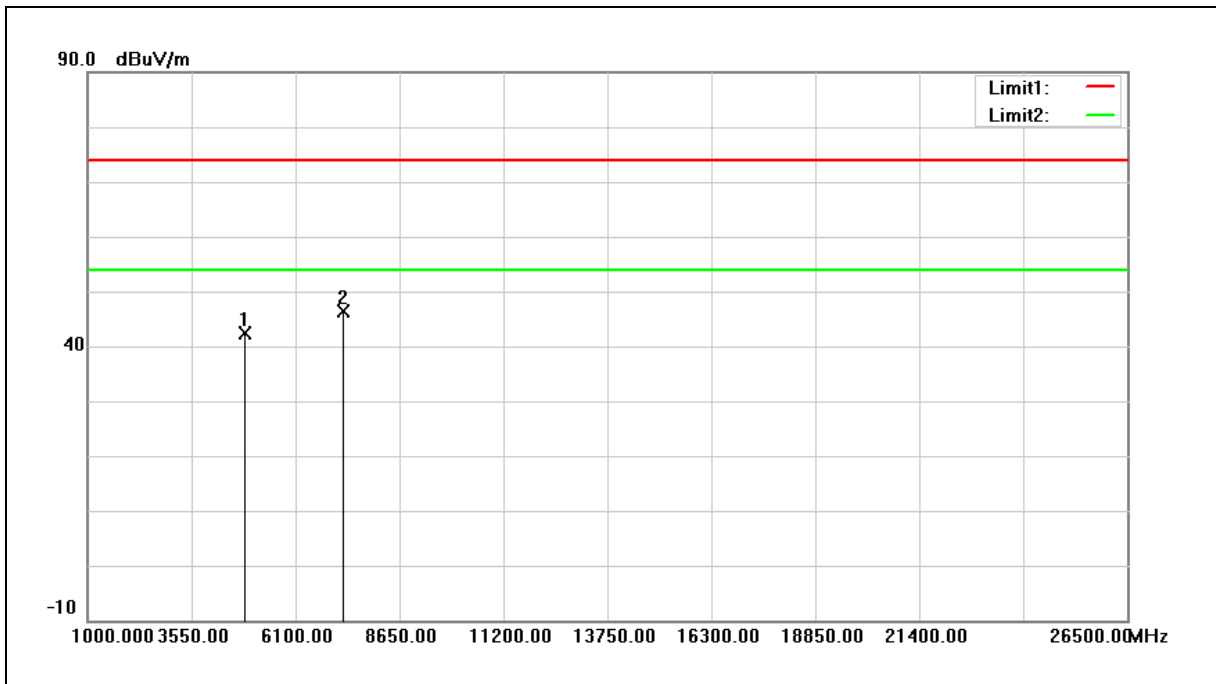


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	35.37	7.11	42.48	74.00	-31.52	peak
2	7266.000	32.88	13.49	46.37	74.00	-27.63	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	802.11n HT40		
Ant.Polar.:	Horizontal		

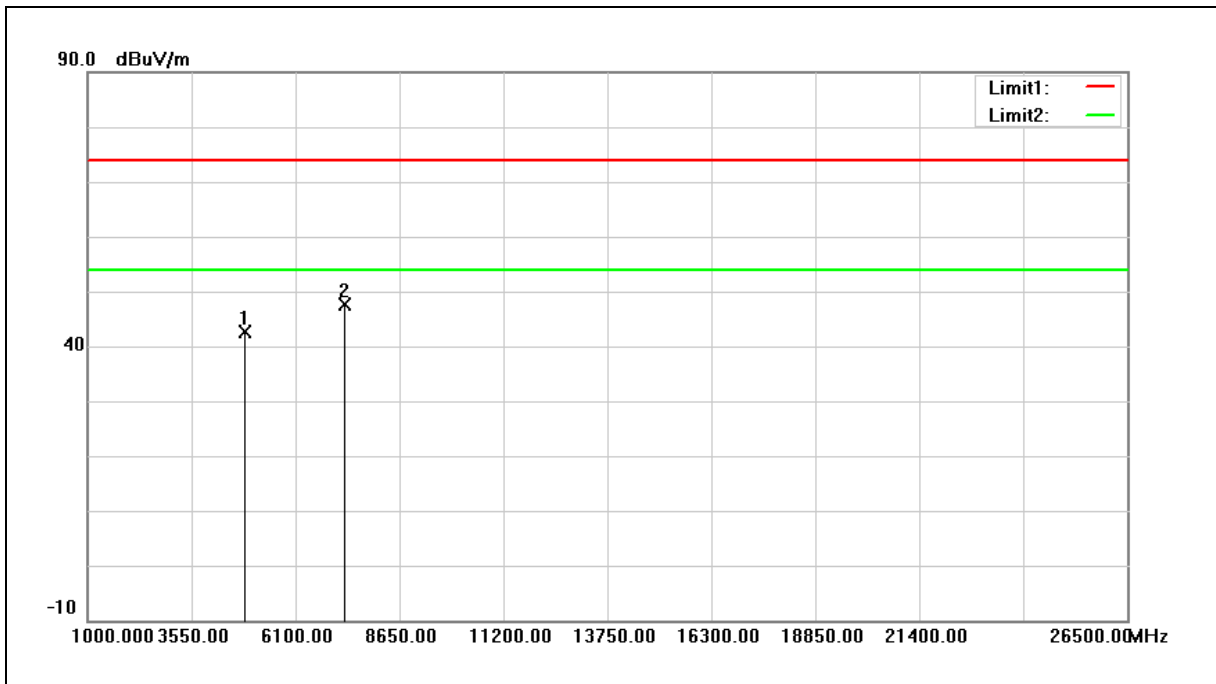


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.53	7.19	42.72	74.00	-31.28	peak
2	7311.000	34.19	13.37	47.56	74.00	-26.44	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	802.11n HT40		
Ant.Polar.:	Vertical		

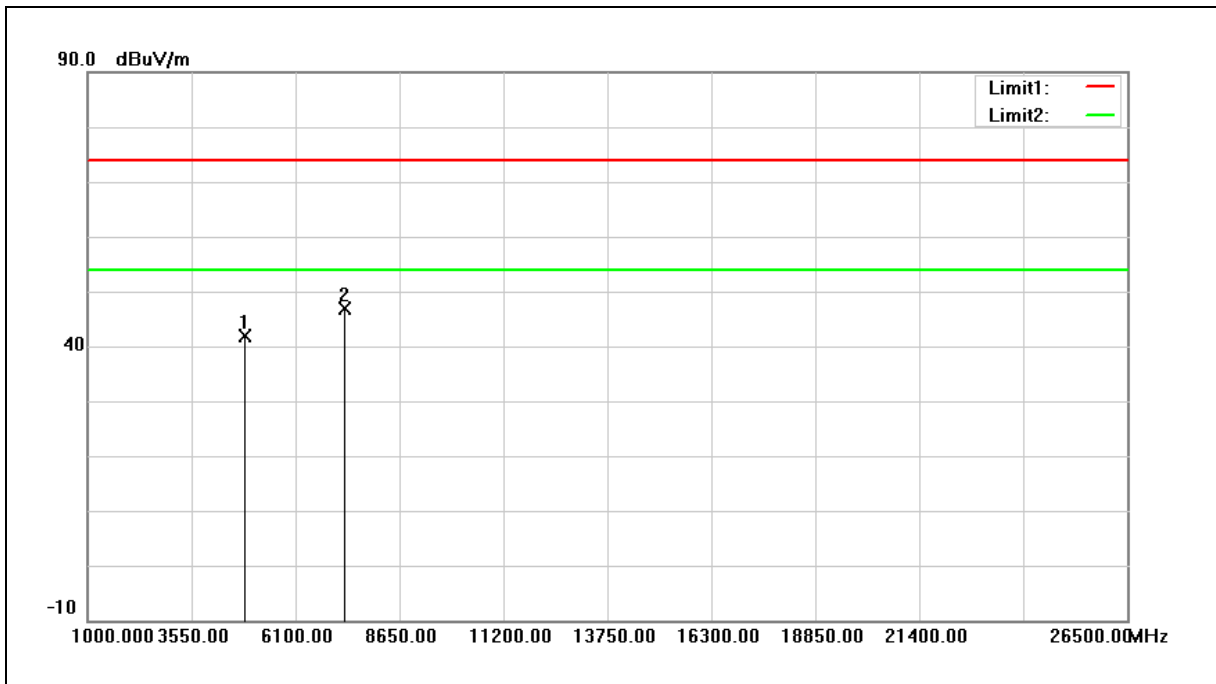

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.65	7.19	41.84	74.00	-32.16	peak
2	7311.000	33.47	13.37	46.84	74.00	-27.16	peak


Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2452 MHz		
Mode:	802.11n HT40		
Ant.Polar.:	Horizontal		

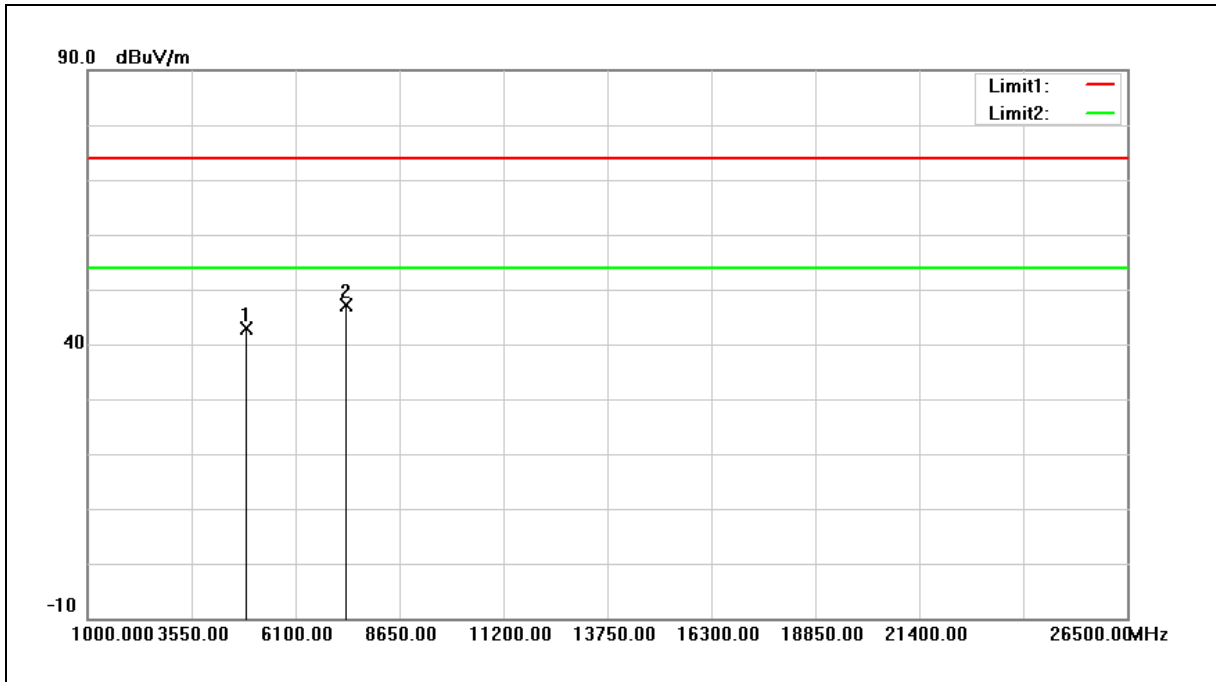

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	35.57	7.27	42.84	74.00	-31.16	peak
2	7356.000	33.73	13.42	47.15	74.00	-26.85	peak



Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Harmonic		
Frequency:	2452 MHz		
Mode:	802.11n HT40		
Ant.Polar.:	Vertical		

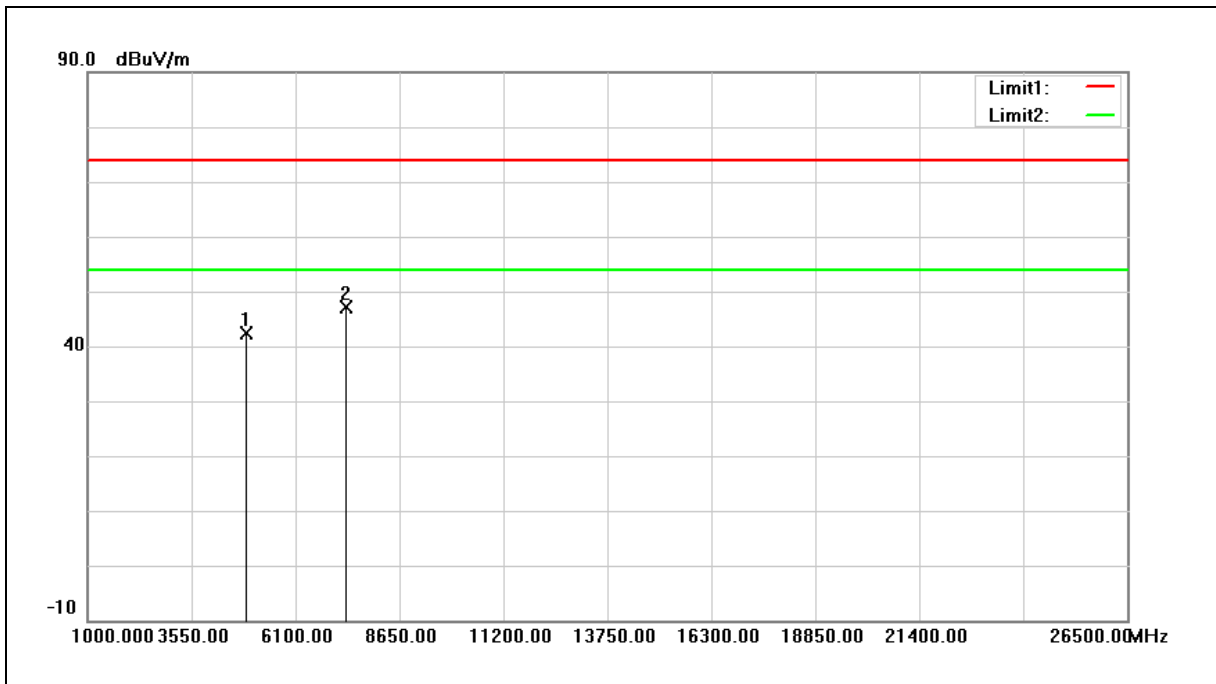


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	35.20	7.27	42.47	74.00	-31.53	peak
2	7356.000	33.69	13.42	47.11	74.00	-26.89	peak

Band Edge


Peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	802.11b		
Ant.Polar.:	Horizontal		

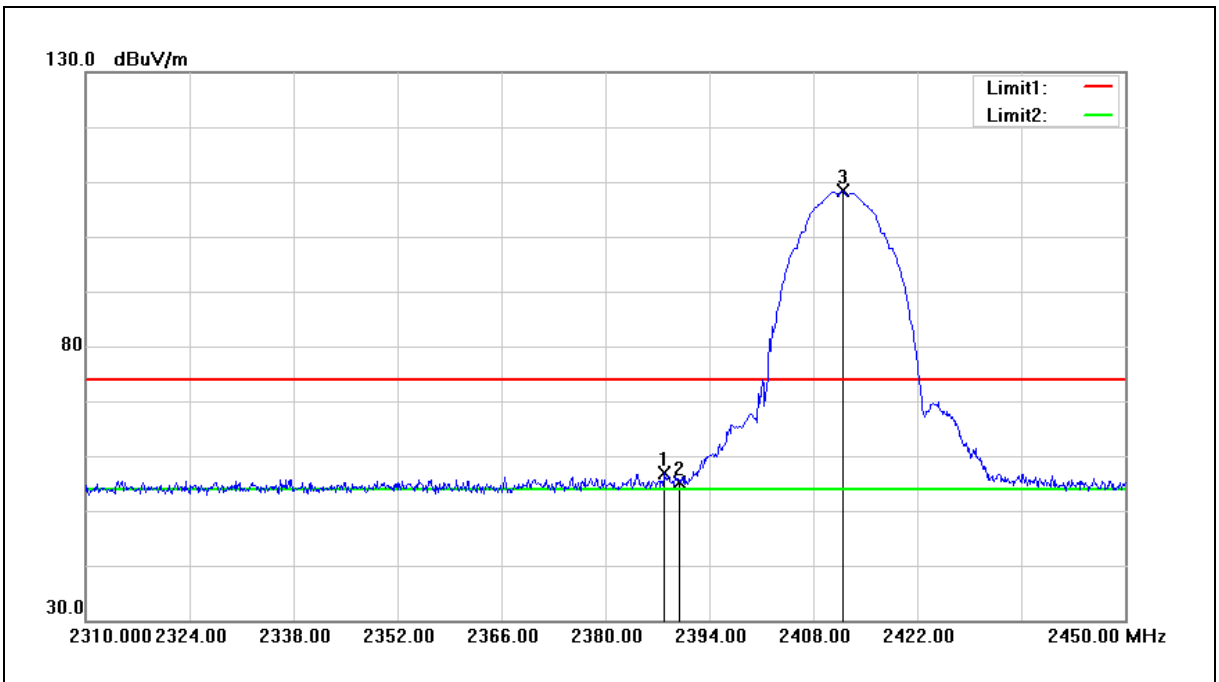


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.980	57.90	-1.13	56.77	74.00	-17.23	peak
2	2390.000	56.24	-1.14	55.10	74.00	-18.90	peak
3	2412.060	109.54	-1.17	108.37	74.00	34.37	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	802.11b		
Ant.Polar.:	Vertical		

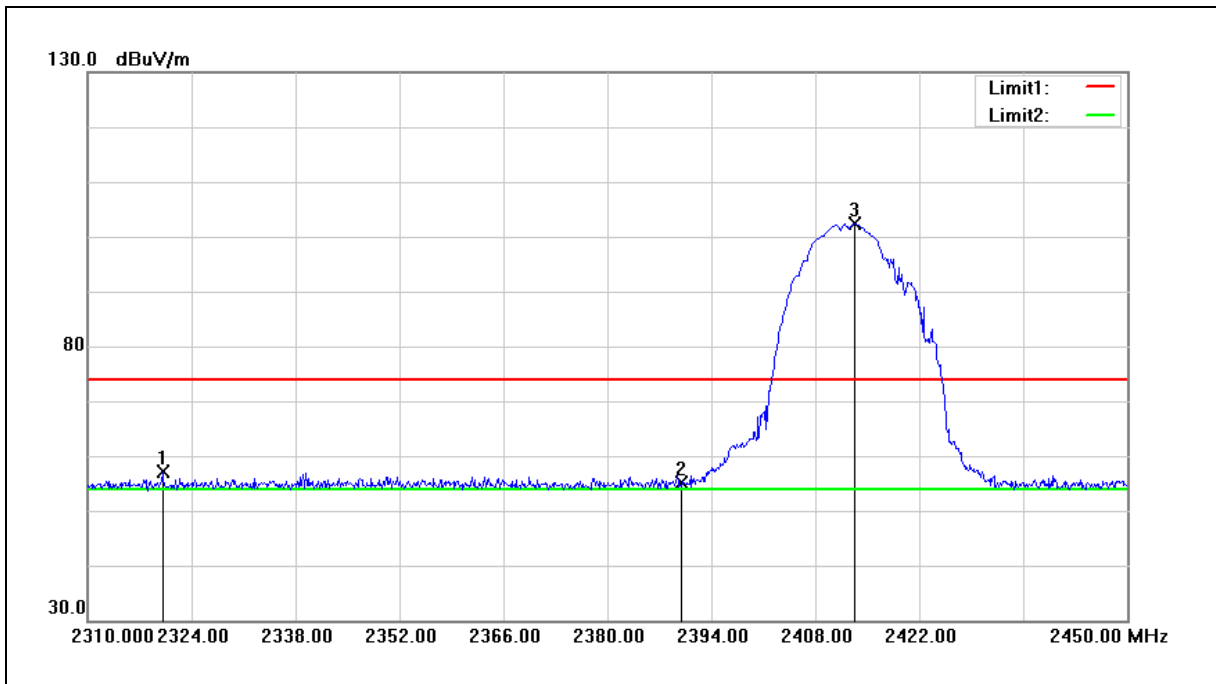


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2320.080	58.12	-1.10	57.02	74.00	-16.98	peak
2	2390.000	56.17	-1.14	55.03	74.00	-18.97	peak
3	2413.320	103.50	-1.18	102.32	74.00	28.32	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	802.11b		
Ant.Polar.:	Horizontal		

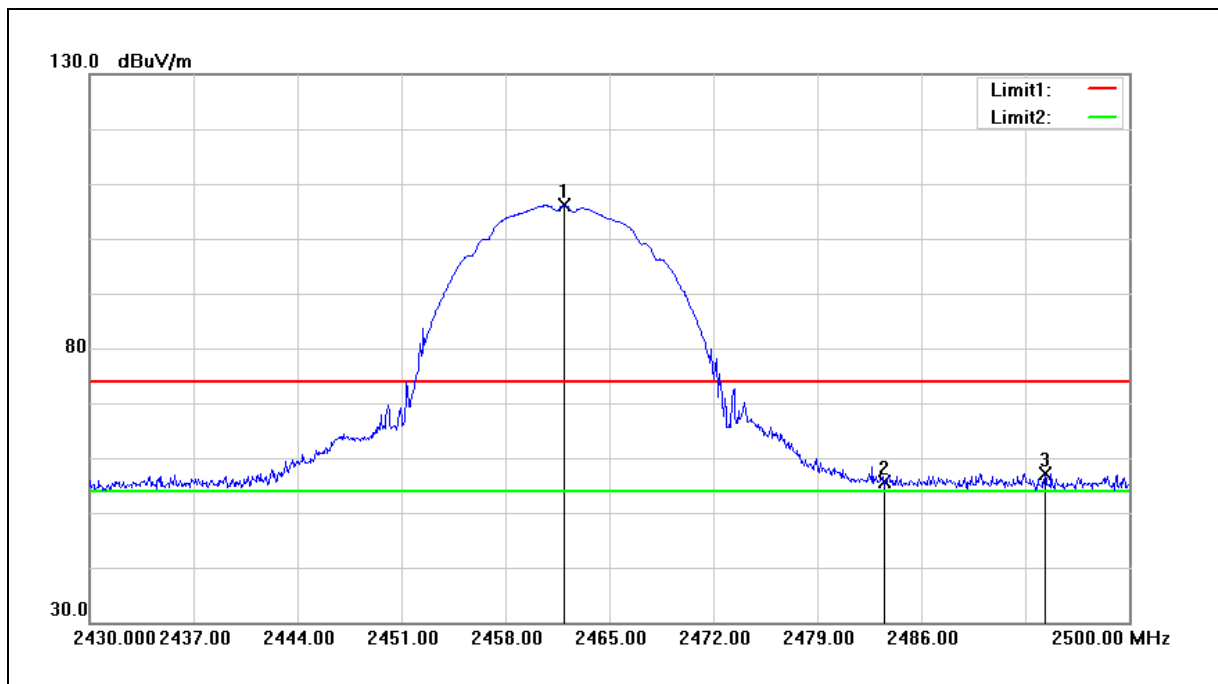


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.990	107.30	-1.16	106.14	74.00	32.14	peak
2	2483.500	56.71	-1.17	55.54	74.00	-18.46	peak
3	2494.330	58.29	-1.16	57.13	74.00	-16.87	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	802.11b		
Ant.Polar.:	Vertical		

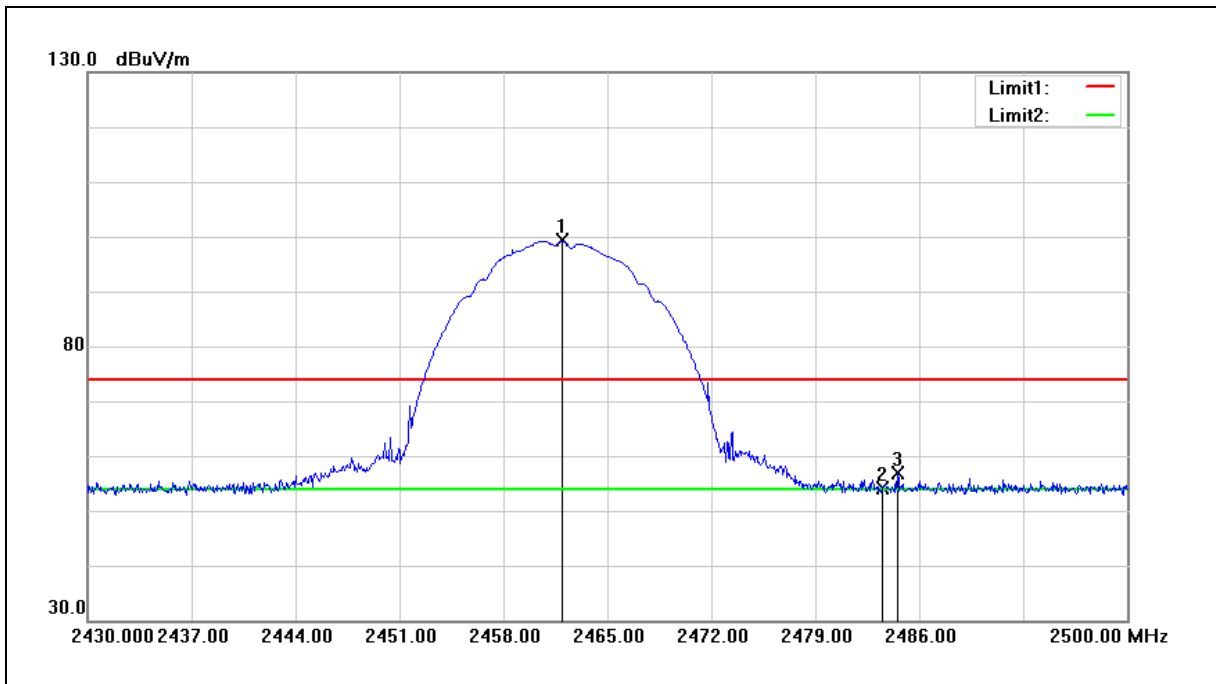


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.920	100.47	-1.16	99.31	74.00	25.31	peak
2	2483.500	55.37	-1.17	54.20	74.00	-19.80	peak
3	2484.530	57.96	-1.16	56.80	74.00	-17.20	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	802.11g		
Ant.Polar.:	Horizontal		

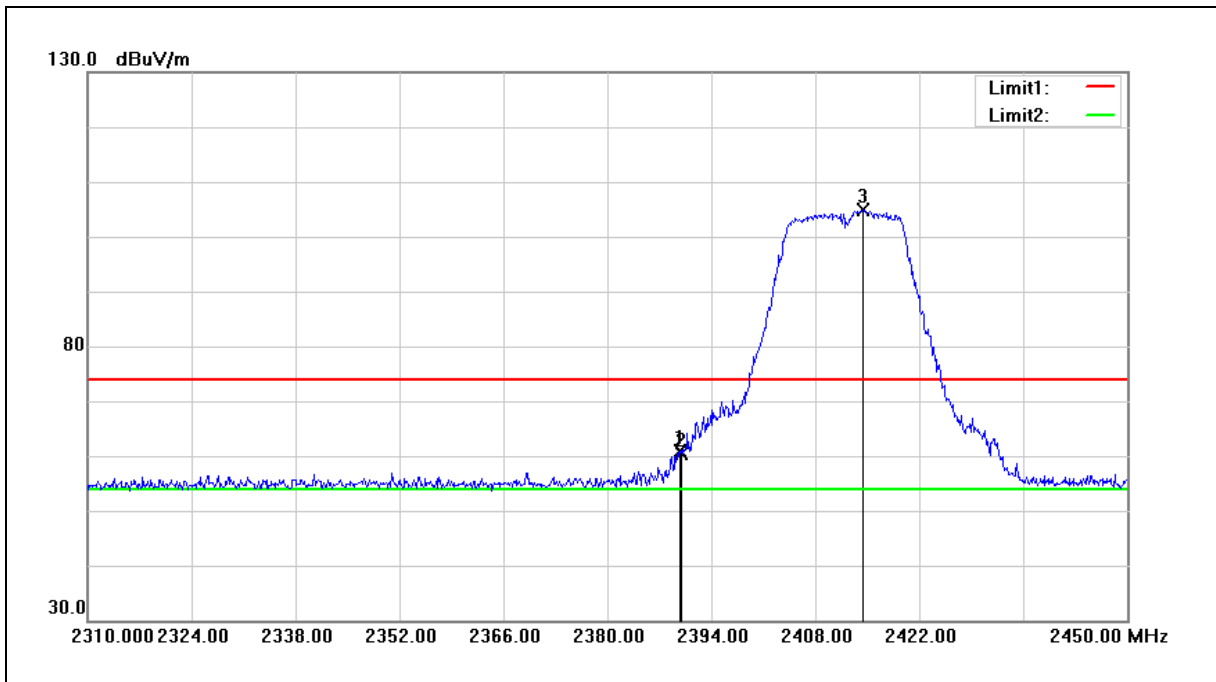


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.800	62.01	-1.14	60.87	74.00	-13.13	peak
2	2390.000	61.60	-1.14	60.46	74.00	-13.54	peak
3	2414.440	105.98	-1.17	104.81	74.00	30.81	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	802.11g		
Ant.Polar.:	Vertical		

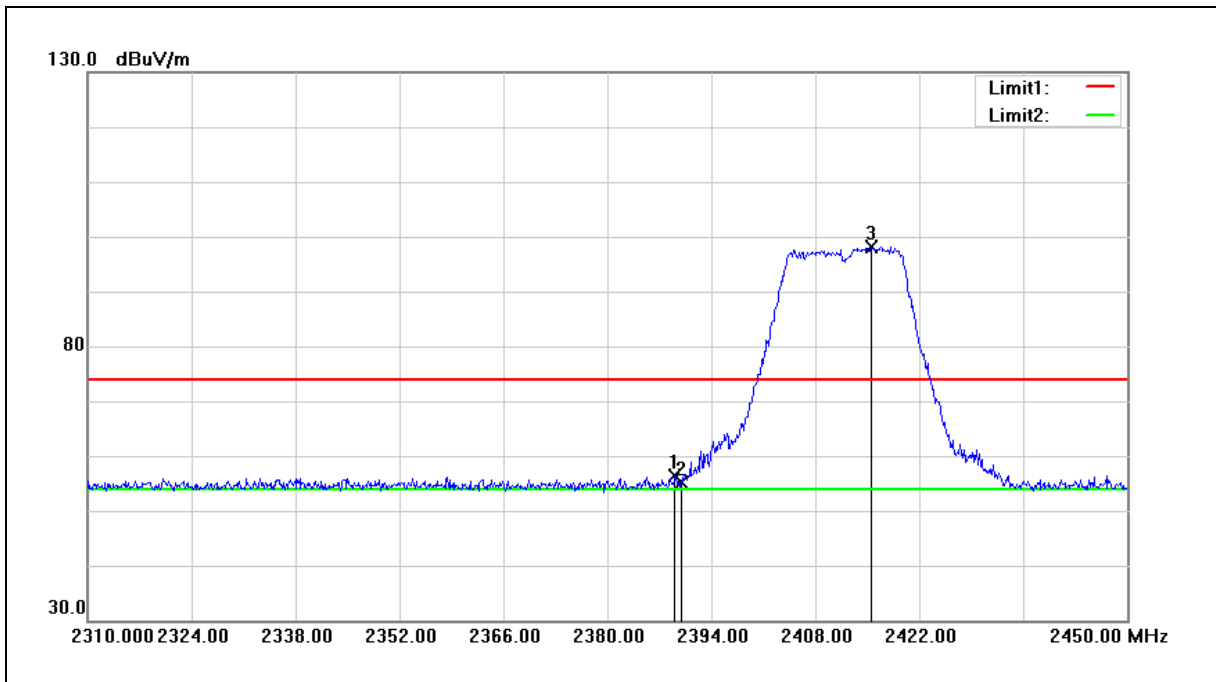

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.100	57.52	-1.13	56.39	74.00	-17.61	peak
2	2390.000	56.34	-1.14	55.20	74.00	-18.80	peak
3	2415.560	99.26	-1.17	98.09	74.00	24.09	peak


Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	802.11g		
Ant.Polar.:	Horizontal		

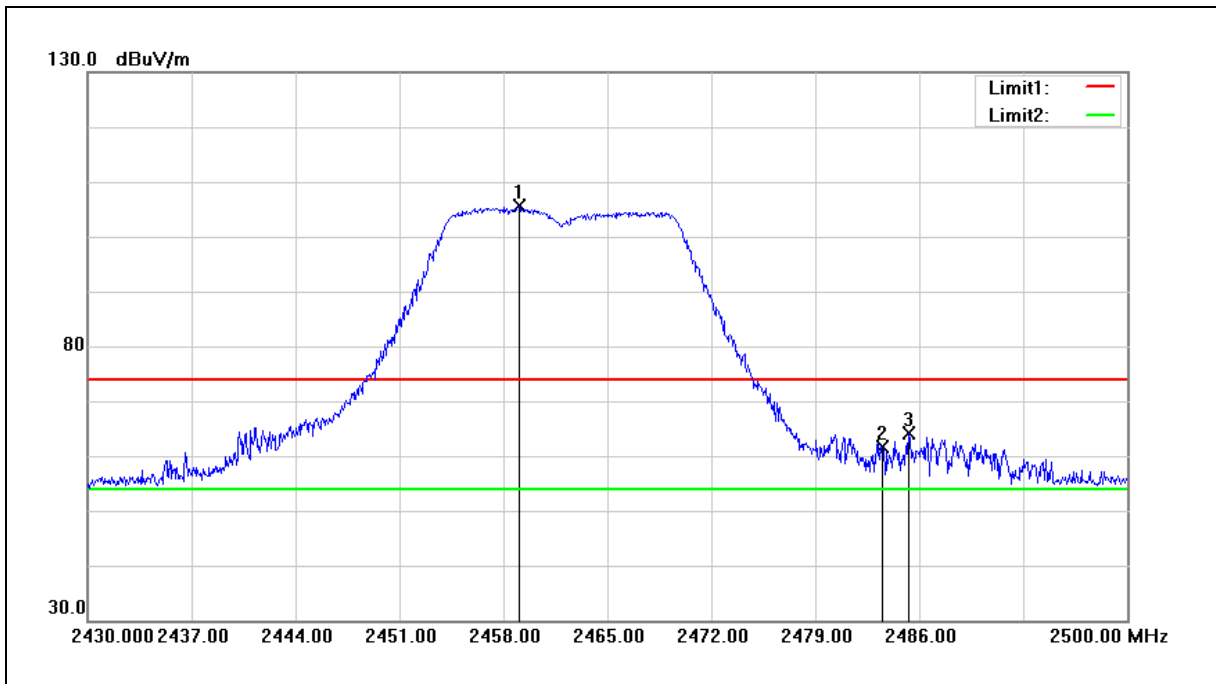

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2459.050	106.79	-1.17	105.62	74.00	31.62	peak
2	2483.500	62.89	-1.17	61.72	74.00	-12.28	peak
3	2485.300	65.29	-1.16	64.13	74.00	-9.87	peak




Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	802.11g		
Ant.Polar.:	Vertical		

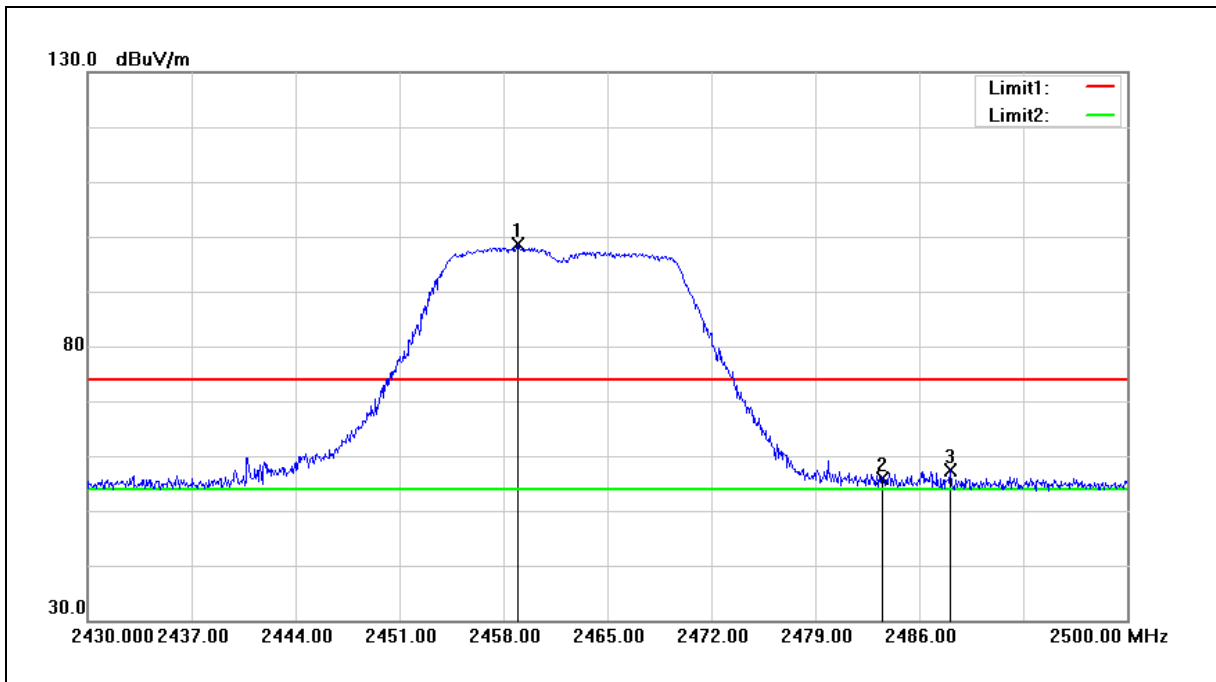


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2458.980	99.75	-1.17	98.58	74.00	24.58	peak
2	2483.500	57.06	-1.17	55.89	74.00	-18.11	peak
3	2488.100	58.59	-1.17	57.42	74.00	-16.58	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	802.11n HT20		
Ant.Polar.:	Horizontal		

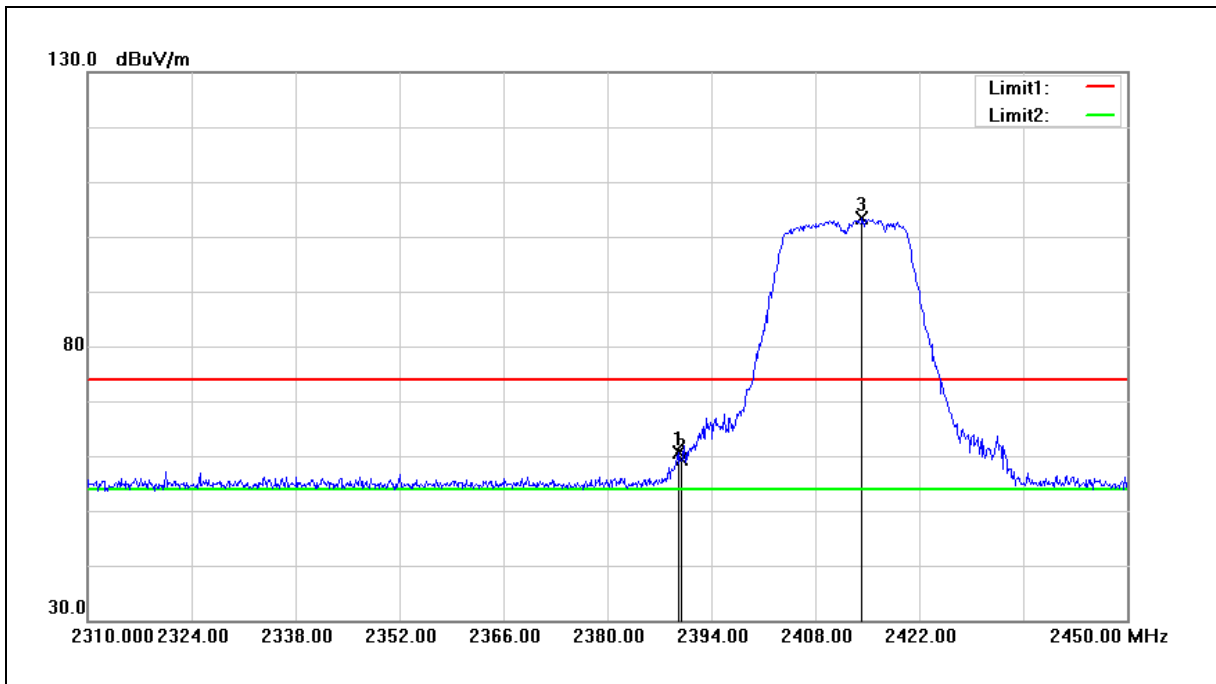


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.520	61.78	-1.14	60.64	74.00	-13.36	peak
2	2390.000	60.50	-1.14	59.36	74.00	-14.64	peak
3	2414.300	104.49	-1.18	103.31	74.00	29.31	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	802.11n HT20		
Ant.Polar.:	Vertical		

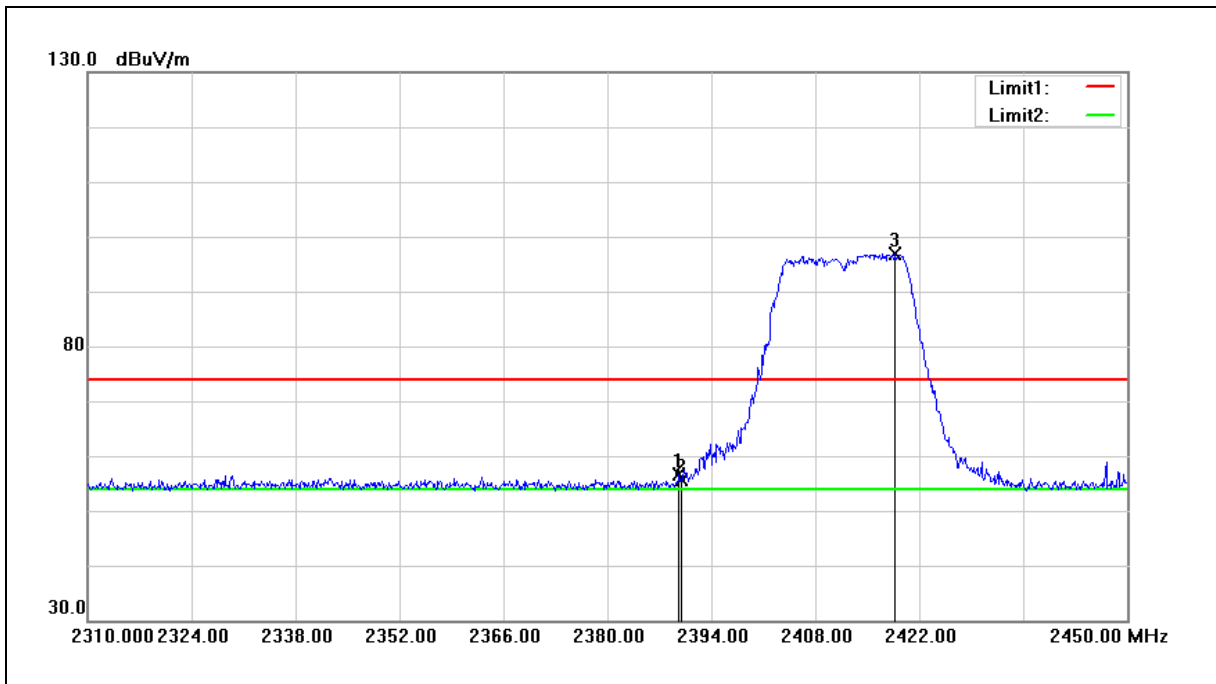


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	57.69	-1.14	56.55	74.00	-17.45	peak
2	2390.000	56.65	-1.14	55.51	74.00	-18.49	peak
3	2418.780	98.12	-1.18	96.94	74.00	22.94	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	802.11n HT20		
Ant.Polar.:	Horizontal		

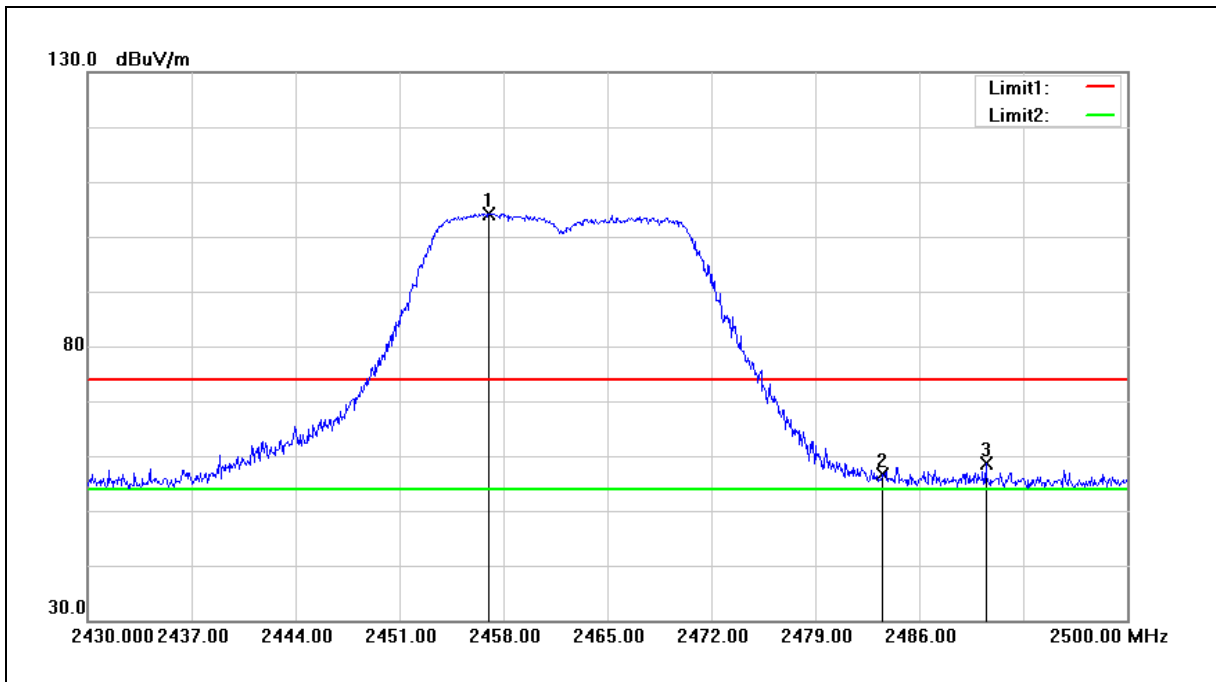


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2457.020	105.34	-1.16	104.18	74.00	30.18	peak
2	2483.500	57.79	-1.17	56.62	74.00	-17.38	peak
3	2490.480	59.79	-1.16	58.63	74.00	-15.37	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	802.11n HT20		
Ant.Polar.:	Vertical		

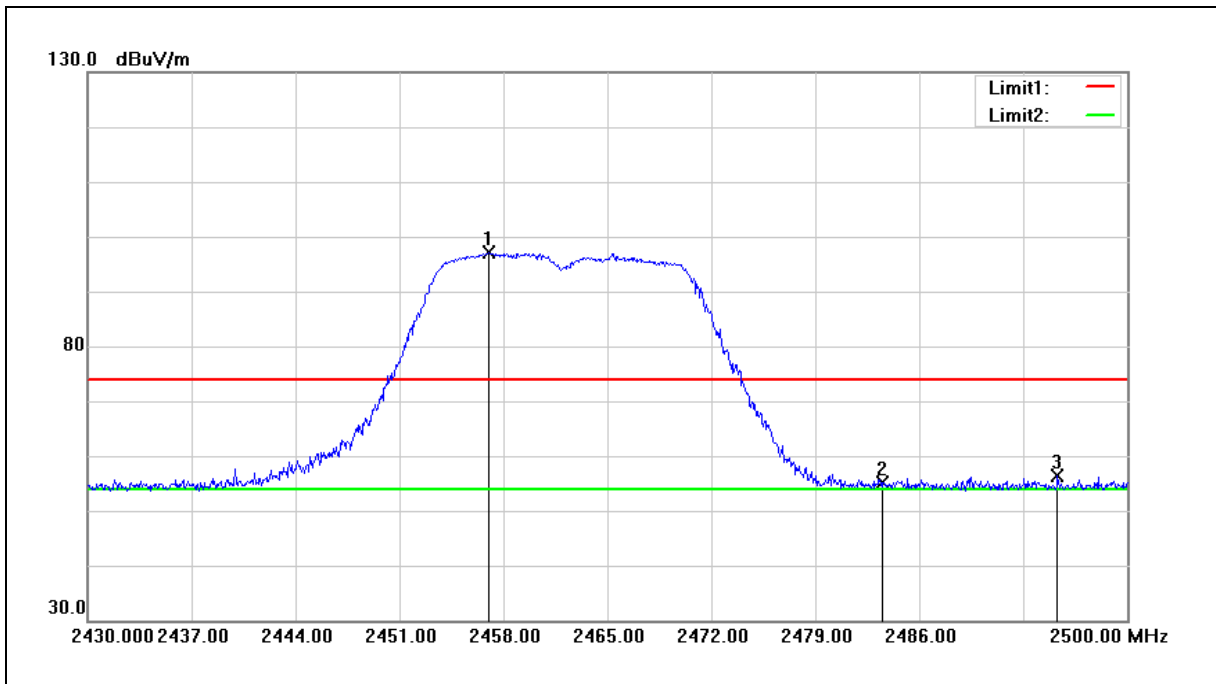


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2457.020	98.24	-1.16	97.08	74.00	23.08	peak
2	2483.500	56.18	-1.17	55.01	74.00	-18.99	peak
3	2495.310	57.49	-1.16	56.33	74.00	-17.67	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	802.11n HT40		
Ant.Polar.:	Horizontal		

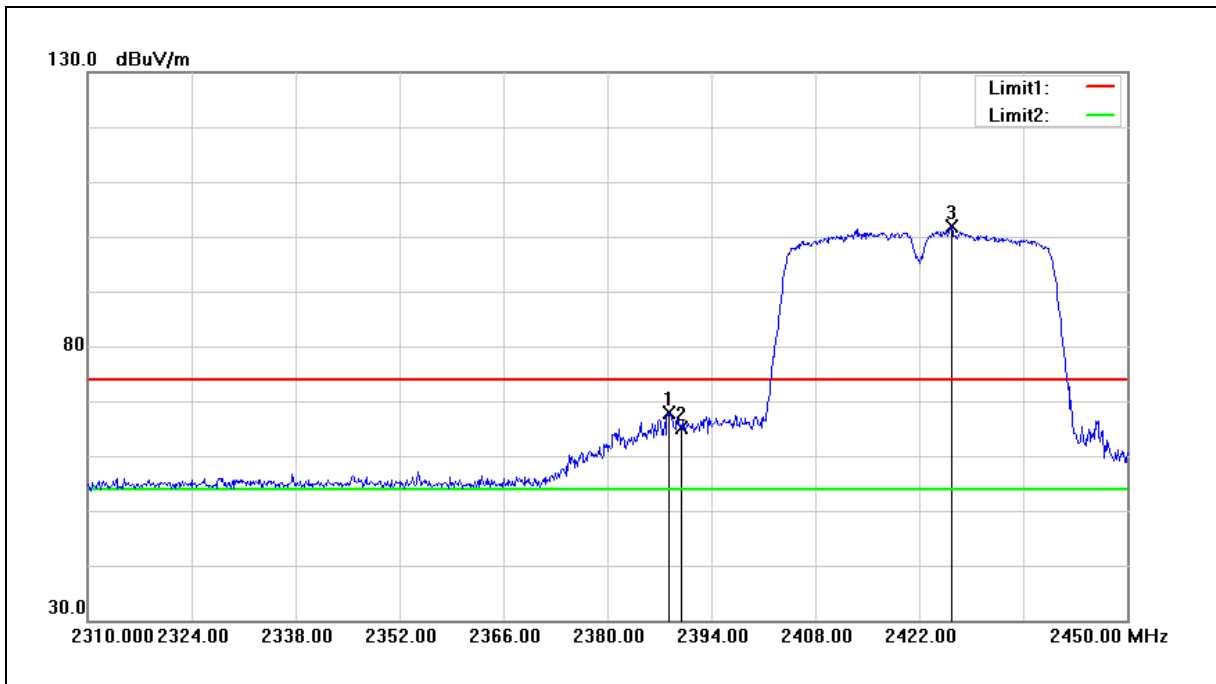


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.260	69.03	-1.13	67.90	74.00	-6.10	peak
2	2390.000	66.25	-1.14	65.11	74.00	-8.89	peak
3	2426.340	102.97	-1.17	101.80	74.00	27.80	peak

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	802.11n HT40		
Ant.Polar.:	Vertical		

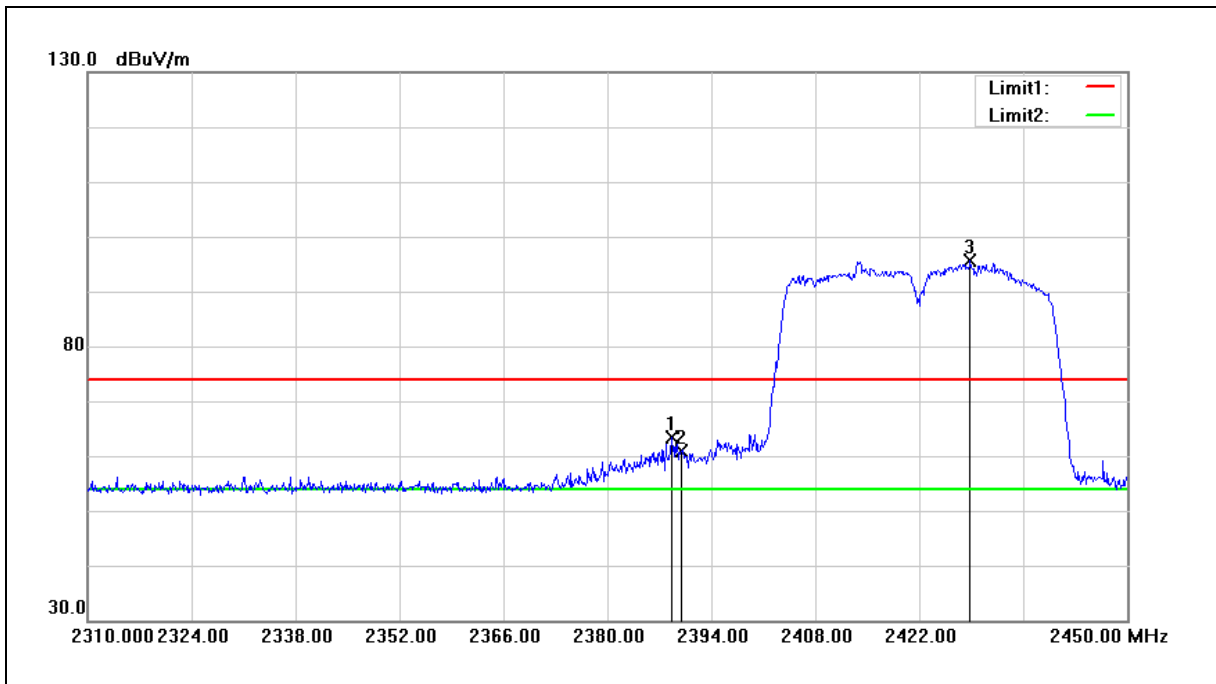

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.680	64.59	-1.13	63.46	74.00	-10.54	peak
2	2390.000	61.93	-1.14	60.79	74.00	-13.21	peak
3	2428.860	96.69	-1.17	95.52	74.00	21.52	peak


Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	802.11n HT40		
Ant.Polar.:	Horizontal		

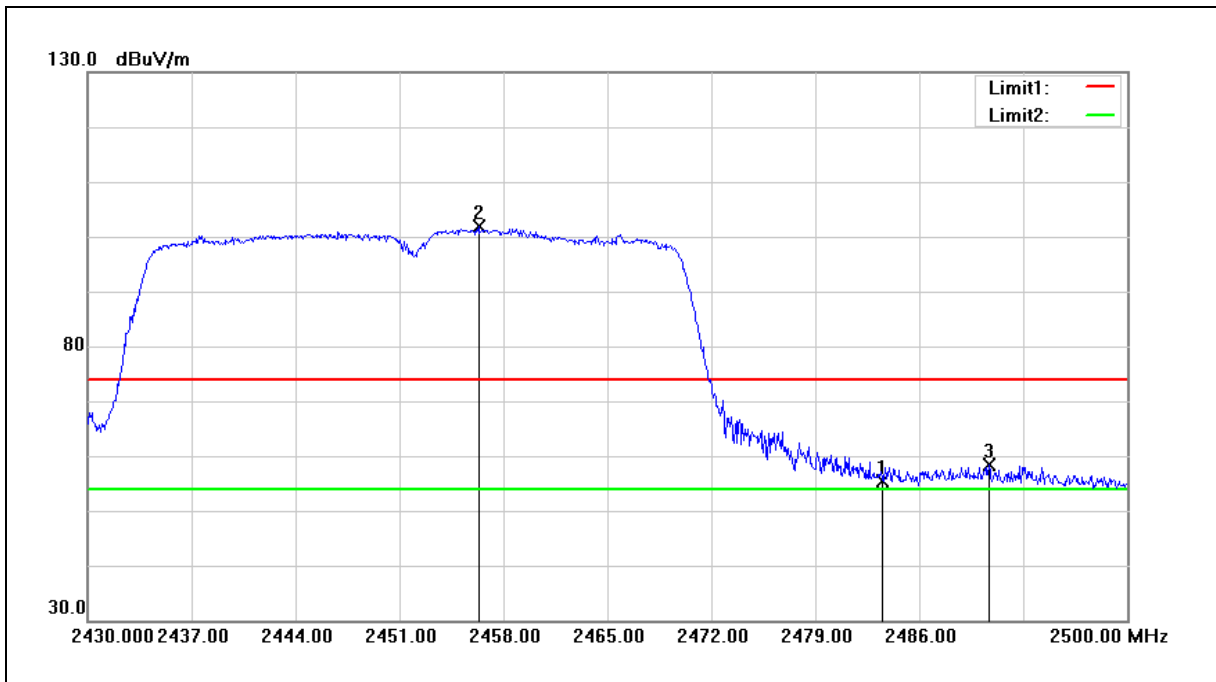

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	56.67	-1.17	55.50	74.00	-18.50	peak
2	2456.320	103.02	-1.16	101.86	74.00	27.86	peak
3	2490.690	59.50	-1.16	58.34	74.00	-15.66	peak




Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	802.11n HT40		
Ant.Polar.:	Vertical		

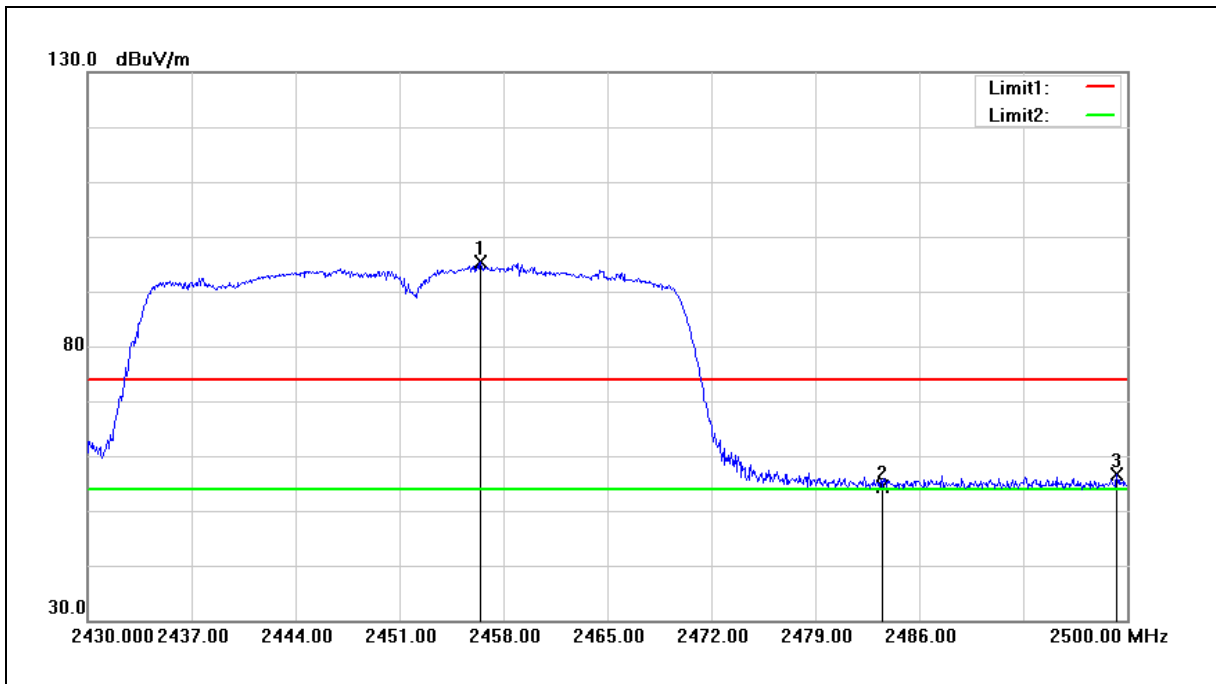

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2456.460	96.42	-1.16	95.26	74.00	21.26	peak
2	2483.500	55.57	-1.17	54.40	74.00	-19.60	peak
3	2499.300	57.68	-1.16	56.52	74.00	-17.48	peak


Average

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	802.11b		
Ant.Polar.:	Horizontal		

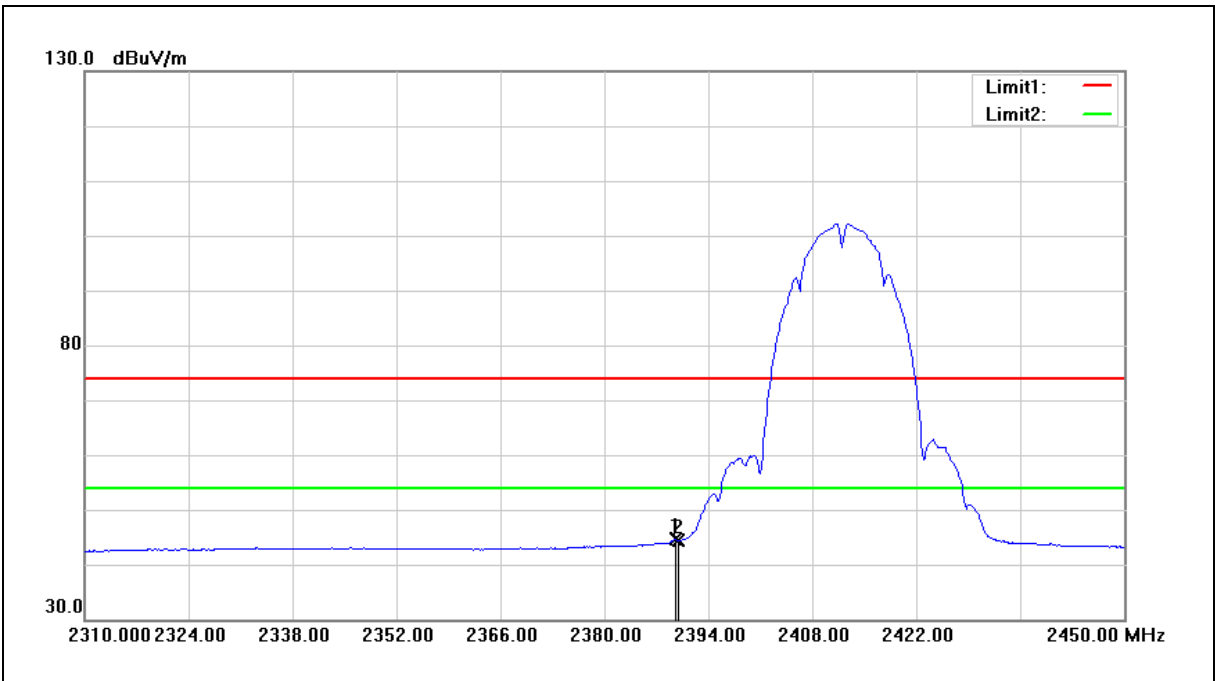


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.520	45.80	-1.14	44.66	54.00	-9.34	AVG
2	2390.000	45.56	-1.14	44.42	54.00	-9.58	AVG

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	802.11b		
Ant.Polar.:	Vertical		

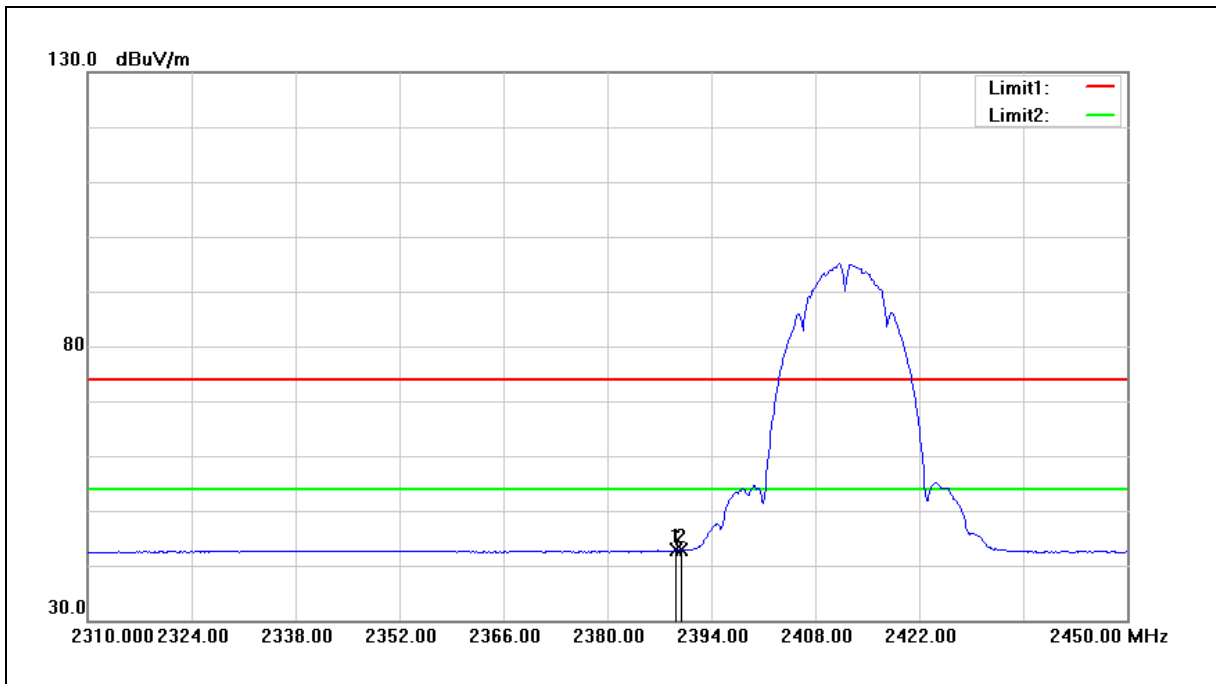


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.240	43.95	-1.14	42.81	54.00	-11.19	AVG
2	2390.000	43.98	-1.14	42.84	54.00	-11.16	AVG

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	802.11b		
Ant.Polar.:	Horizontal		

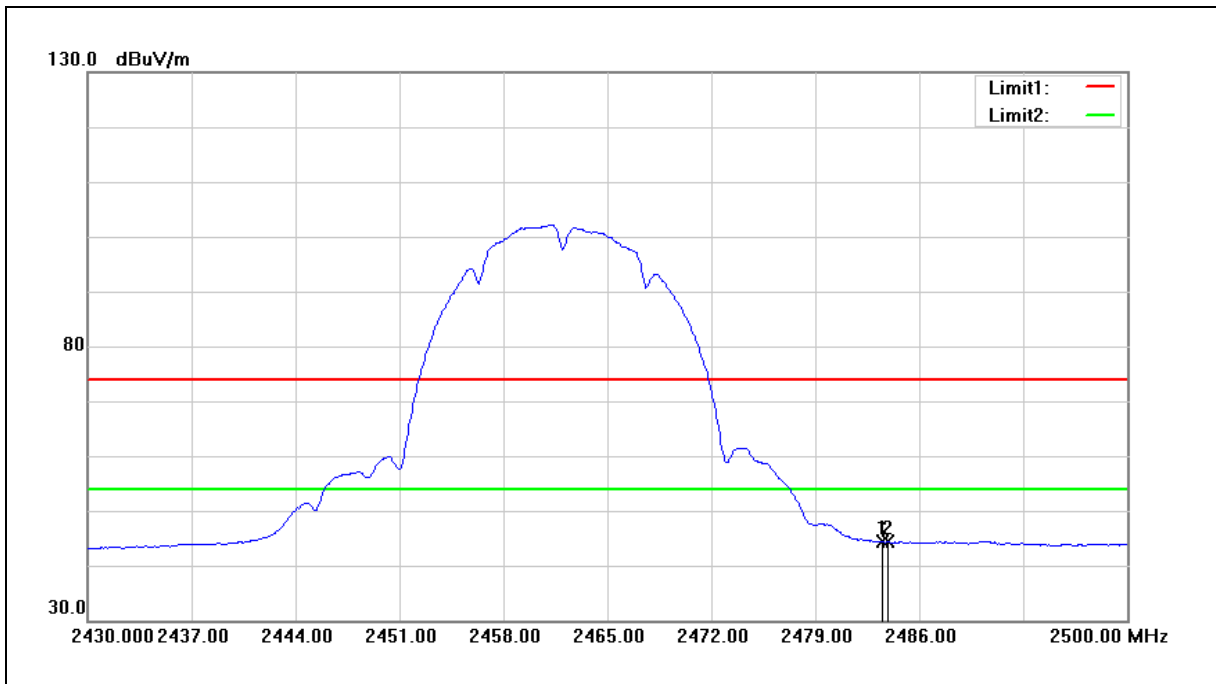


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	45.50	-1.17	44.33	54.00	-9.67	AVG
2	2483.900	45.51	-1.16	44.35	54.00	-9.65	AVG

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	802.11b		
Ant.Polar.:	Vertical		

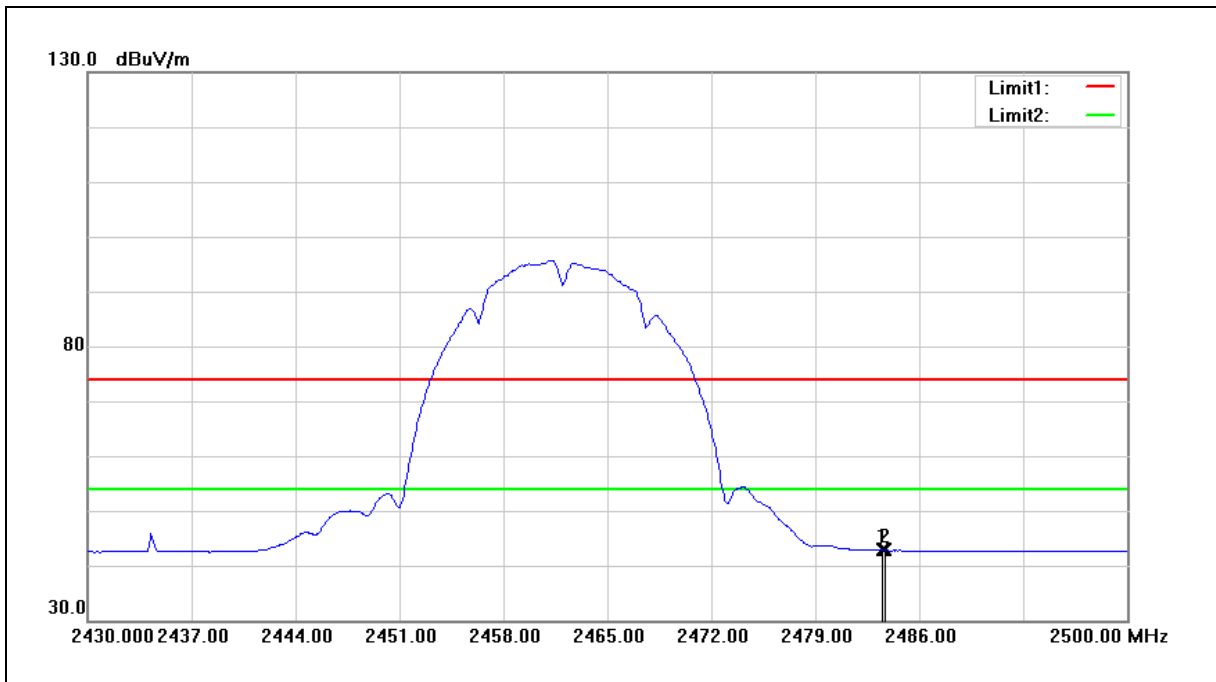


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	43.94	-1.17	42.77	54.00	-11.23	AVG
2	2483.690	44.03	-1.17	42.86	54.00	-11.14	AVG

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	802.11g		
Ant.Polar.:	Horizontal		

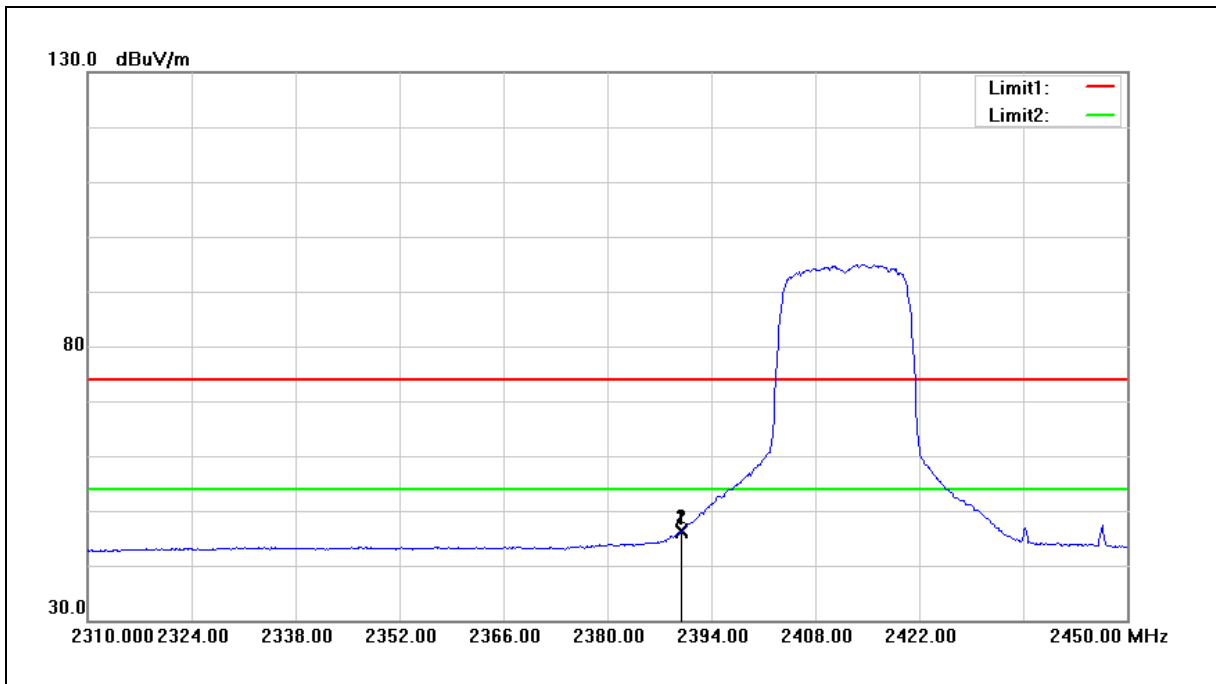


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.940	47.35	-1.14	46.21	54.00	-7.79	AVG
2	2390.000	47.57	-1.14	46.43	54.00	-7.57	AVG

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	802.11g		
Ant.Polar.:	Vertical		

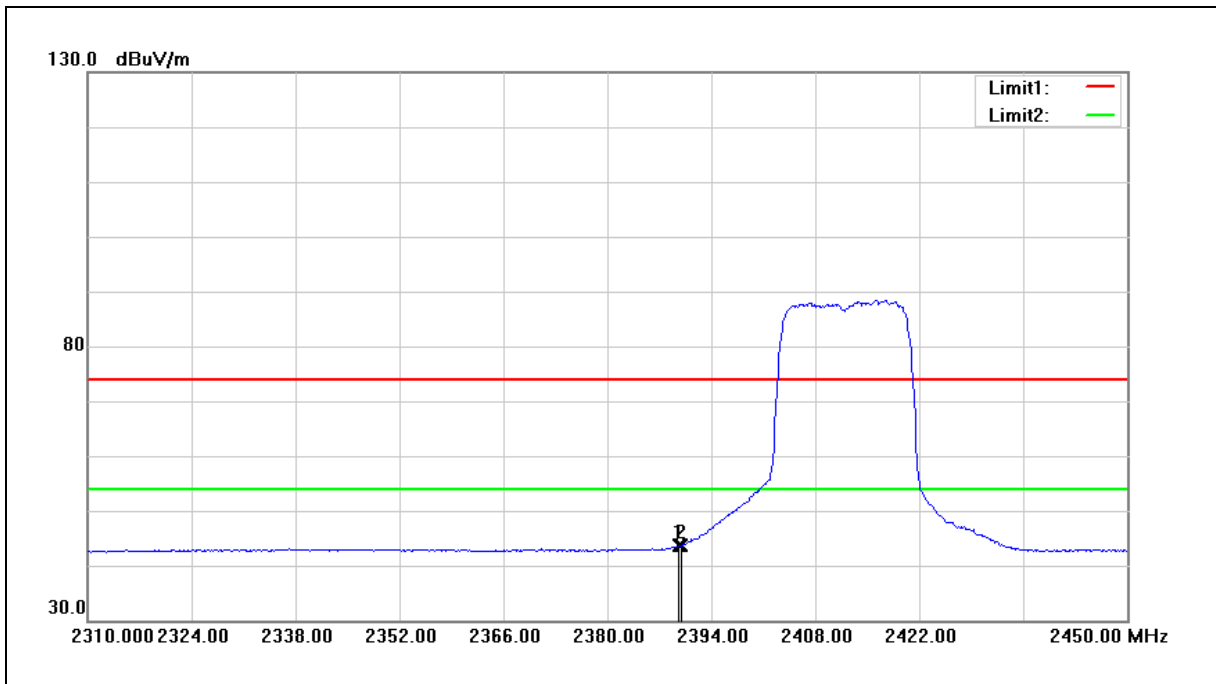

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	44.83	-1.14	43.69	54.00	-10.31	AVG
2	2390.000	44.87	-1.14	43.73	54.00	-10.27	AVG


Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	802.11g		
Ant.Polar.:	Horizontal		

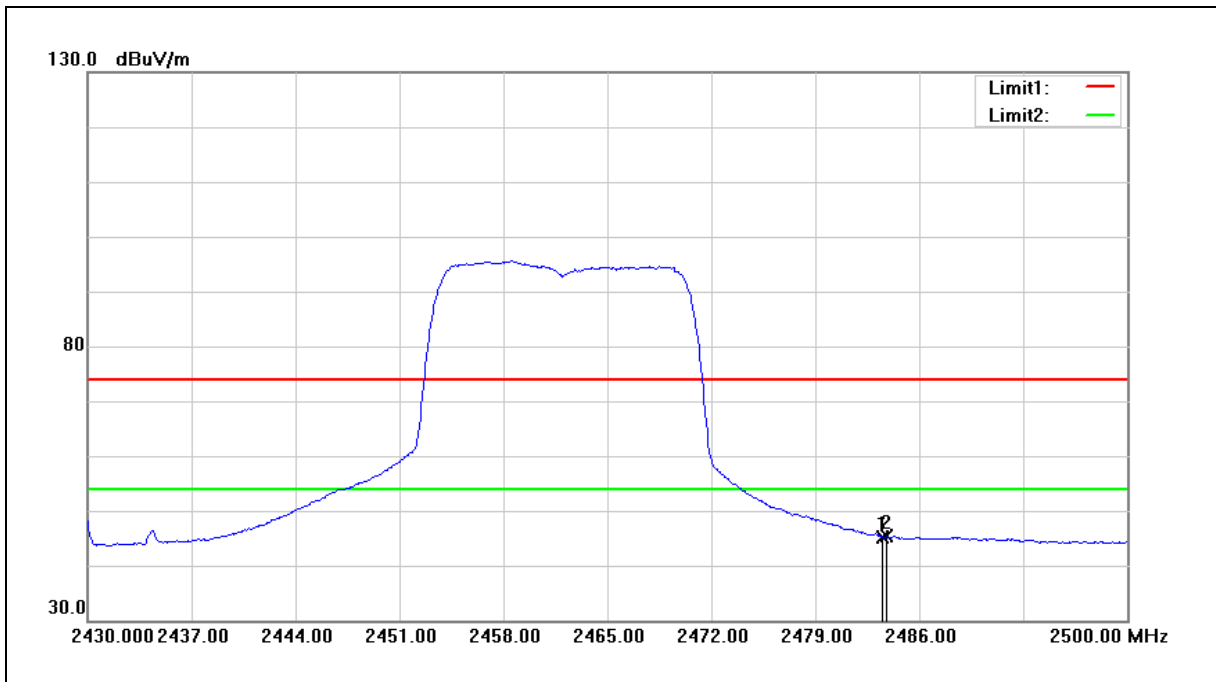

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	46.41	-1.17	45.24	54.00	-8.76	AVG
2	2483.830	46.47	-1.16	45.31	54.00	-8.69	AVG




Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	802.11g		
Ant.Polar.:	Vertical		

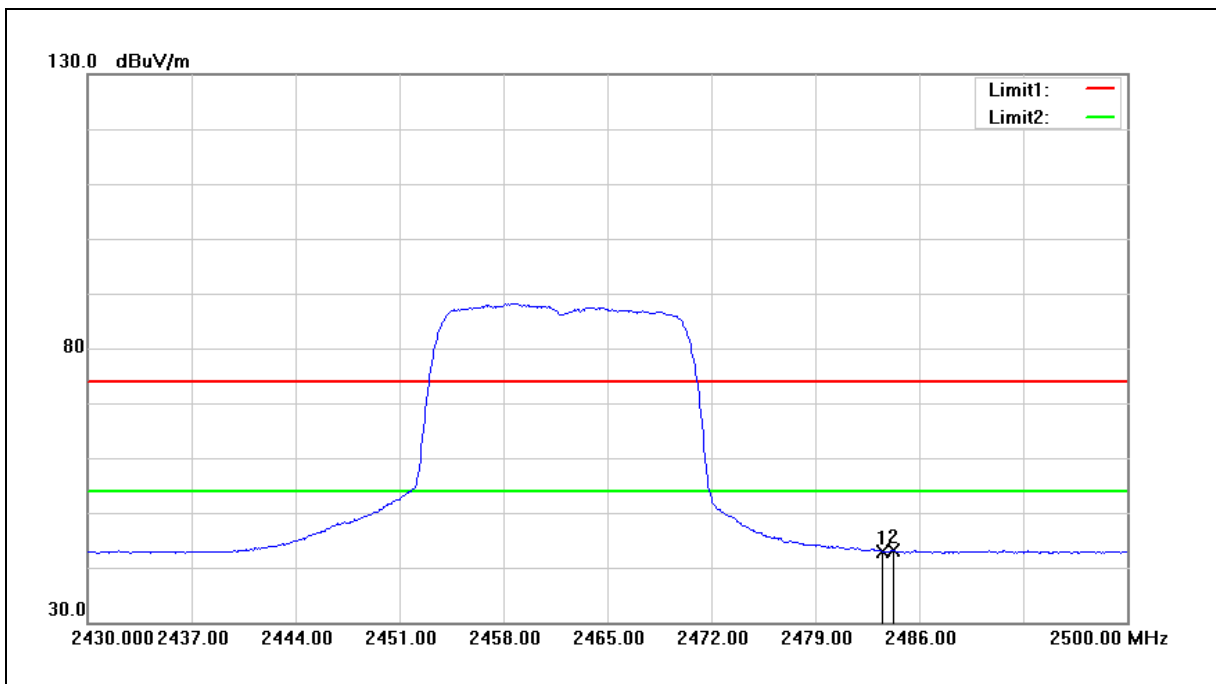


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	44.15	-1.17	42.98	54.00	-11.02	AVG
2	2484.250	44.30	-1.16	43.14	54.00	-10.86	AVG

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	802.11n HT20		
Ant.Polar.:	Horizontal		

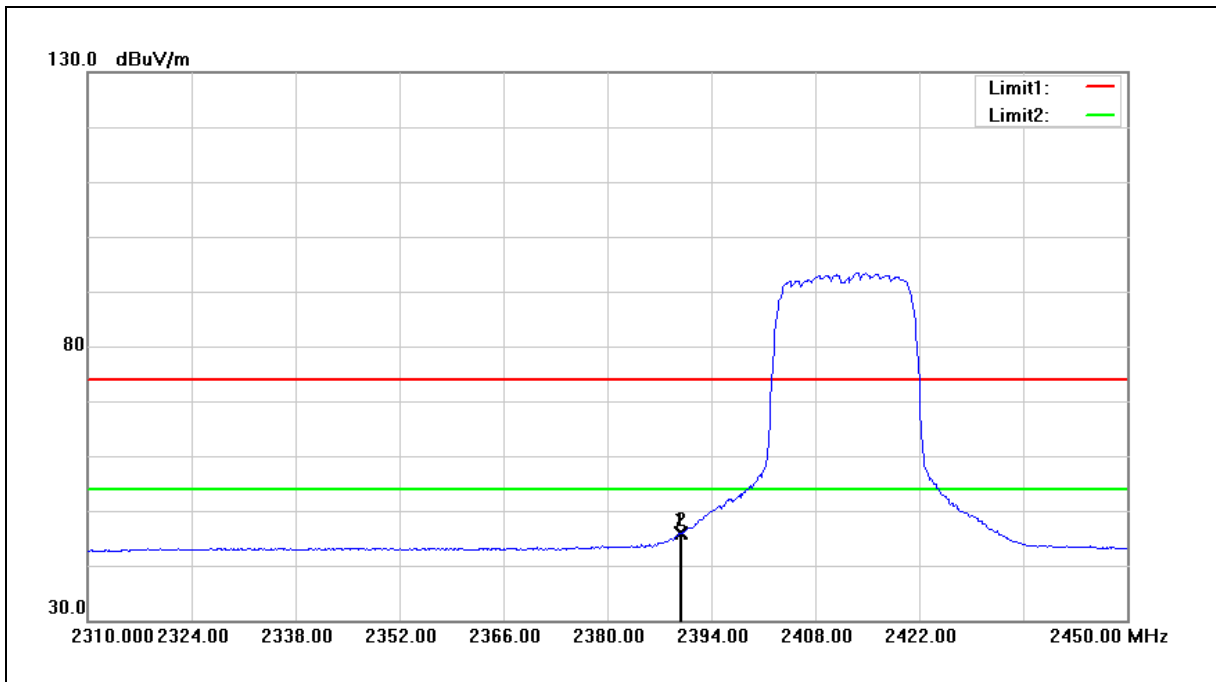


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.800	47.14	-1.14	46.00	54.00	-8.00	AVG
2	2390.000	46.99	-1.14	45.85	54.00	-8.15	AVG

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	802.11n HT20		
Ant.Polar.:	Vertical		

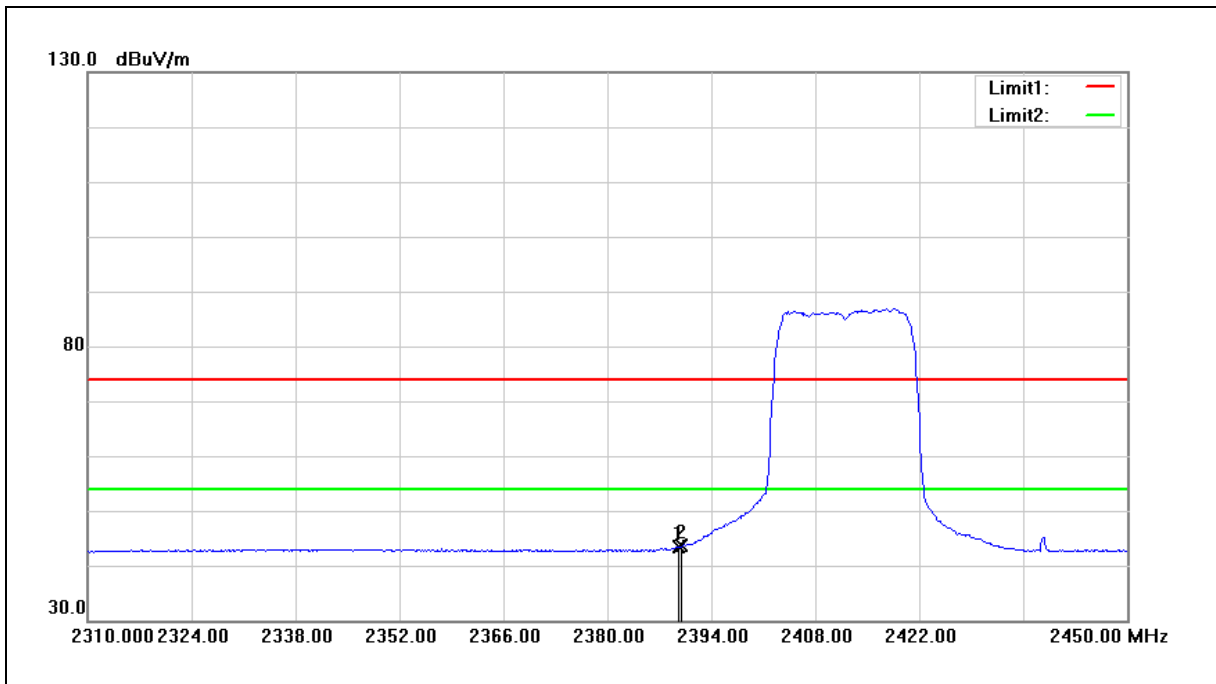


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	44.61	-1.14	43.47	54.00	-10.53	AVG
2	2390.000	44.74	-1.14	43.60	54.00	-10.40	AVG

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	802.11n HT20		
Ant.Polar.:	Horizontal		

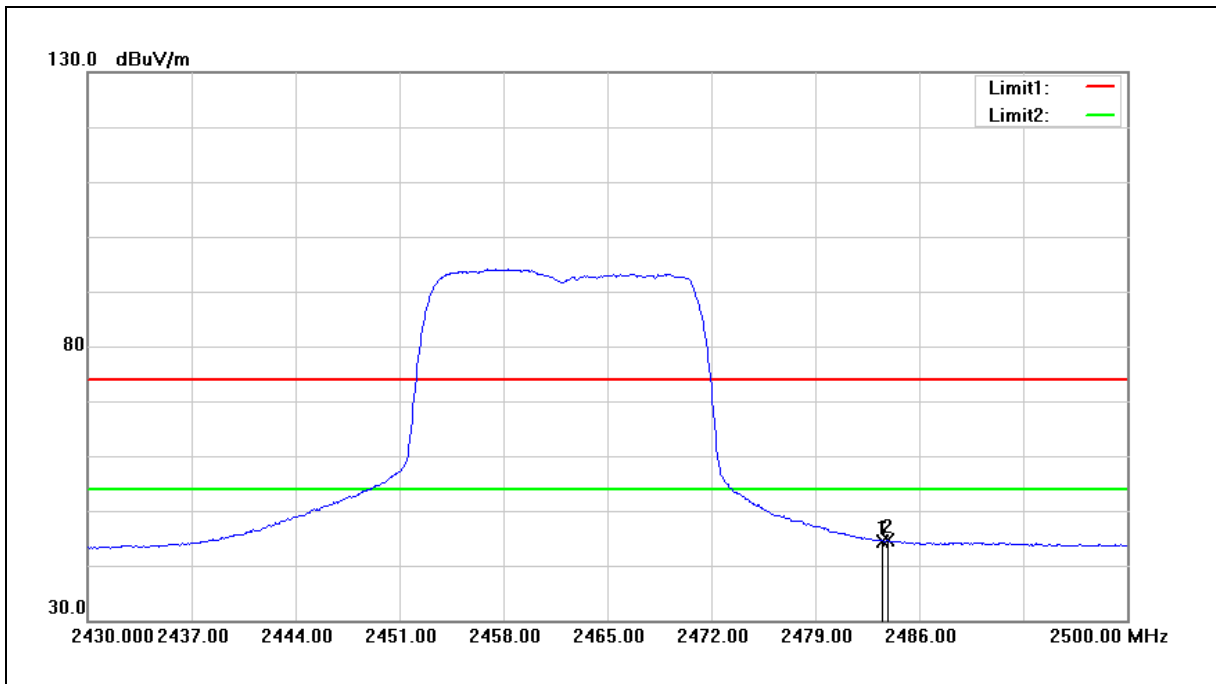


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	45.67	-1.17	44.50	54.00	-9.50	AVG
2	2483.900	45.76	-1.16	44.60	54.00	-9.40	AVG

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	802.11n HT20		
Ant.Polar.:	Vertical		

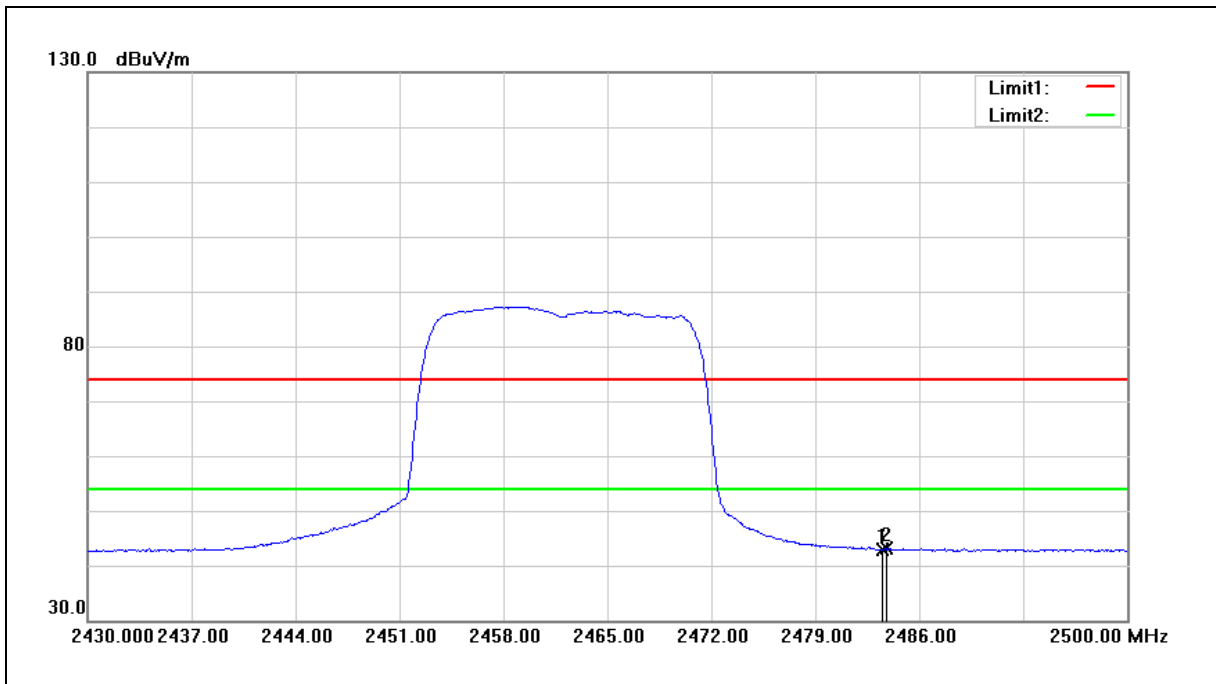


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	44.14	-1.17	42.97	54.00	-11.03	AVG
2	2483.760	44.23	-1.17	43.06	54.00	-10.94	AVG

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	802.11n HT40		
Ant.Polar.:	Horizontal		

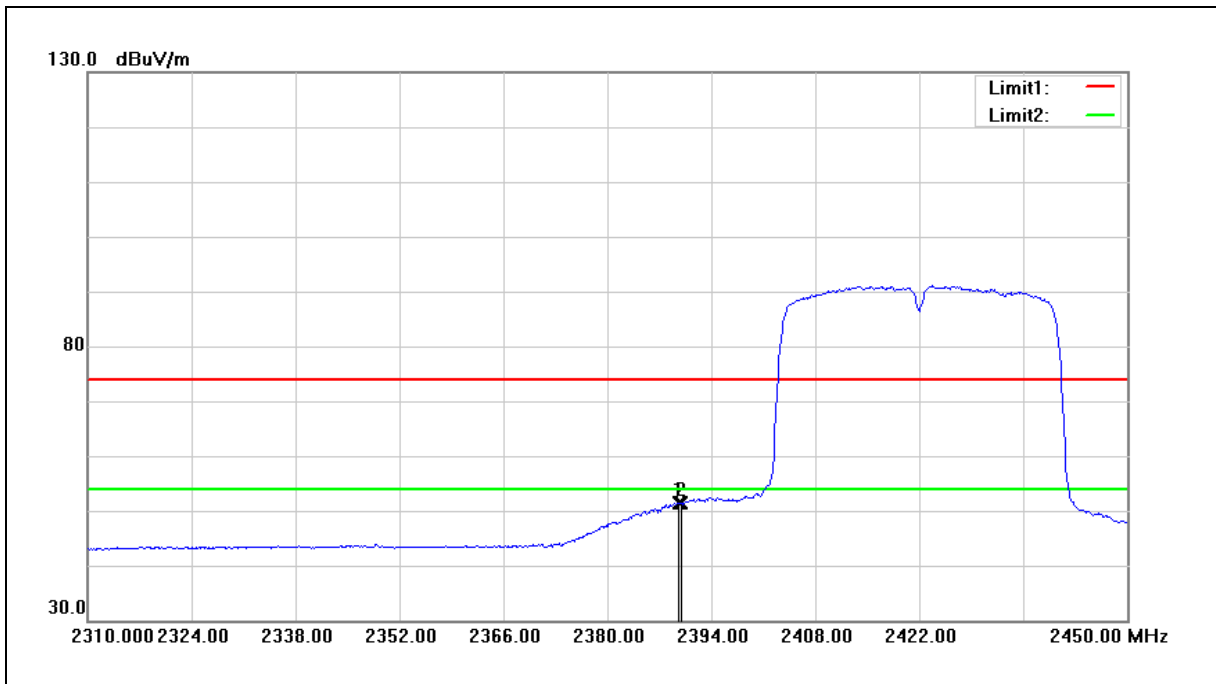


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.520	52.61	-1.14	51.47	54.00	-2.53	AVG
2	2390.000	52.62	-1.14	51.48	54.00	-2.52	AVG

Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	802.11n HT40		
Ant.Polar.:	Vertical		

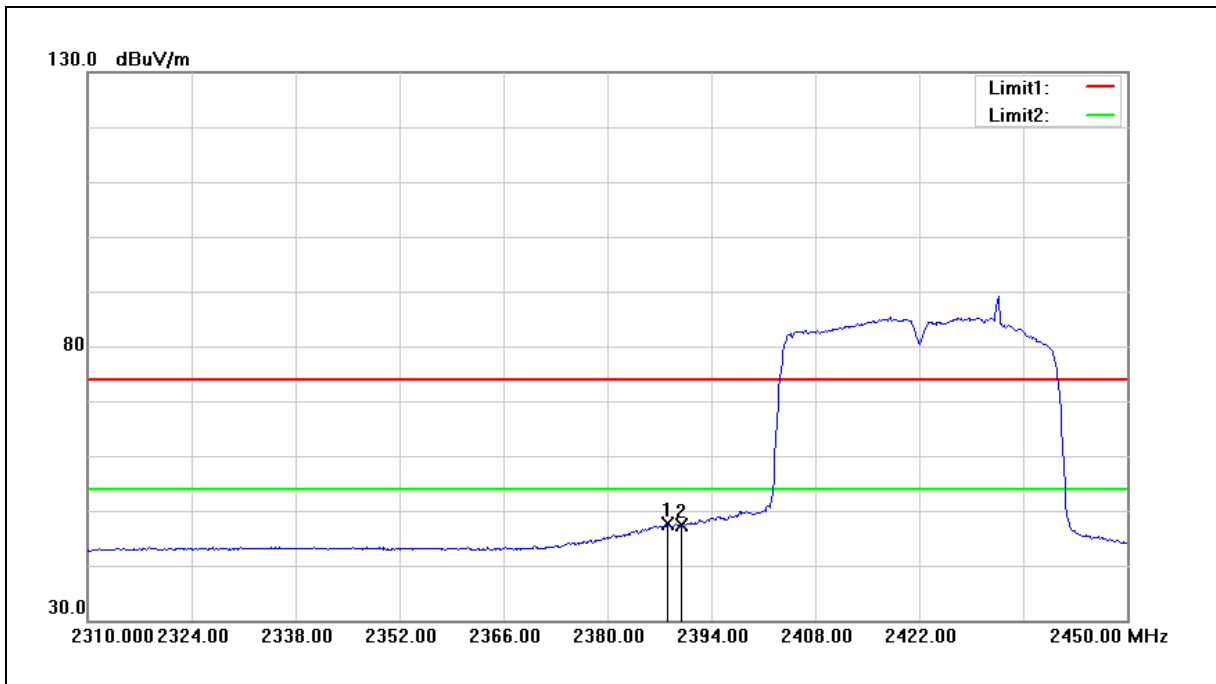

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.120	48.86	-1.13	47.73	54.00	-6.27	AVG
2	2390.000	48.55	-1.14	47.41	54.00	-6.59	AVG


Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	802.11n HT40		
Ant.Polar.:	Horizontal		

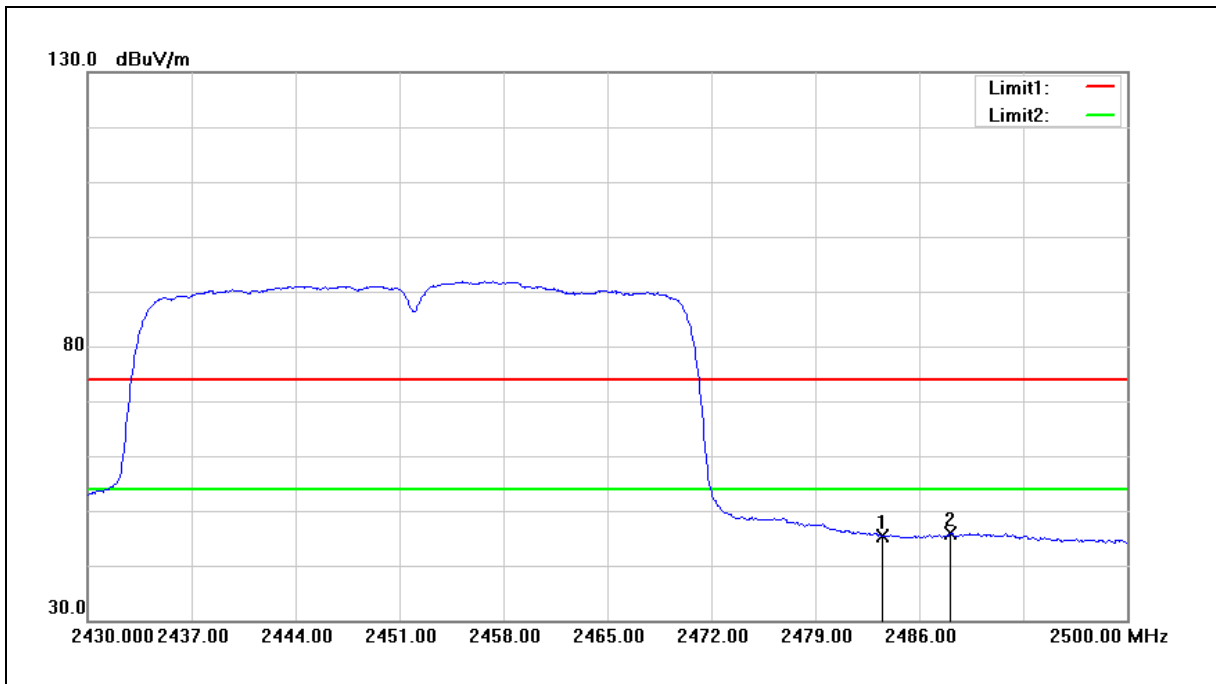

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	46.63	-1.17	45.46	54.00	-8.54	AVG
2	2488.100	47.10	-1.17	45.93	54.00	-8.07	AVG



Standard:	FCC Part 15.247	Test Distance:	3(m)
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	802.11n HT40		
Ant.Polar.:	Vertical		

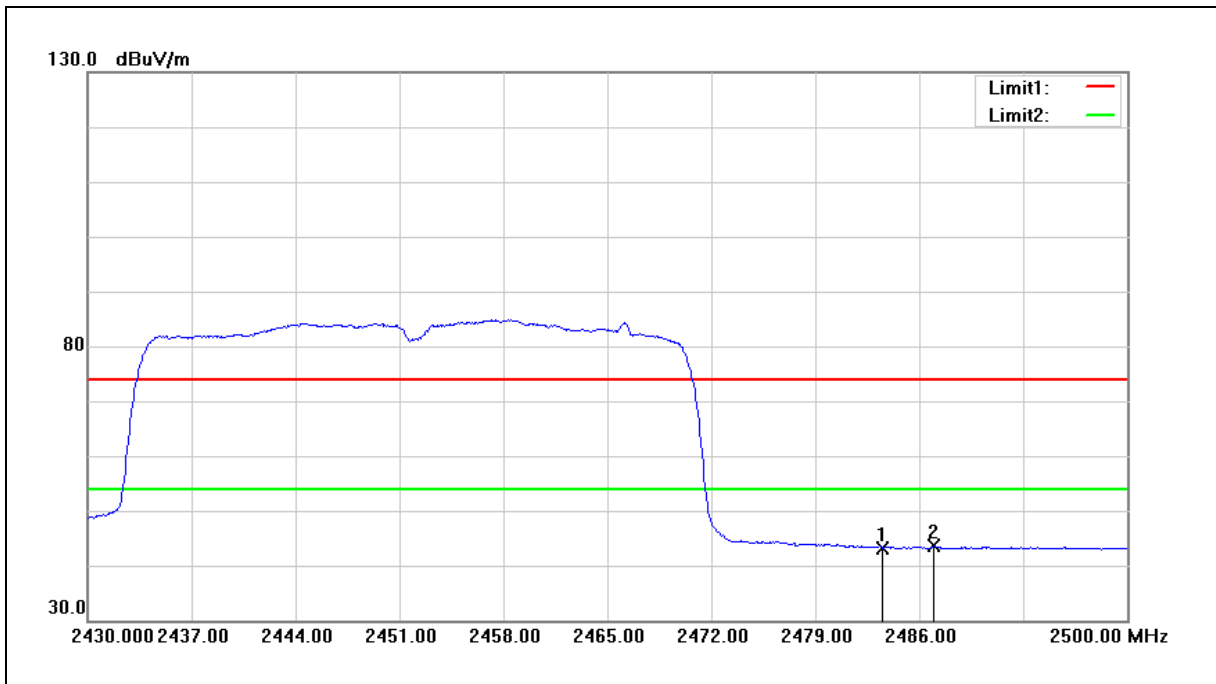

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	44.35	-1.17	43.18	54.00	-10.82	AVG
2	2486.980	44.70	-1.16	43.54	54.00	-10.46	AVG

### 5.3. Conducted Test Results

**Duty cycle**

Reference Appendix A / Appendix B

**Maximum Conducted Output Power Measurement**

Reference Appendix A

**6 dB RF Bandwidth Measurement**

Reference Appendix A / Appendix B

**Maximum Power Spectral Density Measurement**

Reference Appendix A / Appendix B

**Out of Band Conducted Emissions Measurement**

**Reference level**

Reference Appendix B

**Out of Band Conducted Emissions**

Reference Appendix B

**Conducted Band Edge**

Reference Appendix B

---END---