



FCC Test Report

Report No.: AGC13525230201FE07

FCC ID : 2AATLK265B-PR

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: WiFi/BT module

BRAND NAME : FN-LINK

MODEL NAME : K265B-PR

APPLICANT: FN-LINK TECHNOLOGY LIMITED

DATE OF ISSUE : Jul. 10, 2023

STANDARD(S) : FCC Part 15.407 **TEST PROCEDURE(S)** : KDB 905462 D02

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 15

Report Revise Record

| Report Version | Revise Time | Issued Date | Valid Version | Notes |
|----------------|-------------|---------------|---------------|-----------------|
| V1.0 | / | Jul. 10, 2023 | Valid | Initial Release |







TABLE OF CONTENTS

| 1. VERIFICATION OF CONFORMITY | 4 |
|--|----|
| 2. GENERAL INFORMATION | 5 |
| 3. DESCRIPTION OF TEST MODES | 7 |
| 4. SUMMARY OF TEST RESULTS | 7 |
| 5. TEST FACILITY | 7 |
| 6. DYNAMIC FREQUENCY SELECTION (DFS) | 8 |
| 6.1. APPLICABILITY OF DFS REQUIREMENTS | ε |
| 6.2. TEST SET-UP | 9 |
| 6.3. LIMITS | 9 |
| 6.4. RADAR TEST WAVEFORMS | 11 |
| 6.5. TEST PROCEDURE | 11 |
| 6.6. TEST RESULT | 12 |
| APPENDIX A: PHOTOGRAPHS OF TEST SETUP | 15 |
| APPENDIX B: PHOTOGRAPHS OF EUT | 15 |





1. VERIFICATION OF CONFORMITY

| Applicant | FN-LINK TECHNOLOGY LIMITED | |
|------------------------------------|---|--|
| Address | No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, CHINA | |
| Manufacturer | FN-LINK TECHNOLOGY LIMITED | |
| Address | No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, CHINA | |
| Factory | FN-LINK TECHNOLOGY LIMITED | |
| Address | No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, CHINA | |
| Product Designation WiFi/BT module | | |
| Brand Name | FN-LINK | |
| Test Model | K265B-PR | |
| Date of receipt of test item | Feb. 12, 2023 | |
| Date of test | Feb. 12, 2023 to Jul. 10, 2023 | |
| Deviation | No any deviation from the test method | |
| Condition of Test Sample Normal | | |
| Test Result | Pass | |
| Report Template | AGCRT-US-BGN/RF | |

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in KDB 905462 D02.

Alan Duan
(Project Engineer)

Reviewed By

Calvin Liu
(Reviewer)

Approved By

Max Zhang
(Authorized Officer)

Jul. 10, 20232



Report No.: AGC13525230201FE07 Page 5 of 15

2. GENERAL INFORMATION

The EUT is designed as "Integrated Audio Production Studio". It is designed by way of utilizing the OFDM technology to achieve the system operation.

| Equipment Type | ☐ Outdoor access points ☐ Indoor access points | | |
|-----------------------|--|--|--|
| | ☐ Fixed P2P access points ☐ Client devices ☐ U-NII 1:5150MHz~5250MHz ☐ U-NII 2A: 5250MHz~5350MHz | | |
| Operation Frequency | □ U-NII 2C:5470MHz~5725MHz □ U-NII 3: 5725MHz~5850MHz | | |
| DFS Design Type | ☐ Master ☐ Slave with radar detection ☐ Slave without radar detection | | |
| TPC Function | ☐ Yes ⊠ No | | |
| | For 802.11a/n/ax-HT20-VHT20: 5180~5240MHz, 5260~5320MHz, | | |
| | 5500~5720MHz, 5745~5825MHz | | |
| Tost Fraguency Bango: | For 802.11n/ax-HT40-HE 40: 5190~5230MHz, 5270~5310MHz, | | |
| Test Frequency Range: | 5510~5710MHz, 5755~5795MHz | | |
| | For 802.11ac/ax-VHT80-HE80: 5210MHz, 5290MHz, 5530~5690MHz, | | |
| | 5775MHz | | |
| | IEEE 802.11a(HT20):9.98dBm; IEEE 802.11n(HT20):9.79dBm; | | |
| | IEEE802.11n(HT40):9.20dBm; IEEE 802.11ac(VHT20):10.24dBm; | | |
| Output Power-SISO | IEEE802.11ac(VHT40):9.14dBm; IEEE802.11ac(VHT80):8.65dBm; | | |
| | IEEE802.11ax(HE20):10.27dBm; IEEE802.11ax(HE40):8.96dBm; | | |
| | IEEE802.11ax(HE80):8.46dBm | | |
| | IEEE 802.11n(HT20):12.83dBm; IEEE802.11n(HT40):12.04dBm; | | |
| Output Dower MIMO | IEEE 802.11ac(VHT20):12.75dBm; IEEE802.11ac(VHT40):12.14dBm; | | |
| Output Power-MIMO | IEEE802.11ac(VHT80):11.28dBm; IEEE802.11ax(HE20):12.81dBm; | | |
| | IEEE802.11ax(HE40):11.85dBm; IEEE802.11ax(HE80):11.19dBm | | |
| Modulation | 802.11a/n:(64-QAM, 16-QAM, QPSK, BPSK) OFDM | | |
| Wodulation | 802.11ac :(256-QAM, 64-QAM, 16-QAM, QPSK, BPSK) OFDM | | |
| | 802.11a: 6/9/12/18/24/36/48/54Mbps; | | |
| Data Rate | 802.11n: up to 300Mbps; | | |
| | 802.11ac: up to 866.6Mbps; | | |
| Number of channels | 7 channels of U-NII-1 Band; 7 channels of U-NII-2A Band | | |
| Number of Charmers | 21 channels of U-NII-2C Band; 8 channels of U-NII-3 Band | | |
| Hardware Version | 1.0 | | |
| Software Version | 1.0 | | |
| Antenna Designation | FPC Antenna (Comply with requirements of the FCC part 15.203) | | |
| | Antenna 1: U-NII-1:3.49dBi; U-NII-2A:4.38dBi; | | |
| Antenna Gain | U-NII-2C: 6.33dBi; U-NII-3: 6.29dBi | | |
| Antonna Gain | Antenna 2: U-NII-1:4.21dBi; U-NII-2A:4.43dBi; | | |
| | U-NII-2C: 5.03dBi; U-NII-3: 5.57dBi | | |
| Power Supply | DC 12V by adapter | | |



Page 6 of 15

Note:

- 1. This device does not support radar monitoring.
- 2. The signal loading method between the client device and the Master device is TCP technology.
- 3. Distribution of start-up time of Master device and client device:

| Equipment | Boot time(s) |
|------------------------|--------------|
| Passive device(client) | 10s |
| Active device(master) | 40s |



Report No.: AGC13525230201FE07 Page 7 of 15

3. DESCRIPTION OF TEST MODES

The tests in this section are run sequentially and the UUT must pass all tests successfully.

If the UUT fails any one of the tests it will count as a failure of compliance.

To show compliance, all tests must be performed with waveforms randomly generated as specified with test results meeting the required percentage of successful detection criteria.

One frequency will be chosen from the operating Channels of the UUT within the 5250-5350 MHz or 5470-5725 MHz bands.

4. SUMMARY OF TEST RESULTS

| FCC RULES | DESCRIPTION OF TEST | RESULT |
|---------------|---|-----------|
| §15.407(h)(2) | Dynamic Frequency Selection Channel Move Time and Channel Closing Transmission Time | Compliant |

5. TEST FACILITY

| Test Site | Attestation of Global Compliance (Shenzhen) Co., Ltd | |
|-----------------------------------|--|--|
| Location | 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China | |
| Designation Number | CN1259 | |
| FCC Test Firm Registration Number | 975832 | |
| A2LA Cert. No. | 5054.02 | |
| Description | Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA | |

| Description | Manufacturer | Model No. | S/N | Calibration Due. | Calibration Due. |
|---|---------------|--------------------------|------------|------------------|------------------|
| MXG X-Series Vector Signal Generator | Agilent | N5182B | MY53050647 | Aug. 03, 2022 | Aug. 02, 2023 |
| EXA Signal Analyzer | Agilent | N9020A | MY49100060 | Aug. 04, 2022 | Aug. 03, 2023 |
| Attenuator | ZHINAN | E-002 | N/A | Aug. 04, 2022 | Aug. 03, 2024 |
| Power spliter | Mini-Circuits | ZFRSC-183-s | 3122 | N/A | N/A |
| RF Cable | Harbour | FLCA-7312-80 -10000S2 | FL0000169 | Nov. 11, 2022 | Nov. 10, 2024 |
| DFS waveform Generator software | Keysight | N7607C V2.0.0.0 | N/A | N/A | N/A |
| DFS data Analyzer software | Tonscend | JS1120-2 | N/A | N/A | N/A |
| AP(Master) | ZTE | ZXHN F670 | N/A | N/A | N/A |

FCC ID of AP(Master): Q78-ZXHNF670E



Page 8 of 15

6. DYNAMIC FREQUENCY SELECTION (DFS)

6.1. APPLICABILITY OF DFS REQUIREMENTS

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

| | Operational Mode | | | |
|---------------------------------|------------------|-----------------------|--------------------|--|
| Requirement | □Master | ⊠Client Without Radar | ☐Client With Radar | |
| | | Detection | Detection | |
| Non-Occupancy Period | Yes | Not required | Yes | |
| DFS Detection Threshold | Yes | Not required | Yes | |
| Channel Availability Check Time | Yes | Not required | Not required | |
| U-NII Detection Bandwidth | Yes | Not required | Yes | |

Table 2: Applicability of DFS requirements during normal operation


| | Operational Mode | | |
|-----------------------------------|--------------------------------|-----------------------|--|
| Requirement | ☐ Master Device or Client with | ⊠Client Without Radar | |
| | Radar Detection | Detection | |
| DFS Detection Threshold | Yes | Not required | |
| Channel Closing Transmission Time | Yes | Yes | |
| Channel Move Time | Yes | Yes | |
| U-NII Detection Bandwidth | Yes | Not required | |

| Additional requirements for devices | ☐Master Device or Client with | ⊠Client Without Radar |
|-------------------------------------|-------------------------------|-------------------------------|
| with multiple bandwidth modes | Radar Detection | Detection |
| U-NII Detection Bandwidth and | All BW modes must be tested | Not required |
| Statistical Performance Check | | |
| Channel Move Time and Channel | Test using widest BW mode | Test using the widest BW mode |
| Closing Transmission Time | available | available for the link |
| All other tests | Any single BW mode | Not required |

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.



6.2. TEST SET-UP

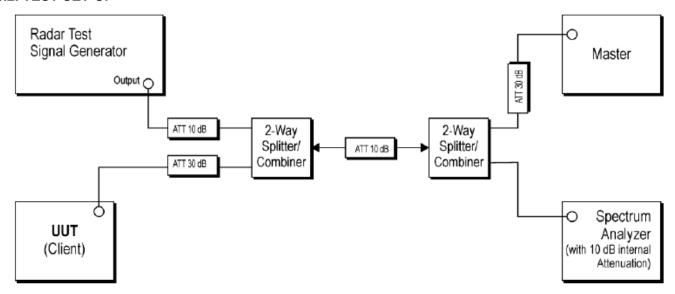

6.3. LIMITS

Table 3: DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

| Maximum Transmit Power | Value (See Notes 1, 2, and 3) | |
|---|----------------------------------|--|
| EIRP ≥ 200 milliwatt | -64 dBm | |
| EIRP < 200 milliwatt and | CO dDm | |
| power spectral density < 10 dBm/MHz | -62 dBm | |
| EIRP < 200 milliwatt that do not meet the power | -64 dBm | |
| spectral density requirement | | |

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.



Report No.: AGC13525230201FE07 Page 10 of 15

Table 4: DFS Response Requirement Values

| Parameter | Value | | |
|-----------------------------------|---------------------------------------|--|--|
| Non-occupancy period | Minimum 30 minutes | | |
| Channel Availability Check Time | 60 seconds | | |
| Channal Mayo Time | 10 seconds | | |
| Channel Move Time | See Note 1. | | |
| | 200 milliseconds + an | | |
| | aggregate of 60 | | |
| Channel Closing Transmission Time | milliseconds over remaining | | |
| | 10 second period. | | |
| | See Notes 1 and 2. | | |
| | Minimum 100% of the U- | | |
| U-NII Detection Bandwidth | NII 99% transmission power bandwidth. | | |
| | See Note 3. | | |

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.



Page 11 of 15

6.4. RADAR TEST WAVEFORMS

| Radar | Pulse Width | PRI | Number of Pulses | Minimum | Minimum |
|-------|-------------|--------|------------------|---------------|------------|
| Туре | (µsec) | (µsec) | | Percentage of | Number of |
| | | | | Successful | Trials |
| | | | | Detection | |
| 0 | 1 | 1428 | 18 | See Note 1 | See Note 1 |

6.5. TEST PROCEDURE

- 1. When a Client Device without Radar Detection is the UUT, the Master Device is the Radar Detection Device.
- 2. A spectrum analyzer is used to establish the test signal level for each radar type.
- 3. During this process, there are no transmissions by either the Master Device or Client Device.
- 4. The spectrum analyzer is switched to the zero span (time domain) mode at the frequency of the Radar Waveform generator. The peak detector function of the spectrum analyzer is utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) are set to at least 3 MHz.
- 5. The measured channels are 5530MHz in 80MHz Bandwidth and 5290MHz in 80MHz Bandwidth. The Radar signal was the same as transmitted channels, and injected into the antenna port of AP(master) ,measured the DFS parameters. The master transmitted the test data to client, the transmitted duty cycle is 30.8%.

6.6. TEST RESULT

6.6.1 DFS DETECTION THRESHOLD


Calibration:

For a detection threshold level of -62dBm and the antenna gain is 6.33dBi, required detection threshold is -55.67dBm (= -62+6.33).

Note: Maximum Transmit Power is less than 200 milliwatt in this report, so detection threshold level is -62dBm .



Radar Type 0

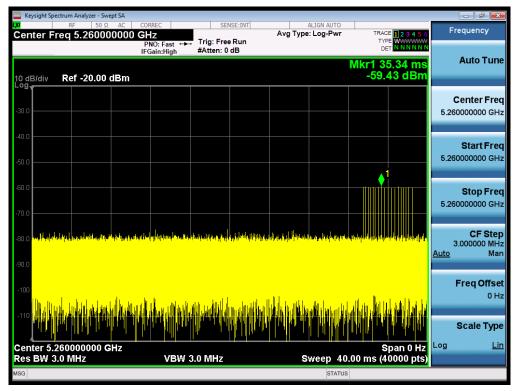


6.6.2TEST RESULT

Channel Move Time and Channel Closing Transmission Time


| Test Frequency | Requirement | Measurement Level | Limit |
|----------------|-----------------------------------|-------------------|--------|
| EOCOMUL- | Channel Closing Transmission Time | 0.041 | ≤0.26s |
| 5260MHz | Channel Move Time | 1.311 | ≤10s |
| EEOOMI I | Channel Closing Transmission Time | 0.009 | ≤0.26s |
| 5500MHz | Channel Move Time | 1.069 | ≤10s |



Radar Type 0(20MHz/5260MHz)

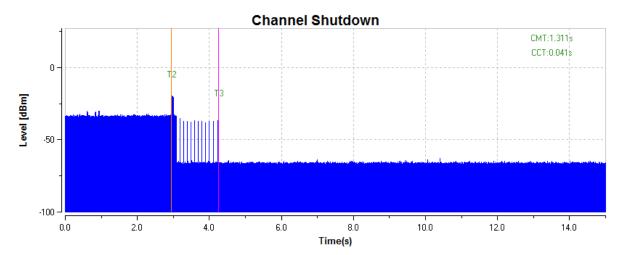


Non-occupancy Period-Elapse time 30minutes

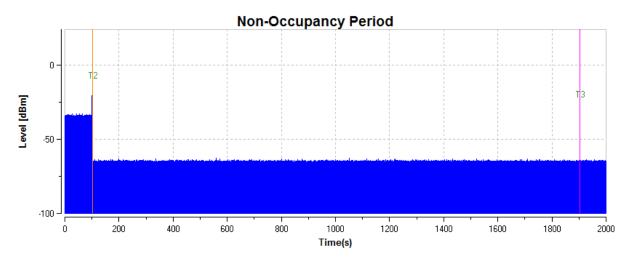


RESULT: PASS



Radar Type 0(20MHz/5500MHz)

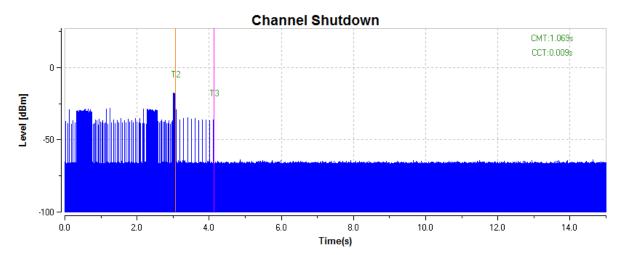

Non-occupancy Period-Elapse time 30minutes

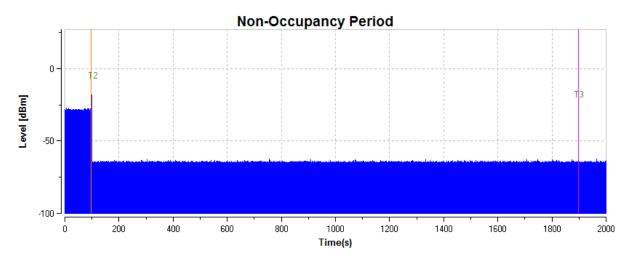

RESULT: PASS



Page 15 of 15

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC13525230201AP02

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC13525230201AP03

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.