



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

For

Shanghai HowayGIS Co., Ltd

RM230, Fawkes Building, No. 1985, Road Chunshen, Shanghai, China

FCC ID: 2AAZD-TGH1-S4

Report Type: Original Report	Product Type: High Precision Mobile GNSS Receiver
Test Engineer: <u>Hope Zhang</u>	<i>Hope Zhang</i>
Report Number: <u>RKSA180622002-00C</u>	
Report Date: <u>2018-09-25</u>	
Reviewed By: <u>Oscar Ye RF Leader</u>	<i>Oscar.Ye</i>
Prepared By: <u>Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn</u>	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4

 OBJECTIVE.....4

 RELATED SUBMITTAL(S)/GRANT(S).....4

 TEST METHODOLOGY.....4

 MEASUREMENT UNCERTAINTY.....5

 TEST FACILITY.....5

SYSTEM TEST CONFIGURATION.....6

 DESCRIPTION OF TEST CONFIGURATION.....6

 EQUIPMENT MODIFICATIONS.....6

 EUT EXERCISE SOFTWARE.....6

 SUPPORT EQUIPMENT LIST AND DETAILS.....7

 EXTERNAL I/O CABLE.....7

 BLOCK DIAGRAM OF TEST SETUP.....7

SUMMARY OF TEST RESULTS.....9

TEST EQUIPMENT LIST.....10

FCC§15.247 (I), §1.1310 &§2.1093 –RF EXPOSURE.....11

 MEASUREMENT RESULT.....11

FCC §15.203 - ANTENNA REQUIREMENT.....12

 APPLICABLE STANDARD.....12

 ANTENNA CONNECTOR CONSTRUCTION.....12

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS.....13

 APPLICABLE STANDARD.....13

 EUT SETUP.....13

 EMI TEST RECEIVER SETUP.....13

 TEST PROCEDURE.....13

 CORRECTED FACTOR & MARGIN CALCULATION.....14

 TEST RESULTS SUMMARY.....14

 TEST DATA.....14

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....17

 APPLICABLE STANDARD.....17

 EUT SETUP.....17

 EMI TEST RECEIVER SETUP.....18

 TEST PROCEDURE.....18

 CORRECTED AMPLITUDE & MARGIN CALCULATION.....18

 TEST RESULTS SUMMARY.....18

 TEST DATA.....19

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....27

 APPLICABLE STANDARD.....27

 TEST PROCEDURE.....27

 TEST DATA.....27

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....30

 APPLICABLE STANDARD.....30

 TEST PROCEDURE.....30

 TEST DATA.....30

FCC §15.247(d) – BAND EDGE	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST DATA	33
FCC §15.247(e) - POWER SPECTRAL DENSITY	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST DATA	35

FINAL

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Shanghai HowayGIS Co., Ltd
Tested Model	TG-H1
Series Model	TG-K700, TG-K706, TG-H2, X3, G100, G200
Model Difference	Model name
Product Type	High Precision Mobile GNSS Receiver
Dimension	137mm(L)*72mm(W)*50.4mm(H)
Power Supply	DC 7.2V from Battery and DC 12V charging by Adapter

Adapter information:

Model: A122-1201000ID

Input: AC100-240V 50/60Hz 0.4A

Output: DC12V,1000mA

**All measurement and test data in this report was gathered from production sample serial number: 20180207001. (Assigned by BACL, Kunshan). The EUT was received on 2018-02-07.*

Objective

This report is prepared on behalf of *Shanghai HowayGIS Co., Ltd* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS and Part 15B JBP submissions with FCC ID: 2AAZD-TGH1-S4.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 15.247 Meas Guidance v05

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel List for BLE mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404
...
...
18	2438	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.


EUT Exercise Software

RF test tool: HCI Tester.

BLE Power Level: 13

Duty Cycle:

Middle Channel

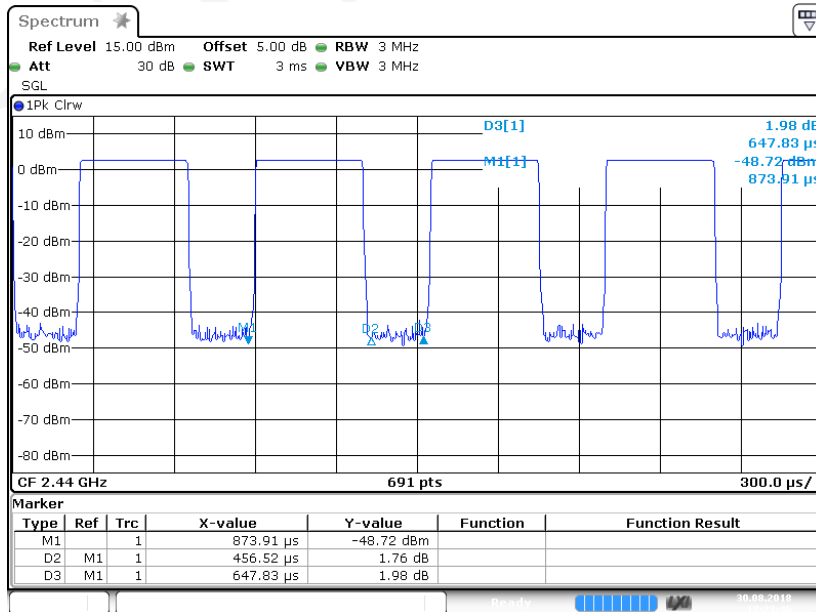

Date: 30 AUG 2018 17:23:46

Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	10log(1/x)
BLE	70.50	0.457	2.18	1.52

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152

External I/O Cable


Cable Description	Shielding Type	Length (m)	From Port	To
9-pin DC IN Cable	Un-shielding	0.35	EUT	Power Cable
Power Cable	Un-shielding	0.80	Power Cable	LISN/Adapter

Block Diagram of Test Setup


For Conducted Emissions:

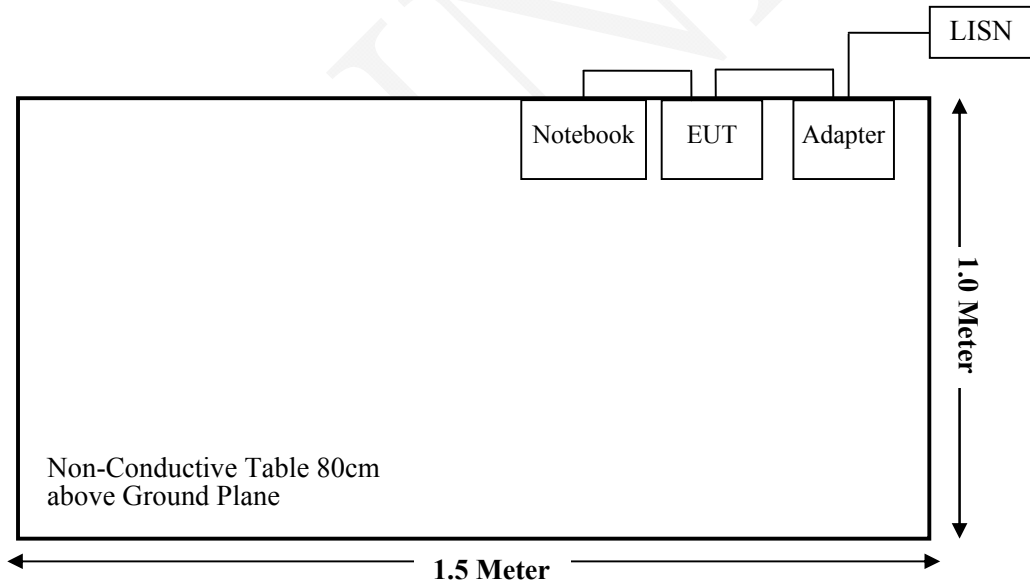

For Radiated Emissions(Below 1GHz):

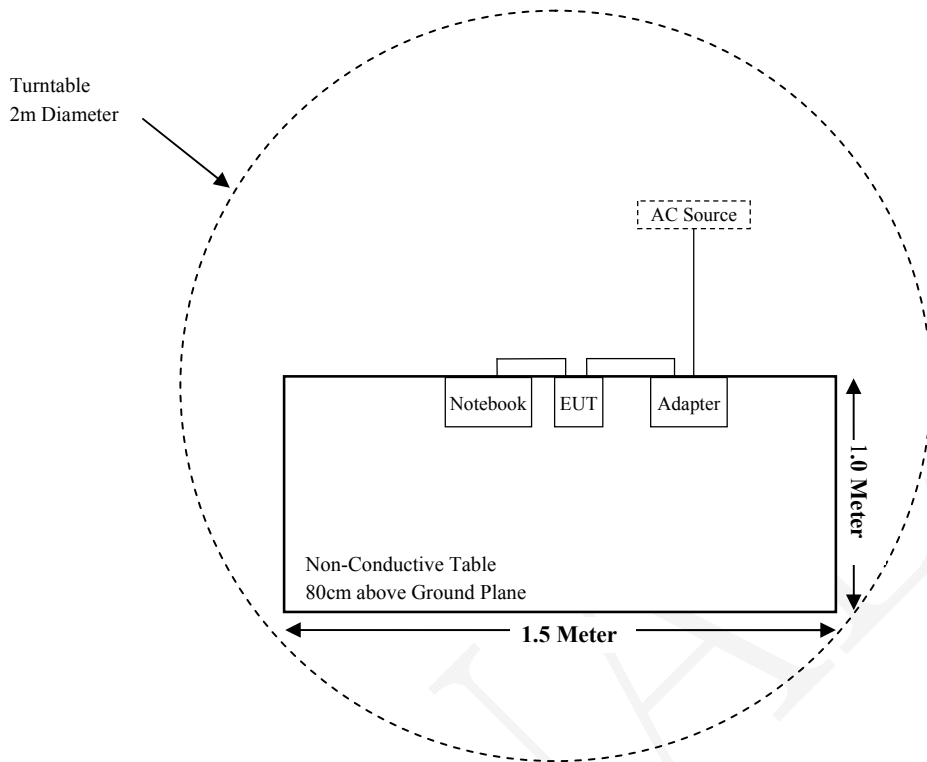

For Radiated Emissions(Above 1GHz):

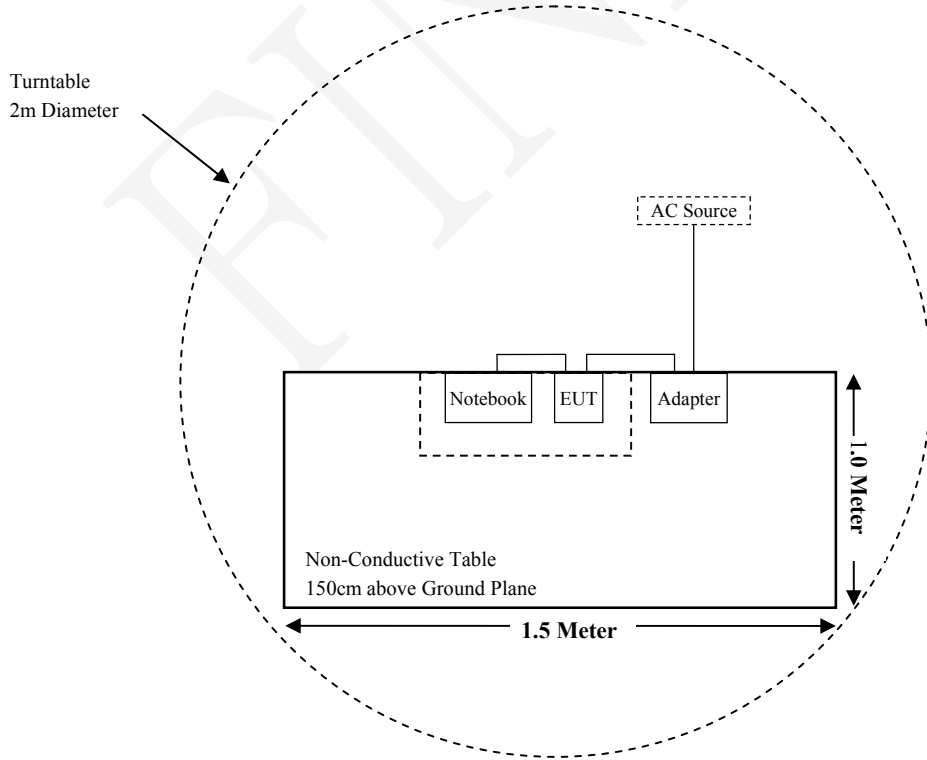

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.247 (i), §1.1310 &§2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-25	2018-11-24
Sunol Sciences	Broadband Antenna	JB3	A040914-2	2016-01-09	2019-01-08
Sonoma Instrument	Pre-amplifier	310N	171205	2017-08-15	2018-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2017-08-15	2018-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2017-08-27	2018-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Mini-Circuits	Amplifier	ZVA-183W-S+	220701818	2018-05-20	2019-05-19
MICRO-TRONICS	Notch Filter	BRM50702	/	2017-08-05	2018-08-04
MICRO-TRONICS	Notch Filter	BRM50702	/	2018-08-05	2019-08-04
Narda	Attenuator/10dB	10dB	/	2017-08-15	2018-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2017-08-15	2018-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2018-07-23	2019-07-22
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2017-11-12	2018-11-11
Narda	Attenuator/2dB	2dB	/	2017-08-15	2018-08-14
HowayGIS	RF Cable	/	/	Each Time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2017-11-12	2018-11-11
Rohde & Schwarz	LISN	ENV216	3560655016	2017-11-12	2018-11-11
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2017-08-15	2018-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (I), §1.1310 &§2.1093 –RF EXPOSURE

Applicable Standard

According to§2.1093and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission’s guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

For worst case:

Mode	Frequency Range (MHz)	Max Tune-up Conducted Power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
		(dBm)	(mW)				
BT 3.0	2402-2480	1.00	1.26	5.0	0.4	3.0	Yes
BLE	2402-2480	1.00	1.26	5.0	0.4	3.0	Yes

Result: No SAR test is required.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a ceramic antenna for BLE, which the antenna gain is 1.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

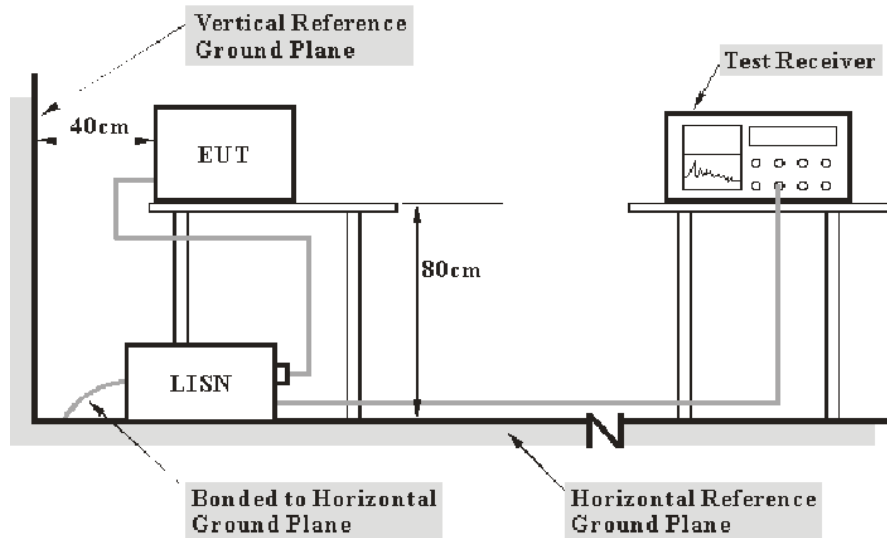

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Corrected Amplitude (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	25.0°C
Relative Humidity:	48 %
ATM Pressure:	101.2 kPa

The testing was performed by Hope Zhang on 2018-03-04


EUT operation mode: Transmitting in middle channel. (Worst case)

AC 120V/60 Hz, Line

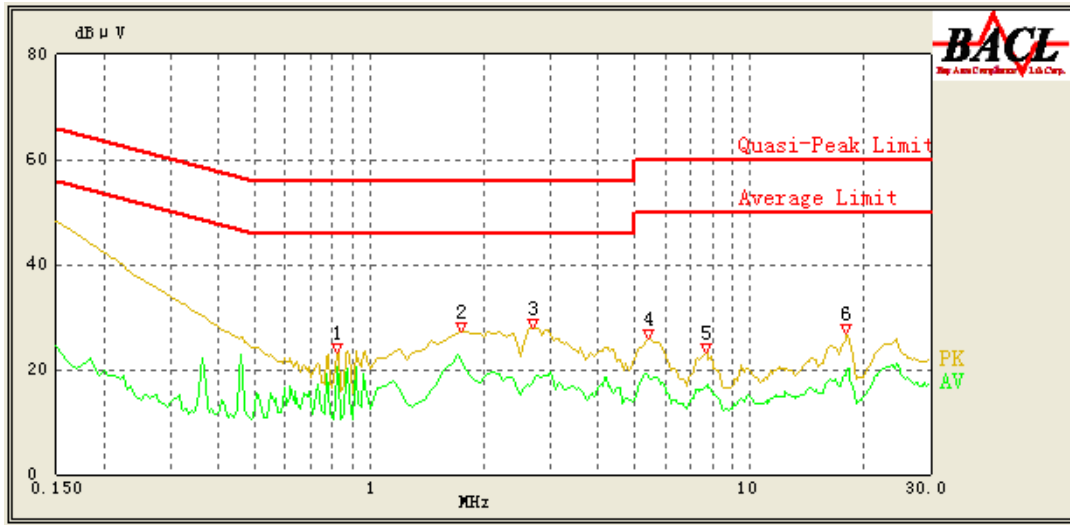

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.825	23.09	QP	9.000	L1	15.92	56.00	32.91	Compliant
0.825	20.56	AV	9.000	L1	15.92	46.00	25.44	Compliant
1.750	27.15	QP	9.000	L1	15.86	56.00	28.85	Compliant
1.750	21.84	AV	9.000	L1	15.86	46.00	24.16	Compliant
2.700	27.93	QP	9.000	L1	15.85	56.00	28.07	Compliant
2.700	17.39	AV	9.000	L1	15.85	46.00	28.61	Compliant
5.400	25.95	QP	9.000	L1	15.88	60.00	34.05	Compliant
5.400	18.67	AV	9.000	L1	15.88	50.00	31.33	Compliant
7.650	23.06	QP	9.000	L1	16.00	60.00	36.94	Compliant
7.650	16.93	AV	9.000	L1	16.00	50.00	33.07	Compliant
17.950	26.72	QP	9.000	L1	16.35	60.00	33.28	Compliant
18.000	19.76	AV	9.000	L1	16.35	50.00	30.24	Compliant

AC 120V/60 Hz, Neutral

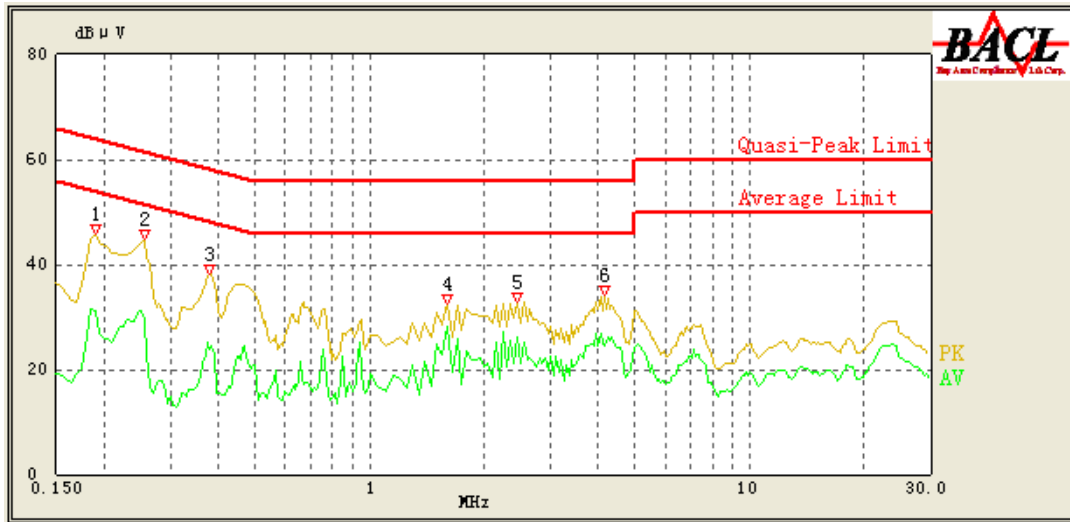

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.190	45.80	QP	9.000	N	16.05	64.04	18.24	Compliant
0.190	31.16	AV	9.000	N	16.05	54.04	22.88	Compliant
0.255	44.75	QP	9.000	N	16.06	61.59	16.84	Compliant
0.255	29.38	AV	9.000	N	16.06	51.59	22.21	Compliant
0.380	38.20	QP	9.000	N	16.09	58.28	20.08	Compliant
0.380	23.86	AV	9.000	N	16.09	48.28	24.42	Compliant
1.600	32.64	QP	9.000	N	15.92	56.00	23.36	Compliant
1.600	28.18	AV	9.000	N	15.92	46.00	17.82	Compliant
2.450	32.88	QP	9.000	N	15.90	56.00	23.12	Compliant
2.450	26.12	AV	9.000	N	15.90	46.00	19.88	Compliant
4.150	34.15	QP	9.000	N	15.88	56.00	21.85	Compliant
4.150	24.45	AV	9.000	N	15.88	46.00	21.55	Compliant

Note:

- 1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Margin (dB) = Limit (dBμV) – Corrected Amplitude (dBμV)


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

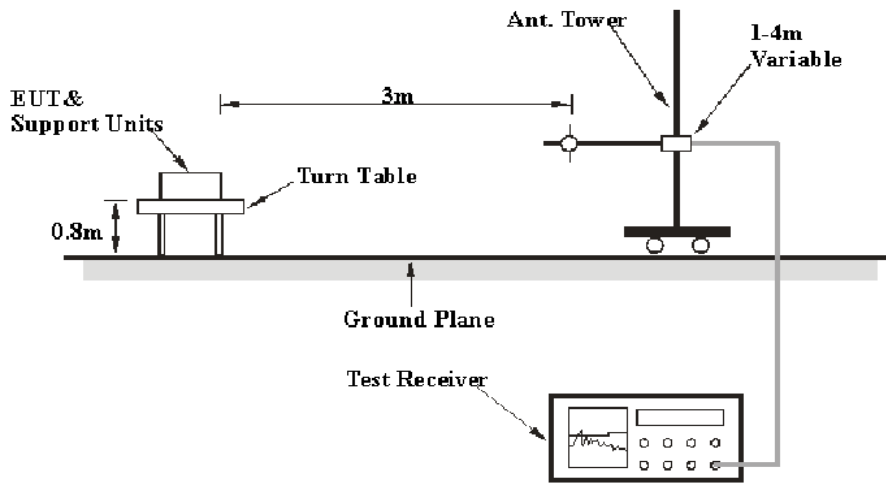

Above 1GHz:

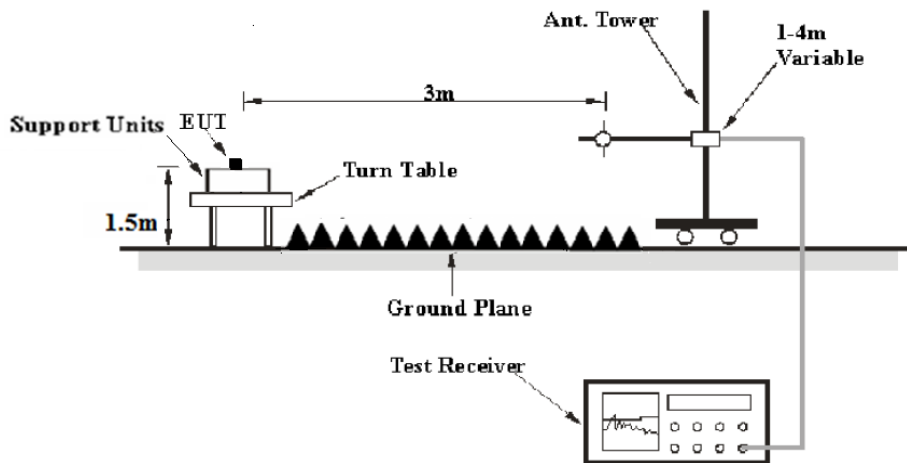

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data

Environmental Conditions

Temperature:	24.2°C-24.3°C
Relative Humidity:	51 %-53%
ATM Pressure:	101.2 kPa-1021.3kPa


The testing was performed by Hope Zhang from 2018-05-03 to 2018-05-22.

EUT operation mode: Transmitting

Spurious Emission Test:

30MHz-1GHz

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in X-axis of orientation** was recorded)

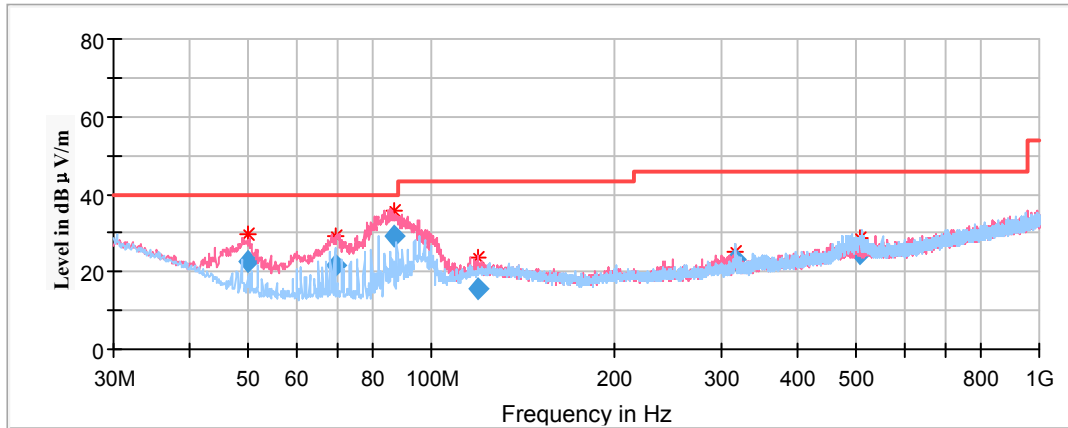

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dB μ V/m)	Height (cm)	Polar (H/V)				
49.801450	22.65	101.0	V	64.0	-17.8	40.00	17.35
69.549550	21.85	199.0	V	212.0	-17.7	40.00	18.15
86.755950	29.39	101.0	V	246.0	-18.0	40.00	10.61
118.941500	15.62	101.0	V	198.0	-11.8	43.50	27.88
317.090600	23.02	101.0	H	82.0	-10.6	46.00	22.98
508.695750	24.50	199.0	H	272.0	-6.1	46.00	21.50

1GHz-18GHz


(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded.)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
 Corrected Amplitude = Corrected Factor + Reading
 Margin = Limit – Corrected. Amplitude

Low Channel: 2402MHz


Full Spectrum

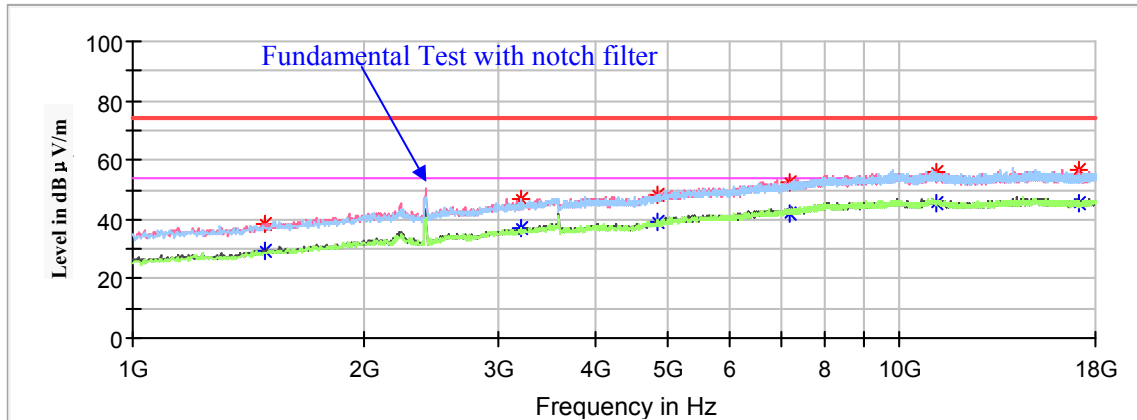

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1482.800000	---	29.72	150.0	V	138.0	-1.4	54.00	24.28
1482.800000	38.76	---	150.0	V	138.0	-1.4	74.00	35.24
3213.400000	---	37.40	200.0	H	53.0	6.6	54.00	16.60
3213.400000	46.53	---	200.0	H	53.0	6.6	74.00	27.47
4804.000000	---	39.17	100.0	V	23.0	10.8	54.00	14.83
4804.000000	48.52	---	100.0	V	23.0	10.8	74.00	25.48
7206.000000	---	42.29	200.0	V	110.0	15.2	54.00	11.71
7206.000000	52.20	---	200.0	V	110.0	15.2	74.00	21.80
11135.400000	---	45.80	100.0	V	349.0	18.9	54.00	8.20
11135.400000	56.15	---	100.0	V	349.0	18.9	74.00	17.85
17126.200000	---	45.29	150.0	V	101.0	18.2	54.00	8.71
17126.200000	56.61	---	150.0	V	101.0	18.2	74.00	17.39

Middle Channel: 2440MHz


Full Spectrum

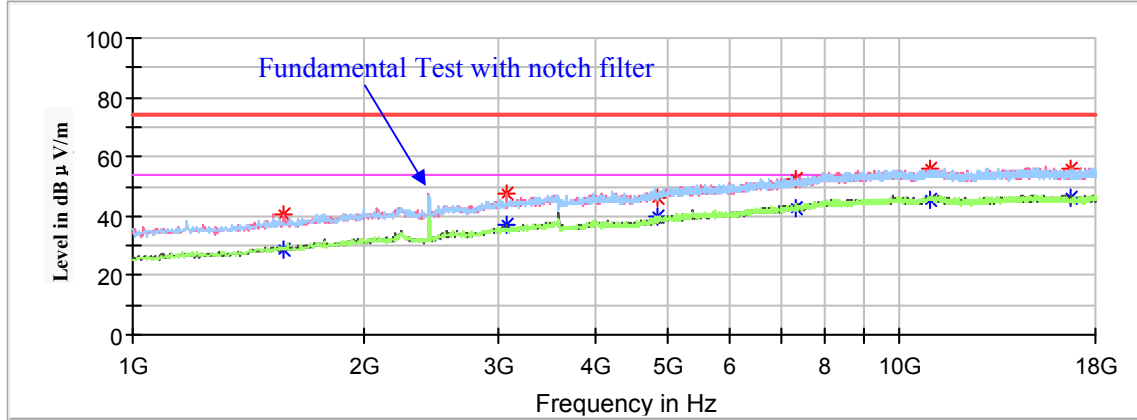

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1574.600000	40.88	---	150.0	H	113.0	-0.7	74.00	33.12
1574.600000	---	28.65	150.0	H	113.0	-0.7	54.00	25.35
3070.600000	47.67	---	200.0	V	275.0	6.2	74.00	26.33
3070.600000	---	37.31	200.0	V	275.0	6.2	54.00	16.69
4880.000000	---	39.73	150.0	V	301.0	10.9	54.00	14.27
4880.000000	46.30	---	150.0	V	301.0	10.9	74.00	27.70
7320.000000	52.13	---	150.0	V	281.0	15.4	74.00	21.87
7320.000000	---	42.77	150.0	V	281.0	15.4	54.00	11.23
10982.400000	---	45.53	250.0	V	275.0	19.0	54.00	8.47
10982.400000	56.26	---	250.0	V	275.0	19.0	74.00	17.74
16694.400000	---	45.87	150.0	H	32.0	18.1	54.00	8.13
16694.400000	55.69	---	150.0	H	32.0	18.1	74.00	18.31

High Channel: 2480MHz

Full Spectrum

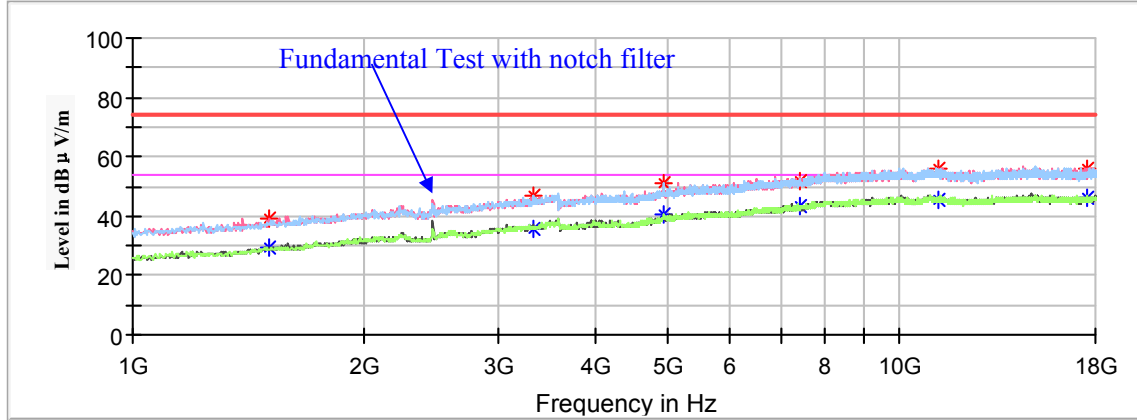


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1510.000000	---	29.06	150.0	V	327.0	-1.2	54.00	24.94
1510.000000	39.33	---	150.0	V	327.0	-1.2	74.00	34.67
3325.600000	---	35.77	200.0	V	85.0	6.8	54.00	18.23
3325.600000	46.64	---	200.0	V	85.0	6.8	74.00	27.36
4960.000000	---	40.91	150.0	V	101.0	11.3	54.00	13.09
4960.000000	50.81	---	150.0	V	101.0	11.3	74.00	23.19
7440.000000	---	43.21	200.0	V	314.0	15.5	54.00	10.79
7440.000000	52.04	---	200.0	V	314.0	15.5	74.00	21.96
11264.600000	---	45.80	150.0	H	128.0	18.7	54.00	8.20
11264.600000	55.91	---	150.0	H	128.0	18.7	74.00	18.09
17592.000000	---	45.93	150.0	V	355.0	18.6	54.00	8.07
17592.000000	55.63	---	150.0	V	355.0	18.6	74.00	18.37

18GHz-25GHz


(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle** channel of operation in X-axis of orientation was recorded)

Horizontal

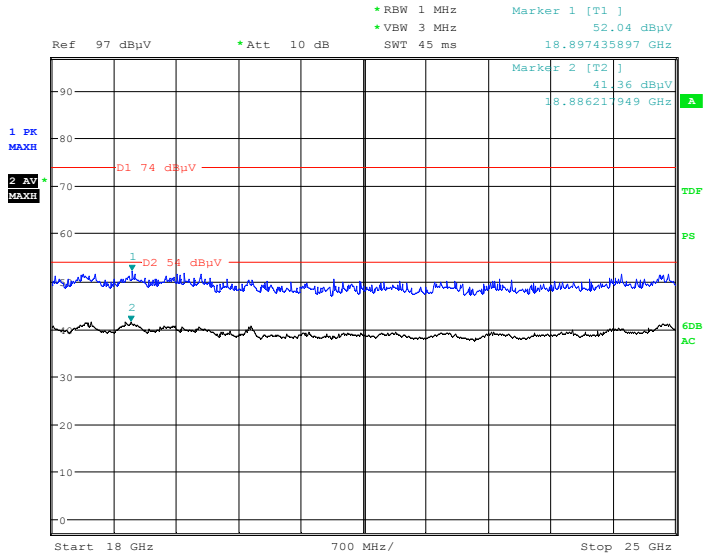

Date: 18.MAY.2018 19:59:01

Vertical

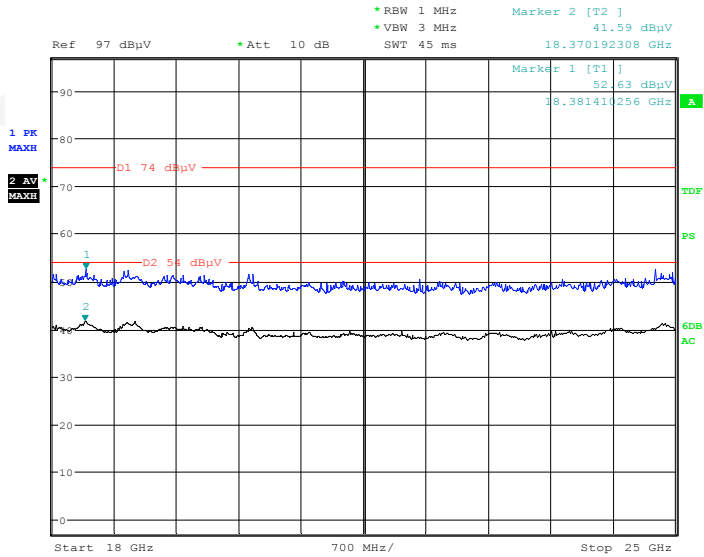

Date: 18.MAY.2018 20:36:33

Fundamental Test & Restricted Bands Emissions Test:

(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded.)


Note:

- 1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
- Corrected Amplitude = Corrected Factor + Reading
- Margin = Limit - Corrected. Amplitude

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2402.000000	92.65	---	200.0	V	230.0	5.1	/	/
2402.000000	---	90.57	200.0	V	230.0	5.1	/	/
2402.000000	89.28	---	150.0	H	254.0	5.1	/	/
2402.000000	---	87.35	150.0	H	254.0	5.1	/	/
2390.000000	48.35	---	150.0	V	204.0	5.1	74.00	25.65
2390.000000	---	40.43	150.0	V	204.0	5.1	54.00	13.57
Middle Channel: 2440MHz								
2440.000000	93.68	---	250.0	V	191.0	5.2	/	/
2440.000000	---	92.57	250.0	V	191.0	5.2	/	/
2440.000000	91.26	---	200.0	H	185.0	5.2	/	/
2440.000000	---	90.28	200.0	H	185.0	5.2	/	/
High Channel: 2480MHz								
2480.000000	93.70	---	200.0	V	314.0	5.3	/	/
2480.000000	---	92.86	200.0	V	314.0	5.3	/	/
2480.000000	91.53	---	150.0	H	293.0	5.3	/	/
2480.000000	---	90.46	150.0	H	293.0	5.3	/	/
2483.500000	50.08	---	100.0	V	211.0	5.3	74.00	23.92
2483.500000	---	40.44	100.0	V	211.0	5.3	54.00	13.56


Conducted Spurious Emissions at Antenna Port:

Low Channel

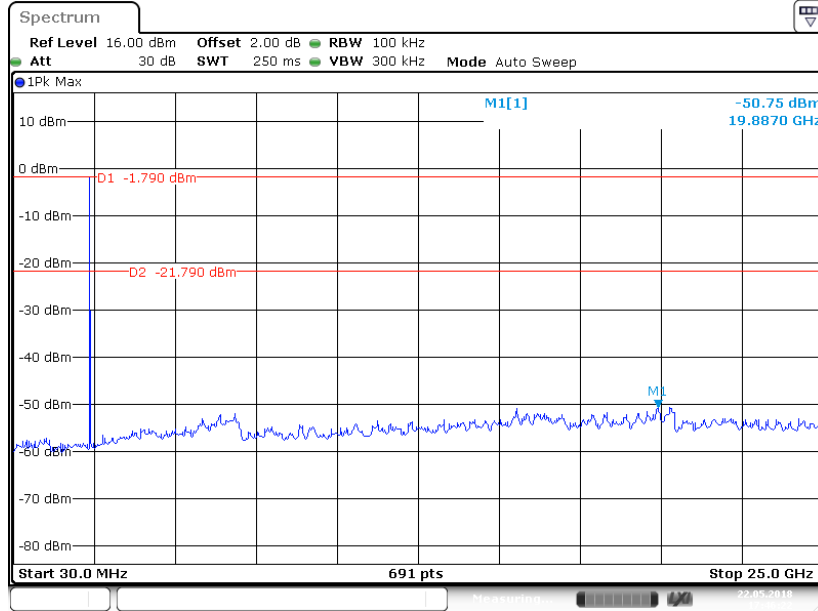


Date: 22 MAY 2018 17:46:23

Middle Channel

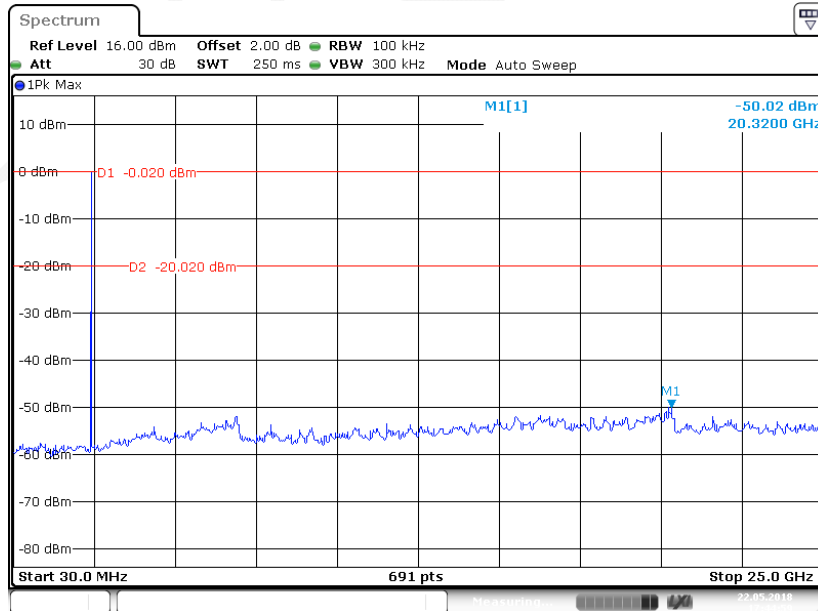

Date: 22 MAY 2018 17:45:00

High Channel

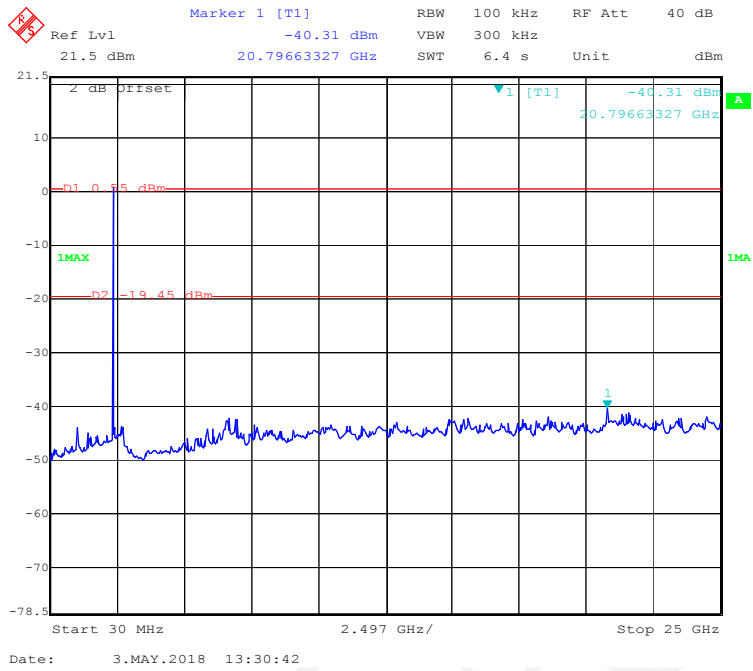

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	24.2°C
Relative Humidity:	51 %
ATM Pressure:	101.2 kPa


The testing was performed by Hope Zhang on 2018-08-30.

Test Result: Pass.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
Low	2402	0.712	≥ 0.5
Middle	2440	0.716	≥ 0.5
High	2480	0.725	≥ 0.5

Low Channel

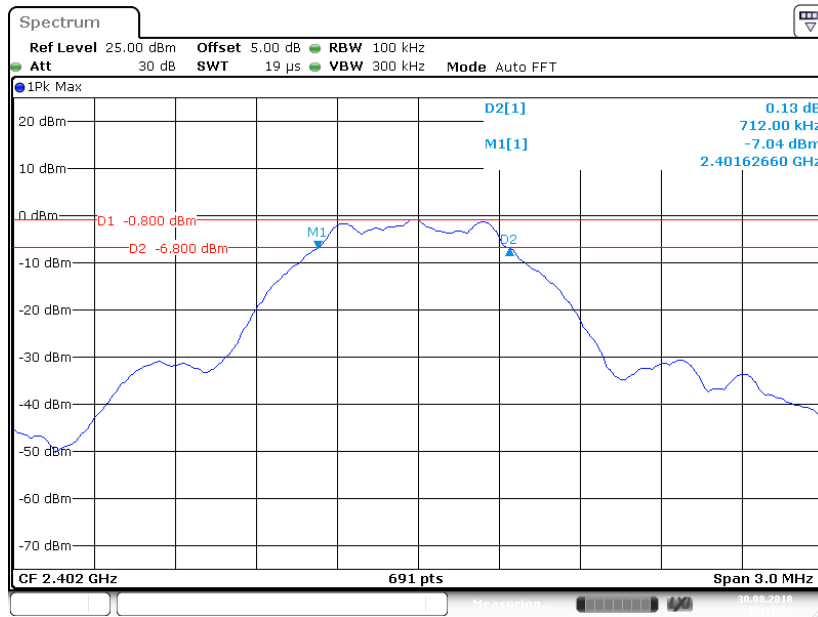


Date: 30.AUG.2018 17:11:02

Middle Channel

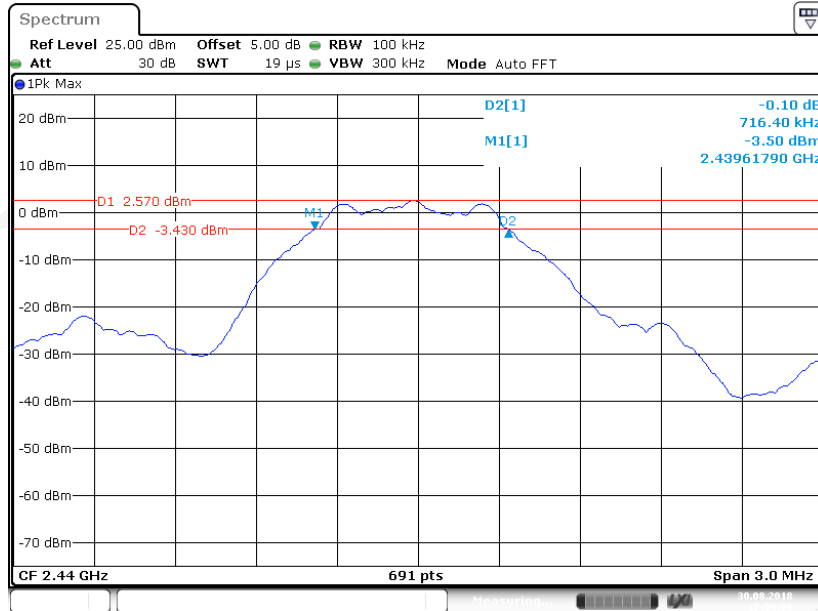

Date: 30.AUG.2018 17:09:36

High Channel

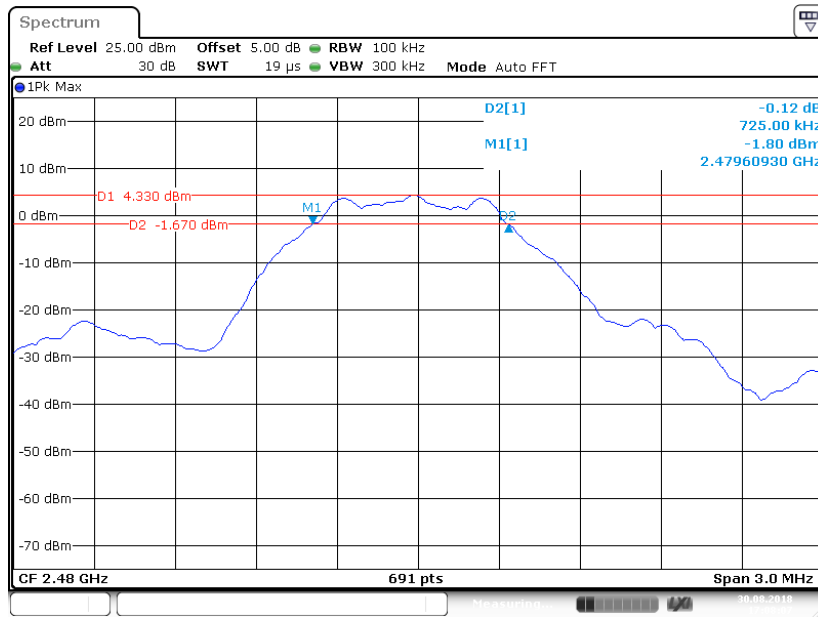

Date: 30.AUG.2018 17:08:07

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.1

1. Set the RBW \geq DTS bandwidth.
2. Set VBW \geq 3 x RBW.
3. Set span \geq 3 x RBW
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.



Test Data

Environmental Conditions


Temperature:	24.2°C
Relative Humidity:	51 %
ATM Pressure:	101.2 kPa

The testing was performed by Hope Zhang on 2018-05-22.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Low	2402	-0.75	30	Pass
Middle	2440	0.39	30	Pass
High	2480	0.39	30	Pass

Low Channel

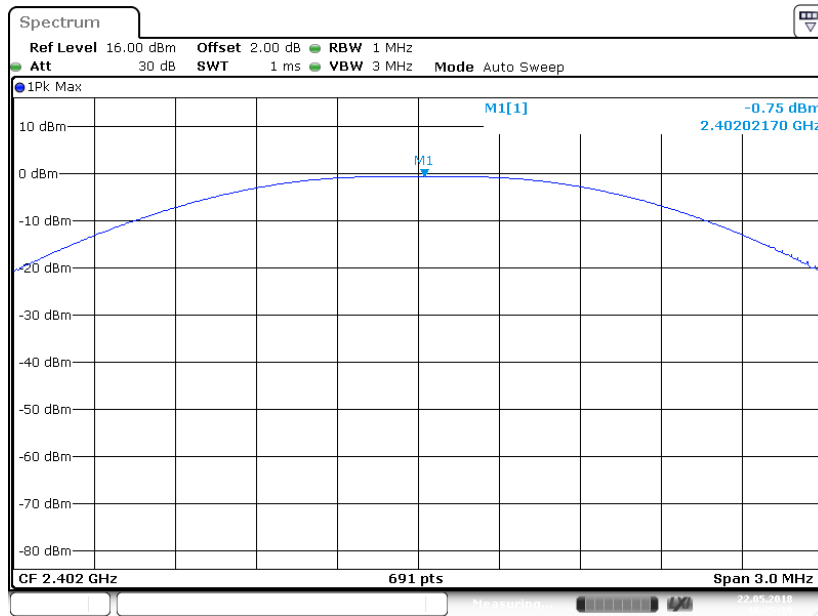


Date: 22 MAY 2018 16:25:19

Middle Channel

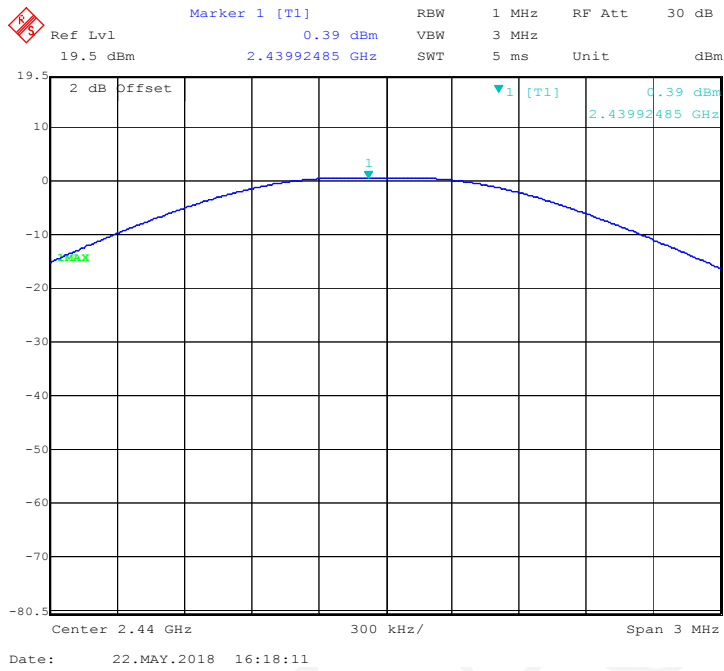

High Channel

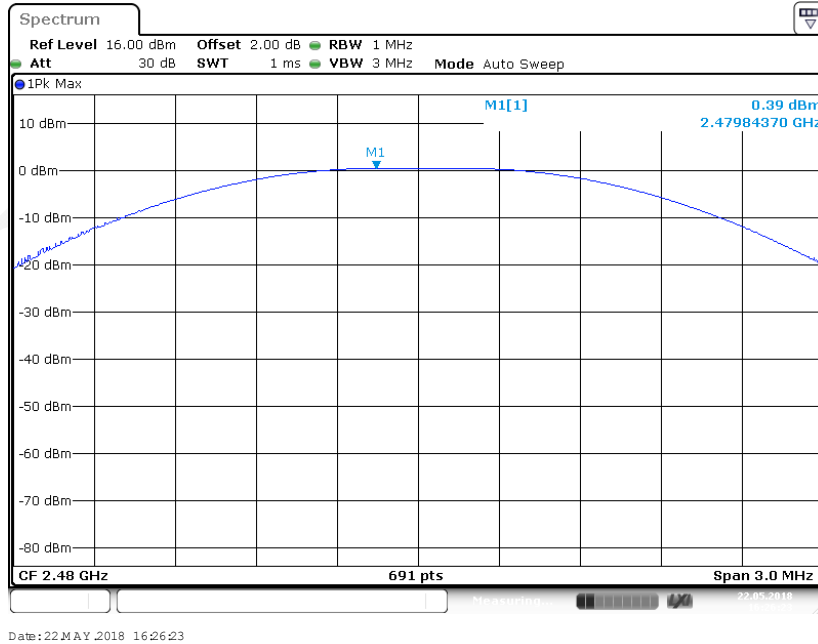

FCC §15.247(d) – BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	24.2°C
Relative Humidity:	51 %
ATM Pressure:	101.2 kPa

The testing was performed by Hope Zhang on 2018-05-22.

EUT operation mode: Transmitting


Test Result: *Compliance*

Left Side

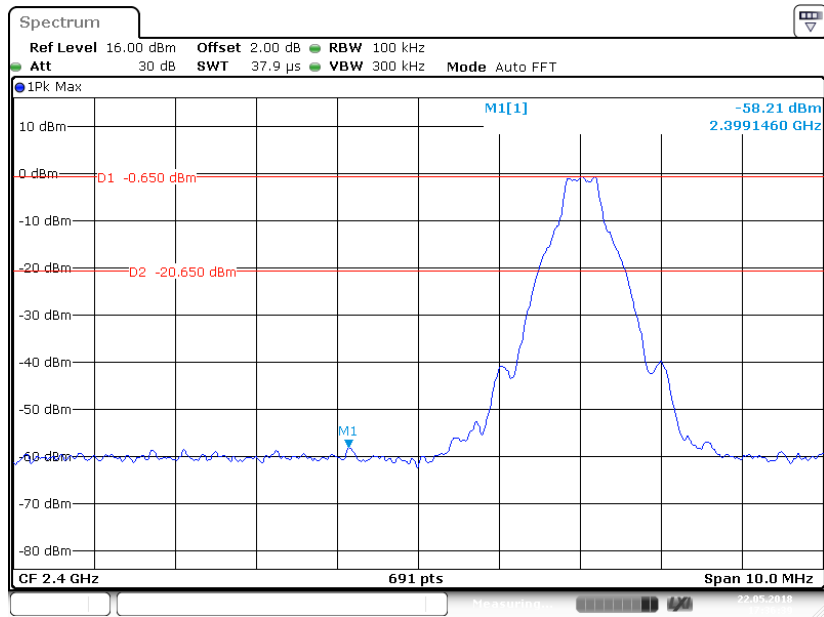

Date: 22 MAY 2018 17:36:39

Right Side

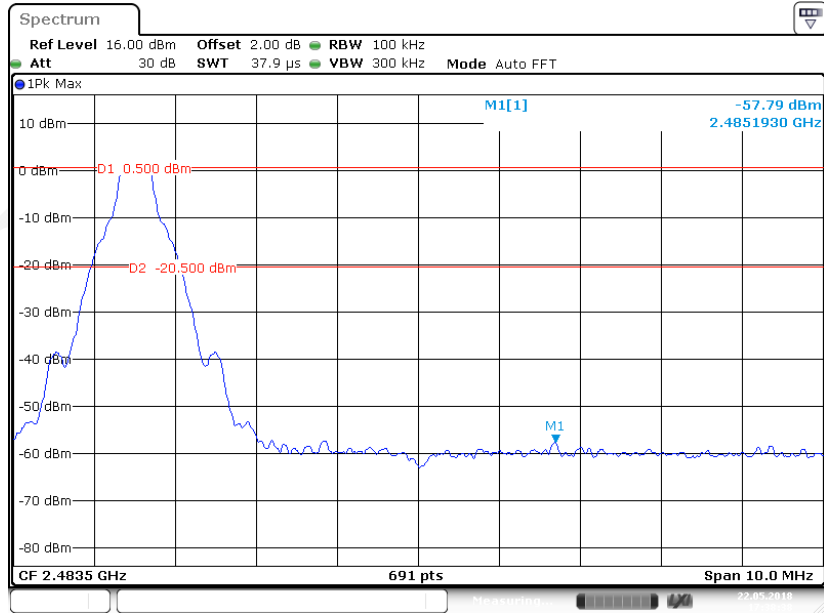

Date: 22 MAY 2018 17:38:38

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	24.2°C
Relative Humidity:	51 %
ATM Pressure:	101.2 kPa


The testing was performed by Hope Zhang on 2018-05-22.

Test Result: Pass


EUT operation mode: Transmitting

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low	2402	-13.78	≤8
Middle	2440	-11.27	≤8
High	2480	-12.77	≤8


Low Channel

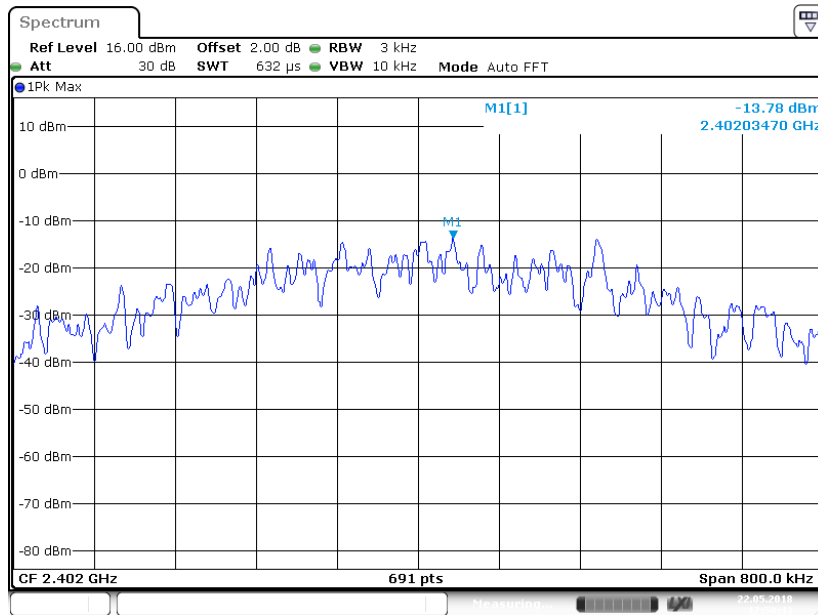

Middle Channel

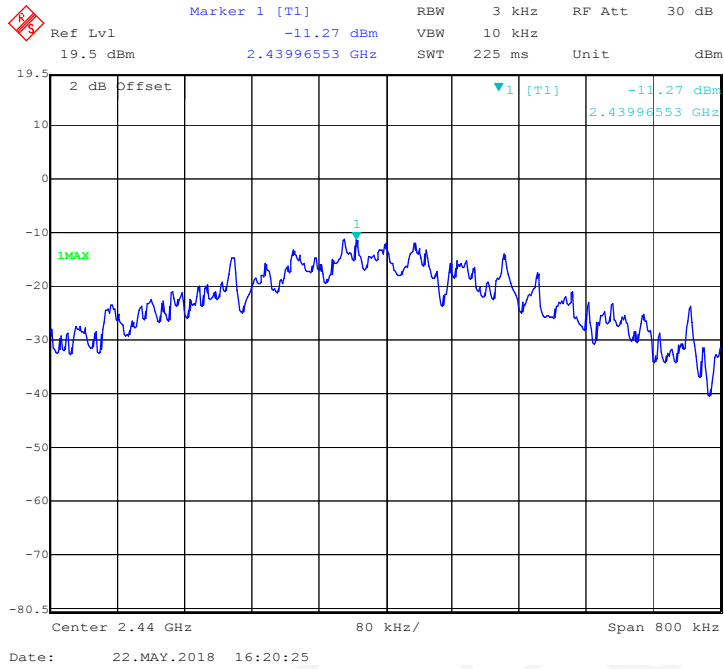

High Channel

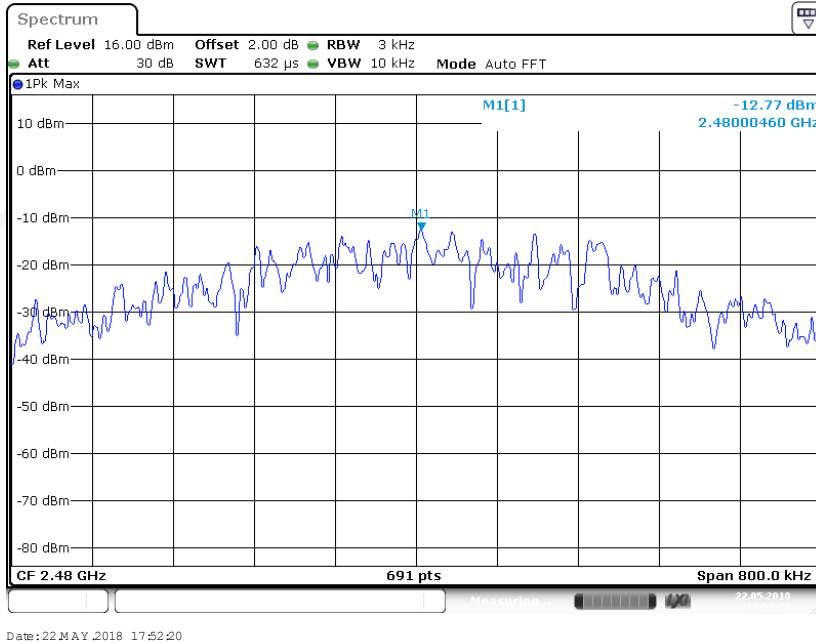

***** END OF REPORT *****