

APPLICATION CERTIFICATION
On Behalf of
Carewell Electric Technology (Zhongshan) Co., Ltd.

REMOTE CONTROL
Model No.: FAN61T-4S

FCC ID: 2AAZPFAN61T4S

Prepared for : Carewell Electric Technology (Zhongshan) Co., Ltd.
Address : Torch Development Zone, No.2, Ouya Road, Zhongshan,
Guangdong, China

Prepared by : ACCURATE TECHNOLOGY CO., LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290

Fax: (0755) 26503396

Report Number : ATE20151430
Date of Test : Jul 01-08,2015
Date of Report : Jul 09,2015

TABLE OF CONTENTS

Description

Page

Test Report Certification

1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility	5
1.3. Measurement Uncertainty	5
2. MEASURING DEVICE AND TEST EQUIPMENT	6
3. SUMMARY OF TEST RESULTS.....	7
4. THE FIELD STRENGTH OF RADIATION EMISSION	8
4.1. Block Diagram of Test Setup.....	8
4.2. The Field Strength of Radiation Emission Measurement Limits.....	9
4.3. Configuration of EUT on Measurement	9
4.4. Operating Condition of EUT	9
4.5. Test Procedure	10
4.6. The Field Strength of Radiation Emission Measurement Results	11
5. 20DB OCCUPIED BANDWIDTH	13
5.1. Block Diagram of Test Setup.....	13
5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section 15.231(c).....	13
5.3. EUT Configuration on Measurement	14
5.4. Operating Condition of EUT	14
5.5. Test Procedure	14
5.6. Measurement Result	14
6. RELEASE TIME MEASUREMENT.....	15
6.1. Block Diagram of Test Setup.....	15
6.2. Release Time Measurement According To FCC Part 15 Section 15.231(a)	15
6.3. EUT Configuration on Measurement	16
6.4. Operating Condition of EUT	16
6.5. Test Procedure	16
6.6. Measurement Result	16
7. AVERAGE FACTOR MEASUREMENT.....	17
7.1. Block Diagram of Test Setup.....	17
7.2. Average factor Measurement according to ANSI C63.10-2013.....	17
7.3. EUT Configuration on Measurement	18
7.4. Operating Condition of EUT	18
7.5. Test Procedure	18
7.6. Measurement Result	18
8. ANTENNA REQUIREMENT.....	19
8.1. The Requirement	19
8.2. Antenna Construction	19

Test Report Certification

Applicant : Carewell Electric Technology (Zhongshan) Co., Ltd.
 Manufacturer : Carewell Electric Technology (Zhongshan) Co., Ltd.
 EUT Description : REMOTE CONTROL
 (A) MODEL NO.: FAN61T-4S
 (B) SERIAL NO.: N/A
 (C) POWER SUPPLY: DC 3V (Battery 2x AAA)

Measurement Procedure Used:


FCC Rules and Regulations Part 15 Subpart C Section 15.231a ANSI C63.10-2013

The device described above is tested by ACCURATE TECHNOLOGY CO., LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.231a. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO., LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO., LTD.

Date of Test : Jul 01-08,2015
 Date of Report : Jul 09,2015

Prepared by : 
 (Eric Zhang , Engineer)

Approved & Authorized Signer : 
 (Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	REMOTE CONTROL
Model Number	:	FAN61T-4S
Power Supply	:	DC 3V (battery 2x AAA)
Modulation:	:	ASK
Operation Frequency	:	315MHz
Applicant	:	Carewell Electric Technology (Zhongshan) Co., Ltd.
Address	:	Torch Development Zone, No.2, Ouya Road, Zhongshan, Guangdong, China
Manufacturer	:	Carewell Electric Technology (Zhongshan) Co., Ltd.
Address	:	Torch Development Zone, No.2, Ouya Road, Zhongshan, Guangdong, China
Date of sample received	:	Jul 01, 2015
Date of Test	:	Jul 01-08,2015

1.2. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC

The Registration Number is 752051

Listed by Industry Canada

The Registration Number is 5077A-2

Accredited by China National Accreditation Committee
for Laboratories

The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO., LTD

Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

1.3. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2
(Above 1GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Cal. Interval
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 10, 2015	One Year
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 10, 2015	One Year
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 10, 2015	One Year
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 10, 2015	One Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 15, 2015	One Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 15, 2015	One Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 15, 2015	One Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1067	Jan. 15, 2015	One Year
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 10, 2015	One Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 10, 2015	One Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 10, 2015	One Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 10, 2015	One Year

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission	N/A
Section 15.231(b)	Radiated Emission	Compliant
Section 15.231(c)	20dB Bandwidth	Compliant
Section 15.231(a)(1)	Release Time Measurement	Compliant
Section 15.203	Antenna Requirement	Compliant

The product is a manually operated transmitter.

Section 15.231 (a) (2), (3), (4) and (5) are not applicable.

All normal using modes of the normal function were tested but only the worst test data of the worst mode is recorded by this report.

4. THE FIELD STRENGTH OF RADIATION EMISSION

4.1. Block Diagram of Test Setup



4.1.1. Block diagram of connection between the EUT and simulators



(EUT: REMOTE CONTROL)

4.1.2. Semi-Anechoic Chamber Test Setup Diagram

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

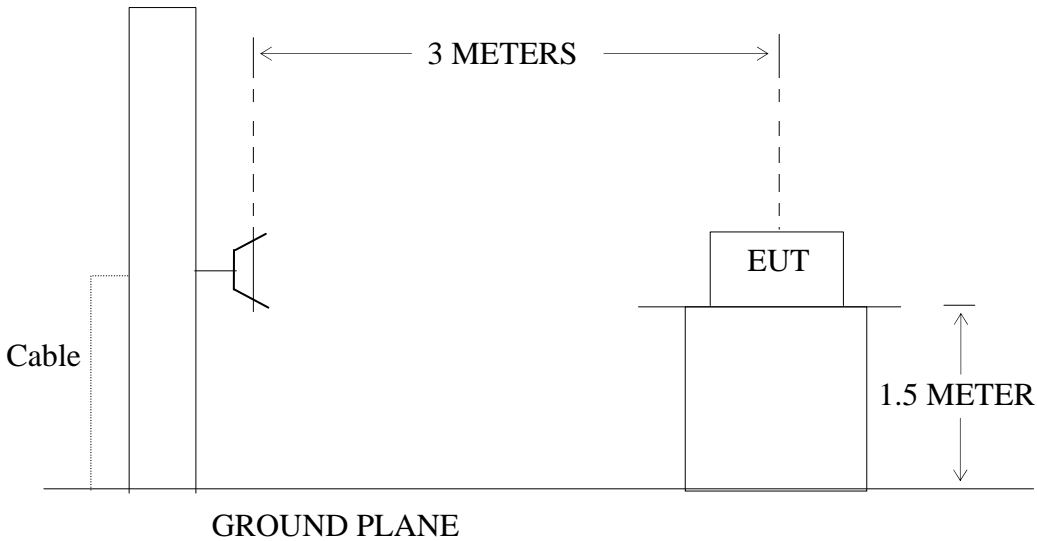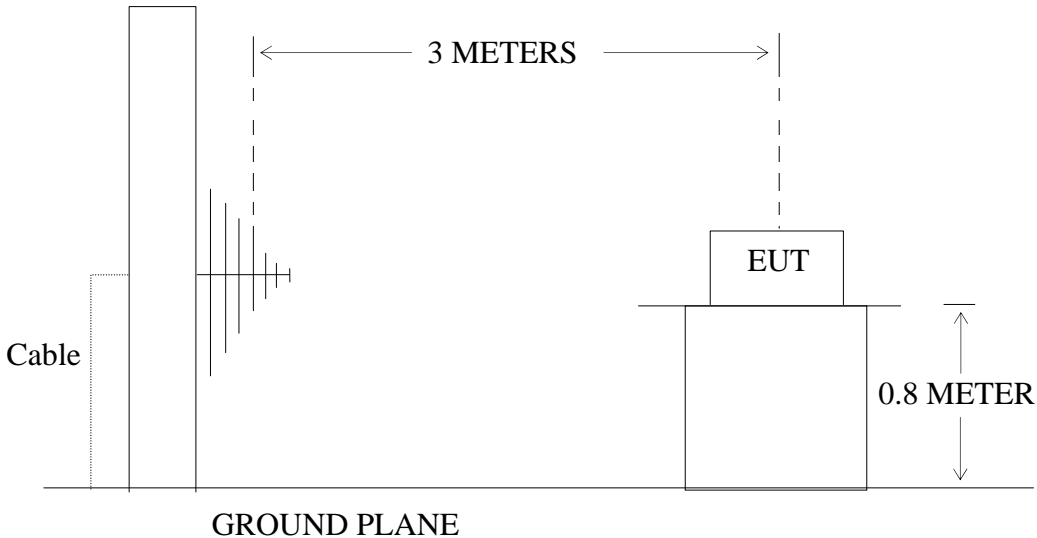

4.2. The Field Strength of Radiation Emission Measurement Limits

4.2.1. Radiation Emission Measurement Limits According to FCC Part 15 Section 15.231(b)

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Average] [$\mu\text{V}/\text{m}$]	Field Strength of Spurious Emission [Average] [$\mu\text{V}/\text{m}$]
40.66-40.70	2250	225
70-130	1250	125
130-174	1250-3750	125-375
174-260	3750	375
260-470	3750-12500	375-1250
Above 470	12500	1250

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, $\mu\text{V}/\text{m}$ at 3 meters = $56.81818(F) - 6136.3636$; for the band 260-470 MHz, $\mu\text{V}/\text{m}$ at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

4.2.2. Restricted Band Radiation Emission Measurement Limits According to FCC part 15 Section 15.205 and Section 15.209.

4.3. Configuration of EUT on Measurement

The following equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.3.1. REMOTE CONTROL (EUT)

Model Number : FAN61T-4S
 Serial Number : N/A
 Manufacturer : Carewell Electric Technology (Zhongshan) Co., Ltd.

4.4. Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Turn on the power of all equipment.

4.4.3. Let the EUT work in TX mode measure it.

4.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna.

For emission measurements above 1 GHz, the EUT shall be placed at a height of 1.5 m above the floor on a support that is RF transparent for the frequencies of interest. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 120 kHz in 30-1000 MHz, and 1 MHz in 1000-4000 MHz.

The frequency range from 30 MHz to 4000 MHz is checked.

4.6. The Field Strength of Radiation Emission Measurement Results

PASS.

The frequency range 30MHz to 4000MHz is investigated.

EUT:	<u>REMOTE CONTROL</u>		
Model No.:	<u>FAN61T-4S</u>	Power Supply:	<u>DC 3V</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Ricky</u>

Frequency (MHz)	Reading (dB μ V/m)	Factor Corr.	Average Factor	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB)		Polarization
	PEAK	(dB)	(dB)	AV	PEAK	AV	PEAK	AV	PEAK	
315	82.50	-17.55	-9.01	55.96	64.97	75.6	95.6	-19.64	-30.63	Horizontal
630	52.87	-11.05	-9.01	32.81	41.82	55.6	75.6	-22.79	-33.78	
945	45.46	-5.45	-9.01	31.00	40.01	55.6	75.6	-24.60	-35.59	
1260	56.55	-12.40	-9.01	35.14	44.15	55.6	75.6	-20.46	-31.45	
1575	50.66	-10.97	-9.01	30.68	39.69	55.6	75.6	-24.92	-35.91	
1890	48.42	-9.60	-9.01	29.81	38.82	55.6	75.6	-25.79	-36.78	
315	76.89	-17.53	-9.01	50.35	59.36	75.6	95.6	-25.25	-36.24	Vertical
630	52.80	-11.05	-9.01	32.74	41.75	55.6	75.6	-22.86	-33.85	
945	43.33	-5.45	-9.01	28.87	37.88	55.6	75.6	-26.73	-37.72	
1260	57.46	-12.40	-9.01	36.05	45.06	55.6	75.6	-19.55	-30.54	
1575	57.26	-10.97	-9.01	37.28	46.29	55.6	75.6	-18.32	-29.31	
1890	56.90	-9.60	-9.01	38.29	47.30	55.6	75.6	-17.31	-28.30	

Note:

- Emissions attenuated more than 20 dB below the permissible value are not reported.
- The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain
- FCC Limit for Average Measurement = $41.6667(315)-7083.3333 = 6041.6772 \mu\text{V/m} = 75.6 \mu\text{V/m}$
- The spectral diagrams in appendix I display the measurement of peak values.
- Average value= PK value + Average Factor (duty factor)
- If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

7. The EUT is tested radiation emission in three axes(X,Y,Z). The worst emissions are reported in three axes.

8. Pulse Desensitization Correction Factor

Pulse Width (PW) = 0.391ms

$2/PW = 2/0.391\text{ms} = 5.115\text{kHz}$

RBW (100 kHz) > 2/PW (5.115 kHz)

Therefore PDCF is not needed

5. 20DB OCCUPIED BANDWIDTH


5.1. Block Diagram of Test Setup

5.1.1. Block diagram of connection between the EUT and simulators



(EUT: REMOTE CONTROL)

5.1.2. Semi-Anechoic Chamber Test Setup Diagram

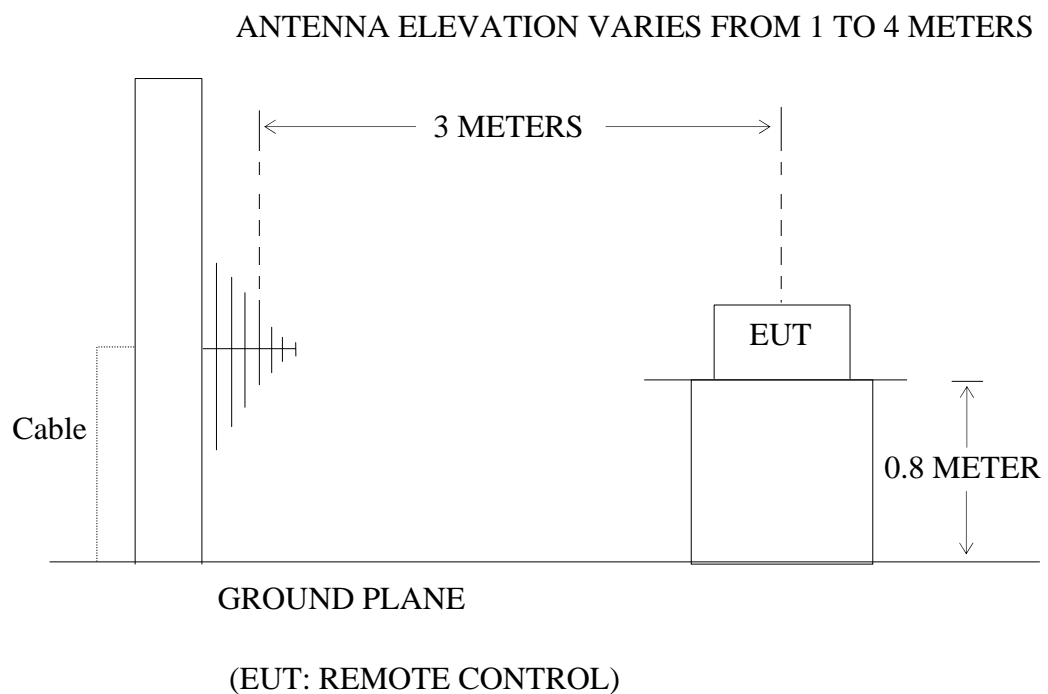

5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section

15.231(c)

The bandwidth of emission shall be no wider than 0.25% of the center frequency. Therefore, the bandwidth of the emission limit is $315 \text{ MHz} \times 0.25\% = 787.5 \text{ kHz}$. Bandwidth is determined at the two points 20 dB down from the top of modulated carrier.

5.3.EUT Configuration on Measurement

The following equipment are installed on the bandwidth of emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1.REMOTE CONTROL (EUT)

Model Number : FAN61T-4S
Serial Number : N/A
Manufacturer : Carewell Electric Technology (Zhongshan) Co., Ltd.

5.4.Operating Condition of EUT

5.4.1.Setup the EUT and simulator as shown as Section 5.1.

5.4.2.Turn on the power of all equipment.

5.4.3.Let the EUT work in TX mode measure it.

5.5.Test Procedure

5.5.1.Set SPA Center Frequency = Fundamental frequency, RBW = 10 kHz, VBW = 30 kHz, Span = 1MHz.

5.5.2.Set SPA Max hold, Mark peak, -20 dB.

5.6.Measurement Result

The EUT does meet the FCC requirement.

-20 dB bandwidth = 66.6 kHz < 787.5 kHz.

The spectral diagrams in appendix I.

6. RELEASE TIME MEASUREMENT


6.1. Block Diagram of Test Setup

6.1.1. Block diagram of connection between the EUT and simulators



(EUT: REMOTE CONTROL)

6.1.2. Semi-Anechoic Chamber Test Setup Diagram

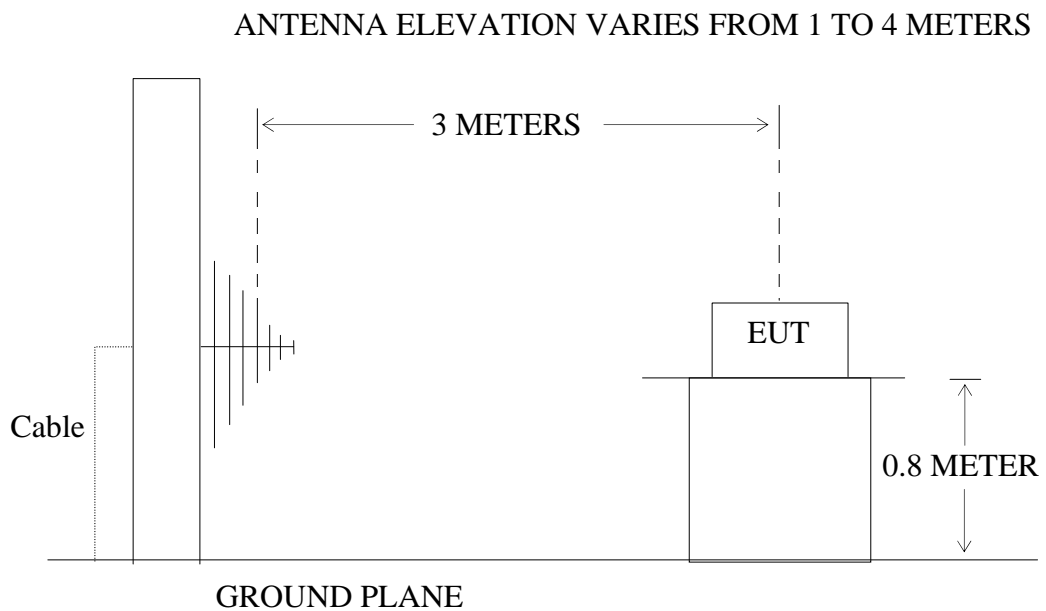

(EUT: REMOTE CONTROL)

6.2. Release Time Measurement According To FCC Part 15 Section 15.231(a)

Section 15.231(a) (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

6.3.EUT Configuration on Measurement

The following equipment are installed on Release Time Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.3.1. REMOTE CONTROL (EUT)

Model Number : FAN61T-4S
Serial Number : N/A
Manufacturer : Carewell Electric Technology (Zhongshan) Co., Ltd.

6.4.Operating Condition of EUT

6.4.1.Setup the EUT and simulator as shown as Section 6.1.

6.4.2.Turn on the power of all equipment.

6.4.3.Let the EUT work in TX mode measure it.

6.5.Test Procedure

6.5.1.Set SPA Center Frequency = Fundamental frequency, RBW = 100 kHz, VBW = 300 kHz, Span = 0 Hz. Sweep time = 10 s.

6.5.2.Set EUT as normal operation and press Transmitter button.

6.5.3.Set SPA View. Delta Mark time.

6.6. Measurement Result

The release time less than 5 seconds.

Release Time = 1.908s

The spectral diagrams in appendix I.

7. AVERAGE FACTOR MEASUREMENT


7.1. Block Diagram of Test Setup

7.1.1. Block diagram of connection between the EUT and simulators



(EUT: REMOTE CONTROL)

7.1.2. Semi-Anechoic Chamber Test Setup Diagram

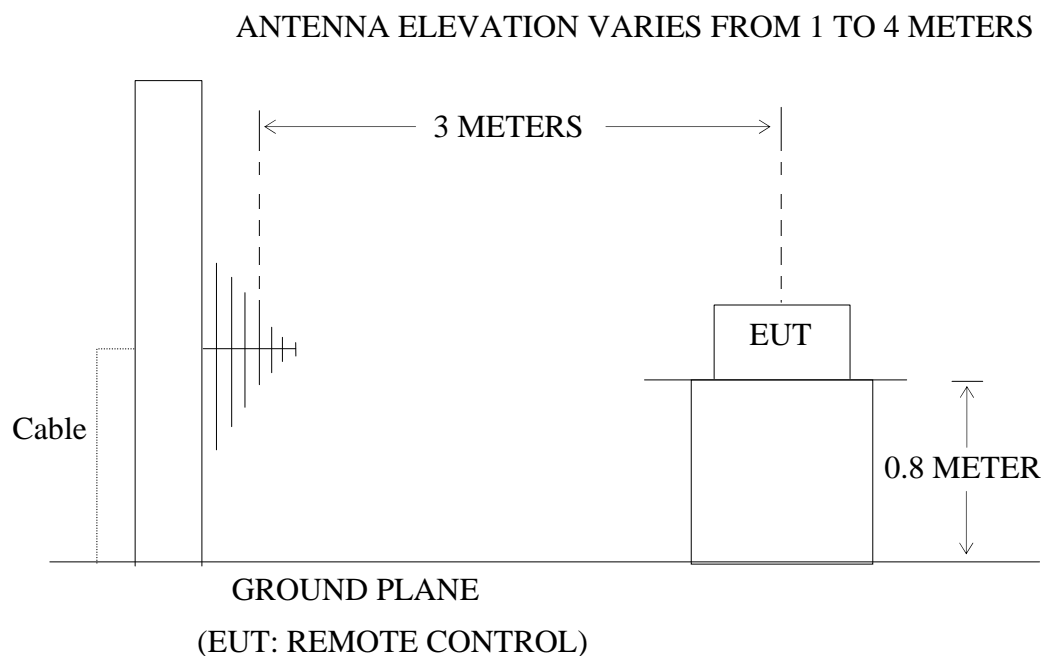

7.2. Average factor Measurement according to ANSI C63.10-2013

ANSI C63.10-2013 Section 13.4.2 Devices transmitting pulsed emissions and subject to a limit requiring an average detector function for radiated emissions shall initially be measured with an instrument that uses a peak detector. A radiated emission measured with a peak detector may then be corrected to a true average using the appropriate factor for emission duty cycle. This correction factor relates the measured peak level to the average limit and is derived by averaging absolute field strength over one complete pulse train that is 0.1 s, or less, in length. If the pulse train is longer than 0.1 s, the average shall be determined from the average absolute field strength during the 0.1 s interval in which the field strength is at a maximum.

Average factor in dB = 20 log (duty cycle)

7.3.EUT Configuration on Measurement

The following equipment are installed on average factor Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.3.1. REMOTE CONTROL

Model Number : FAN61T-4S
Serial Number : N/A
Manufacturer : Carewell Electric Technology (Zhongshan) Co., Ltd.

7.4.Operating Condition of EUT

7.4.1.Setup the EUT and simulator as shown as Section 7.1.

7.4.2.Turn on the power of all equipment.

7.4.3.Let the EUT work in TX mode measure it.

7.5.Test Procedure

7.5.1.The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation.

7.5.2.Set SPA Center Frequency = Fundamental frequency, RBW = 100 kHz, VBW = 300 kHz, Span = 0 Hz.

7.5.3.Set EUT as normal operation.

7.5.4.Set SPA View. Delta Mark time.

7.6. Measurement Result

The duty cycle is simply the on time divided by the period:

The duration of one cycle = 31.884ms

Effective period of the cycle = $(0.391 \times 23) + (0.768 \times 3)$ ms = 11.297 ms

DC = $11.297\text{ms} / 31.884\text{ms} = 0.354$

Therefore, the average factor is found by $20\log 0.354 = -9.01\text{dB}$

The spectral diagrams in appendix I.

8. ANTENNA REQUIREMENT

8.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2.Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.



Antenna

APPENDIX I (Test Curves)




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: ricky- 2015 #96	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 15/07/06/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 10/02/56
EUT: REMOTE CONTROL	Engineer Signature:
Mode: TX	Distance: 3m
Model: FAN61T-4S	
Manufacturer: Carewell	

Note: Report No.:ATE20151430

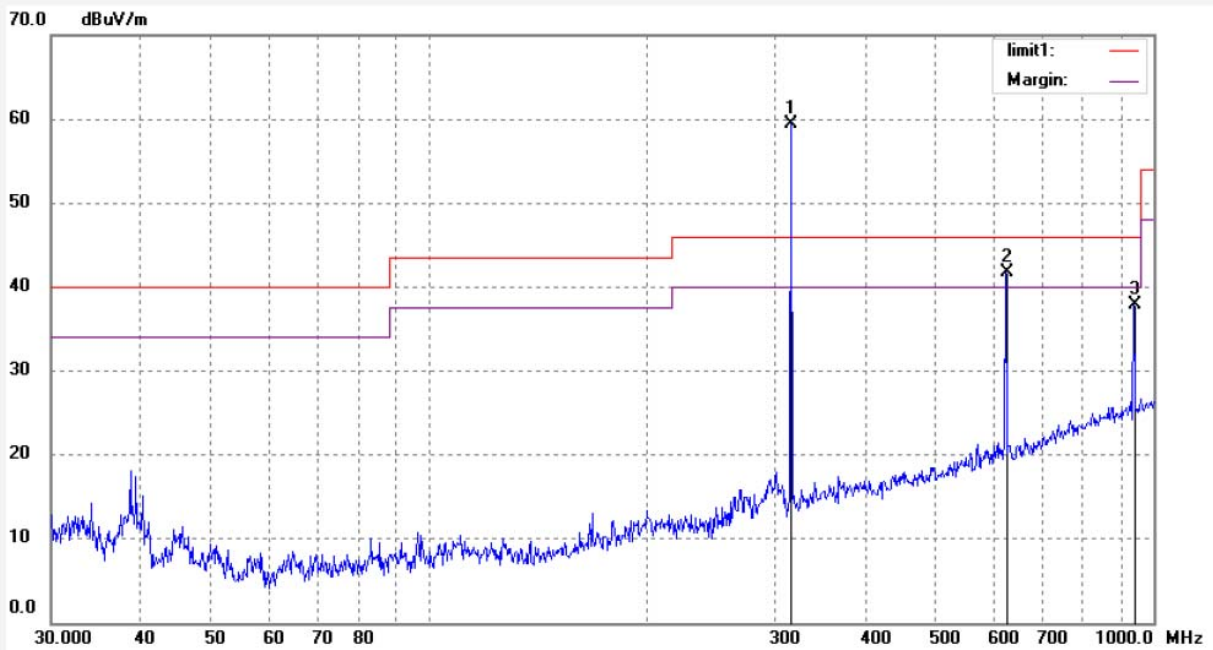

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	315.0000	76.89	-17.53	59.36	95.60	36.24	peak			
2	630.0000	52.80	-11.05	41.75	46.00	-4.25	peak			
3	945.0000	43.33	-5.45	37.88	46.00	-8.12	peak			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: ricky- 2015 #97	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 15/07/06/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 10/05/33
EUT: REMOTE CONTROL	Engineer Signature:
Mode: TX	Distance: 3m
Model: FAN61T-4S	
Manufacturer: Carewell	

Note: Report No.:ATE20151430

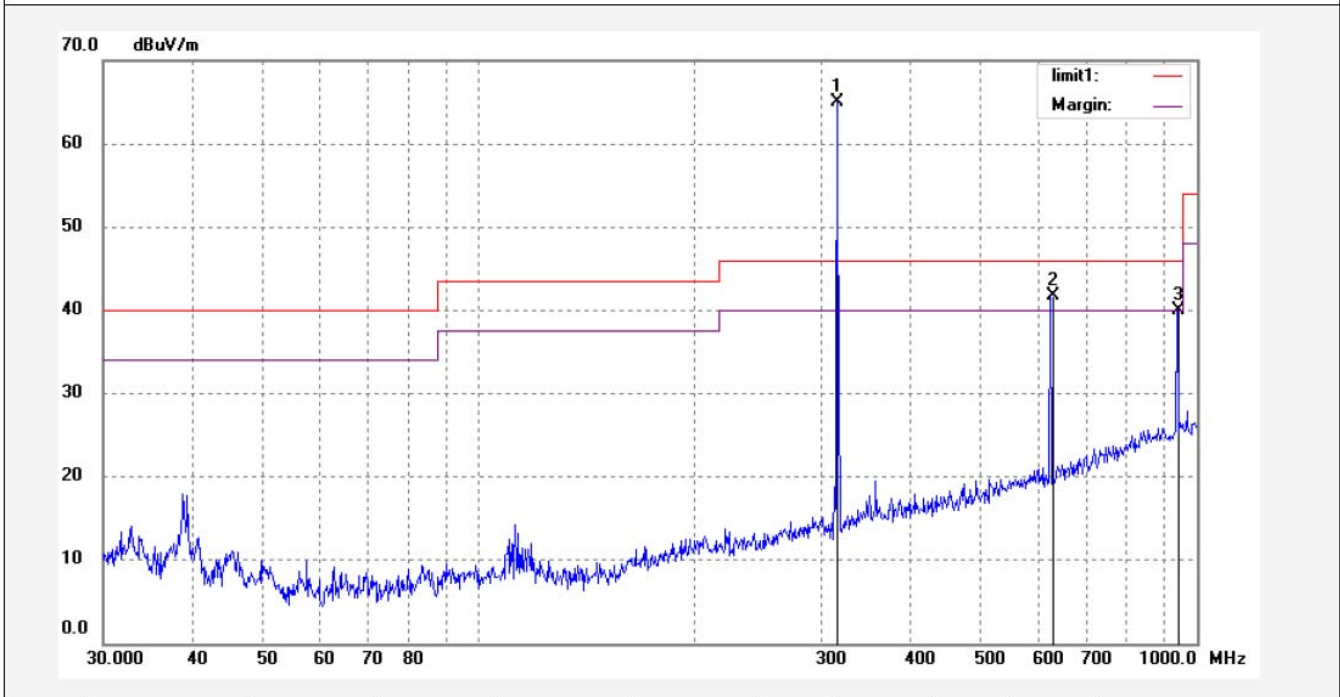

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	315.0000	82.50	-17.53	64.97	95.60	30.63	peak			
2	630.0000	52.87	-11.05	41.82	46.00	-4.18	peak			
3	945.0000	45.46	-5.45	40.01	46.00	-5.99	peak			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: ricky- 2015 #100	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 15/07/06/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 10/16/24
EUT: REMOTE CONTROL	Engineer Signature:
Mode: TX	Distance: 3m
Model: FAN61T-4S	
Manufacturer: Carewell	

Note: Report No.:ATE20151430

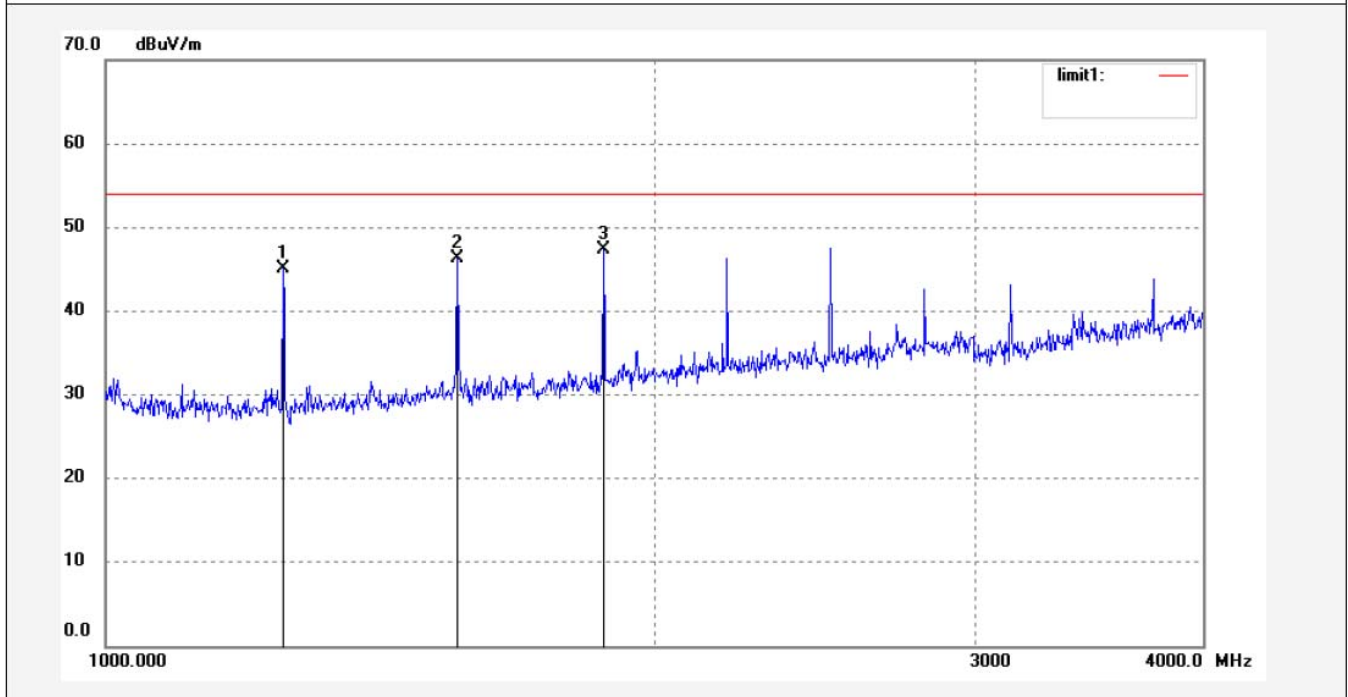

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1251.747	57.46	-12.40	45.06	54.00	-8.94	peak			
2	1560.330	57.26	-10.97	46.29	54.00	-7.71	peak			
3	1875.720	56.90	-9.60	47.30	54.00	-6.70	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396


Job No.: ricky- 2015 #101
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: REMOTE CONTROL
Mode: TX
Model: FAN61T-4S
Manufacturer: Carewell

Polarization: Horizontal
Power Source: DC 3V
Date: 15/07/06/
Time: 10/18/33
Engineer Signature:
Distance: 3m


Note: Report No.:ATE20151430

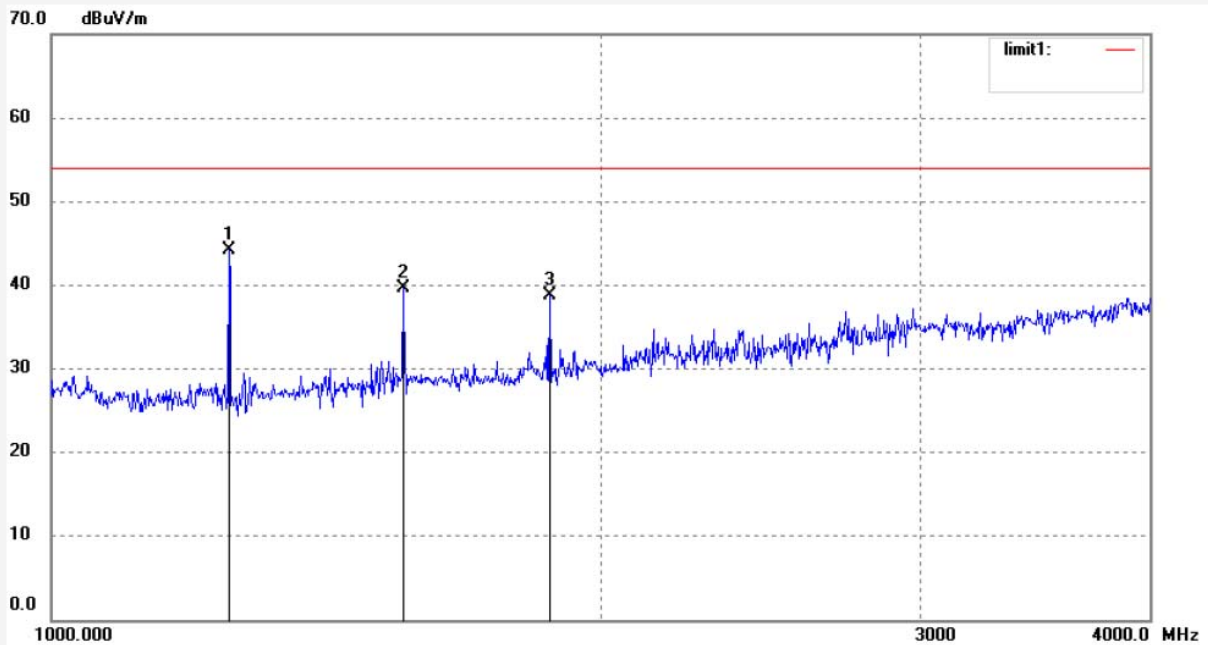

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1251.747	56.55	-12.40	44.15	54.00	-9.85	peak			
2	1560.330	50.66	-10.97	39.69	54.00	-14.31	peak			
3	1875.720	48.42	-9.60	38.82	54.00	-15.18	peak			

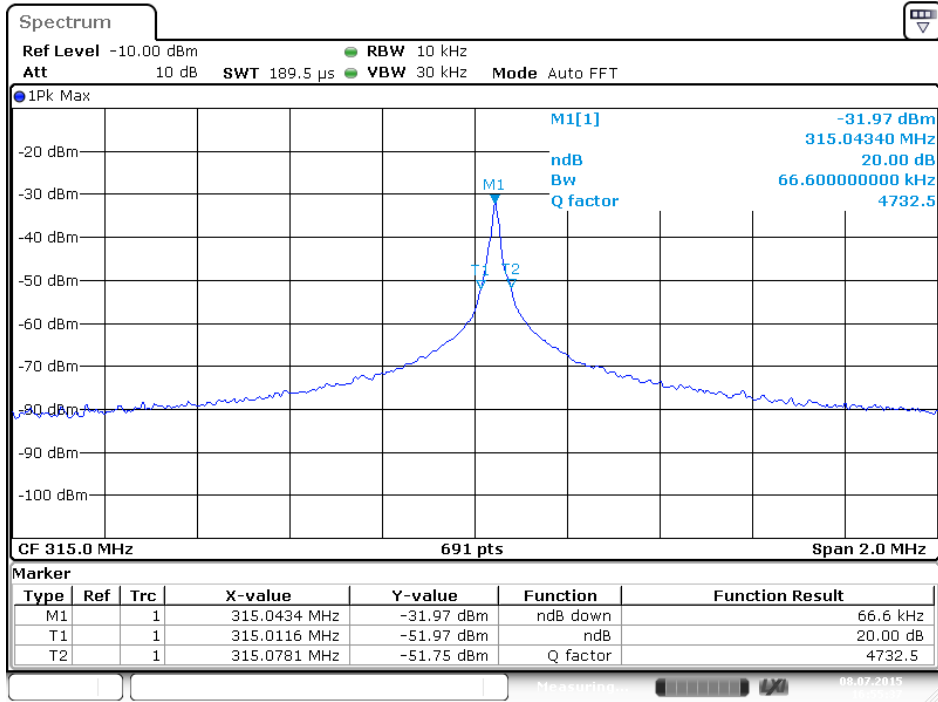


Date: 8.JUL.2015 16:55:37

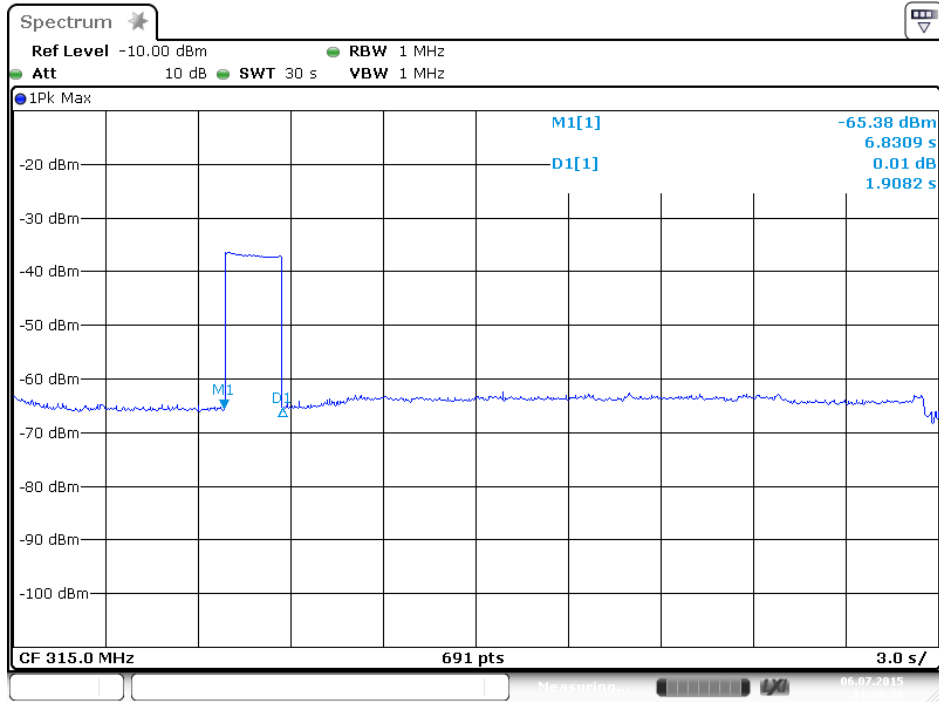


Date: 6.JUL.2015 11:05:30

Release Time = 1.9082s

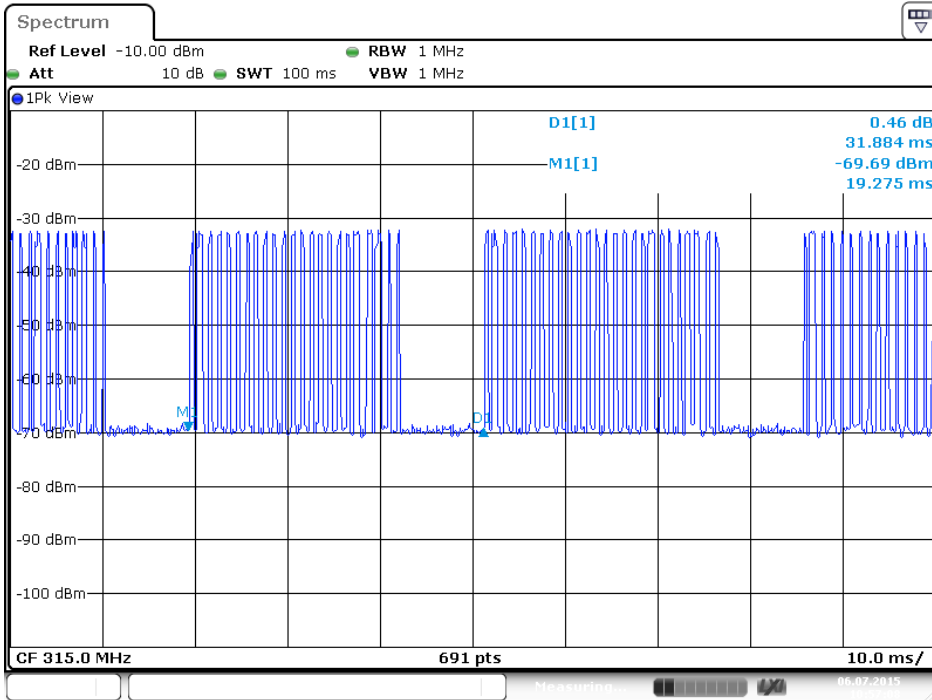


Date: 6.JUL.2015 10:57:09

The graph shows the pattern of coding during the signal transmission.
The duration of one cycle = 31.884 ms.

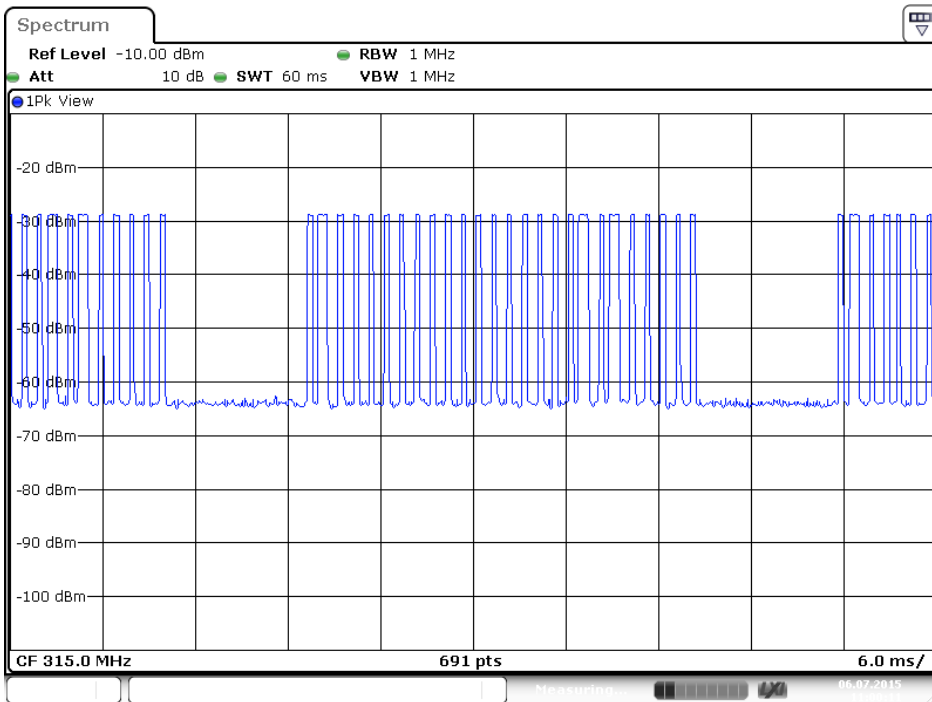


Date: 6.JUL.2015 11:00:12

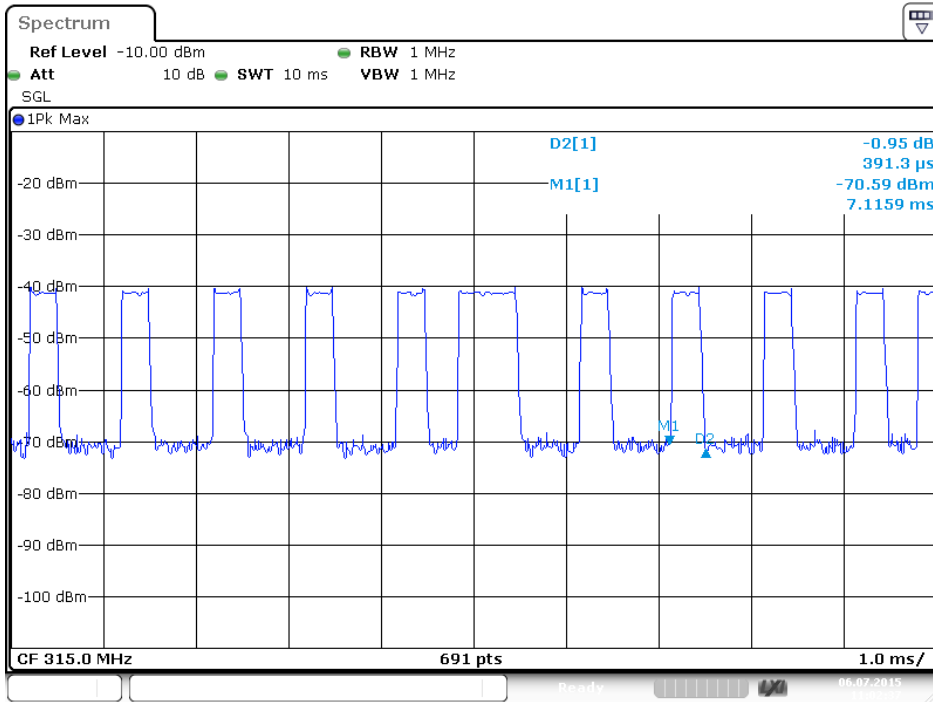

Date: 6.JUL.2015 11:02:38

The graph shows the duration of 'on' signal. From marker 1 to marker 2, duration is 0.391ms.

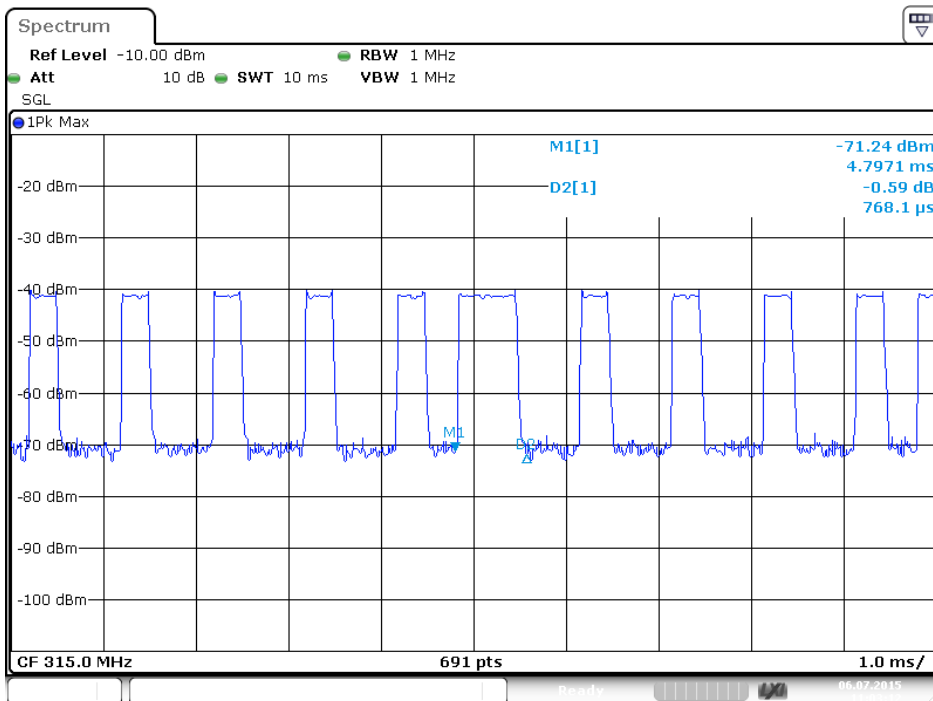

Date: 6.JUL.2015 11:03:13

The graph shows the duration of 'on' signal. From marker 1 to marker 2, duration is 0.768 ms.