




FCC PART 15.249 TEST REPORT

For

LEEDARSON LIGHTING CO., LTD.

Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou, Fujian, China

FCC ID: 2AB2Q-A11PR38150WUL

Report Type: Original Report	Product Type: LED Lamp
Report Number: RXM210827050-00	
Report Date: 2021-11-01	
Reviewed By: Candy Li	
Reviewed By: RF Engineer	
Prepared By: Shenzhen Accurate Technology Co., Ltd. 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China Tel: (0755) 26503290 Fax: (0755) 26503396 Http://www.atc-lab.com	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	3
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
SUPPORT CABLE DESCRIPTIONS.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
TEST EQUIPMENT LIST	8
FCC§15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 – AC LINE CONDUCTED EMISSIONS.....	10
APPLICABLE STANDARD	10
EUT SETUP.....	10
EMI TEST RECEIVER SETUP.....	10
TEST PROCEDURE	10
CORRECTED FACTOR & MARGIN CALCULATION	11
TEST RESULTS SUMMARY.....	11
TEST DATA	11
FCC§15.205, §15.209 & §15.249(D) - RADIATED EMISSIONS.....	18
APPLICABLE STANDARD	18
TEST EQUIPMENT SETUP	18
EUT SETUP.....	19
TEST PROCEDURE	20
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST RESULTS SUMMARY.....	20
TEST DATA	20
FCC§15.215(C) - 20DB EMISSION BANDWIDTH	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST DATA	28

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	LED Lamp
Tested Model	A11PR38150WUL52
Multiple Model	A11PR38150WULXX, DF-PAR11a-1500-120-15-yxx(Where "y" may be "A"-"Z" for different enclosure pattern design; "xx or XX" may be "00" to "99", which designates for different beam angle, color of eyelet contact, package of style, color of enclosure.)
Model Differences	Refer to the DoS letter
Frequency Range	5730MHz-5870MHz
Modulation Technique	CW
Antenna Specification	3.0dBi
Voltage Range	AC 120V/60Hz
Date of Test	2021-10-01 to 2021-11-01
Sample serial number	RXM210827050 (Assigned by ATC, Shenzhen)
Received date	2021-08-27
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

For Radiated Emissions testing, please refer to DA 00-705 Released March 30, 2000, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz- 18GHz	4.98dB
	18GHz- 26.5GHz	5.06dB
	26.5GHz- 40GHz	4.72dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A-2.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing by manufacturer.

Sweep frequency range: 5730~5870MHz

Low channel: 5730MHz; Middle channel: 5800MHz; High channel: 5870MHz

EUT Exercise Software

EUT was test in test mode configured for testing by manufacturer and power level is default*.

Equipment Modifications

No modifications were made to the unit tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

Support Cable Descriptions

Cable Description	Length (m)	From/Port	To
Un-shielding Un-Detachable AC Cable	1.2	LISN	Receptacle
Un-shielding Detachable AC Cable	1.7	Receptacle	EUT

Block Diagram of Test Setup

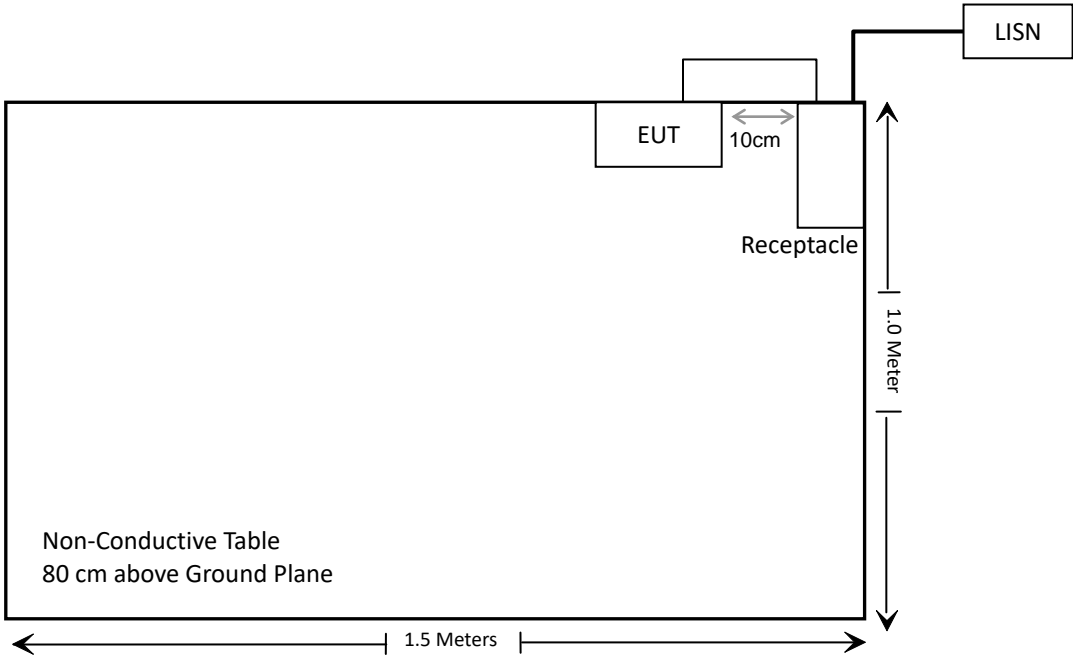

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	Conduction Emissions	Compliant
15.205, §15.209, §15.249(d)	Radiated Emissions& Outside of Band Emission	Compliant
§15.215 (c)	20 dB Bandwidth	Compliant

Test Equipment List

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	Test Receiver	ESPI3	100396	2020/12/24	2021/12/23
R & S	L.I.S.N.	ENV216	101314	2020/12/25	2021/12/24
Anritsu Corp	50ΩCoaxial Switch	MP59B	6200506474	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-2m	No.2	2020/12/25	2021/12/24
Rohde & Schwarz	Test Software	ES-K1	V1.71	NCR	NCR
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	101817	2020/12/24	2021/12/23
Rohde&Schwarz	Spectrum Analyzer	FSV40	101495	2020/12/24	2021/12/23
SONOMA INSTRUMENT	Amplifier	310 N	186131	2020/12/25	2021/12/24
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2021/07/08	2022/07/07
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2020/11/28	2021/11/27
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2020/12/25	2021/12/24
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
OREGON SCIENTIFIC	Temperature & Humidity Meter	JB913R	GZ-WS004	2021/01/02	2022/01/01
FARAD	Test Software	EZ_EMCC	V1.1.4.2	NCR	NCR
Unknown	RF Coaxial Cable	N-5m	No.3	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-5m	No.4	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.5	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.6	2020/12/25	2021/12/24
CD	Band Reject Filter	BRM-5.725/5. 875G-45	065	2020/12/25	2021/12/24
CD	High Pass Filter	HPM-8.0/18G -60	020	2020/12/25	2021/12/24

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna which was permanently attached and the antenna gain is 3dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC §15.207

EUT Setup

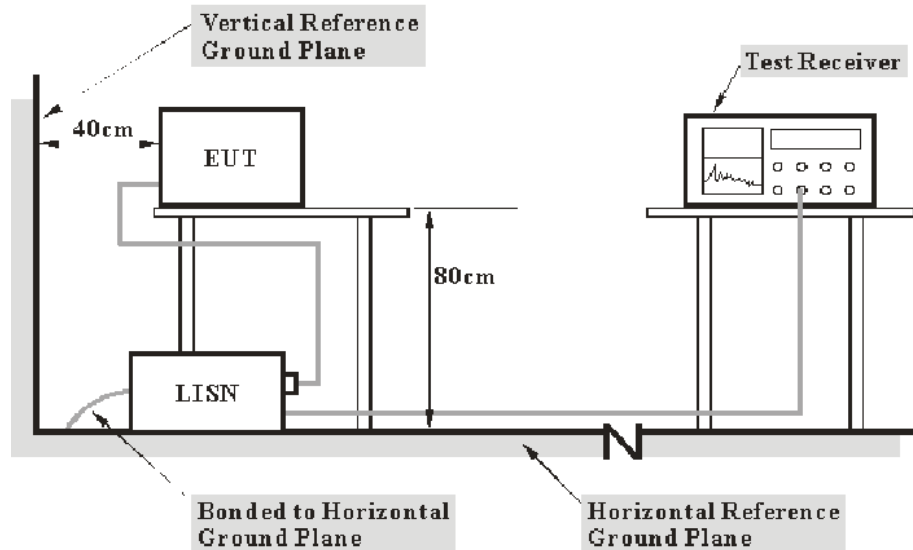

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with per ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the EUT complied with the FCC Part 15.207,

Test Data

Environmental Conditions


Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Anny on 2021-10-13.

EUT Operation Mode: Transmitting

Low channel:

AC 120V/60 Hz, Line

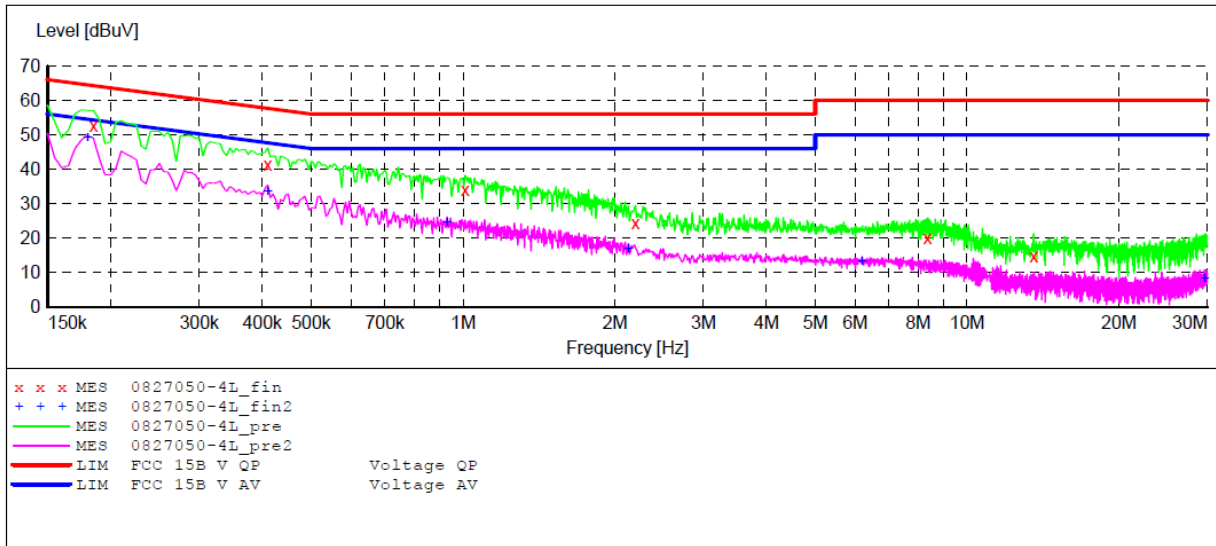

MEASUREMENT RESULT: "0827050-4L_fin"

2021-10-13 10:27


Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.185000	52.70	10.8	64	11.3	QP	L1	GND
0.410000	41.20	11.0	58	16.8	QP	L1	GND
1.010000	34.10	11.1	56	21.9	QP	L1	GND
2.200000	24.40	11.3	56	31.6	QP	L1	GND
8.360000	20.00	11.5	60	40.0	QP	L1	GND
13.550000	14.90	11.6	60	45.1	QP	L1	GND

MEASUREMENT RESULT: "0827050-4L_fin2"

2021-10-13 10:27

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.180000	49.40	10.8	55	5.6	AV	L1	GND
0.410000	33.60	11.0	48	14.4	AV	L1	GND
0.930000	24.60	11.1	46	21.4	AV	L1	GND
2.130000	17.20	11.3	46	28.8	AV	L1	GND
6.190000	13.40	11.5	50	36.6	AV	L1	GND
29.600000	8.30	11.8	50	41.7	AV	L1	GND

AC 120V/60 Hz, Neutral

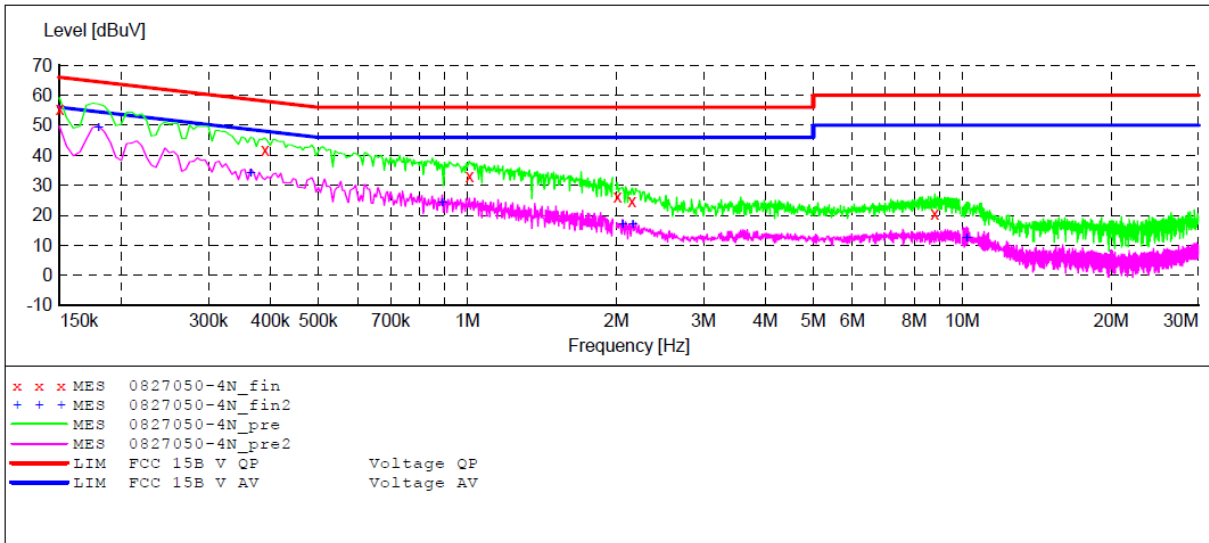

MEASUREMENT RESULT: "0827050-4N_fin"

2021-10-13 10:23

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	55.60	10.8	66	10.4	QP	N	GND
0.390000	41.70	11.0	58	16.3	QP	N	GND
1.010000	33.10	11.1	56	22.9	QP	N	GND
2.010000	26.30	11.3	56	29.7	QP	N	GND
2.150000	24.70	11.3	56	31.3	QP	N	GND
8.800000	20.70	11.5	60	39.3	QP	N	GND


MEASUREMENT RESULT: "0827050-4N_fin2"

2021-10-13 10:23

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.180000	49.40	10.8	55	5.6	AV	N	GND
0.365000	34.10	10.9	49	14.9	AV	N	GND
0.890000	24.50	11.1	46	21.5	AV	N	GND
2.060000	17.20	11.3	46	28.8	AV	N	GND
2.160000	17.00	11.3	46	29.0	AV	N	GND
10.200000	12.70	11.6	50	37.3	AV	N	GND

Middle channel:

AC 120V/60 Hz, Line

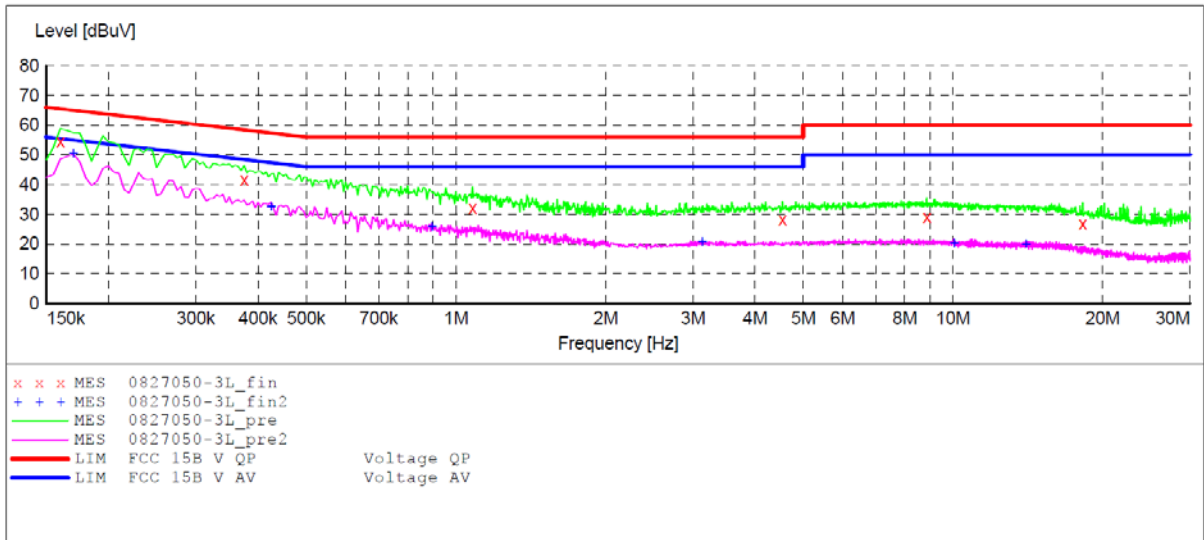

MEASUREMENT RESULT: "0827050-3L_fin"

2021-10-13 10:16


Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.160000	54.60	10.8	66	11.4	QP	L1	GND
0.375000	41.50	10.9	58	16.5	QP	L1	GND
1.080000	32.30	11.1	56	23.7	QP	L1	GND
4.540000	28.10	11.4	56	27.9	QP	L1	GND
8.860000	29.20	11.5	60	30.8	QP	L1	GND
18.250000	26.90	11.7	60	33.1	QP	L1	GND

MEASUREMENT RESULT: "0827050-3L_fin2"

2021-10-13 10:16

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.170000	50.20	10.8	55	4.8	AV	L1	GND
0.425000	32.40	11.0	47	14.6	AV	L1	GND
0.895000	25.70	11.1	46	20.3	AV	L1	GND
3.130000	20.70	11.3	46	25.3	AV	L1	GND
10.050000	20.20	11.6	50	29.8	AV	L1	GND
14.025000	19.80	11.6	50	30.2	AV	L1	GND

AC 120V/60 Hz, Neutral

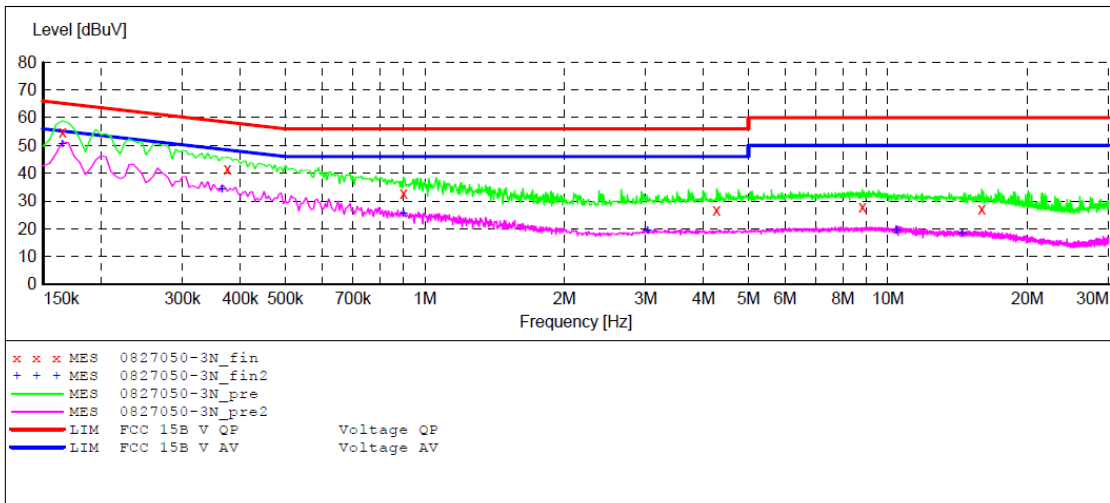

MEASUREMENT RESULT: "0827050-3N_fin"

2021-10-13 10:21

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.165000	54.80	10.8	65	10.2	QP	N	GND
0.375000	41.50	10.9	58	16.5	QP	N	GND
0.900000	32.90	11.1	56	23.1	QP	N	GND
4.270000	26.70	11.4	56	29.3	QP	N	GND
8.820000	28.00	11.5	60	32.0	QP	N	GND
15.950000	27.20	11.7	60	32.8	QP	N	GND


MEASUREMENT RESULT: "0827050-3N_fin2"

2021-10-13 10:20

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.165000	50.50	10.8	55	4.5	AV	N	GND
0.365000	34.50	10.9	49	14.5	AV	N	GND
0.900000	25.70	11.1	46	20.3	AV	N	GND
3.030000	19.40	11.3	46	26.6	AV	N	GND
10.425000	19.50	11.6	50	30.5	AV	N	GND
14.475000	18.30	11.6	50	31.7	AV	N	GND

High channel:

AC 120V/60 Hz, Line

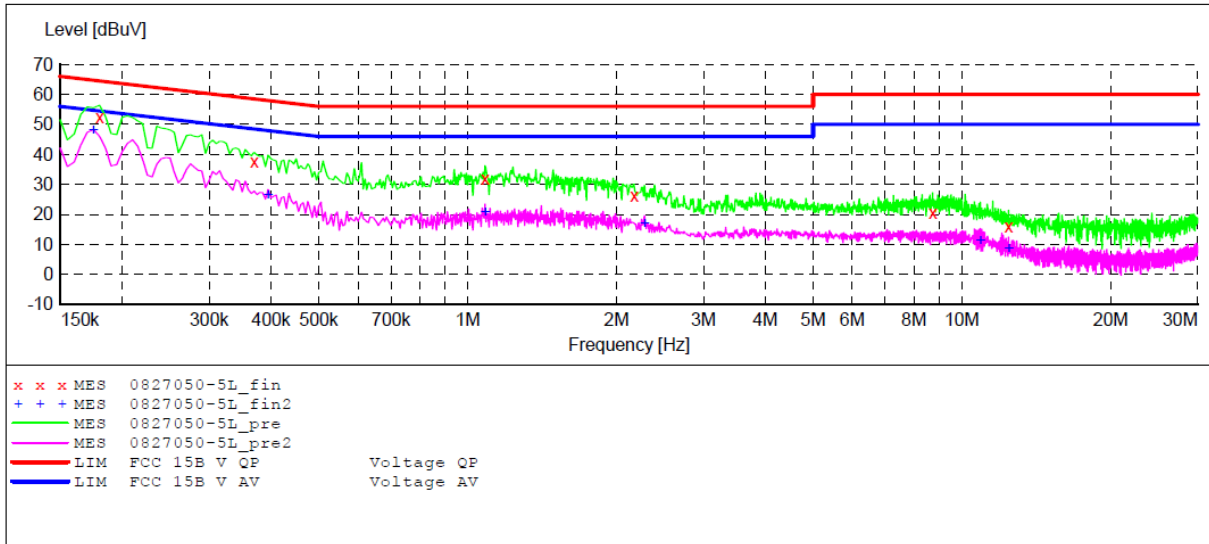

MEASUREMENT RESULT: "0827050-5L_fin"

2021-10-13 10:31


Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.180000	52.30	10.8	65	12.7	QP	L1	GND
0.370000	37.50	10.9	59	21.5	QP	L1	GND
1.085000	31.80	11.1	56	24.2	QP	L1	GND
2.170000	26.10	11.3	56	29.9	QP	L1	GND
8.730000	20.50	11.5	60	39.5	QP	L1	GND
12.425000	16.00	11.6	60	44.0	QP	L1	GND

MEASUREMENT RESULT: "0827050-5L_fin2"

2021-10-13 10:31

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.175000	48.40	10.8	55	6.6	AV	L1	GND
0.395000	26.70	11.0	48	21.3	AV	L1	GND
1.085000	21.10	11.1	46	24.9	AV	L1	GND
2.280000	17.30	11.3	46	28.7	AV	L1	GND
10.900000	11.50	11.6	50	38.5	AV	L1	GND
12.425000	8.70	11.6	50	41.3	AV	L1	GND

AC 120V/60 Hz, Neutral

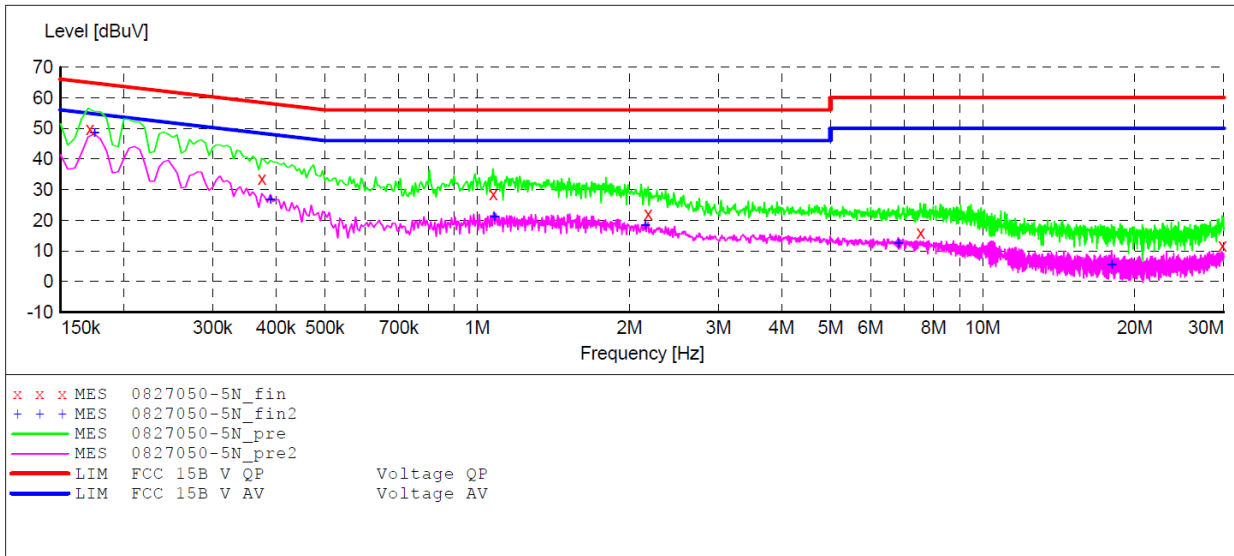

MEASUREMENT RESULT: "0827050-5N_fin"

2021-10-13 10:33

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.170000	48.65	10.8	65	6.35	QP	N	GND
0.375000	37.10	10.9	58	20.9	QP	N	GND
1.075000	32.00	11.1	56	24.0	QP	N	GND
2.180000	25.50	11.3	56	30.5	QP	N	GND
7.530000	19.50	11.5	60	40.5	QP	N	GND
29.775000	15.20	11.8	60	44.8	QP	N	GND

MEASUREMENT RESULT: "0827050-5N_fin2"

2021-10-13 10:33

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.175000	48.40	10.8	55	6.6	AV	N	GND
0.390000	26.60	11.0	48	21.4	AV	N	GND
1.080000	21.10	11.1	46	24.9	AV	N	GND
2.150000	18.30	11.3	46	27.7	AV	N	GND
6.810000	12.40	11.5	50	37.6	AV	N	GND
18.000000	5.30	11.7	50	44.7	AV	N	GND

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
The corrected factor has been input into the transducer of the test software.
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit - Corrected Amplitude

FCC§15.205, §15.209 & §15.249(d) - RADIATED EMISSIONS

Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

As per FCC§15.249 (d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Test Equipment Setup

The spectrum analyzer or receiver is set as:

Below 1000MHz:


$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000MHz:


$$\begin{aligned} \text{Peak: RBW} &= 1\text{MHz} / \text{VBW} = 1\text{MHz} / \text{Sweep} = \text{Auto} \\ \text{Average: RBW} &= 1\text{MHz} / \text{VBW} = 10\text{Hz} / \text{Sweep} = \text{Auto} \end{aligned}$$

EUT Setup

Below 1GHz:

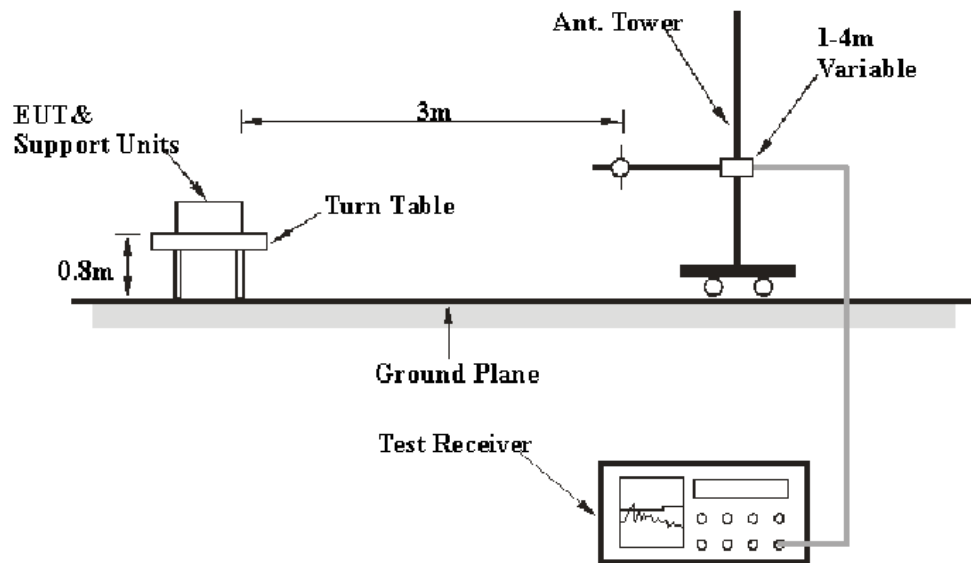

Above 1GHz:

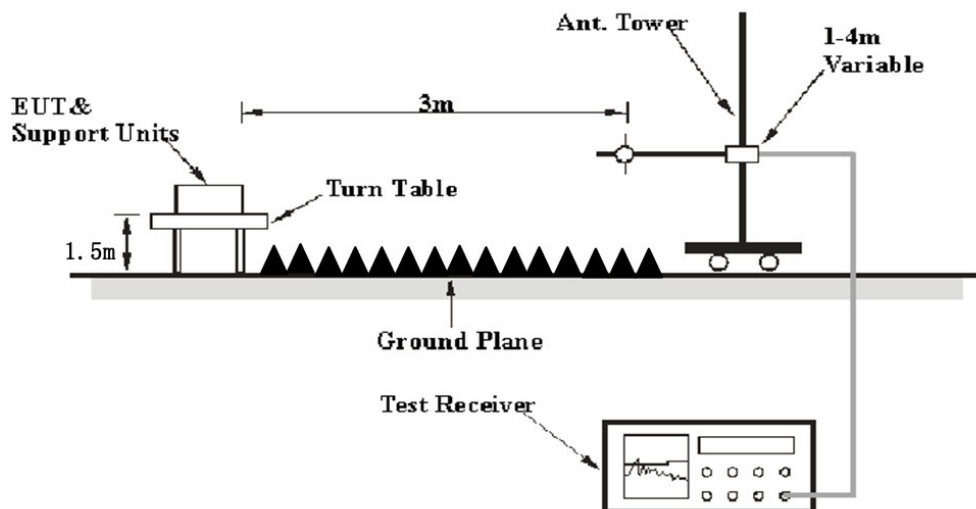

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter above ground plane for below 1GHz or 1.5 meter for above 1GHz, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} / \text{Result} - \text{Limit}$$

Test Results Summary

According to the EUT complied with the FCC Part 15.205, 15.209 & §15.249

Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	48 %
ATM Pressure:	100.9 kPa


The testing was performed by Ting Lv on 2021-10-01 and 2021-10-08.

Test Mode: Transmitting


30MHz-1GHz:

Low Channel:

Horizontal

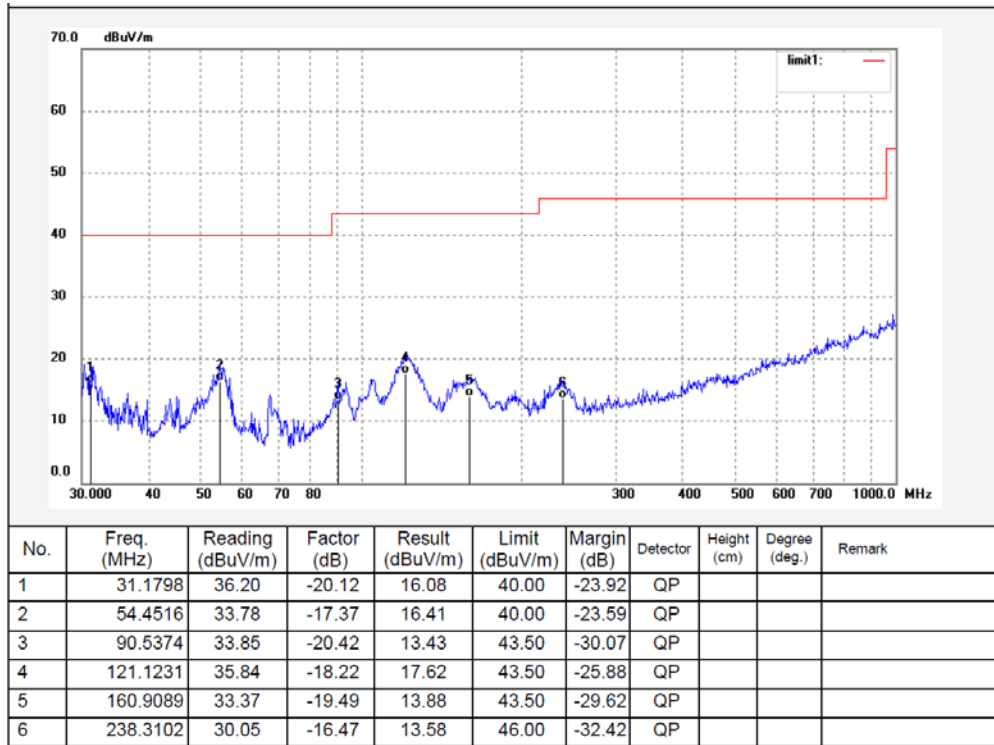


Vertical

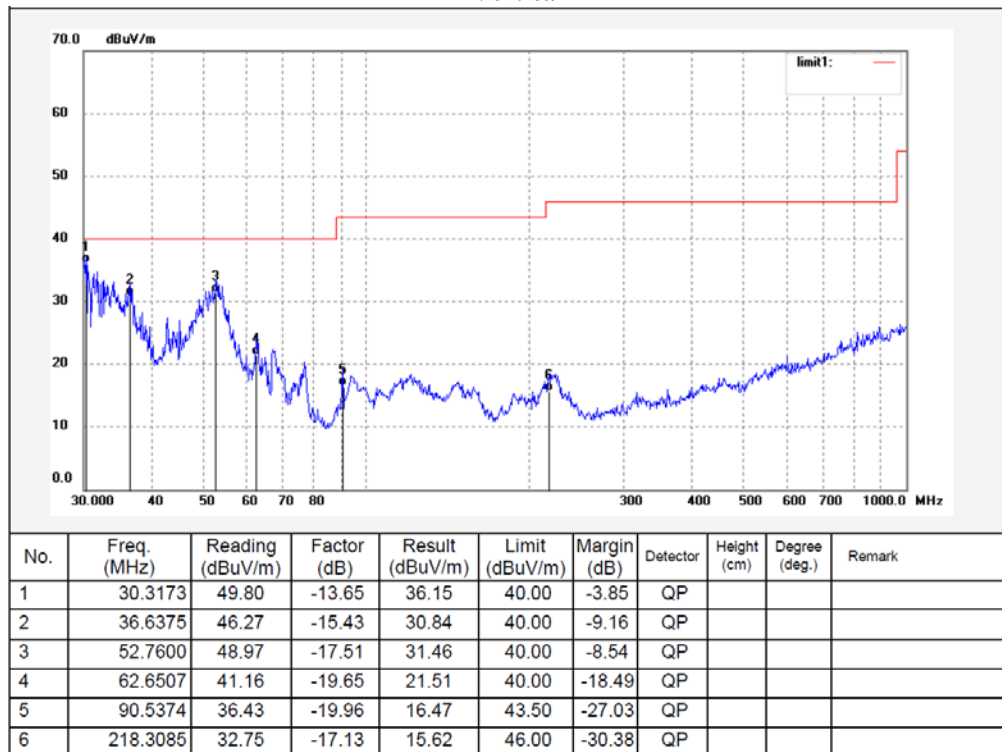


Middle Channel

Horizontal

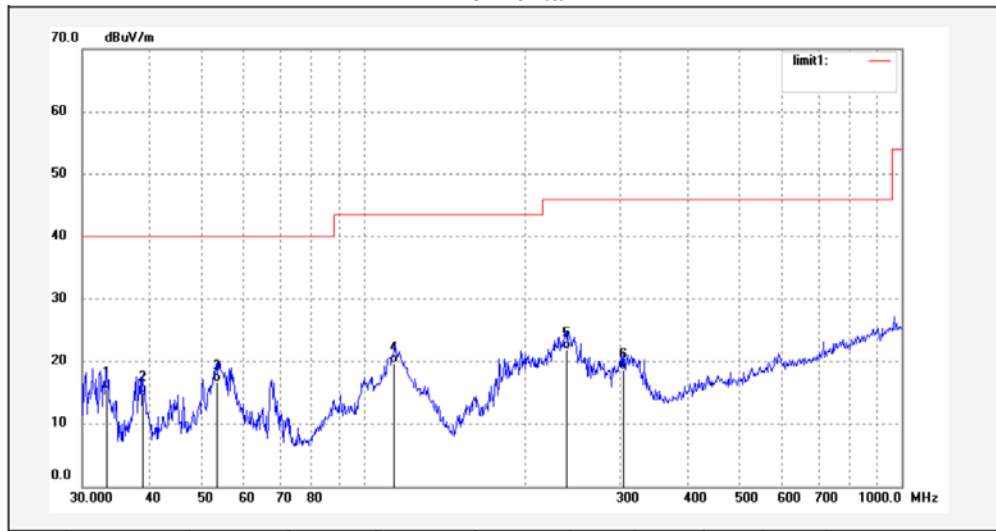

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.3279	35.66	-19.99	15.67	40.00	-24.33	QP			
2	38.8878	33.50	-18.59	14.91	40.00	-25.09	QP			
3	53.3179	34.10	-17.30	16.80	40.00	-23.20	QP			
4	114.1138	37.89	-18.25	19.64	43.50	-23.86	QP			
5	238.3102	38.45	-16.47	21.98	46.00	-24.02	QP			
6	303.5437	33.15	-14.50	18.65	46.00	-27.35	QP			


Vertical

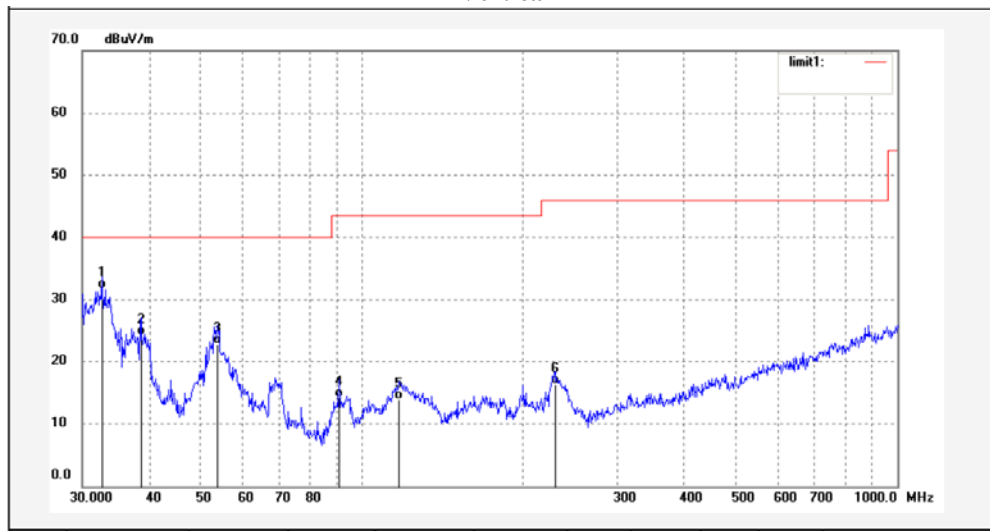


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	32.6340	46.04	-14.34	31.70	40.00	-8.30	QP			
2	38.6160	40.12	-15.88	24.24	40.00	-15.76	QP			
3	53.6932	40.38	-17.58	22.80	40.00	-17.20	QP			
4	90.5374	34.28	-19.96	14.32	43.50	-29.18	QP			
5	116.9495	32.05	-18.10	13.95	43.50	-29.55	QP			
6	229.2931	33.22	-16.80	16.42	46.00	-29.58	QP			

High Channel:

Horizontal

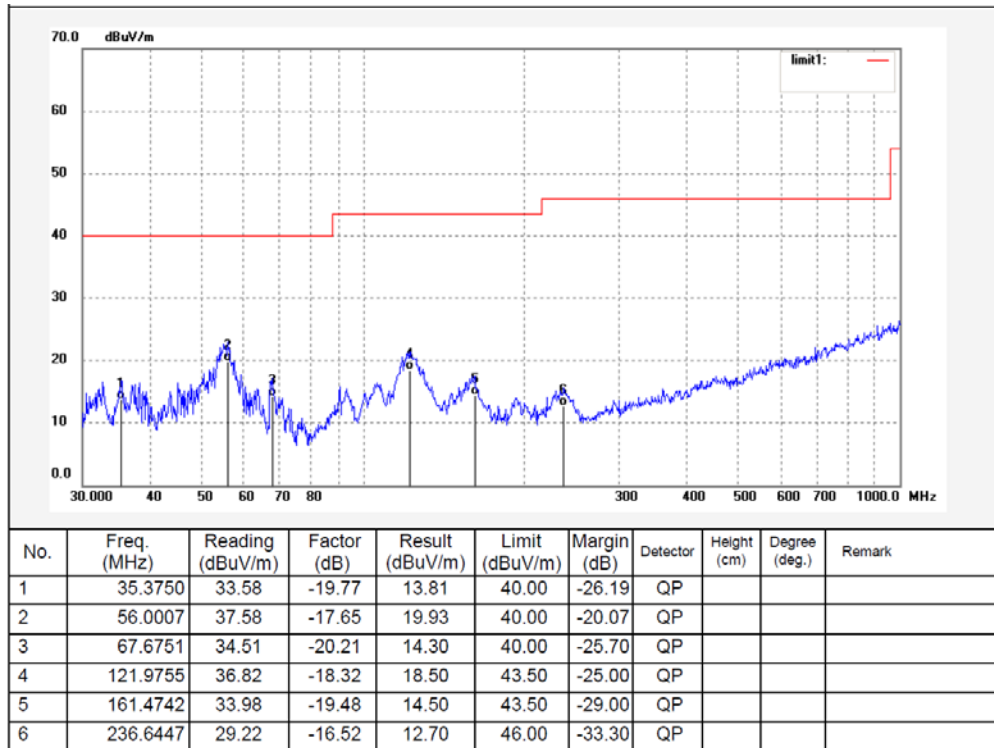

Vertical

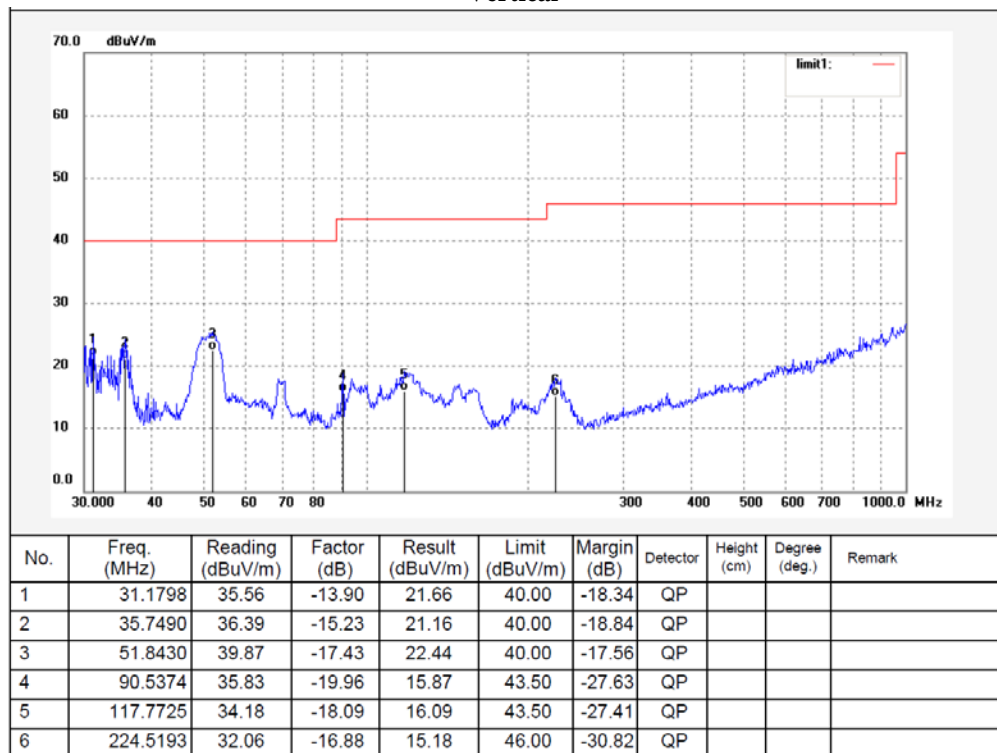

1-40 GHz:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected. Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel (5730 MHz)									
5730	83.49	PK	264	2.1	H	3.98	87.47	114	-26.53
5730	71.33	AVG	264	2.1	H	3.98	75.31	94	-18.69
5730	82.4	PK	39	2.1	V	3.98	86.38	114	-27.62
5730	71.4	AVG	39	2.1	V	3.98	75.38	94	-18.62
5725	51.8	PK	93	1.5	H	3.97	55.77	74	-18.23
5725	42.01	Ave	93	1.5	H	3.97	45.98	54	-8.02
5725	53	PK	312	1.8	V	3.97	56.97	74	-17.03
5725	43.51	Ave	312	1.8	V	3.97	47.48	54	-6.52
11460	36.42	PK	171	1.6	H	14.87	51.29	74	-22.71
11460	35.17	PK	203	1.8	V	14.87	50.04	74	-23.96
Middle Channel (5800 MHz)									
5800	83.18	PK	341	1.9	H	4.19	87.37	114	-26.63
5800	71.28	AVG	341	1.9	H	4.19	75.47	94	-18.53
5800	81.68	PK	336	1.3	V	4.19	85.87	114	-28.13
5800	71.65	AVG	336	1.3	V	4.19	75.84	94	-18.16
11600	35.15	PK	82	1.7	H	14.59	49.74	74	-24.26
11600	34.65	PK	116	1.8	V	14.59	49.24	74	-24.76
High Channel (5870 MHz)									
5870	83.96	PK	11	1.8	H	4.39	88.35	114	-25.65
5870	71.96	AVG	11	1.8	H	4.39	76.35	94	-17.65
5870	81.77	PK	110	2.0	V	4.39	86.16	114	-27.84
5870	70.98	AVG	110	2.0	V	4.39	75.37	94	-18.63
5875	50.96	PK	111	1.2	H	4.41	55.37	74	-18.63
5875	41.18	Ave	111	1.2	H	4.41	45.59	54	-8.41
5875	51.96	PK	209	1.5	V	4.41	56.37	74	-17.63
5875	42.65	Ave	209	1.5	V	4.41	47.06	54	-6.94
11740	35.23	PK	223	2.1	H	14.36	49.59	74	-24.41
11740	35.73	PK	139	1.5	V	14.36	50.09	74	-23.91

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is 20dB to the limit was not recorded.


The test result of peak was less than the limit of average, so just peak values were recorded.

18~40GHz: The test values lower than the limits of 20dB or in the noise floor level, the test data were not recorded in the report.


**Pre-scan with high channel Peak
1-18GHz
Horizontal**

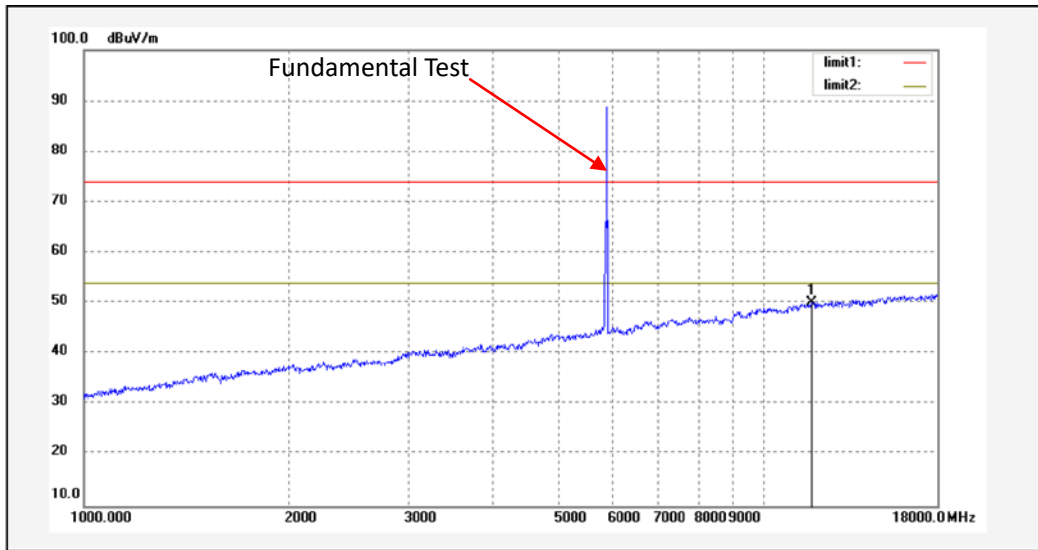


Vertical

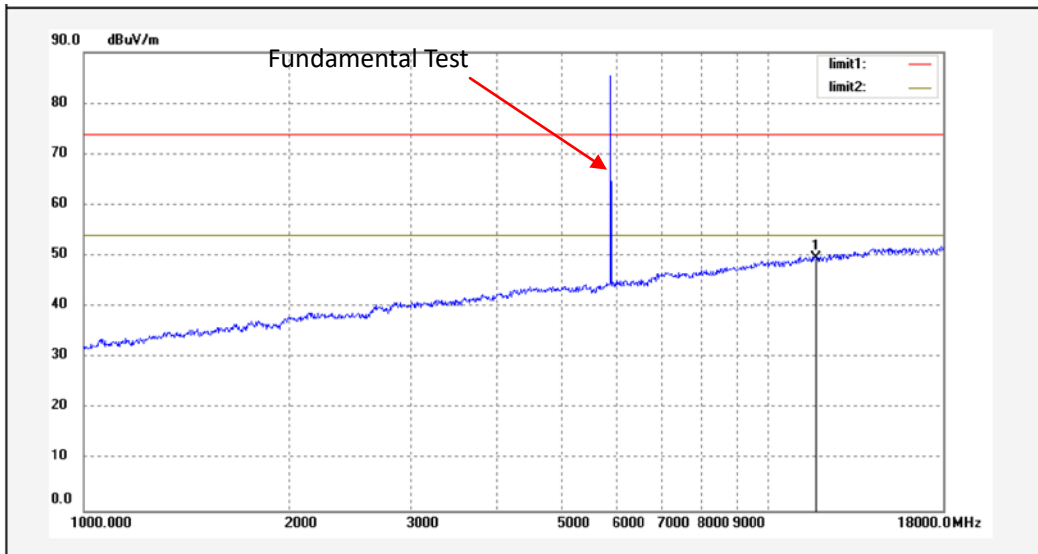


18-25GHz
Horizontal

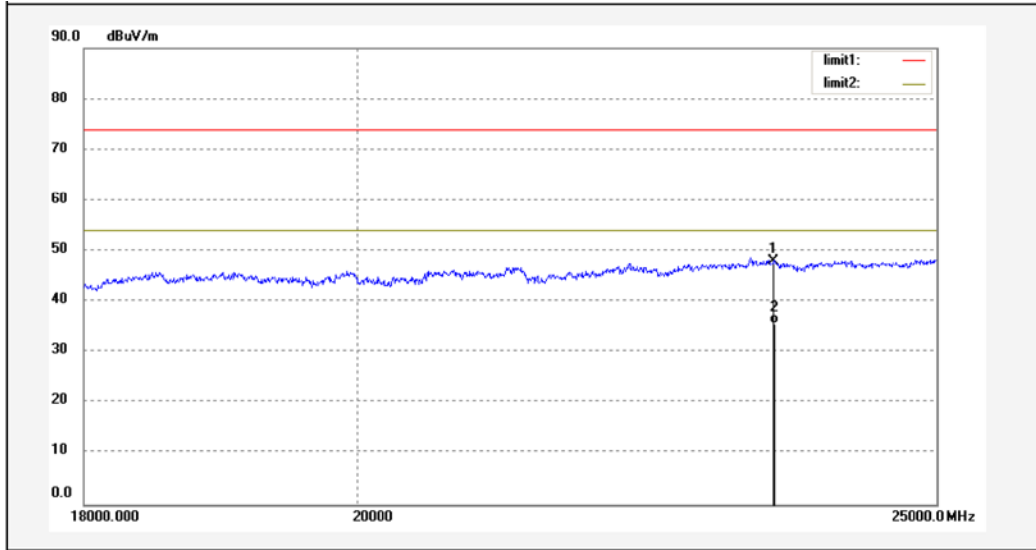


Vertical

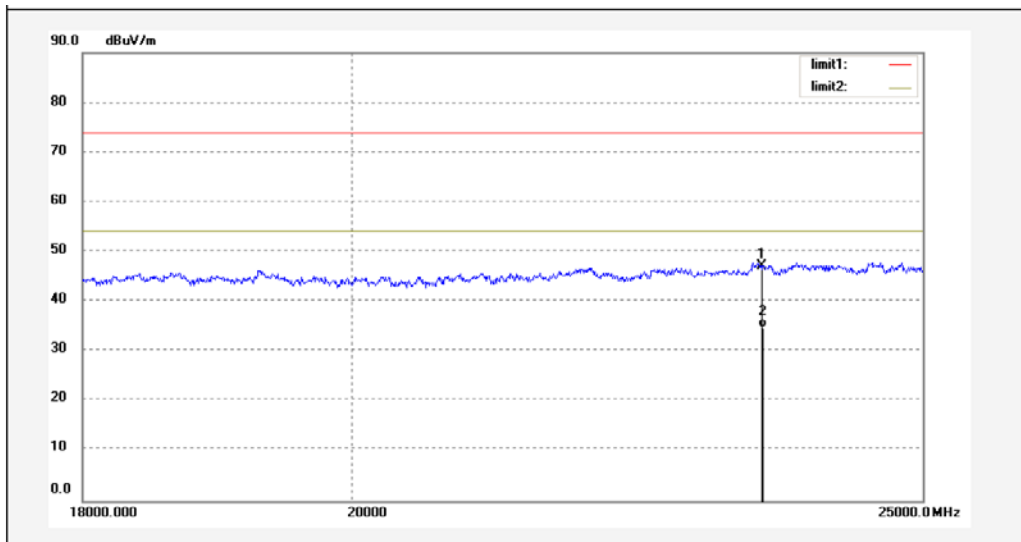

25-40GHz Horizontal

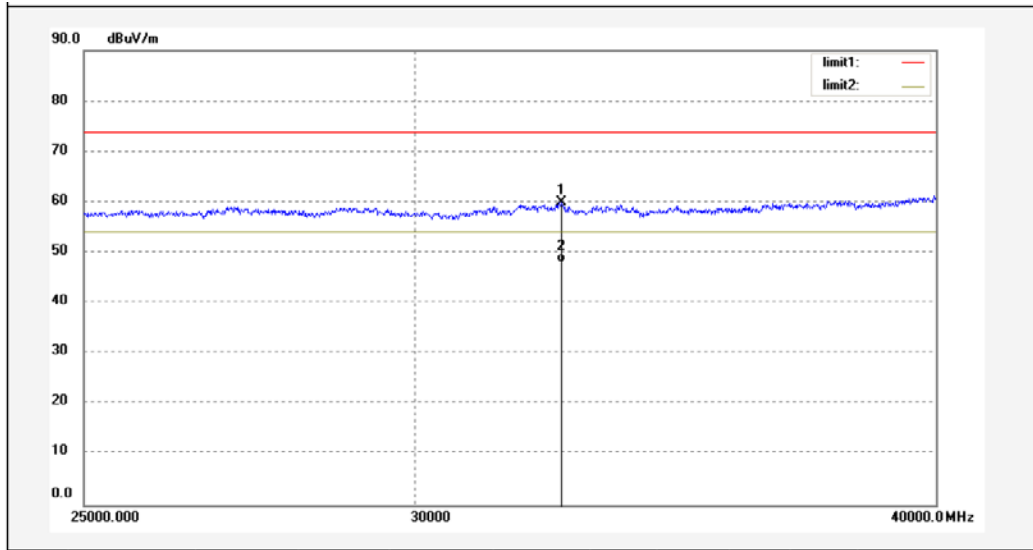

Vertical

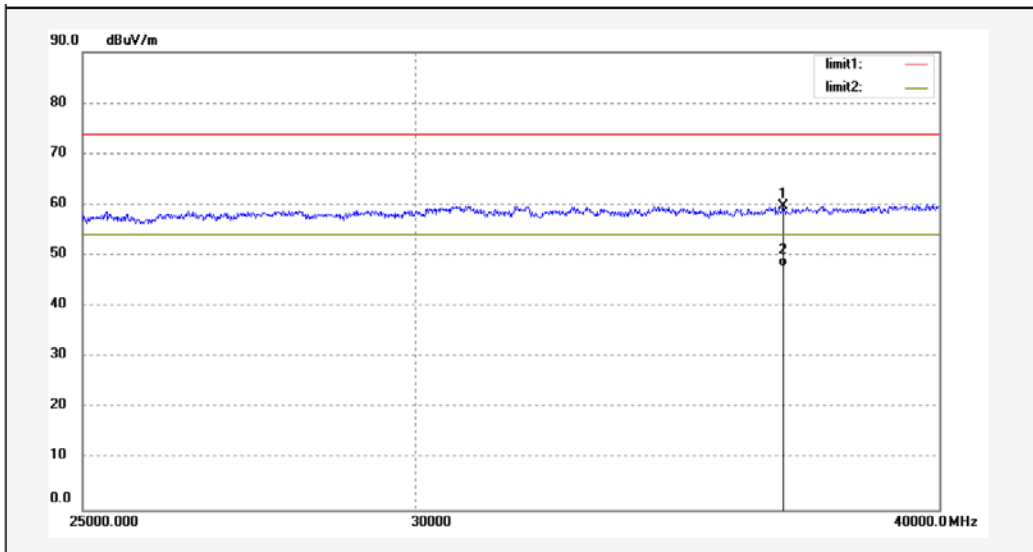

FCC§15.215(c) - 20dB EMISSION BANDWIDTH

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that indicated 20dB bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25.8 °C
Relative Humidity:	47 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting Lv on 2021-10-15 and 2021-11-01.


Test Mode: Transmitting

Please refer to the following table and plots.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	5730	0.787
Middle	5800	0.822
High	5870	0.944


Mode	20dB Bandwidth (MHz)
Swept-frequency	141.45

Low Channel

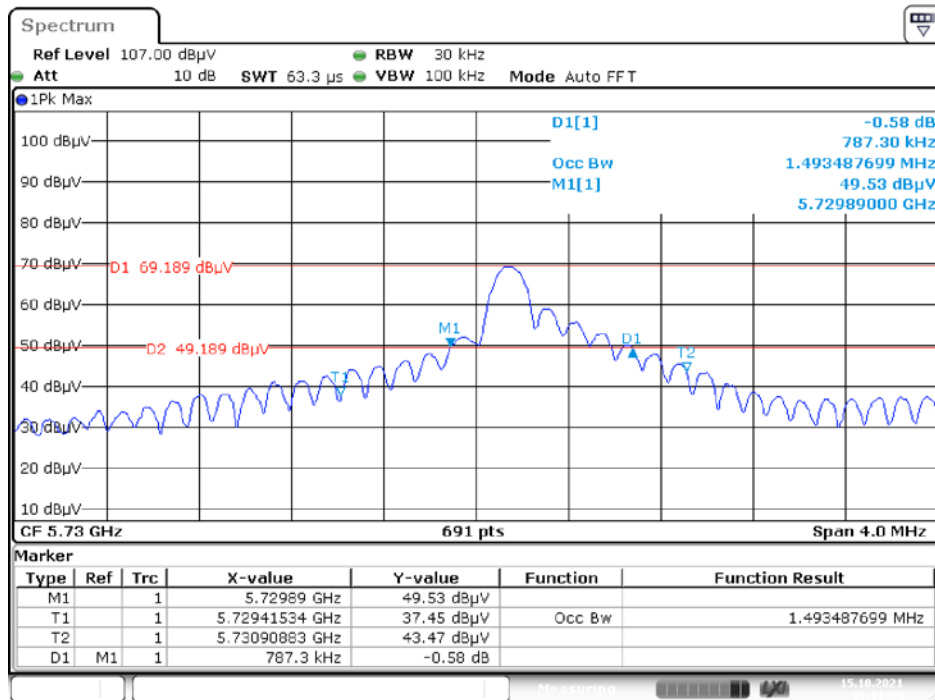


Date: 15.OCT.2021 19:11:34

Middle Channel

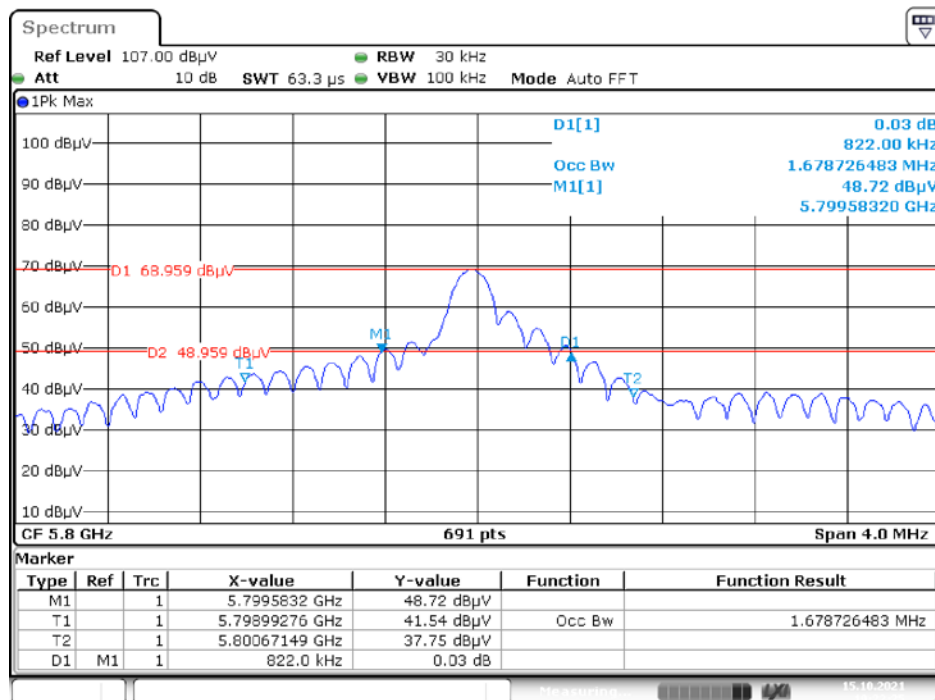


Date: 15.OCT.2021 19:22:25

High Channel

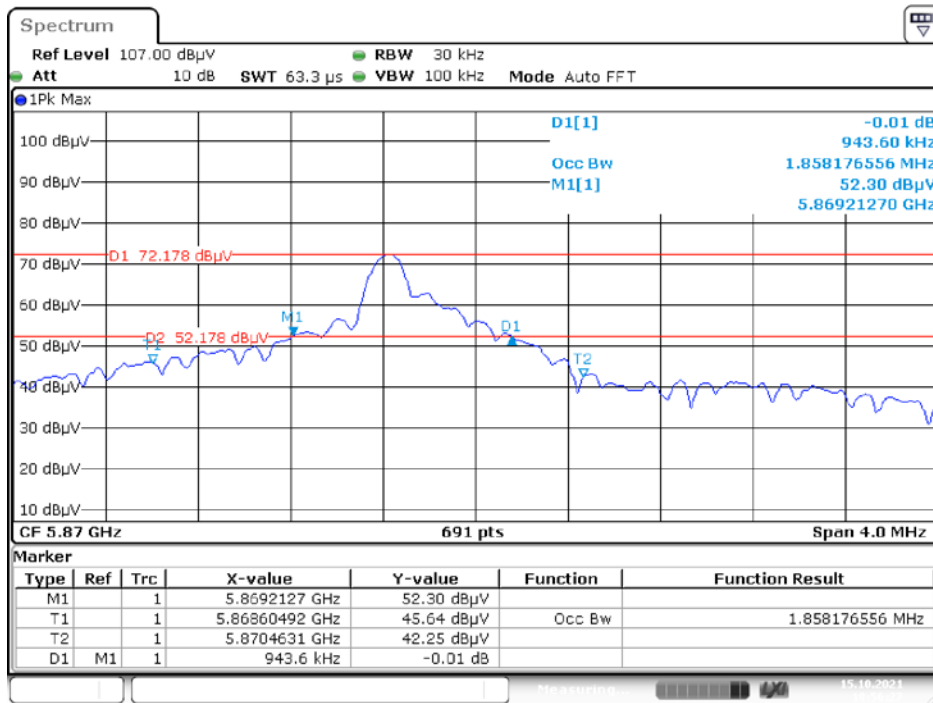

Date: 15.OCT.2021 18:56:27

Swept-frequency mode

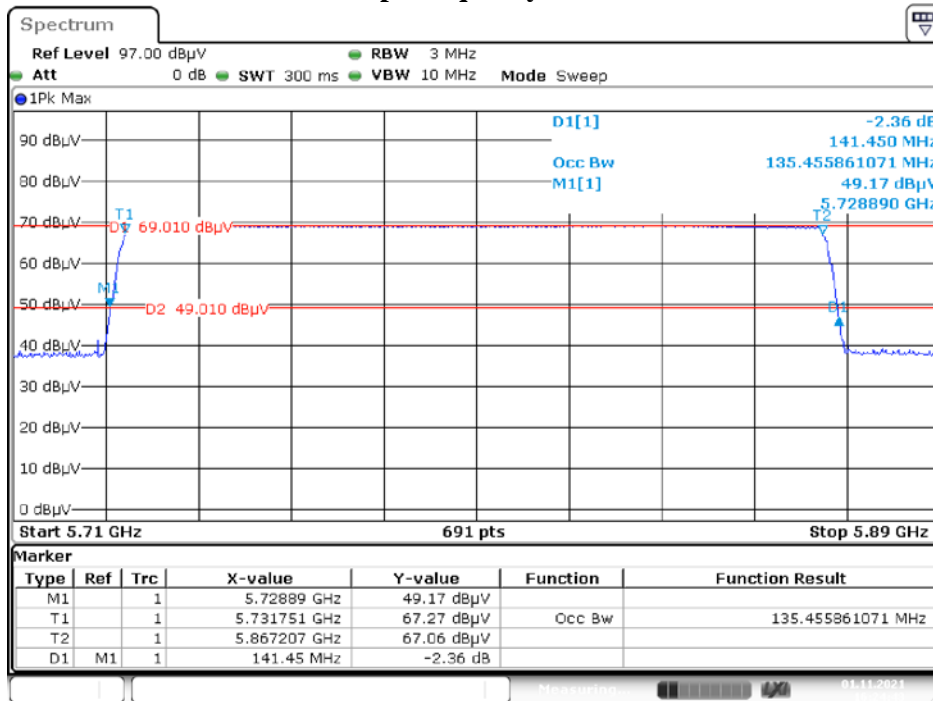

Date: 1.NOV.2021 16:24:43

***** END OF REPORT *****