

FCC

RF

TEST REPORT


ISSUED BY  
Shenzhen BALUN Technology Co., Ltd.



FOR  
**ECS DL Spkbulb**

ISSUED TO  
LEEDARSON LIGHTING CO., LTD.

Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou,  
Fujian, China

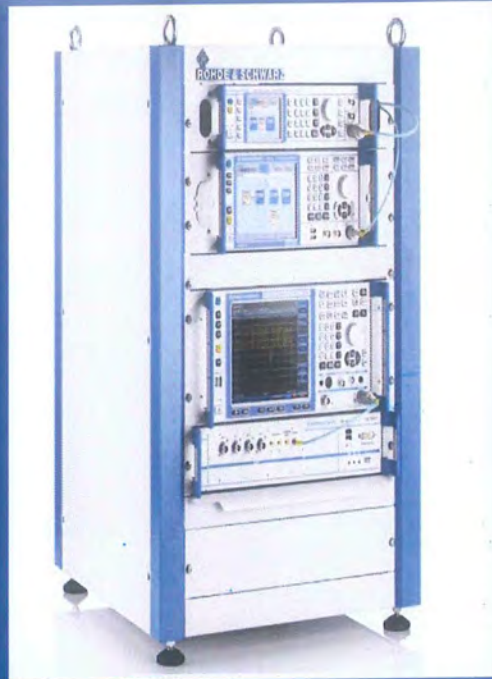

Tested by:

*Cao Shaocong*

Cao Shaocong  
(Engineer)

Date

*Mar. 27, 2017*

Approved by:

*Wei Yanquan*

Wei Yanquan  
(Chief Engineer)

Date

*Mar. 27, 2017*



Report No.: BL-SZ1730119-601

EUT Name: ECS DL Spkbulb

Model Name: DL-N35A13FR1-27

Brand Name: LEEDARSON

Test Standard: 47 CFR Part 15 Subpart C

FCC ID: 2AB2QDL-N35A13FR1

Test conclusion: Pass

Test Date: Mar. 08, 2017 ~ Mar. 17, 2017

Date of Issue: Mar. 27, 2017

*NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please visit BALUN website.*

### Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
Rev. 01	Mar. 23, 2017	Initial Issue
Rev. 02	Mar. 27, 2017	Updated the antenna position in the internal photo and update the network and wireless connectivity.

## TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION).....	6
1.1	Identification of the Testing Laboratory.....	6
1.2	Identification of the Responsible Testing Location.....	6
1.3	Laboratory Condition.....	6
1.4	Announce.....	6
2	PRODUCT INFORMATION.....	7
2.1	Applicant Information.....	7
2.2	Manufacturer Information.....	7
2.3	Factory Information.....	7
2.4	General Description for Equipment under Test (EUT).....	7
2.5	Ancillary Equipment.....	7
2.6	Technical Information.....	8
2.7	Additional Instructions.....	9
3	SUMMARY OF TEST RESULTS.....	10
3.1	Test Standards.....	10
3.2	Verdict.....	10
4	GENERAL TEST CONFIGURATIONS.....	11
4.1	Test Environments.....	11
4.2	Test Equipment List.....	11
4.3	Measurement Uncertainty.....	13
4.4	Description of Test Setup.....	13
4.4.1	For Antenna Port Test.....	13
4.4.2	For AC Power Supply Port Test.....	14
4.4.3	For Radiated Test (Below 30 MHz).....	14
4.4.4	For Radiated Test (30 MHz-1 GHz).....	15

4.4.5	For Radiated Test (Above 1 GHz).....	15
4.5	Measurement Results Explanation Example.....	16
4.5.1	For conducted test items:.....	16
4.5.2	For radiated band edges and spurious emission test:.....	16
5	TEST ITEMS.....	17
5.1	Antenna Requirements.....	17
5.1.1	Standard Applicable.....	17
5.1.2	Antenna Anti-Replacement Construction.....	17
5.1.3	Antenna Gain.....	18
5.2	Number of Hopping Frequencies.....	19
5.2.1	Limit.....	19
5.2.2	Test Setup.....	19
5.2.3	Test Procedure.....	19
5.2.4	Test Result.....	19
5.3	Peak Output Power and E.I.R.P.....	20
5.3.1	Test Limit.....	20
5.3.2	Test Setup.....	20
5.3.3	Test Procedure.....	20
5.3.4	Test Result.....	20
5.4	Occupied Bandwidth.....	21
5.4.1	Limit.....	21
5.4.2	Test Setup.....	21
5.4.3	Test Procedure.....	21
5.4.4	Test Result.....	21
5.5	Carrier Frequency Separation.....	22
5.5.1	Limit.....	22
5.5.2	Test Setup.....	22
5.5.3	Test Procedure.....	22
5.5.4	Test Result.....	22
5.6	Time of Occupancy (Dwell time).....	23
5.6.1	Limit.....	23
5.6.2	Test Setup.....	23

5.6.3	Test Procedure.....	23
5.6.4	Test Result.....	23
5.7	Conducted Spurious Emission & Authorized-band band-edge.....	24
5.7.1	Limit.....	24
5.7.2	Test Setup.....	24
5.7.3	Test Procedure.....	24
5.7.4	Test Result.....	24
5.8	Conducted Emission.....	25
5.8.1	Limit.....	25
5.8.2	Test Setup.....	25
5.8.3	Test Procedure.....	25
5.8.4	Test Result.....	25
5.9	Radiated Spurious Emission.....	26
5.9.1	Limit.....	26
5.9.2	Test Setup.....	26
5.9.3	Test Procedure.....	26
5.9.4	Test Result.....	27
5.10	Band Edge (Restricted-band band-edge).....	28
5.10.1	Limit.....	28
5.10.2	Test Setup.....	28
5.10.3	Test Procedure.....	28
5.10.4	Test Result.....	28
ANNEX A	TEST RESULT.....	29
A.1	Number of Hopping Frequency.....	29
A.2	Peak Output Power.....	30
A.3	20 dB and 99% bandwidth.....	33
A.4	Hopping Frequency Separation.....	36
A.5	Average Time of Occupancy.....	37
A.6	Conducted Spurious Emissions & Authorized-band band-edge.....	39
A.7	Conducted Emissions.....	46
A.8	Radiated Spurious Emission.....	48
A.9	Band Edge (Restricted-band band-edge).....	57

ANNEX B TEST SETUP PHOTOS..... 60

ANNEX C EUT EXTERNAL PHOTOS..... 60

ANNEX D EUT INTERNAL PHOTOS..... 60

# 1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

## 1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

## 1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

## 1.3 Laboratory Condition

Ambient Temperature	20 to 25°C
Ambient Relative Humidity	45% - 55%
Ambient Pressure	100 kPa - 102 kPa

## 1.4 Announce

- (1) The test report reference to the report template version v5.6.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	LEEDARSON LIGHTING CO., LTD.	
Address	Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou, Fujian, China	

### 2.2 Manufacturer Information

Manufacturer	LEEDARSON LIGHTING CO., LTD.	
Address	Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou, Fujian, China	

### 2.3 Factory Information

Factory	N/A	
Address	N/A	

### 2.4 General Description for Equipment under Test (EUT)

EUT Type	ECS DL Spkbulb	
Model Name Under Test	DL-N35A13FR1-27	
Series Model Name	DL-N35A13FR1-27, DL-N35A13FR1-yy	
Description of Model name differentiation	The Circuit, PCB Layout, Electrical Parts and Outlook of DL-N35A13FR1-27 are identical to DL-N35A13FR1-yy (Where yy- Replaced by two digital numbers 27~65 to denote Different CCT).	
Hardware Version	1.0	
Software Version	1.0	
Dimensions (Approx.)	N/A	
Weight (Approx.)	N/A	
Network and Wireless connectivity	Bluetooth 2.1 + EDR	

### 2.5 Ancillary Equipment

Ancillary Equipment 1	Rotary Union	
	Length	0.25 m

## 2.6 Technical Information

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	Mobile and portable
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	FPC Antenna
Antenna Gain	4.64 dBi (All involve the antenna gain test item, has been included in the final results)
Antenna System(MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
<b>0</b>	<b>2402</b>	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	<b>78</b>	<b>2480</b>
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	<b>39</b>	<b>2441</b>	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-




## 2.7 Additional Instructions

EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Bluetooth test mode loop back enabled. EUT is controlled over CBT / CMU.
------	---

Power level setup in software			
Mode	Channel	Frequency (MHz)	Soft Set
DH5	CH0	2402	TX LEVEL is built-in set parameters and cannot be changed and selected.
	CH39	2441	
	CH78	2480	
2DH5	CH0	2402	
	CH39	2441	
	CH78	2480	
3DH5	CH0	2402	
	CH39	2441	
	CH78	2480	

Run Software:

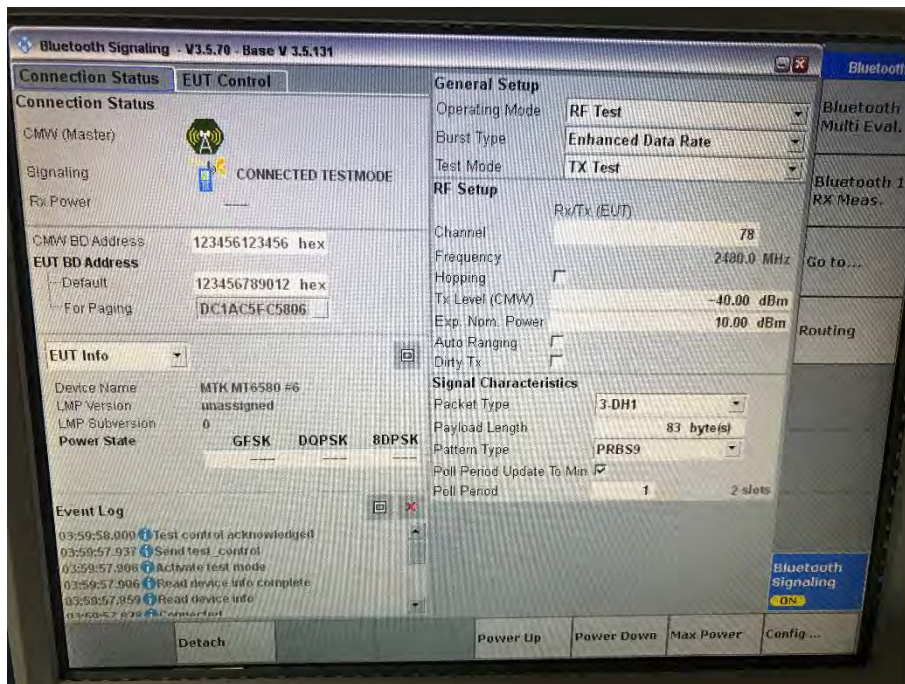

### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-15 Edition)	Miscellaneous Wireless Communications Services
2	FCC PUBLIC NOTICE DA 00-705 (Mar. 30, 2000)	Filling and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

#### 3.2 Verdict

No.	Description	FCC Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	N/A	--	Pass	Note <sup>1</sup>
2	Number of Hopping Frequencies	15.247(a)	Hopping Mode	ANNEX A.1	Pass	Note <sup>2</sup>
3	Peak Output Power	15.247(b)	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	Low/Middle/High	ANNEX A.3	Pass	Note <sup>2</sup>
5	Carrier Frequency Separation	15.247(a)	Hopping Mode	ANNEX A.4	Pass	Note <sup>2</sup>
6	Time of Occupancy (Dwell time)	15.247(a)	Hopping Mode	ANNEX A.5	Pass	Note <sup>2</sup>
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	Low/Middle/High	ANNEX A.6	Pass	Note <sup>2</sup>
8	Conducted Emission	15.207	Low/Middle/High	ANNEX A.7	Pass	Note <sup>2</sup>
9	Radiated Spurious Emission	15.209 15.247(d)	Hopping Mode, Low/Middle/High	ANNEX A.8	Pass	Note <sup>2</sup>
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Hopping Mode, Low/Middle/High	ANNEX A.9	Pass	Note <sup>2</sup>

Note<sup>1</sup>: Please refer to section 5.1

Note<sup>2</sup>: Because of the modulation of  $\Pi/4$ -DQPSK same as 8-DPSK, and the test results are basically the same with them, so we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item

## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% - 55%	
Atmospheric Pressure	100 kPa - 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	120 V

### 4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2016.07.13	2017.07.12
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2016.07.13	2017.07.12
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2016.09.09	2017.09.08
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2016.07.05	2017.07.04
LISN	SCHWARZBECK	NSLK 8127	8127-687	2016.07.05	2017.07.04
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2016.07.13	2017.07.12
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2016.07.13	2017.07.12
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2016.07.13	2017.07.12
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2016.07.13	2017.07.12
Test Antenna-Rod(9 kHz-30 MHz)	SCHWARZBECK	VAMP 9243	9243-556	2016.07.22	2017.07.21
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2015.07.22	2017.07.21
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2015.07.22	2017.07.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2015.07.22	2017.07.21
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2015.07.22	2017.07.21
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2019.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2016.08.09	2018.08.08
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2016.07.13	2017.07.12
Power Amplifier	OPHIR RF	5225F	1037	2017.02.17	2018.02.16
Power Amplifier	OPHIR RF	5273F	1016	2017.02.17	2018.02.16

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Feld Strength Meter	Narda	EP601	511WX5112 9	2017.02.23	2018.02.22
Mouth Simulator	B&K	4227	2423931	2016.11.15	2017.11.14
Sound Calibrator	B&K	4231	2430337	2016.11.09	2017.11.08
Sound Level Meter	B&K	NL-20	00844023	2016.11.11	2017.11.10
Ear Simulator	B&K	4185	2409449	2016.11.15	2017.11.14
Ear Simulator	B&K	4195	2418189	2016.11.15	2017.11.14
Audio analyzer	B&K	UPL 16	100129	2016.11.08	2017.11.07

### 4.3 Measurement Uncertainty


The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Occupied Channel Bandwidth	±4%
RF output power, conducted	±1.4 dB
Power Spectral Density, conducted	±2.5 dB
Unwanted Emissions, conducted	±2.8 dB
All emissions, radiated	±5.4 dB
Temperature	±1°C
Humidity	±4%


### 4.4 Description of Test Setup

#### 4.4.1 For Antenna Port Test

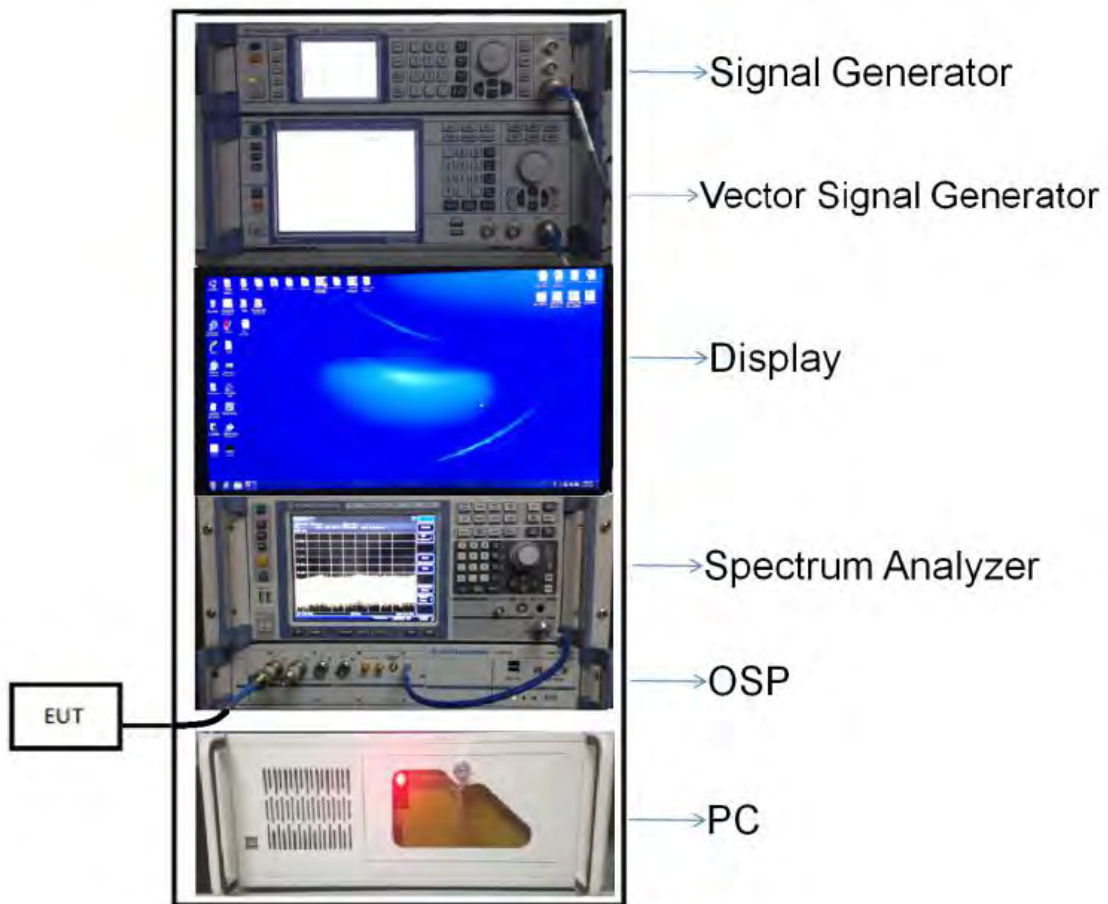


(Diagram 1)

4.4.2 For AC Power Supply Port Test

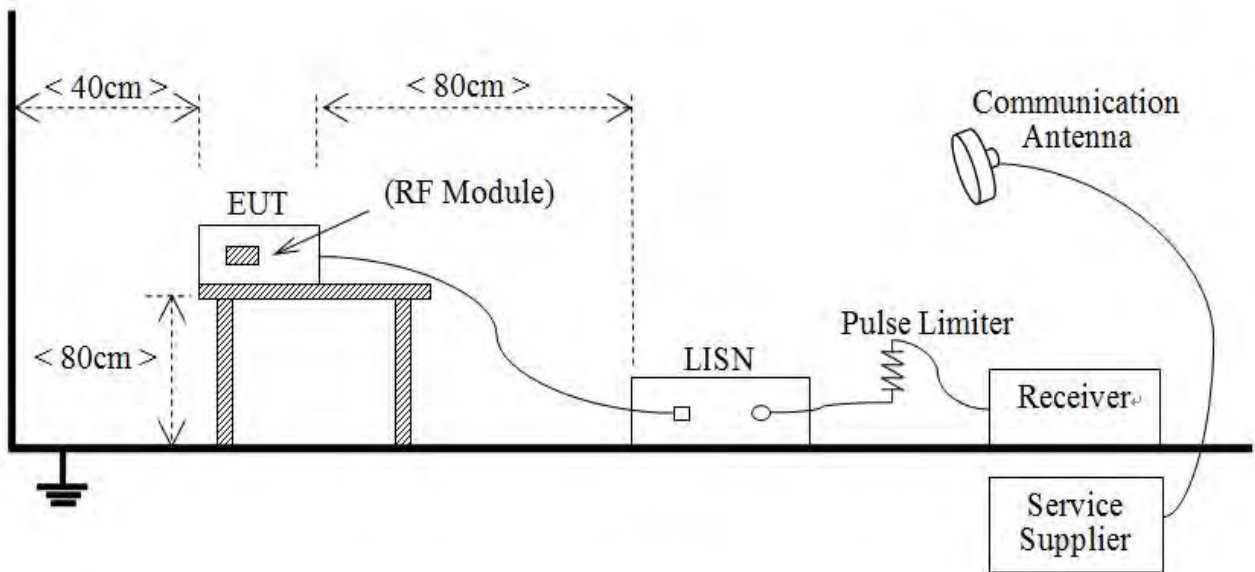


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

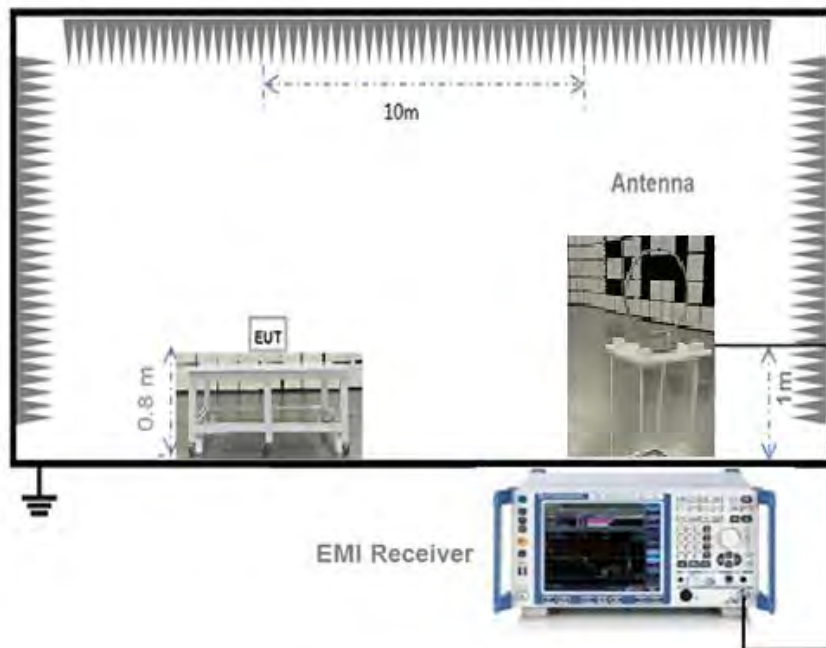


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

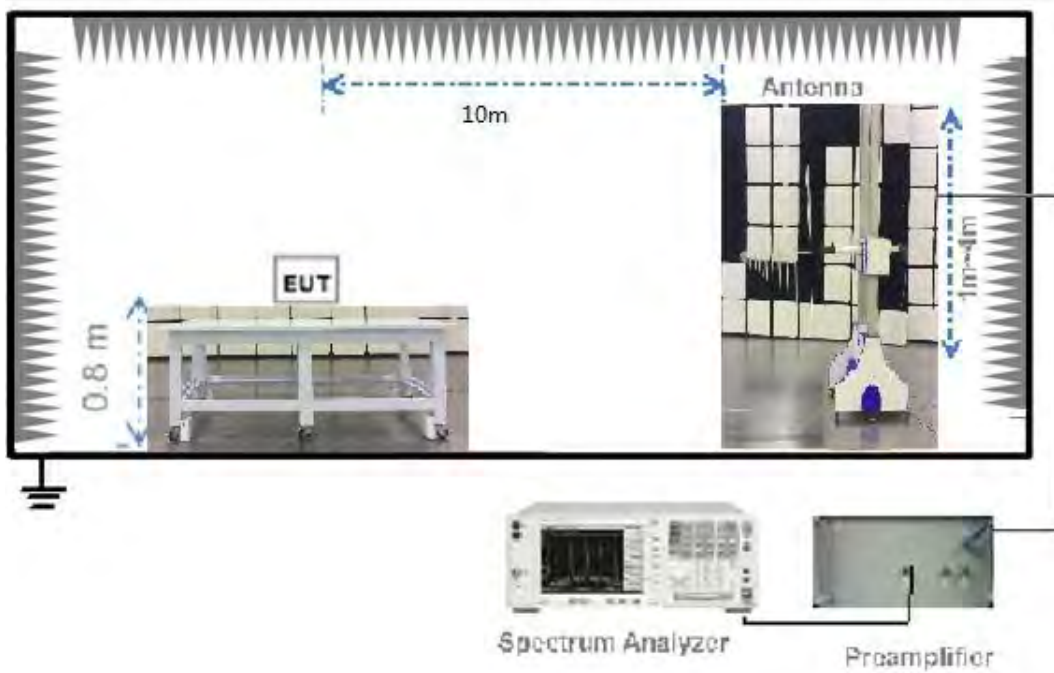

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

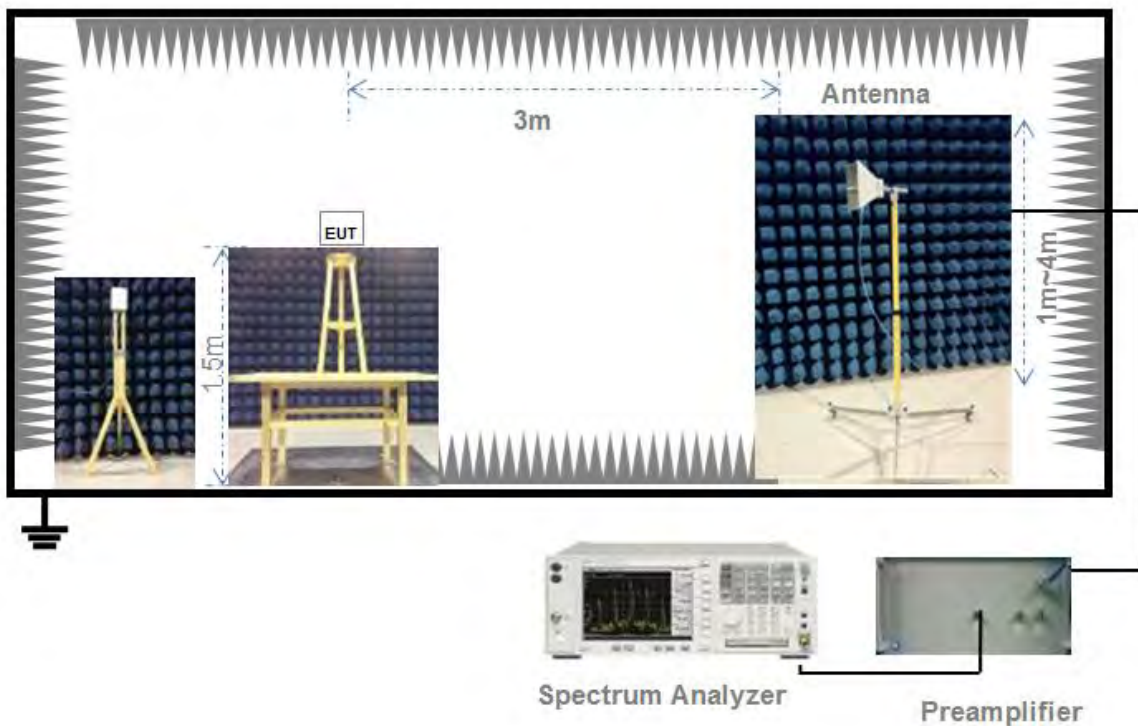

(Diagram 5)

## 4.5 Measurement Results Explanation Example

### 4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

### 4.5.2 For radiated band edges and spurious emission test:

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + Duty cycle correction factor (dB)

Duty cycle correction factor (dB) =  $20 * \log(\text{Duty cycle})$ .

Duty cycle = on time / 100 milliseconds

On time = dwell time \* hopping number in 100 ms

For example: bluetooth with dwell time 2.9 ms and 3 hops in 100 ms, then

Duty cycle correction factor (dB) =  $20 * \log((2.9 * 3) / 100) = -21.21 \text{ dB}$

Following shows an average computation example with duty cycle correction factor = -21.21 dB, and the peak emission level is 45.61 dBuV/m.

Example:

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + duty cycle correction factor (dB)

=  $45.61 + (-21.21) = 24.4 \text{ (dBuV/m)}$



## 5 TEST ITEMS

### 5.1 Antenna Requirements

#### 5.1.1 Standard Applicable

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)



An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

#### 5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
Compliance with 15.203, use of a standard antenna jack or electrical connector is prohibited.	The antenna is the unique connector with a FPC antenna.

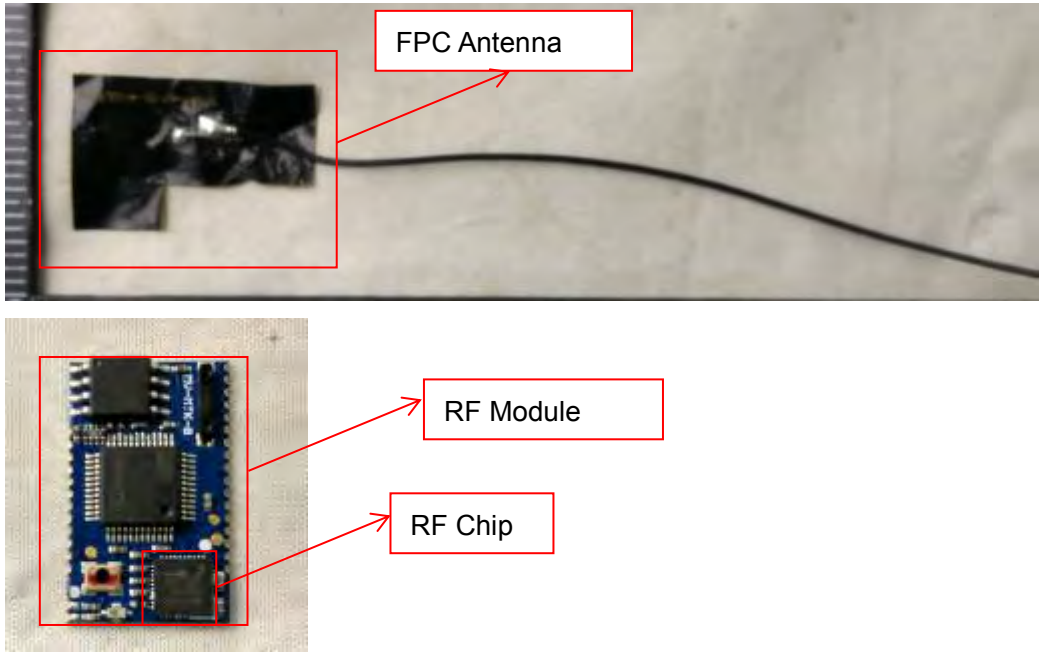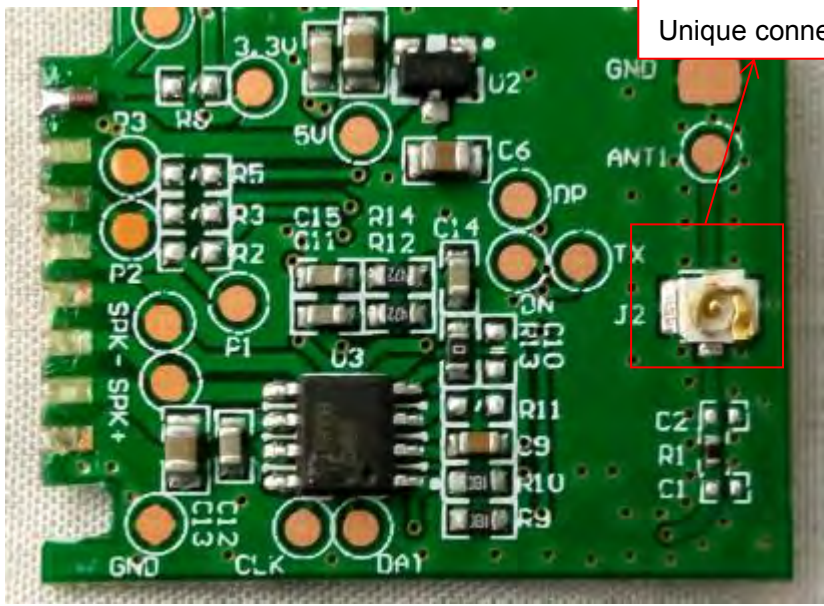Reference Documents	Item
Photo	 <p>FPC Antenna</p> <p>RF Module</p> <p>RF Chip</p>
	 <p>Unique connector</p>

### 5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 5.2 Number of Hopping Frequencies

### 5.2.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (4)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

### 5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW  $\geq$  1% of the span

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

### 5.2.4 Test Result

Please refer to ANNEX A.1.

## 5.3 Peak Output Power and E.I.R.P

### 5.3.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 5.4 (2)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

### 5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.3.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

### 5.3.4 Test Result

Please refer to ANNEX A.2.

## 5.4 Occupied Bandwidth

### 5.4.1 Limit

FCC §15.247(a); RSS-247, 5.1 (1)

Measurement of the 20dB bandwidth of the modulated signal.

### 5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

### 5.4.4 Test Result

Please refer to ANNEX A.3.

## 5.5 Carrier Frequency Separation

### 5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span

Video (or Average) Bandwidth (VBW)  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

### 5.5.4 Test Result

Please refer to ANNEX A.4.

## 5.6 Time of Occupancy (Dwell time)

### 5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (4)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.6.3 Test Procedure

The average time of occupancy on any channel within the Period can be calculated with formulas:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

### 5.6.4 Test Result

Please refer to ANNEX A.5

## 5.7 Conducted Spurious Emission & Authorized-band band-edge

### 5.7.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

### 5.7.4 Test Result

Please refer to ANNEX A.6.



## 5.8 Conducted Emission

### 5.8.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

### 5.8.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

### 5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

### 5.8.4 Test Result

Please refer to ANNEX A.7.

## 5.9 Radiated Spurious Emission

### 5.9.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ ) =  $20 \cdot \log[\text{Field Strength } (\mu\text{V}/\text{m})]$ .
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics:  $54\text{dB}\mu\text{V}/\text{m}@3\text{m}$  (AV) and  $74\text{dB}\mu\text{V}/\text{m}@3\text{m}$  (PK).

### 5.9.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from  $0^\circ$  to  $360^\circ$ , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

#### 5.9.4 Test Result

Please refer to ANNEX A.8.

## 5.10 Band Edge (Restricted-band band-edge)

### 5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

### 5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

### 5.10.4 Test Result

Please refer to ANNEX A.9.

# ANNEX A TEST RESULT


## A.1 Number of Hopping Frequency

### Test Data


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass

### Test plots


GFSK 2.4 GHz ~ 2.4415 GHz

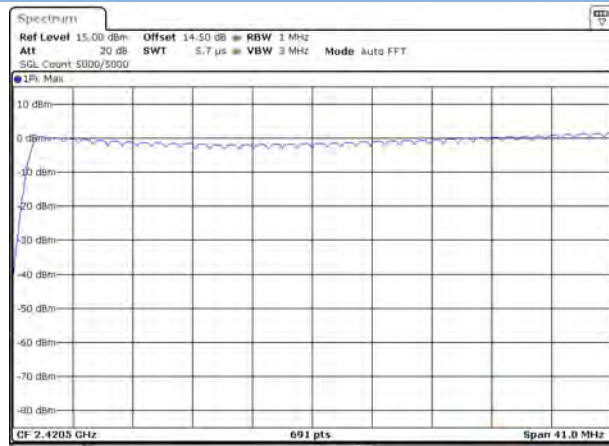


GFSK 2.4415 GHz ~ 2.4835 GHz

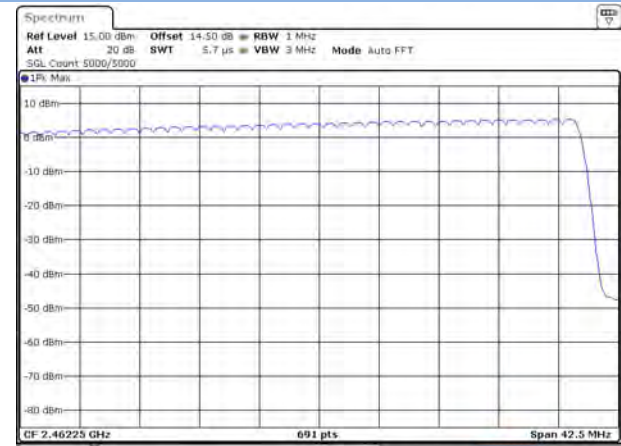

8-DPSK 2.4 GHz ~ 2.4415 GHz

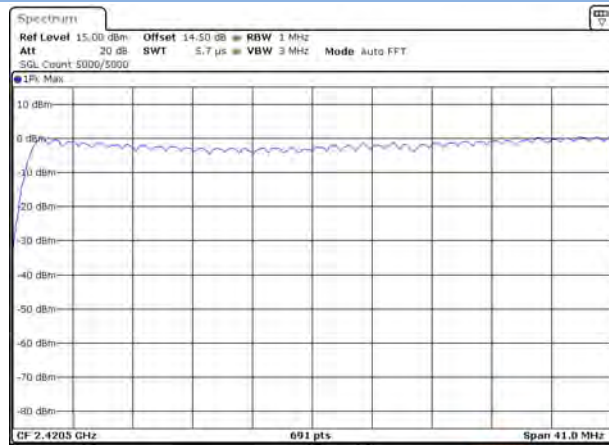

8-DPSK 2.4415 GHz ~ 2.4835 GHz

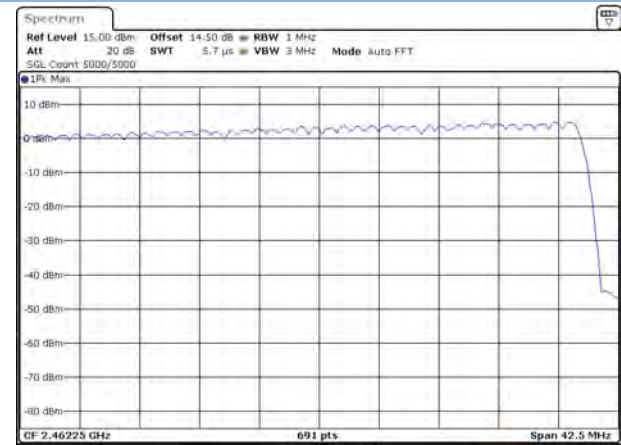

## A.2 Peak Output Power


### Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK		dBm	mW	
	dBm	mW			
Low	0.79	1.20	30	1000	Pass
Middle	1.59	1.44			Pass
High	5.40	3.47			Pass

Channel	Measured Output Peak Power				Limit		Verdict
	π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW			
Low	0.57	1.14	0.83	1.21	30	1000	Pass
Middle	1.29	1.35	1.67	1.47			Pass
High	5.17	3.29	5.31	3.40			Pass


Test plots

GFSK LOW CHANNEL

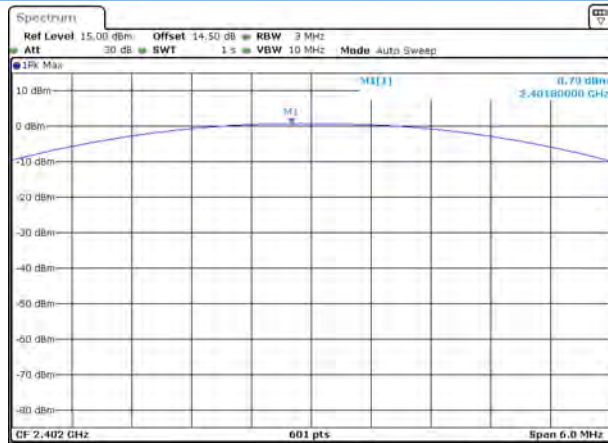


Date: 16.MAR.2017 :22:22:32

GFSK MIDDLE CHANNEL

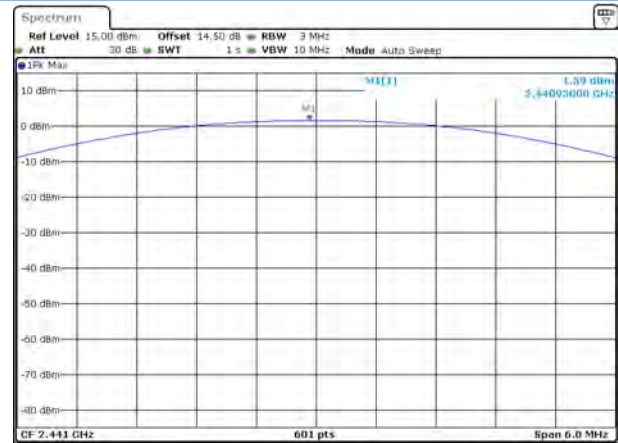


Date: 16.MAR.2017 :22:25:53

GFSK HIGH CHANNEL

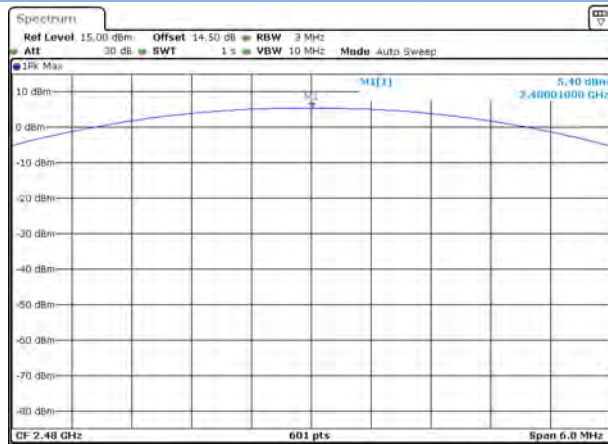

Date: 16.MAR.2017 :22:29:14

II/4-DQPSK LOW CHANNEL

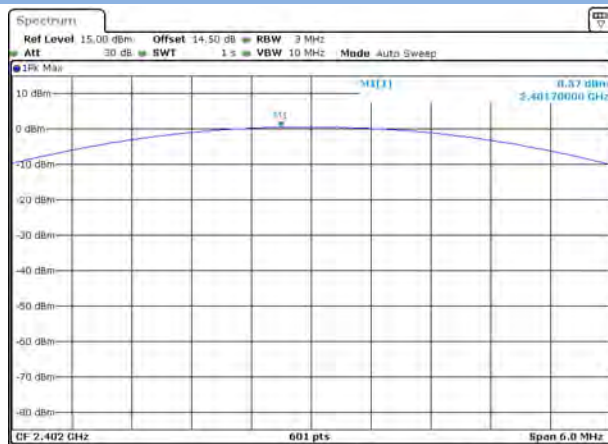

Date: 16.MAR.2017 :22:33:25

II/4-DQPSK MIDDLE CHANNEL




Date: 16.MAR.2017 :22:33:38


Π/4-DQPSK HIGH CHANNEL




8-DPSK LOW CHANNEL

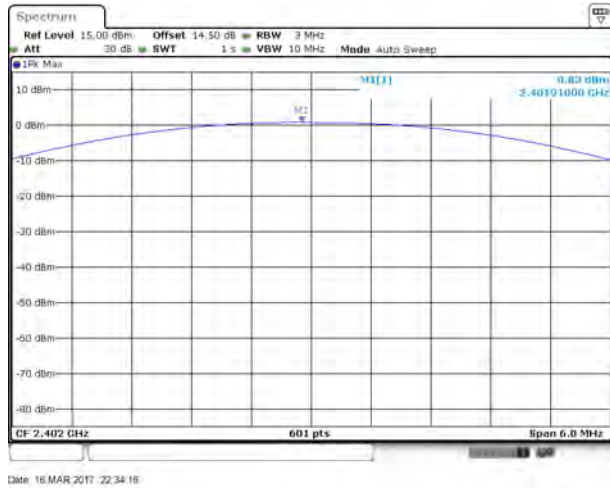

8-DPSK MIDDLE CHANNEL

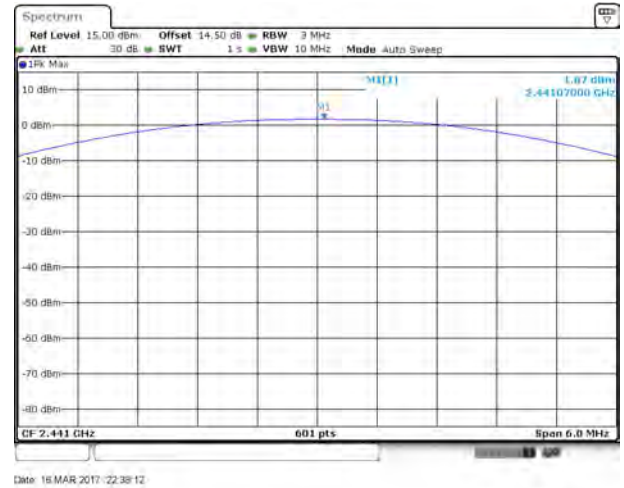

8-DPSK HIGH CHANNEL

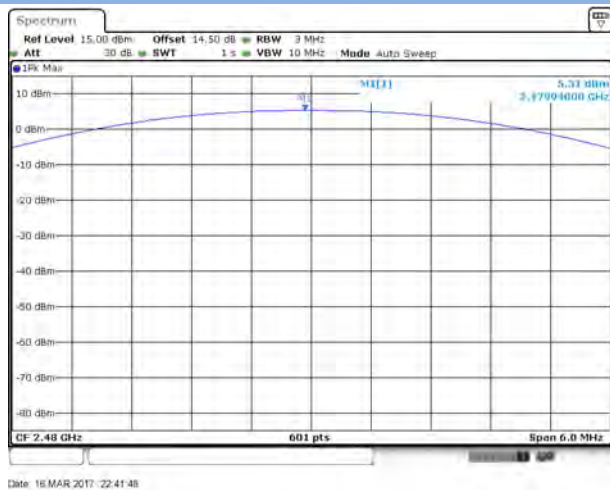



### A.3 20 dB and 99% bandwidth


#### Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.035	0.899
Middle	0.978	0.899
High	0.991	0.894
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	0.991	0.899
Middle	0.983	0.903
High	0.996	0.894

#### Test plots


##### 20 dB Bandwidth

GFSK LOW CHANNEL

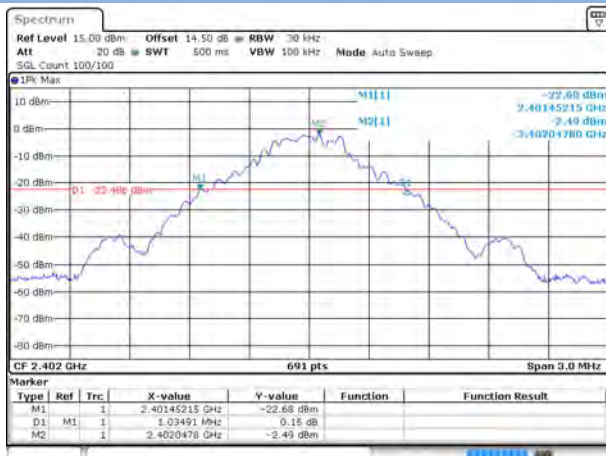


Date: 18.MAR.2017 22:23:28

GFSK MIDDLE CHANNEL

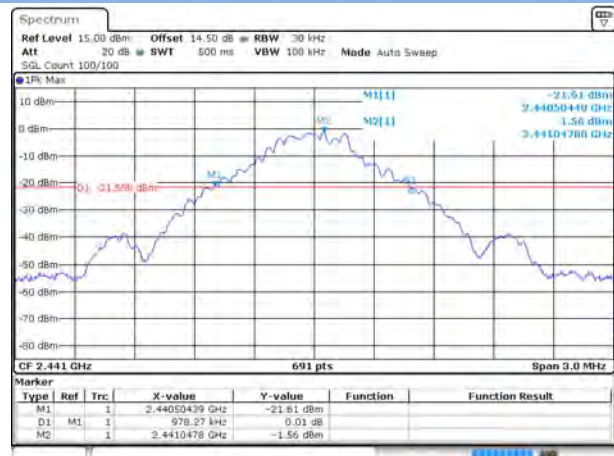


Date: 18.MAR.2017 22:26:49

GFSK HIGH CHANNEL

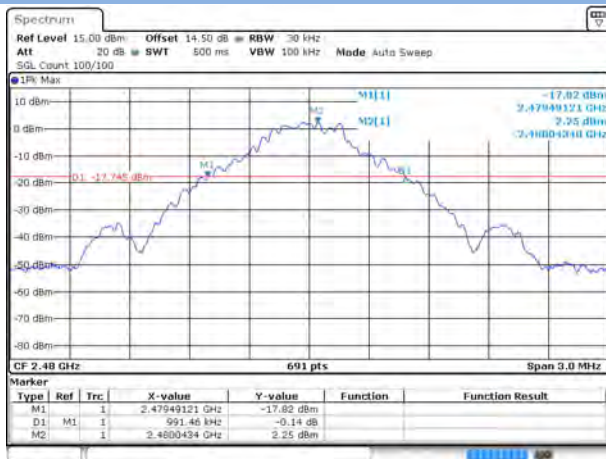


Date: 18.MAR.2017 22:30:10

## 8-DPSK LOW CHANNEL

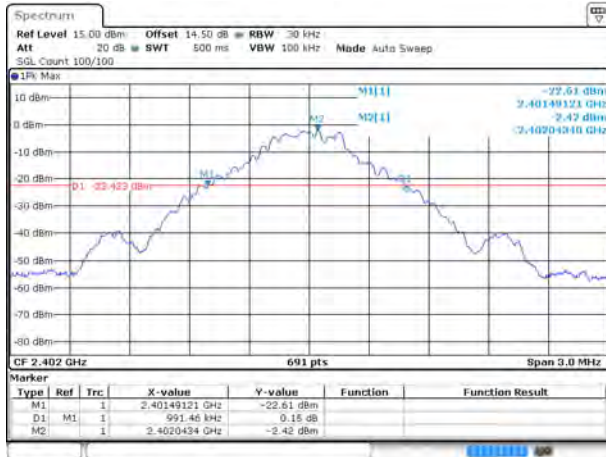


Date 16.MAR.2017 22:35:12

## 8-DPSK MIDDLE CHANNEL

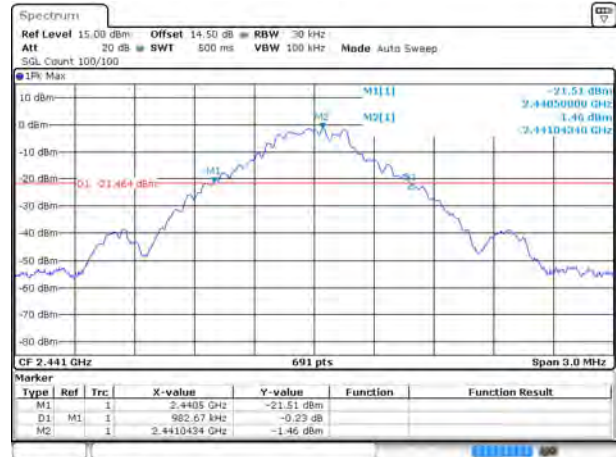

Date 16.MAR.2017 22:38:08


## 8-DPSK HIGH CHANNEL

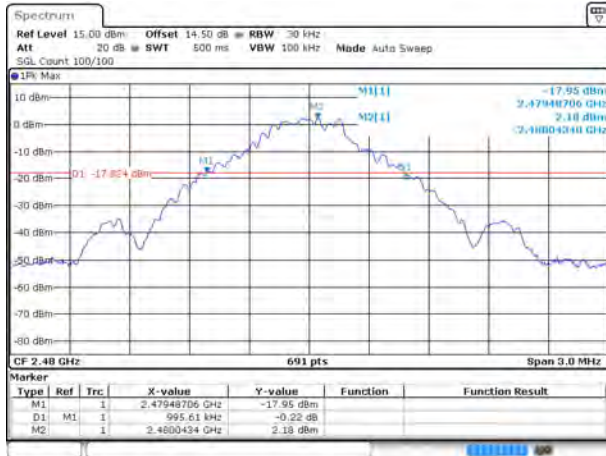

Date 16.MAR.2017 22:42:45

## 99% Bandwidth

## GFSK LOW CHANNEL

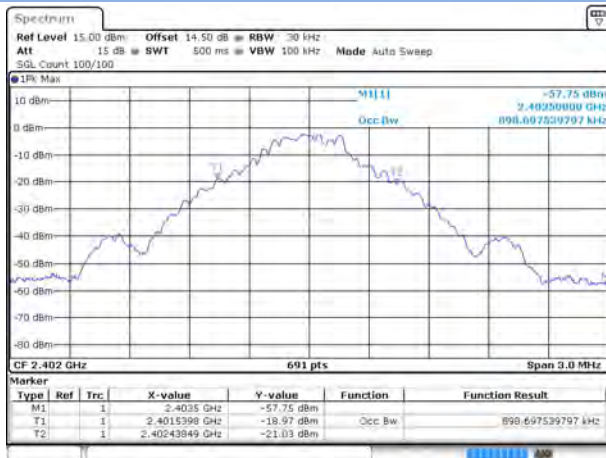


Date 16.MAR.2017 22:24:25

## GFSK MIDDLE CHANNEL



Date 16.MAR.2017 22:27:45

### GFSK HIGH CHANNEL

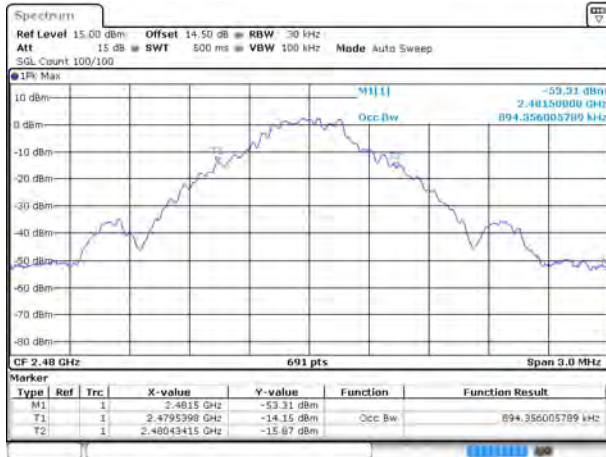

Date 16.MAR.2017 22:31:06

### 8-DPSK LOW CHANNEL



Date 16.MAR.2017 22:36:09

### 8-DPSK MIDDLE CHANNEL



Date 16.MAR.2017 22:40:05

### 8-DPSK HIGH CHANNEL



Date 16.MAR.2017 22:43:41

## A.4 Hopping Frequency Separation


### Test Data

Note: The systems operate with an output power no greater than 125 mw, The data provided in the section A.2.

Mode	Frequency separation (MHz)	Max 20 dB Bandwidth (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Verdict
GFSK	0.983	1.035	0.690	Pass
8-DPSK	1.003	0.996	0.664	Pass


### Test Plots

GFSK

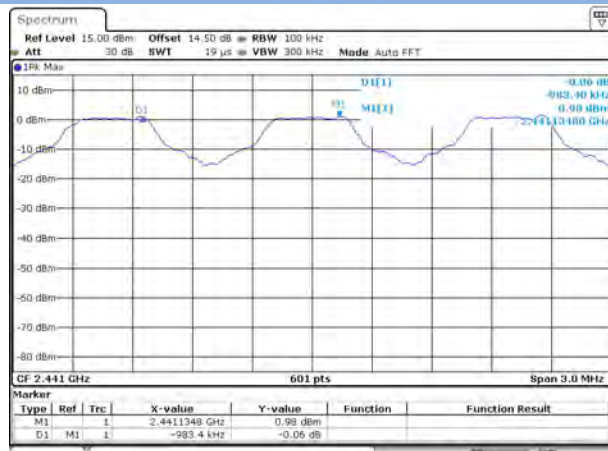

Date: 16 MAR 2017 22:47:17

8-DPSK

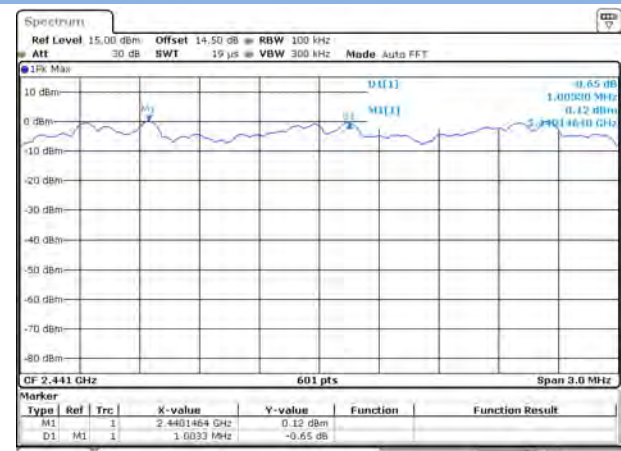

Date: 16 MAR 2017 22:52:11


## A.5 Average Time of Occupancy

### Test Data

GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.365	116.749	0.4	Pass
DH 3	1.607	257.181	0.4	Pass
DH 5	2.844	303.334	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.372	119.044	0.4	Pass
DH 3	1.604	256.600	0.4	Pass
DH 5	2.856	304.618	0.4	Pass


### Test Plots

GFSK DH1

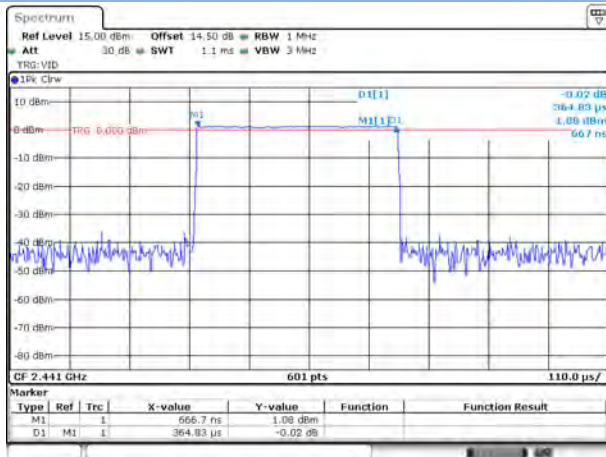


Date: 16 MAR 2017 22:56:37

GFSK DH3

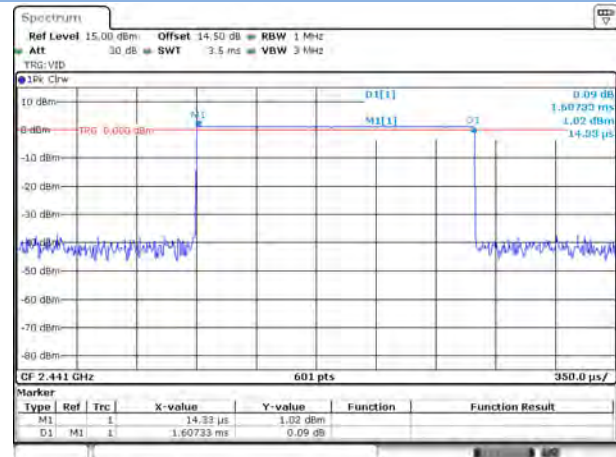


Date: 16 MAR 2017 22:56:59

## GFSK DH5

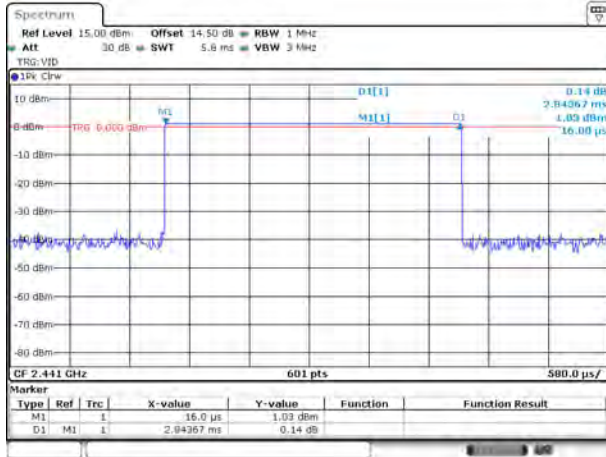


Date: 16 MAR 2017 22:57:23

## 8-DPSK DH1

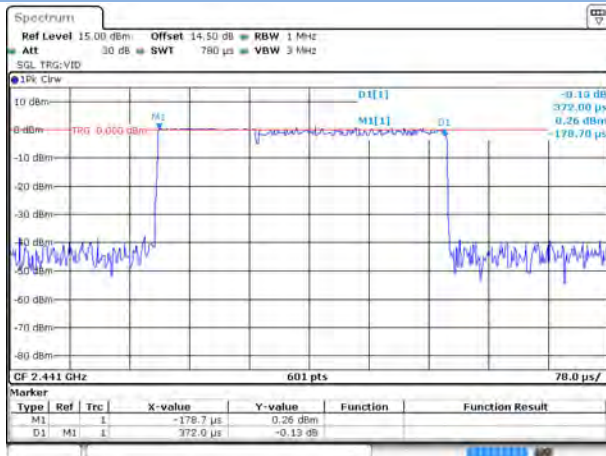


Date: 16 MAR 2017 22:58:17

## 8-DPSK DH3

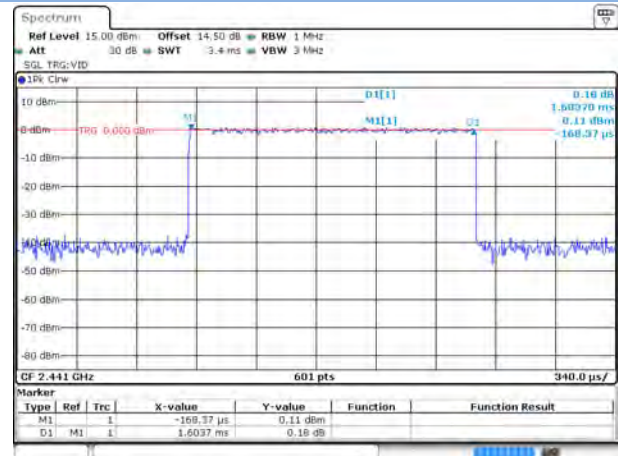

Date: 16 MAR 2017 22:58:43

## 8-DPSK DH5

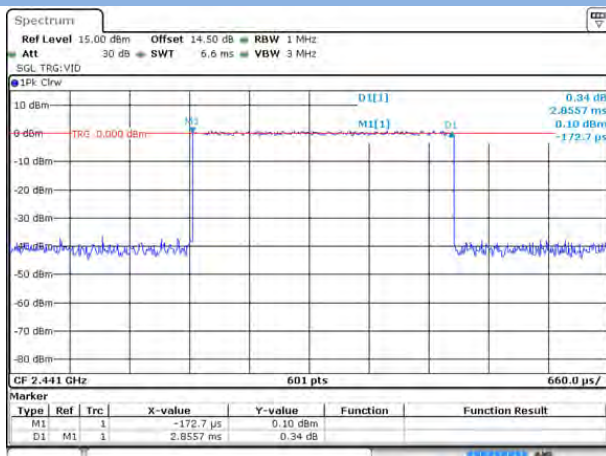

Date: 16 MAR 2017 22:59:10


## A.6 Conducted Spurious Emissions & Authorized-band band-edge

### Test Data

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-39.03	0.40	-19.60	Pass
Middle	-39.59	1.28	-18.72	Pass
High	-39.02	5.10	-14.90	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-40.09	0.44	-19.56	Pass
Middle	-39.90	1.41	-18.59	Pass
High	-39.47	5.07	-14.93	Pass
Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-39.72	4.38	-15.62	Pass
8-DPSK	-39.33	2.88	-17.12	Pass


## Test Plots

GFSK LOW CHANNEL, CARRIER LEVEL

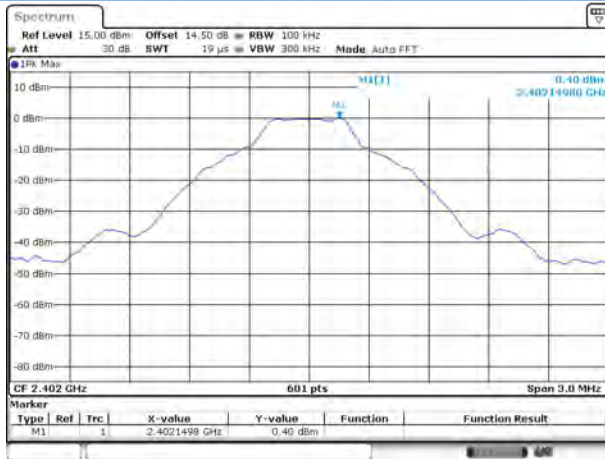


Date: 16 MAR 2017 22:24:42

GFSK LOW CHANNEL, BAND EDGE

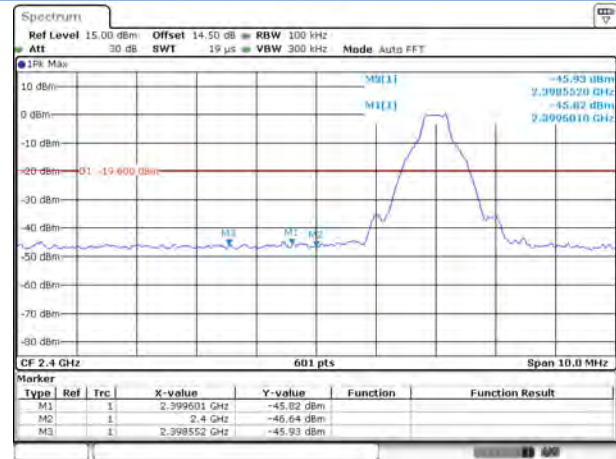


Date: 16 MAR 2017 22:25:35

GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

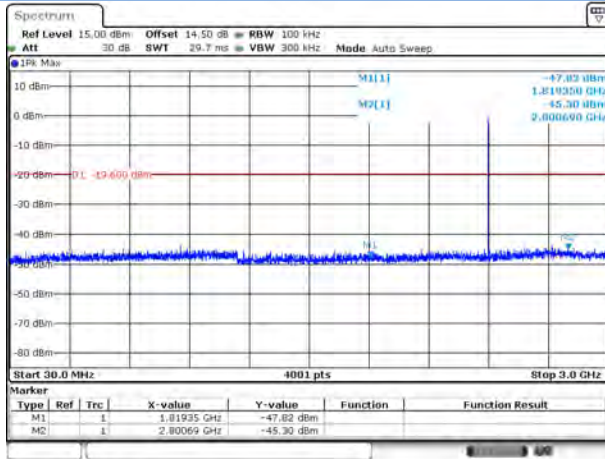


Date: 16 MAR 2017 22:25:04

GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

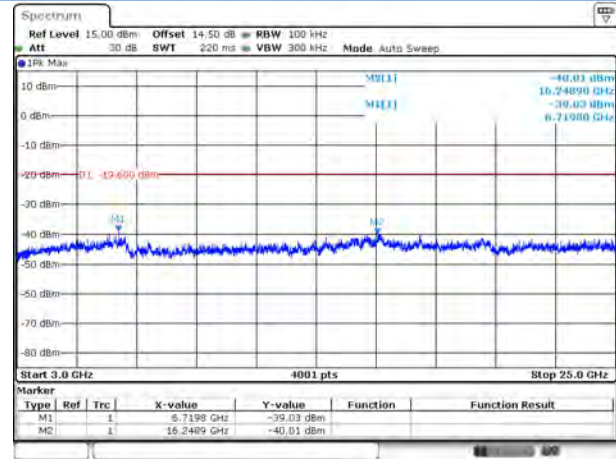

Date: 16 MAR 2017 22:25:18


GFSK MIDDLE CHANNEL, CARRIER LEVEL

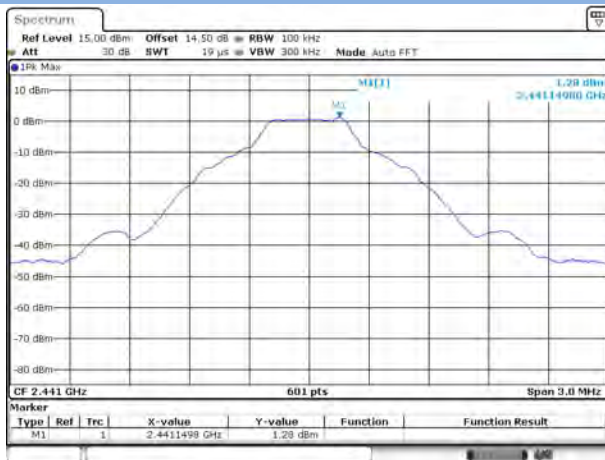

Date: 16 MAR 2017 22:28:10




## GFSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

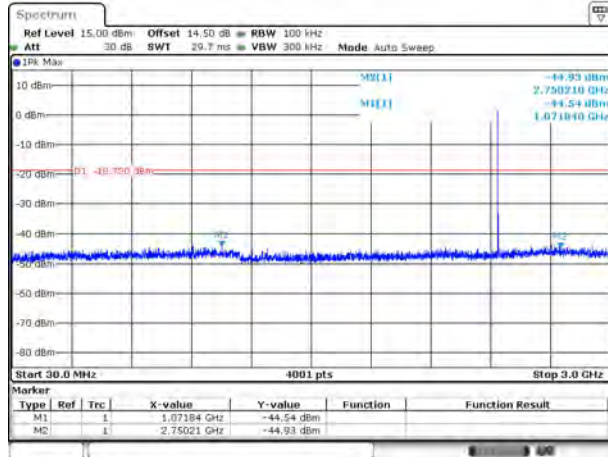


Date: 16 MAR 2017 :22:28:38

## GFSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

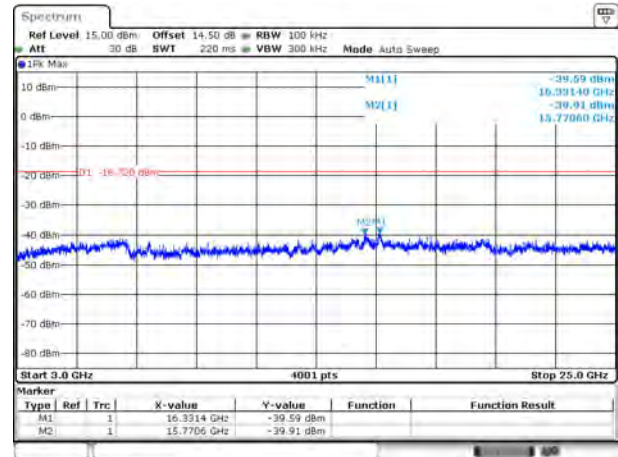


Date: 16 MAR 2017 :22:28:51

## GFSK HIGH CHANNEL , CARRIER LEVEL

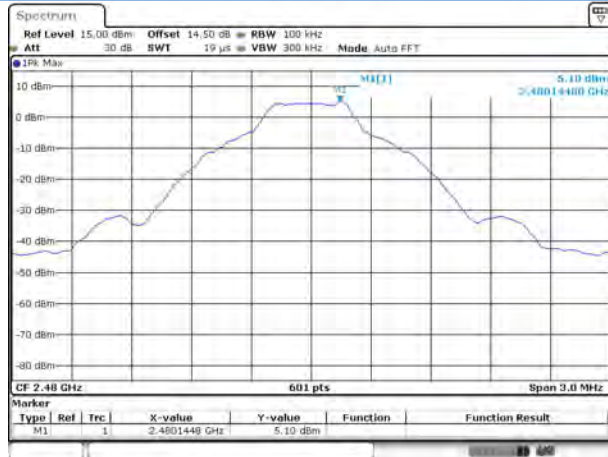


Date: 16 MAR 2017 :22:31:38

## GFSK HIGH CHANNEL , BAND EDGE

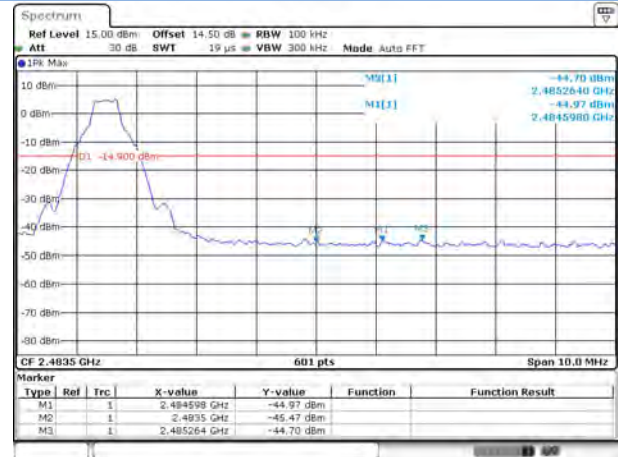


Date: 16 MAR 2017 :22:33:00

## GFSK HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

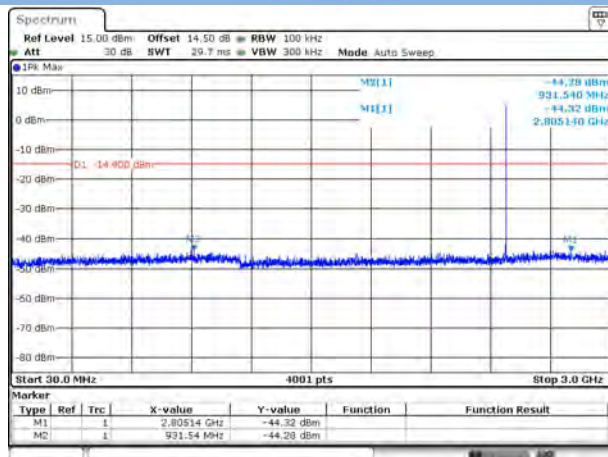

Date: 16 MAR 2017 :22:32:07


## GFSK HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

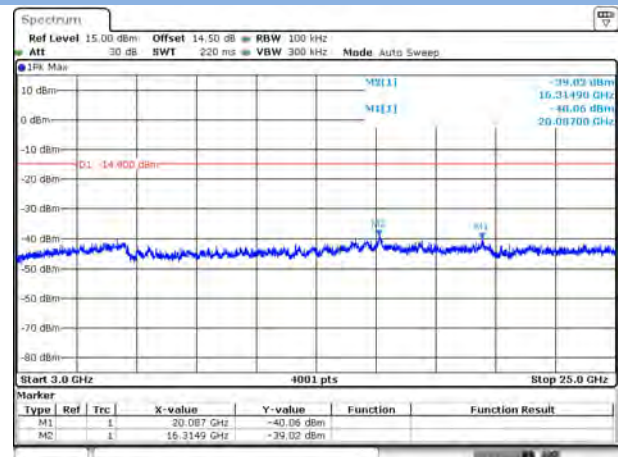


Date: 16 MAR 2017 :22:32:23

## 8-DPSK LOW CHANNEL , CARRIER LEVEL

## 8-DPSK LOW CHANNEL , BAND EDGE

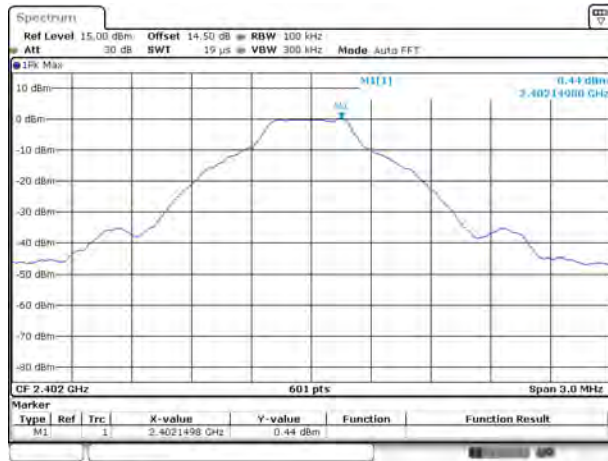


Date: 16.MAR.2017 22:36:32

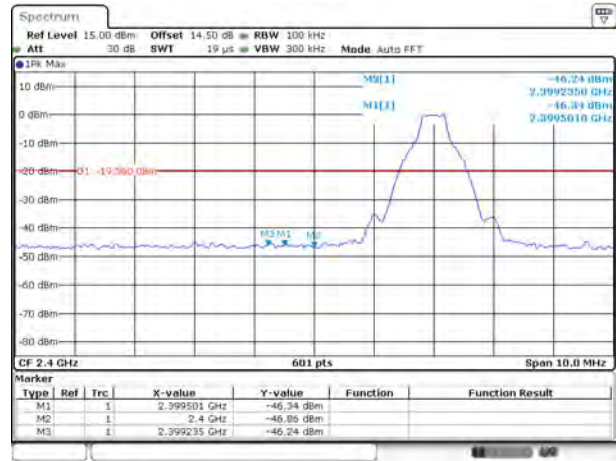


Date: 16.MAR.2017 22:37:27

8-DPSK LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

8-DPSK LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

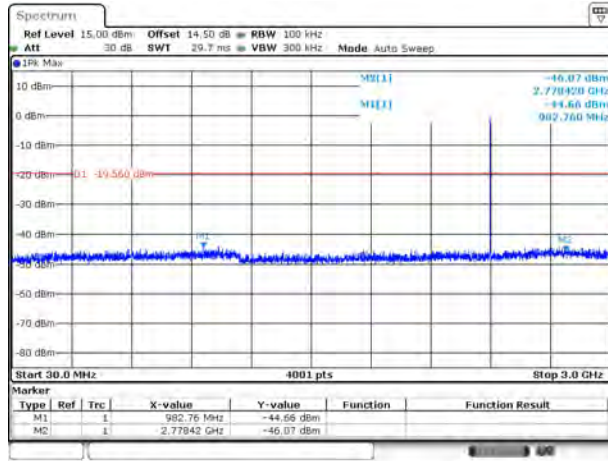


Date: 16.MAR.2017 22:36:53

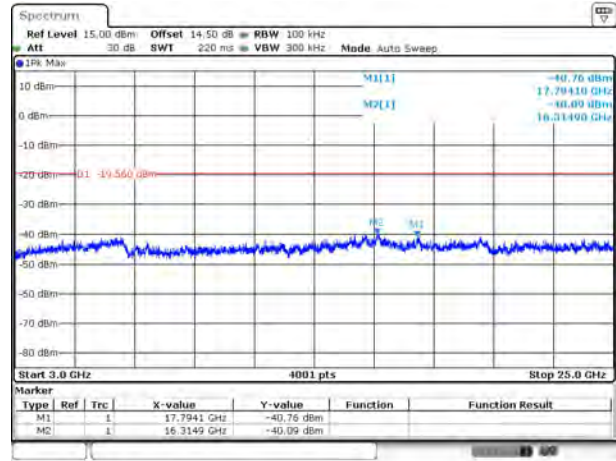


Date: 16.MAR.2017 22:37:05

8-DPSK MIDDLE CHANNEL, CARRIER LEVEL

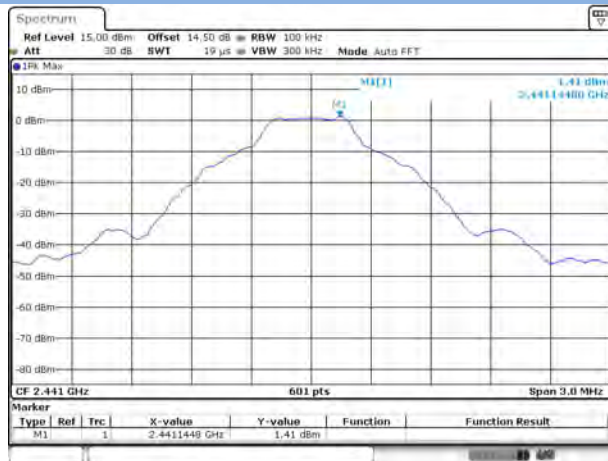


Date: 16.MAR.2017 22:40:43

## 8-DPSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

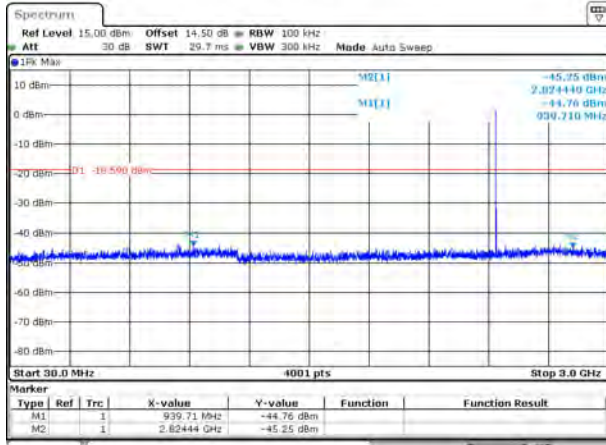


Date: 16 MAR 2017 22:41:04

## 8-DPSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

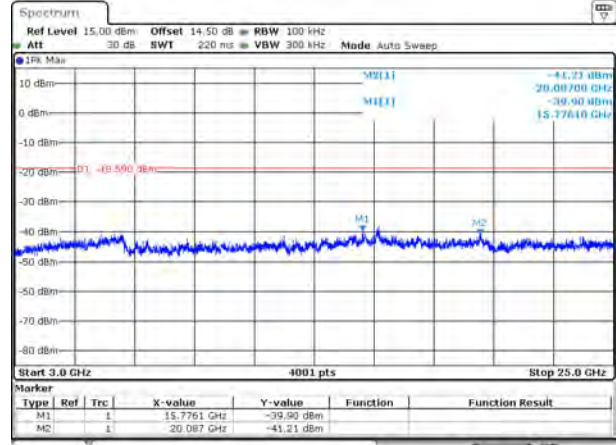


Date: 16 MAR 2017 22:41:24

## 8-DPSK HIGH CHANNEL , CARRIER LEVEL

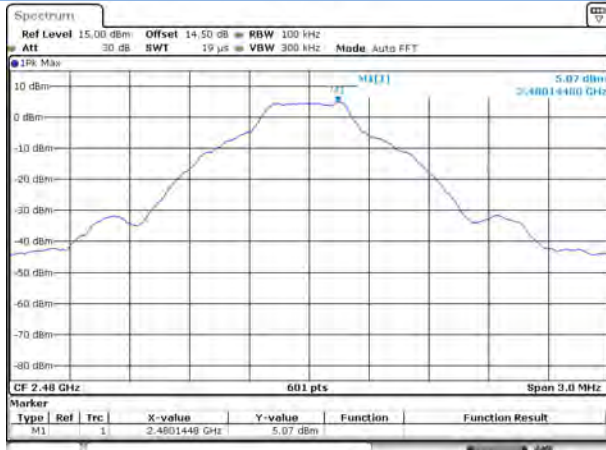


Date: 16 MAR 2017 22:44:16

## 8-DPSK HIGH CHANNEL , BAND EDGE

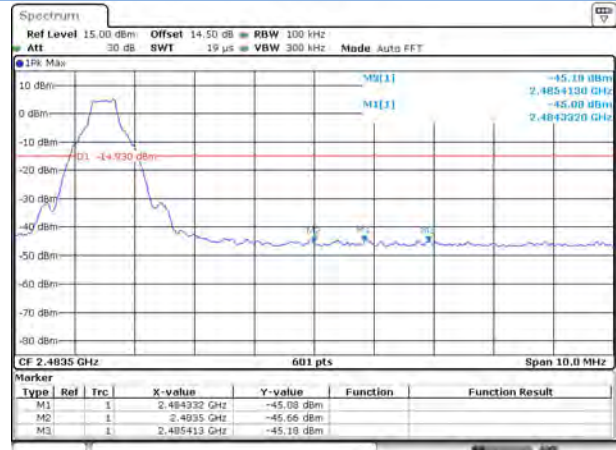


Date: 16 MAR 2017 22:45:26

## 8-DPSK HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

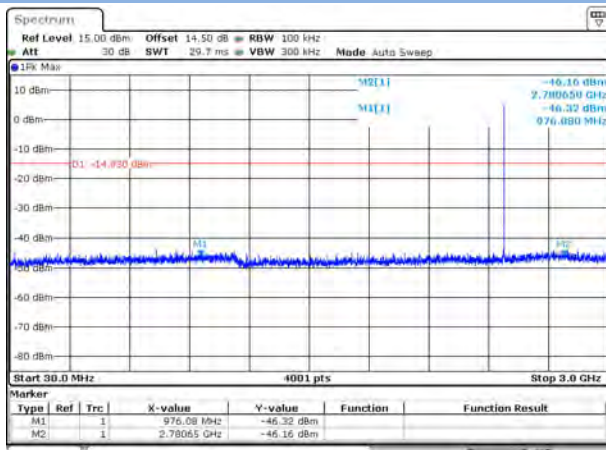


Date: 16 MAR 2017 22:44:42

## 8-DPSK HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

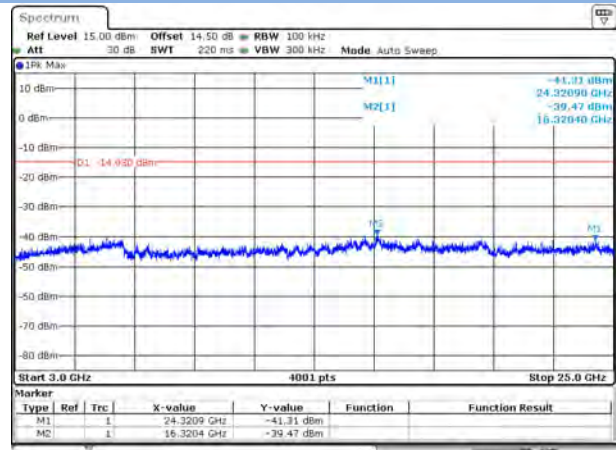


Date: 16 MAR 2017 22:44:53

## GFSK HOPPING, CARRIER LEVEL

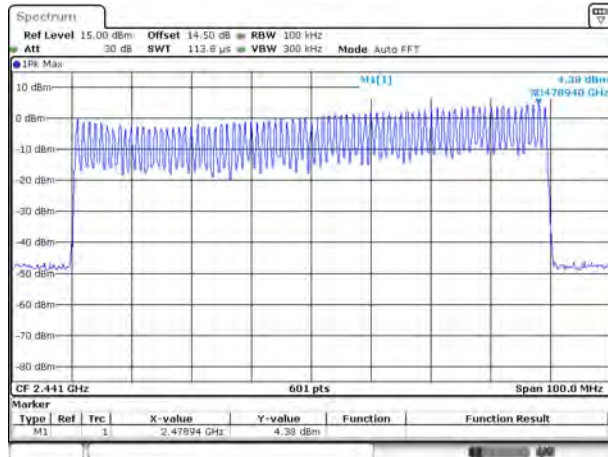


Date: 18 MAR 2017 22:47:29

## GFSK HOPPING BAND EDGE (LOW)

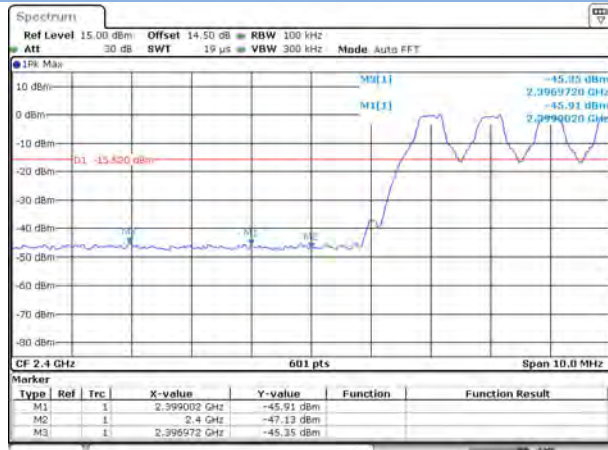


Date: 18 MAR 2017 22:49:08

## GFSK HOPPING BAND EDGE (HIGH)

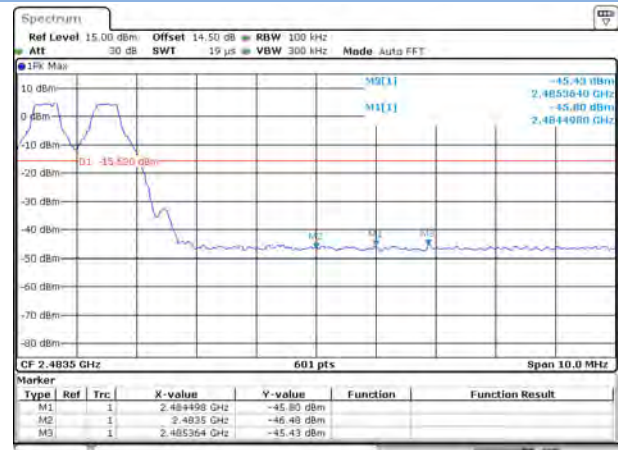


Date: 18 MAR 2017 22:49:28

## GFSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

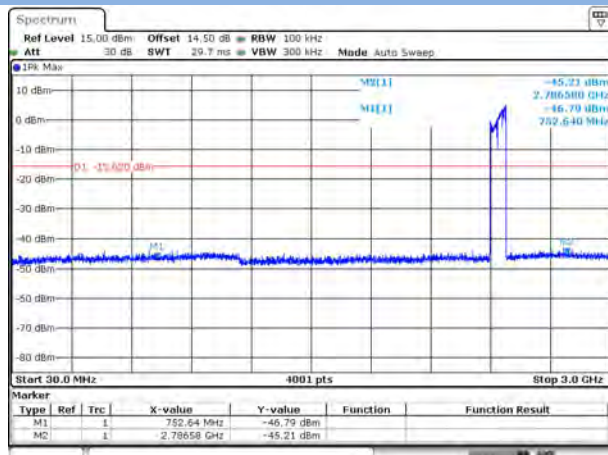


Date: 18 MAR 2017 22:49:27

## GFSK Hopping Mode, SPURIOUS 30 3GHz ~ 25 GHz

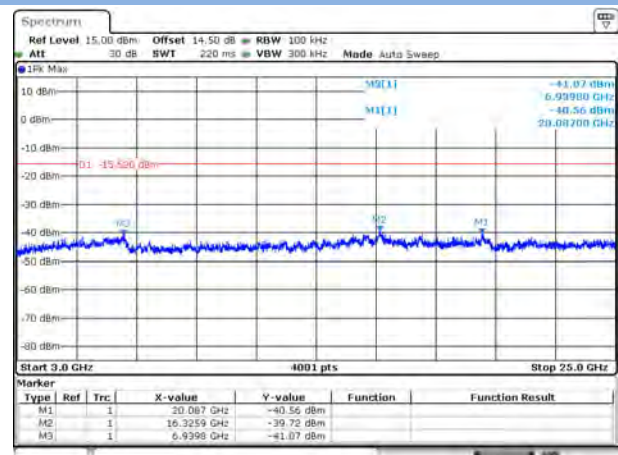


Date: 18 MAR 2017 22:49:42

## 8-DPSK HOPPING, CARRIER LEVEL

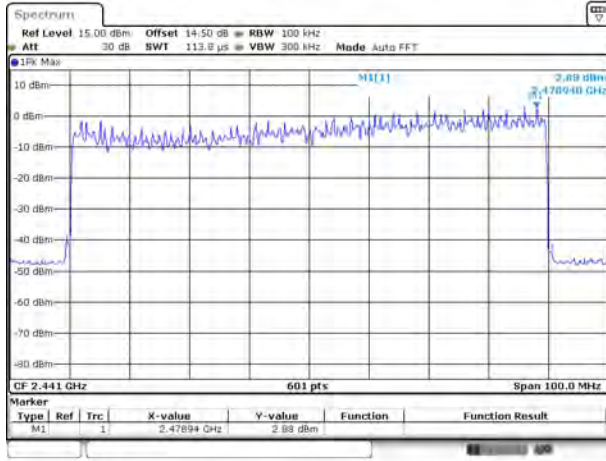


Date: 16.MAR.2017 22:52:44

## 8-DPSK Hopping BAND EDGE (LOW)

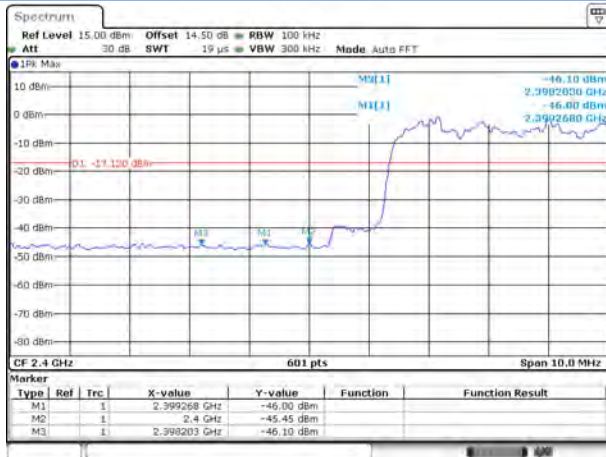


Date: 16.MAR.2017 22:54:38

## 8-DPSK Hopping BAND EDGE (HIGH)

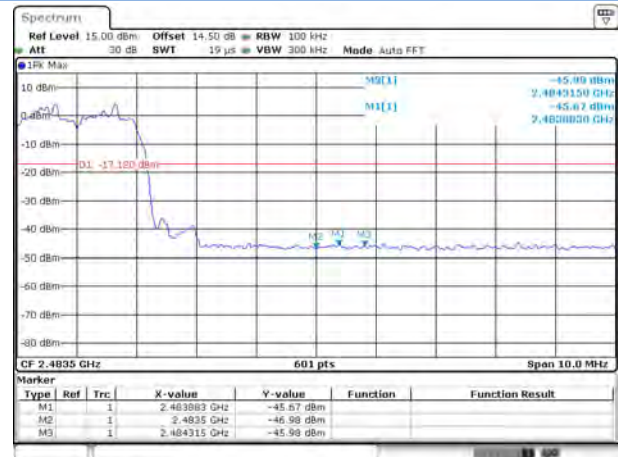


Date: 16.MAR.2017 22:55:00

## 8-DPSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

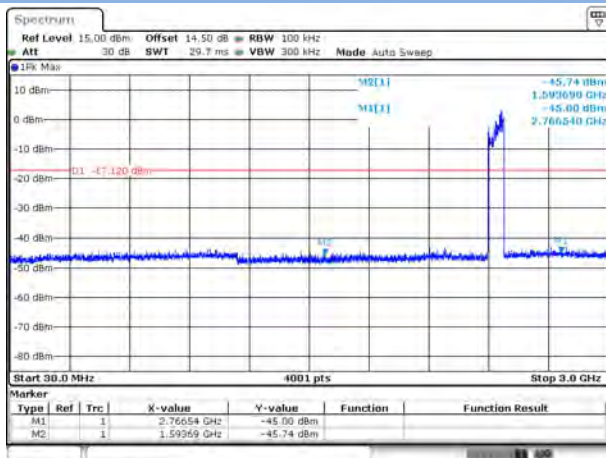

Date: 16.MAR.2017 22:53:58

## 8-DPSK Hopping Mode, SPURIOUS 30 GHz ~ 25 GHz

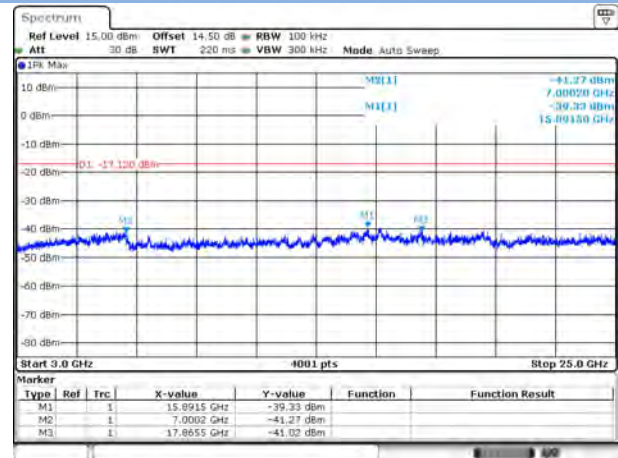


Date: 16.MAR.2017 22:54:12

## A.7 Conducted Emissions

Note 1: The EUT is working in the Normal link mode.


### Test Data and Plots

#### PHASE L

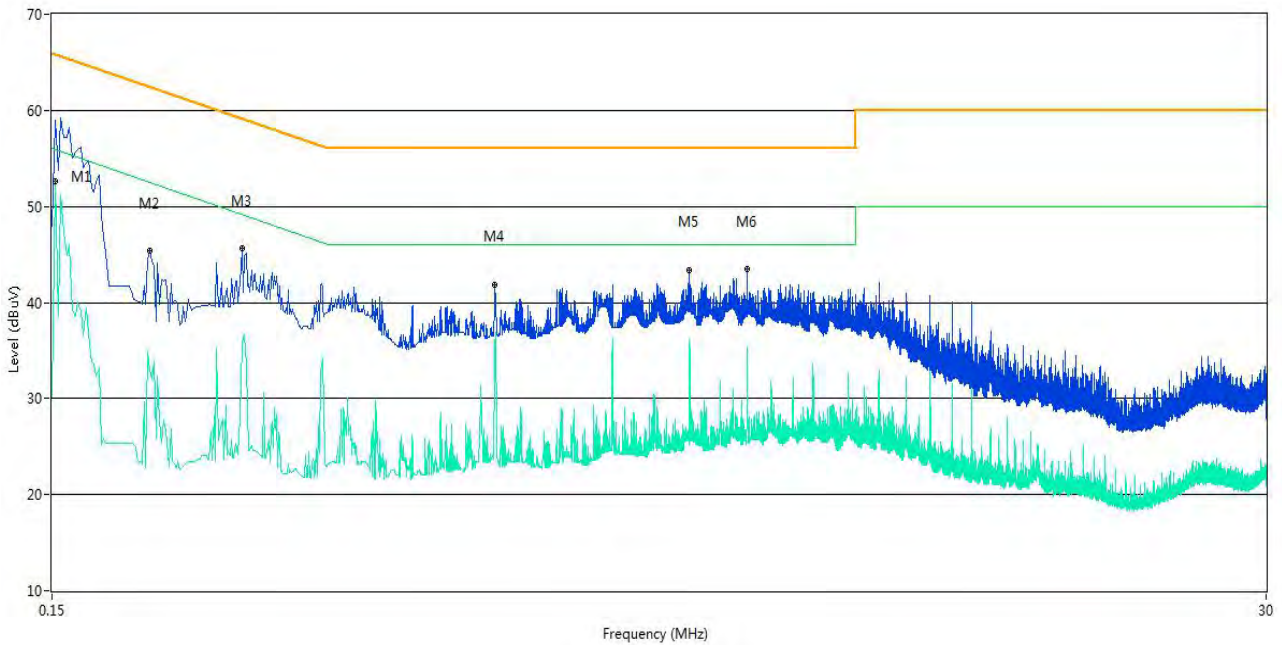

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.152	59.0	11.00	65.9	6.90	Peak	L Line	Pass
1**	0.152	52.6	11.00	55.9	3.30	AV	L Line	Pass
2	0.230	45.3	11.00	62.4	17.10	Peak	L Line	Pass
2**	0.230	32.9	11.00	52.4	19.50	AV	L Line	Pass
3	0.344	45.6	11.00	59.1	13.50	Peak	L Line	Pass
3**	0.344	35.5	11.00	49.1	13.60	AV	L Line	Pass
4	1.036	41.8	11.00	56.0	14.20	Peak	L Line	Pass
4**	1.036	35.5	11.00	46.0	10.50	AV	L Line	Pass
5	2.422	43.4	11.00	56.0	12.60	Peak	L Line	Pass
5**	2.422	35.7	11.00	46.0	10.30	AV	L Line	Pass
6	3.118	43.5	11.00	56.0	12.50	Peak	L Line	Pass
6**	3.118	35.3	11.00	46.0	10.70	AV	L Line	Pass

## PHASE N

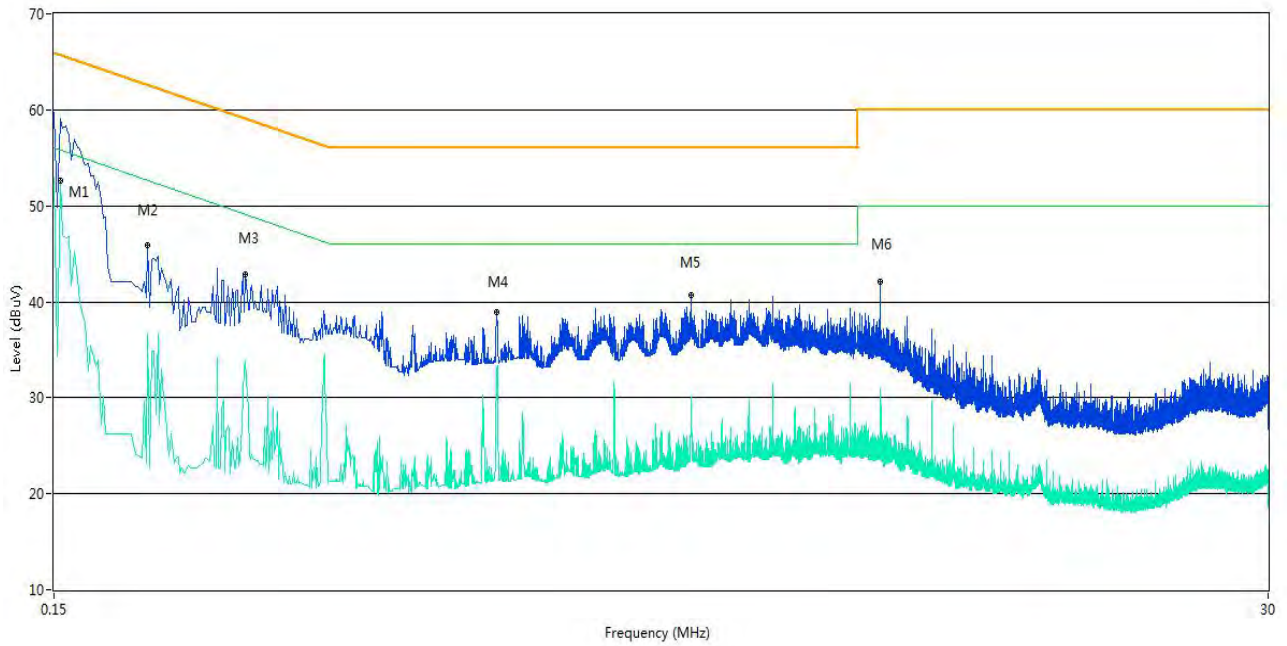

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.154	59.1	11.00	65.8	6.70	Peak	N Line	Pass
1**	0.154	52.7	11.00	55.8	3.10	AV	N Line	Pass
2	0.226	45.9	11.00	62.6	16.70	Peak	N Line	Pass
2**	0.226	36.6	11.00	52.6	16.00	AV	N Line	Pass
3	0.346	42.8	11.00	59.1	16.30	Peak	N Line	Pass
3**	0.346	33.8	11.00	49.1	15.30	AV	N Line	Pass
4	1.034	38.9	11.00	56.0	17.10	Peak	N Line	Pass
4**	1.034	32.4	11.00	46.0	13.60	AV	N Line	Pass
5	2.418	40.8	11.00	56.0	15.20	Peak	N Line	Pass
5**	2.418	29.6	11.00	46.0	16.40	AV	N Line	Pass
6	5.528	42.1	11.00	60.0	17.90	Peak	N Line	Pass
6**	5.528	30.0	11.00	50.0	20.00	AV	N Line	Pass


## A.8 Radiated Spurious Emission

Duty cycle correction factor for average measurement.


Note:

1. Duty cycle = on time/100 milliseconds =  $4 * 2.856 / 100 = 11.42 \%$
2. Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -18.84 \text{ dB}$
3. DH5 has the highest duty cycle and is reported.

DH5 on time/100 ms (One Pulse) Plot on Channel 39

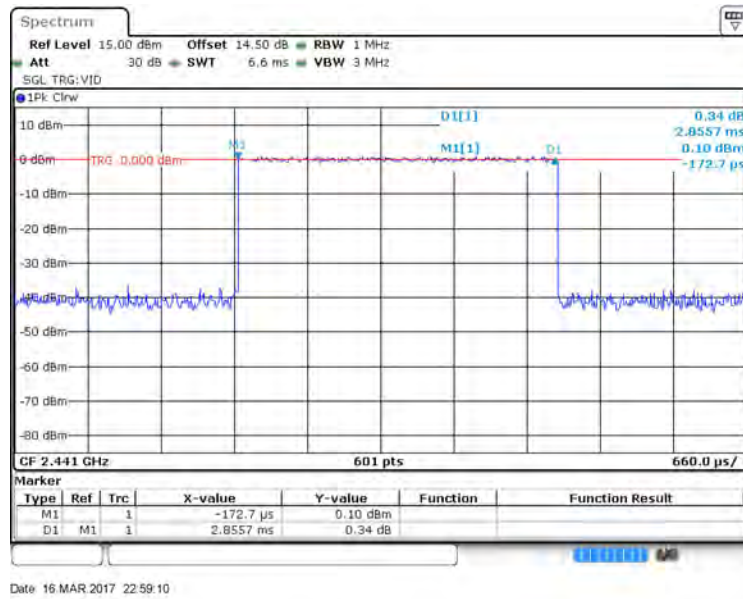

DH5 on time/100 ms (Count Pulses) Plot on Channel 39

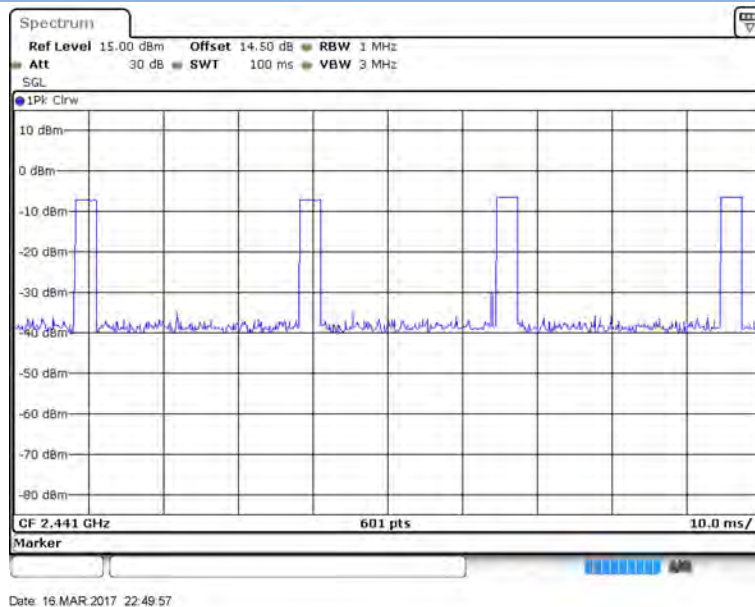



Test Data and Plots


Note 1: The symbol of “--” in the table which means not application.

Note 2: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The EUT is working in the Normal link mode below 1 GHz.


The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

30 MHz to 1 GHz, ANT V

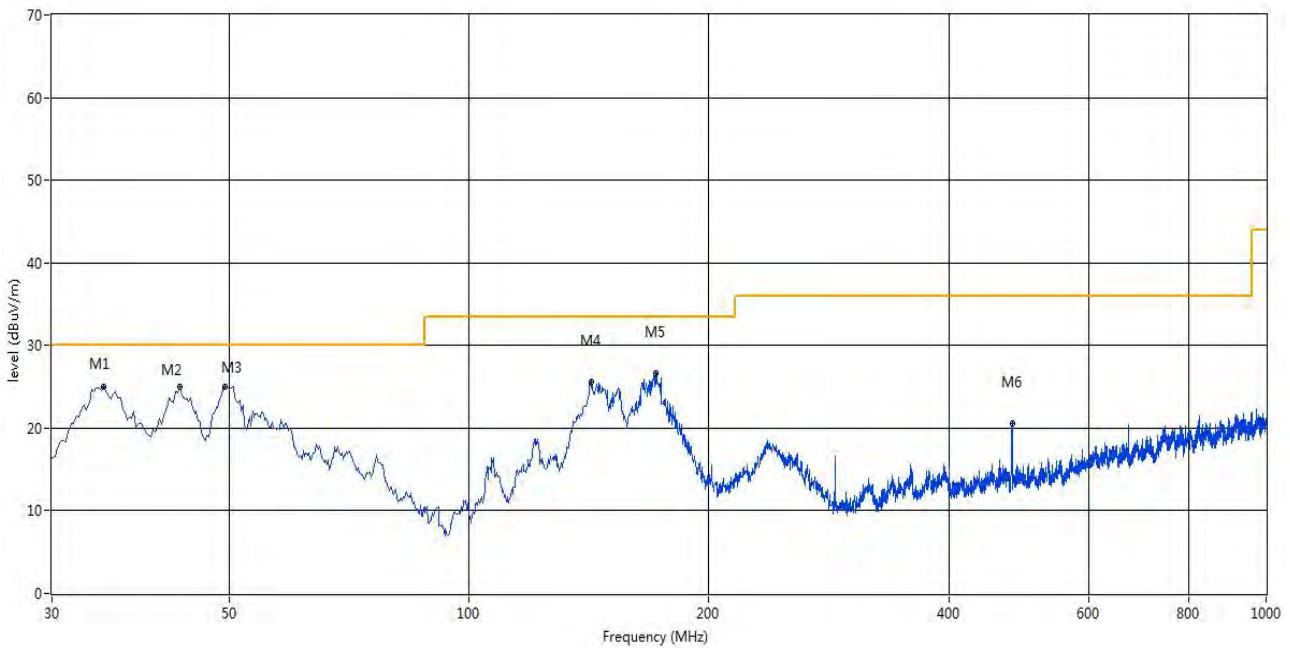

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	34.849	24.98	-16.45	30.0	5.02	Peak	0.00	100	Vertical	Pass
2	43.334	25.07	-14.18	30.0	4.93	Peak	7.00	200	Vertical	Pass
3	49.395	25.08	-13.92	30.0	4.92	Peak	49.00	200	Vertical	Pass
4	142.492	25.64	-19.67	33.5	7.86	Peak	260.00	200	Vertical	Pass
5	171.827	26.62	-18.31	33.5	6.88	Peak	89.00	100	Vertical	Pass
6	480.210	20.56	-9.71	36.0	15.44	Peak	0.00	200	Vertical	Pass

30 MHz to 1 GHz, ANT H

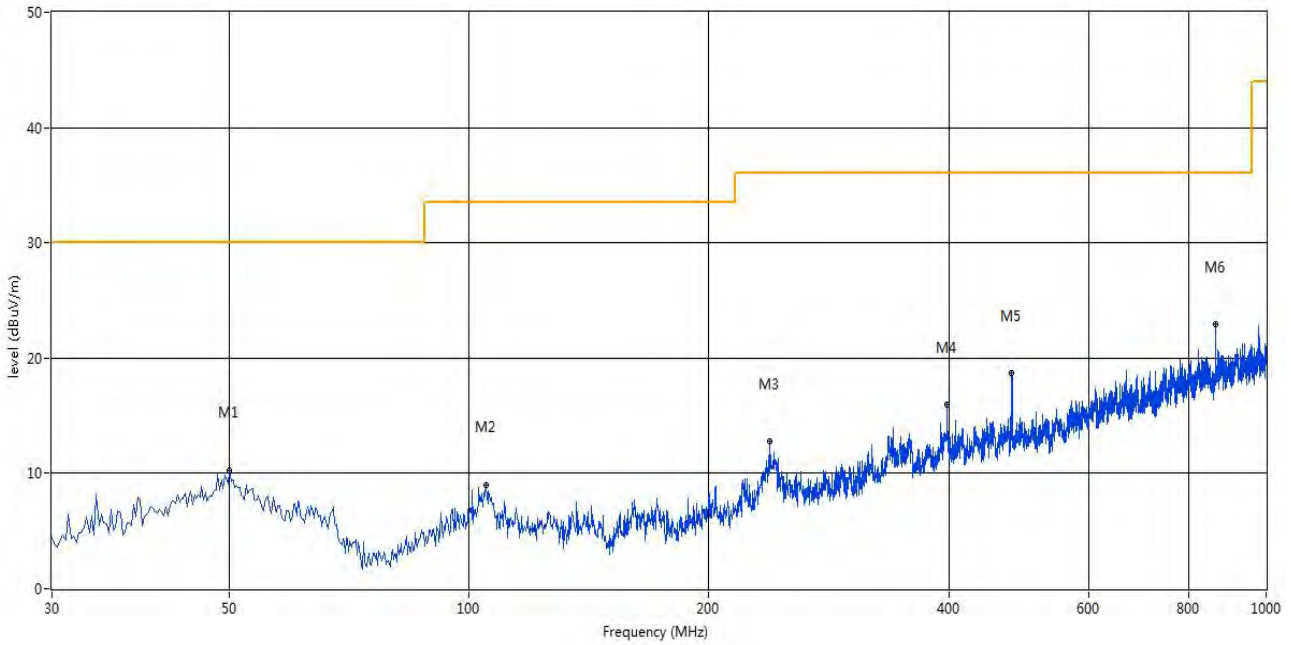

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	50.122	10.28	-13.99	30.0	19.72	Peak	255.00	200	Horizontal	Pass
2	105.156	9.04	-15.66	33.5	24.46	Peak	66.00	400	Horizontal	Pass
3	238.740	12.81	-14.81	36.0	23.19	Peak	83.00	100	Horizontal	Pass
4	398.023	16.00	-10.74	36.0	20.00	Peak	107.00	200	Horizontal	Pass
5	479.968	18.67	-9.69	36.0	17.33	Peak	118.00	100	Horizontal	Pass
6	863.749	22.90	-3.37	36.0	13.10	Peak	104.00	100	Horizontal	Pass

Test Data and Plots (1 GHz ~ 10th Harmonic)

Note: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

**GFSK LOW CHANNEL 1 GHz to 25 GHz, ANT V**

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1995.19	44.35	-0.27	74	29.66	Peak	355.6	150	Vertical	Pass
2	2402.03	68.57	0.04	74	5.43	Peak	23.5	150	Vertical	N/A
3	5120.77	46.72	11.80	74	27.28	Peak	323.2	150	Vertical	Pass
4	11581.95	43.17	14.59	74	30.83	Peak	192.3	150	Vertical	Pass
5	15526.62	48.01	9.62	74	25.99	Peak	175.3	150	Vertical	Pass
6	19579.04	43.24	12.16	74	30.76	Peak	229.1	150	Vertical	Pass

**GFSK LOW CHANNEL 1 GHz to 25 GHz, ANT H**

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2074.15	41.02	0.15	74	32.98	Peak	280.8	150	Horizontal	Pass
2	2402.09	67.82	0.39	74	6.18	Peak	77.7	150	Horizontal	N/A
3	5871.62	46.53	11.55	74	27.47	Peak	230.2	150	Horizontal	Pass
4	9099.83	49.57	20.18	74	24.43	Peak	349.9	150	Horizontal	Pass
5	16857.74	44.25	9.47	74	29.75	Peak	146	150	Horizontal	Pass
6	24640.60	46.47	13.93	74	27.53	Peak	350.9	150	Horizontal	Pass

**GFSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT V**

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1993.17	46.26	-0.27	74	27.75	Peak	199.8	150	Vertical	Pass
2	2440.23	69.50	0.84	74	4.50	Peak	91.8	150	Vertical	N/A
3	5117.66	48.27	11.57	74	25.73	Peak	333.5	150	Vertical	Pass
4	9268.30	41.03	15.04	74	32.97	Peak	103.3	150	Vertical	Pass
5	13165.97	51.78	12.93	74	22.23	Peak	158	150	Vertical	Pass
6	21286.19	49.50	10.58	74	24.50	Peak	145.9	150	Vertical	Pass

## GFSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2077.38	41.42	0.15	74	32.58	Peak	283.9	150	Horizontal	Pass
2	2440.90	68.92	0.81	74	5.08	Peak	176.2	150	Horizontal	N/A
3	5874.18	47.47	11.68	74	26.53	Peak	225.7	150	Horizontal	Pass
4	11829.04	43.25	13.64	74	30.75	Peak	313.8	150	Horizontal	Pass
5	16379.37	49.26	9.22	74	24.74	Peak	225.1	150	Horizontal	Pass
6	22673.88	48.19	12.23	74	25.81	Peak	260	150	Horizontal	Pass

## GFSK HIGH CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1993.58	45.90	-1.12	74	28.11	Peak	304.5	150	Vertical	Pass
2	2480.74	68.72	0.39	74	5.28	Peak	62	150	Vertical	N/A
3	5120.41	47.16	11.80	74	26.84	Peak	143.8	150	Vertical	Pass
4	6303.25	46.42	14.82	74	27.58	Peak	312.8	150	Vertical	Pass
5	12603.99	48.39	8.72	74	25.61	Peak	308.3	150	Vertical	Pass
6	23023.30	44.47	11.06	74	29.53	Peak	320.6	150	Vertical	Pass

## GFSK HIGH CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2077.13	40.65	-0.86	74	33.35	Peak	146.7	150	Horizontal	Pass
2	2480.83	68.67	0.81	74	5.33	Peak	325.9	150	Horizontal	N/A
3	5875.16	47.82	12.09	74	26.18	Peak	158.2	150	Horizontal	Pass
4	7853.16	43.16	19.68	74	30.84	Peak	301.7	150	Horizontal	Pass
5	12750.00	45.89	9.74	74	28.11	Peak	217.6	150	Horizontal	Pass
6	18521.63	44.40	10.57	74	29.60	Peak	231.9	150	Horizontal	Pass

## 8-DPSK LOW CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1995.01	45.27	-0.70	74	28.74	Peak	14.7	150	Vertical	Pass
2	2402.01	69.58	0.74	74	4.42	Peak	298.3	150	Vertical	N/A
3	5117.01	46.95	11.60	74	27.05	Peak	189.1	150	Vertical	Pass
4	7538.69	43.52	14.35	74	30.48	Peak	52	150	Vertical	Pass
5	13758.74	49.88	10.77	74	24.12	Peak	189.2	150	Vertical	Pass
6	24111.48	44.78	12.08	74	29.22	Peak	308.3	150	Vertical	Pass

## 8-DPSK LOW CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2075.54	42.16	-0.25	74	31.84	Peak	320.3	150	Horizontal	Pass
2	2402.01	68.03	0.81	74	5.97	Peak	126.3	150	Horizontal	N/A
3	5873.40	48.36	11.55	74	25.64	Peak	163.2	150	Horizontal	Pass
4	11458.40	49.04	14.17	74	24.96	Peak	50.1	150	Horizontal	Pass
5	13332.36	49.40	19.41	74	24.60	Peak	180.8	150	Horizontal	Pass
6	22074.88	48.27	11.90	74	25.73	Peak	43.1	150	Horizontal	Pass

## 8-DPSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1992.76	45.39	-1.12	74	28.62	Peak	29	150	Vertical	Pass
2	2440.53	69.05	0.81	74	4.95	Peak	310.8	150	Vertical	N/A
3	5118.28	48.36	11.48	74	25.64	Peak	330	150	Vertical	Pass
4	10110.65	51.93	20.11	74	22.07	Peak	323.8	150	Vertical	Pass
5	17356.91	46.12	9.77	74	27.88	Peak	47.2	150	Vertical	Pass
6	23572.38	44.58	9.85	74	29.42	Peak	77.4	150	Vertical	Pass

## 8-DPSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2076.57	41.64	0.39	74	32.36	Peak	306.7	150	Horizontal	Pass
2	2440.16	68.53	0.84	74	5.47	Peak	159.4	150	Horizontal	N/A
3	5871.83	47.34	11.55	74	26.66	Peak	296.2	150	Horizontal	Pass
4	8527.04	42.71	14.47	74	31.29	Peak	289.9	150	Horizontal	Pass
5	14497.09	42.47	9.23	74	31.53	Peak	16.6	150	Horizontal	Pass
6	19069.88	43.77	9.76	74	30.24	Peak	99.3	150	Horizontal	Pass

## 8-DPSK HIGH CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1993.13	44.34	-0.27	74	29.67	Peak	38.8	150	Vertical	Pass
2	2480.48	69.16	0.39	74	4.84	Peak	0.9	150	Vertical	N/A
3	5118.68	46.89	11.66	74	27.11	Peak	350.1	150	Vertical	Pass
4	6224.63	44.93	15.63	74	29.07	Peak	305	150	Vertical	Pass
5	17835.28	45.73	9.15	74	28.27	Peak	139.7	150	Vertical	Pass
6	24241.27	48.21	12.13	74	25.80	Peak	357.4	150	Vertical	Pass

## 8-DPSK HIGH CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2078.24	40.57	-0.80	74	33.43	Peak	56.3	150	Horizontal	Pass
2	2480.76	67.08	0.79	74	6.92	Peak	292.9	150	Horizontal	N/A
3	5873.04	48.34	11.84	74	25.66	Peak	122.2	150	Horizontal	Pass
4	8527.04	46.95	14.19	74	27.05	Peak	324.6	150	Horizontal	Pass
5	12926.79	42.93	9.08	74	31.07	Peak	281.5	150	Horizontal	Pass
6	23712.15	46.95	10.10	74	27.05	Peak	124	150	Horizontal	Pass

**Hopping Mode:**
**GFSK MODE 1 GHz to 25 GHz, ANT V**

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1994.49	46.06	-1.42	74	27.95	Peak	223.4	150	Vertical	Pass
2	2402.02	67.98	0.79	74	6.02	Peak	95.3	150	Vertical	N/A
3	5118.58	47.77	11.80	74	26.23	Peak	136	150	Vertical	Pass
4	11694.26	49.23	16.89	74	24.78	Peak	343.3	150	Vertical	Pass
5	15568.22	47.60	9.04	74	26.40	Peak	270.2	150	Vertical	Pass
6	22524.13	46.67	11.88	74	27.33	Peak	146.8	150	Vertical	Pass

**GFSK MODE 1 GHz to 25 GHz, ANT H**

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2077.36	41.34	-0.80	74	32.66	Peak	153.9	150	Horizontal	Pass
2	2402.01	68.90	0.39	74	5.10	Peak	132.6	150	Horizontal	N/A
3	5873.17	48.36	11.84	74	25.64	Peak	212.5	150	Horizontal	Pass
4	7819.47	45.98	14.15	74	28.02	Peak	329.3	150	Horizontal	Pass
5	16358.57	44.47	11.69	74	29.53	Peak	237	150	Horizontal	Pass
6	18490.43	48.96	12.60	74	25.04	Peak	228.3	150	Horizontal	Pass

**8-DPSK MODE 1 GHz to 25 GHz, ANT V**

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1992.51	44.93	-1.42	74	29.08	Peak	165	150	Vertical	Pass
2	2402.04	68.77	0.84	74	5.23	Peak	312.8	150	Vertical	N/A
3	5118.97	47.86	11.80	74	26.14	Peak	20.9	150	Vertical	Pass
4	7606.07	49.73	14.74	74	24.27	Peak	329.4	150	Vertical	Pass
5	16472.96	45.68	8.89	74	28.32	Peak	164.4	150	Vertical	Pass
6	19459.24	49.53	9.78	74	24.47	Peak	356.9	150	Vertical	Pass

## 8-DPSK MODE 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2075.53	40.62	-0.25	74	33.38	Peak	225.4	150	Horizontal	Pass
2	2402.03	67.01	0.71	74	6.99	Peak	312.6	150	Horizontal	N/A
3	5872.87	47.23	12.09	74	26.77	Peak	216.7	150	Horizontal	Pass
4	7403.91	46.29	19.07	74	27.71	Peak	135.9	150	Horizontal	Pass
5	15256.24	43.90	8.72	74	30.10	Peak	316	150	Horizontal	Pass
6	19049.92	45.80	12.42	74	28.20	Peak	120.3	150	Horizontal	Pass



## A.9 Band Edge (Restricted-band band-edge)

Note <sup>1</sup>: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note <sup>2</sup>: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note <sup>3</sup>: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390.00	44.54	74	29.46	PEAK	Pass
		2390.00	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.50	45.27	74	28.73	PEAK	Pass
		2483.50	N/A	54	N/A	AVERAGE	Pass
8-DPSK	Low	2390.00	44.31	74	29.69	PEAK	Pass
		2390.00	N/A	54	N/A	AVERAGE	Pass
8-DPSK	HIGH	2483.50	45.71	74	28.29	PEAK	Pass
		2483.50	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	Low	2390.00	43.92	74	30.08	PEAK	Pass
		2390.00	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	HIGH	2483.50	45.22	74	28.78	PEAK	Pass
		2483.50	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	Low	2390.00	43.70	74	30.30	PEAK	Pass
		2390.00	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	HIGH	2483.50	45.72	74	28.28	PEAK	Pass
		2483.50	N/A	54	N/A	AVERAGE	Pass

Test Plots


GFSK LOW CHANNEL , PEAK




GFSK HIGH CHANNEL , PEAK

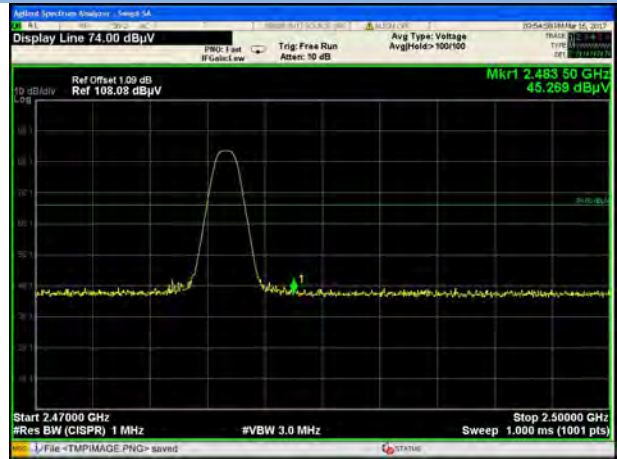

8-DPSK LOW CHANNEL , PEAK

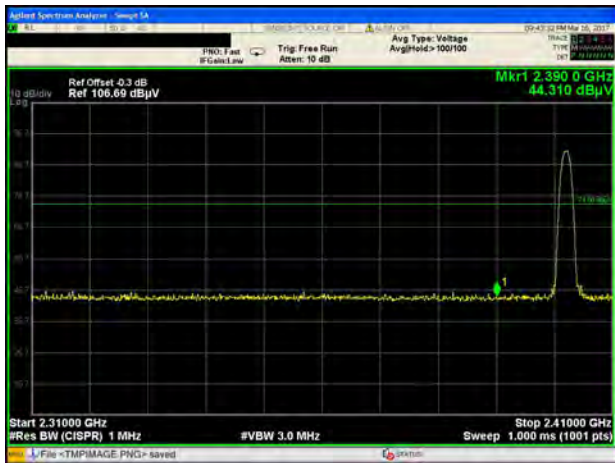


8-DPSK HIGH CHANNEL , PEAK

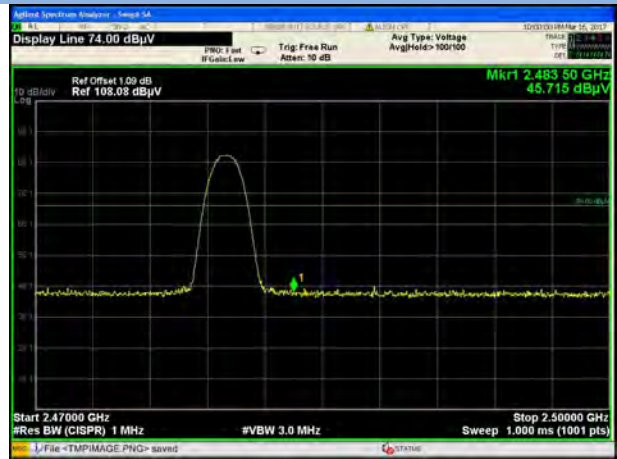


Hopping Mode:

GFSK LOW FREQUENCY BAND, PEAK

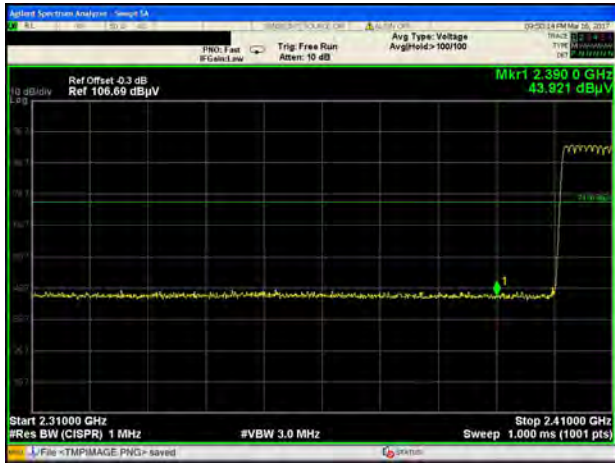

GFSK HIGH FREQUENCY BAND, PEAK

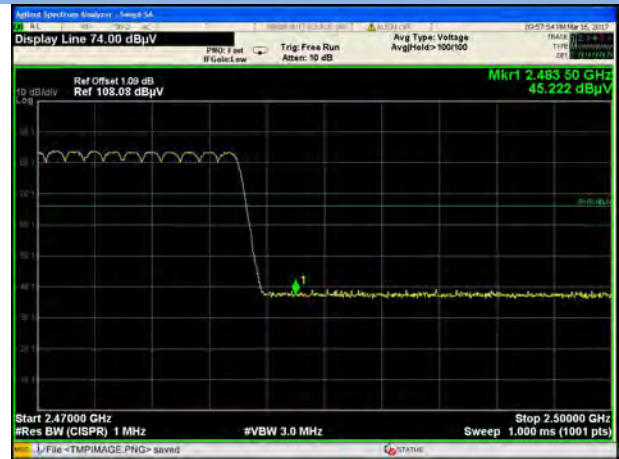

8-DPSK LOW FREQUENCY BAND, PEAK



8-DPSK HIGH FREQUENCY BAND, PEAK



## **ANNEX B TEST SETUP PHOTOS**

Please refer the document "BL-SZ1730119-AR.PDF".

## **ANNEX C EUT EXTERNAL PHOTOS**

Please refer the document "BL-SZ1730119-AW.PDF".

## **ANNEX D EUT INTERNAL PHOTOS**

Please refer the document "BL-SZ1730119-AI.PDF".

--END OF REPORT--