

FCC AND IC CERTIFICATION TEST REPORT

FOR

Applicant	:	ION Audio, LLC
Address	:	200 Scenic View Drive, Cumberland, RI 02864 U.S.A.
Equipment under Test	:	Tiki-Style Outdoor Solar Speaker
Model No.	:	Tiki Sounds
Project Code	:	iSP92
Trade Mark	:	ION
FCC ID	:	2AB3E-ISP92
IC	:	10541A-ISP92
Manufacturer	:	ION Audio, LLC
Address	:	200 Scenic View Drive, Cumberland, RI 02864 U.S.A.

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan
City, Guangdong Province, China, 523808

Tel: +86-0769-89201699, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

TABLE OF CONTENTS

	Test report declares.....	4
1.	Summary of test results	5
2.	General test information	6
2.1.	Description of EUT	6
2.2.	Accessories of EUT	6
2.3.	Assistant equipment used for test.....	6
2.4.	Block diagram of EUT configuration for test	6
2.5.	Test environment conditions	7
2.6.	Deviations of test standard	7
2.7.	Test laboratory.....	7
2.8.	Measurement uncertainty	8
3.	Equipment used during test	9
4.	20dB Bandwidth and 99% Bandwidth.....	10
4.1.	Block diagram of test setup	10
4.2.	Limits	10
4.3.	Test Procedure	10
4.4.	Test Result	10
4.5.	Original test data.....	11
5.	Radiated emission	13
5.1.	Block diagram of test setup	13
5.2.	Limit	14
5.3.	Test Procedure	15
5.4.	Test result.....	15
6.	Band Edge Compliance	19
6.1.	Block diagram of test setup	19
6.2.	Limit.....	19
6.3.	Test Procedure	19
6.4.	Test result.....	19
7.	Power Line Conducted Emission.....	24
7.1.	Block diagram of test setup	24
7.2.	Power Line Conducted Emission Limits.....	24
7.3.	Test Procedure	24
7.4.	Test Result	25
8.	Antenna Requirements.....	28
8.1.	Limit	28
8.2.	Result	28

TEST REPORT DECLARE

Applicant	:	ION Audio, LLC
Address	:	200 Scenic View Drive, Cumberland, RI 02864 U.S.A.
Equipment under Test	:	Tiki-Style Outdoor Solar Speaker
Model No.	:	Tiki Sounds
Trade mark	:	ION
Manufacturer	:	ION Audio, LLC
Address	:	200 Scenic View Drive, Cumberland, RI 02864 U.S.A.

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C, RSS-210 Issue 9 August 2016.

Test procedure used:

ANSI C63.10:2013, RSS-Gen Issue 4, Nov. 2014.

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&IC standards.

Report No:	DDT-R17121107-1E1		
Date of Receipt:	Dec. 21, 2017	Date of Test:	Dec. 21, 2017 ~ Jan. 16, 2018

Prepared By:

Sam Li

Sam Li/Engineer

Approved By:



Kevin Feng/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision history

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Jan. 17, 2018	

1. Summary of test results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Results
20dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.215 ANSI C63.10:2013 RSS-210 Issue 9 B.10 RSS-Gen Issue 4 clause 6.6	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.249 ANSI C63.10:2013 RSS-210 Issue 9 B.10.a RSS-Gen Issue 4 8.9 8.10	PASS
Band Edge Compliance	FCC Part 15: 15.205 FCC Part 15: 15.249 ANSI C63.10:2013 RSS-210 Issue 9 B.10.b RSS-Gen Issue 4 8.9 8.10	PASS
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10:2013 RSS-Gen Issue 4 8.8	PASS
Antenna requirement	FCC Part 15: 15.203 RSS-Gen Issue 4 8.3	PASS
N/A is an abbreviation for Not Applicable.		

2. General test information

2.1. Description of EUT

EUT* Name	: Tiki-Style Outdoor Solar Speaker
Model Number	: Tiki Sounds
EUT function description	: Please reference user manual of this device
Power supply	: DC 5V from external AC Adapter : DC 3.7V built-in battery*2
Operation frequency	: 5731MHz -5800MHz
Modulation	: GFSK
Antenna Type	: Dedicated Antenna, maximum PK gain: 3.57dBi
Sample Type	: Series production

Note: EUT is the ab. of equipment under test.

EUT channels and frequencies list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5731	9	5771
2	5734	10	5773
3	5738	11	5774
4	5749	12	5778
5	5753	13	5789
6	5756	14	5796
7	5760	15	5800
8	5767		

2.2. Accessories of EUT


Description of Accessories	Manufacturer	Model number	Serial No.	Other
/	/	/	/	/

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Serial No.	Other
/	/	/	/	/

2.4. Block diagram of EUT configuration for test

Tx Mode:



For Tx Mode, A special test firmware was installed in EUT and which can exercise the EUT work in continues RF test mode at specified test channel as below:

Note: Fully charged battery is used during all test

Tested mode, channel, information		
Mode	Channel	Frequency (MHz)
GFSK Tx mode	CH1	5731
	CH7	5760
	CH15	5800

2.5. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa

2.6. Deviations of test standard

No Deviation.

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808

Tel: +86-0769-89201699, E-mail: ddt@dgddt.com, <http://www.dgddt.com>

CNAS Accreditation No. L6451; A2LA Accreditation No. 3870.01

Designation Number: CN1182; Test Firm Registration Number: 540522

Industry Canada site registration number: 10288A-1

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power(Conducted)(Spectrum analyzer)	0.86dB(10 MHz ≤ f < 3.6GHz);
	1.38dB(3.6GHz ≤ f < 8GHz)
Peak Output Power(Conducted)(Power Sensor)	0.74dB
Power Spectral Density	0.74dB(10 MHz ≤ f < 3.6GHz);
	1.38dB(3.6GHz ≤ f < 8GHz)
Conducted spurious emissions	0.86dB(10 MHz ≤ f < 3.6GHz);
	1.40dB(3.6GHz ≤ f < 8GHz)
	1.66dB(8GHz ≤ f < 22GHz)
Uncertainty for radio frequency (RBW<20kHz)	3×10^{-8}
Temperature	0.4℃
Humidity	2%
Uncertainty for Radiation Emission test (30MHz-1GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1GHz-40GHz)	4.10dB(1-6GHz)
	4.40dB (6GHz-18GHz)
	3.54dB(18GHz-26GHz)
	4.30dB (26GHz-40GHz)
Uncertainty for Power line conduction emission test	3.32dB (150kHz-30MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment used during test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Connected Test					
Spectrum analyzer	R&S	FSU26	200071	Oct. 23, 2017	1Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jun. 16, 2017	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Oct. 23, 2017	1Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jun.16, 2017	1Year
Power Sensor	Agilent	U2021XA	MY55150010	Oct. 21, 2017	1Year
Power Sensor	Agilent	U2021XA	MY55150011	Oct. 23, 2017	1Year
DC Power Source	MATRIS	MPS-3005L-3	D813058W	Aug. 18, 2017	1Year
Attenuator	Mini-Circuits	BW-S10W2	101109	Aug. 18, 2017	1Year
RF Cable	Micable	C10-01-01-1	100309	Oct. 21, 2017	1Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Oct. 21, 2017	1Year
Test Software	JS Tonscent	JS1120-3	Ver.2.7	N/A	N/A
USB Data acquisition	Agilent	U2531A	TW55043503	N/A	N/A
Radiated Emission Test Chamber 1#					
EMI Test Receiver	R&S	ESU8	100316	Oct. 21, 2017	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 16, 2017	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Nov. 09, 2017	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Oct. 17, 2017	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Oct. 17, 2017	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	Nov. 09, 2017	1 Year
Pre-amplifier	TERA-MW	TRLA-0040G35	101303	Oct. 21, 2017	1 Year
Preamplifier	A.H.Systems.lnc	PAM-0118	360	Oct. 21, 2017	1 Year
RF Cable	HUBSER	CP-X2+ CP-X1	W11.03+ W12.02	Oct. 21, 2017	1Year
RF Cable	N/A	SMAJ-SMAJ-1M+ SMAJ-SMAJ-11M	17070133+17070131	Nov. 08, 2017	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
Power Line Conducted Emissions Test					
Test Receiver	R&S	ESPI	101761	Oct. 21, 2017	1 Year
LISN 1	R&S	ENV216	101109	Oct. 21, 2017	1 Year
LISN 2	R&S	ESH2-Z5	100309	Oct. 21, 2017	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Oct. 21, 2017	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Oct. 21, 2017	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. 20dB Bandwidth and 99% Bandwidth

4.1. Block diagram of test setup

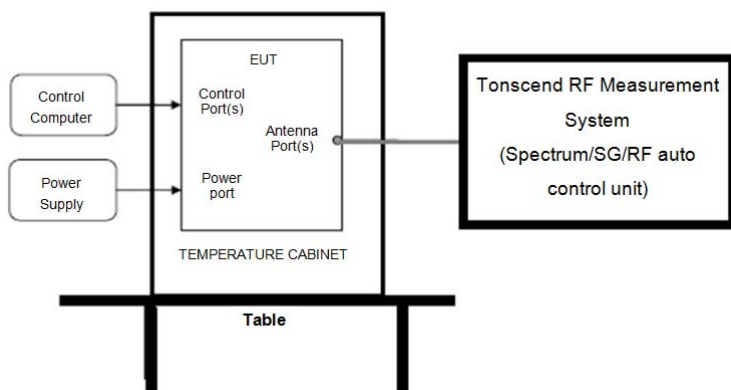

4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

RBW:	100kHz
VBW:	300kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, measure the 20dB and 99% bandwidth of signal.

4.4. Test Result

Mode	Freq (MHz)	20dB bandwidth Result (MHz)	99% bandwidth Result (MHz)	Conclusion
GFSK	5731	3.429	3.189	PASS
	5760	3.397	3.173	PASS
	5800	3.429	3.205	PASS

4.5. Original test data


20 dB Bandwidth	
LCH 5731	<p> *RBW 100 kHz *VBW 300 kHz *Att 0 dB SWF 20 ms Marker 1 [T1] -20.50 dBm 5.731064103 GHz ndB [T1] 20.00 dB BW 3.42948179 MHz Temp 1 [T1] ndB -41.54 dBm 5.72925205 GHz Temp 2 [T2] ndB -41.54 dBm 5.73268692 GHz Center 5.731 GHz 1 MHz/ Span 10 MHz </p>
MCH 5760	<p> *RBW 100 kHz *VBW 300 kHz *Att 0 dB SWF 20 ms Marker 1 [T1] -22.93 dBm 5.760048077 GHz ndB [T1] 20.00 dB BW 3.39743897 MHz Temp 1 [T1] ndB -41.06 dBm 5.75823179 GHz Temp 2 [T2] ndB -41.11 dBm 5.761634615 GHz Center 5.76 GHz 1 MHz/ Span 10 MHz </p>
HCH 5800	<p> *RBW 100 kHz *VBW 300 kHz *Att 0 dB SWF 20 ms Marker 1 [T1] -24.86 dBm 5.800080128 GHz ndB [T1] 20.00 dB BW 3.42948179 MHz Temp 1 [T1] ndB -41.40 dBm 5.79823179 GHz Temp 2 [T2] ndB -41.90 dBm 5.80166667 GHz Center 5.8 GHz 1 MHz/ Span 10 MHz </p>

Occupied Bandwidth											
LCH 5731	<p> *RBW 100 kHz Marker 1 [T1] -25.40 dBm *VBW 300 kHz 5.731096154 GHz *Att. 0 dB SWF 20 ms Ref 0 dBm </p> <table border="1"> <tr> <td>OSW</td> <td>3.189101564 MHz</td> </tr> <tr> <td>Temp 1 [T1 OBW]</td> <td>-36.84 dBm</td> </tr> <tr> <td>Temp 2 [T1 OBW]</td> <td>5.72938410 GHz</td> </tr> <tr> <td>Temp 3 [T1 OBW]</td> <td>-46.86 dBm</td> </tr> <tr> <td>Temp 4 [T1 OBW]</td> <td>5.732576513 GHz</td> </tr> </table> <p>Center 5.731 GHz 1 MHz/ Span 10 MHz</p>	OSW	3.189101564 MHz	Temp 1 [T1 OBW]	-36.84 dBm	Temp 2 [T1 OBW]	5.72938410 GHz	Temp 3 [T1 OBW]	-46.86 dBm	Temp 4 [T1 OBW]	5.732576513 GHz
OSW	3.189101564 MHz										
Temp 1 [T1 OBW]	-36.84 dBm										
Temp 2 [T1 OBW]	5.72938410 GHz										
Temp 3 [T1 OBW]	-46.86 dBm										
Temp 4 [T1 OBW]	5.732576513 GHz										
MCH 5760	<p> *RBW 100 kHz Marker 1 [T1] -25.76 dBm *VBW 300 kHz 5.760096154 GHz *Att. 0 dB SWF 20 ms Ref 0 dBm </p> <table border="1"> <tr> <td>OSW</td> <td>3.173074923 MHz</td> </tr> <tr> <td>Temp 1 [T1 OBW]</td> <td>-41.60 dBm</td> </tr> <tr> <td>Temp 2 [T1 OBW]</td> <td>5.75838410 GHz</td> </tr> <tr> <td>Temp 3 [T1 OBW]</td> <td>-46.86 dBm</td> </tr> <tr> <td>Temp 4 [T1 OBW]</td> <td>5.76155487 GHz</td> </tr> </table> <p>Center 5.76 GHz 1 MHz/ Span 10 MHz</p>	OSW	3.173074923 MHz	Temp 1 [T1 OBW]	-41.60 dBm	Temp 2 [T1 OBW]	5.75838410 GHz	Temp 3 [T1 OBW]	-46.86 dBm	Temp 4 [T1 OBW]	5.76155487 GHz
OSW	3.173074923 MHz										
Temp 1 [T1 OBW]	-41.60 dBm										
Temp 2 [T1 OBW]	5.75838410 GHz										
Temp 3 [T1 OBW]	-46.86 dBm										
Temp 4 [T1 OBW]	5.76155487 GHz										
HCH 5800	<p> *RBW 100 kHz Marker 1 [T1] -21.85 dBm *VBW 300 kHz 5.800096154 GHz *Att. 0 dB SWF 20 ms Ref 0 dBm </p> <table border="1"> <tr> <td>OSW</td> <td>3.205121205 MHz</td> </tr> <tr> <td>Temp 1 [T1 OBW]</td> <td>-31.87 dBm</td> </tr> <tr> <td>Temp 2 [T1 OBW]</td> <td>5.79836385 GHz</td> </tr> <tr> <td>Temp 3 [T1 OBW]</td> <td>-46.86 dBm</td> </tr> <tr> <td>Temp 4 [T1 OBW]</td> <td>5.801576513 GHz</td> </tr> </table> <p>Center 5.8 GHz 1 MHz/ Span 10 MHz</p>	OSW	3.205121205 MHz	Temp 1 [T1 OBW]	-31.87 dBm	Temp 2 [T1 OBW]	5.79836385 GHz	Temp 3 [T1 OBW]	-46.86 dBm	Temp 4 [T1 OBW]	5.801576513 GHz
OSW	3.205121205 MHz										
Temp 1 [T1 OBW]	-31.87 dBm										
Temp 2 [T1 OBW]	5.79836385 GHz										
Temp 3 [T1 OBW]	-46.86 dBm										
Temp 4 [T1 OBW]	5.801576513 GHz										


5. Radiated emission

5.1. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9kHz-30MHz

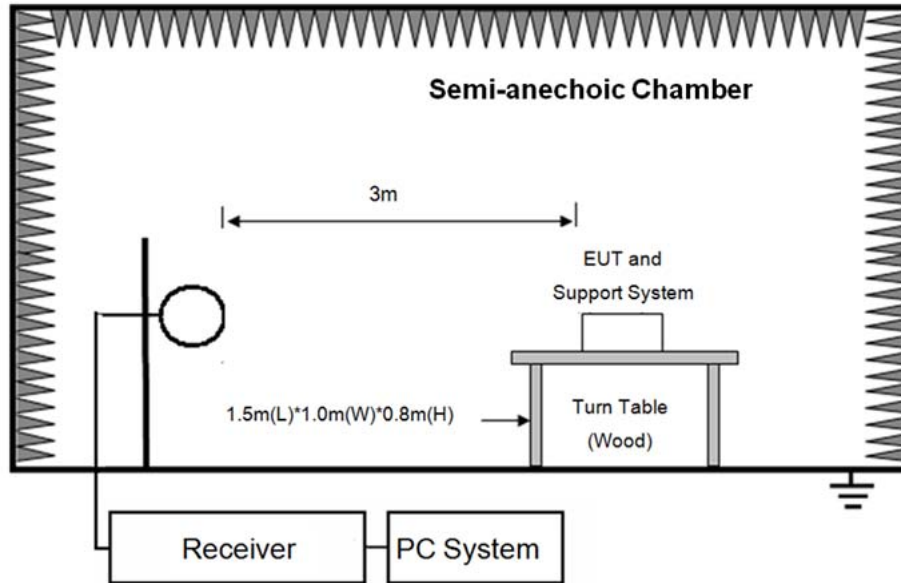

In 3m Anechoic Chamber Test Setup Diagram for 30MHz-1GHz

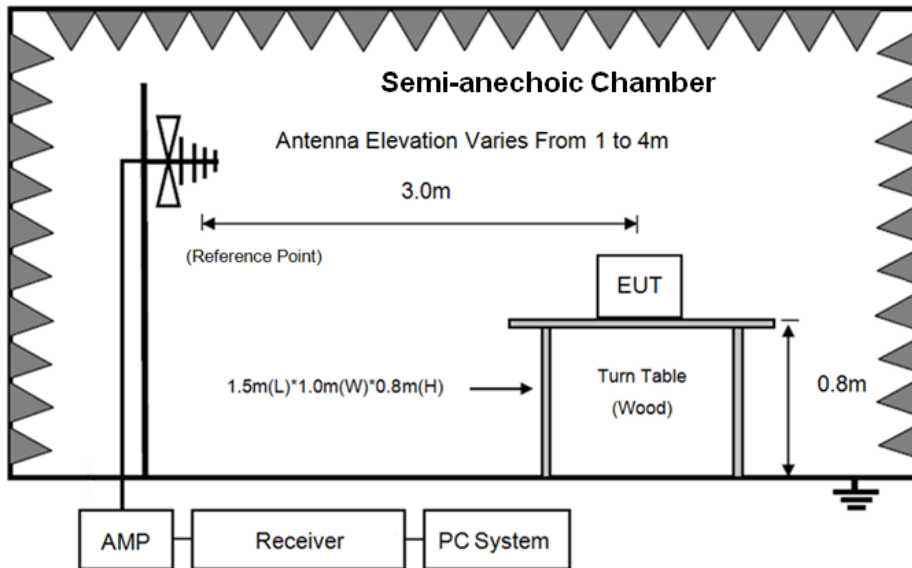

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

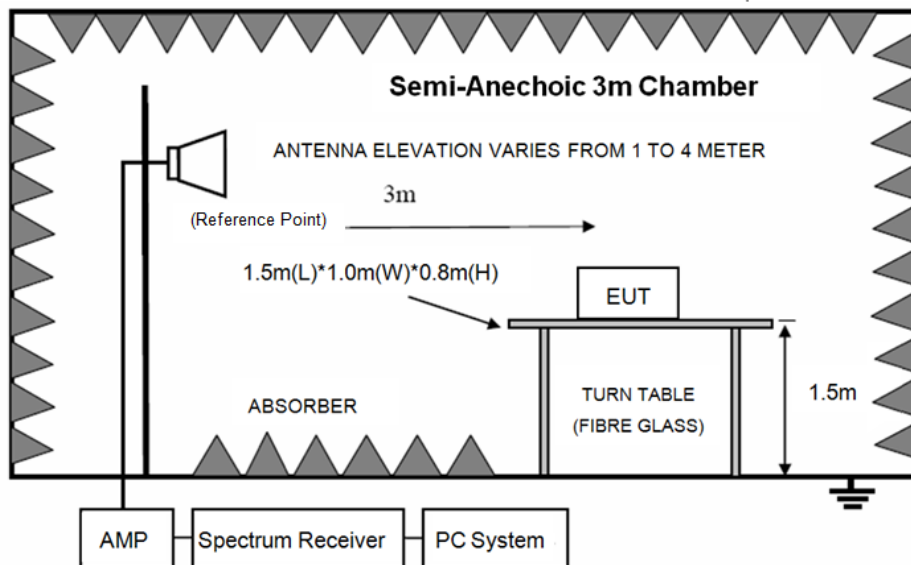

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

5.2. Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	
Field Strength of Fundamental emission for 5725MHz-5875MHz	3	94.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average) 114.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak)	
Field Strength of Harmonics	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Remark:

- (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V}/\text{m}$
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
- (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

5.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and assistant system according clause 2.4 and 5.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Change power supply range from 85% to 115% of the rated supply voltage
 - (d) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9kHz to 25GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 9kHz to 30MHz and 18GHz to 25GHz, so below final test was performed with frequency range from 30MHz to 18GHz.
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.
- (6) For emissions from 30MHz to 1GHz, Quasi-Peak values were measured with EMI Receiver and the bandwidth of Receiver is 120 kHz.
- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure. Peak detector is used for both PK and AV test.
- (8) For fundamental frequency test, set spectrum analyzer's RBW=10MHz, VBW=30MHz. peak detector for PK, RMS detector for AV, Read the Level in spectrum analyzer and record.
- (9) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.

5.4. Test result

PASS. (See below detailed test result)

All the emissions except fundamental emission from 9kHz to 25GHz were comply with 15.209 limit.

Note1: According exploratory test no any obvious emission were detected from 9kHz to 30MHz and 18GHz to 25GHz, so the final test was performed with frequency range from 30MHz to 18GHz and recorded in below.


Note2: For emissions below 1GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1GHz, the final test was only performed with EUT working in GFSK, Tx 5760MHz mode.

Note3: For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Emission test (below 1GHz) TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2017 RE1# Report Data\Q17121107-1E\Q17121107-1E FCC 30M-1G.EM6	
Test Date	: 2018-01-14	Tested By	: TALENT
EUT	: Tiki-Style Outdoor Solar Speaker	Model Number	: Tiki Sounds
Power Supply	: DC 3.7V	Test Mode	: Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	Antenna/Distance	: 2017 VULB 9163 1#/3m/VERTICAL
Memo	:		

Data: 1

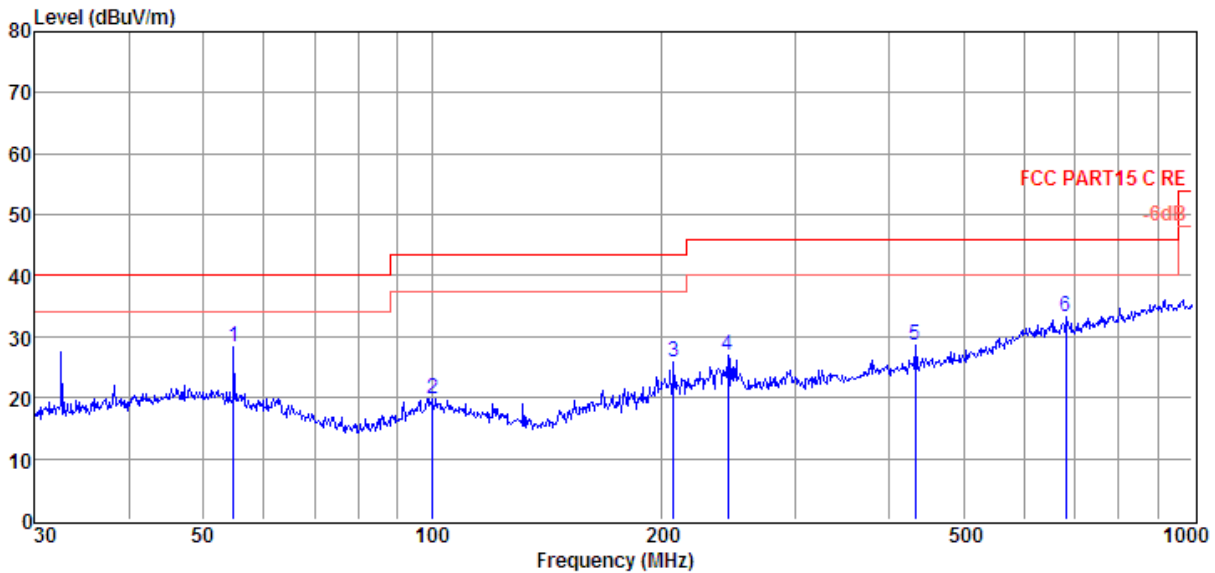

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	54.84	11.77	12.58	4.04	28.39	40.00	-11.61	QP	VERTICAL
2	100.23	3.95	11.47	4.41	19.83	43.50	-23.67	QP	VERTICAL
3	207.85	9.00	11.67	5.07	25.74	43.50	-17.76	QP	VERTICAL
4	245.09	9.19	12.40	5.27	26.86	46.00	-19.14	QP	VERTICAL
5	432.55	6.87	16.01	5.73	28.61	46.00	-17.39	QP	VERTICAL
6	682.35	6.75	19.65	6.95	33.35	46.00	-12.65	QP	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2017 RE1# Report Data\Q17121107-1E\Q17121107-1E FCC 30M-1G.EM6

Test Date : 2018-01-14

Tested By : TALENT

EUT : Tiki-Style Outdoor Solar Speaker

Model Number : Tiki Sounds

Power Supply : DC 3.7V


Test Mode : Tx mode

Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa

Antenna/Distance : 2017 VULB 9163 1#/3m/HORIZONTAL

Memo :

Data: 2

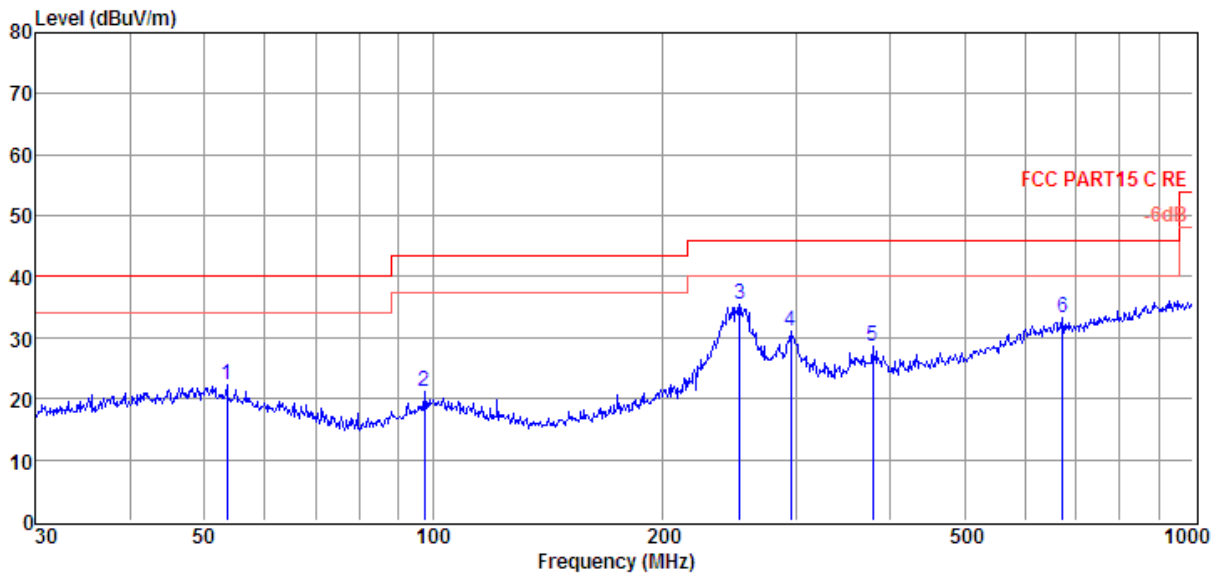

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	53.51	5.31	12.91	4.03	22.25	40.00	-17.75	QP	HORIZONTAL
2	97.46	5.67	10.99	4.39	21.05	43.50	-22.45	QP	HORIZONTAL
3	252.95	17.73	12.54	5.31	35.58	46.00	-10.42	QP	HORIZONTAL
4	295.15	12.43	13.23	5.50	31.16	46.00	-14.84	QP	HORIZONTAL
5	378.58	7.76	14.84	5.87	28.47	46.00	-17.53	QP	HORIZONTAL
6	672.84	6.63	19.62	6.92	33.17	46.00	-12.83	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


Radiated Emission test (above 1GHz)

Freq. (MHz)	Read level (dB μ V)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector type	Polarization
GFSK Tx mode 5731MHz									
5731.00	83.82	35.59	29.22	8.04	98.23	114.00	-15.77	Peak	HORIZONTAL
5731.00	76.91	35.59	29.22	8.04	91.32	94.00	-2.68	Average	HORIZONTAL
8616.00	34.81	37.35	31.94	9.93	50.15	74.00	-23.85	Peak	HORIZONTAL
10316.00	34.04	38.39	33.11	10.94	50.26	74.00	-23.74	Peak	HORIZONTAL
11489.00	34.22	38.60	34.49	11.02	49.35	74.00	-24.65	Peak	HORIZONTAL
12186.00	35.11	38.86	34.92	11.04	50.09	74.00	-23.91	Peak	HORIZONTAL
5731.00	85.28	35.59	29.22	8.04	99.69	114.00	-14.31	Peak	VERTICAL
5731.00	78.07	35.59	29.22	8.04	92.48	94.00	-1.52	Average	VERTICAL
7596.00	35.80	37.04	30.90	8.87	50.81	74.00	-23.19	Peak	VERTICAL
9024.00	34.92	37.51	32.33	10.38	50.48	74.00	-23.52	Peak	VERTICAL
11455.00	35.56	38.62	34.49	11.02	50.71	74.00	-23.29	Peak	VERTICAL
13410.00	35.48	39.71	35.38	11.76	51.57	74.00	-22.43	Peak	VERTICAL
GFSK Tx mode 5760MHz									
5760.00	83.48	35.60	29.21	8.06	97.93	114.00	-16.07	Peak	HORIZONTAL
5760.00	75.57	35.60	29.21	8.06	90.02	94.00	-3.98	Average	HORIZONTAL
7545.00	35.17	37.02	30.84	8.82	50.17	74.00	-23.83	Peak	HORIZONTAL
9551.00	34.61	37.75	32.69	10.66	50.33	74.00	-23.67	Peak	HORIZONTAL
11251.00	34.28	38.70	34.28	11.04	49.74	74.00	-24.26	Peak	HORIZONTAL
13104.00	34.87	39.40	35.64	11.46	50.09	74.00	-23.91	Peak	HORIZONTAL
5760.00	85.81	35.60	29.21	8.06	100.26	114.00	-13.74	Peak	VERTICAL
5760.00	78.45	35.60	29.21	8.06	92.90	94.00	-1.10	Average	VERTICAL
7749.00	35.39	37.10	31.00	9.00	50.49	74.00	-23.51	Peak	VERTICAL
9721.00	34.60	37.92	32.80	10.74	50.46	74.00	-23.54	Peak	VERTICAL
11506.00	35.08	38.60	34.51	11.01	50.18	74.00	-23.82	Peak	VERTICAL
12730.00	34.83	39.03	35.52	11.25	49.59	74.00	-24.41	Peak	VERTICAL
GFSK Tx mode 5800MHz									
5800.00	82.64	35.62	29.21	8.08	97.13	114.00	-16.87	Peak	HORIZONTAL
5800.00	76.48	35.62	29.21	8.08	90.97	94.00	-3.03	Average	HORIZONTAL
7885.00	35.19	37.15	31.09	9.13	50.38	74.00	-23.62	Peak	HORIZONTAL
9160.00	34.89	37.56	32.39	10.45	50.51	74.00	-23.49	Peak	HORIZONTAL
10571.00	34.41	38.54	33.33	10.99	50.61	74.00	-23.39	Peak	HORIZONTAL
11540.00	34.31	38.62	34.53	11.01	49.41	74.00	-24.59	Peak	HORIZONTAL
5800.00	85.80	35.62	29.21	8.08	100.29	114.00	-13.71	Peak	VERTICAL
5800.00	78.55	35.62	29.21	8.08	93.04	94.00	-0.96	Average	VERTICAL
7919.00	35.15	37.17	31.10	9.16	50.38	74.00	-23.62	Peak	VERTICAL
9126.00	34.93	37.55	32.38	10.44	50.54	74.00	-23.46	Peak	VERTICAL
10401.00	34.68	38.44	33.20	10.96	50.88	74.00	-23.12	Peak	VERTICAL
11591.00	34.83	38.65	34.56	11.01	49.93	74.00	-24.07	Peak	VERTICAL
Result: Pass									

Note: Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

6. Band Edge Compliance

6.1. Block diagram of test setup

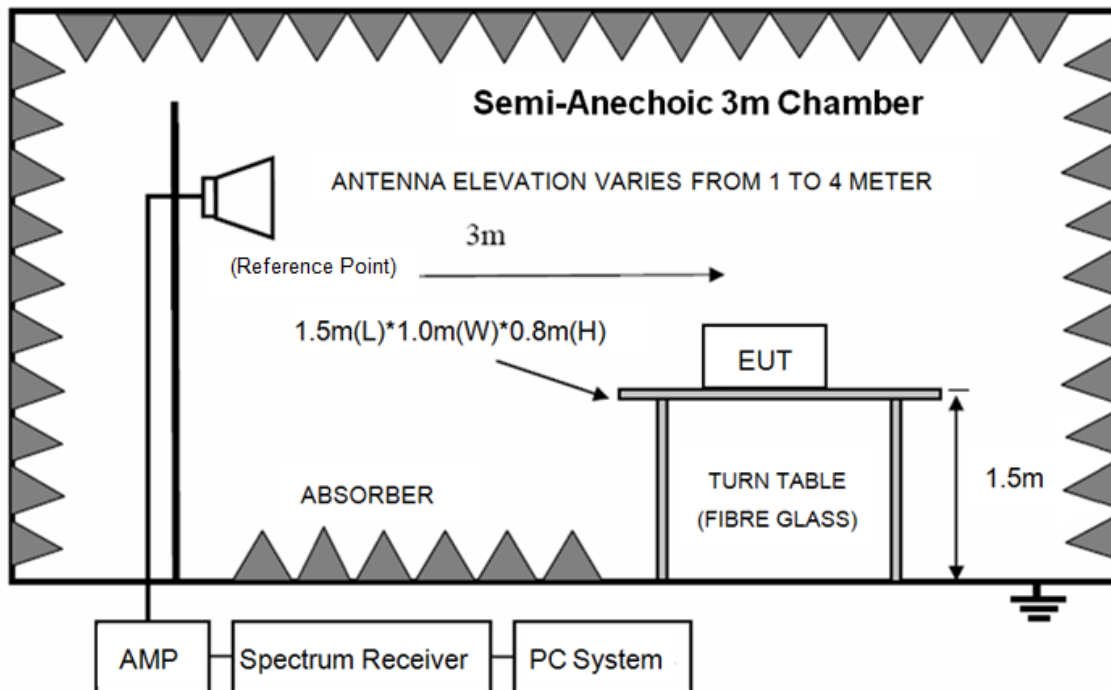

6.2. Limit

All the other emissions outside operation frequency band 5725MHz to 5875MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

6.3. Test Procedure

Same with clause 5.3 except change investigated frequency range from 5700MHz to 5750MHz and 5790MHz to 5900MHz.

Remark: All restriction band have been tested, and only the worse case is shown in report.


6.4. Test result

PASS. (See below detailed test result)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2017 RE1# Report Data\Q17121107-1\FCC.EM6
Test Date : 2018-01-14 **Tested By** : Sam
EUT : Tiki-Style Outdoor Solar Speaker **Model Number** : Tiki Sounds
Power Supply : DC 3.7V **Test Mode** : Tx mode
Condition : Temp:24.5°C,Humi:55%,
 : Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/VERTICAL
Memo : 5731MHz

Data: 13

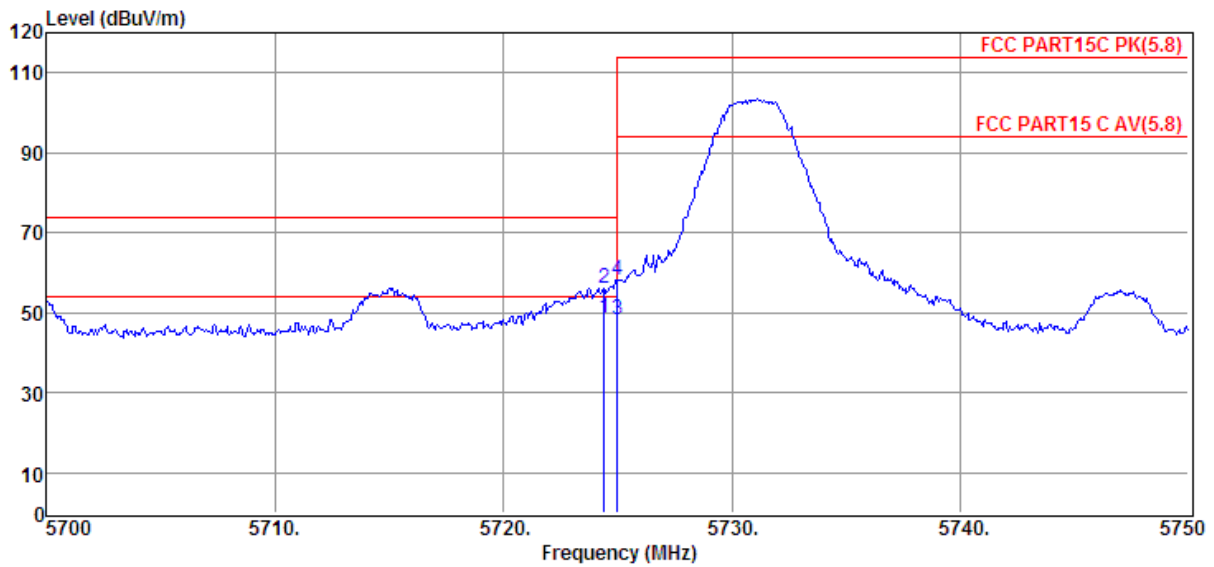


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV /m)	Over Limit (dB)	Detector	Polarization
1	5724.40	34.41	35.59	29.22	8.04	48.82	54.00	-5.18	Average	VERTICAL
2	5724.40	41.79	35.59	29.22	8.04	56.20	74.00	-17.80	Peak	VERTICAL
3	5725.00	33.99	35.59	29.22	8.04	48.40	54.00	-5.60	Average	VERTICAL
4	5725.00	43.79	35.59	29.22	8.04	58.20	74.00	-15.80	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2017 RE1# Report Data\Q17121107-1\FCC.EM6
Test Date : 2018-01-14 **Tested By** : Sam
EUT : Tiki-Style Outdoor Solar Speaker **Model Number** : Tiki Sounds
Power Supply : DC 3.7V **Test Mode** : Tx mode
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/HORIZONTAL
Memo : 5731MHz

Data: 14

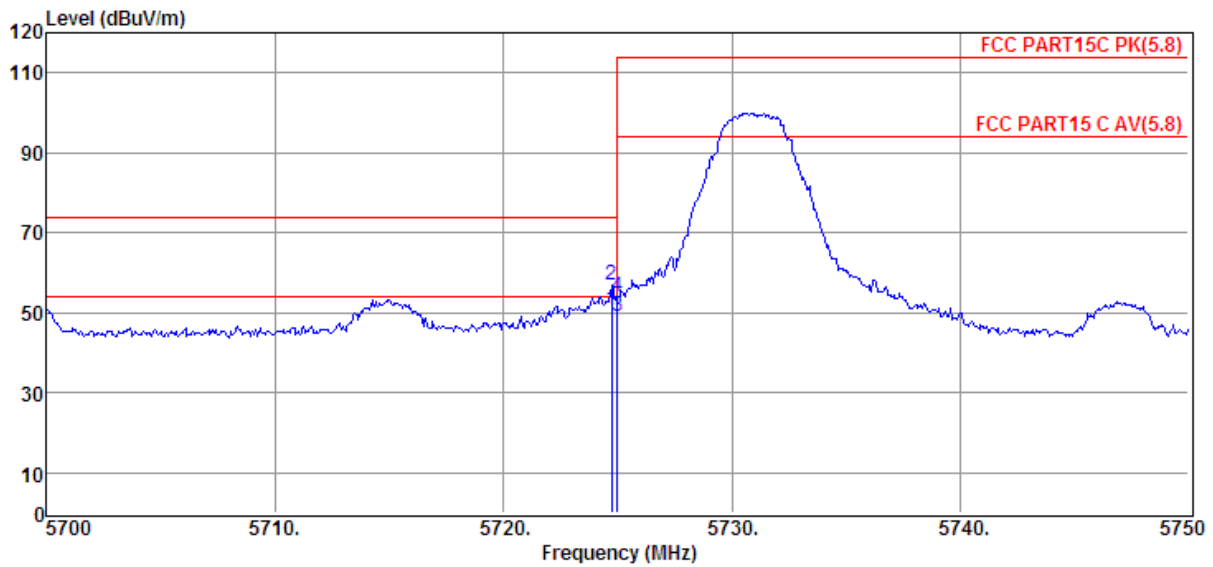


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV /m)	Over Limit (dB)	Detector	Polarization
1	5724.75	36.51	35.59	29.22	8.04	50.92	54.00	-3.08	Average	HORIZONTAL
2	5724.75	42.42	35.59	29.22	8.04	56.83	74.00	-17.17	Peak	HORIZONTAL
3	5725.00	34.52	35.59	29.22	8.04	48.93	54.00	-5.07	Average	HORIZONTAL
4	5725.00	39.81	35.59	29.22	8.04	54.22	74.00	-19.78	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2017 RE1# Report Data\Q17121107-1\FCC.EM6
Test Date : 2018-01-14 **Tested By** : Sam
EUT : Tiki-Style Outdoor Solar Speaker **Model Number** : Tiki Sounds
Power Supply : DC 3.7V **Test Mode** : Tx mode
Condition : Temp:24.5°C,Humi:55%,
 : Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/VERTICAL
Memo : 5800MHz

Data: 21

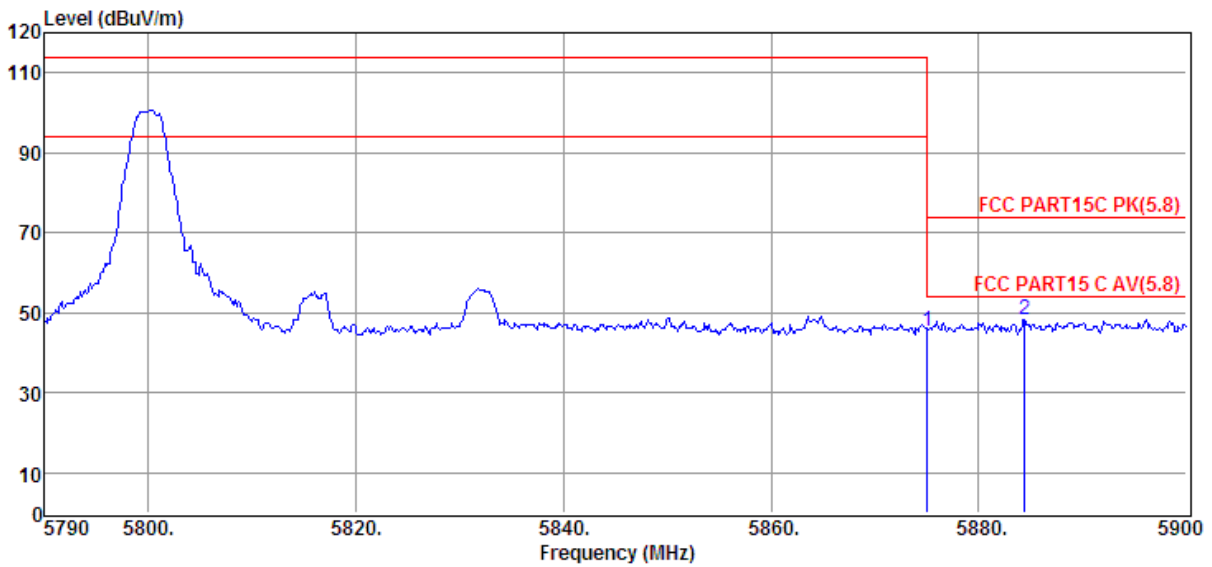


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5875.00	30.86	35.65	29.20	8.13	45.44	74.00	-28.56	Peak	VERTICAL
2	5884.38	33.70	35.65	29.20	8.14	48.29	74.00	-25.71	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2017 RE1# Report Data\Q17121107-1\FCC.EM6
Test Date : 2018-01-14 **Tested By** : Sam
EUT : Tiki-Style Outdoor Solar Speaker **Model Number** : Tiki Sounds
Power Supply : DC 3.7V **Test Mode** : Tx mode
Condition : Temp:24.5°C,Humi:55%,
 : Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/HORIZONTAL
Memo : 5800MHz

Data: 22

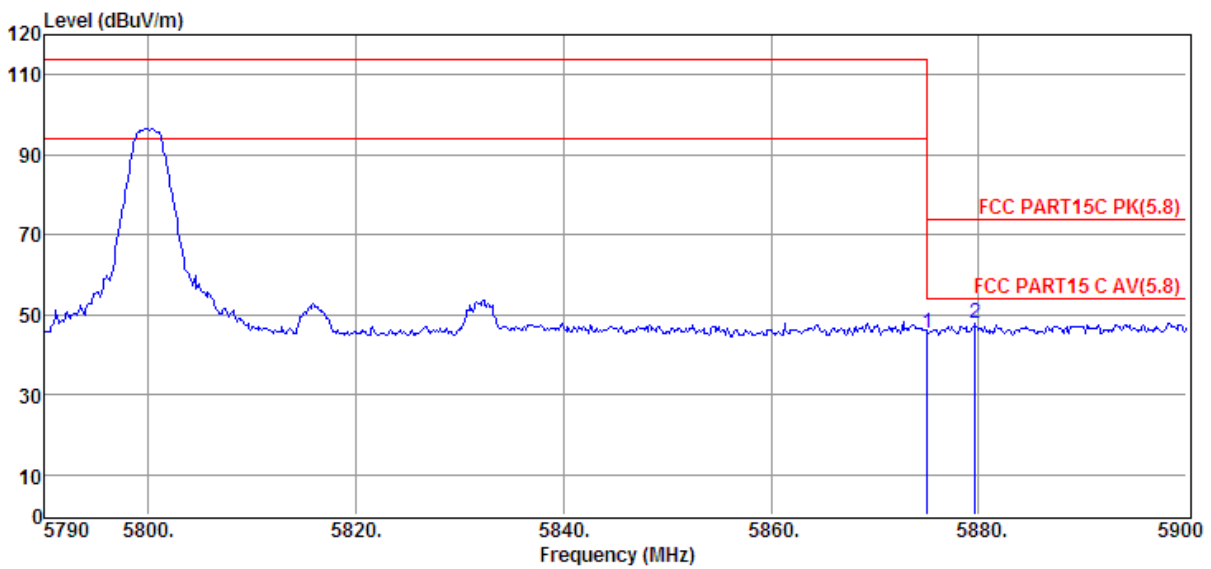


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5875.00	30.95	35.65	29.20	8.13	45.53	74.00	-28.47	Peak	HORIZONTAL
2	5879.65	33.39	35.65	29.20	8.13	47.97	74.00	-26.03	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

7. Power Line Conducted Emission

7.1. Block diagram of test setup

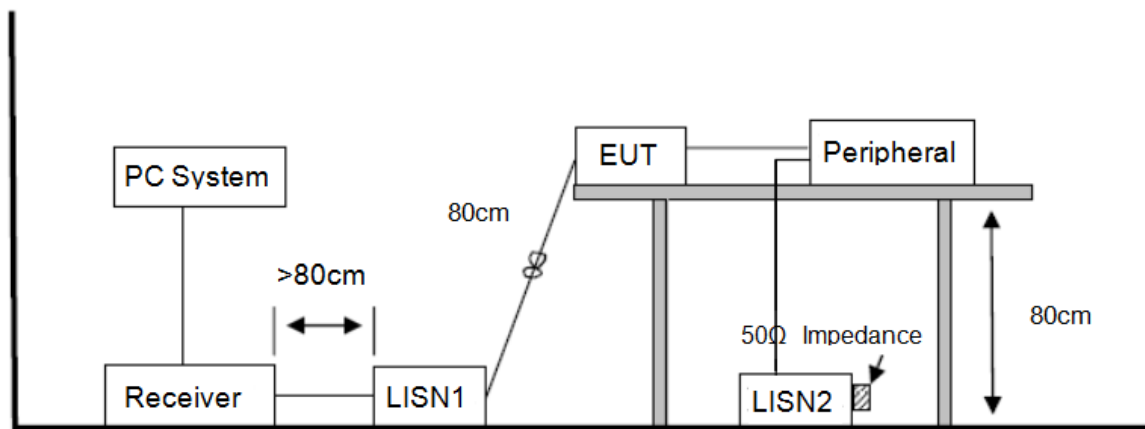

7.2. Power Line Conducted Emission Limits

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

7.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level. The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 KHz.

7.4. Test Result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.


Note2: "-----" means Peak detection; "-----" means Average detection

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 230V/50Hz, recorded worst case (AC 120V/60Hz).

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room E:\2017 CE report data\Q17121107-1E\CE.EM6
Test Date : 2018-01-14 **Tested By** : Xian
EUT : Tiki-Style Outdoor Solar Speaker **Model Number** : Tiki Sounds
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **LISN** : 2017 ENV216/LINE
Memo :

Data: 2

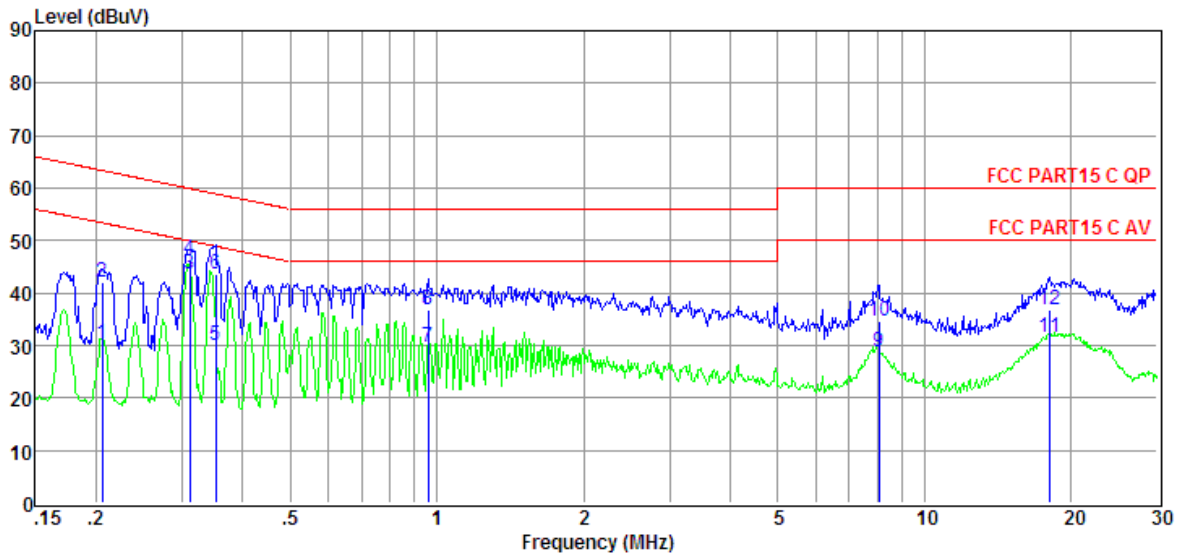


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Detector	Phase
1	0.21	10.87	9.51	0.04	9.86	30.28	53.36	-23.08	Average	LINE
2	0.21	22.71	9.51	0.04	9.86	42.12	63.36	-21.24	QP	LINE
3	0.31	24.06	9.53	0.04	9.86	43.49	49.93	-6.44	Average	LINE
4	0.31	26.89	9.53	0.04	9.86	46.32	59.93	-13.61	QP	LINE
5	0.35	10.62	9.52	0.04	9.84	30.02	48.91	-18.89	Average	LINE
6	0.35	24.31	9.52	0.04	9.84	43.71	58.91	-15.20	QP	LINE
7	0.96	10.12	9.57	0.13	9.86	29.68	46.00	-16.32	Average	LINE
8	0.96	17.39	9.57	0.13	9.86	36.95	56.00	-19.05	QP	LINE
9	8.06	9.12	9.75	0.11	9.88	28.86	50.00	-21.14	Average	LINE
10	8.06	14.83	9.75	0.11	9.88	34.57	60.00	-25.43	QP	LINE
11	18.04	11.79	9.87	0.11	9.93	31.70	50.00	-18.30	Average	LINE
12	18.04	16.89	9.87	0.11	9.93	36.80	60.00	-23.20	QP	LINE

- Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room E:\2017 CE report data\Q17121107-1E\CE.EM6
Test Date : 2018-01-14 **Tested By** : Xian
EUT : Tiki-Style Outdoor Solar Speaker **Model Number** : Tiki Sounds
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C,Humi:55%,
 Press:100.1kPa **LISN** : 2017 ENV216/NEUTRAL
Memo :

Data: 4

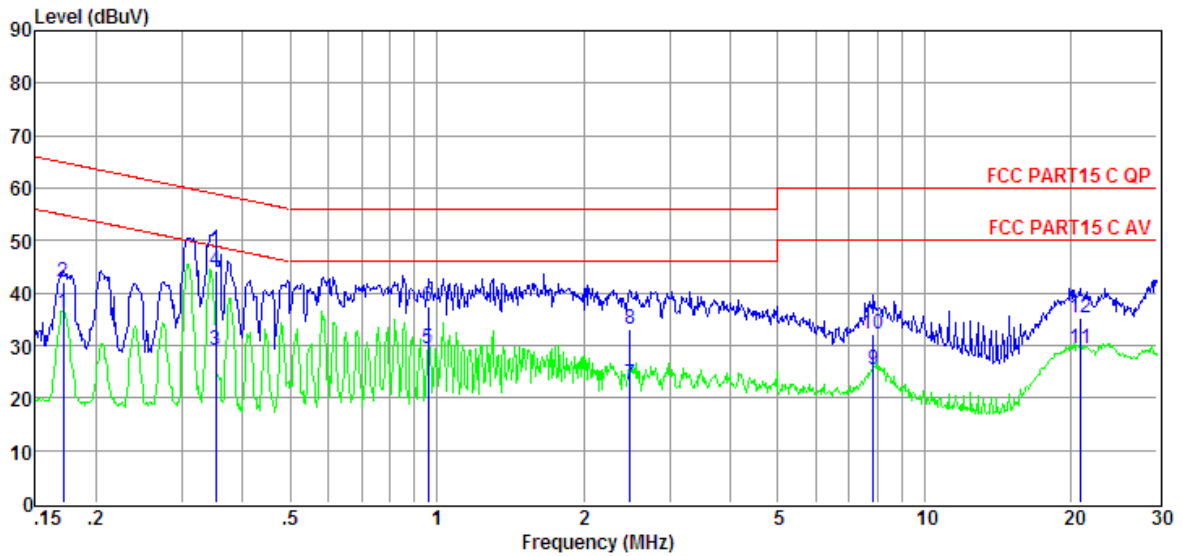

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Over Limit (dB)	Detector	Phase
1	0.17	16.66	9.47	0.04	9.86	36.03	54.90	-18.87	Average	NEUTRAL
2	0.17	22.60	9.47	0.04	9.86	41.97	64.90	-22.93	QP	NEUTRAL
3	0.35	9.86	9.38	0.04	9.84	29.12	48.91	-19.79	Average	NEUTRAL
4	0.35	25.00	9.38	0.04	9.84	44.26	58.91	-14.65	QP	NEUTRAL
5	0.96	10.15	9.30	0.13	9.86	29.44	46.00	-16.56	Average	NEUTRAL
6	0.96	18.00	9.30	0.13	9.86	37.29	56.00	-18.71	QP	NEUTRAL
7	2.49	3.04	9.42	0.12	9.87	22.45	46.00	-23.55	Average	NEUTRAL
8	2.49	13.84	9.42	0.12	9.87	33.25	56.00	-22.75	QP	NEUTRAL
9	7.85	6.03	9.36	0.11	9.88	25.38	50.00	-24.62	Average	NEUTRAL
10	7.85	12.85	9.36	0.11	9.88	32.20	60.00	-27.80	QP	NEUTRAL
11	20.81	9.81	9.50	0.11	9.95	29.37	50.00	-20.63	Average	NEUTRAL
12	20.81	15.66	9.50	0.11	9.95	35.22	60.00	-24.78	QP	NEUTRAL

- Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

8. Antenna Requirements

8.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2. Result

The antennas used for this product are dedicated Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 3.57dBi.

END OF REPORT