

# NORTHWEST EMC


## CINCH Systems

RF-FOB-319

FCC 15.231:2016

Low Power Transmitter

Report # CINC0004.1

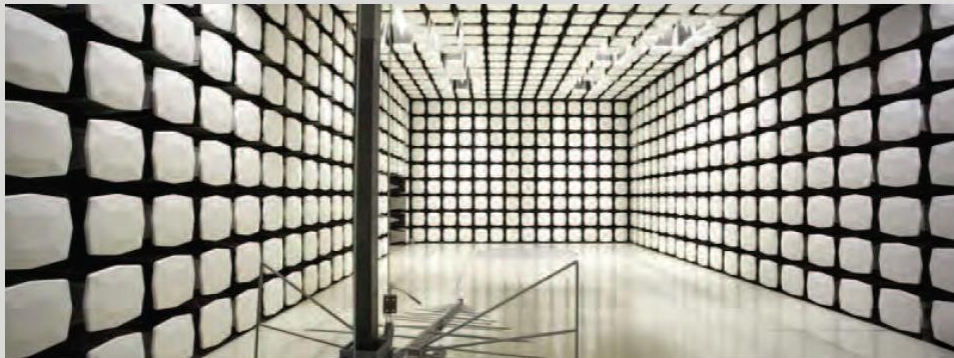

NVLAP Lab Code: 200881-0

*This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report shall not be reproduced, except in full without written approval of the laboratory.*

# CERTIFICATE OF TEST



Last Date of Test: December 29, 2016  
CINCH Systems  
Model: RF-FOB-319

## Radio Equipment Testing

### Standards

Specification	Method
FCC 15.231:2016	ANSI C63.10:2013

### Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
6.5, 6.6	Field Strength of Fundamental	Yes	Pass	
6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	
6.9.2	Occupied Bandwidth	Yes	Pass	
7.5	Duty Cycle	Yes	Pass	

### Deviations From Test Standards

None

### Approved By:

Tim O'Shea, Operations Manager

*Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.*

# REVISION HISTORY

Revision Number	Description	Date	Page Number
00	None		

# ACCREDITATIONS AND AUTHORIZATIONS

---

## United States

---

**FCC** - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

**A2LA** - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

**NVLAP** - Each laboratory is accredited by NVLAP to ISO 17025

---

## Canada

---

**ISED** - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

---

## European Union

---

**European Commission** – Validated by the European Commission as a Notified Body under the R&TTE Directive.

---

## Australia/New Zealand

---

**ACMA** - Recognized by ACMA as a CAB for the acceptance of test data.

---

## Korea

---

**MSIP / RRA** - Recognized by KCC's RRA as a CAB for the acceptance of test data.

---

## Japan

---

**VCCI** - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

---

## Taiwan

---

**BSMI** – Recognized by BSMI as a CAB for the acceptance of test data.

**NCC** - Recognized by NCC as a CAB for the acceptance of test data.

---

## Singapore

---

**IDA** – Recognized by IDA as a CAB for the acceptance of test data.

---

## Israel

---

**MOC** – Recognized by MOC as a CAB for the acceptance of test data.

---

## Hong Kong

---

**OFCA** – Recognized by OFCA as a CAB for the acceptance of test data.

---

## Vietnam

---

**MIC** – Recognized by MIC as a CAB for the acceptance of test data.

---


## SCOPE

For details on the Scopes of our Accreditations, please visit:


<http://www.nwemc.com/accreditations/>

<http://gsi.nist.gov/global/docs/cabs/designations.html>

# FACILITIES

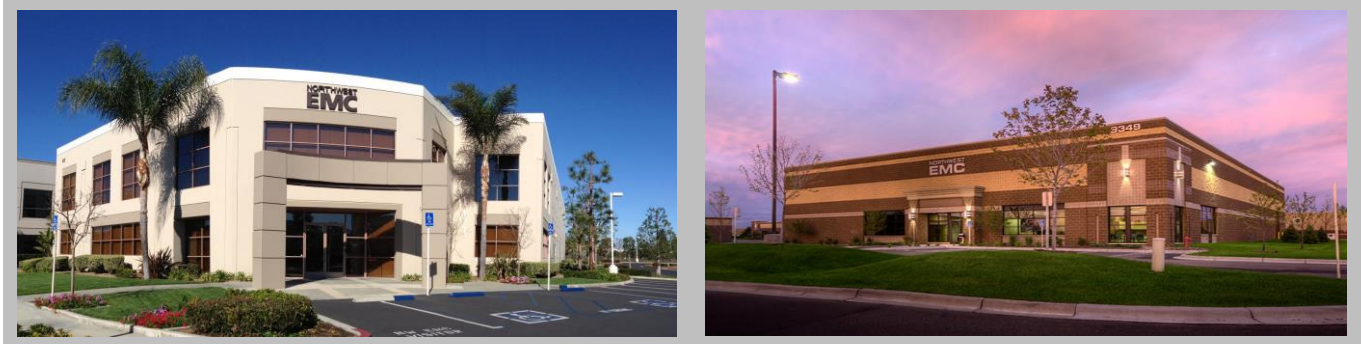

<b>California</b> Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	<b>Minnesota</b> Labs MN01-08, MN10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	<b>New York</b> Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	<b>Oregon</b> Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	<b>Texas</b> Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	<b>Washington</b> Labs NC01-05 19201 120 <sup>th</sup> Ave NE Bothell, WA 98011 (425)984-6600
<b>NVLAP</b>					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
<b>Innovation, Science and Economic Development Canada</b>					
2834B-1, 2834B-3	2834E-1	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
<b>BSMI</b>					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
<b>VCCI</b>					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
<b>Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA</b>					
US0158	US0175	N/A	US0017	US0191	US0157

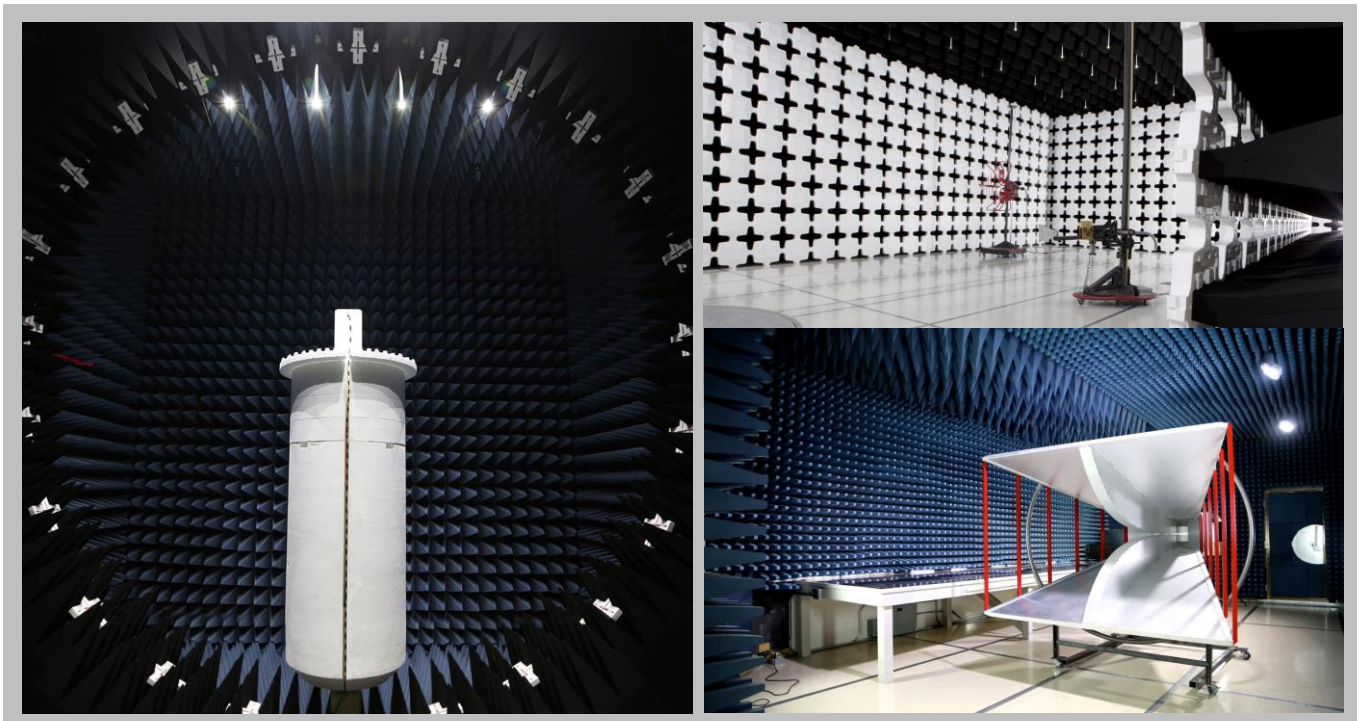

# MEASUREMENT UNCERTAINTY

## Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.


A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.


<b>Test</b>	<b>+ MU</b>	<b>- MU</b>
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

# Test Setup Block Diagrams


## Antenna Port Conducted Measurements

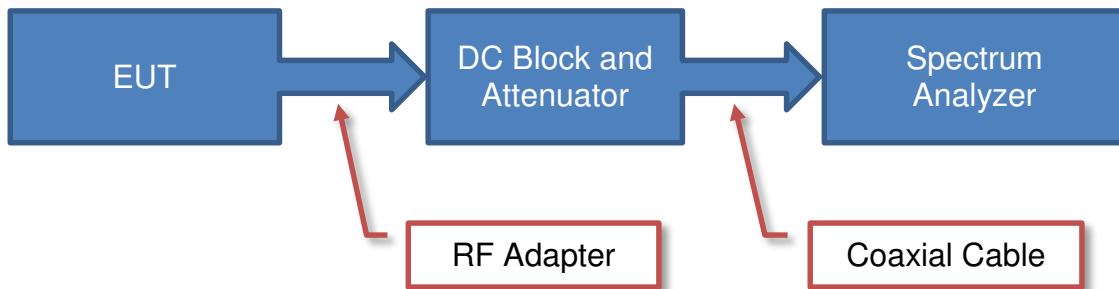

## Near Field Test Fixture Measurements

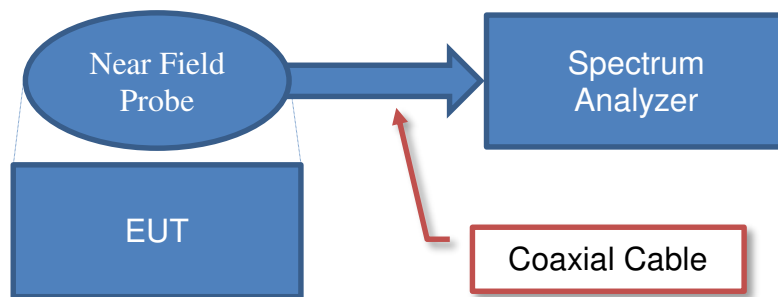

## Spurious Radiated Emissions

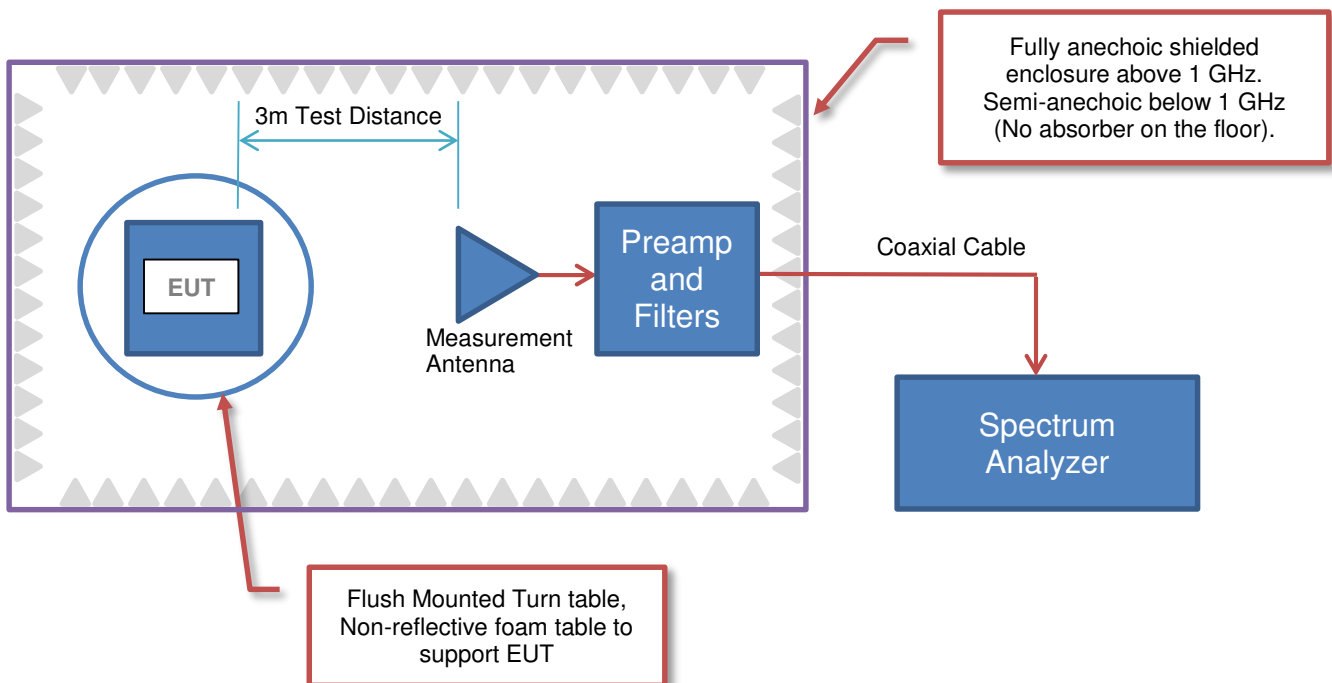

# PRODUCT DESCRIPTION

## Client and Equipment Under Test (EUT) Information

<b>Company Name:</b>	CINCH Systems
<b>Address:</b>	Suite 300 12075 43rd Street NE
<b>City, State, Zip:</b>	St. Michael, MN 55376
<b>Test Requested By:</b>	Jibril Aga
<b>Model:</b>	RF-FOB-319
<b>First Date of Test:</b>	December 29, 2016
<b>Last Date of Test:</b>	December 29, 2016
<b>Receipt Date of Samples:</b>	December 29, 2016
<b>Equipment Design Stage:</b>	Production
<b>Equipment Condition:</b>	No Damage
<b>Purchase Authorization:</b>	Verified

## Information Provided by the Party Requesting the Test

<b>Functional Description of the EUT:</b>
Key fob operates at 319.5 MHz, used in alarm systems.
<b>Testing Objective:</b>
To demonstrate compliance of the periodic radio to FCC 15.231(b) requirements.



# CONFIGURATIONS

## Configuration CINC0004- 1

Software/Firmware Running during test	
Description	Version
MPLabX	Unknown

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Key Fob	CINCH Systems	RF-FOB-319	F3

## Configuration CINC0004- 2

Software/Firmware Running during test	
Description	Version
MPLabX	Unknown

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Key Fob	CINCH Systems	RF-FOB-319	F2

## Configuration CINC0004- 3

Software/Firmware Running during test	
Description	Version
MPLabX	Unknown

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Key Fob	CINCH Systems	RF-FOB-319	F1

# MODIFICATIONS

## Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	12/29/2016	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	12/29/2016	Field Strength of Fundamental	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	12/29/2016	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
4	12/29/2016	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

# FIELD STRENGTH OF FUNDAMENTAL

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

## MODES OF OPERATION

Transmitting CW at 319.5 MHz

## POWER SETTINGS INVESTIGATED

Battery

## CONFIGURATIONS INVESTIGATED

CINC0004 - 1

## FREQUENCY RANGE INVESTIGATED

Start Frequency | 319 MHz | Stop Frequency | 320 MHz

## SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	1/27/2016	12 mo
Filter - Low Pass	Micro-Tronics	LPM50004	LFK	9/22/2016	12 mo
Cable	ESM Cable Corp.	Bilog Cables	MNH	12/1/2016	12 mo
Antenna - Biconilog	Teseq	CBL 6141B	AYD	1/6/2016	24 mo

## MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

## TEST DESCRIPTION

The measurement was made in a radiated configuration of the fundamental with the carrier fully maximized for its highest radiated power. For software controlled or pre-programmed devices, the manufacturer shall declare the duty cycle class or classes for the equipment under test. For manually operated or event dependant devices, with or without software controlled functions, the manufacturer shall declare whether the device once triggered, follows a pre-programmed cycle, or whether the transmission is constant until the trigger is released or manually reset. The manufacturer shall also give a description of the application for the device and include a typical usage pattern. The typical usage pattern as declared by the manufacturer shall be used to determine the duty cycle and hence the duty class.

Where an acknowledgement is required, the additional transmitter on-time shall be included and declared by the manufacturer.

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" =  $N1L1 + N2L2 + \dots$

Where N1 is the number of type 1 pulses, L1 is length of type 1 pulses, N2 is the number of type 2 pulses, L2 is the length of type 2 pulses, etc.

Therefore, Duty Cycle =  $(N1L1 + N2L2 + \dots)/100\text{mS}$  or T, whichever is less. (Where T is the period of the pulse train.)

The measured values for the EUT's pulse train are as follows

Period = 127 mSec

Pulsewidth of Type 1 Pulse = 0.3315 mSec

Pulsewidth of Type 2 Pulse = 0.4972 mSec

Pulsewidth of Type 3 Pulse = 0.1281mSec

Number of Type 1 Pulses = 1

Number of Type 2 Pulses = 1

Number of Type 3 Pulses = 78

Duty Cycle =  $20 \log [((1)(.3315) + (1)(.4972) + (78)(.1281))/100] = -19.32 \text{ dB}$

The duty cycle correction factor of -19.32 dB was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz.

# FIELD STRENGTH OF FUNDAMENTAL




PSA-ESCI 2016.09.30.1  
EmiR5 2016.08.26

Work Order:	CINC0004	Date:	12/29/16	<i>Trevor Buls</i>
Project:	None	Temperature:	21.8 °C	
Job Site:	MN05	Humidity:	23% RH	
Serial Number:	F3	Barometric Pres.:	1014 mbar	Tested by: Trevor Buls, Kyle McMullan, Chris Patterson
EUT:	RF-FOB-319			
Configuration:	1			
Customer:	CINCH Systems			
Attendees:	Jibril Aga			
EUT Power:	Battery			
Operating Mode:	Transmitting CW at 319.5 MHz			
Deviations:	None			
Comments:	Horizontal			

Test Specifications	FCC 15.231(b):2016	Test Method	ANSI C63.10:2013
---------------------	--------------------	-------------	------------------

Run #	1	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	---	-------------------	---	-------------------	-----------	---------	------

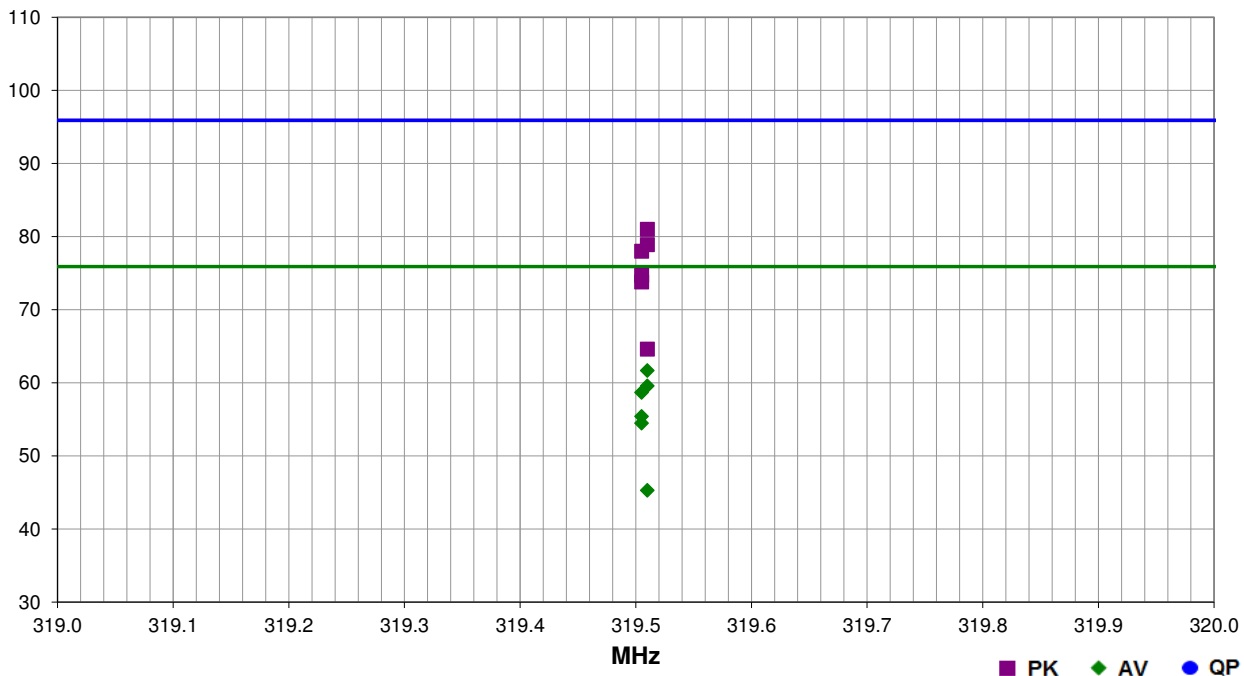

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
319.510	61.1	19.9	1.0	91.1	-19.3	0.0	Horz	AV	0.0	61.7	75.9	-14.2	EUT Horz
319.510	61.1	19.9	1.0	91.1	-19.3	0.0	Horz	PK	0.0	81.0	95.9	-14.9	EUT Horz
319.510	59.0	19.9	1.8	179.0	-19.3	0.0	Vert	AV	0.0	59.6	75.9	-16.3	EUT Vert
319.510	59.0	19.9	1.8	179.0	-19.3	0.0	Vert	PK	0.0	78.9	95.9	-17.0	EUT Vert
319.505	58.1	19.9	1.9	174.1	-19.3	0.0	Vert	AV	0.0	58.7	75.9	-17.2	EUT On Side
319.505	58.1	19.9	1.9	174.1	-19.3	0.0	Vert	PK	0.0	78.0	95.9	-17.9	EUT On Side
319.505	54.8	19.9	2.5	253.0	-19.3	0.0	Horz	AV	0.0	55.4	75.9	-20.5	EUT On Side
319.505	54.8	19.9	2.5	253.0	-19.3	0.0	Horz	PK	0.0	74.7	95.9	-21.2	EUT On Side
319.505	53.9	19.9	1.8	258.9	-19.3	0.0	Horz	AV	0.0	54.5	75.9	-21.4	EUT Vert
319.505	53.9	19.9	1.8	258.9	-19.3	0.0	Horz	PK	0.0	73.8	95.9	-22.1	EUT Vert
319.510	44.7	19.9	1.2	36.0	-19.3	0.0	Vert	AV	0.0	45.3	75.9	-30.6	EUT Horz
319.510	44.7	19.9	1.2	36.0	-19.3	0.0	Vert	PK	0.0	64.6	95.9	-31.3	EUT Horz

# SPURIOUS RADIATED EMISSIONS

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

## MODES OF OPERATION

Transmitting Data at 319.5 MHz

## POWER SETTINGS INVESTIGATED

Battery

## CONFIGURATIONS INVESTIGATED

CINC0004 - 2

## FREQUENCY RANGE INVESTIGATED

Start Frequency 30 MHz Stop Frequency 5 GHz

## SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVT	3/1/2016	12 mo
Cable	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	12/1/2016	12 mo
Antenna - Double Ridge	ETS Lindgren	3115	AJA	6/23/2016	24 mo
Filter - Low Pass	Micro-Tronics	LPM50004	LFK	9/22/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AVO	12/1/2016	12 mo
Cable	ESM Cable Corp.	Bilog Cables	MNH	12/1/2016	12 mo
Antenna - Biconilog	Teseq	CBL 6141B	AYD	1/6/2016	24 mo
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	1/27/2016	12 mo

## MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

## TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequency in each operational band and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector  
PK = Peak Detector  
AV = RMS Detector

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" =  $N1L1 + N2L2 + \dots$

Where N1 is the number of type 1 pulses, L1 is length of type 1 pulses, N2 is the number of type 2 pulses, L2 is the length of type 2 pulses, etc.

Therefore, Duty Cycle =  $(N1L1 + N2L2 + \dots)/100\text{mS}$  or T, whichever is less. Where T is the period of the pulse train.

The measured values for the EUT's pulse train are as follows:

Period = 127 mSec  
Pulsewidth of Type 1 Pulse = 0.3315 mSec  
Pulsewidth of Type 2 Pulse = 0.4972 mSec  
Pulsewidth of Type 3 Pulse = 0.1281mSec  
Number of Type 1 Pulses = 1  
Number of Type 2 Pulses = 1  
Number of Type 3 Pulses = 78  
Duty Cycle =  $20 \log [((1)(.3315) + (1)(.4972) + (78)(.1281))/100] = -19.32 \text{ dB}$

The duty cycle correction factor of -19.32 dB was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz.

# SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2016.09.30.1  
EmiR5 2016.08.26


Work Order:	CINC0004	Date:	12/29/16	<i>Trevor Buls</i>
Project:	None	Temperature:	21.9 °C	
Job Site:	MN05	Humidity:	22.9% RH	
Serial Number:	F2	Barometric Pres.:	1016 mbar	
EUT:	RF-FOB-319			
Configuration:	2			
Customer:	CINCH Systems			
Attendees:	Jibril Aga			
EUT Power:	Battery			
Operating Mode:	Transmitting Data at 319.5 MHz			
Deviations:	None			
Comments:	None			

*Trevor Buls*

Tested by: Trevor Buls, Kyle McMullan, Chris Patterson

Test Specifications	Test Method
FCC 15.231:2016	ANSI C63.10:2013

Run #	10	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	----	-------------------	---	-------------------	-----------	---------	------

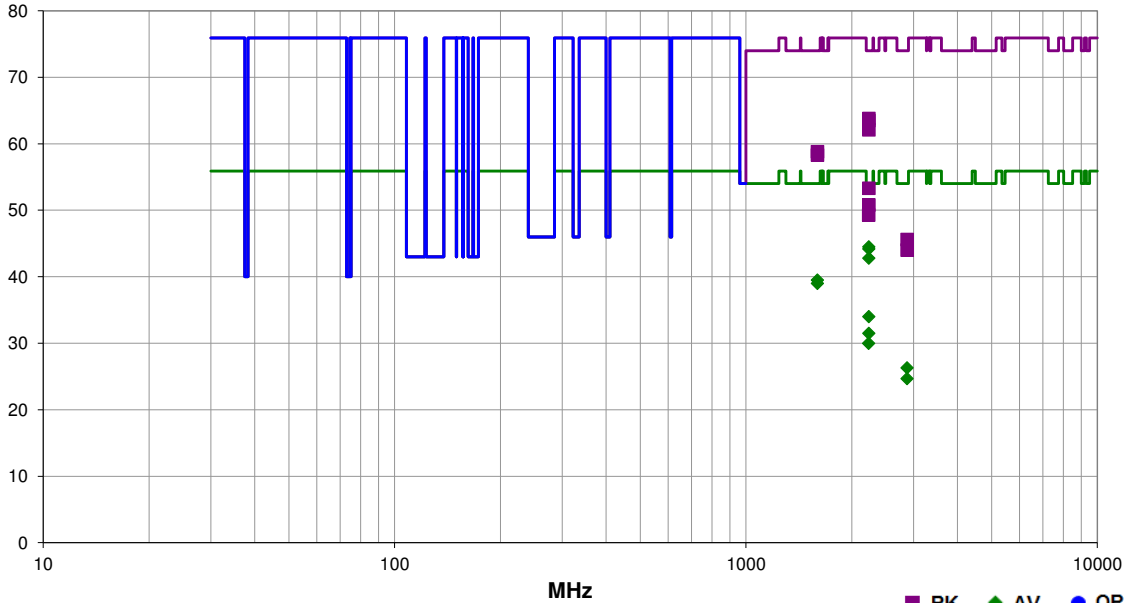

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2236.775	66.1	-2.3	1.0	114.0	-19.3	0.0	Vert	AV	0.0	44.5	54.0	-9.5	EUT Vert
2236.783	65.8	-2.3	1.0	75.0	-19.3	0.0	Horz	AV	0.0	44.2	54.0	-9.8	EUT On Side
2236.775	66.1	-2.3	1.0	114.0	0.0	0.0	Vert	PK	0.0	63.8	74.0	-10.2	EUT Vert
2236.783	65.8	-2.3	1.0	75.0	0.0	0.0	Horz	PK	0.0	63.5	74.0	-10.5	EUT On Side
2236.500	64.4	-2.3	1.0	268.9	-19.3	0.0	Horz	AV	0.0	42.8	54.0	-11.2	EUT Horz
2236.500	64.4	-2.3	1.0	268.9	0.0	0.0	Horz	PK	0.0	62.1	74.0	-11.9	EUT Horz
1597.742	64.0	-5.2	1.0	94.1	-19.3	0.0	Vert	AV	0.0	39.5	54.0	-14.5	EUT Vert
1597.492	63.5	-5.2	1.0	122.0	-19.3	0.0	Horz	AV	0.0	39.0	54.0	-15.0	EUT On Side
1597.742	64.0	-5.2	1.0	94.1	0.0	0.0	Vert	PK	0.0	58.8	74.0	-15.2	EUT Vert
1597.492	63.5	-5.2	1.0	122.0	0.0	0.0	Horz	PK	0.0	58.3	74.0	-15.7	EUT On Side
2236.558	55.6	-2.3	1.0	15.1	-19.3	0.0	Vert	AV	0.0	34.0	54.0	-20.0	EUT On Side
2236.558	55.6	-2.3	1.0	15.1	0.0	0.0	Vert	PK	0.0	53.3	74.0	-20.7	EUT On Side
2236.542	53.1	-2.3	1.0	91.1	-19.3	0.0	Horz	AV	0.0	31.5	54.0	-22.5	EUT Vert
2236.542	53.1	-2.3	1.0	91.1	0.0	0.0	Horz	PK	0.0	50.8	74.0	-23.2	EUT Vert
2236.408	51.6	-2.3	1.0	301.9	-19.3	0.0	Vert	AV	0.0	30.0	54.0	-24.0	EUT Horz
2236.408	51.6	-2.3	1.0	301.9	0.0	0.0	Vert	PK	0.0	49.3	74.0	-24.7	EUT Horz
2875.392	46.8	-1.2	1.0	88.1	-19.3	0.0	Horz	AV	0.0	26.3	54.0	-27.7	EUT On Side
2875.392	46.8	-1.2	1.0	88.1	0.0	0.0	Horz	PK	0.0	45.6	74.0	-28.4	EUT On Side
2876.000	45.2	-1.2	1.0	169.0	-19.3	0.0	Vert	AV	0.0	24.7	54.0	-29.3	EUT Vert
2876.000	45.2	-1.2	1.0	169.0	0.0	0.0	Vert	PK	0.0	44.0	74.0	-30.0	EUT Vert



# OCCUPIED BANDWIDTH

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Filter - Low Pass	Micro-Tronics	LPM50004	LFK	9/22/2016	9/22/2017
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AVO	12/1/2016	12/1/2017
Cable	ESM Cable Corp.	Bilog Cables	MNH	12/1/2016	12/1/2017
Antenna - Biconilog	Teseq	CBL 6141B	AYD	1/6/2016	1/6/2018
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	1/27/2016	1/27/2017

## TEST DESCRIPTION

The measurement was made in a radiated configuration of the fundamental with the carrier fully maximized for its highest radiated power. The EUT was transmitting at its maximum data rate.

The 20 dB occupied bandwidth is required to be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz.

# OCCUPIED BANDWIDTH




XMIT 2016.09.29

EUT: RF-FOB-319		Work Order: CINC0004	
Serial Number: F1		Date: 12/29/16	
Customer: CINCH Systems		Temperature: 21.8 °C	
Attendees: Jibril Aga		Humidity: 23% RH	
Project: None		Barometric Pres.: 1016 mbar	
Tested by: Trevor Buls, Kyle McMullan, Chris Patterson		Power: Battery	
Job Site: MN05			
<b>TEST SPECIFICATIONS</b>			
FCC 15.231:2016		ANSI C63.10:2013	
<b>COMMENTS</b>			
None			
<b>DEVIATIONS FROM TEST STANDARD</b>			
None			
Configuration #	3	Signature <i>Trevor Buls</i>	

	Value	Limit	Result
Occupied Bandwidth	68.90 kHz	798.75 kHz	Pass

# OCCUPIED BANDWIDTH

Occupied Bandwidth			
	Value	Limit	Result
	68.90 kHz	798.75 kHz	Pass

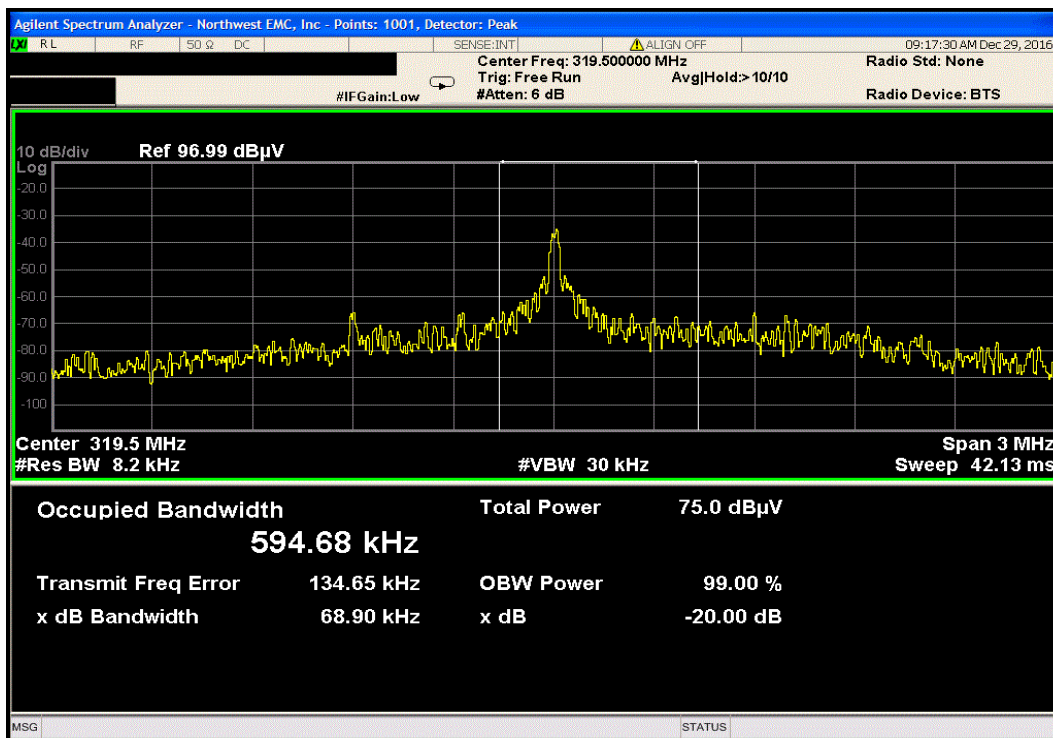

# DUTY CYCLE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Filter - Low Pass	Micro-Tronics	LPM50004	LFK	9/22/2016	9/22/2017
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AVO	12/1/2016	12/1/2017
Cable	ESM Cable Corp.	Bilog Cables	MNH	12/1/2016	12/1/2017
Antenna - Biconilog	Teseq	CBL 6141B	AYD	1/6/2016	1/6/2018
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	1/27/2016	1/27/2017

## TEST DESCRIPTION

The measurement was made in a radiated configuration of the fundamental with the carrier fully maximized for its highest radiated power. For software controlled or pre-programmed devices, the manufacturer shall declare the duty cycle class or classes for the equipment under test. For manually operated or event dependant devices, with or without software controlled functions, the manufacturer shall declare whether the device once triggered, follows a pre-programmed cycle, or whether the transmission is constant until the trigger is released or manually reset. The manufacturer shall also give a description of the application for the device and include a typical usage pattern. The typical usage pattern as declared by the manufacturer shall be used to determine the duty cycle and hence the duty class.

Where an acknowledgement is required, the additional transmitter on-time shall be included and declared by the manufacturer.

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" =  $N1L1 + N2L2 + \dots$

Where N1 is the number of type 1 pulses, L1 is length of type 1 pulses, N2 is the number of type 2 pulses, L2 is the length of type 2 pulses, etc.

Therefore, Duty Cycle =  $(N1L1 + N2L2 + \dots)/100\text{mS}$  or T, whichever is less. (Where T is the period of the pulse train.)

The measured values for the EUT's pulse train are as follows:

Period = 127 mSec  
Pulsewidth of Type 1 Pulse = 0.3315 mSec  
Pulsewidth of Type 2 Pulse = 0.4972 mSec  
Pulsewidth of Type 3 Pulse = 0.1281mSec  
Number of Type 1 Pulses = 1  
Number of Type 2 Pulses = 1  
Number of Type 3 Pulses = 78

Duty Cycle =  $20 \log [((1)(.3315) + (1)(.4972) + (78)(.1281))/100] = -19.32 \text{ dB}$


The duty cycle correction factor of -19.32 dB was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz.

# DUTY CYCLE


EUT: RF-FOB-319		Work Order: CINC0004			
Serial Number: F1		Date: 12/29/16			
Customer: CINCH Systems		Temperature: 21.9 °C			
Attendees: Jibril Aga		Humidity: 23% RH			
Project: None		Barometric Pres.: 1015 mbar			
Tested by: Trevor Buls, Kyle McMullan, Chris Patterson		Power: Battery			
Job Site: MN05					
TEST SPECIFICATIONS		Test Method			
FCC 15.231:2016		ANSI C63.10:2013			
COMMENTS					
None					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	3	Signature <i>Trevor Buls</i>			
		Pulses or Pulse Trains	Period	Limit	Result
10 seconds		N/A	N/A	N/A	N/A
2 seconds		8	127.0 ms	N/A	N/A
30 milliseconds		80	N/A	N/A	N/A

# DUTY CYCLE

10 seconds						
Pulses or Pulse Trains						
			Period	Limit	Result	
			N/A	N/A	N/A	N/A

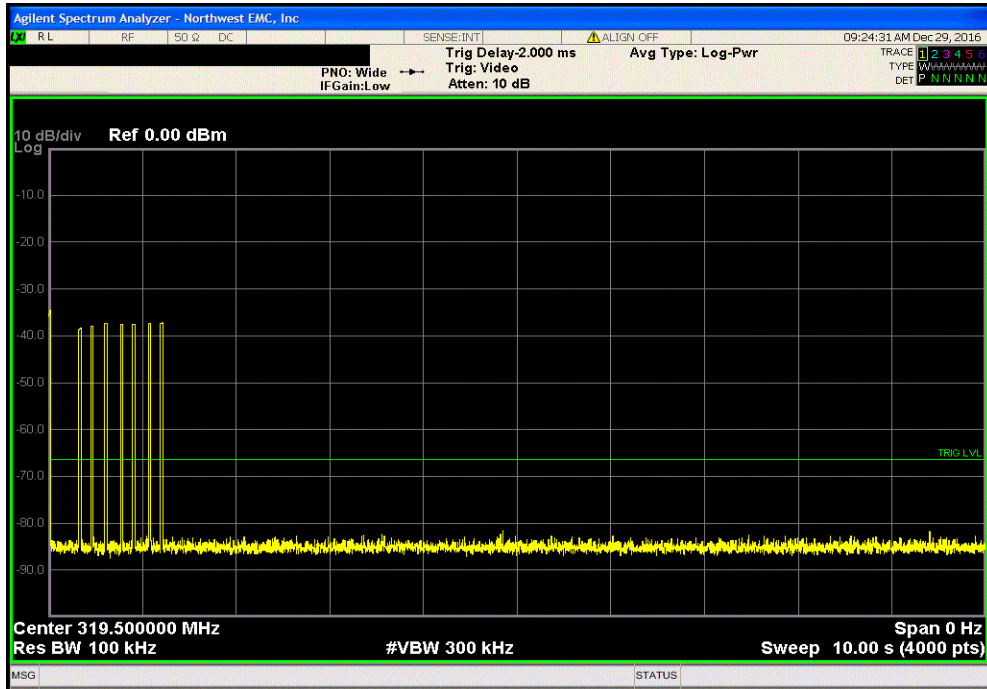

2 seconds						
Pulses or Pulse Trains						
			Period	Limit	Result	
			8	N/A	N/A	

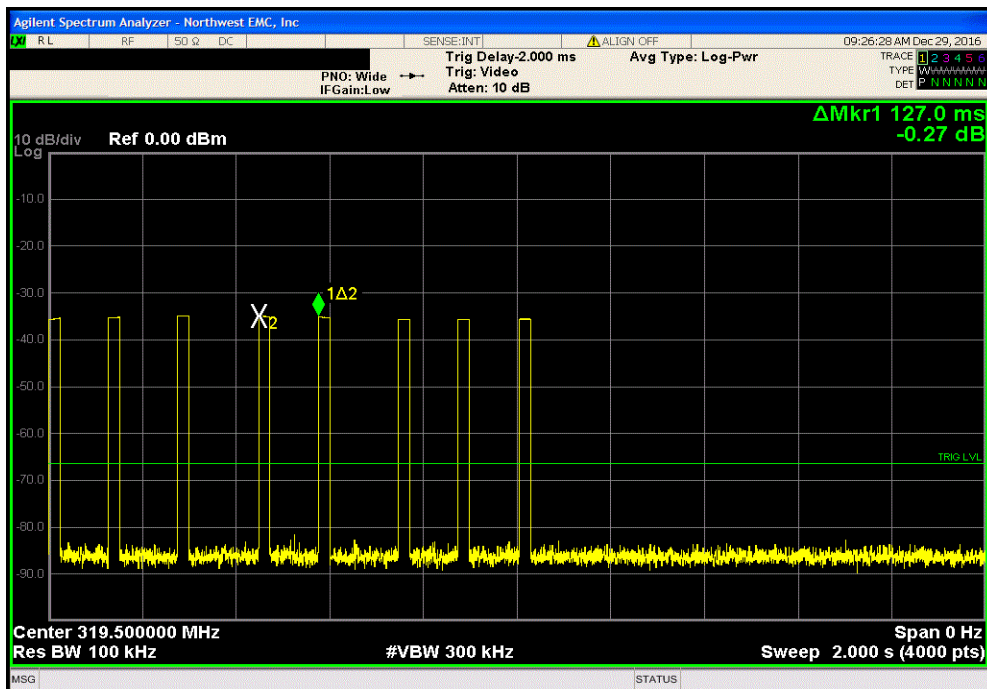

# DUTY CYCLE

30 milliseconds						
Pulses or Pulse Trains						
			80	N/A	N/A	N/A

