

FCC RADIO TEST REPORT

FCC ID:2ABC5-E0043

Product: Android Tablet

Trade Mark: N/A

Model No.: EP103A

Family Model: EM103A, M108A, A16T, T31

Report No.: S23060802704004

Issue Date: Jul 05, 2023

Prepared for

SHENZHEN ELECTRON TECHNOLOGY CO.,LTD.
Bld.2,Yingfeng Industrial Zone,Tantou Community,Songgang
Street,Bao'an,Shenzhen,China.

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website:<http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name..... : SHENZHEN ELECTRON TECHNOLOGY CO.,LTD.
 Address : Bld.2,Yingfeng Industrial Zone,Tantou Community,Songgang Street,Bao'an,Shenzhen,China.
Manufacturer's Name : SHENZHEN ELECTRON TECHNOLOGY CO.,LTD.
 Address : Bld.2,Yingfeng Industrial Zone,Tantou Community,Songgang Street,Bao'an,Shenzhen,China.

Product description

Product name : Android Tablet
 Trade Mark : N/A
 Model and/or type reference : EP103A
 Family Model : EM103A, M108A, A16T, T31
 Test Sample number : S230608027004
Standards..... : FCC Part15.407
 Test procedure..... ANSI C63.10-2013 and KDB 789033 D02 General UNII Test Procedures New Rules v02r01

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements/ the Industry Canada requirements.. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test.....

Date (s) of performance of tests Jun 08, 2023 ~ Jul 05, 2023
 Date of Issue Jul 05, 2023
 Test Result **Pass**

Testing Engineer : *Mukzi Lee*
 (Mukzi Lee)

Authorized Signatory : *Alex*
 (Alex Li)

Table of Contents

Page

1 . SUMMARY OF TEST RESULTS	6
1.1 FACILITIES AND ACCREDITATIONS	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	12
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3 . TEST REQUIREMENTS	15
3.1 CONDUCTED EMISSION MEASUREMENT	15
3.2 RADIATED EMISSION MEASUREMENT	20
3.3 POWER SPECTRAL DENSITY TEST	35
3.4 26DB & 99% EMISSION BANDWIDTH	38
3.5 MINIMUM 6 DB BANDWIDTH	40
3.6 MAXIMUM CONDUCTED OUTPUT POWER	42
3.7 OUT OF BAND EMISSIONS	46
3.8 SPURIOUS RF CONDUCTED EMISSIONS	48
3.9 FREQUENCY STABILITY MEASUREMENT	49
4. ANTENNA REQUIREMENT	56
4.1 STANDARD REQUIREMENT	56
4.2 EUT ANTENNA	56
5. TEST RESULTS	57
5.2G WIFI	57
5.1 DUTY CYCLE	57
5.2 MAXIMUM CONDUCTED OUTPUT POWER	67
5.3 -26DB BANDWIDTH	77
5.4 OCCUPIED CHANNEL BANDWIDTH	87
5.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL	97
5.5 BAND EDGE	107
5.6 CONDUCTED RF SPURIOUS EMISSION	115
5.8G WIFI	125
5.1 DUTY CYCLE	125
5.2 MAXIMUM CONDUCTED OUTPUT POWER	135

Table of Contents**Page**

5.3 -6DB BANDWIDTH	145
5.3 OCCUPIED CHANNEL BANDWIDTH	155
5.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL	165
5.5 BAND EDGE	175
5.6 CONDUCTED RF SPURIOUS EMISSION	183

Revision History

Report No.	Version	Description	Issued Date
S23060802704004	Rev.01	Initial issue of report	Jul 05, 2023

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(4)	Spurious Radiated Emissions	PASS	
15.407 (a)(1) 15.407 (a)(3)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
15.407(b)(1) 15.407(b)(4)	Band Edge	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.203	Antenna Requirement	PASS	
15.407(c)	Automatically discontinue transmission	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.
CAB identifier:CN0074

FCC- Accredited : Test Firm Registration Number: 463705.
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	± 2.80 dB
2	RF power, conducted	± 0.16 dB
3	Spurious emissions, conducted	± 0.21 dB
4	All emissions, radiated(30MHz~1GHz)	± 2.64 dB
5	All emissions, radiated(1GHz~6GHz)	± 2.40 dB
6	All emissions, radiated(> 6GHz)	± 2.52 dB
7	Temperature	± 0.5 °C
8	Humidity	± 2 %
9	All emissions, radiated(9KHz~30MHz)	± 6 dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Android Tablet	
Trade Mark	N/A	
FCC ID	2ABC5-E0043	
Model Name	EP103A	
Family Model	EM103A, M108A, A16T, T31	
Model Difference	All models are identical in the circuit design, PCB layout, internal wiring and product functions, the difference only lies in the model name. EP103A was selected as test model.	
Product Description	IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11a/n/ac/ax (20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n/ac/ax (40MHz channel bandwidth)
	Modulation	OFDMA with BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM for 802.11ax OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/n OFDM with BPSK/QPSK/16QAM/64QAM/256QAM/ for 802.11ac
	Operating Frequency Range	<input checked="" type="checkbox"/> 5180-5240MHz for 802.11a/n(HT20)/ac/ax(VHT20); 5190-5230MHz for 802.11n(HT40)/ac/ax(VHT40); <input checked="" type="checkbox"/> 5745-5825 MHz for 802.11a/n(HT20)/ac/ax(VHT20); 5755-5795 MHz for 802.11n(HT40)/ac/ax(VHT40);
	Number of Channels	<input checked="" type="checkbox"/> 4 channels for 802.11a/n20/ac20/ax20 in the 5180-5240MHz band ; 2 channels for 802.11 n40/ac40/ax40 in the 5190-5230MHz band ; <input checked="" type="checkbox"/> 5 channels for 802.11a/n20/ac20/ax20 in the 5745-5825MHz band ; 2 channels for 802.11 n40/ac40/ax40 in the 5755-5795MHz band ;
	Antenna Type	Internal antenna
	Antenna Gain	1.01 dBi
	Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.	
Adapter	Model:PS10UA050K2000UU Input: 100-240V~50/60Hz 0.35A Max. Output: 5.0V---2.0A 10.0W	
Battery	DC 3.8V, 5000mAh, 19Wh	
Power supply	DC 3.8V from battery or DC 5V from adapter	
Connecting I/O Port(s)	Please refer to the User's Manual	
HW Version	N/A	
SW Version	N/A	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list for 802.11a/n/ac/ax(20MHz) band I (5180-5240MHz):

802.11a/n/ac/ax(20MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy z(MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

Frequency and Channel list for 802.11n/ac/ax(40MHz) band I (5190-5230MHz):

802.11n/ac/ax(40MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

Frequency and Channel list for 802.11a/n/ac/ax(20 MHz) band IV (5745-5825MHz):

802.11a/n/ac/ax(20 MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

Frequency and Channel list for 802.11n/ac/ax(40MHz) band IV (5755-5795MHz):

802.11n/ac/ax(40MHz) Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n20 / ac20/ax20 CH36/ CH40/ CH 48 802.11a / n20 / ac20 / ax20 CH149/ CH157/ CH 165
Mode 3	802.11n40 / ac40/ ax40 CH38/ CH 46 802.11n40 / ac40/ ax40 CH 151 / CH 159


For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n20 / ac20/ax20 CH36/ CH40/ CH 48 802.11a / n20 / ac20 / ax20 CH149/ CH157/ CH 165
Mode 3	802.11n40 / ac40/ ax40 CH38/ CH 46 802.11n40 / ac40/ ax40 CH 151 / CH 159

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
- (3) 802.11ax mode only support full resource unit size.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode

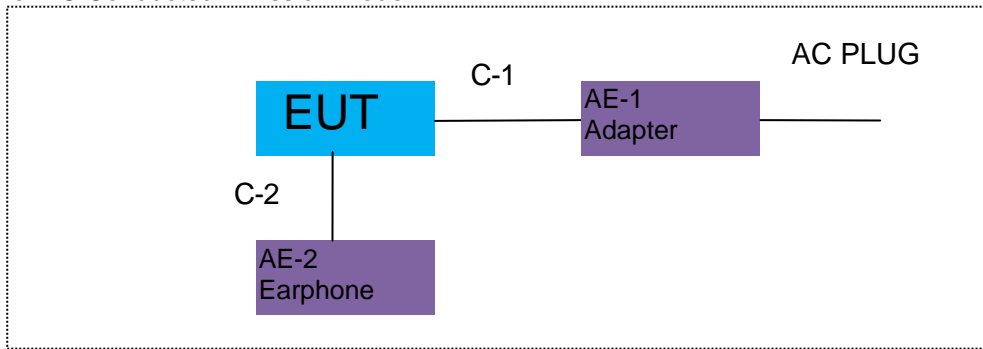

For Radiated Test Cases

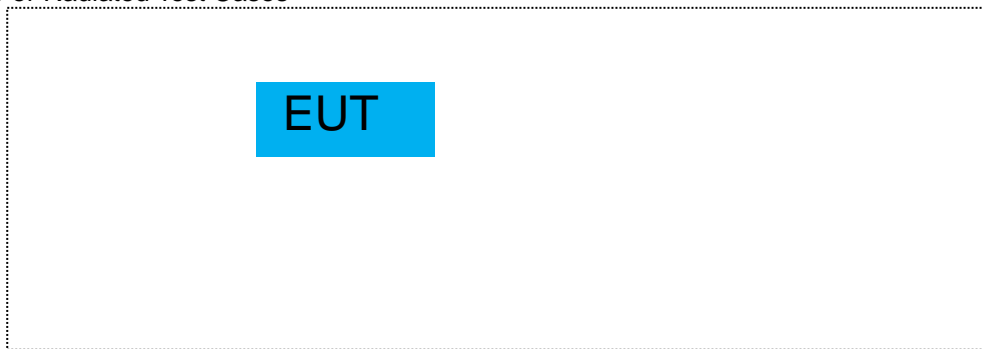

For Conducted Test Cases

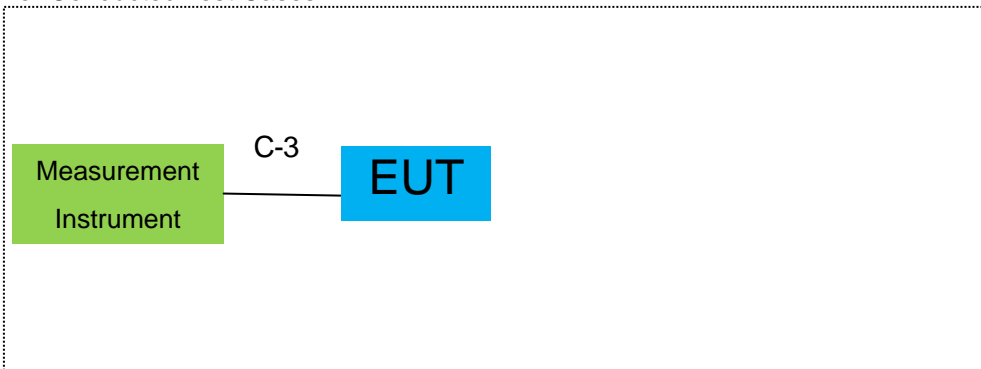

Note:1.The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.
 2.EUT built-in battery-powered, the battery is fully-charged.

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
AE-1	Adapter	PS10UA050K2000UU	N/A	Peripherals
AE-2	Earphone	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	USB Cable	YES	YES	0.7m
C-2	Earphone Cable	NO	NO	1.2m
C-3	RF Cable	YES	NO	0.1m

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2023.03.27	2024.03.26	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023.05.29	2024.05.28	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2023.05.29	2024.05.28	1 year
4	Test Receiver	R&S	ESPI7	101318	2023.03.27	2024.04.26	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2023.03.16	2024.03.16	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2023.05.06	2026.05.05	3 year
7	Horn Antenna	SCHWARZBECK	BBHA 9120D	2816	2023.01.12	2024.01.11	1 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2022.11.07	2023.11.06	1 year
9	Amplifier	EMC	EMC051835SE	980246	2023.05.29	2024.05.28	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2022.11.04	2023.11.03	1 year
11	Power Meter	DARE	RPR3006W	15I00041SN084	2023.05.29	2024.05.28	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2022.06.17	2025.06.16	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
14	High Test Cable(1G-40GHz)	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
15	Filter	TRILTHIC	2400MHz	29	2023.03.26	2026.03.25	3 year
16	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2023.03.27	2024.03.26	1 year
2	LISN	R&S	ENV216	101313	2023.03.27	2024.03.26	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2023.03.27	2024.03.26	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2023.05.06	2026.05.05	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2023.05.06	2026.05.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& Aux Equipment which is scheduled for calibration every 3 years.

3. TEST REQUIREMENTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a)

3.1.2 CONFORMANCE LIMIT

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
 2. The lower limit shall apply at the transition frequencies
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3.1.3 TEST CONFIGURATION

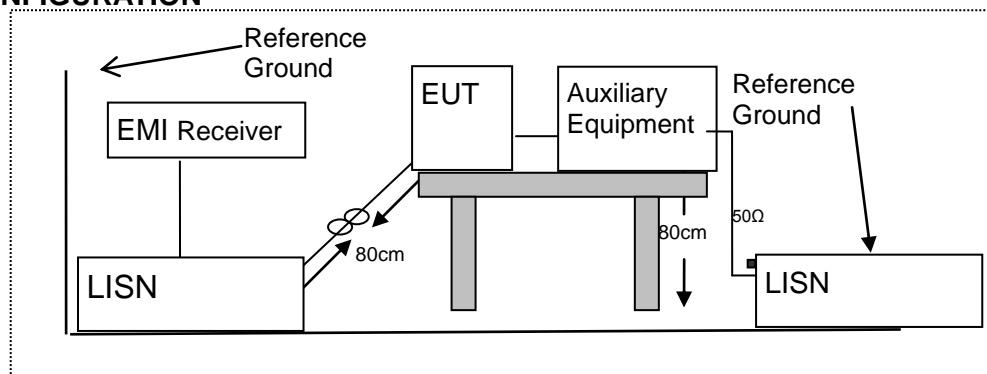

3.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.


3.1.5 TEST RESULTS

EUT :	Android Tablet	Model Name :	EP103A
Temperature :	22°C	Relative Humidity :	57%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measurement (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1580	45.23	9.63	54.86	65.56	-10.70	QP
0.1580	19.12	9.63	28.75	55.56	-26.81	AVG
0.1700	42.59	9.63	52.22	64.96	-12.74	QP
0.1700	16.51	9.63	26.14	54.96	-28.82	AVG
0.2419	36.89	9.64	46.53	62.03	-15.50	QP
0.2419	14.77	9.64	24.41	52.03	-27.62	AVG
0.8377	32.16	9.66	41.82	56.00	-14.18	QP
0.8377	17.25	9.66	26.91	46.00	-19.09	AVG
1.0980	33.74	9.66	43.40	56.00	-12.60	QP
1.0980	18.49	9.66	28.15	46.00	-17.85	AVG
2.1939	32.01	9.66	41.67	56.00	-14.33	QP
2.1939	17.82	9.66	27.48	46.00	-18.52	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

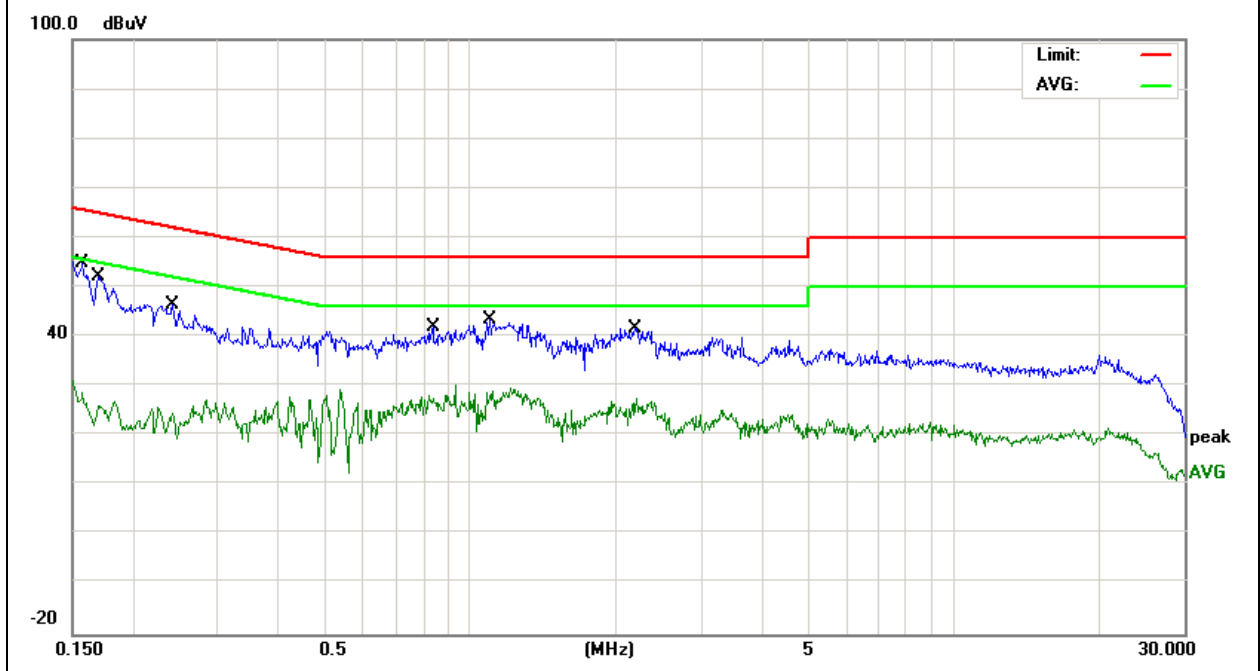


EUT :	Android Tablet	Model Name :	EP103A
Temperature :	22°C	Relative Humidity :	57%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measurement (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1737	41.12	9.63	50.75	64.78	-14.03	QP
0.1737	15.85	9.63	25.48	54.78	-29.30	AVG
0.2220	40.11	9.64	49.75	62.74	-12.99	QP
0.2220	16.51	9.64	26.15	52.74	-26.59	AVG
0.2340	38.62	9.64	48.26	62.30	-14.04	QP
0.2340	15.91	9.64	25.55	52.30	-26.75	AVG
0.3497	35.14	9.64	44.78	58.97	-14.19	QP
0.3497	11.28	9.64	20.92	48.97	-28.05	AVG
0.3955	32.20	9.64	41.84	57.95	-16.11	QP
0.3955	14.65	9.64	24.29	47.95	-23.66	AVG
1.0380	35.17	9.66	44.83	56.00	-11.17	QP
1.0380	15.15	9.66	24.81	46.00	-21.19	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

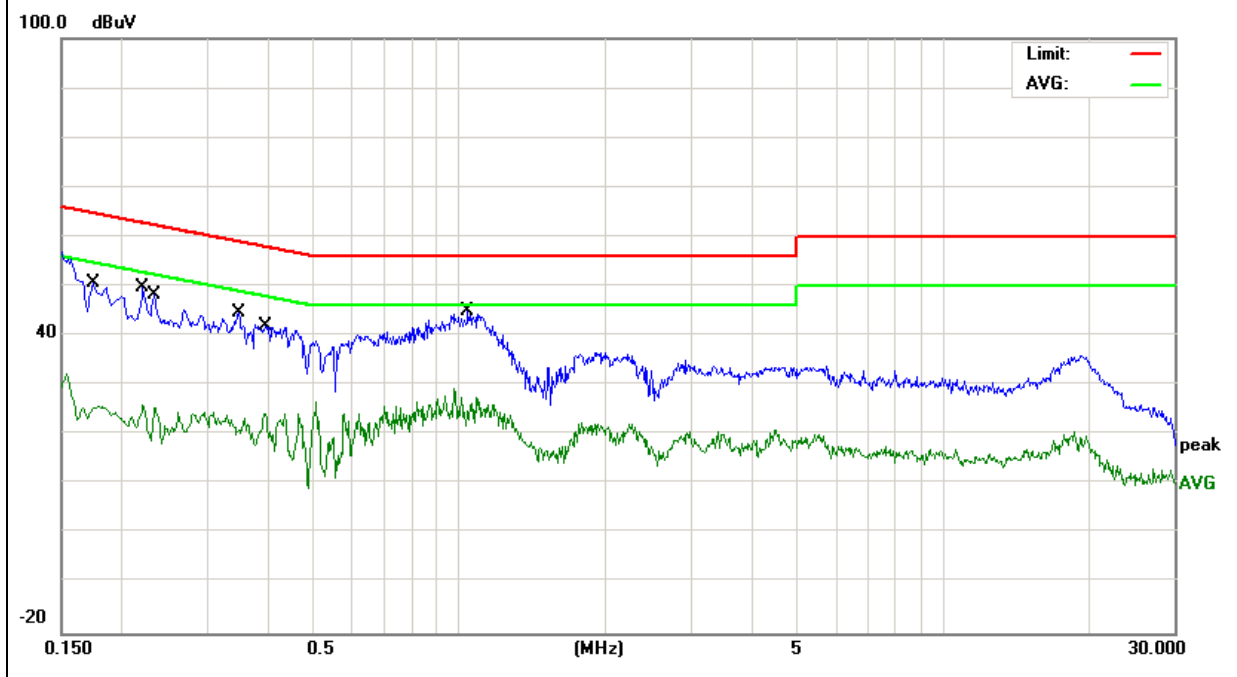


EUT :	Android Tablet	Model Name :	EP103A
Temperature :	22 °C	Relative Humidity :	57%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1580	47.23	9.63	56.86	65.56	-8.70	QP
0.1580	20.47	9.63	30.10	55.56	-25.46	AVG
0.2149	40.13	9.64	49.77	63.01	-13.24	QP
0.2149	18.24	9.64	27.88	53.01	-25.13	AVG
0.2419	39.39	9.64	49.03	62.03	-13.00	QP
0.2419	15.15	9.64	24.79	52.03	-27.24	AVG
0.3140	35.04	9.64	44.68	59.86	-15.18	QP
0.3140	17.25	9.64	26.89	49.86	-22.97	AVG
1.0380	33.58	9.66	43.24	56.00	-12.76	QP
1.0380	19.55	9.66	29.21	46.00	-16.79	AVG
2.3420	33.33	9.66	42.99	56.00	-13.01	QP
2.3420	18.38	9.66	28.04	46.00	-17.96	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

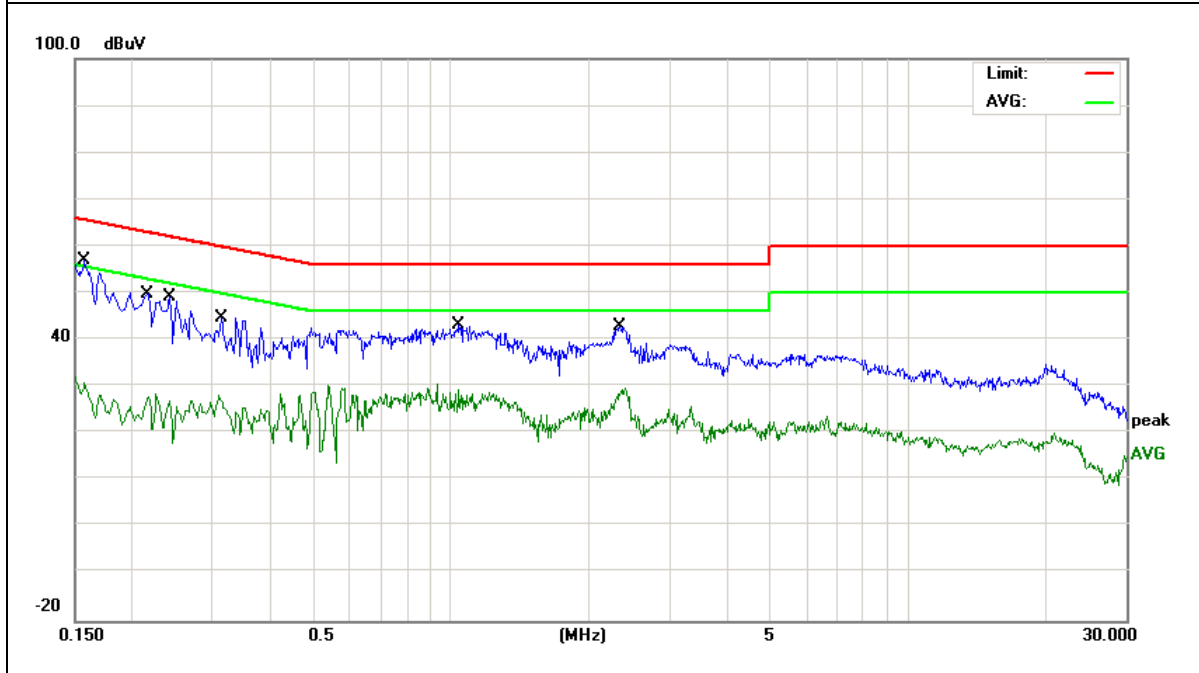


EUT :	Android Tablet	Model Name :	EP103A
Temperature :	22 °C	Relative Humidity :	57%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1564	46.83	9.63	56.46	65.65	-9.19	QP
0.1564	19.05	9.63	28.68	55.65	-26.97	AVG
0.2020	39.64	9.63	49.27	63.52	-14.25	QP
0.2020	15.65	9.63	25.28	53.52	-28.24	AVG
0.2671	38.21	9.64	47.85	61.20	-13.35	QP
0.2671	15.44	9.64	25.08	51.20	-26.12	AVG
0.3462	35.33	9.64	44.97	59.05	-14.08	QP
0.3462	12.07	9.64	21.71	49.05	-27.34	AVG
0.6139	33.97	9.65	43.62	56.00	-12.38	QP
0.6139	15.09	9.65	24.74	46.00	-21.26	AVG
1.0380	32.67	9.66	42.33	56.00	-13.67	QP
1.0380	12.65	9.66	22.31	46.00	-23.69	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

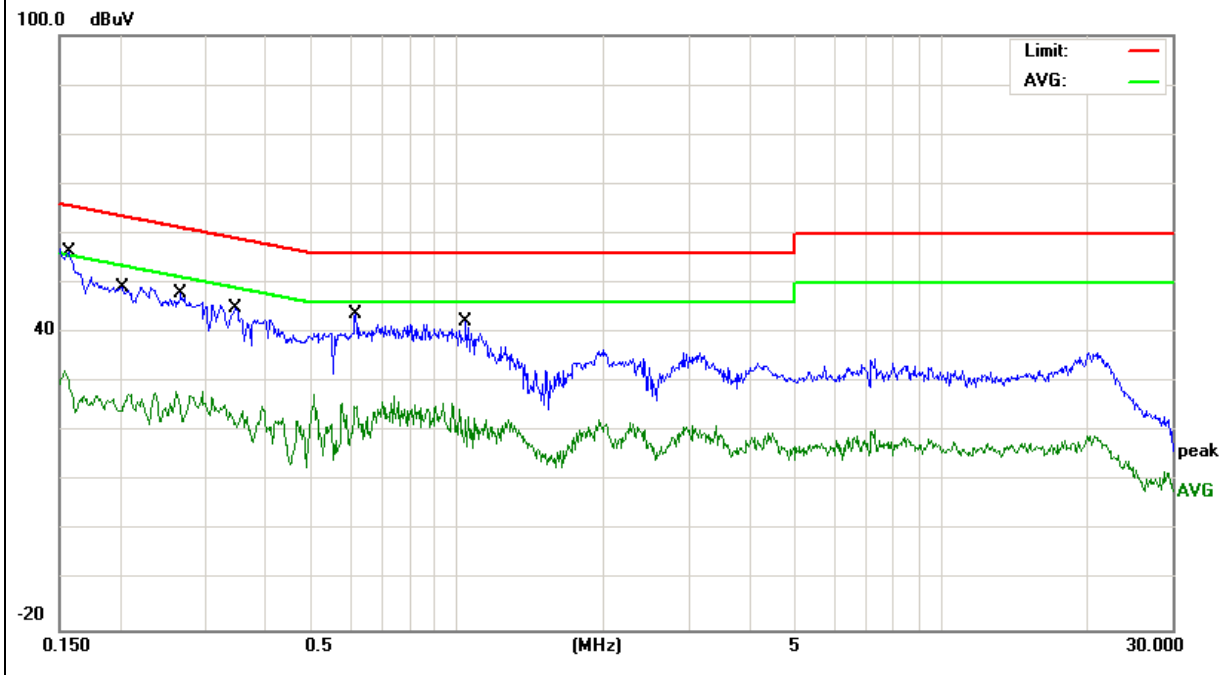

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(b) and 15.209

3.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ($\mu\text{V}/\text{m}$)	300
0.490-1.705	24000/F(KHz)	20 log ($\mu\text{V}/\text{m}$)	30
1.705-30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B ($\text{dB}\mu\text{V}/\text{m}$) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark : 1. Emission level in $\text{dB}\mu\text{V}/\text{m}=20 \log (\mu\text{V}/\text{m})$

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor = $40 \log (\text{Specific distance}/ \text{test distance})(\text{dB})$;

Limit line=Specific limits($\text{dB}\mu\text{V}$) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor = $20 \log (\text{Specific distance}/ \text{test distance})(\text{dB})$;


Limit line=Specific limits($\text{dB}\mu\text{V}$) + distance extrapolation factor.

3.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

3.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

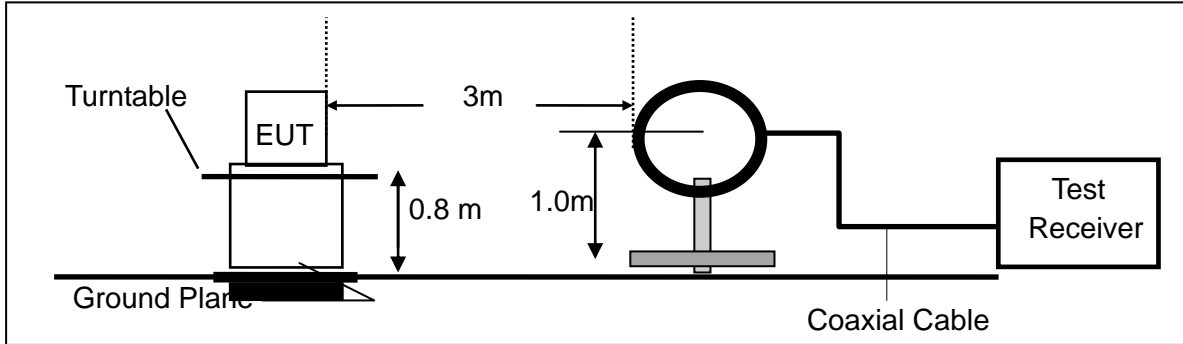

(b) For radiated emissions from 30MHz to 1000MHz

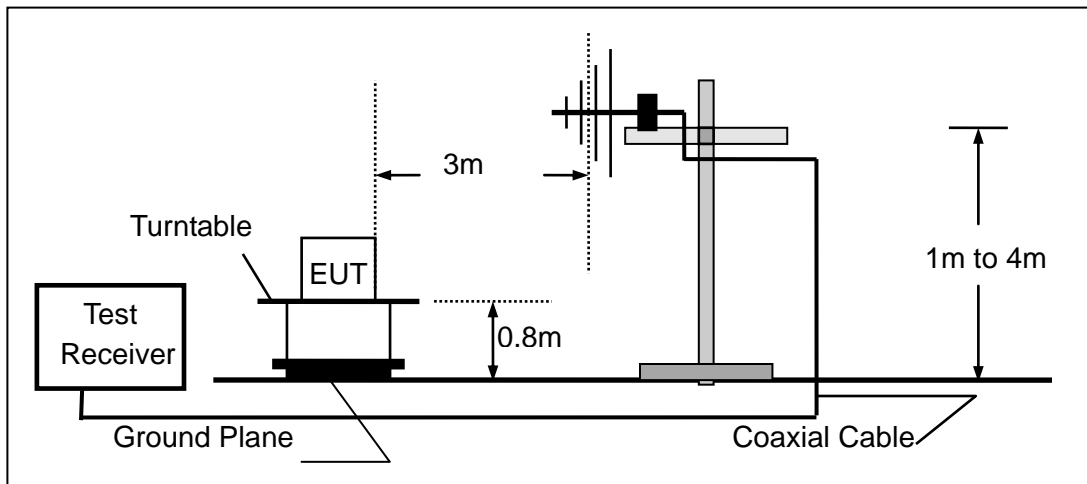

(c) For radiated emissions above 1000MHz

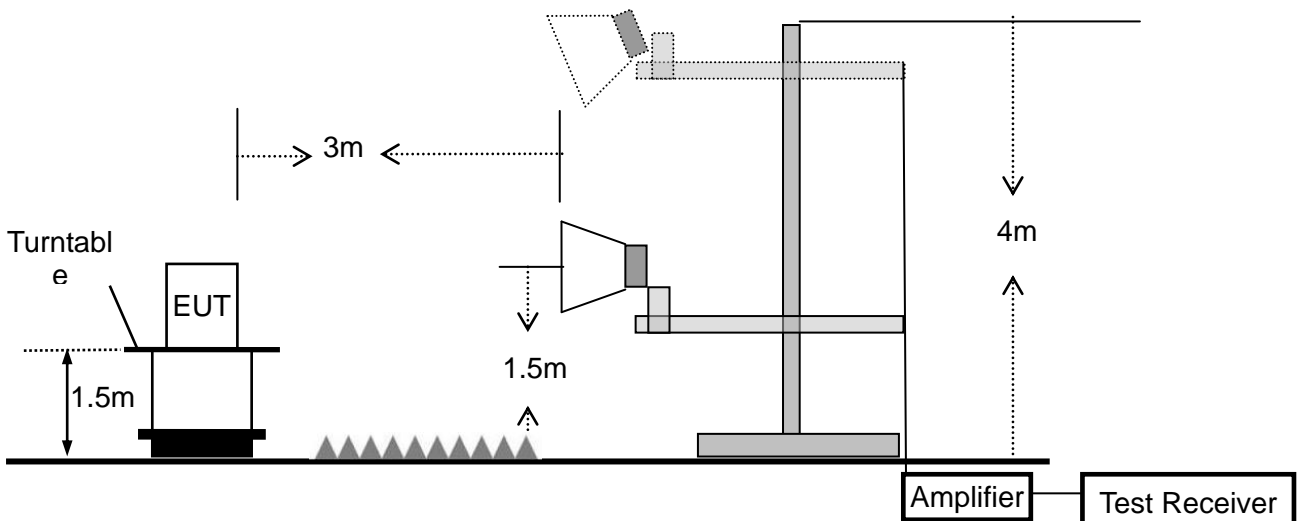

3.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 1MHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	1 MHz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz]/\text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

3.2.6 TEST RESULTS (9KHz – 30 MHz)

EUT:	Android Tablet	Model Name. :	EP103A
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


3.2.7 TEST RESULTS (30MHz – 1GHz)

EUT :	Android Tablet	Model Name. :	EP103A
Temperature :	25°C	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(5.2G)- 802.11n20 (Mid CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	32.8635	21.53	12.35	33.88	40.00	-6.12	QP
V	41.7129	20.16	14.32	34.48	40.00	-5.52	QP
V	149.4857	23.29	9.23	32.52	43.50	-10.98	QP
V	222.1697	15.15	12.57	27.72	46.00	-18.28	QP
V	477.1693	11.33	17.16	28.49	46.00	-17.51	QP
V	576.6443	10.28	18.97	29.25	46.00	-16.75	QP

Remark:


Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

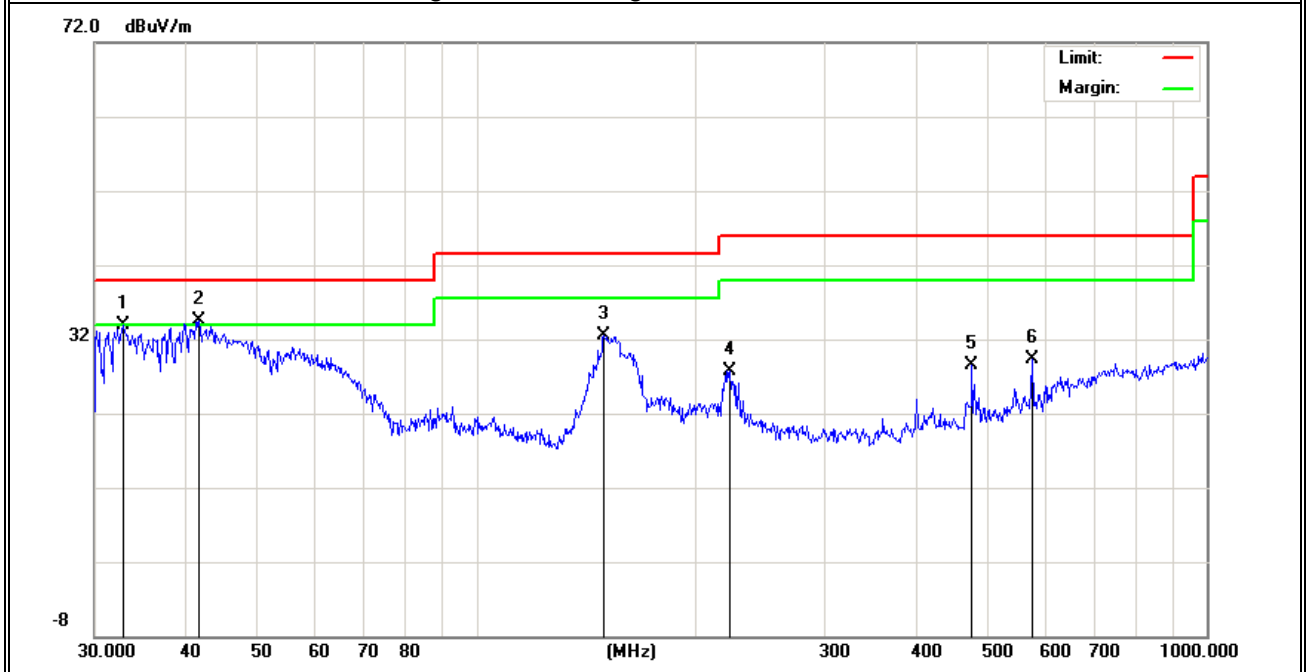

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	43.5056	7.65	14.57	22.22	40.00	-17.78	QP
H	54.8348	7.64	14.49	22.13	40.00	-17.87	QP
H	122.4038	13.70	10.56	24.26	43.50	-19.24	QP
H	159.7844	21.34	9.74	31.08	43.50	-12.42	QP
H	216.0240	18.08	12.32	30.40	46.00	-15.60	QP
H	935.5461	6.66	23.39	30.05	46.00	-15.95	QP

Remark:

Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

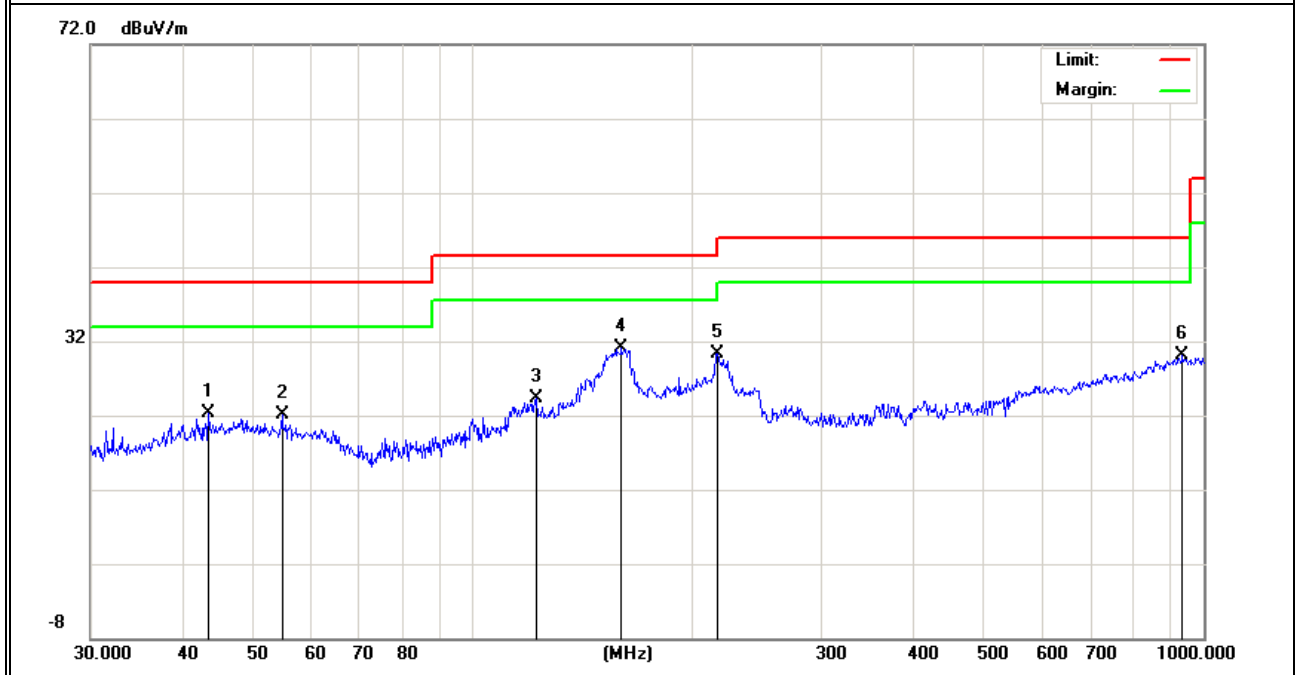

Note(1)“802.11n20” mode is the worst mode.


(2)Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

EUT :	Android Tablet	Model Name. :	EP103A
Temperature :	25°C	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(5.8G)- 802.11ax20(Mid CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	30.5304	19.47	12.35	31.82	40.00	-8.18	QP
V	50.7635	13.99	15.16	29.15	40.00	-10.85	QP
V	159.2247	22.51	9.67	32.18	43.50	-11.32	QP
V	219.8446	13.10	12.56	25.66	46.00	-20.34	QP
V	576.6443	8.78	18.97	27.75	46.00	-18.25	QP
V	750.1082	7.30	21.32	28.62	46.00	-17.38	QP

Remark:


Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

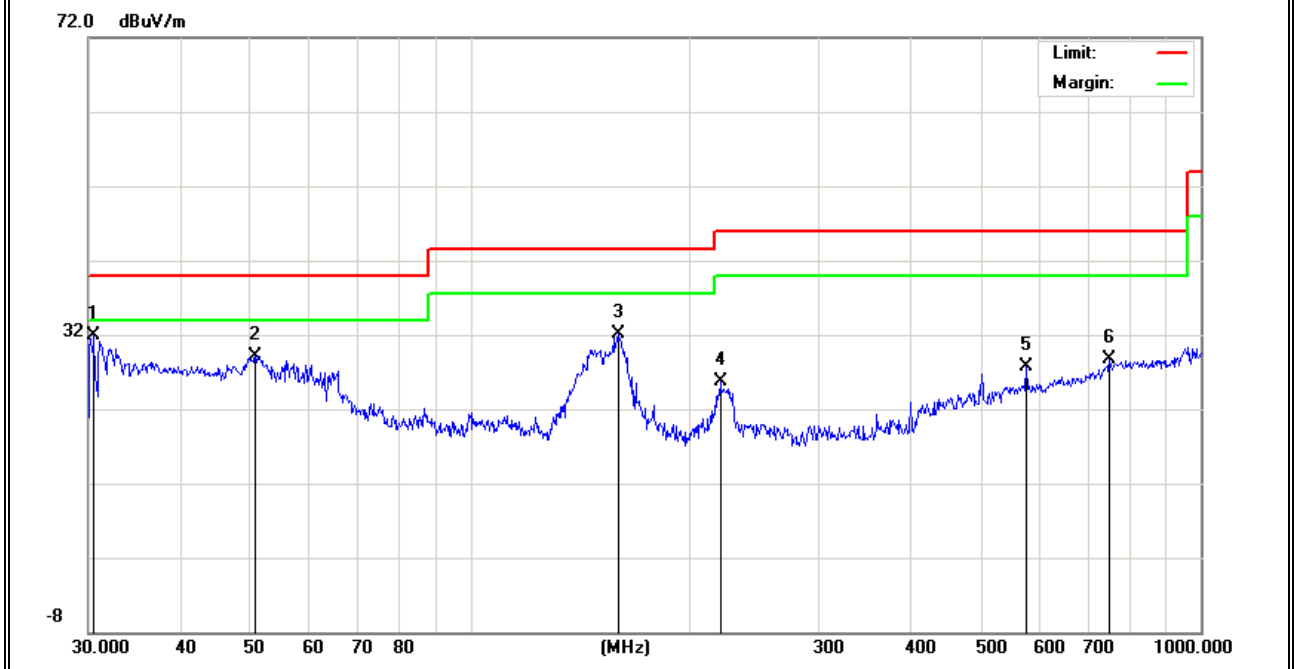

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	43.5056	9.15	14.57	23.72	40.00	-16.28	QP
H	54.8348	10.14	14.49	24.63	40.00	-15.37	QP
H	152.6639	25.26	9.24	34.50	43.50	-9.00	QP
H	191.7450	20.96	11.59	32.55	43.50	-10.95	QP
H	480.5276	11.37	17.26	28.63	46.00	-17.37	QP
H	935.5461	7.16	23.39	30.55	46.00	-15.45	QP

Remark:

Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit

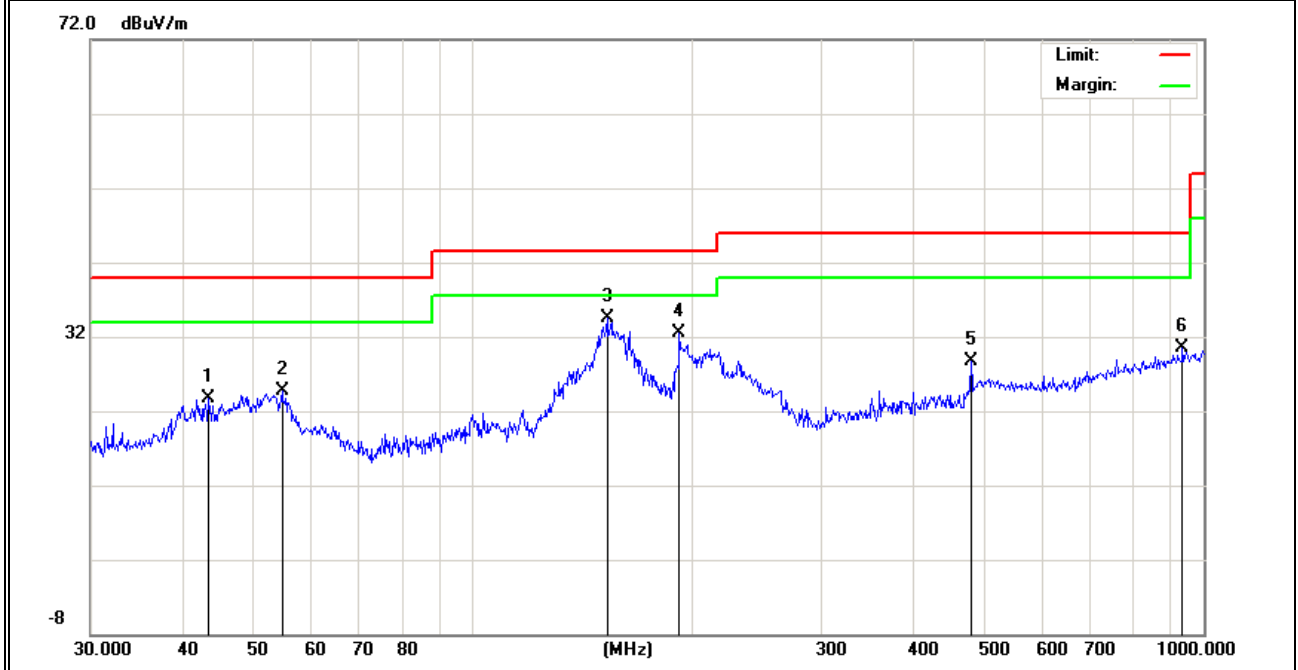

Note(1) "802.11ax20" mode is the worst mode.

(2) Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.

3.2.8 TEST RESULTS (1GHz-18GHz)

EUT :	Android Tablet	Model Name. :	EP103A
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(5.2G) -802.11n20 Mode		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	3694.39	61.83	5.94	35.40	44.00	59.17	74.00	-14.83	Pk
Vertical	3694.45	42.49	5.94	35.40	44.00	39.83	54.00	-14.17	AV
Vertical	10360.40	58.88	8.46	39.75	44.50	62.59	68.20	-5.61	Pk
Vertical	15540.73	61.20	10.12	38.80	44.10	66.02	74.00	-7.98	Pk
Vertical	15540.77	39.89	10.12	38.80	42.70	46.11	54.00	-7.89	AV
Horizontal	3713.58	63.69	5.94	35.18	44.00	60.81	74.00	-13.19	Pk
Horizontal	3713.25	43.96	5.94	35.18	44.00	41.08	54.00	-12.92	AV
Horizontal	10361.00	59.28	8.46	38.71	44.50	61.95	68.20	-6.25	Pk
Horizontal	15540.78	57.69	10.12	38.38	44.10	62.09	74.00	-11.91	Pk
Horizontal	15540.63	41.05	10.12	38.38	44.10	45.45	54.00	-8.55	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	3624.53	58.75	6.48	36.35	44.05	57.53	74.00	-16.47	Pk
Vertical	3624.54	43.25	6.48	36.35	44.05	42.03	54.00	-11.97	AV
Vertical	10400.36	60.13	8.47	37.88	44.51	61.97	68.20	-6.23	Pk
Vertical	15600.50	60.42	10.12	38.80	44.10	65.24	74.00	-8.76	Pk
Vertical	15600.40	39.76	10.12	38.80	42.70	45.98	54.00	-8.02	AV
Horizontal	4202.66	58.58	6.48	36.37	44.05	57.38	74.00	-16.62	Pk
Horizontal	4202.66	45.20	6.48	36.37	44.05	44.00	54.00	-10.00	AV
Horizontal	10400.39	61.84	8.47	38.64	44.50	64.45	68.20	-3.75	Pk
Horizontal	15600.80	60.47	10.12	38.38	44.10	64.87	74.00	-9.13	Pk
Horizontal	15600.76	41.58	10.12	38.38	44.10	45.98	54.00	-8.02	AV

Note: "802.11n20" mode is the worst mode.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported. Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Android Tablet	Model Name. :	EP103A
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5.8G) -- 802.11ax20 Mode		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	5123.00	64.21	5.94	35.40	44.00	61.55	74.00	-12.45	Pk
Vertical	5122.80	45.67	5.94	35.40	44.00	43.01	54.00	-10.99	AV
Vertical	11491.10	60.56	8.46	39.75	44.50	64.27	74.00	-9.73	Pk
Vertical	11490.97	43.82	8.46	39.75	44.50	47.53	54.00	-6.47	AV
Vertical	17236.11	52.51	10.12	38.80	44.10	57.33	68.20	-10.87	Pk
Horizontal	5167.03	59.75	5.94	35.18	44.00	56.87	68.20	-11.33	Pk
Horizontal	11490.95	59.42	8.46	38.71	44.50	62.09	74.00	-11.91	Pk
Horizontal	11490.81	42.87	8.46	38.71	44.50	45.54	54.00	-8.46	AV
Horizontal	17235.80	51.74	10.12	38.38	44.10	56.14	68.20	-12.06	Pk
middle Channel (5785 MHz)-Above 1G									
Vertical	5433.68	63.01	6.48	36.35	44.05	61.79	74.00	-12.21	Pk
Vertical	5433.96	43.40	6.48	36.35	44.05	42.18	54.00	-11.82	AV
Vertical	11570.77	60.97	8.47	37.88	44.51	62.81	74.00	-11.19	Pk
Vertical	11570.92	43.34	8.47	37.88	44.51	45.18	54.00	-8.82	AV
Vertical	17356.35	56.19	10.12	38.80	44.10	61.01	68.20	-7.19	Pk
Horizontal	4866.87	60.34	6.48	36.37	44.05	59.14	74.00	-14.86	Pk
Horizontal	4866.97	43.00	6.48	36.37	44.05	41.80	54.00	-12.20	AV
Horizontal	11570.78	62.98	8.47	38.64	44.50	65.59	74.00	-8.41	Pk
Horizontal	11570.55	44.36	8.47	38.64	44.50	46.97	54.00	-7.03	AV
Horizontal	17356.03	56.80	10.12	38.38	44.10	61.20	68.20	-7.00	Pk
High Channel (5825 MHz)-Above 1G									
Vertical	5243.80	62.02	7.10	37.24	43.50	62.86	68.20	-5.34	Pk
Vertical	11651.62	61.69	8.46	37.68	44.50	63.33	74.00	-10.67	Pk
Vertical	11651.65	43.15	8.46	37.68	44.50	44.79	54.00	-9.21	AV
Vertical	17473.10	60.59	10.12	38.80	44.10	65.41	68.20	-2.79	Pk
Vertical	17472.89	60.58	10.12	38.80	44.10	65.40	68.20	-2.80	Pk
Horizontal	5284.67	60.24	7.10	37.24	43.50	61.08	68.20	-7.12	Pk
Horizontal	11651.80	60.29	8.46	38.57	44.50	62.82	74.00	-11.18	Pk
Horizontal	11652.03	41.94	8.46	38.57	44.50	44.47	54.00	-9.53	AV
Horizontal	17473.91	58.15	10.12	38.38	44.10	62.55	68.20	-5.65	Pk
Horizontal	17473.98	58.36	10.12	38.38	44.10	62.76	68.20	-5.44	Pk

Note:"802.11ax20" mode is the worst mode.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


3.2.9 TEST RESULTS (18GHz-40GHz)

EUT :	Android Tablet	Model Name. :	EP103A
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5.2G)-802.11n20 TX (5.8G)-802.11ax20		

All the modulation modes have been tested, and the worst result was report as below:


Low Channel (5180 MHz)-Above 1G

Horizontal

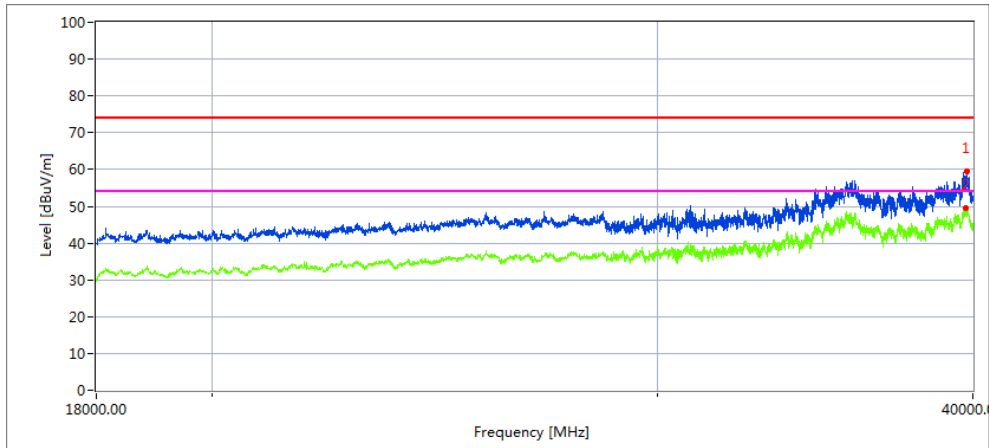

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39769.07	39.19	20.09	44.07	43.48	59.87	68.2	8.33	Peak
39766.81	27.6	20.09	44.04	43.48	48.25	54	5.75	AVG


Vertical

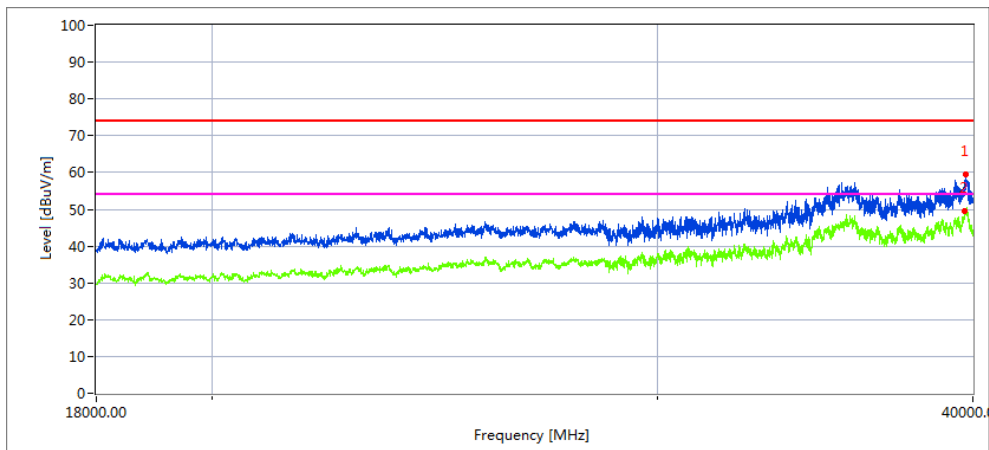

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39769.286	36.05	20.09	44.07	43.48	56.73	68.2	11.47	Peak
39769.135	27.45	20.09	44.04	43.48	48.1	54	5.9	AVG


High Channel (5240 MHz)-Above 1G

Horizontal

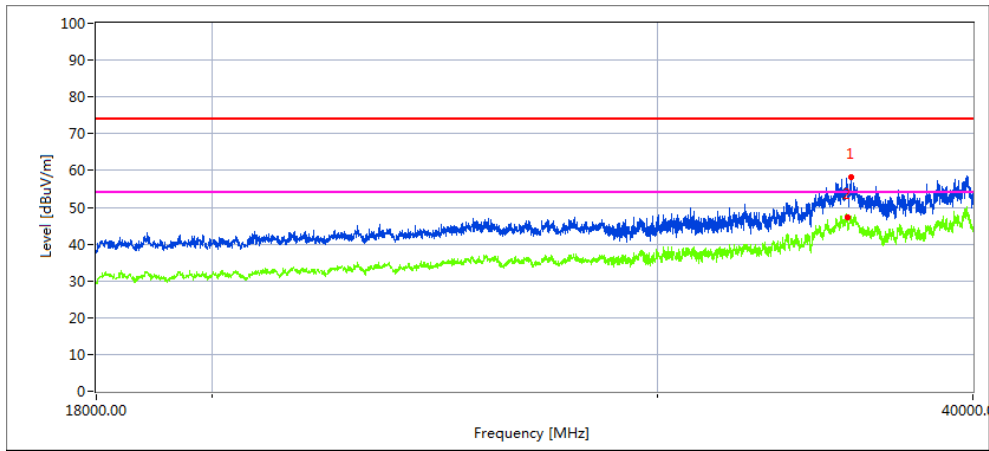

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
35627.9	40.92	19.11	42.73	44.61	58.15	68.2	10.05	Peak
35596.696	31.58	19.11	42.73	44.61	48.81	54	5.19	AVG

Vertical

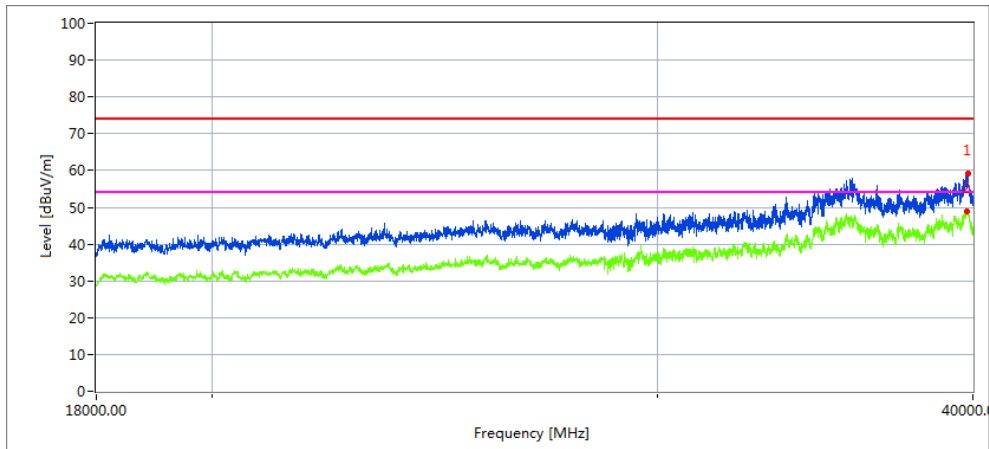


Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39769.176	37.13	20.09	44.07	43.48	57.81	68.2	10.39	Peak
39769.366	25.52	20.09	44.04	43.48	46.17	54	7.83	AVG

Note:802.11n20 mode is the worst mode.


Low Channel (5745 MHz)-Above 1G

Horizontal

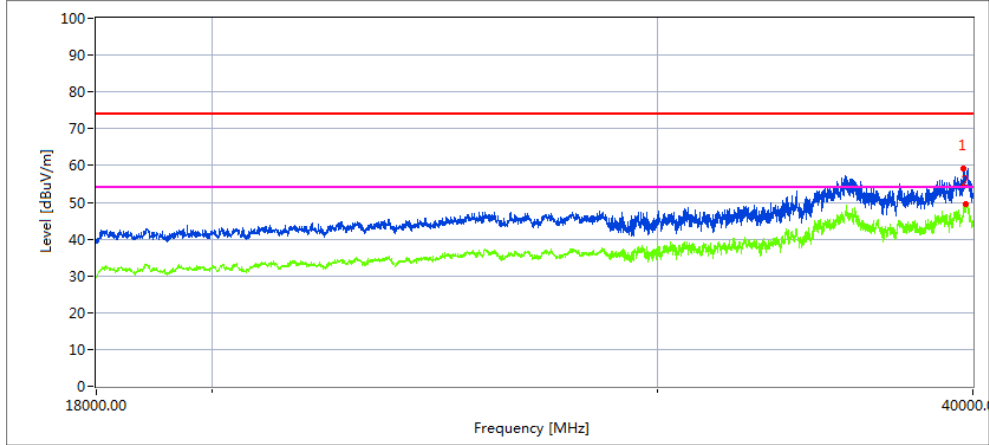

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39669.664	38.5	20.09	44.16	43.48	59.27	68.2	8.93	Peak
39669.944	29.37	20.09	44.16	43.48	50.14	54	3.86	AVG


Vertical

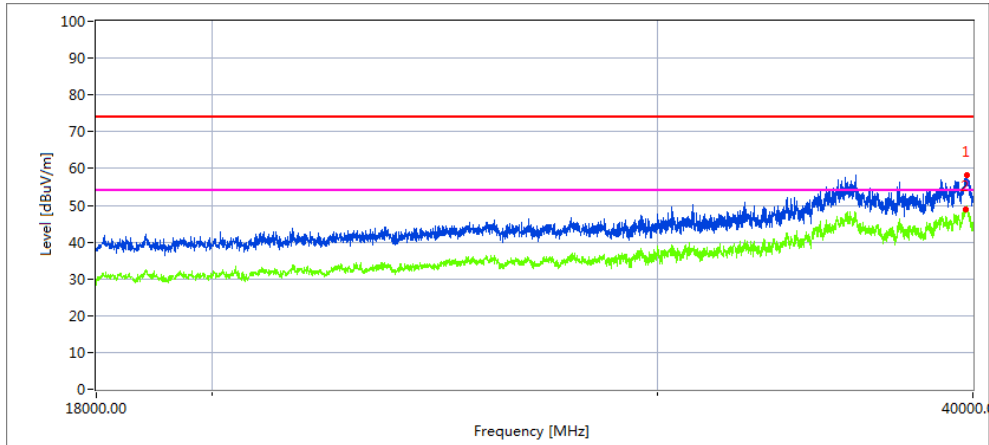

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39731.112	37.49	20.06	44.07	43.21	58.41	68.2	9.79	Peak
39731.202	28.48	20.06	44.07	43.21	49.4	54	4.6	AVG


High Channel (5825 MHz)-Above 1G

Horizontal

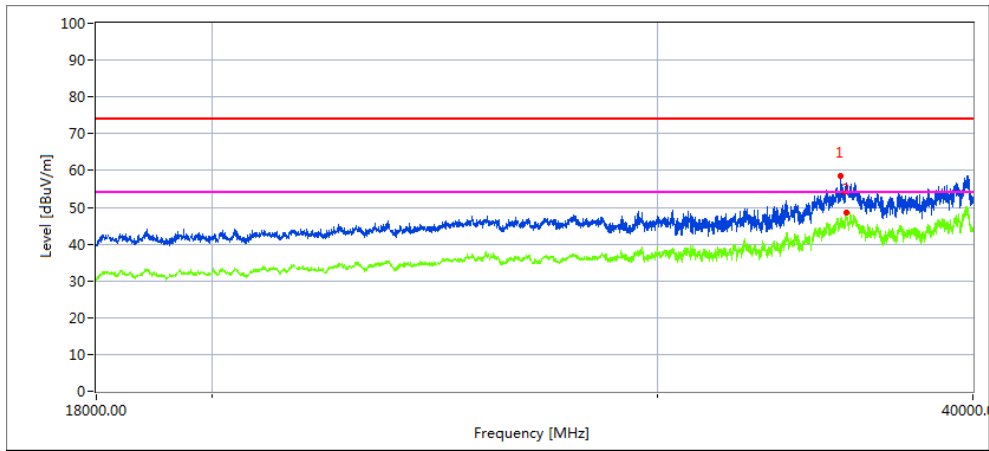

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
35628.144	39.68	19.11	42.63	43.48	57.94	68.2	10.26	Peak
35635.818	29.9	19.12	42.63	43.48	48.17	54	5.83	AVG

Vertical

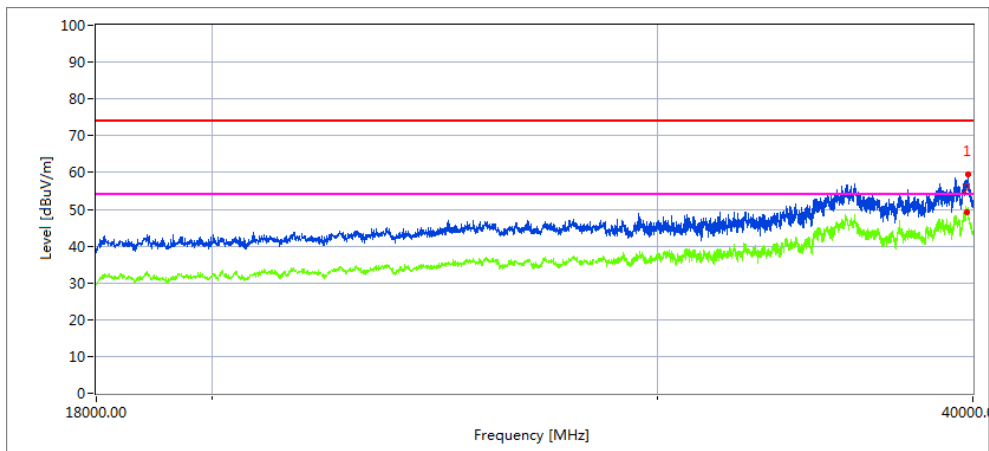

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39821.563	38.51	20.1	44.1	43.22	59.49	68.2	8.71	Peak
39821.433	29.36	20.1	44.1	43.22	50.34	54	3.66	AVG

Note:802.11ax20 mode is the worst mode.

3.2.10 Spurious Emission in Restricted Band 4.5GHz~5.150 GHz& 5.350GHz~5460GHz

EUT :	Android Tablet	Model Name. :	EP103A
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5.2G)-802.11n20		

All the modulation modes have been tested, The report just record the worst data mode.

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
5.2G WIFI-802.11n20 Mode									
4500	56.27	5.2	35.6	44.2	52.87	74	-21.13	Pk	Horizontal
4500	47.49	5.2	35.6	44.2	44.09	54	-9.91	AV	Horizontal
4500	59.18	5.2	35.6	44.2	55.78	74	-18.22	Pk	Vertical
4500	46.39	5.2	35.6	44.2	42.99	54	-11.01	AV	Vertical
5150	70.27	5.36	35.66	44.22	67.07	74	-6.93	Pk	Horizontal
5150	49.74	5.36	35.66	44.22	46.54	54	-7.46	AV	Horizontal
5150	57.18	5.36	35.66	44.22	53.98	74	-20.02	Pk	Vertical
5150	38.16	5.36	35.66	44.22	34.96	54	-19.04	AV	Vertical
5350	65.70	5.68	35.68	44.22	62.84	74	-11.16	Pk	Vertical
5350	47.36	5.68	35.68	44.22	44.5	54	-9.5	AV	Vertical
5350	60.91	5.68	35.68	44.22	58.05	74	-15.95	Pk	Horizontal
5350	45.59	5.68	35.68	44.22	42.73	54	-11.27	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11n20" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

3.3 POWER SPECTRAL DENSITY TEST

3.3.1 Applied procedures / limit

According to FCC §15.407(a)(3)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

,

3.3.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

3.3.3 DEVIATION FROM STANDARD

No deviation.

3.3.4 TEST SETUP



3.3.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

3.3.6 TEST RESULTS

EUT :	Android Tablet	Model Name. :	EP103A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency Band I (5150-5250MHz), Band IV (5725-5850MHz)		

Test data reference attachment.

3.4 26DB & 99% EMISSION BANDWIDTH

3.4.1 Applied procedures / limit


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

3.4.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

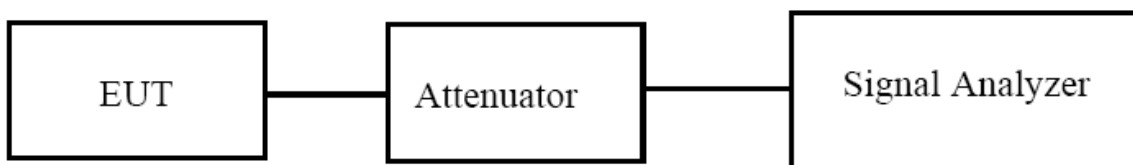

3.4.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.4.4 TEST RESULTS

EUT :	Android Tablet	Model Name. :	EP103A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency Band I (5150-5250MHz), Band IV (5725-5850MHz)		

Test data reference attachment.

3.5 MINIMUM 6 DB BANDWIDTH

3.5.1 Applied procedures / limit

According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.5.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.5.3 DEVIATION FROM STANDARD

No deviation.

3.5.4 TEST SETUP

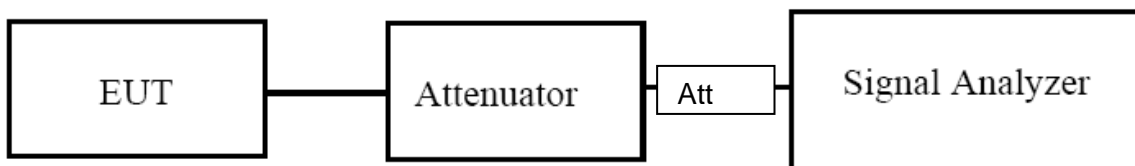

3.5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.5.6 TEST RESULTS

EUT :	Android Tablet	Model Name. :	EP103A
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5G) Mode Frequency Band IV (5725-5850MHz)		

Test data reference attachment.

3.6 MAXIMUM CONDUCTED OUTPUT POWER

3.6.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

3.6.2 TEST PROCEDURE

- Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".


(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

3.6.3 DEVIATION FROM STANDARD

No deviation.

3.6.4 TEST SETUP

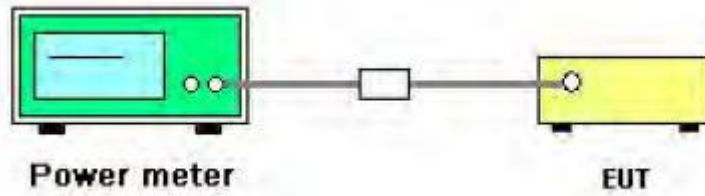

3.6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.6.6 TEST RESULTS

EUT :	Android Tablet	Model Name. :	EP103A
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5G) Mode Frequency Band I (5150-5250MHz), Band IV (5725-5850MHz)		

Test data reference attachment.

3.7 OUT OF BAND EMISSIONS

3.7.1 Applicable Standard

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


3.7.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

3.7.3 DEVIATION FROM STANDARD

No deviation.

3.7.4 TEST SETUP

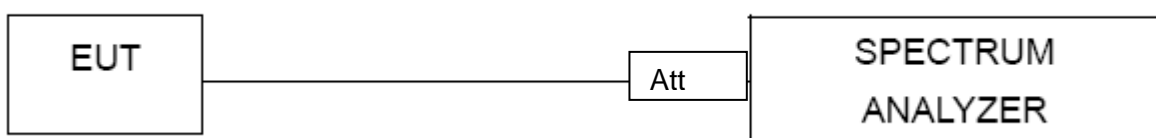

3.7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.7.6 TEST RESULTS

EUT :	Android Tablet	Model Name. :	EP103A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V

Test data reference attachment.

3.8 SPURIOUS RF CONDUCTED EMISSIONS

3.8.1 Conformance Limit

According to FCC §15.407(b)(1) (2) (3) (4)

3.8.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

3.8.3 Test Setup

Please refer to Section 6.1 of this test report.

3.8.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measure frequency range from 30MHz to 40GHz.

3.8.5 Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.

Test data reference attachment.

3.9 FREQUENCY STABILITY MEASUREMENT


3.9.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.9.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6 \text{ ppm}$.
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 70^\circ\text{C}$.

3.9.3 TEST SETUP LAYOUT

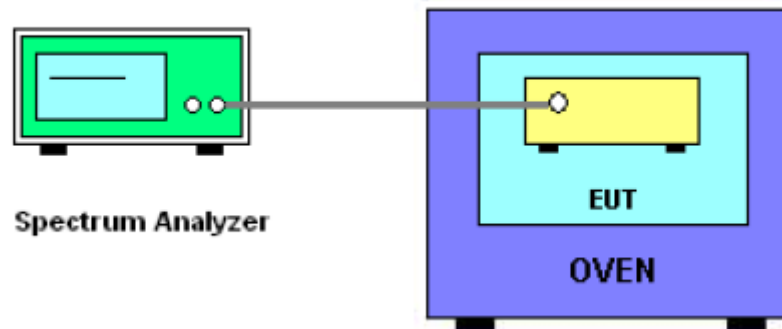

3.9.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

3.9.5 TEST RESULTS

EUT :	Android Tablet	Model Name. :	EP103A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.80	5180.0247	5180	0.0247	-4.7683
		V max (V)	4.37	5180.0255	5180	0.0255	-4.9228
		V min (V)	3.23	5180.019	5180	0.0190	-3.6680
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5180.0051	5180	0.0051	-0.9846
		T (°C)	-10	5180.0096	5180	0.0096	-1.8533
		T (°C)	0	5180.0156	5180	0.0156	-3.0116
		T (°C)	10	5180.0130	5180	0.0130	-2.5097
		T (°C)	20	5180.0097	5180	0.0097	-1.8726
		T (°C)	30	5180.0079	5180	0.0079	-1.5251
		T (°C)	40	5180.0116	5180	0.0116	-2.2394
		T (°C)	50	5180.0337	5180	0.0337	-6.5058
		T (°C)	60	5180.0104	5180	0.0104	-2.0077
		T (°C)	70	5180.0256	5180	0.0256	-4.9421
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.80	5200.0055	5200	0.0055	-1.0577
		V max (V)	4.37	5200.0289	5200	0.0289	-5.5577
		V min (V)	3.23	5200.0253	5200	0.0253	-4.8654
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5200.0037	5200	0.0037	-0.7115
		T (°C)	-10	5200.0252	5200	0.0252	-4.8462
		T (°C)	0	5200.0087	5200	0.0087	-1.6731
		T (°C)	10	5200.0132	5200	0.0132	-2.5385
		T (°C)	20	5200.0245	5200	0.0245	-4.7115
		T (°C)	30	5200.0062	5200	0.0062	-1.1923
		T (°C)	40	5200.0022	5200	0.0022	-0.4231
		T (°C)	50	5200.0143	5200	0.0143	-2.7500
		T (°C)	60	5200.0334	5200	0.0334	-6.4231
		T (°C)	70	5200.0262	5200	0.0262	-5.0385
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.80	5240.0016	5240	0.0016	-0.3053
		V max (V)	4.37	5240.0263	5240	0.0263	-5.0191
		V min (V)	3.23	5240.0003	5240	0.0003	-0.0573
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5240.0323	5240	0.0323	-6.1641
		T (°C)	-10	5240.0273	5240	0.0273	-5.2099
		T (°C)	0	5240.0251	5240	0.0251	-4.7901
		T (°C)	10	5240.0149	5240	0.0149	-2.8435
		T (°C)	20	5240.0034	5240	0.0034	-0.6489
		T (°C)	30	5240.0065	5240	0.0065	-1.2405
		T (°C)	40	5240.0266	5240	0.0266	-5.0763
		T (°C)	50	5240.0112	5240	0.0112	-2.1374
		T (°C)	60	5240.0316	5240	0.0316	-6.0305
		T (°C)	70	5240.0028	5240	0.0028	-0.5344
Limits				Within 5150-5250MHz			
Result				Complies			

EUT :	Android Tablet	Model Name. :	EP103A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency(5745-5825MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.80	5745.0312	5745	0.03120	-5.4308
		V max (V)	4.37	5745.0159	5745	0.01590	-2.7676
		V min (V)	3.23	5745.0096	5745	0.00960	-1.6710
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5745.0035	5745	0.00350	-0.6092
		T (°C)	-10	5745.0017	5745	0.00170	-0.2959
		T (°C)	0	5745.0046	5745	0.00460	-0.8007
		T (°C)	10	5745.0220	5745	0.02200	-3.8294
		T (°C)	20	5745.0311	5745	0.03110	-5.4134
		T (°C)	30	5745.0071	5745	0.00710	-1.2359
		T (°C)	40	5745.0157	5745	0.01570	-2.7328
		T (°C)	50	5745.0118	5745	0.01180	-2.0540
		T (°C)	60	5745.0238	5745	0.02380	-4.1427
		T (°C)	70	5745.0158	5745	0.01580	-2.7502
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.80	5785.0183	5785	0.01830	-3.1634
		V max (V)	4.37	5785.0017	5785	0.00170	-0.2939
		V min (V)	3.23	5785.0122	5785	0.01220	-2.1089
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5785.0199	5785	0.01990	-3.4399
		T (°C)	-10	5785.0324	5785	0.03240	-5.6007
		T (°C)	0	5785.0138	5785	0.01380	-2.3855
		T (°C)	10	5785.0072	5785	0.00720	-1.2446
		T (°C)	20	5785.0267	5785	0.02670	-4.6154
		T (°C)	30	5785.0109	5785	0.01090	-1.8842
		T (°C)	40	5785.0316	5785	0.03160	-5.4624
		T (°C)	50	5785.0268	5785	0.02680	-4.6327
		T (°C)	60	5785.0283	5785	0.02830	-4.8920
		T (°C)	70	5785.0078	5785	0.00780	-1.3483
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.80	5825.0301	5825	0.03010	-5.1674
		V max (V)	4.37	5825.0247	5825	0.02470	-4.2403
		V min (V)	3.23	5825.0139	5825	0.01390	-2.3863
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.8	T (°C)	-20	5825.0105	5825	0.01050	-1.8026
		T (°C)	-10	5825.0004	5825	0.00040	-0.0687
		T (°C)	0	5825.0252	5825	0.02520	-4.3262
		T (°C)	10	5825.0021	5825	0.00210	-0.3605
		T (°C)	20	5825.0274	5825	0.02740	-4.7039
		T (°C)	30	5825.0013	5825	0.00130	-0.2232
		T (°C)	40	5825.0178	5825	0.01780	-3.0558
		T (°C)	50	5825.0312	5825	0.03120	-5.3562
		T (°C)	60	5825.0178	5825	0.01780	-3.0558
		T (°C)	70	5825.0180	5825	0.01800	-3.0901
Limits				Within 5745-5850MHz			
Result				Complies			

4. ANTENNA REQUIREMENT

4.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

4.2 EUT ANTENNA

The EUT antenna is permanent Interna antenna (Gain: 1.01 dBi). It comply with the standard requirement.


5. TEST RESULTS

5.2G WIFI


5.1 DUTY CYCLE

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5180	Ant1	96.07	0.17
NVNT	a	5200	Ant1	95.55	0.2
NVNT	a	5240	Ant1	95.52	0.2
NVNT	ac20	5180	Ant1	95.58	0.2
NVNT	ac20	5200	Ant1	95.15	0.22
NVNT	ac20	5240	Ant1	94.84	0.23
NVNT	ac40	5190	Ant1	90.41	0.44
NVNT	ac40	5230	Ant1	89.7	0.47
NVNT	ax20	5180	Ant1	93.8	0.28
NVNT	ax20	5200	Ant1	93.47	0.29
NVNT	ax20	5240	Ant1	93.43	0.3
NVNT	ax40	5190	Ant1	88.8	0.52
NVNT	ax40	5230	Ant1	87.65	0.57
NVNT	n20	5180	Ant1	95.41	0.2
NVNT	n20	5200	Ant1	94.61	0.24
NVNT	n20	5240	Ant1	92.28	0.35
NVNT	n40	5190	Ant1	90.13	0.45
NVNT	n40	5230	Ant1	91.49	0.39


Duty Cycle NVNT a 5180MHz Ant1

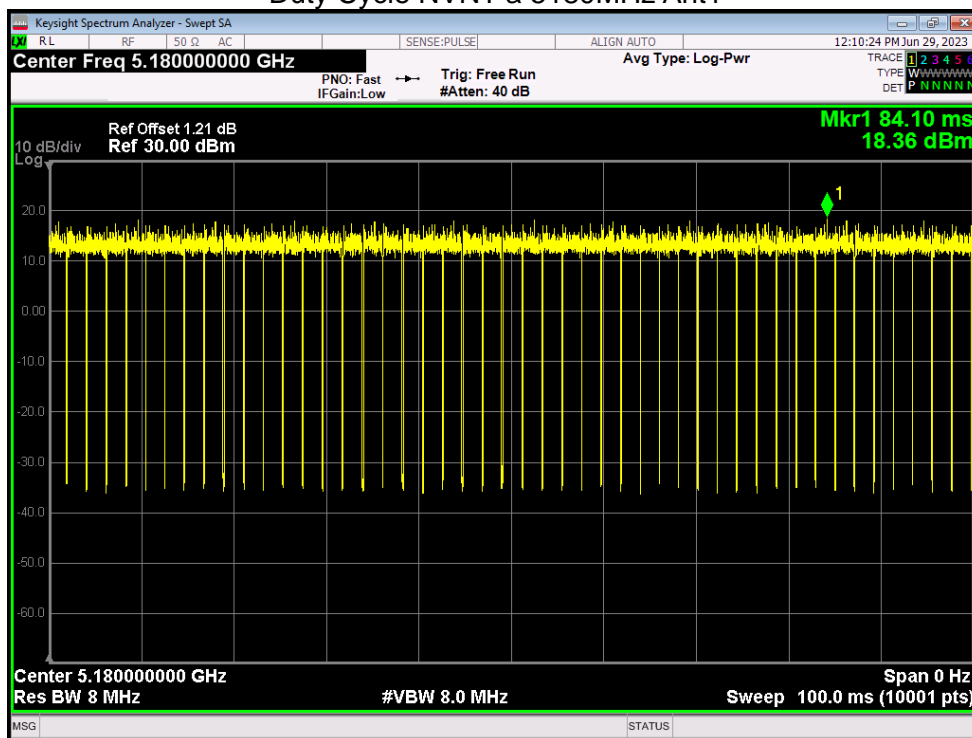


Duty Cycle NVNT a 5200MHz Ant1

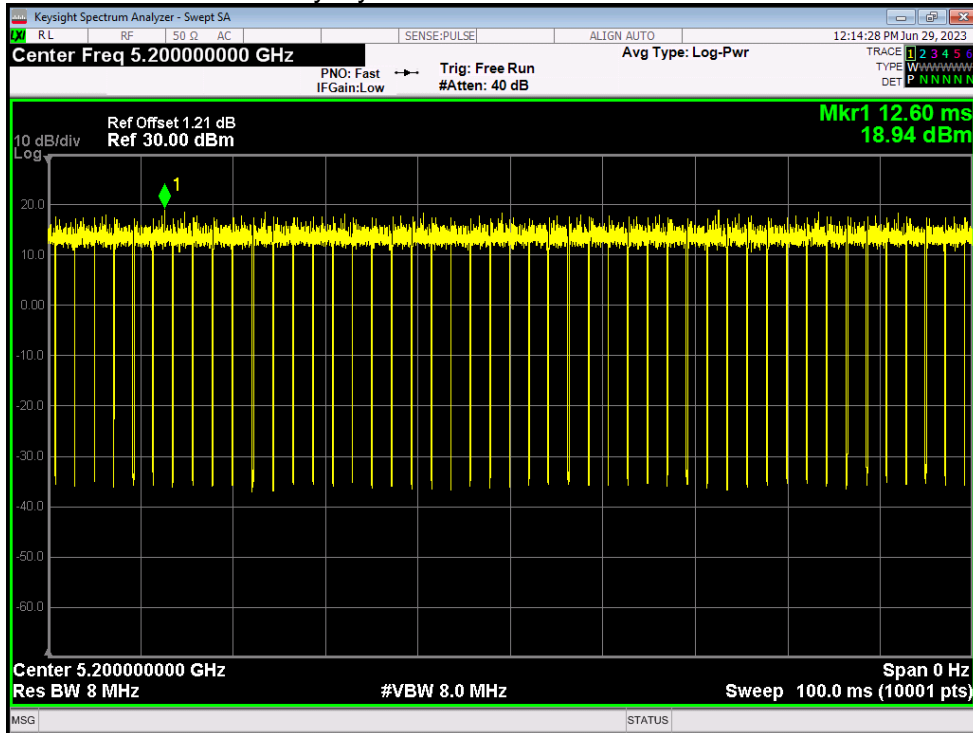


Duty Cycle NVNT a 5240MHz Ant1

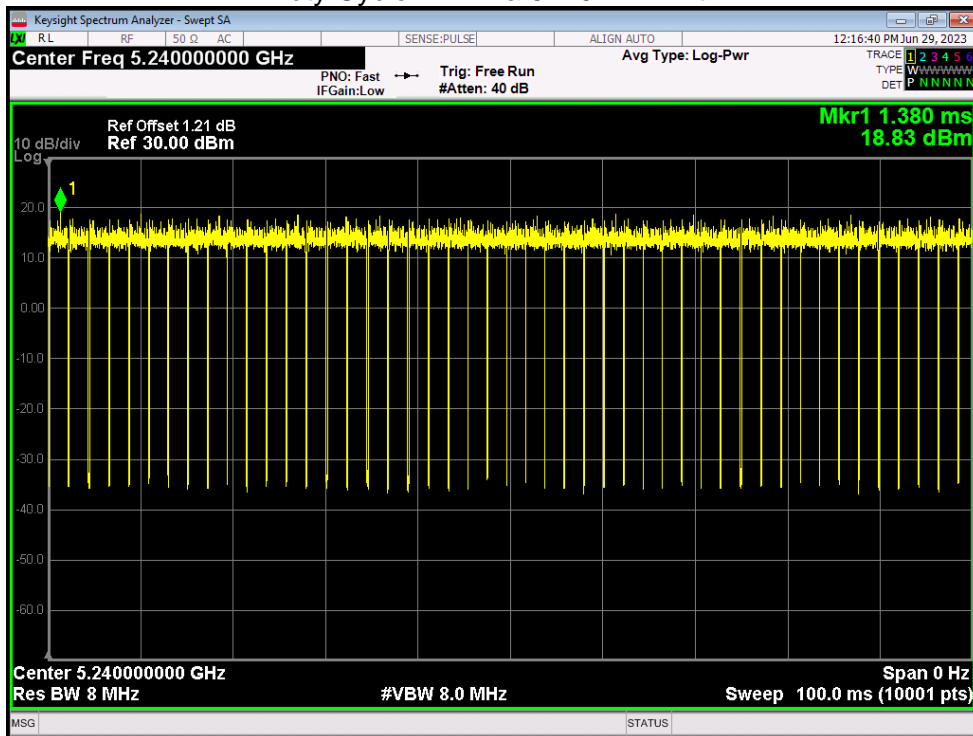


Duty Cycle NVNT ac20 5180MHz Ant1

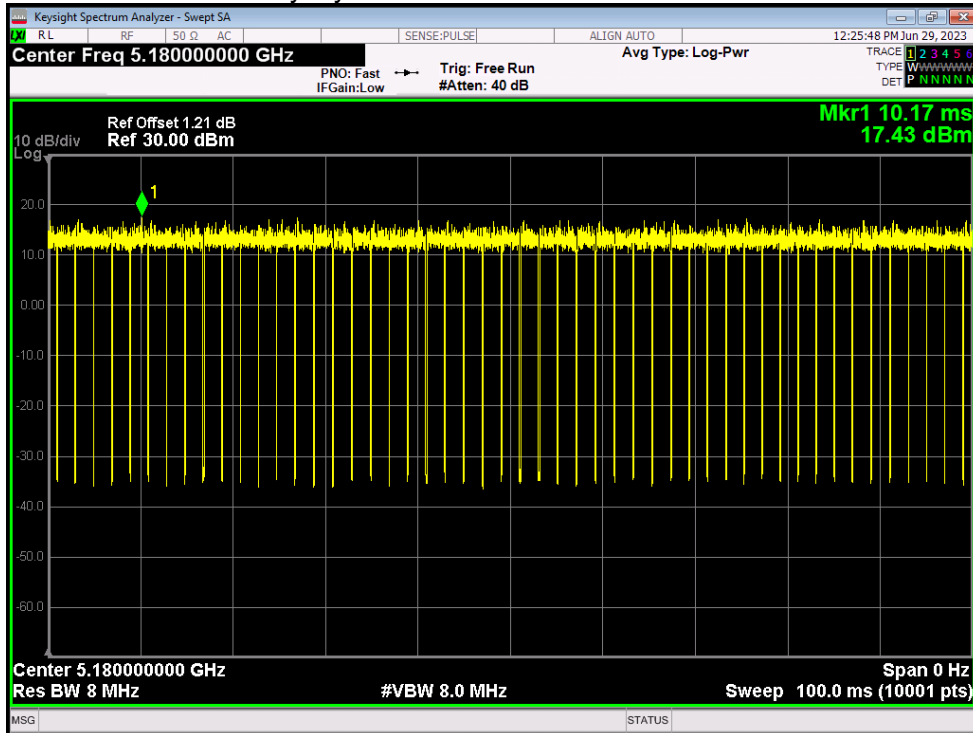


Duty Cycle NVNT ac20 5200MHz Ant1

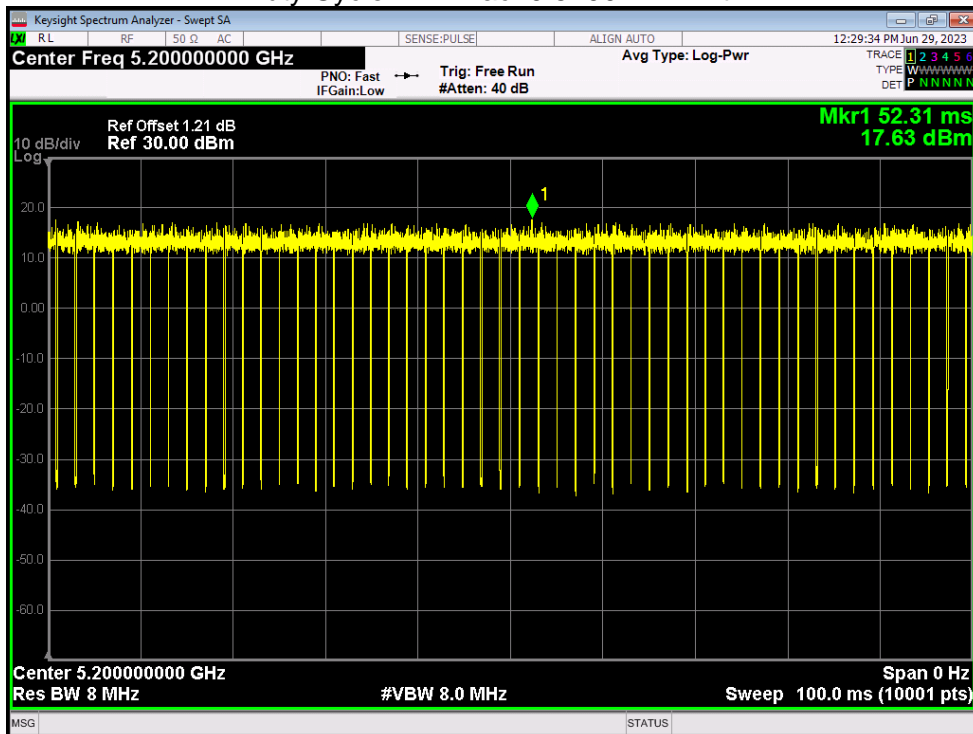


Duty Cycle NVNT ac20 5240MHz Ant1

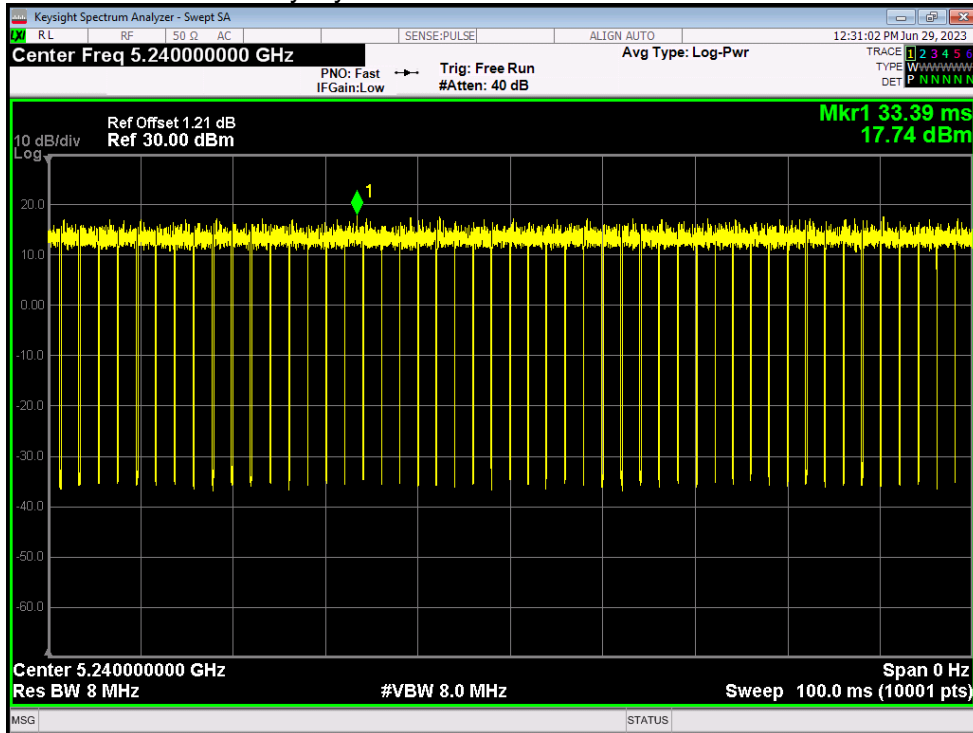


Duty Cycle NVNT ac40 5190MHz Ant1

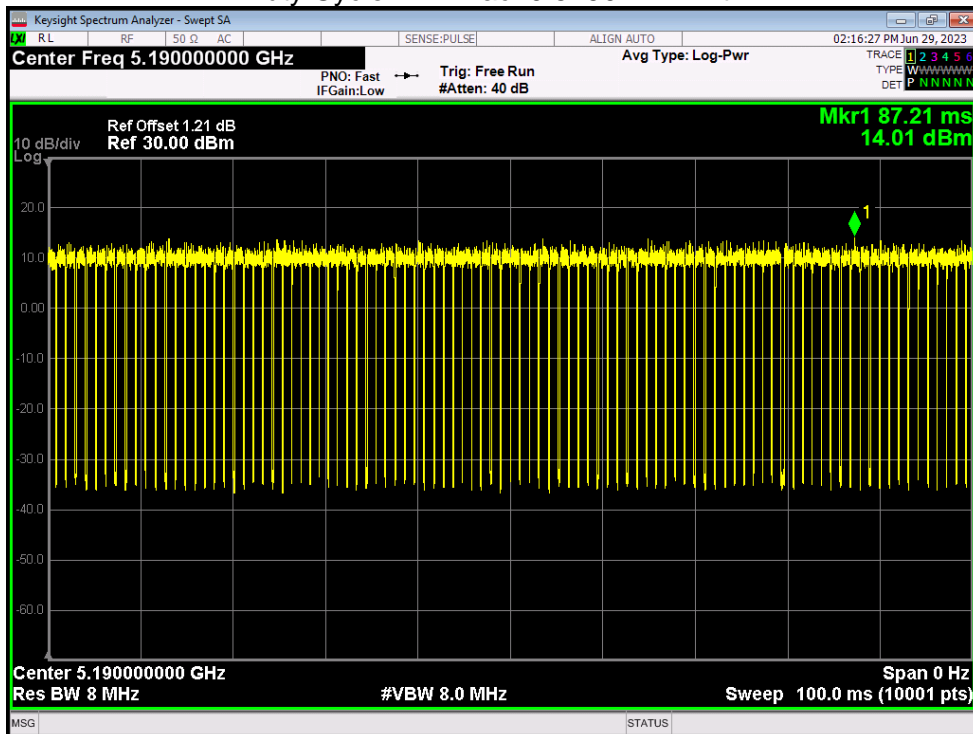


Duty Cycle NVNT ac40 5230MHz Ant1

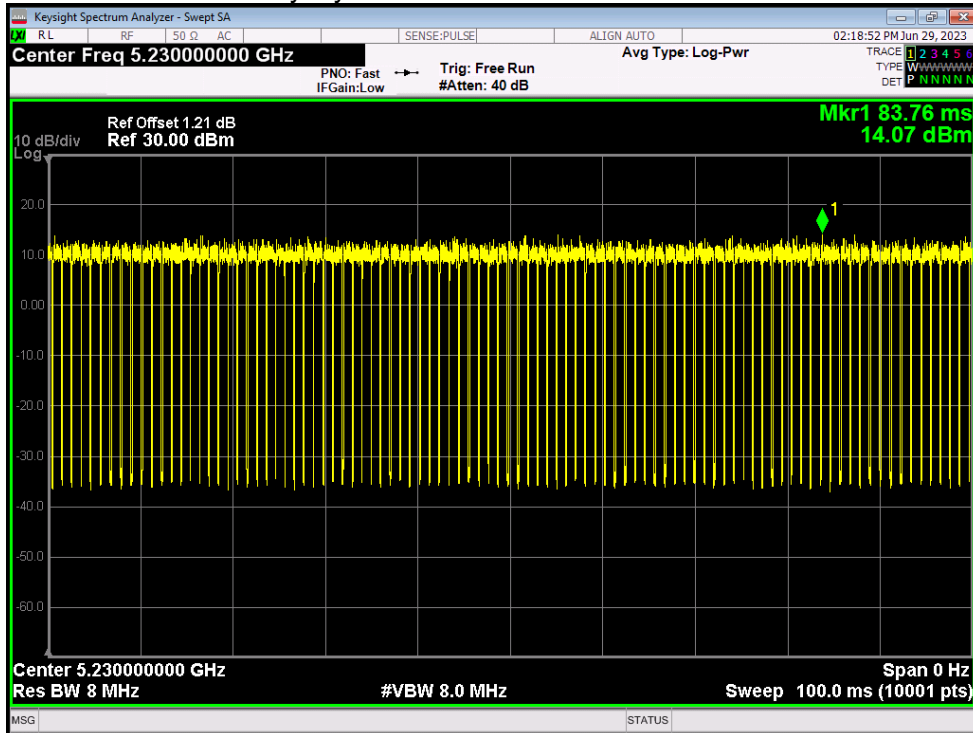


Duty Cycle NVNT ax20 5180MHz Ant1

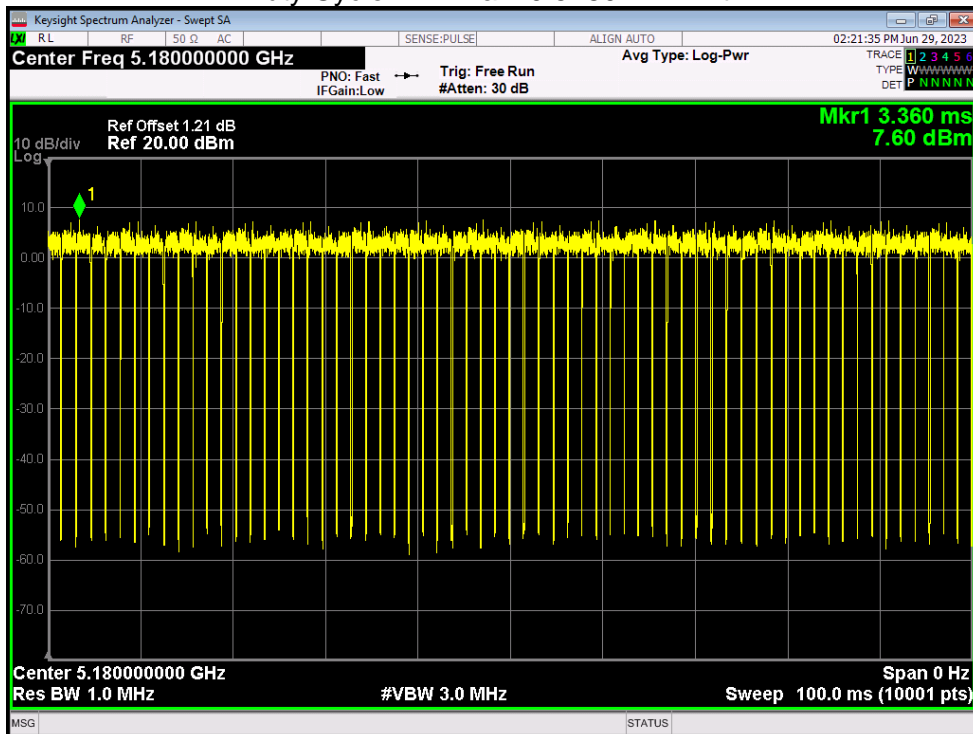


Duty Cycle NVNT ax20 5200MHz Ant1

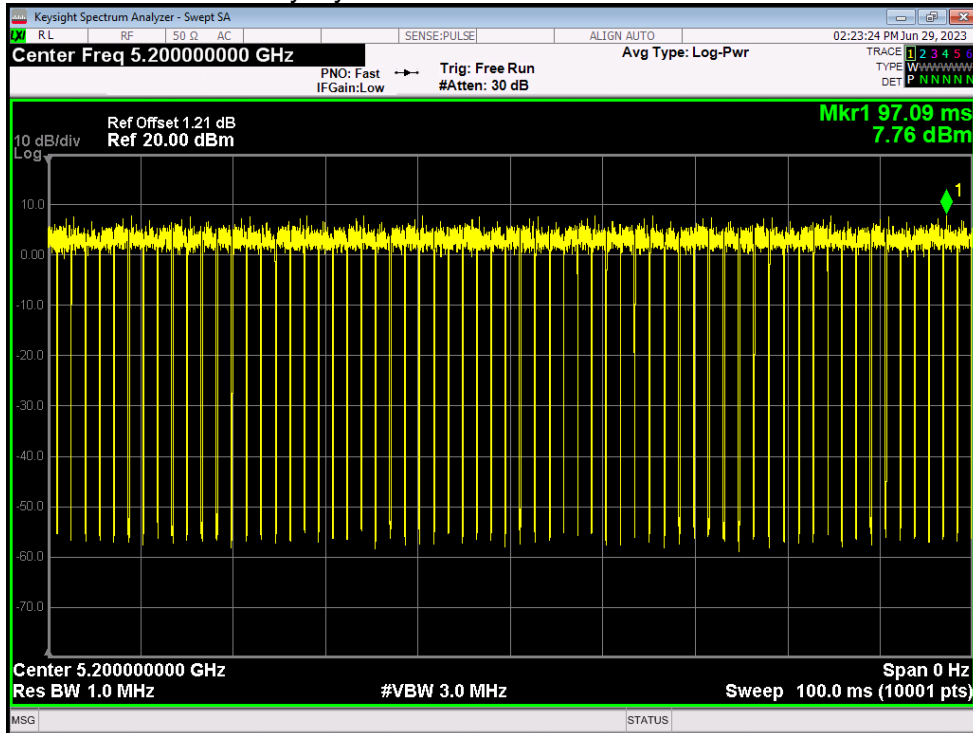


Duty Cycle NVNT ax20 5240MHz Ant1

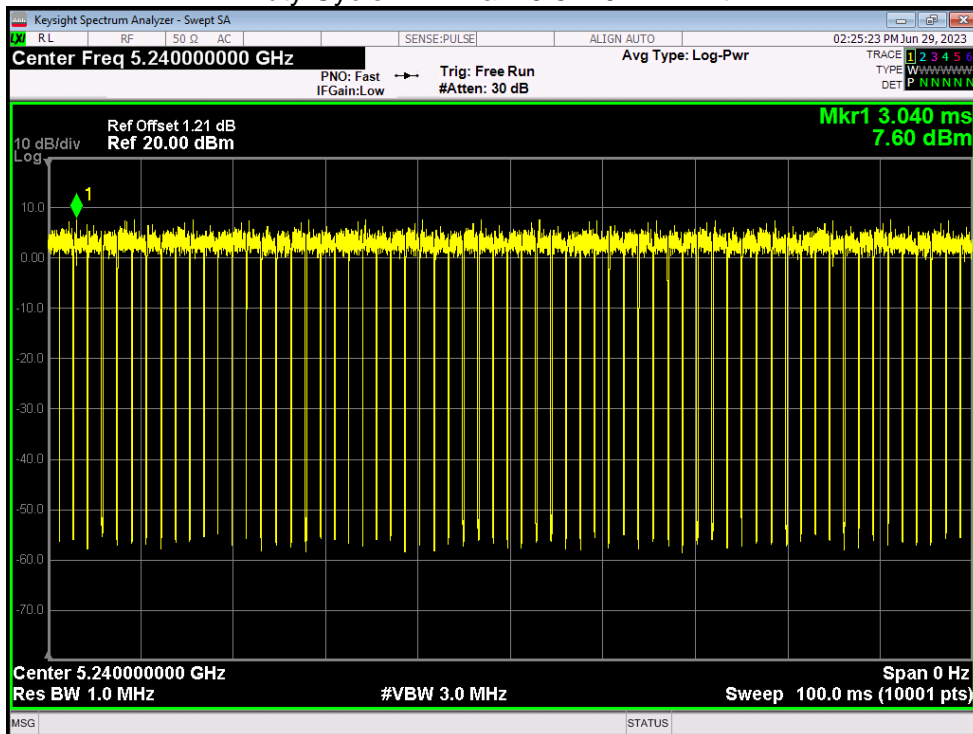


Duty Cycle NVNT ax40 5190MHz Ant1

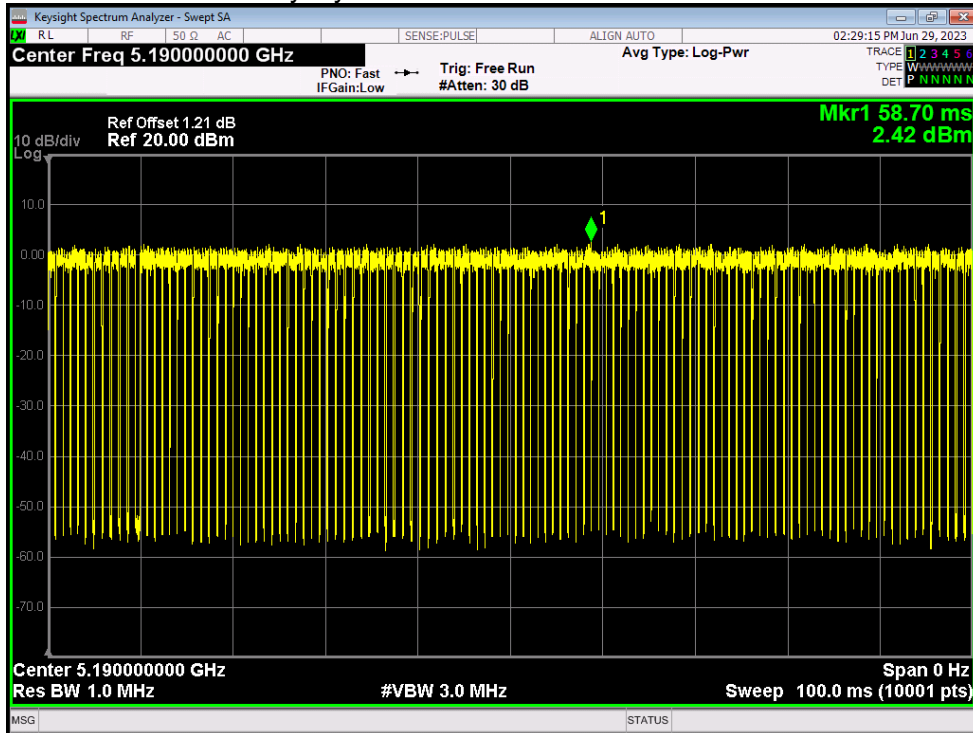


Duty Cycle NVNT ax40 5230MHz Ant1

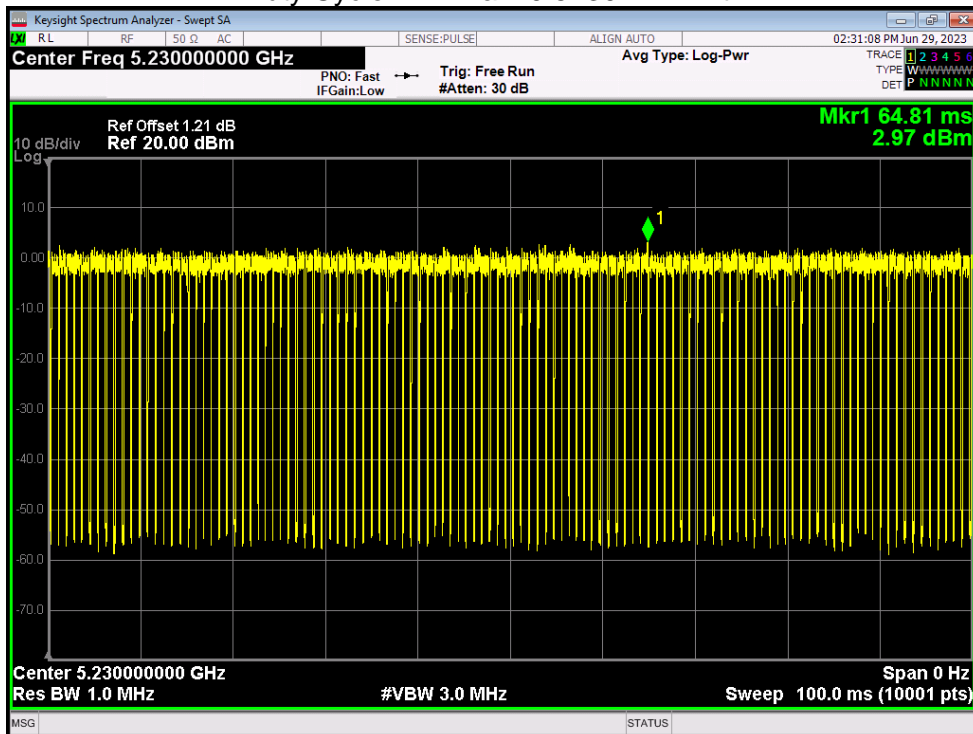


Duty Cycle NVNT n20 5180MHz Ant1

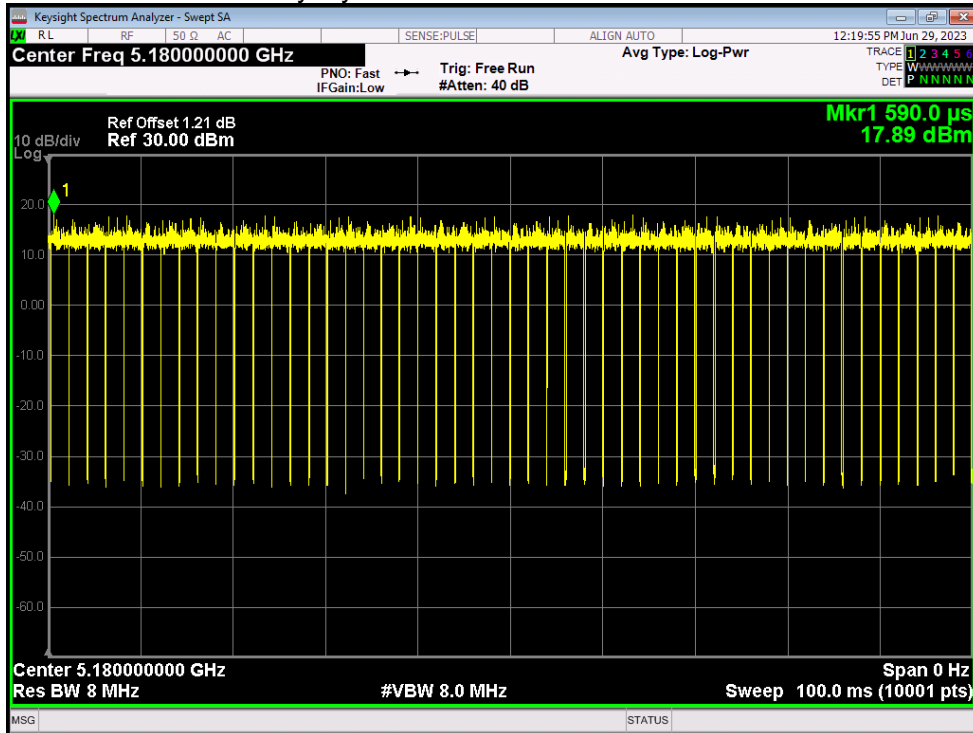


Duty Cycle NVNT n20 5200MHz Ant1

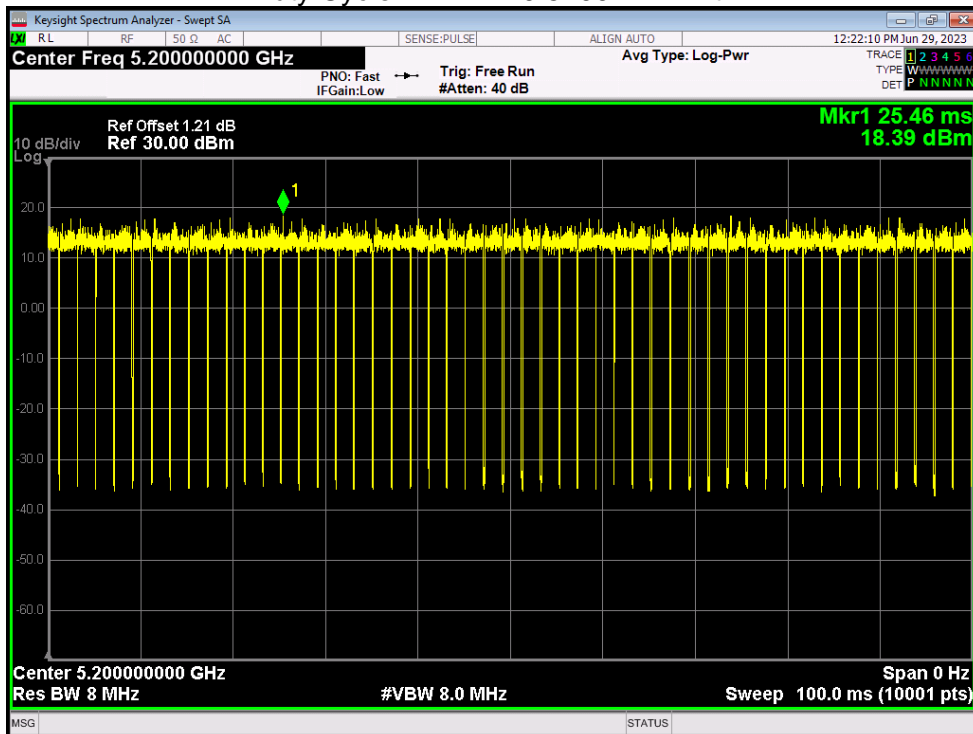


Duty Cycle NVNT n20 5240MHz Ant1

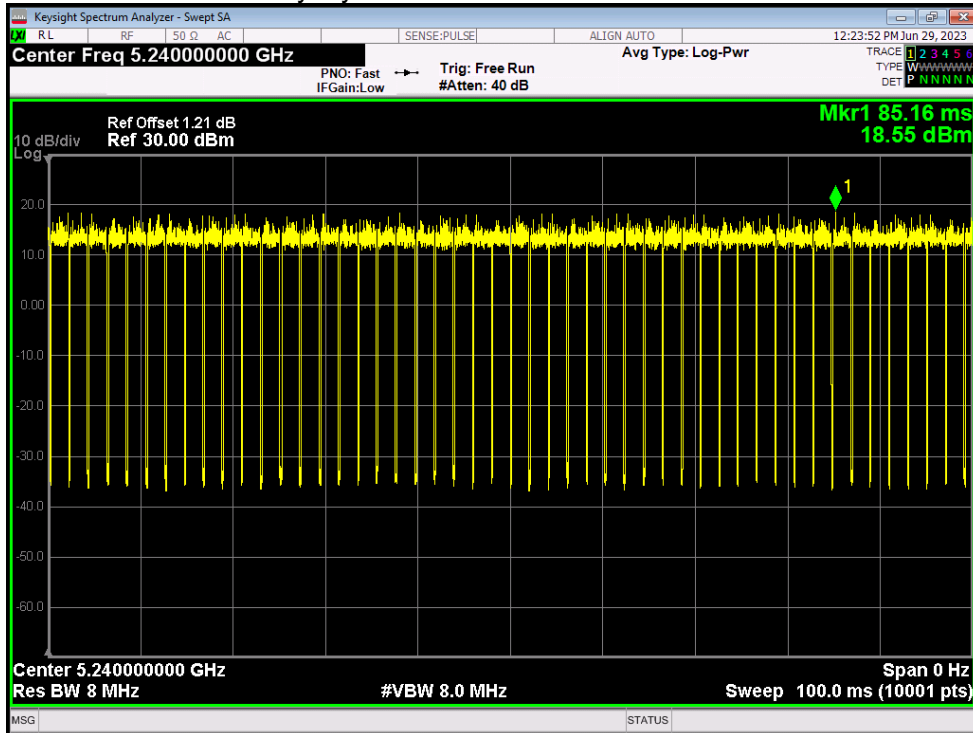

Duty Cycle NVNT n40 5190MHz Ant1

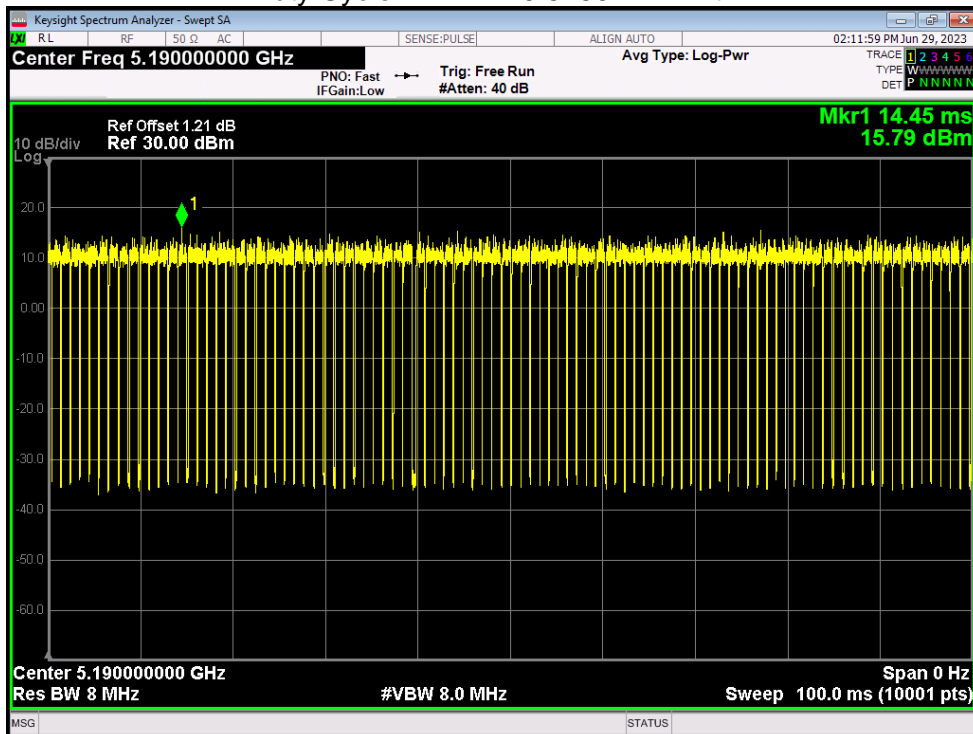


Duty Cycle NVNT n40 5230MHz Ant1

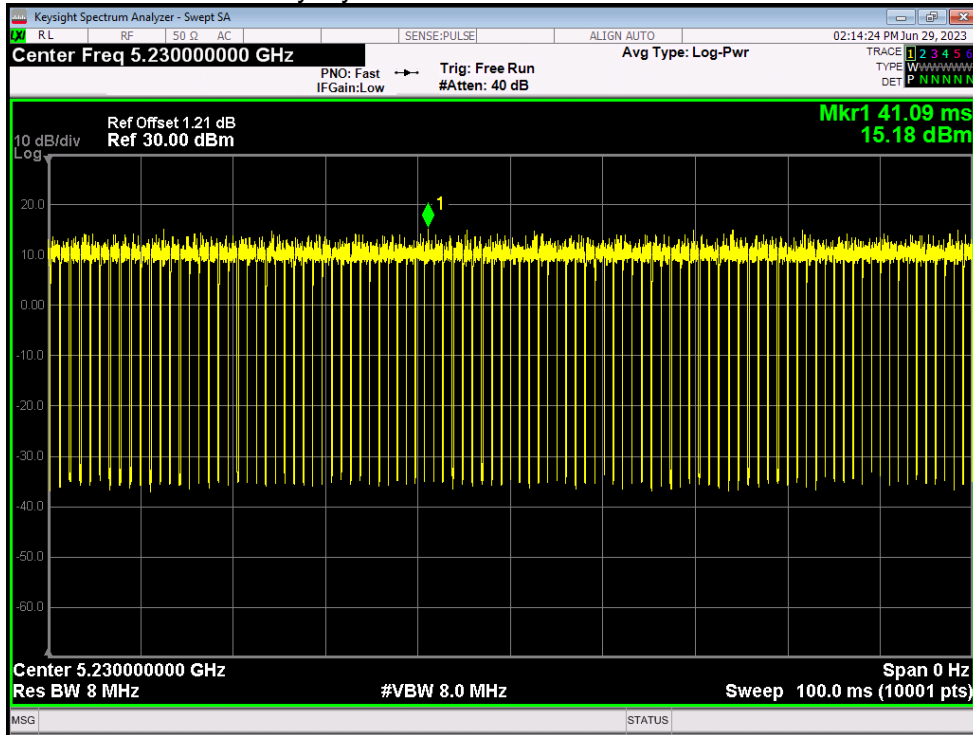


5.2 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	10.239	0.17	10.409	24	Pass
NVNT	a	5200	Ant1	9.729	0.2	9.929	24	Pass
NVNT	a	5240	Ant1	10.229	0.2	10.429	24	Pass
NVNT	ac20	5180	Ant1	9.722	0.2	9.922	24	Pass
NVNT	ac20	5200	Ant1	9.719	0.22	9.939	24	Pass
NVNT	ac20	5240	Ant1	9.702	0.23	9.932	24	Pass
NVNT	ac40	5190	Ant1	9.79	0.44	10.23	24	Pass
NVNT	ac40	5230	Ant1	9.669	0.47	10.139	24	Pass
NVNT	ax20	5180	Ant1	10.071	0.28	10.351	24	Pass
NVNT	ax20	5200	Ant1	9.832	0.29	10.122	24	Pass
NVNT	ax20	5240	Ant1	10.082	0.3	10.382	23	Pass
NVNT	ax40	5190	Ant1	9.601	0.52	10.121	24	Pass
NVNT	ax40	5230	Ant1	9.651	0.57	10.221	24	Pass
NVNT	n20	5180	Ant1	9.969	0.2	10.169	24	Pass
NVNT	n20	5200	Ant1	9.862	0.24	10.102	24	Pass
NVNT	n20	5240	Ant1	10.115	0.35	10.465	24	Pass
NVNT	n40	5190	Ant1	9.775	0.45	10.225	24	Pass
NVNT	n40	5230	Ant1	9.969	0.39	10.359	24	Pass


Power NVNT a 5180MHz Ant1

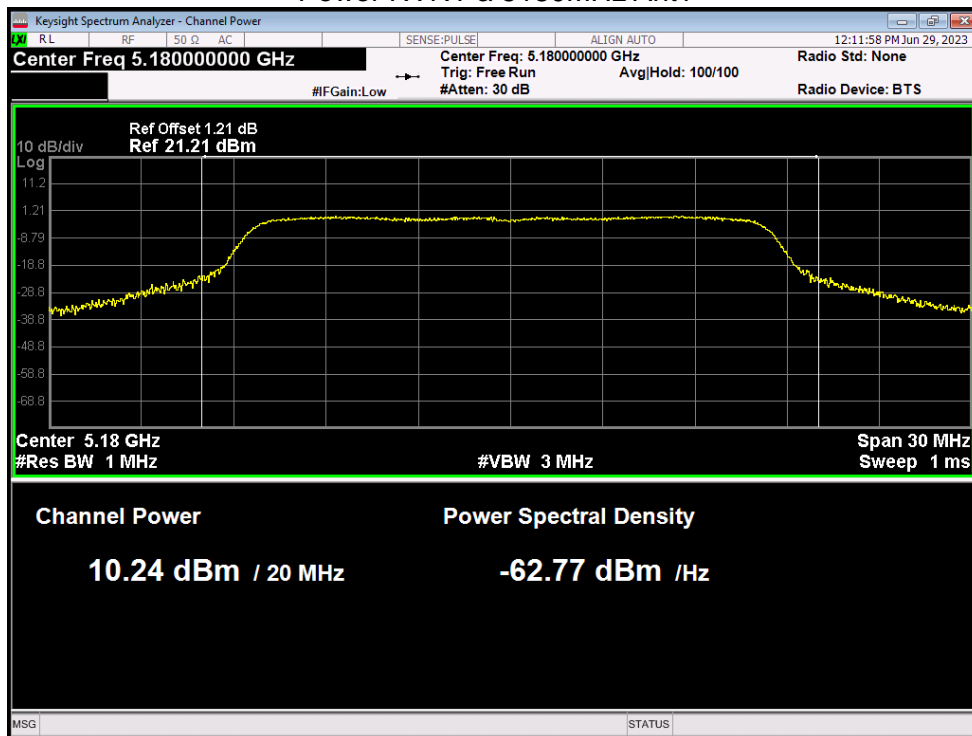


Power NVNT a 5200MHz Ant1

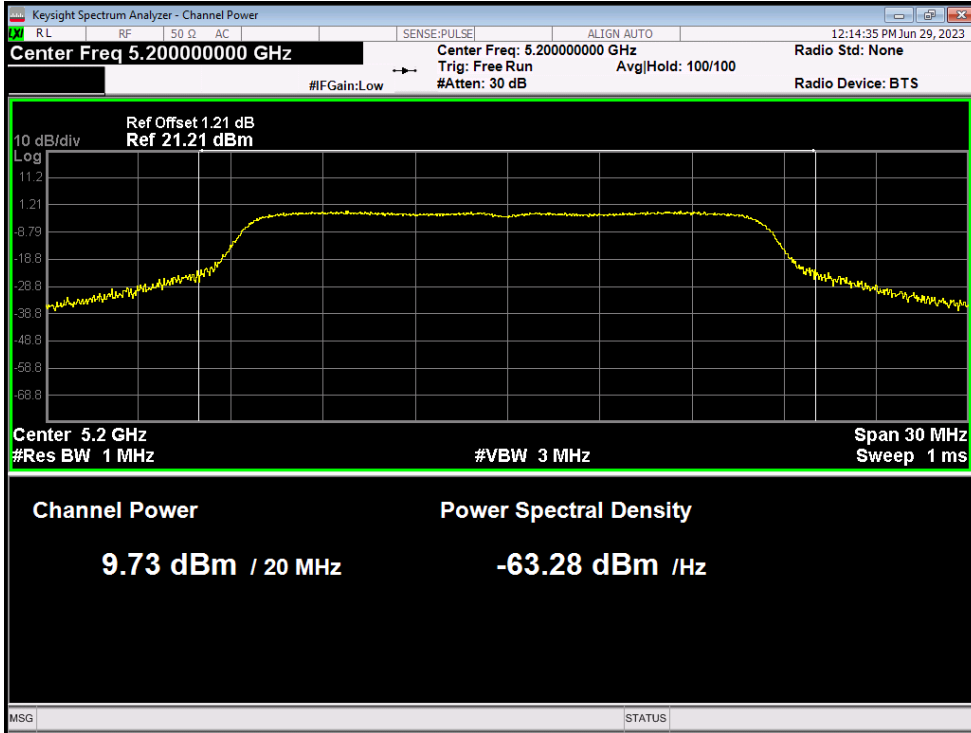


Power NVNT a 5240MHz Ant1

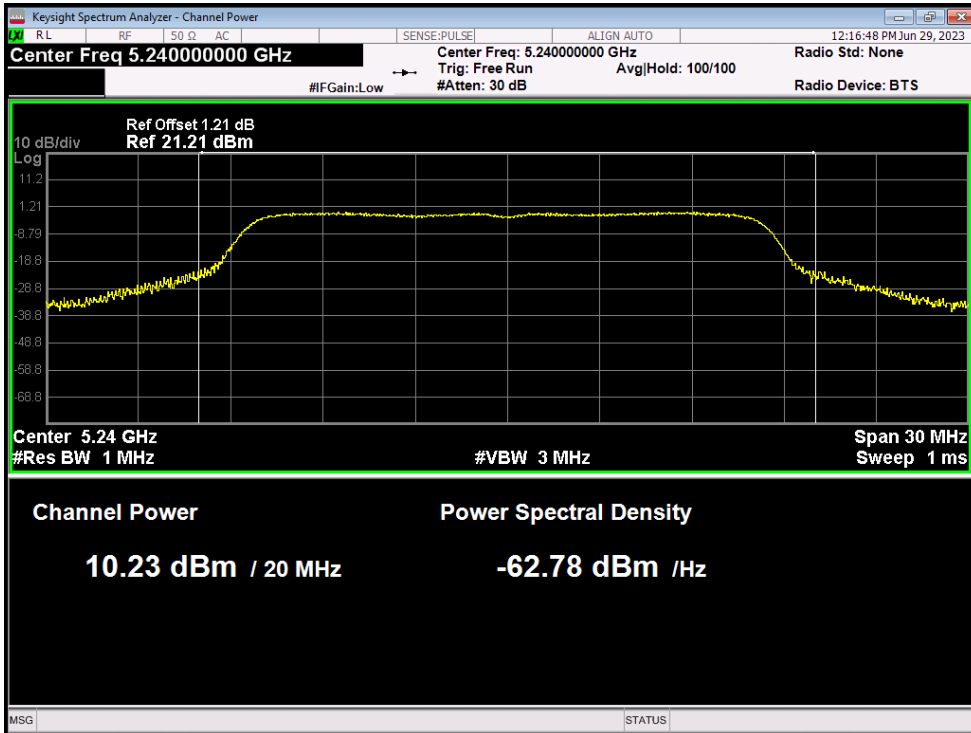


Power NVNT ac20 5180MHz Ant1

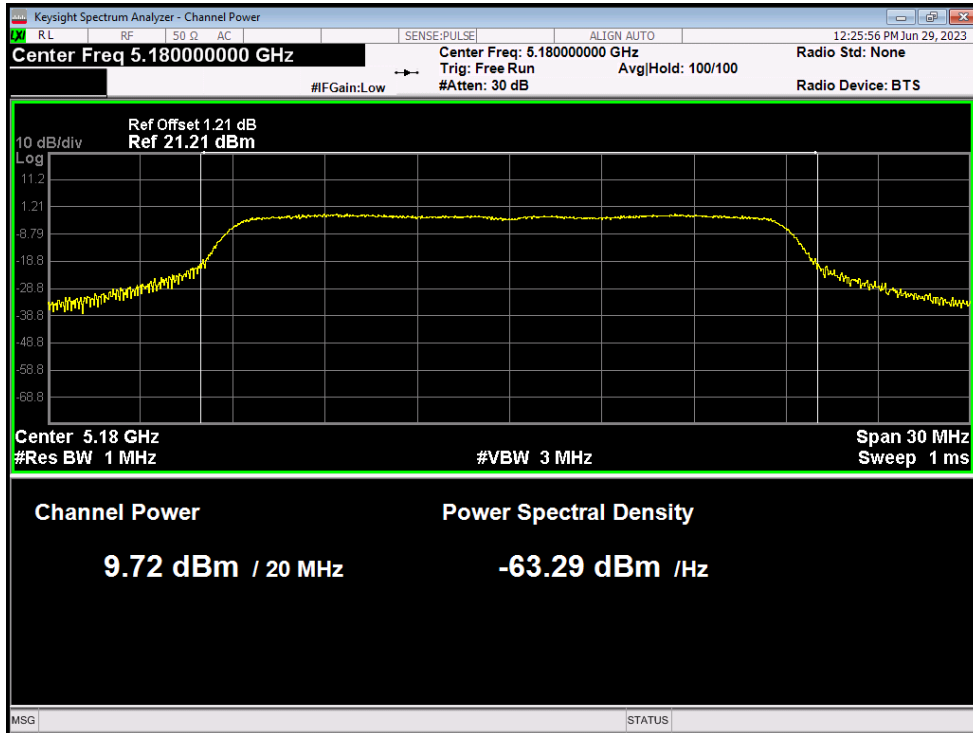


Power NVNT ac20 5200MHz Ant1

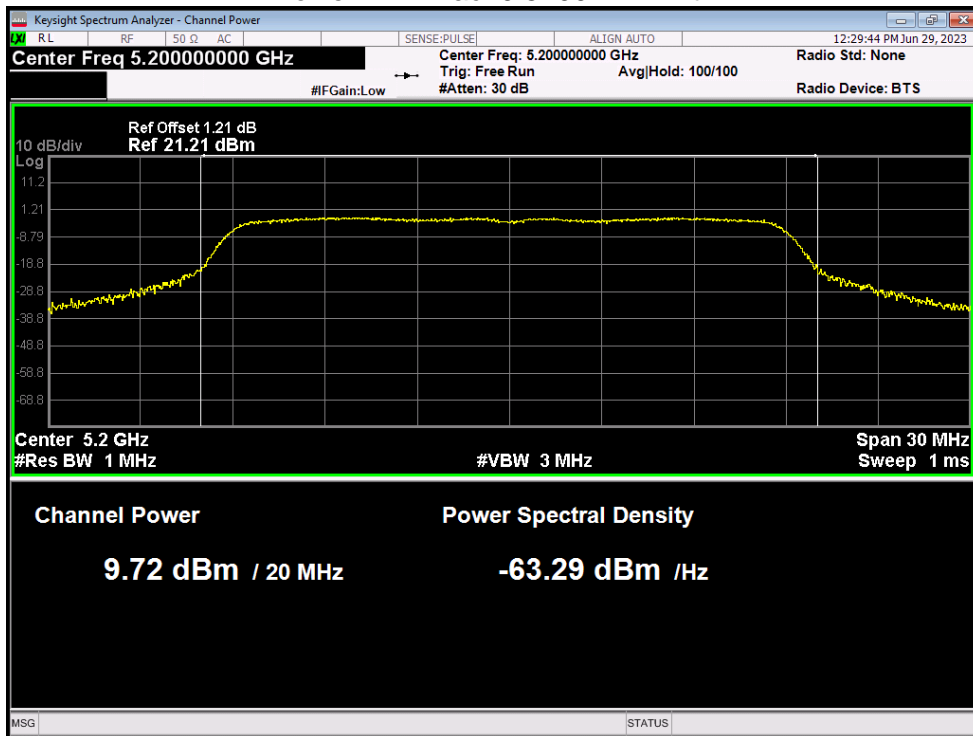


Power NVNT ac20 5240MHz Ant1

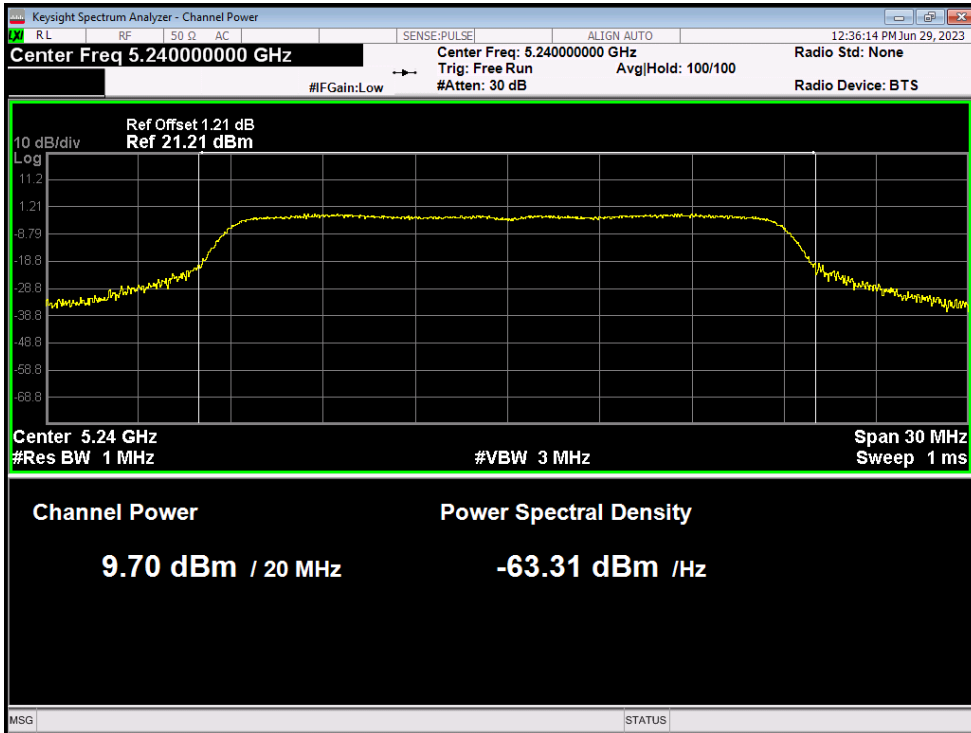


Power NVNT ac40 5190MHz Ant1

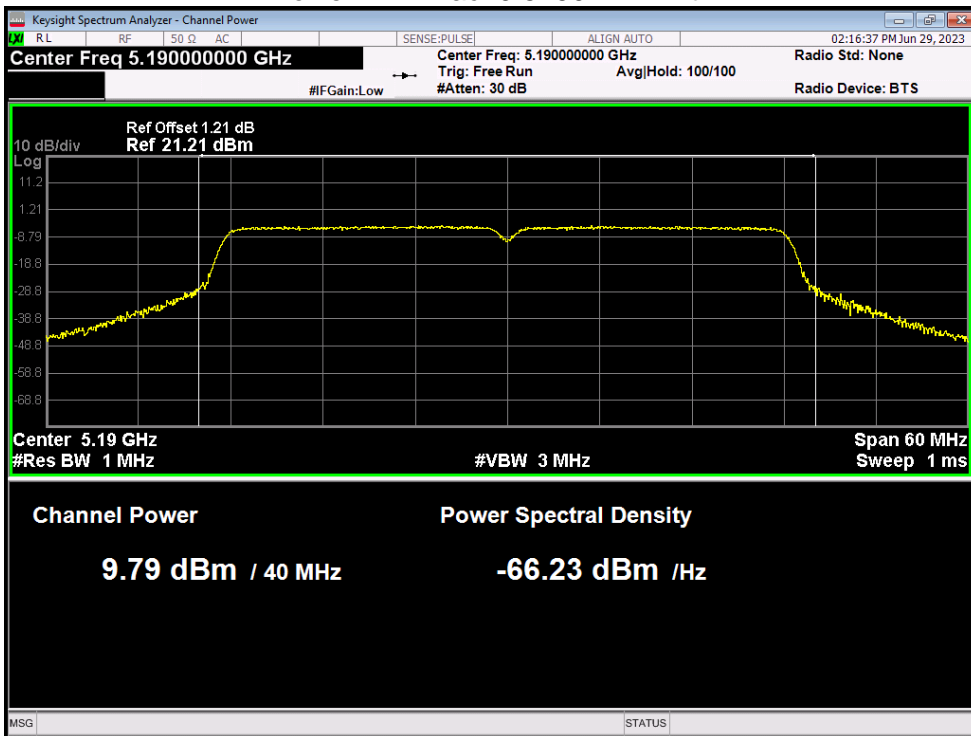


Power NVNT ac40 5230MHz Ant1

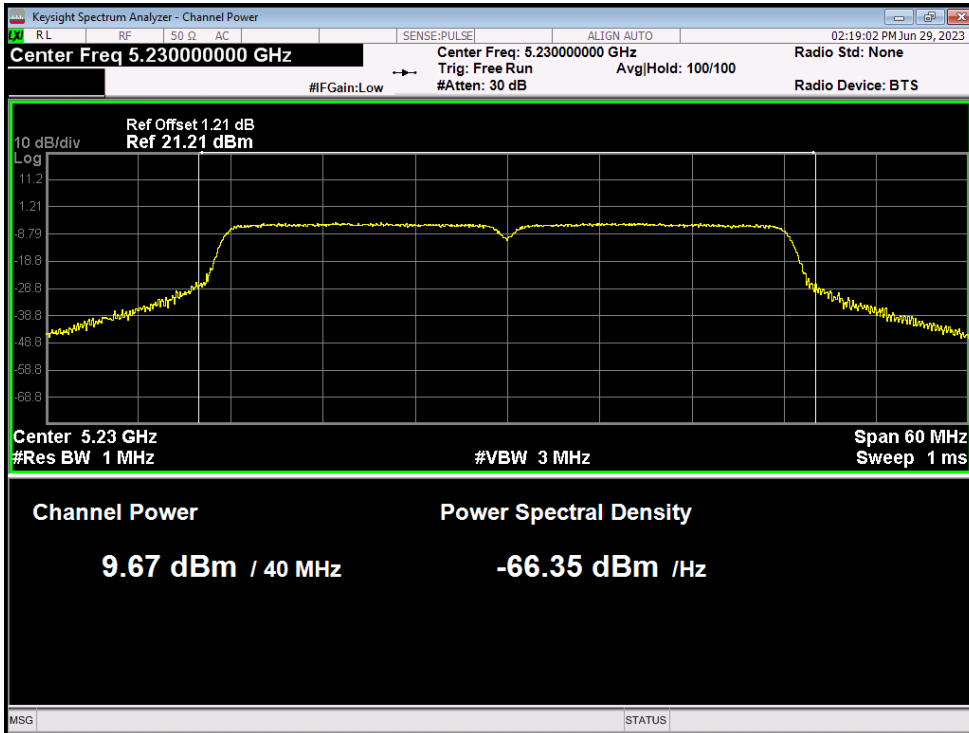


Power NVNT ax20 5180MHz Ant1

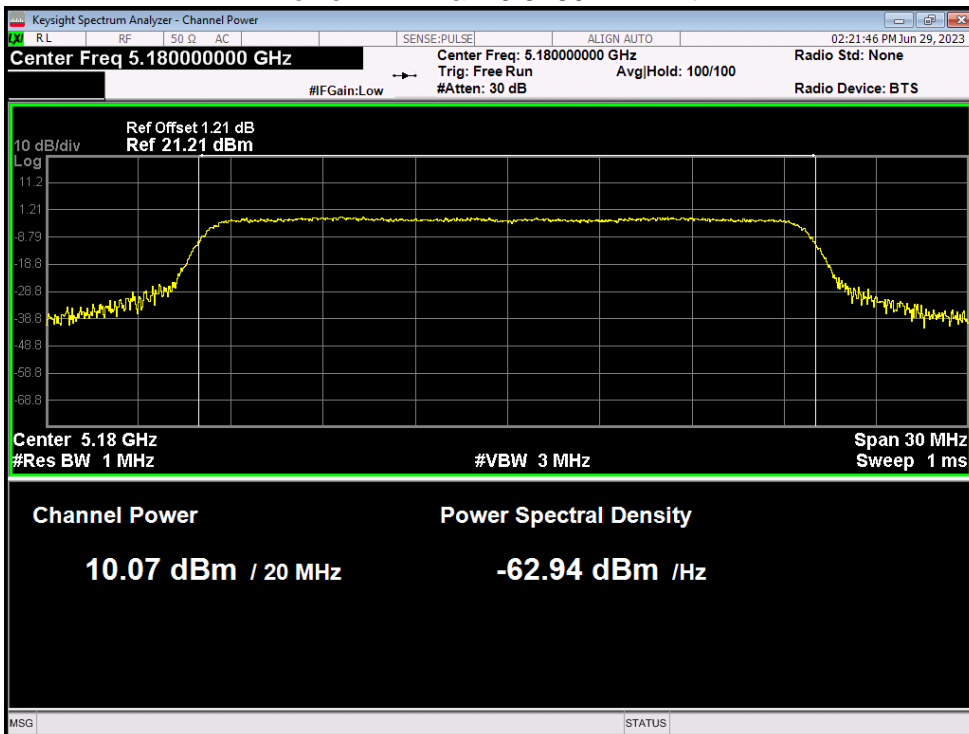


Power NVNT ax20 5200MHz Ant1

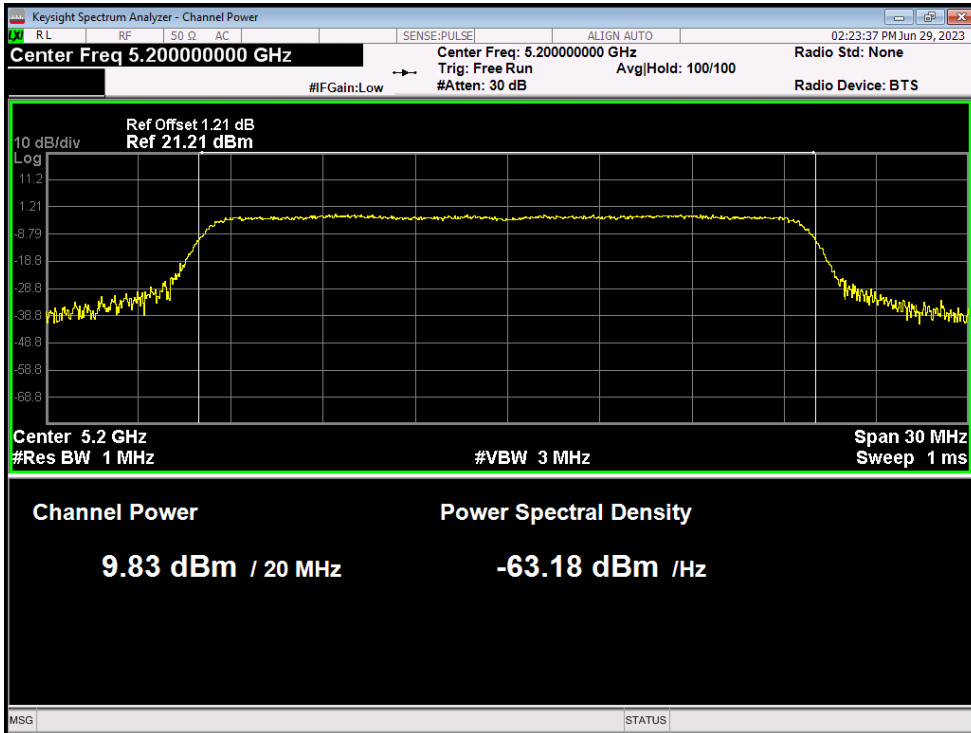


Power NVNT ax20 5240MHz Ant1

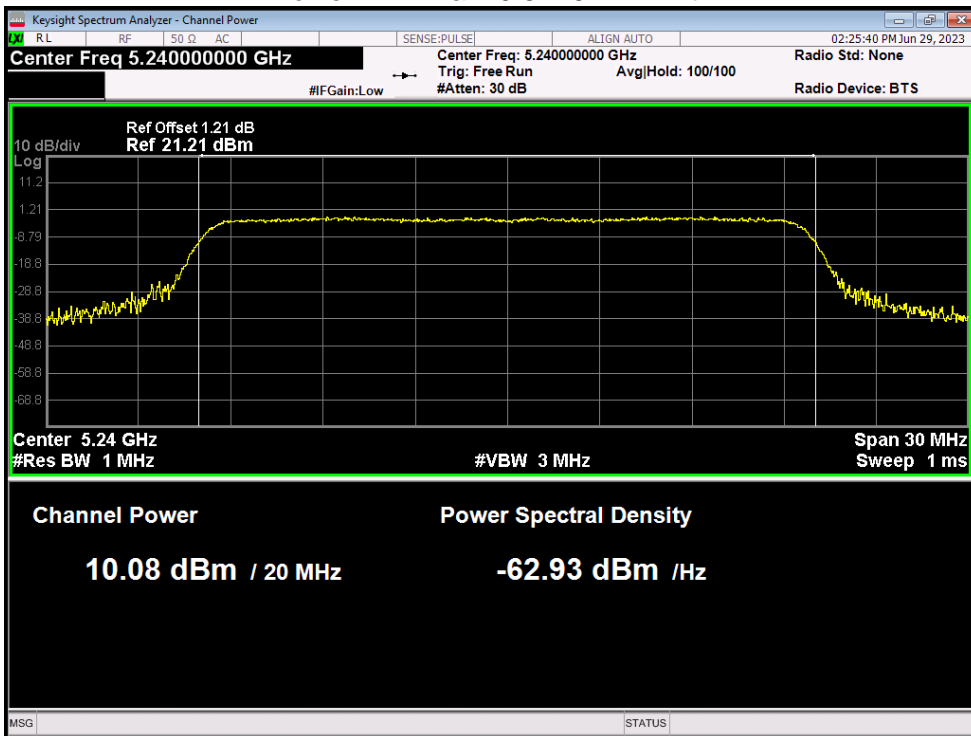


Power NVNT ax40 5190MHz Ant1

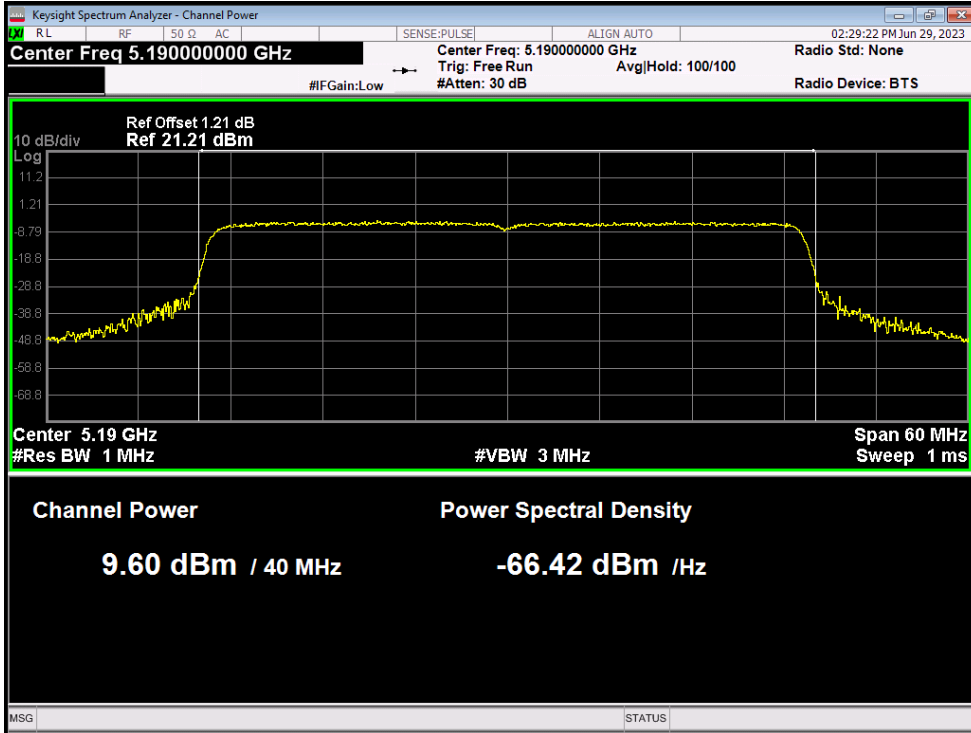


Power NVNT ax40 5230MHz Ant1

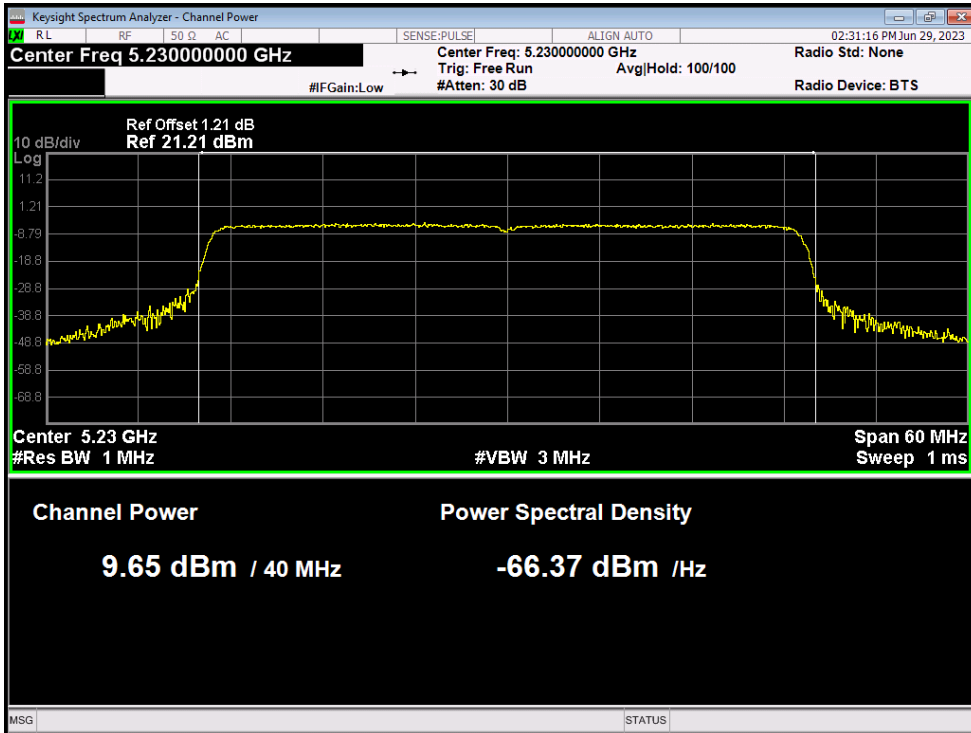


Power NVNT n20 5180MHz Ant1

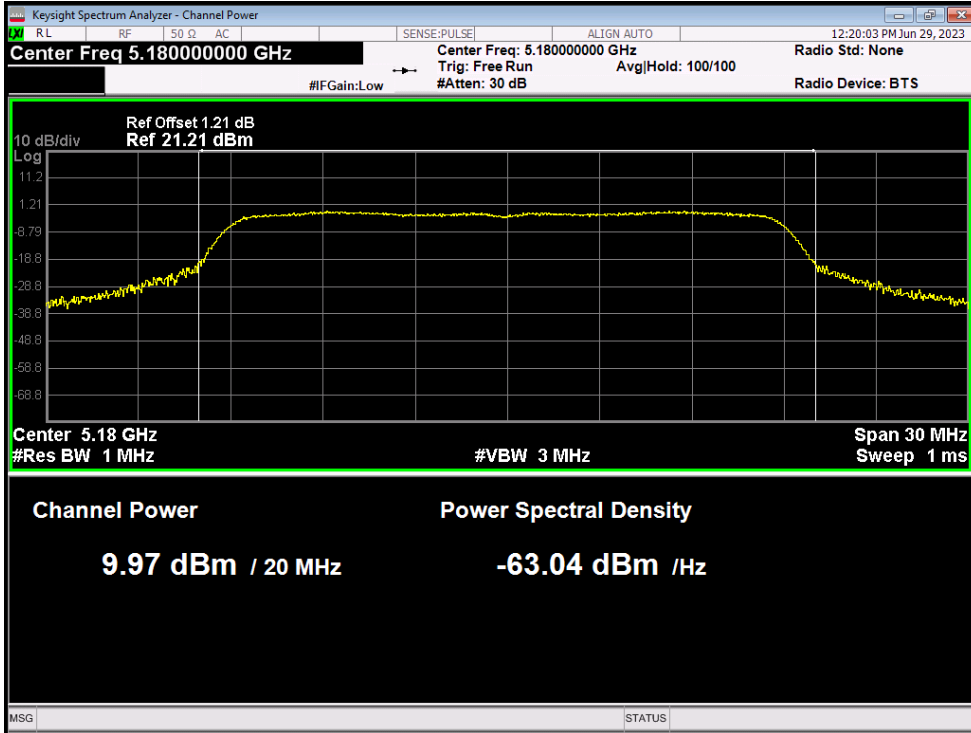


Power NVNT n20 5200MHz Ant1

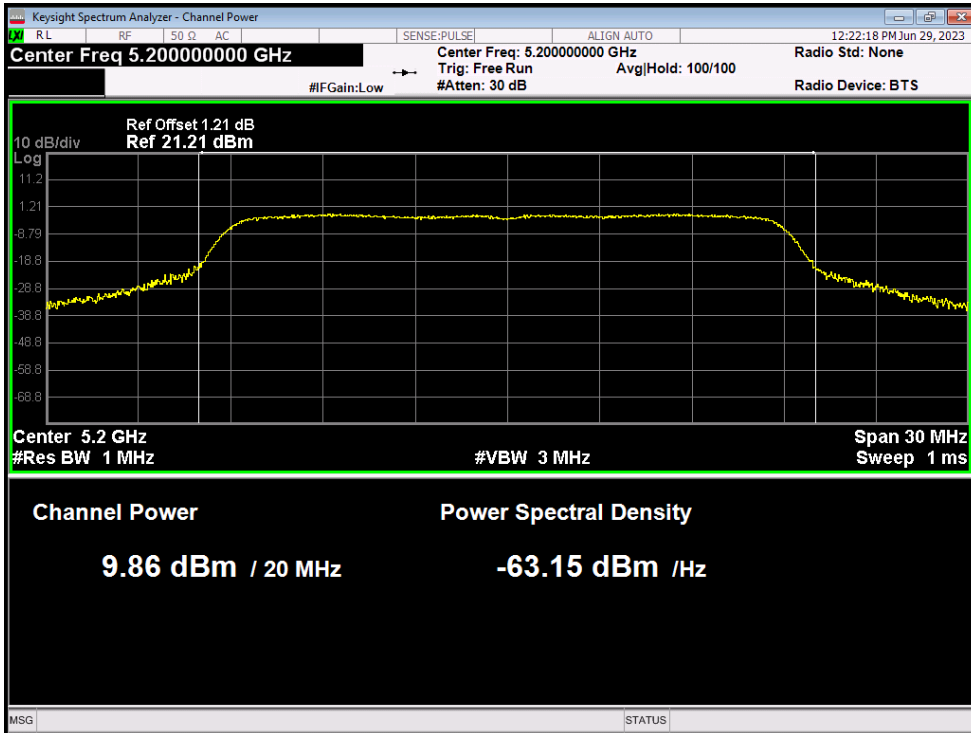


Power NVNT n20 5240MHz Ant1

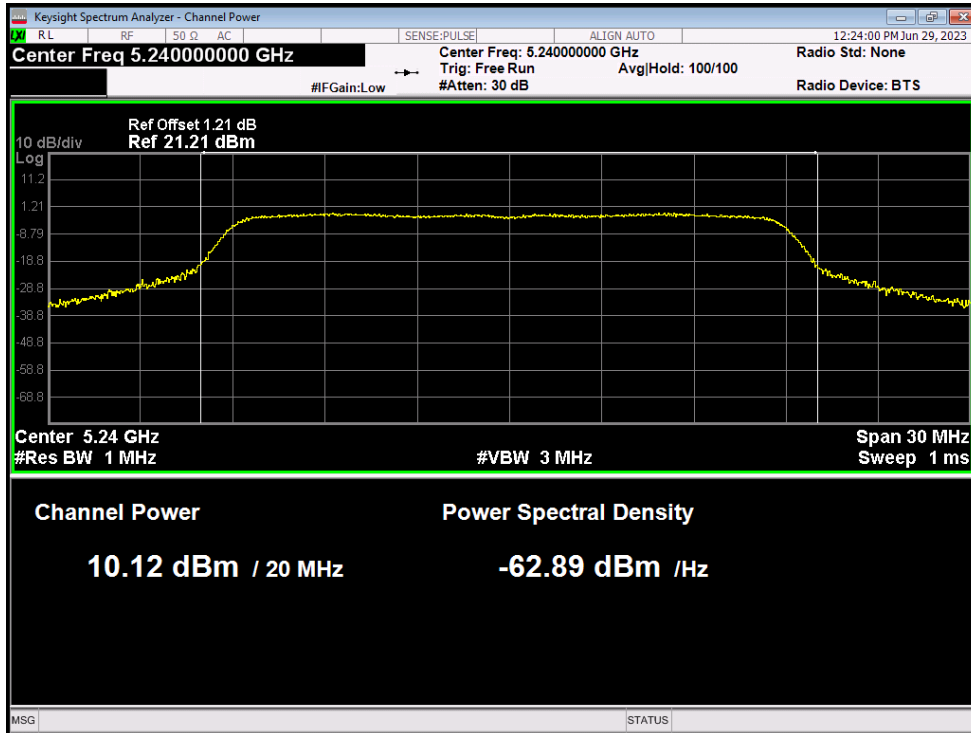

Power NVNT n40 5190MHz Ant1

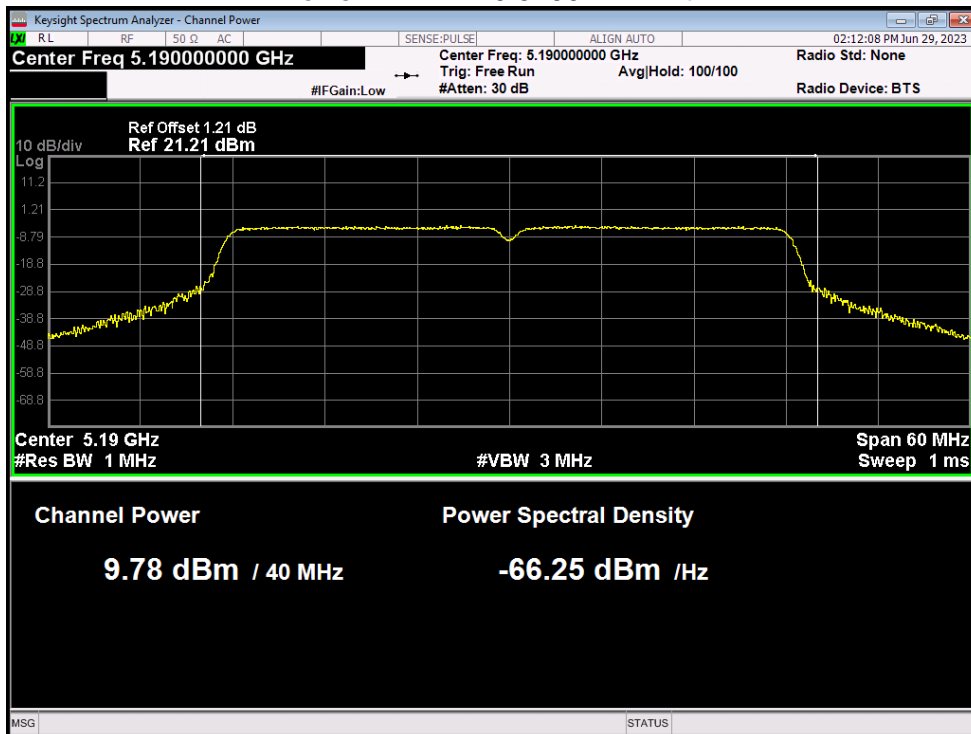


Power NVNT n40 5230MHz Ant1

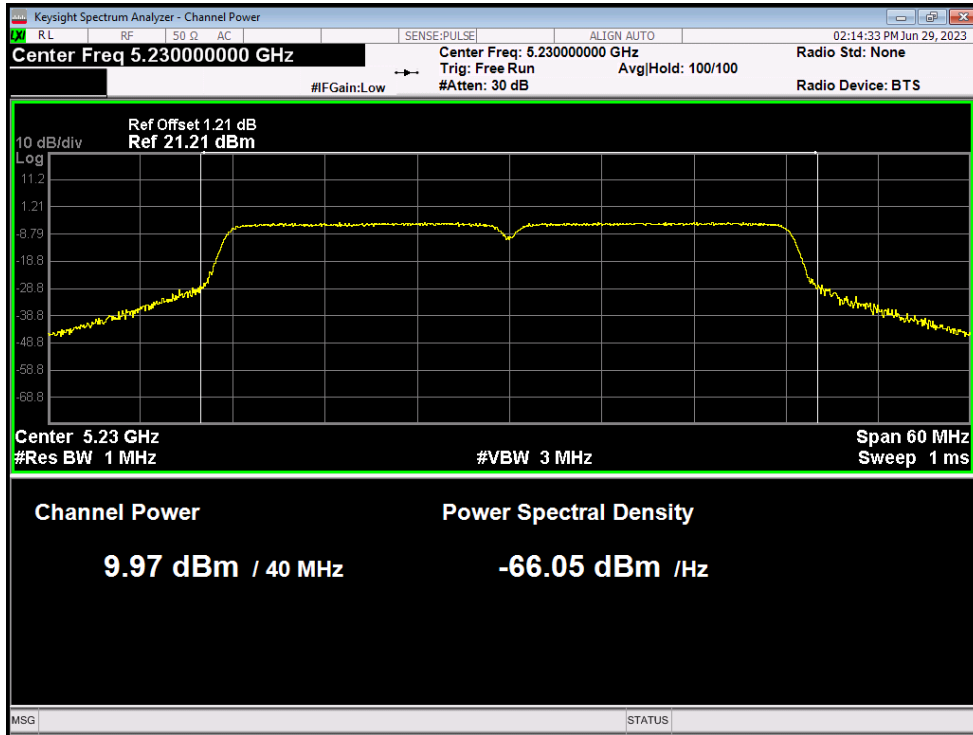


5.3 -26DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	23.43	Pass
NVNT	a	5200	Ant1	24.03	Pass
NVNT	a	5240	Ant1	23.728	Pass
NVNT	ac20	5180	Ant1	24.799	Pass
NVNT	ac20	5200	Ant1	25.582	Pass
NVNT	ac20	5240	Ant1	25.133	Pass
NVNT	ac40	5190	Ant1	45.969	Pass
NVNT	ac40	5230	Ant1	47.463	Pass
NVNT	ax20	5180	Ant1	24.213	Pass
NVNT	ax20	5200	Ant1	24.213	Pass
NVNT	ax20	5240	Ant1	24.307	Pass
NVNT	ax40	5190	Ant1	44.851	Pass
NVNT	ax40	5230	Ant1	45.7	Pass
NVNT	n20	5180	Ant1	24.561	Pass
NVNT	n20	5200	Ant1	24.699	Pass
NVNT	n20	5240	Ant1	24.567	Pass
NVNT	n40	5190	Ant1	47.631	Pass
NVNT	n40	5230	Ant1	46.217	Pass


-26dB Bandwidth NVNT a 5180MHz Ant1

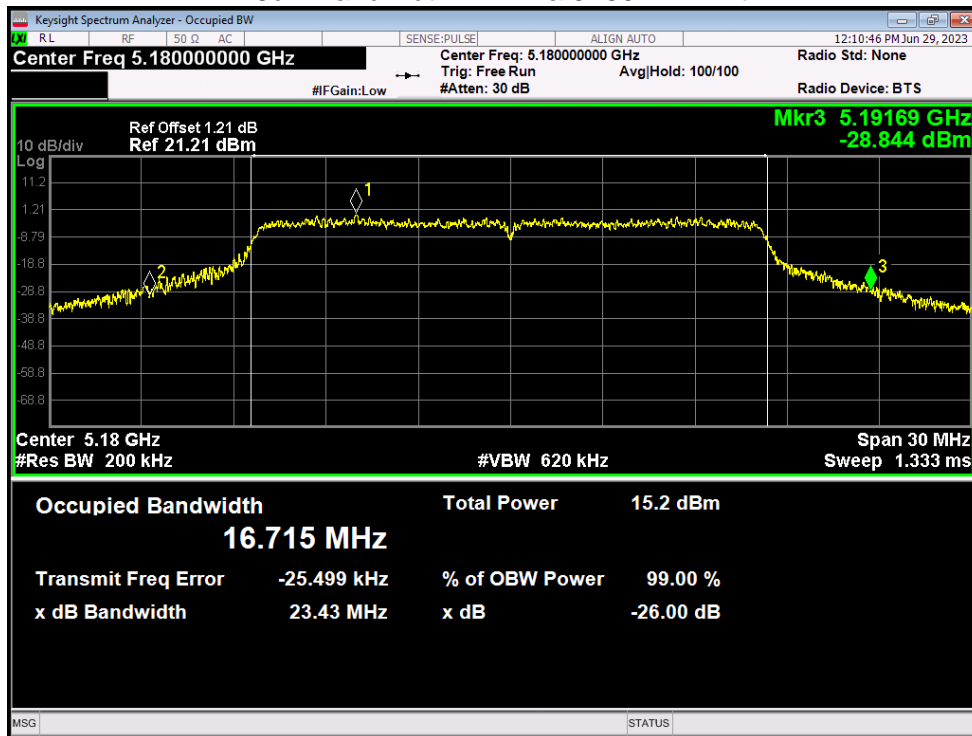


-26dB Bandwidth NVNT a 5200MHz Ant1

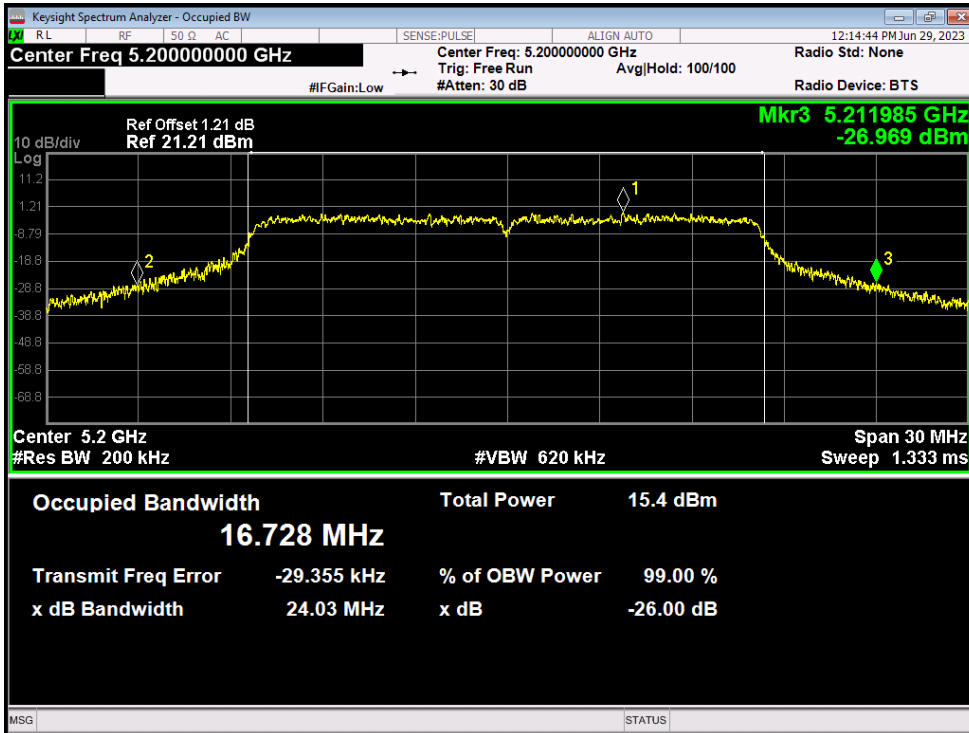


-26dB Bandwidth NVNT a 5240MHz Ant1

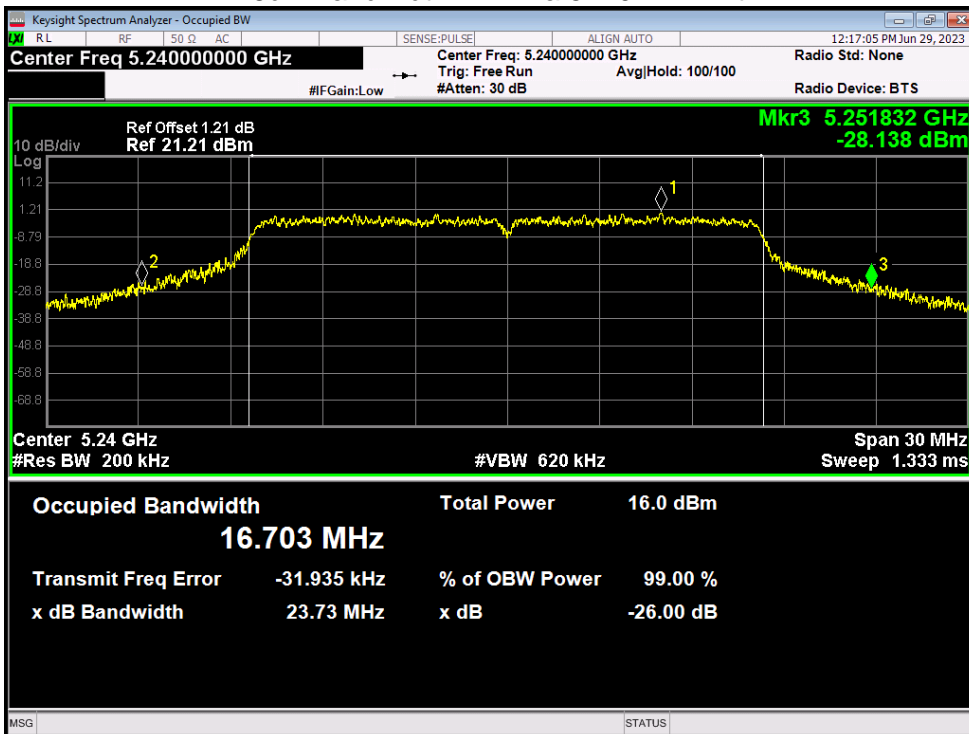


-26dB Bandwidth NVNT ac20 5180MHz Ant1

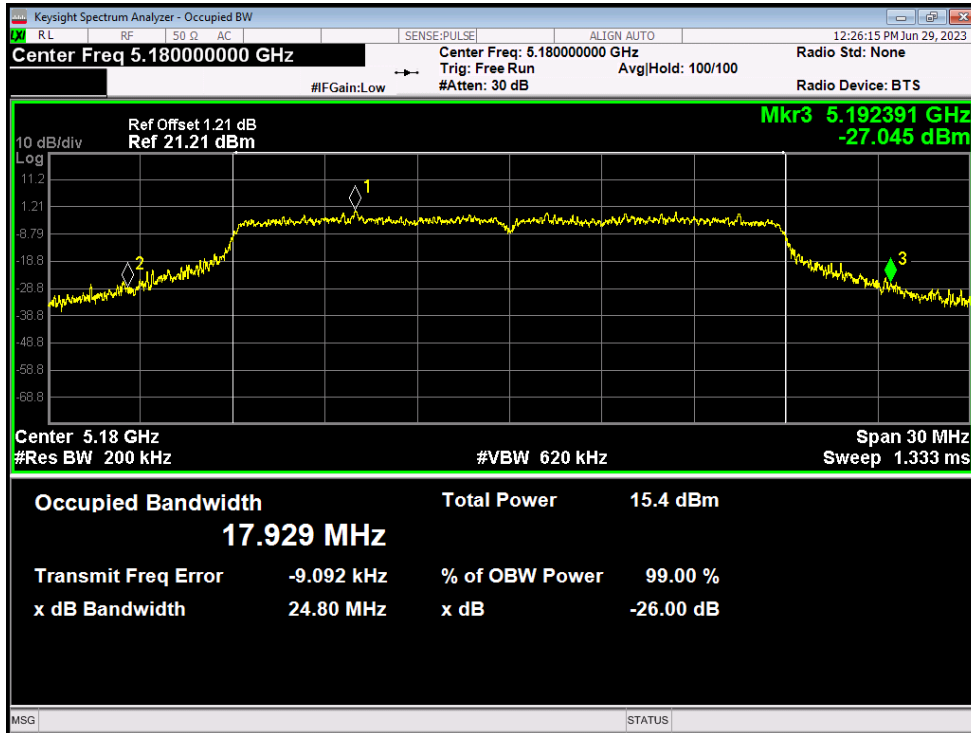


-26dB Bandwidth NVNT ac20 5200MHz Ant1

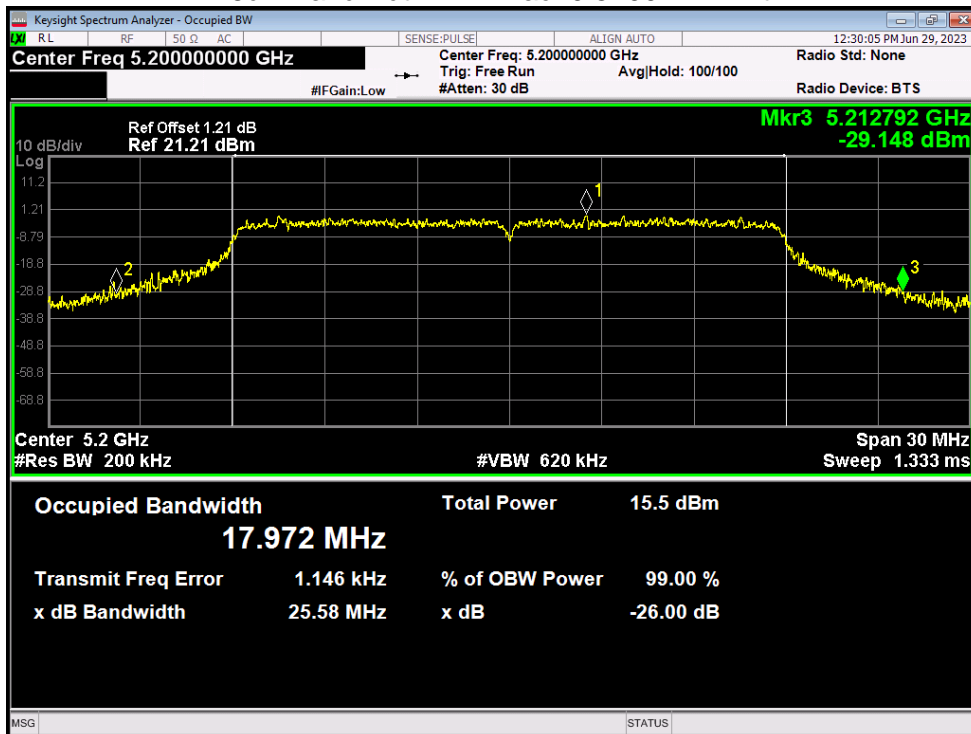


-26dB Bandwidth NVNT ac20 5240MHz Ant1

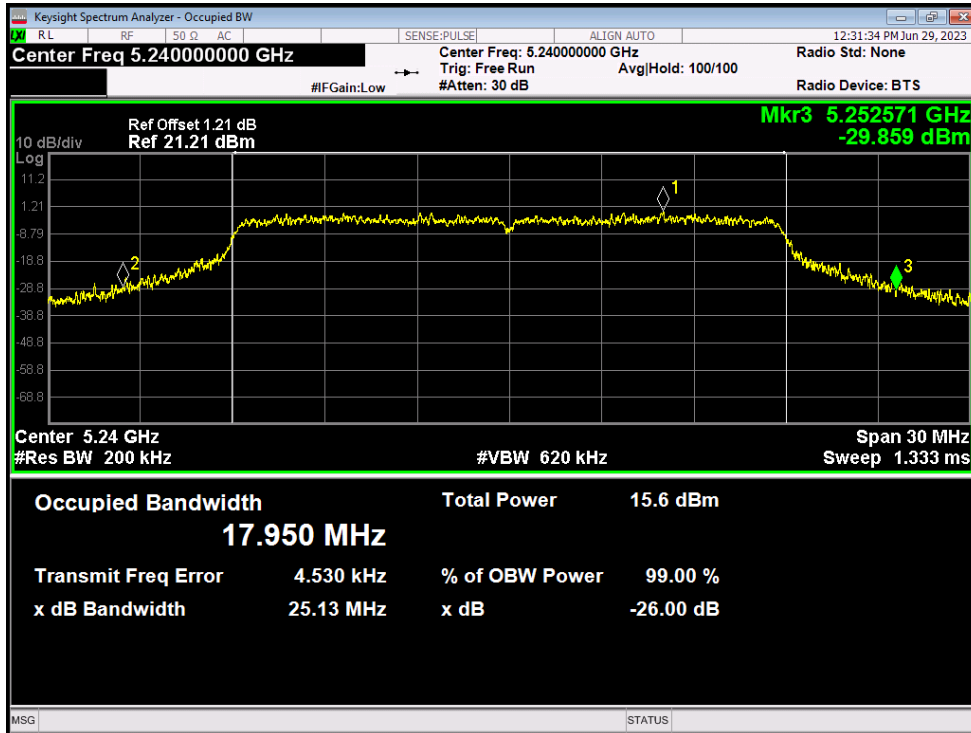


-26dB Bandwidth NVNT ac40 5190MHz Ant1

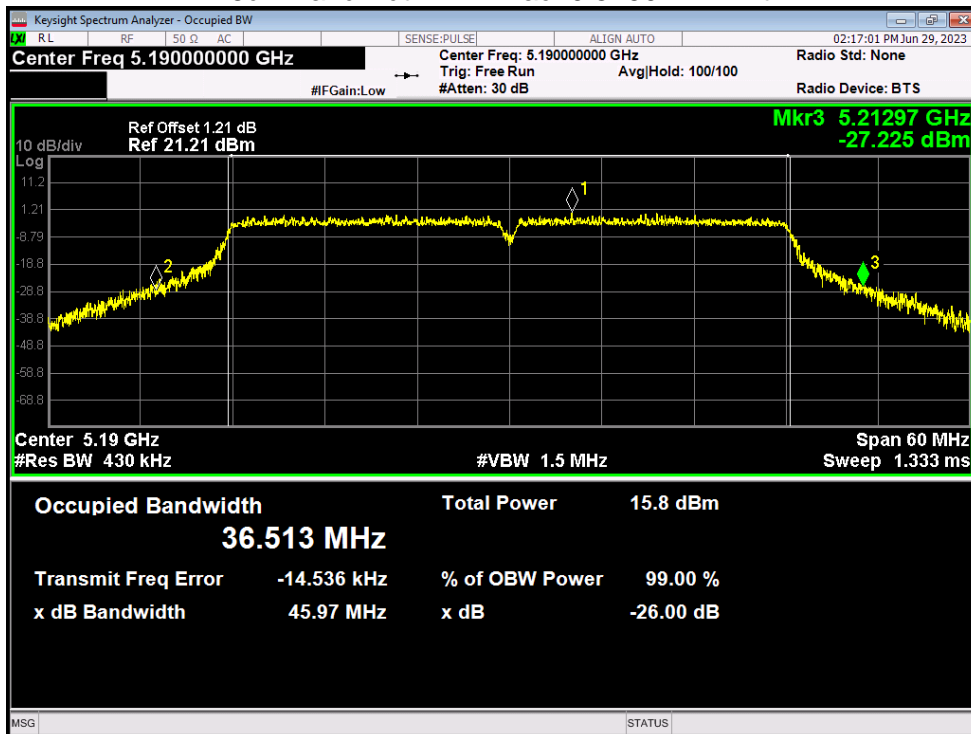


-26dB Bandwidth NVNT ac40 5230MHz Ant1

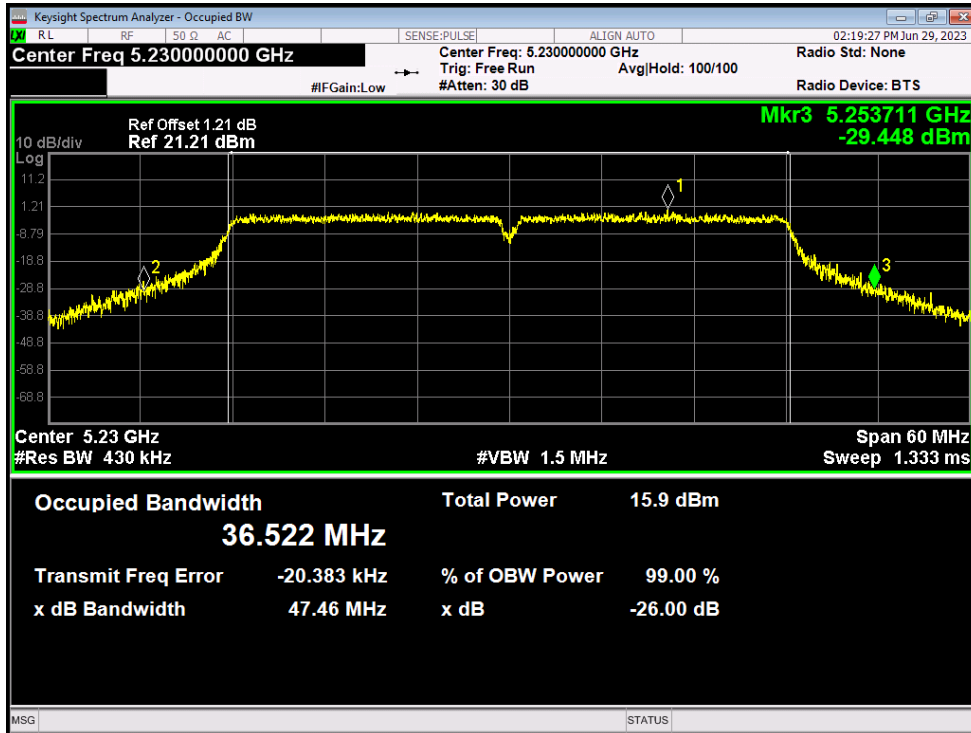


-26dB Bandwidth NVNT ax20 5180MHz Ant1

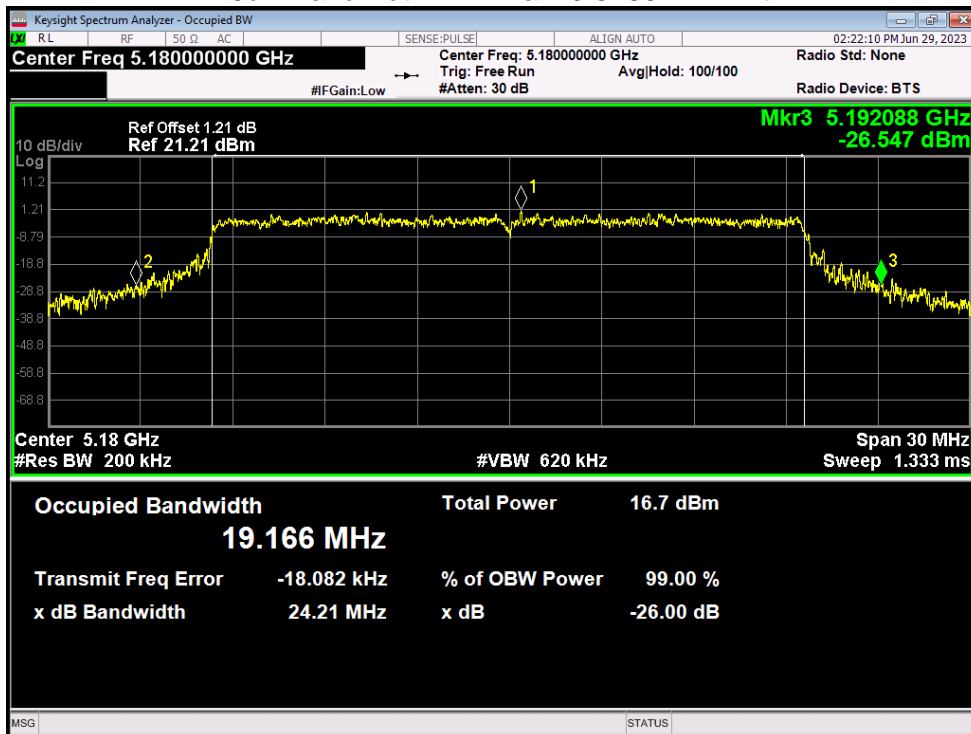


-26dB Bandwidth NVNT ax20 5200MHz Ant1

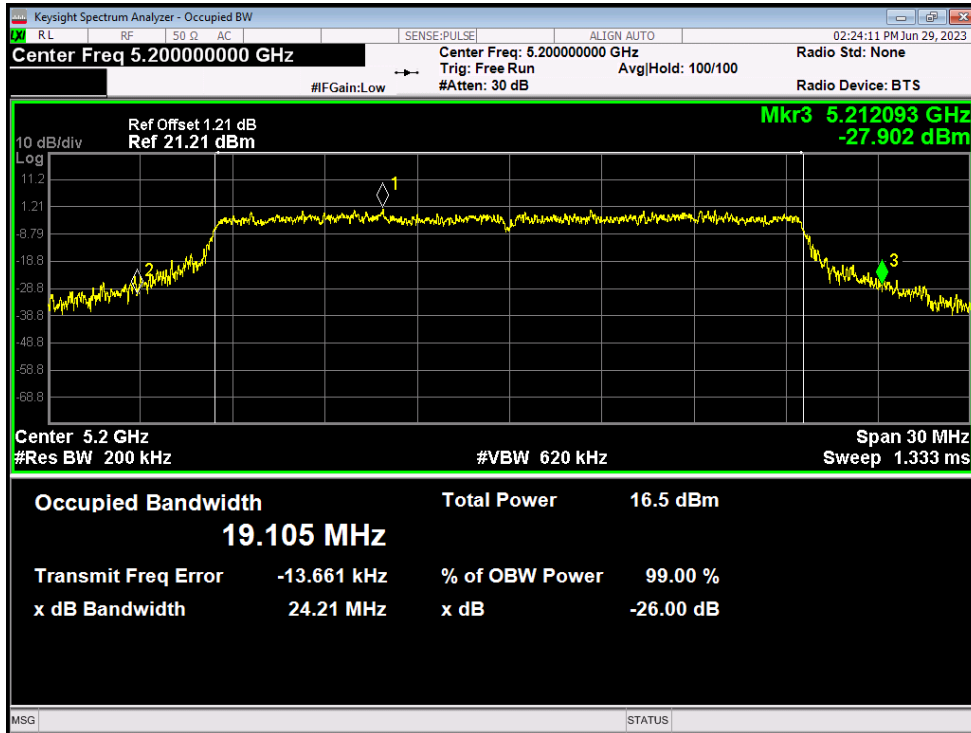


-26dB Bandwidth NVNT ax20 5240MHz Ant1

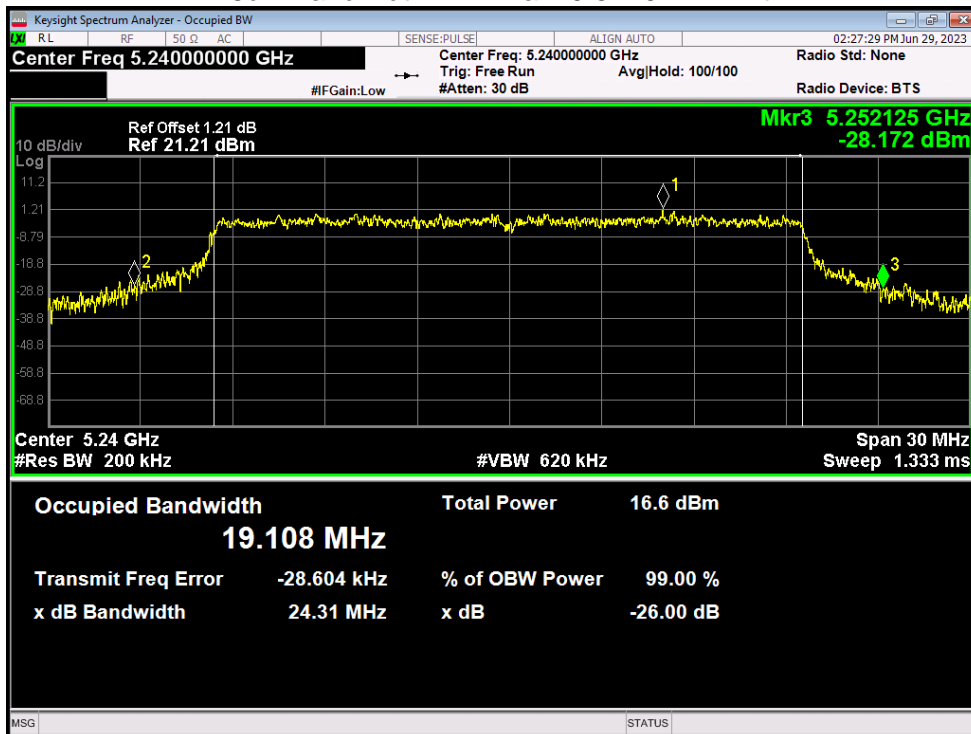


-26dB Bandwidth NVNT ax40 5190MHz Ant1

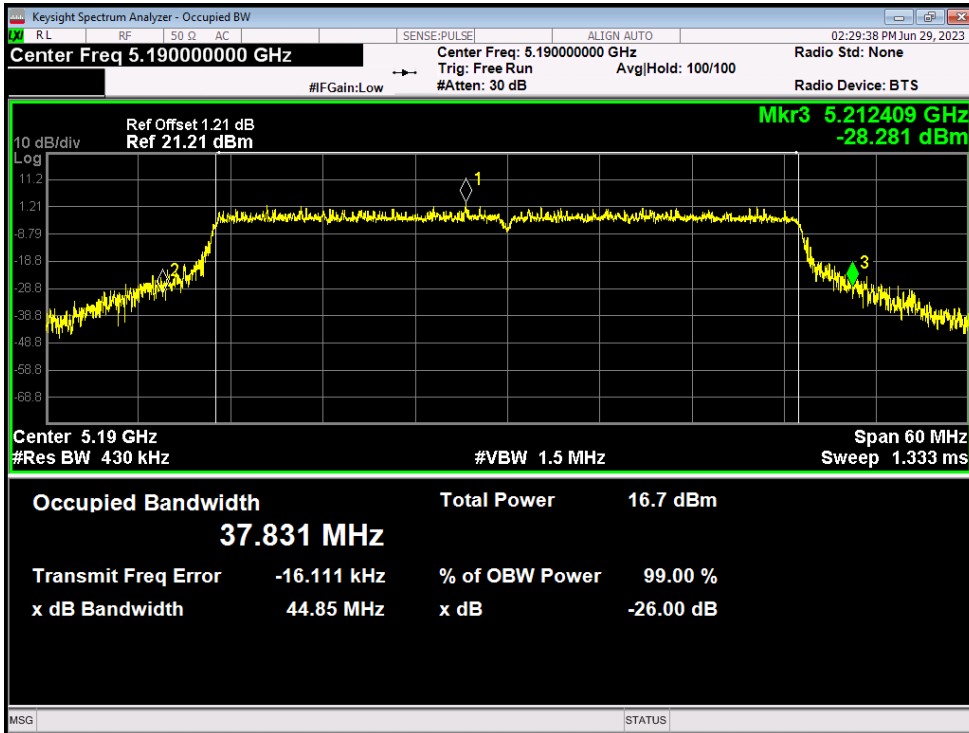


-26dB Bandwidth NVNT ax40 5230MHz Ant1

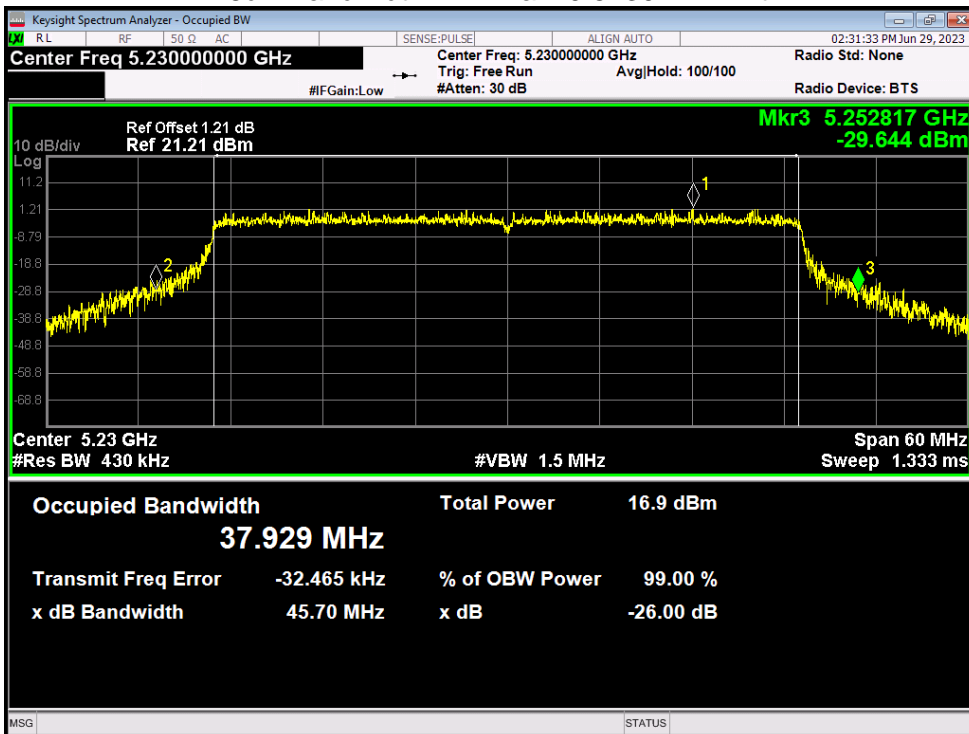


-26dB Bandwidth NVNT n20 5180MHz Ant1

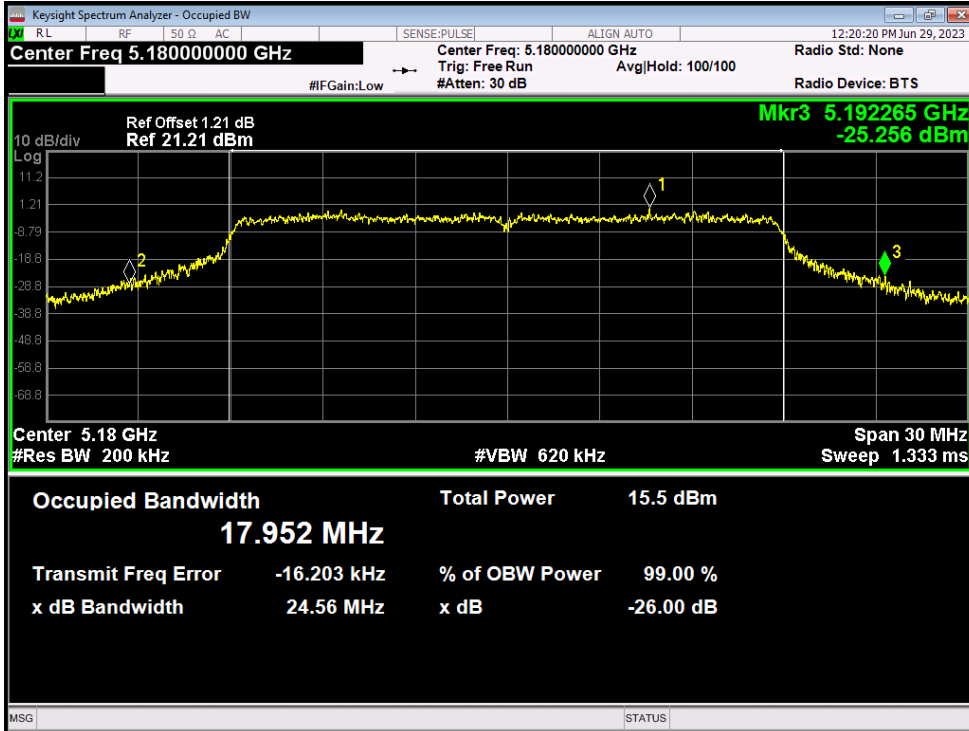


-26dB Bandwidth NVNT n20 5200MHz Ant1

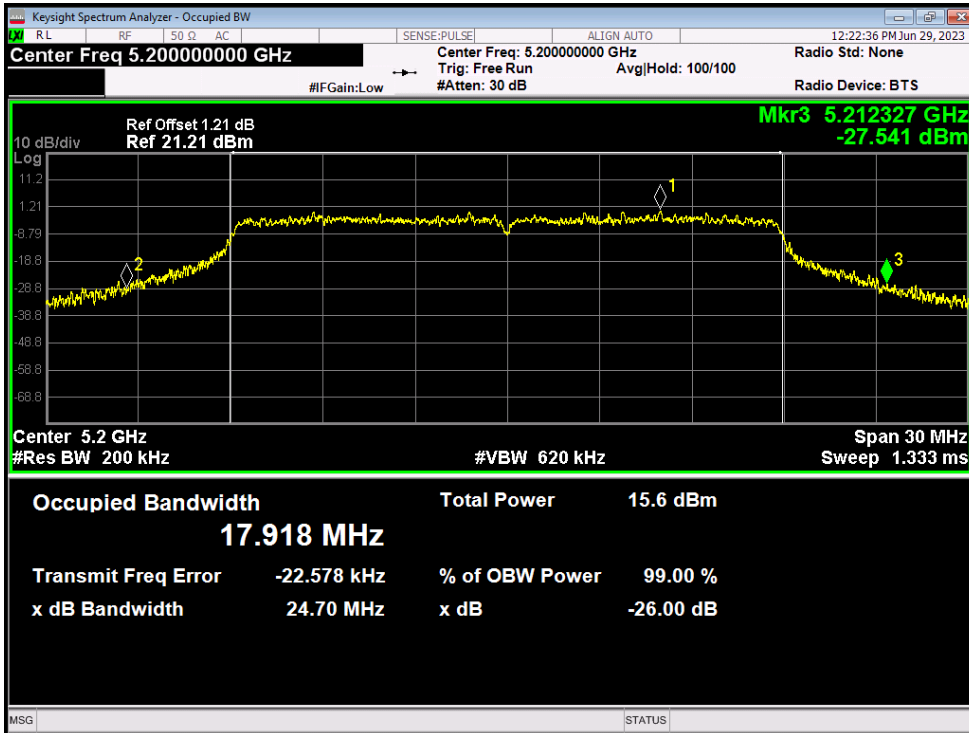


-26dB Bandwidth NVNT n20 5240MHz Ant1

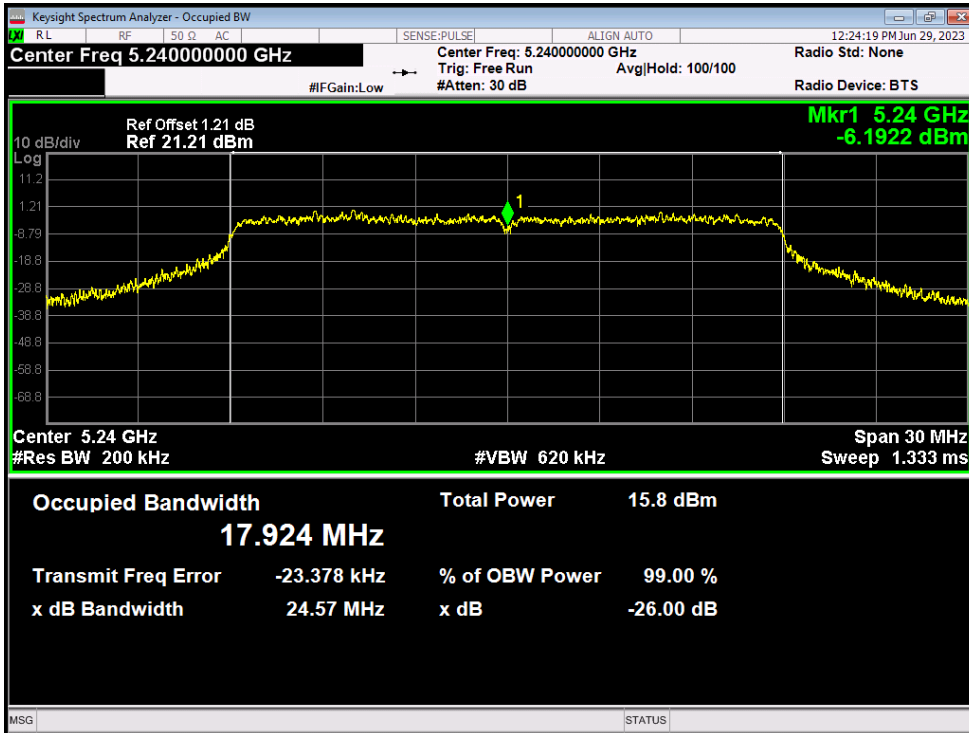

-26dB Bandwidth NVNT n40 5190MHz Ant1

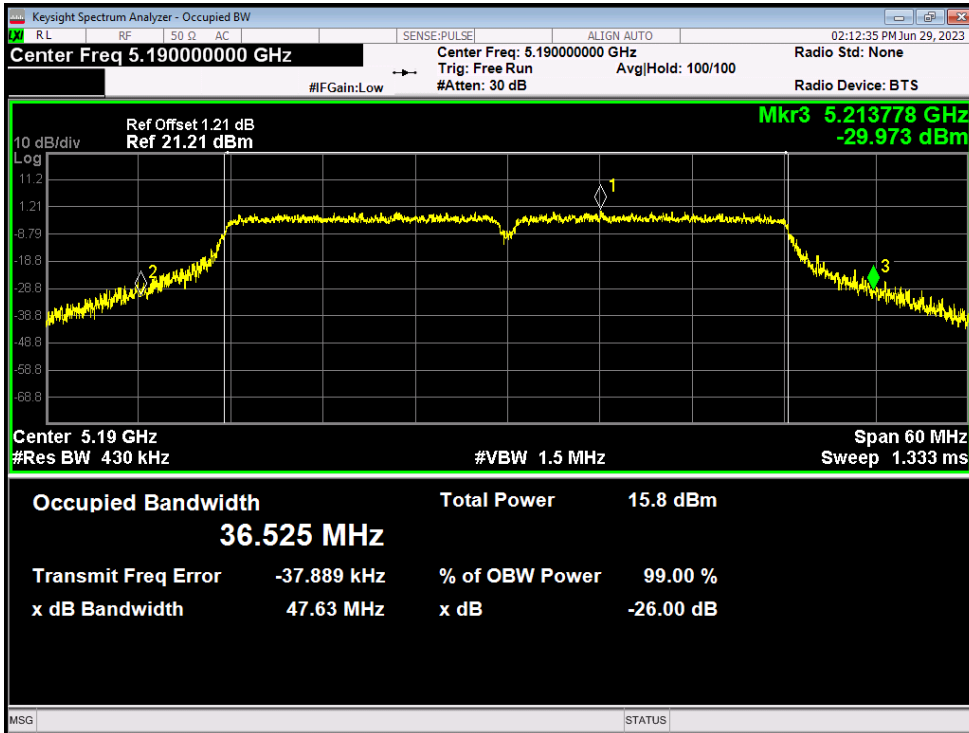


-26dB Bandwidth NVNT n40 5230MHz Ant1

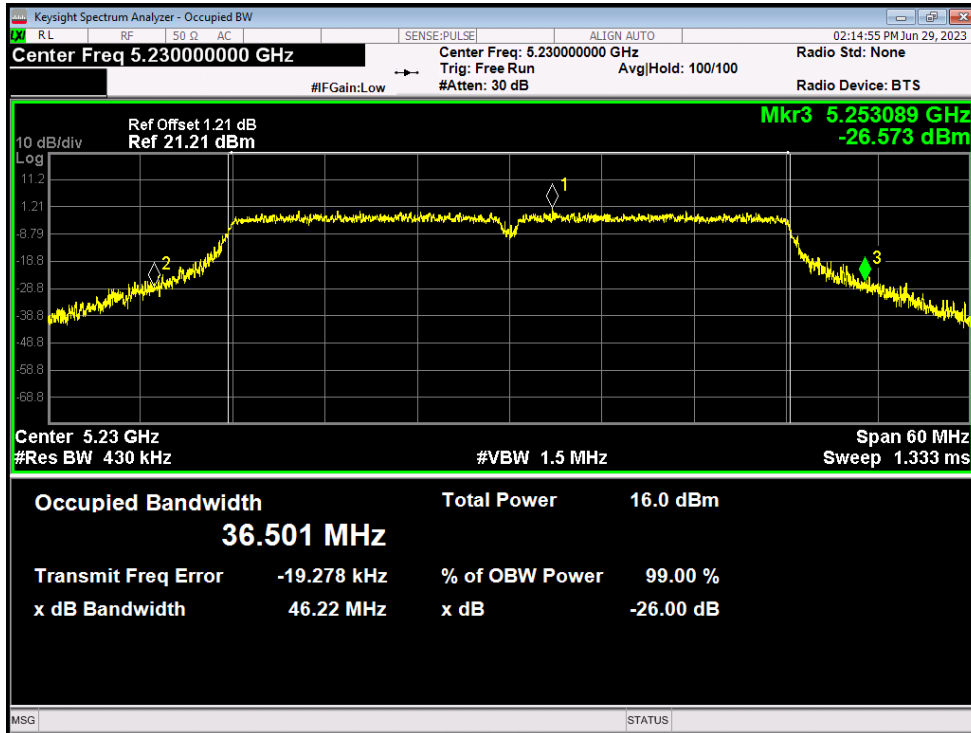


5.4 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.751
NVNT	a	5200	Ant1	16.712
NVNT	a	5240	Ant1	16.72
NVNT	ac20	5180	Ant1	17.906
NVNT	ac20	5200	Ant1	17.944
NVNT	ac20	5240	Ant1	17.892
NVNT	ac40	5190	Ant1	36.491
NVNT	ac40	5230	Ant1	36.527
NVNT	ax20	5180	Ant1	19.112
NVNT	ax20	5200	Ant1	19.096
NVNT	ax20	5240	Ant1	19.096
NVNT	ax40	5190	Ant1	37.915
NVNT	ax40	5230	Ant1	37.988
NVNT	n20	5180	Ant1	17.978
NVNT	n20	5200	Ant1	17.924
NVNT	n20	5240	Ant1	17.936
NVNT	n40	5190	Ant1	36.489
NVNT	n40	5230	Ant1	36.557


OBW NVNT a 5180MHz Ant1

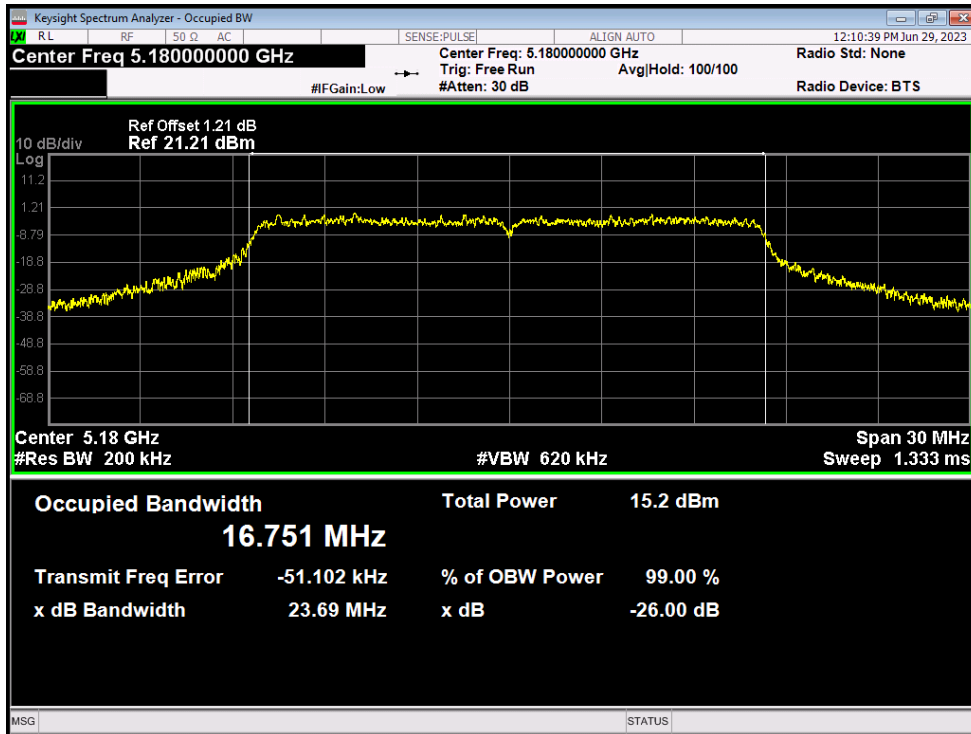


OBW NVNT a 5200MHz Ant1

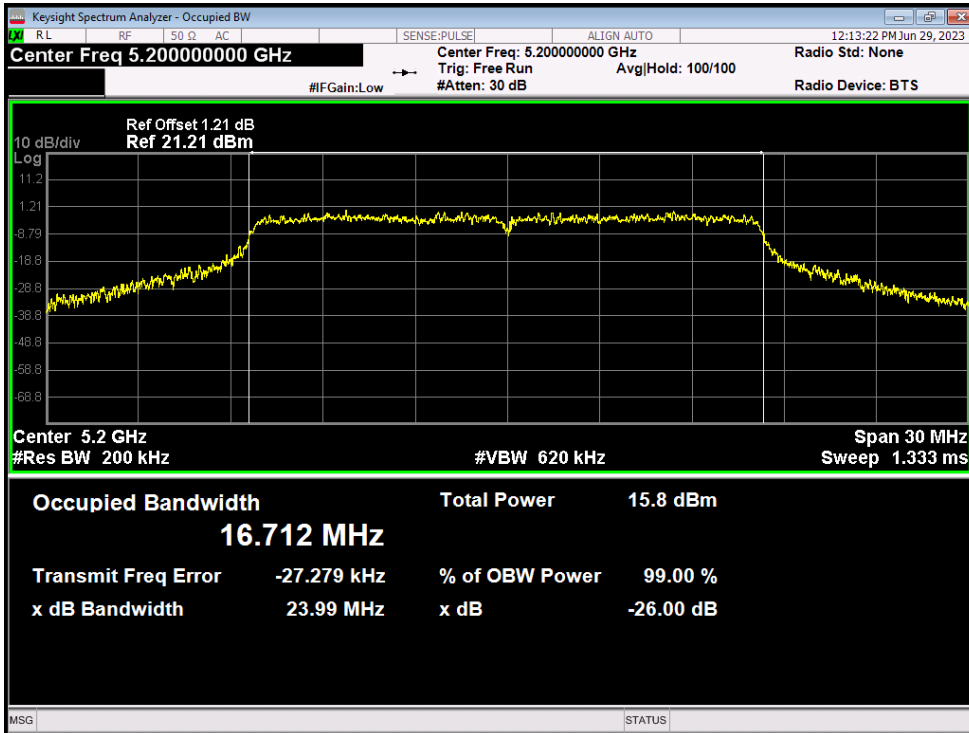


OBW NVNT a 5240MHz Ant1

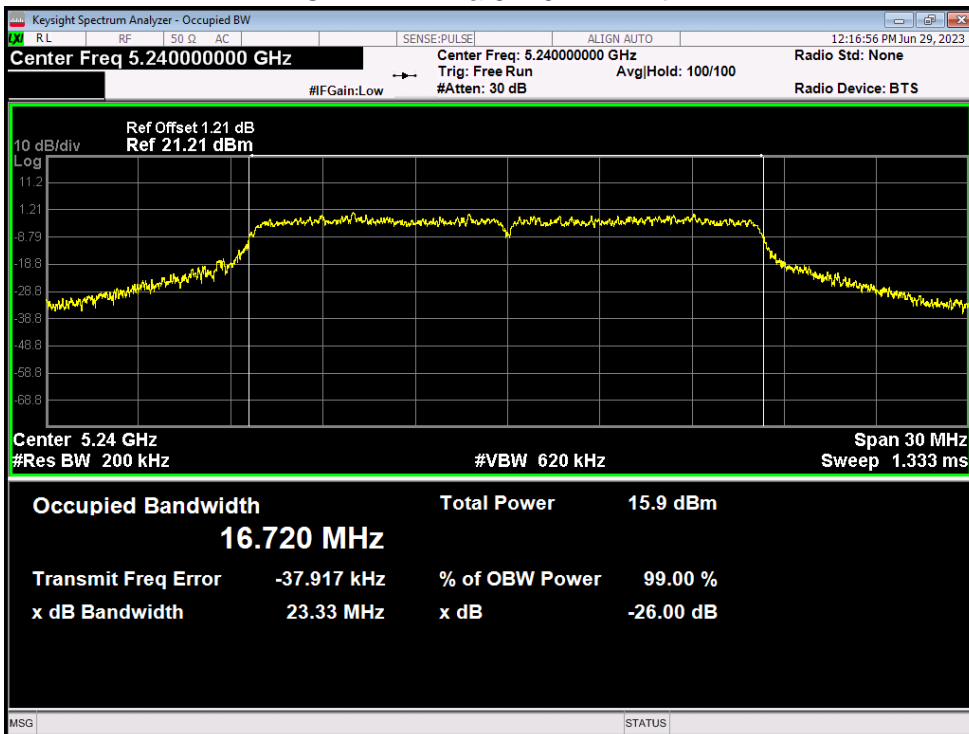


OBW NVNT ac20 5180MHz Ant1

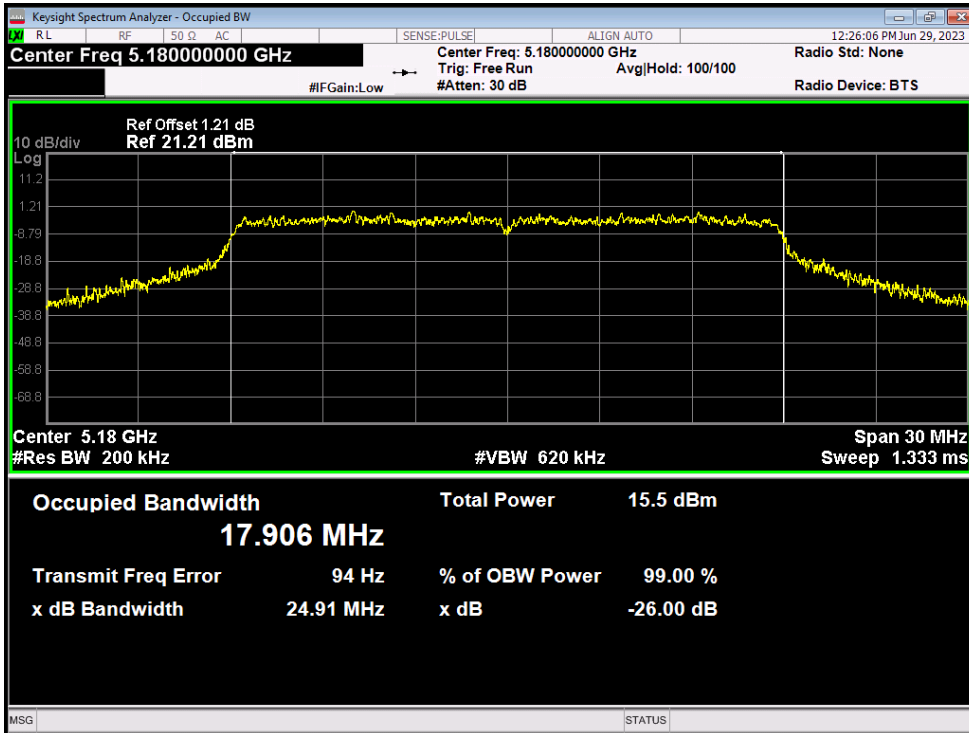


OBW NVNT ac20 5200MHz Ant1

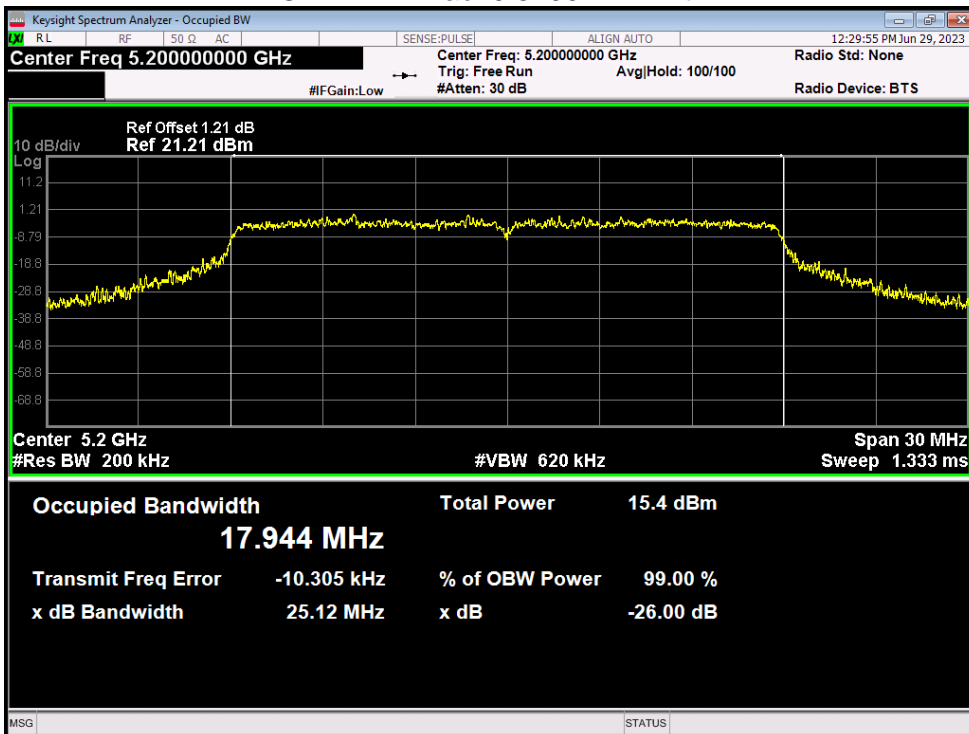


OBW NVNT ac20 5240MHz Ant1

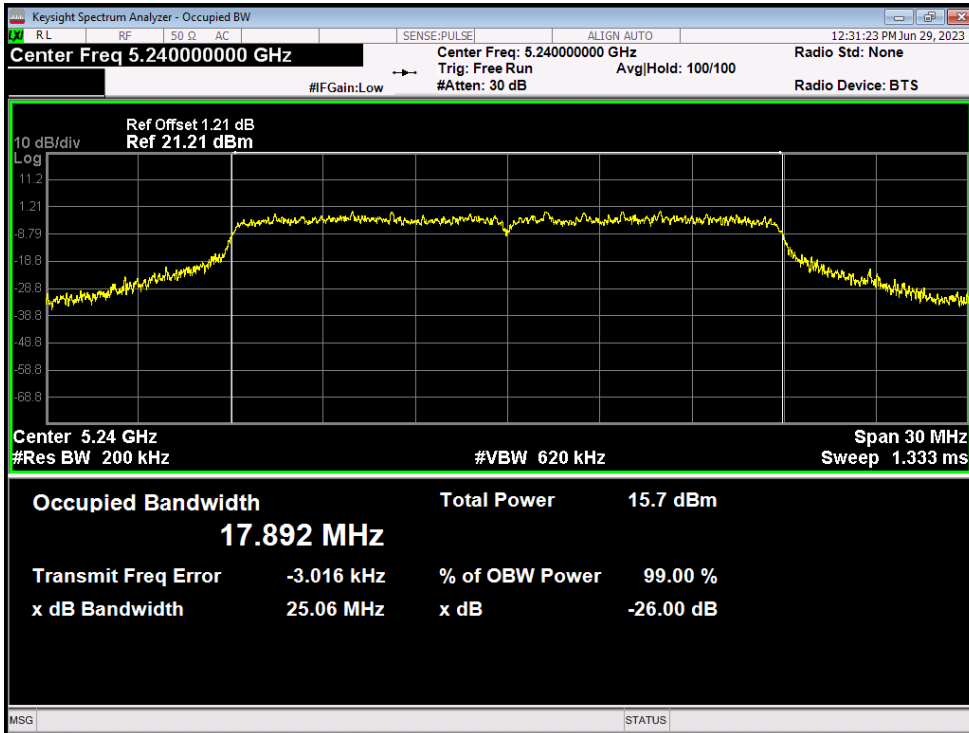


OBW NVNT ac40 5190MHz Ant1

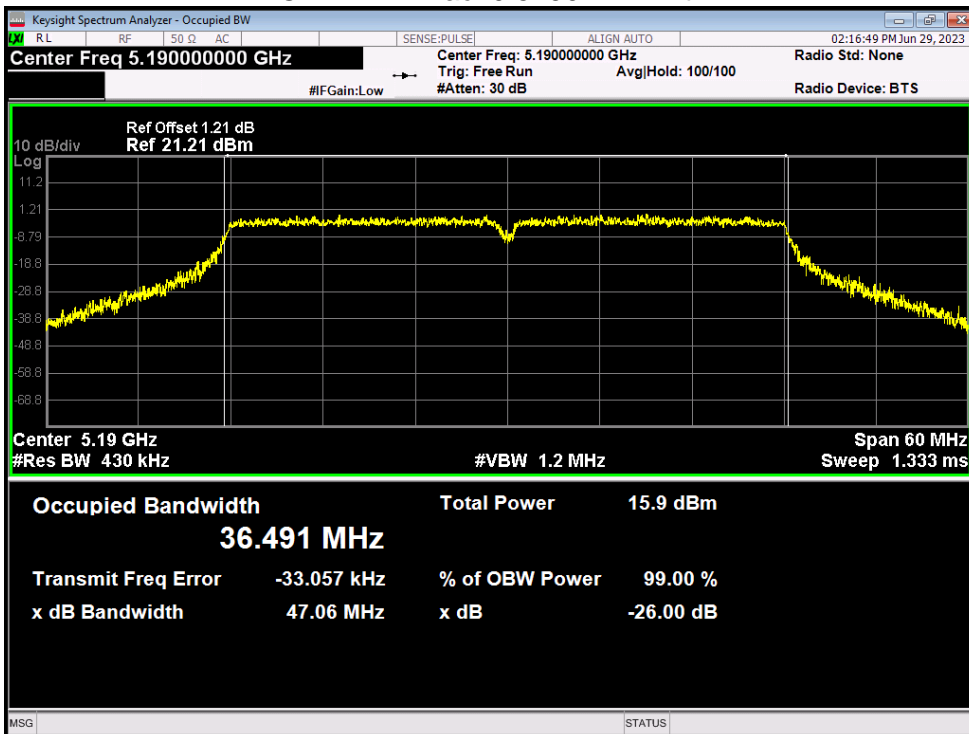


OBW NVNT ac40 5230MHz Ant1

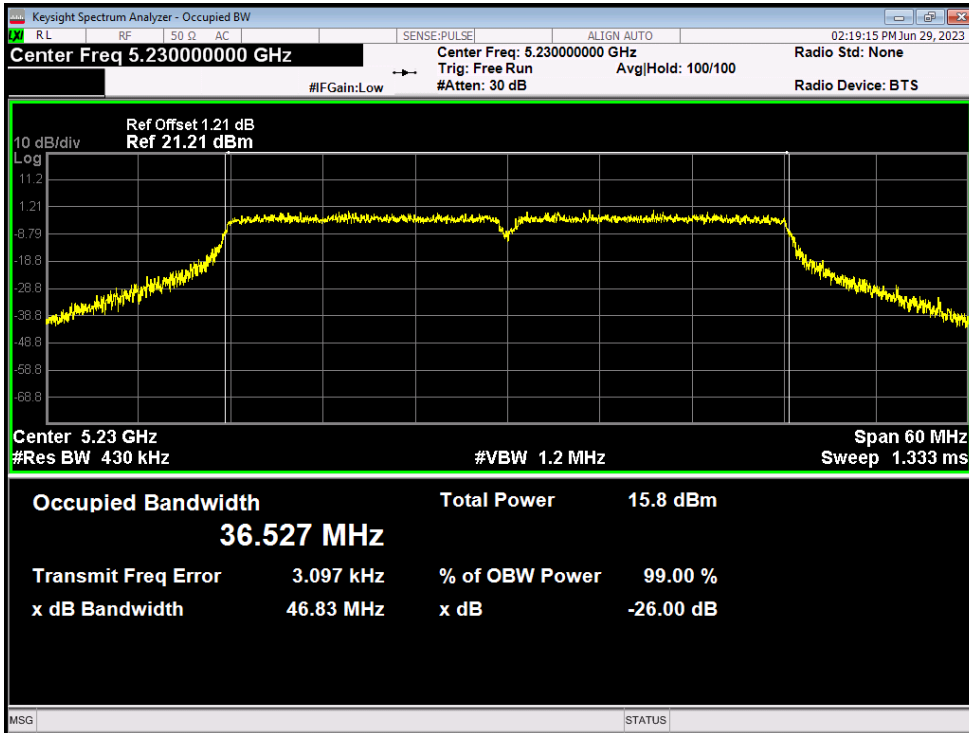


OBW NVNT ax20 5180MHz Ant1

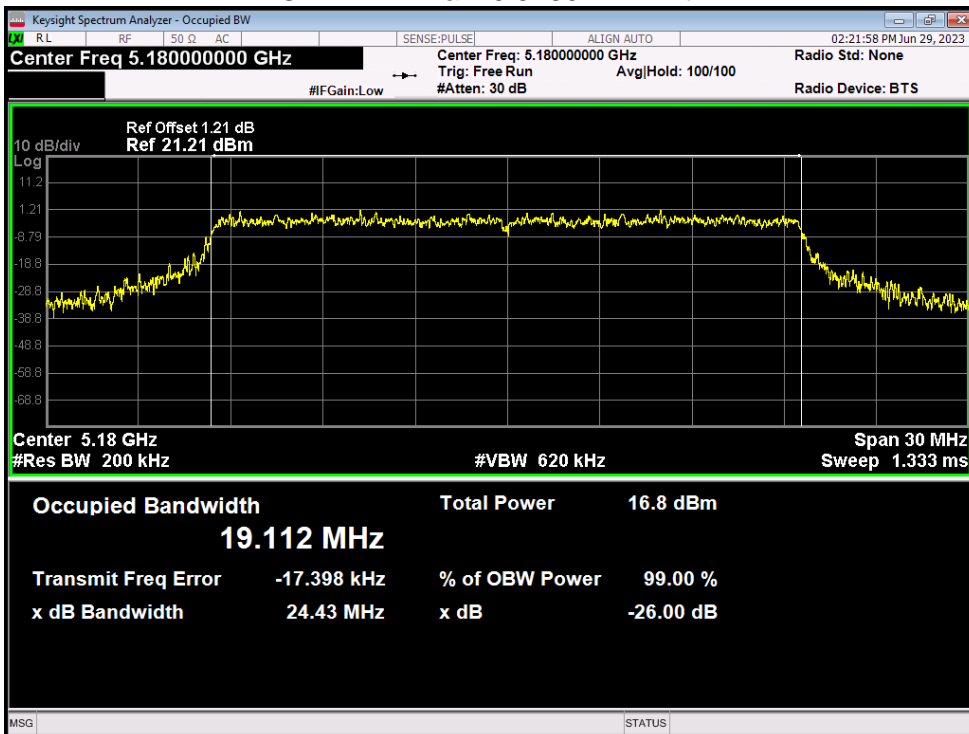


OBW NVNT ax20 5200MHz Ant1

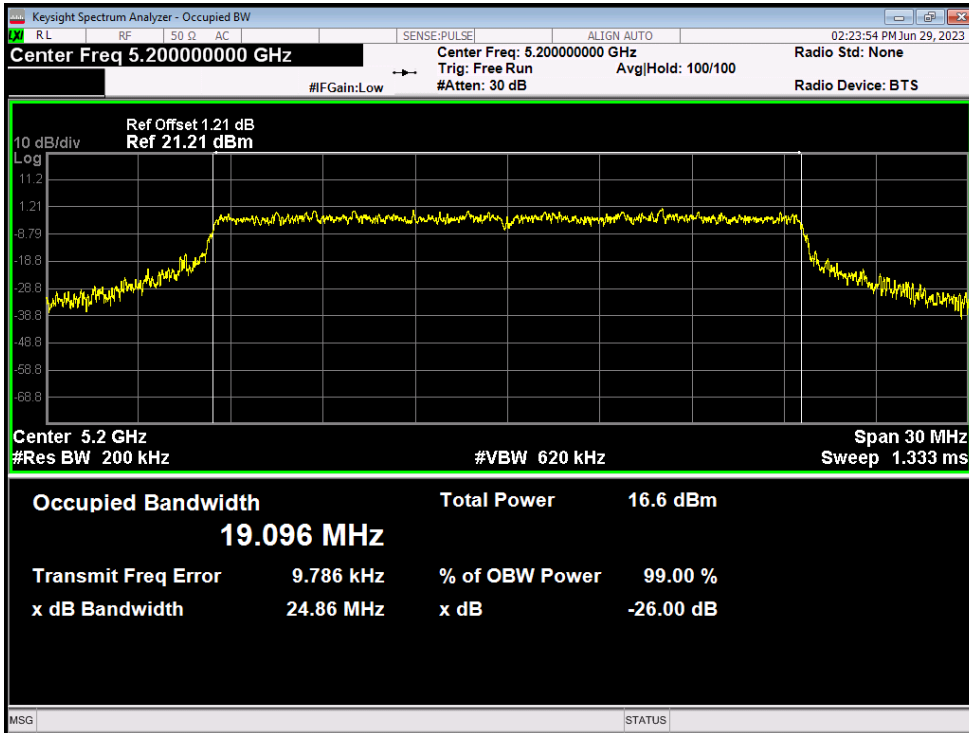


OBW NVNT ax20 5240MHz Ant1

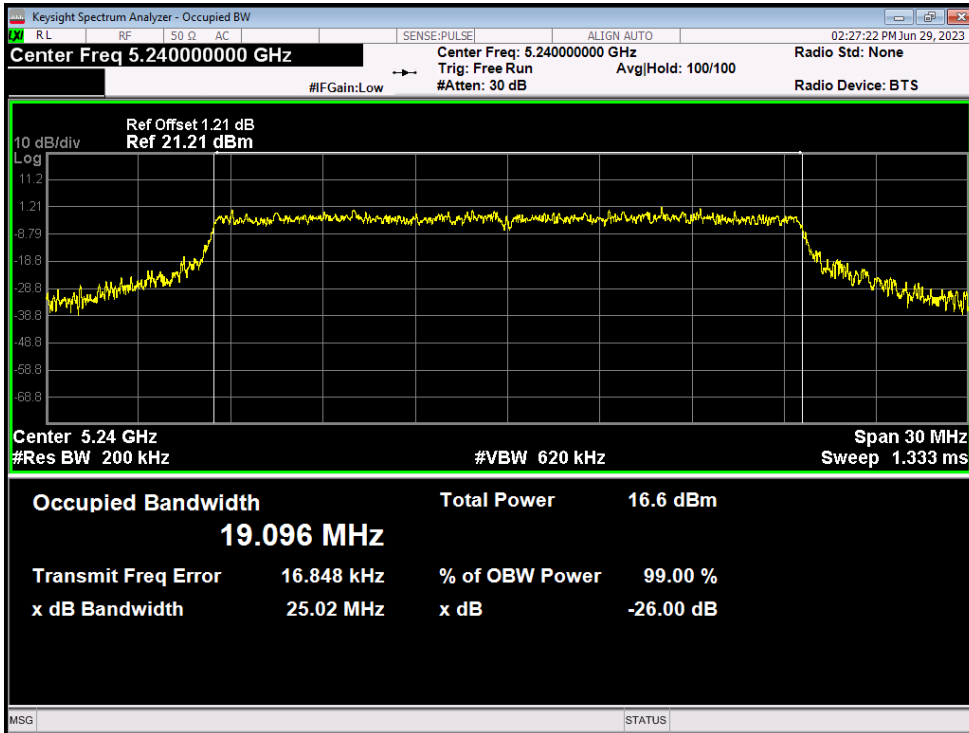


OBW NVNT ax40 5190MHz Ant1

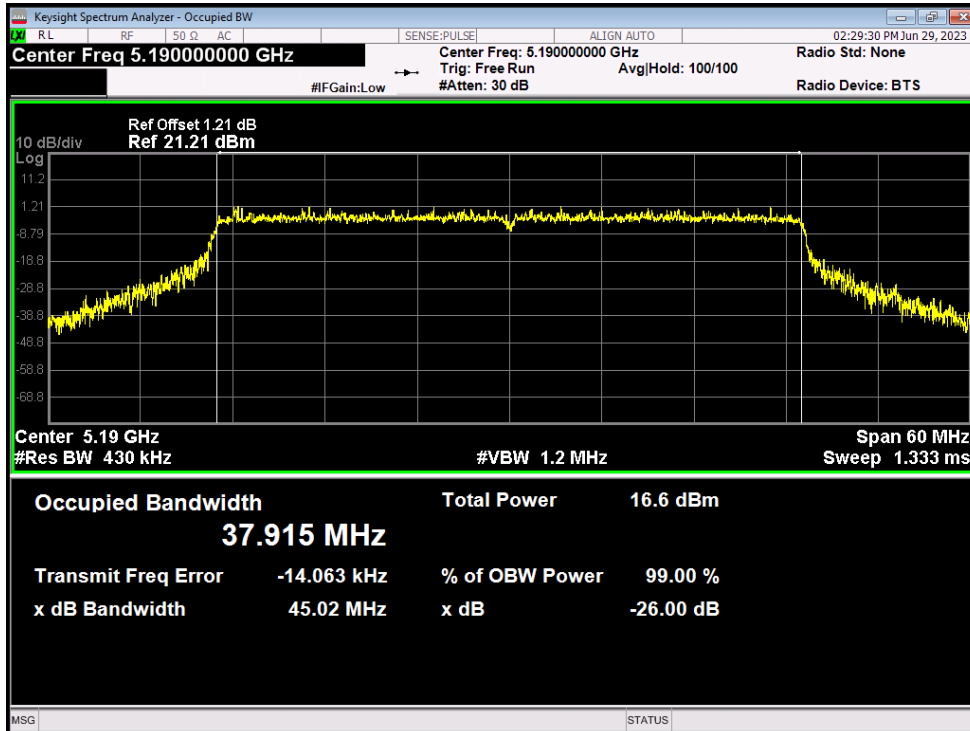


OBW NVNT ax40 5230MHz Ant1

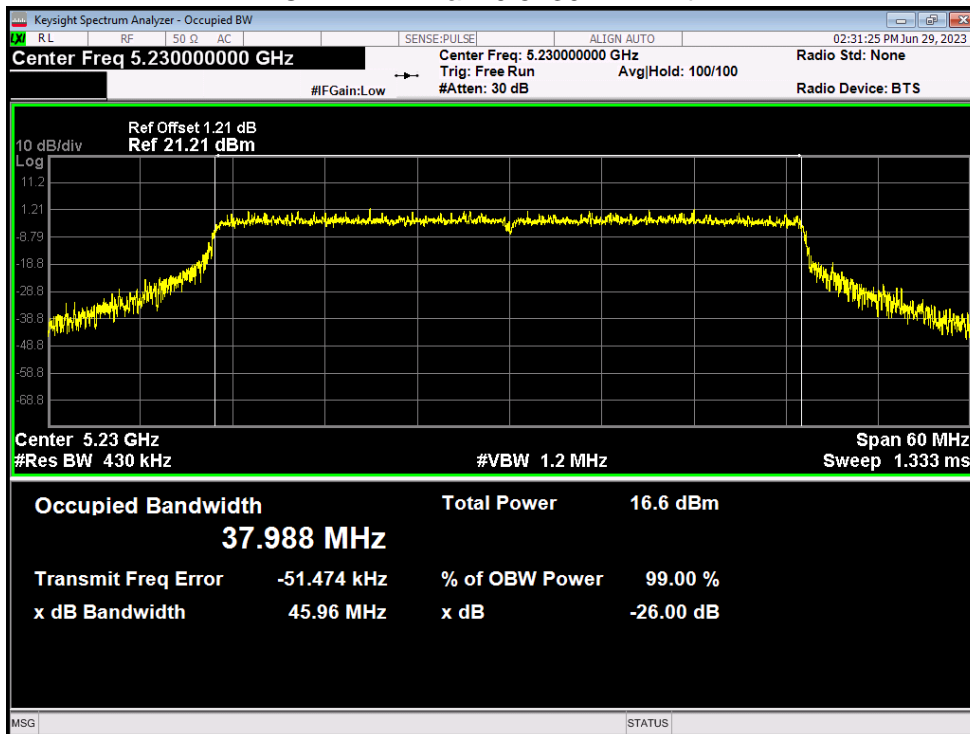


OBW NVNT n20 5180MHz Ant1

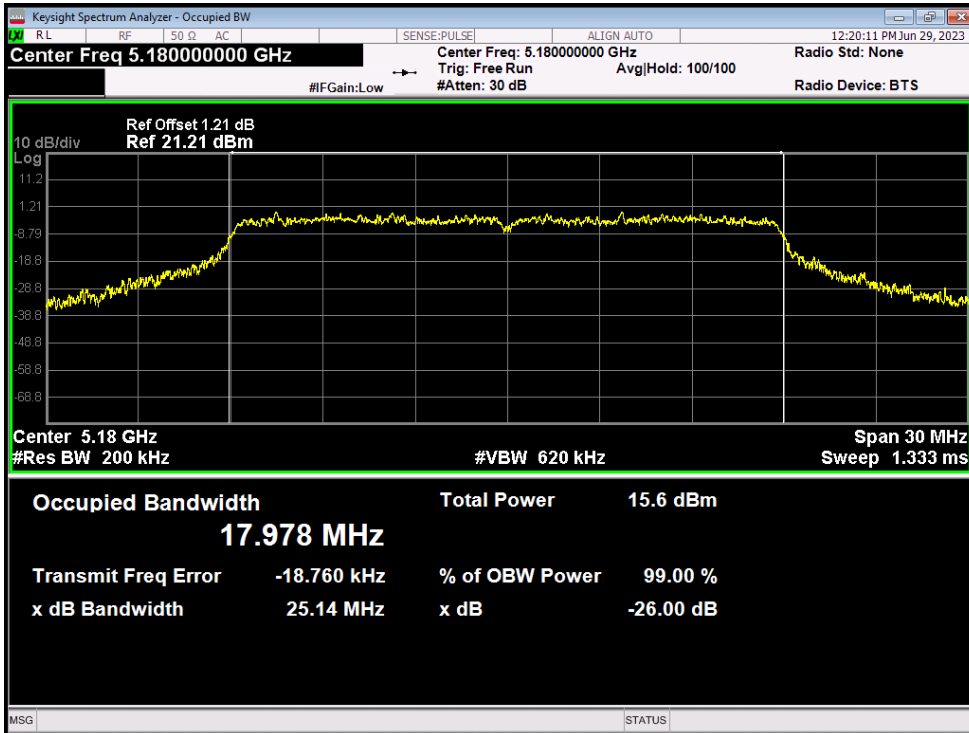


OBW NVNT n20 5200MHz Ant1

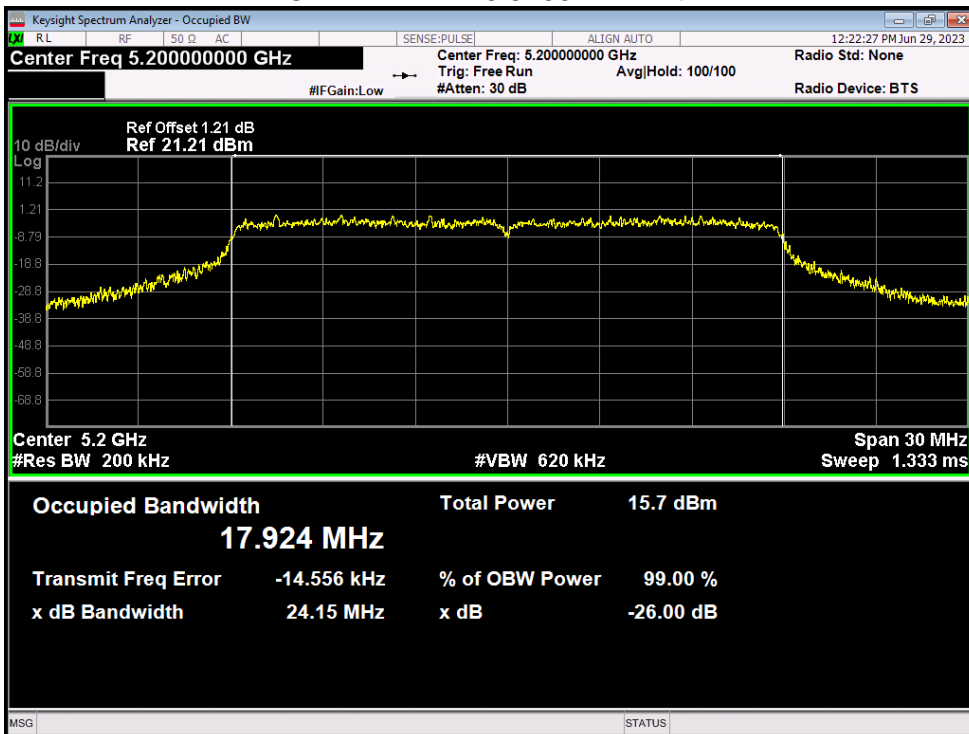


OBW NVNT n20 5240MHz Ant1

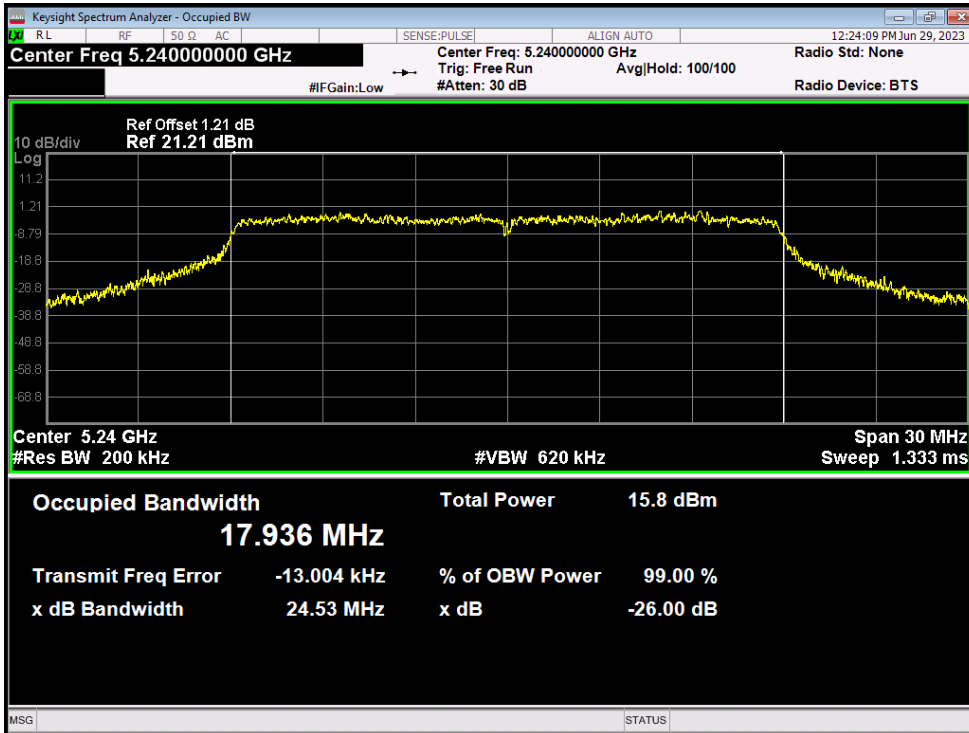

OBW NVNT n40 5190MHz Ant1

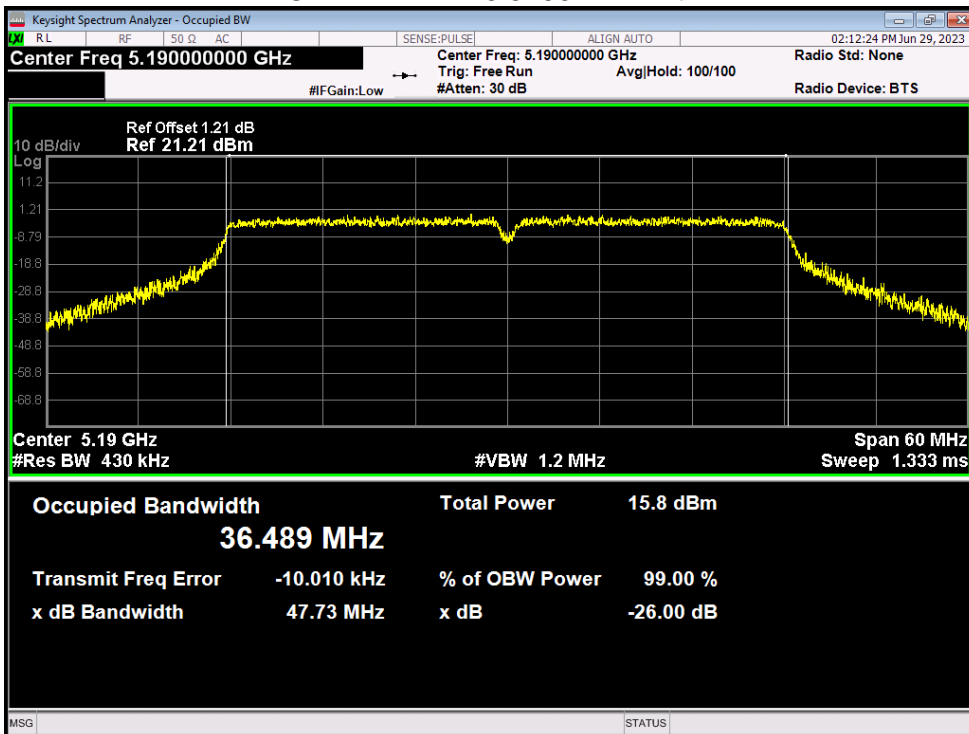


OBW NVNT n40 5230MHz Ant1

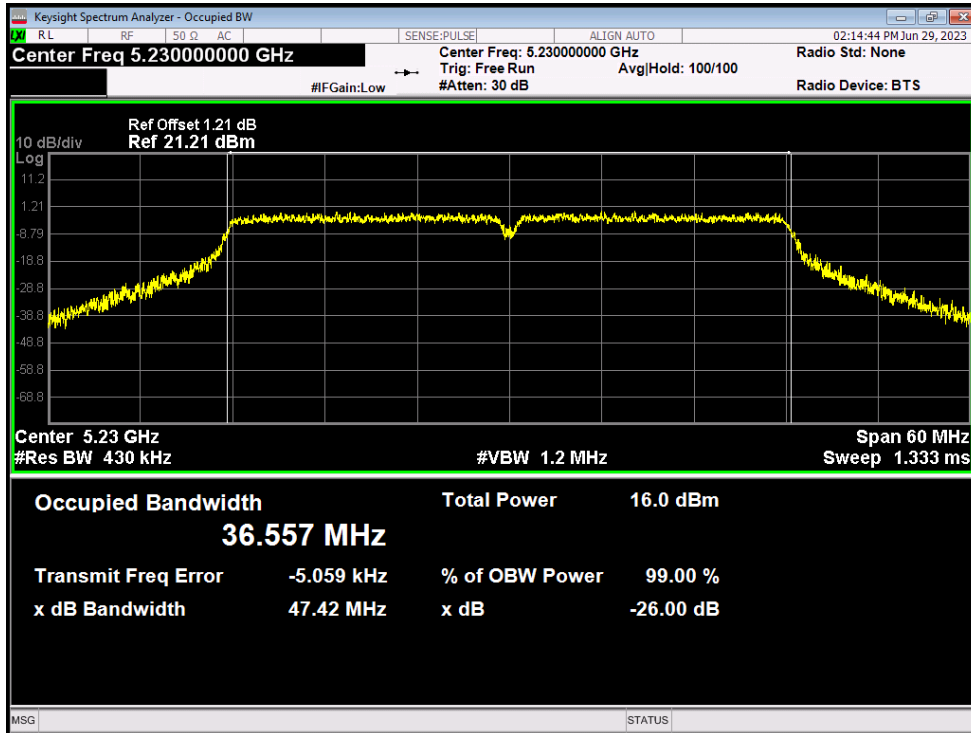


5.5 MAXIMUM POWER SPECTRAL DENSITY LEVEL

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-1.095	0.17	-0.925	11	Pass
NVNT	a	5200	Ant1	-0.451	0.2	-0.251	11	Pass
NVNT	a	5240	Ant1	-0.016	0.2	0.184	11	Pass
NVNT	ac20	5180	Ant1	-0.91	0.2	-0.71	11	Pass
NVNT	ac20	5200	Ant1	-0.722	0.22	-0.502	11	Pass
NVNT	ac20	5240	Ant1	-0.714	0.23	-0.484	11	Pass
NVNT	ac40	5190	Ant1	-4.206	0.44	-3.766	11	Pass
NVNT	ac40	5230	Ant1	-4.355	0.47	-3.885	11	Pass
NVNT	ax20	5180	Ant1	-0.755	0.28	-0.475	11	Pass
NVNT	ax20	5200	Ant1	-1.021	0.29	-0.731	11	Pass
NVNT	ax20	5240	Ant1	-0.956	0.3	-0.656	11	Pass
NVNT	ax40	5190	Ant1	-4.545	0.52	-4.025	11	Pass
NVNT	ax40	5230	Ant1	-3.956	0.57	-3.386	11	Pass
NVNT	n20	5180	Ant1	-0.568	0.2	-0.368	11	Pass
NVNT	n20	5200	Ant1	-0.944	0.24	-0.704	11	Pass
NVNT	n20	5240	Ant1	-0.639	0.35	-0.289	11	Pass
NVNT	n40	5190	Ant1	-4.78	0.45	-4.33	11	Pass
NVNT	n40	5230	Ant1	-4.578	0.39	-4.188	11	Pass


PSD NVNT a 5180MHz Ant1

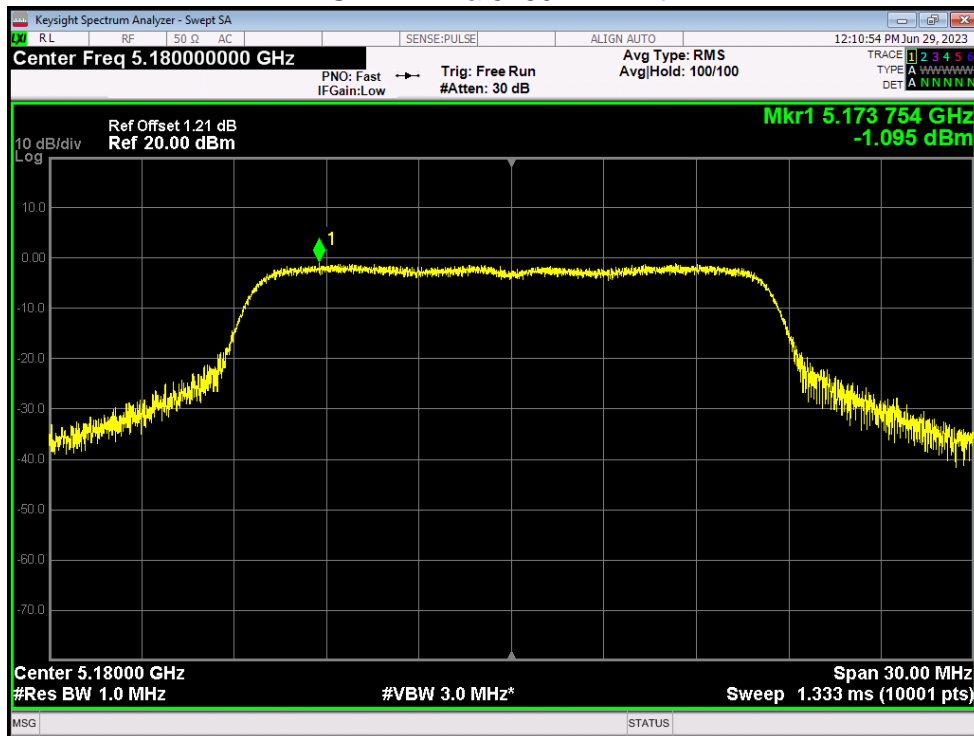


PSD NVNT a 5200MHz Ant1

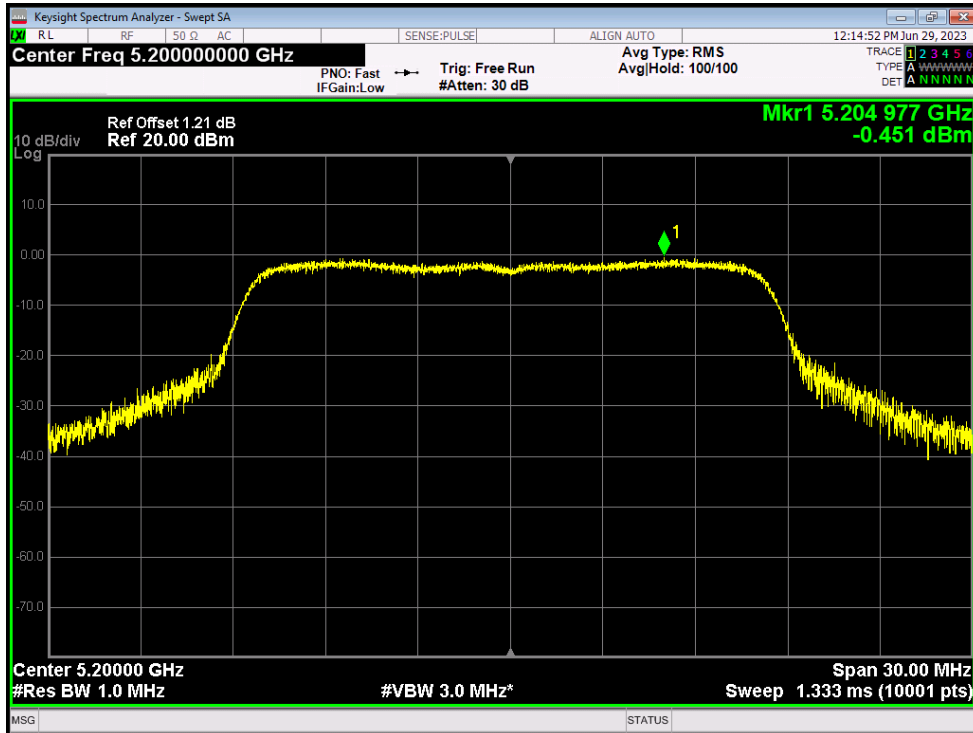


PSD NVNT a 5240MHz Ant1

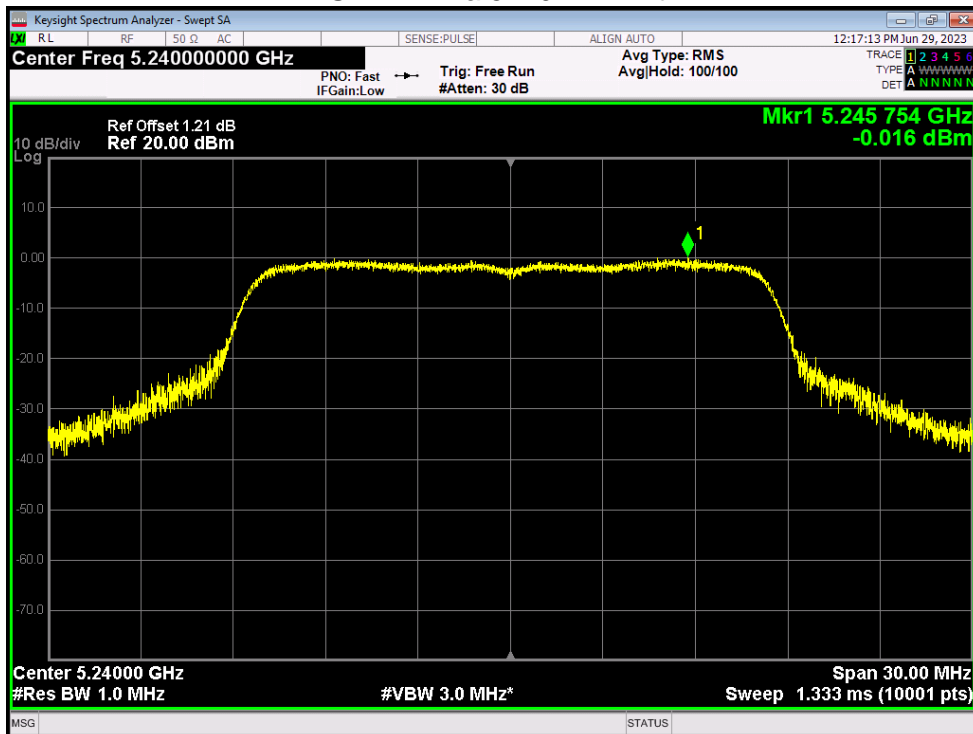


PSD NVNT ac20 5180MHz Ant1

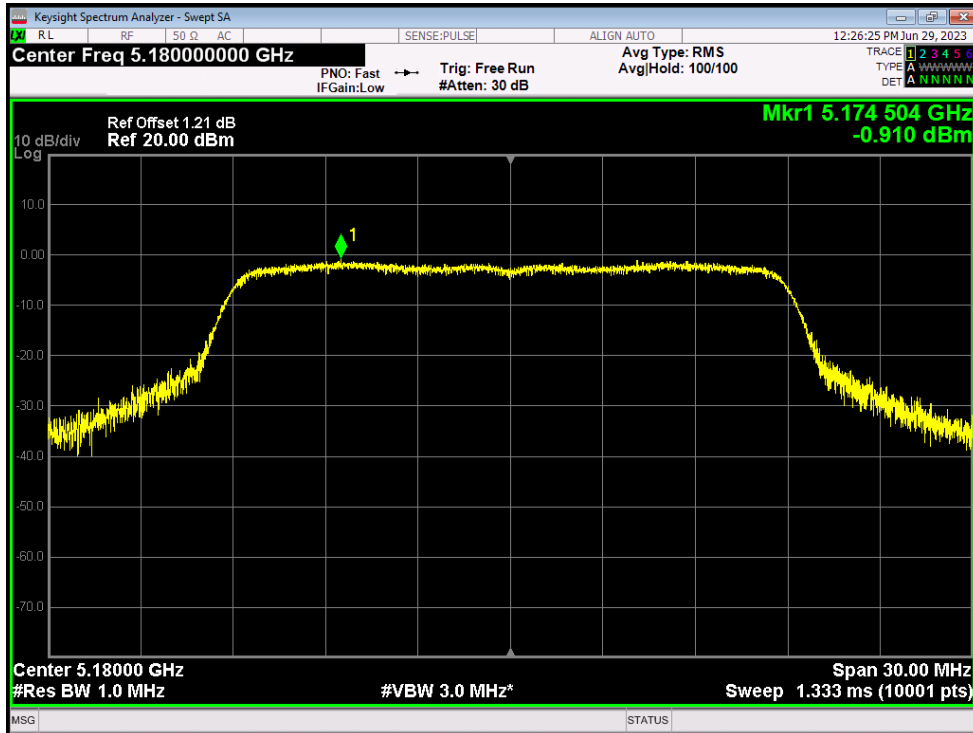


PSD NVNT ac20 5200MHz Ant1

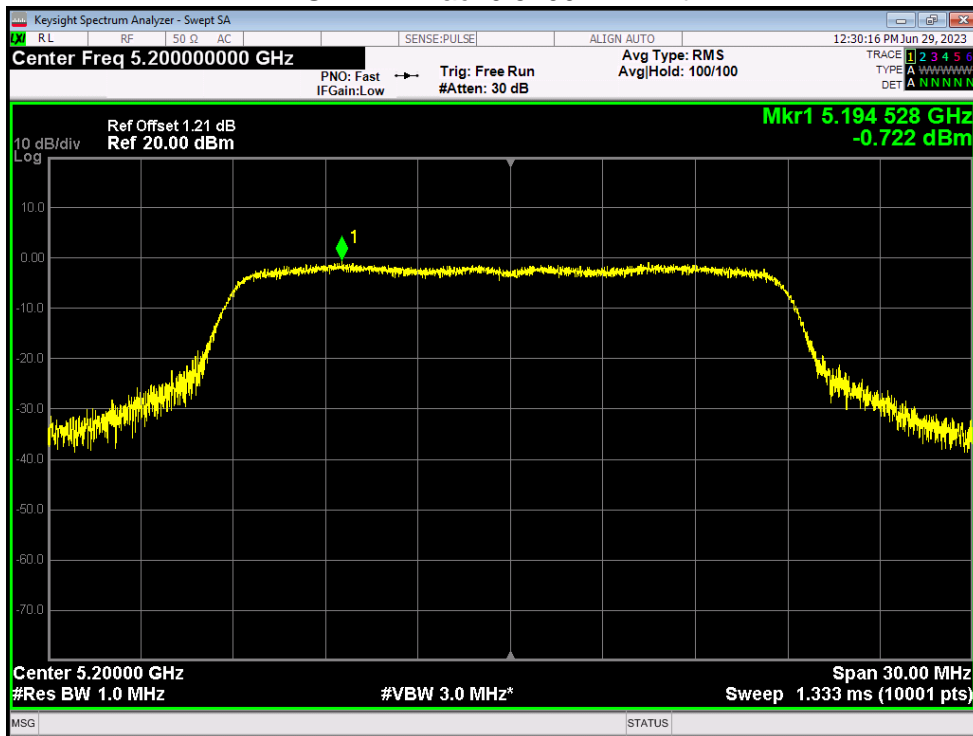


PSD NVNT ac20 5240MHz Ant1

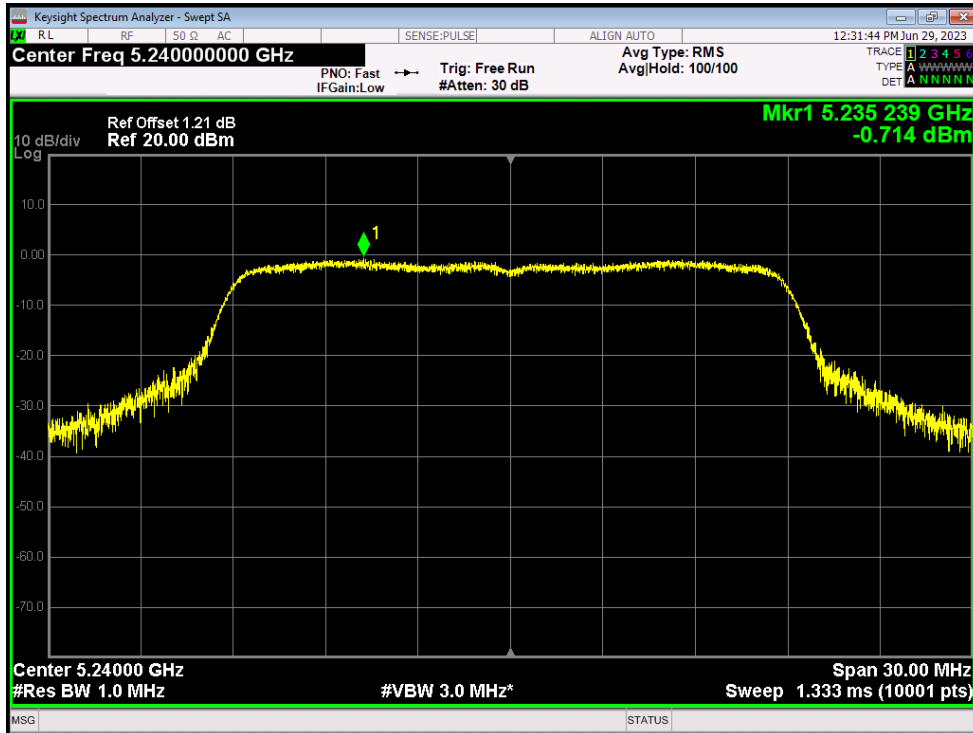


PSD NVNT ac40 5190MHz Ant1

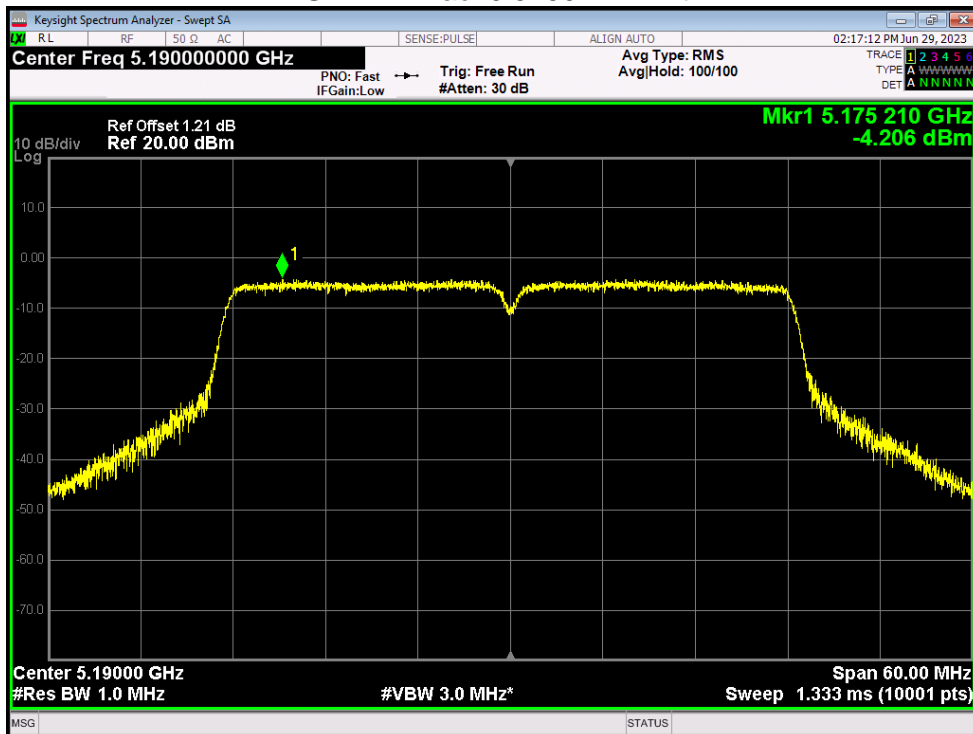


PSD NVNT ac40 5230MHz Ant1

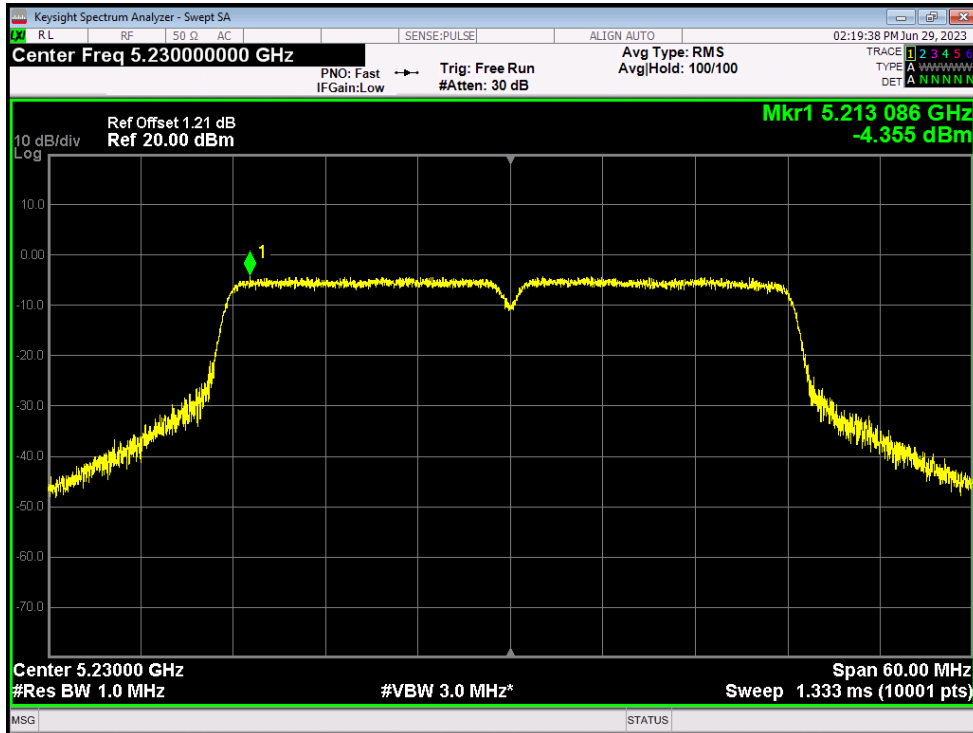


PSD NVNT ax20 5180MHz Ant1

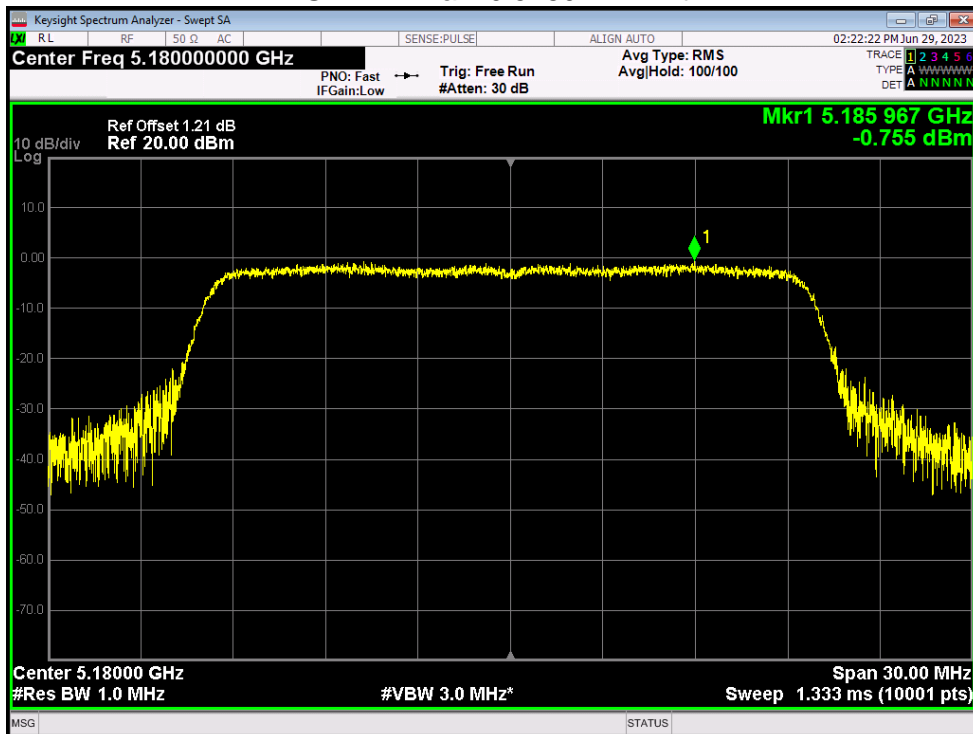


PSD NVNT ax20 5200MHz Ant1

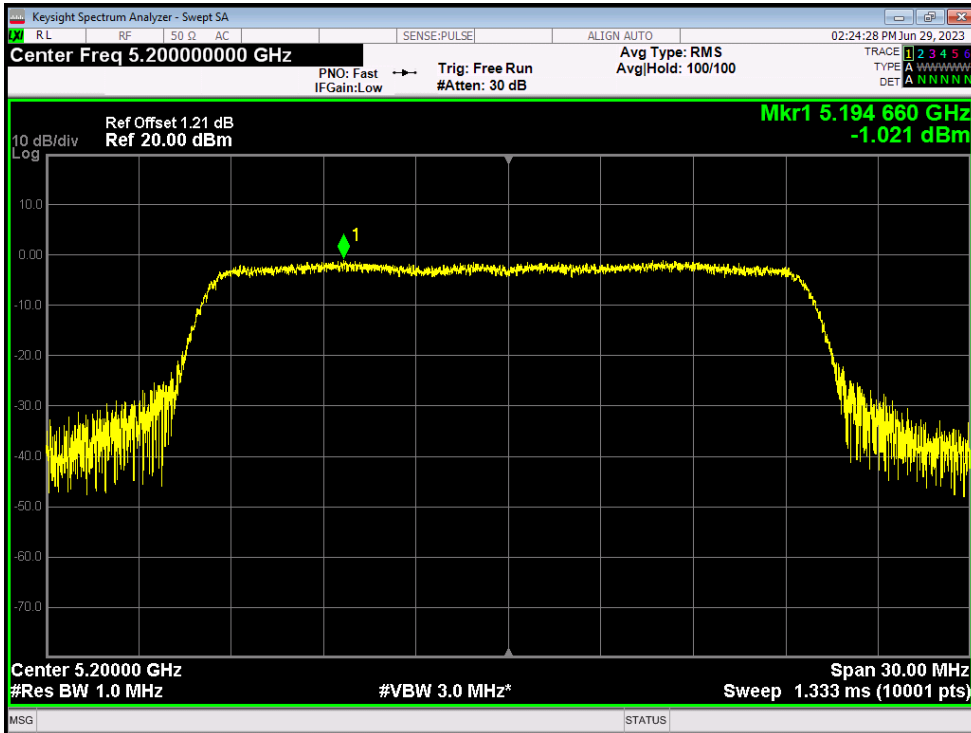


PSD NVNT ax20 5240MHz Ant1

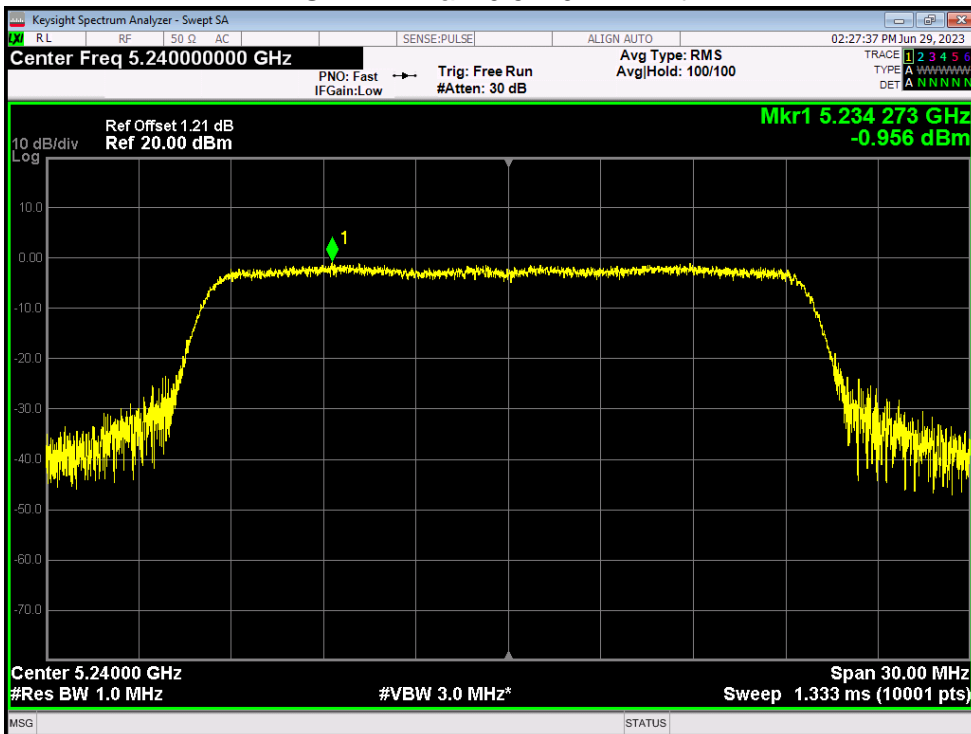


PSD NVNT ax40 5190MHz Ant1

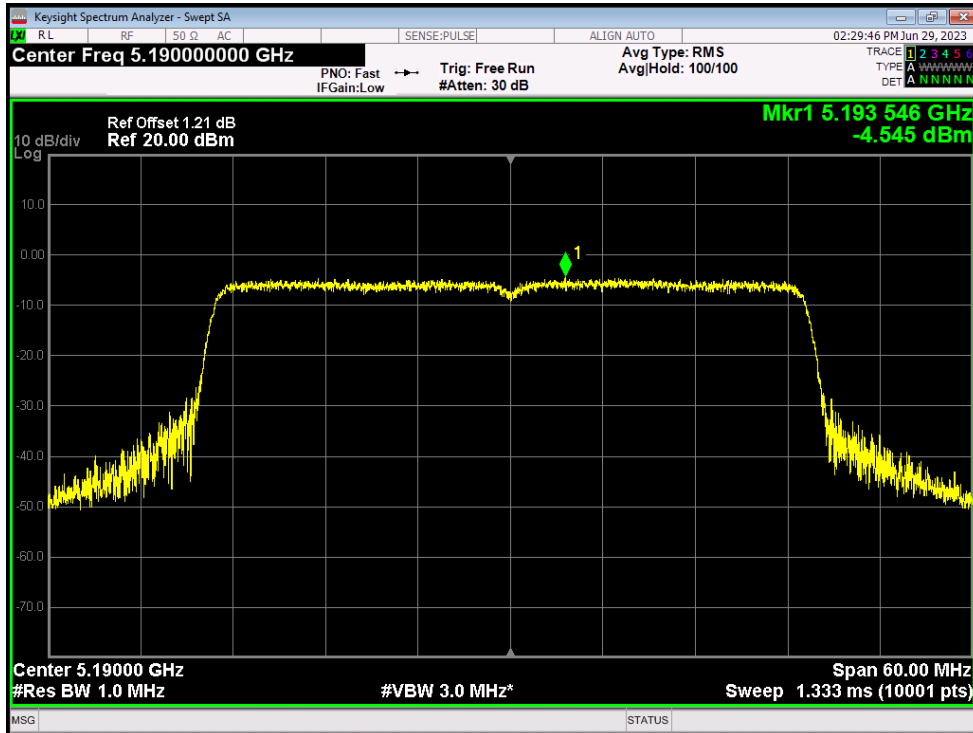


PSD NVNT ax40 5230MHz Ant1

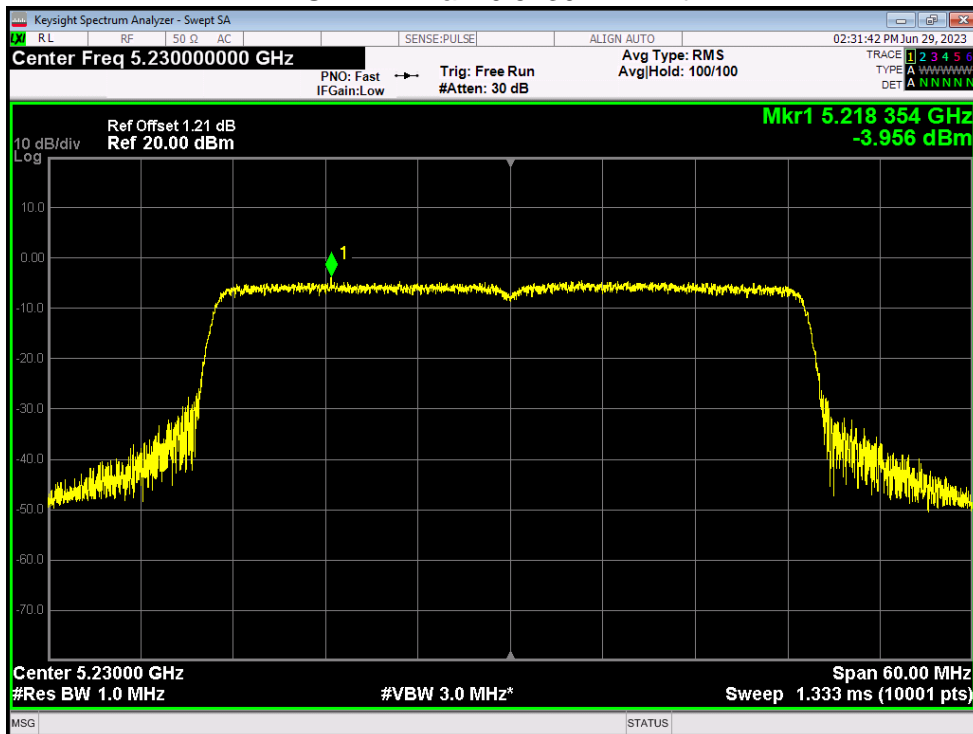


PSD NVNT n20 5180MHz Ant1

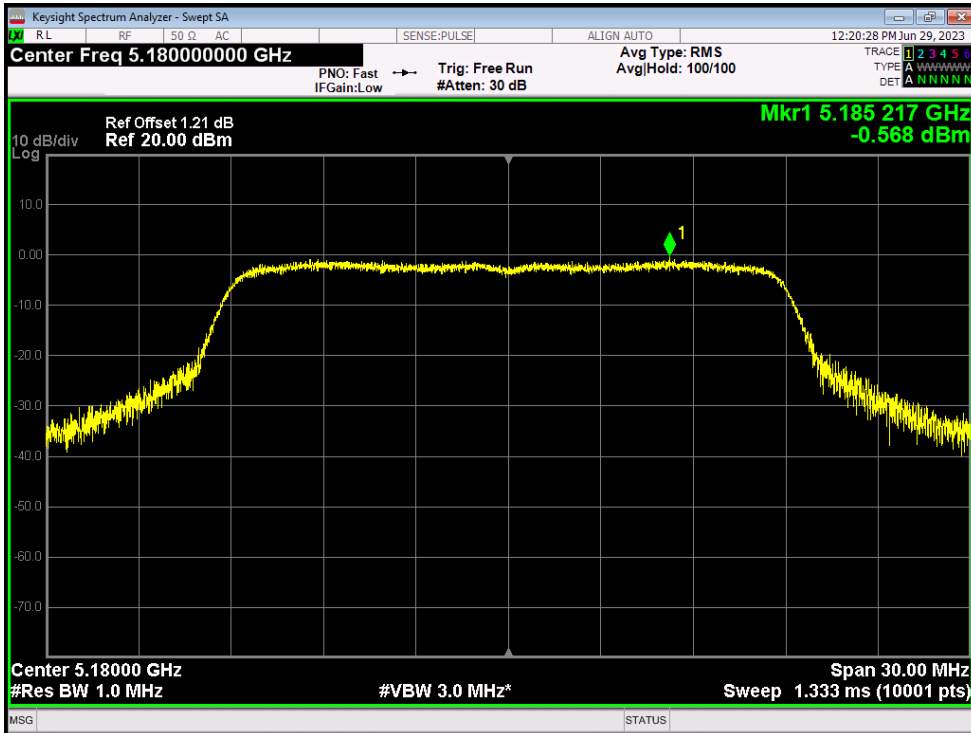


PSD NVNT n20 5200MHz Ant1

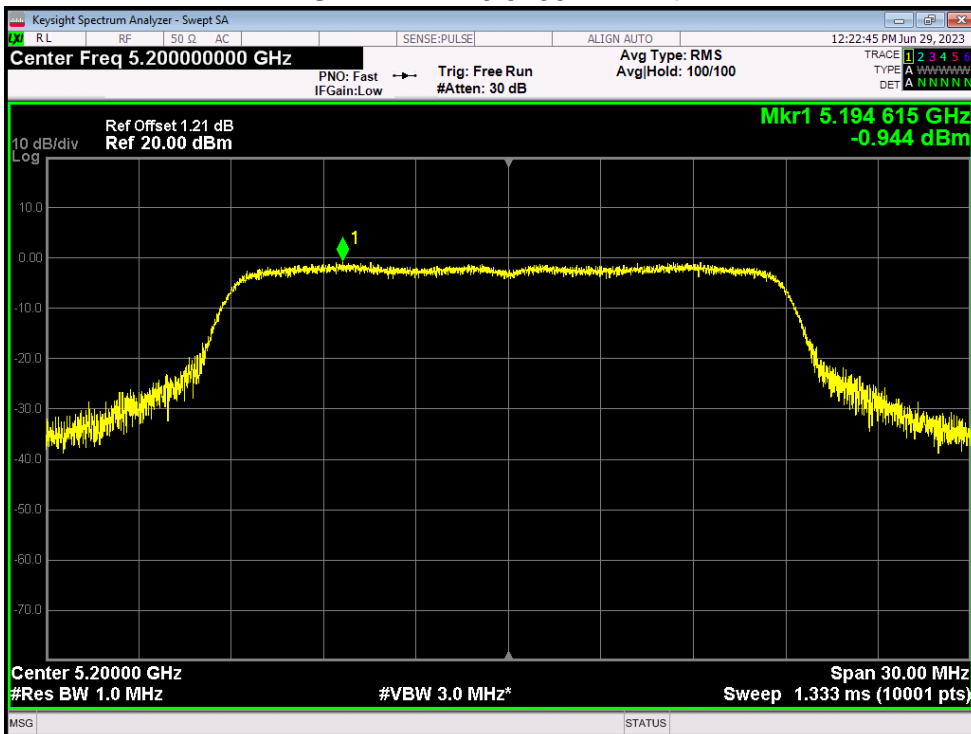


PSD NVNT n20 5240MHz Ant1

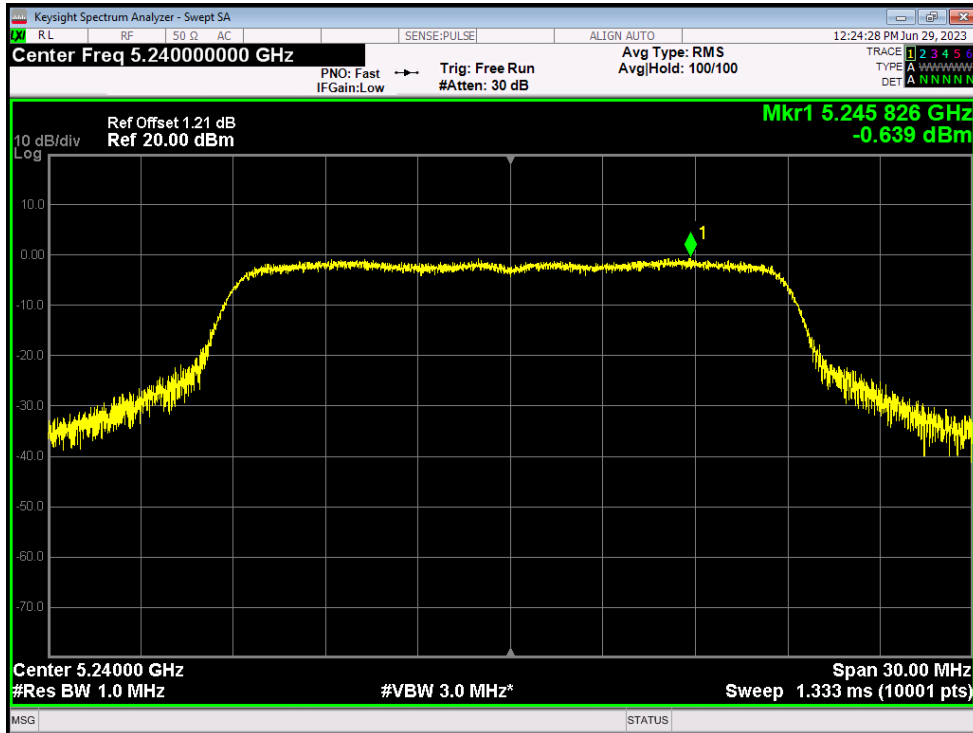

PSD NVNT n40 5190MHz Ant1

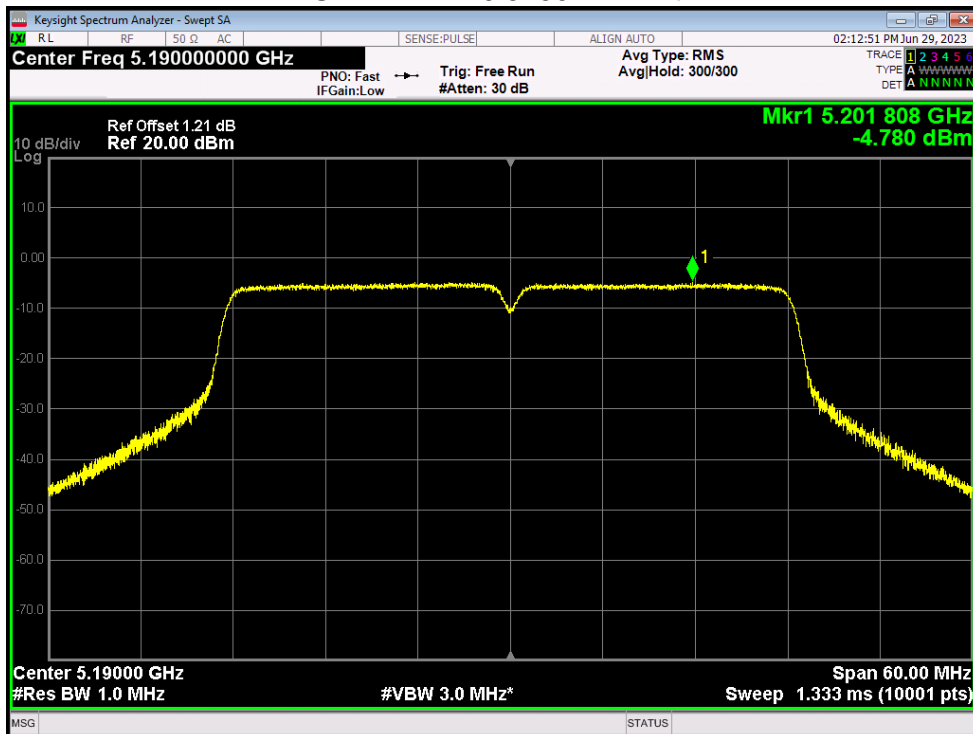


PSD NVNT n40 5230MHz Ant1

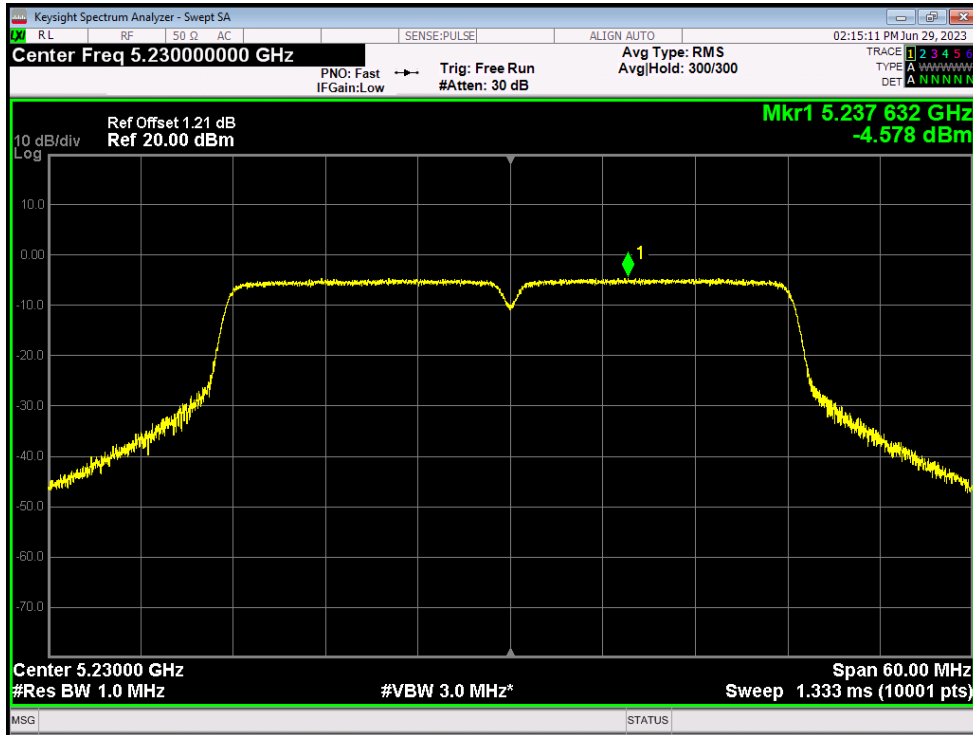


5.6 BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-40.59	-27	Pass
NVNT	a	5240	Ant1	-40.92	-27	Pass
NVNT	ac20	5180	Ant1	-40.82	-27	Pass
NVNT	ac20	5240	Ant1	-41.7	-27	Pass
NVNT	ac40	5190	Ant1	-38.9	-27	Pass
NVNT	ac40	5230	Ant1	-41.76	-27	Pass
NVNT	ax20	5180	Ant1	-40.11	-27	Pass
NVNT	ax20	5240	Ant1	-40.55	-27	Pass
NVNT	ax40	5190	Ant1	-35.78	-27	Pass
NVNT	ax40	5230	Ant1	-41.83	-27	Pass
NVNT	n20	5180	Ant1	-40.53	-27	Pass
NVNT	n20	5240	Ant1	-40.51	-27	Pass
NVNT	n40	5190	Ant1	-38.94	-27	Pass
NVNT	n40	5230	Ant1	-40.41	-27	Pass


Band Edge NVNT a 5180MHz Low Ant1

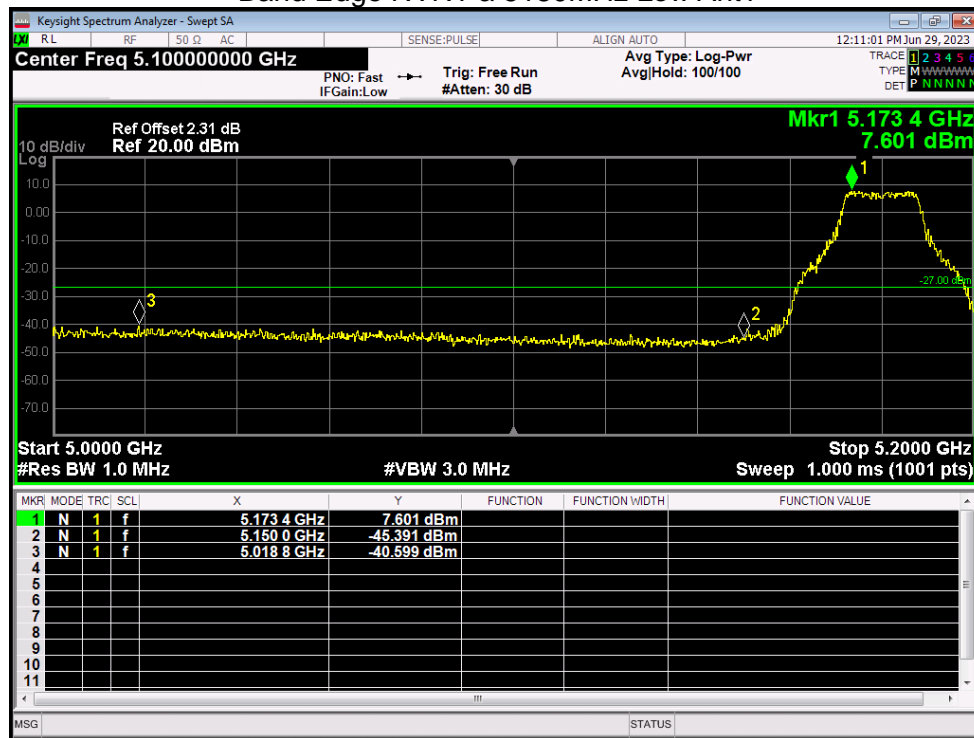


Band Edge NVNT a 5240MHz High Ant1

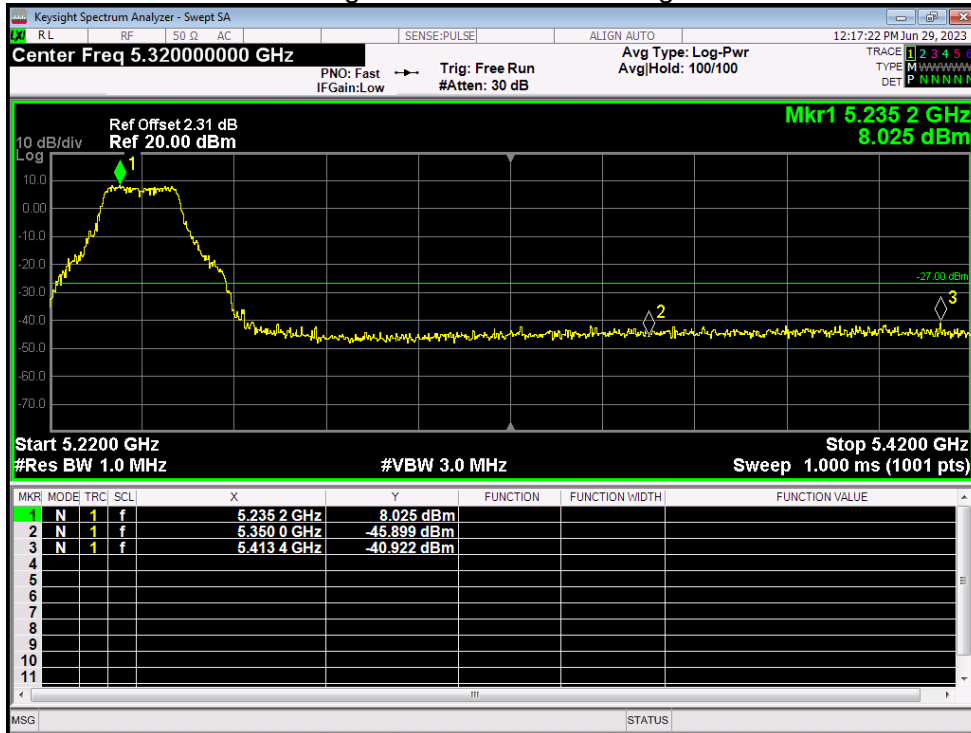


Band Edge NVNT ac20 5180MHz Low Ant1

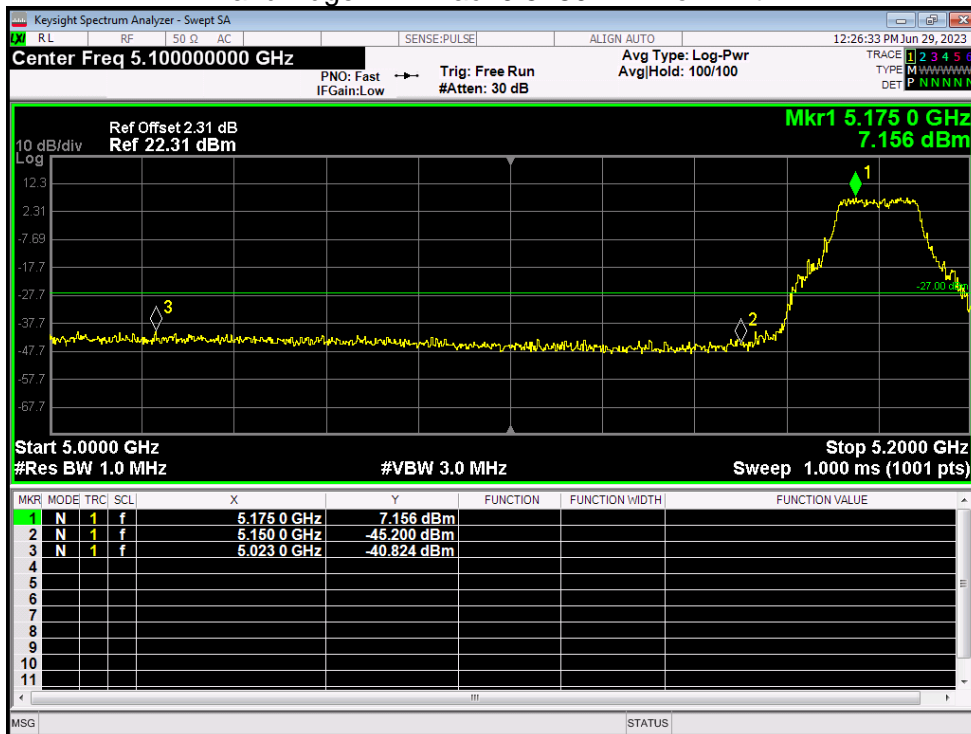


Band Edge NVNT ac20 5240MHz High Ant1

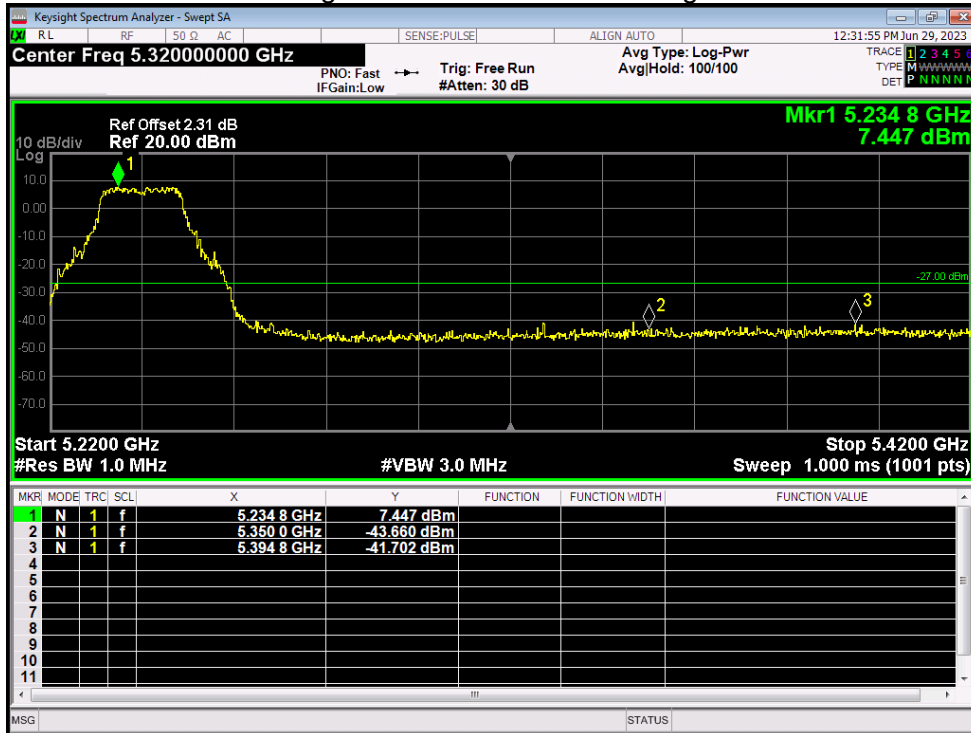


Band Edge NVNT ac40 5190MHz Low Ant1

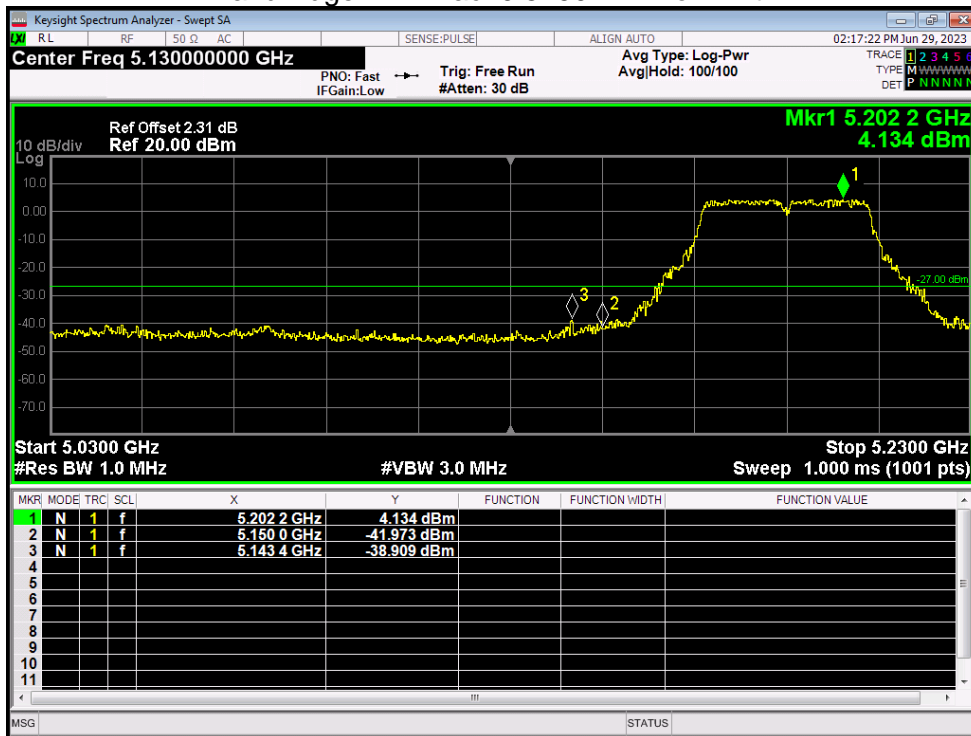


Band Edge NVNT ac40 5230MHz High Ant1

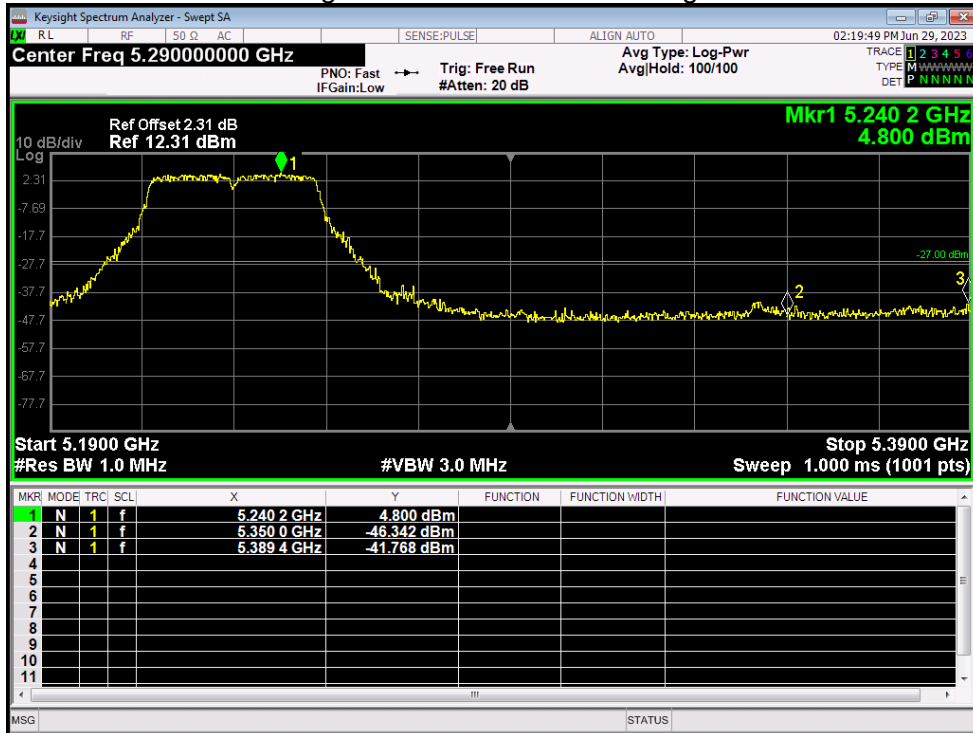


Band Edge NVNT ax20 5180MHz Low Ant1

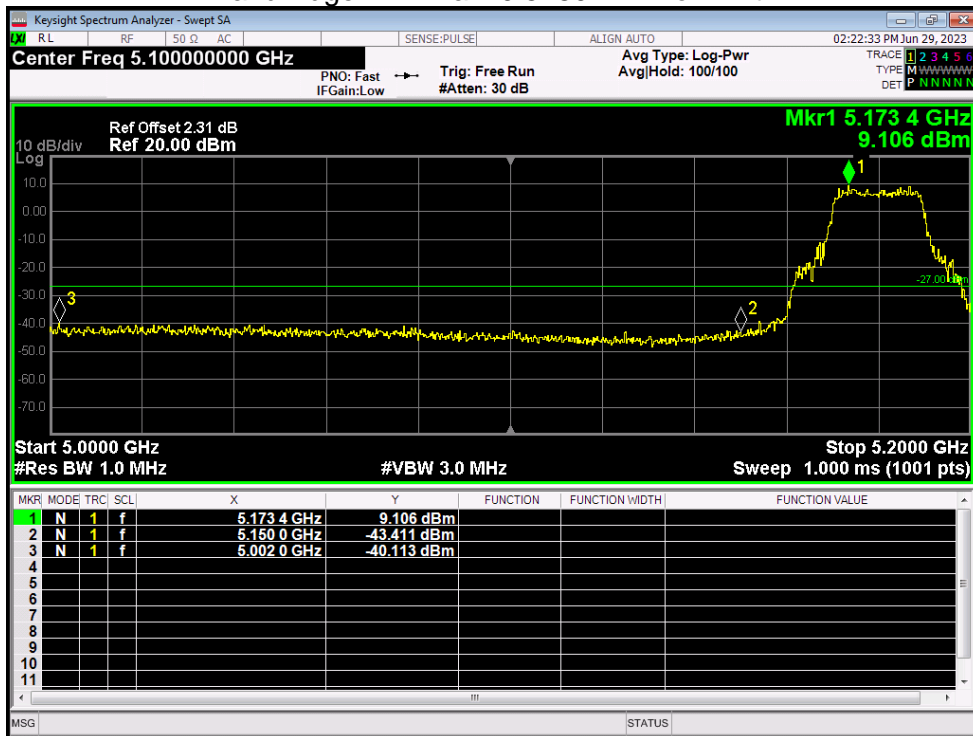


Band Edge NVNT ax20 5240MHz High Ant1

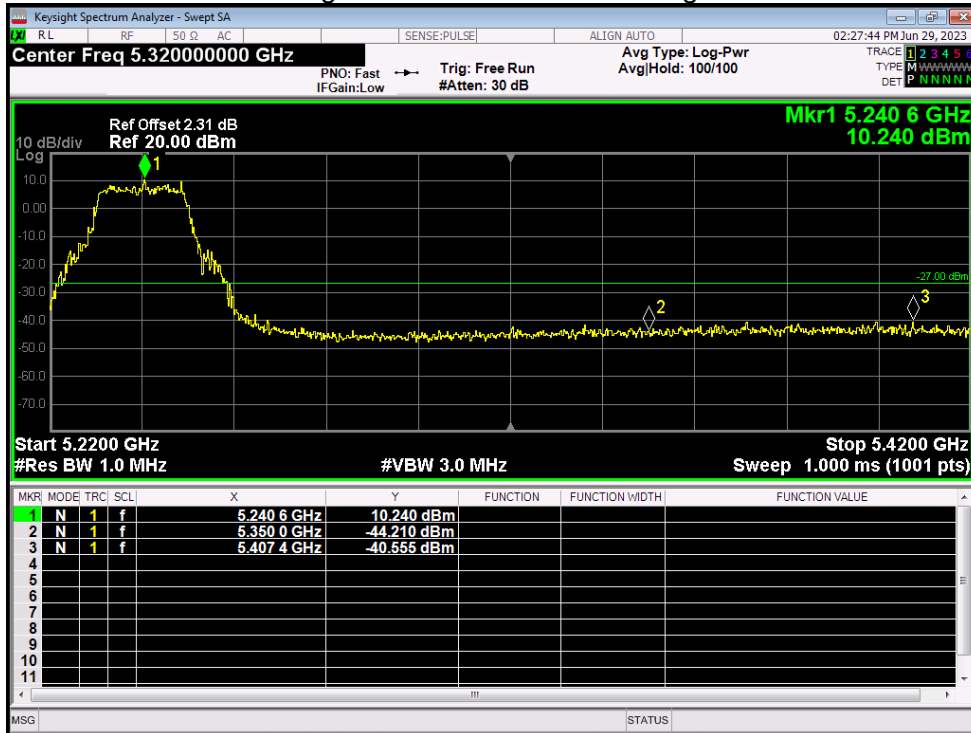


Band Edge NVNT ax40 5190MHz Low Ant1

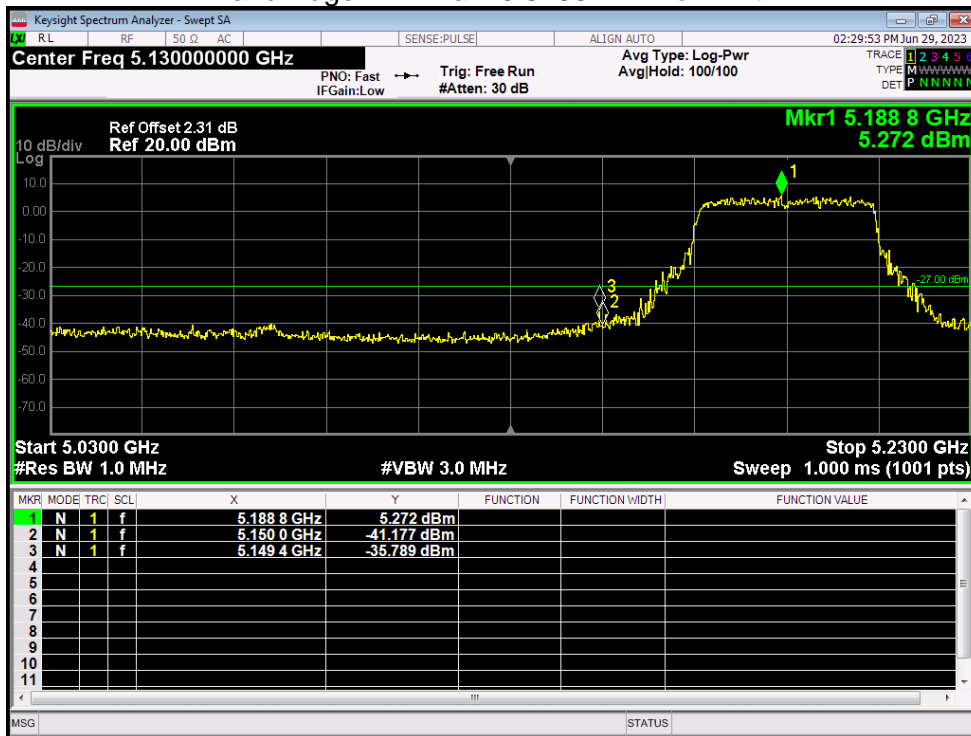


Band Edge NVNT ax40 5230MHz High Ant1

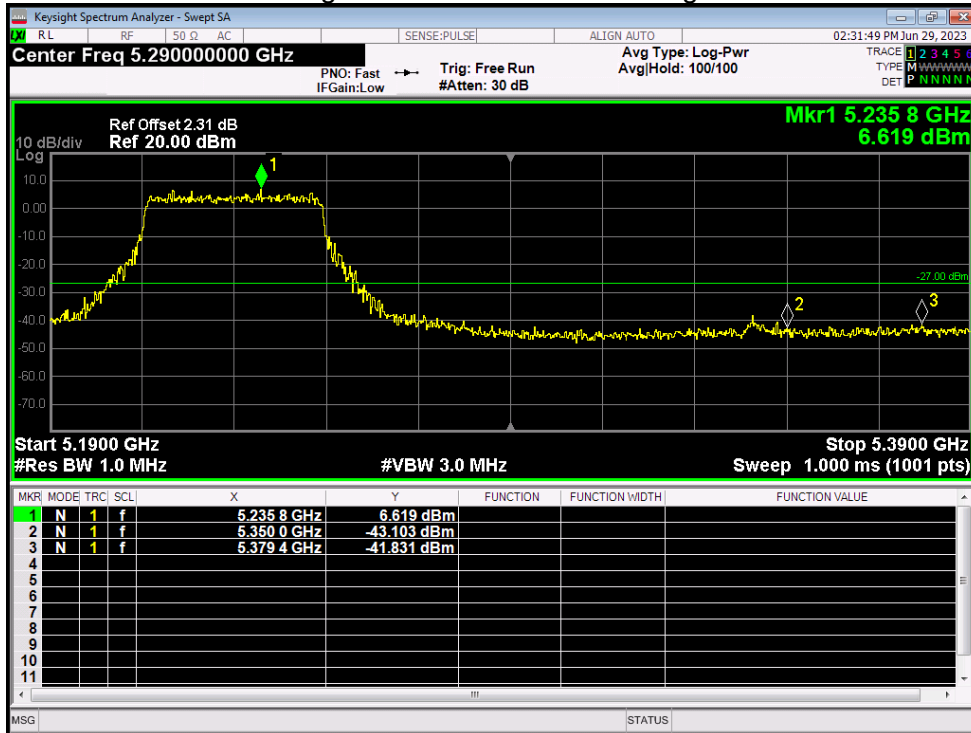


Band Edge NVNT n20 5180MHz Low Ant1

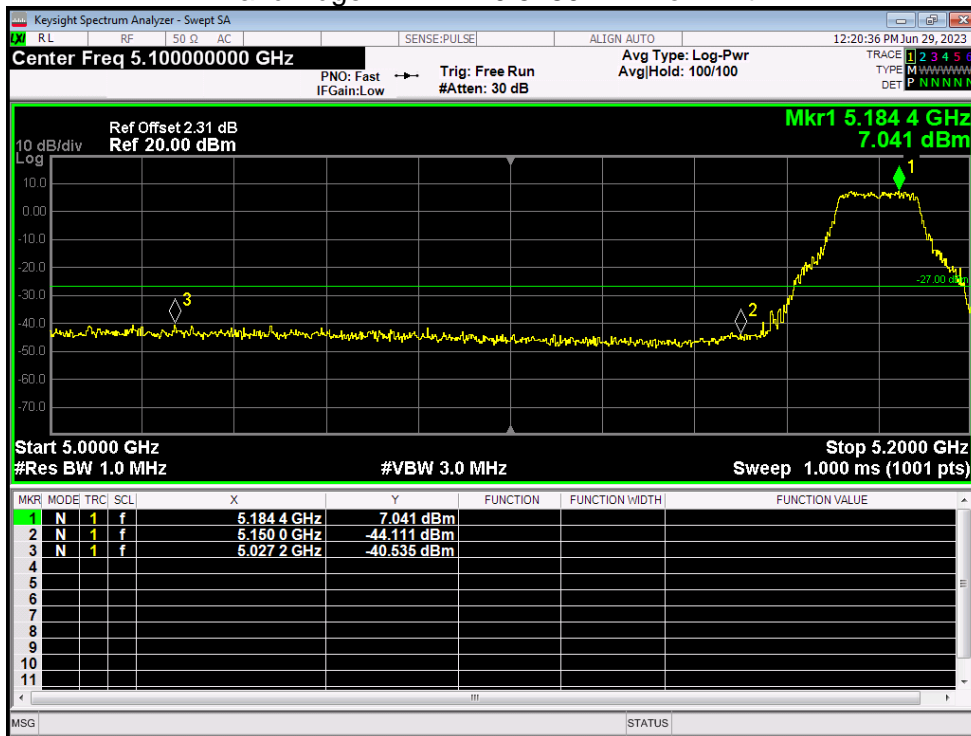


Band Edge NVNT n20 5240MHz High Ant1

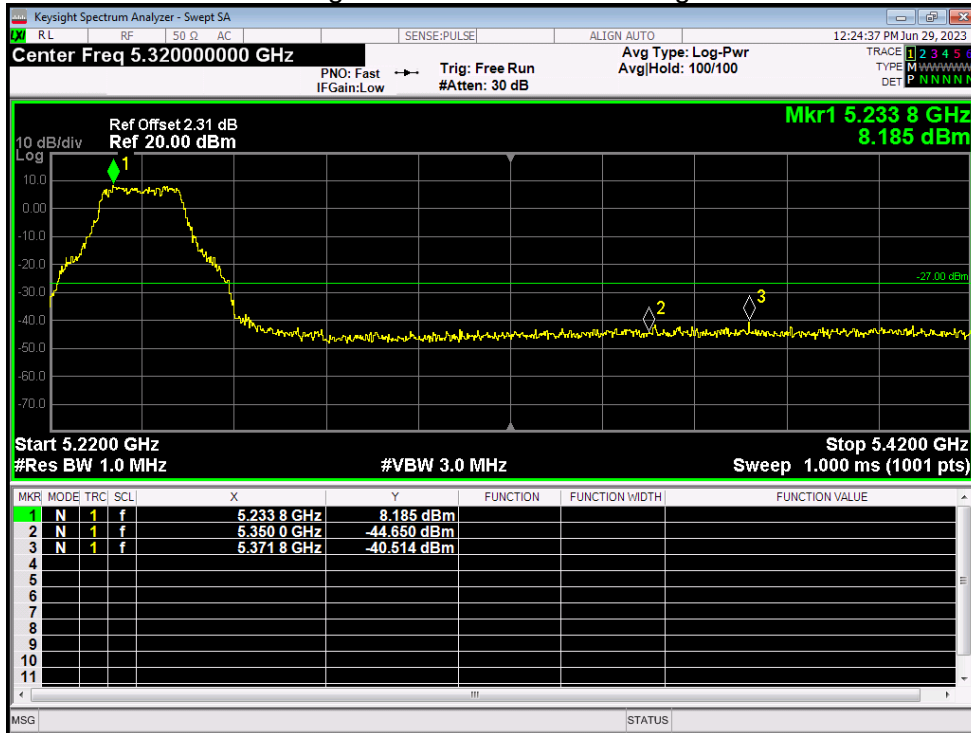

Band Edge NVNT n40 5190MHz Low Ant1

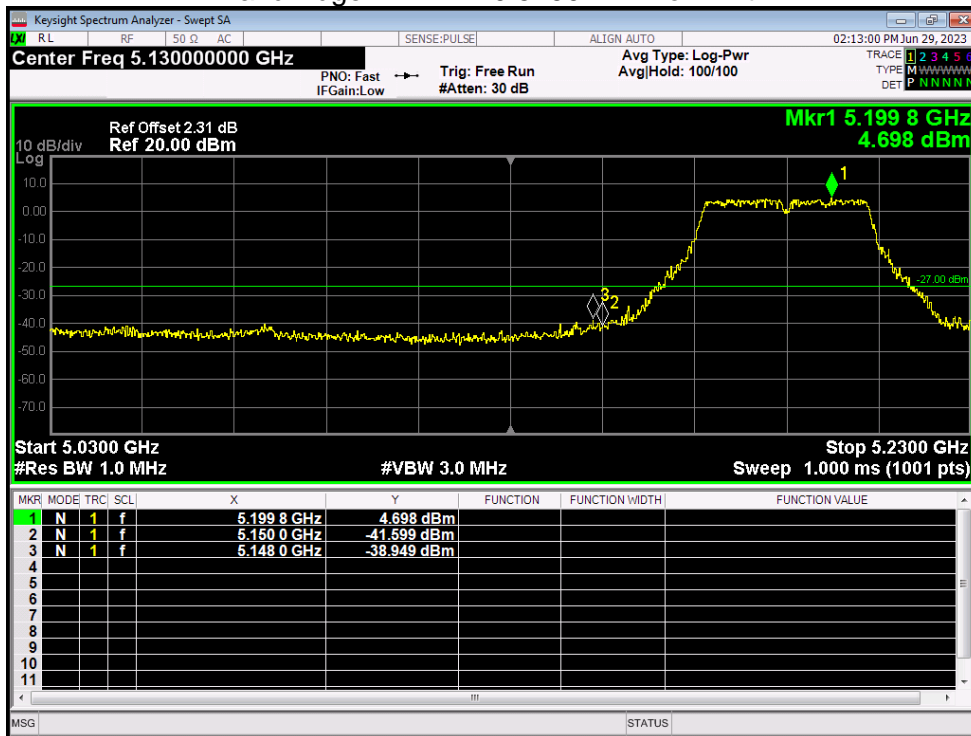


Band Edge NVNT n40 5230MHz High Ant1

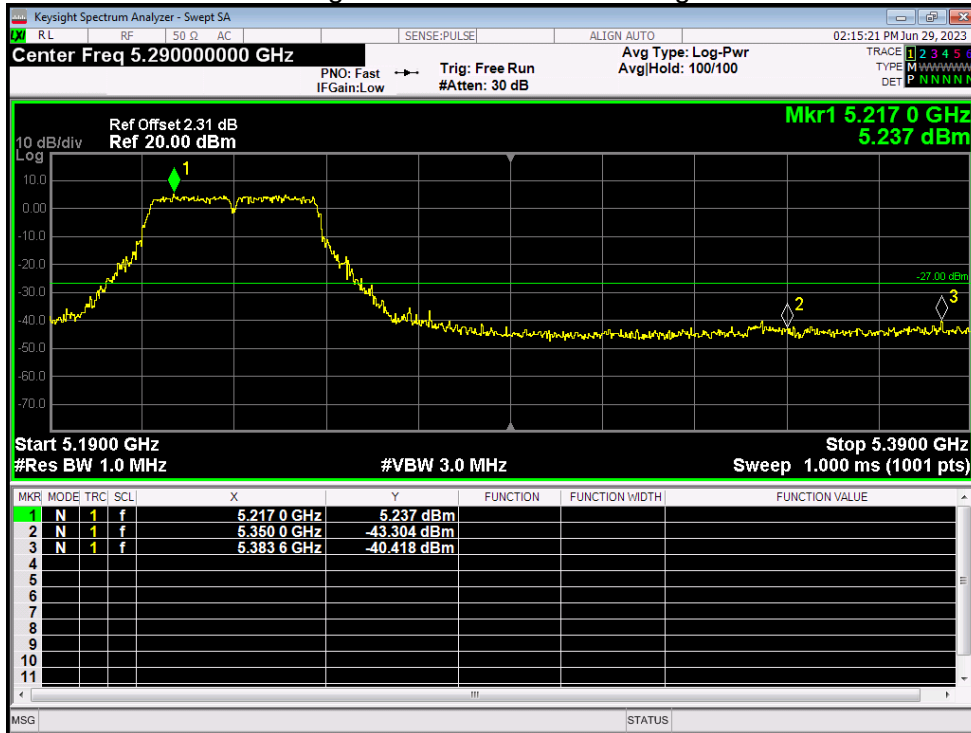


5.7 CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-32.79	-27	Pass
NVNT	a	5200	Ant1	-31.97	-27	Pass
NVNT	a	5240	Ant1	-32.95	-27	Pass
NVNT	ac20	5180	Ant1	-32.68	-27	Pass
NVNT	ac20	5200	Ant1	-32.81	-27	Pass
NVNT	ac20	5240	Ant1	-32.94	-27	Pass
NVNT	ac40	5190	Ant1	-39.12	-27	Pass
NVNT	ac40	5230	Ant1	-39.6	-27	Pass
NVNT	ax20	5180	Ant1	-32.81	-27	Pass
NVNT	ax20	5200	Ant1	-32.83	-27	Pass
NVNT	ax20	5240	Ant1	-32.65	-27	Pass
NVNT	ax40	5190	Ant1	-31.89	-27	Pass
NVNT	ax40	5230	Ant1	-39.52	-27	Pass
NVNT	n20	5180	Ant1	-32.19	-27	Pass
NVNT	n20	5200	Ant1	-32.65	-27	Pass
NVNT	n20	5240	Ant1	-32.27	-27	Pass
NVNT	n40	5190	Ant1	-32.39	-27	Pass
NVNT	n40	5230	Ant1	-32.75	-27	Pass


Tx. Spurious NVNT a 5180MHz Ant1 Emission

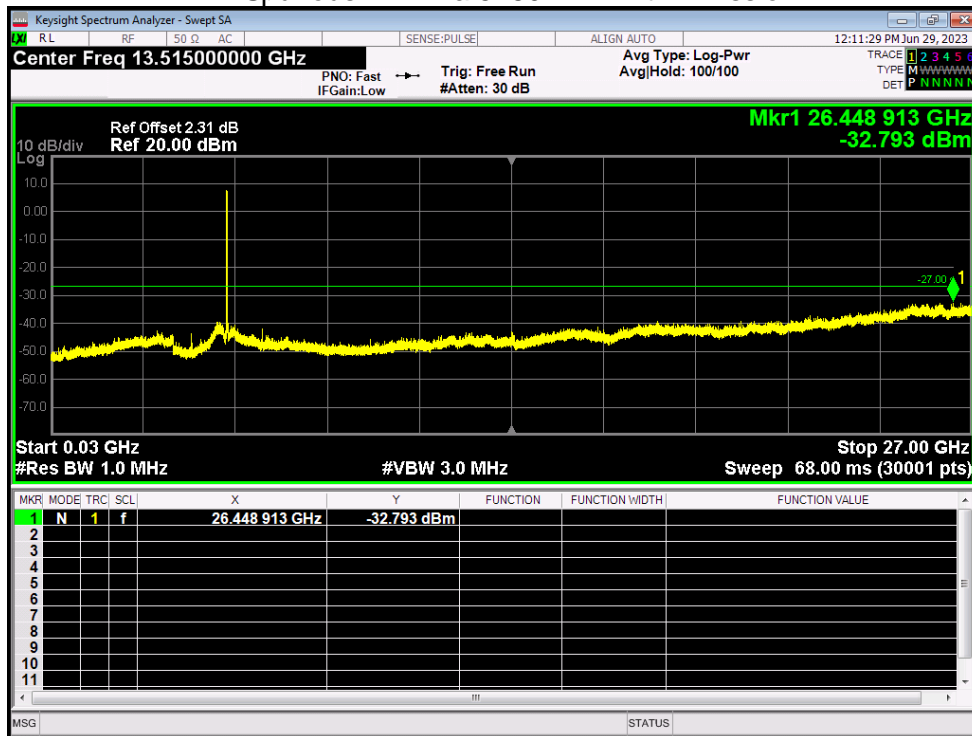


Tx. Spurious NVNT a 5200MHz Ant1 Emission

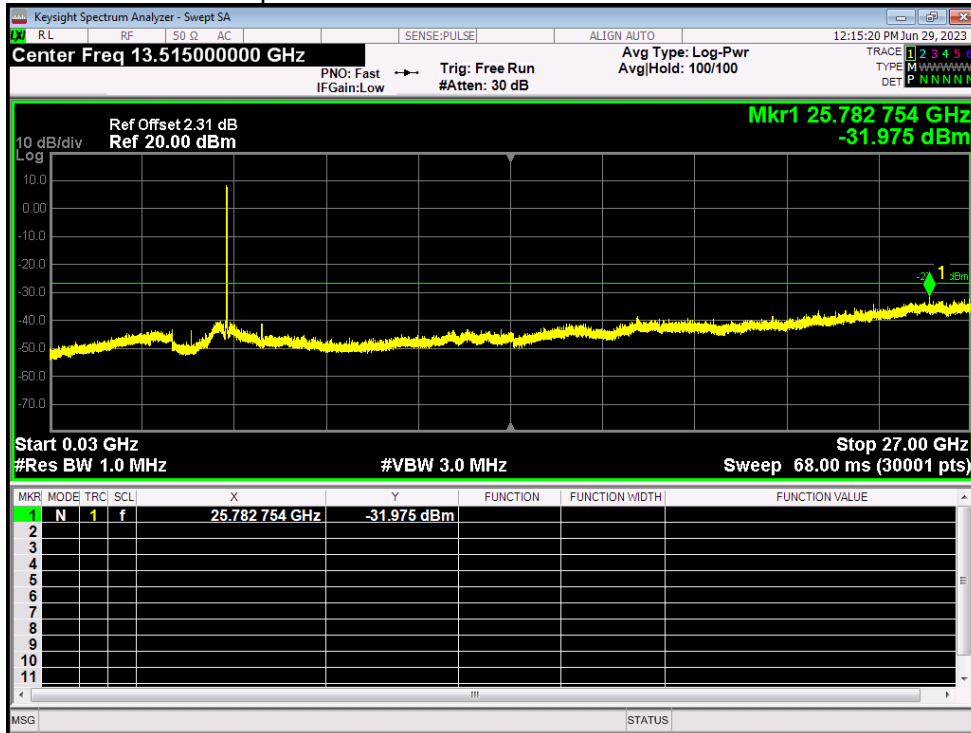


Tx. Spurious NVNT a 5240MHz Ant1 Emission

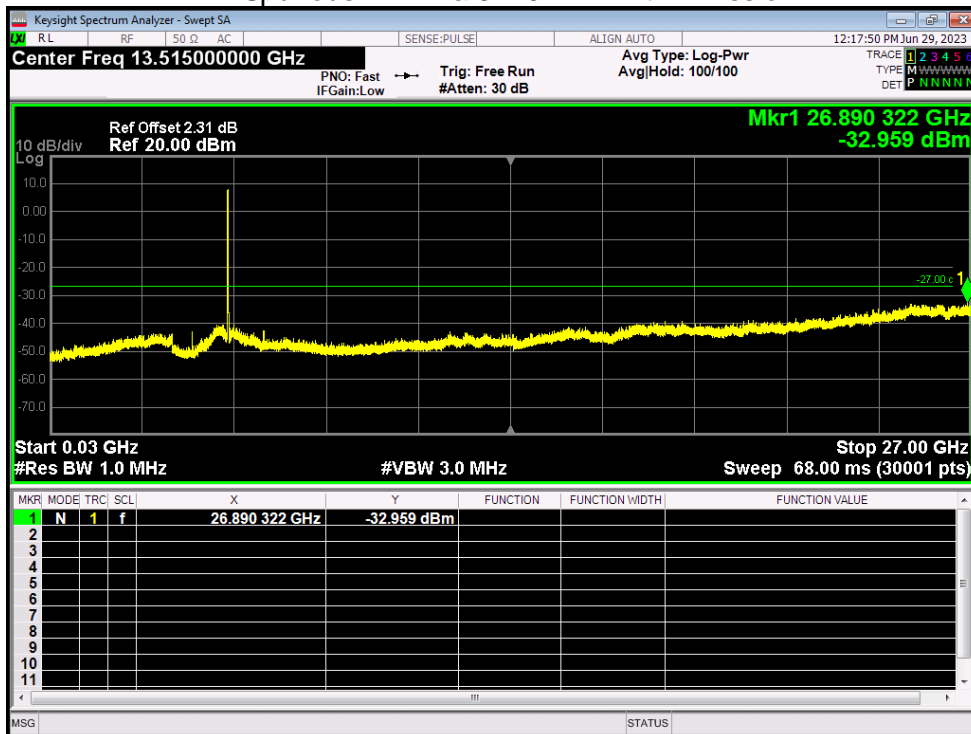


Tx. Spurious NVNT ac20 5180MHz Ant1 Emission

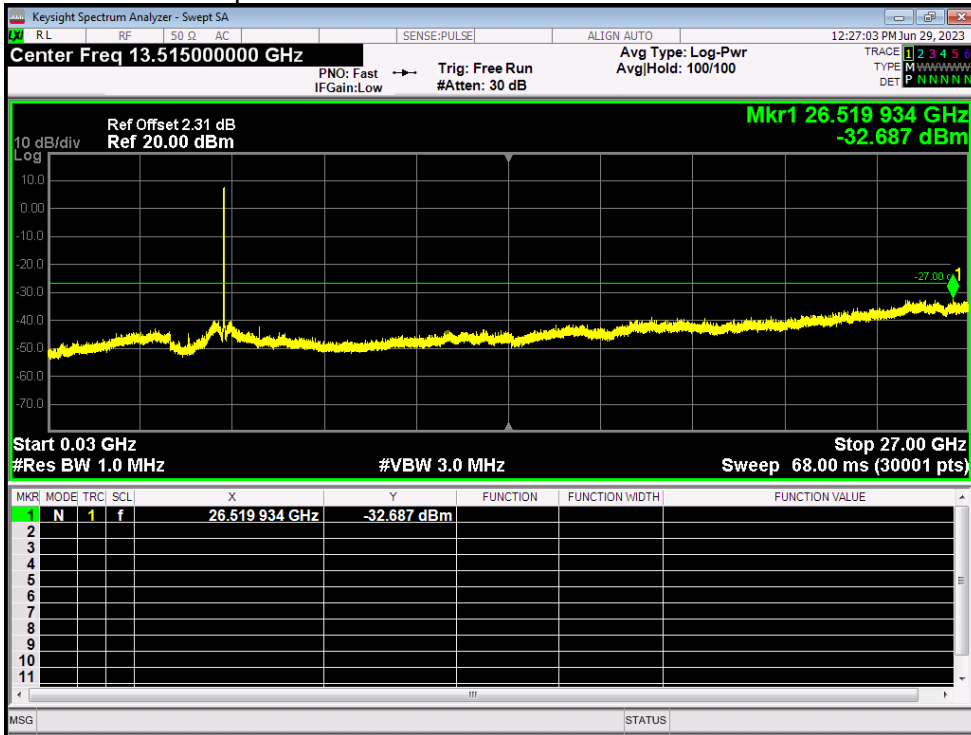


Tx. Spurious NVNT ac20 5200MHz Ant1 Emission

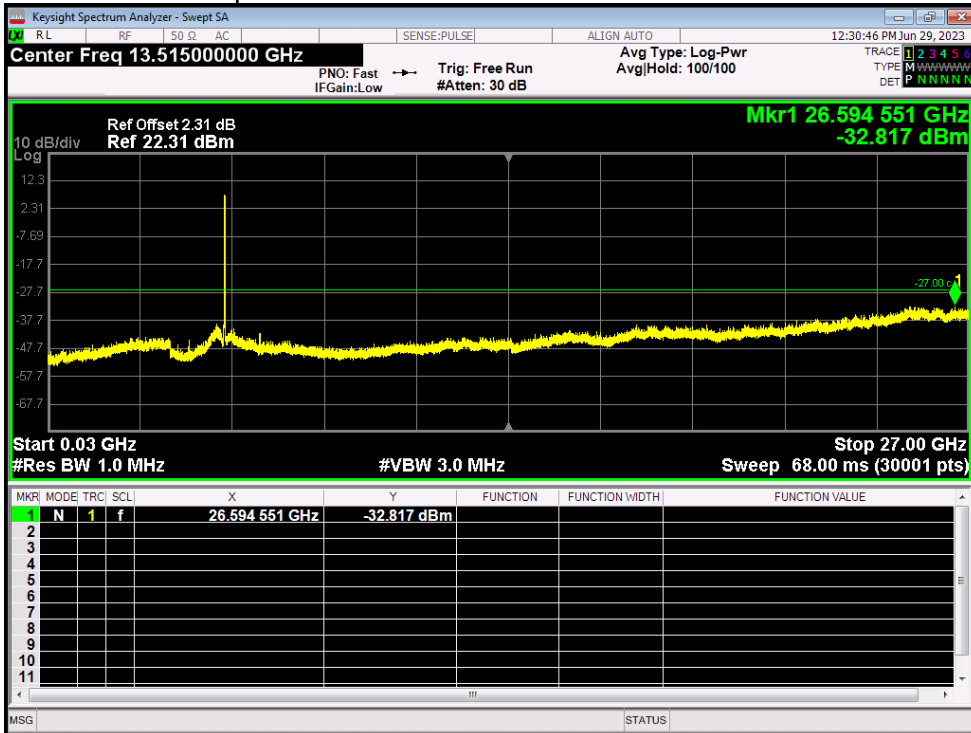


Tx. Spurious NVNT ac20 5240MHz Ant1 Emission

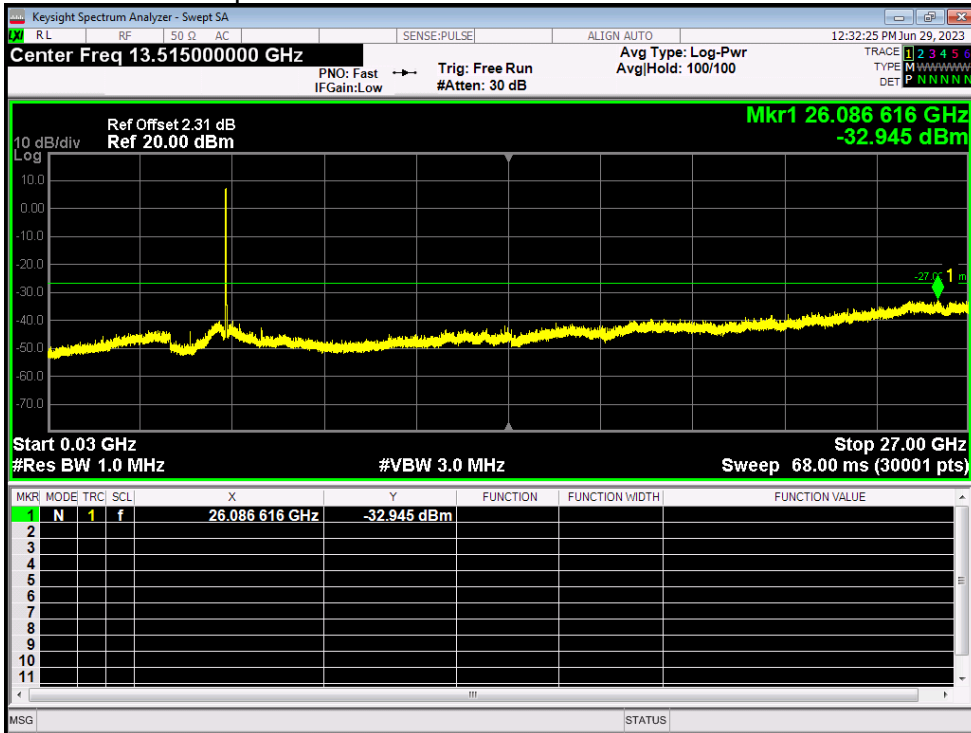


Tx. Spurious NVNT ac40 5190MHz Ant1 Emission

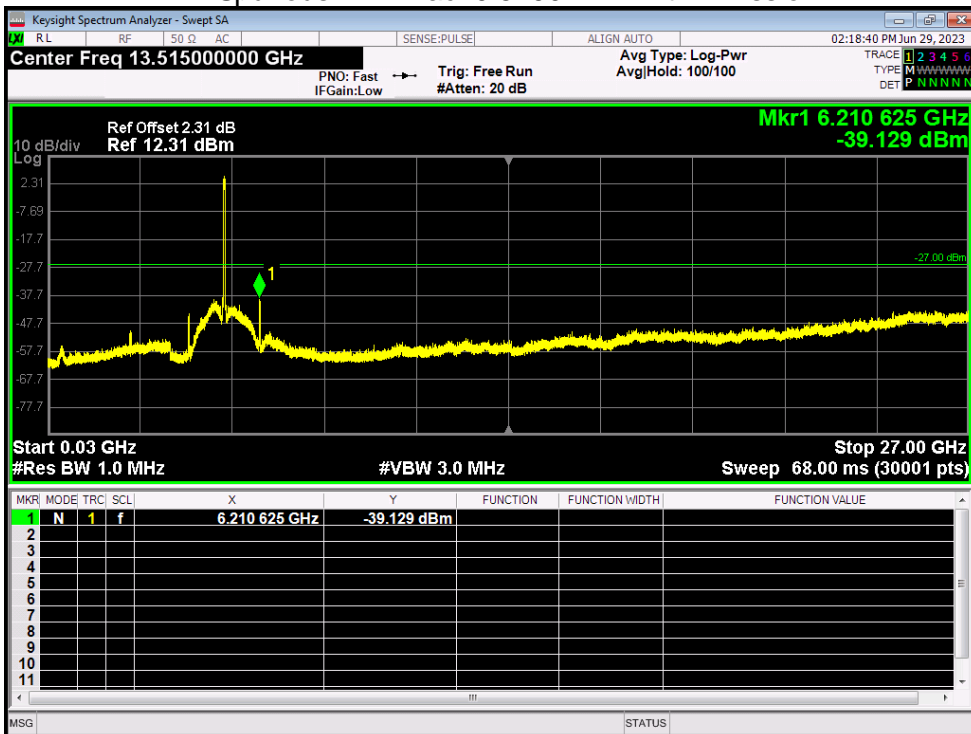


Tx. Spurious NVNT ac40 5230MHz Ant1 Emission

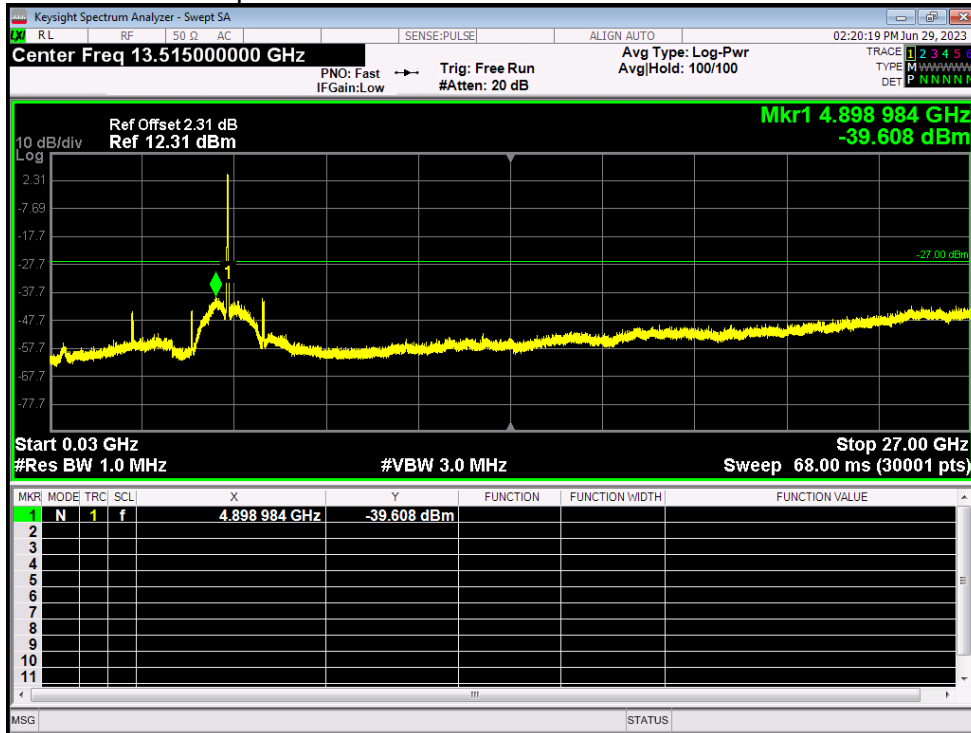


Tx. Spurious NVNT ax20 5180MHz Ant1 Emission

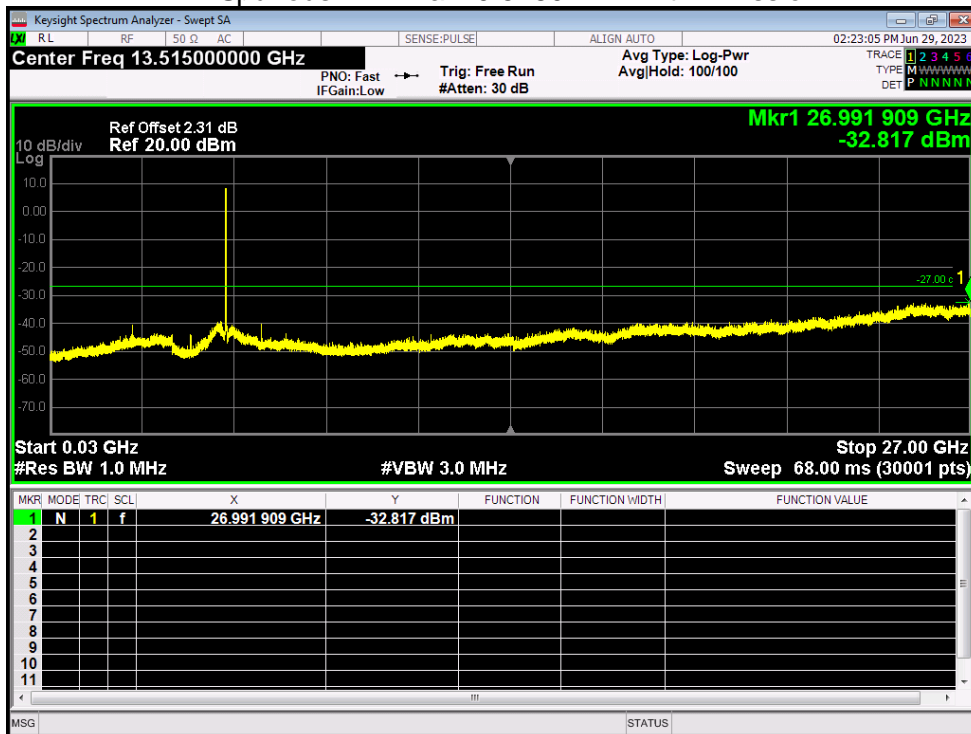


Tx. Spurious NVNT ax20 5200MHz Ant1 Emission

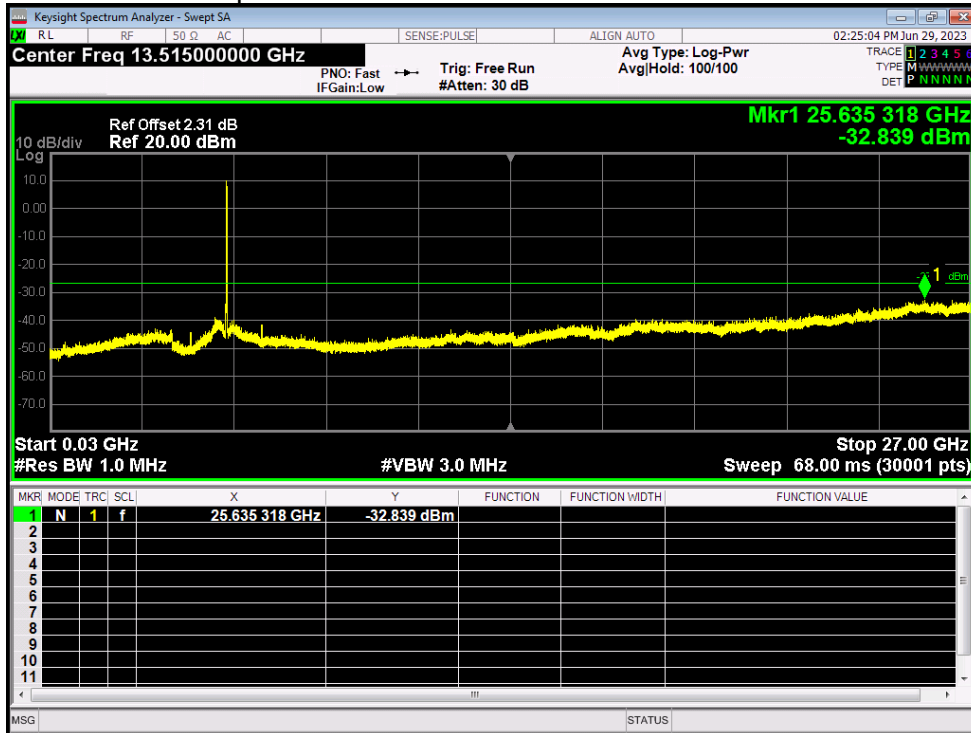


Tx. Spurious NVNT ax20 5240MHz Ant1 Emission

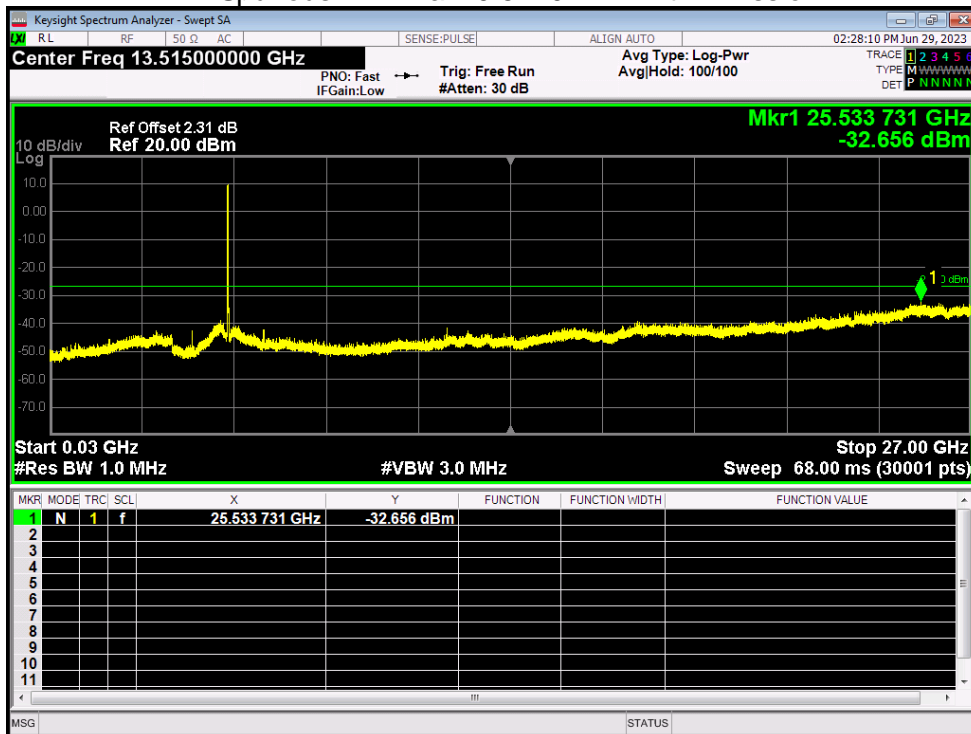


Tx. Spurious NVNT ax40 5190MHz Ant1 Emission

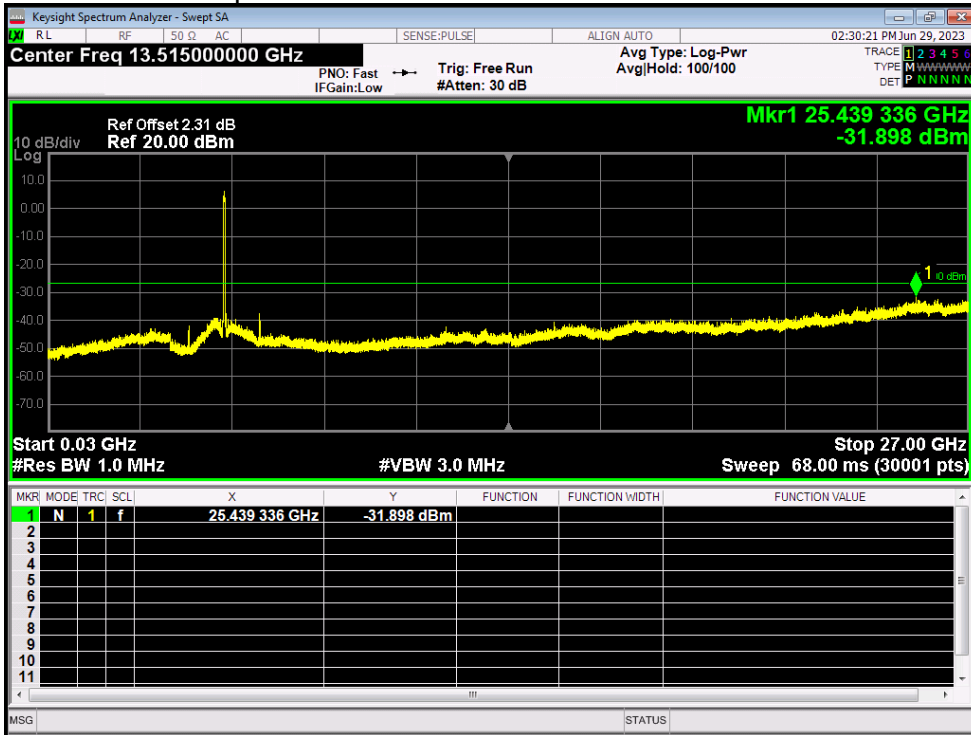


Tx. Spurious NVNT ax40 5230MHz Ant1 Emission

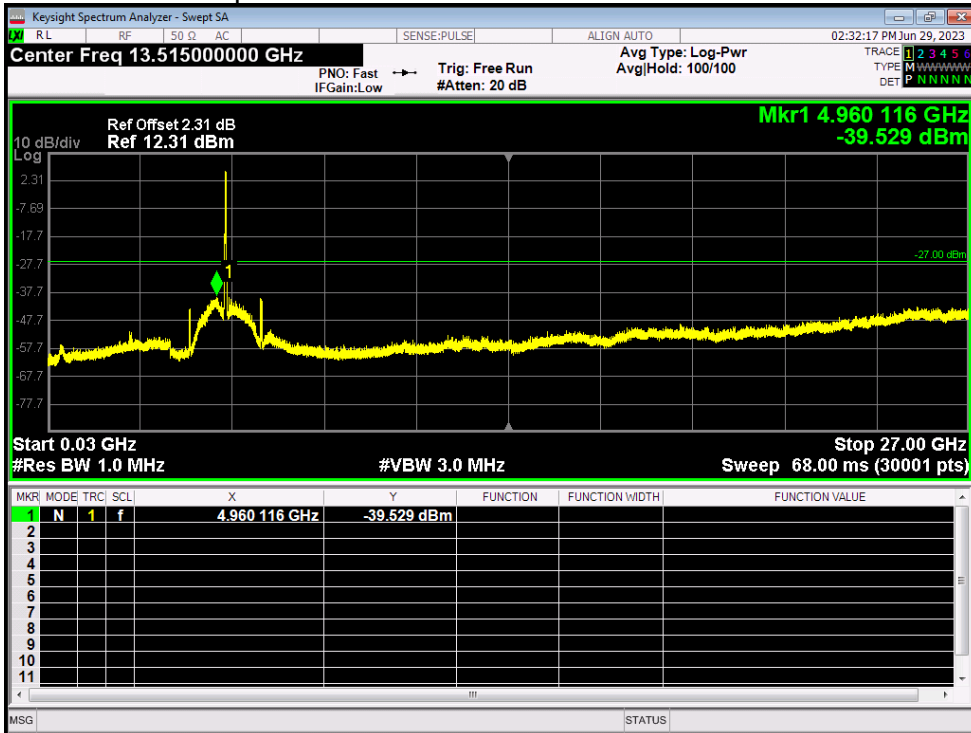


Tx. Spurious NVNT n20 5180MHz Ant1 Emission

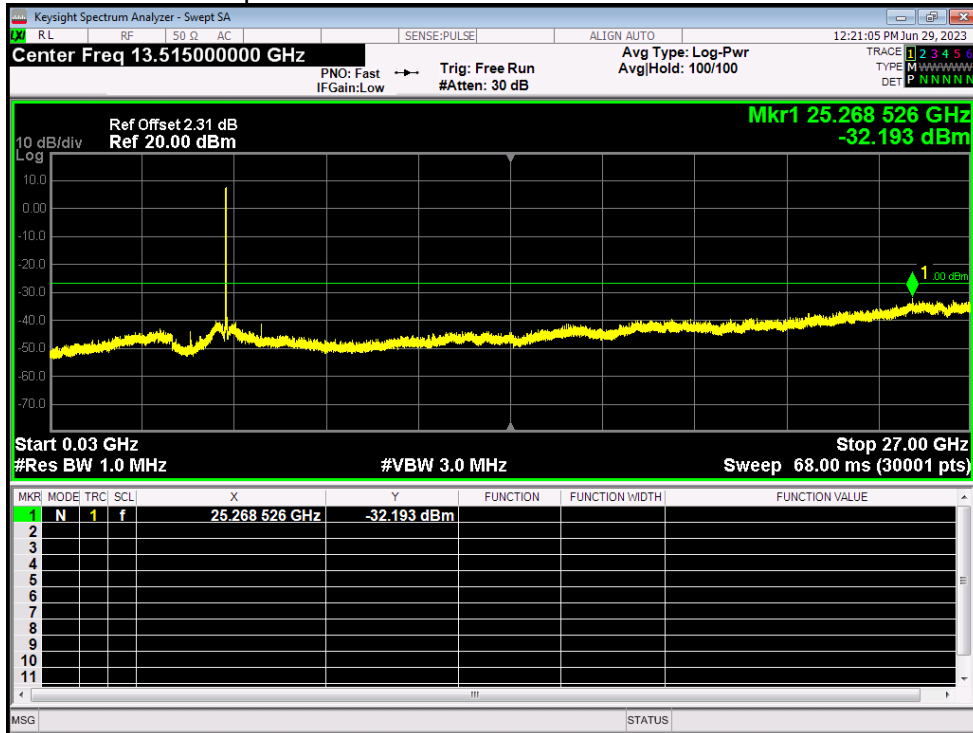


Tx. Spurious NVNT n20 5200MHz Ant1 Emission

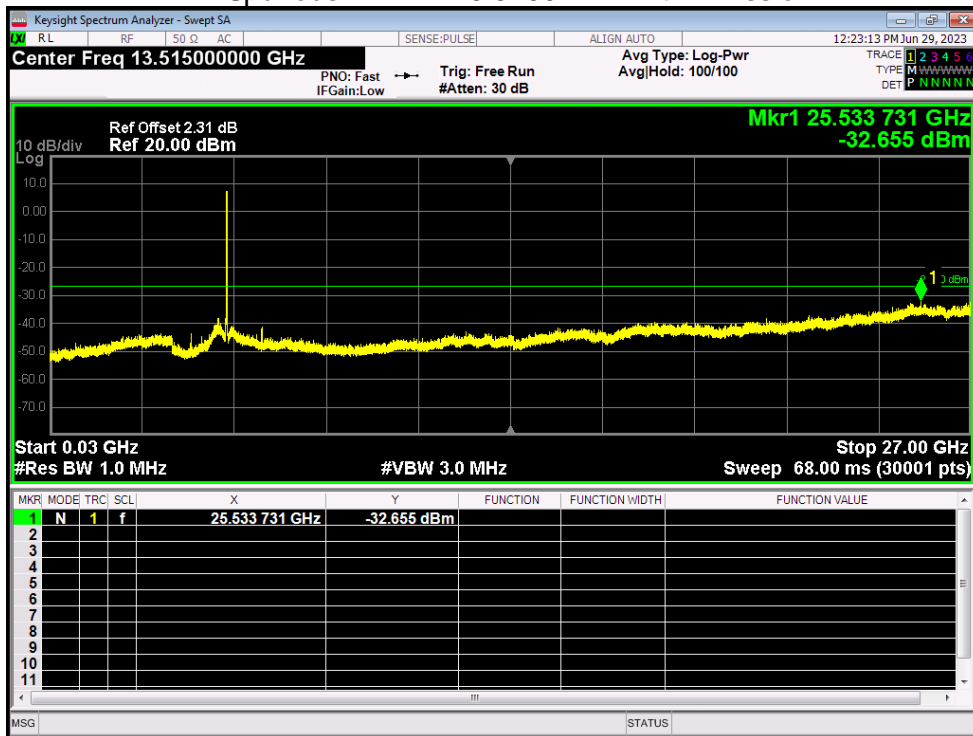

Tx. Spurious NVNT n20 5240MHz Ant1 Emission

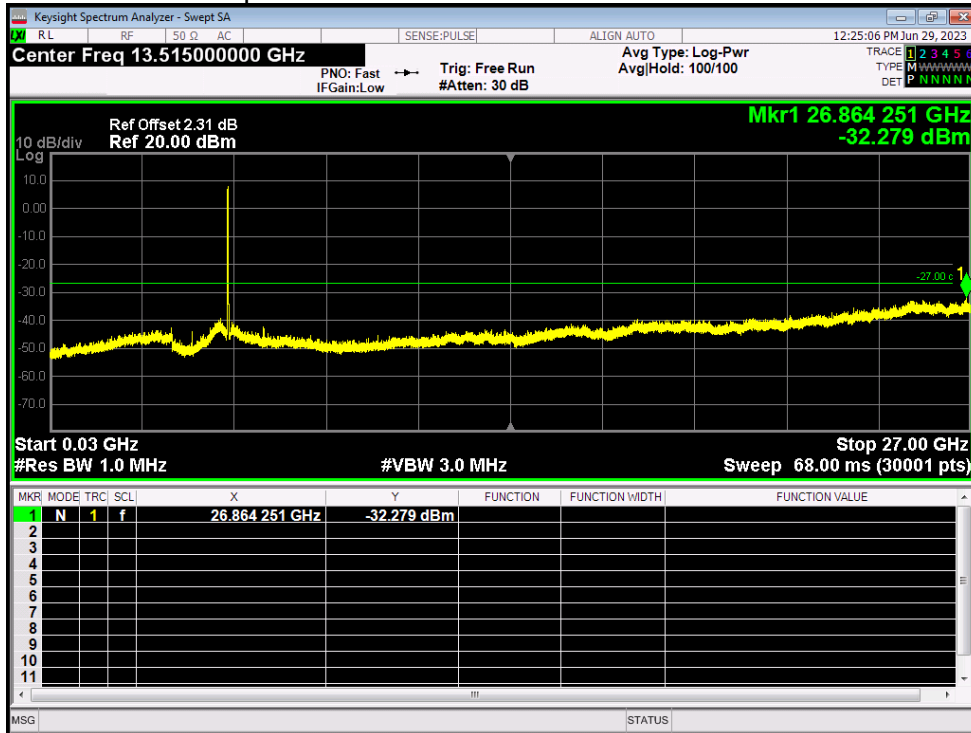

Tx. Spurious NVNT n40 5190MHz Ant1 Emission

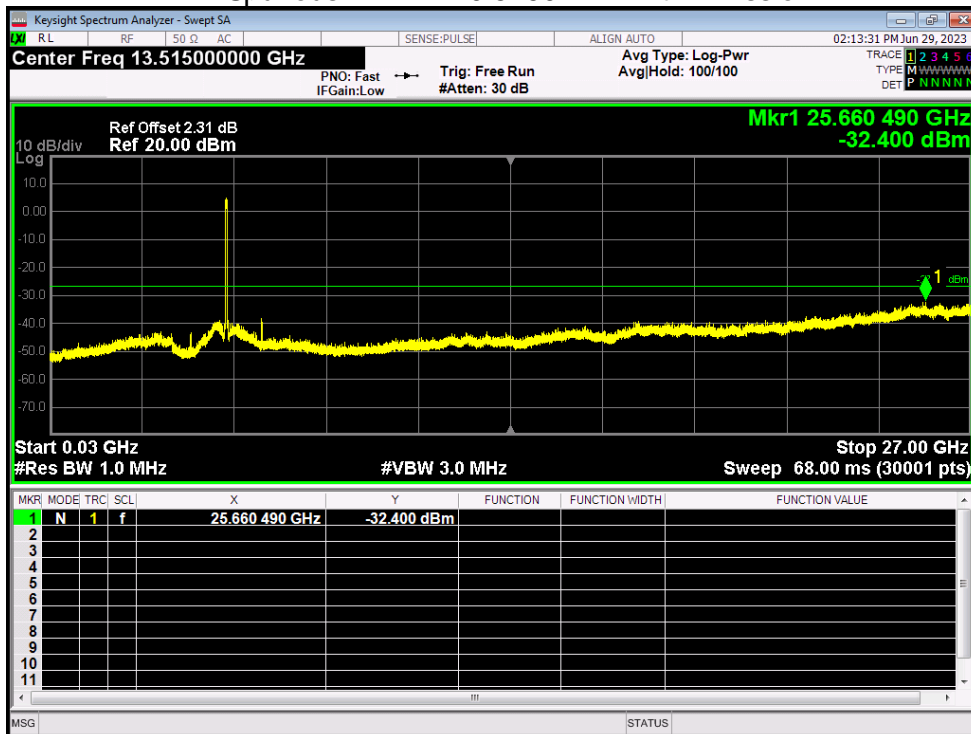

Tx. Spurious NVNT n40 5230MHz Ant1 Emission

