



Report No.: FCC 2005215-01 File reference No.: 2020-06-05

Applicant: SHENZHEN SURE THING INDUSTRY AND COMMERCE

DEVELOPMENT CO.,LTD.

Product: Bluetooth Receiver

Model No.: BTC21-RCA, BTC21A-RCA, BTC21B-RCA, BTC21C-RCA,

BTC21D-RCA, BTC21E-RCA, BTC21F-RCA

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: June 05, 2020

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC2005215-01 Page 2 of 51

Date: 2020-06-05



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 51

Report No.: FCC2005215-01

Date: 2020-06-05



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	4
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
5.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit.	13
7.0	6dB Bandwidth Measurement Bandwidth.	24
8.0	Maximum Peak Output Power.	29
9.0	Power Spectral Density Measurement.	31
10.0	Out of Band Measurement.	36
11.0	Antenna Requirement.	43
12.0	FCC ID Label.	44
13.0	Photo of Test Setup and EUT View.	45

Date: 2020-06-05



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: SHENZHEN SURE THING INDUSTRY AND COMMERCE DEVELOPMENT CO.,LTD.

Address: Building 6,1st Phase of Fu'an Industrial City, 99th Dayang Road, Fuhai Town, Bao'an District,

Shenzhen, China.

Telephone: 86-755-26509966

Fax: 86-755-26617277

1.3 Description of EUT

Product: Bluetooth Receiver

Manufacturer: SHENZHEN SURE THING INDUSTRY AND COMMERCE

DEVELOPMENT CO.,LTD.

Address: Building 6,1st Phase of Fu'an Industrial City, 99th Dayang Road,Fuhai

Town, Bao'an District, Shenzhen, China.

Brand Name: N/A
Additional Brand Name: N/A

Model Number: BTC21-RCA

Additional Model Number: BTC21A-RCA, BTC21B-RCA, BTC21C-RCA, BTC21D-RCA, BTC21E-RCA,

BTC21F-RCA

Type of Modulation GFSK (Bluetooth BLE)

Frequency range 2402-2480MHz Frequency Selection By software

Channel Number 40

Rating: DC5V from USB port

1.4 Submitted Sample: 1 Samples

1.5 Test Duration

2020-05-22 to 2020-06-05

1.6 Test Uncertainty

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC2005215-01 Page 5 of 51

Date: 2020-06-05



Conducted Emissions Uncertainty =3.6dB
Radiated Emissions below 1GHz Uncertainty =4.7dB
Radiated Emissions above 1GHz Uncertainty =6.0dB
Conducted Power Uncertainty =6.0dB
Occupied Channel Bandwidth Uncertainty =5%

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Page 6 of 51

Report No.: FCC2005215-01

Date: 2020-06-05



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver R&S		ESPI 3	100379	2019-06-21	2020-06-20
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2019-06-21	2020-06-20
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2019-06-21	2020-06-20
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2019-06-21	2020-06-20
Loop Antenna	EMCO	6507	00078608	2020-06-20	2020-06-20
Spectrum	R&S	FSIQ26	100292	2019-06-21	2020-06-20
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2019-06-21	2020-06-20
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2019-08-22	2020-08-21
Power sensor	Anritsu	MA2491A	32263	2019-08-22	2020-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2019-06-21	2020-06-20
EMI Test Receiver	RS	ESH3	860904/006	2019-06-21	2020-06-20
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2019-06-21	2020-06-20
Spectrum	HP/Agilent	E4407B	MY50441392	2019-06-21	2020-06-20
Spectrum	RS	FSP	1164.4391.38	2020-01-16	2021-01-15
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2019-06-21	2020-06-20
RF Cable	Zhengdi	7m		2019-06-21	2020-06-20
RF Switch	EM	EMSW18	060391	2019-06-21	2020-06-20
Pre-Amplifier	Schwarebeck	BBV9743	#218	2019-06-21	2020-06-20
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2019-06-21	2020-06-20
LISN	SCHAFFNER	NNB42	00012	2020-01-07	2021-01-06

Report No.: FCC2005215-01

Date: 2020-06-05



3.0 **Technical Details**

3.1 **Summary of test results**

Standard	Test Type	Result	Notes
CC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

EUT Modification 4.0

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Report No.: FCC2005215-01

Date: 2020-06-05



5.Power Line Conducted Emission Test

5.1 Schematics of the test

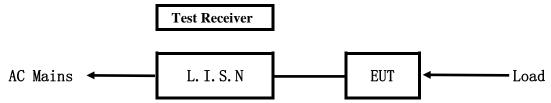


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15 MHz to 30MHz was investigated. The LISN used was 500hm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

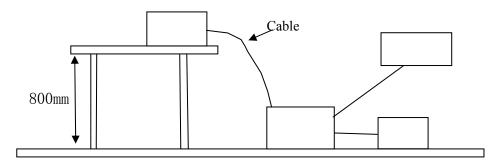

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Bluetooth Receiver	SHENZHEN SURE THING INDUSTRY AND COMMERCE DEVELOPMENT CO.,LTD.	BTC21-RCA, BTC21A-RCA, BTC21B-RCA, BTC21C-RCA, BTC21D-RCA, BTC21E-RCA, BTC21F-RCA	2ABFFBTC2 1RCA

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC2005215-01 Page 9 of 51

Date: 2020-06-05



B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	MerryKing	MKS-0501500	Input: 100-240V~ 50/60Hz, 0.3A;
			Output: DC5V, 1500mA

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No.: FCC2005215-01

Date: 2020-06-05



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

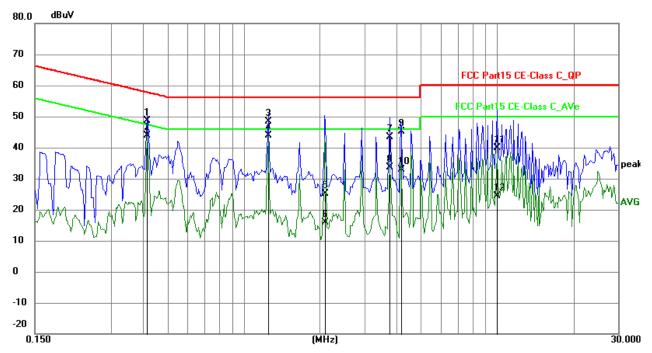

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.4152	38.88	9.76	48.64	57.54	-8.90	QP	Р
2	0.4152	34.23	9.76	43.99	47.54	-3.55	AVG	Р
3	1.2498	38.62	9.79	48.41	56.00	-7.59	QP	Р
4	1.2498	34.03	9.79	43.82	46.00	-2.18	AVG	Р
5	2.0961	15.33	9.80	25.13	56.00	-30.87	QP	Р
6	2.0961	5.96	9.80	15.76	46.00	-30.24	AVG	Р
7	3.7605	33.41	9.88	43.29	56.00	-12.71	QP	Р
8	3.7605	23.80	9.88	33.68	46.00	-12.32	AVG	Р
9	4.1700	35.35	9.89	45.24	56.00	-10.76	QP	Р
10	4.1700	23.02	9.89	32.91	46.00	-13.09	AVG	Р
11	9.9966	29.77	10.16	39.93	60.00	-20.07	QP	Р
12	9.9966	14.28	10.16	24.44	50.00	-25.56	AVG	Р



Date: 2020-06-05



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

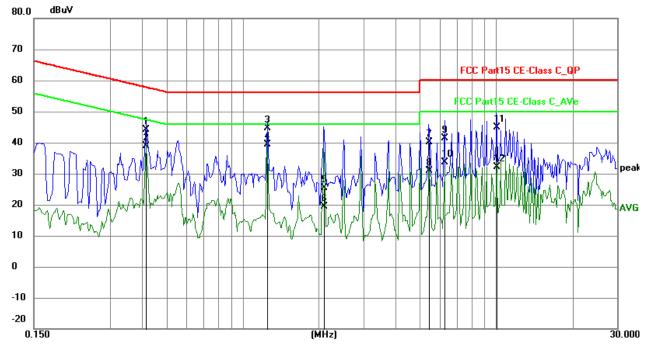

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.4152	34.41	9.76	44.17	57.54	-13.37	QP	Р
2	0.4152	29.00	9.76	38.76	47.54	-8.78	AVG	Р
3	1.2536	34.89	9.79	44.68	56.00	-11.32	QP	Р
4	1.2536	29.67	9.79	39.46	46.00	-6.54	AVG	Р
5	2.0961	15.64	9.80	25.44	56.00	-30.56	QP	Р
6	2.0961	9.68	9.80	19.48	46.00	-26.52	AVG	Р
7	5.4336	30.28	9.95	40.23	60.00	-19.77	QP	Р
8	5.4336	20.87	9.95	30.82	50.00	-19.18	AVG	Р
9	6.2643	31.38	9.98	41.36	60.00	-18.64	QP	Р
10	6.2643	23.73	9.98	33.71	50.00	-16.29	AVG	Р
11	10.0239	34.66	10.16	44.82	60.00	-15.18	QP	Р
12	10.0239	21.87	10.16	32.03	50.00	-17.97	AVG	Р

Report No.: FCC2005215-01 Page 12 of 51


Date: 2020-06-05



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No.744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

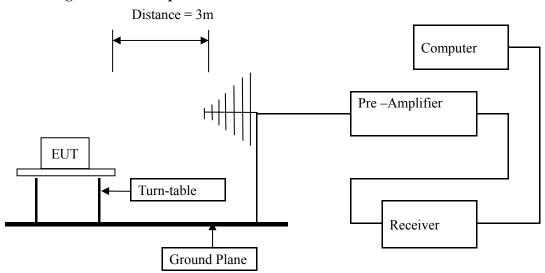

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC2005215-01 Page 13 of 51

Date: 2020-06-05



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Report No.: FCC2005215-01

Date: 2020-06-05



Test result General Radiated Emission Data and Harmonics Radiated Emission Data


Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Test Figure:

FCC_FCC Part 15C Class B 30MHz-1GHz

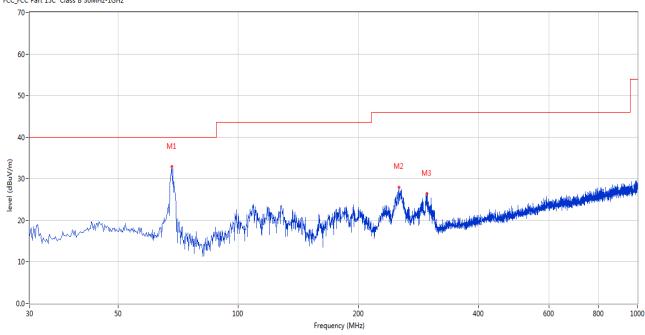

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	68.063	32.85	-14.68	40.0	-7.15	Peak	290.00	100	Н	Pass
2	252.559	27.99	-12.11	46.0	-18.01	Peak	36.00	100	Н	Pass
3	296.441	26.40	-11.05	46.0	-19.60	Peak	207.00	100	Н	Pass

Page 15 of 51

Report No.: FCC2005215-01

Date: 2020-06-05



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data


Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: **Keep Transmitting**

Results: Pass

Test Figure:

FCC_FCC Part 15C Class B 30MHz-1GHz

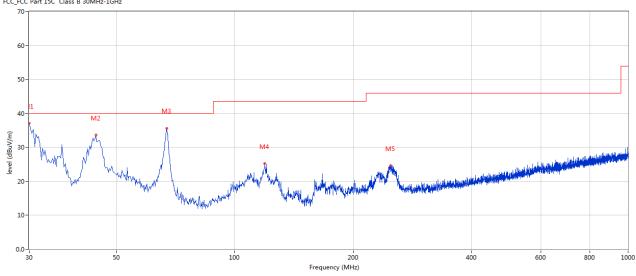

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	30.000	37.09	-14.19	40.0	-2.91	Peak	75.00	100	٧	Pass
2	44.304	33.61	-11.46	40.0	-6.39	Peak	241.00	100	٧	Pass
3	67.093	35.64	-14.32	40.0	-4.36	Peak	360.00	200	٧	Pass
4	119.218	25.20	-15.13	43.5	-18.30	Peak	360.00	200	٧	Pass
5	249.165	24.61	-12.17	46.0	-21.39	Peak	298.00	200	٧	Pass

Report No.: FCC2005215-01

Date: 2020-06-05



Operation Mode: Transmitting under Low Channel (2402MHz)

	0	, ,	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
4804		H/V	74(Peak)/ 54(AV)
7206		H/V	74(P ak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2440MHz)

	8.8	,	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4880		H/V	74(Peak)/ 54(AV)
7320		H/V	74(Peak)/ 54(AV)
9760		H/V	74(Peak)/ 54(AV)
12200		H/V	74(Peak)/ 54(AV)
14640		H/V	74(Peak)/ 54(AV)
17080		H/V	74(Peak)/ 54(AV)
19520		H/V	74(Peak)/ 54(AV)
21960		H/V	74(Peak)/ 54(AV)
24400		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Page 17 of 51 Report No.: FCC2005215-01

Date: 2020-06-05



Operation Mode: Transmitting under High Channel (2480MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4960	ı	H/V	74(Peak)/ 54(AV)
7440	-	H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360	1	H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

^{2.} Remark "---" means that the emissions level is too low to be measured

Page 18 of 51

Report No.: FCC2005215-01


Date: 2020-06-05



Please refer to the following test plots for details:

Low Channel: Vertical

FCC_FCC Part 15B Class B 1GHz-18GHz - 2

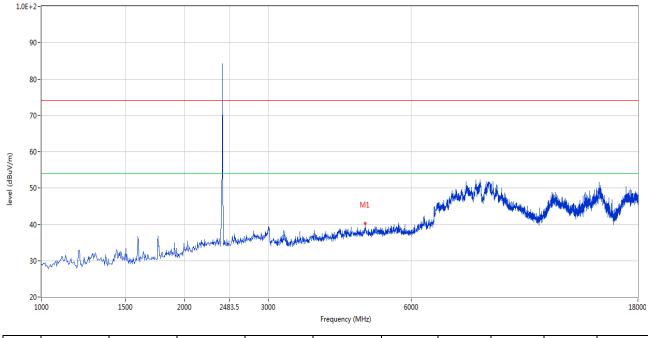


	No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
		(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
-	1	4802.799	40.33	3.12	54.0	-13.67	Peak	3.00	100	V	Pass

Page 19 of 51 Report No.: FCC2005215-01

Date: 2020-06-05



Low Channel: Horizontal

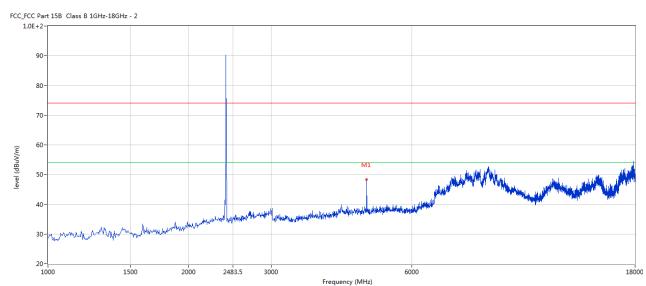


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4802.799	48.37	3.12	54.0	-5.63	Peak	240.00	100	Н	Pass

Report No.: FCC2005215-01 Page 20 of 51

Date: 2020-06-05



Middle Channel: Vertical

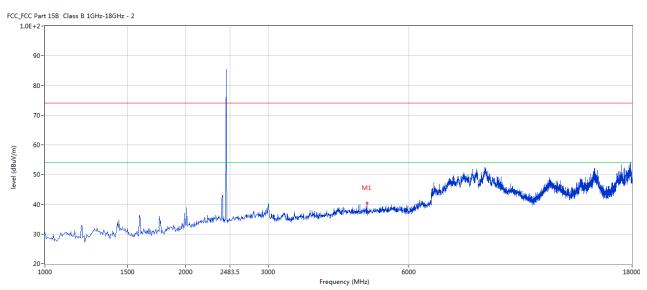


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4879.280	40.51	3.20	54.0	-13.49	Peak	360.00	100	V	Pass

Report No.: FCC2005215-01 Page 21 of 51

Date: 2020-06-05



Middle Channel: Horizontal

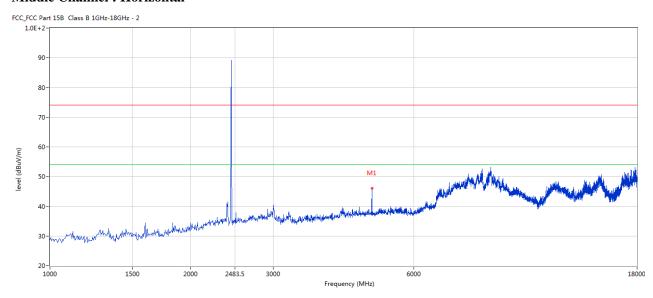


No	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4879.280	46.18	3.20	54.0	-7.82	Peak	237.00	100	Н	Pass

Report No.: FCC2005215-01 Page 22 of 51

Date: 2020-06-05



High Channel: Vertical

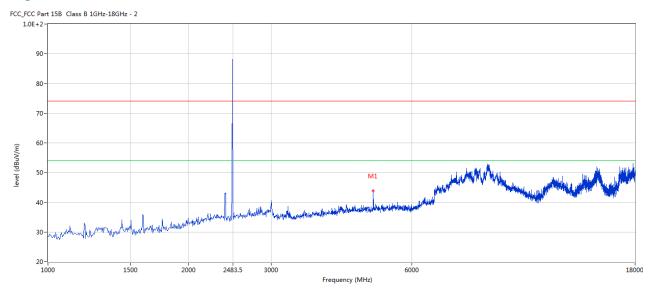

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4960.010	43.91	3.36	54.0	-10.09	Peak	360.00	100	٧	Pass


Page 23 of 51

Report No.: FCC2005215-01

Date: 2020-06-05



High Channel: Horizontal

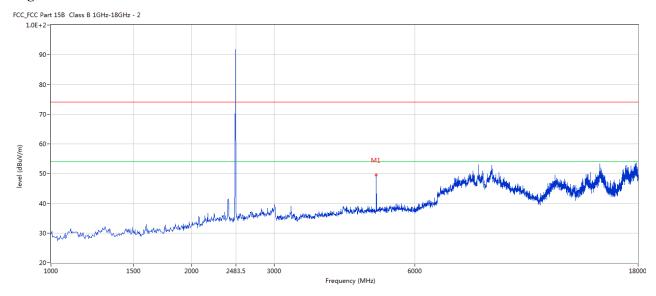

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4960.010	50.57	3.36	54.0	-3.43	Peak	240.00	100	Н	Pass

Note: 1. for the radiated emissions above 18G and below 30MHz, it is the floor noise.

2. the measured PK radiated emissions level less than the AV limit, so no necessary to take down the AV result

Page 24 of 51


Report No.: FCC2005215-01

Date: 2020-06-05



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Page 25 of 51 Report No.: FCC2005215-01

Date: 2020-06-05



6dB BW

Jub D II						
EUT	Bluetooth	Receiver	Model		B	TC21-RCA
Mode	Keep Trar	smitting	Input Voltag	e		DC5V
Temperature 24 deg		g. C, Humidity				56% RH
Channel	Channel Frequency (MHz)		6 dB Bandwidth (kHz)		inimum Limit (kHz)	Pass/ Fail
Low	2402	7	39		0.5	Pass
Middle	2440	7	733		0.5	Pass
High	2480		39		0.5	Pass

Page 26 of 51


Report No.: FCC2005215-01

Date: 2020-06-05



Test Figure:

1. Condition: Low Channel

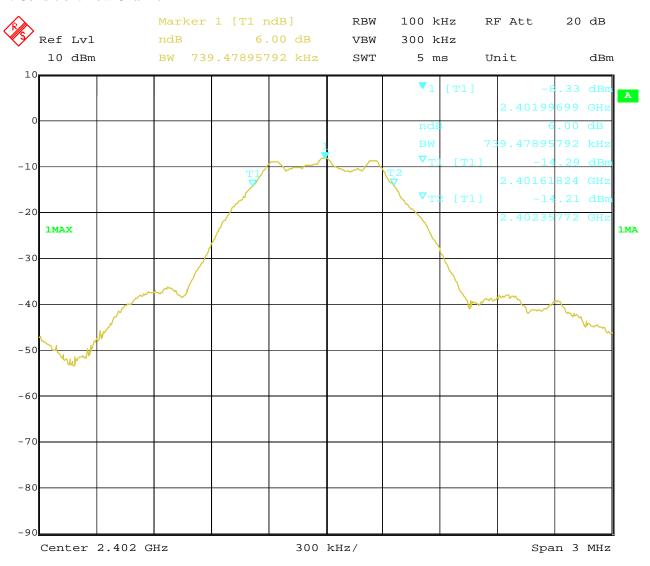

4.JUN.2020

17:13:06


Date:

Report No.: FCC2005215-01 Page 27 of 51

Date: 2020-06-05



2. Condition: Middle Channel

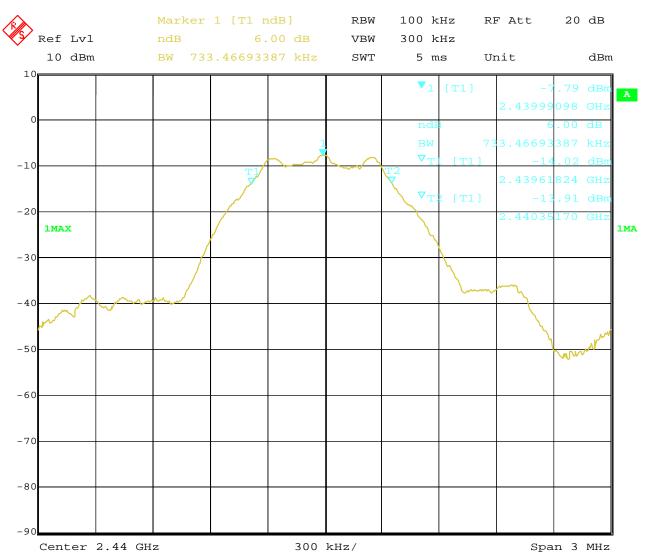


Date: 4.JUN.2020 17:13:52

Report No.: FCC2005215-01 Page 28 of 51

Date: 2020-06-05



3. High Channel

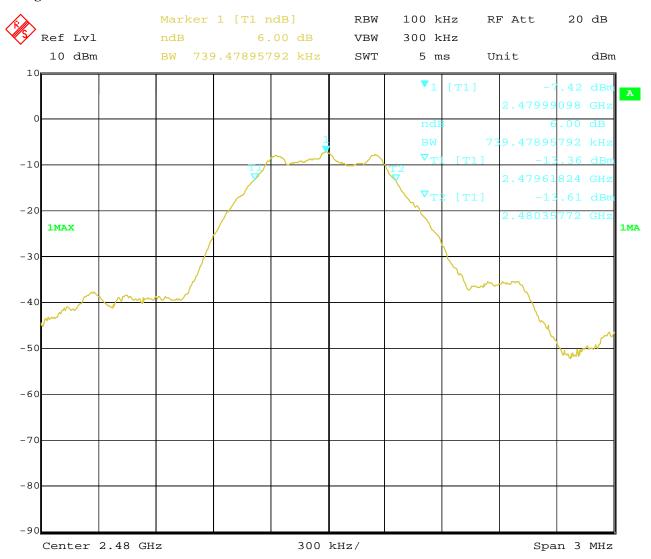

Date: 4.JUN.2020 17:15:35


Report No.: FCC2005215-01 Page 29 of 51

Date: 2020-06-05



8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power were measured.

Report No.: FCC2005215-01 Page 30 of 51

Date: 2020-06-05



8.4Test Results

EUT		Bluetooth Re	ceiver	Model		BTC21-R	CA
Mode		Keep Transm	nitting	Input Voltage		DC5V	
Temperatu	Temperature 2		C, Humidity			56% RH	
Channel		nannel Frequency	Max	Max. Power Output (dBm)			Pass/ Fail
Chamer		(MHz)		Peak			
Low		2402		-7.59		30	Pass
Middle		2440		-7.12		30	Pass
High		2480	2480			30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator


Report No.: FCC2005215-01 Page 31 of 51

Date: 2020-06-05



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Report No.: FCC2005215-01 Page 32 of 51

Date: 2020-06-05



9.4Test Result

EUT		Blueto	ooth Receiver	r	Model	ВТС	21-RCA
Mode		Keep	Transmitting		Input Voltage	D	C5V
Temperat	ure	24	4 deg. C,		Humidity	56	% RH
Channel	Peak Po Channel Readir (dBm		Cable Loss (dB)	F	inal Power Spectral Density (dBm)	Maximum Limit (dBm)	Pass/ Fail
Low	-1	5.09	0.2		-14.89	8	Pass
Middle	-1	4.16	0.2		-13.96	8	Pass
High	-1	3.77	0.2		-13.57	8	Pass

Note: The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss

Page 33 of 51


Report No.: FCC2005215-01

Date: 2020-06-05



Test Figure:

1. Condition: Low Channel

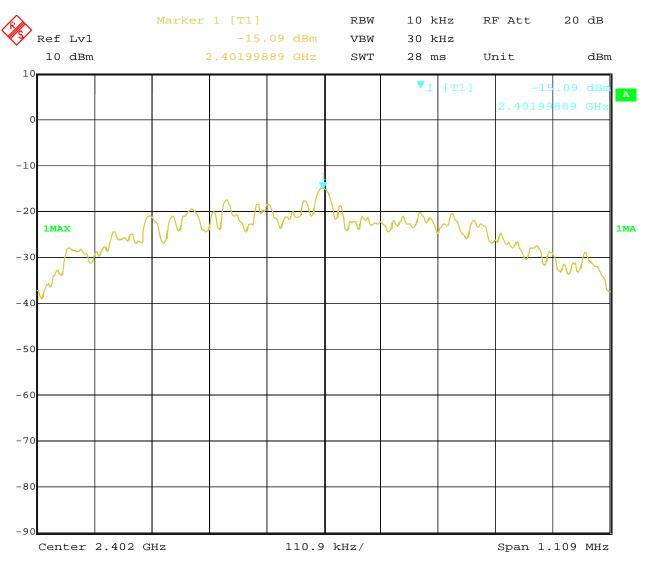

Date: 4.JUN.2020 17:22:01


Page 34 of 51

Report No.: FCC2005215-01

Date: 2020-06-05



2. Condition: Middle Channel

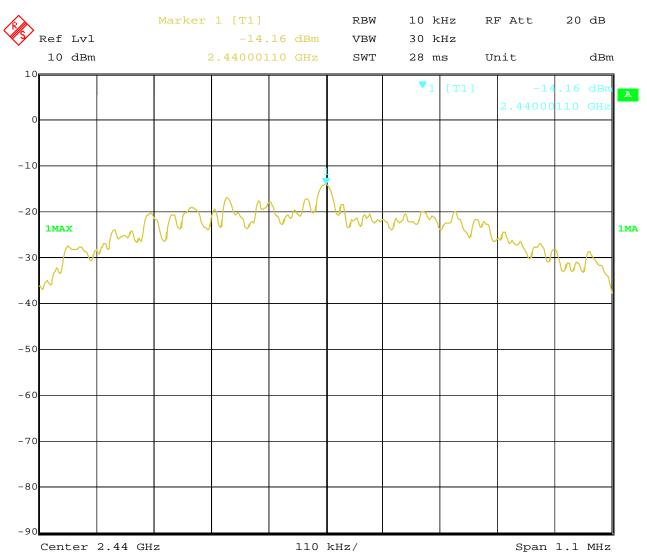


Date: 4.JUN.2020 17:25:19

Report No.: FCC2005215-01 Page 35 of 51

Date: 2020-06-05



3. High Channel

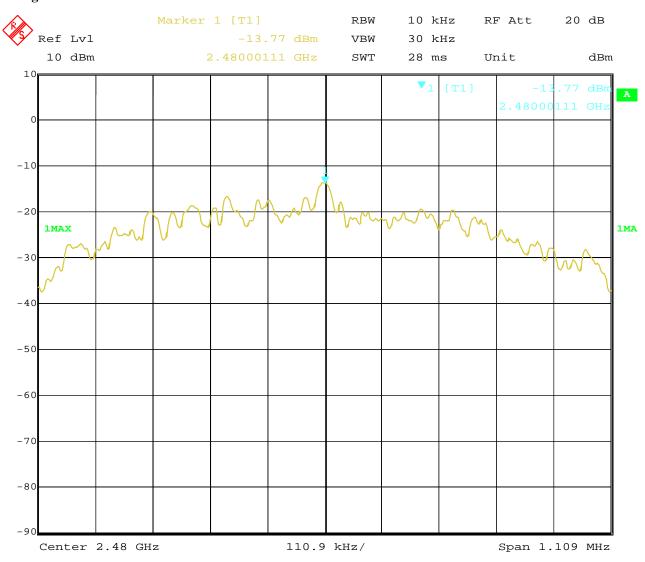

Date: 4.JUN.2020 17:26:52


Page 36 of 51

Report No.: FCC2005215-01

Date: 2020-06-05



10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of Radiated emission test. (Peak values with RBW=1MHz, VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Report No.: FCC2005215-01 Page 37 of 51


Date: 2020-06-05



10.4 Band-edge Measurement

EUT	Bluetooth Receiver	Model	BTC21-RCA
Mode	Keep Transmitting	Input Voltage	DC5V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

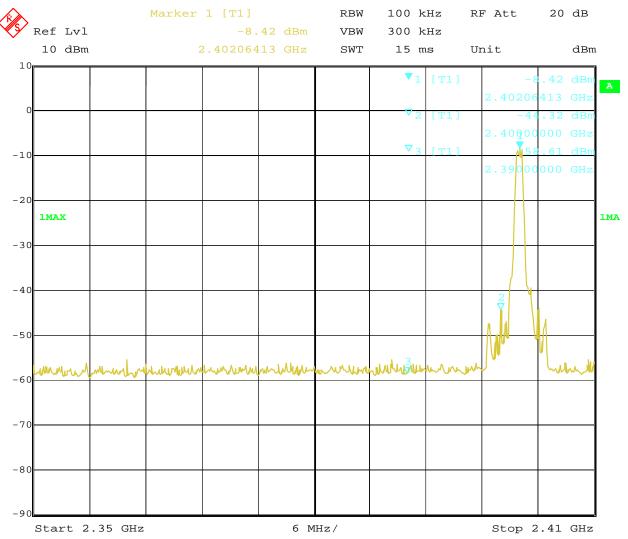

Date: 4.JUN.2020 17:29:56

Page 38 of 51

Report No.: FCC2005215-01


Date: 2020-06-05



10.4 Band-edge Measurement

EUT	Bluetooth Receiver	Model	BTC21-RCA
Mode	Keeping Transmitting	Input Voltage	DC5V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

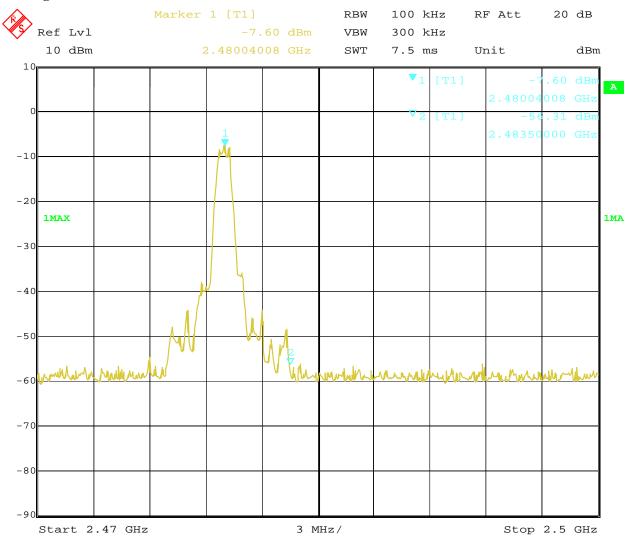

Date: 4.JUN.2020 17:29:17


Report No.: FCC2005215-01 Page 39 of 51

Date: 2020-06-05



10.4 Restrict Band Measurement

EUT	Bluetooth Receiver	Model	BTC21-RCA
Mode	Keep Transmitting	Input Voltage	DC5V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

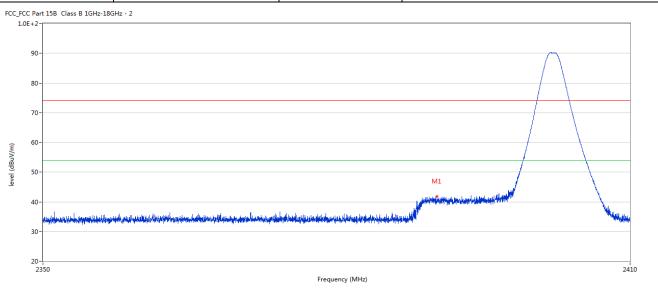

(MHz) (dBuV/m) (dB) (dB) (cm) 1 2390.085 41.88 -3.53 54.0 -12.12 Peak 227.00 100 H Pass	No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
1 2390.085 41.88 -3.53 54.0 -12.12 Peak 227.00 100 H Pass		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
	1	2390.085	41.88	-3.53	54.0	-12.12	Peak	227.00	100	Н	Pass

Page 40 of 51 Report No.: FCC2005215-01

Date: 2020-06-05



10.4 Pastriat Pand Massurament

	EUT	H	Bluetooth	Receiver		Model			BTC21-	-RCA					
	Mode]	Keep Tra	nsmitting	I	Input Voltage		DC5V				DC5V			
Temperature 24 deg. C, Humidity						7		56%	RH						
	Test Result:		Pa	iss											
_	C Part 15B Class B 1GH E+2-	z-18GHz - 2													
1.0	L+2														
	90-														
	80-														
	70-														
	70-														
	60-														
	50-						M1								
	40-						. Marine of problem	yearla, and and an object for being the	pa ^{ge}						
		handelek enemen bestelek enemen bestelek en bestelek e	hamilian de la companya de la compa	and the depth of the said of the						The state of the s					
	30-														
	20-														
	20-				Frequenc	y (MHz)				241					
	20-				Frequenc	y (MHz)				241					
No	2350	Results	Factor	Limit	Frequence	y (MHz) Detector	Table (o)	Height	ANT	verdict Verdict					

No	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict	
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)			
1	2390.145	43.87	-3.53	54.0	-10.13	Peak	153.00	100	V	Pass	


Report No.: FCC2005215-01 Page 41 of 51

Date: 2020-06-05



10.4 Restrict Band Measurement

EUT	Bluetooth Receiver	Model	BTC21-RCA
Mode	Keep Transmitting	Input Voltage	DC5V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

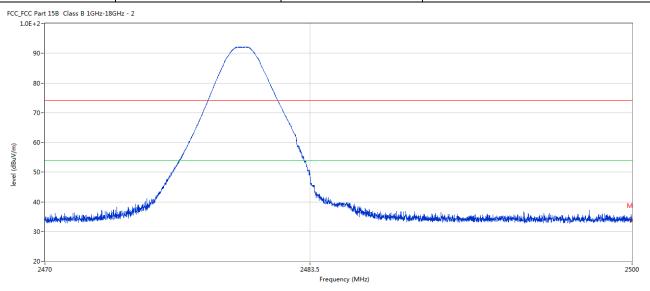

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2483.039	50.25	-3.57	54.0	-13.75	Peak	241.00	100	Н	Pass

Page 42 of 51

Report No.: FCC2005215-01

Date: 2020-06-05



10.4 Restrict Band Measurement

	EUT	Blue	etooth Re	eceiver	Mode	el		BTO	C21-RC	CA	
	Mode	e Keep Transmitting Input Voltage					DC5V				
Т	emperature		24 deg. (C,	Humid	Humidity 56% RH					
Γ	est Result:		Pass								
CC_FC0	Part 15B Class B 1GH	z-18GHz - 2									
2101											
	90-										
	80-			/							
	70-										
level (dBuV/m)	60-										
evel (d	50-										
	40-		/		h. man						
	30-	AND REAL PROPERTY.				THE PERSON NAMED IN COLUMN TWO IS NOT THE OWNER, THE PERSON NAMED IN COLUMN TWO IS NOT THE OWNER, THE PERSON NAMED IN COLUMN TWO IS NOT THE OWNER, THE PERSON NAMED IN COLUMN TWO IS NOT THE OWNER, THE PERSON NAMED IN COLUMN TWO IS NOT THE OWNER, THE PERSON NAMED IN COLUMN TWO IS NOT THE OWNER, THE PERSON NAMED IN COLUMN TWO IS NOT THE OWNER, THE PERSON NAMED IN COLUMN TWO IS NOT THE OWNER, THE		ted made and the little distrib	himostrajakula hajittan		
	20- 2470				2483.5 Fragues	cy (MHz)				250	
					rrequen	cy (WII 12)					
No	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict	
_	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(-)	(cm)			
		ļ	-3.57	54.0	-3.66	Peak	356.00	100	V	Pass	

Note: The measured PK radiated emissions level less than the AV limit, so no necessary to take down the AV result

Date: 2020-06-05



Page 43 of 51

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Dipole antenna with revised polarity antenna connector. The gain of the antennas is 2.0dBi.

Report No.: FCC2005215-01 Page 44 of 51

Date: 2020-06-05




12.0 FCC ID Label

FCC ID: 2ABFFBTC21RCA

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

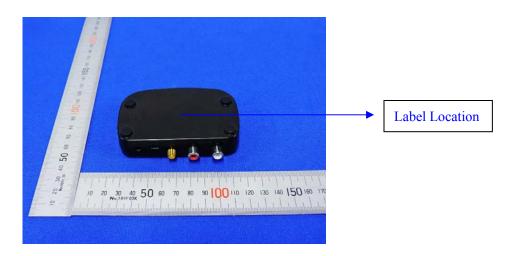

Page 45 of 51


Report No.: FCC2005215-01

Date: 2020-06-05



13.0 Photo of testing


Conducted Emission Test Setup:

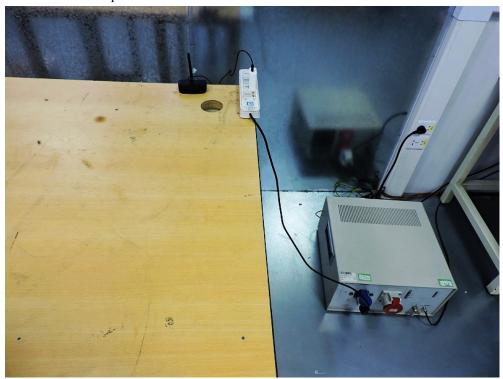

Date: 2020-06-05



Radiated Emission Test Setup:

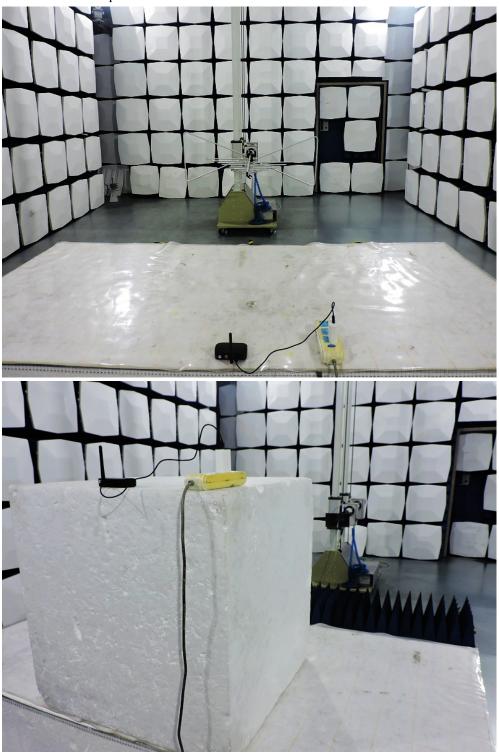

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2020-06-05



Photographs - EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Date: 2020-06-05



Photographs - EUT

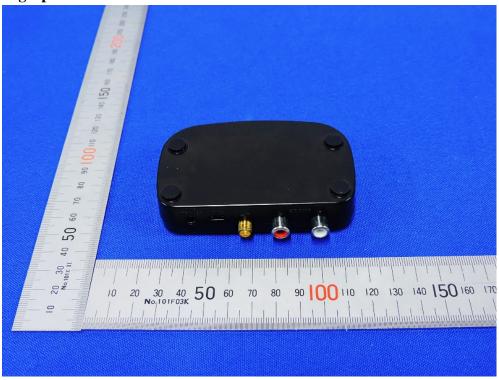

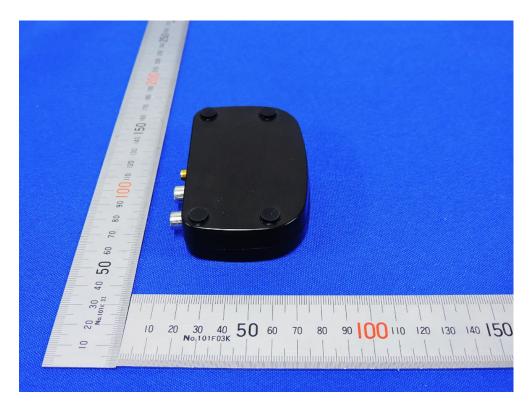

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2020-06-05



Photographs - EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Date: 2020-06-05



Photographs - EUT



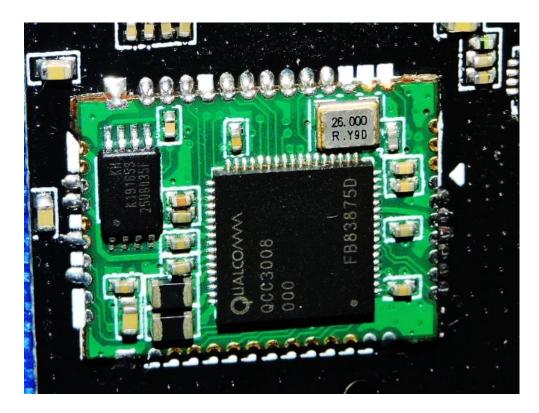

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2020-06-05



Photographs - EUT



End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.