



FCC TEST REPORT

**Test report
On Behalf of
International Communications Corporation
For
Wi-Fi 6 1800Mbps Router
Model No.: ResiRouterWF6
FCC ID: 2ABFZ-RESIROUTERWF6**

Prepared For : International Communications Corporation
11801 Pierce St., 2nd FL Riverside, California 92505 United States

Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Date of Test: Dec. 02, 2021 ~ Dec. 14, 2021

Date of Report: Dec. 14, 2021

Report Number: HK2112024710-3E



TEST RESULT CERTIFICATION

Applicant's name: International Communications Corporation
Address: 11801 Pierce St., 2nd FL Riverside, California 92505 United States

Manufacture's Name.....: Shenzhen Yunlink Technology Co., Ltd.
Address: B3 Building, Anle Industrial Zone, Hangcheng Road, Gushu, Xixiang, Bao'an, Shenzhen, China

Product description

Trade Mark: ResiRouter
Product name: Wi-Fi 6 1800Mbps Router
Model and/or type reference .: ResiRouterWF6
FCC Rules and Regulations Part 15 Subpart E Section

Standards: 15.407
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test.....:
Date (s) of performance of tests: Dec. 02, 2021 ~ Dec. 14, 2021
Date of Issue.....: Dec. 14, 2021
Test Result: Pass

Testing Engineer : [Signature]
(Gary Qian)

Technical Manager : [Signature]
(Eden Hu)

Authorized Signatory : [Signature]
(Jason Zhou)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.cer-mark.com.



TABLE OF CONTENTS

1. TEST RESULT SUMMARY	5
1.1. TEST PROCEDURES AND RESULTS.....	5
1.2. INFORMATION OF THE TEST LABORATORY	5
1.3. MEASUREMENT UNCERTAINTY	6
2. EUT DESCRIPTION	7
2.1. GENERAL DESCRIPTION OF EUT	7
2.2. OPERATION FREQUENCY EACH OF CHANNEL	8
2.3. OPERATION OF EUT DURING TESTING.....	8
2.4. DESCRIPTION OF TEST SETUP	9
3. GENERA INFORMATION	10
3.1. TEST ENVIRONMENT AND MODE	10
3.2. DESCRIPTION OF SUPPORT UNITS.....	11
4. TEST RESULTS AND MEASUREMENT DATA	12
4.1. CONDUCTED EMISSION	12
4.2. MAXIMUM CONDUCTED OUTPUT POWER.....	16
4.3. 6DB EMISSION BANDWIDTH.....	20
4.4. 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	41
4.5. POWER SPECTRAL DENSITY	42
4.6. BAND EDGE	60
4.7. SPURIOUS EMISSION	115
4.8. FREQUENCY STABILITY MEASUREMENT	140
4.9. ANTENNA REQUIREMENT	142
5. PHOTOGRAPHS OF TEST SETUP.....	143
6. PHOTOS OF THE EUT	145



**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Dec. 14, 2021	Jason Zhou

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

HUAK Testing Lab TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



1. TEST RESULT SUMMARY

1.1. TEST PROCEDURES AND RESULTS

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a)	PASS
6dB Emission Bandwidth	§15.407(e)	PASS
26dB Emission Bandwidth & 99% Occupied Bandwidth	§15.407(a)	N/A
Power Spectral Density	§15.407(a)	PASS
Band edge	§15.407(b)/15.209/15.205	PASS
Radiated Emission	§15.407(b)/15.209/15.205	PASS
Frequency Stability	§15.407(g)	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.2. INFORMATION OF THE TEST LABORATORY

Shenzhen HUAK Testing Technology Co., Ltd.
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
 Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.
 FCC Designation Number is CN1229.
 Canada IC CAB identifier is CN0045.
 CNAS Registration Number is L9589.



1.3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 0.37\text{dB}$
2	RF power, conducted	$\pm 3.35\text{dB}$
3	Spurious emissions, conducted	$\pm 2.20\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.90\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$



2. EUT DESCRIPTION

2.1. GENERAL DESCRIPTION OF EUT

Equipment:	Wi-Fi 6 1800Mbps Router
Model Name:	ResiRouterWF6
Serial Model:	N/A
Model Difference:	N/A
Trade Mark:	ResiRouter
FCC ID:	2ABFZ-RESIROUTERWF6
Operation Frequency:	IEEE 802.11a/n/ac/ax(HT20)5.745GHz-5.825GHz IEEE 802.11n/ac/ax(HT40)5.755GHz-5.795GHz IEEE 802.11ac/ax(HT80) 5.775GHz
Modulation Technology:	IEEE 802.11a/n/ac/ax
Modulation Type:	OFDM, OFDMA
Antenna Type:	Internal Antenna
Antenna Gain:	Antenna 1:3dBi Antenna 2:3dBi MIMO: 6.01dBi
Power Source:	POE IN:48V, 05A DC IN:12V, 1A
Power Supply:	POE IN:48V, 05A DC IN:12V, 1A
Hardware Version:	V1.2
Software Version:	V2.0
Note: The EUT incorporates a MIMO function. Physically, it provides two completed transmitters and receivers(2T2R), two transmit signals are completely correlated, then, Direction gain=GANT + Array Gain(Array Gain=10 log(2) dB for power spectral density; Array Gain=0 for power measurement)	



2.2. OPERATION FREQUENCY EACH OF CHANNEL

802.11a/802.11n(HT20) 802.11ac(HT20) 802.11ax(HT20)		802.11n(HT40)/ 802.11ac(HT40) 802.11ax(HT40)		802.11ac(HT80) 802.11ax(HT80)	
Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745	151	5755	155	5775
153	5765	159	5790		
157	5785				
161	5805				
165	5825				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

2.3. OPERATION OF EUT DURING TESTING

Band IV (5725 - 5850 MHz)		
For 802.11a/n (HT20)/ac(HT20)/axHT20)		
Channel Number	Channel	Frequency (MHz)
149	Low	5745
157	Mid	5785
165	High	5825


For 802.11n (HT40)/ ac(HT40)/axHT40)		
Channel Number	Channel	Frequency (MHz)
151	Low	5755
159	High	5795

For 802.11ac(HT80)/ax(HT80)		
Channel Number	Channel	Frequency (MHz)
155	/	5775


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing and below 1GHz Radiation testing:

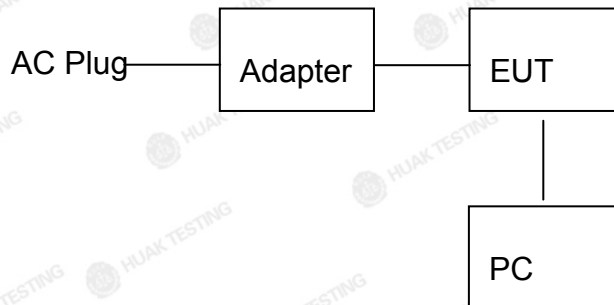

Operation of EUT during Above1GHz Radiation testing:



PC information

Model: TP00067A

Input: DC 20V, 2.25~3.25A

Output: 5VDC, 0.5A

Adapter information

Model: GRT-POE15-480050

Input: AC100-240V, 50/60Hz, 0.8A

Output: 48V, 500mA

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position



3. GENERA INFORMATION

3.1. TEST ENVIRONMENT AND MODE

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 100%)
<p>The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

<p>We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:</p>	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
802.11ac(HT20)/ac(HT40)/ac(HT80)	MCS0
802.11ax(HT20)/ax(HT40)/ax(HT80)	MCS0
Final Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



3.2. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



4. TEST RESULTS AND MEASUREMENT DATA

4.1. CONDUCTED EMISSION

4.1.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10:2013		
Frequency Range:	150 kHz to 30 MHz		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limits:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
Test Setup:	<p>Reference Plane</p> <p>40cm</p> <p>80cm</p> <p>E.U.T</p> <p>AC power</p> <p>LISN</p> <p>Filter</p> <p>AC power</p> <p>EMI Receiver</p> <p>Test table/Insulation plane</p> <p><i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>		
Test Mode:	Tx Mode		
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 		
Test Result:	Pass		

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



4.1.2. Test Instruments


Conducted Emission Shielding Room Test Site (843)					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Receiver	R&S	ESR-7	HKE-010	Dec. 09, 2021	Dec. 08, 2022
LISN	R&S	ENV216	HKE-002	Dec. 09, 2021	Dec. 08, 2022
Coax cable (9KHz-30MHz)	Times	381806-00 2	N/A	Dec. 09, 2021	Dec. 08, 2022
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.1.3. Test data

Test Specification: Line

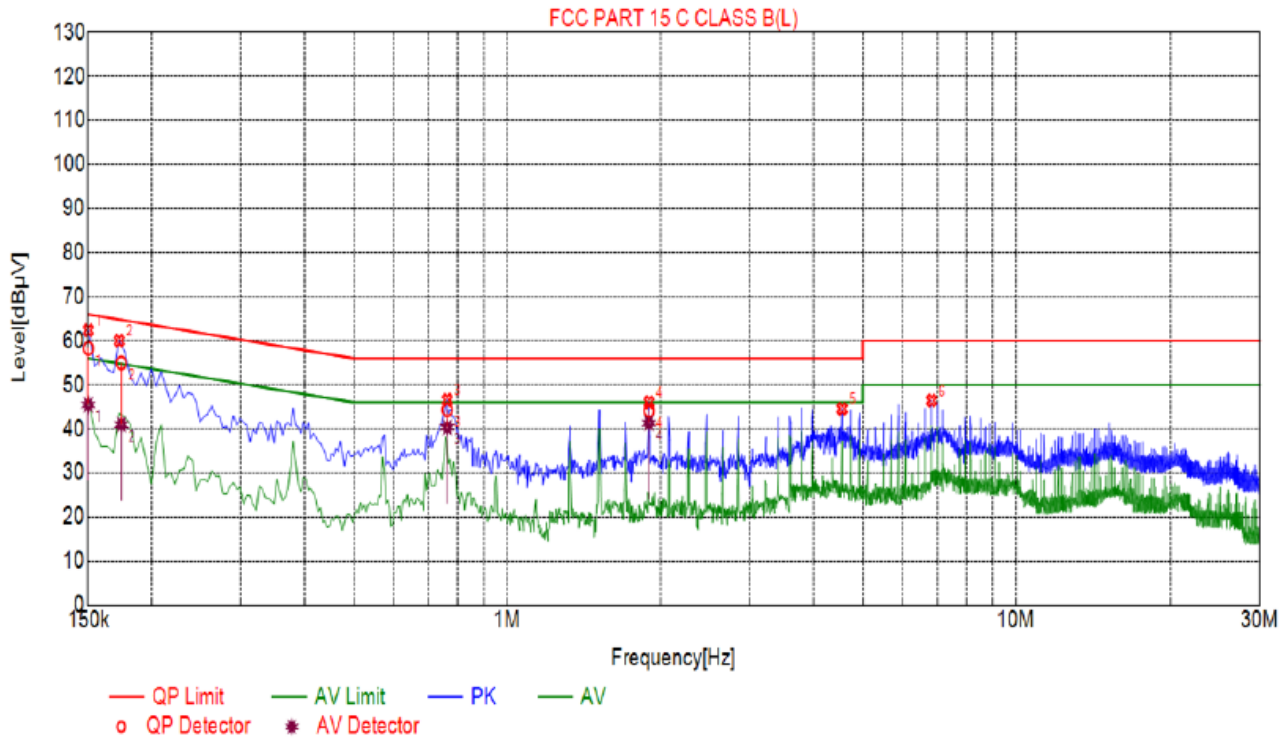

Suspected List								
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Reading [dBµV]	Detector	Type
1	0.1500	62.40	20.03	66.00	3.60	41.37	PK	L
2	0.1725	60.02	20.04	64.84	4.82	38.98	PK	L
3	0.7620	46.57	20.05	56.00	9.43	25.52	PK	L
4	1.9005	46.04	20.14	56.00	9.96	24.90	PK	L
5	4.5555	44.53	20.25	56.00	11.47	23.28	PK	L
6	6.8370	46.43	20.20	60.00	13.57	25.23	PK	L


Final Data List											
NO.	Freq. [MHz]	Correction factor[dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	QP Reading [dBµV]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	AV Reading [dBµV]	Type
1	0.1500	20.79	58.30	66.00	7.70	38.27	45.46	56.00	10.54	24.67	L
2	0.1742	20.04	54.98	64.76	9.78	34.34	40.98	54.76	13.78	20.64	L
3	0.7620	20.05	44.33	56.00	11.67	24.28	40.33	46.00	5.67	20.28	L
4	1.9005	20.14	44.12	56.00	11.88	23.98	41.29	46.00	4.71	21.15	L

Remark: Margin = Limit – Level
 Correction factor = Cable lose + LISN insertion loss
 Level=Test receiver reading + correction factor

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



Test Specification: Neutral

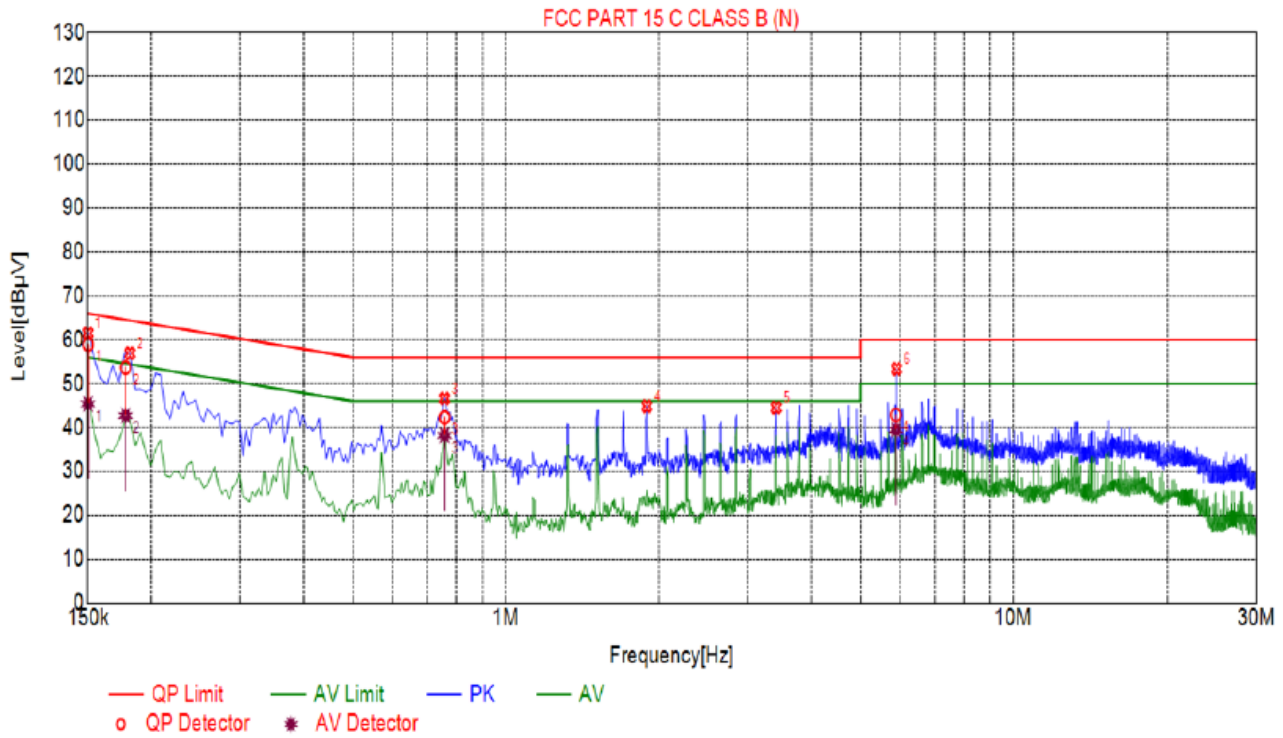

Suspected List								
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Reading [dBµV]	Detector	Type
1	0.1500	61.54	20.03	66.00	4.46	40.51	PK	N
2	0.1815	56.93	20.06	64.42	7.49	35.87	PK	N
3	0.7575	46.58	20.06	56.00	9.42	25.52	PK	N
4	1.8960	44.85	20.14	56.00	11.15	23.71	PK	N
5	3.4125	44.53	20.24	56.00	11.47	23.29	PK	N
6	5.8965	53.37	20.23	60.00	6.63	32.14	PK	N


Final Data List											
NO.	Freq. [MHz]	Correction factor[dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	QP Reading [dBµV]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	AV Reading [dBµV]	Type
1	0.1501	20.03	58.93	66.00	7.07	38.90	45.40	56.00	10.60	25.37	N
2	0.1779	20.05	53.69	64.59	10.90	33.64	42.72	54.59	11.87	22.67	N
3	0.7575	20.06	42.31	56.00	13.69	22.25	38.21	46.00	7.79	18.15	N
4	5.8768	20.24	42.88	60.00	17.12	22.64	39.46	50.00	10.54	19.22	N

Remark: Margin = Limit – Level
 Correction factor = Cable lose + LISN insertion loss
 Level=Test receiver reading + correction factor

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

4.2. MAXIMUM CONDUCTED OUTPUT POWER

4.2.1. Test Specification

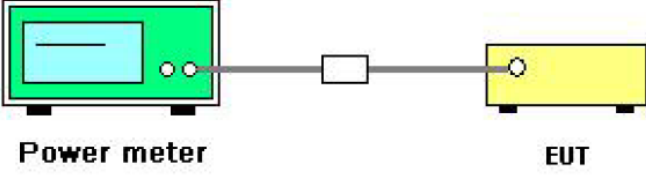Test Requirement:	FCC Part15 E Section 15.407(a)				
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02.r01 Section E				
Limit:	<table border="1"> <thead> <tr> <th>Frequency Band (MHz)</th> <th>Limit</th> </tr> </thead> <tbody> <tr> <td>5725-5850</td> <td>1 W</td> </tr> </tbody> </table>	Frequency Band (MHz)	Limit	5725-5850	1 W
	Frequency Band (MHz)	Limit			
5725-5850	1 W				
Test Setup:	 <p>The diagram illustrates the test setup. On the left is a green box labeled 'Power meter'. A cable connects it to a small white box labeled 'Attenuator'. Another cable connects the attenuator to a yellow box labeled 'EUT' (Equipment Under Test).</p>				
Test Mode:	Transmitting mode with modulation				
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a. 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Measure the conducted output power and record the results in the test report. 				
Test Result:	PASS				
Remark:	Conducted output power= measurement power +10log(1/x) X is duty cycle=1, so 10log(1/1)=0 Conducted output power= measurement power				



4.2.2. Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 09, 2021	Dec. 08, 2022
Power meter	Agilent	E4419B	HKE-085	Dec. 09, 2021	Dec. 08, 2022
Power Sensor	Agilent	E9300A	HKE-086	Dec. 09, 2021	Dec. 08, 2022
RF cable	Times	1-40G	HKE-034	Dec. 09, 2021	Dec. 08, 2022
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 09, 2021	Dec. 08, 2022

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



Test Data

Configuration Band IV (5725 - 5850 MHz)					
Mode	Test channel	Maximum Conducted Output Power (dBm)		FCC Limit (dBm)	Result
		Antenna port 1	Antenna port 2		
11a	CH149	11.12	13.39	30	PASS
11a	CH157	12.98	13.51	30	PASS
11a	CH165	13.42	14.23	30	PASS
11n(HT20)	CH149	10.72	12.54	30	PASS
11n(HT20)	CH157	11.87	12.99	30	PASS
11n(HT20)	CH165	11.37	11.57	30	PASS
11n(HT40)	CH151	12.07	13.87	30	PASS
11n(HT40)	CH159	12.36	13.71	30	PASS
11ac(HT20)	CH149	10.68	13.31	30	PASS
11ac(HT20)	CH157	11.96	13.57	30	PASS
11ac(HT20)	CH165	10.99	11.95	30	PASS
11ac(HT40)	CH151	11.86	13.86	30	PASS
11ac(HT40)	CH159	12.73	13.66	30	PASS
11ac(HT80)	CH155	12.57	14.18	30	PASS
11ax(HT20)	CH149	10.60	12.96	30	PASS
11ax(HT20)	CH157	12.06	13.04	30	PASS
11ax(HT20)	CH165	11.07	11.29	30	PASS
11ax(HT40)	CH151	11.65	13.45	30	PASS
11ax(HT40)	CH159	12.03	13.26	30	PASS
11ax(HT80)	CH155	12.17	13.94	30	PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

HUAKE Testing Lab TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




Configuration Band IV (5725 - 5850 MHz)				
Mode	Test channel	Maximum Conducted Output Power (dBm)	FCC Limit (dBm)	Result
		MIMO		
11n(HT20)	CH149	14.73	30	PASS
11n(HT20)	CH157	15.48	30	PASS
11n(HT20)	CH165	14.48	30	PASS
11n(HT40)	CH151	16.07	30	PASS
11n(HT40)	CH159	16.10	30	PASS
11ac(HT20)	CH149	15.20	30	PASS
11ac(HT20)	CH157	15.85	30	PASS
11ac(HT20)	CH165	14.51	30	PASS
11ac(HT40)	CH151	15.98	30	PASS
11ac(HT40)	CH159	16.23	30	PASS
11ac(HT80)	CH155	16.46	30	PASS
11ax(HT20)	CH157	14.95	30	PASS
11ax(HT20)	CH165	15.59	30	PASS
11ax(HT20)	CH165	14.19	30	PASS
11ax(HT40)	CH151	15.65	30	PASS
11ax(HT40)	CH159	15.70	30	PASS
11ax(HT80)	CH155	16.15	30	PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

4.3. 6DB EMISSION BANDWIDTH

4.3.1. Test Specification

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v01r04 Section C
Limit:	>500kHz
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS

4.3.2. Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 09, 2021	Dec. 08, 2022
RF cable	Times	1-40G	HKE-034	Dec. 09, 2021	Dec. 08, 2022
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 09, 2021	Dec. 08, 2022

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.3.3. Test data

ANT 1

Band IV (5725 - 5850 MHz)					
Mode	Test channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
11a	CH149	5745	16.28	0.5	PASS
11a	CH157	5785	15.36	0.5	PASS
11a	CH165	5825	15.12	0.5	PASS
11n(HT20)	CH149	5745	16.64	0.5	PASS
11n(HT20)	CH157	5785	16.32	0.5	PASS
11n(HT20)	CH165	5825	17.28	0.5	PASS
11n(HT40)	CH151	5755	36.32	0.5	PASS
11n(HT40)	CH159	5795	35.68	0.5	PASS
11ac(HT20)	CH149	5745	14.80	0.5	PASS
11ac(HT20)	CH157	5785	16.52	0.5	PASS
11ac(HT20)	CH165	5825	16.64	0.5	PASS
11ac(HT40)	CH151	5755	36.24	0.5	PASS
11ac(HT40)	CH159	5795	36.32	0.5	PASS
11ac(HT80)	CH155	5775	75.04	0.5	PASS
11ax(HT20)	CH149	5745	18.72	0.5	PASS
11ax(HT20)	CH157	5785	18.00	0.5	PASS
11ax(HT20)	CH165	5825	18.04	0.5	PASS
11ax(HT40)	CH151	5755	37.60	0.5	PASS
11ax(HT40)	CH159	5795	37.76	0.5	PASS
11ax(HT80)	CH155	5775	75.52	0.5	PASS


Test plots as follows:

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




Band IV (5725 – 5850 MHz)


802.11a

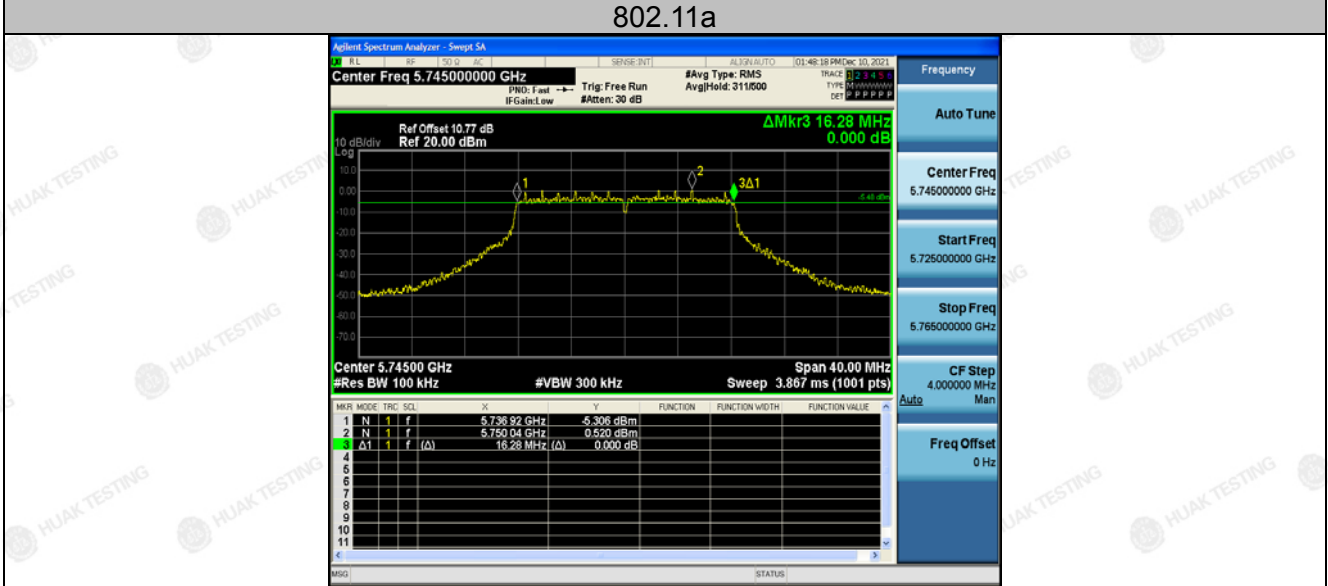

Low

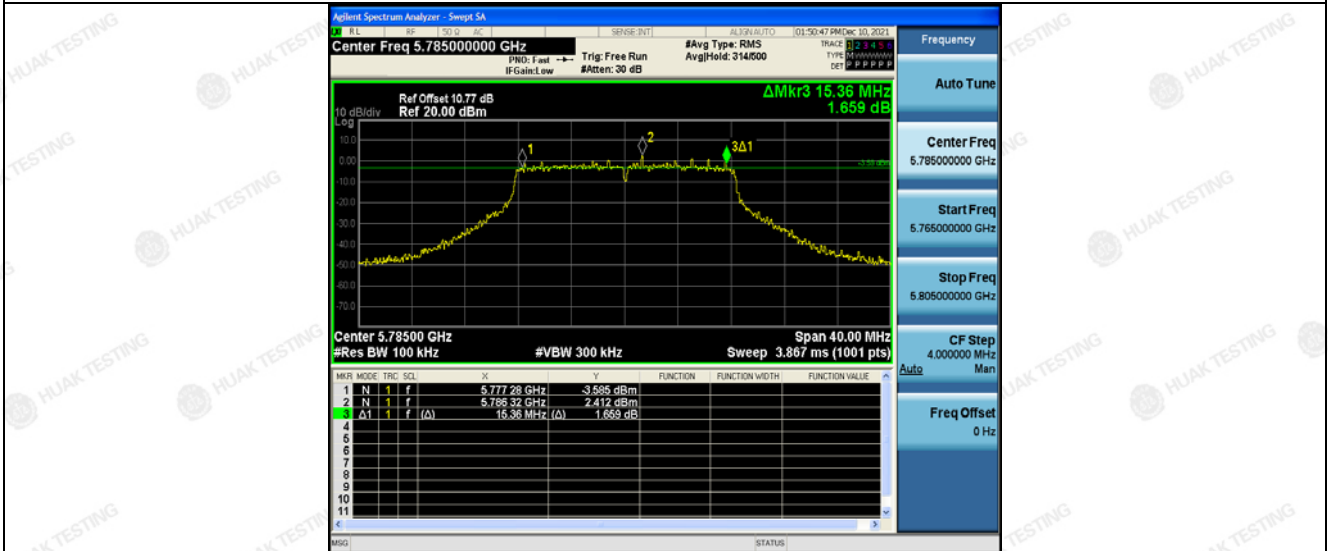

Mid

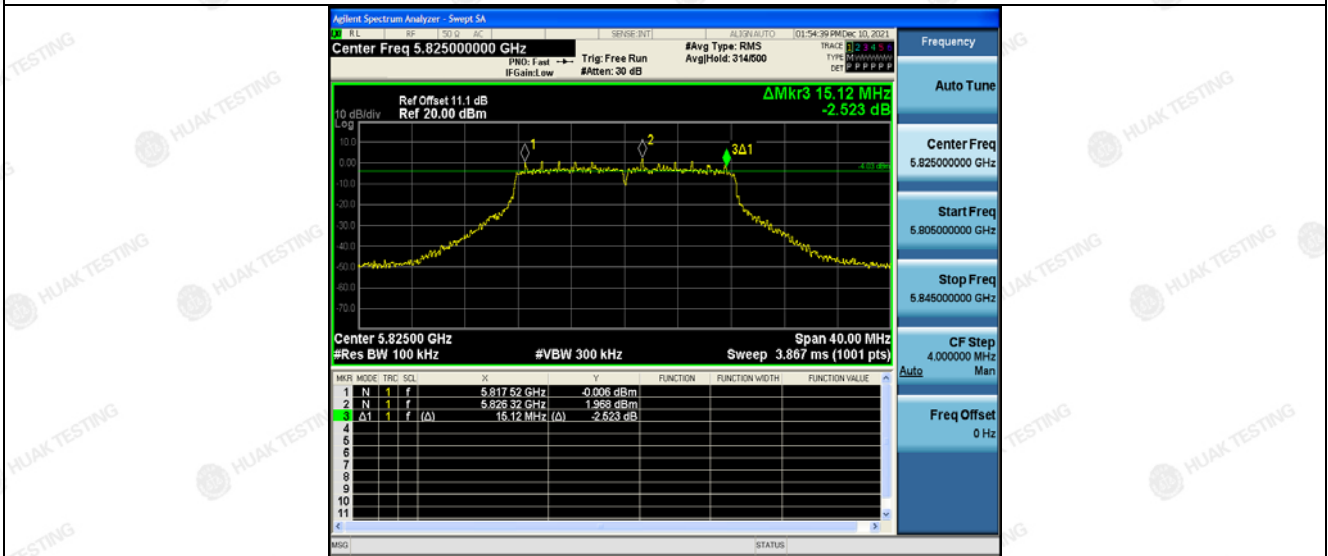


High


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



Low

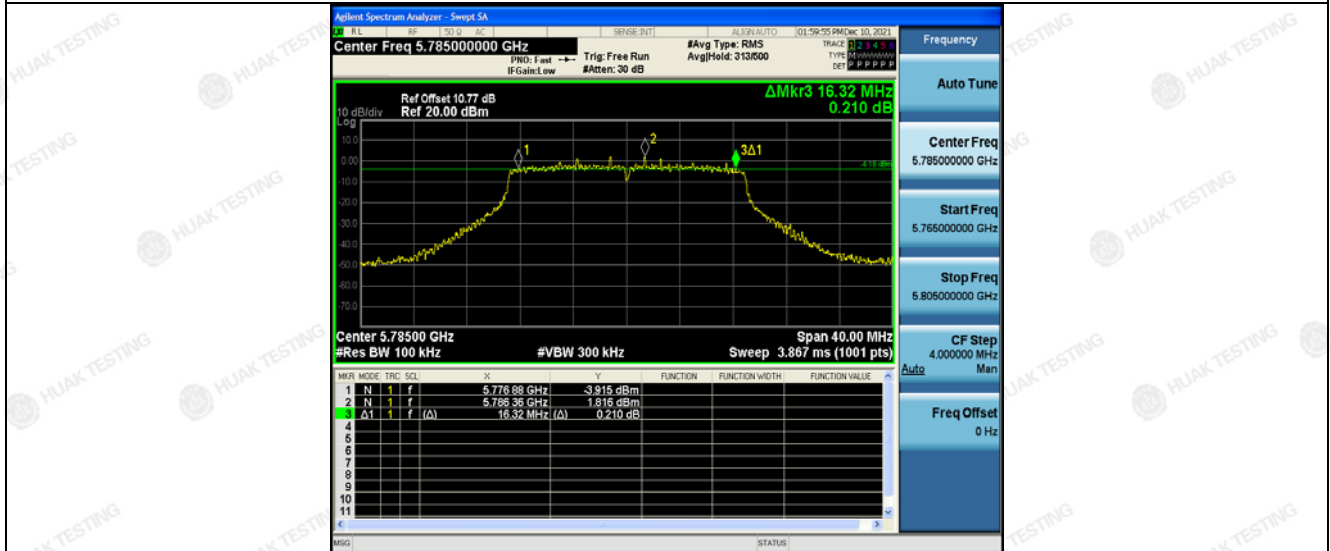


Mid

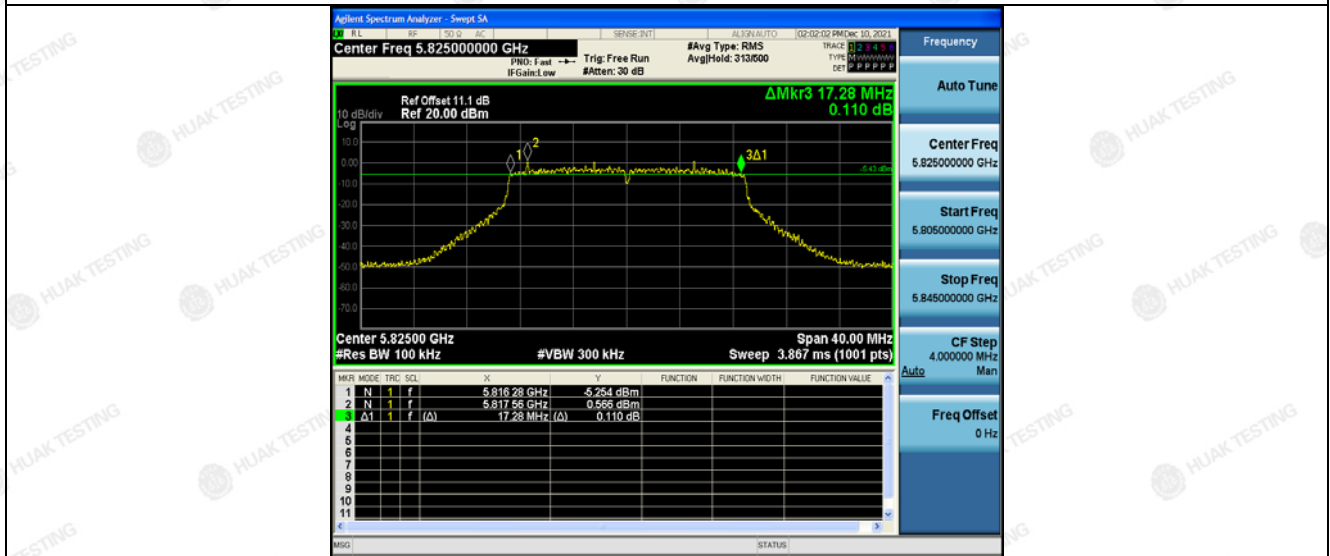


High

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

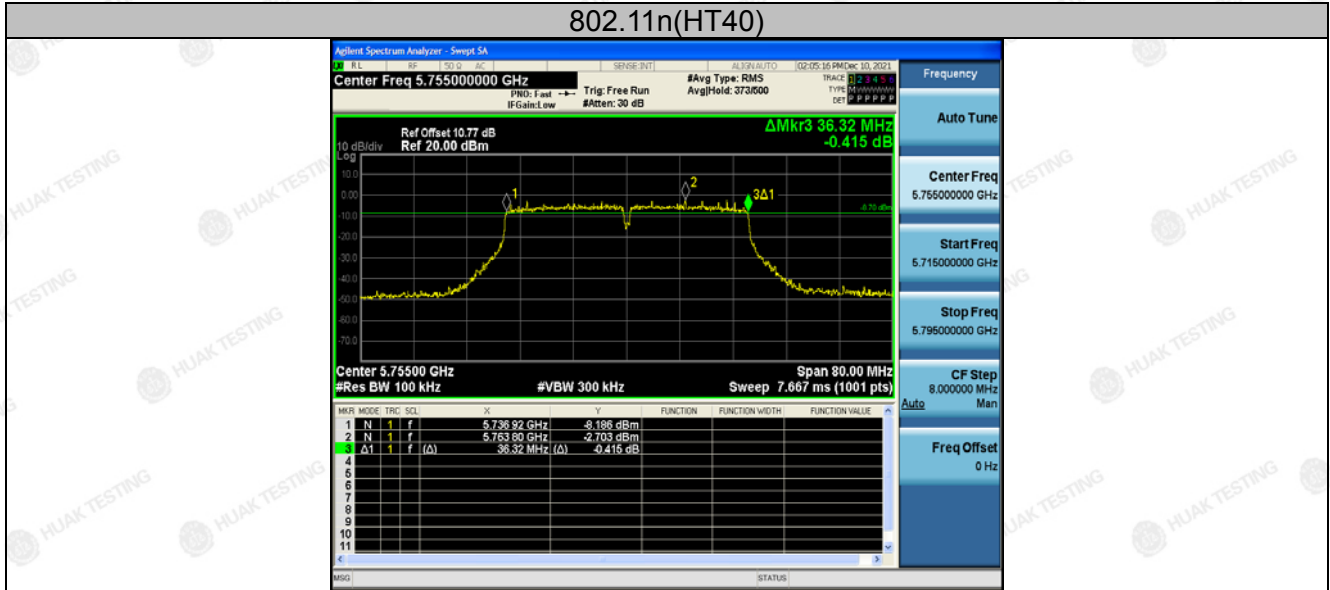

Low

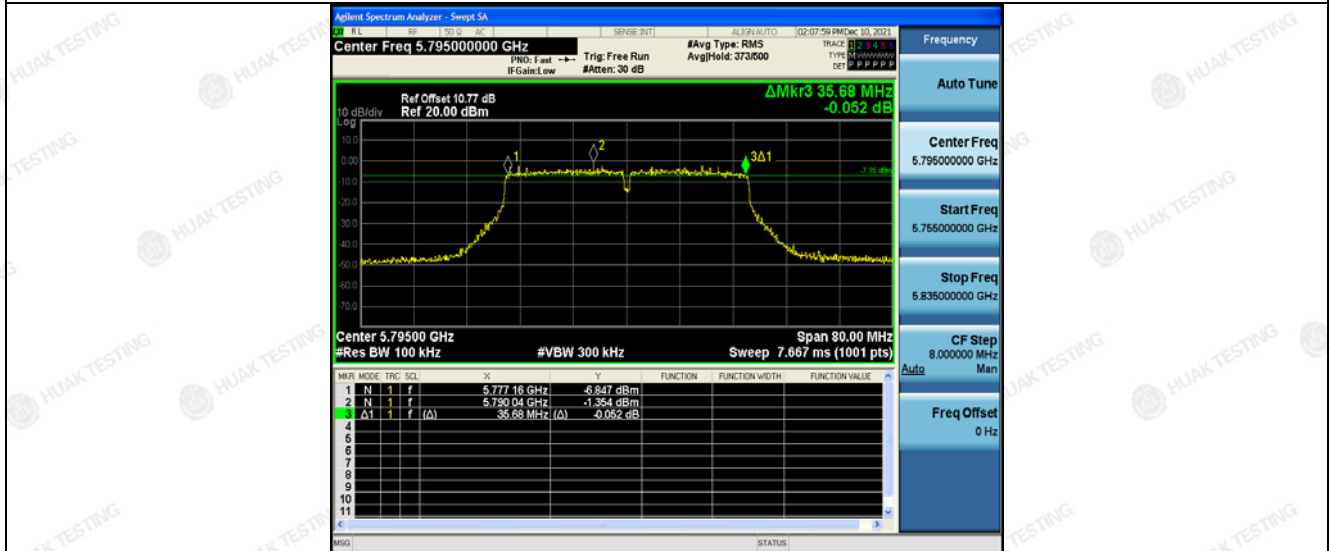


High

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



802.11ac(HT20)

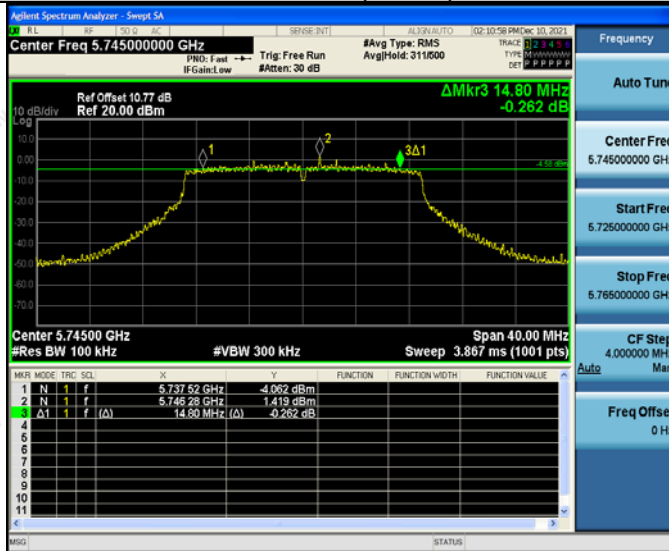

Low



Mid




High


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



802.11ac(HT40)

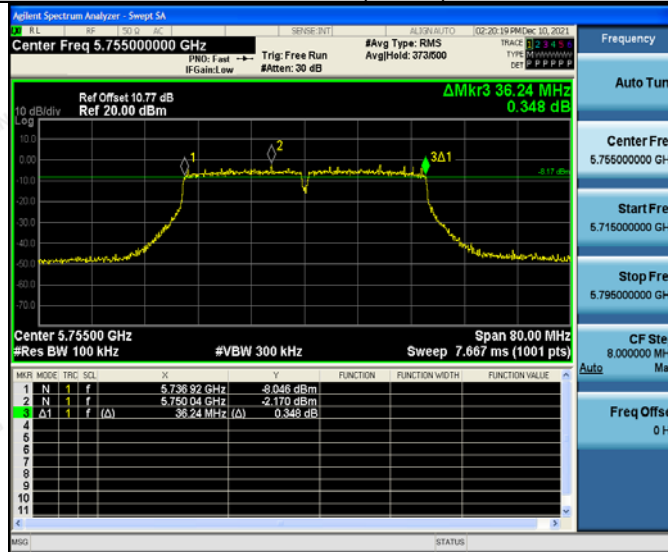


Low

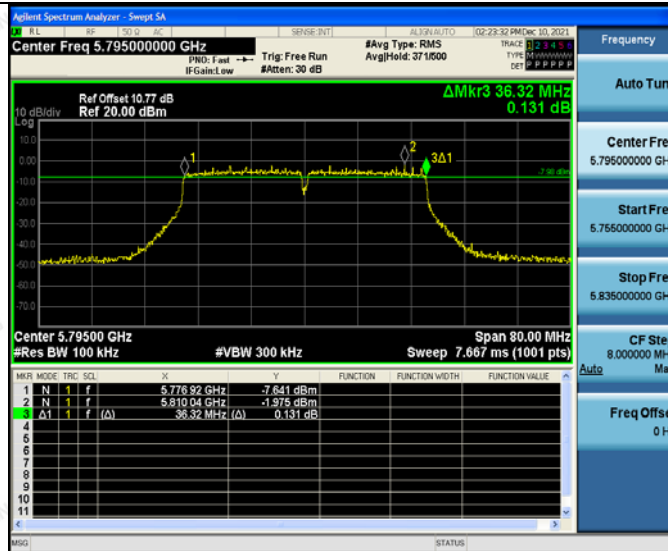

High


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

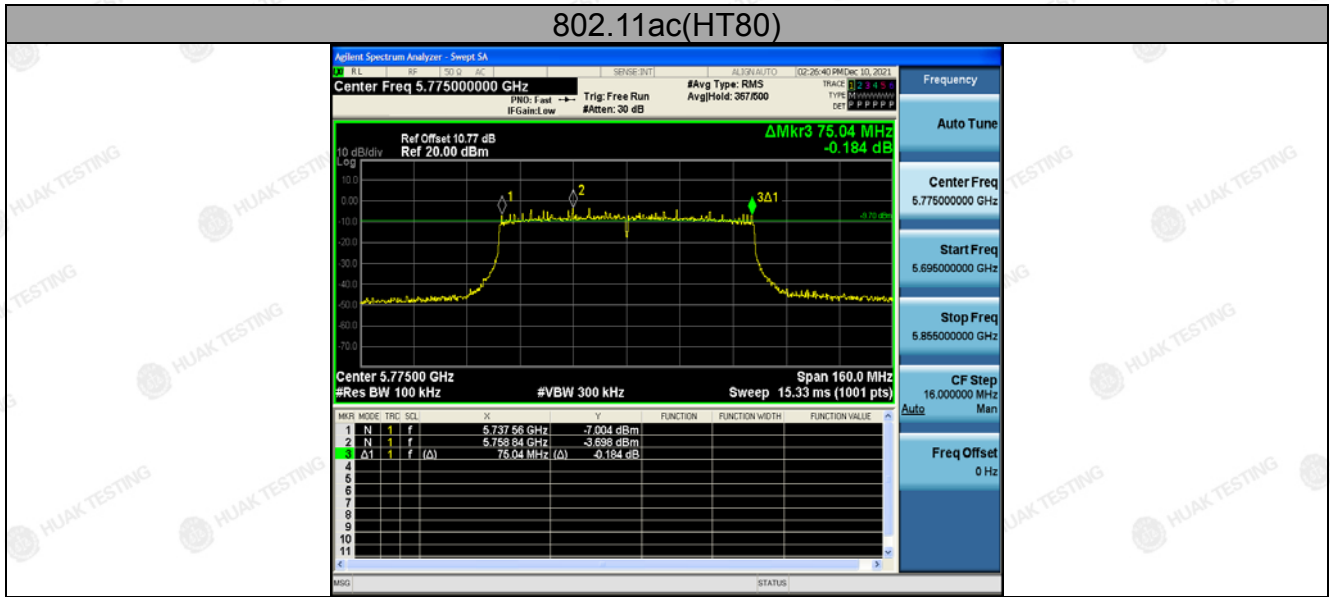


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




802.11ax(HT20)

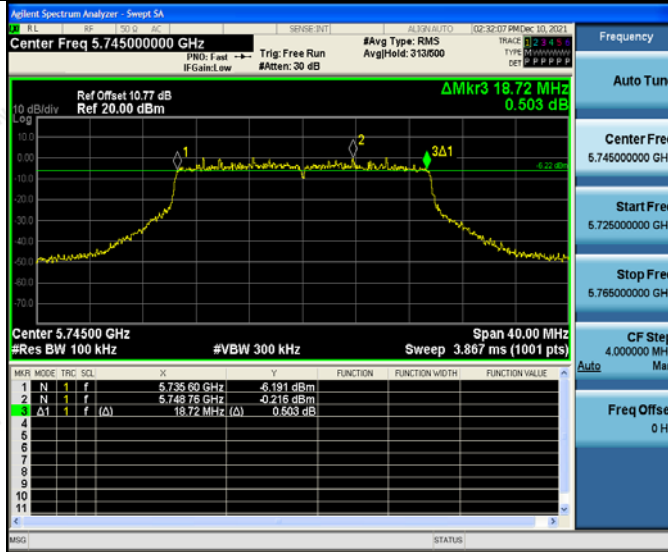

Low

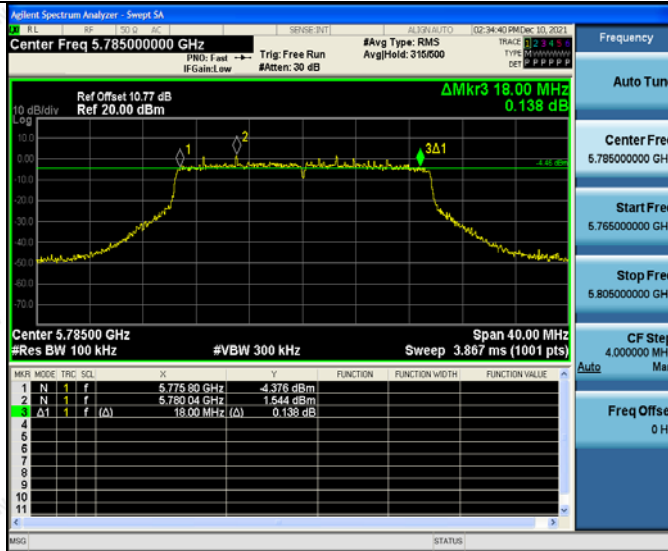

Mid

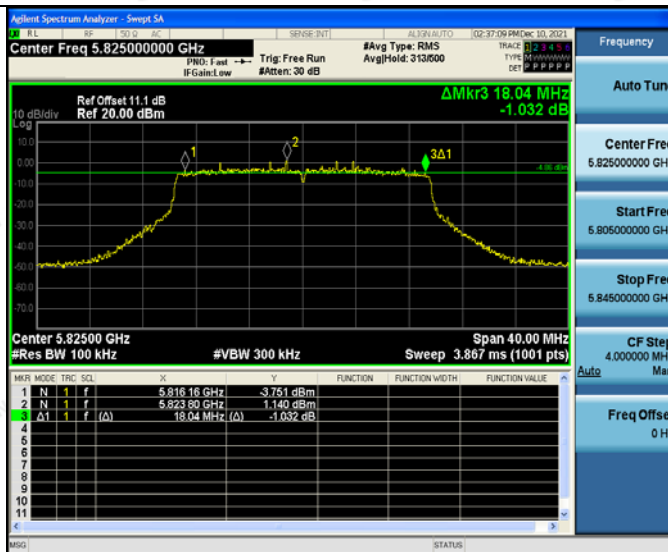


High


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



802.11ax(HT40)

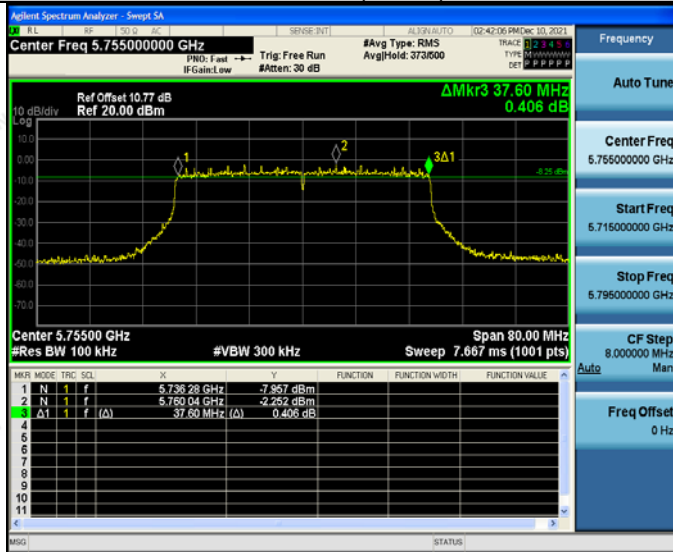


Low

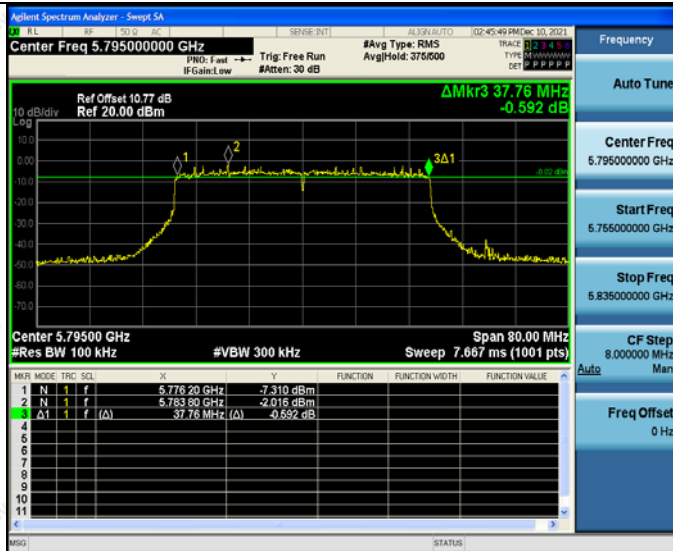

High

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

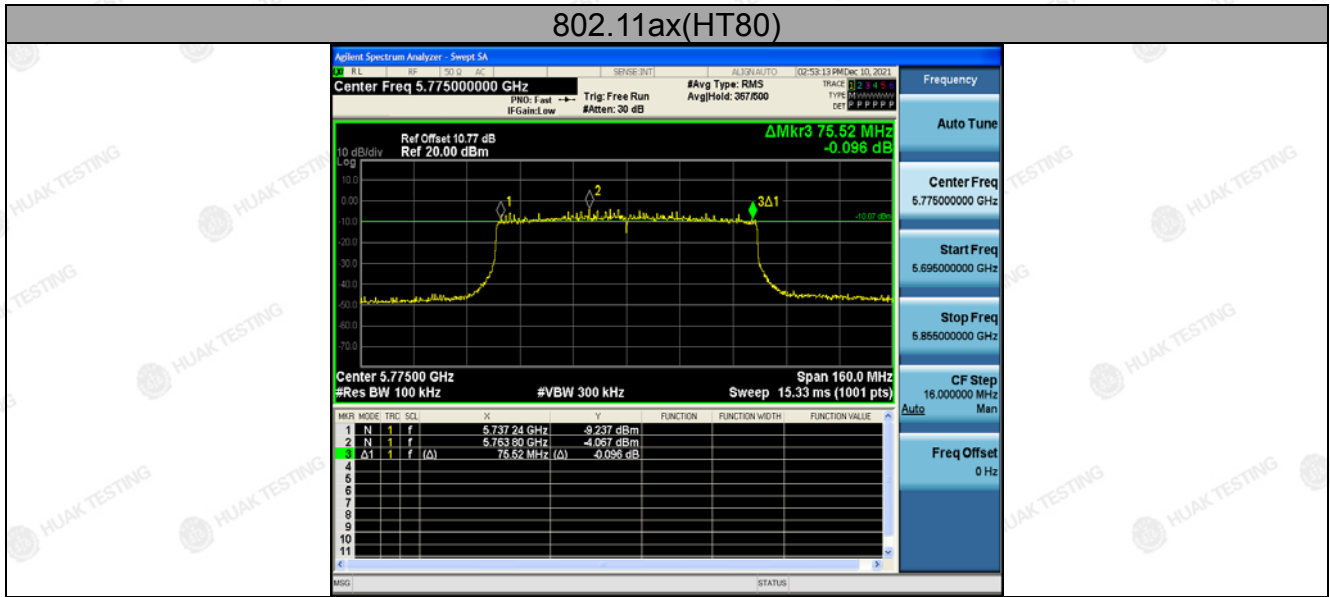

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



ANT 2


Band IV (5725 - 5850 MHz)					
Mode	Test channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
11a	CH149	5745	16.04	0.5	PASS
11a	CH157	5785	15.64	0.5	PASS
11a	CH161	5825	16.00	0.5	PASS
11n(HT20)	CH149	5745	14.76	0.5	PASS
11n(HT20)	CH157	5785	15.00	0.5	PASS
11n(HT20)	CH161	5825	15.68	0.5	PASS
11n(HT40)	CH151	5755	36.32	0.5	PASS
11n(HT40)	CH159	5795	36.32	0.5	PASS
11ac(HT20)	CH149	5745	16.80	0.5	PASS
11ac(HT20)	CH157	5785	17.52	0.5	PASS
11ac(HT20)	CH165	5825	17.24	0.5	PASS
11ac(HT40)	CH151	5755	36.24	0.5	PASS
11ac(HT40)	CH159	5795	36.08	0.5	PASS
11ac(HT80)	CH155	5755	75.20	0.5	PASS
11ax(HT20)	CH149	5745	18.44	0.5	PASS
11ax(HT20)	CH157	5785	18.24	0.5	PASS
11ax(HT20)	CH165	5825	16.28	0.5	PASS
11ax(HT40)	CH151	5755	38.00	0.5	PASS
11ax(HT40)	CH159	5795	37.52	0.5	PASS
11ax(HT80)	CH155	5755	76.80	0.5	PASS

Test plots as follows:




Band IV (5725 – 5850 MHz)


802.11a

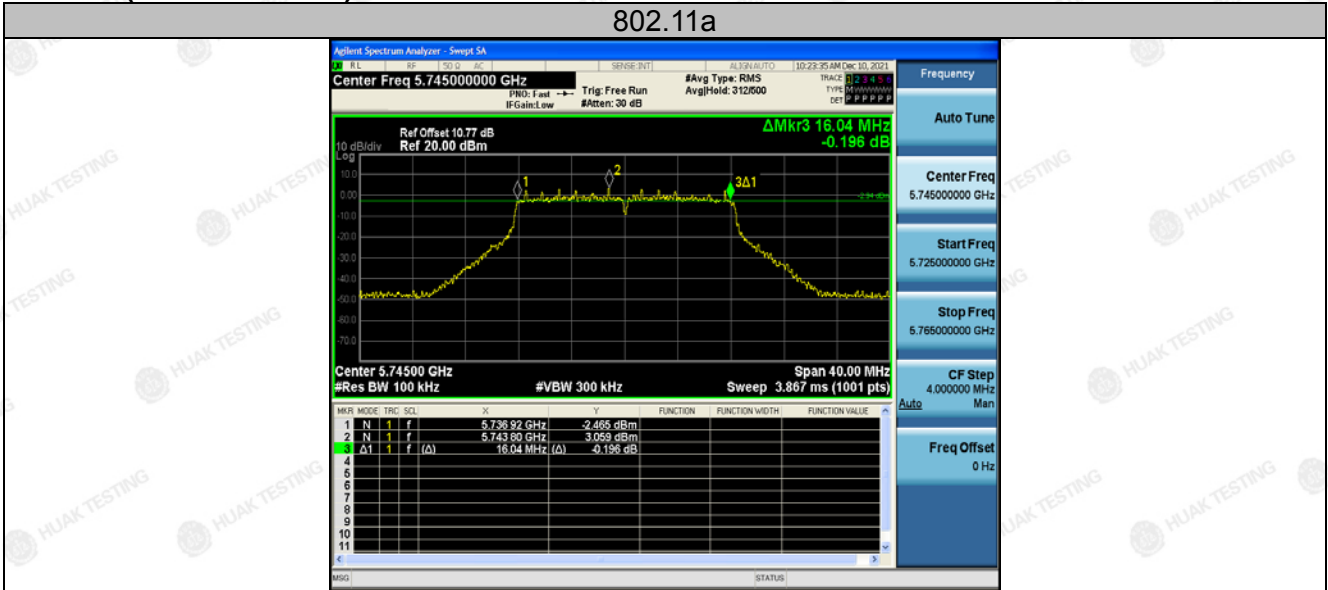

Low

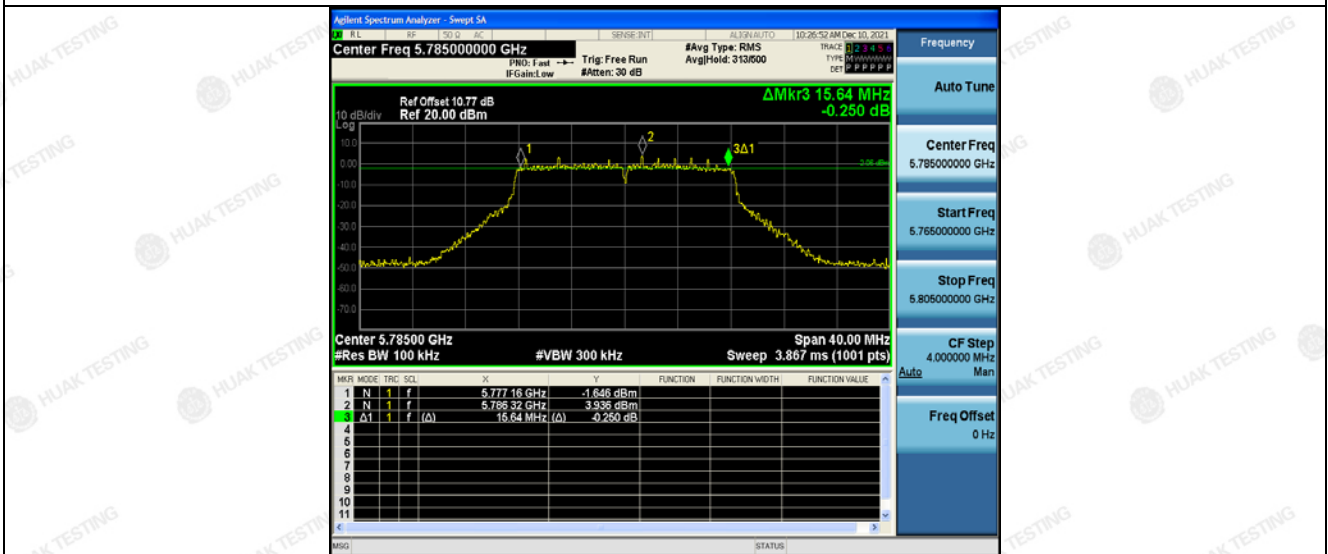

Mid

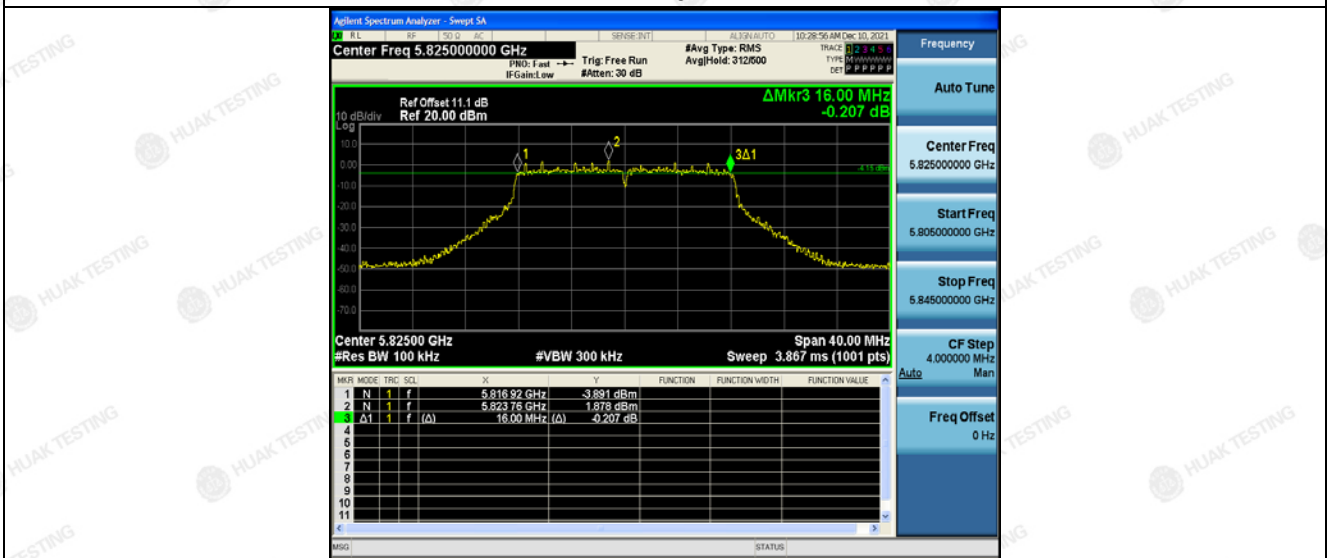


High


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




802.11n(HT20)

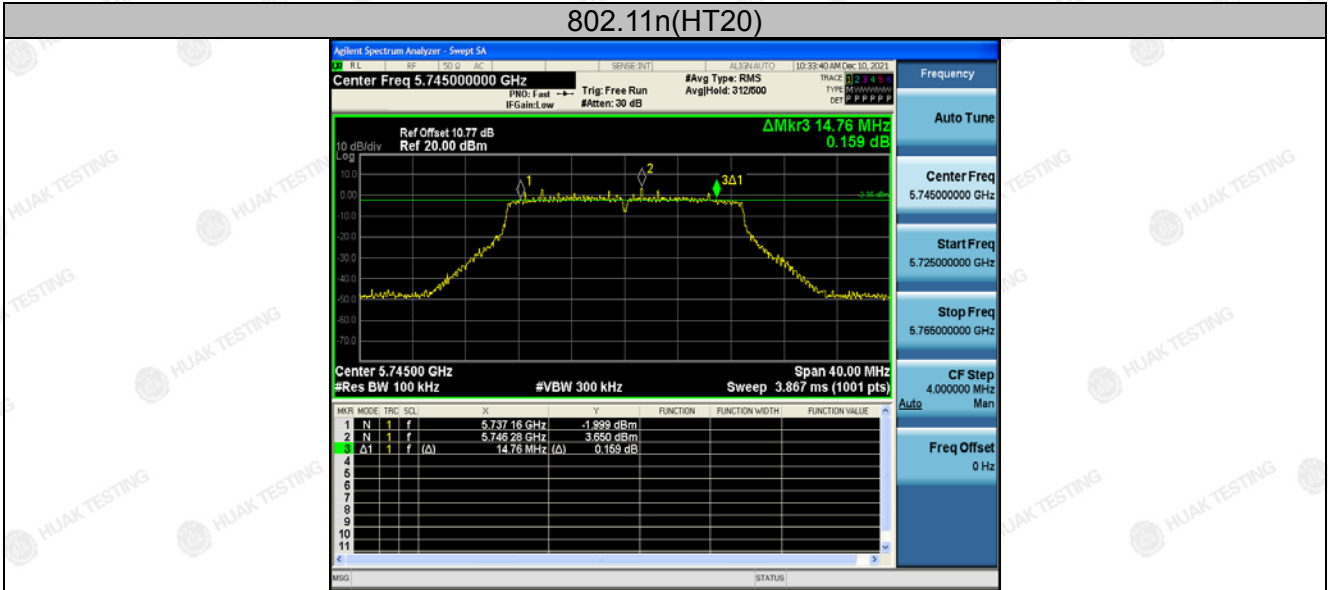

Low

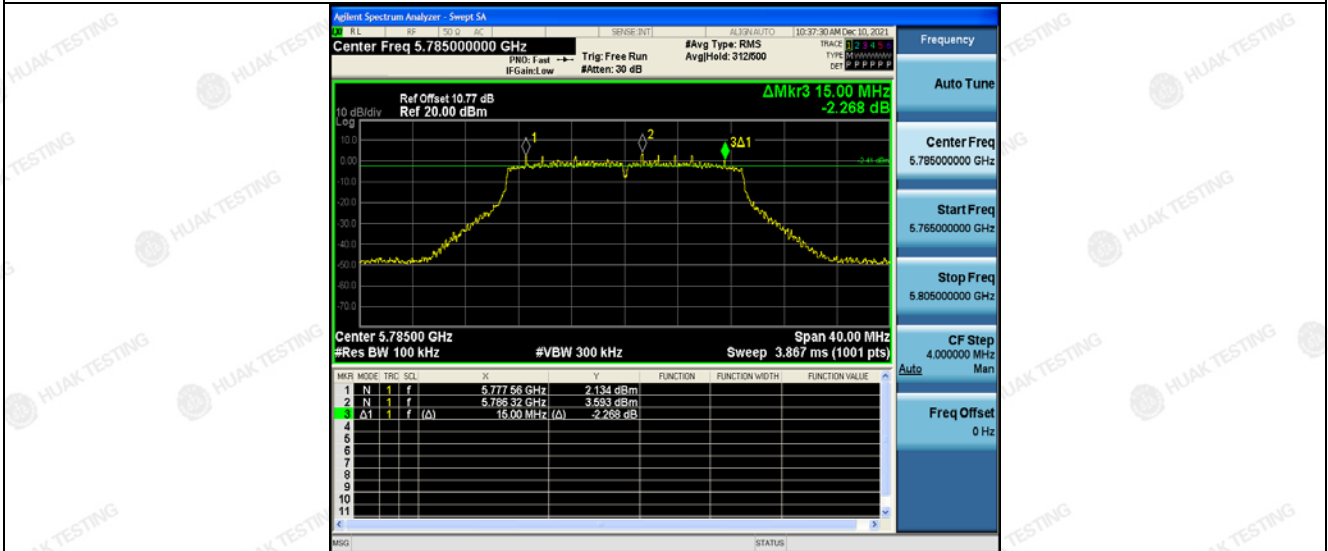

Mid

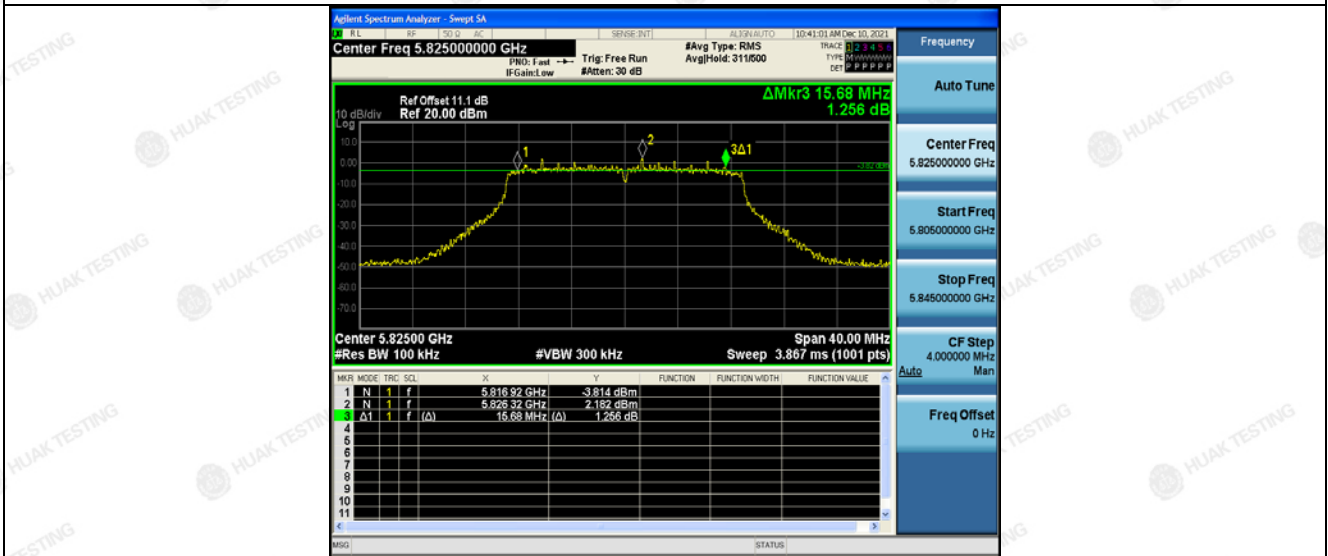


High


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



802.11n(HT40)

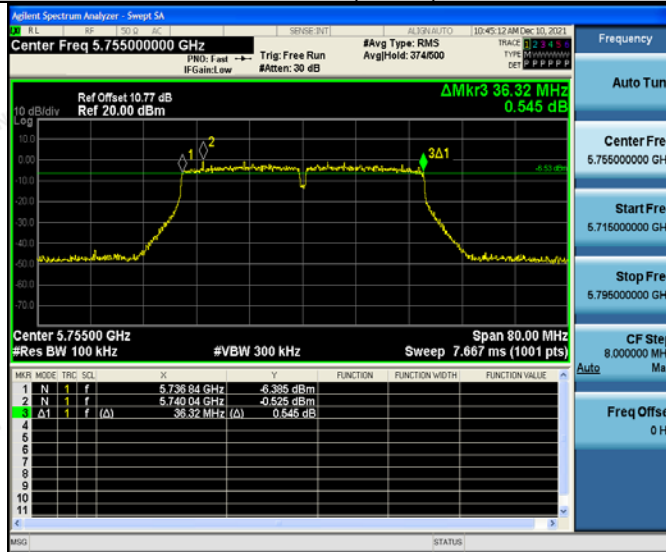

Low

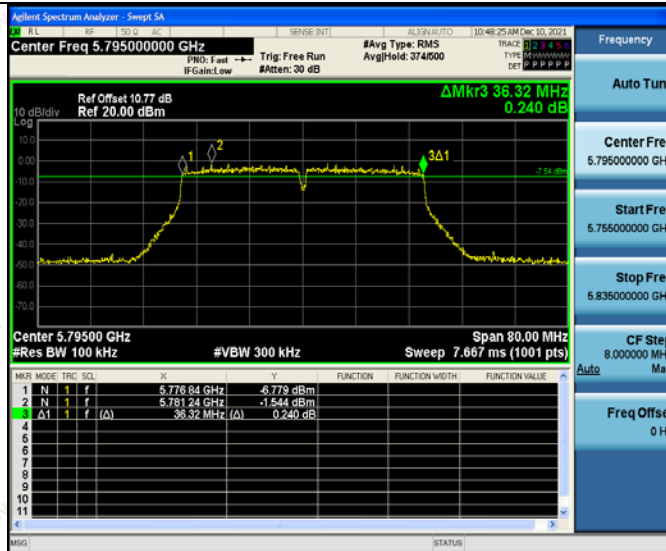


High

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




802.11ac(HT20)

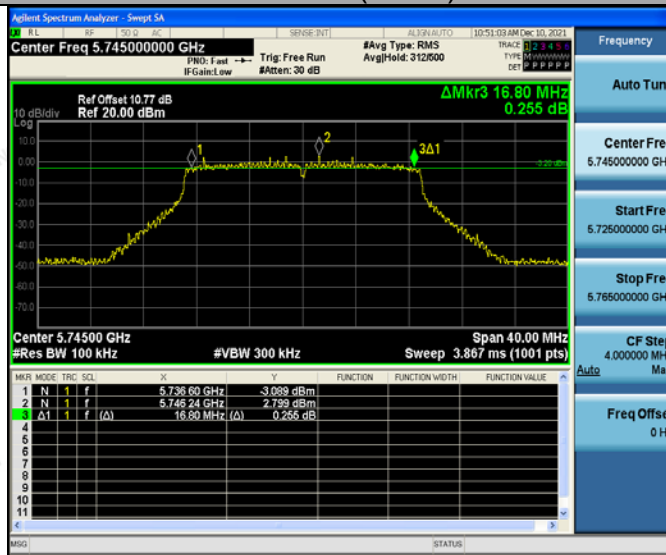

Low



Mid

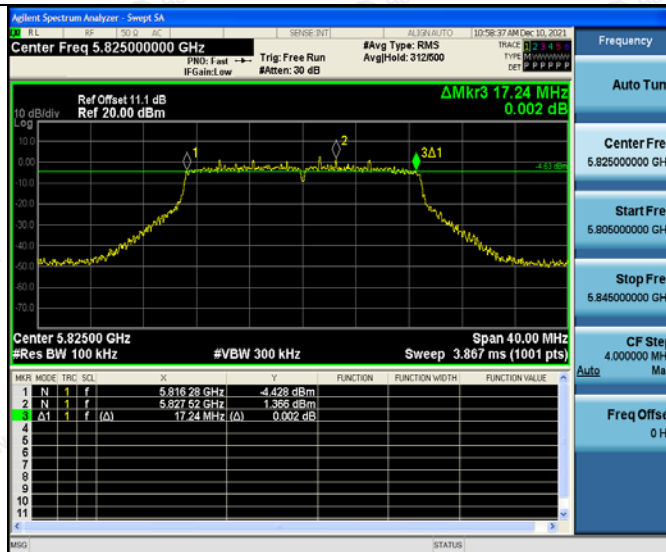

High


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



802.11ac(HT40)




Low

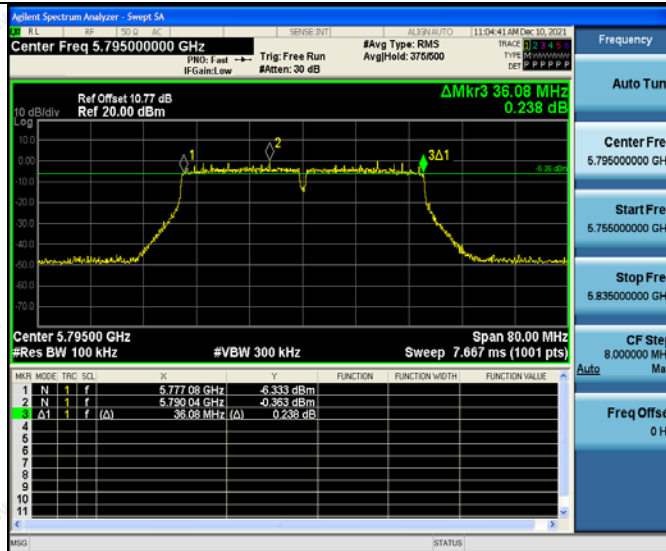

High


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

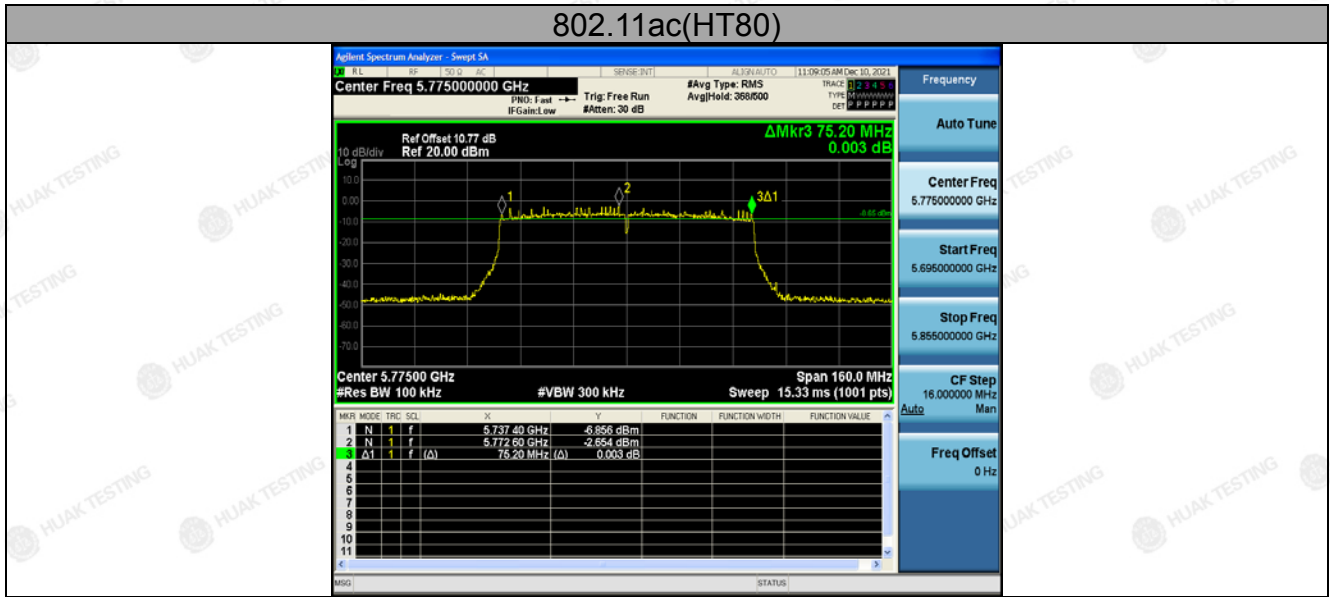


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




802.11ax(HT20)

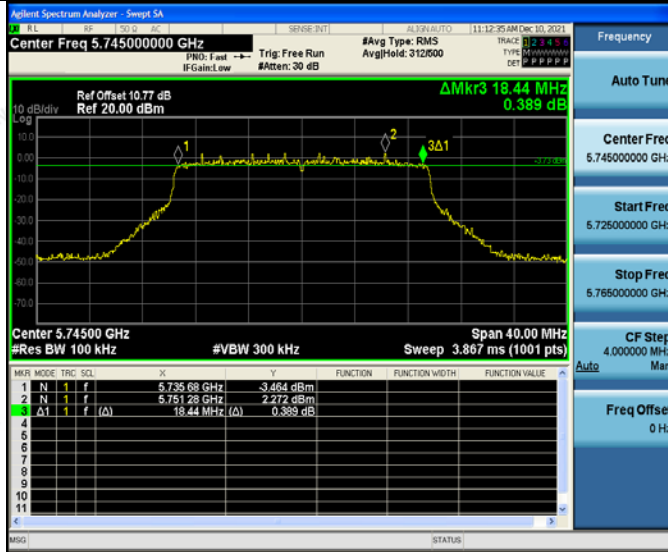

Low

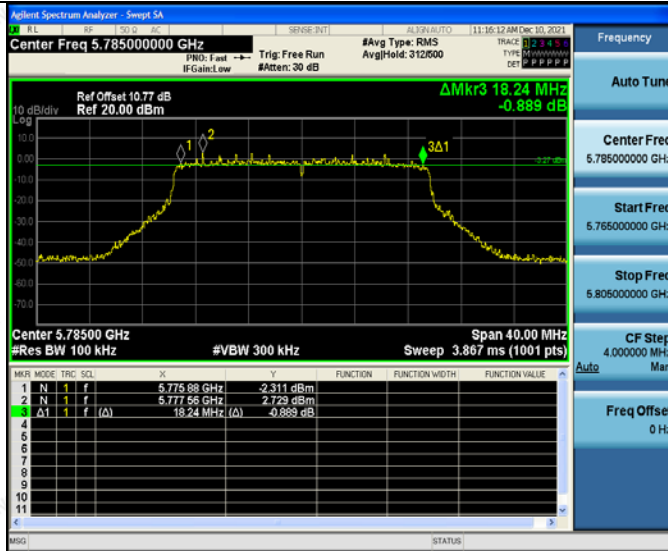

Mid

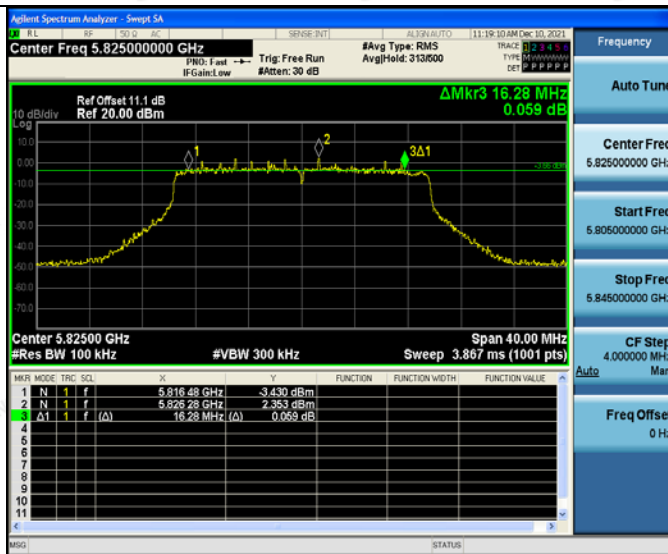


High


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



802.11ax(HT40)

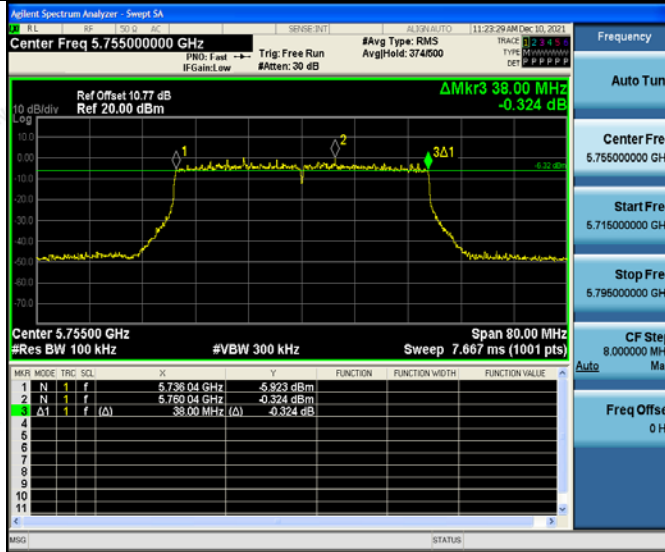


Low

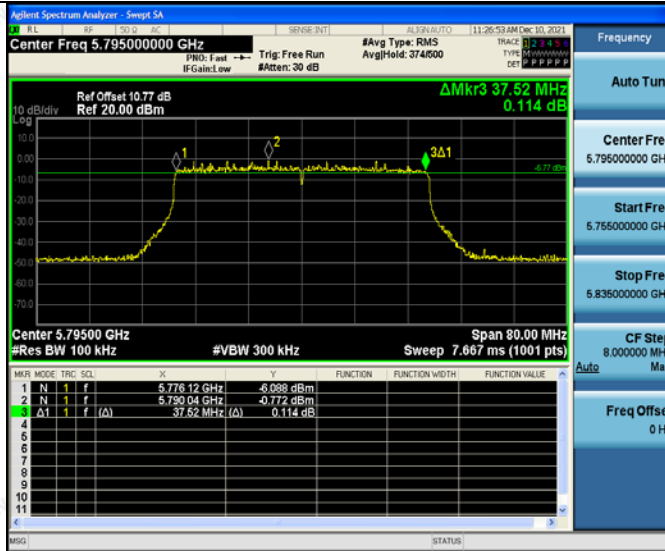

High


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

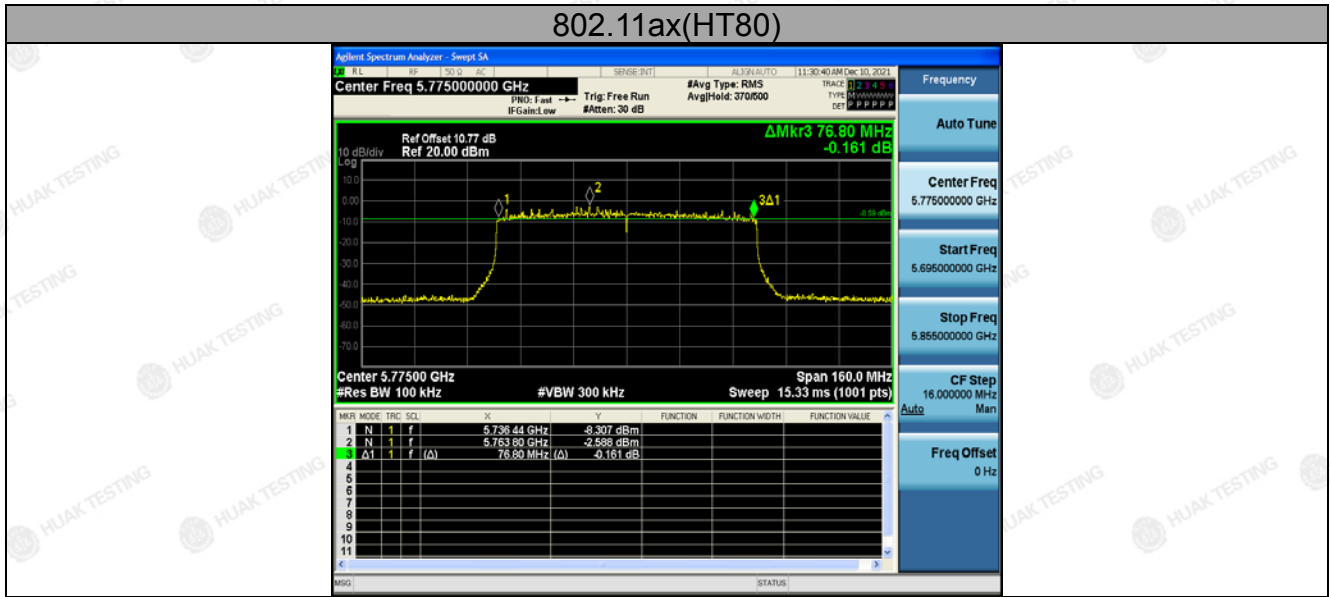

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

4.4. 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

4.4.1. Test Specification

Test Requirement:	47 CFR Part 15C Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Limit:	No restriction limits
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth $RBW = 1\% EBW$, $VBW \geq 3RBW$, In order to make an accurate measurement. 4. Measure and record the results in the test report.
Test Result:	N/A

4.4.2. Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 09, 2021	Dec. 08, 2022
RF cable	Times	1-40G	HKE-034	Dec. 09, 2021	Dec. 08, 2022
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 09, 2021	Dec. 08, 2022


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

4.4.3. Test Result

N/A

4.5. POWER SPECTRAL DENSITY

4.5.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F
Limit:	≤30.00dBm/500KHz for Band IV 5725MHz-5850MHz
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 2. Set RBW = 510 kHz/1 MHz, VBW ≥ 3*RBW, Sweep time = Auto, Detector = RMS. 3. Allow the sweeps to continue until the trace stabilizes. 4. Use the peak marker function to determine the maximum amplitude level. 5. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.
Test Result:	PASS

4.5.2. Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 09, 2021	Dec. 08, 2022
RF cable	Times	1-40G	HKE-034	Dec. 09, 2021	Dec. 08, 2022
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 09, 2021	Dec. 08, 2022

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.5.3. Test data

ANT 1

Configuration Band IV (5725 - 5850 MHz)						
Mode	Test channel	Level [dBm/510kHz]	10log(500/510)	Power Spectral Density	Limit (dBm/500kHz)	Result
11a	CH149	3.94	-0.086	3.854	30	PASS
11a	CH157	5.28	-0.086	5.194	30	PASS
11a	CH165	4.44	-0.086	4.354	30	PASS
11n HT20	CH149	4.06	-0.086	3.974	30	PASS
11n HT20	CH157	4.74	-0.086	4.654	30	PASS
11n HT20	CH165	5.06	-0.086	4.974	30	PASS
11n HT40	CH151	1.56	-0.086	1.474	30	PASS
11n HT40	CH159	1.51	-0.086	1.424	30	PASS
11ac HT20	CH149	4.6	-0.086	4.514	30	PASS
11ac HT20	CH157	5.35	-0.086	5.264	30	PASS
11ac HT20	CH165	5.07	-0.086	4.984	30	PASS
11ac HT40	CH151	2.29	-0.086	2.204	30	PASS
11ac HT40	CH159	2.34	-0.086	2.254	30	PASS
11ac HT80	CH155	-0.89	-0.086	-0.976	30	PASS
11ax HT20	CH149	5.23	-0.086	5.144	30	PASS
11ax HT20	CH157	5.88	-0.086	5.794	30	PASS
11ax HT20	CH165	6.44	-0.086	6.354	30	PASS
11ax HT40	CH151	2.67	-0.086	2.584	30	PASS
11ax HT40	CH159	3.55	-0.086	3.464	30	PASS
11ax HT80	CH155	1.56	-0.086	1.474	30	PASS

Test plots as follows:

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.