



# TEST REPORT

**APPLICANT** : Reliance Communications LLC

**PRODUCT NAME** : Orbic Fun

**MODEL NAME** : RC609LSM

**BRAND NAME** : Orbic

**FCC ID** : 2ABGH-RC609LSM

**STANDARD(S)** : 47 CFR Part 15 Subpart C

**RECEIPT DATE** : 2022-03-31

**TEST DATE** : 2022-04-11 to 2022-05-06

**ISSUE DATE** : 2022-05-25

Edited by: Peng Mi  
Peng Mi (Rapporteur)

Approved by: Shen Junsheng  
Shen Junsheng (Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

- 1. Technical Information ..... 3**
- 1.1. Applicant and Manufacturer Information ..... 3**
- 1.2. Equipment Under Test (EUT) Description ..... 3**
- 1.3. Modulation Type and Data Rate of EUT ..... 4**
- 1.4. The Channel Number and Frequency ..... 5**
- 1.5. Test Standards and Results ..... 6**
- 1.6. Environmental Conditions ..... 7**
- 2. 47 CFR Part 15C Requirements ..... 8**
- 2.1. Antenna Requirement ..... 8**
- 2.2. Duty Cycle of Test Signal ..... 9**
- 2.3. Maximum Peak and Average Conducted Output Power ..... 13**
- 2.4. Bandwidth ..... 16**
- 2.5. Conducted Spurious Emissions and Band Edge ..... 25**
- 2.6. Power Spectral Density ..... 38**
- 2.7. Conducted Emission ..... 47**
- 2.8. Restricted Frequency Bands ..... 51**
- 2.9. Radiated Emission ..... 64**
- Annex A Test Uncertainty ..... 80**
- Annex B Testing Laboratory Information ..... 81**

Change History		
Version	Date	Reason for change
1.0	2022-05-25	First edition



# 1. Technical Information

Note: Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	Reliance Communications LLC
<b>Applicant Address:</b>	91 Colin Drive, Unit 1, HOLBROOK, New York 11741, United States
<b>Manufacturer:</b>	Unimaxcomm
<b>Manufacturer Address:</b>	35F, HBC HuiLong Center Building-II Minzhi Street, Longhua, Shenzhen, P.R. China 518110

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	Orbic Fun	
<b>Sample No.:</b>	7#	
<b>Hardware Version:</b>	V1.0	
<b>Software Version:</b>	ORB609L_V1.0.14_BVZ-SM	
<b>Modulation Technology:</b>	DSSS, OFDM	
<b>Modulation Type:</b>	Refer to section1.3	
<b>Operating Frequency Range:</b>	802.11b/g/ n (HT20): 2412MHz–2472MHz 802.11n (HT40): 2422MHz–2462MHz	
<b>Antenna Type:</b>	PIFA Antenna	
<b>Antenna Gain:</b>	4.43dBi	
<b>Accessory Information:</b>	Battery	
	Brand Name:	N/A
	Model No.:	BTE-3402
	Serial No.:	N/A
	Capacity:	3400mAh
	Rated Voltage:	3.8V
	Charge Limit:	4.35V
	Manufacturer:	Phenix New Energy(Hui Zhou)Co.,Ltd.



<b>Accessory Information:</b>	AC Adapter	
	Brand Name:	N/A
	Model No.:	TPA-23A050200UU01
	Serial No.:	N/A
	Rated Output:	5V $\pm$ 2000mA
	Rated Input:	100-240V $\sim$ 50/60Hz, 0.3A
	Manufacturer:	Shenzhen Tianyin Electronics Co.,Ltd.

**Note 1:** We use the dedicated software to control the EUT continuous transmission.

**Note 2:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

### 1.3. Modulation Type and Data Rate of EUT

Modulation technology	Modulation Type	Data Rate (Mbps) <sup>Note1</sup>
DSSS (802.11b)	DBPSK	<b>1</b>
	DQPSK	2
	CCK	5.5/ 11
OFDM (802.11g)	BPSK	<b>6 / 9</b>
	QPSK	12 / 18
	16QAM	24 / 36
	64QAM	48 / 54
OFDM (802.11n (HT20))	BPSK	<b>6.5</b>
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65
OFDM (802.11n (HT40))	BPSK	<b>13.5</b>
	QPSK	27/40.5
	16QAM	54/81/108
	64QAM	121.5/135

**Note1:** The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.



## 1.4. The Channel Number and Frequency

Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11b/g/n (HT20)	<b>1</b>	<b>2412</b>	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432	12	2467
	6	2437	<b>13</b>	<b>2472</b>
	<b>7</b>	<b>2442</b>		
Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11n (HT40)	<b>3</b>	<b>2422</b>	8	2447
	4	2427	9	2452
	5	2432	10	2457
	6	2437	<b>11</b>	<b>2462</b>
	<b>7</b>	<b>2442</b>		

**Note 1:** The black bold channels were selected for test.



## 1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle Of Test Signal	Apr. 15, 2022	Meng Shurui	PASS	No deviation
3	15.247(b)	Maximum Peak and Average Conducted Output Power	Apr. 15, 2022	Meng Shurui	PASS	No deviation
4	15.247(a)	Bandwidth	Apr. 18, 2022	Meng Shurui	PASS	No deviation
5	15.247(d)	Conducted Spurious Emission and Band Edge	Apr. 18, 2022	Meng Shurui	PASS	No deviation
6	15.247(e)	Power Spectral Density	Apr. 18, 2022	Meng Shurui	PASS	No deviation
7	15.207	Conducted Emission	Apr. 11, 2022	Wu Zhaoling	PASS	No deviation
8	15.247(d)	Restricted Frequency Bands	Apr. 27&29, 2022	Lin Jiayong	PASS	No deviation
9	15.209, 15.247(d)	Radiated Emission	May. 06, 2022	Lin Jiayong	PASS	No deviation

**Note 1:** The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013, KDB558074 D01 v05r02.

**Note 2:** The path loss during the RF test is calibrated to correct the results by the offset setting



in the test equipments. The ref offset 11.0dB contains two parts that cable loss 1.0dB and Attenuator 10dB.

**Note 3:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 4:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

## 1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



## 2. 47 CFR Part 15C Requirements

### 2.1. Antenna Requirement

#### 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 2.1.2. Test Result: Compliant

Inside of the EUT has a PIFA antenna coupled with the metal shrapnel. Please refer to the EUT internal photos.



## 2.2. Duty Cycle of Test Signal

### 2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this subclause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than  $\pm 2\%$ ; otherwise, the duty cycle is considered to be nonconstant.

### 2.2.2. Test Description

#### Test Setup:



ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.




2.2.3. Test Result


A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor (10*log[1/D])
802.11b	98.79	0.05
802.11g	98.31	0.07
802.11n (HT20)	98.18	0.08
802.11n (HT40)	94.87	0.23


B. Test Plot:

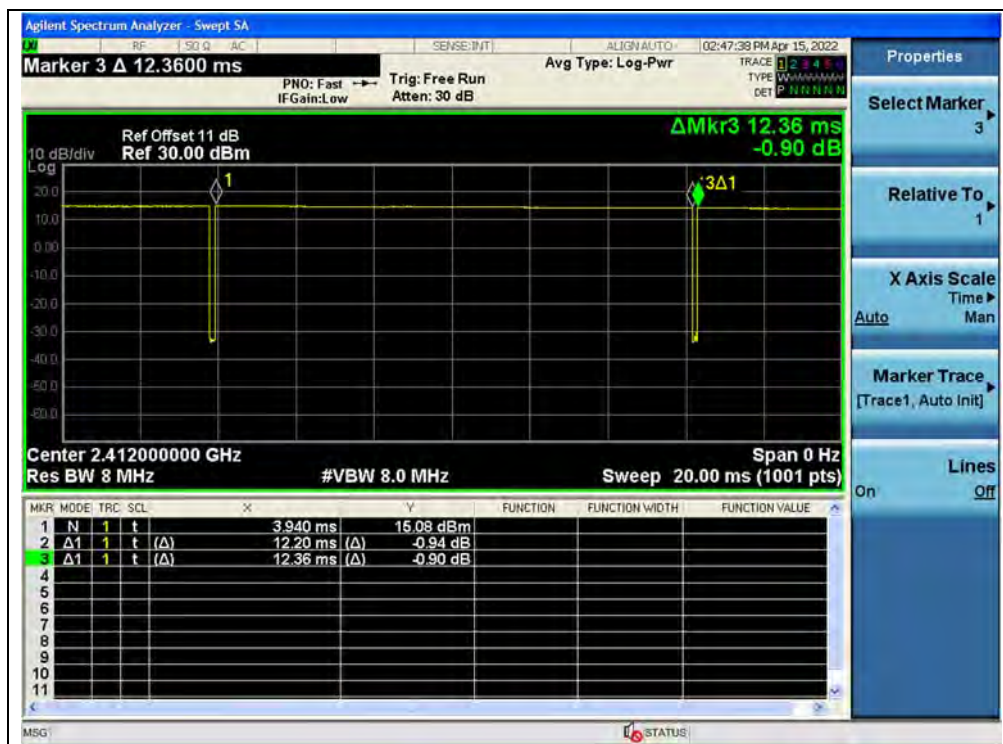

(Channel 1, 802.11b)

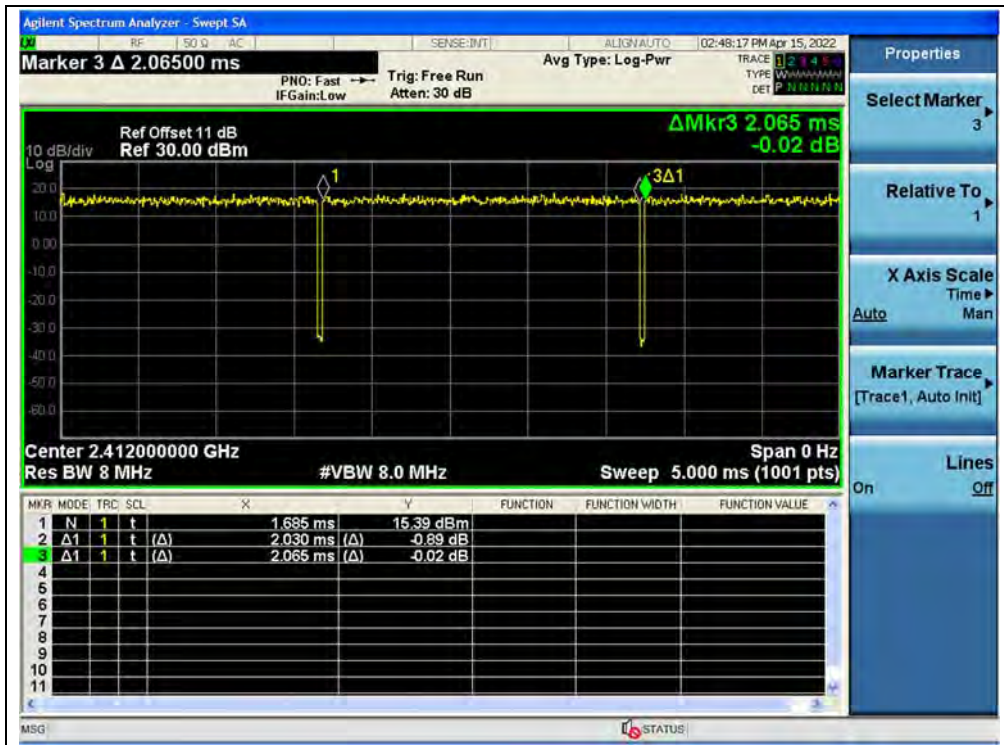

(Channel 1, 802.11g)

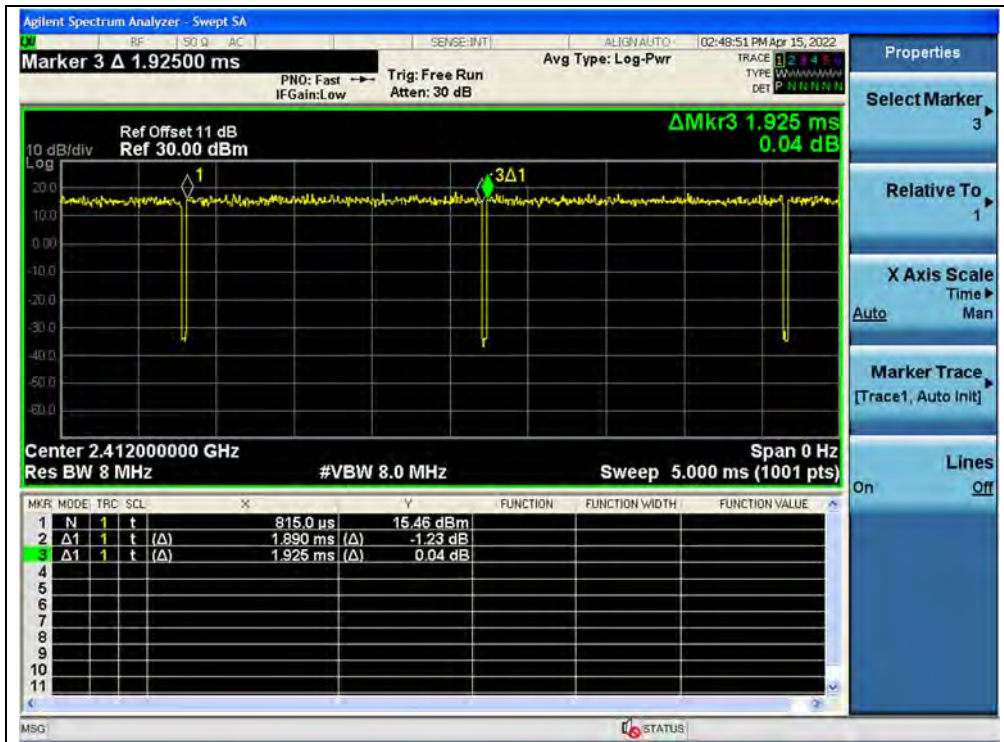

(Channel 1, 802.11n (HT20))



(Channel 3, 802.11n (HT40))

## 2.3. Maximum Peak and Average Conducted Output Power

### 2.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

### 2.3.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

#### Test Setup:



The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.





### 2.3.3. Test Result

#### Maximum Peak Conducted Output Power

##### 802.11b Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	15.74	0.037	30	1	PASS
7	2442	17.48	0.056			PASS
13	2472	16.52	0.045			PASS

##### 802.11g Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	19.87	0.097	30	1	PASS
7	2442	20.87	0.122			PASS
13	2472	14.84	0.030			PASS

##### 802.11n (HT20) Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	19.67	0.093	30	1	PASS
7	2442	20.65	0.116			PASS
13	2472	14.15	0.026			PASS

##### 802.11n (HT40) Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
3	2422	20.32	0.108	30	1	PASS
7	2442	<b>21.20</b>	<b>0.132</b>			PASS
11	2462	20.56	0.114			PASS



**Maximum Average Conducted Output Power**

**802.11b Mode**

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty Factor Calculated		dBm	W	
		dBm		dBm	W			
1	2412	12.52	0.05	12.57	0.018	30	1	PASS
7	2442	14.70		<b>14.75</b>	<b>0.030</b>			PASS
13	2472	13.43		13.48	0.022			PASS

**802.11g Mode**

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty Factor Calculated		dBm	W	
		dBm		dBm	W			
1	2412	9.75	0.07	9.82	0.010	30	1	PASS
7	2442	11.76		11.83	0.015			PASS
13	2472	6.41		6.48	0.004			PASS

**802.11n (HT20) Mode**

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty Factor Calculated		dBm	W	
		dBm		dBm	W			
1	2412	9.63	0.08	9.71	0.009	30	1	PASS
7	2442	11.66		11.74	0.015			PASS
13	2472	5.64		5.72	0.004			PASS

**802.11n (HT40) Mode**

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty Factor Calculated		dBm	W	
		dBm		dBm	W			
3	2422	10.81	0.23	11.04	0.013	30	1	PASS
7	2442	12.32		12.55	0.018			PASS
11	2462	10.33		10.56	0.011			PASS


## 2.4. Bandwidth

### 2.4.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.4.2. Test Description

#### Test Setup:

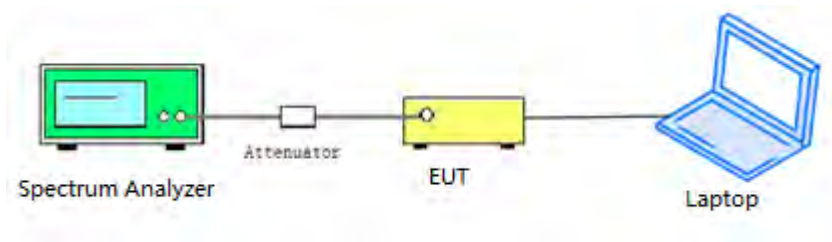

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 2.4.3. Test Procedure

KDB 558074 Section 8.2 was used in order to prove compliance.





2.4.4. Test Result

802.11b Mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	8.538	≥500	PASS
7	2442	8.102	≥500	PASS
13	2472	8.039	≥500	PASS


B. Test Plot:



(Channel 1, 802.11b)



(Channel 7, 802.11b)

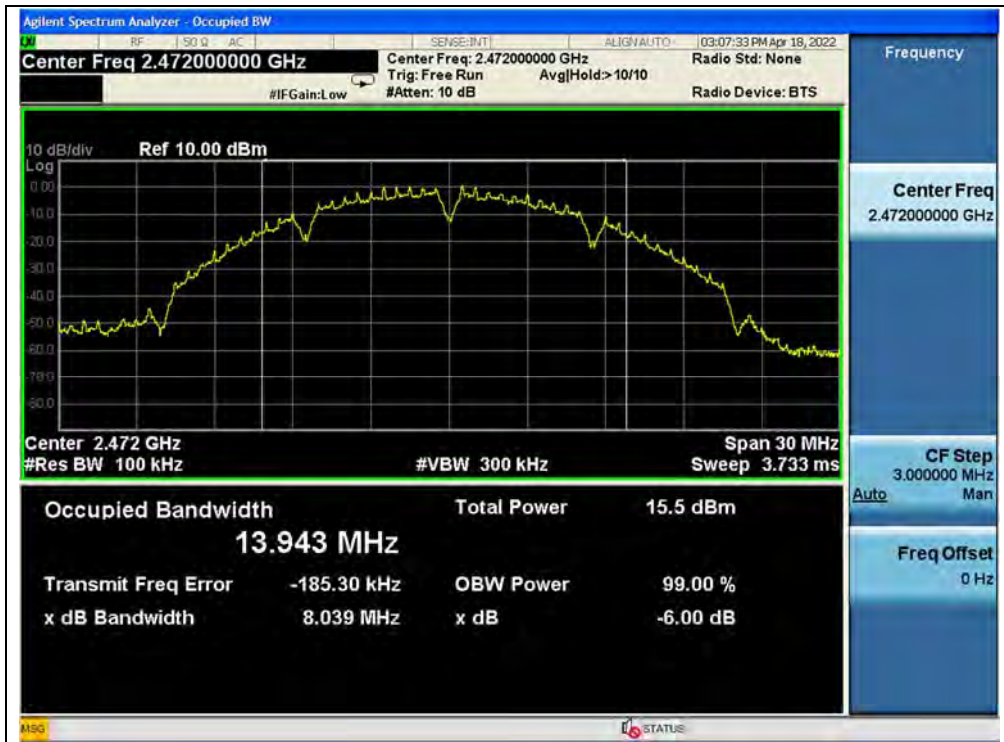

(Channel 13, 802.11b)



802.11g Mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	16.36	≥500	PASS
7	2442	16.05	≥500	PASS
13	2472	15.94	≥500	PASS

B. Test Plot:



(Channel 1, 802.11g)



(Channel 7, 802.11g)



(Channel 13, 802.11g)






**802.11n (HT20) Mode**


**A. Test Verdict:**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	17.26	≥500	PASS
7	2442	17.18	≥500	PASS
13	2472	16.35	≥500	PASS

**B. Test Plot:**

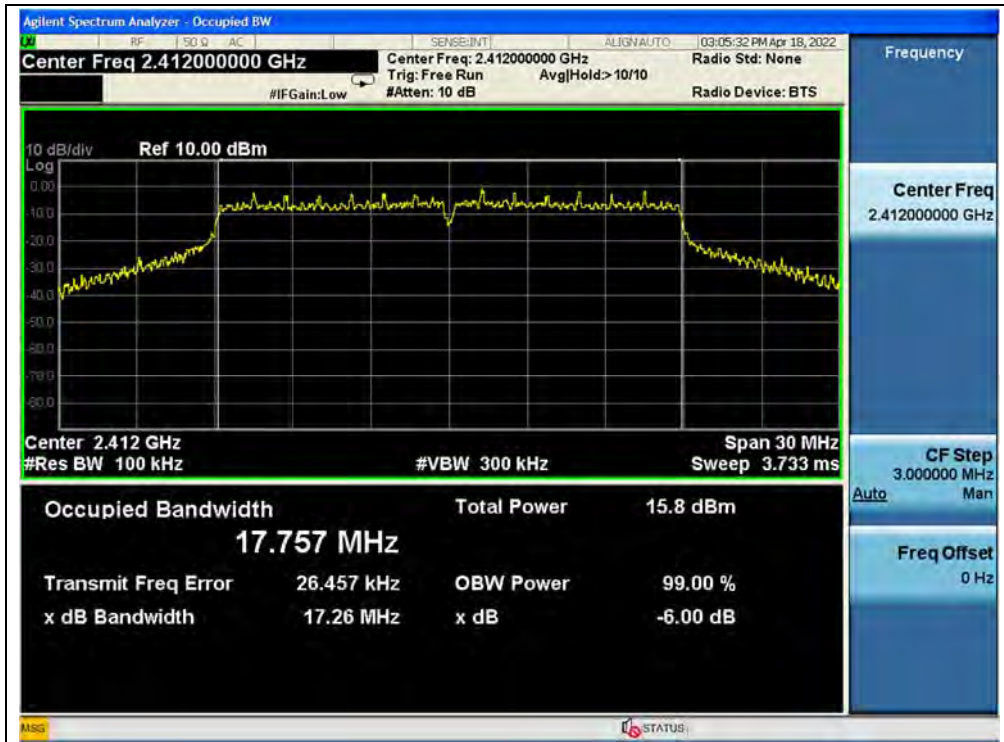

(Channel 1, 802.11n (HT20))

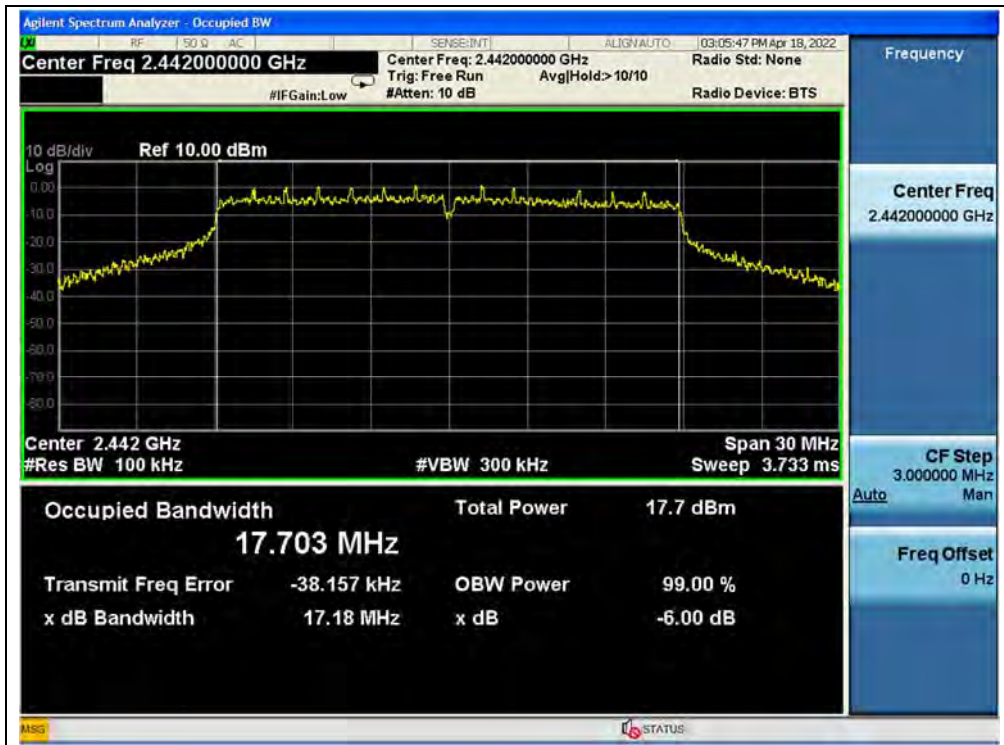

(Channel 7, 802.11n (HT20))



(Channel 13, 802.11n (HT20))




**802.11n (HT40) Mode**


**A. Test Verdict:**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
3	2422	35.11	≥500	PASS
7	2442	36.34	≥500	PASS
11	2462	35.09	≥500	PASS

**B. Test Plot:**

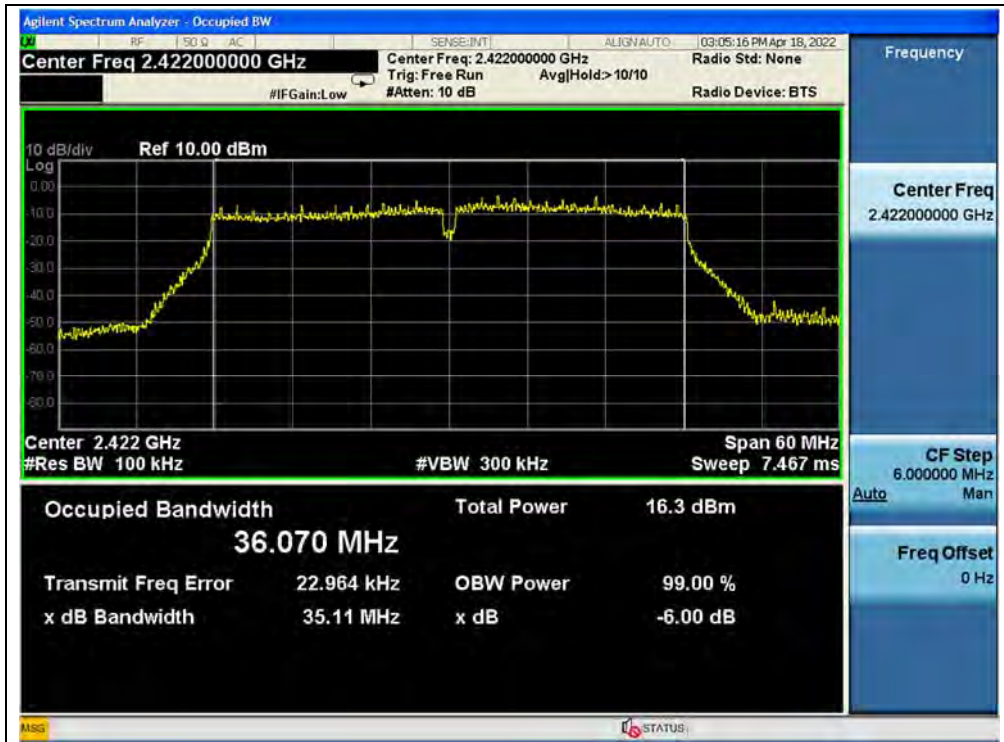

(Channel 3, 802.11n (HT40))

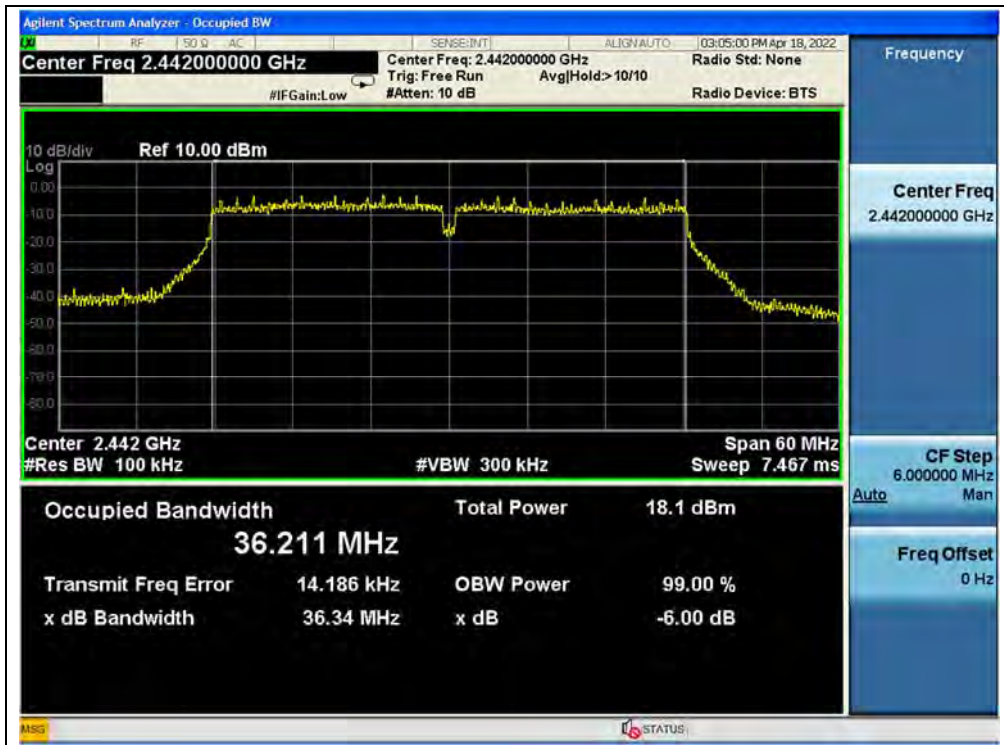

(Channel 7, 802.11n (HT40))



(Channel 11, 802.11n (HT40))



## 2.5. Conducted Spurious Emissions and Band Edge

### 2.5.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.5.2. Test Description

#### Test Setup:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 2.5.3. Test Procedure

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.




2.5.4. Test Result

802.11b Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-41.00	0.63	-19.37	PASS
7	2442	-41.18	0.77	-19.23	PASS
13	2472	-40.95	-1.24	-21.24	PASS


B. Test Plot:

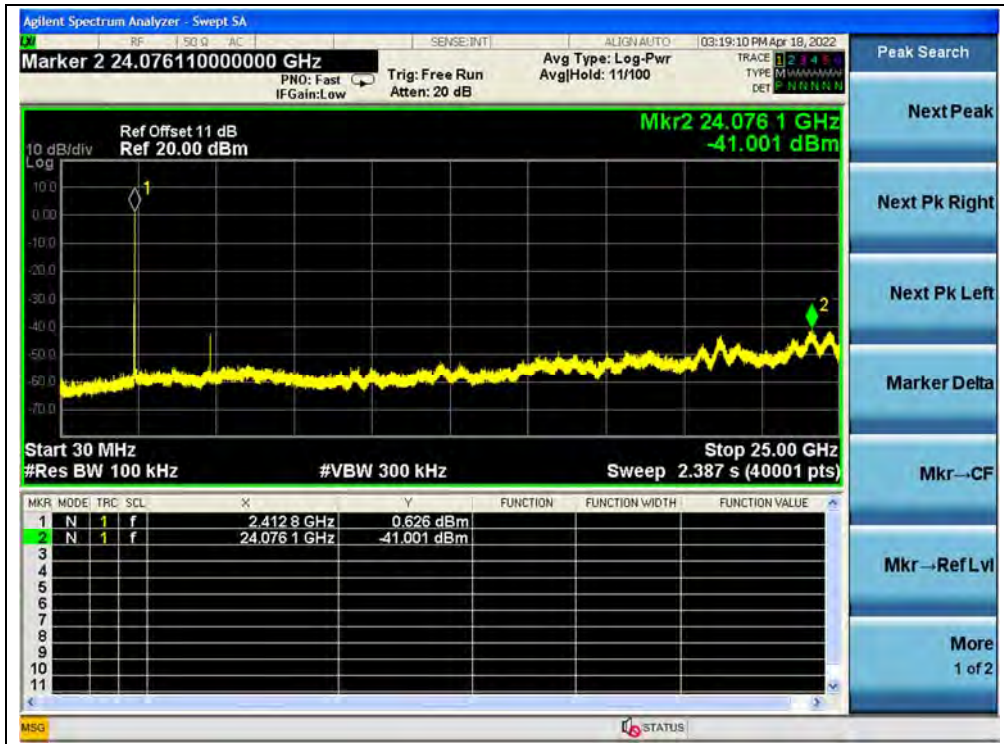

(30MHz to 25GHz, Channel 1, 802.11b)

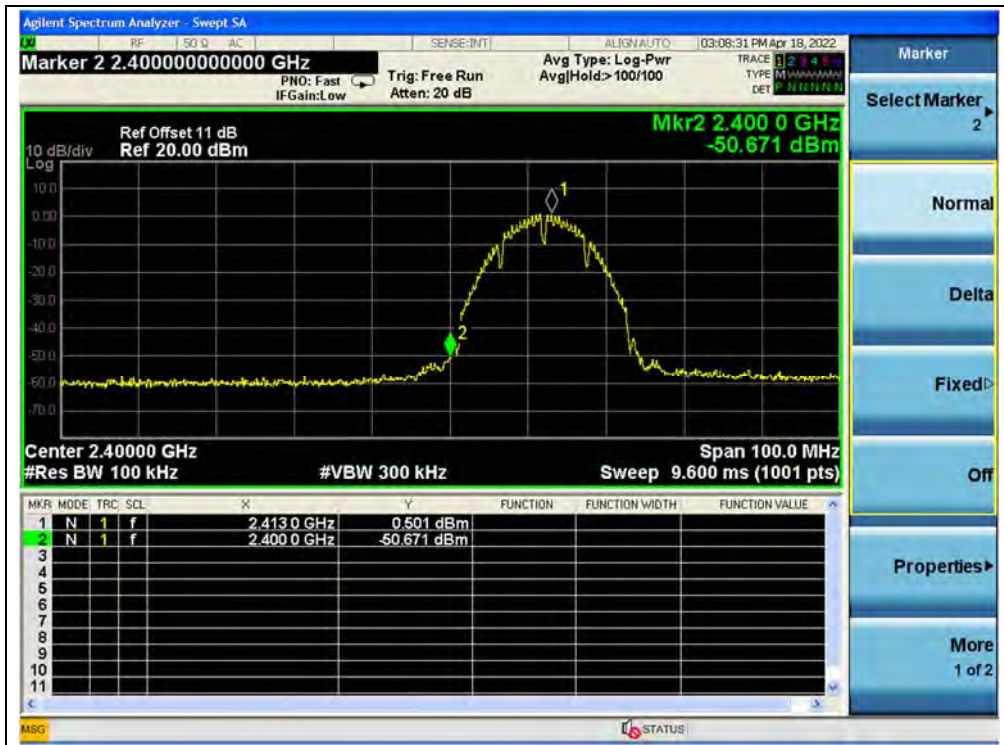


(Band Edge, Channel 1, 802.11b)

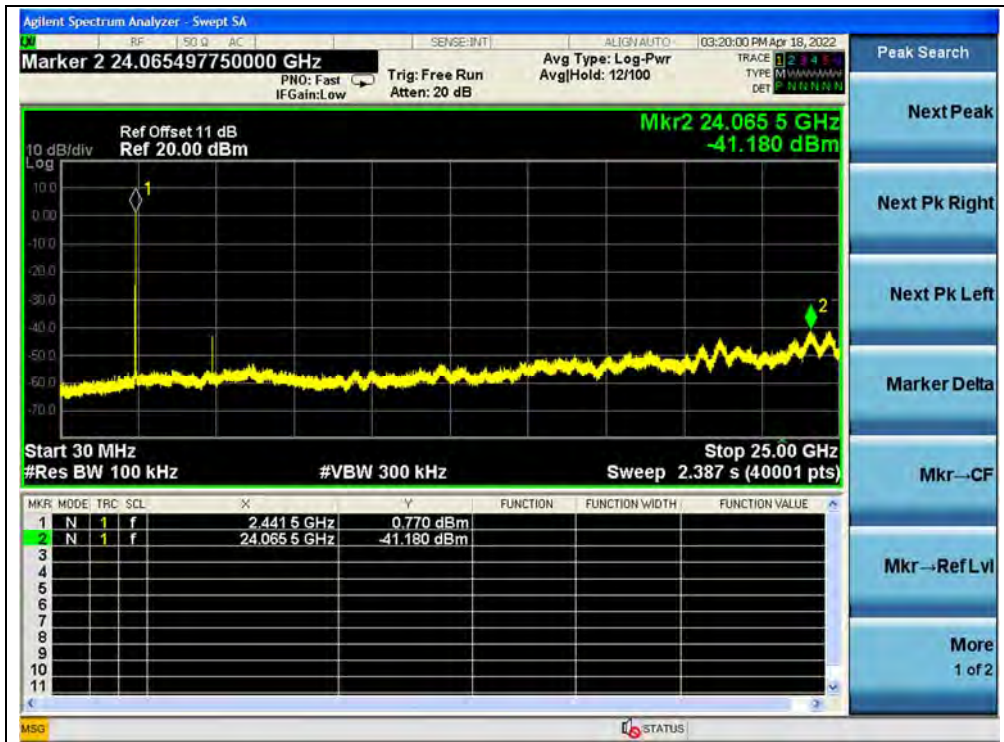


(30MHz to 25GHz, Channel 7, 802.11b)



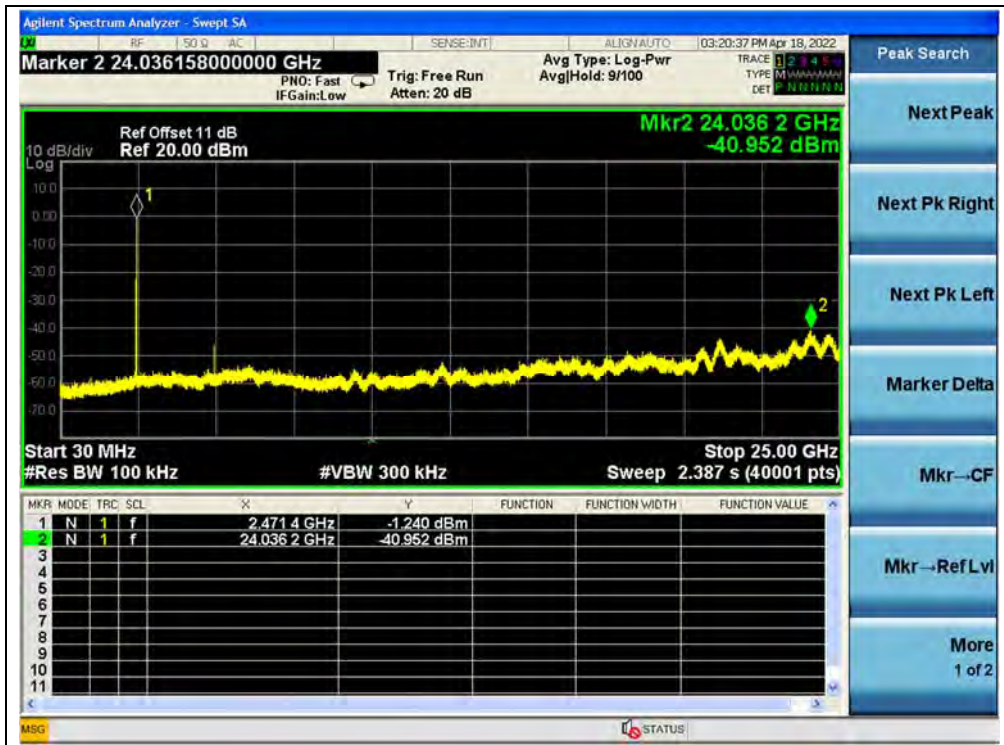

(30MHz to 25GHz, Channel 13, 802.11b)

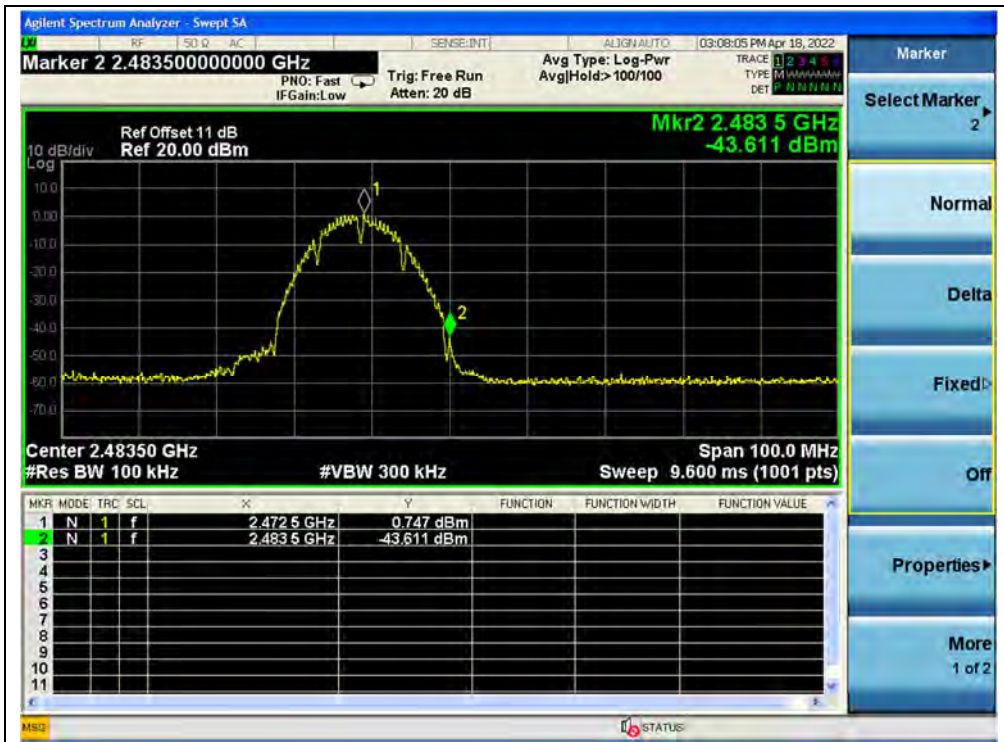

(Band Edge, Channel 13, 802.11b)




802.11g Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-41.46	-4.53	-24.53	PASS
7	2442	-41.14	0.89	-19.11	PASS
13	2472	-39.93	-2.82	-22.82	PASS

B. Test Plot:

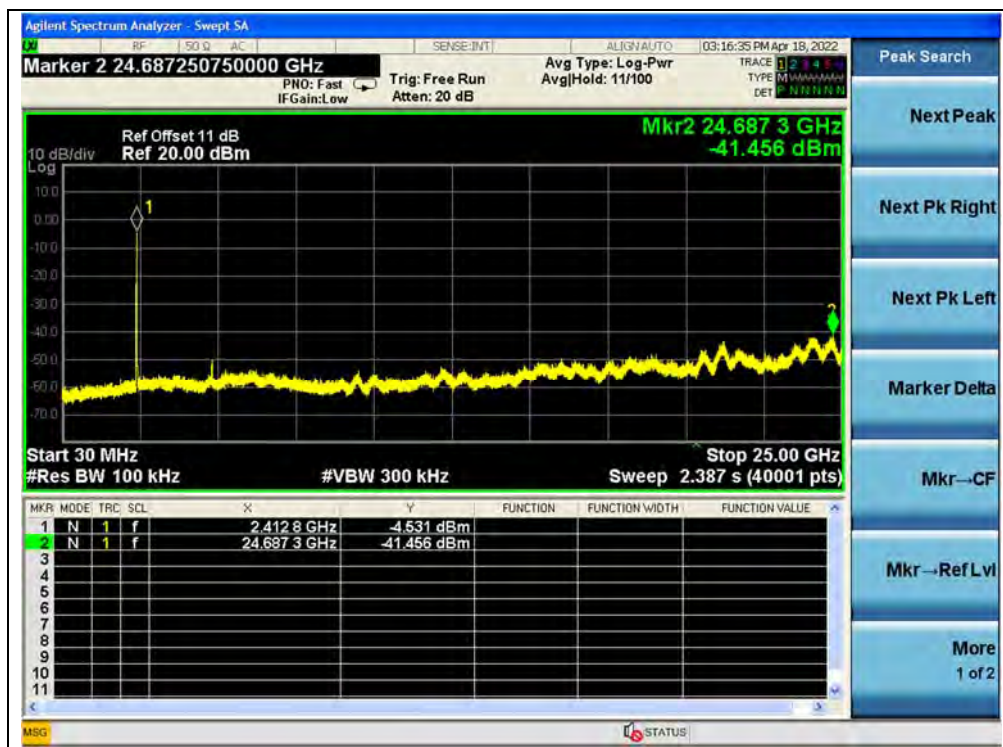

(30MHz to 25GHz, Channel 1, 802.11g)

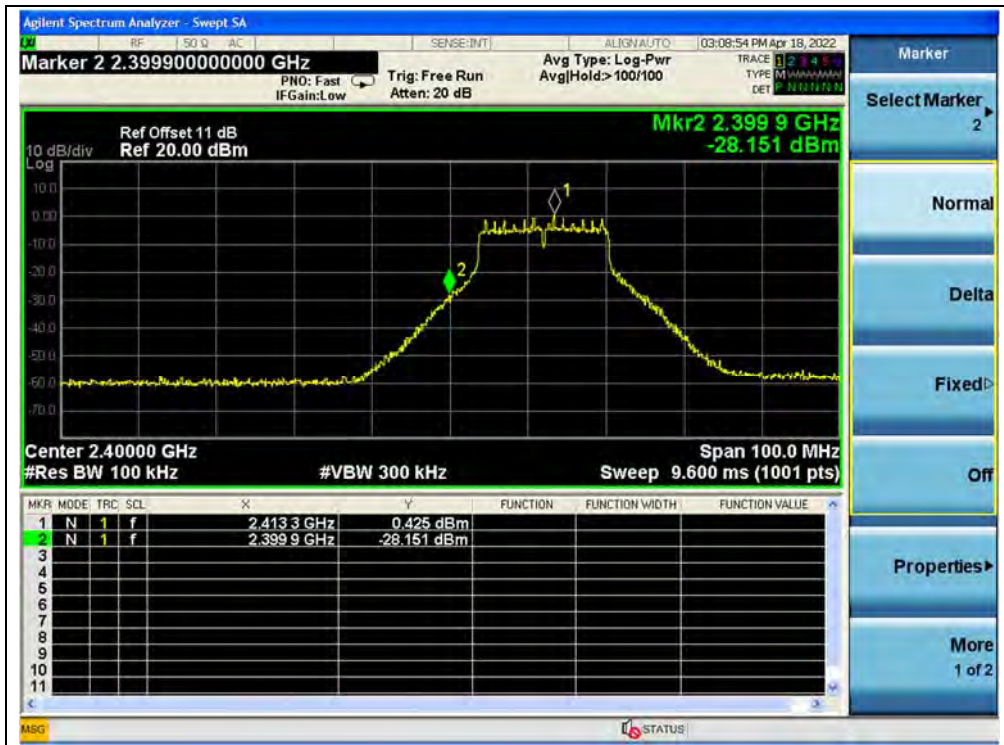


(Band Edge, Channel 1, 802.11g)



(30MHz to 25GHz, Channel 7, 802.11g)



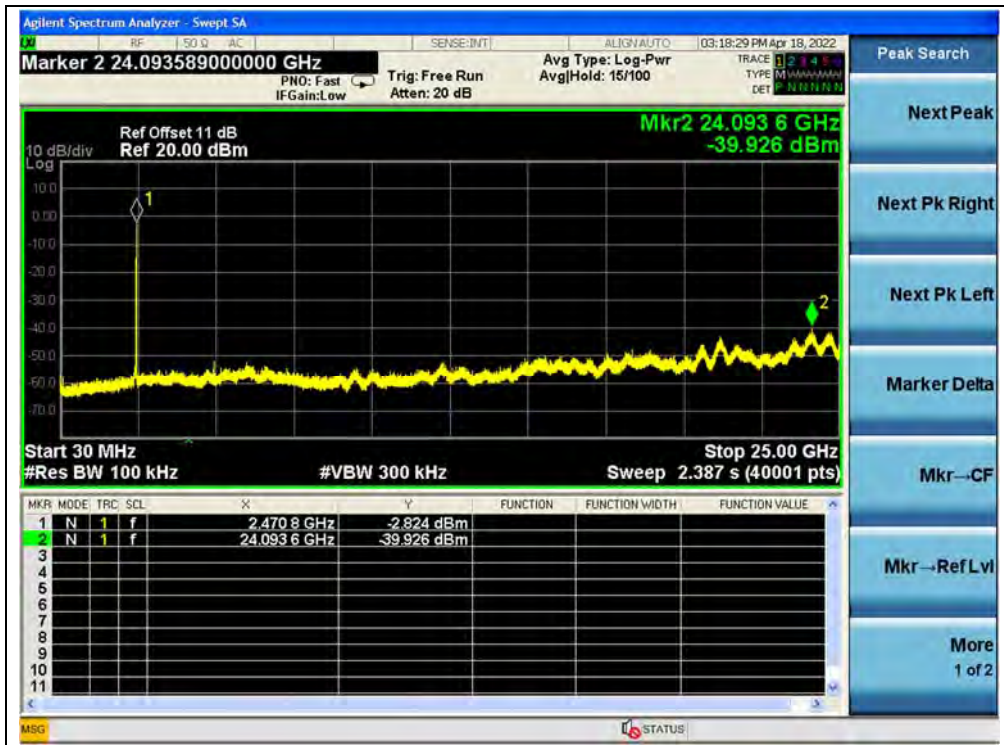

(30MHz to 25GHz, Channel 13, 802.11g)



(Band Edge, Channel 13, 802.11g)




802.11n (HT20) Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-41.20	-1.87	-21.87	PASS
7	2442	-40.94	-2.40	-22.40	PASS
13	2472	-41.31	-1.96	-21.96	PASS

B. Test Plot:

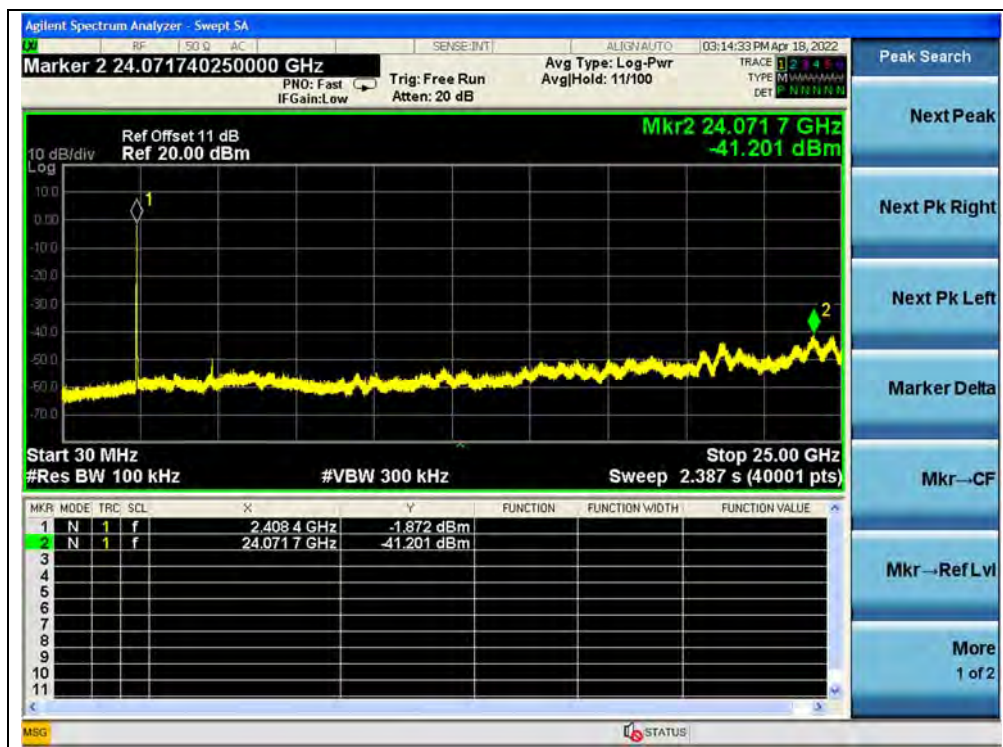

(30MHz to 25GHz, Channel 1, 802.11n (HT20))




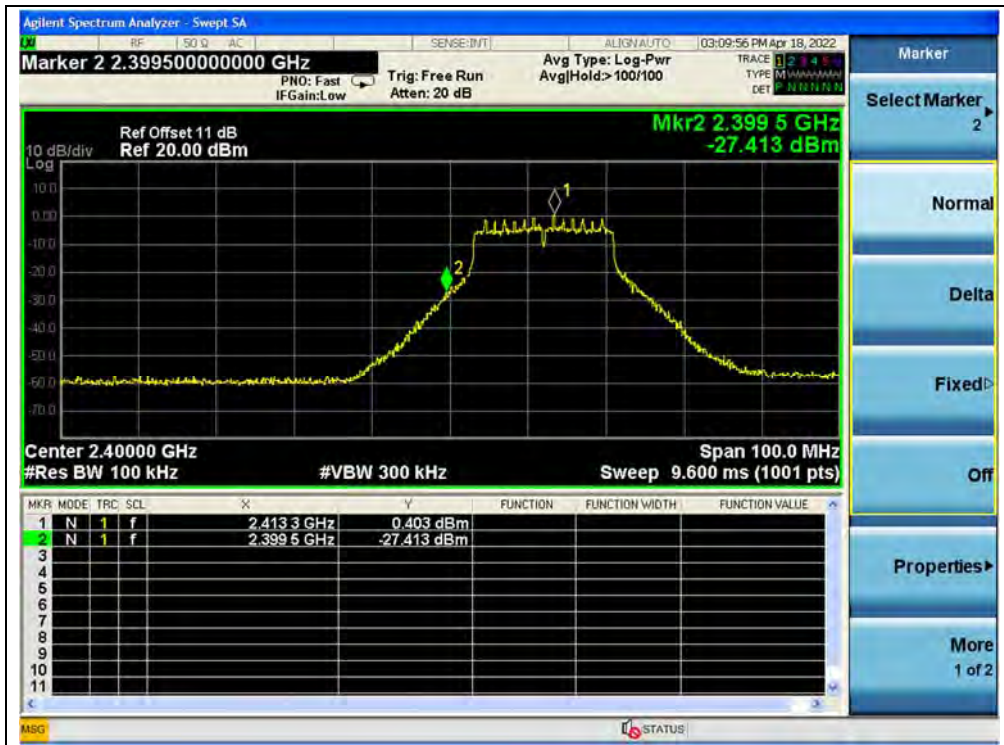


(Band Edge, Channel 1, 802.11n (HT20))



(30MHz to 25GHz, Channel 7, 802.11n (HT20))

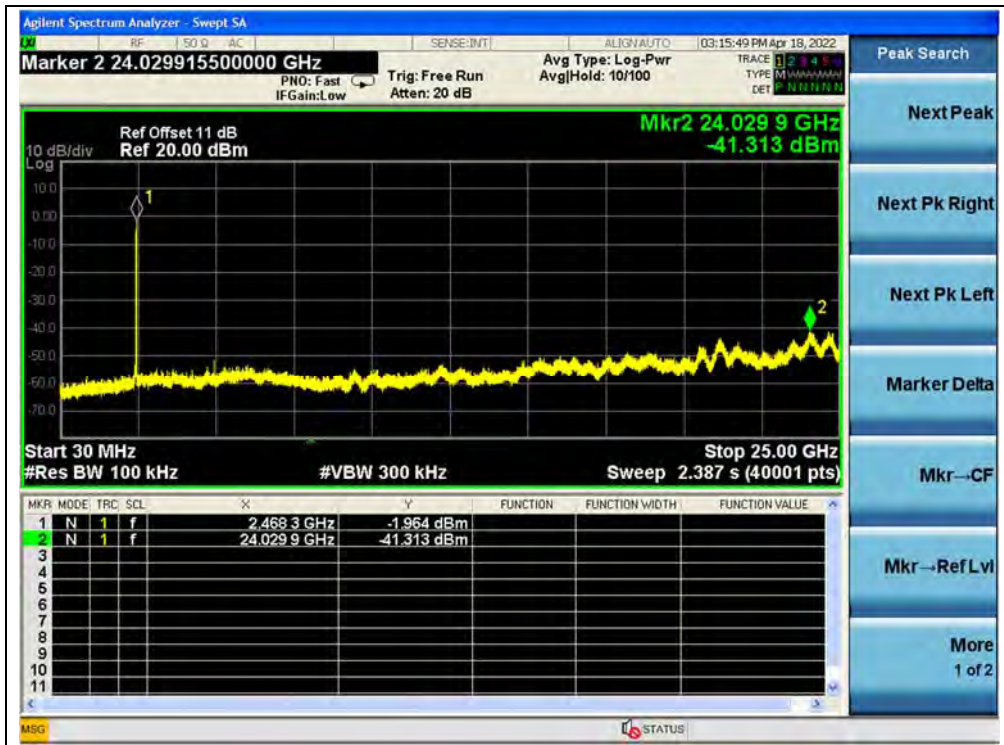

(30MHz to 25GHz, Channel 13, 802.11n (HT20))

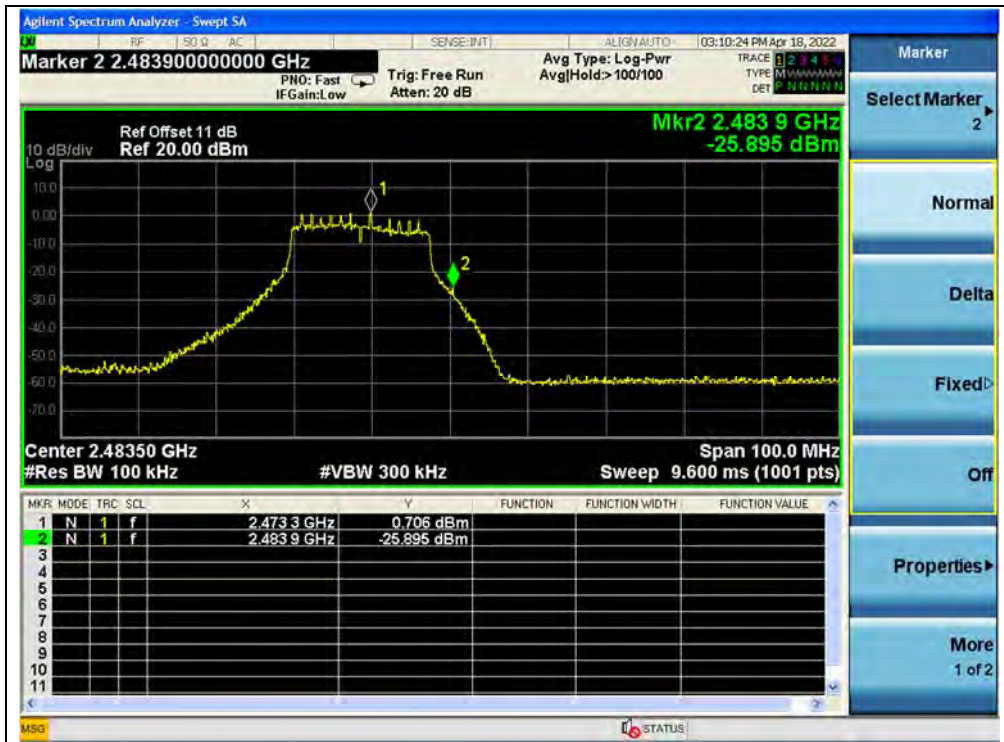

(Band Edge, Channel 13, 802.11n (HT20))




802.11n (HT40) Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
3	2422	-41.67	-2.30	-22.30	PASS
7	2442	-40.66	-1.15	-21.15	PASS
11	2462	-41.03	-3.12	-23.12	PASS

B. Test Plot:

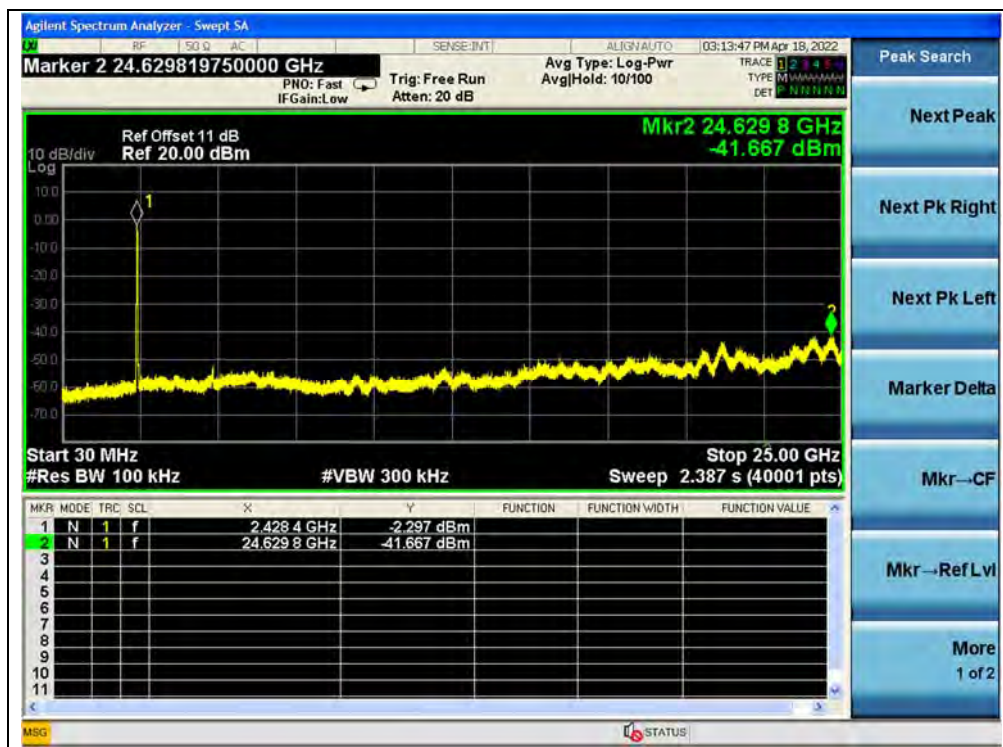

(30MHz to 25GHz, Channel 3, 802.11n (HT40))






(Band Edge, Channel 3, 802.11n (HT40))



(30MHz to 25GHz, Channel 7, 802.11n (HT40))

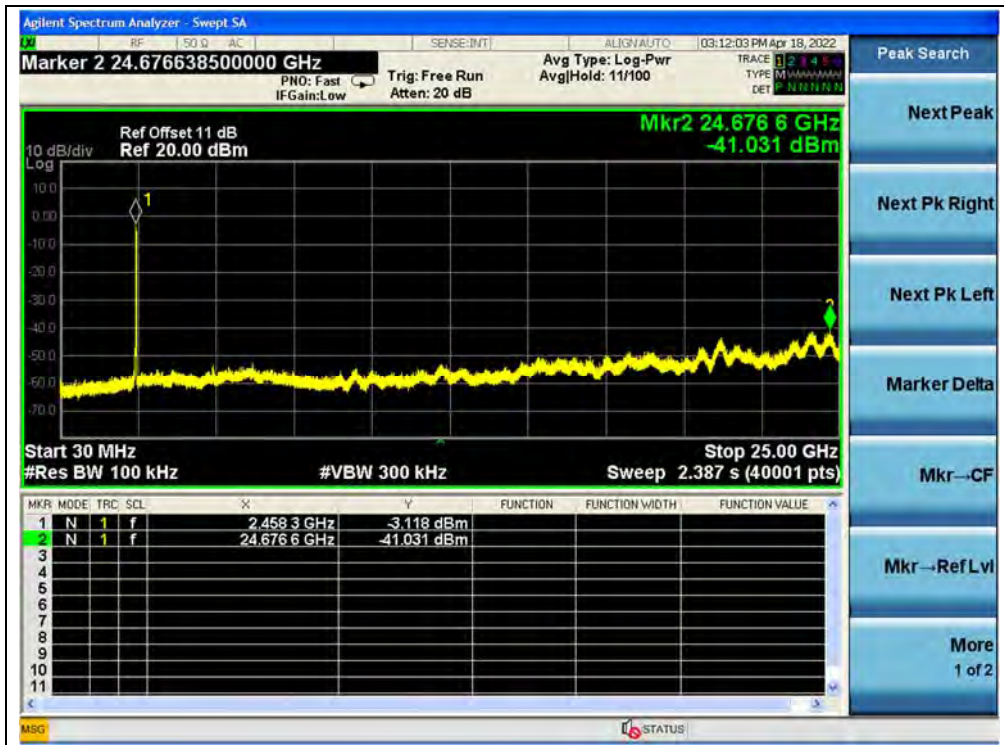

(30MHz to 25GHz, Channel 11, 802.11n (HT40))



(Band Edge, Channel 11, 802.11n (HT40))


## 2.6. Power Spectral Density

### 2.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 2.6.2. Test Description

#### Test Setup:

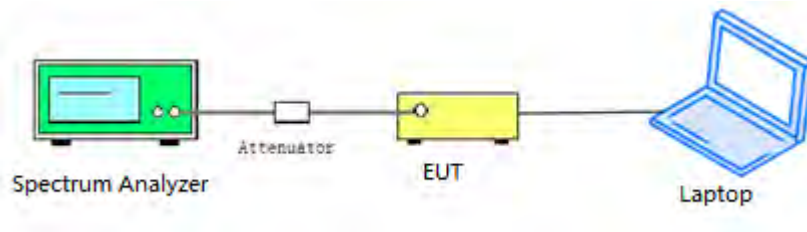

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

### 2.6.3. Test Procedure

KDB 558074 Section 8.4 was used in order to prove compliance.



2.6.4. Test Result

802.11b Mode

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-7.62	8	PASS
7	2442	-5.57	8	PASS
13	2472	-7.07	8	PASS

B. Test Plot:



(Channel 1, 802.11b)





(Channel 7, 802.11b)



(Channel 13, 802.11b)






802.11g Mode


A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-14.90	8	PASS
7	2442	-12.26	8	PASS
13	2472	-14.85	8	PASS

B. Test Plot:

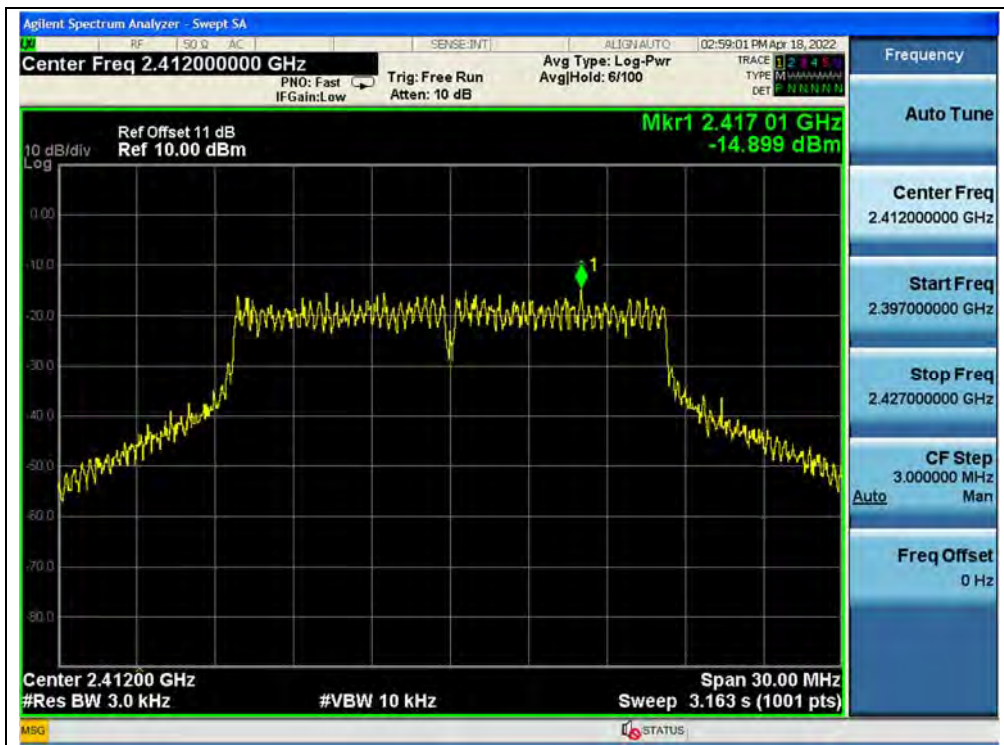

(Channel 1, 802.11g)

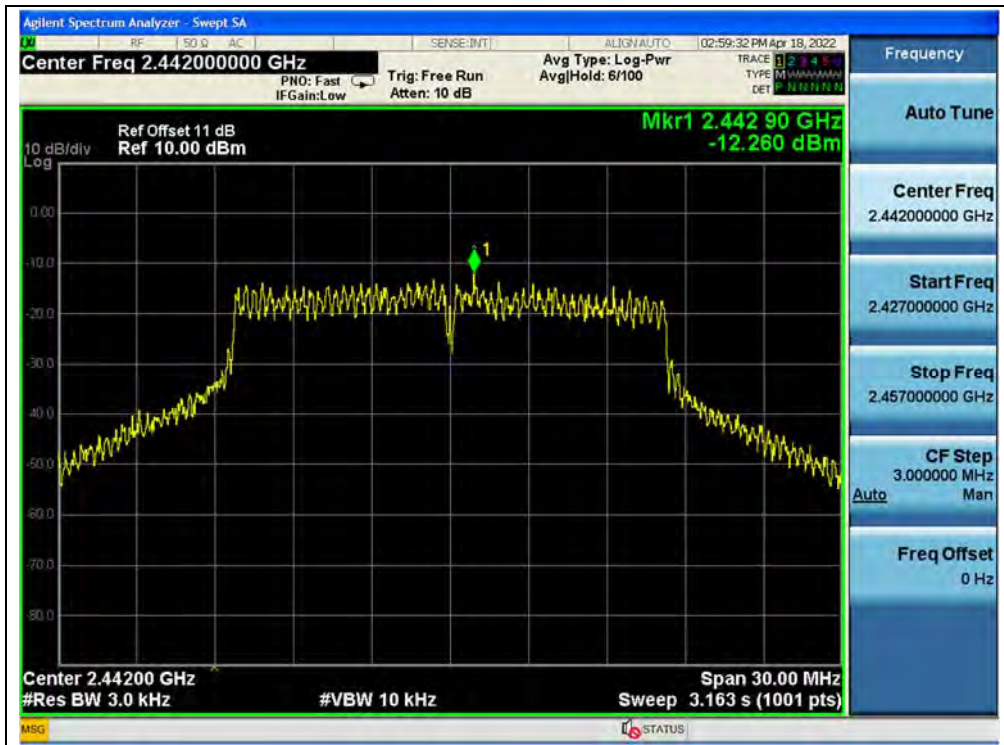

(Channel 7, 802.11g)



(Channel 13, 802.11g)




802.11n (HT20) Mode

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-15.83	8	PASS
7	2442	-13.37	8	PASS
13	2472	-15.05	8	PASS

B. Test Plot:

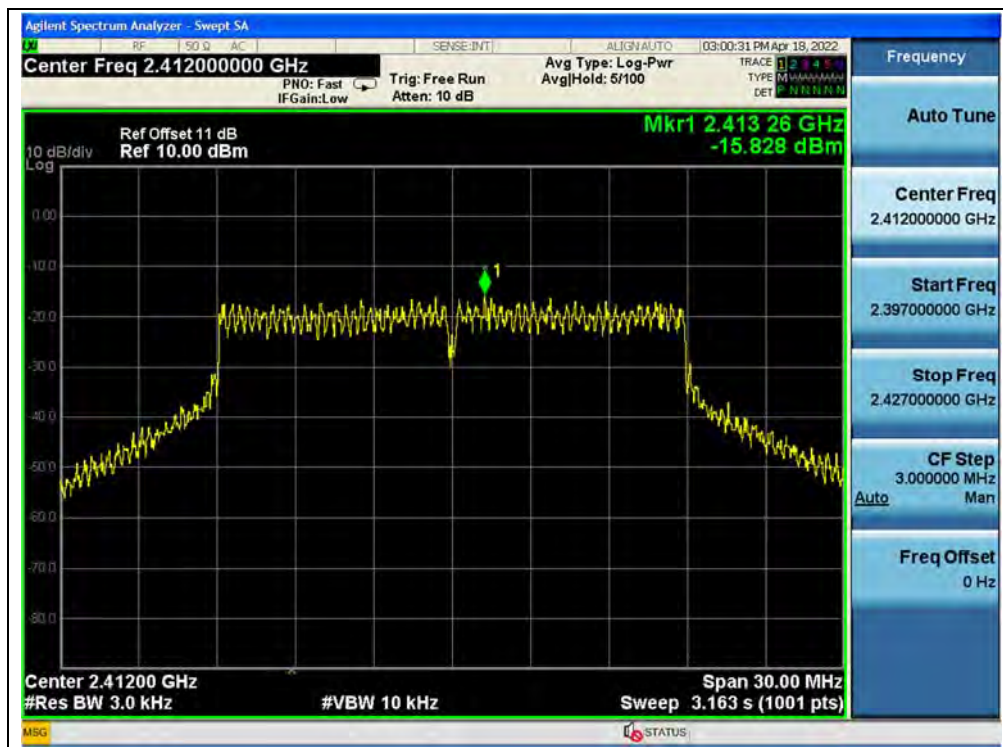

(Channel 1, 802.11n (HT20))





(Channel 7, 802.11n (HT20))



(Channel 13, 802.11n (HT20))





802.11n (HT40) Mode

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
3	2422	-16.81	8	PASS
7	2442	-14.13	8	PASS
11	2462	-15.03	8	PASS


B. Test Plot:



(Channel 3, 802.11n (HT40))



(Channel 7, 802.11n (HT40))

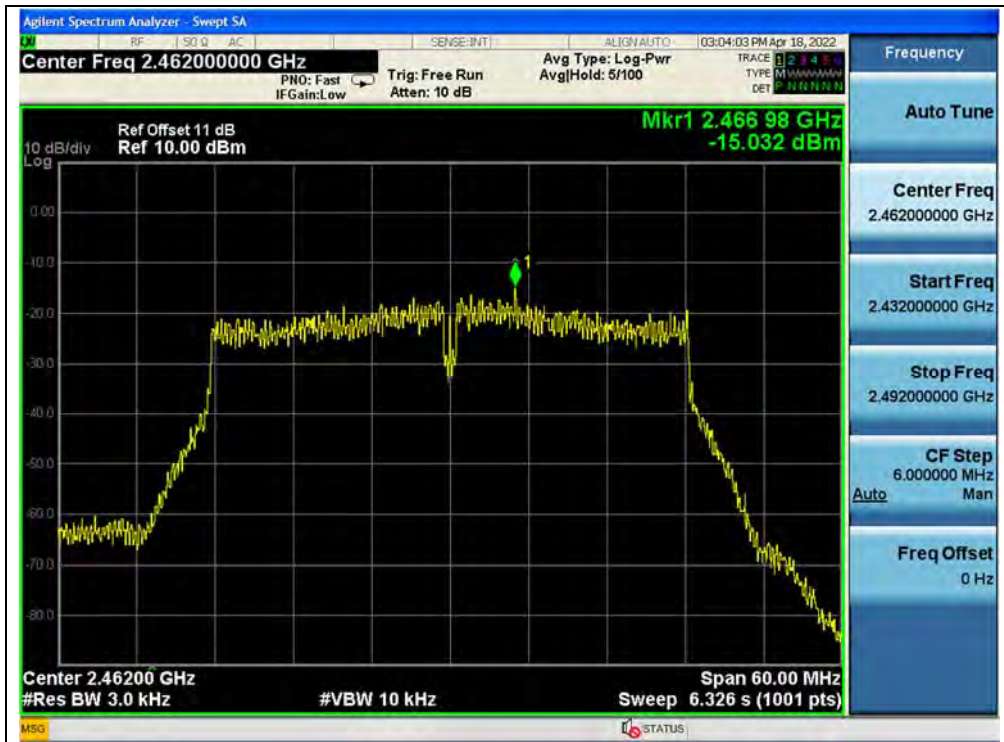

(Channel 11, 802.11n (HT40))

## 2.7. Conducted Emission

### 2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


Frequency Range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

**Note:**

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.7.2. Test Description

**Test Setup:**

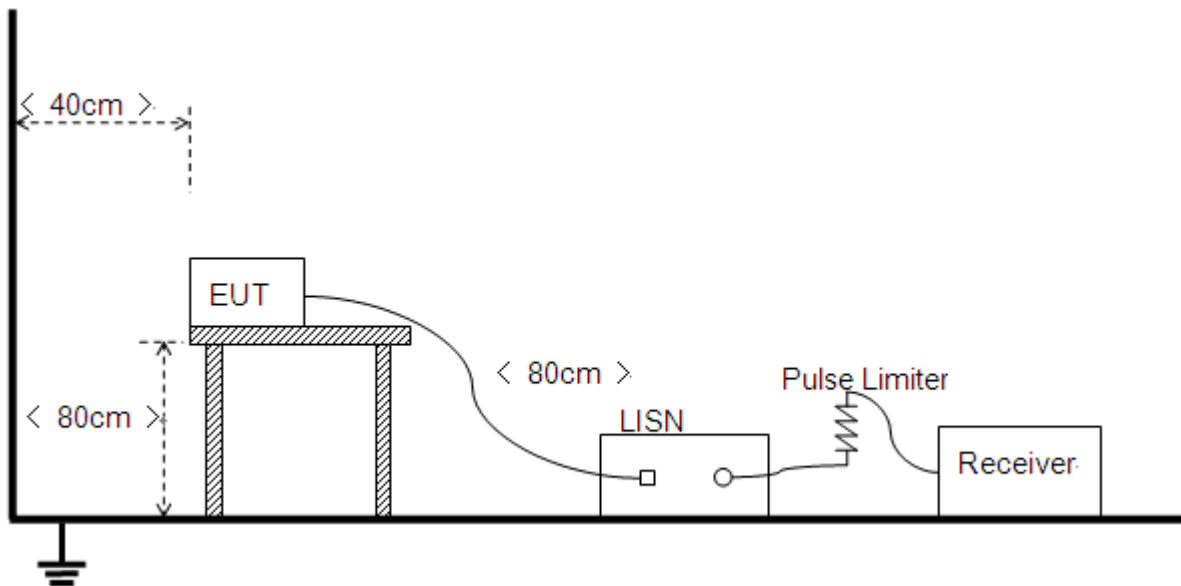

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.



### 2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

#### A. Test Setup:

Test Mode: EUT+Adaptor+Earphone + WIFI TX

Test Voltage: AC 120V/60Hz

The measurement results are obtained as below:


$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

$U_R$ : Receiver Reading

$A_{\text{Factor}}$ : Voltage division factor of LISN




**B. Test Plot:**

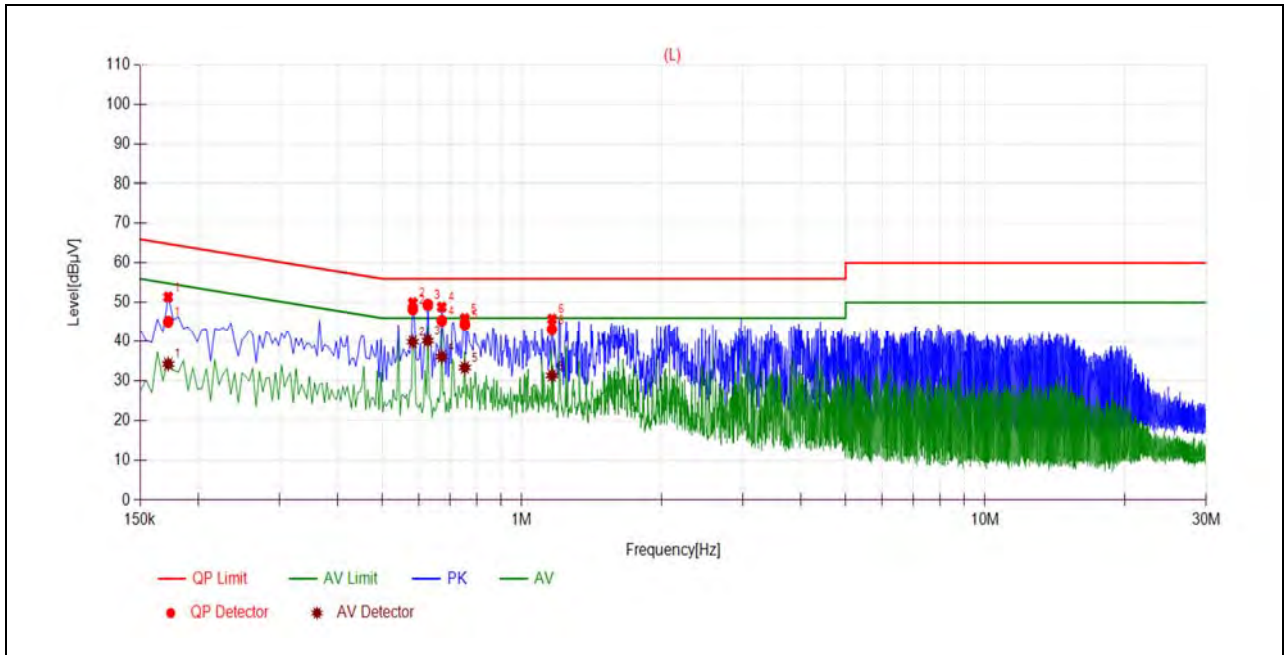

(L Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1725	45.10	34.21	64.84	54.84	Line	PASS
2	0.5816	48.25	39.84	56.00	46.00		PASS
3	0.6265	49.42	40.14	56.00	46.00		PASS
4	0.6716	45.33	36.08	56.00	46.00		PASS
5	0.7535	44.37	33.31	56.00	46.00		PASS
6	1.1614	43.05	31.32	56.00	46.00		PASS

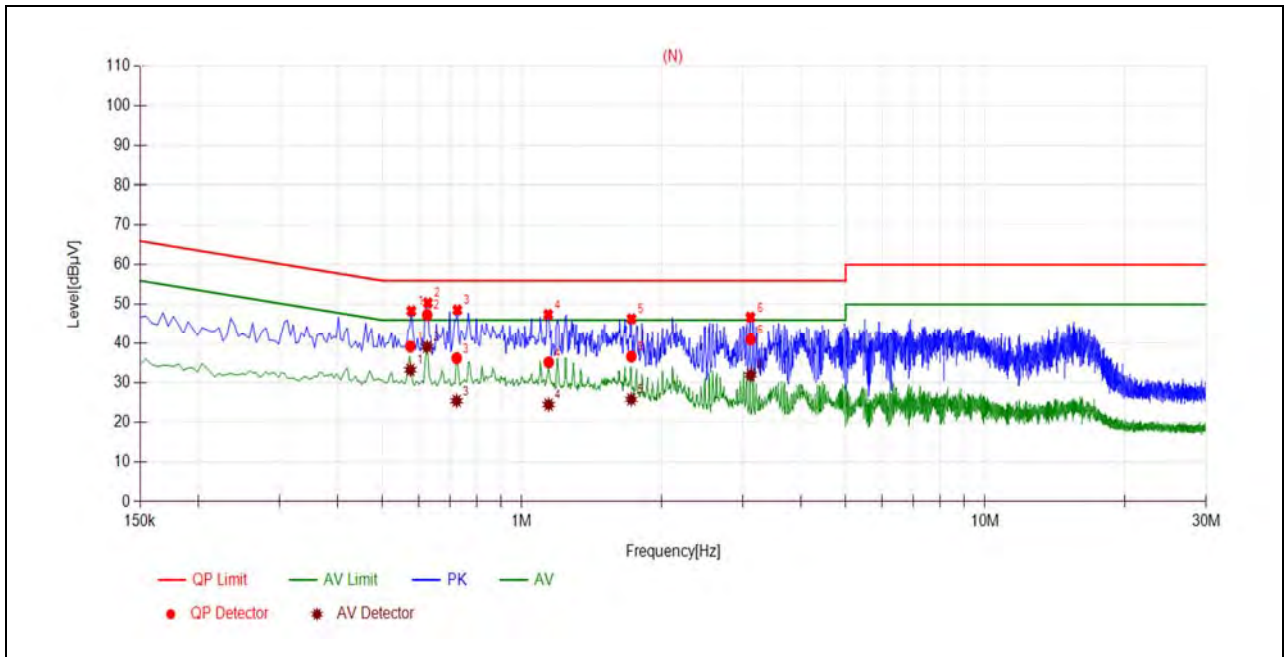

(N Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.5748	39.17	33.23	56.00	46.00	Neutral	PASS
2	0.6249	47.33	39.08	56.00	46.00		PASS
3	0.7233	36.19	25.37	56.00	46.00		PASS
4	1.1426	35.16	24.42	56.00	46.00		PASS
5	1.7232	36.61	25.75	56.00	46.00		PASS
6	3.1194	40.98	31.93	56.00	46.00		PASS

## 2.8. Restricted Frequency Bands

### 2.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 2.8.2. Test Description

#### Test Setup



The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



### 2.8.3. Test Procedure

KDB 558074 Section 8.6 and 8.7 was used in order to prove compliance.

### 2.8.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

**Note:** Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

### 802.11b Mode


#### A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	$A_T$ (dB)	$A_{\text{Factor}}$ (dB@3m)	Max. Emission E (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Verdict
		PK/ AV	$U_R$ (dB $\mu$ V)					
1	2372.13	PK	26.84	6.74	27.20	60.78	74	PASS
1	2390.00	AV	13.45	6.74	27.20	47.39	54	PASS
13	2483.50	PK	28.53	6.74	27.20	62.47	74	PASS
13	2483.50	AV	16.02	6.74	27.20	49.96	54	PASS






B. Test Plot:

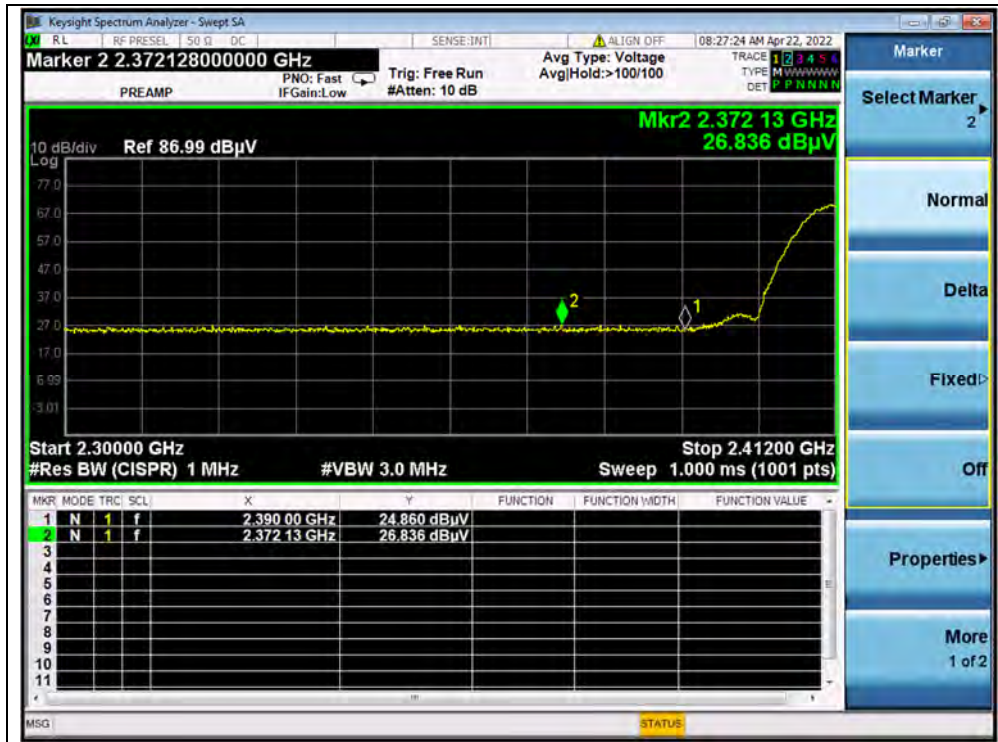

(PEAK, Channel 1, 802.11b)

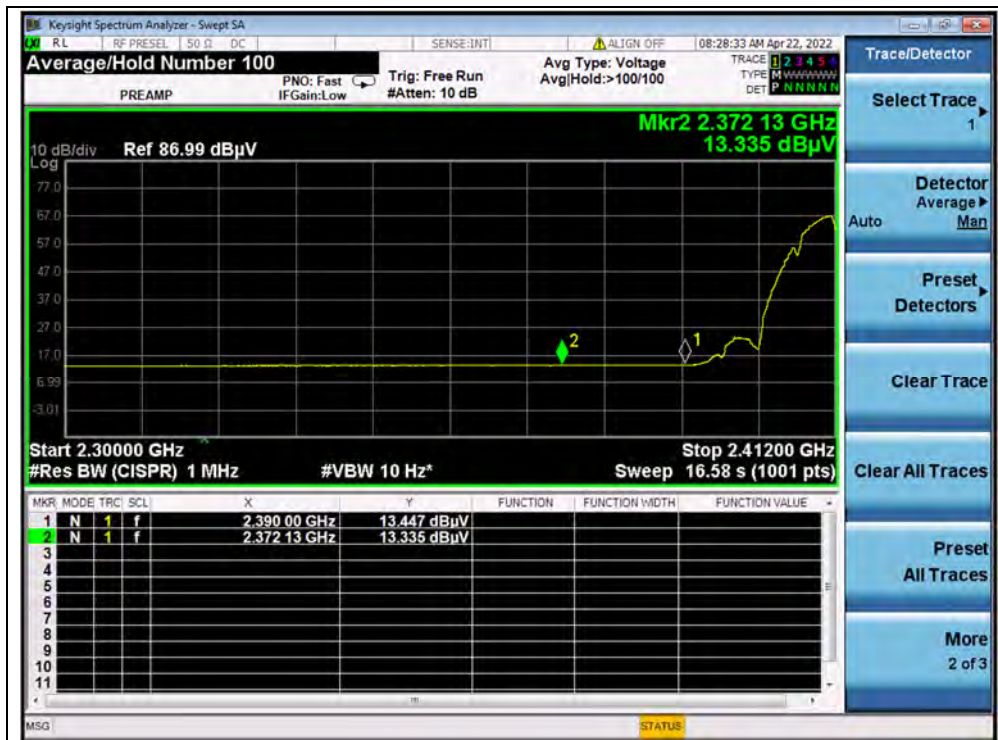

(AVERAGE, Channel 1, 802.11b)






802.11g Mode

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U <sub>R</sub> (dBμV)	A <sub>T</sub> (dB)	A <sub>Factor</sub> (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2386.83	PK	25.67	6.74	27.20	59.61	74	PASS
1	2390.00	AV	13.53	6.74	27.20	47.47	54	PASS
13	2483.66	PK	36.67	6.74	27.20	70.61	74	PASS
13	2483.50	AV	19.30	6.74	27.20	53.24	54	PASS

B. Test Plot:

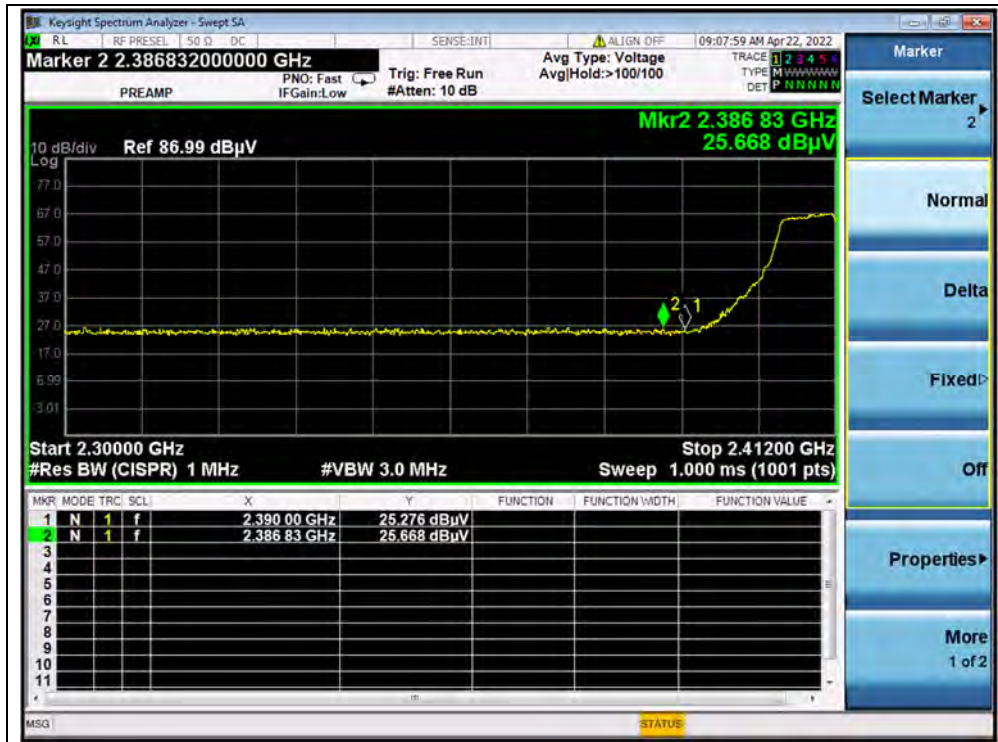


(PEAK, Channel 1, 802.11g)



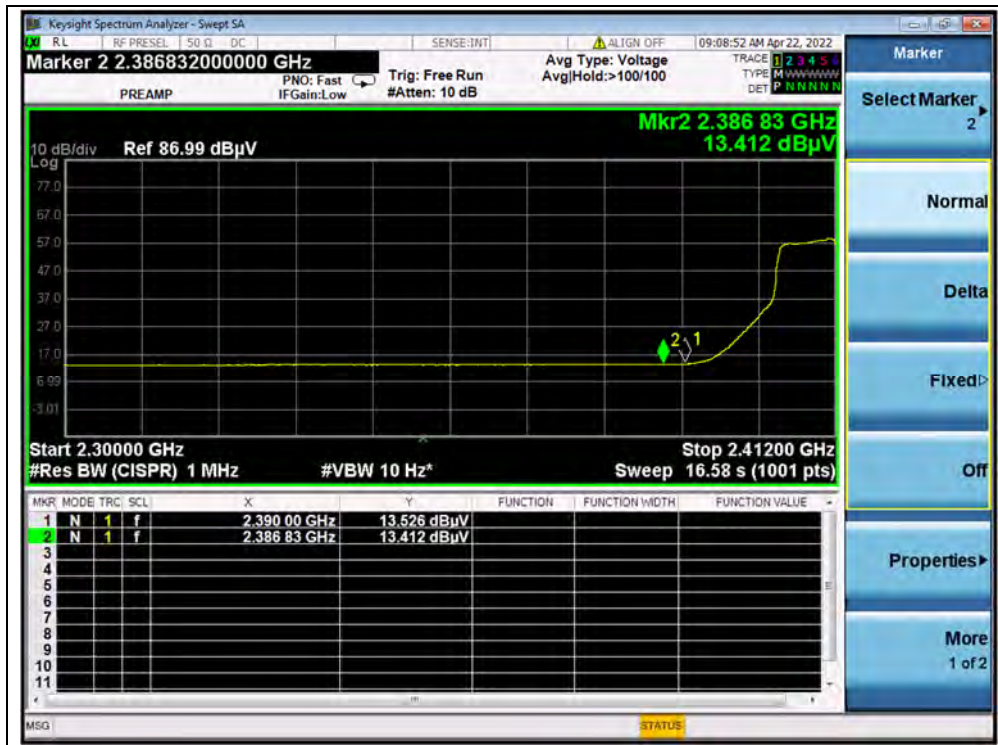


(AVERAGE, Channel 1, 802.11g)

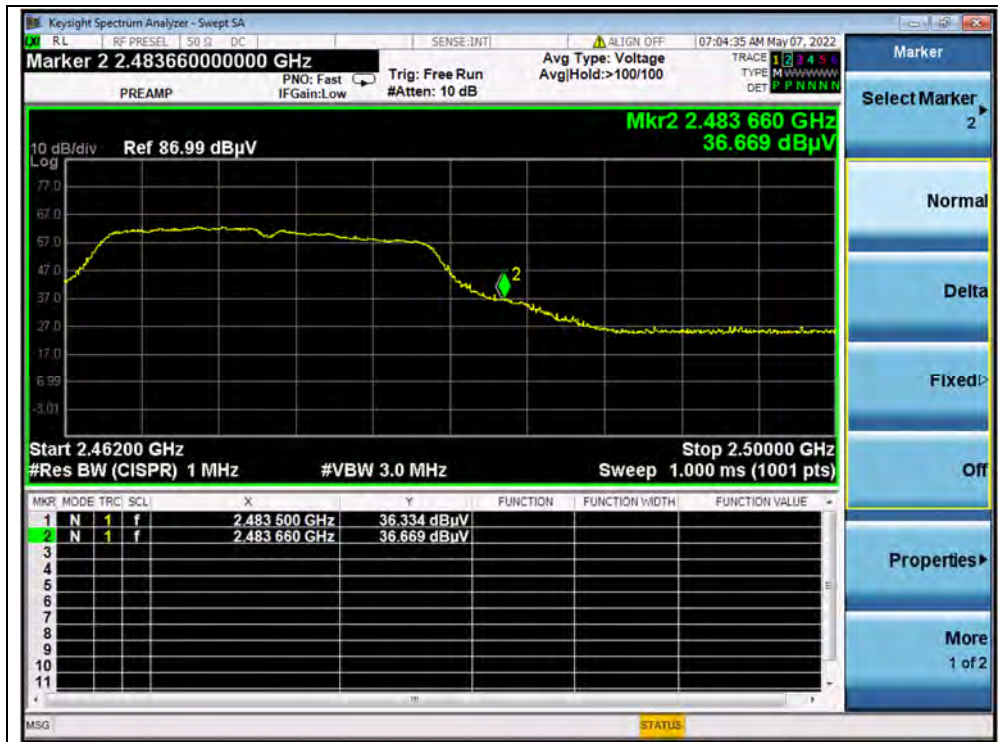

(PEAK, Channel 13, 802.11g)



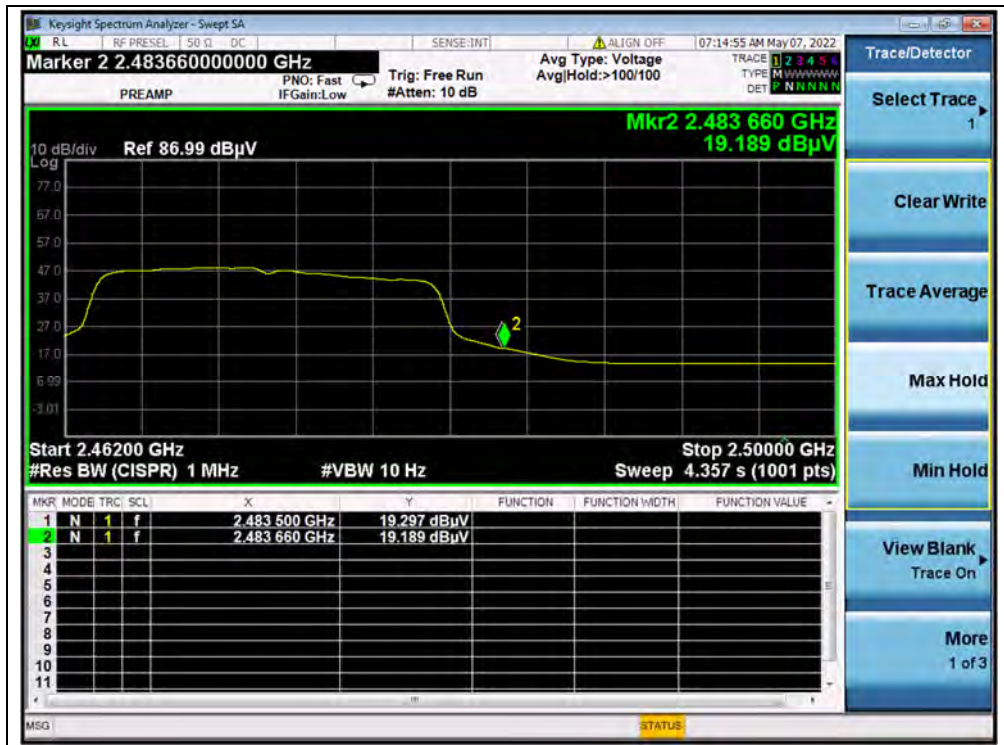

(AVERAGE, Channel 13, 802.11g)




802.11n (HT20) Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading $U_R$ (dB $\mu$ V)	$A_T$ (dB)	$A_{Factor}$ (dB@3m)	Max. Emission E (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Verdict
		PK/ AV						
1	2385.46	PK	26.65	6.74	27.20	60.59	74	PASS
1	2390.00	AV	14.72	6.74	27.20	48.66	54	PASS
13	2483.50	PK	36.61	6.74	27.20	70.55	74	PASS
13	2483.50	AV	19.98	6.74	27.20	53.92	54	PASS


B. Test Plot:

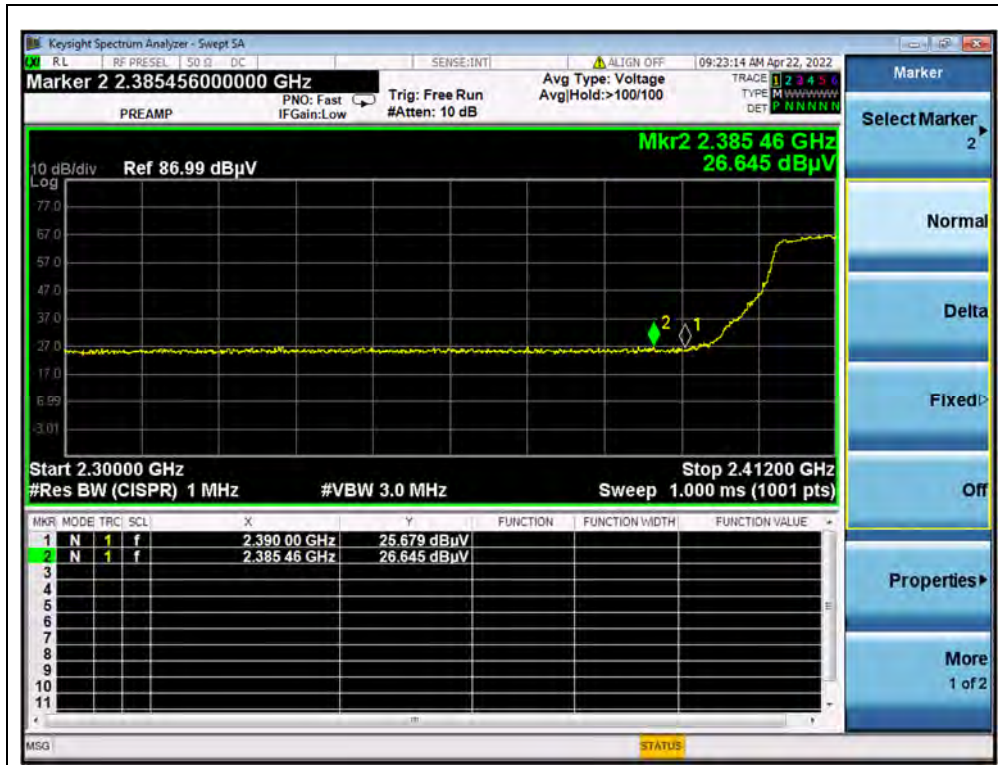


(PEAK, Channel 1, 802.11n (HT20))

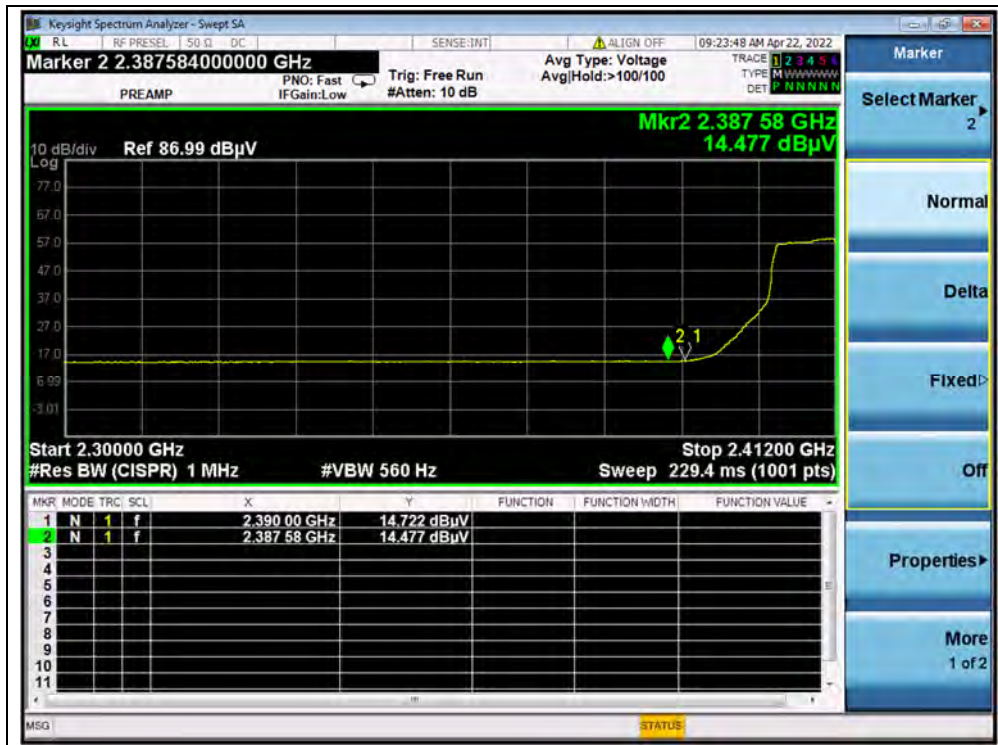

(AVERAGE, Channel 1, 802.11n (HT20))

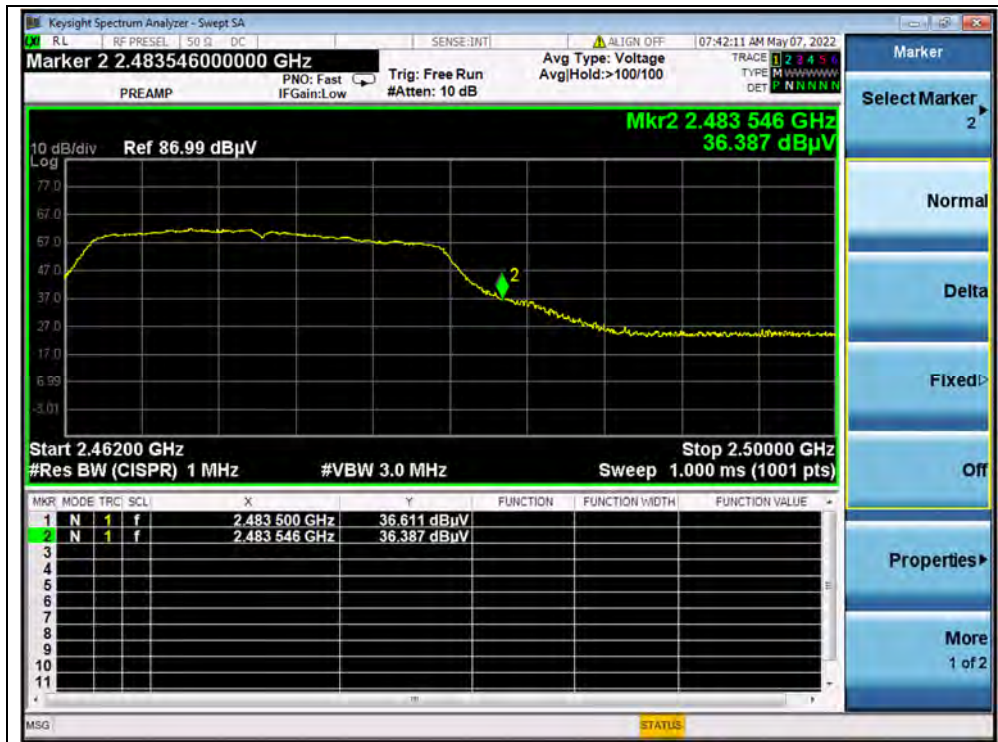

(PEAK, Channel 13, 802.11n (HT20))

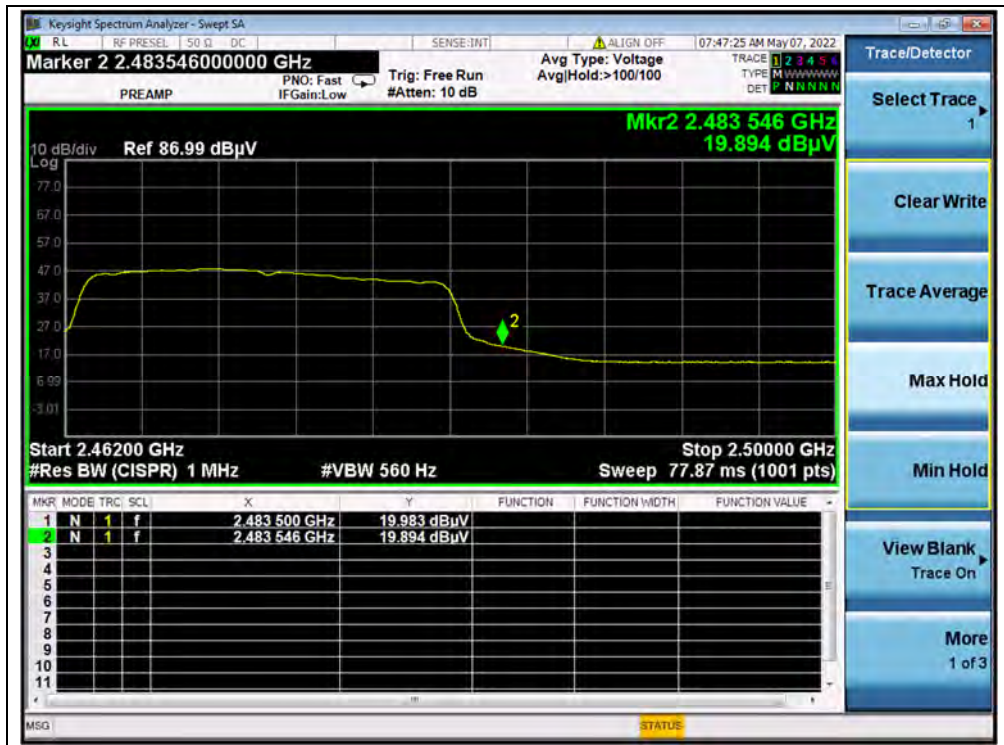

(AVERAGE, Channel 13, 802.11n (HT20))






802.11n (HT40) Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading $U_R$ (dB $\mu$ V)	$A_T$ (dB)	$A_{Factor}$ (dB@3m)	Max. Emission E (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Verdict
		PK/ AV						
3	2385.77	PK	26.78	6.74	27.20	60.72	74	PASS
3	2390.00	AV	14.46	6.74	27.20	48.40	54	PASS
11	2483.50	PK	35.38	6.74	27.20	69.32	74	PASS
11	2483.50	AV	19.85	6.74	27.20	53.79	54	PASS

B. Test Plot:

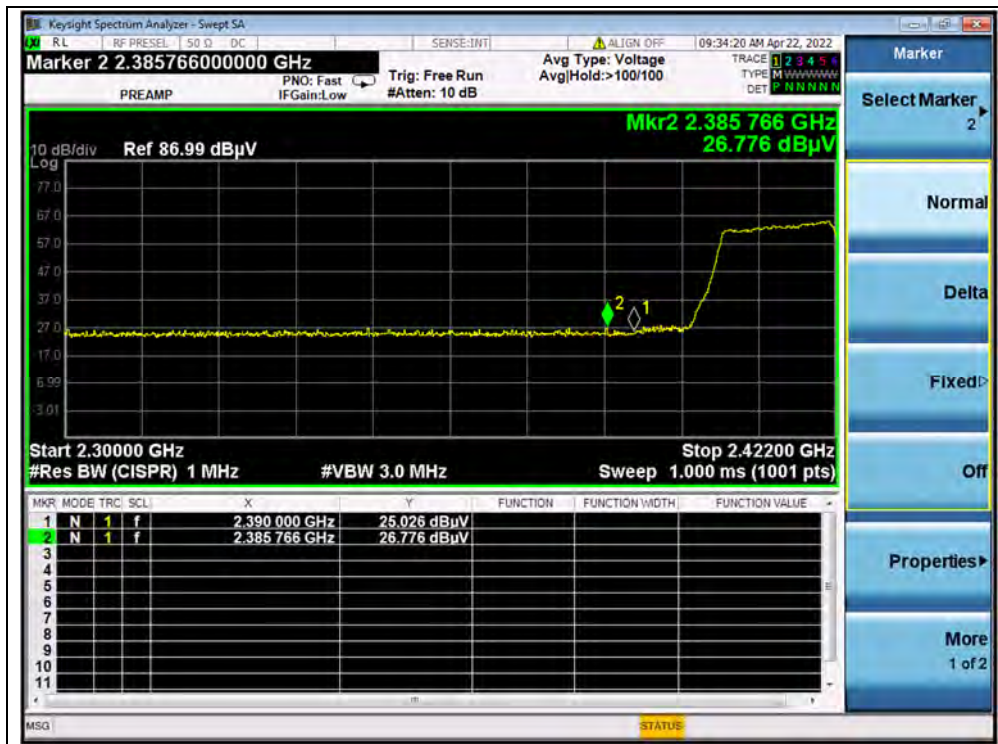


(PEAK, Channel 3, 802.11n (HT40))

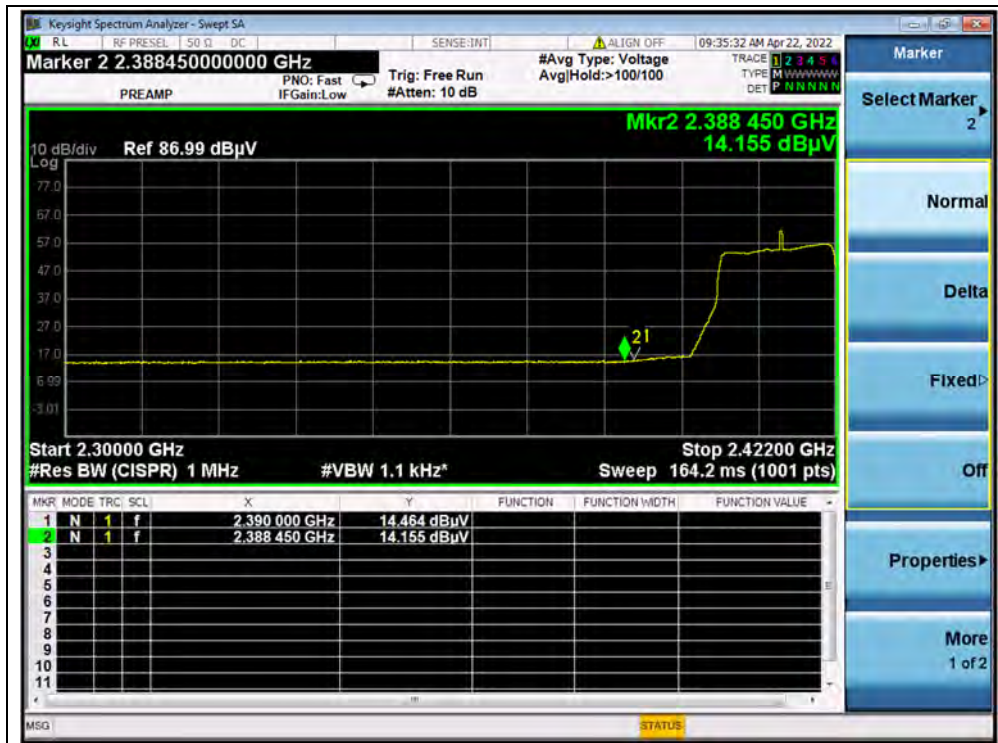

(AVERAGE, Channel 3, 802.11n (HT40))



(PEAK, Channel 11, 802.11n (HT40))

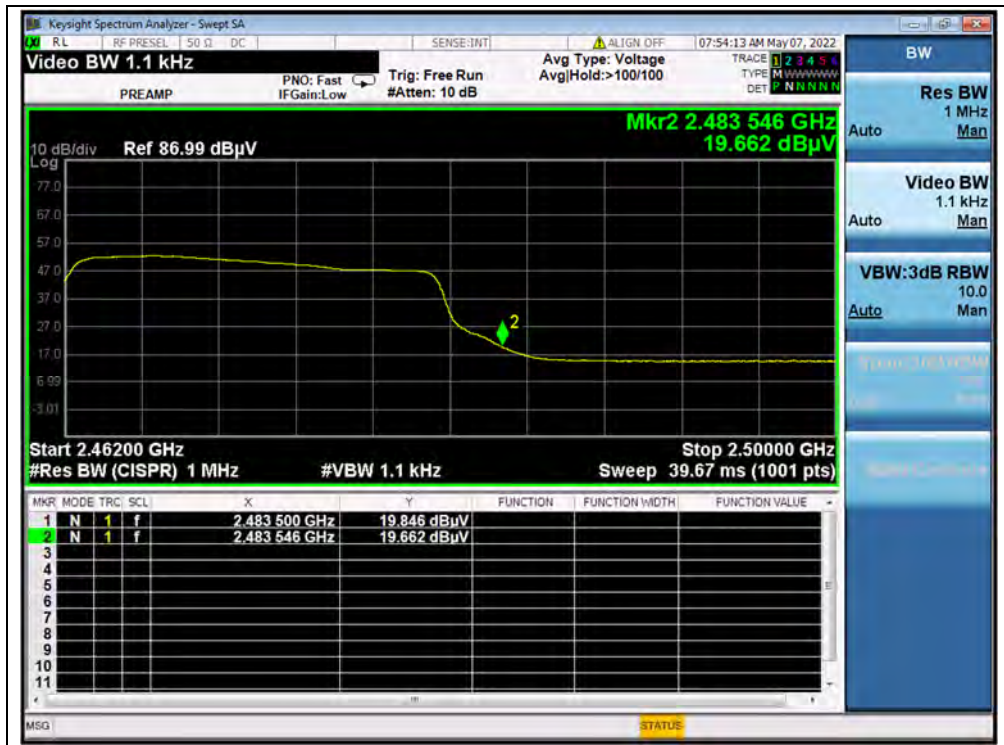

(AVERAGE, Channel 11, 802.11n (HT40))



## 2.9. Radiated Emission

### 2.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**Note1:** For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

**Note2:** For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).




**2.9.2. Test Description**

**Test Setup:**


- 1) For radiated emissions from 9kHz to 30MHz



- 2) For radiated emissions from 30MHz to 1GHz

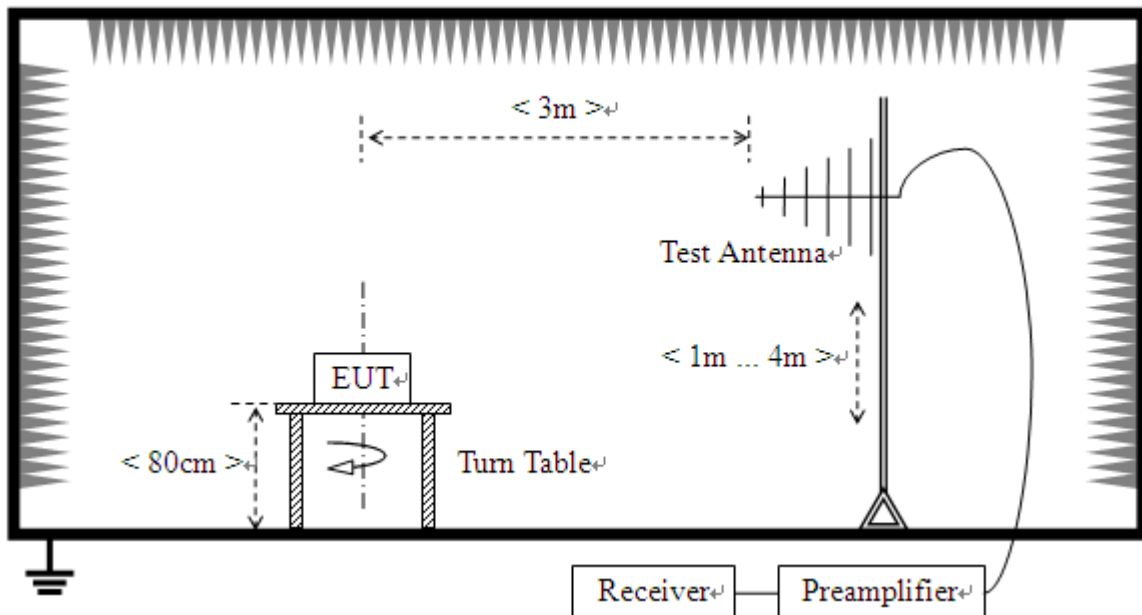

3) For radiated emissions above 1GHz

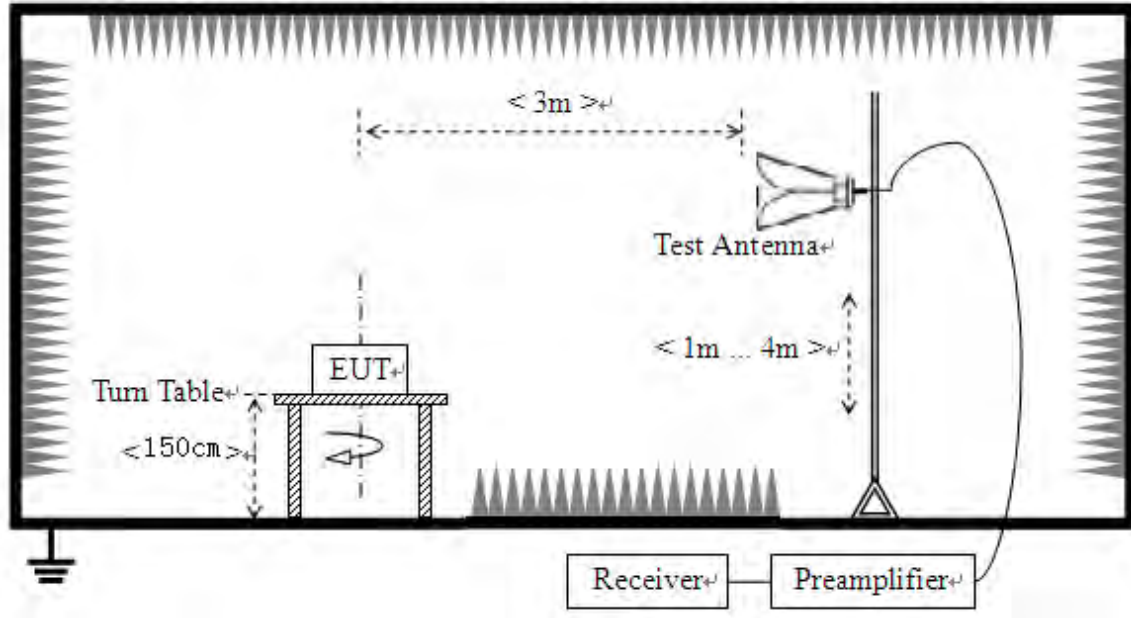

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



### 2.9.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.

**Note1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


**Note2:** For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

**Note3:** For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.




**802.11b Mode**

**Plot for Channel 1**

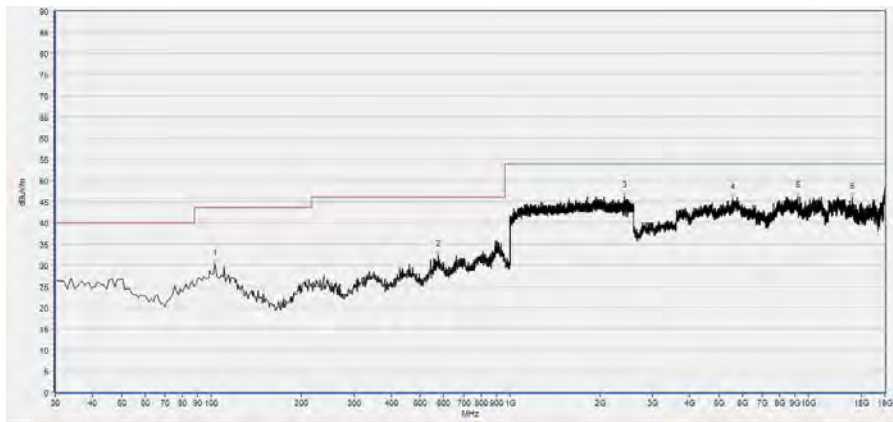

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
102.750	30.11	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
575.140	32.38	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2421.333	46.29	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5578.360	45.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9188.120	46.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14011.400	45.92	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

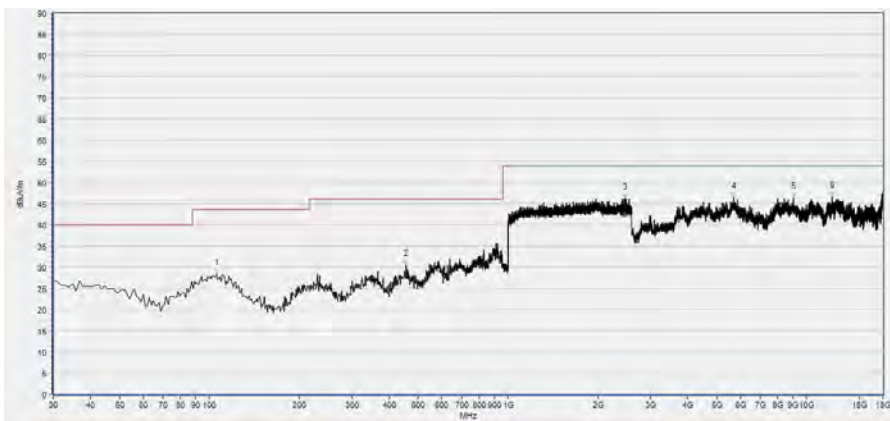


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
105.660	28.39	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
455.830	30.47	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2459.733	46.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5698.480	46.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9052.600	46.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12157.240	46.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 7

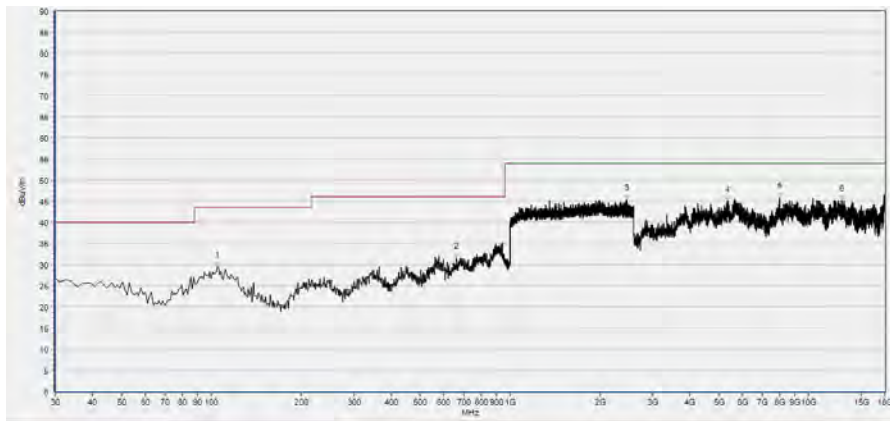

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
104.690	29.43	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
663.410	31.65	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2455.467	45.33	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5359.680	44.94	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7996.160	45.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12924.160	45.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

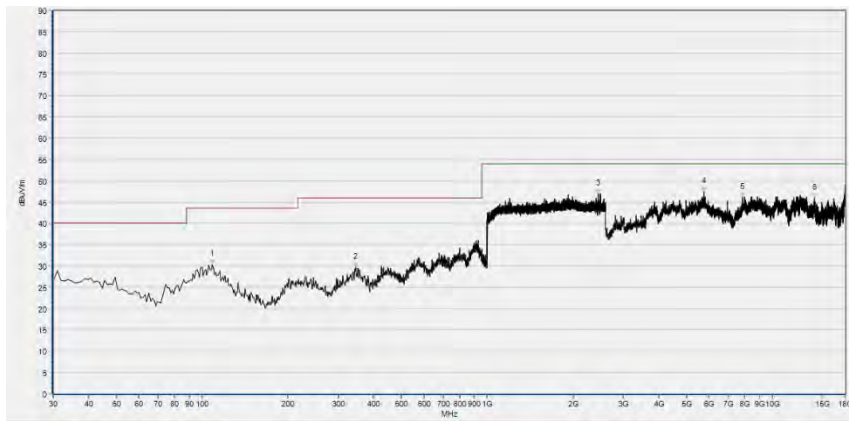

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
108.570	30.26	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
346.220	29.72	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2457.067	46.95	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5741.600	47.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7839.080	46.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14020.640	45.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 13

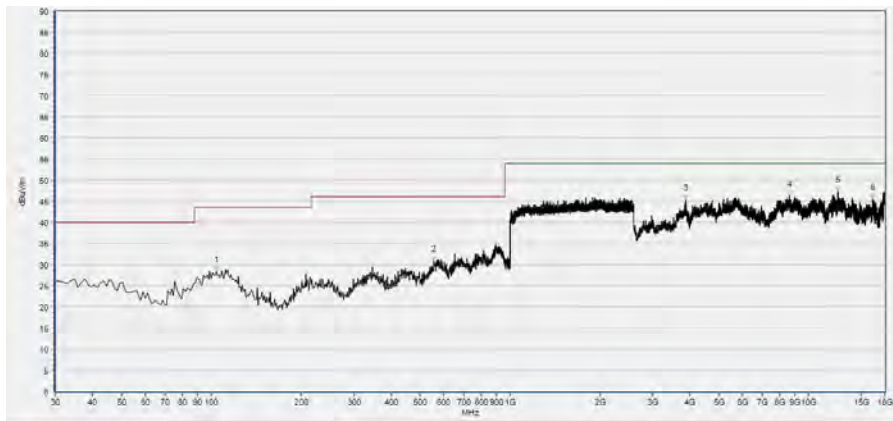

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
103.720	28.36	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
556.710	30.90	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
3887.440	45.31	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8606.000	46.31	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12523.760	47.25	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16410.720	45.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

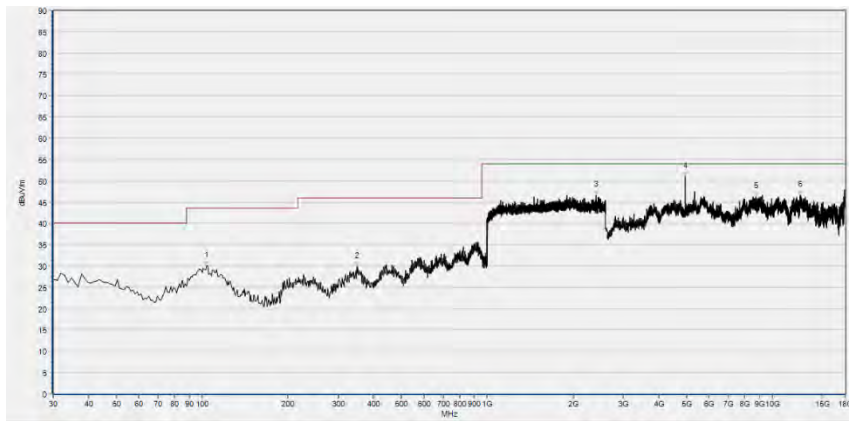


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
103.720	29.98	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
349.130	29.91	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2409.600	46.65	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4943.880	51.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8747.680	46.25	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12499.120	46.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




**802.11g Mode**

**Plot for Channel 1**

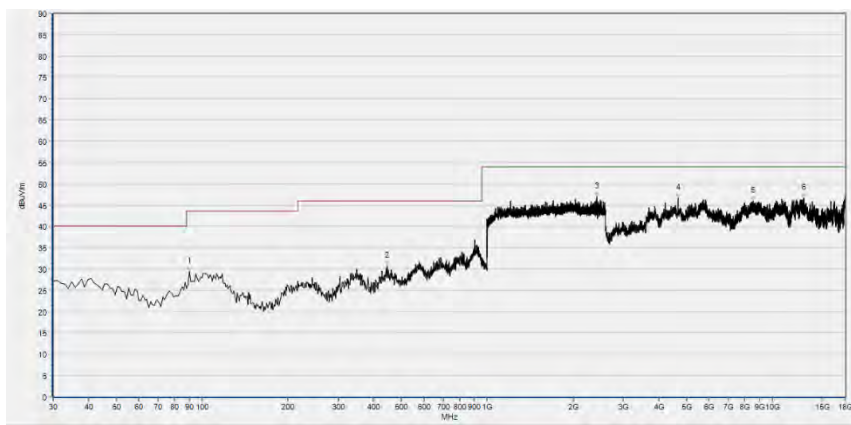

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
90.140	29.41	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
446.130	30.63	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2416.533	46.96	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4660.520	46.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8578.280	45.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12890.280	46.62	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

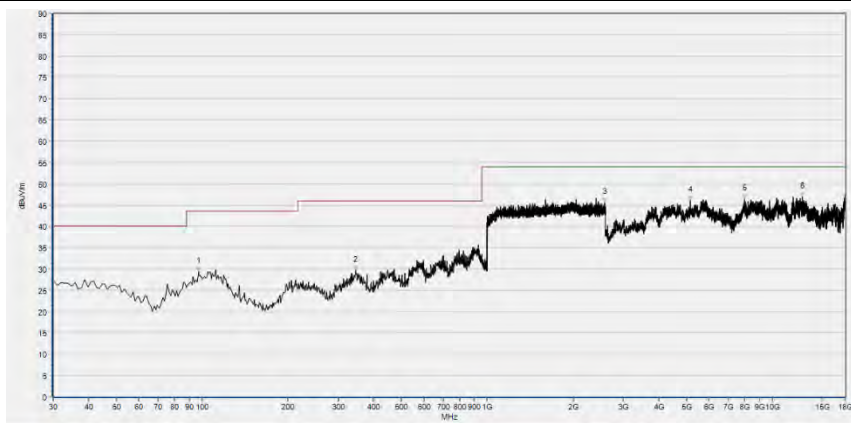

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
96.930	29.26	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
346.220	29.63	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2583.467	45.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5150.240	46.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8005.400	46.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12748.600	46.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 7

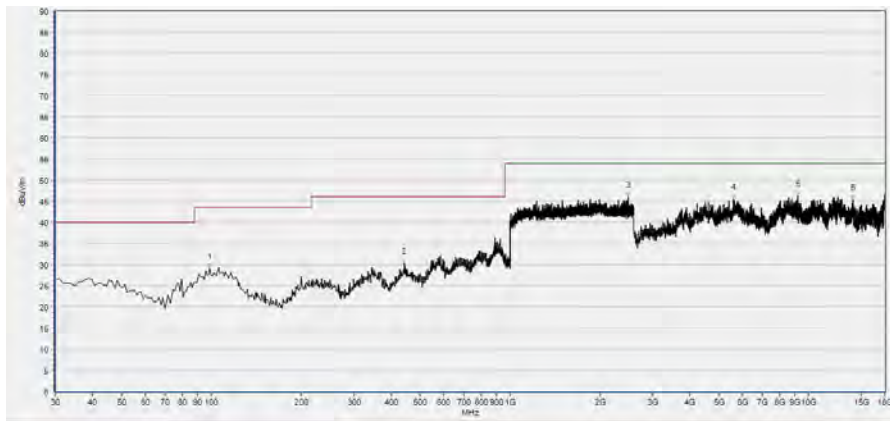

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
98.870	29.11	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
443.220	30.37	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2491.200	45.99	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5609.160	45.48	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9206.600	46.25	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14079.160	45.39	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

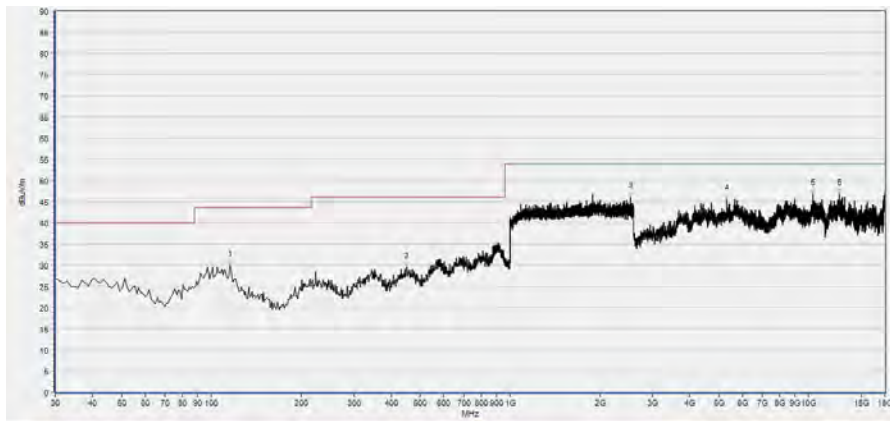


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
115.360	29.76	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
450.980	29.47	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2536.533	46.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5325.800	45.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10343.120	46.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12683.920	46.76	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 13

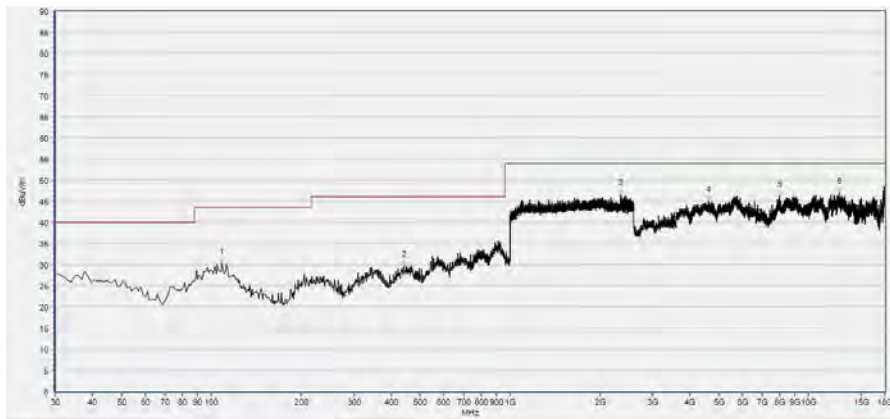

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
108.570	30.37	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
441.280	29.58	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2354.133	46.53	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4620.480	44.96	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8002.320	46.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12677.760	47.03	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

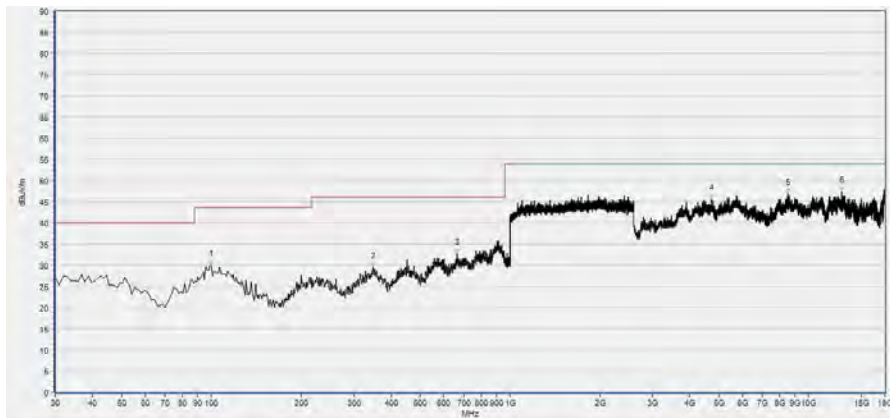


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
99.840	30.08	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
348.160	29.45	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
665.350	32.74	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
4725.200	45.59	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8529.000	46.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12893.360	47.33	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

**802.11n (HT20) Mode**

Plot for Channel 1

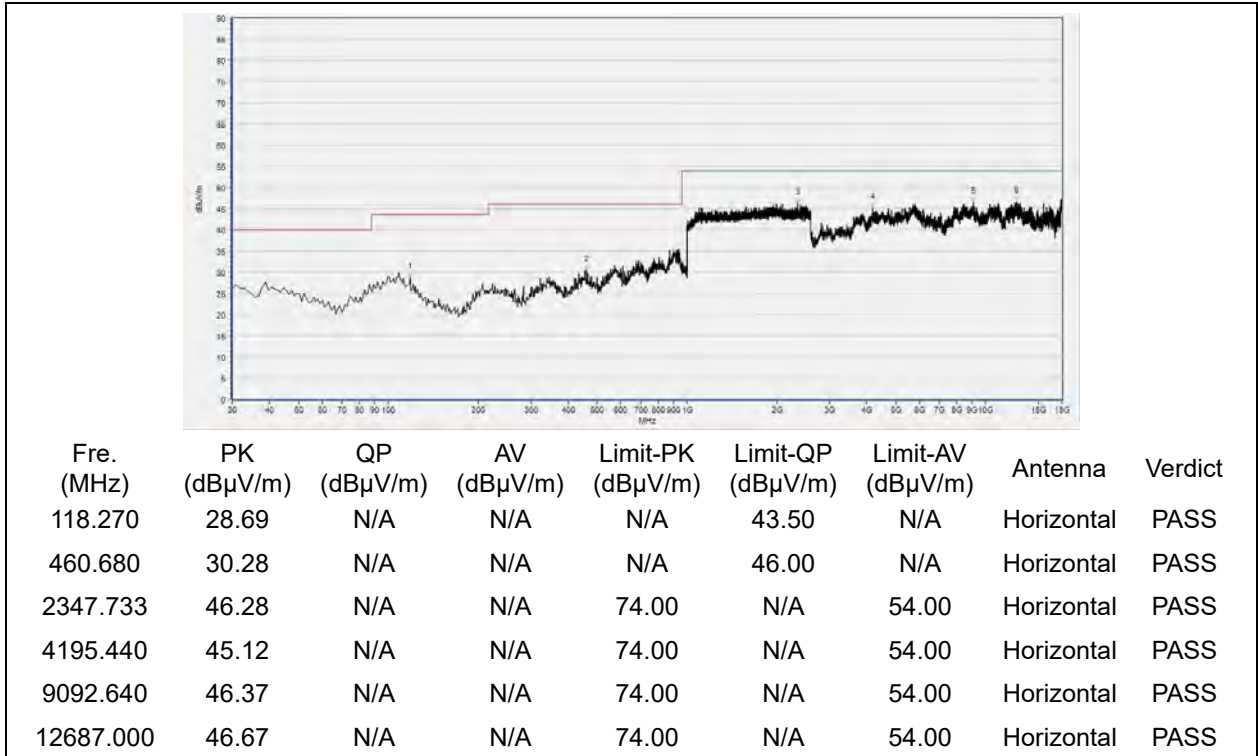


(Antenna Horizontal, 30MHz to 18GHz)

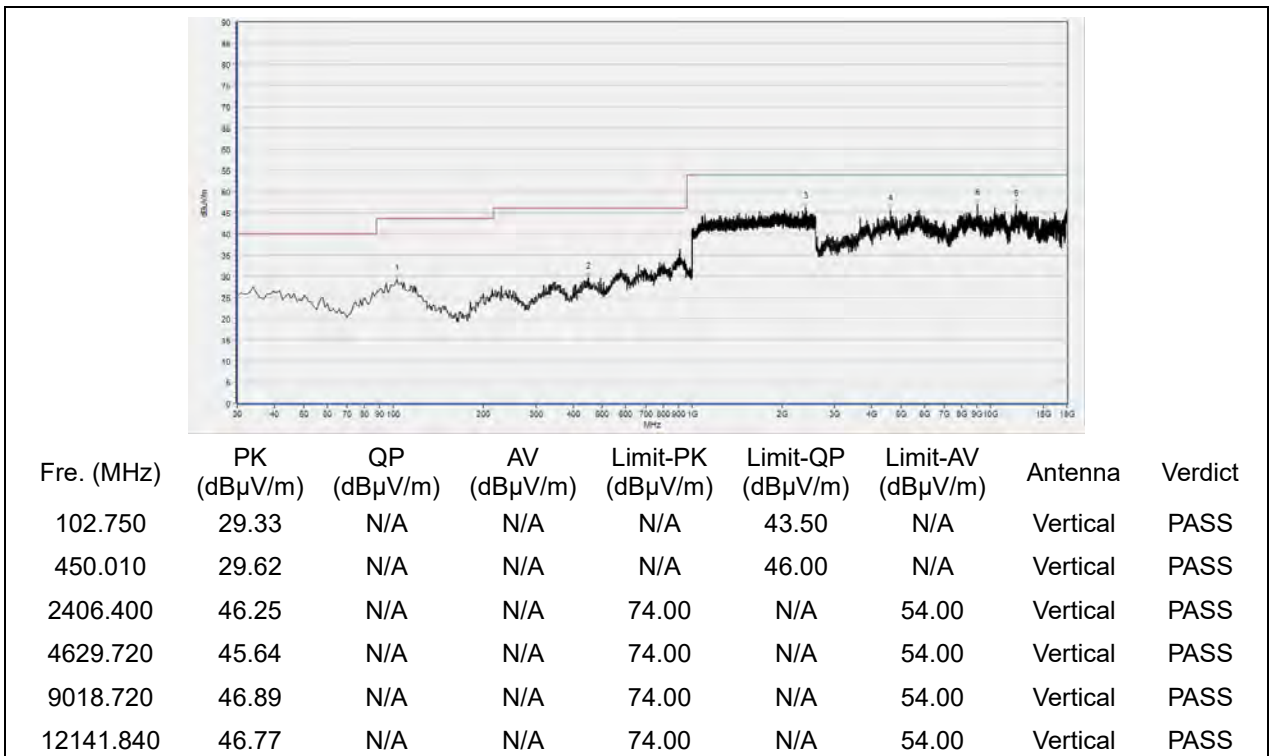


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 7

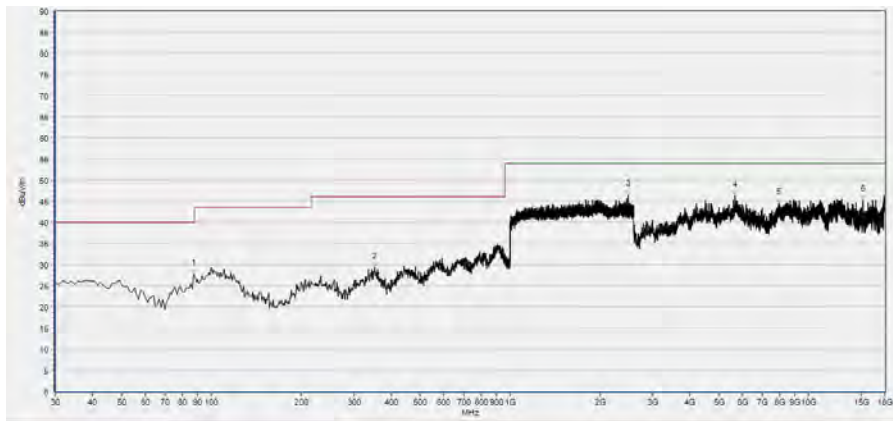

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
87.230	27.61	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
353.010	29.21	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2493.867	46.48	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5683.080	46.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7971.520	44.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
15240.320	45.27	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

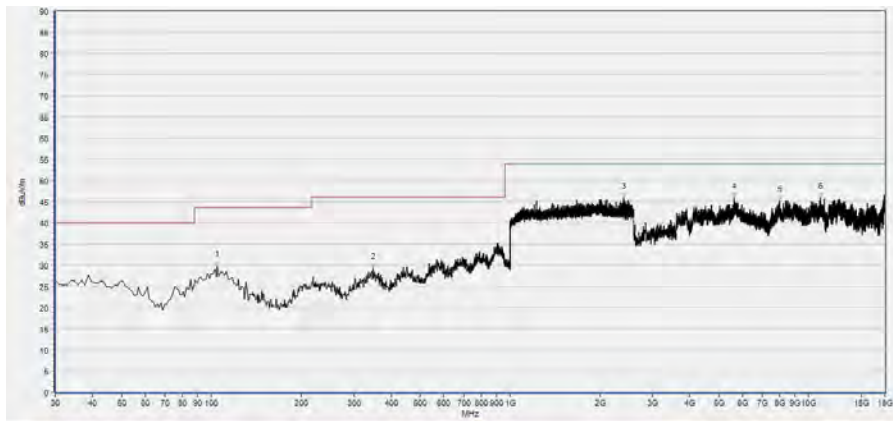

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
104.690	29.79	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
348.160	29.33	N/A	N/A	74.00	46.00	54.00	Vertical	PASS
2400.533	45.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5643.040	45.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7993.080	45.22	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10931.400	45.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 13

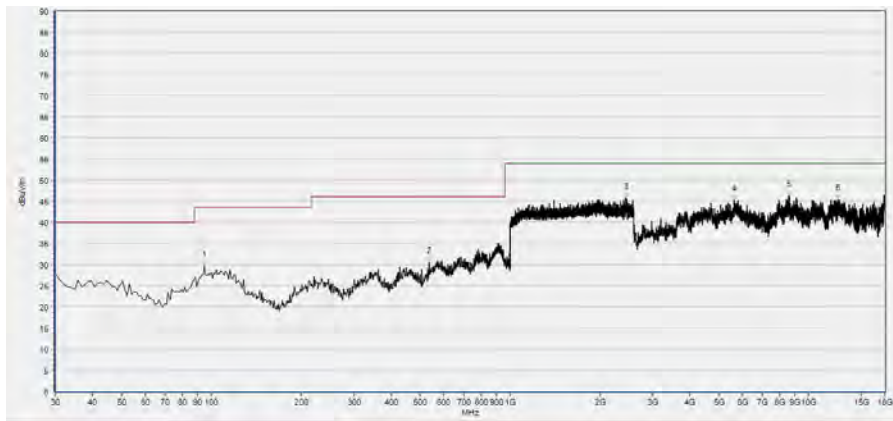

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
94.990	29.63	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
537.310	30.58	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2451.200	45.66	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5639.960	45.15	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8596.760	46.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12526.840	45.33	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

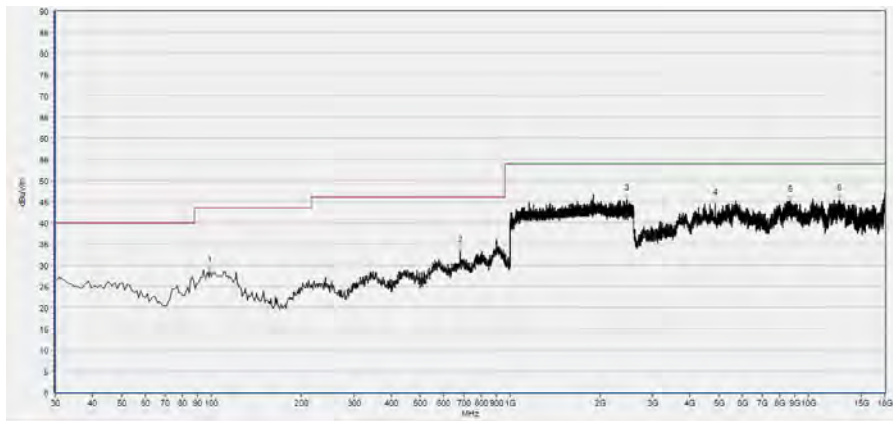


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
98.870	28.55	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
682.810	33.14	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2456.533	45.46	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4873.040	44.46	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8676.840	45.26	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12650.040	45.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




**802.11n (HT40) Mode**

**Plot for Channel 3**

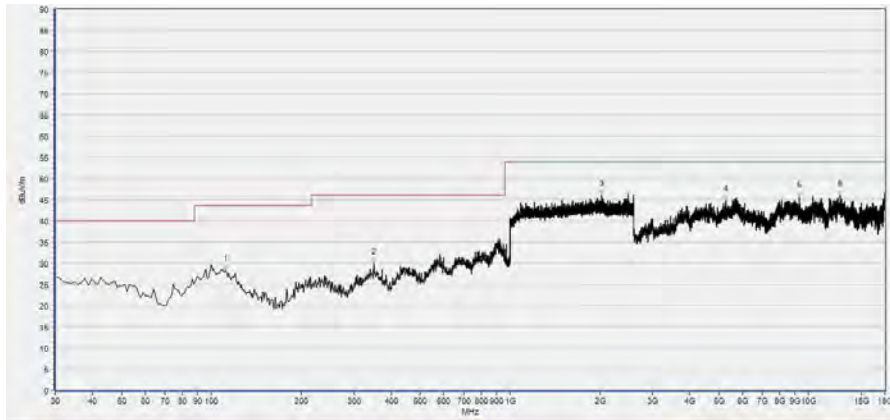

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
111.480	28.34	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
351.070	30.00	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2031.467	46.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5298.080	44.79	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9292.840	45.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12730.120	46.14	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

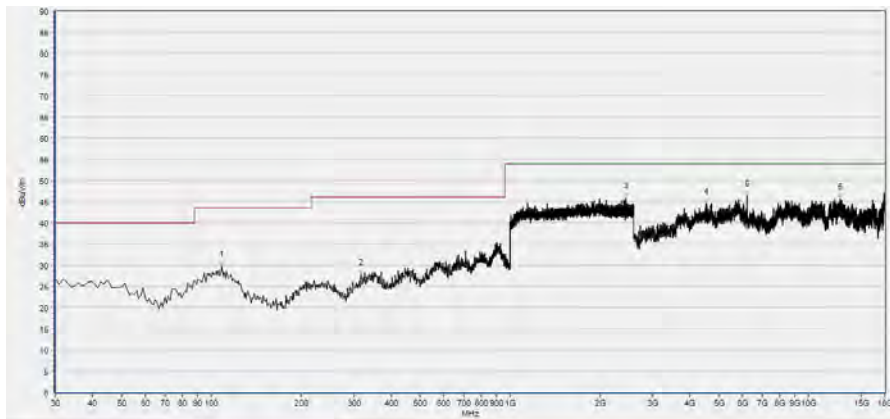

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	29.90	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
317.120	27.87	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2448.000	45.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4540.400	44.57	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6219.000	46.46	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12727.040	45.70	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 7

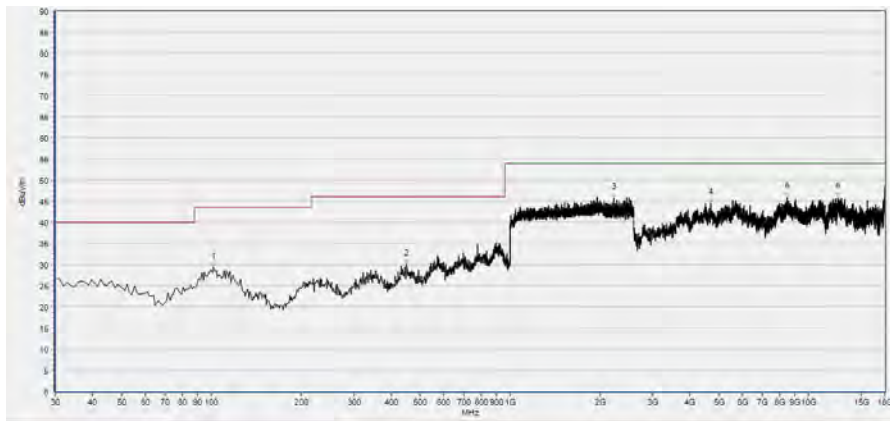

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
101.780	29.27	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
450.980	29.96	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2224.000	45.66	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4706.720	44.53	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8467.400	45.91	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12508.360	45.98	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

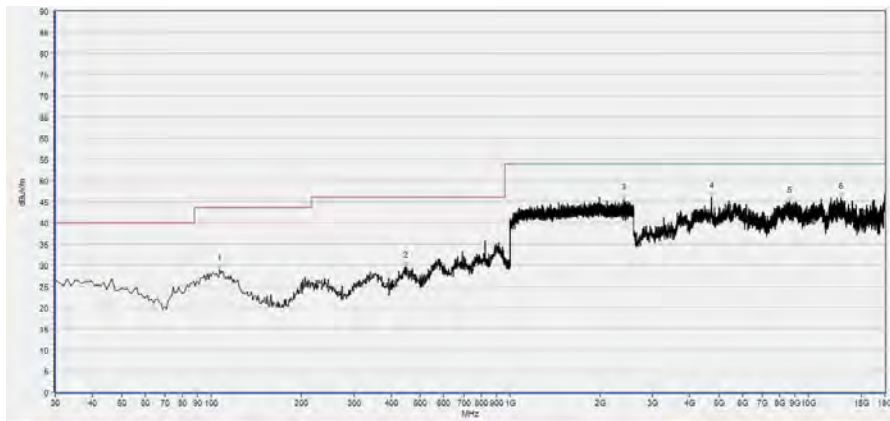

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
106.630	28.88	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
448.070	29.72	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2408.000	45.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4725.200	46.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8606.000	44.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12831.760	45.84	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 11

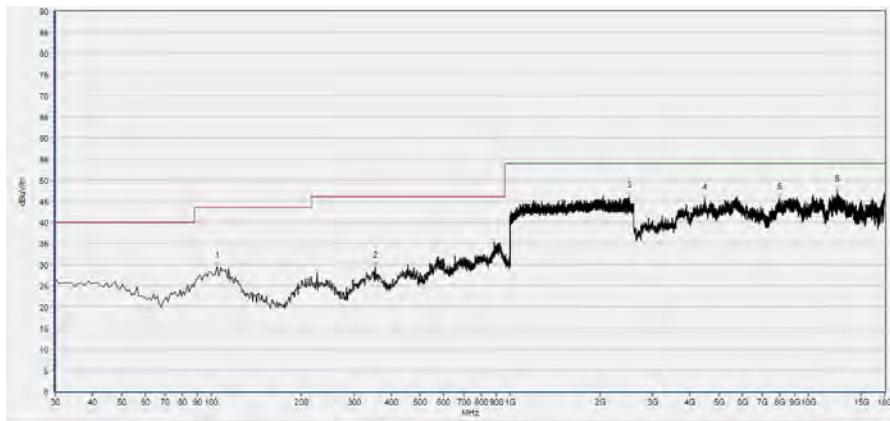

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
104.690	29.44	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
353.980	29.46	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2497.600	46.14	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4494.200	45.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7993.080	45.77	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12496.040	47.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

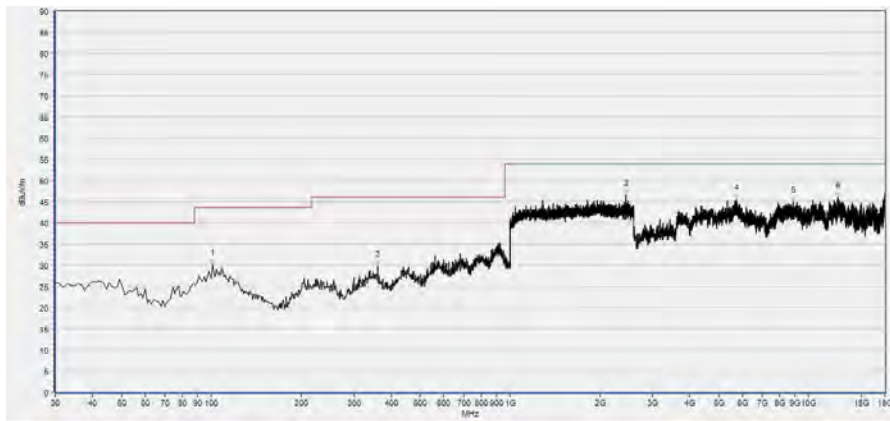

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
100.810	30.24	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
360.770	29.77	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2450.667	46.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5732.360	45.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8898.600	45.01	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12517.600	46.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)



## Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test Items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power Spectral Density	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{dB}$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$





## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Laboratory Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Laboratory Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



#### 4. Test Equipments Utilized

##### 4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Attenuator 1	(N/A.)	10dB	Resent	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2022.03.01	2023.02.28
USB Wideband Power Sensor	MY54180008	U2021XA	Agilent	2021.10.21	2022.10.20
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

##### 4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2022.03.03	2023.03.02
LISN	812744	NSLK 8127	Schwarzbeck	2022.03.03	2023.03.02
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2021.07.21	2022.07.20
Coaxial Cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

##### 4.3 List of Software Used

Description	Manufacturer	Software Version
Test System	Tonscend	V2.5.77.0418
Morlab EMCR V1.2	Morlab	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2021.07.16	2022.07.15
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2022.02.11	2025.02.10
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2019.07.26	2022.07.25
Coaxial Cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-40GHz)	CB05	EMC05	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2021.07.16	2022.07.15
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2021.07.16	2022.07.15
26-40GHz pre-Amplifier	56774	S40M400L40 02	Tonscend	2021.07.16	2022.07.15
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2021.07.16	2022.07.15
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

END OF REPORT