



FCC PART 15.247 TEST REPORT

For

NINGBO CSTAR IMP&EXP CO., LTD

Floor 4, Building E, No. 655-90, Qiming Road, Yinzhou Investment & Innovation Center, Ningbo, China

FCC ID:2ABHA0071

Report Type: Original Report	Product Type: Bluetooth earbuds with charging case
Report Number:	RSH191202051-00
Report Date:	2019-12-10
Reviewed By:	Simon Wang <i>Simon wang</i> RF Engineer
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "**". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC §15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE.....	11
APPLICABLE STANDARD	11
FCC §15.203 – ANTENNA REQUIREMENT	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP.....	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
CORRECTED FACTOR & MARGIN CALCULATION	14
TEST RESULTS SUMMARY.....	14
TEST DATA	14
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	17
APPLICABLE STANDARD	17
EUT SETUP.....	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	18
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST RESULTS SUMMARY.....	18
TEST DATA	18
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST DATA	26

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT27
 APPLICABLE STANDARD27
 TEST PROCEDURE27
 TEST DATA27

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST28
 APPLICABLE STANDARD28
 TEST PROCEDURE28
 TEST DATA28

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....29
 APPLICABLE STANDARD29
 TEST PROCEDURE29
 TEST DATA29

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST30
 APPLICABLE STANDARD30
 TEST PROCEDURE30
 TEST DATA30

FCC §15.247(d) - BAND EDGES TESTING31
 APPLICABLE STANDARD31
 TEST PROCEDURE31
 TEST DATA31

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Bluetooth earbuds with charging case
Tested Model	SL265
Multiple Model	32399
Frequency Range	Bluetooth: 2402~2480MHz
Transmit Power	Bluetooth: 4.54dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK
Antenna Specification	Ceramic Antenna:0 dBi
Voltage Range	DC 3.7V from battery
Date of Test	2019-12-03 to 2019-12-05
Sample serial number	RSH191202051-RF-1 (Assigned by BACL, Shenzhen)
Received date	2019-12-05
Sample/EUT Status	Good condition

Notes: This series products model: 32399 and SL265 are identical schematics. Model SL265 was selected for fully testing, the detailed information can be referred to the declaration letter.

Objective

This test report is prepared on behalf of *Ningbo Cstar Imp&Exp CO., LTD* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submissions.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

For Radiated Emissions testing, please refer to DA 00-705 Released March 30, 2000, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

No exercise software was made to the EUT tested.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Unknown	Adapter	Unknown	Unknown

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding detachable DC Cable	0.8	EUT	Adapter

Block Diagram of Test Setup

For conducted emission:

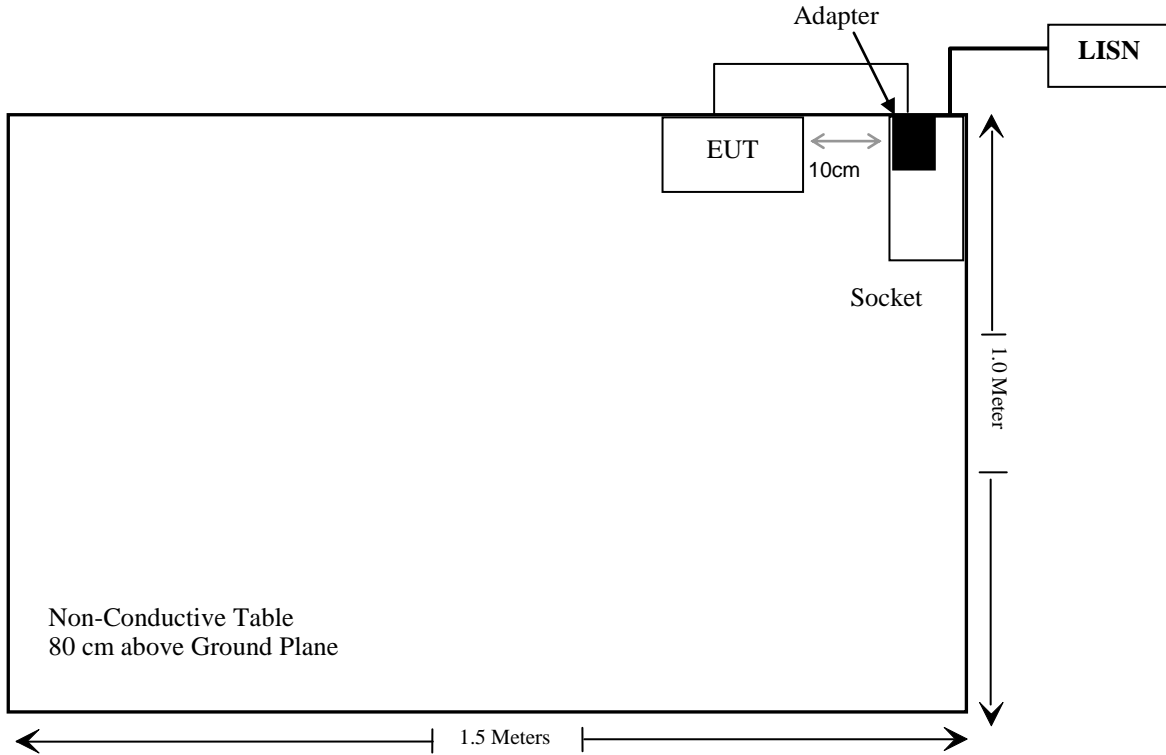

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2019-07-09	2020-07-08
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2019-01-25	2020-01-25
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2019-03-02	2020-03-01
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
N/A	Conducted Emission Cable	78652	UF A210B-1-0720-504504	2019-04-20	2020-04-20
Radiated Emission Test					
unknown	Horn Antenna	SAS-571	1395	2018-09-01	2021-08-31
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2019-07-22	2020-07-21
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
COM-POWER	Pre-amplifier	PA-122	181919	2019-11-12	2020-11-12
Sonoma instrument	Amplifier	310 N	186238	2019-04-20	2020-04-20
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2019-07-09	2020-07-08
N/A	RF Cable	Cable1	N/A	2019-04-20	2020-04-20
N/A	RF Cable	Cable4	EC-007	2019-04-20	2020-04-20
Ducommun technologies	RF Cable	RG-214	1	2019-11-19	2020-05-21
Ducommun technologies	RF Cable	RG-214	2	2019-11-12	2020-11-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Heatsink Required	Amplifier	QLW-18405536-J0	15964001002	2019-11-12	2020-11-12
Sinoscite	Notch Filter	BSF2402-2480MN-0898-001	99632	2019-11-12	2020-11-12
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Signal and Spectrum Analyzer	FSV40	101473	2019-07-22	2020-07-21
Tonscend Corporation	SRD/BT/WIFI Test System	JS0806-2	19D8060154	NCR	NCR
Ducommun technologies	RF Cable	RG-214	3	Each Time	
TIMESMICROWAve. E SYSTEMS	RF Cable	SFT205- NMSWSM-1.50M	454575-0008	Each Time	

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission’s guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

For worst case:

Frequency (MHz)	Maximum Tune-up power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
	(dBm)	(mW)				
2480	4.6	2.88	5	0.9	3.0	Yes

Result: No Standalone SAR test is required

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 0dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

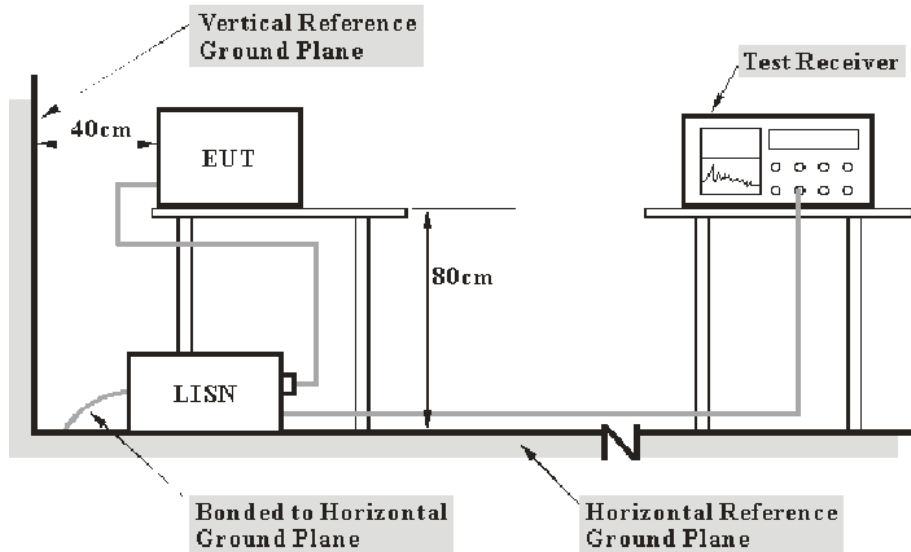

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the EUT complied with the FCC Part 15.207,

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2019-12-04.


EUT operation mode: Transmitting & charging (the worst case is GFSK Mode, high channel)

AC 120V/60 Hz, Line

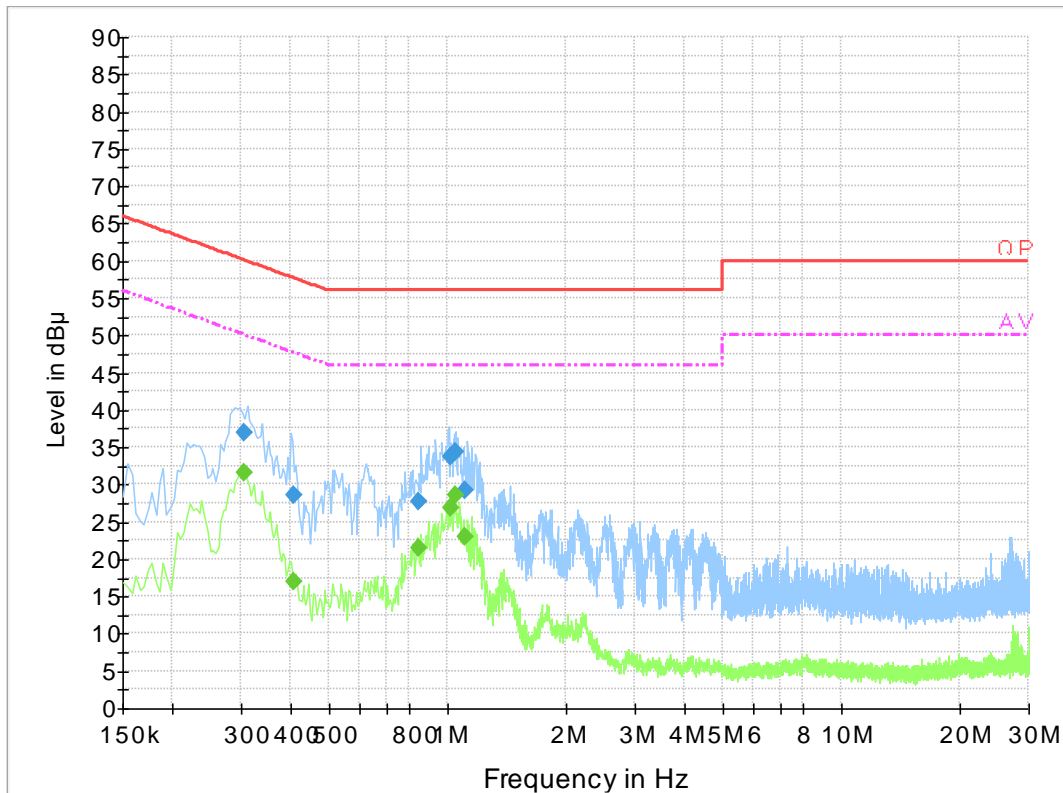

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.305350	37.0	19.7	60.1	23.1	QP
0.407970	28.6	19.9	57.7	29.1	QP
0.845130	27.7	19.8	56.0	28.3	QP
1.022850	33.7	19.9	56.0	22.3	QP
1.050250	34.3	19.9	56.0	21.7	QP
1.113110	29.2	19.8	56.0	26.8	QP
0.305350	31.6	19.7	50.1	18.5	Ave.
0.407970	16.9	19.9	47.7	30.8	Ave.
0.845130	21.4	19.8	46.0	24.6	Ave.
1.022850	26.8	19.9	46.0	19.2	Ave.
1.050250	28.7	19.9	46.0	17.3	Ave.
1.113110	23.0	19.8	46.0	23.0	Ave.

AC 120V/60 Hz, Neutral

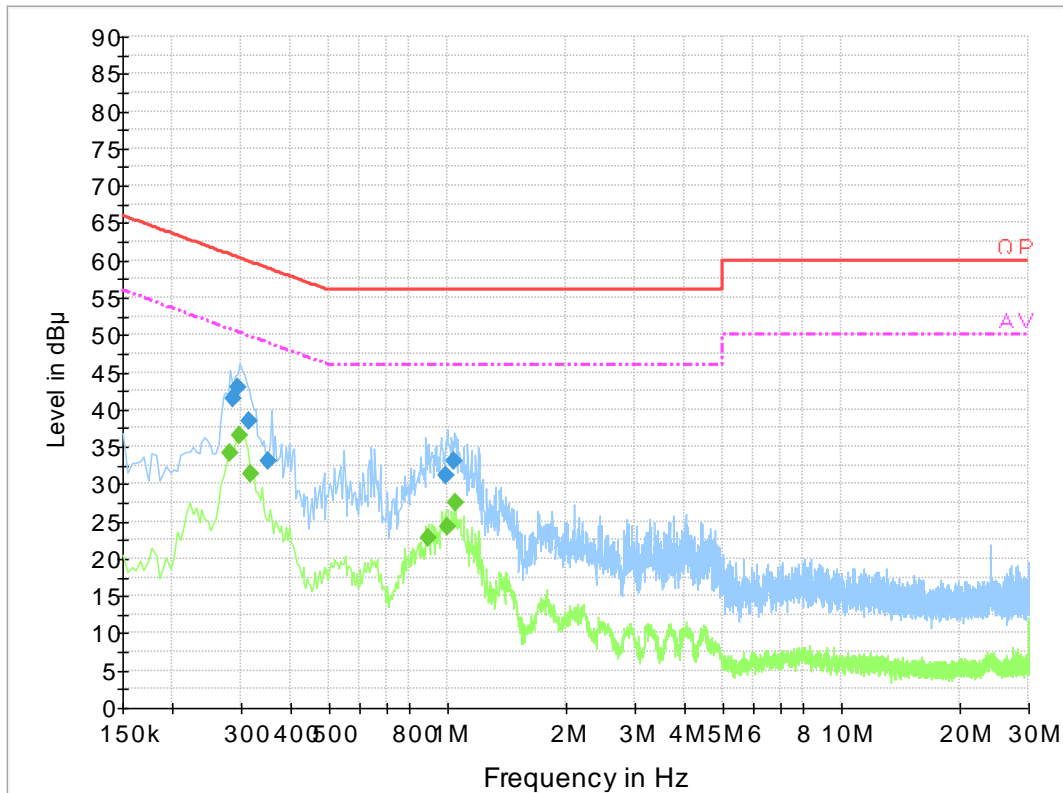

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.285500	41.4	19.7	60.7	19.3	QP
0.293500	42.9	19.7	60.4	17.5	QP
0.313230	38.5	19.7	59.9	21.4	QP
0.352630	33.0	19.9	58.9	25.9	QP
0.990970	31.2	19.8	56.0	24.8	QP
1.046310	33.1	19.8	56.0	22.9	QP
0.282000	34.1	19.7	50.8	16.7	Ave.
0.298000	36.5	19.7	50.3	13.8	Ave.
0.318000	31.3	19.7	49.8	18.5	Ave.
0.898000	22.7	19.7	46.0	23.3	Ave.
1.002000	24.3	19.8	46.0	21.7	Ave.
1.050000	27.6	19.8	46.0	18.4	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

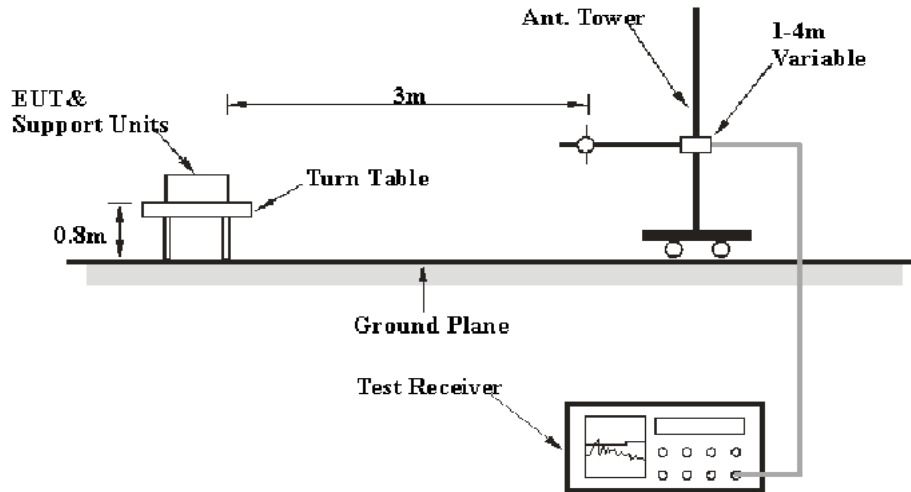

Above 1GHz:

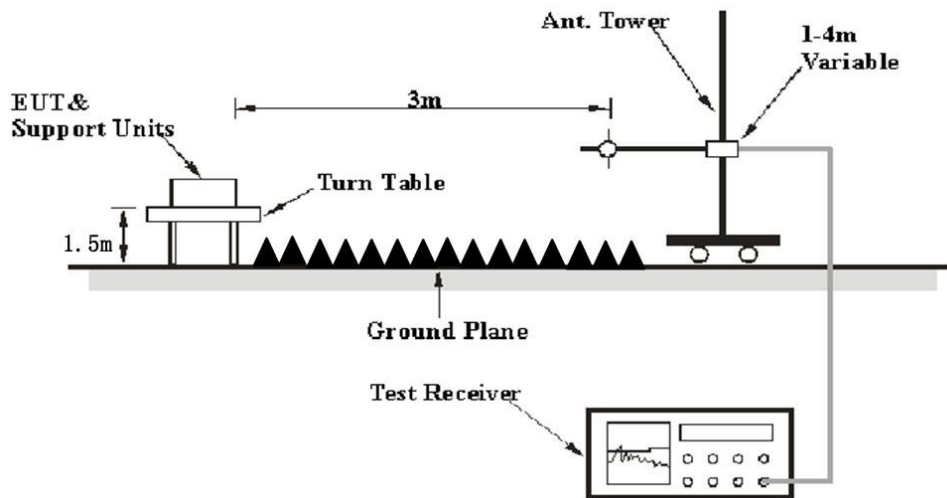

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, according to the DA 00-705 Released March 30, 2000, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data


Environmental Conditions

Temperature:	23 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa

The testing was performed by Steve Lan on 2019-12-03 for below 1G and Curry Xiang on 2019-12-03 for above 1G.

EUT operation mode: Transmitting (Scan with GFSK, $\pi/4$ -DQPSK mode, the worst case is $\pi/4$ -DQPSK Mode)

30 MHz-1 GHz: (the worst case is $\pi/4$ -DQPSK, Low channel)

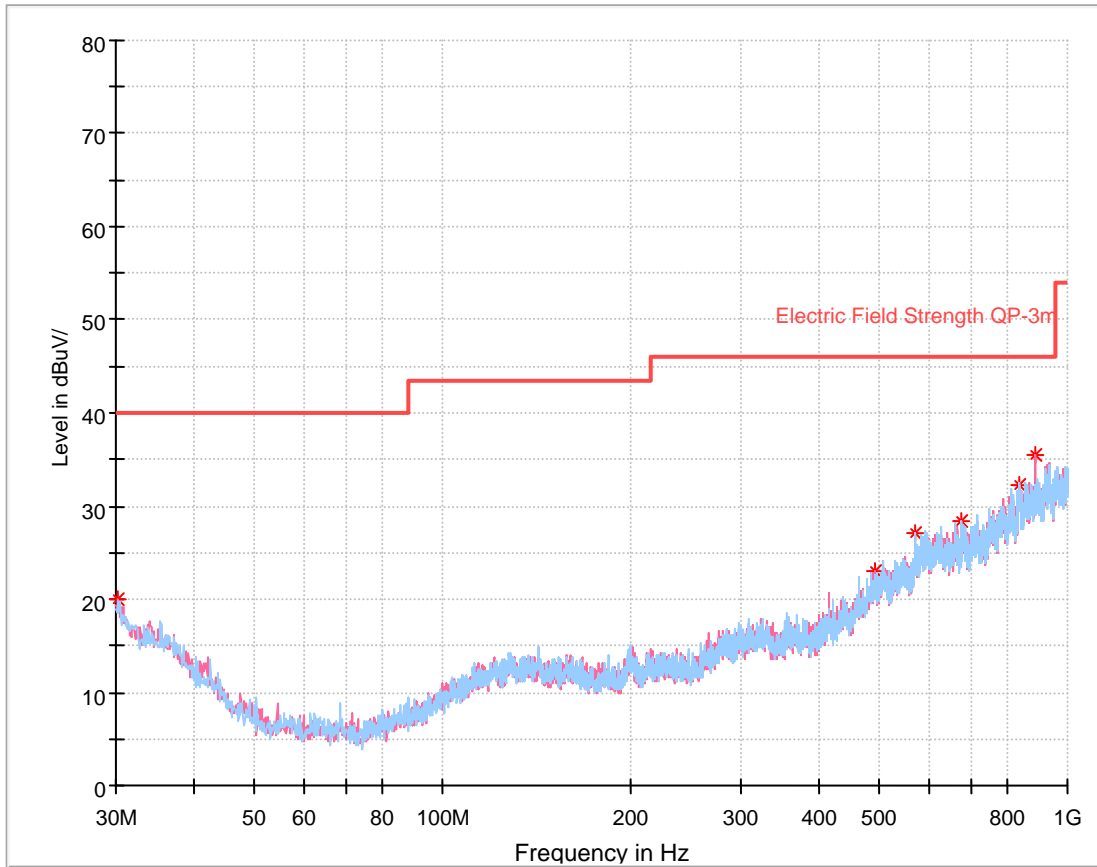

Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
677.960000	28.38	390.0	H	0.0	-1.4	46.00	17.62
572.593750	27.04	390.0	H	342.0	-3.0	46.00	18.96
891.117500	35.38	105.0	V	134.0	4.0	46.00	10.62
838.495000	32.27	305.0	V	0.0	2.8	46.00	13.73
30.242500	20.09	305.0	V	26.0	-7.8	40.00	19.91
492.083750	22.95	390.0	V	135.0	-5.7	46.00	23.05

1 GHz - 25 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2379.41	28.15	PK	81	1.3	H	31.87	60.02	74	13.98
2379.41	13.91	AV	81	1.3	H	31.87	45.78	54	8.22
2484.32	28.05	PK	183	2.5	H	32.13	60.18	74	13.82
2484.32	13.88	AV	183	2.5	H	32.13	46.01	54	7.99
4804.00	47.29	PK	303	1.6	H	5.40	52.69	74	21.31
4804.00	39.52	AV	303	1.6	H	5.40	44.92	54	9.08
Middle Channel (2441 MHz)									
4882.00	47.14	PK	316	1.4	H	6.43	53.57	74	20.43
4882.00	39.46	AV	316	1.4	H	6.43	45.89	54	8.11
High Channel (2480 MHz)									
2372.69	28.09	PK	44	1.9	H	31.87	59.96	74	14.04
2372.69	13.94	AV	44	1.9	H	31.87	45.81	54	8.19
2483.51	28.50	PK	185	2.5	H	32.13	60.63	74	13.37
2483.51	15.38	AV	185	2.5	H	32.13	47.51	54	6.49
4960.00	47.75	PK	289	1.3	H	6.95	54.70	74	19.30
4960.00	39.84	AV	289	1.3	H	6.95	46.79	54	7.21

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


The other spurious emission which is 20dB to the limit was not recorded.

And for the pre-scan is performed with the 2400-2483.5MHz band filter.

Pre-scan with high channel Peak Horizontal

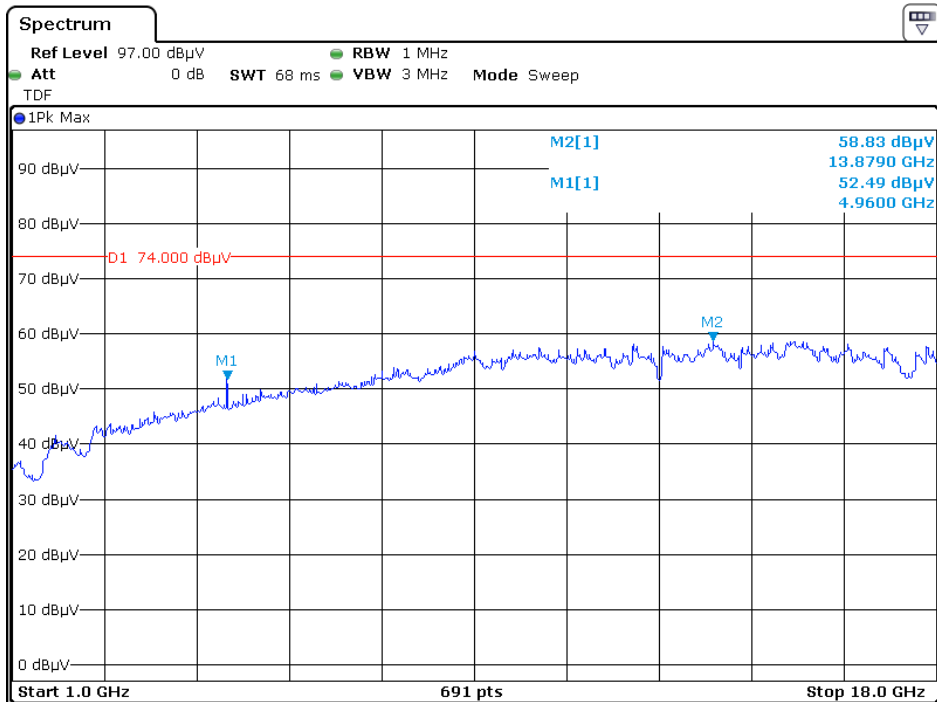


Date: 3.DEC.2019 17:27:34

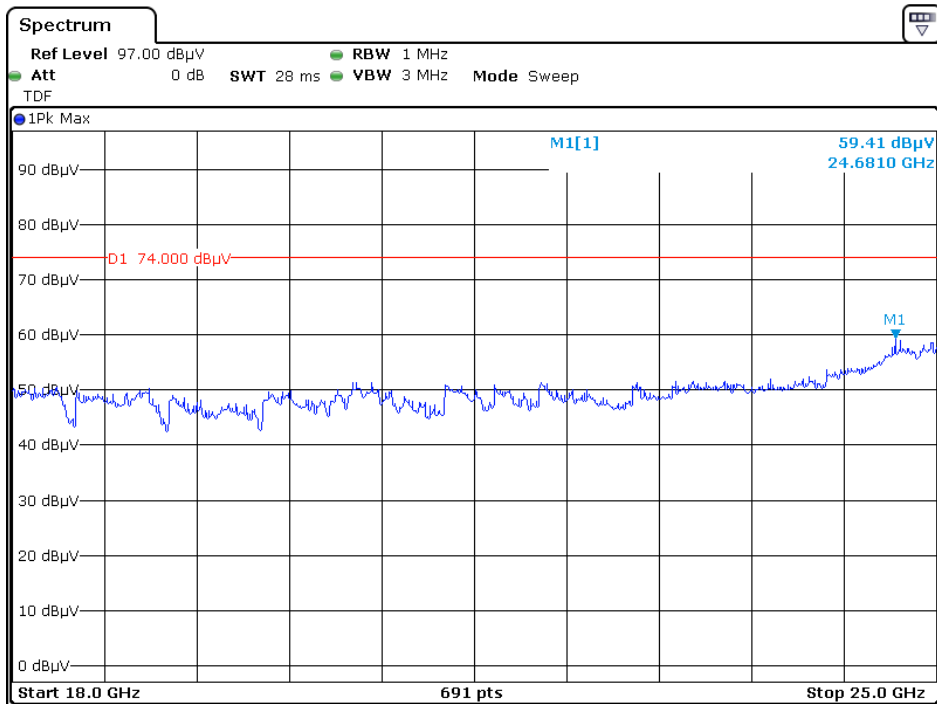


Date: 3.DEC.2019 18:21:45

Vertical

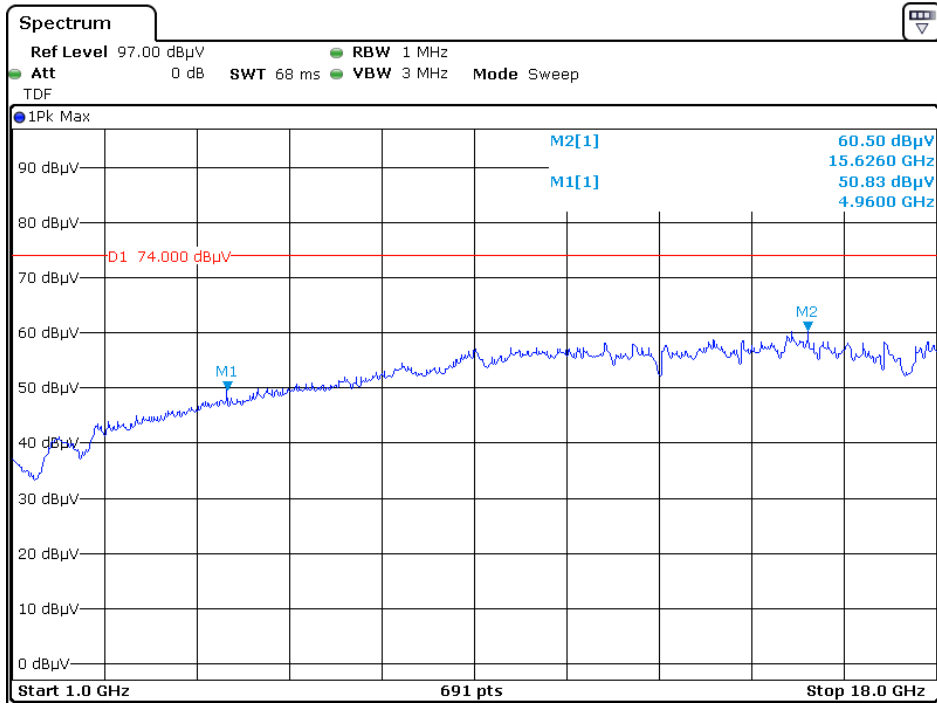


Date: 3.DEC.2019 17:18:32

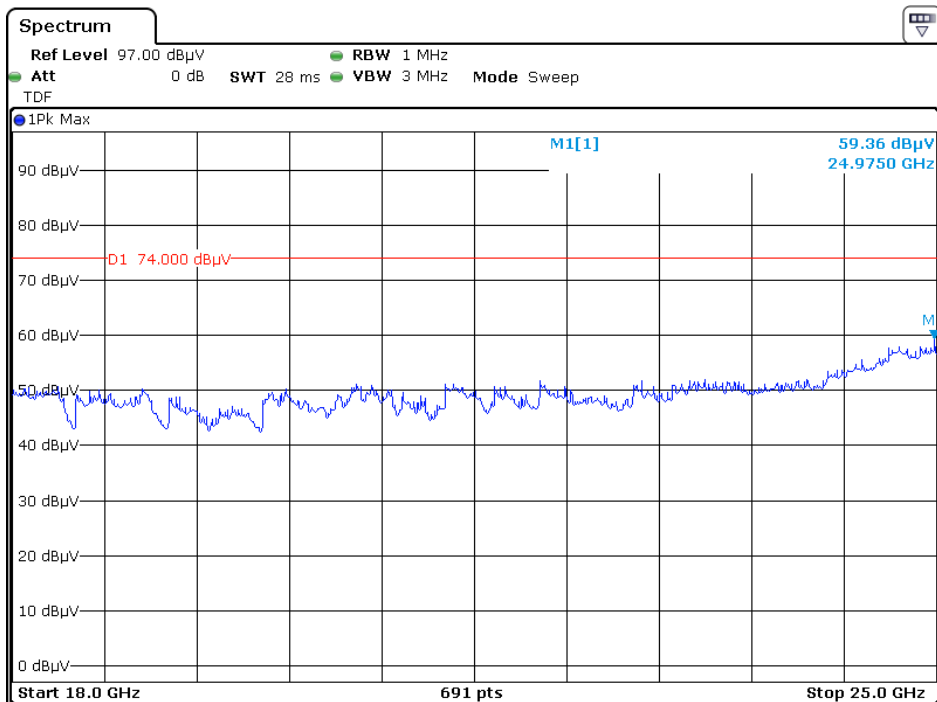


Date: 3.DEC.2019 18:28:52


Pre-scan for Average Horizontal

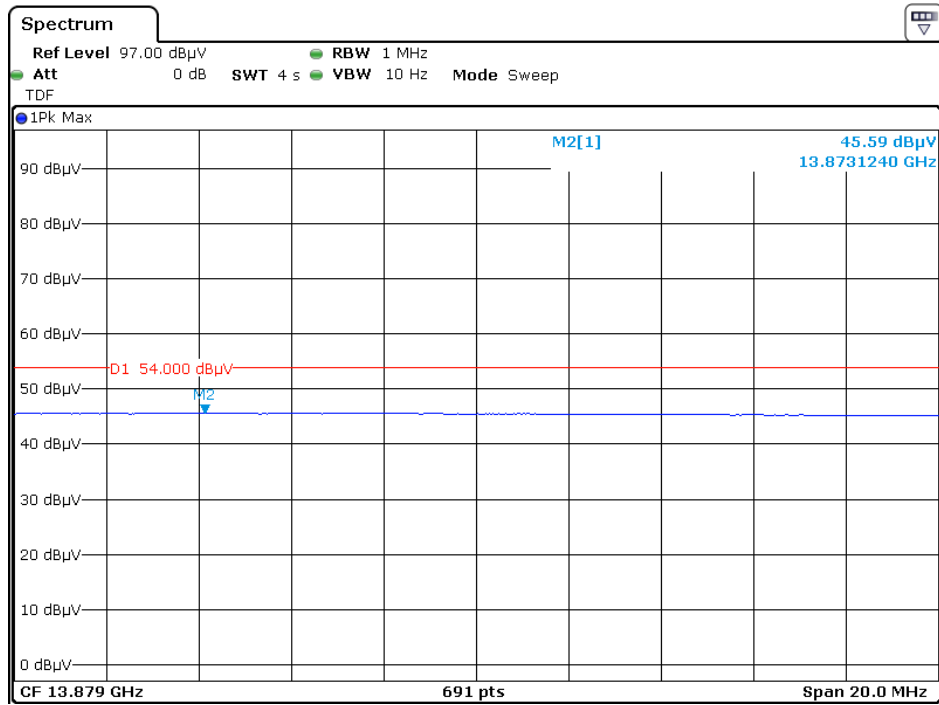

Date: 3.DEC.2019 17:31:08

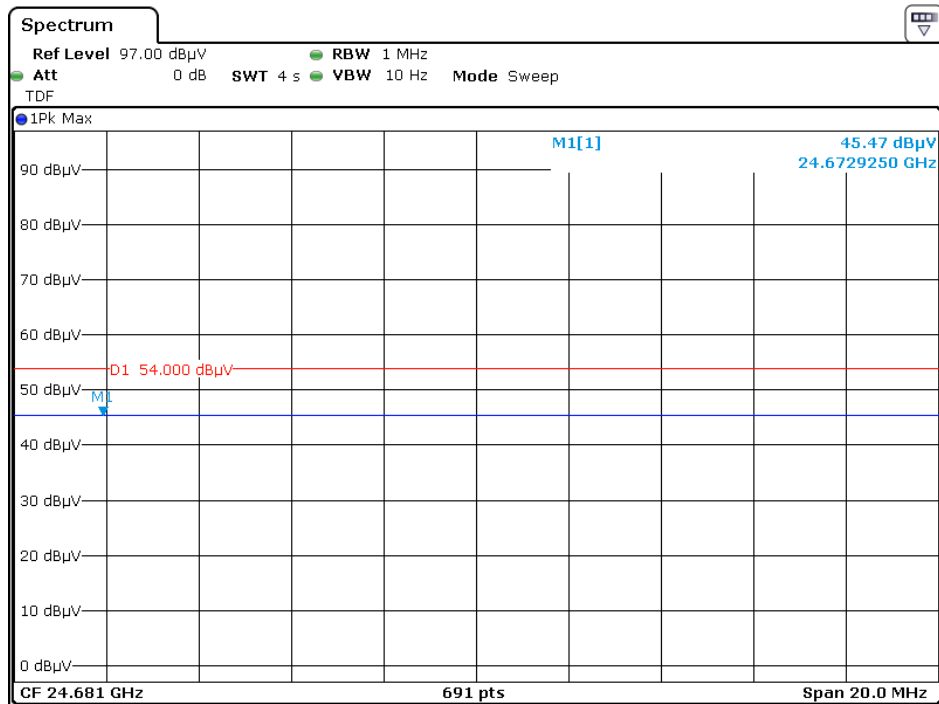


Date: 3.DEC.2019 18:25:12

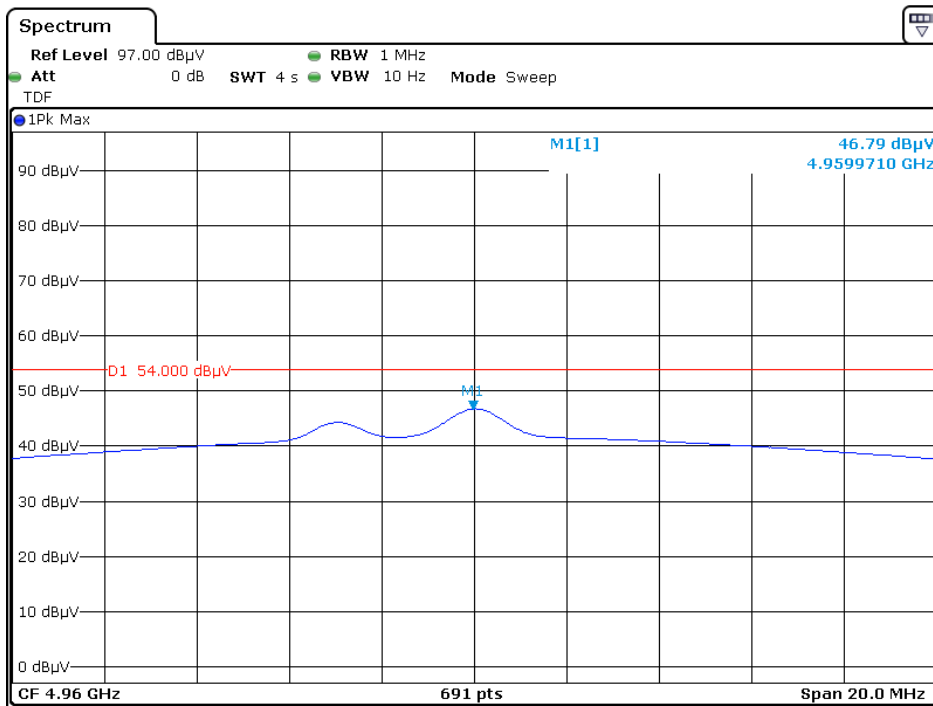


Date: 3.DEC.2019 17:41:08


Vertical

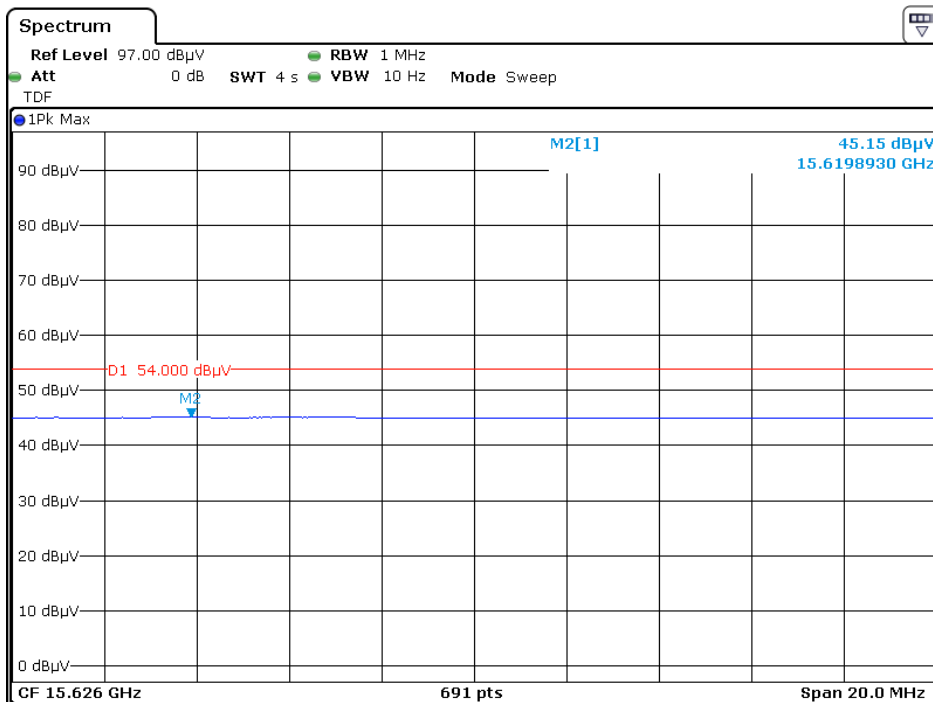

Date: 3.DEC.2019 17:23:01

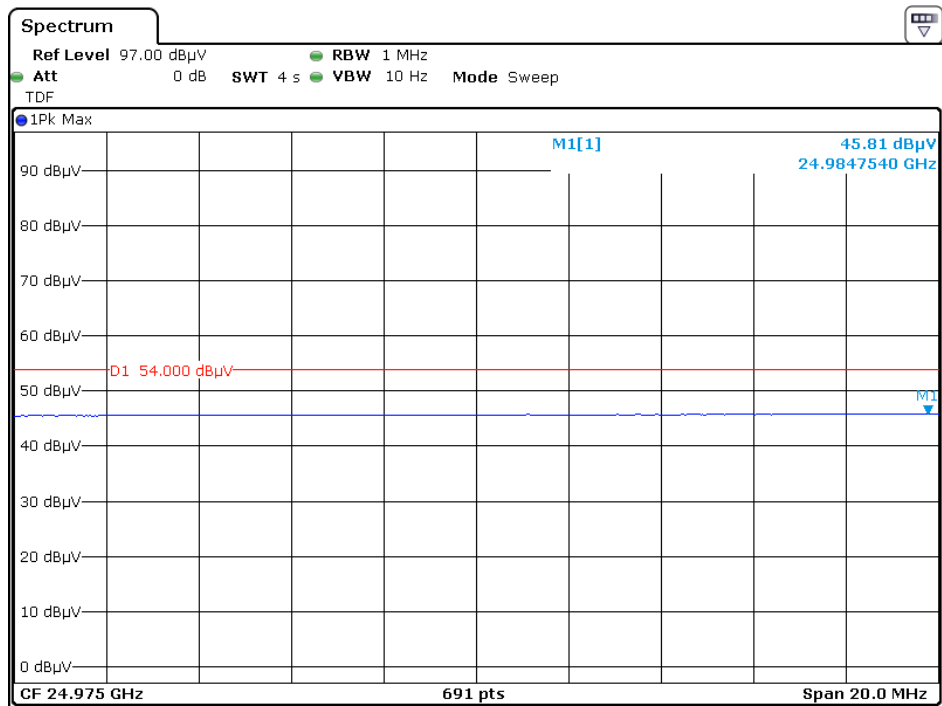

Date: 3.DEC.2019 18:33:26

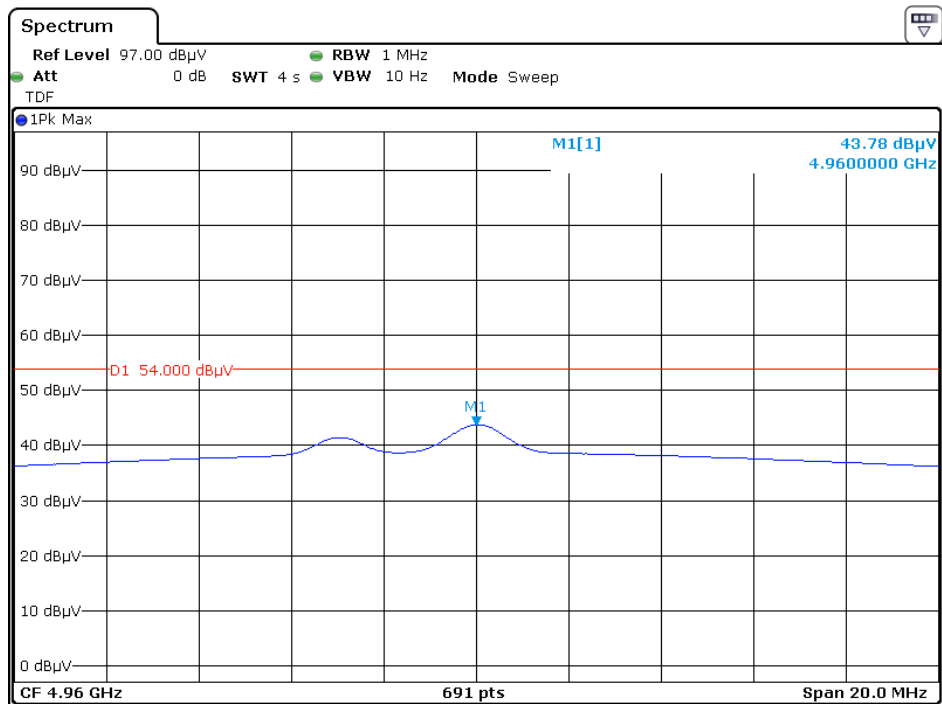

Date: 3.DEC.2019 17:36:49

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Cary Guan on 2019-12-05.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to Appendix A.

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Cary Guan on 2019-12-05.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to Appendix B.

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Cary Guan on 2019-12-05.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to Appendix C.

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Cary Guan on 2019-12-05.

Test Result: Compliance. Please refer to Appendix D.

Note 1: A period time=0.4*79=31.6(s), Total of Dwell=Pluse Time*Hopping Number

Note 2: Hopping Number= Hopping Number in 3.16s*10

Note 3: Hopping Number in 3.16s = Total of highest signals in 3.16s. (Second high signals were other channel)

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Cary Guan on 2019-12-05.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to Appendix E.

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Cary Guan on 2019-12-05.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to Appendix F.

******* END OF REPORT *******