



# FCC TEST REPORT

## FCC ID: 2ABKA-NP030AB

Product	:	Portable CD Player Boombox
Model Name	:	NP030AB,NSBX030BT,NSBX030BTL,SBX030C,SBX030BTL, SBX030BT,NP030AUBL
Brand	:	Singing Wood/hPlay/Prosonic/Transonic
Report No.	:	PTC22020800501E-FC01
<b>Prepared for</b>		
LEADERWAVE ELECTRONICS (H.K) LTD		
RM811,HENG NGAI JEWELRY CENTER,4 HOKYUEN STREET EAST,HUNGHOM,KOWLOON,HONG KONG		
Prepared by		
Precise Testing & Certification Co., Ltd.		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China		



## 1 TEST RESULT CERTIFICATION

Applicant's name : LEADERWAVE ELECTRONICS (H.K) LTD  
Address : RM811,HENG NGAI JEWELRY CENTER,4 HOKYUEN STREET  
EAST,HUNGHOM,KOWLOON,HONG KONG  
Manufacture's name : Dongguan QingXi Leaderwave Electronics Technology Company  
Limited  
Address : 3RD.INDUSTRIAL.DISTRICT.QINGXI .TOWN,DONGGUAN,  
GUANGDONG,CHINA  
Product name : Portable CD Player Boombox  
Model name : NP030AB  
Standards : FCC CFR47 Part 15 Section 15.247  
Test procedure : ANSI C63.10:2013  
Test Date : Mar.2, 2022 to Mar.23, 2022  
Date of Issue : Mar.23, 2022  
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

Win Wang / Engineer

Technical Manager:

Wu Weimin / Manager



## Contents

	Page
<b>1 TEST RESULT CERTIFICATION.....</b>	<b>2</b>
<b>2 TEST SUMMARY.....</b>	<b>5</b>
<b>3 TEST FACILITY.....</b>	<b>5</b>
<b>4 GENERAL INFORMATION.....</b>	<b>6</b>
4.1 GENERAL DESCRIPTION OF E.U.T.....	6
4.2 TEST MODE.....	7
<b>5 EQUIPMENT DURING TEST.....</b>	<b>9</b>
5.1 EQUIPMENTS LIST.....	9
5.2 MEASUREMENT UNCERTAINTY.....	11
5.3 DESCRIPTION OF SUPPORT UNITS.....	12
<b>6 CONDUCTED EMISSION.....</b>	<b>13</b>
6.1 E.U.T. OPERATION.....	13
6.2 EUT SETUP.....	13
6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	14
6.4 MEASUREMENT PROCEDURE:.....	14
6.5 CONDUCTED EMISSION LIMIT.....	14
6.6 MEASUREMENT DESCRIPTION.....	14
6.7 CONDUCTED EMISSION TEST RESULT.....	14
<b>7 RADIATED SPURIOUS EMISSIONS.....</b>	<b>15</b>
7.1 EUT OPERATION.....	17
7.2 TEST SETUP.....	18
7.3 SPECTRUM ANALYZER SETUP.....	19
7.4 TEST PROCEDURE.....	20
7.5 SUMMARY OF TEST RESULTS.....	21
<b>8 MAXIMUM PEAK OUTPUT POWER TEST.....</b>	<b>28</b>
8.1 TEST STANDARD AND LIMIT.....	28
8.2 TEST SETUP.....	28
8.3 TEST PROCEDURE.....	28
8.4 TEST DATA.....	29



<b>9 20DB OCCUPY BANDWIDTH TEST.....</b>	<b>36</b>
9.1 TEST STANDARD.....	36
9.2 TEST SETUP.....	36
9.3 TEST PROCEDURE.....	36
9.4 TEST DATA.....	36
<b>10 CARRIER FREQUENCY SEPARATION TEST.....</b>	<b>44</b>
10.1 TEST STANDARD AND LIMIT.....	44
10.2 TEST SETUP.....	44
10.3 TEST PROCEDURE.....	44
10.4 TEST DATA.....	44
<b>11 NUMBER OF HOPPING CHANNEL TEST.....</b>	<b>47</b>
11.1 TEST STANDARD AND LIMIT.....	47
11.2 TEST SETUP.....	47
11.3 TEST PROCEDURE.....	47
11.4 TEST DATA.....	48
<b>12 DWELL TIME TEST.....</b>	<b>50</b>
12.1 TEST STANDARD AND LIMIT.....	50
12.2 TEST SETUP.....	50
12.3 TEST PROCEDURE.....	50
12.4 TEST DATA.....	51
<b>13 100KHZ BANDWIDTH OF FREQUENCY BAND EDGE REQUIREMENT.....</b>	<b>54</b>
13.1 TEST STANDARD AND LIMIT.....	54
13.2 TEST SETUP.....	54
13.3 TEST PROCEDURE.....	54
13.4 TEST DATA.....	55
<b>14 ANTENNA REQUIREMENT.....</b>	<b>72</b>
14.1 TEST STANDARD AND REQUIREMENT.....	72
14.2 ANTENNA CONNECTED CONSTRUCTION.....	72
<b>15 APPENDIX I -- TEST SETUP PHOTOGRAPH.....</b>	<b>73</b>
<b>16 APPENDIX II -- EUT PHOTOGRAPH.....</b>	<b>75</b>



## 2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(3)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	PASS

## 3 TEST FACILITY

Precise Testing & Certification Co., Ltd.

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A



## 4 General Information

### 4.1 General Description of E.U.T.

Product Name	:	Portable CD Player Boombox
Model Name	:	NP030AB
Additional model	:	NSBX030BT,NSBX030BTL,SBX030C,SBX030BTL,SBX030BT,NP030AUBL Note:the machine size is the same;except for the 1.NP030AB: No LED flash, no USB function;2.NP030AUBL: LED flash, USB function; NSBX030BT,NSBX030BTL,SBX030C,SBX030BTL,SBX030BT with same NP030AB.
Specification	:	BT 5.0 BDR
Operation Frequency	:	2402-2480MHz
Number of Channel	:	79 channels for BDR
Type of Modulation	:	GFSK, $\pi/4$ -DQPSK,8DPSK For DSS;
Antenna installation	:	PCB antenna
Antenna Gain	:	2dBi
Rated Power Supply	:	Input:AC 120V/60Hz;Battery:6*1.5V(No. 2 dry battery)
Test Power Supply	:	AC 120V/60Hz
Hardware Version	:	NAC6921A
Software Version	:	V1.0



## 4.2 Test Mode

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK,  $\pi/4$ -DQPSK, 8DPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-



<b>Channel</b>	<b>Frequency(MHz)</b>
0	2402
39	2441
78	2480





## 5 Equipment During Test

### 5.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-30GHz	Aug. 21, 2022
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug. 21, 2022
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug. 21, 2022
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug. 21, 2022

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 21, 2022
Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	Aug. 21, 2022
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug. 21, 2022
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 21, 2022
Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	Aug. 21, 2022
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-40GHz	Aug. 21, 2022
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug. 21, 2022
Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	Aug. 21, 2022
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-181	14GHz-40GHz	Aug. 21, 2022
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Aug. 21, 2022
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug. 21, 2022
RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug. 21, 2022



Conducted Emissions

<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Characteristics</b>	<b>Calibration Due</b>
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 21, 2022
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-300MHz	Aug. 21, 2022
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Aug. 21, 2022



## 5.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 <sup>-6</sup>
Bandwidth	± 1.5 x 10 <sup>-6</sup>
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9kHz~30MHz)	±3.15dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB



### **5.3 Description of Support Units**

N/A

## 6 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207  
 Test Method: : ANSI C63.10:2013  
 Test Result: : PASS  
 Frequency Range: : 150kHz to 30MHz  
 Class/Severity: : Class B  
 Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)


### 6.1 E.U.T. Operation

Operating Environment :


Temperature: : 23.2°C  
 Humidity: : 51 % RH  
 Atmospheric Pressure: : 101.12 kPa  
 Test Voltage : AC 120V/60Hz

### 6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013

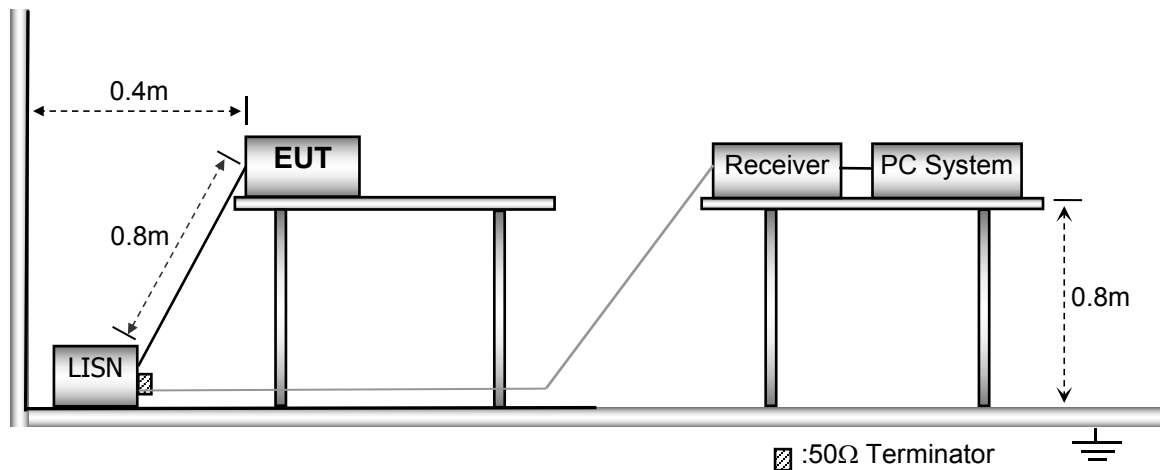

### 6.3 Test SET-UP (Block Diagram of Configuration)

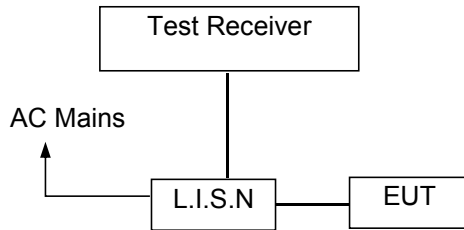

### 6.4 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 6.5 Conducted Emission Limit

#### Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

#### Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 6.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


### 6.7 Conducted Emission Test Result

Pass

Conducted emission at both 120V & 240V is assessed, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode (GFSK) are recorded in the following pages and the others modulation methods do not exceed the limits.




Line -120V/60Hz:

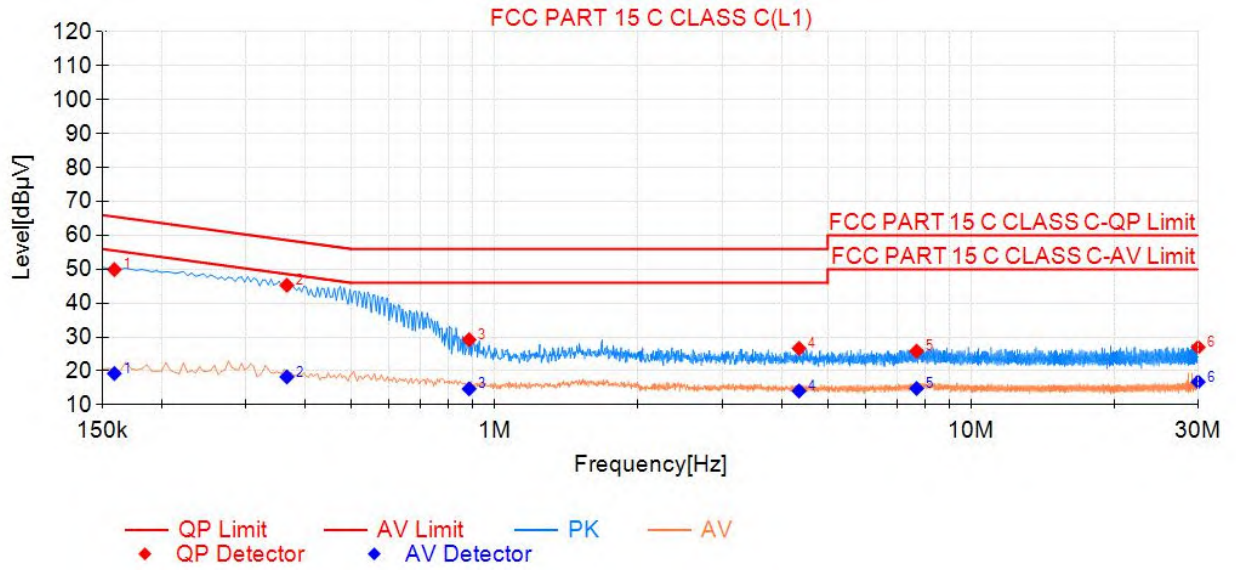

Final Data List								
NO.	Freq. [MHz]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
1	0.159	49.91	65.52	15.61	19.25	55.52	36.27	PASS
2	0.366	45.28	58.59	13.31	18.26	48.59	30.33	PASS
3	0.8835	29.23	56.00	26.77	14.74	46.00	31.26	PASS
4	4.353	26.67	56.00	29.33	14.10	46.00	31.90	PASS
5	7.683	25.85	60.00	34.15	14.86	50.00	35.14	PASS
6	29.9715	27.00	60.00	33.00	16.78	50.00	33.22	PASS



Neutral -120V/60Hz:

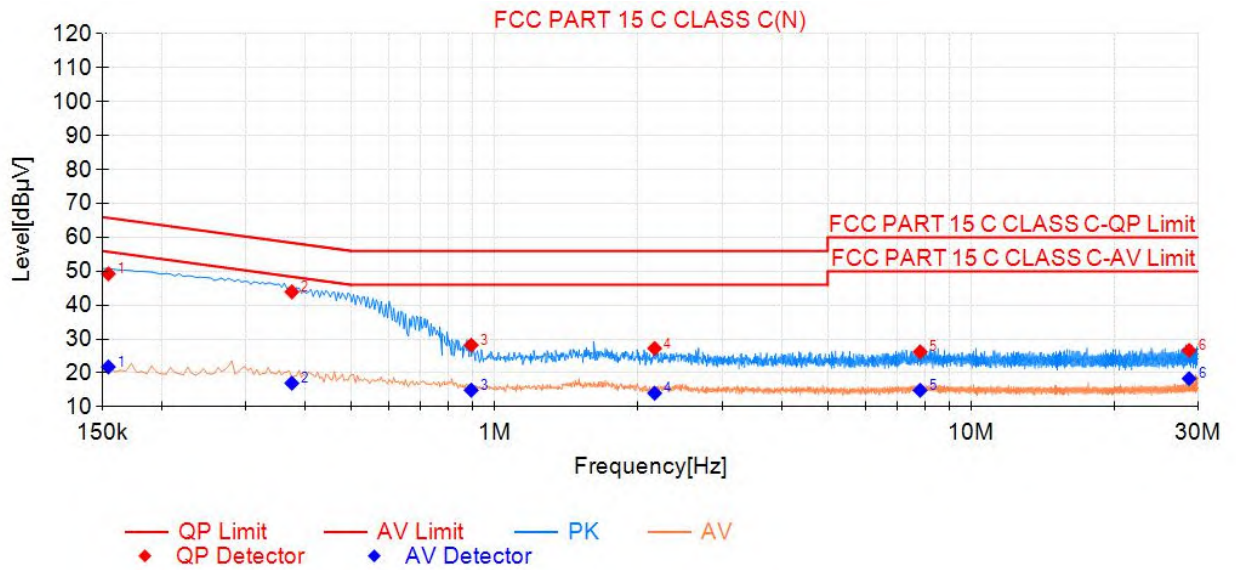

Final Data List								
NO.	Freq. [MHz]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
1	0.1545	49.26	65.75	16.49	21.79	55.75	33.96	PASS
2	0.375	43.94	58.39	14.45	16.99	48.39	31.40	PASS
3	0.8925	28.22	56.00	27.78	14.92	46.00	31.08	PASS
4	2.166	27.25	56.00	28.75	14.03	46.00	31.97	PASS
5	7.818	26.22	60.00	33.78	14.89	50.00	35.11	PASS
6	28.699	26.67	60.00	33.33	18.34	50.00	31.66	PASS





## 7 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247  
 Test Method : ANSI C63.10:2013  
 Test Result : PASS  
 Measurement Distance : 3m  
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 7.1 EUT Operation


Operating Environment :

Temperature : 24.5 °C  
 Humidity : 55.5% RH  
 Atmospheric Pressure : 101.3kPa  
 Test Voltage : AC 120V60Hz


## 7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

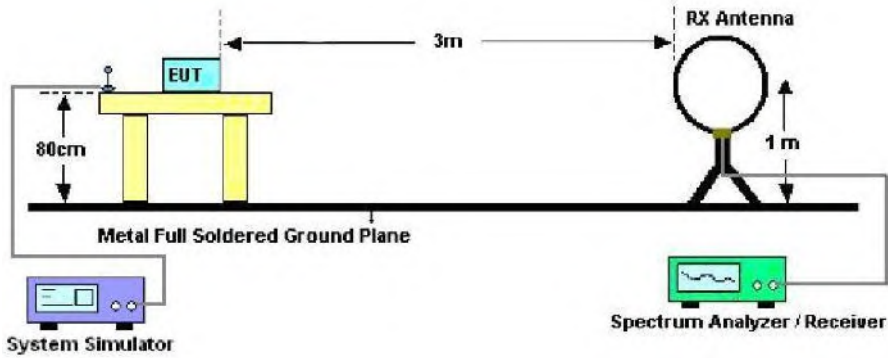

The test setup for emission measurement from 30 MHz to 1 GHz.

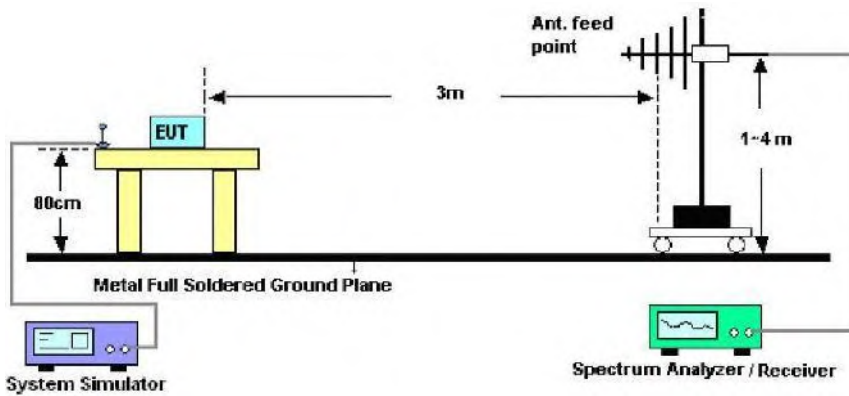

The test setup for emission measurement above 1 GHz.

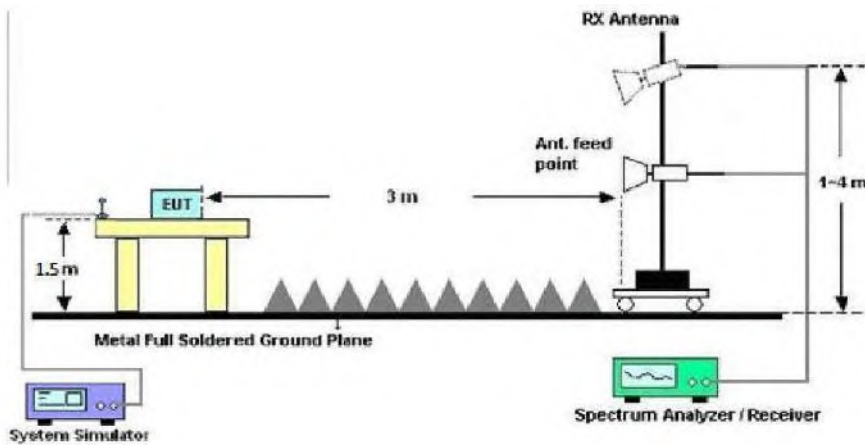



### 7.3 Spectrum Analyzer Setup

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



## 7.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
  - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
  - 2) Change the antenna polarization and repeat 1) with vertical polarization.
  - 3) Make a hardcopy of the spectrum.
  - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
  - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
  - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
  - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
  - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



### 7.5 Summary of Test Results

#### Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over Limit (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor =  $40\log(\text{Specific distance/ test distance})$  (dB);  
Limit line = Specific limits (dBuV) + distance extrapolation factor.

#### Test Frequency: 30MHz ~ 1GHz

Please refer to the following test plots, Low Channel (2402MHz) Worst case GFSK for record:



Test plot for Horizontal

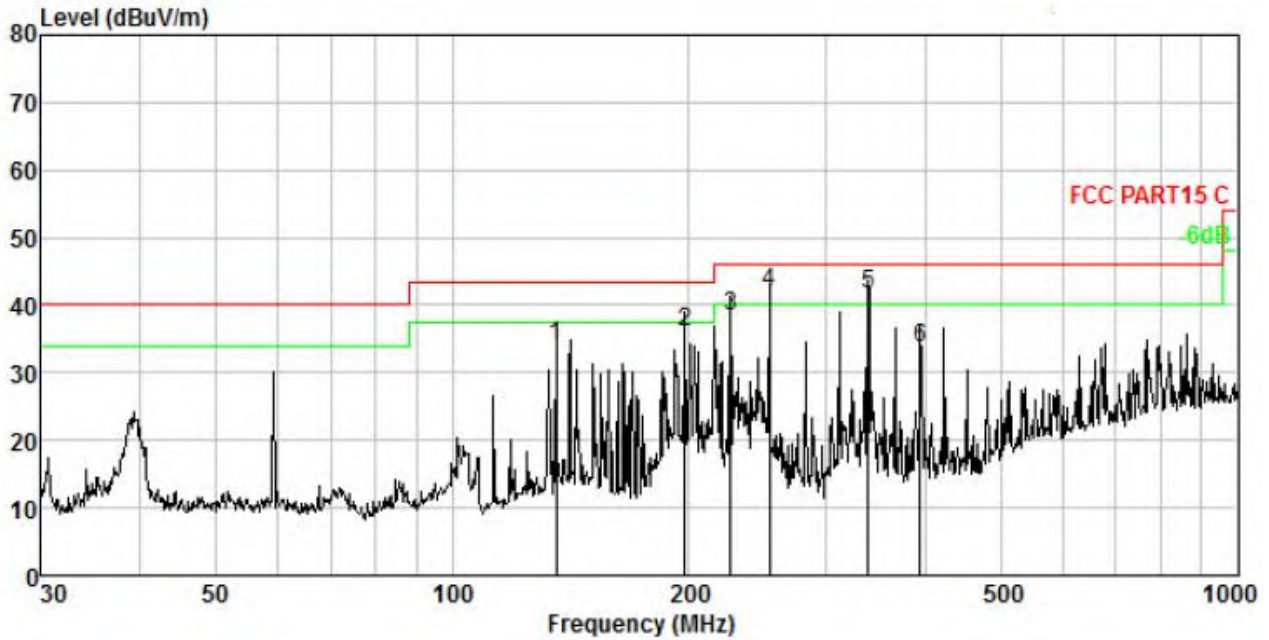


No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	135.506	3.79	13.02	47.13	30.01	33.93	43.50	-9.57	QP
2.	197.893	4.44	11.15	50.46	30.04	36.01	43.50	-7.49	QP
3.	226.099	4.67	11.82	51.95	30.12	38.32	46.00	-7.68	QP
4.	253.837	4.87	12.56	54.77	30.20	42.00	46.00	-4.00	QP
5.	338.400	5.37	14.14	52.51	30.48	41.54	46.00	-4.46	QP
6.	394.855	5.64	14.76	44.06	30.68	33.78	46.00	-12.22	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



Test plot for Vertical

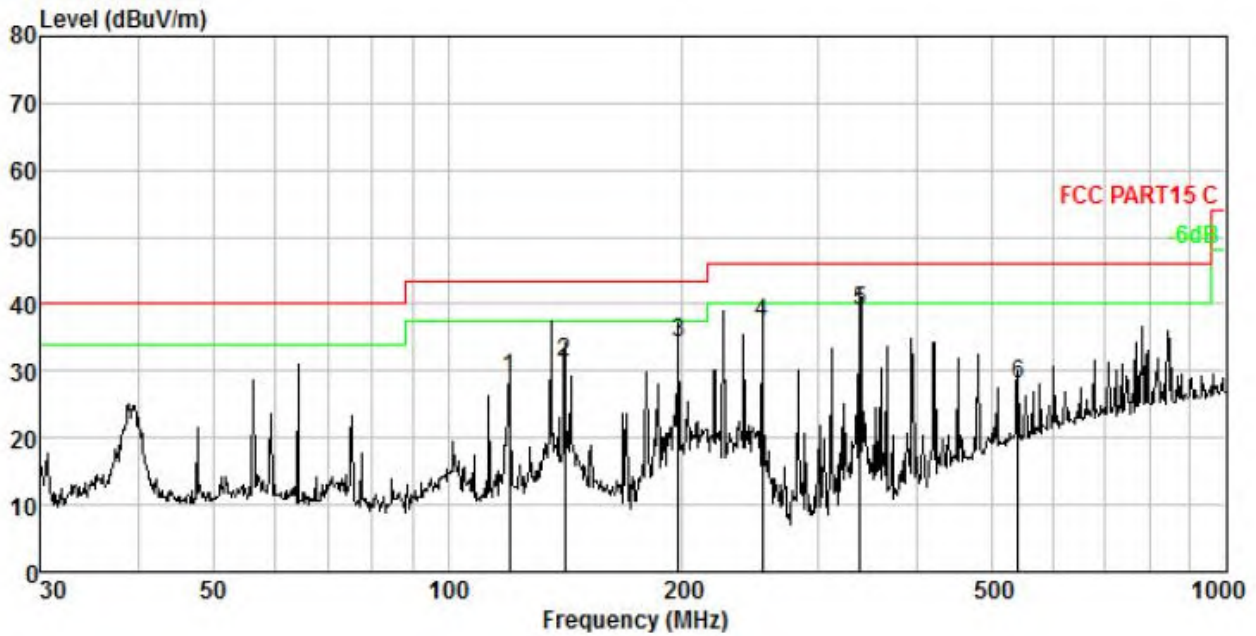

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	119.856	3.59	11.98	43.37	30.00	28.94	43.50	-14.56	QP
2.	141.330	3.87	13.36	43.95	30.01	31.17	43.50	-12.33	QP
3.	197.893	4.44	11.15	48.63	30.04	34.18	43.50	-9.32	QP
4.	253.837	4.87	12.56	50.01	30.20	37.24	46.00	-8.76	QP
5.	338.400	5.37	14.14	50.08	30.48	39.11	46.00	-6.89	QP
6.	541.373	6.18	18.27	34.62	30.95	28.12	46.00	-17.88	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



**Test Frequency 1GHz-25GHz**

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK, Hopping)mode have been tested, and the worst result(GFSK, Hopping) was report as below

Test Mode: CH00 GFSK					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804	44.37	34.04	6.58	34.09	50.9	74	-23.1	V
7206	40.08	37.11	7.73	34.5	50.42	74	-23.58	V
9608	36.59	39.31	9.23	34.79	50.34	74	-23.66	V
4804	43.89	34.04	6.58	34.09	50.42	74	-23.58	H
7206	39.29	37.11	7.73	34.5	49.63	74	-24.37	H
9608	38.21	39.31	9.23	34.79	51.96	74	-22.04	H
Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804	41.79	34.04	6.58	34.09	48.32	54	-5.68	V
7206	35.83	37.11	7.73	34.5	46.17	54	-7.83	V
9608	31.35	39.31	9.23	34.79	45.1	54	-8.9	V
4804	38.12	34.04	6.58	34.09	44.65	54	-9.35	H
7206	34.24	37.11	7.73	34.5	44.58	54	-9.42	H
9608	33.47	39.31	9.23	34.79	47.22	54	-6.78	H





Test Mode: CH39 GFSK					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4882	42.37	34.38	6.69	34.09	49.35	74	-24.65	V
7323	38.69	37.22	7.78	34.53	49.16	74	-24.84	V
9764	35.37	39.46	9.35	34.8	49.38	74	-24.62	V
4882	44.55	34.38	6.69	34.09	51.53	74	-22.47	H
7323	37.19	37.22	7.78	34.53	47.66	74	-26.34	H
9764	35.49	39.46	9.35	34.8	49.5	74	-24.5	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4882	39.2	34.38	6.69	34.09	46.18	54	-7.82	V
7323	34.29	37.22	7.78	34.53	44.76	54	-9.24	V
9764	30.75	39.46	9.35	34.8	44.76	54	-9.24	V
4882	39.12	34.38	6.69	34.09	46.1	54	-7.9	H
7323	31.98	37.22	7.78	34.53	42.45	54	-11.55	H
9764	31.29	39.46	9.35	34.8	45.3	54	-8.7	H



Test Mode: CH78 GFSK					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960	43.35	34.72	6.79	34.09	50.77	74.00	-23.23	V
7440	40.26	37.34	7.82	34.57	50.85	74.00	-23.15	V
9920	34.81	39.62	9.46	34.81	49.08	74.00	-24.92	V
4960	41.65	34.72	6.79	34.09	49.07	74.00	-24.93	H
7440	37.33	37.34	7.82	34.57	47.92	74.00	-26.08	H
9920	37.14	39.62	9.46	34.81	51.41	74.00	-22.59	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960	39.23	34.04	6.58	34.09	45.76	54.00	-8.24	V
7440	35.71	37.11	7.73	34.50	46.05	54.00	-7.95	V
9920	30.20	39.31	9.23	34.79	43.95	54.00	-10.05	V
4960	36.71	34.04	6.58	34.09	43.24	54.00	-10.76	H
7440	31.99	37.11	7.73	34.50	42.33	54.00	-11.67	H
9920	32.07	39.31	9.23	34.79	45.82	54.00	-8.18	H

Note:

1. The testing has been conformed to  $10 \times 2480\text{MHz} = 24800\text{MHz}$ .
2. All other emissions more than 30dB below the limit.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Over Limit = Emission Level - Limit



**Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz**

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK)mode have been tested, and the worst result(GFSK) was report as below

Test Mode: Low Channel 2402MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2390	46.37	29.15	3.41	34.01	44.92	74	-29.08	H	Peak
2400	59.11	29.16	3.43	34.01	57.69	74	-16.31	H	Peak
2390	44.46	29.15	3.41	34.01	43.01	74	-30.99	V	Peak
2400	60.37	29.16	3.43	34.01	58.95	74	-15.05	V	Peak
2390	38.4	29.15	3.41	34.01	36.95	54	-17.05	H	AV
2400	47.12	29.16	3.43	34.01	45.7	54	-8.3	H	AV
2390	36.56	29.15	3.41	34.01	35.11	54	-18.89	V	AV
2400	45.37	29.16	3.43	34.01	43.95	54	-10.05	V	AV

Test Mode: High Channel 2480MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2483.5	49.89	29.28	3.53	34.03	48.67	74.00	-25.33	H	Peak
2500	45.33	29.30	3.56	34.03	44.16	74.00	-29.84	H	Peak
2483.5	50.83	29.28	3.53	34.03	49.61	74.00	-24.39	V	Peak
2500	44.49	29.30	3.56	34.03	43.32	74.00	-30.68	V	Peak
2483.5	41.37	29.28	3.53	34.03	40.15	54.00	-13.85	H	AV
2500	36.61	29.30	3.56	34.03	35.44	54.00	-18.56	H	AV
2483.5	42.54	29.28	3.53	34.03	41.32	54.00	-12.68	V	AV
2500	37.48	29.30	3.56	34.03	36.31	54.00	-17.69	V	AV




## 8 Maximum Peak Output Power Test

### 8.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	125mW

### 8.2 Test Setup



### 8.3 Test Procedure

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 15.247 Meas Guidance v05 section 8.3.1.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.



### 8.4 Test Data

Test Item	: Max. peak output power	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	6.02	≤20.97	PASS
		2440	6.12	≤20.97	PASS
		2441	5.99	≤20.97	PASS
		2480	5.64	≤20.97	PASS
2DH5	Ant1	2402	5.04	≤20.97	PASS
		2440	4.95	≤20.97	PASS
		2441	4.77	≤20.97	PASS
		2480	4.32	≤20.97	PASS
3DH5	Ant1	2402	5	≤20.97	PASS
		2440	4.97	≤20.97	PASS
		2441	4.89	≤20.97	PASS
		2480	4.37	≤20.97	PASS



DH5\_Ant1\_2402



DH5\_Ant1\_2440



DH5\_Ant1\_2441



DH5\_Ant1\_2480







2DH5\_Ant1\_2441



2DH5\_Ant1\_2480



3DH5\_Ant1\_2402



3DH5\_Ant1\_2440



3DH5\_Ant1\_2441



3DH5\_Ant1\_2480




## 9 20DB Occupy Bandwidth Test

### 9.1 Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)
---------------	------------------------------------

### 9.2 Test Setup



### 9.3 Test Procedure

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

### 9.4 Test Data

Test Item	: 20dB BW	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH



TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.963	2401.532	2402.495	---	---
		2440	0.957	2439.535	2440.492	---	---
		2441	0.690	2440.670	2441.360	---	---
		2480	0.963	2479.535	2480.498	---	---
2DH5	Ant1	2402	1.317	2401.343	2402.660	---	---
		2440	1.296	2439.367	2440.663	---	---
		2441	1.134	2440.436	2441.570	---	---
		2480	1.296	2479.367	2480.663	---	---
3DH5	Ant1	2402	1.311	2401.349	2402.660	---	---
		2440	1.311	2439.349	2440.660	---	---
		2441	1.125	2440.442	2441.567	---	---
		2480	1.308	2479.352	2480.660	---	---



DH5\_Ant1\_2402



DH5\_Ant1\_2440



DH5\_Ant1\_2441



DH5\_Ant1\_2480



2DH5\_Ant1\_2402



2DH5\_Ant1\_2440



2DH5\_Ant1\_2441





2DH5\_Ant1\_2480



3DH5\_Ant1\_2402



3DH5\_Ant1\_2440



3DH5\_Ant1\_2441



3DH5\_Ant1\_2480




## 10 Carrier Frequency Separation Test

### 10.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

### 10.2 Test Setup



### 10.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

### 10.4 Test Data

Test Item	: Frequency Separation	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH



TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	Hop	0.996	≥0.963	PASS
2DH5	Ant1	Hop	1.000	≥0.878	PASS
3DH5	Ant1	Hop	1.000	≥0.874	PASS



DH5\_Ant1\_Hop



2DH5\_Ant1\_Hop



3DH5\_Ant1\_Hop




## 11 Number of Hopping Channel Test

### 11.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>15 channels

### 11.2 Test Setup



### 11.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:


1. Span= the frequency band of operation
2. Set the RBW = 100kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.




**11.4 Test Data**

Test Item	: Number of Hopping Frequency	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH


TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

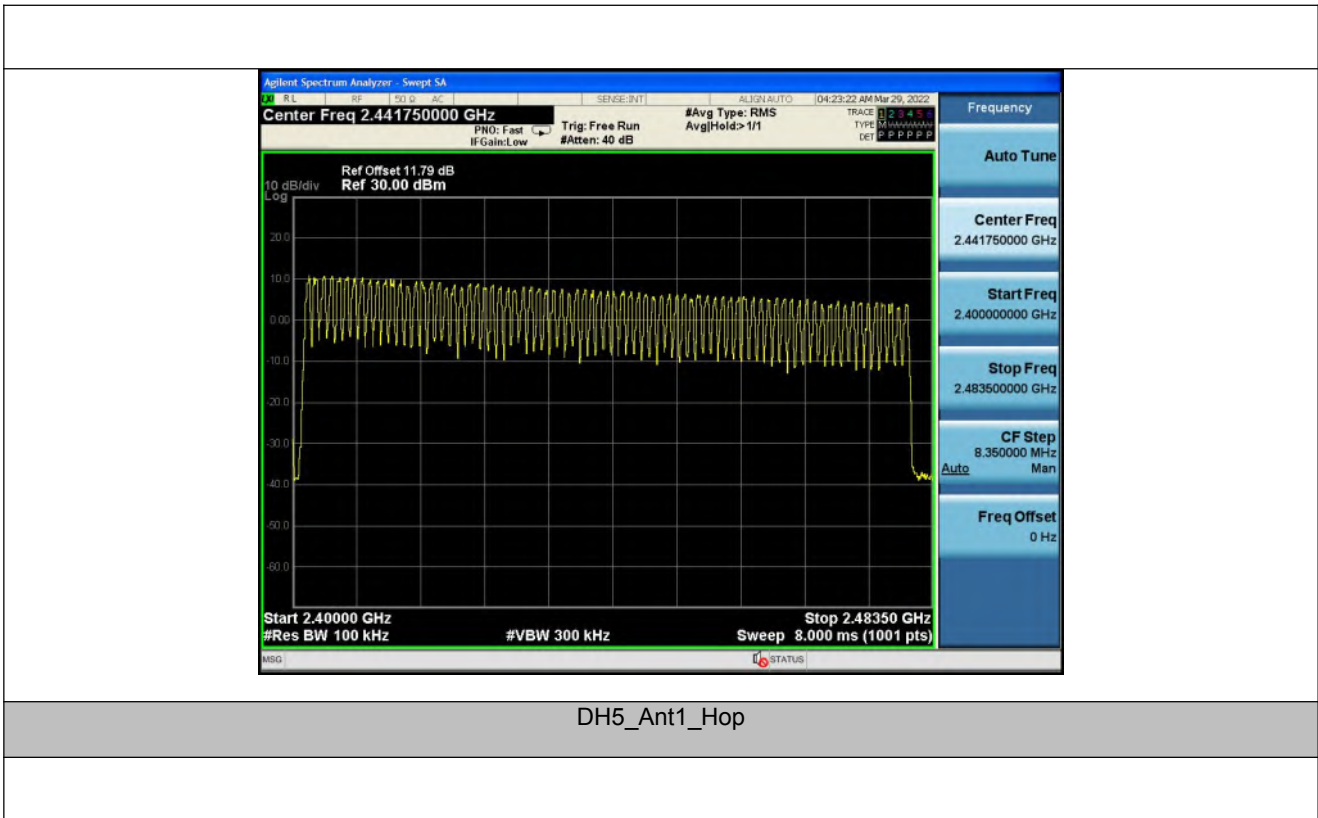



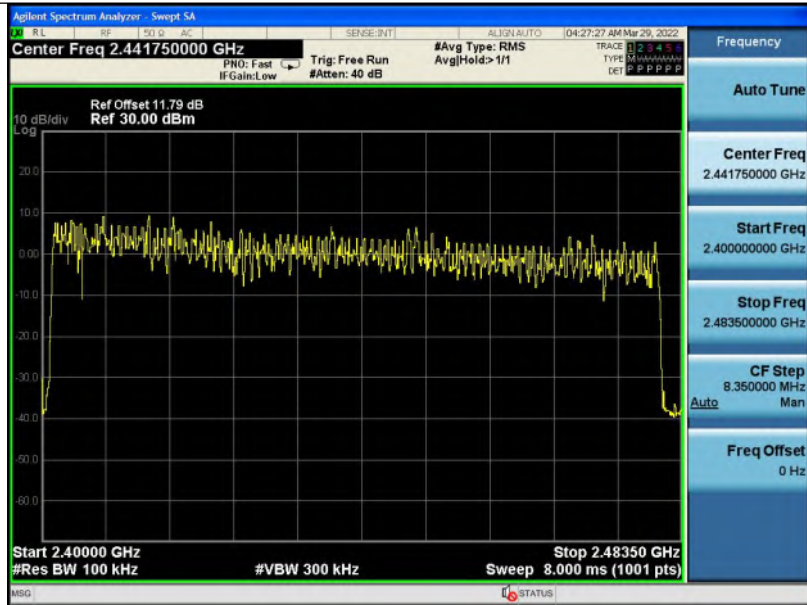

2DH5\_Ant1\_Hop

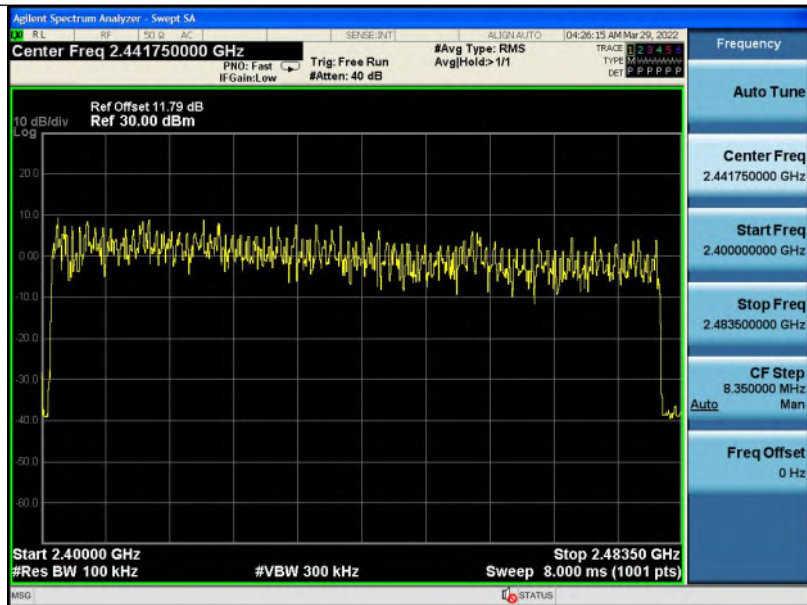

3DH5\_Ant1\_Hop




## 12 Dwell Time Test

### 12.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	0.4 sec

### 12.2 Test Setup



### 12.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.



### 12.4 Test Data

Test Item	: Time of Occupancy	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH


TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.88	106.67	0.308	≤0.4	PASS
2DH3	Ant1	Hop	2.88	160	0.461	≤0.4	FAIL
2DH5	Ant1	Hop	2.88	106.67	0.308	≤0.4	PASS
3DH3	Ant1	Hop	2.89	160	0.462	≤0.4	FAIL
3DH5	Ant1	Hop	2.89	106.67	0.308	≤0.4	PASS



DH5\_Ant1\_Hop




2DH3\_Ant1\_Hop

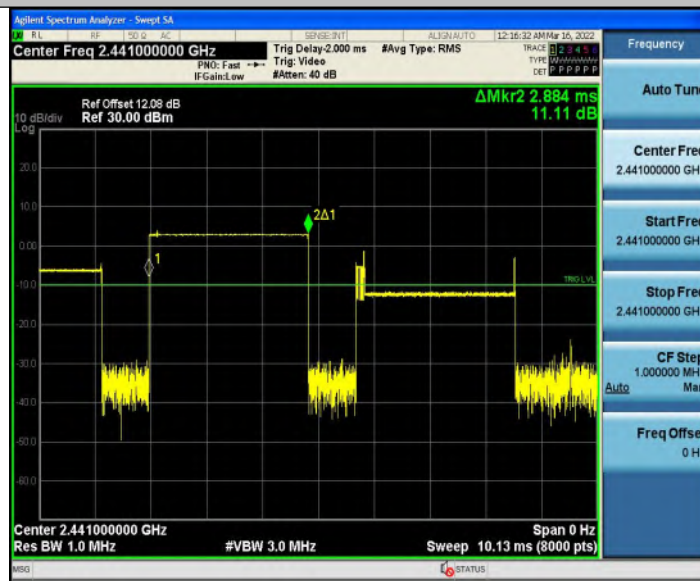

2DH5\_Ant1\_Hop



3DH3\_Ant1\_Hop

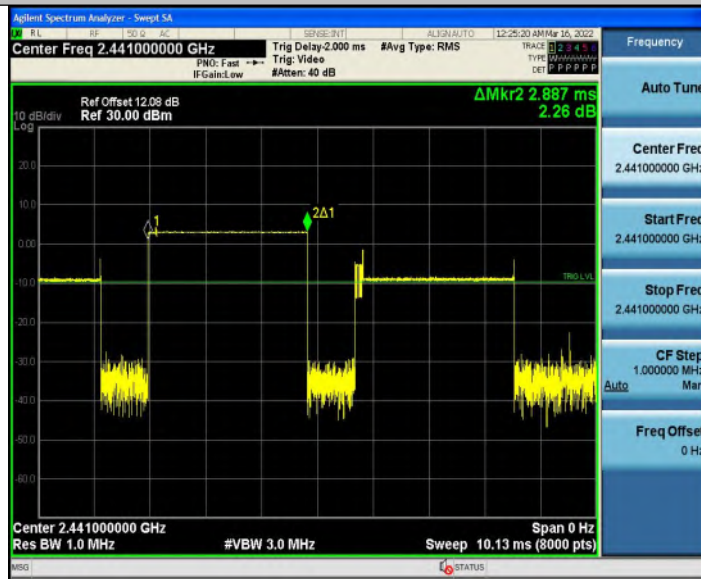


3DH5\_Ant1\_Hop

## 13 100kHz Bandwidth of Frequency Band Edge Requirement

### 13.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 13.2 Test Setup



### 13.3 Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:


1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.




### 13.4 Test Data

Test Item	: Band edge	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH

TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	5.56	-45.36	≤-14.44	PASS
		High	2480	5.20	-45.43	≤-14.8	PASS
		Low	Hop_2402	5.30	-44.64	≤-14.71	PASS
		High	Hop_2480	5.55	-45.42	≤-14.45	PASS
2DH5	Ant1	Low	2402	3.07	-44.09	≤-16.93	PASS
		High	2480	2.03	-45.27	≤-17.97	PASS
		Low	Hop_2402	2.82	-46.29	≤-17.18	PASS
		High	Hop_2480	5.59	-45.61	≤-14.41	PASS
3DH5	Ant1	Low	2402	3.19	-43.65	≤-16.81	PASS
		High	2480	2.16	-45.18	≤-17.84	PASS
		Low	Hop_2402	2.89	-46.58	≤-17.12	PASS
		High	Hop_2480	2.45	-45.21	≤-17.55	PASS

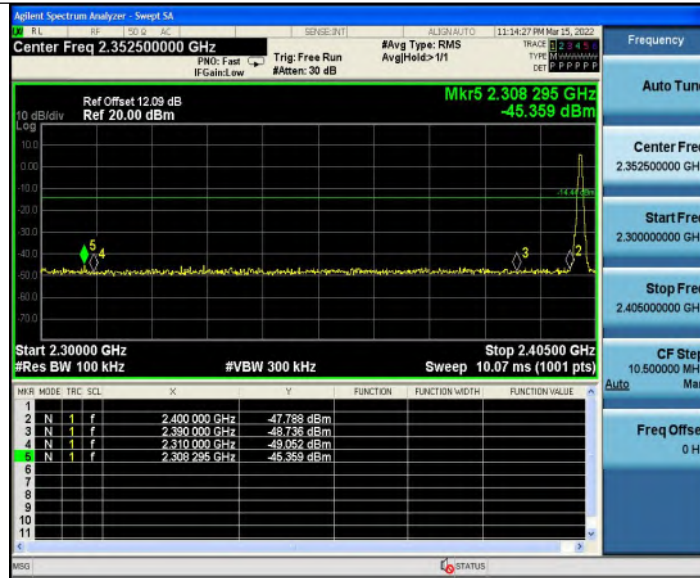


DH5\_Ant1\_Low\_2402

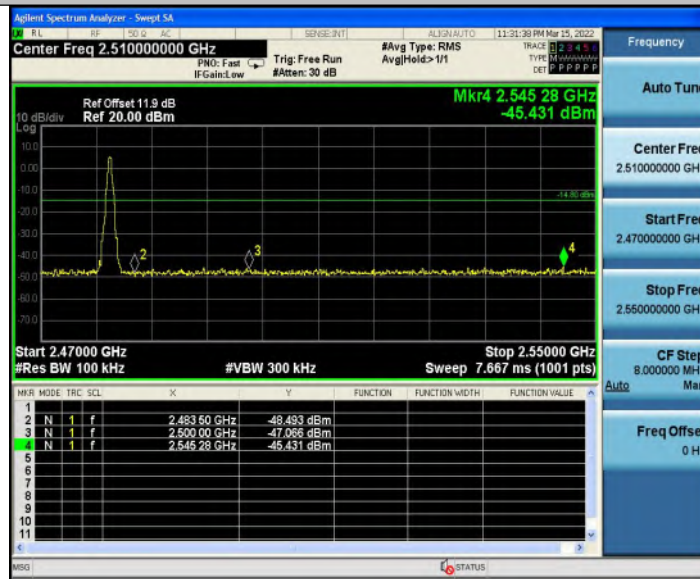


DH5\_Ant1\_High\_2480




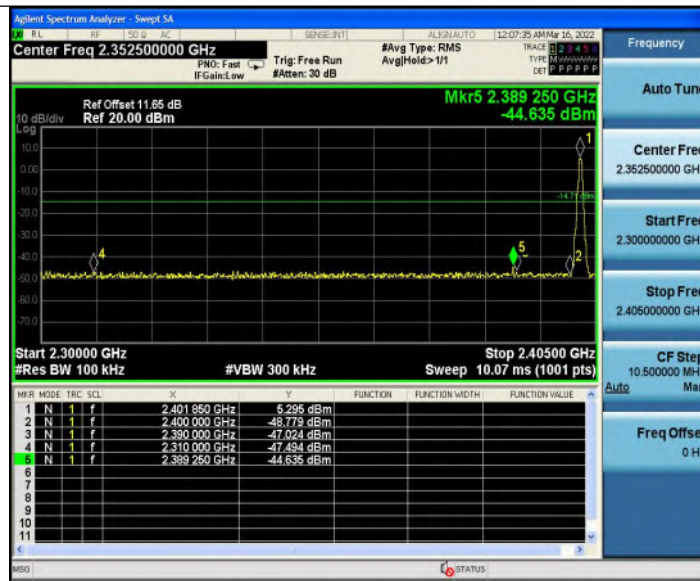


DH5\_Ant1\_Low\_Hop\_2402

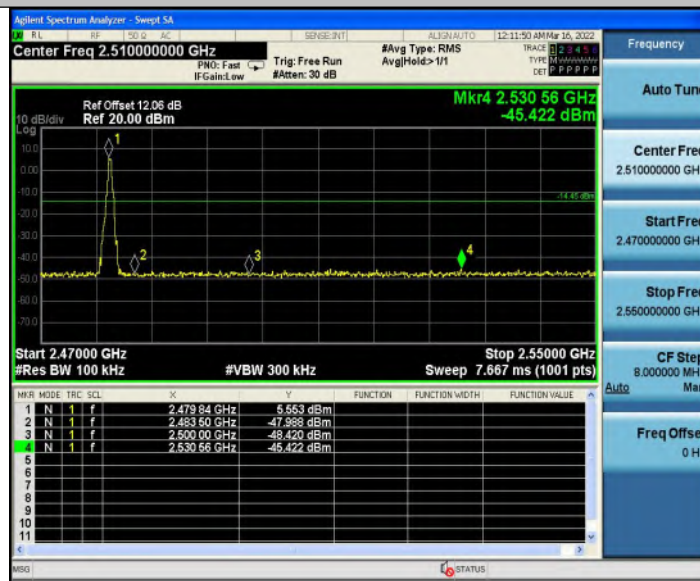


DH5\_Ant1\_High\_Hop\_2480

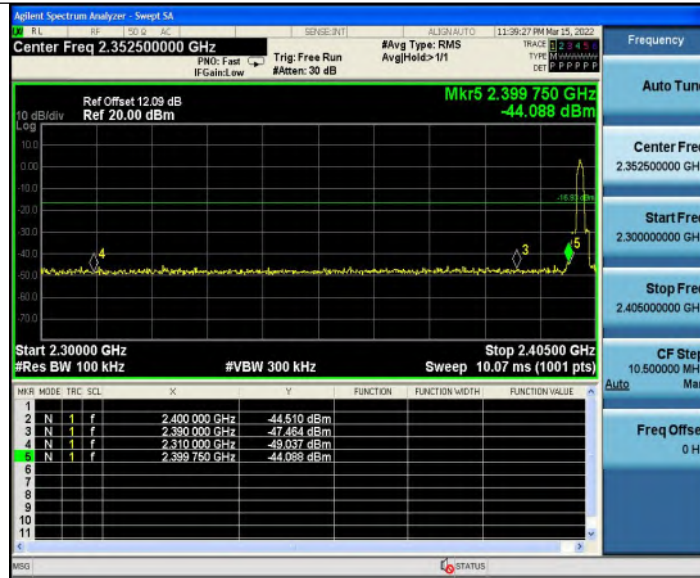


2DH5\_Ant1\_Low\_2402

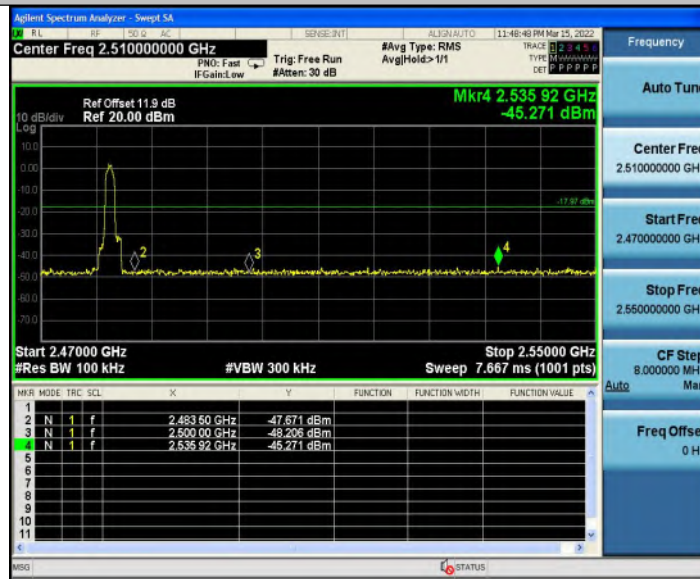


2DH5\_Ant1\_High\_2480

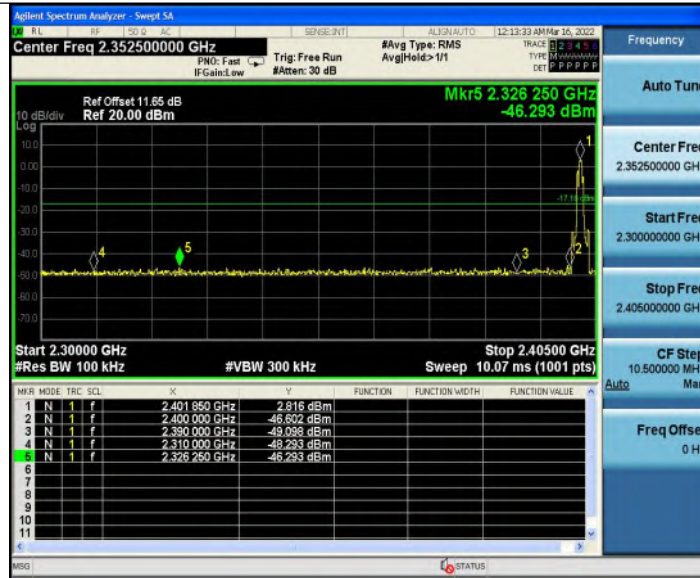


2DH5\_Ant1\_Low\_Hop\_2402

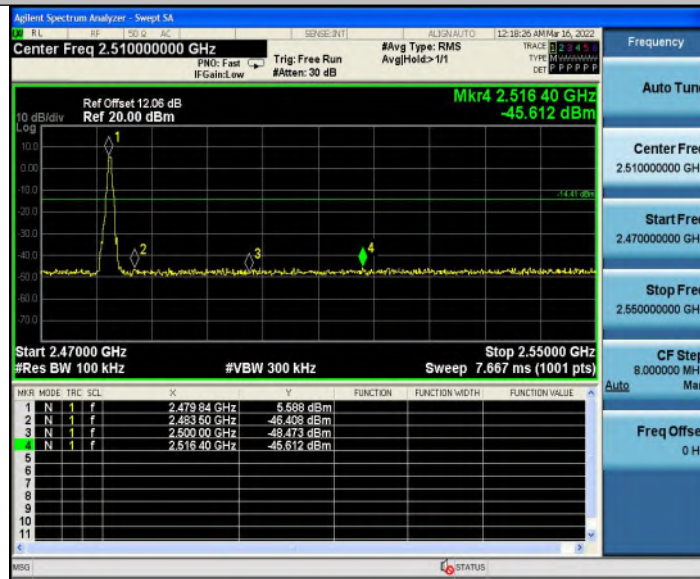


2DH5\_Ant1\_High\_Hop\_2480

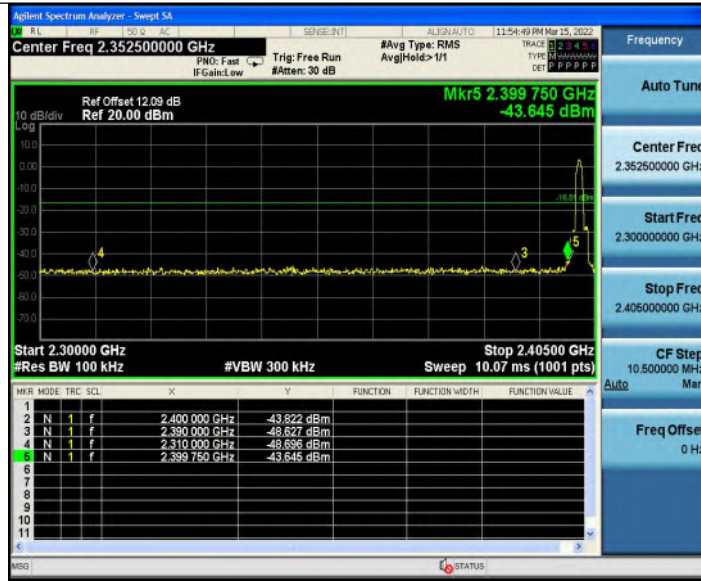


3DH5\_Ant1\_Low\_2402

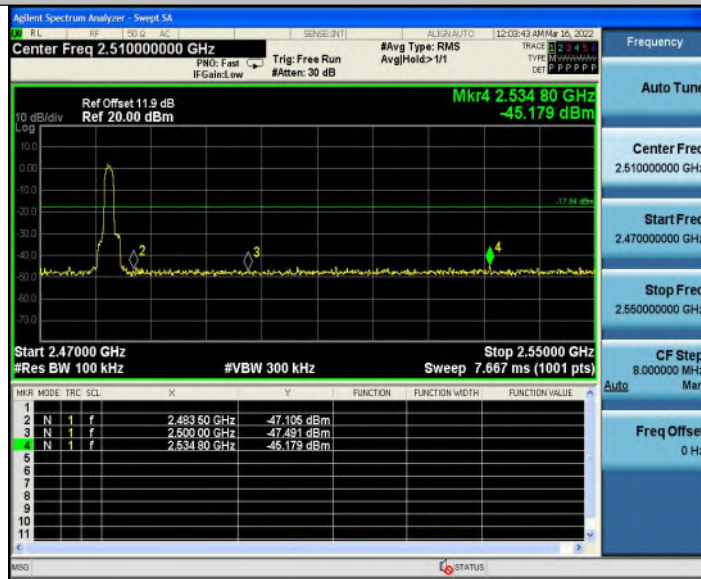

3DH5\_Ant1\_High\_2480

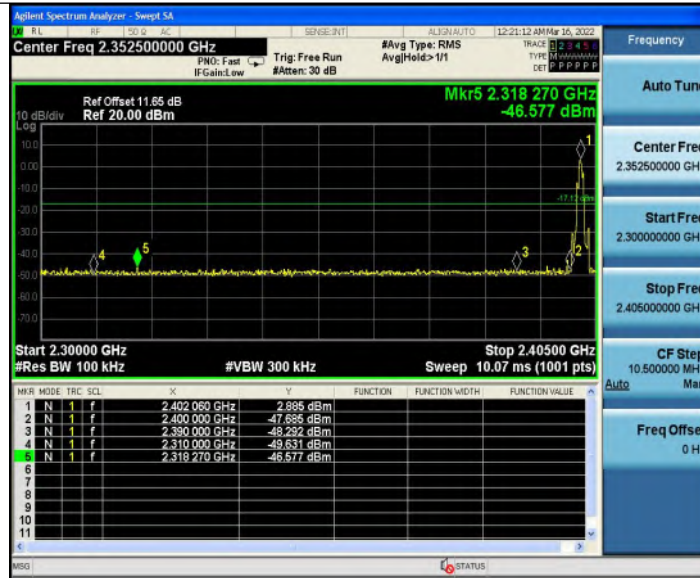

3DH5\_Ant1\_Low\_Hop\_2402

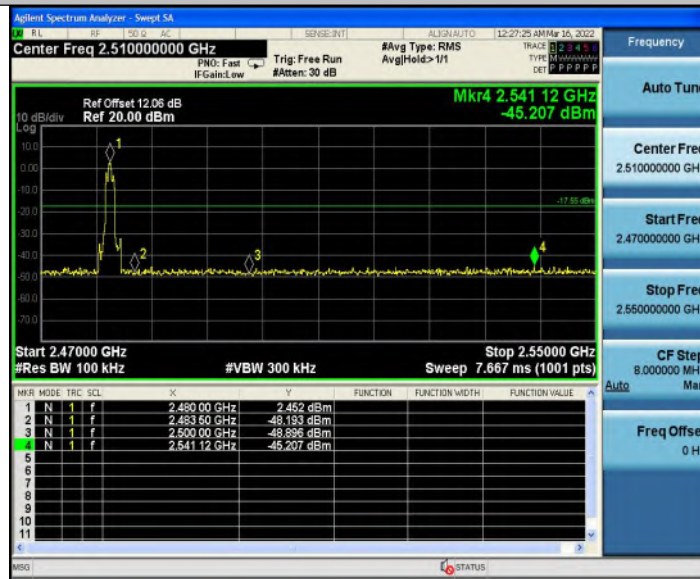

3DH5\_Ant1\_High\_Hop\_2480




Conducted Emission Method

Test Result

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	30~1000	5.56	-57.08	≤-14.44	PASS
			1000~26500	5.56	-39.97	≤-14.44	PASS
		2440	30~1000	5.63	-57.8	≤-14.37	PASS
			1000~26500	5.63	-43.98	≤-14.37	PASS
		2480	30~1000	5.20	-57.69	≤-14.8	PASS
			1000~26500	5.20	-43.79	≤-14.8	PASS
2DH5	Ant1	2402	30~1000	3.07	-57.48	≤-16.93	PASS
			1000~26500	3.07	-43.23	≤-16.93	PASS
		2440	30~1000	2.94	-57.15	≤-17.06	PASS
			1000~26500	2.94	-44.21	≤-17.06	PASS
		2480	30~1000	2.03	-57.64	≤-17.97	PASS
			1000~26500	2.03	-43.5	≤-17.97	PASS
3DH5	Ant1	2402	30~1000	3.19	-57.75	≤-16.81	PASS
			1000~26500	3.19	-44	≤-16.81	PASS
		2440	30~1000	2.90	-56.77	≤-17.1	PASS
			1000~26500	2.90	-44.34	≤-17.1	PASS
		2480	30~1000	2.16	-57.81	≤-17.84	PASS
			1000~26500	2.16	-43.78	≤-17.84	PASS




Test Graphs

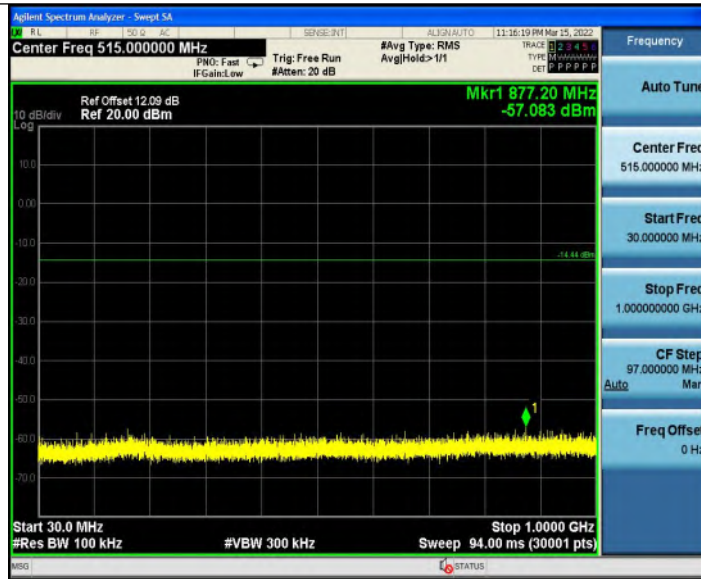


DH5\_Ant1\_2402\_30~1000



DH5\_Ant1\_2402\_1000~26500

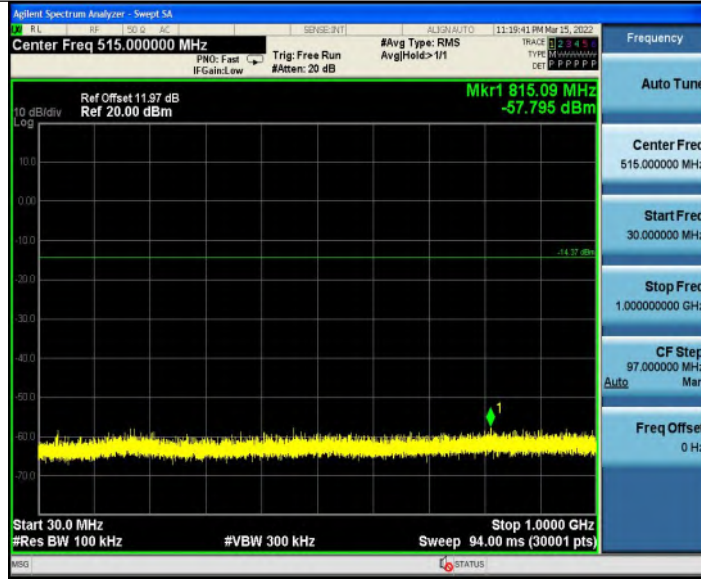


DH5\_Ant1\_2440\_30~1000

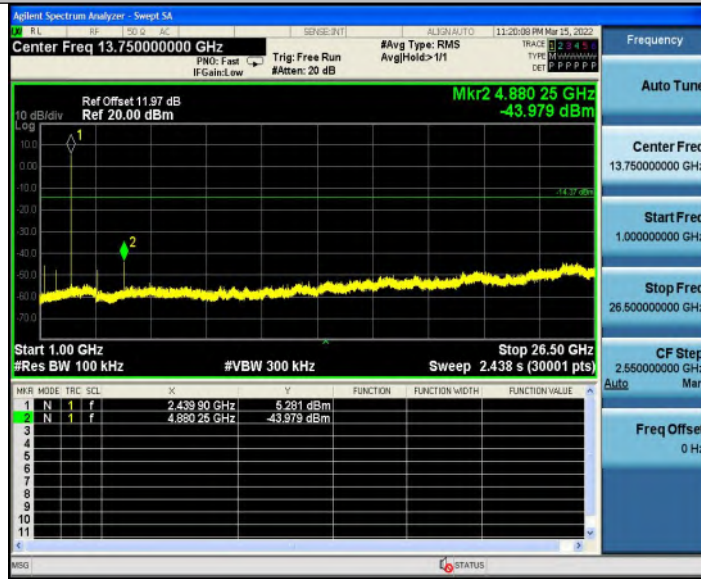


DH5\_Ant1\_2440\_1000~26500




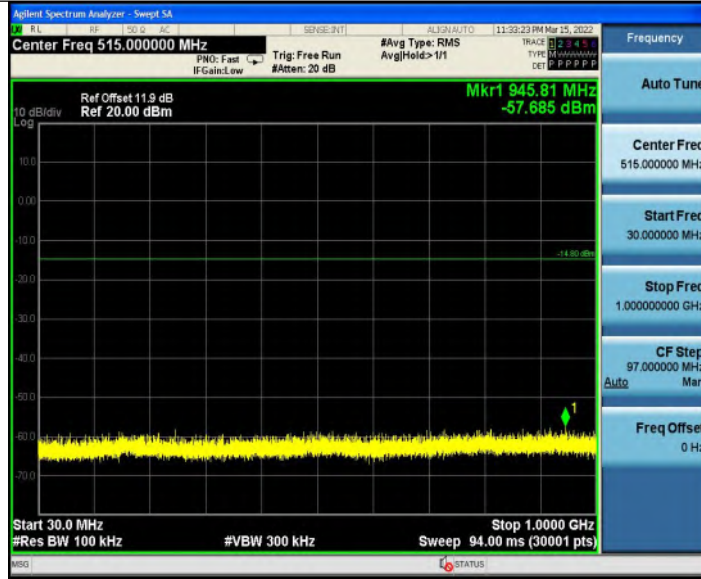


DH5\_Ant1\_2480\_30~1000

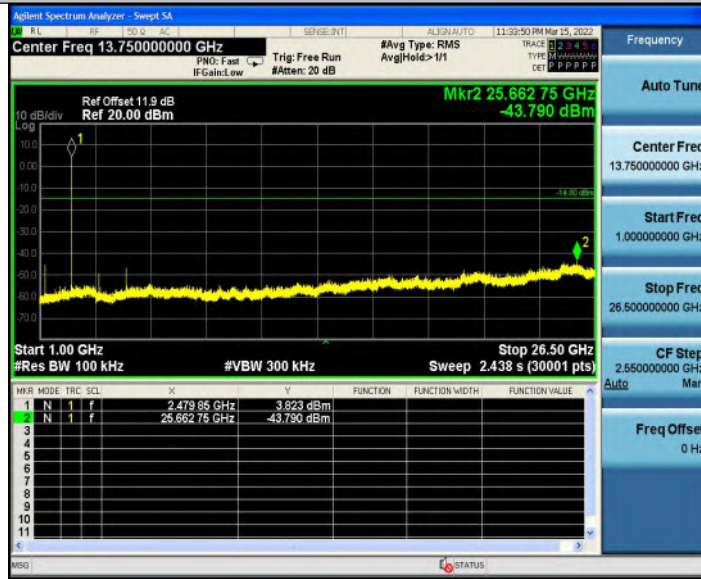


DH5\_Ant1\_2480\_1000~26500

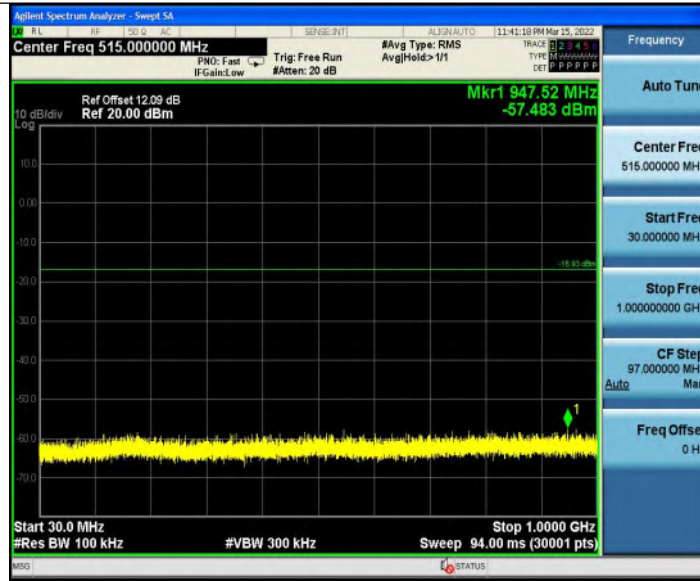


2DH5\_Ant1\_2402\_30~1000

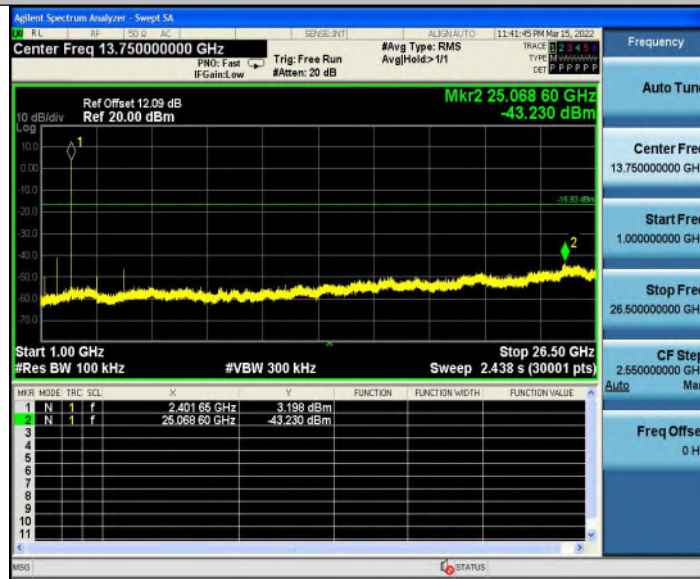


2DH5\_Ant1\_2402\_1000~26500

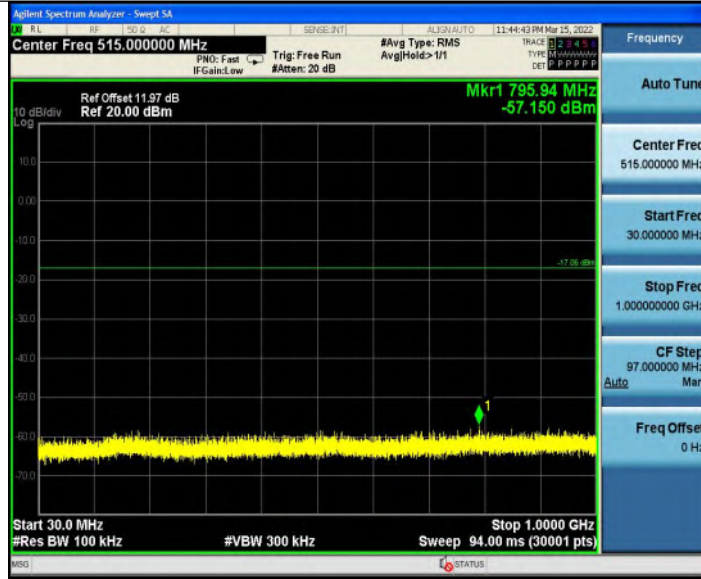


2DH5\_Ant1\_2440\_30~1000

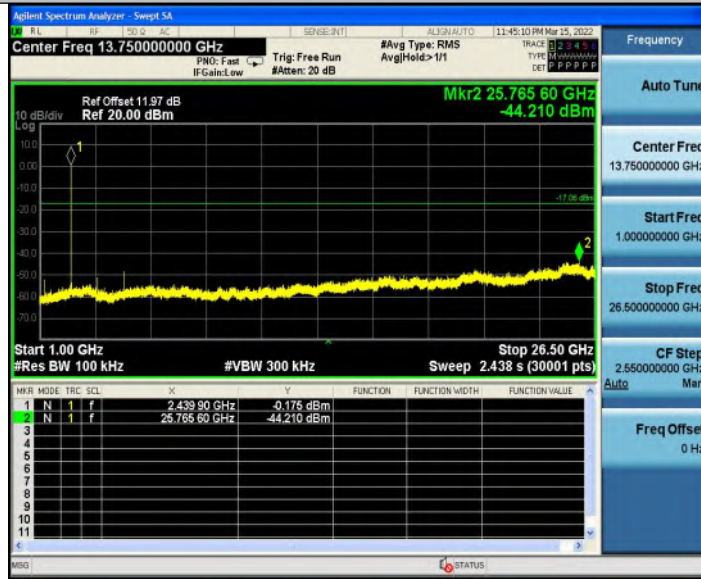


2DH5\_Ant1\_2440\_1000~26500

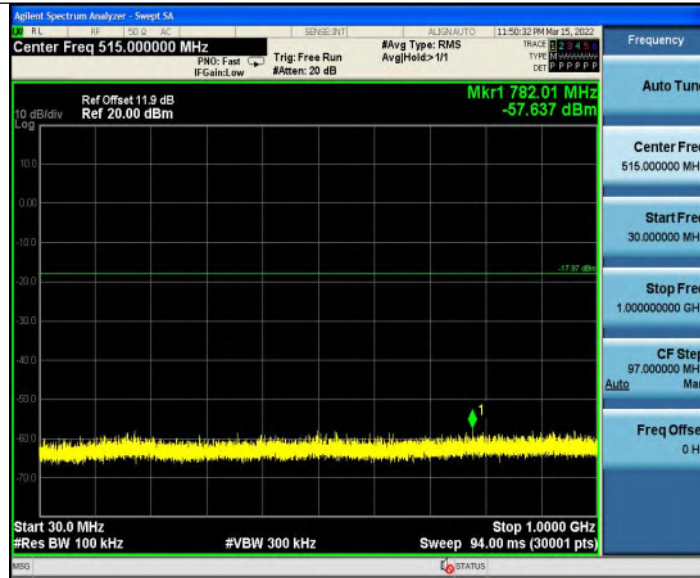


2DH5\_Ant1\_2480\_30~1000

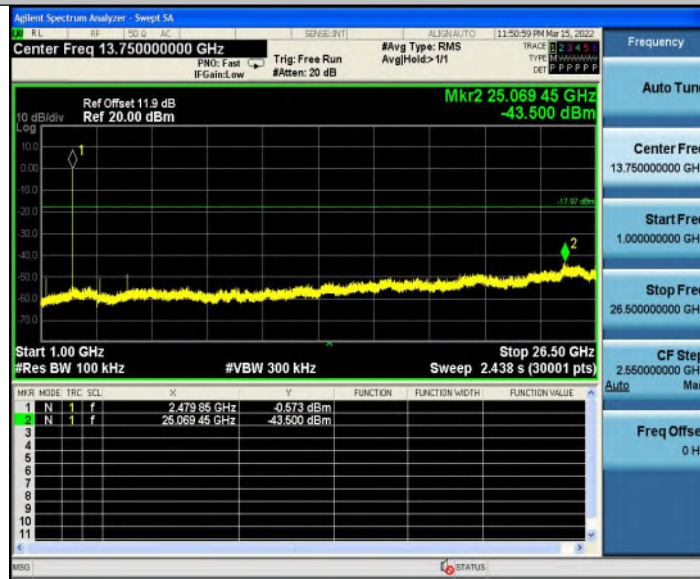


2DH5\_Ant1\_2480\_1000~26500

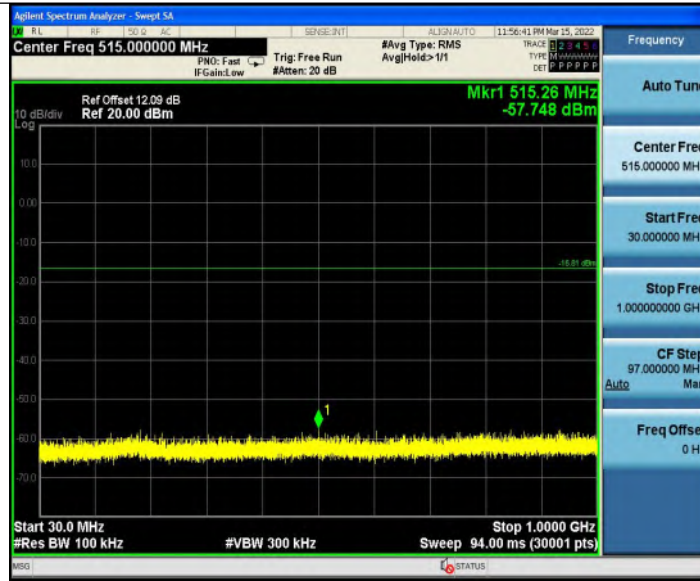


3DH5\_Ant1\_2402\_30~1000

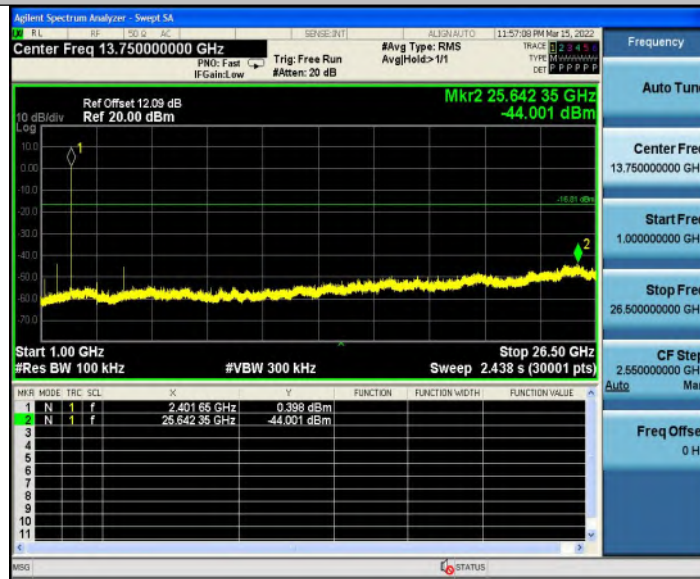


3DH5\_Ant1\_2402\_1000~26500

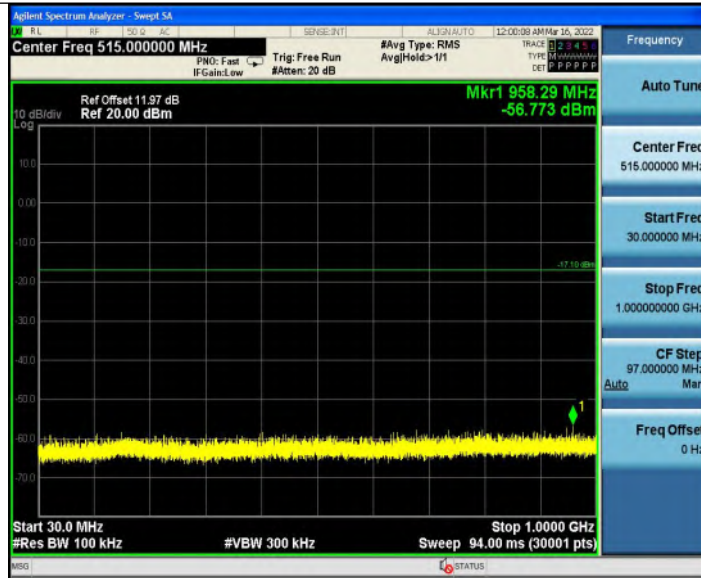


3DH5\_Ant1\_2440\_30~1000

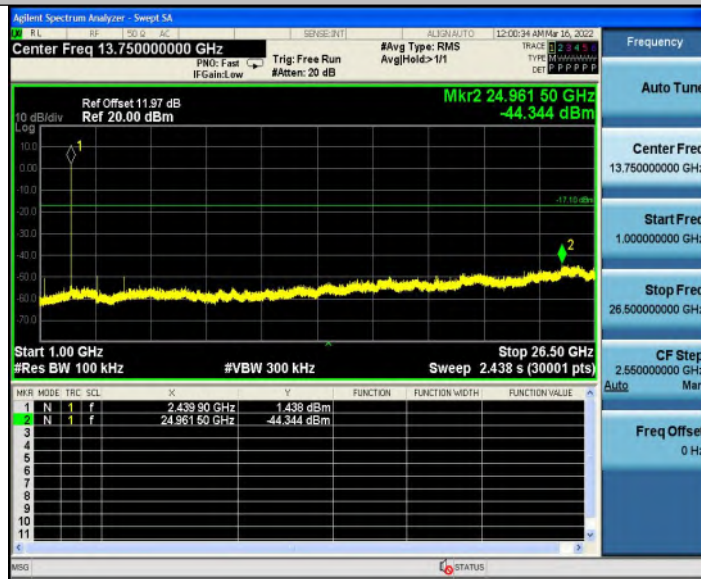

3DH5\_Ant1\_2440\_1000~26500

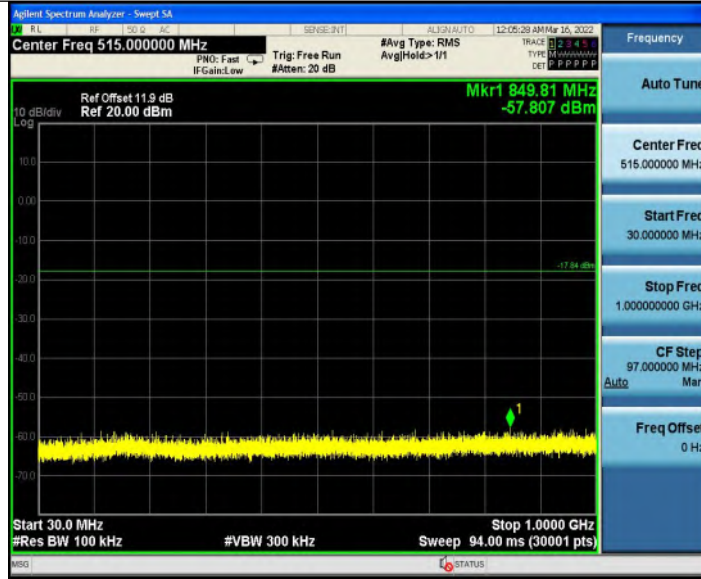

3DH5\_Ant1\_2480\_30~1000

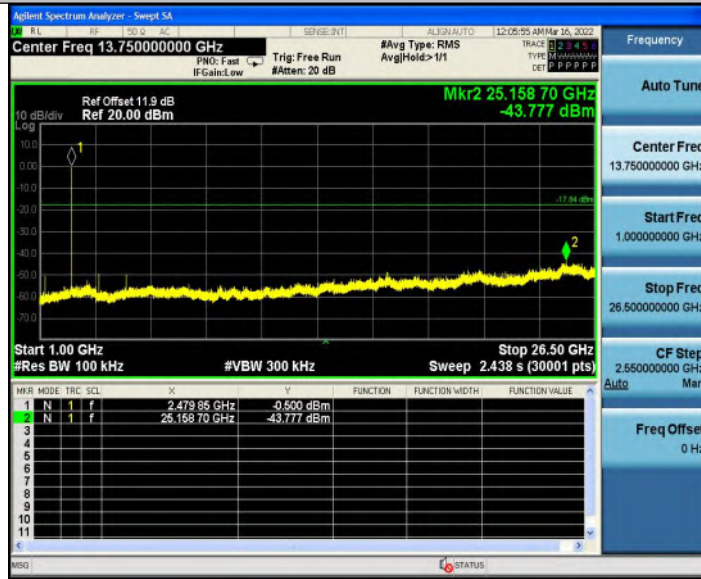

3DH5\_Ant1\_2480\_1000~26500


## 14 Antenna Requirement

### 14.1 Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	<p>1) 15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement:</p> <p>Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p>

### 14.2 Antenna Connected Construction

The antenna is PCB Antenna which permanently attached, and the best case gain of the antenna is 2dBi. It complies with the standard requirement.

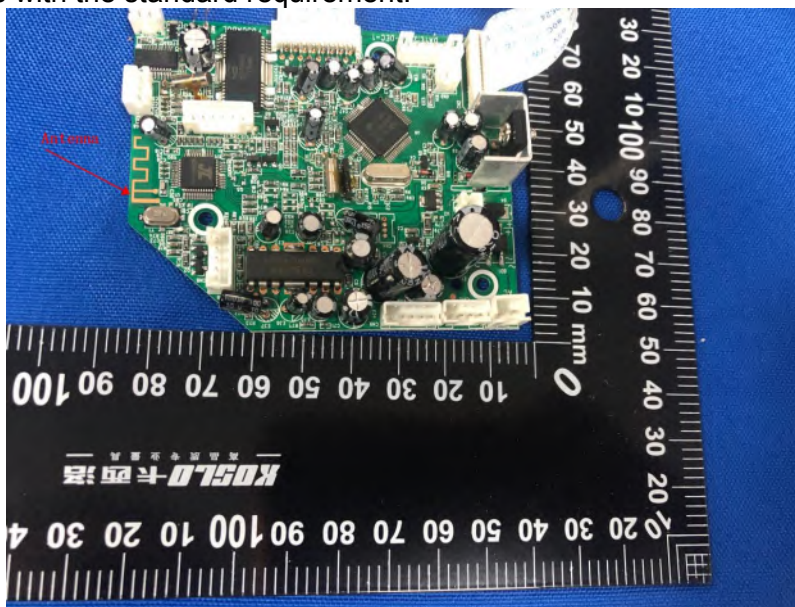




## 15 APPENDIX I -- TEST SETUP PHOTOGRAPH


Conducted Emissions



Radiated Emissions  
From 30M-1GHz

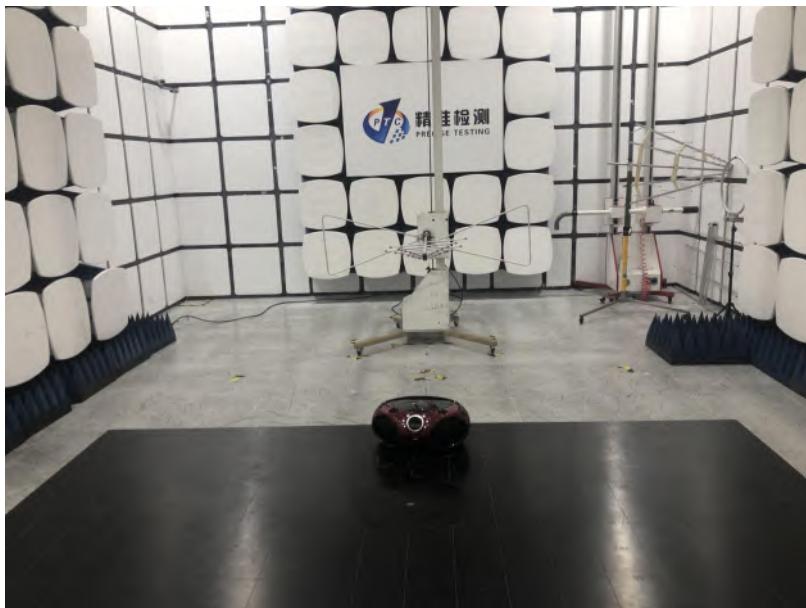


Above 1GHz

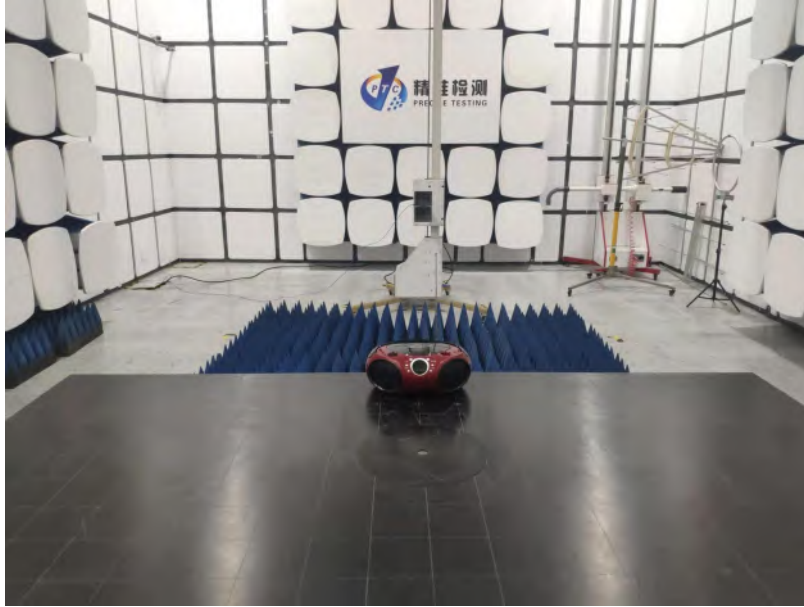




## 16 APPENDIX II -- EUT PHOTOGRAPH





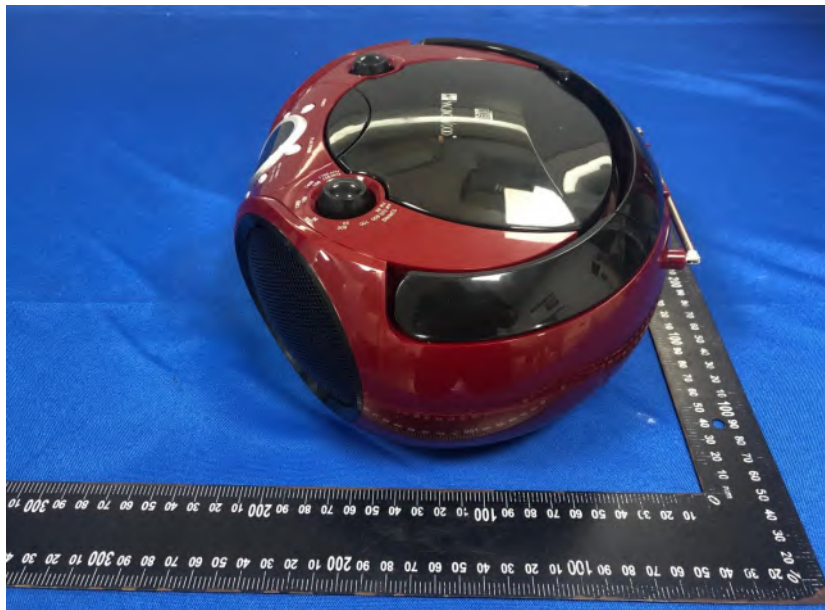






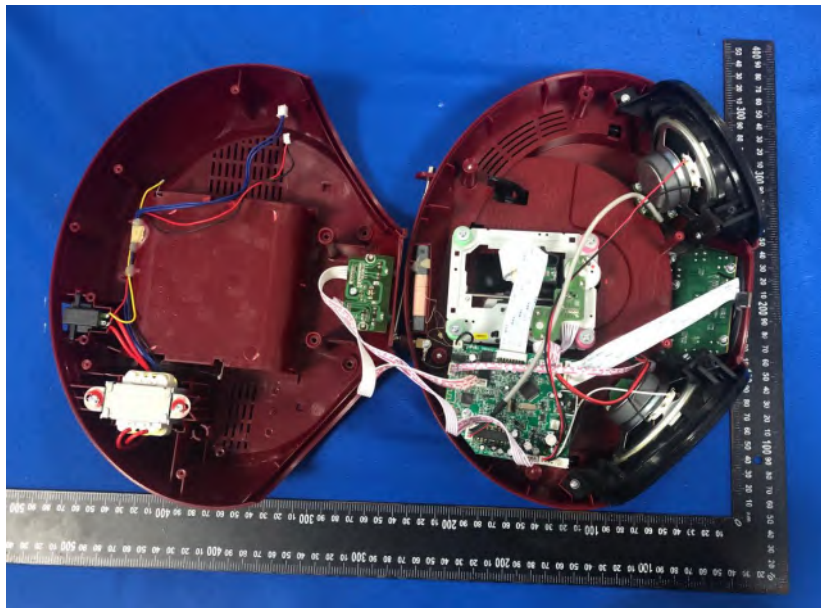


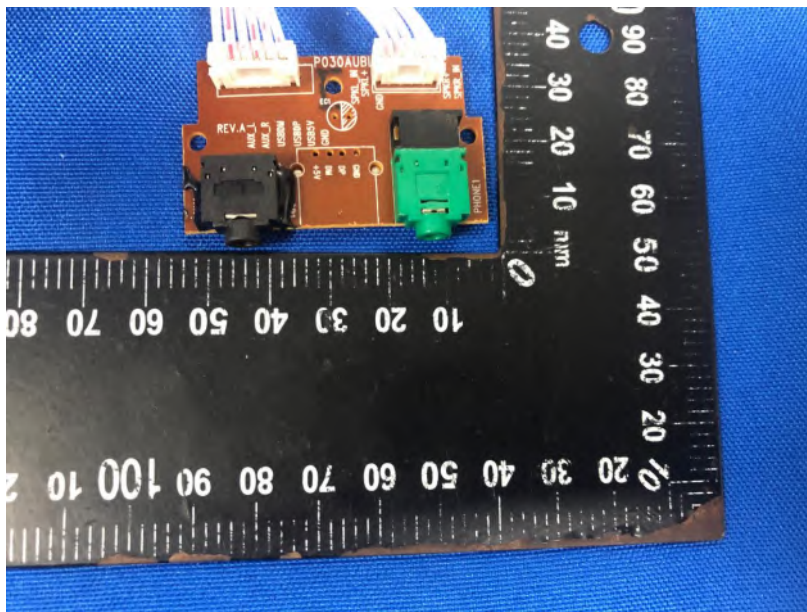
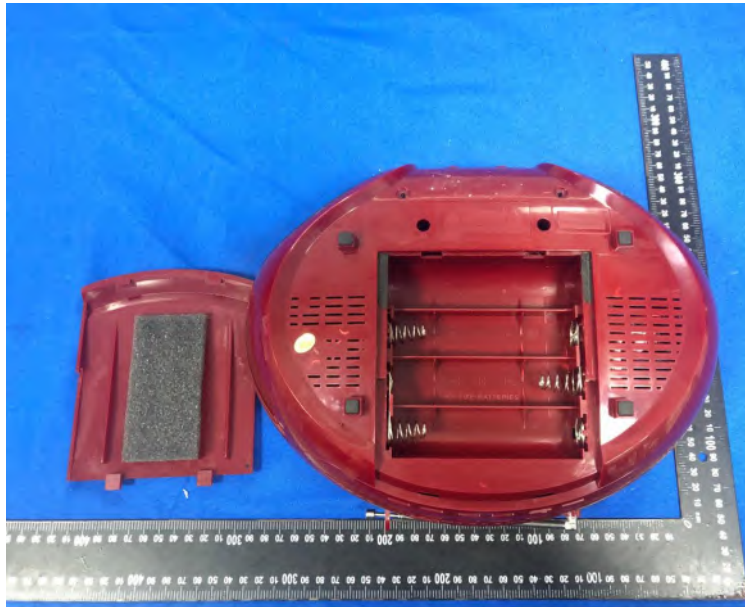


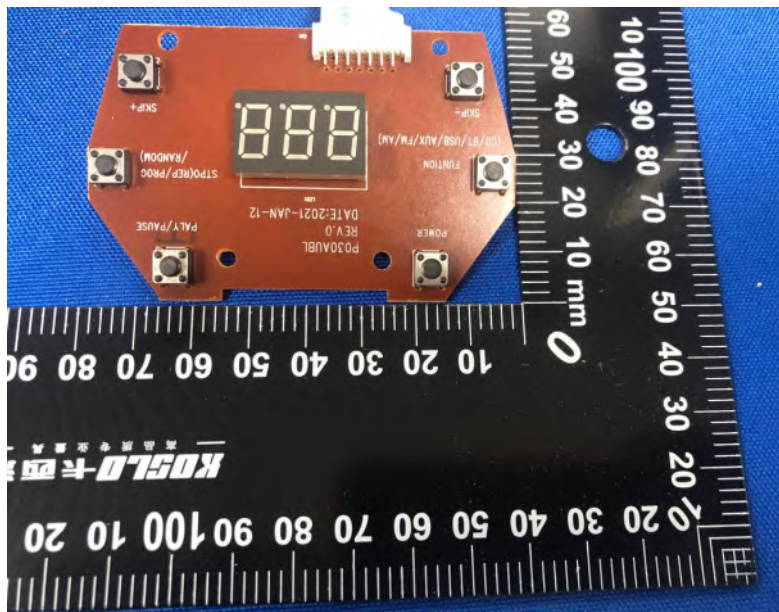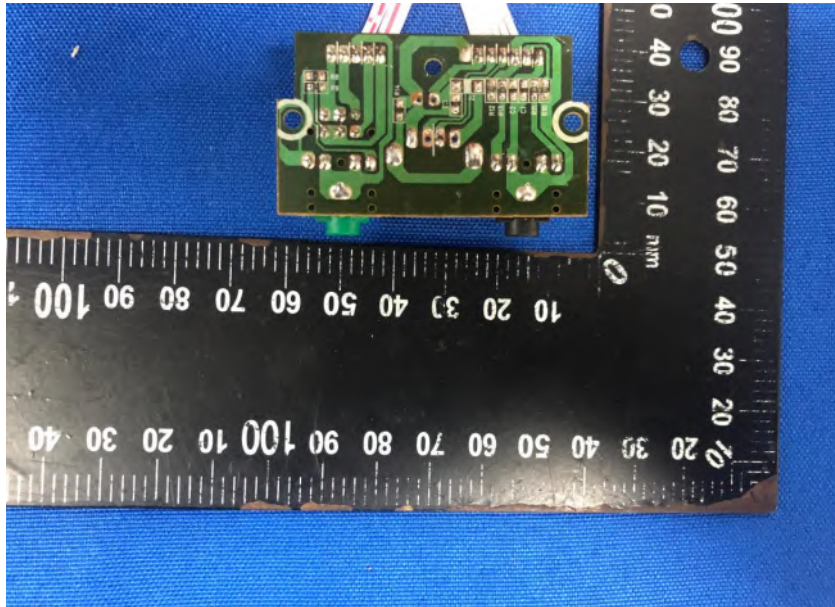



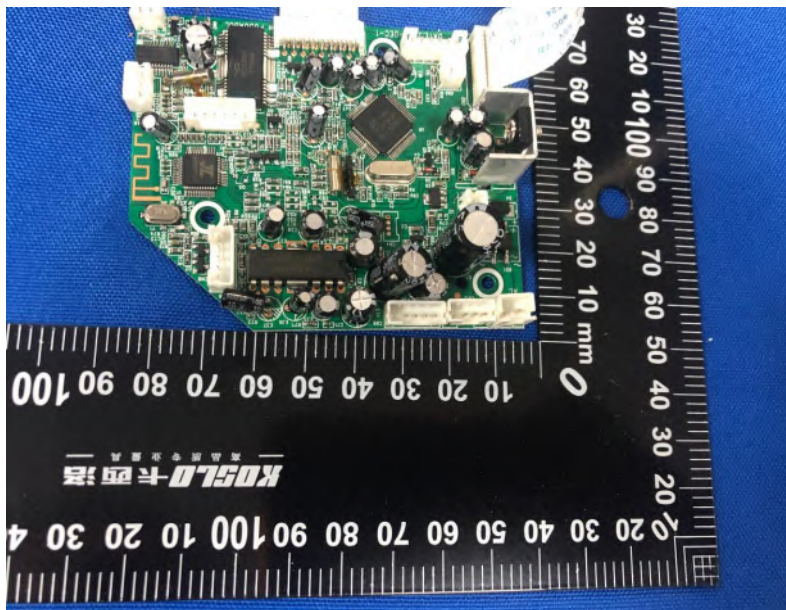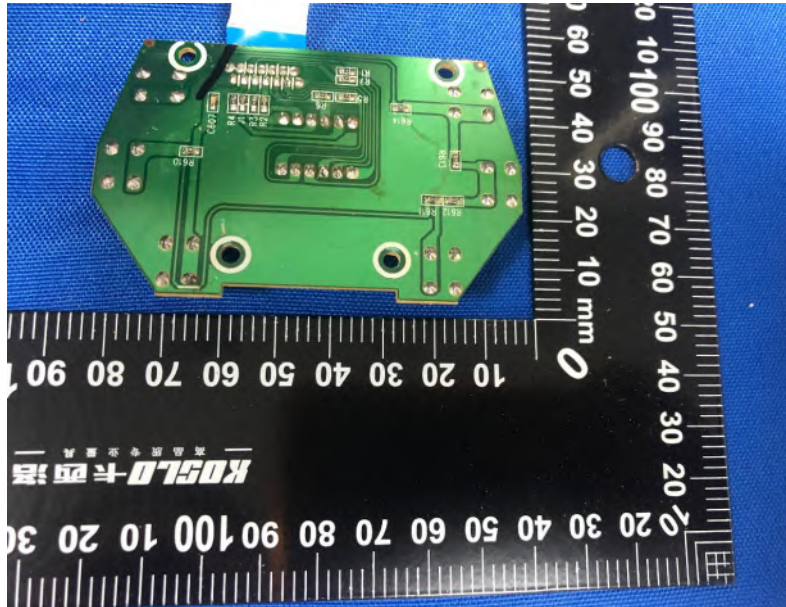

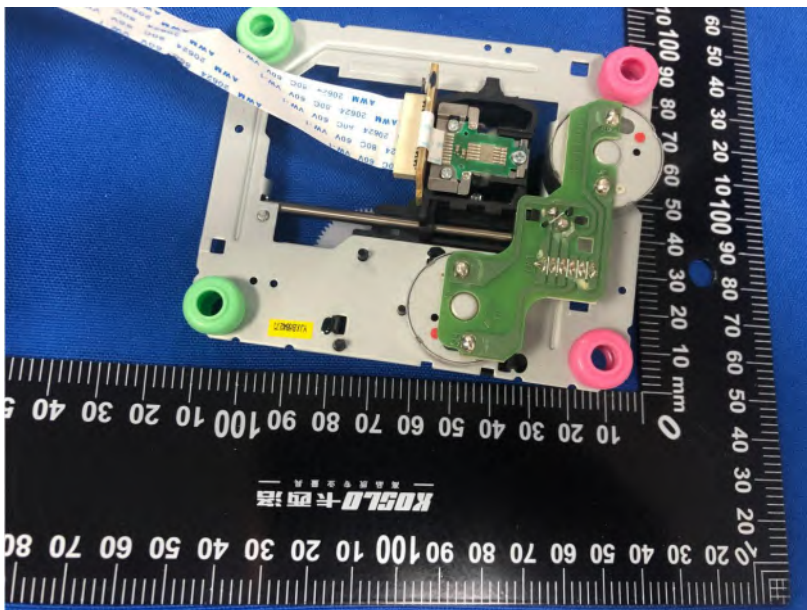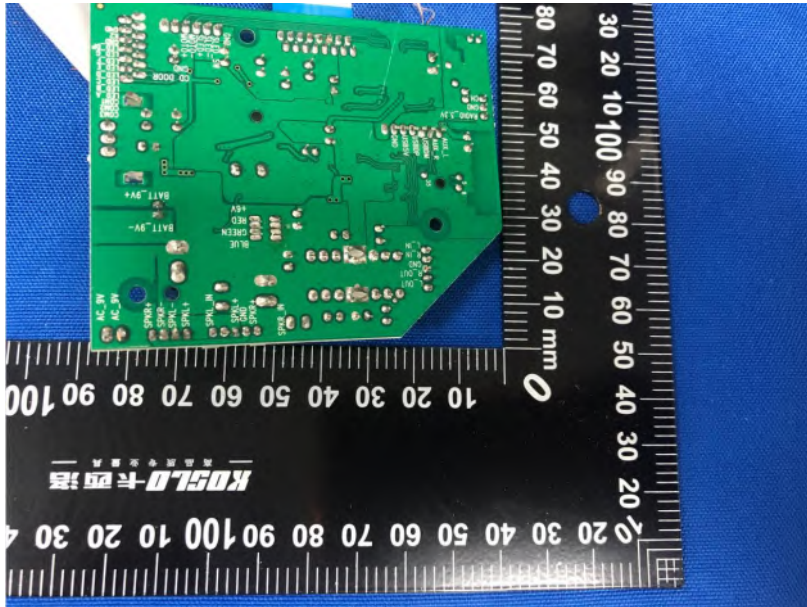

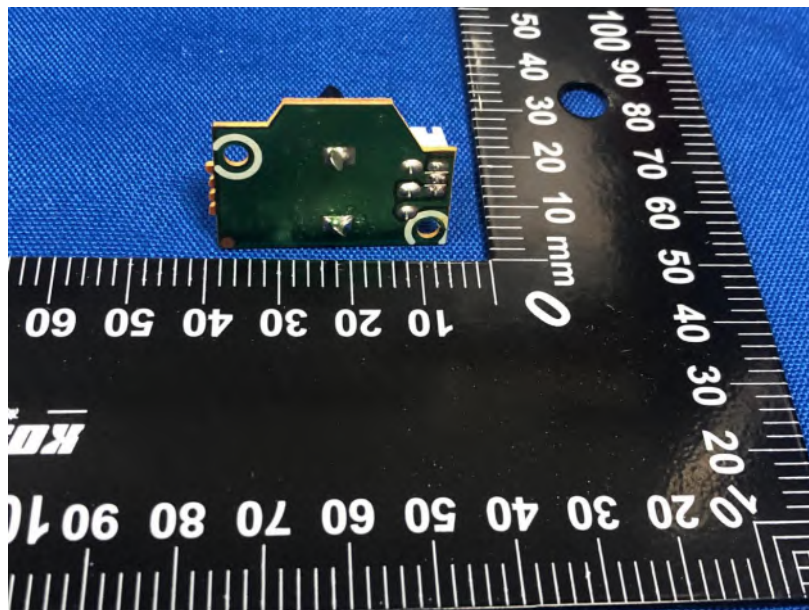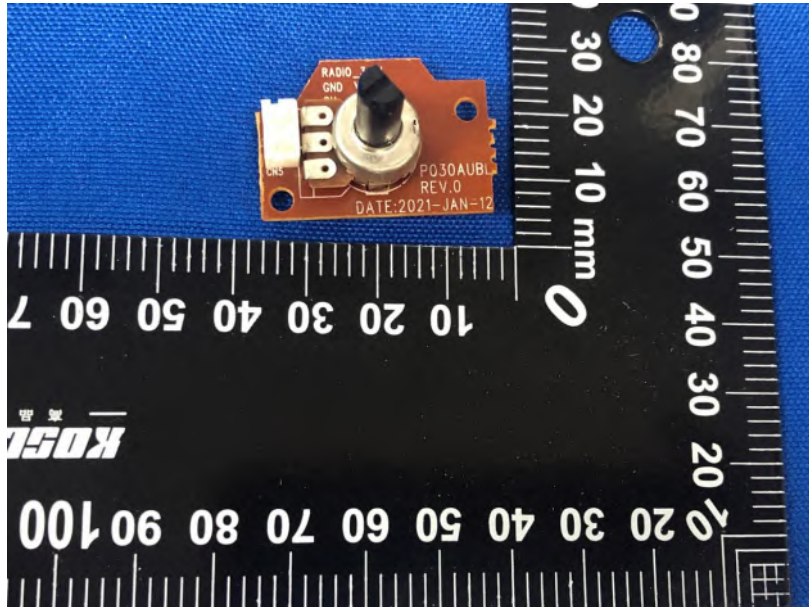

\*\*\*\*\*THE END REPORT\*\*\*\*\*