

# **FCC TEST REPORT**

## **FCC ID: 2ABKAP137**

Product : BLUETOOTH SPEAKER

Model Name : P137L, P137LL, P137J, P126L, P178L, P179L

Brand : N/A

Report No. : PTC802048160809E-FC02

### **Prepared for**

Leaderwave Electronics (H.K.) Ltd  
RM811, HENG NGAI JEWELRY CENTER,4 HOK YUEN STREET EAST, ,  
HUNGHOM, KOWLOON, HK

### **Prepared by**

DongGuan Precise Testing Service Co.,Ltd.  
Building D, Baoding Technology Park, Guangming Road 2, Guangming Community  
Dongcheng District, Dongguan, Guangdong, China

### TEST RESULT CERTIFICATION


Applicant's name : Leaderwave Electronics (H.K.) Ltd  
Address : RM811, HENG NGAI JEWELRY CENTER,4 HOK YUEN STREET  
EAST,HUNGHOM, KOWLOON, HK  
Manufacture's name : Dongguan QingXILeaderwave Electronics Technology Company  
Limited  
Address : 3RD INDUSTRIAL DISTRICT , QINGXI TOWN , DONGGUAN ,  
GUANGDONG , CHINA  
Product name : BLUETOOTH SPEAKER  
Model name : P137L, P137LL, P137J, P126L, P178L, P179L  
Standards : FCC CFR47 Part 15 Section 15.247  
Test procedure : ANSI C63.10:2013, DA 00-705  
Test Date : Aug. 20, 2016 ~Aug.24, 2016  
Date of Issue : Aug.25, 2016  
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.


Testing Engineer

August Qiu

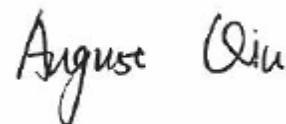


Technical Manager

Hack Ye



Authorized Signatory

Chris Du





## Contents

	<b>Page</b>
<b>2 TEST SUMMARY .....</b>	<b>5</b>
<b>3 GENERAL INFORMATION .....</b>	<b>6</b>
3.1 GENERAL DESCRIPTION OF E.U.T. ....	6
3.2 CHANNEL LIST .....	7
3.3 TEST MODE .....	7
3.4 TEST VOLTAGE.....	8
3.5 CONFIGURATION OF SYSTEM .....	8
<b>4 EQUIPMENT DURING TEST .....</b>	<b>9</b>
4.1 EQUIPMENTS LIST .....	9
4.2 MEASUREMENT UNCERTAINTY .....	10
<b>5 CONDUCTED EMISSION .....</b>	<b>11</b>
5.1 E.U.T. OPERATION .....	11
5.2 EUT SETUP.....	11
5.3 MEASUREMENT DESCRIPTION.....	12
5.4 CONDUCTED EMISSION TEST RESULT .....	12
<b>6 RADIATED SPURIOUS EMISSIONS .....</b>	<b>14</b>
6.1 EUT OPERATION .....	14
6.2 TEST SETUP.....	15
6.3 SPECTRUM ANALYZER SETUP.....	16
6.4 TEST PROCEDURE .....	17
6.5 SUMMARY OF TEST RESULTS.....	18
<b>7 CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>23</b>
7.1 TEST PROCEDURE .....	23
7.2 TEST RESULT .....	23
<b>8 BAND EDGE MEASUREMENT.....</b>	<b>25</b>
8.1 TEST PROCEDURE .....	25
8.2 TEST RESULT .....	25
<b>9 6DB BANDWIDTH MEASUREMENT .....</b>	<b>27</b>
9.1 TEST PROCEDURE .....	27
9.2 TEST RESULT .....	27
<b>10 MAXIMUM PEAK OUTPUT POWER.....</b>	<b>29</b>
10.1 TEST PROCEDURE .....	29



10.2	TEST RESULT .....	29
<b>11</b>	<b>POWER SPECTRAL DENSITY .....</b>	<b>32</b>
11.1	TEST PROCEDURE .....	32
11.2	TEST RESULT .....	32
<b>12</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>35</b>



## 2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203	PASS

Remark:

N/A: Not Applicable



### 3 General Information

#### 3.1 General Description of E.U.T.

Product Name : BLUETOOTH SPEAKER

Model Name : P137L, P137LL, P137J, P126L, P178L, P179L

Model Description : N/A

Bluetooth Version : V4.0(EDR+BLE)

Operating frequency : For BT ( Normal )  
2402-2480MHz,79channels  
For BLE  
2402-2480MHz,40channels

Antenna installation: : Integrated Antenna

Antenna Gain: : -0.61dBi

The lowest oscillator: : 32.768KHz

Type of Modulation : GFSK, Pi/4DQPSK, 8DPSK

Power supply : Input: AC230/50MHz Output: DC 15V/3A



### 3.2 Channel List

BLE							
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

### 3.3 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2440MHz	2480MHz
Hopping	2402-2480MHz		
Tests Carried Out Under FCC part 15.207& 15.209			
Test Item	Test Mode		
Conduction Emission, 0.15MHz to 30MHz	BT Communication		
Radiated Emission, 30M-1GHz	BT Communication		




### 3.4 Test Voltage

Normal Test Voltage	Item
120V 60Hz	Conducted Emission & Radiated Emission
240V 60Hz	Conducted Emission & Radiated Emission

Remark: Only the worst case (120V 60Hz) was recorded in the report.

### 3.5 Configuration of System

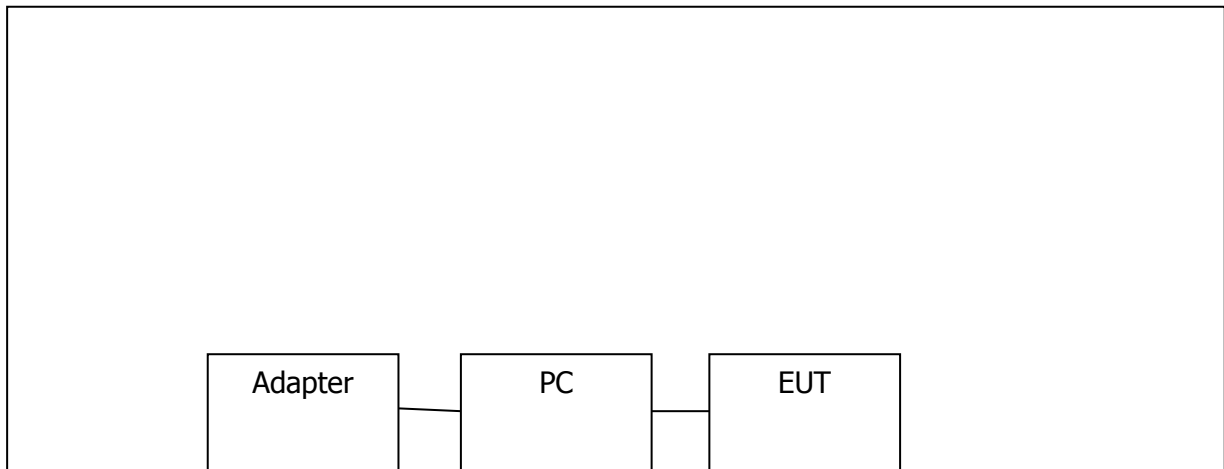





## 4 Equipment During Test

### 4.1 Equipments List

RF Conducted Test							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMC Analyzer (9k~26.5GHz)	Agilent	E4407B	MY45109572	Aug.04, 2016	Aug.03, 2017	1 year
2	EXA Signal Analyzer	Keysight	N9010A	MY50520207 526B25MPB W7X	Aug.04, 2016	Aug.03, 2017	1 year
3	EMI Test Receiver	R&S	ESCI	101155	July 15, 2016	July 14, 2017	1 year
Radiated Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	Rohde&Schwarz	ESCI	101417	July 15, 2016	July 14, 2017	1 year
2	Trilog Broadband Antenna	SCHWARZECK	VULB9160	9160-3355	July 15, 2016	July 14, 2017	1 year
3	Amplifier	EM	EM-30180	060538	July 15, 2016	July 14, 2017	1 year
4	Horn Antenna	SCHWARZECK	BBHA9120D	9120D-1246	July 15, 2016	July 14, 2017	1 year
Conducted Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	R&S	ESCI	101155	July 15, 2016	July 14, 2017	1 year
2	LISN	SCHWARZECK	NSLK 8128	8128-289	July 15, 2016	July 14, 2017	1 year
3	Cable	LARGE	RF300	-	July 15, 2016	July 14, 2017	1 year



#### 4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 <sup>-6</sup>
Bandwidth	± 1.5 x 10 <sup>-6</sup>
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions(150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB



## 5 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207  
Test Method: : ANSI C63.10:2013  
Test Result: : PASS  
Frequency Range: : 150kHz to 30MHz  
Class/Severity: : Class B  
Limit: : 66-56 dB $\mu$ V between 0.15MHz & 0.5MHz  
: 56 dB $\mu$ V between 0.5MHz & 5MHz  
: 60 dB $\mu$ V between 5MHz & 30MHz  
Detector: : Peak for pre-scan(9kHz Resolution Bandwidth)

### 5.1 E.U.T. Operation

Operating Environment:  
Temperature: : 25.5 °C  
Humidity: : 51 % RH  
Atmospheric Pressure: : 101.2kPa  
EUT Operation: : Refer to section 3.3

### 5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

### 5.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

Note: In the worst test mode with GFSK 2402MHz

### 5.4 Conducted Emission Test Result


Live line:



Data: 24

File: E:\Test Data 843\Conduction Data\L\lidewei.EM6 (26)

Date: 2016-08-19

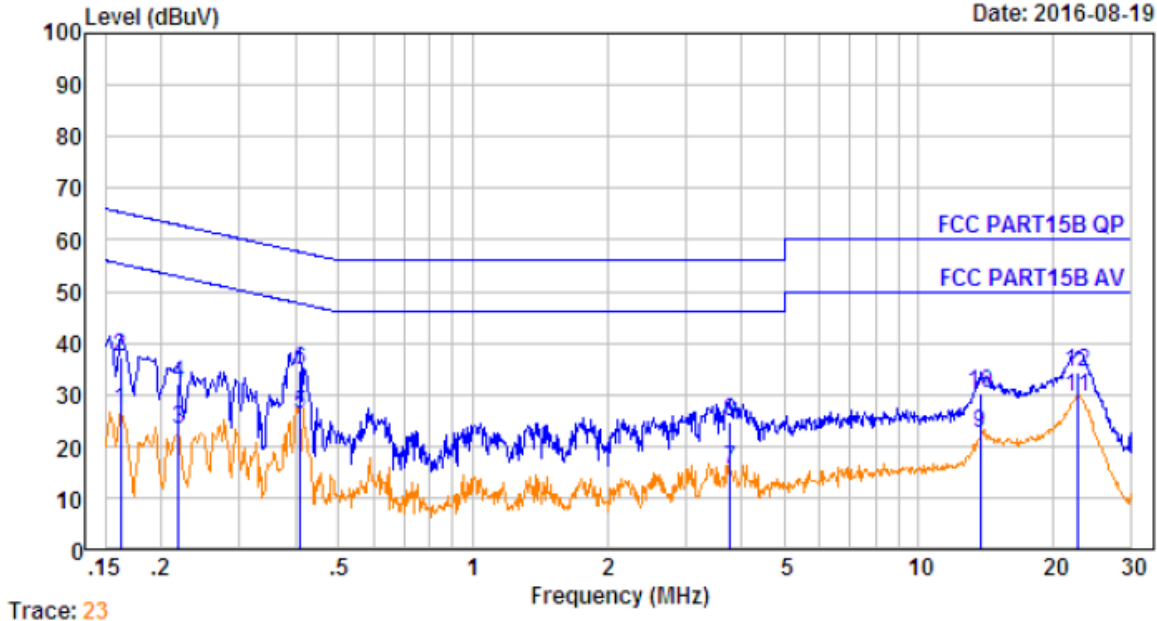

Trace: 23

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.162	10.60	0.60	15.76	26.96	55.34	-28.38	Average
2.	0.162	10.60	0.60	26.10	37.30	65.34	-28.04	QP
3.	0.219	10.61	0.60	12.10	23.31	52.88	-29.57	Average
4.	0.219	10.61	0.60	20.82	32.03	62.88	-30.85	QP
5.	0.410	10.64	0.60	15.11	26.35	47.64	-21.29	Average
6.	0.410	10.64	0.60	23.39	34.63	57.64	-23.01	QP
7.	3.779	10.72	0.60	4.18	15.50	46.00	-30.50	Average
8.	3.779	10.72	0.60	13.33	24.65	56.00	-31.35	QP
9.	13.768	10.77	0.60	11.13	22.50	50.00	-27.50	Average
10.	13.768	10.77	0.60	18.78	30.15	60.00	-29.85	QP
11.	22.775	10.79	0.60	18.06	29.45	50.00	-20.55	Average
12.	22.775	10.79	0.60	23.06	34.45	60.00	-25.55	QP

Note: Emission Level=Cable Loss+AMNFactor+Receiver Reading


Neutral line:



Data: 26

File: E:\Test Data 843\Conduction Data\Lilidewei.EM6 (26)

Date: 2016-08-19

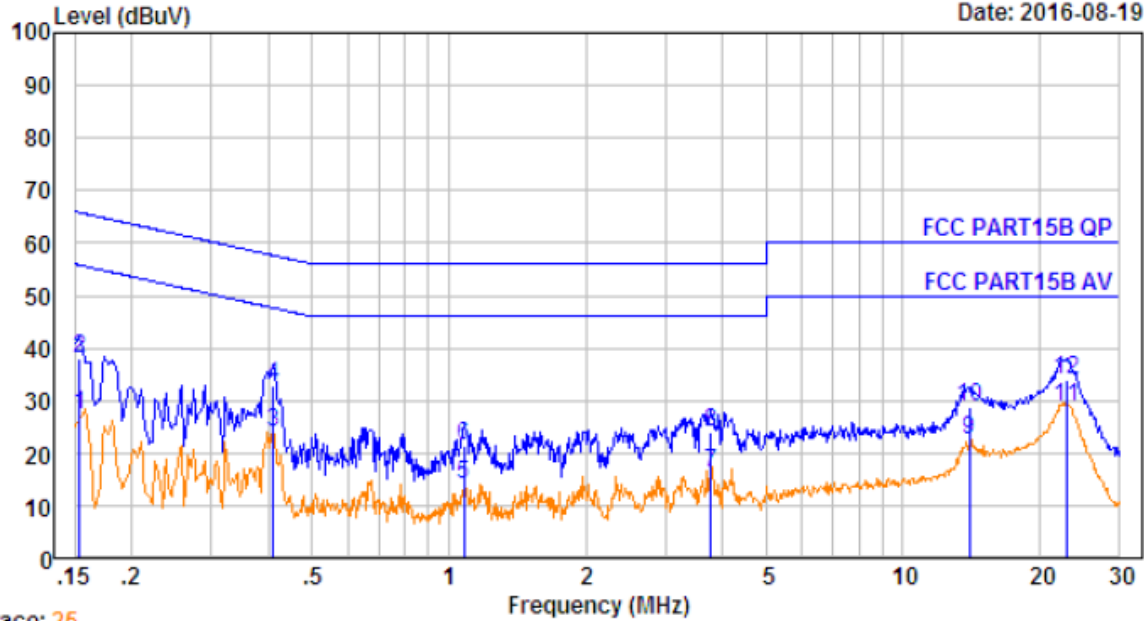

Trace: 25

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.154	10.60	0.60	15.94	27.14	55.78	-28.64	Average
2.	0.154	10.60	0.60	26.81	38.01	65.78	-27.77	QP
3.	0.410	10.64	0.60	12.68	23.92	47.64	-23.72	Average
4.	0.410	10.64	0.60	21.75	32.99	57.64	-24.65	QP
5.	1.082	10.68	0.60	2.65	13.93	46.00	-32.07	Average
6.	1.082	10.68	0.60	10.21	21.49	56.00	-34.51	QP
7.	3.779	10.72	0.60	5.10	16.42	46.00	-29.58	Average
8.	3.779	10.72	0.60	12.82	24.14	56.00	-31.86	QP
9.	13.989	10.77	0.60	11.00	22.37	50.00	-27.63	Average
10.	13.989	10.77	0.60	17.27	28.64	60.00	-31.36	QP
11.	22.896	10.79	0.60	17.55	28.94	50.00	-21.06	Average
12.	22.896	10.79	0.60	22.60	33.99	60.00	-26.01	QP

Note: Emission Level=Cable Loss+AMNFactor+Receiver Reading



## 6 Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.209 & 15.247  
 Test Method: : ANSI C63.10:2013,DA 00-705  
 Test Result: : PASS  
 Measurement Distance: : 3m  
 Limit: : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$


### 6.1 EUT Operation

Operating Environment :  
 Temperature: : 23.5 °C  
 Humidity: : 51.1 % RH  
 Atmospheric Pressure: : 101.2kPa  
 EUT Operation : : Refer to section 3.3


### 6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber testsite


The test setup for emission measurement below 30MHz.

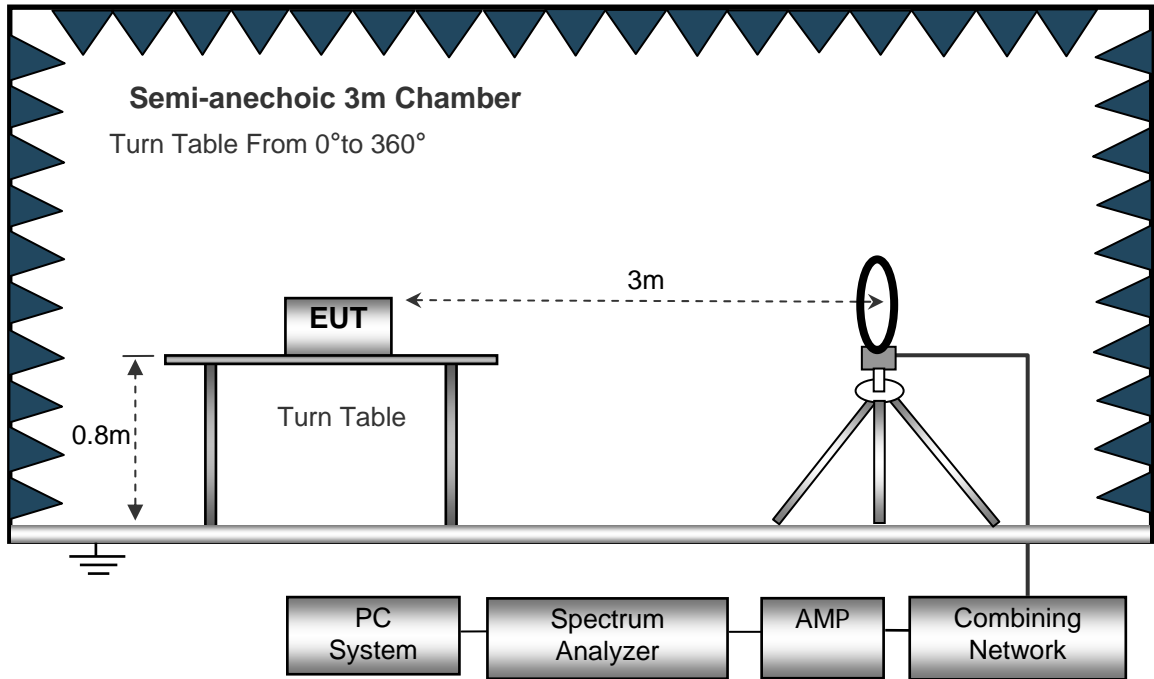

The test setup for emission measurement from 30 MHz to 1 GHz.

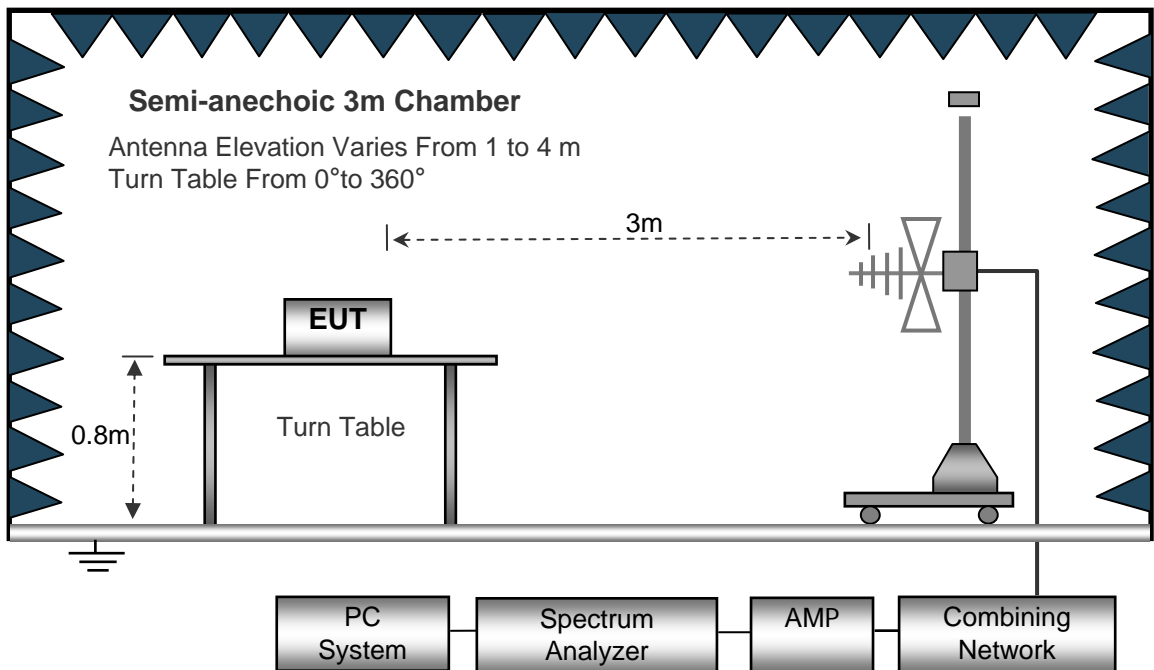

The test setup for emission measurement above 1 GHz.

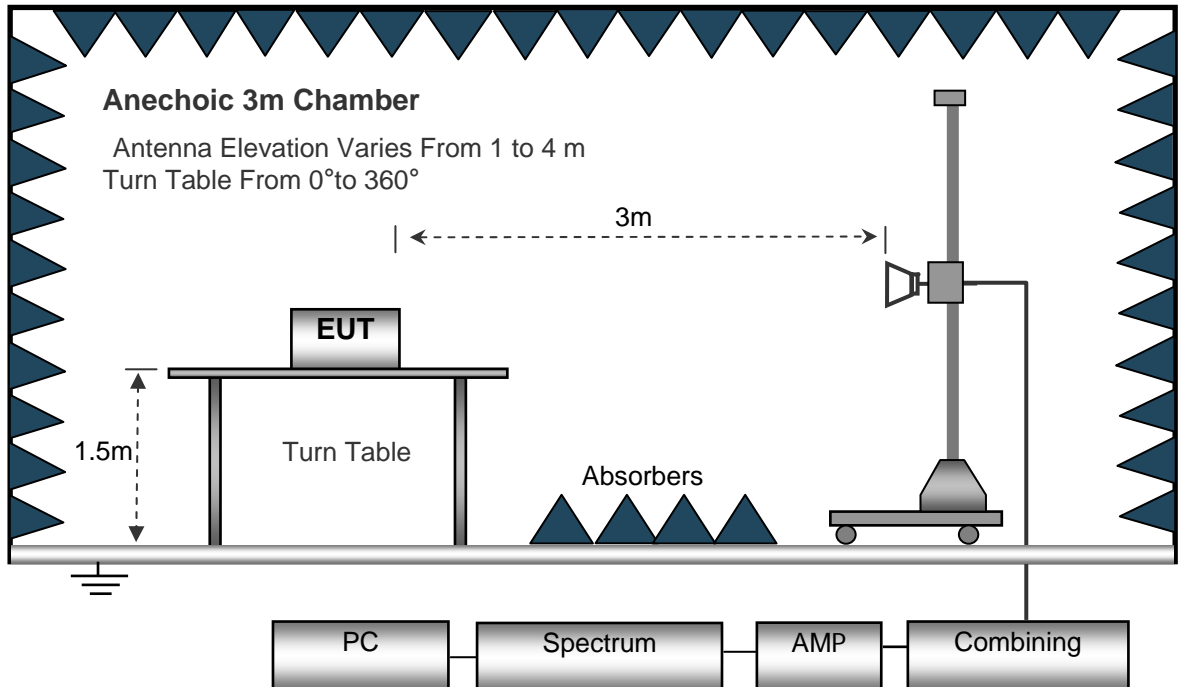

### 6.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed..... Auto  
IF Bandwidth.....10kHz  
Video Bandwidth .....10kHz  
Resolution Bandwidth .....10kHz

30MHz ~ 1GHz

Sweep Speed..... Auto  
Detector.....PK  
Resolution Bandwidth .....100kHz  
Video Bandwidth .....300kHz

Above 1GHz

Sweep Speed..... Auto  
Detector.....PK  
Resolution Bandwidth .....1MHz  
Video Bandwidth .....3MHz  
Detector.....Ave.  
Resolution Bandwidth .....1MHz  
Video Bandwidth .....10Hz





## 6.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



### 6.5 Summary of Test Results


**Test Frequency: Below 30MHz**

The measurements were more than 30 dB below the limit and not reported.

**Test Frequency: 30MHz ~ 1GHz**

Note: In the worst test mode with GFSK 2402MHz

Antenna Polarization: Horizontal

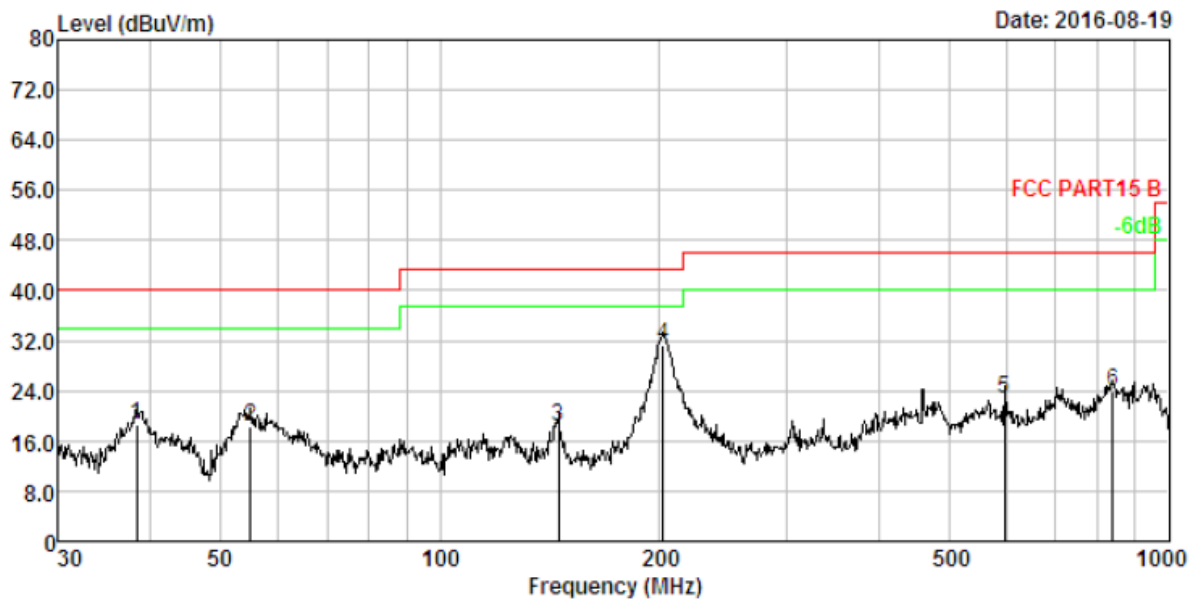


No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBUV	Preamp Factor dB	Emission Level dBUV/m	Limit dBUV/m	Over Limit dB	Remark
1.	38.346	1.28	13.58	33.77	30.06	18.57	40.00	-21.43	QP
2.	55.027	1.60	11.90	34.84	30.18	18.16	40.00	-21.84	QP
3.	145.351	2.48	13.65	32.74	30.52	18.35	43.50	-25.15	QP
4.	202.810	2.79	10.44	48.68	30.63	31.28	43.50	-12.22	QP
5.	595.133	3.76	19.03	30.92	31.01	22.70	46.00	-23.30	QP
6.	839.182	4.07	22.00	28.83	31.13	23.77	46.00	-22.23	QP

Note: Emission Level=Cable Loss+AMNFactor+Receiver Reading-Preamp Factor



Antenna Polarization: Vertical

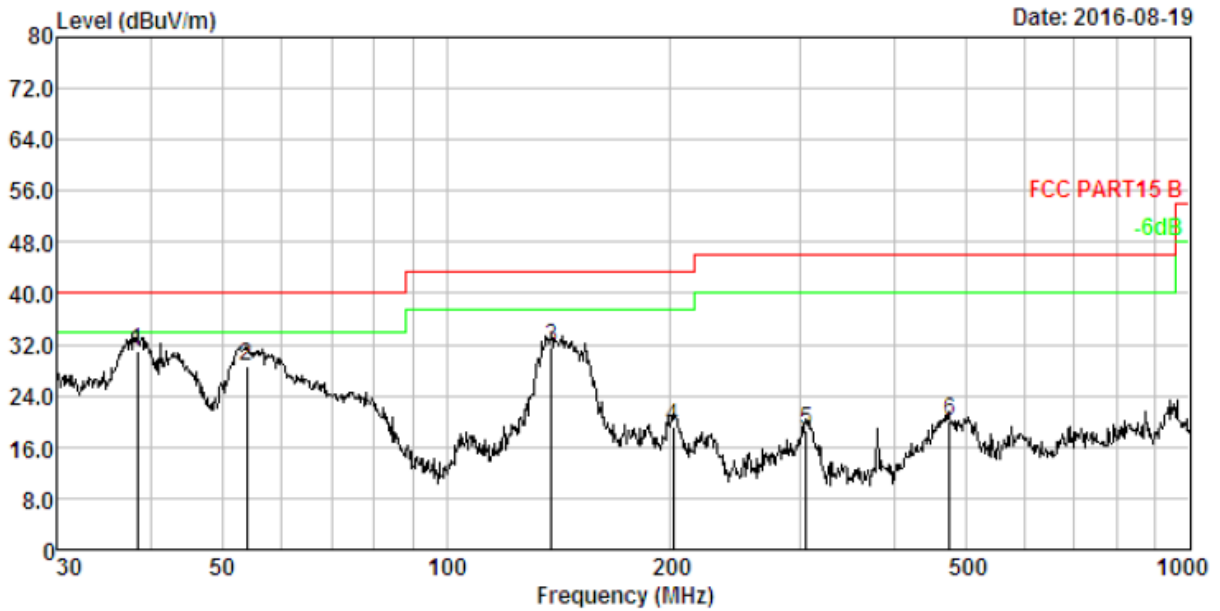

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	38.346	1.28	13.58	46.24	30.06	31.04	40.00	-8.96	QP
2.	53.882	1.59	11.98	45.23	30.17	28.63	40.00	-11.37	QP
3.	138.387	2.44	13.25	46.49	30.50	31.68	43.50	-11.82	QP
4.	202.100	2.78	10.42	36.70	30.63	19.27	43.50	-24.23	QP
5.	304.610	3.15	13.30	32.80	30.78	18.47	46.00	-27.53	QP
6.	475.499	3.56	16.81	30.60	30.93	20.04	46.00	-25.96	QP

Note: Emission Level=Cable Loss+AMNFactor+Receiver Reading-Preamp Factor

**Test Frequency: 1GHz ~ 18GHz**

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK(BLE)Low Channel						
Harmonic& Spurious Emission						
1200.33	55.42	PK	-18.88	36.54	74	-37.46
1200.33	43.68	Ave	-18.88	24.8	54	-29.2
4804.00	56.11	PK	-1.06	55.05	74	-18.95
4804.00	43.05	Ave	-1.06	41.99	54	-12.01
7206.00	55.76	PK	1.33	57.09	74	-16.91
7206.00	42.67	Ave	1.33	44	54	-10
Restricted bands Emission						
2322.16	52.78	PK	-13.19	39.59	74	-34.41
2322.16	43	Ave	-13.19	29.81	54	-24.19
2390.50	54.89	PK	-13.14	41.75	74	-32.25
2390.50	42.58	Ave	-13.14	29.44	54	-24.56
2455.40	56.12	PK	-13.08	43.04	74	-30.96
2455.40	44.1	Ave	-13.08	31.02	54	-22.98
Remark:						
1.Corrected Factor=ANT Factor + Cable Loss – Amp Gain						
2.the display data are worst case with horizontal direction						



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK(BLE)Middle Channel						
Harmonic& Spurious Emission						
1203.56	56.89	PK	-18.91	37.98	74	-36.02
1203.56	42.25	Ave	-18.91	23.34	54	-30.66
4880.00	54.56	PK	-0.93	53.63	74	-20.37
4880.00	42.28	Ave	-0.93	41.35	54	-12.65
7320.00	55.17	PK	1.67	56.84	74	-17.16
7320.00	42.96	Ave	1.67	44.63	54	-9.37
Restricted bands Emission						
2325.42	56.37	PK	-13.19	43.18	74	-30.82
2325.42	43.38	Ave	-13.19	30.19	54	-23.81
2350.60	55.12	PK	-13.14	41.98	74	-32.02
2350.60	42.47	Ave	-13.14	29.33	54	-24.67
2495.71	54.69	PK	-13.07	41.62	74	-32.38
2495.71	43.87	Ave	-13.07	30.8	54	-23.2
Remark:						
1.Corrected Factor=ANT Factor + Cable Loss – Amp Gain						
2.the display data are worst case with horizontal direction						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK(BLE)High Channel						
Harmonic& Spurious Emission						
1128.33	56.11	PK	-18.88	37.23	74	-36.77
1128.33	43.25	Ave	-18.88	24.37	54	-29.63
4960.00	56.37	PK	-0.87	55.5	74	-18.5
4960.00	42.82	Ave	-0.87	41.95	54	-12.05
7440.00	56.05	PK	1.84	57.89	74	-16.11
7440.00	42.63	Ave	1.84	44.47	54	-9.53
Restricted bands Emission						
2320.85	56.37	PK	-13.19	43.18	74	-30.82
2320.85	44.52	Ave	-13.19	31.33	54	-22.67
2341.57	55.97	PK	-13.14	42.83	74	-31.17
2341.57	42.23	Ave	-13.14	29.09	54	-24.91
2483.50	58.69	PK	-13.08	45.61	74	-28.39
2483.50	44.25	Ave	-13.08	31.17	54	-22.83
Remark:						
1.Corrected Factor=ANT Factor + Cable Loss – Amp Gain						
2.the dispaly data are worst case with horizontal direction						

**Test Frequency: 18-25GHz**

The measurements were more than 30 dB below the limit and not reported

Remark : 1. The testing has been conformed to 10\*2480 =24800MHz.  
2. All other emissions more than 30dB below the limit



## 7 Conducted Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : DA 00-705

Test Limit : In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


Test Result : PASS

### 7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:  
RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold

### 7.2 Test Result

Remark: only the worst data(2402MHz) were reported.

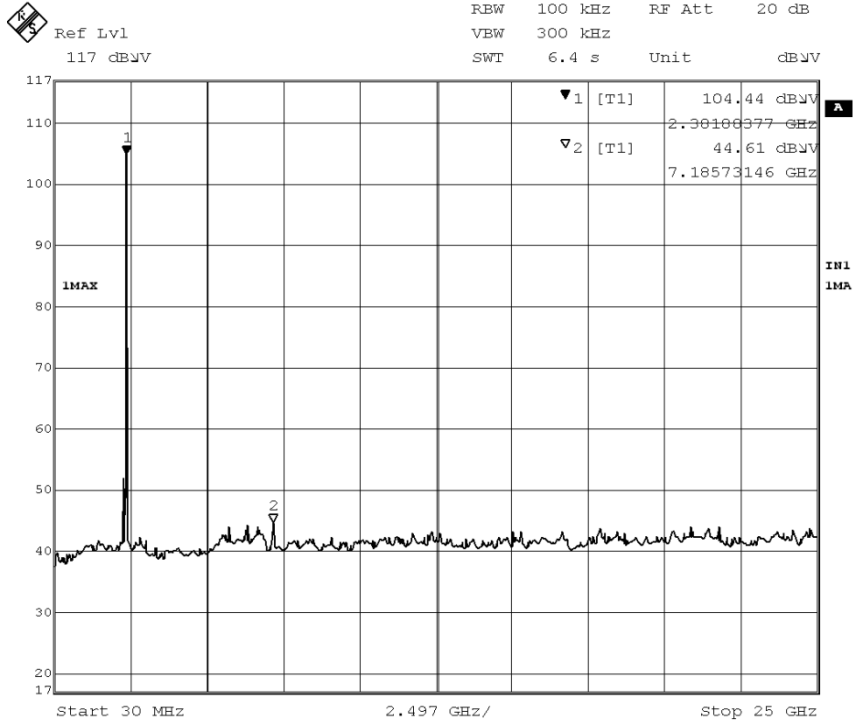





### 8 Band Edge Measurement

- Test Requirement : Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
- Test Method : ANSI C63.10:2013,DA 00-705
- Test Limit : Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
- Test Mode : Transmitting & Hopping
- Remark : The worst case was recorded.

#### 8.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold


#### 8.2 Test Result

Modulation	Mode	Band edge	Value ( dBm )	Limit ( dBm )	Result
GFSK(BLE)	Transmitting	Left	49.08	77.22	Pass
		Right	44.05	76.72	Pass
Remark:					
The limit is 20dB below the maximum peak level, please refer to the display line of the follow plot					

**TX in GFSK Band edge-left side**

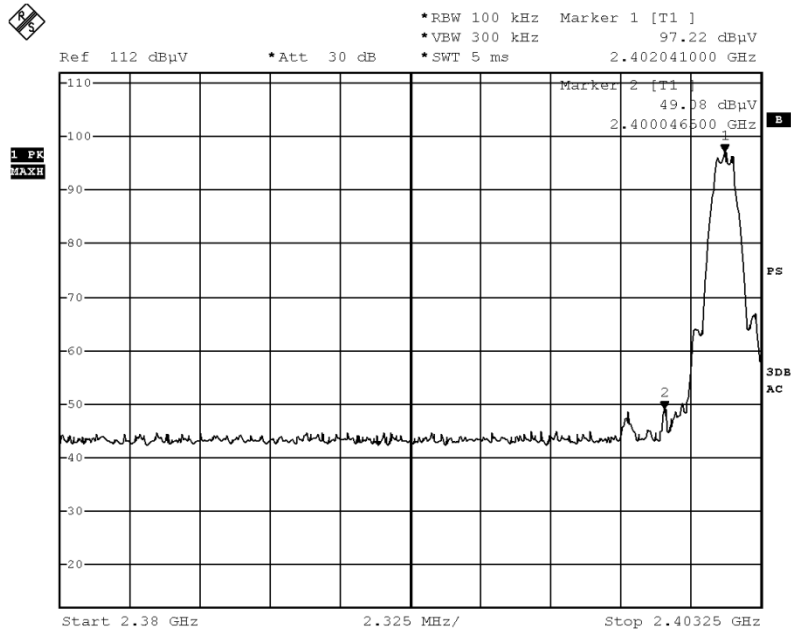

**TX in GFSK Band edge-right side**

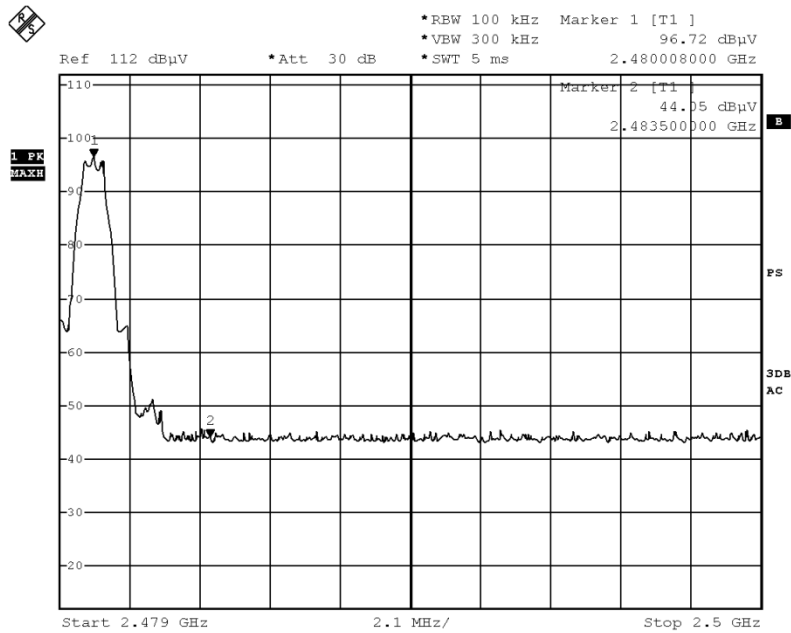



## 9 6dB Bandwidth Measurement


- TestRequirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R03
- Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
- Test Mode : Refer to section 3.3

### 9.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: For BLE, RBW = 100 kHz, VBW = 300kHz, For WIFI, RBW = 100kHz, VBW = 300kHz,

### 9.2 Test Result


Modulation	Bandwidth(MHz)			Limit
	Low Channel	Middle Channel	High Channel	
GFSK(BLE)	0.670	0.675	0.675	≥500kHz

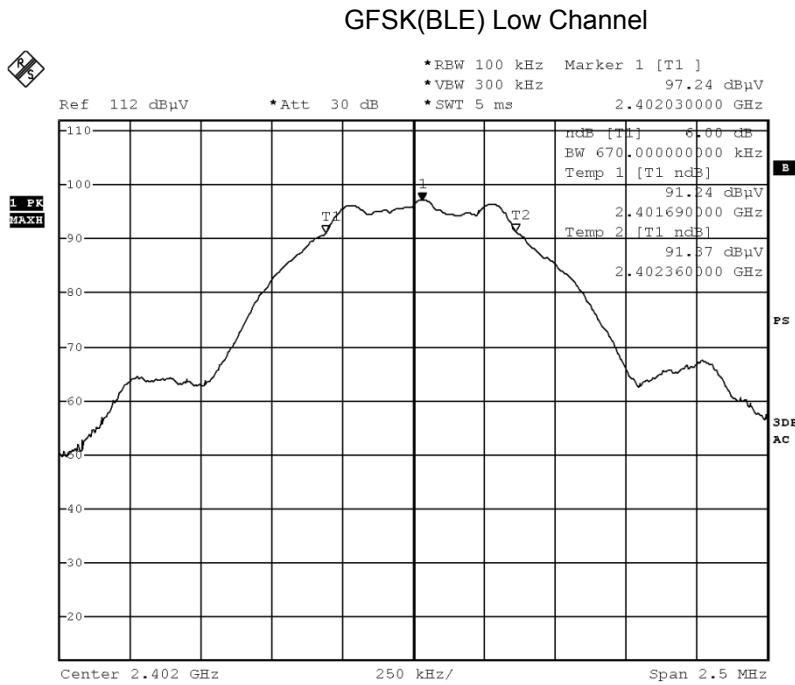

GFSK(BLE) Middle Channel

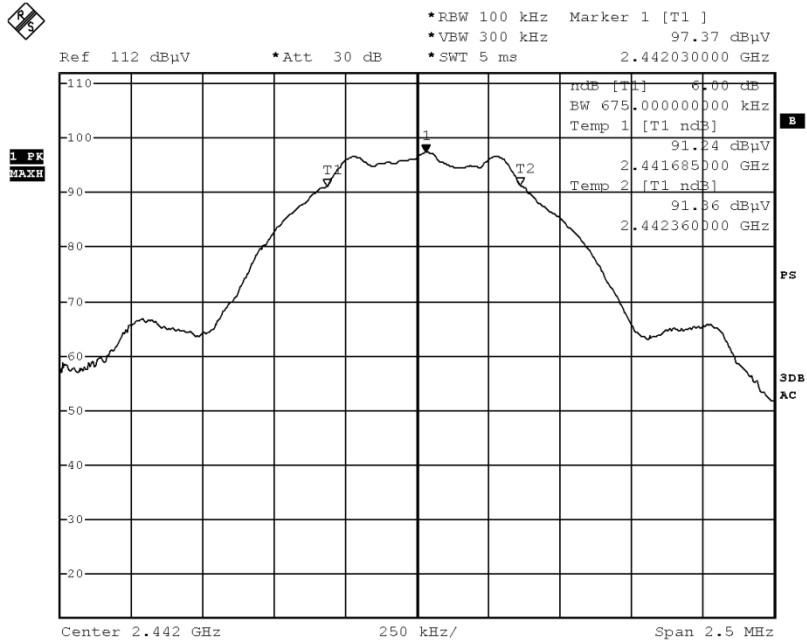

### GFSK(BLE)High Channel

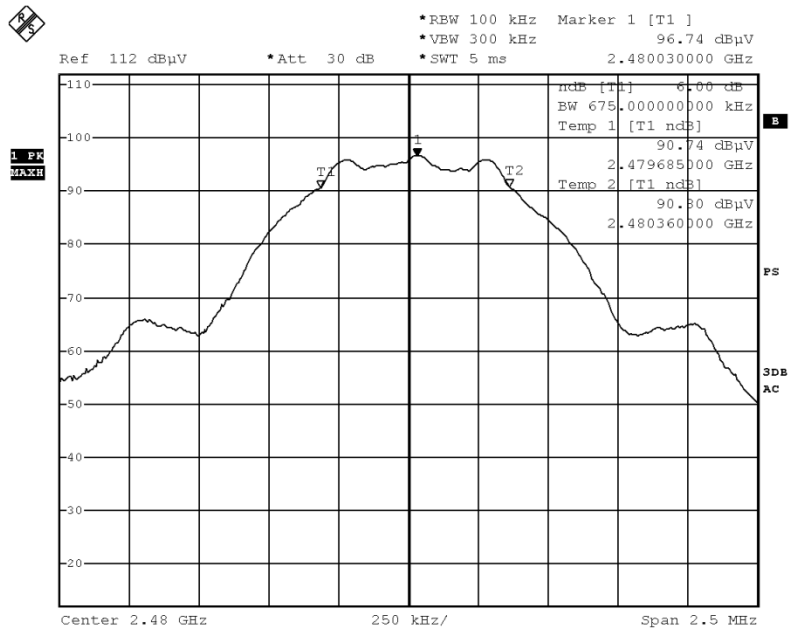



### 10 Maximum Peak Output Power

- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013,KDB 558074 D01 DTS MEAS GUIDANCE V03R03
- Test Limit : Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.
- Test Mode : Refer to section 3.3

#### 10.1 Test Procedure

KDB 558074 D01 DTS Meas Guidance v03r03

section 9.1.1(For BLE)


This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a)Set the RBW  $\geq$  DTS bandwidth.
- b)Set VBW  $\geq$  3 RBW.
- c)Set span  $\geq$  3 x RBW
- d)Sweep time = auto couple.
- e)Detector = peak.
- f)Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.


#### 10.2 Test Result

Modulation	Maximum Peak Output Power (dBm)			Limit
	Low Channel	Middle Channel	High Channel	
GFSK(BLE)	3.06	3.33	3.06	1W(30dBm)

### GFSK(BLE) Low Channel

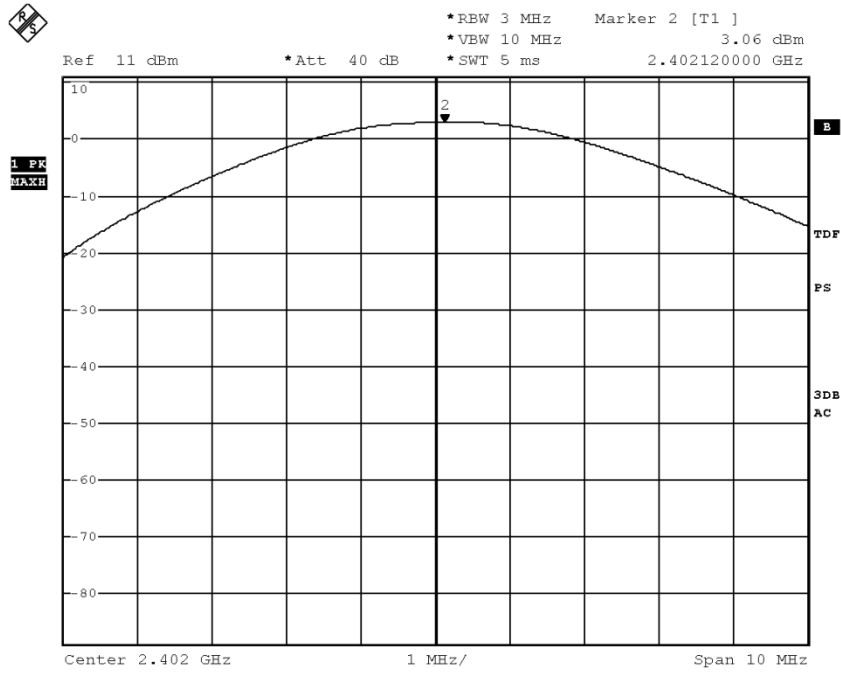


### GFSK(BLE) Middle Channel

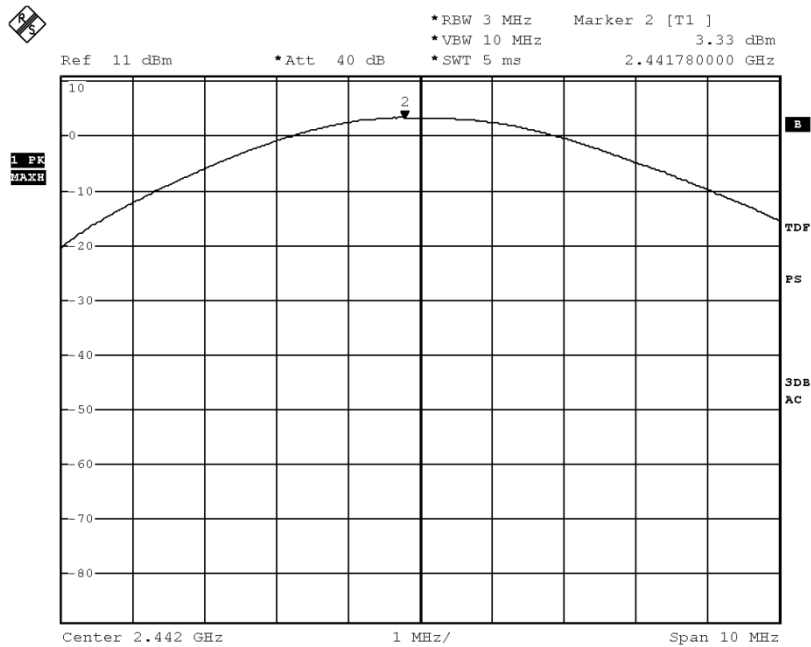

### GFSK(BLE)High Channel



Ref 11 dBm      \*Att 40 dB      \*RBW 3 MHz      Marker 2 [T1]      3.06 dBm  
\*VBW 10 MHz      \*SWT 5 ms      2.479660000 GHz

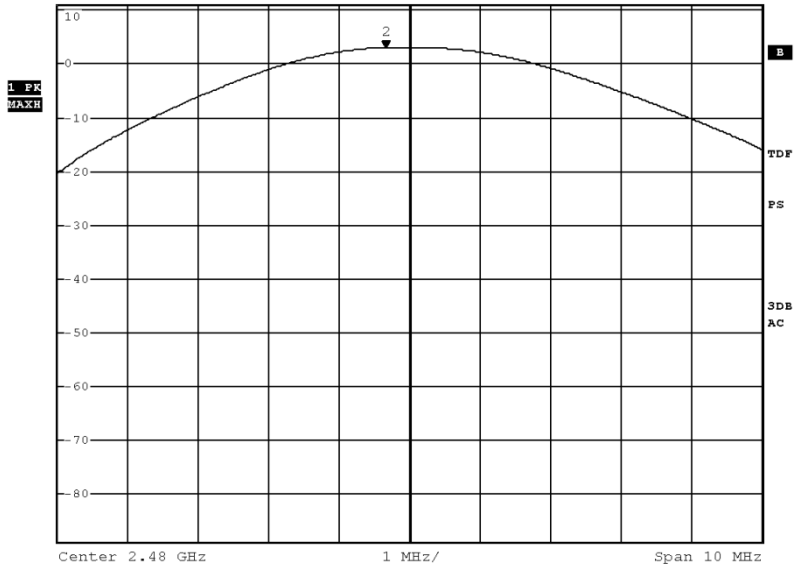



### 11 Power Spectral density

- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013,KDB 558074 D01 DTS MEAS GUIDANCE V03R03
- Test Limit : Regulation 15.247(f)The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
- Test Mode : Refer to section 3.3

#### 11.1 Test Procedure

KDB 558074 D01 DTS Meas Guidance v03r03


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

#### 11.2 Test Result


Modulation	Power Spectral density ( dBm/3kHz )			Limit
	Low Channel	Middle Channel	High Channel	
GFSK(BLE)	-13.30	-12.97	-12.01	8dBm/3kHz




### GFSK(BLE) Low Channel

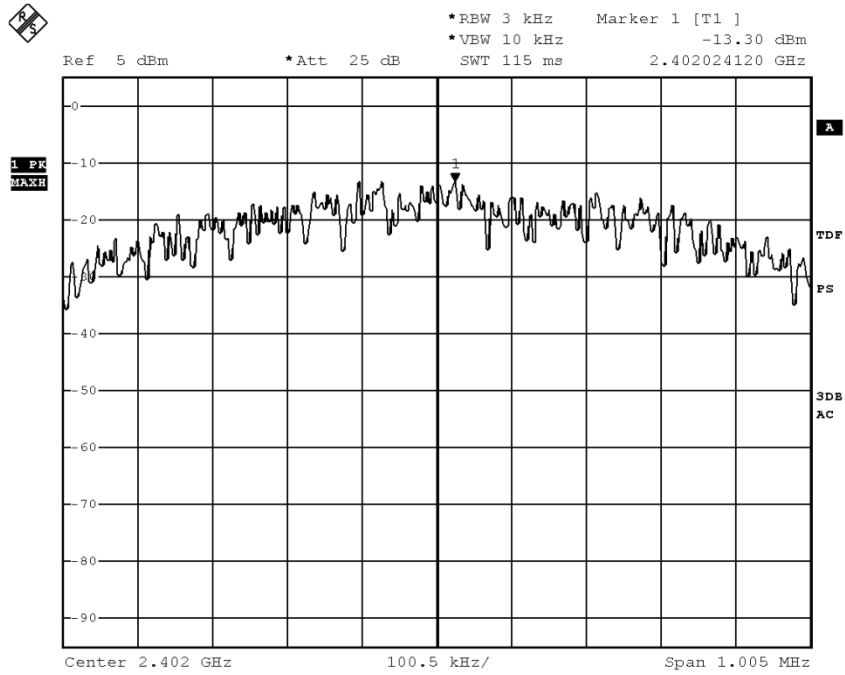

### GFSK(BLE) Middle Channel

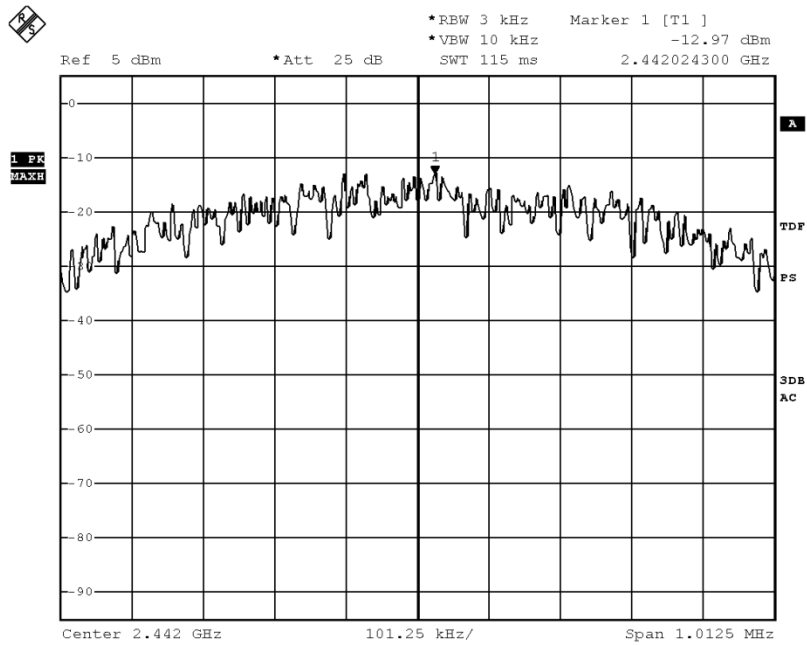

### GFSK(BLE)High Channel

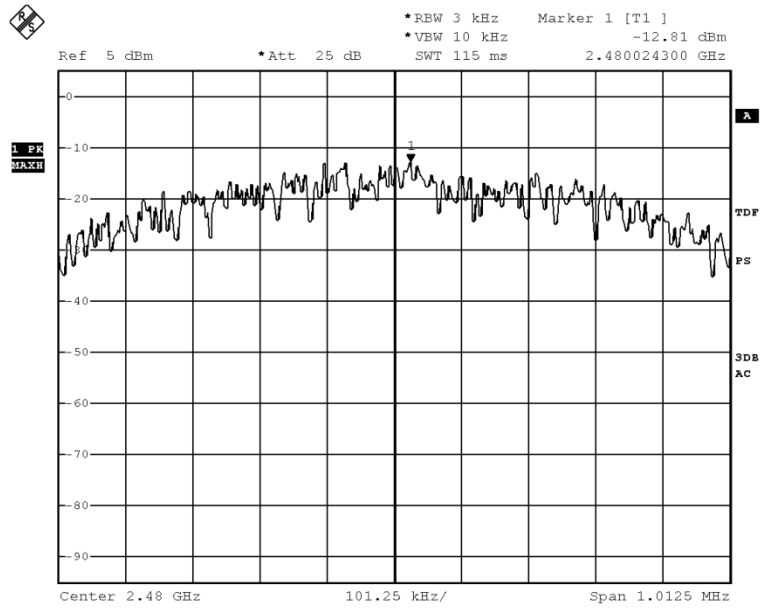



## 12 Antenna Requirement

According to the FCC part15.203, a transmitter can only be sold or operated with antennas with which it was approved. This product has a internal permanent antenna, it meet the requirement of this section.

**\*\*\*\*\*THE END REPORT\*\*\*\*\***