
FCC Test Report

Report No.: AGC00608150401FE03

FCC ID : 2ABM9T1
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : 2ABM9T1
BRAND NAME : SIGN, Polaroid
MODEL NAME : T1, T2, PBT4000
CLIENT : Shenzhen Tongke Electronics Co., Ltd.
DATE OF ISSUE : APR.29,2015
STANDARD(S) : FCC Part 15 Rules
TEST PROCEDURE(S) :
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr.29,2015	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION.....	5
2.2. TABLE OF CARRIER FREQUENCYS.....	5
3. MEASUREMENT UNCERTAINTY.....	6
4. DESCRIPTION OF TEST MODES.....	6
5. SYSTEM TEST CONFIGURATION	7
5.1. CONFIGURATION OF EUT SYSTEM	7
5.2. EQUIPMENT USED IN EUT SYSTEM	7
5.3. SUMMARY OF TEST RESULTS	7
6. TEST FACILITY	8
7 ALL TEST EQUIPMENT LIST	8
8. RADIATED EMISSION	9
8.1 TEST LIMIT.....	9
8.2. MEASUREMENT PROCEDURE	10
8.3. TEST SETUP	12
8.4. TEST RESULT(Worst modulation:GFSK)	14
9. BAND EDGE EMISSION	27
9.1. MEASUREMENT PROCEDURE	27
9.2 TEST SETUP	27
9.3 RADIATED TEST RESULT(Worst modulation:GFSK)	28
10. 20DB BANDWIDTH	32
10.1. MEASUREMENT PROCEDURE	32
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	32
10.3. LIMITS AND MEASUREMENT RESULTS.....	32
11. FCC LINE CONDUCTED EMISSION TEST	39
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	39
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	39
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	40
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	40
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	41
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	43
APPENDIX B: PHOTOGRAPHS OF EUT	44

1. VERIFICATION OF CONFORMITY

Applicant	Shenzhen Tongke Electronics Co., Ltd.
Address	The Second Industrial Zone, Phoenix Village, Fuyong Town, Shenzhen, China
Manufacturer	Shenzhen Tongke Electronics Co., Ltd.
Address	The Second Industrial Zone, Phoenix Village, Fuyong Town, Shenzhen, China
Product Designation	Turntable
Brand Name	SIGN, Polaroid
Test Model	T1
Series Model	T2, PBT4000
Different Description	All the same except for the model name
Date of test	Apr.25,2015
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Compliance Certification Service(Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Prepared By

Water Zuo

Apr.29,2015

Checked By

Forrest Lei

Apr.29,2015

Authorized By

Solger Zhang

Apr.29,2015

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	3.36dBm(Max)
Bluetooth Version	V2.1+EDR
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of channels	79
Hardware Version	V1.1
Software Version	V1.2
Antenna Designation	PCB Antenna (Met 15.203 Antenna requirement)
Antenna Gain	0dBi
Power Supply	DC3.7V

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Normal operation (BT)


Note:

1. V means EMI worst mode.
2. All the test modes can be supply by Built-in Li-ion battery and adapter, only the result of the worst case was recorded in the report.
3. All the test modes can be supply by GFSK, $\pi/4$ -DQPSK, 8DPSK, only the result of the worst case was recorded in the report.


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

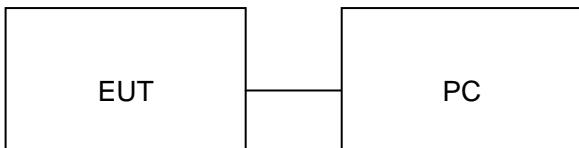

Configure 2: (Control continuous TX)

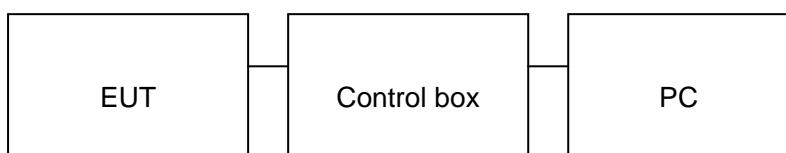

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Turntable	SIGN, Polaroid	T1	EUT
2	Control box	N/A	N/A	A.E
3	PC	Dell	INSPIRON	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant

6. TEST FACILITY

Site	Compliance Certification Service(Shenzhen) Inc.
Location	No.10-1 Mingkeda Logistics Park, No.18 Huanguan South RD. Guan Ian Town,Baoan Distr
FCC Registration No.	441872
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

7 ALL TEST EQUIPMENT LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Spectrum Analyzer	Agilent	E4407B	MY50140340	2014.10.25	2015.10.24
Test Receiver	R&S	ESCI	101427	2014.10.25	2015.10.24
Bilog Antenna	TESEQ	CBL6111D	34678	2014.10.27	2015.10.26
50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2014.06.06	2015.06.06
Horn Antenna	R&S	9120D	152265	2014.10.27	2015.10.26
Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2014.07.06	2015.07.05
Amplifier	EM	EM-30180	060538	2014.12.22	2015.12.21
Loop Antenna	ARA	PLA-1030/B	1029	2014.06.08	2015.06.07
Power Meter	Anritsu	ML2495A	1204003	2014.10.25	2015.10.24
Power Sensor	Anritsu	MA2411B	100309	2014.10.25	2015.10.24

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	102086	102086	2014.10.25	2015.10.24
LISN	R&S	ENV216	101242	2014.10.25	2015.10.24
LISN	EMCO	3810/2NM	000-23625	2014.10.25	2015.10.24
50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2014.06.06	2015.06.06
Passive Voltage Probe	R&S	ESH2-Z3	100196	2014.06.06	2015.06.06
Absorbing clamp	R&S	MDS-21	100668	2014.10.27	2015.10.26

8. RADIATED EMISSION

8.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other: 74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark:

- (1) Emission level $dB\mu$ V = $20 \log$ Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

8.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

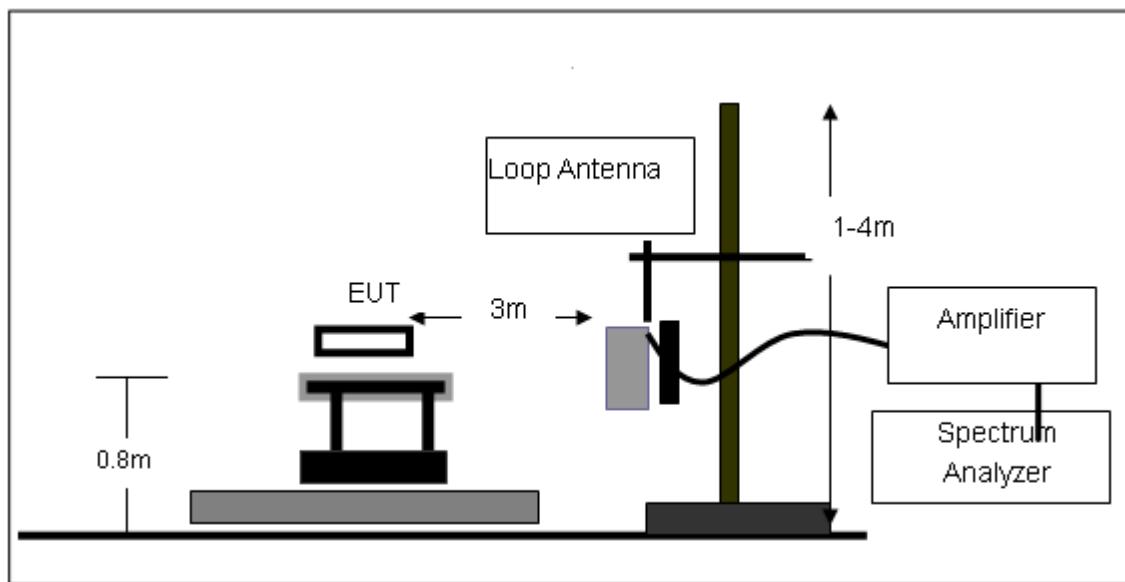

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

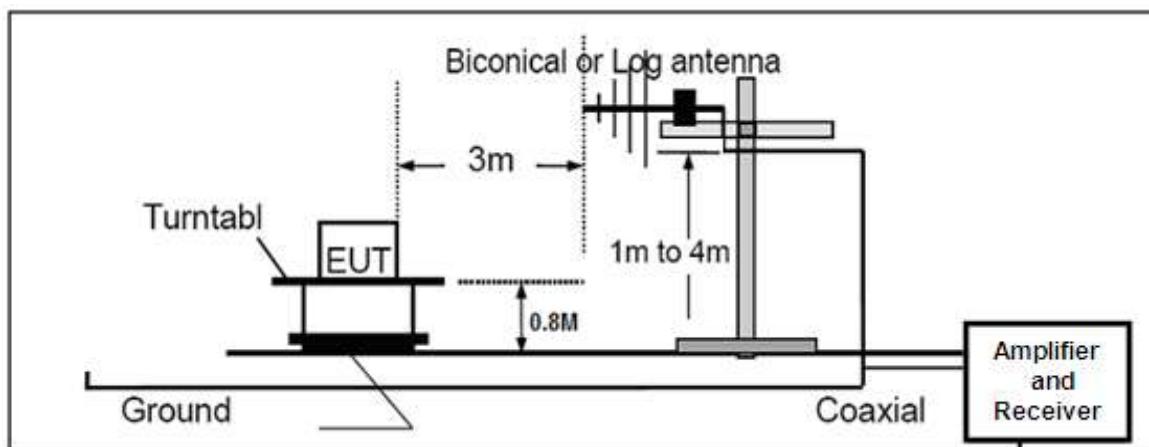

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

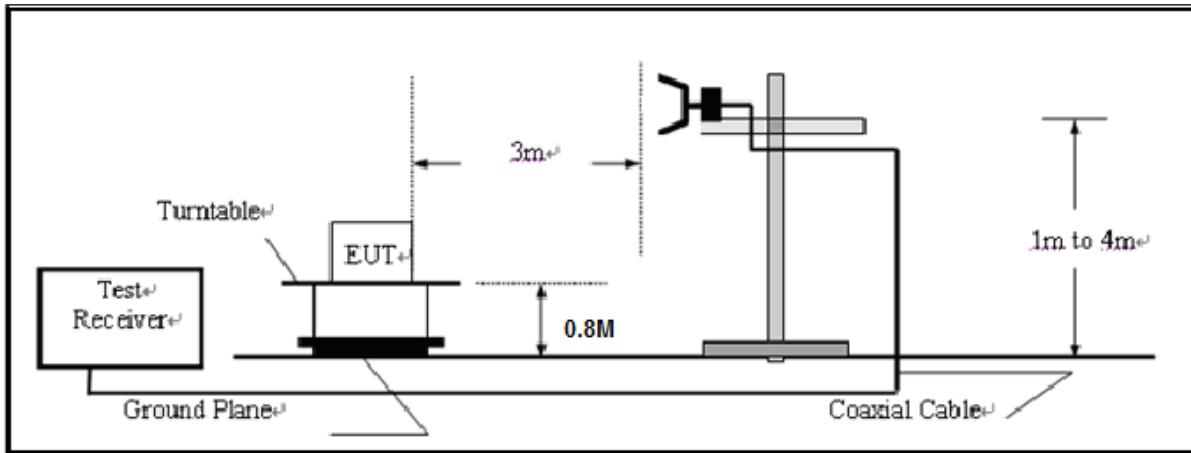


8.4. TEST RESULT(Worst modulation:GFSK)

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

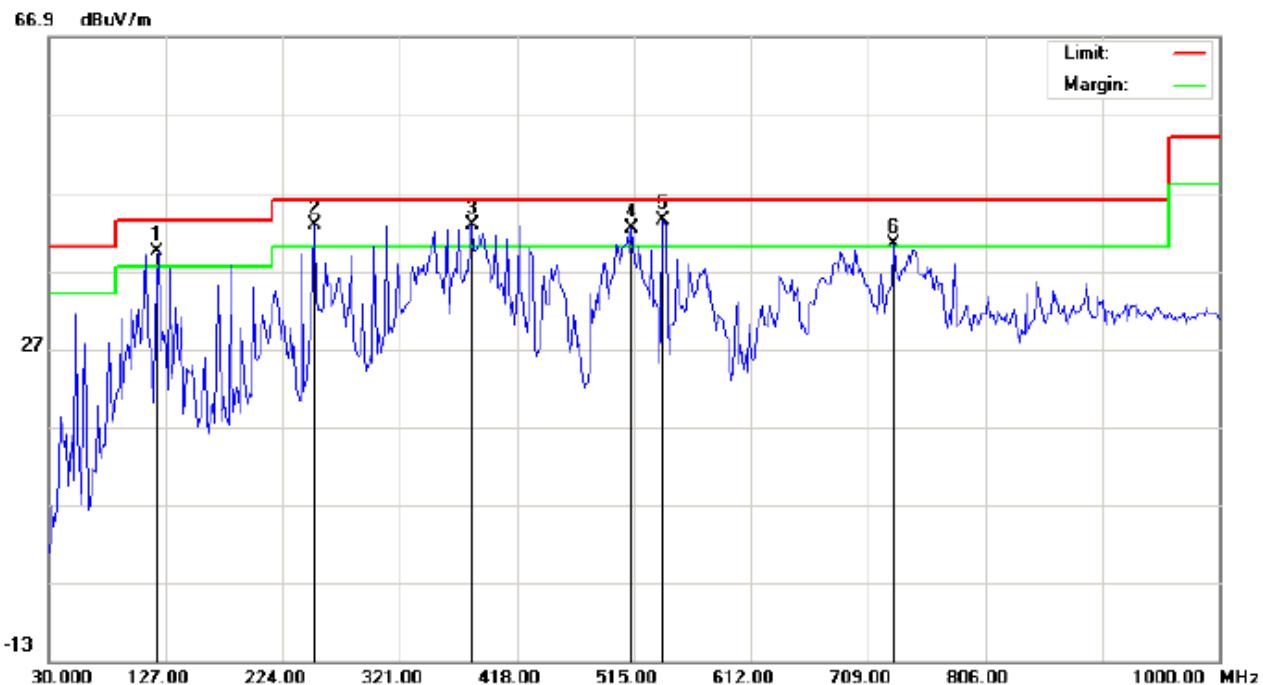


Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation	Power:	Humidity: 60 %
EUT: Turntable	Distance: 3m	
M/N: T1		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	!	120.5331	27.39	11.95	39.34	43.50	-4.16	peak			
2	!	249.8667	28.89	13.89	42.78	46.00	-3.22	peak			
3	!	380.8167	23.90	18.94	42.84	46.00	-3.16	peak			
4	!	513.3831	20.86	21.49	42.35	46.00	-3.65	peak			
5	*	539.2500	21.23	22.19	43.42	46.00	-2.58	peak			
6	!	730.0167	14.30	26.05	40.35	46.00	-5.65	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

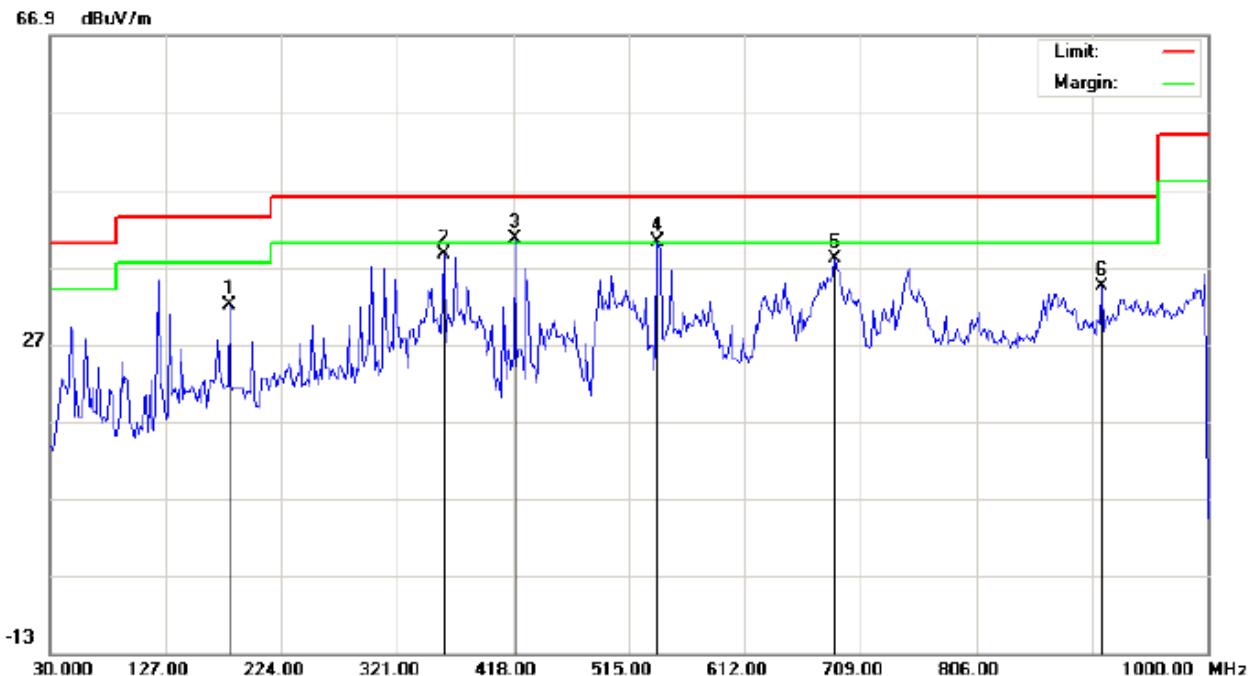

Site: site #1	Polarization: <i>Vertical</i>	Temperature: 26
Limit: FCC Class B 3M Radiation	Power:	Humidity: 60 %
EUT: Turntable	Distance: 3m	
M/N: T1		
Mode: Low Channel TX		
Note:		


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		180.3497	18.03	13.98	32.01	43.50	-11.49	peak			
2		359.8000	19.88	18.80	38.68	46.00	-7.32	peak			
3	*	419.6166	20.86	19.67	40.53	46.00	-5.47	peak			
4	!	539.2500	18.04	22.19	40.23	46.00	-5.77	peak			
5		687.9832	13.22	24.87	38.09	46.00	-7.91	peak			
6		911.0833	5.39	28.92	34.31	46.00	-11.69	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

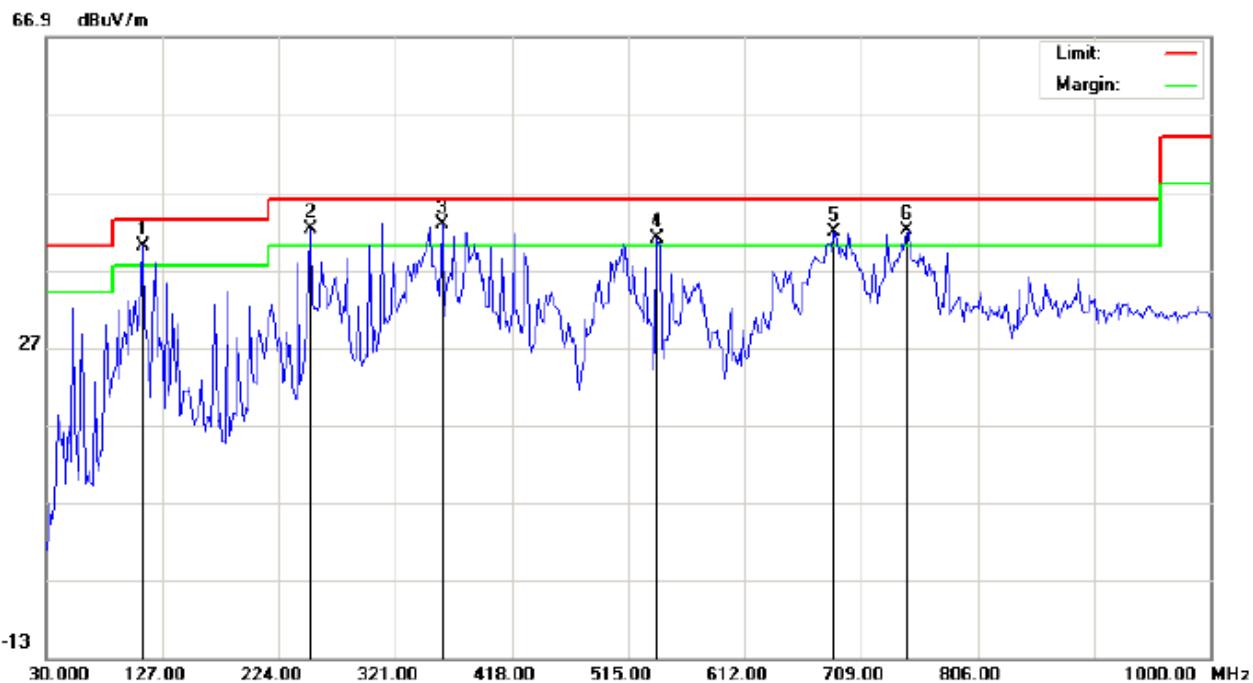


Site: site #1	Polarization: Horizontal	Temperature: 26
Limit: FCC Class B 3M Radiation	Power:	Humidity: 60 %
EUT: Turntable	Distance: 3m	
M/N: T1		
Mode: Middle Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	!	110.8332	28.77	11.23	40.00	43.50	-3.50	peak			
2	!	249.8667	28.39	13.89	42.28	46.00	-3.72	peak			
3	*	359.8000	23.95	18.80	42.75	46.00	-3.25	peak			
4	!	539.2500	18.73	22.19	40.92	46.00	-5.08	peak			
5	!	686.3667	17.07	24.82	41.89	46.00	-4.11	peak			
6	!	747.7998	15.37	26.57	41.94	46.00	-4.06	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

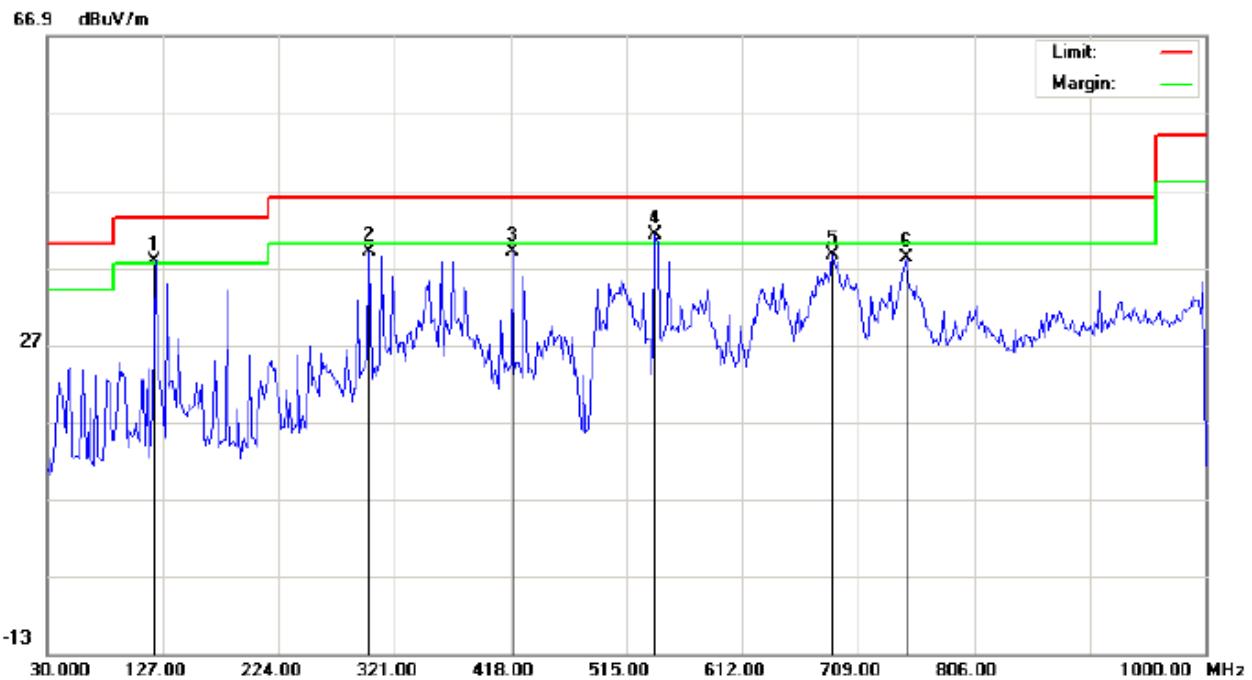

Site: site #1	Polarization: <i>Vertical</i>	Temperature: 26
Limit: FCC Class B 3M Radiation	Power:	Humidity: 60 %
EUT: Turntable	Distance: 3m	
M/N: T1		
Mode: Middle Channel TX		
Note:		


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	!	120.5331	30.70	7.08	37.78	43.50	-5.72	peak			
2		299.9832	23.51	15.41	38.92	46.00	-7.08	peak			
3		419.6166	19.36	19.67	39.03	46.00	-6.97	peak			
4	*	539.2500	19.04	22.19	41.23	46.00	-4.77	peak			
5		687.9832	13.72	24.87	38.59	46.00	-7.41	peak			
6		749.4166	11.64	26.61	38.25	46.00	-7.75	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

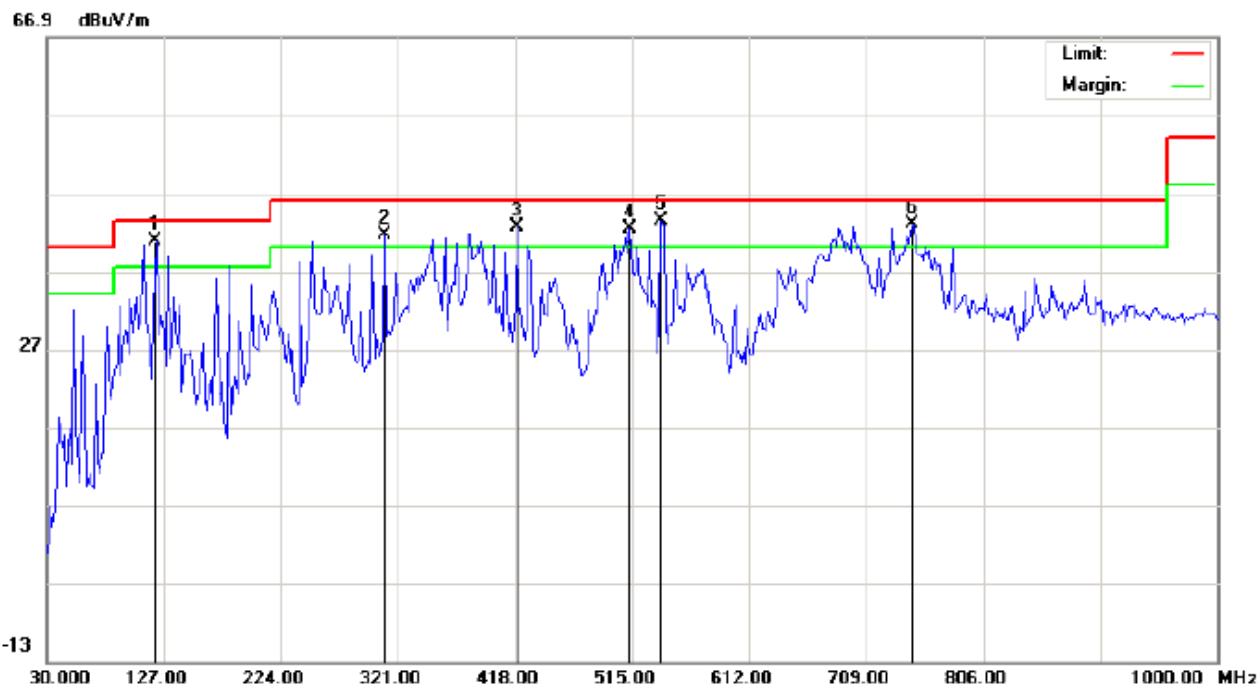


Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation	Power:	Humidity: 60 %
EUT: Turntable	Distance: 3m	
M/N: T1		
Mode: High Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	!	120.5332	28.89	11.95	40.84	43.50	-2.66	peak			
2	!	309.6831	25.46	16.05	41.51	46.00	-4.49	peak			
3	!	419.6166	22.98	19.67	42.65	46.00	-3.35	peak			
4	!	513.3832	20.86	21.49	42.35	46.00	-3.65	peak			
5	*	539.2500	21.23	22.19	43.42	46.00	-2.58	peak			
6	!	747.7999	16.37	26.57	42.94	46.00	-3.06	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

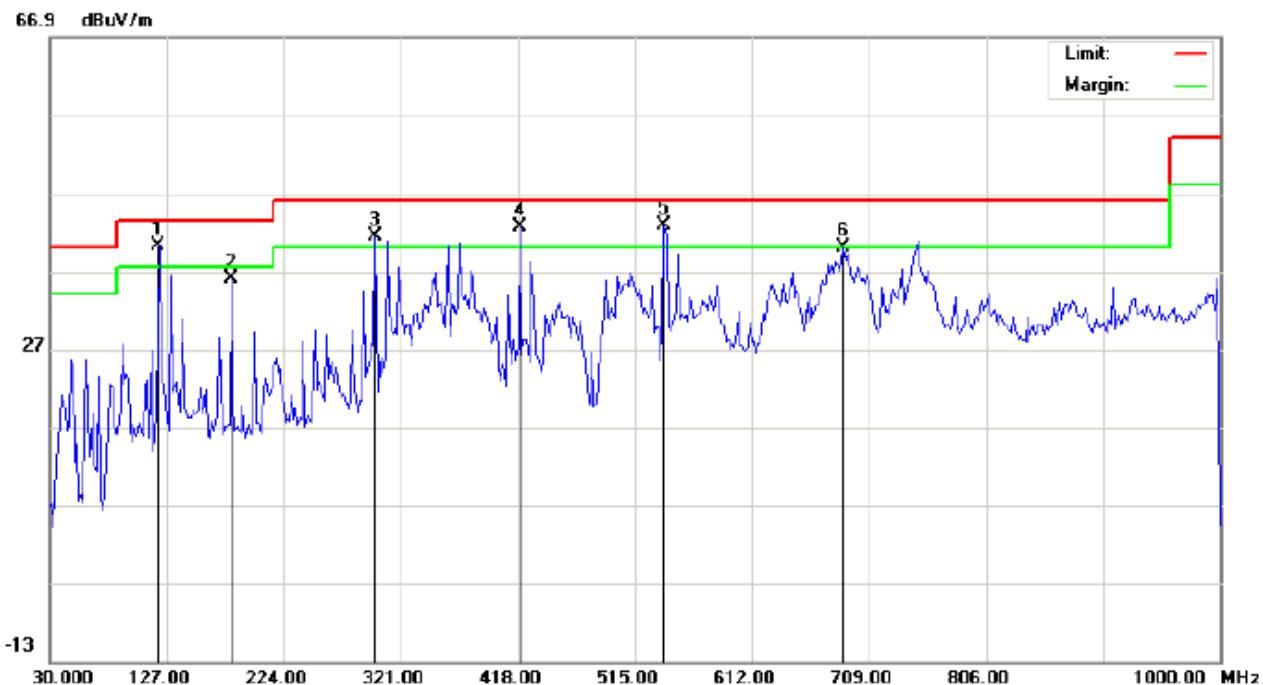

Site: site #1	Polarization: <i>Vertical</i>	Temperature: 26
Limit: FCC Class B 3M Radiation	Power:	Humidity: 60 %
EUT: Turntable	Distance: 3m	
M/N: T1		
Mode: High Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	120.5331	33.20	7.08	40.28	43.50	-3.22	peak			
2		180.3498	22.03	13.98	36.01	43.50	-7.49	peak			
3	!	299.9832	26.01	15.41	41.42	46.00	-4.58	peak			
4	!	419.6166	22.86	19.67	42.53	46.00	-3.47	peak			
5	!	539.2500	20.54	22.19	42.73	46.00	-3.27	peak			
6	!	687.9832	15.22	24.87	40.09	46.00	-5.91	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION ABOVE 1GHZ

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

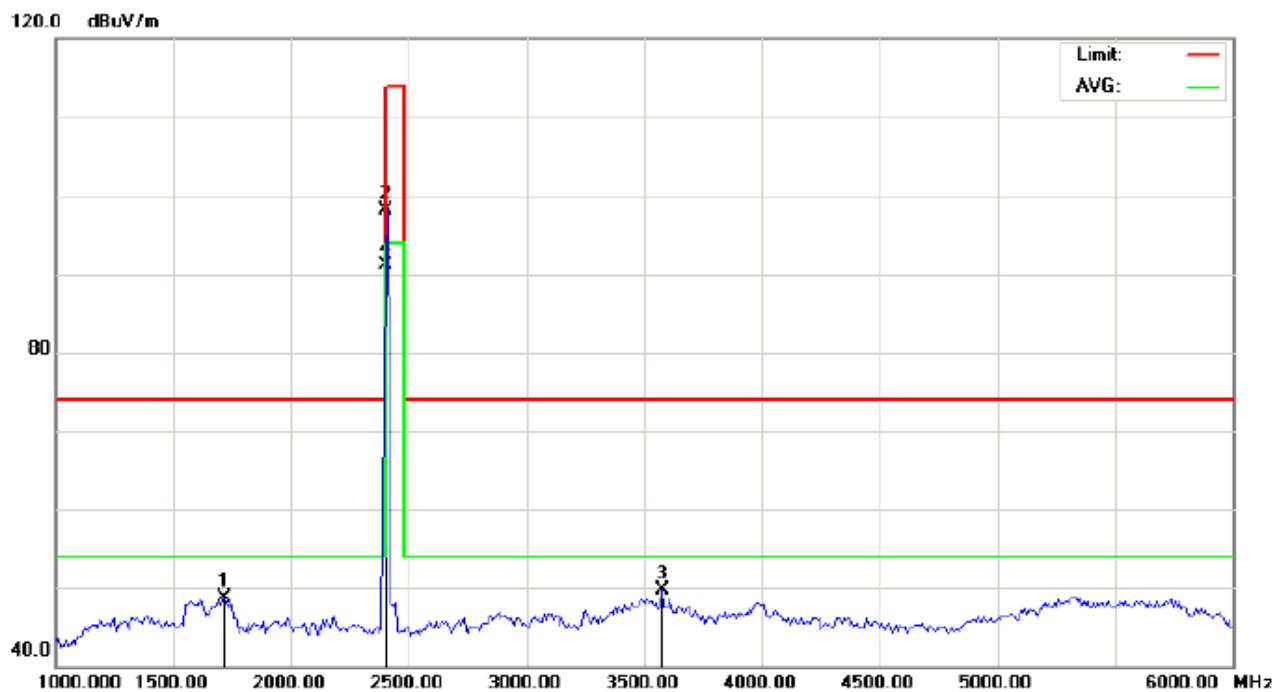


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Turntable Distance: 3m
M/N:T1
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1716.667	61.78	-13.10	48.68	74.00	-25.32	peak			
2		2402.000	107.73	-9.68	98.05	114.00	-15.95	peak			
3		3575.000	57.20	-7.43	49.77	74.00	-24.23	peak			
4	*	2402.000	100.70	-9.68	91.02	94.00	-2.98	AVG	150	360	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

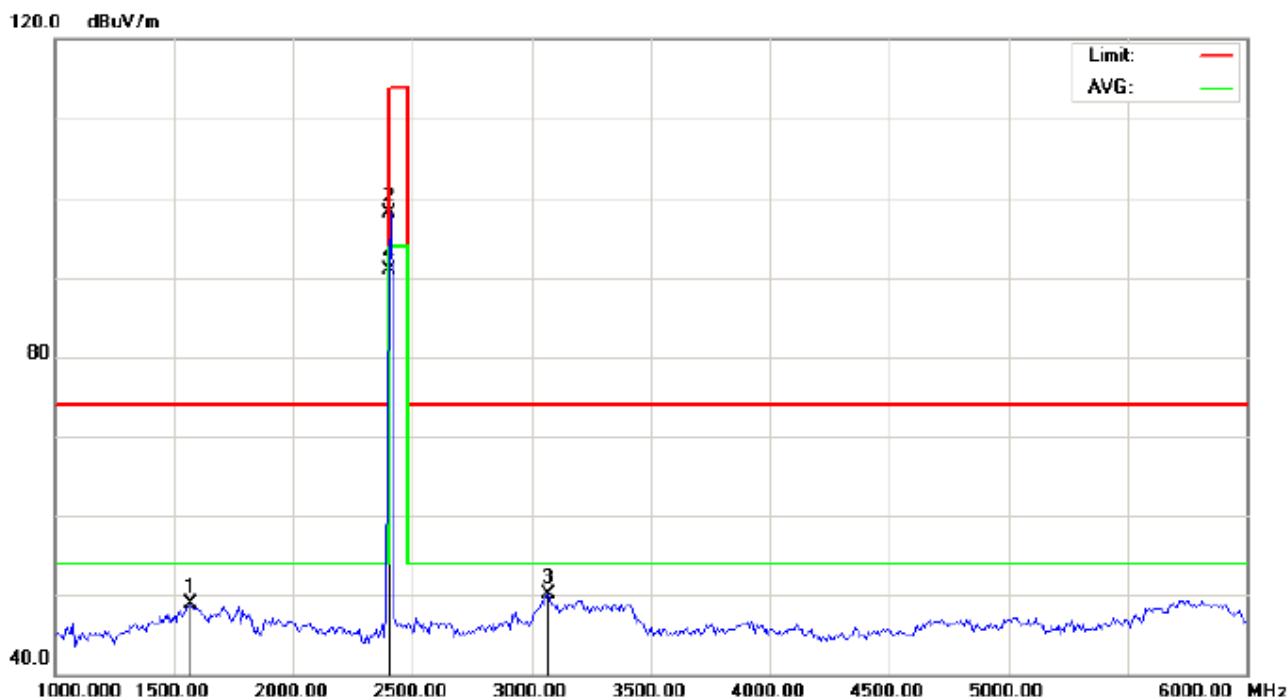


Site: site #1 Polarization: *Vertical* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
 EUT:Turntable Distance: 3m
 M/N:T1
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1566.667	63.51	-14.68	48.83	74.00	-25.17	peak			
2		2402.000	107.73	-9.68	98.05	114.00	-15.95	peak			
3		3066.667	58.38	-8.30	50.08	74.00	-23.92	peak			
4	*	2402.000	100.49	-9.68	90.81	94.00	-3.19	AVG	100	0	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

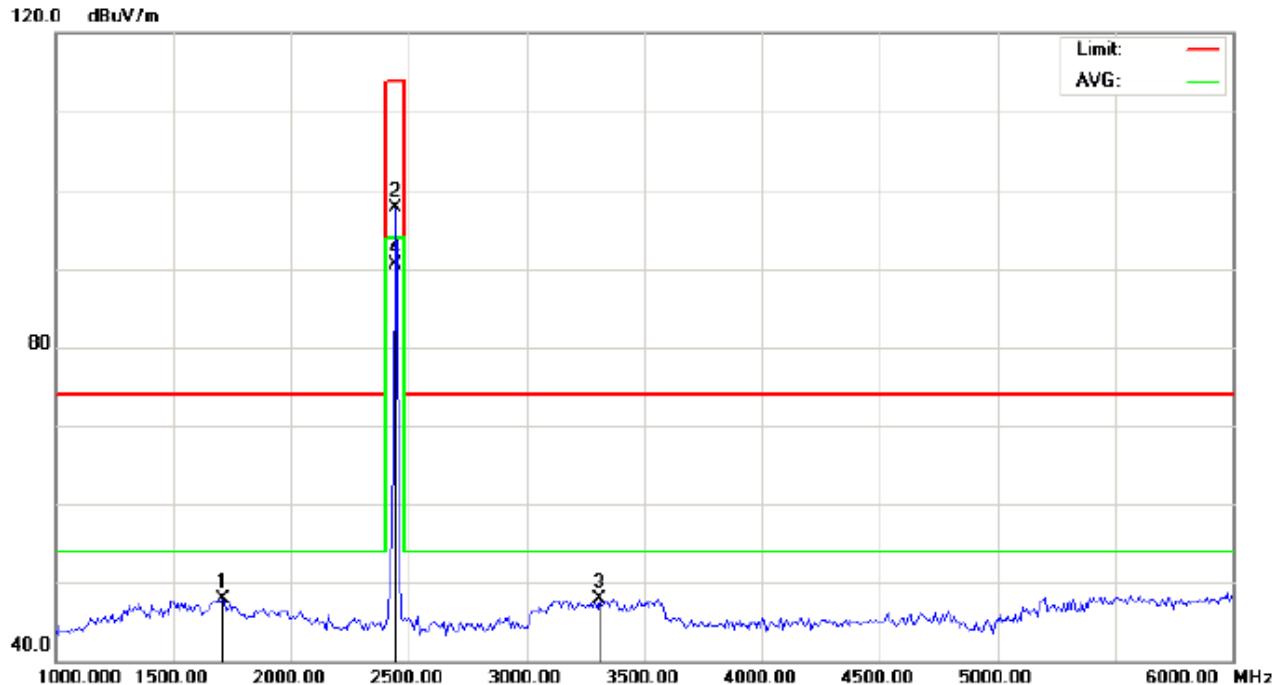

Site: site #1 Polarization: *Horizontal* Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT:Turntable Distance: 3m

M/N:T1


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1708.333	61.11	-13.19	47.92	74.00	-26.08	peak			
2		2441.000	107.29	-9.63	97.66	114.00	-16.34	peak			
3		3308.333	55.99	-8.07	47.92	74.00	-26.08	peak			
4	*	2441.000	100.19	-9.63	90.56	94.00	-3.44	AVG	100	160	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

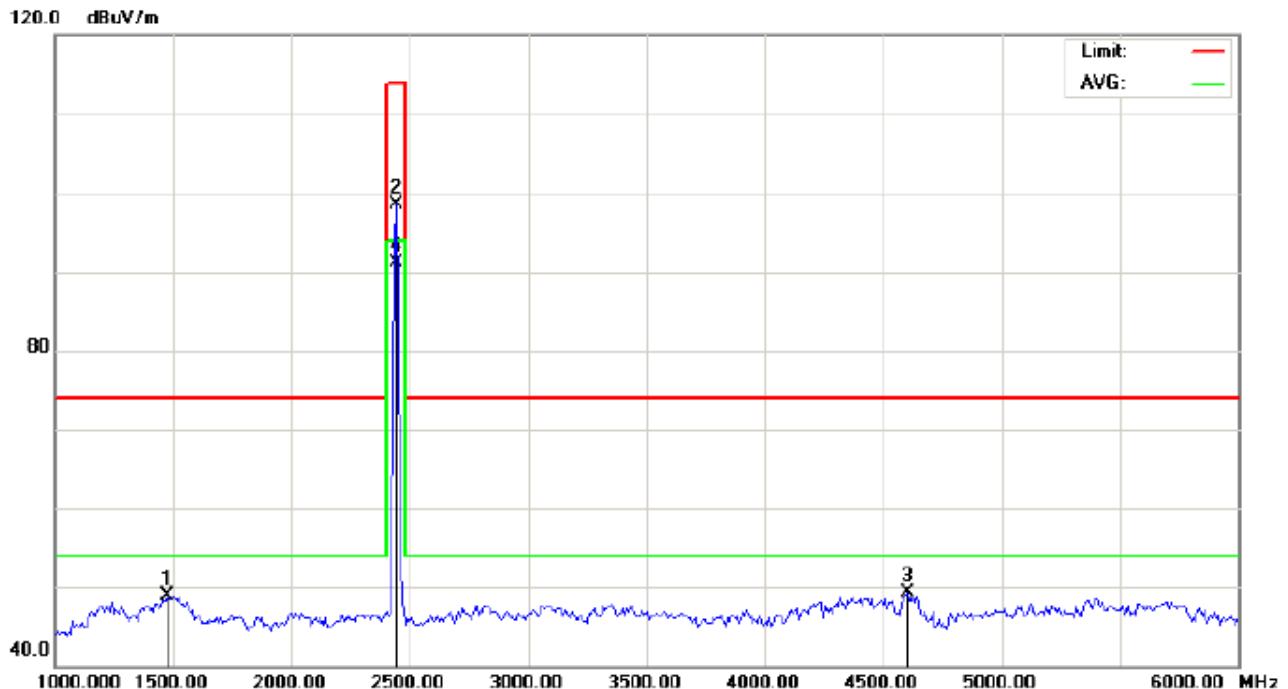


Site: site #1 Polarization: *Vertical* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
 EUT:Turntable Distance: 3m
 M/N:T1
 Mode: Middle Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		1475.000	64.31	-15.39	48.92	74.00	-25.08	peak			
2		2441.000	108.23	-9.63	98.60	114.00	-15.40	peak			
3		4600.000	52.18	-2.85	49.33	74.00	-24.67	peak			
4	*	2441.000	100.73	-9.63	91.10	94.00	-2.90	AVG	100	150	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

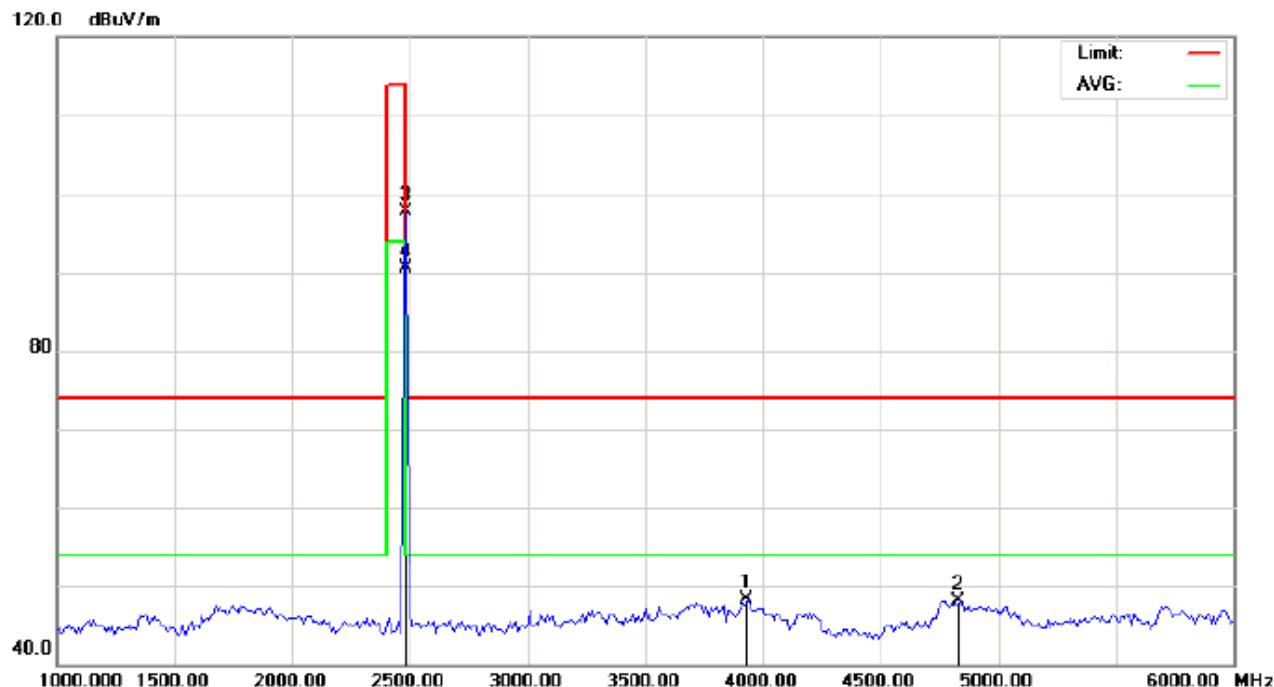


Site: site #1 Polarization: *Horizontal* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
 EUT:Turntable Distance: 3m
 M/N:T1
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		3933.333	53.57	-5.22	48.35	74.00	-25.65	peak			
2		4833.333	50.44	-2.24	48.20	74.00	-25.80	peak			
3		2480.000	107.37	-9.59	97.78	114.00	-16.22	peak			
4	*	2480.000	100.05	-9.59	90.46	94.00	-3.54	AVG	100	360	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

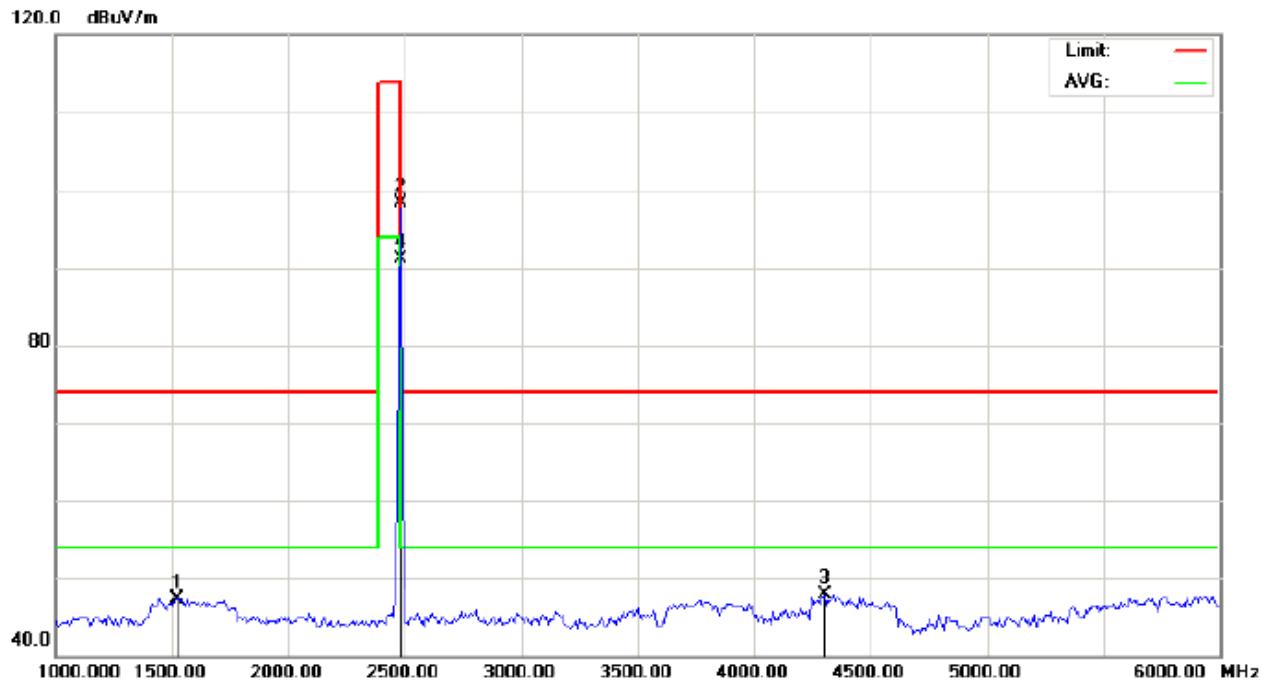

Site: site #1 Polarization: *Vertical* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Turntable Distance: 3m
M/N:T1
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1525.000	62.51	-15.12	47.39	74.00	-26.61	peak			
2		2480.000	107.87	-9.59	98.28	114.00	-15.72	peak			
3		4300.000	51.73	-3.79	47.94	74.00	-26.06	peak			
4	*	2480.000	100.78	-9.59	91.19	94.00	-2.81	AVG	100	359	

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value

Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	107.73	-9.68	98.05	114	-15.95	Horizontal
2402	107.73	-9.68	98.05	114	-15.95	Vertical
2441	107.29	-9.63	97.66	114	-16.34	Horizontal
2441	108.23	-9.63	98.60	114	-15.40	Vertical
2480	107.37	-9.59	97.78	114	-16.22	Horizontal
2480	107.87	-9.59	98.28	114	-15.72	Vertical

Average value

Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	100.70	-9.68	91.02	94	-2.98	Horizontal
2402	100.49	-9.68	90.81	94	-3.19	Vertical
2441	100.19	-9.63	90.56	94	-3.44	Horizontal
2441	100.73	-9.63	91.10	94	-2.90	Vertical
2480	100.05	-9.59	90.46	94	-3.54	Horizontal
2480	100.78	-9.59	91.19	94	-2.81	Vertical

9. BAND EDGE EMISSION

9.1. MEASUREMENT PROCEDURE

1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.


2Max hold the trace of the step 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO


(b) AVERAGE: RBW=1MHz ; VBW=1/on time(1KHz) / Sweep=AUTO

9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

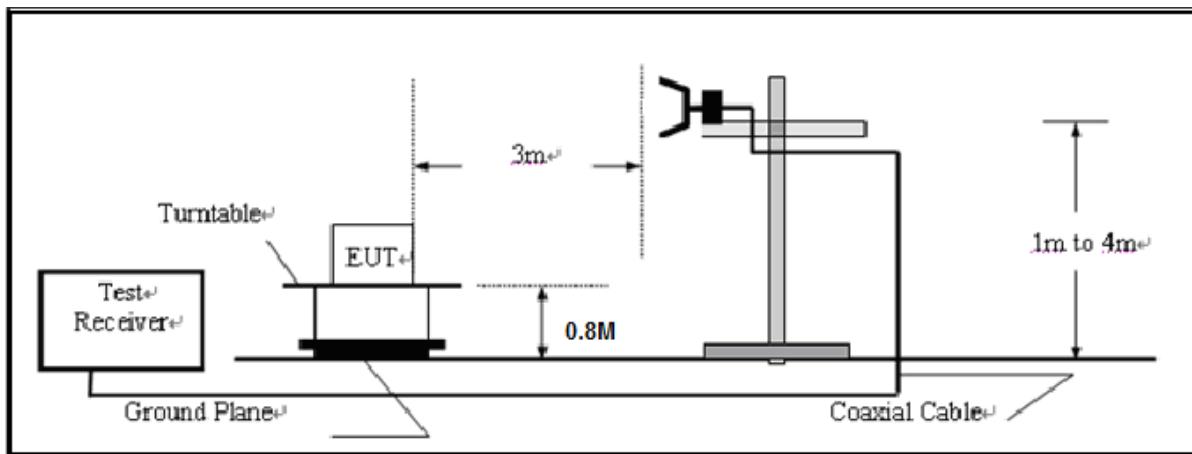


CONDUCTED TEST SETUP

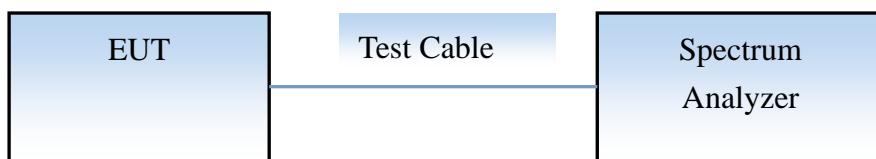

9.3 RADIATED TEST RESULT(Worst modulation:GFSK)

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

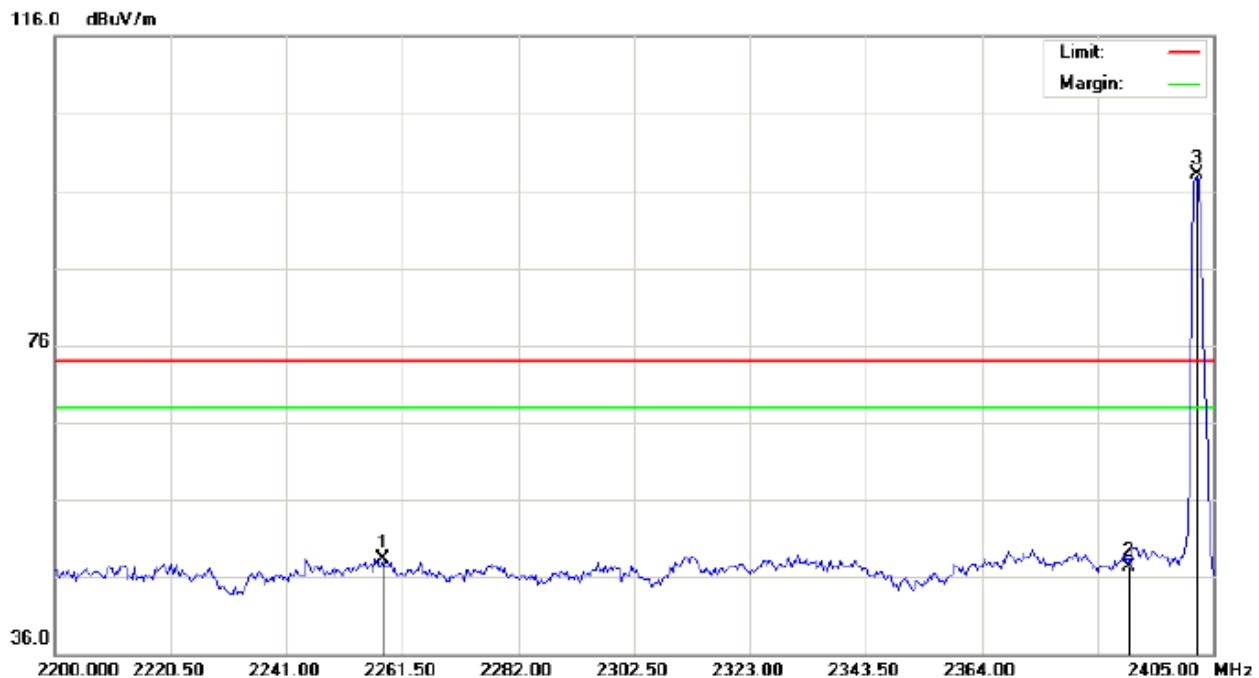

Site: site #1 Polarization: *Horizontal* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
 EUT:Turntable Distance:
 M/N:T1
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2258.083	38.20	10.16	48.36	74.00	-25.64	peak			
2		2390.000	37.00	10.31	47.31	74.00	-26.69	peak			
3	*	2402.000	87.72	10.32	98.04	74.00	24.04	peak			


TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical



Site: site #1	Polarization: Vertical	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT:Turntable	Distance:	
M/N:T1		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2252.958	41.01	10.16	51.17	74.00	-22.83	peak			
2		2390.000	38.21	10.31	48.52	74.00	-25.48	peak			
3	*	2402.000	87.59	10.32	97.91	74.00	23.91	peak			


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

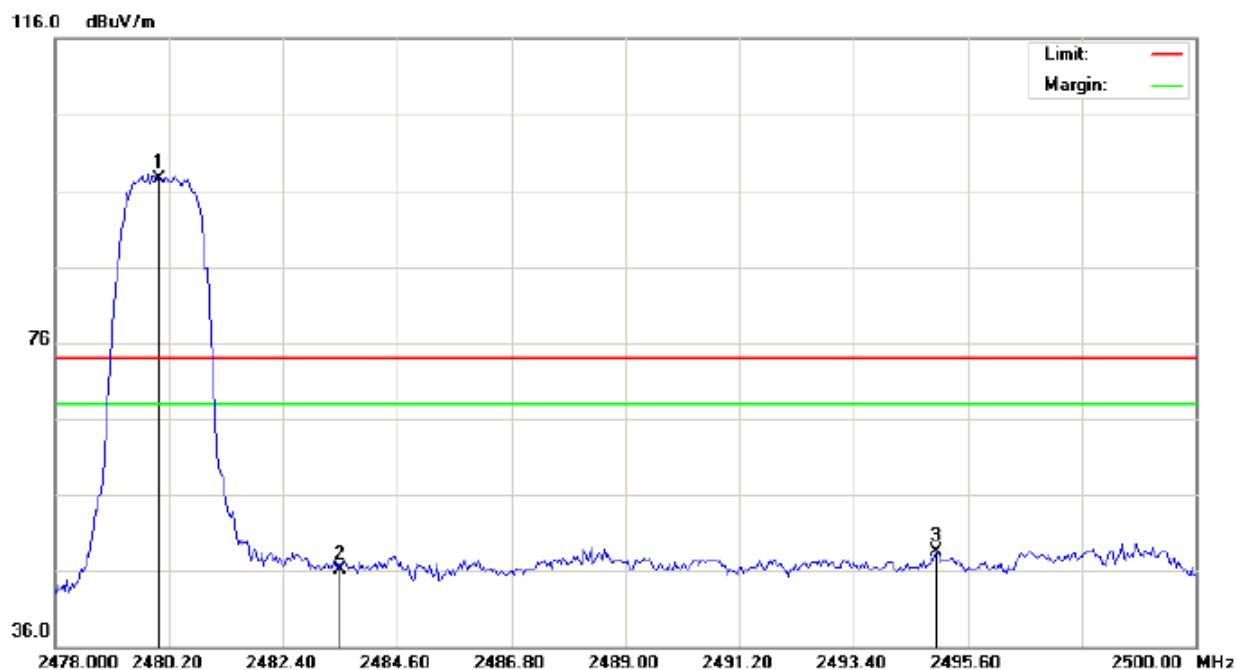

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT:Turntable	Distance:	
M/N:T1		
Mode: High Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	87.05	10.41	97.46	74.00	23.46	peak			
2		2483.500	35.69	10.41	46.10	74.00	-27.90	peak			
3		2495.013	38.03	10.42	48.45	74.00	-25.55	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

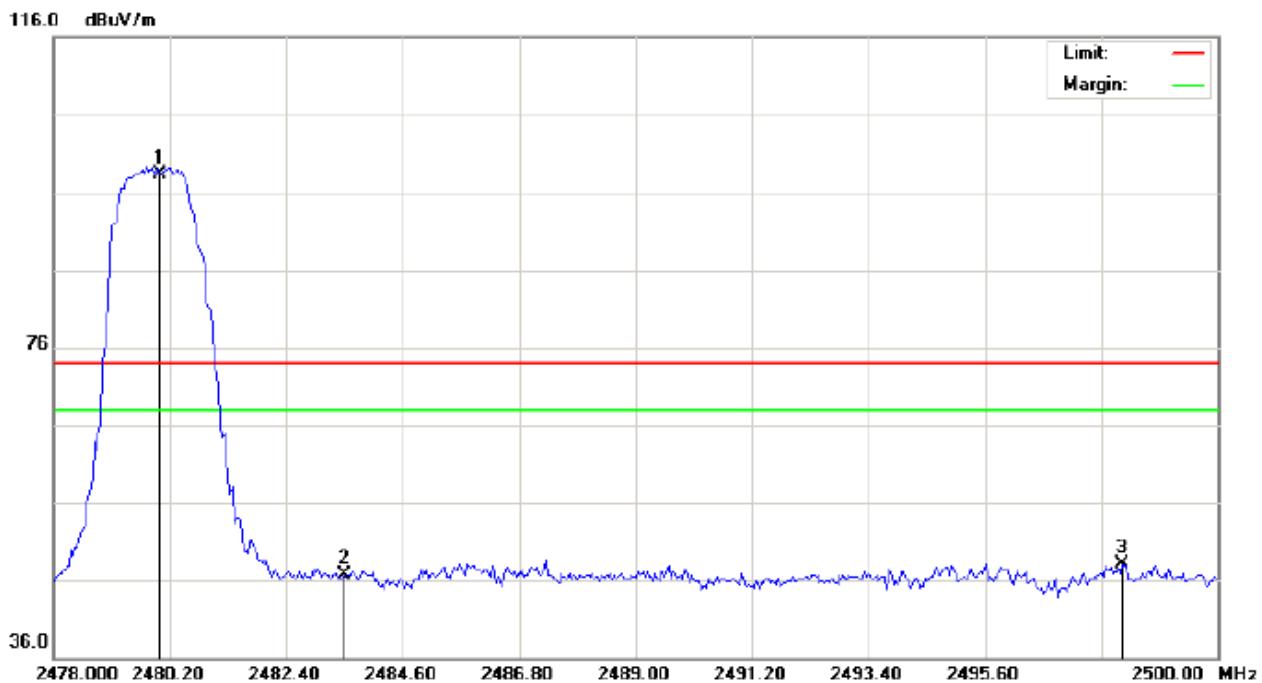

Site: site #1	Polarization: Vertical	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT:Turntable	Distance:	
M/N:T1		
Mode: High Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	87.82	10.41	98.23	74.00	24.23	peak			
2		2483.500	36.26	10.41	46.67	74.00	-27.33	peak			
3		2498.203	37.68	10.43	48.11	74.00	-25.89	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.


The "Factor" value can be calculated automatically by software of measurement system.

10. 20DB BANDWIDTH

10.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 $RBW \geq 1\%$ of the 20 dB bandwidth, $VBW \geq RBW$; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.


10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

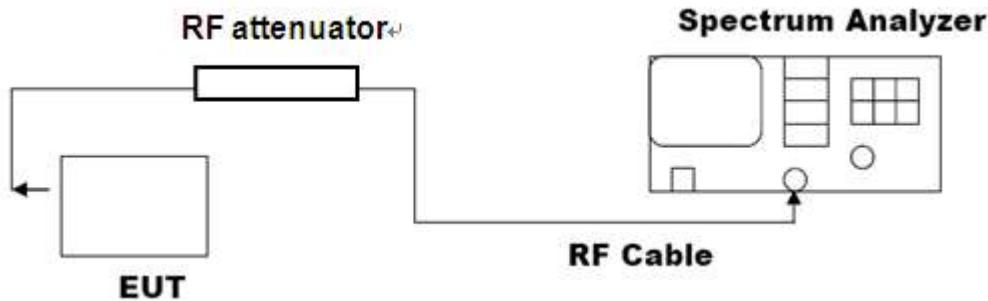

10.3. LIMITS AND MEASUREMENT RESULTS

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
N/A	Low Channel	0.840	PASS
	Middle Channel	0.816	PASS
	High Channel	0.867	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

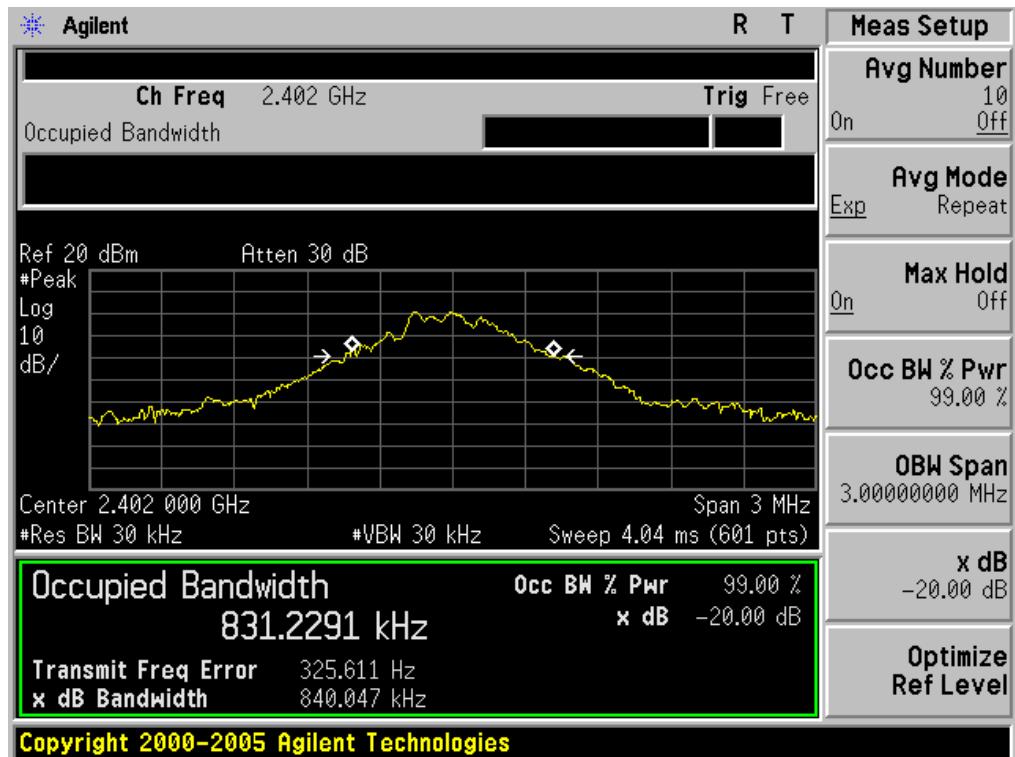

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL




TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

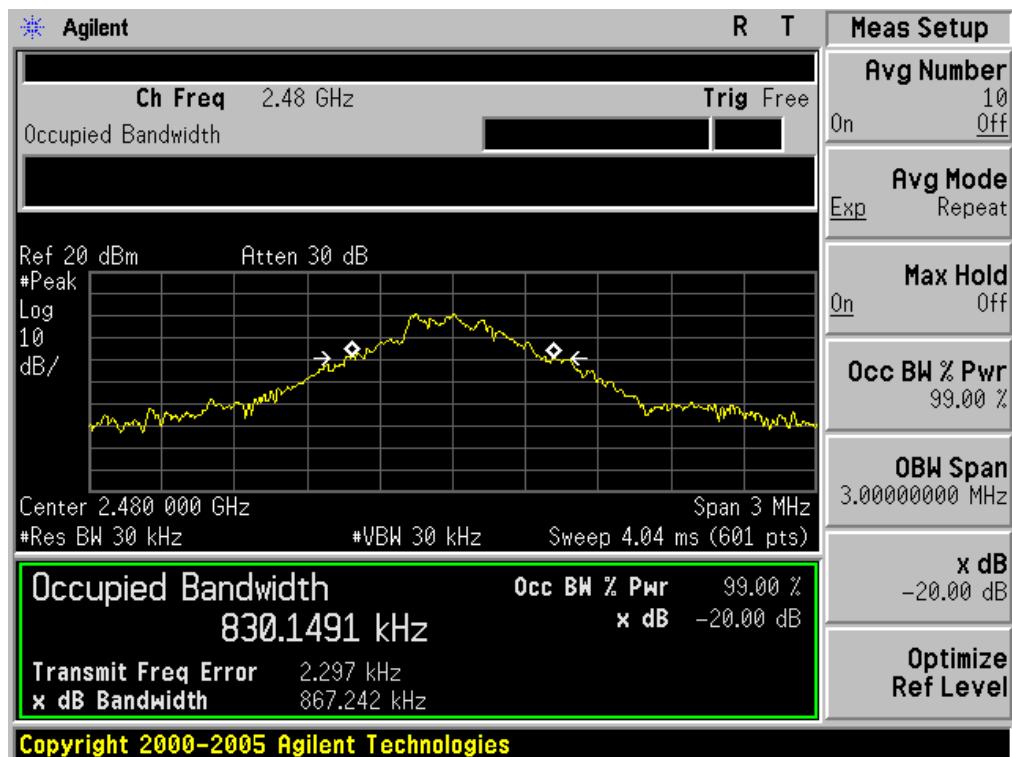


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.254	PASS
	Middle Channel	1.283	PASS
	High Channel	1.266	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

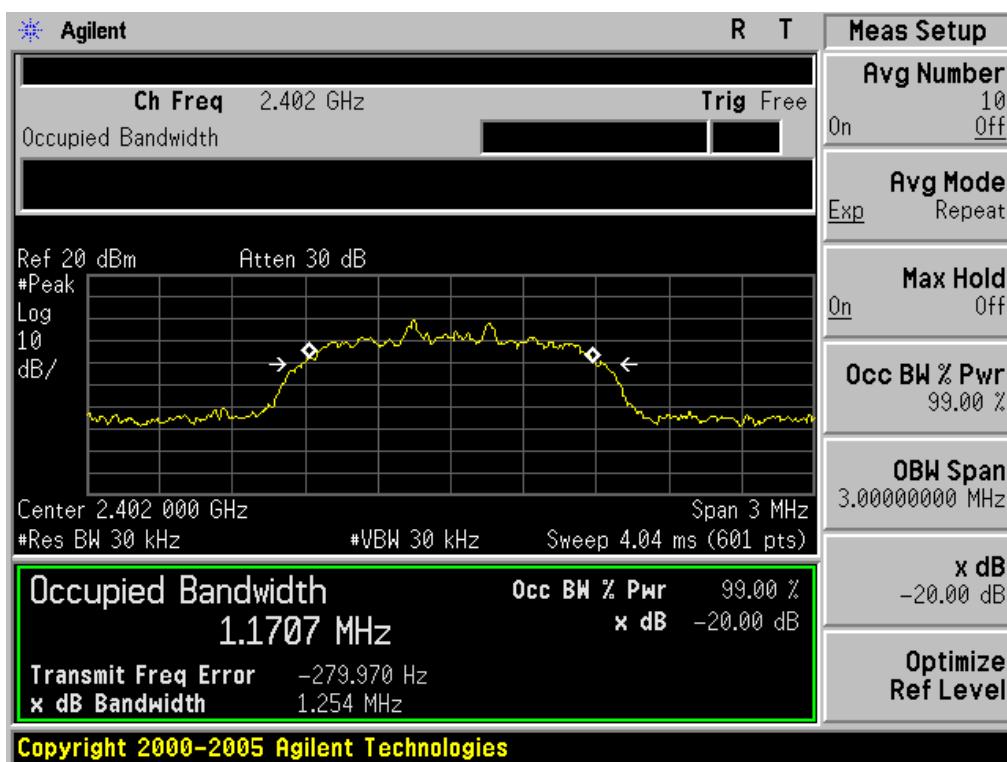

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

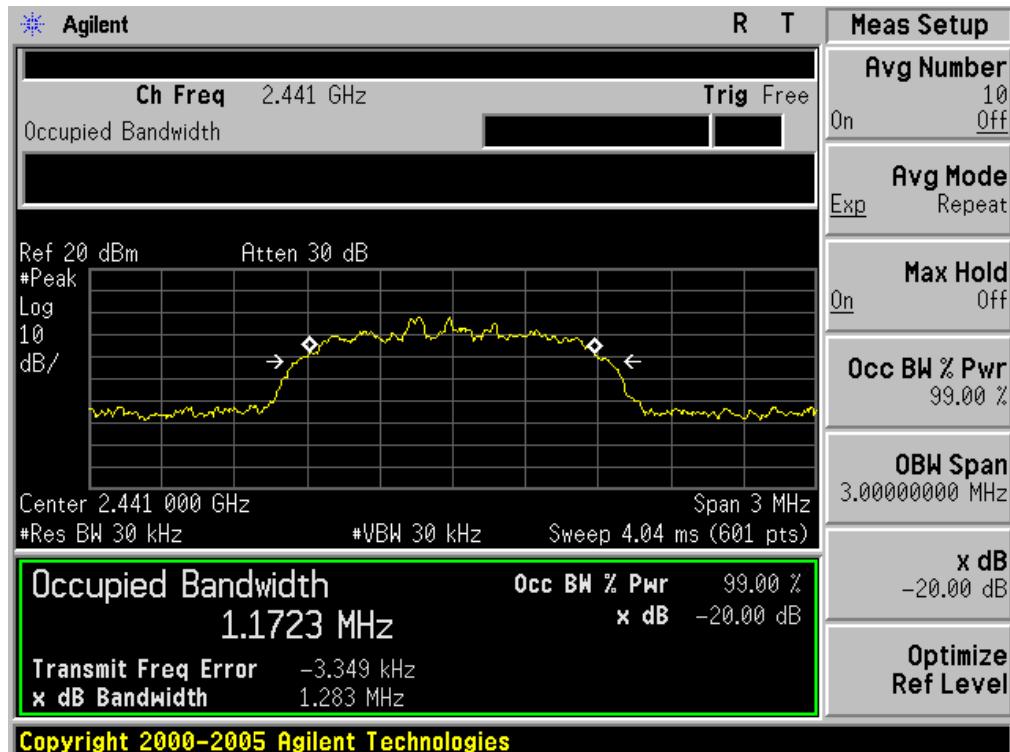


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

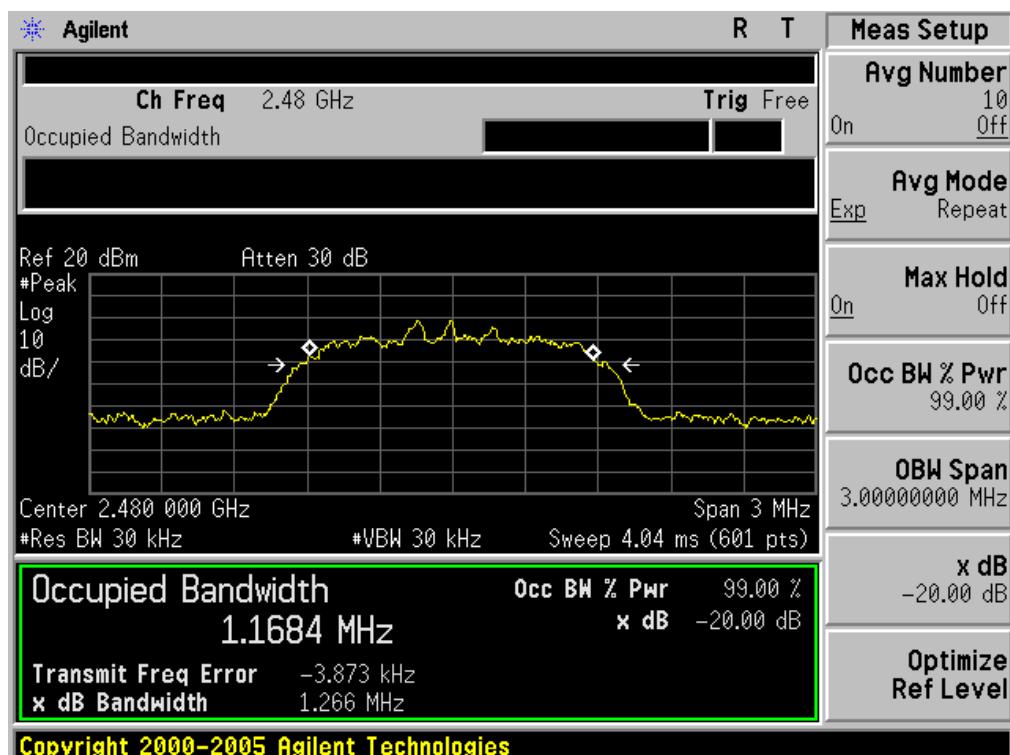


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT

Applicable Limits	Measurement Result	
	Test Data (MHz)	Criteria
N/A	Low Channel	1.264
	Middle Channel	1.264
	High Channel	1.255


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

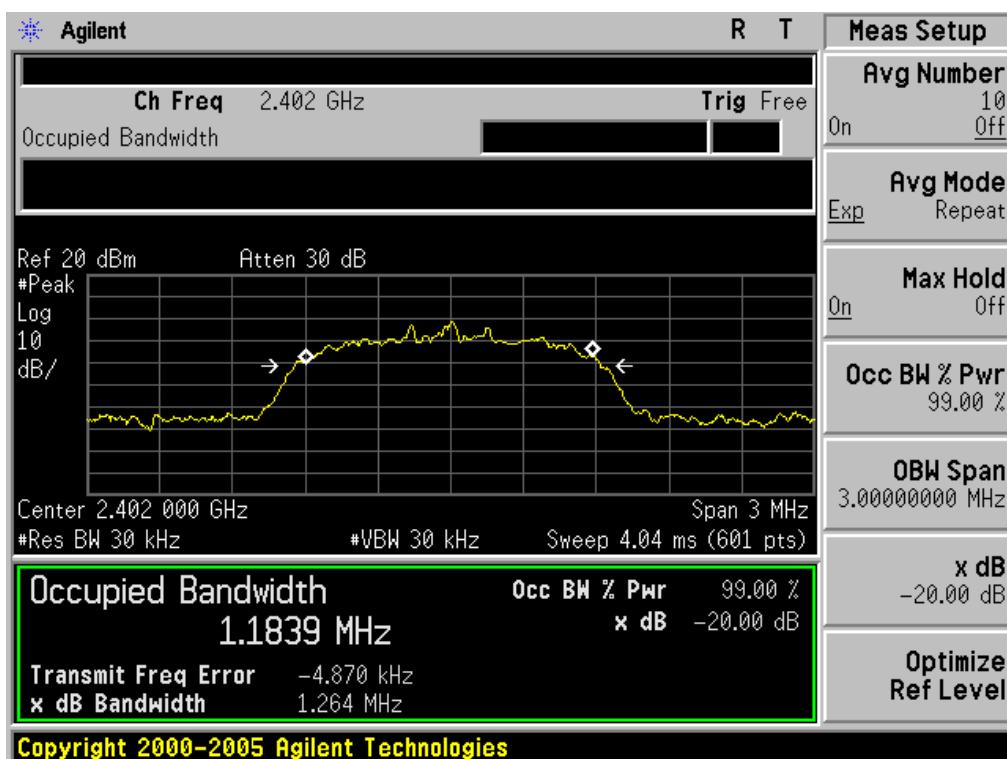

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

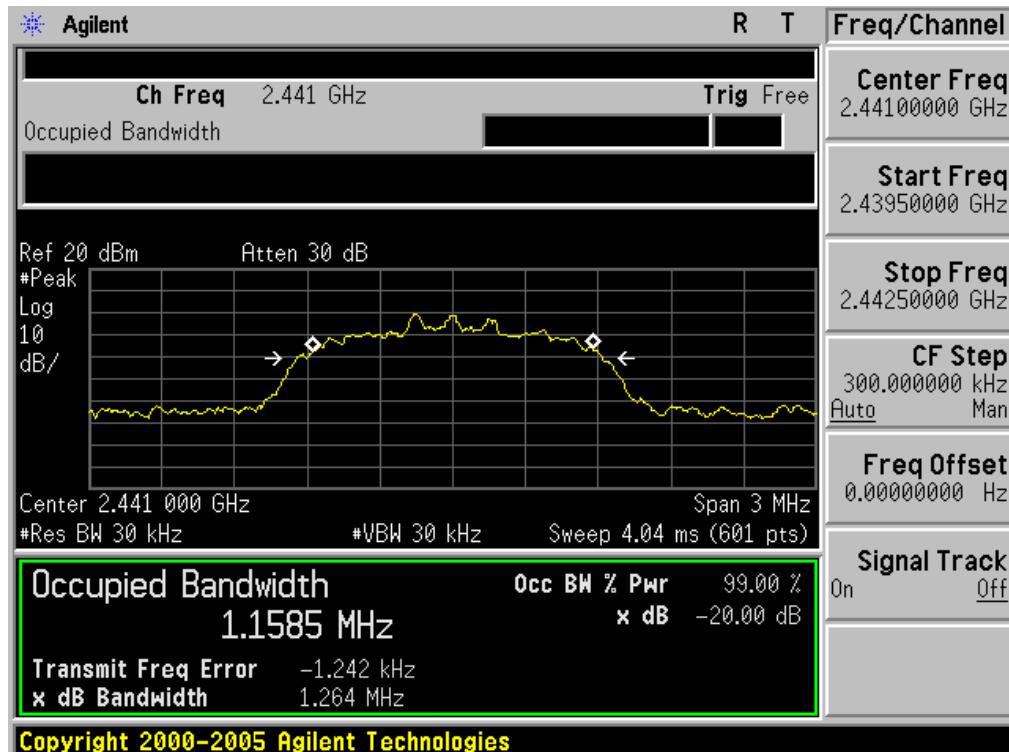

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

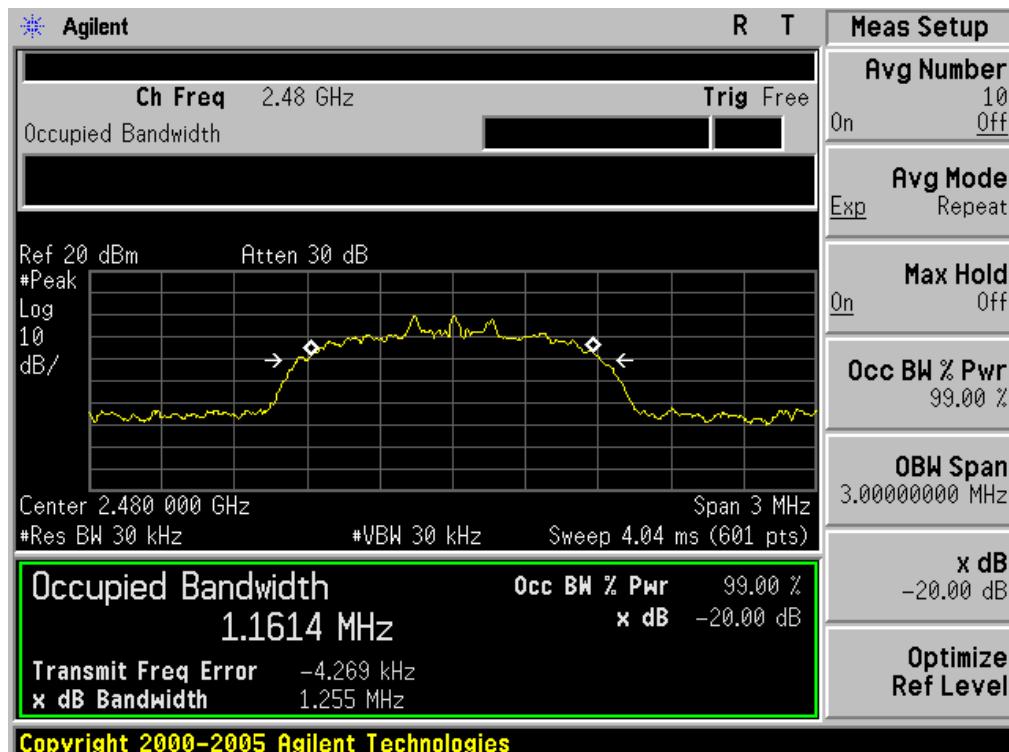

11. FCC LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

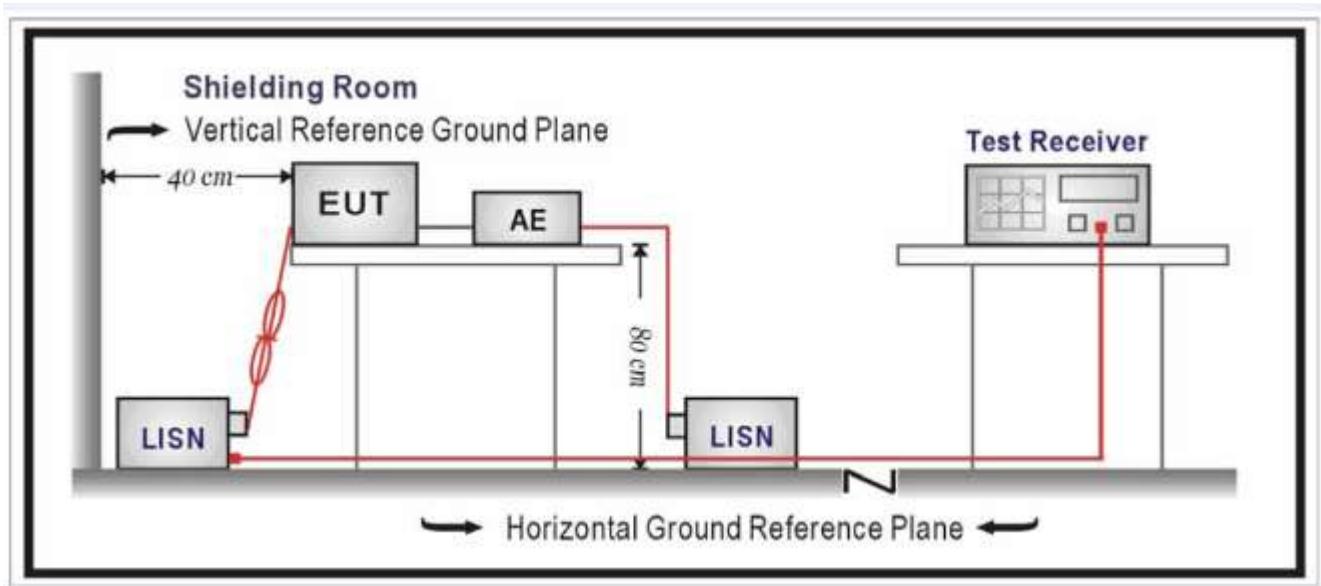

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by PC which received 120V/60Hzpower by a LISN..
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.


11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

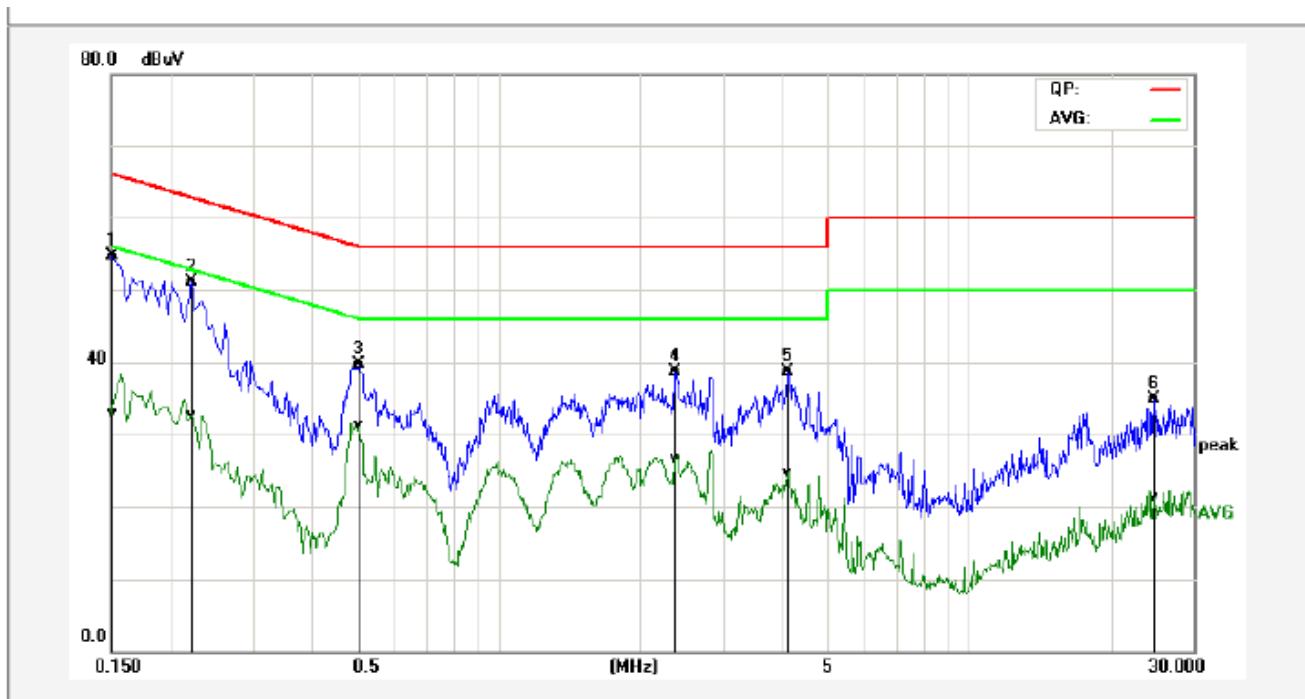

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.1500	45.03	23.39	9.58	54.61	32.97	65.99	56.00	-11.38	-23.03	Pass
2P	0.2220	41.47	22.99	9.69	51.16	32.68	62.74	52.74	-11.58	-20.06	Pass
3P	0.5060	29.94	21.61	9.68	39.62	31.29	56.00	46.00	-16.38	-14.71	Pass
4P	2.3740	29.05	17.06	9.73	38.78	26.79	56.00	46.00	-17.22	-19.21	Pass
5P	4.1180	28.94	15.00	9.70	38.64	24.70	56.00	46.00	-17.36	-21.30	Pass
6P	24.6940	25.01	11.37	9.89	34.90	21.26	60.00	50.00	-25.10	-28.74	Pass

Line Conducted Emission Test Line 2-N

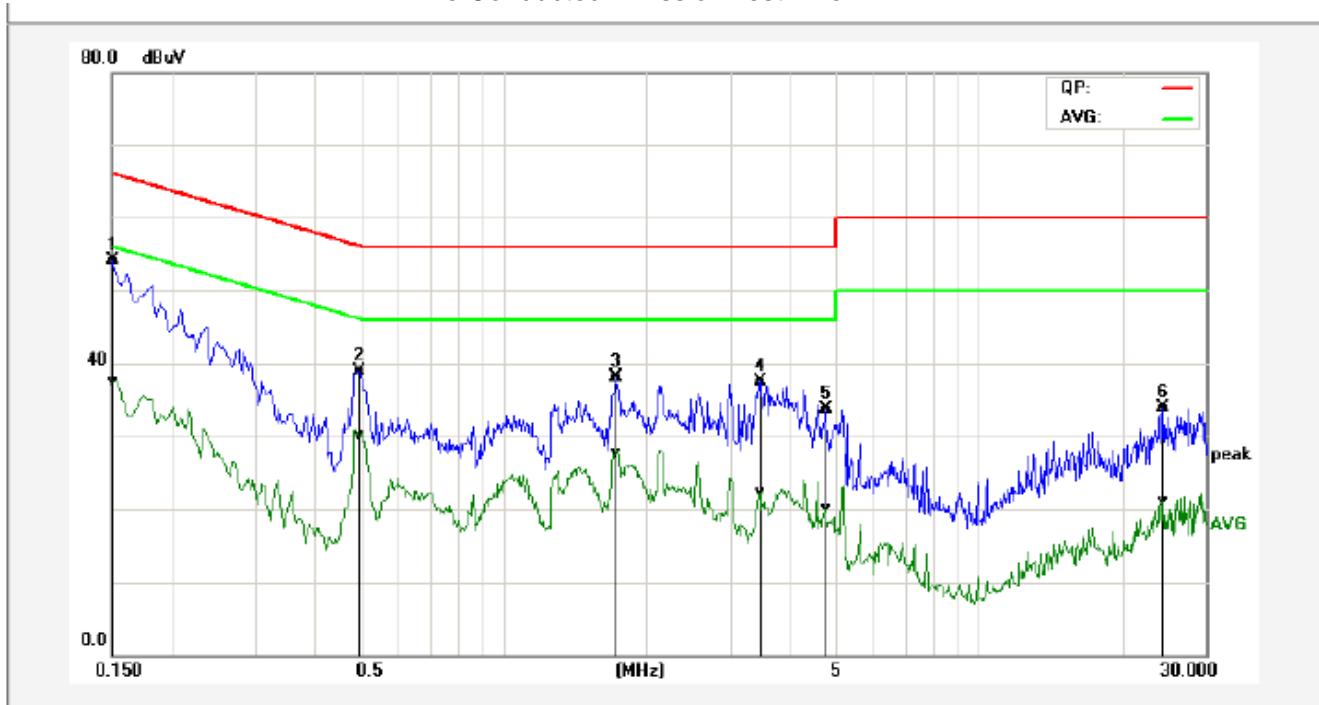

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.1500	44.36	27.78	9.78	54.14	37.56	65.99	56.00	-11.85	-18.44	Pass
2P	0.4980	29.24	20.48	9.68	38.92	30.16	56.03	46.03	-17.11	-15.87	Pass
3P	1.7180	28.33	17.97	9.75	38.08	27.72	56.00	46.00	-17.92	-18.28	Pass
4P	3.4580	27.66	12.49	9.75	37.41	22.24	56.00	46.00	-18.59	-23.76	Pass
5P	4.7580	23.94	10.30	9.78	33.72	20.08	56.00	46.00	-22.28	-25.92	Pass
6P	24.4619	24.18	11.23	9.78	33.96	21.01	60.00	50.00	-26.04	-28.99	Pass

APPENDIX A: PHOTOGRAPHS OF TEST SETUP


FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP



APPENDIX B: PHOTOGRAPHS OF EUT
TOTAL VIEW OF EUT

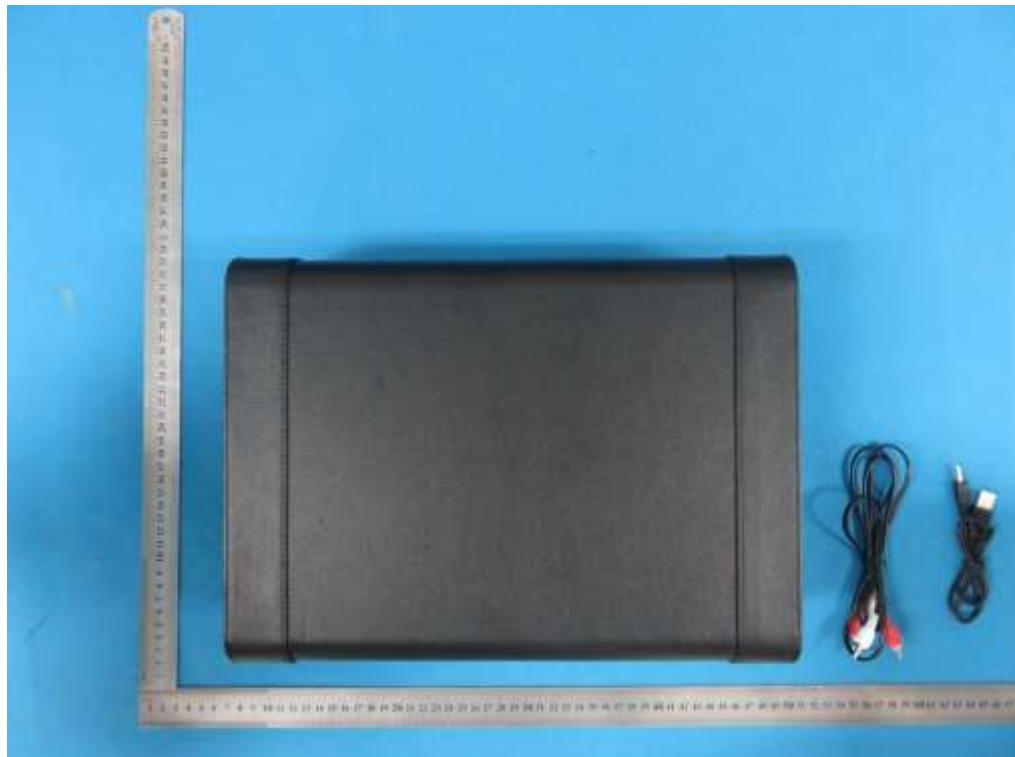

TOP VIEW OF EUT




BOTTOM VIEW OF EUT



FRONT VIEW OF EUT




BACK VIEW OF EUT

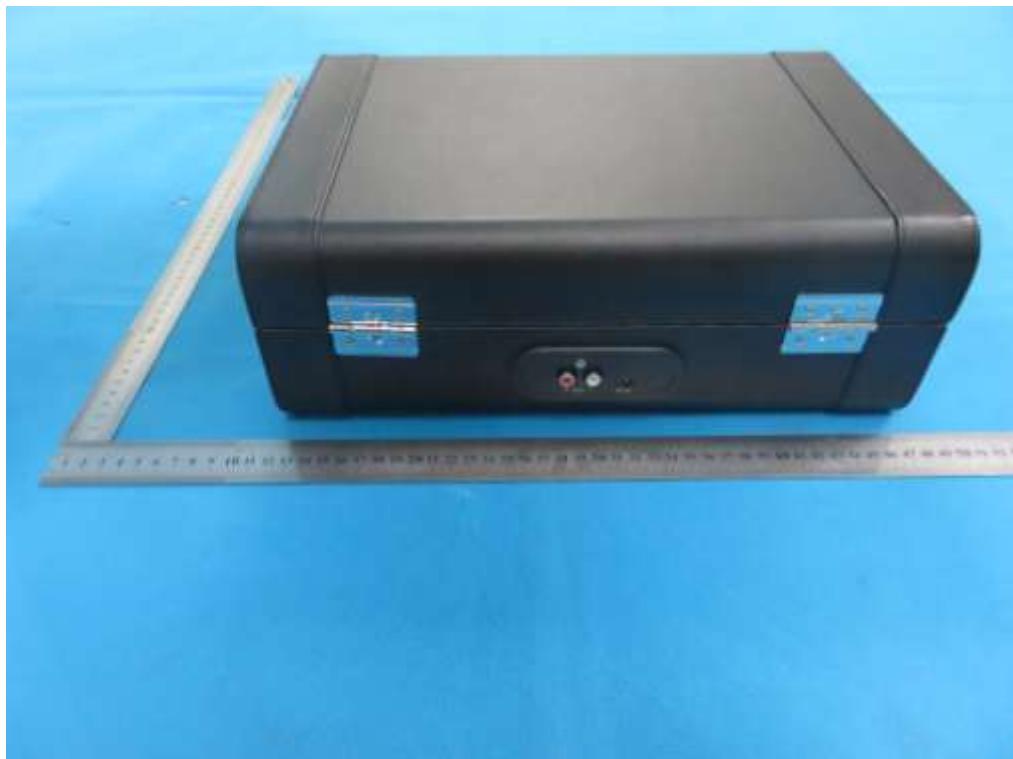

LEFT VIEW OF EUT




RIGHT VIEW OF EUT

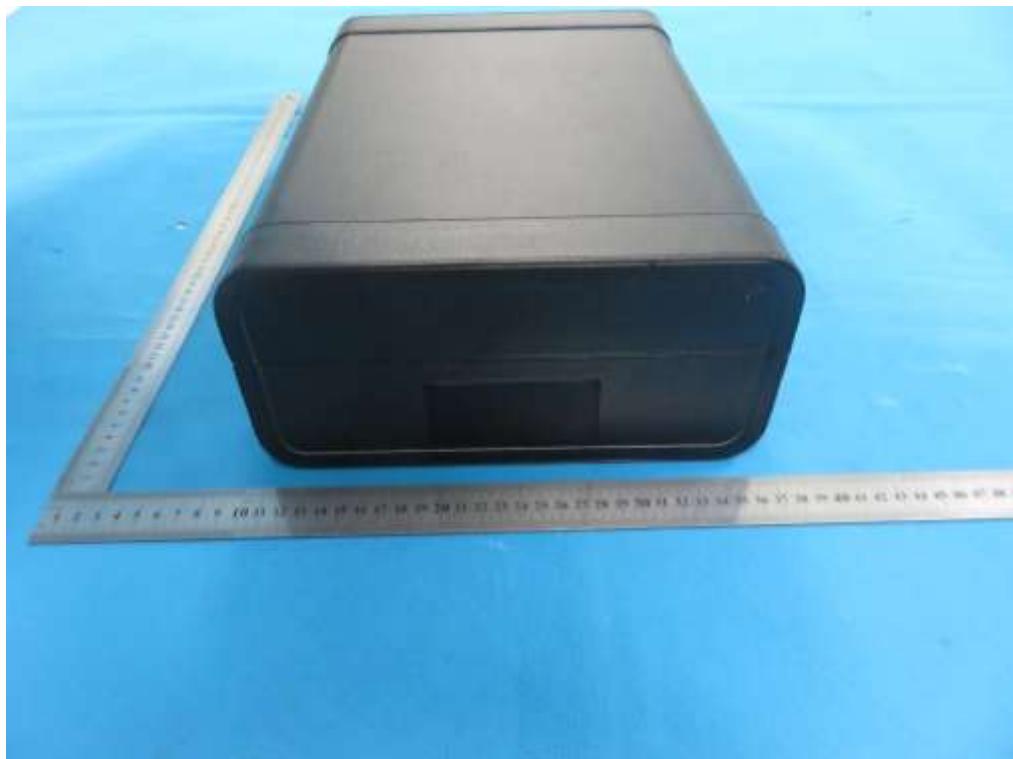

VIEW OF EUT (PORT)




OPEN VIEW OF EUT-1

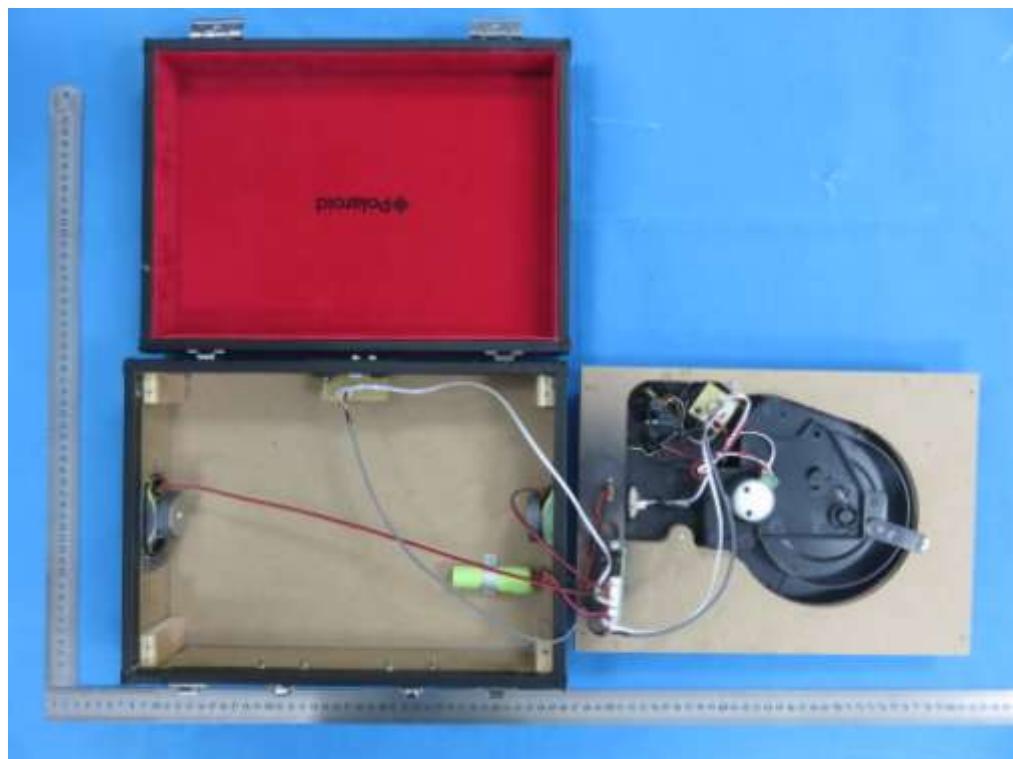


OPEN VIEW OF EUT-2




INTERNAL VIEW OF EUT-1

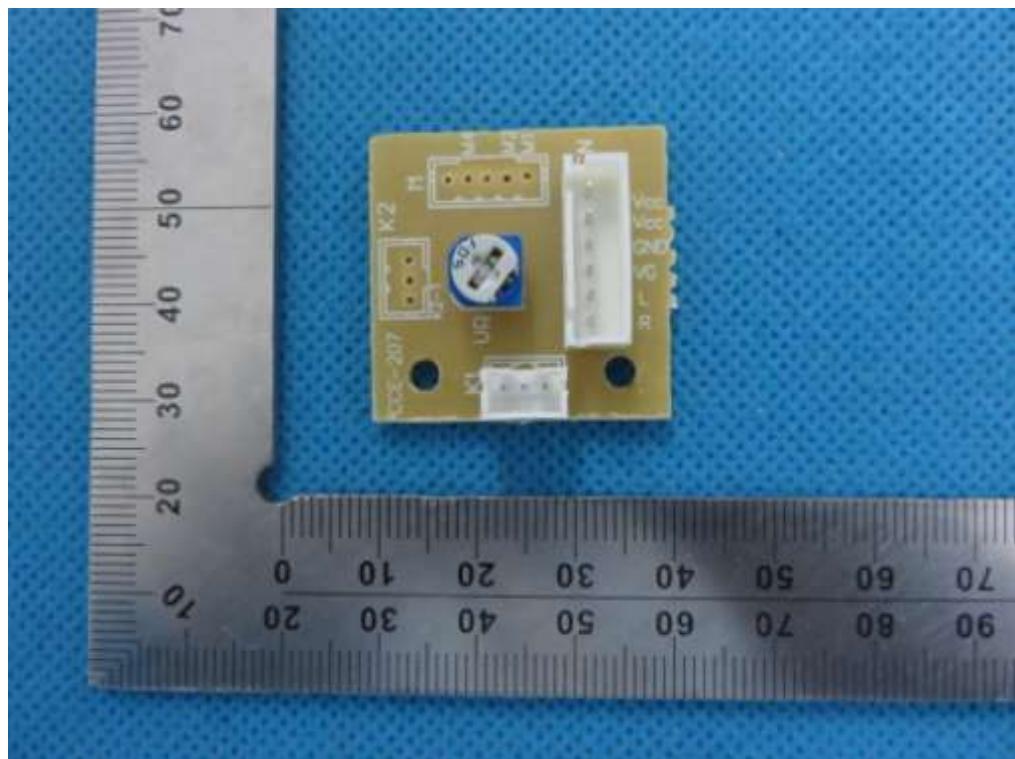


INTERNAL VIEW OF EUT-2

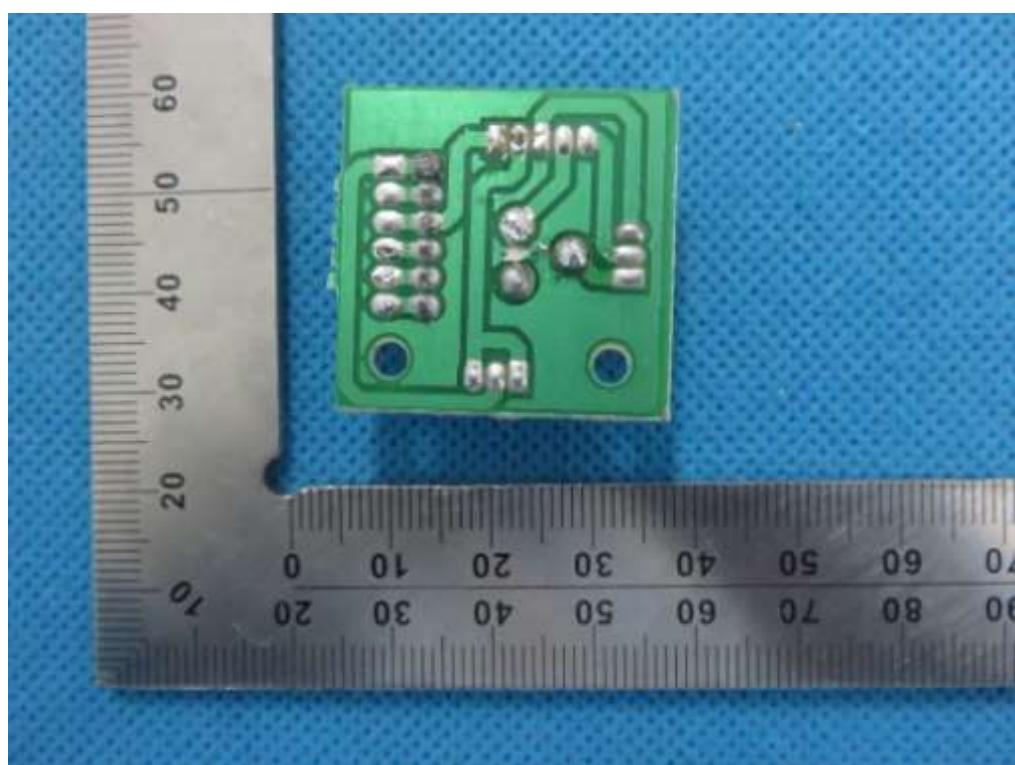


INTERNAL VIEW OF EUT-3

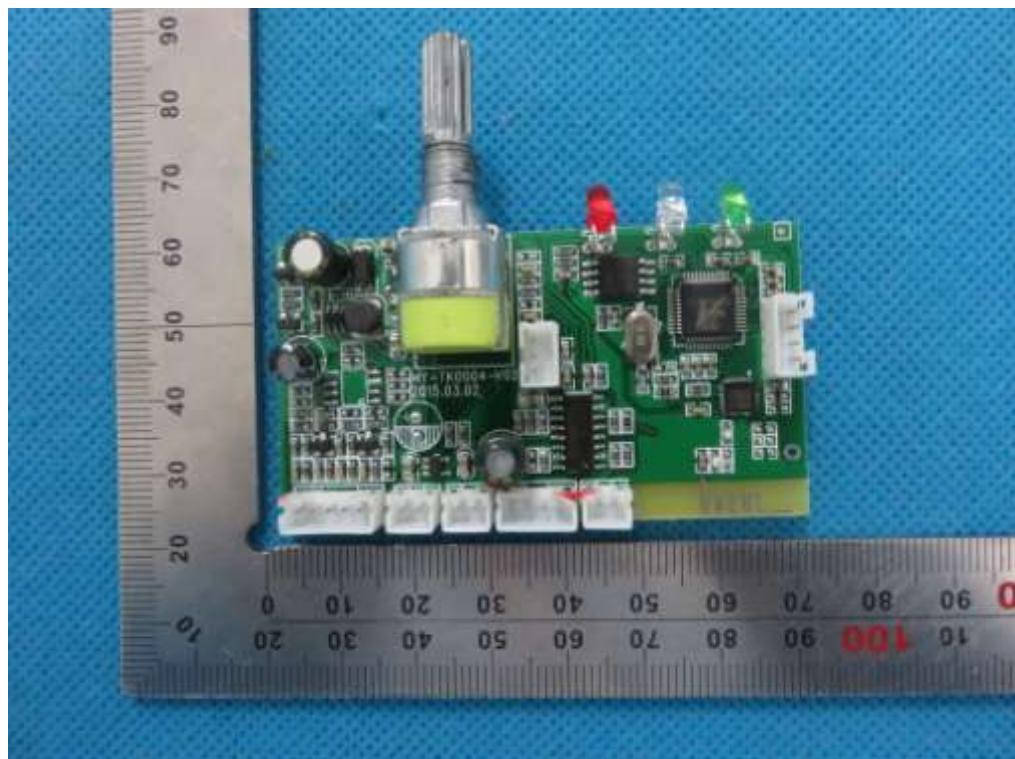


INTERNAL VIEW OF EUT-4

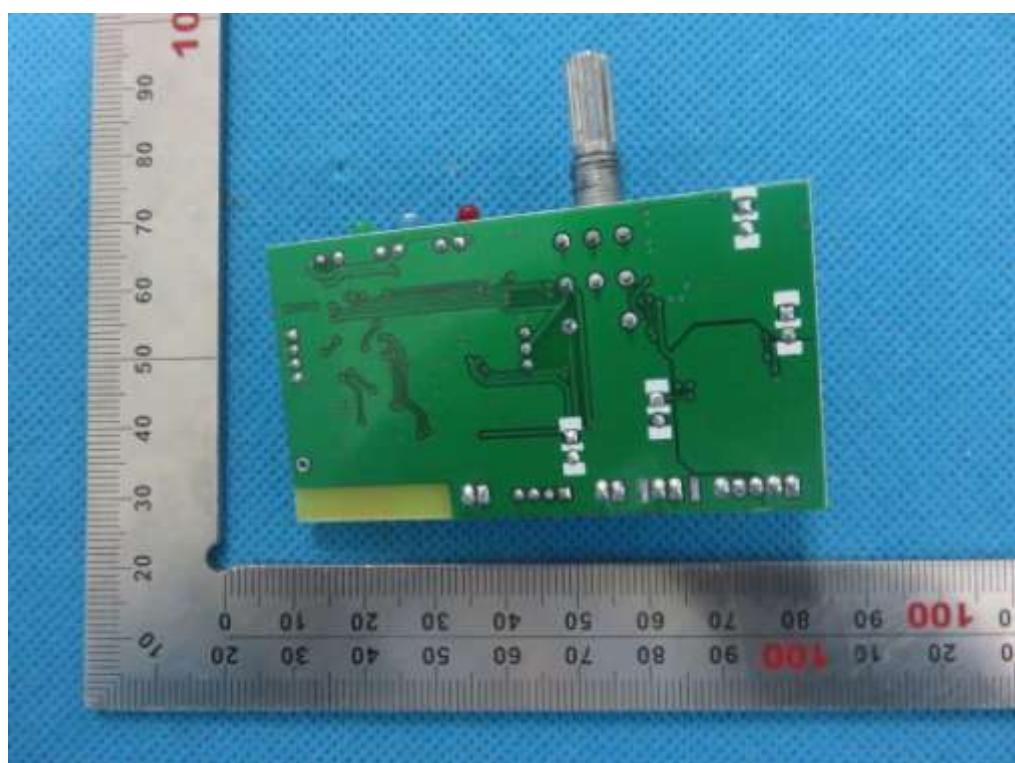


INTERNAL VIEW OF EUT-5

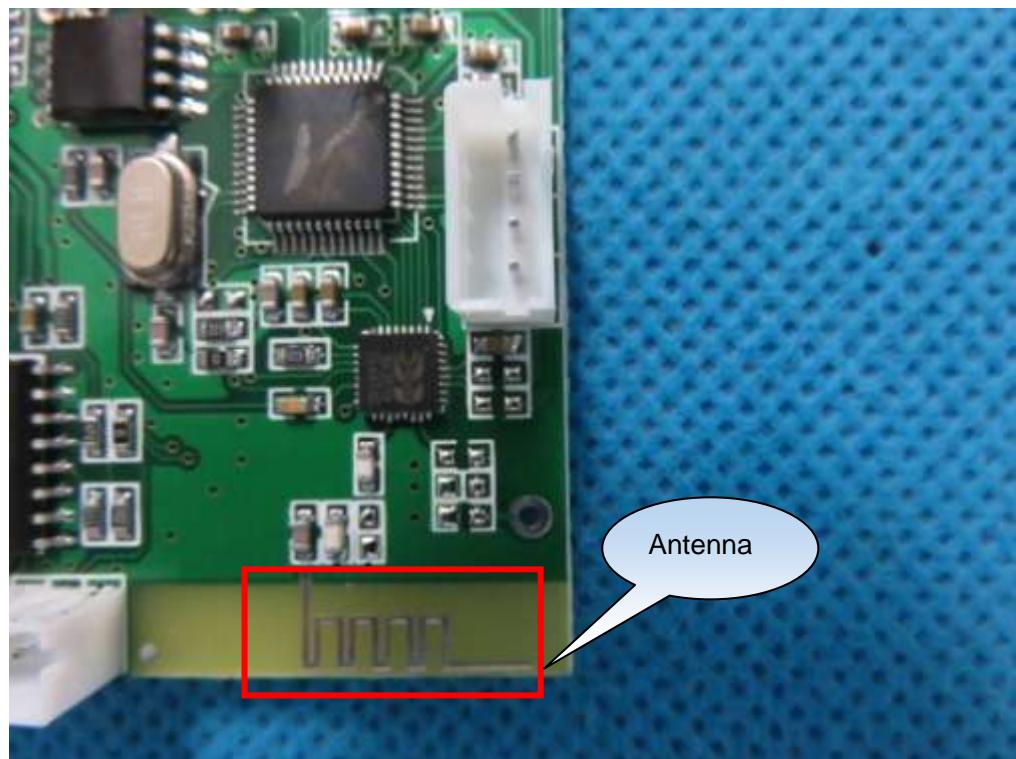


INTERNAL VIEW OF EUT-6

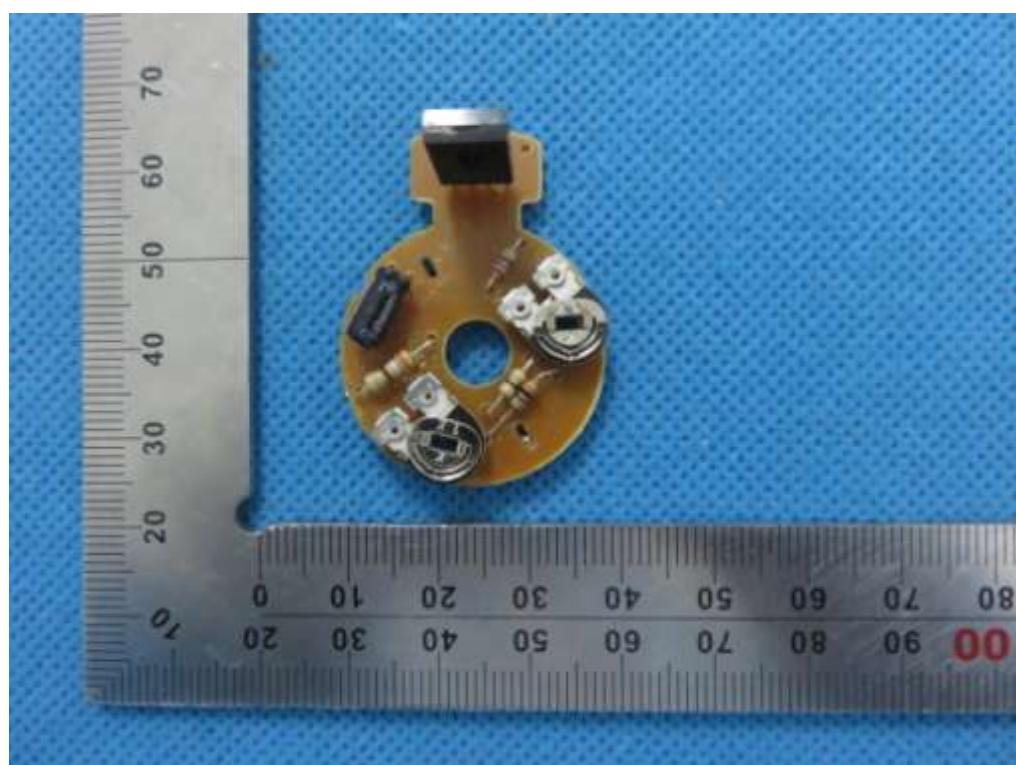


INTERNAL VIEW OF EUT-7

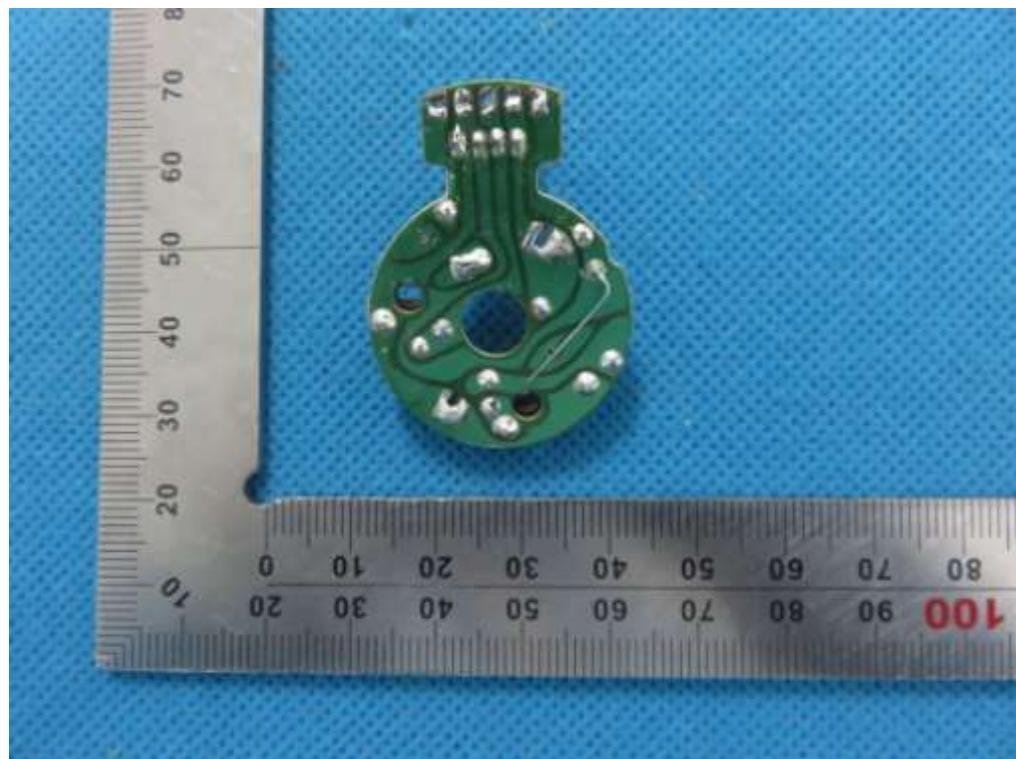

INTERNAL VIEW OF EUT-8

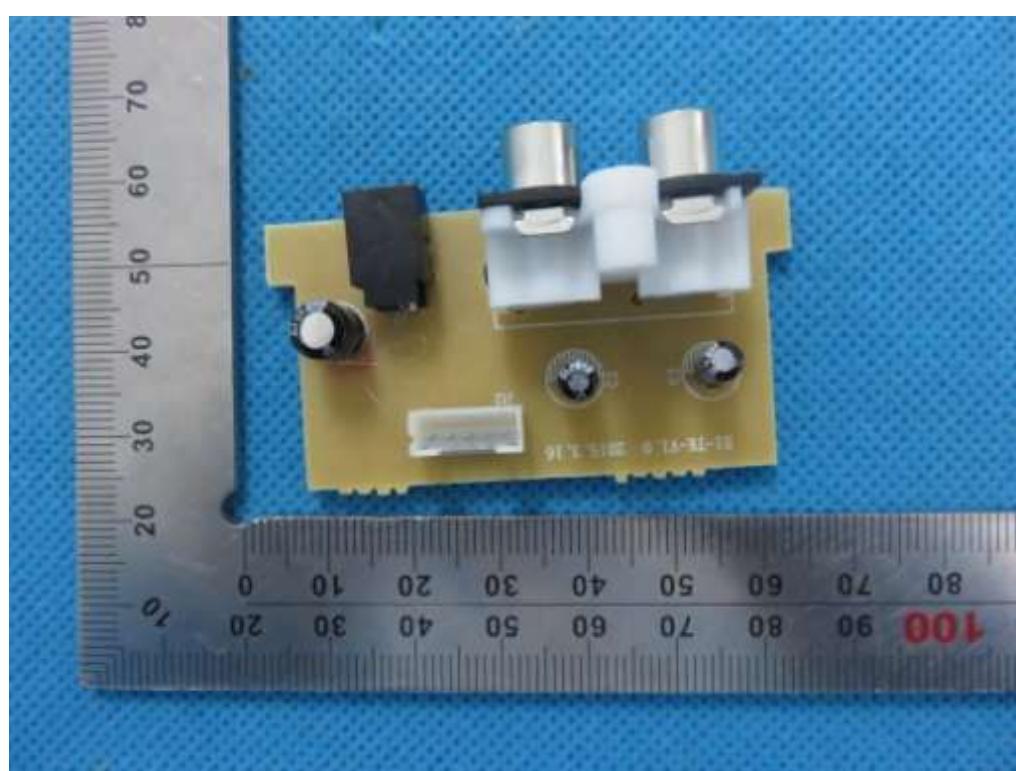

INTERNAL VIEW OF EUT-9

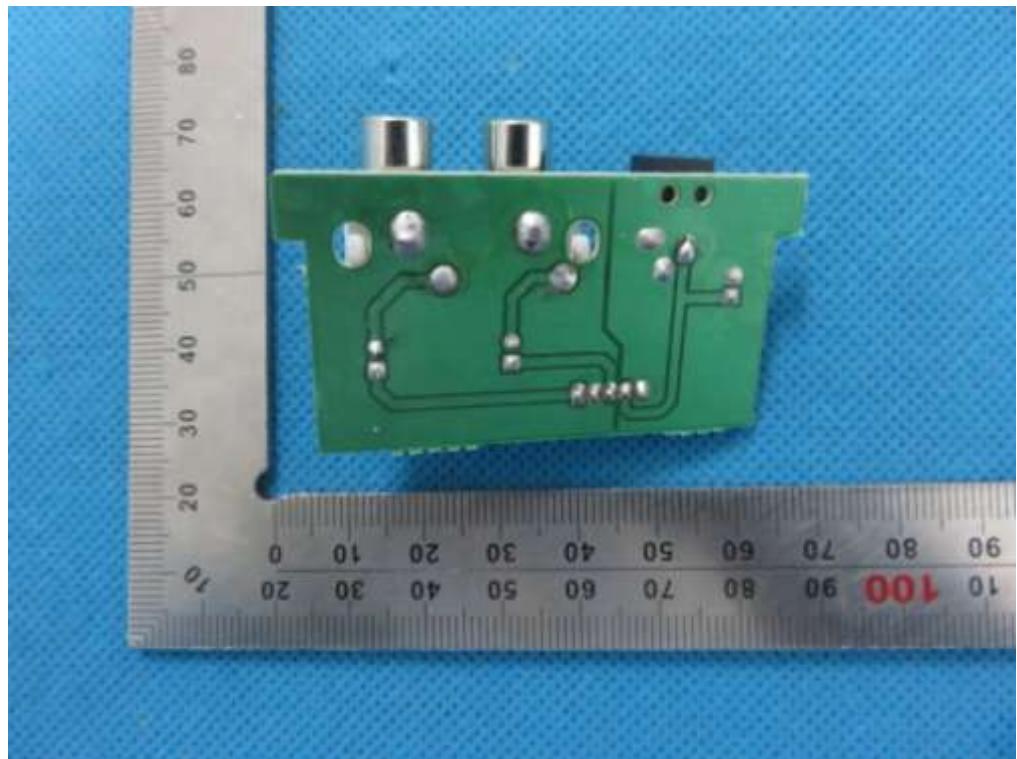

----END OF REPORT----