

# Test Report of FCC CFR 47 Part 15 Subpart C

On Behalf of

## SHENZHEN GONBES TECHNOLOGY CO.,LTD

**FCC ID:** 2ABME-K2

**Product Description:** Smart Sunglasses

**Model No.:** K2

**Supplementary Model:** N/A

**Brand Name:** Gonbes

**Prepared for:** SHENZHEN GONBES TECHNOLOGY CO.,LTD

Room 219, 2nd Floor, JianGong Building, No.5 LangShan Rd,  
Science Park, NanShan District, Shenzhen China

**Prepared by:** Shenzhen Bontek Compliance Testing Laboratory Co., Ltd.

1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East  
Road, Nanshan, Shenzhen, China

Tel: 86-755-86337020

Fax: 86-755-86337028

**Report No.:** BCT14KR362E

**Issue Date:** November 28, 2014

**Test Date:** November 22~28, 2014

**Tested by:**



Jiankai.Li

**Reviewed by:**



Lv yi

**Approved by:**



Owen Yang

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION..... 4**  
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... 4  
1.2 TEST STANDARDS ..... 5  
1.3 TEST FACILITY ..... 5

**2. SYSTEM TEST CONFIGURATION ..... 6**  
2.1 EUT CONFIGURATION ..... 6  
2.2 EUT EXERCISE..... 6  
2.3 GENERAL TEST PROCEDURES ..... 6  
2.4 MEASUREMENT UNCERTAINTY ..... 6  
2.5 LIST OF MEASURING EQUIPMENTS USED ..... 7

**3. SUMMARY OF TEST RESULTS..... 8**

**4. TEST OF AC POWER LINE CONDUCTED EMISSION ..... 9**  
4.1 APPLICABLE STANDARD ..... 9  
4.2 TEST SETUP DIAGRAM ..... 9  
4.3 TEST RESULT ..... 9

**5. TEST OF MAXIMUM PEAK OUTPUT POWER ..... 12**  
5.1 APPLICABLE STANDARD ..... 12  
5.2 EUT SETUP..... 12  
5.3 TEST EQUIPMENT LIST AND DETAILS ..... 12  
5.4 TEST PROCEDURE ..... 12  
5.5 TEST RESULT ..... 13

**6. TEST OF PEAK POWER SPECTRAL DENSITY ..... 16**  
6.1 APPLICABLE STANDARD ..... 16  
6.2 EUT SETUP..... 16  
6.3 TEST EQUIPMENT LIST AND DETAILS ..... 16  
6.4 TEST PROCEDURE ..... 16  
6.5 TEST RESULT ..... 16

**7. TEST OF 6DB BANDWIDTH..... 19**  
7.1 APPLICABLE STANDARD ..... 19  
7.2 EUT SETUP..... 19  
7.3 TEST EQUIPMENT LIST AND DETAILS ..... 19  
7.4 TEST PROCEDURE ..... 19  
7.5 TEST RESULT ..... 19

**8. TEST OF CONDUCTED SPURIOUS EMISSION..... 22**  
8.1 APPLICABLE STANDARD ..... 22  
8.2 EUT SETUP..... 22  
8.3 TEST EQUIPMENT LIST AND DETAILS ..... 22  
8.4 TEST PROCEDURE ..... 22  
8.5 TEST RESULT ..... 22

**9. TEST OF RADIATED SPURIOUS EMISSION ..... 25**  
9.1 RADIATED SPURIOUS EMISSION ..... 25  
9.1.1 LIMITS ..... 25  
9.1.2 EUT SETUP..... 26  
9.1.3 TEST PROCEDURE ..... 27  
9.1.4 TEST RESULT ..... 27

**10. TEST OF BAND EDGES EMISSION..... 38**  
10.1 APPLICABLE STANDARD ..... 38  
10.2 EUT SETUP..... 38  
10.3 TEST EQUIPMENT LIST AND DETAILS ..... 38  
10.4 TEST PROCEDURE ..... 38  
10.5 TEST RESULT ..... 39

**11. ANTENNA REQUIREMENT ..... 41**

11.1 STANDARD APPLICABLE ..... 41  
11.2 ANTENNA CONNECTED CONSTRUCTION ..... 41

# 1. GENERAL INFORMATION

## 1.1 Product Description for Equipment Under Test (EUT)

### Client Information

Applicant:	<b>SHENZHEN GONBES TECHNOLOGY CO.,LTD</b>
Address of Applicant:	Room 219, 2nd Floor, JianGong Building, No.5 LangShan Rd, Science Park, NanShan District, Shenzhen China
Manufacturer:	<b>SHENZHEN GONBES TECHNOLOGY CO.,LTD</b>
Address of Manufacturer:	Room 219, 2nd Floor, JianGong Building, No.5 LangShan Rd, Science Park, NanShan District, Shenzhen China

### General Description of E.U.T

Items	Description
EUT Description:	Smart Sunglasses
Model No.:	K2
Trade Name:	Gonbes
Supplementary Model:	N/A
BT Module	CSR 4.0
Frequency Band:	2402~2480MHz
Number of Channels:	40
Type of Modulation:	Only GFSK Modulation technology
Antenna Gain	0 dBi
Antenna Type:	Integral Antenna
Rated Voltage:	DC 5V for USB, DC 3.7V from Battery

\* The data gathered are from the production sample provided by the manufacturer.

## **1.2 Test standards**

The tests were performed based on the Electromagnetic Interference (EMI) tests performed on the EUT. Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 – 2009 Radiated testing was performed at an antenna to EUT distance 3 meters.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.207, 15.209 and 15.247 rules and the FCC publication KDB558074 of Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247).

## **1.3 Test Facility**

All measurement required was performed at laboratory of Shenzhen CTL Testing Technology Co., Ltd. at Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055.

The test facility is recognized, certified, or accredited by the following organizations:

### **FCC – Registration No.: 970318**

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December, 2013.

## 2. SYstEM TEST CONFIGURATION

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

Support equipments or special accessories in test configuration:

AUX Description:	Manufacturer	Model No.	Certificate	CABLE
Adapter	Nikon	EH-69P	FCC,CE	N/A

### 2.3 General Test Procedures

**Conducted Emissions:**The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

**Radiated Emissions:** The EUT is a placed on as turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

### 2.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

## 2.5 List of Measuring Equipments Used

Test equipments list of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd.

No.	Instrument no.	Equipment	Manufacturer	Model No.	S/N	Last Calculator	Due Calculator
1	BCT-EMC001	EMI Test Receiver	R&S	ESCI	100687	2014-4-25	2015-4-24
2	BCT-EMC002	EMI Test Receiver	R&S	ESPI	100097	2014-11-1	2015-10-31
3	BCT-EMC003	Amplifier	HP	8447D	1937A02492	2014-4-25	2015-4-24
4	BCT-EMC018	TRILOG Broadband Test- Antenna	SCHWARZBECK	VULB9163	9163-324	2014-4-25	2015-4-24
5	BCT-EMC021	Triple-Loop Antenna	EVERFINE	LLA-2	711002	2014-11-1	2015-10-31
6	BCT-EMC026	RF POWER AMPLIFIER	FRANKONIA	FLL-75	1020A1109	2014-4-25	2015-4-24
7	BCT-EMC029	6DB Attenuator	FRANKONIA	N/A	1001698	2014-4-25	2015-4-24
8	BCT-EMC032	10dB attenuator	ELECTRO- METRICS	EM-7600	836	2014-4-25	2015-4-24
9	BCT-EMC036	Spectrum Analyzer	R&S	FSP	100397	2014-11-1	2015-10-31
10	BCT-EMC037	Broadband preamplifier	SCH WARZBECK	BBV9718	9718-182	2014-4-25	2015-4-24
11	BCT-EMC039	Horn Antenna	SCHWARZBECK	BBHA 9120D	0437	2014-4-25	2015-4-24
12	BCT-EMC038	Horn Antenna	SCHWARZBECK	BBHA9170	0483	2014-4-5	2015-4-4

### 3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207	AC Power Line Conducted Emission	Pass
FCC §15.247(b)	Maximum Peak Output Power	Pass
FCC §15.247(e)	Power Spectral Density	Pass
FCC §15.247(a)	6dB Bandwidth	Pass
FCC §15.247 (d)	Conducted Spurious Emission	Pass
FCC §15.205 and §15.209	Radiated Spurious Emission	Pass
FCC §15.203/15.247(b)/(c)	Antenna Requirement	Pass



## 4. Test OF AC POWER LINE CONDUCTED EMISSION


### 4.1 Applicable standard

Refer to FCC §15.207.

For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits ( dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

### 4.2 Test Setup Diagram

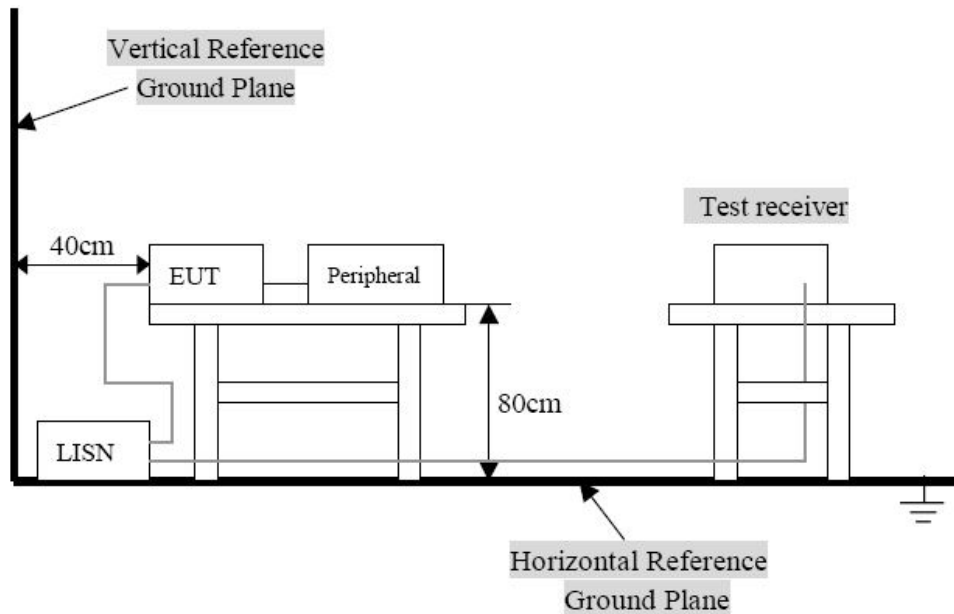

Remark: The EUT was connected to a 120 VAC/ 60Hz power source.


### 4.3 Test Result

Temperature ( °C ) : 23~25	EUT: Smart Sunglasses
Humidity (%RH) : 45~58	M/N: K2
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Charging with Tx Mode

**Conducted Emission:**

EUT: Smart Sunglasses  
 M/N: K2  
 Operating Condition: Charging with Tx Mode  
 Test Site: Shielded Room  
 Operator: Yang  
 Test Specification: AC 120V/60Hz for adapter  
 Comment: L Line

**SCAN TABLE: "Voltage (9K-30M)"**  
 Short Description: 150K-30M Voltage

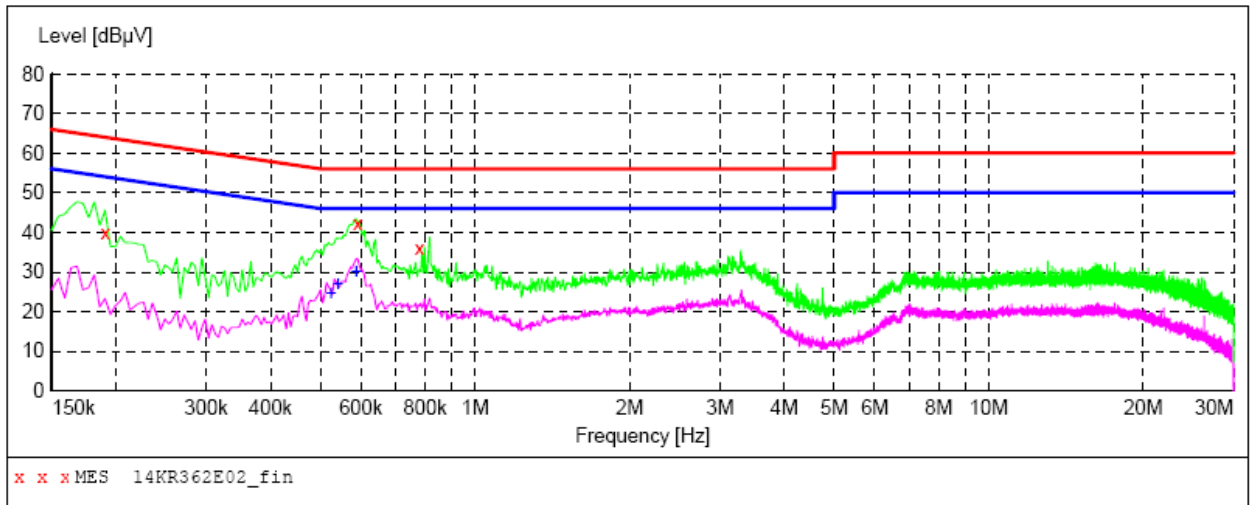

**MEASUREMENT RESULT: "14KR362E02\_fin"**

11/20/2014 19:36

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.190500	39.80	11.7	64	24.2	PK	L1	GND
0.591000	42.20	10.4	56	13.8	PK	L1	GND
0.780000	35.90	10.4	56	20.1	PK	L1	GND

**MEASUREMENT RESULT: "14KR362E02\_fin2"**

11/20/2014 19:36


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.523500	24.60	10.5	46	21.4	AV	L1	GND
0.541500	27.00	10.5	46	19.0	AV	L1	GND
0.586500	30.30	10.4	46	15.7	AV	L1	GND

**Conducted Emission:**

EUT: Smart Sunglasses  
M/N: K2  
Operating Condition: Charging with Tx Mode  
Test Site: Shielded Room  
Operator: Yang  
Test Specification: AC 120V/60Hz for adapter  
Comment: N Line

**SCAN TABLE: "Voltage (9K-30M)"**

Short Description: 150K-30M Voltage

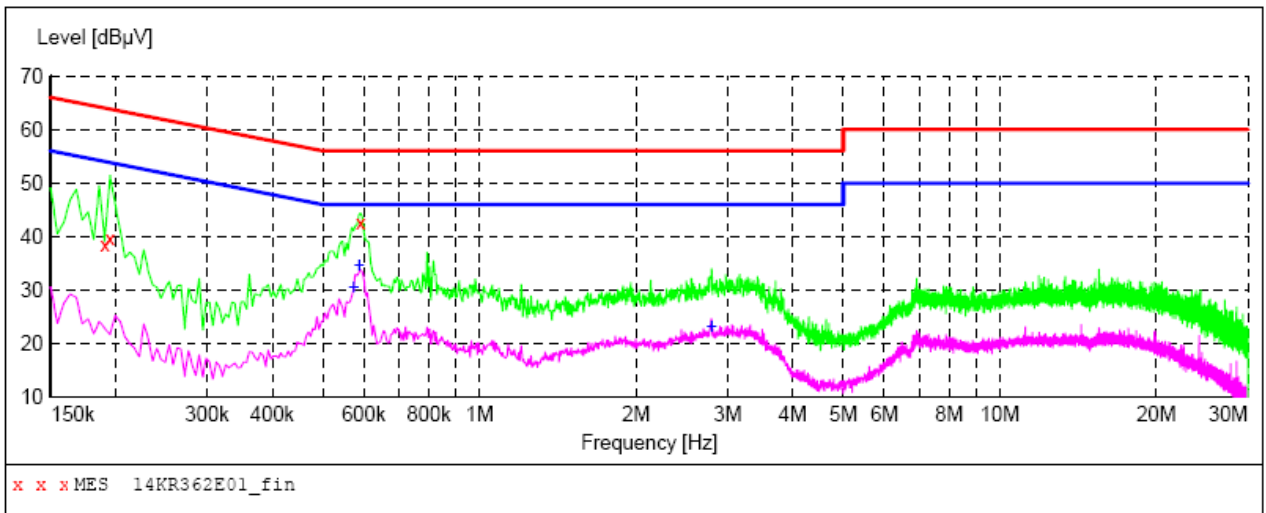

**MEASUREMENT RESULT: "14KR362E01\_fin"**

11/20/2014 19:32

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.190500	38.40	11.7	64	25.6	PK	N	GND
0.195000	39.80	11.5	64	24.0	PK	N	GND
0.591000	42.60	10.4	56	13.4	PK	N	GND

**MEASUREMENT RESULT: "14KR362E01\_fin2"**

11/20/2014 19:32


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.573000	30.50	10.4	46	15.5	AV	N	GND
0.586500	34.70	10.4	46	11.3	AV	N	GND
2.796000	23.20	10.4	46	22.8	AV	N	GND

## 5. Test of Maximum Peak Output Power

### 5.1 Applicable standard

Refer to FCC §15.247 (b)

### 5.2 EUT Setup

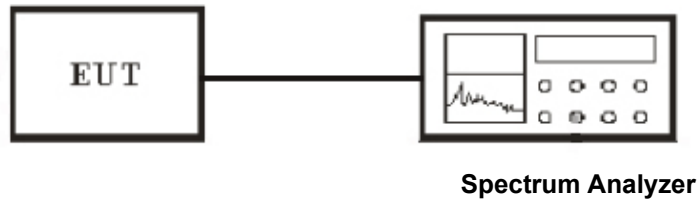

### 5.3 Test Equipment List and Details

See section 2.5.

### 5.4 Test Procedure

This procedure should only be used when the maximum available RBW of the spectrum/signal analyzer is less than the DTS bandwidth. The transmitter output was connected to a spectrum analyzer and the parameter was set as below:

1. Set the RBW = maximum available (at least 1 MHz).
2. Set the VBW = 3 x RBW or maximum available setting (must be  $\geq$  RBW).
3. Set the span to fully encompass the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the spectrum analyzer's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some analyzers, this may require a manual override to ensure use of peak detector). If the spectrum analyzer does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

## 5.5 Test Result

Temperature ( °C ) : 22~23	EUT: Smart Sunglasses
Humidity (%RH) : 50~54	M/N: K2
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2402	1.216	-5.15	30	PASS
Middle	2440	1.216	-4.63	30	PASS
High	2480	1.216	-5.66	30	PASS


NOTE : 1. At final test to get the emission at LE mode.



### MAXIMUM PEAK OUTPUT POWER ( LE MODE CH High)



1 PK  
MAXH

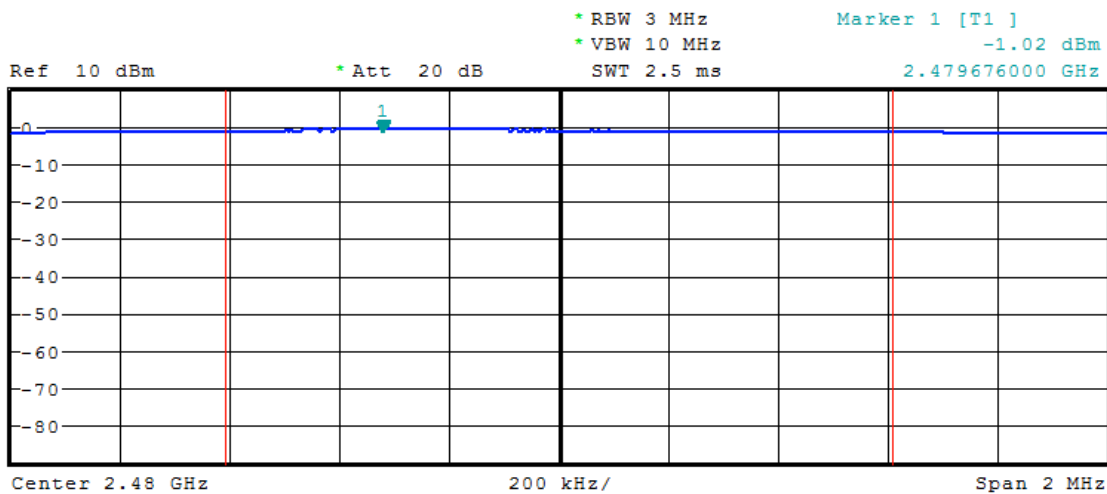

Tx Channel      Bandwidth      1.216 MHz      Power      -5.66 dBm


## 6. Test of Peak Power Spectral Density

### 6.1 Applicable standard

Refer to FCC §15.247 (e).

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 6.2 EUT Setup

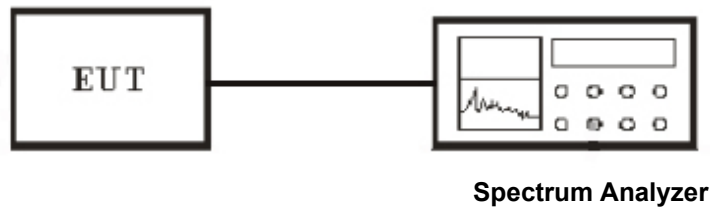

### 6.3 Test Equipment List and Details

See section 2.5.

### 6.4 Test Procedure

The transmitter output was connected to the spectrum analyzer and the parameter was set as below:

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW  $\geq$  3 kHz.
4. Set the VBW  $\geq$  3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 6.5 Test Result


Temperature ( °C ) : 22~23	EUT: Smart Sunglasses
Humidity (%RH) : 50~54	M/N: K2
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode




Channel	Channel Frequency (MHz)	RF Power Level in 100KHz RBW (dBm)	Correct Factor 100KHz to 3KHz (dB)	Final RF Power Level in 3KHz RBW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2402	-1.27	-15.22	-16.49	8	PASS
Middle	2440	-0.82	-15.22	-16.04	8	PASS
High	2480	-1.63	-15.22	-16.85	8	PASS

NOTE : 1. At final test to get the emission at LE mode.


### POWER SPECTRAL DENSITY ( LE MODE CH Low)

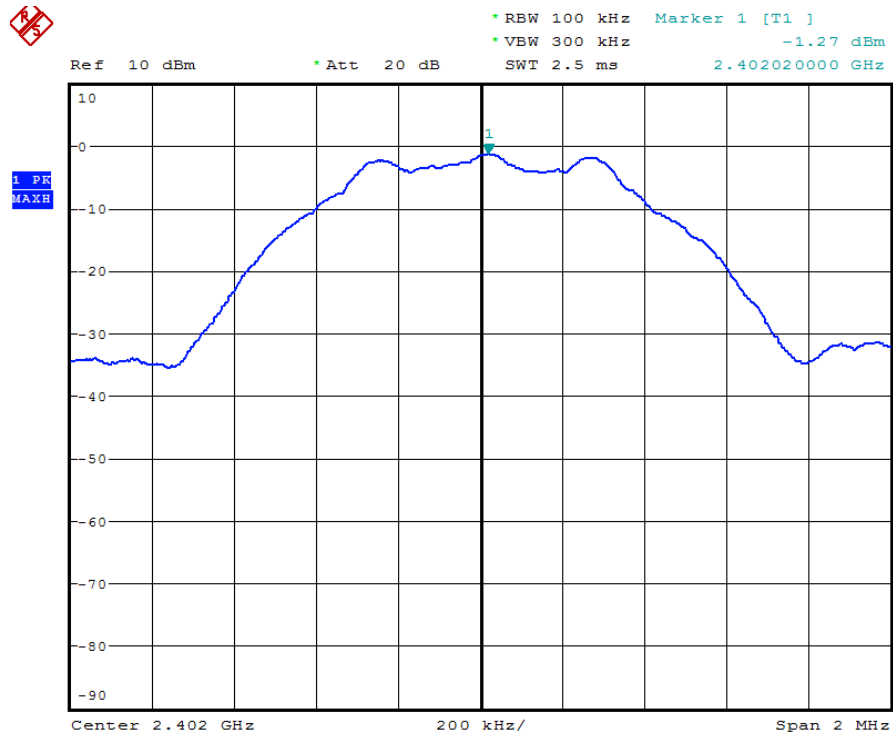

### POWER SPECTRAL DENSITY ( LE MODE CH Mid)

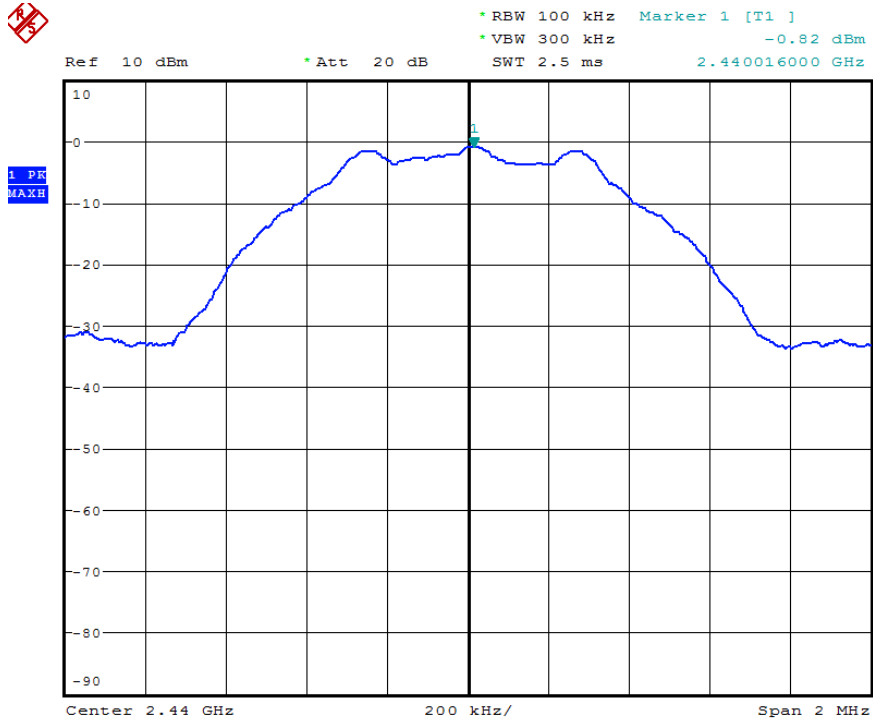

### POWER SPECTRAL DENSITY ( LE MODE CH High)

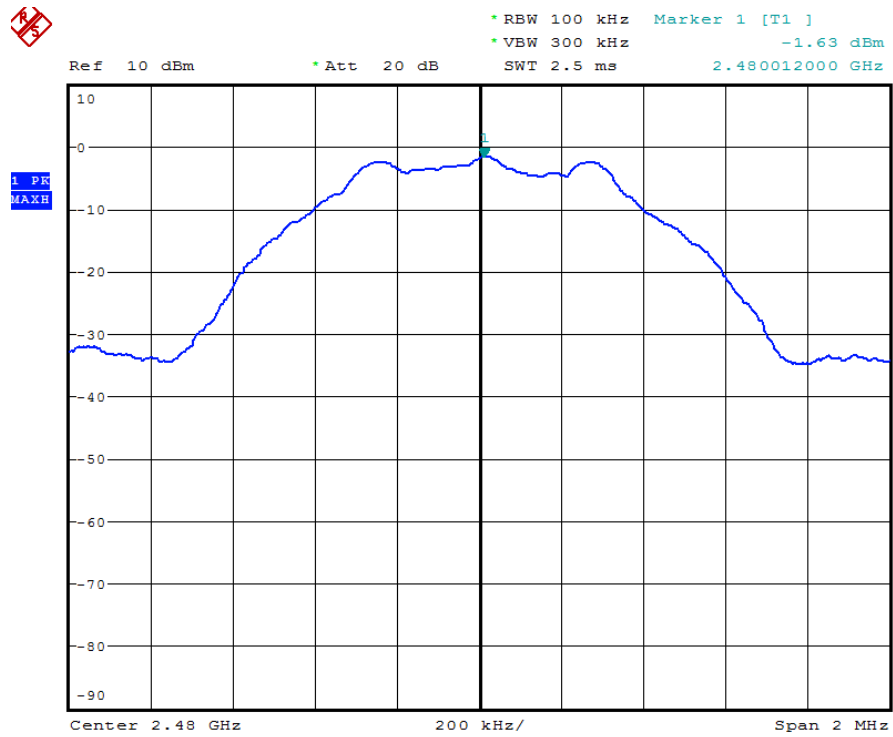


## 7. Test of 6dB Bandwidth

### 7.1 Applicable standard

Refer to FCC §15.247 (a) (2) .

The minimum 6 dB bandwidth shall be at least 500 kHz.

### 7.2 EUT Setup

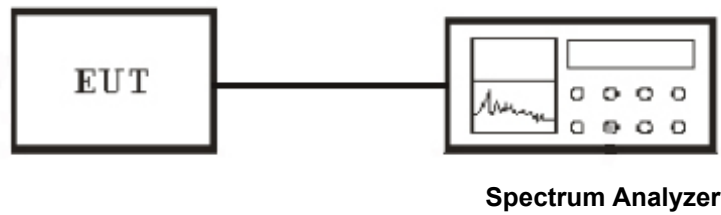

### 7.3 Test Equipment List and Details

See section 2.5.

### 7.4 Test Procedure

The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB. The transmitter output was connected to a spectrum analyzer and the parameter was set as below:

1. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


### 7.5 Test Result

Temperature ( °C ) : 22~23	EUT: Smart Sunglasses
Humidity (%RH) : 50~54	M/N: K2
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode


Channel	Channel Frequency (MHz)	6dB Bandwidth (KHz)	Minimum Limit (kHz)	Pass / Fail
Low	2402	712	500	PASS
Middle	2440	712	500	PASS
High	2480	704	500	PASS

NOTE : 1. At final test to get the emission at LE mode.


### 6dB BANDWIDTH ( LE MODE CH Low)

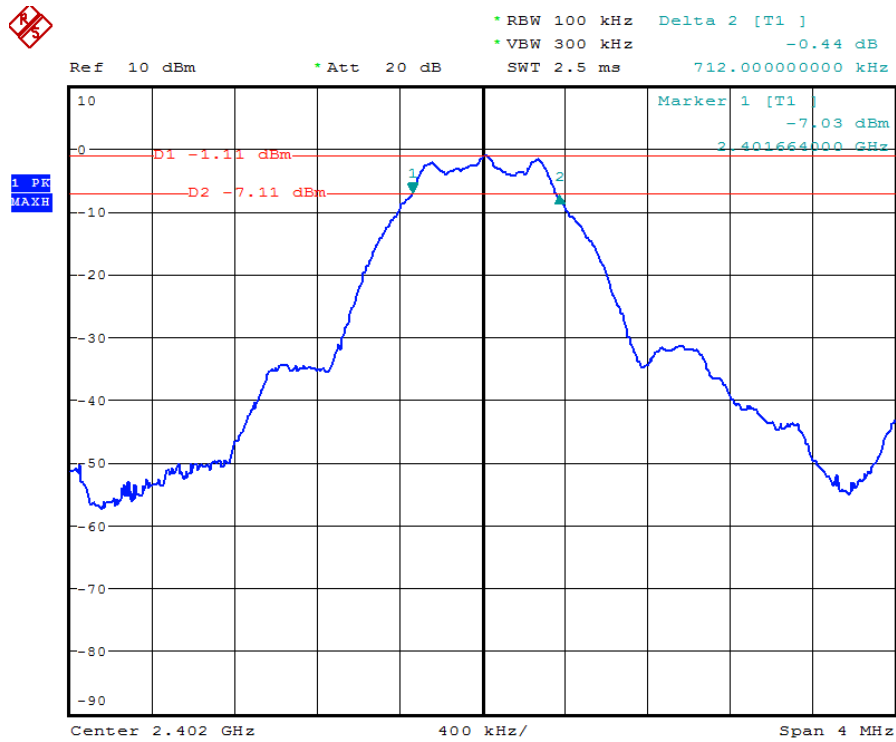

### 6dB BANDWIDTH ( LE MODE CH Mid)

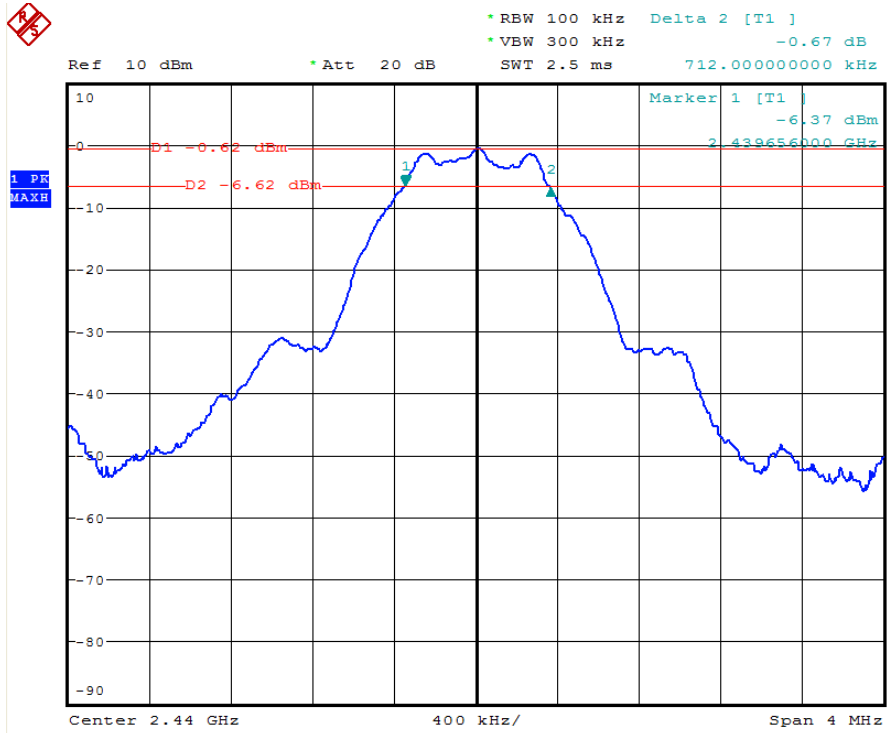

### 6dB BANDWIDTH ( LE MODE CH High)

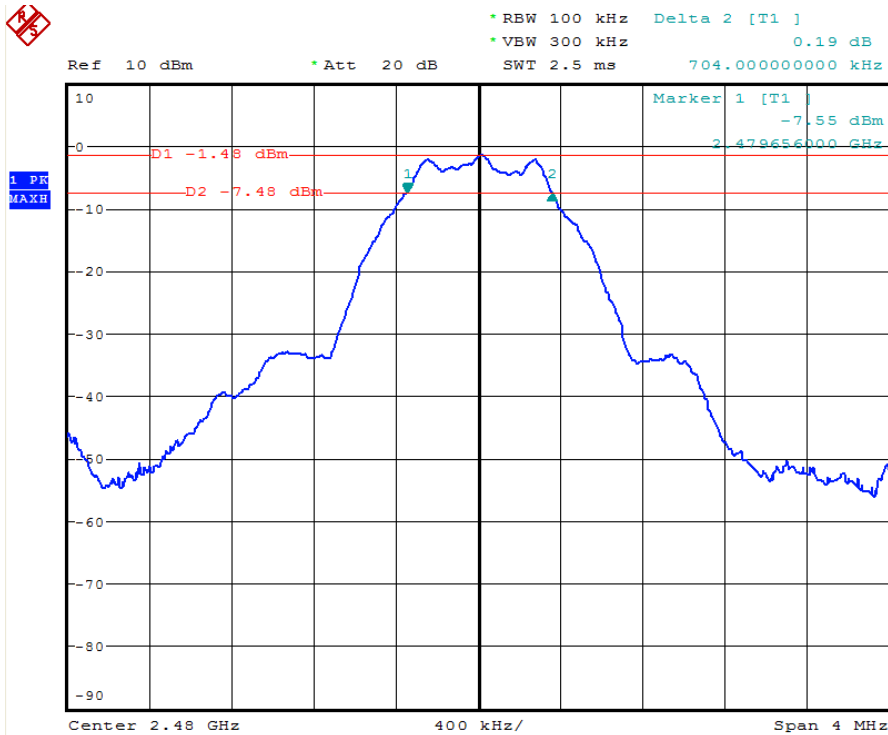


## 8. Test of Conducted Spurious Emission

### 8.1 Applicable standard

Refer to FCC §15.247 (d)

Output power was measured based on the use of RMS averaging over a time interval, therefore the required attenuation is 30 dB.

### 8.2 EUT Setup

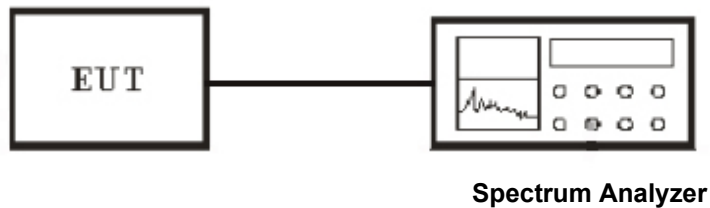

### 8.3 Test Equipment List and Details

See section 2.5.

### 8.4 Test Procedure


The transmitter output was connected to a spectrum analyzer. The spectrum from 30 MHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band. The parameter of the spectrum analyzer was set as below:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW  $\geq$  300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


### 8.5 Test Result

Temperature ( °C ) : 22~23	EUT: Smart Sunglasses
Humidity (%RH) : 50~54	M/N: K2
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: TX Mode


CH Low

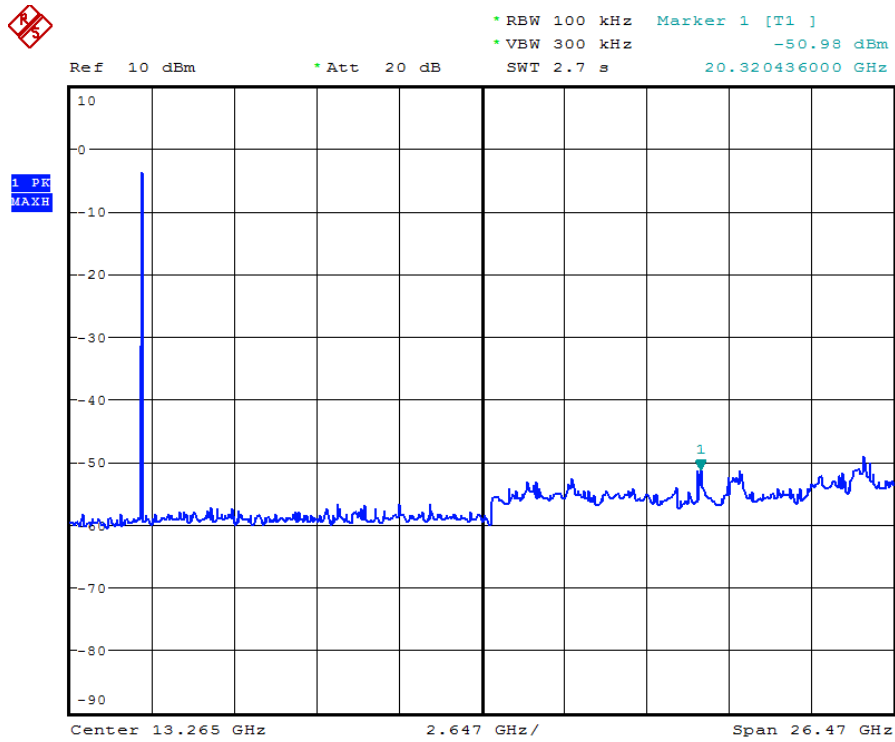

CH Mid

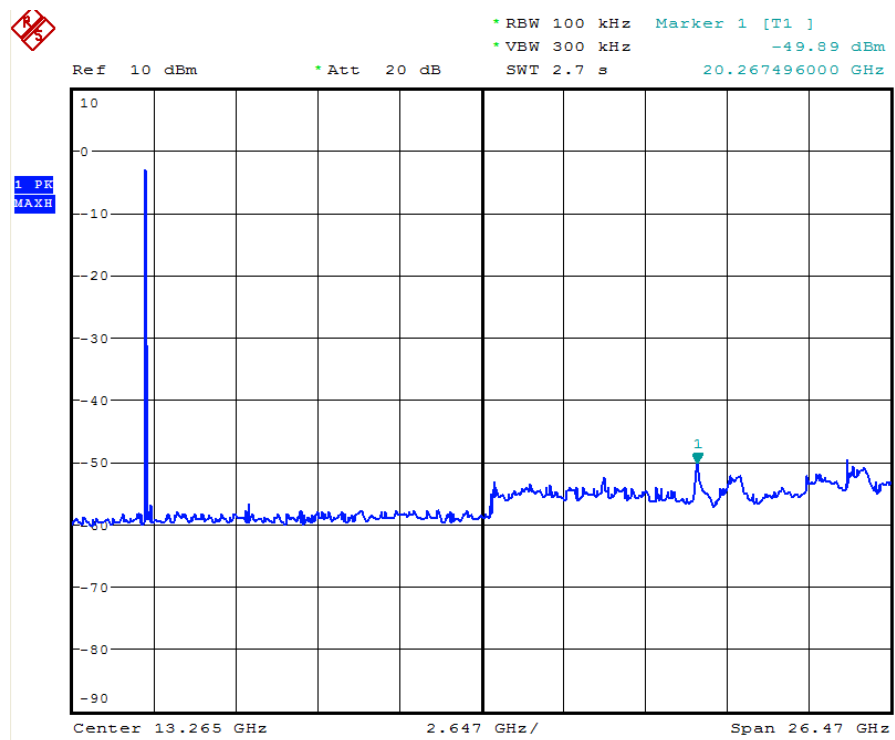

CH High

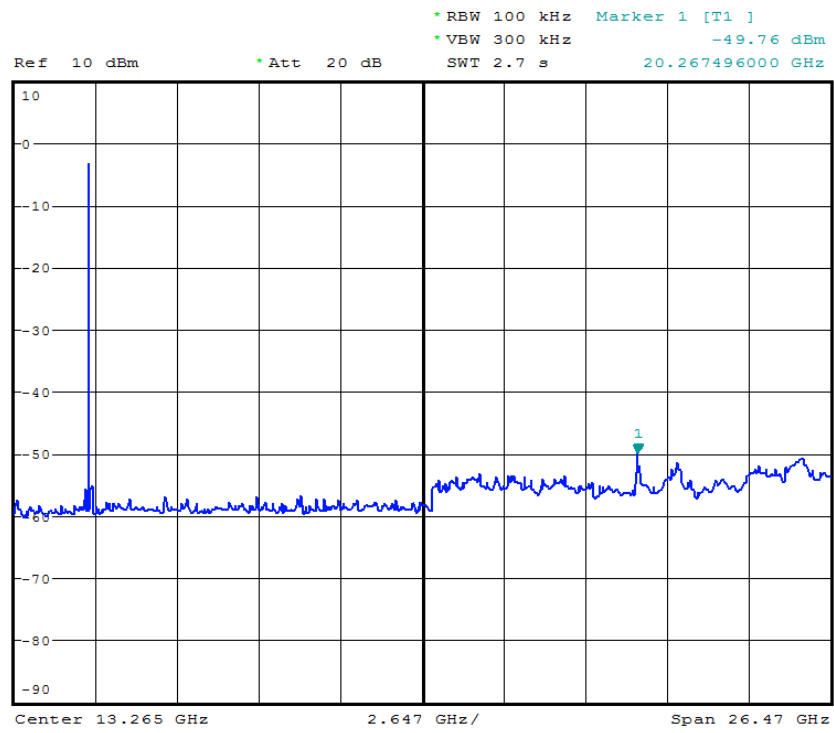



## 9. Test of Radiated Spurious Emission

### 9.1 Radiated Spurious Emission

#### 9.1.1 Limits

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz

or 470-806 MHz, However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.  
 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

### 9.1.2 EUT Setup

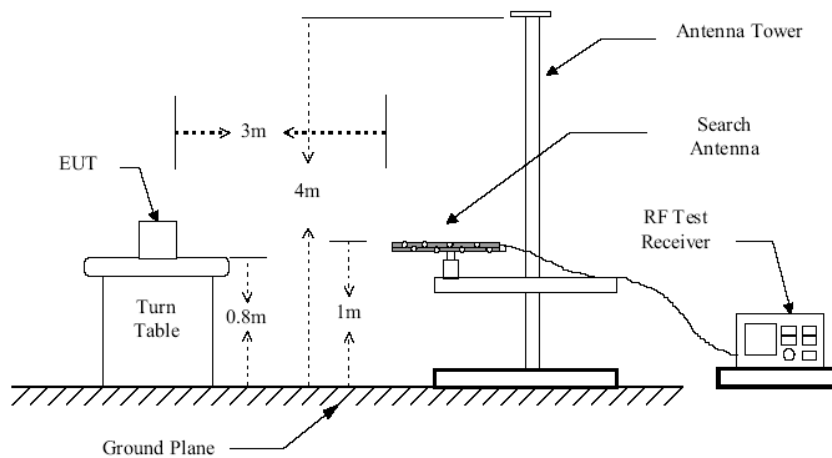
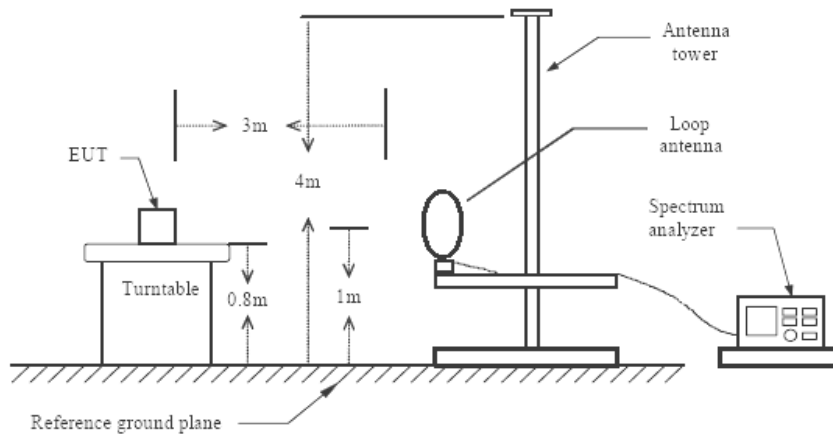


Figure 1 : Frequencies measured below 1 GHz configuration

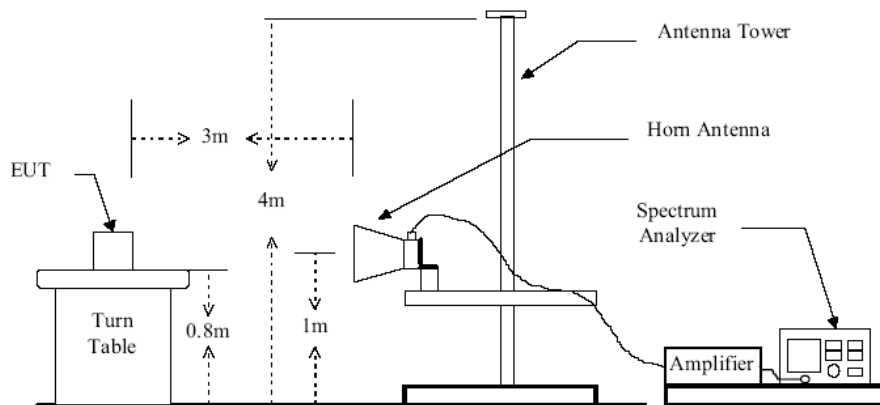


Figure 2 : Frequencies measured above 1 GHz configuration

### 9.1.3 Test Procedure

1. Configure the EUT according to ANSI C63.4-2009
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
4. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. According to the characteristic of the EUT crystals, the range of frequencies was investigated from 9KHz to 30MHz, 30MHz to 1GHz and 1GHz to 24.8GHz.
6. Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1
7. In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
8. Measurements at 2400 & 2483.5 MHz were made to ensure band edge compliance.
9. Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
10. For Frequencies below 1 GHz, RBW= 100 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:  
Peak RBW=VBW= 1MHz  
Average RBW=VBW= 1MHz

These settings as per ANSI C63.10

### 9.1.4 Test Result

Temperature ( °C ) : 22~23	EUT: Smart Sunglasses
Humidity (%RH) : 50~54	M/N: K2
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Normal operation & TX Mode

Note: In this testing, the EUT was respectively tested in three different orientations. That is:

1. EUT was lie vertically, and then its Antenna oriented upward
2. EUT was lie vertically, and then its Antenna oriented downward
3. EUT was lie flatwise, and then its Antenna oriented to the receiving antenna

The worst test data see following pages

When the EUT was lie flatwise, and its Antenna oriented to the receiving antenna, the worst test data was got as following table.

## WORST-CASE RADIATED EMISSION BELOW 30 MHz

Tx operating Mode:


Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Levels	Limits	Margin	Detector Mode
(MHz)	(dB $\mu$ V)	(dB/M)	(dB)	(dB $\mu$ V/M)	(dB $\mu$ V/M)	(dB)	PK/QP
5.46	21.54	8.23	1.03	28.74	67	-38.26	QP
14.89	21.25	9.07	1.19	29.13	49.5	-20.37	QP
22.32	22.57	9.25	1.08	30.74	49.5	-18.76	QP
23.45	22.67	8.43	1.66	29.44	49.5	-20.06	QP

Spurious Emission Data LE Mode Below 1GHz Channel Low:

EUT: Bluetooth Sunglasses  
M/N: K2  
Operating Condition: TX Mode  
Test Site: 3m CHAMBER  
Operator: Chen  
Test Specification: DC 3.7V from battery  
Comment: Polarization: Horizontal

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	MaxPeak	Coupled	100 kHz	VULB9163 NEW
30.0 MHz	1.0 GHz				

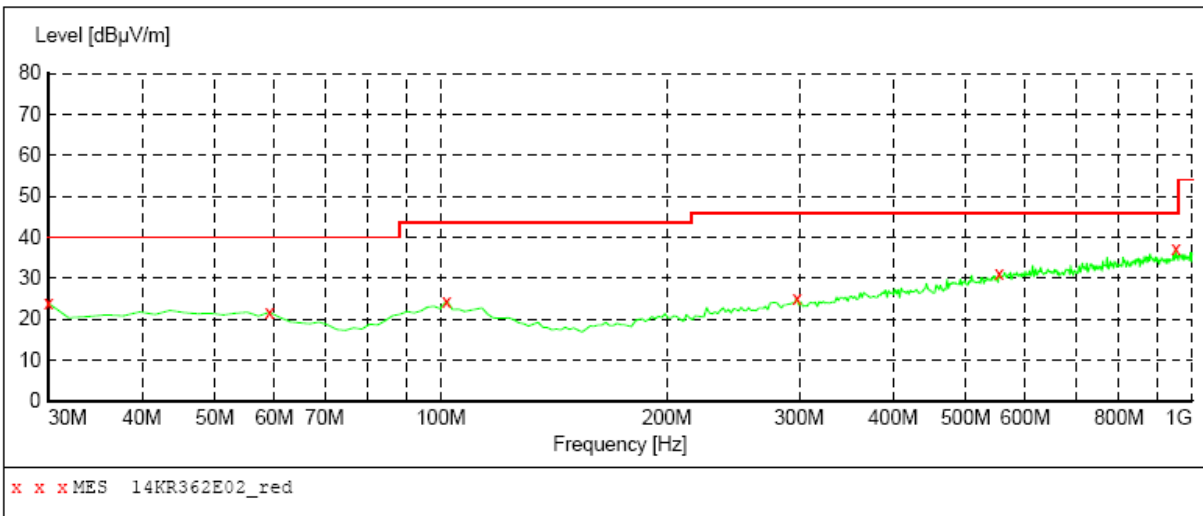

**MEASUREMENT RESULT: "14KR362E02\_red"**

11/24/2014 13:46


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	23.90	14.3	40.0	16.1	QP	100.0	0.00	HORIZONTAL
59.100000	21.70	14.6	40.0	18.3	QP	100.0	0.00	HORIZONTAL
101.780000	24.50	17.3	43.5	19.0	QP	100.0	0.00	HORIZONTAL
297.720000	25.20	18.7	46.0	20.8	QP	100.0	0.00	HORIZONTAL
553.800000	31.00	25.1	46.0	15.0	QP	100.0	0.00	HORIZONTAL
951.500000	37.20	29.6	46.0	8.8	QP	100.0	0.00	HORIZONTAL

Spurious Emission Data LE Mode Below 1GHz Channel Low:

EUT: Bluetooth Sunglasses  
M/N: K2  
Operating Condition: TX Mode  
Test Site: 3m CHAMBER  
Operator: Chen  
Test Specification: DC 3.7V from battery  
Comment: Polarization: Vertical

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	MaxPeak	Coupled	100 kHz	VULB9163 NEW
30.0 MHz	1.0 GHz				

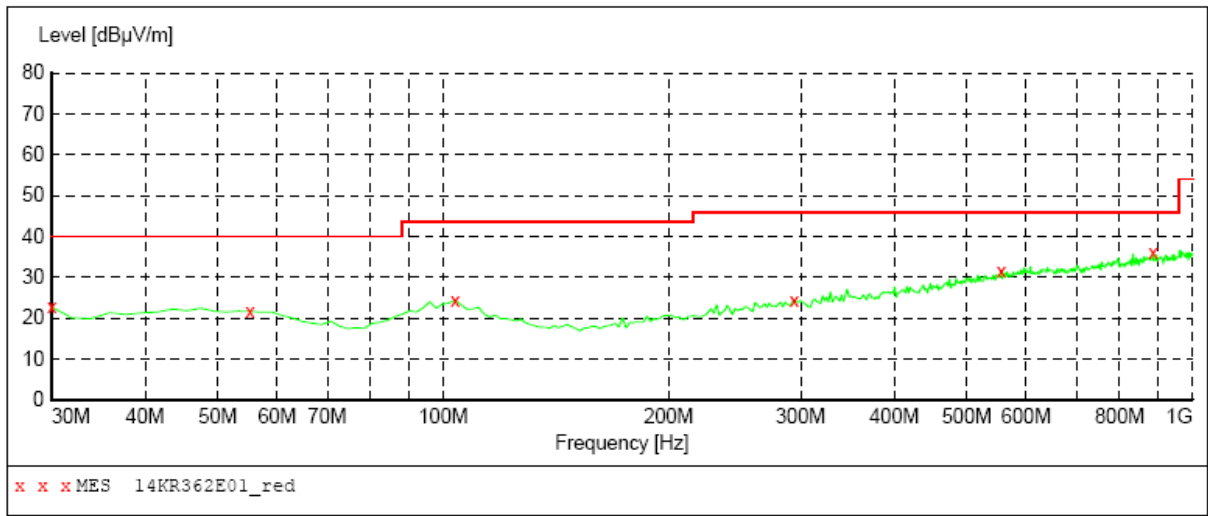

**MEASUREMENT RESULT: "14KR362E01\_red"**

11/24/2014 13:45


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	22.70	14.3	40.0	17.3	QP	100.0	0.00	VERTICAL
55.220000	21.60	15.6	40.0	18.4	QP	100.0	0.00	VERTICAL
103.720000	24.40	17.1	43.5	19.1	QP	100.0	0.00	VERTICAL
293.840000	24.50	18.6	46.0	21.5	QP	100.0	0.00	VERTICAL
555.740000	31.40	25.1	46.0	14.6	QP	100.0	0.00	VERTICAL
885.540000	36.20	29.0	46.0	9.8	QP	100.0	0.00	VERTICAL

Spurious Emission Data LE Mode Below 1GHz Channel Middle:

EUT: Bluetooth Sunglasses  
M/N: K2  
Operating Condition: TX Mode  
Test Site: 3m CHAMBER  
Operator: Chen  
Test Specification: DC 3.7V from battery  
Comment: Polarization: Horizontal

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency 30.0 MHz	Frequency 1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

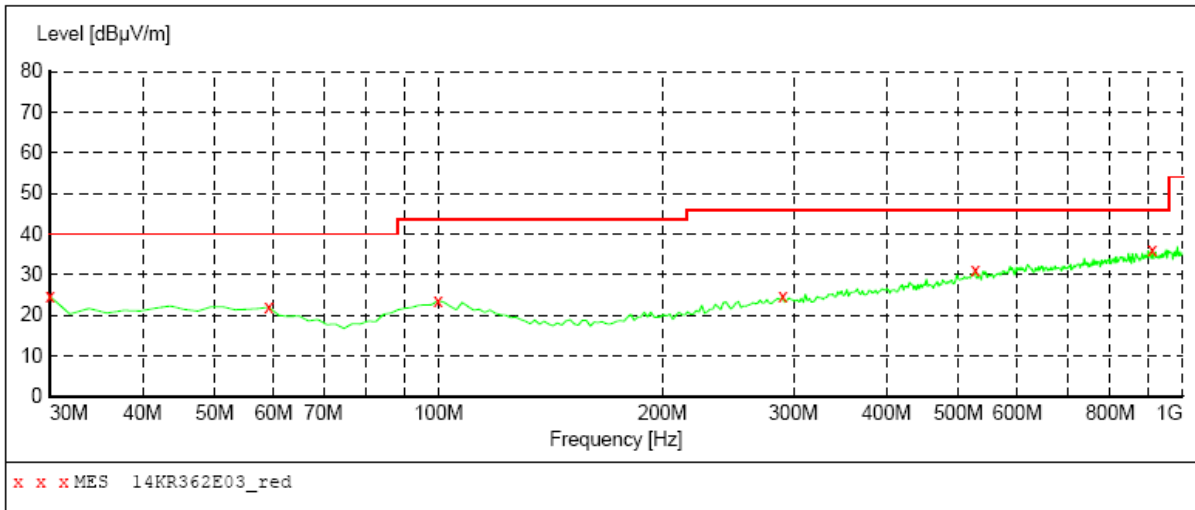

**MEASUREMENT RESULT: "14KR362E03\_red"**

11/24/2014 13:47


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	24.70	14.3	40.0	15.3	QP	100.0	0.00	HORIZONTAL
59.100000	22.00	14.6	40.0	18.0	QP	100.0	0.00	HORIZONTAL
99.840000	23.60	17.5	43.5	19.9	QP	100.0	0.00	HORIZONTAL
289.960000	24.60	18.4	46.0	21.4	QP	100.0	0.00	HORIZONTAL
526.640000	31.10	24.5	46.0	14.9	QP	100.0	0.00	HORIZONTAL
910.760000	36.20	29.3	46.0	9.8	QP	100.0	0.00	HORIZONTAL

Spurious Emission Data LE Mode Below 1GHz Channel Middle:

EUT: Bluetooth Sunglasses  
 M/N: K2  
 Operating Condition: TX Mode  
 Test Site: 3m CHAMBER  
 Operator: Chen  
 Test Specification: DC 3.7V from battery  
 Comment: Polarization: Vertical

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

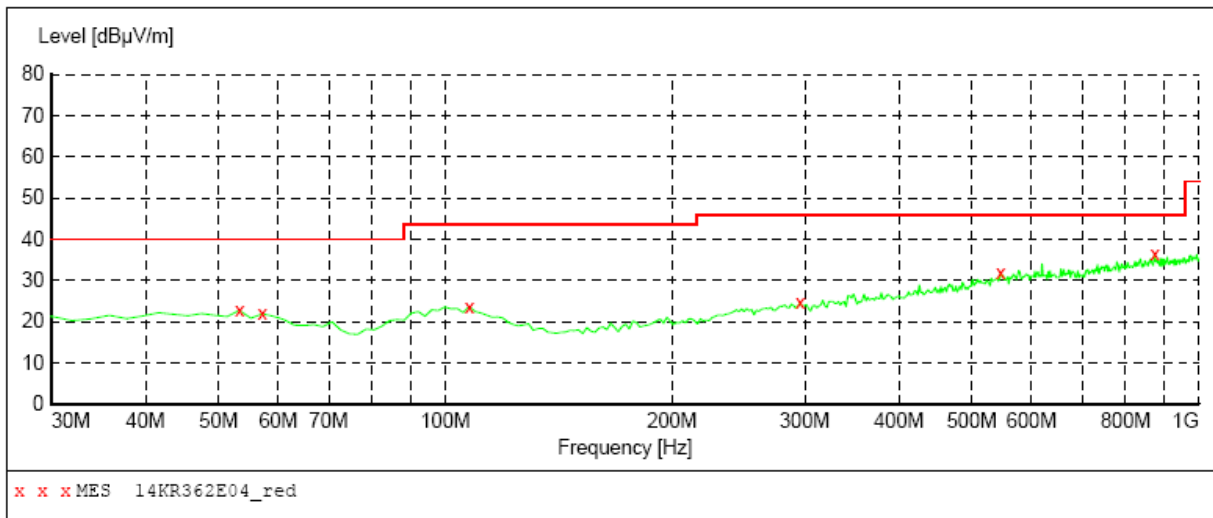

**MEASUREMENT RESULT: "14KR362E04\_red"**

11/24/2014 13:49

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.280000	22.70	15.7	40.0	17.3	QP	100.0	0.00	VERTICAL
57.160000	21.90	15.1	40.0	18.1	QP	100.0	0.00	VERTICAL
107.600000	23.70	16.8	43.5	19.8	QP	100.0	0.00	VERTICAL
295.780000	24.60	18.6	46.0	21.4	QP	100.0	0.00	VERTICAL
546.040000	31.80	24.9	46.0	14.2	QP	100.0	0.00	VERTICAL
873.900000	36.40	28.9	46.0	9.6	QP	100.0	0.00	VERTICAL




Spurious Emission Data LE Mode Below 1GHz Channel High:

EUT: Bluetooth Sunglasses  
M/N: K2  
Operating Condition: TX Mode  
Test Site: 3m CHAMBER  
Operator: Chen  
Test Specification: DC 3.7V from battery  
Comment: Polarization: Horizontal

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

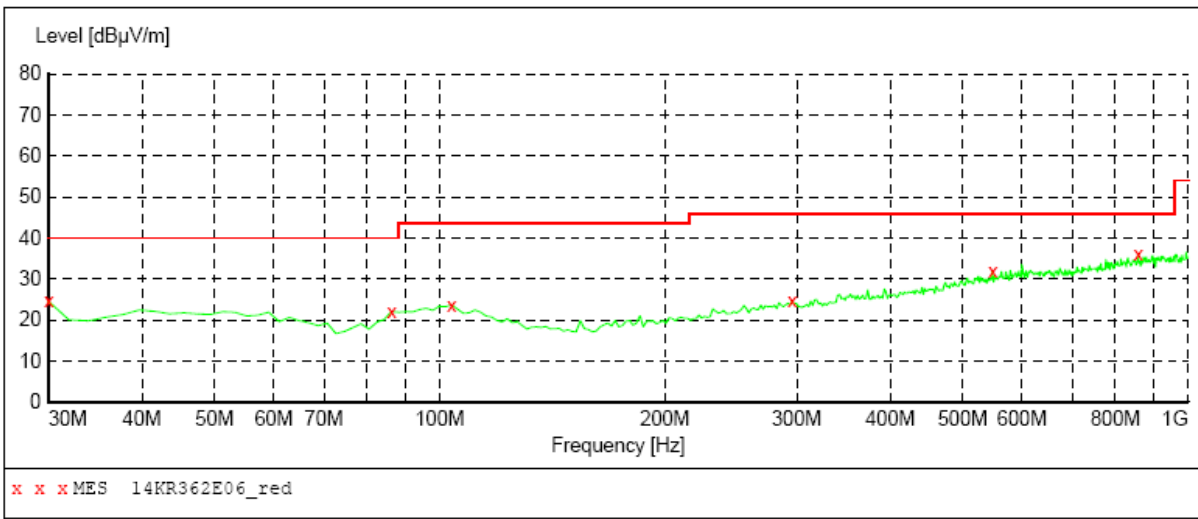

**MEASUREMENT RESULT: "14KR362E06\_red"**

11/24/2014 13:52


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	24.60	14.3	40.0	15.4	QP	100.0	0.00	HORIZONTAL
86.260000	22.10	14.8	40.0	17.9	QP	100.0	0.00	HORIZONTAL
103.720000	23.70	17.1	43.5	19.8	QP	100.0	0.00	HORIZONTAL
295.780000	24.70	18.6	46.0	21.3	QP	100.0	0.00	HORIZONTAL
547.980000	32.00	24.9	46.0	14.0	QP	100.0	0.00	HORIZONTAL
858.380000	36.00	28.7	46.0	10.0	QP	100.0	0.00	HORIZONTAL

Spurious Emission Data LE Mode Below 1GHz Channel High:

EUT: Bluetooth Sunglasses  
M/N: K2  
Operating Condition: TX Mode  
Test Site: 3m CHAMBER  
Operator: Chen  
Test Specification: DC 3.7V from battery  
Comment: Polarization: Vertical

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength				Transducer
Start	Stop	Detector	Meas. Time	IF Bandw.		
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW	

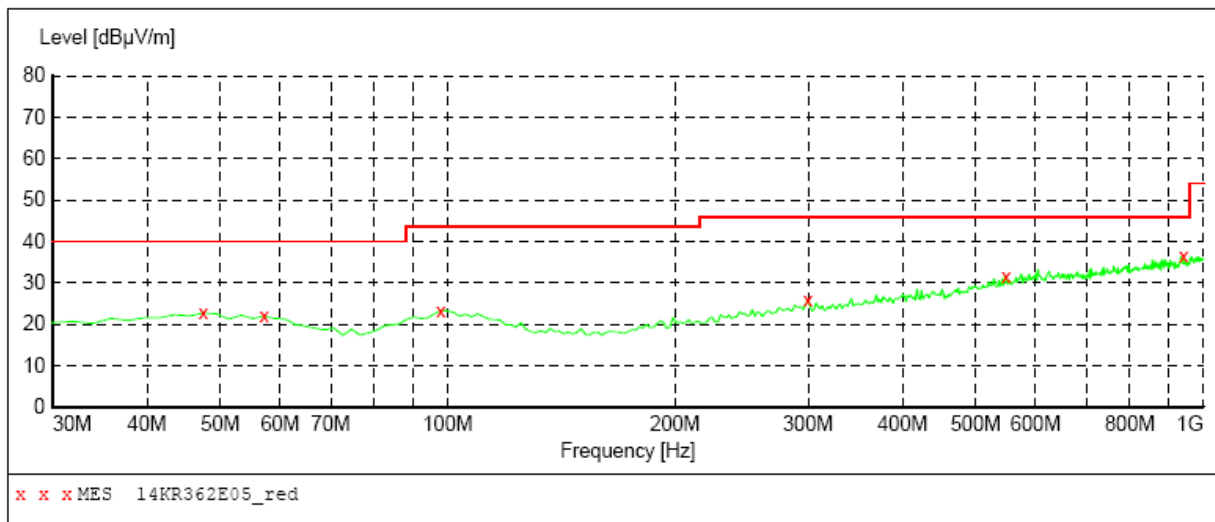

**MEASUREMENT RESULT: "14KR362E05\_red"**

11/24/2014 13:50

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	22.70	15.8	40.0	17.3	QP	100.0	0.00	VERTICAL
57.160000	21.90	15.1	40.0	18.1	QP	100.0	0.00	VERTICAL
97.900000	23.30	17.4	43.5	20.2	QP	100.0	0.00	VERTICAL
299.660000	25.90	18.7	46.0	20.1	QP	100.0	0.00	VERTICAL
547.980000	31.60	24.9	46.0	14.4	QP	100.0	0.00	VERTICAL
941.800000	36.40	29.5	46.0	9.6	QP	100.0	0.00	VERTICAL

## RADIATED EMISSION ABOVE 1 GHz

Channel Low (2402MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBµV/m)	Margin (dBµV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m			
2402	H	1	99.85	-7.15	92.7	N/A	N/A	P
			90.7	-7.15	83.55	N/A	N/A	A
2402	V	1	103.52	-7.15	96.37	N/A	N/A	P
			94.68	-7.15	87.53	N/A	N/A	A
4804	H	1	40.25	1.07	41.32	74	-32.68	P
			31.89	1.07	32.96	54	-21.04	A
4804	V	1	42.76	1.07	43.83	74	-30.17	P
			32.34	1.07	33.41	54	-20.59	A
7206	H	1	40.59	7.38	47.97	74	-26.03	P
			30.69	7.38	38.07	54	-15.93	A
7206	V	1	43.36	7.38	50.74	74	-23.26	P
			31.21	7.38	38.59	54	-15.41	A
9611.37	H	1	41.38	10.29	51.67	74	-22.33	P
			30.54	10.29	40.83	54	-13.17	A
9611.37	V	1	42.39	7.38	49.77	74	-24.23	P
			31.18	7.38	38.56	54	-15.44	A
12022.89	H	1	41.36	14.01	55.37	74	-18.63	P
			31.05	14.01	45.06	54	-8.94	A
12023.33	V	1	42.74	14.01	56.75	74	-17.25	P
			31.23	14.01	45.24	54	-8.76	A
25220.89	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier

Margin = Level-Limit

Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit

Channel Middle (2440MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBµV/m)	Margin (dBµV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m			
2440	H	1	98.79	-6.37	92.42	N/A	N/A	P
			90.56	-6.37	84.19	N/A	N/A	A
2440	V	1	104.33	-6.37	97.96	N/A	N/A	P
			95.79	-6.37	89.42	N/A	N/A	A
4880	H	1	40.32	1.07	41.39	74	-32.61	P
			30.25	1.07	31.32	54	-22.68	A
4880	V	1	42.81	1.07	43.88	74	-30.12	P
			31.25	1.07	32.32	54	-21.68	A
7320	H	1	40.84	7.49	48.33	74	-25.67	P
			30.23	7.49	37.72	54	-16.28	A
7320	V	1	42.36	7.49	49.85	74	-24.15	P
			31.82	7.49	39.31	54	-14.69	A
9760	H	1	41.25	10.47	51.72	74	-22.28	P
			30.89	10.47	41.36	54	-12.64	A
9760	V	1	43.52	10.47	53.99	74	-20.01	P
			32.33	10.47	42.8	54	-11.2	A
12168.22	H	1	41.85	14.1	55.95	74	-18.05	P
			30.24	14.1	44.34	54	-9.66	A
12168.22	V	1	42.58	14.1	56.68	74	-17.32	P
			30.86	14.1	44.96	54	-9.04	A
25380.37	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier  
Margin = Level-Limit  
Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value  
2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.  
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.  
4. The test limit distance is 3m limit

Channel High (2480MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBµV/m)	Margin (dBµV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m			
2480	H	1	99.35	-6.05	93.3	N/A	N/A	P
			91.38	-6.05	85.33	N/A	N/A	A
2480	V	1	104.59	-6.05	98.54	N/A	N/A	P
			94.36	-6.05	88.31	N/A	N/A	A
4960	H	1	40.58	1.07	41.65	74	-32.35	P
			31.02	1.07	32.09	54	-21.91	A
4960	V	1	42.35	1.07	43.42	74	-30.58	P
			32.33	1.07	33.4	54	-20.6	A
7440	H	1	40.89	7.61	48.5	74	-25.5	P
			31.36	7.61	38.97	54	-15.03	A
7440	V	1	42.59	7.61	50.2	74	-23.8	P
			32.33	7.61	39.94	54	-14.06	A
9920	H	1	40.89	10.65	51.54	74	-22.46	P
			31.34	10.65	41.99	54	-12.01	A
9920	V	1	43.25	10.65	53.9	74	-20.1	P
			32.59	10.65	43.24	54	-10.76	A
12362.56	H	1	41.68	14.19	55.87	74	-18.13	P
			31.74	14.19	45.93	54	-8.07	A
12362.56	V	1	42.25	14.19	56.44	74	-17.56	P
			32.18	14.19	46.37	54	-7.63	A
25380.89	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier  
Margin = Level-Limit  
Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value  
2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.  
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.  
4. The test limit distance is 3m limit

## 10. Test of Band Edges Emission

### 10.1 Applicable standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

### 10.2 EUT Setup

#### Radiated Measurement Setup


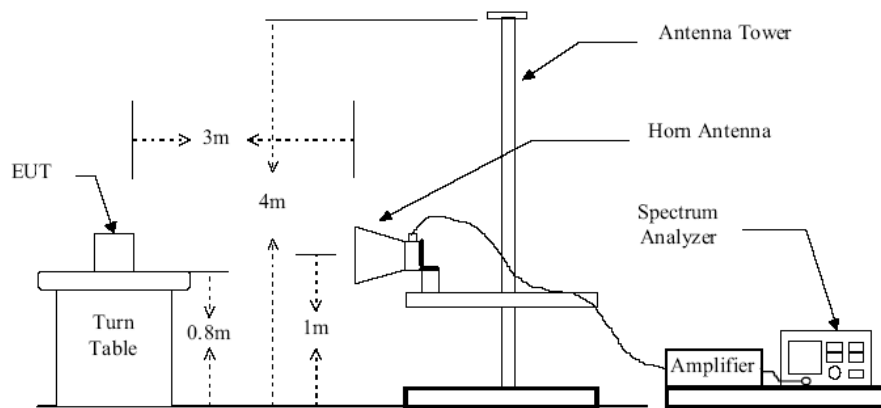


Figure 2 : Frequencies measured above 1 GHz configuration

#### Conducted Measurement Setup

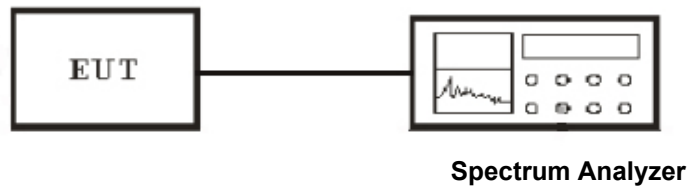

### 10.3 Test Equipment List and Details

See section 2.5.

### 10.4 Test Procedure

#### Conducted Measurement

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.

3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge. Then detector set to peak and max hold this trace.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

**Radiated Measurement**

1. Configure the EUT according to ANSI C63.4-2009
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For band edge emission, use 1MHz VBW and 1MHz RBW for reading under AV and use 1MHz VBW and 1MHz RBW for reading under PK.

**10.5 Test Result**

Temperature ( °C ) : 22~23	EUT: Smart Sunglasses
Humidity (%RH) : 50~54	M/N: st
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode

**Radiated Test Result**


TEst RESULT

**LE mode**


Channel	Freq.(MHz)	Polarity	Level(dBuV/m)	Limit(dBuV)	Margin(dB)	Detector
LOW	2390	H	41.36	74	-32.64	Peak
	2390	H	32.25	54	-21.75	Average
	2390	V	43.25	74	-30.75	Peak
	2390	V	33.33	54	-20.67	Average
HIGH	2483.62	H	42.35	74	-31.65	Peak
	2483.62	H	32.59	54	-21.41	Average
	2483.62	V	43.79	74	-30.21	Peak
	2483.62	V	33.15	54	-20.85	Average

# Test of Conducted band edges

## CH Low

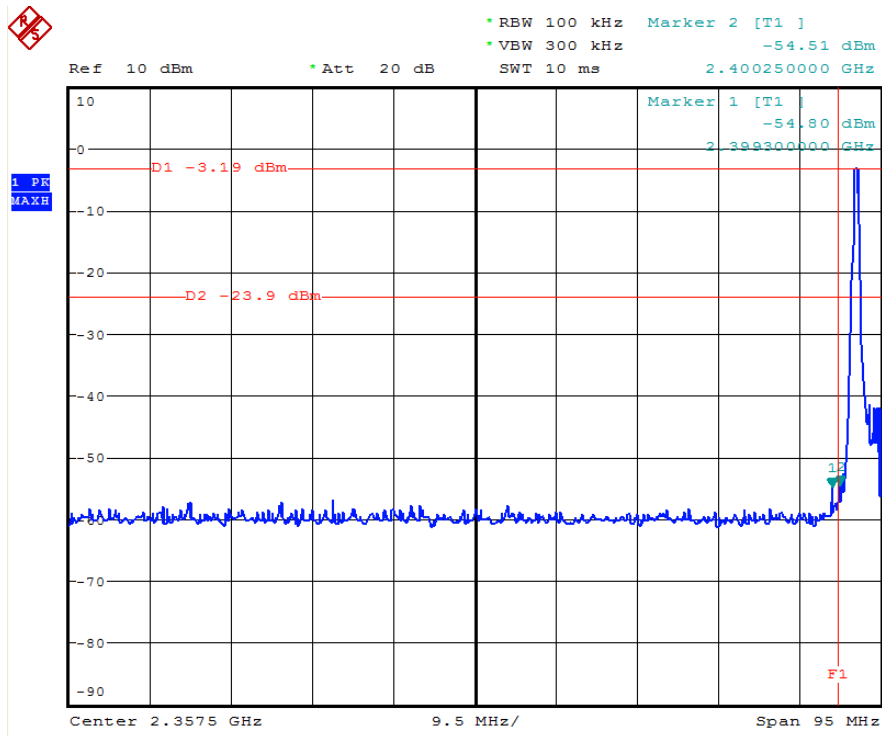

## CH High

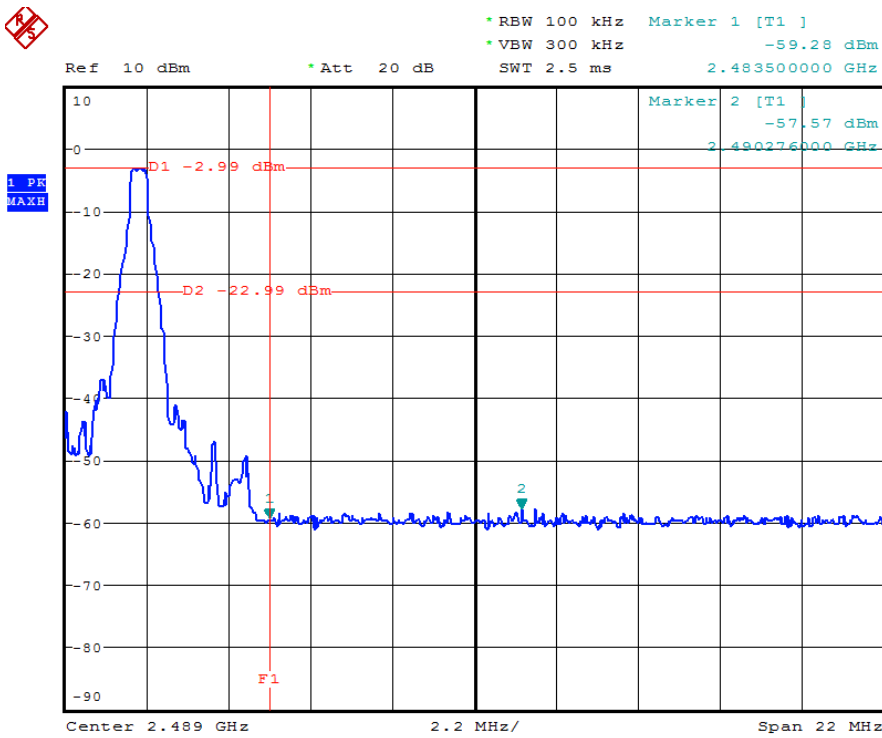



## **11. ANTENNA REQUIREMENT**

### **11.1 standard Applicable**

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### **11.2 Antenna Connected Construction**

The antenna is designed with permanent attachment and no consideration of replacement. The antenna used in this product is complied with standard. The maximum Gain of the antenna lower than 6.0dBi and have the definite antenna Specification.