

# RF TEST REPORT

**Report No.:** SET2021-15934

**Product Name:** Pulse Oximeter

**Model No.:** CMS50S

**FCC ID:** 2ABOGCMS50S

**Applicant:** Contec Medical Systems Co., Ltd.

**Address:** No. 112 Qinhuang West Street Qinhuangdao China

**Dates of Testing:** 2021.10.21 - 2021.11.22

**Issued by:** CCIC Southern Testing Co., Ltd.

**Lab Location:** Electronic Testing Building, No. 43 Shahe Road, Xili Street,  
Nanshan District, Shenzhen, Guangdong, China.

**Tel:** 86 755 26627338    **Fax:** 86 755 26627238

This test report consists of 35 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

## Test Report

**Product Name**.....: Pulse Oximeter

**Trade Name**.....: CONTEC

**Applicant**.....: Contec Medical Systems Co., Ltd.


**Applicant Address**.....: No. 112 Qinhuang West Street Qinhuangdao China

**Manufacturer**.....: Contec Medical Systems Co., Ltd.


**Manufacturer Address** .....: No. 112 Qinhuang West Street Qinhuangdao China

**Test Standards**.....: 47 CFR Part 15 Subpart C  
ANSI C63.10-2013  
KDB558074 D01 DTS Meas Guidance v05r02

**Test Result** .....: PASS

**Tested by** .....:  2021.11.24  
Sun, Test Engineer

**Reviewed by** .....:  2021.11.24  
Chris You, Senior Engineer

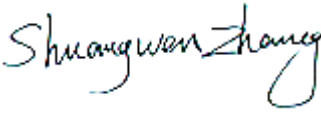**Approved by** .....:  2021.11.24  
ShuangwenZhang, Manager

## TABLE OF CONTENTS

<b>RF TEST REPORT .....</b>	<b>1</b>
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. EUT Description .....	4
1.2. Test Standards and Results .....	5
1.3. Table for Supporting Units .....	6
1.4. Facilities and Accreditations .....	7
<b>2. TEST REQUIREMENTS .....</b>	<b>8</b>
2.1. Antenna requirement .....	8
2.2. Peak Output Power .....	9
2.3. 6dB Bandwidth .....	10
2.4. Conducted Band Edges and Spurious Emissions .....	11
2.5. Power spectral density (PSD) .....	13
2.6. Radiated Band Edge and Spurious Emission .....	15
2.7. Conducted Emission .....	23
<b>3. LIST OF MEASURING EQUIPMENT .....</b>	<b>27</b>
<b>4. UNCERTAINTY OF EVALUATION .....</b>	<b>28</b>
<b>5. APPENDIX A .....</b>	<b>29</b>

Change History		
Issue	Date	Reason for change
1.0	2021.11.24	First edition

## 1. General Information

### 1.1. EUT Description

EUT Type	Pulse Oximeter
Hardware Version:	1.4
Software Version:	2.0.1
Power supply	Rechargeable Li-ion Battery DC3.7V/250mAh
EUT supports Radios application	Bluetooth LE V4.0
Frequency Range	2402MHz~2480MHz
Channel Number	40
Bit Rate of Transmitter	1Mbps
Modulation Type	GFSK
Antenna Type	Internal Antenna
Antenna Gain	0dBi

Note 1: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 2: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

## 1.2. Test Standards and Results

The objective of the report is to perform testing according to FCC Certification:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart C	Radio Frequency Devices
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Result
1	15.203	Antenna Requirement	PASS
2	15.247(b)	Peak Output Power and EIRP	PASS
3	15.247(a)	6dB and 99% Occupied Bandwidth	PASS
4	15.247(d)	Conducted Band Edges and Spurious Emission	PASS
5	15.247(e)	Power spectral density (PSD)	PASS
6	15.207	Conducted Emission	PASS
7	15.209 15.205 15.247(d)	Radiated Band Edges and Spurious Emission	PASS

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10-2013.

These RF tests were performed according to the method of measurements prescribed in KDB 558074D01 v05r02.

### 40 channels are provided for Bluetooth LE

Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460

10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

	Test Items	Modulation	Channel
Bluetooth LE V4.1	Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Conducted and Spurious Emission Radiated and Spurious Emission	GFSK	0/19/39
	Band Edge	GFSK	0/39

### 1.3. Table for Supporting Units

No.	Equipment	Brand Name	Model Name	Manufacturer	Serial No.	Note
N/A						

## 1.4. Facilities and Accreditations

### 1.4.1. Facilities

#### **CNAS-Lab Code: L1659**

CCIC-SET is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

#### **FCC-Registration No.: 406086**

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until April 19th, 2023.

#### **ISED Registration: 11185A-1**

#### **CAB identifier: CN0064**

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Jun. 30th, 2023.

#### **A2LA Code: 5721.01**

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

### 1.4.2. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature ( °C):	15 °C - 35 °C
Relative Humidity (%):	30% -60%
Atmospheric Pressure (kPa):	86KPa-106KPa

## 2. Test Requirements

### 2.1. Antenna requirement

#### 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

And according to FCC 47 CFR Section 15.247(c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

#### 2.1.2. Antenna Information

**Antenna Category:** Internal antenna

An Internal antenna was soldered to the antenna port of EUT via an adaptor cable, can't be removed.

#### Antenna General Information:

No.	EUT	Ant. Type	Operating frequency range	Ant. Gain
1	Pulse Oximeter	Internal	2402-2480MHz	0dBi

#### 2.1.3. Result: comply

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.



## 2.2. Peak Output Power


### 2.2.1. Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. The e.i.r.p. shall not exceed 4 W

### 2.2.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.2.3. Test Setup

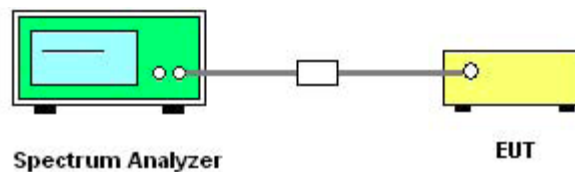

### 2.2.4. Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB 558074D01 v05r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.  
The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings: Span  $\geq 3$ RBW;  
RBW  $\geq$  DTS bandwidth; VBW  $\geq 3$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Measure the conducted output power and record the results in the test report.

### 2.2.5. Test Result

Please refer to Appendix A for detail

## 2.3. 6dB Bandwidth


### 2.3.1. Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.3.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.3.3. Test Setup

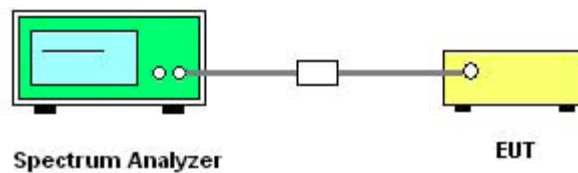

### 2.3.4. Test Procedures

1. The testing follows FCC KDB 558074D01 v05r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

### 2.3.5. Test Results of 6dB Bandwidth

Please refer to Appendix A for detail

## 2.4. Conducted Band Edges and Spurious Emissions


### 2.4.1. Limit of Conducted Band Edges and Spurious Emissions

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.

### 2.4.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.4.3. Test Setup

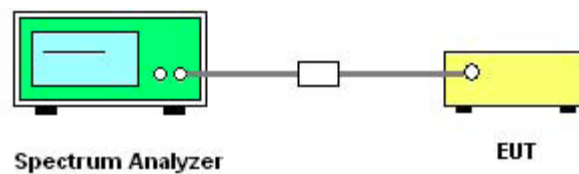

### 2.4.4. Test Procedure

1. The testing follows FCC KDB 558074D01 v05r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

#### **2.4.5. Test Results of Conducted Band Edges**

Please refer to Appendix A for detail

## 2.5. Power spectral density (PSD)


### 2.5.1. Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

### 2.5.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.5.3. Test Setup

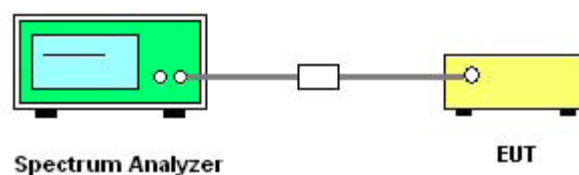

### 2.5.4. Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB 558074D01 v05r02.

2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

3. Set to the maximum power setting and enable the EUT transmit continuously.

4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz.

Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)

5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.

6. Measure and record the results in the test report.

7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limitline for Conducted Band Edges and Conducted Spurious Emission.

### **2.5.5. Test Results of Power spectral density**

Please refer to Appendix A for detail

## 2.6. Radiated Band Edge and Spurious Emission

### 2.6.1. Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Note: Wireless charger configuration was evaluated.


Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 2.6.2. Measuring Instruments


The measuring equipment is listed in the section 3 of this test report.

### 2.6.3. Test Setup


For radiated emissions from 9 KHz to 30 MHz

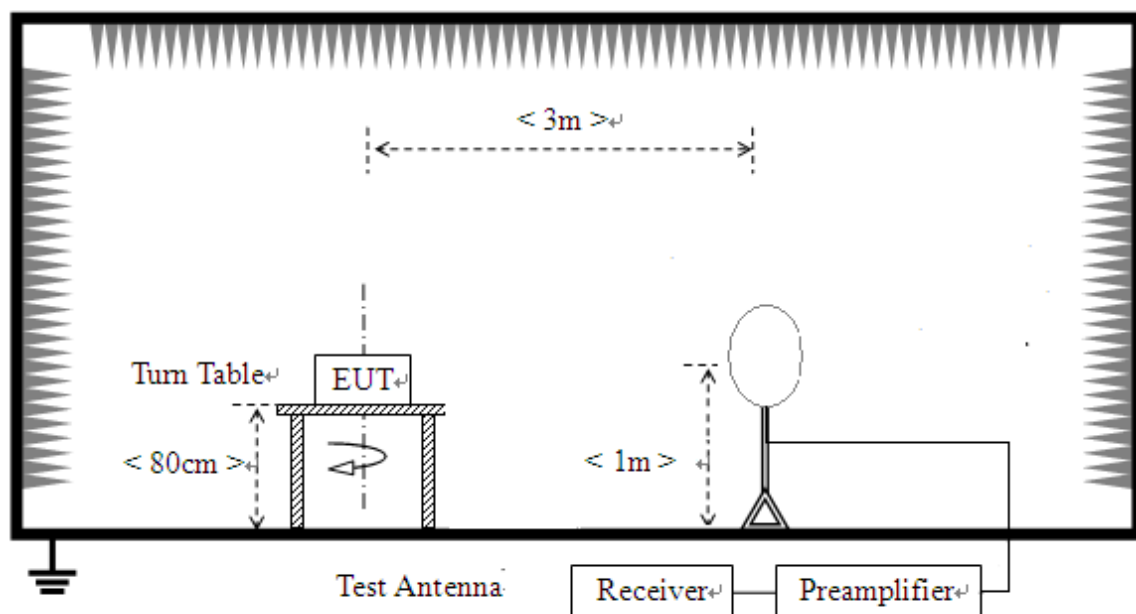

**For radiated emissions from 30MHz to 1GHz**

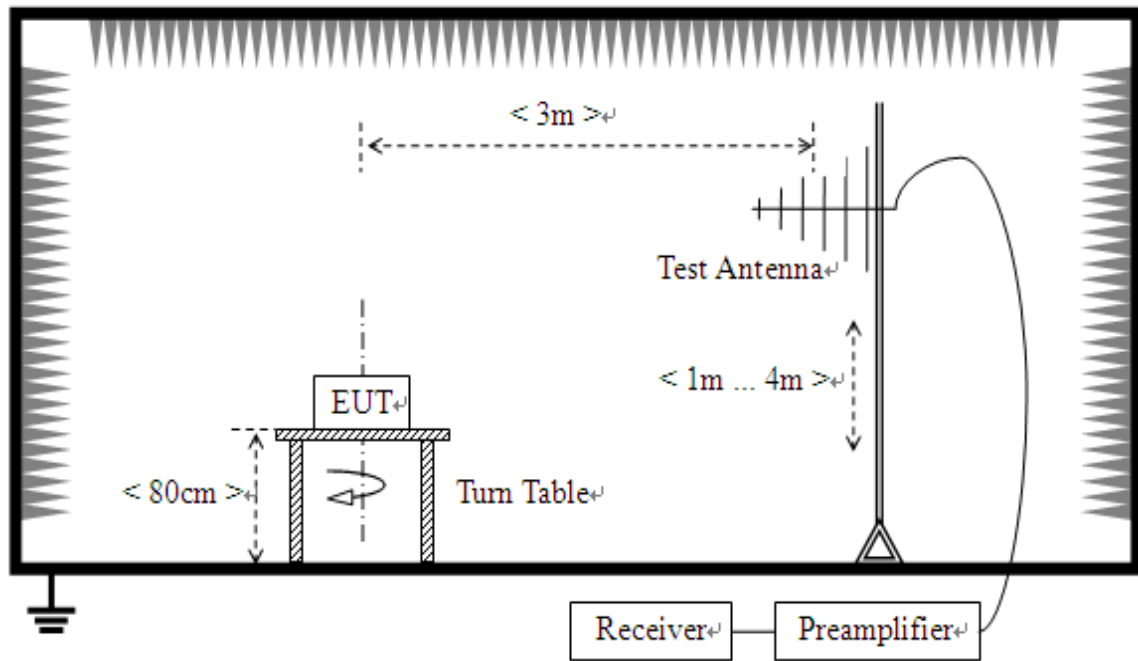

**For radiated emissions above 1GHz**

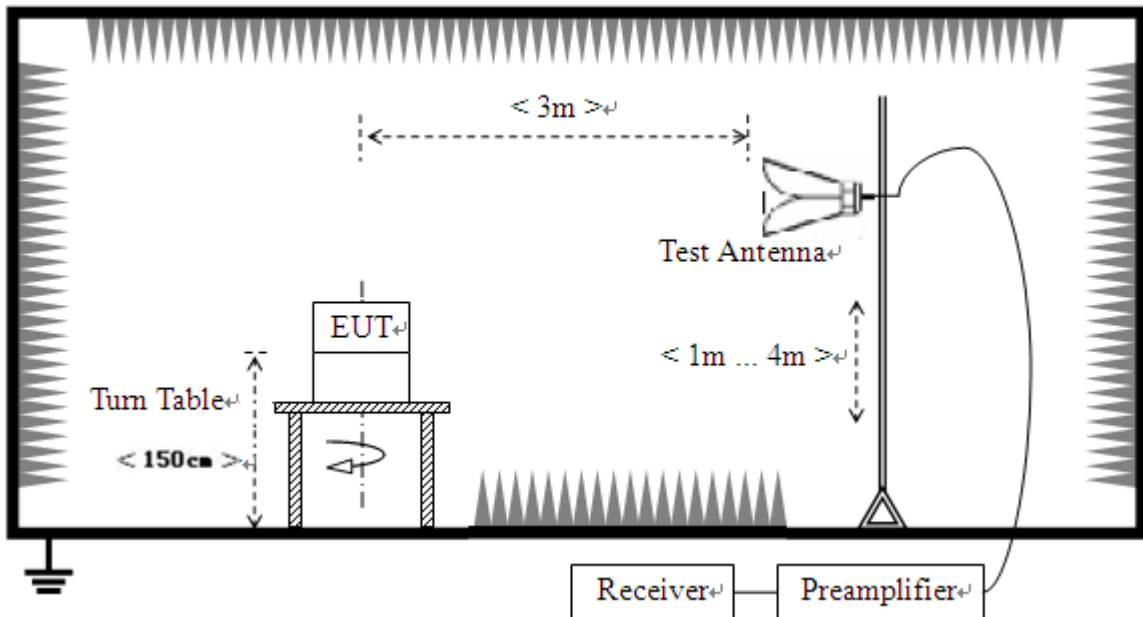



#### 2.6.4. Test Procedures

1. The EUT was placed on a turntable 0.8m below 1GHz and 1.5m above 1GHz above ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. Height of receiving antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported.  
Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

#### NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

### 2.6.5. Test Results of Radiated Band Edge and Spurious Emission

#### For 9KHz to 30MHz


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

#### For 30MHz to 1000 MHz

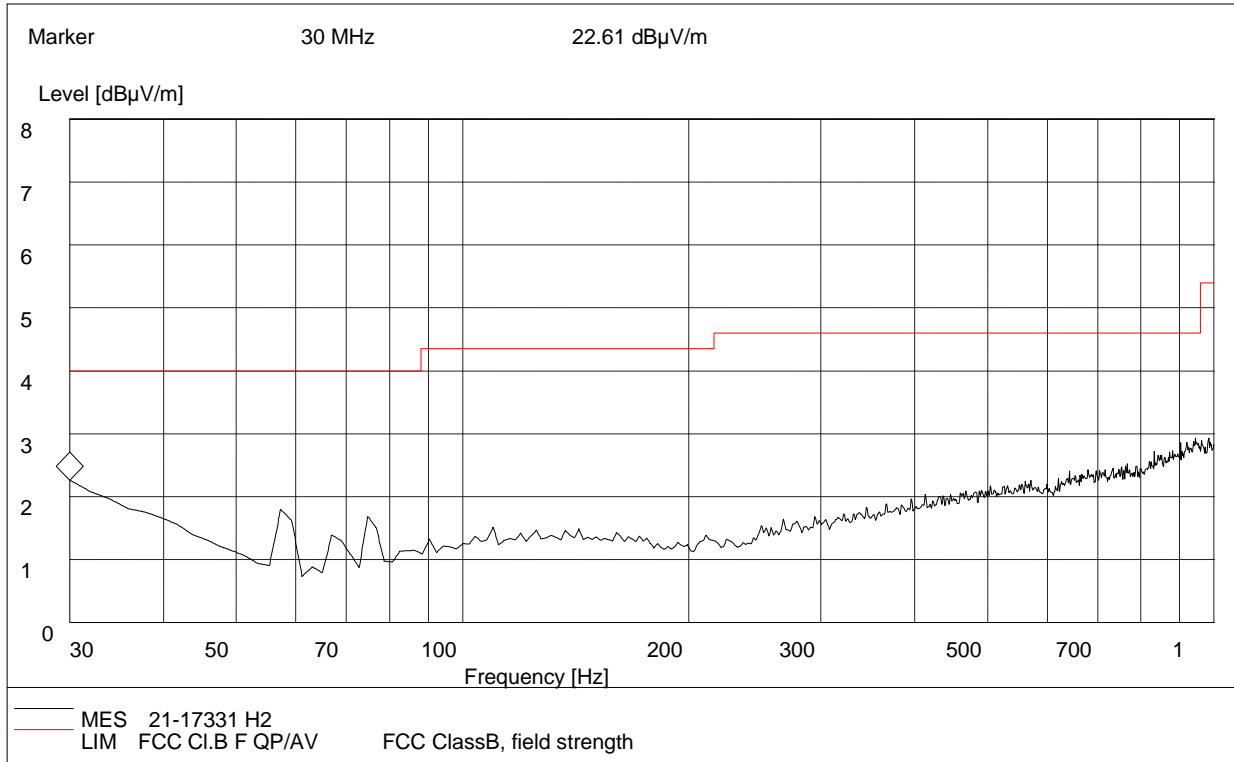

**Plot A: 30MHz to 1GHz, Antenna Horizontal**

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Corr. Factor (dB/m)	Antenna height (cm)	Limit (dBµV/m)	Margin	Antenna	Verdict
30.000000	21.65	120.000	17.9	100.0	40.0	21.65	Horizontal	Pass
57.120000	16.93	120.000	8.70	100.0	40.0	16.93	Horizontal	Pass
108.650000	14.23	120.000	9.40	100.0	43.5	14.23	Horizontal	Pass
142.730000	13.25	120.000	12.90	100.0	43.5	13.25	Horizontal	Pass
560.600000	21.52	120.000	20.00	100.0	46.0	21.52	Horizontal	Pass
882.820000	27.20	120.000	24.80	100.0	46.0	27.20	Horizontal	Pass

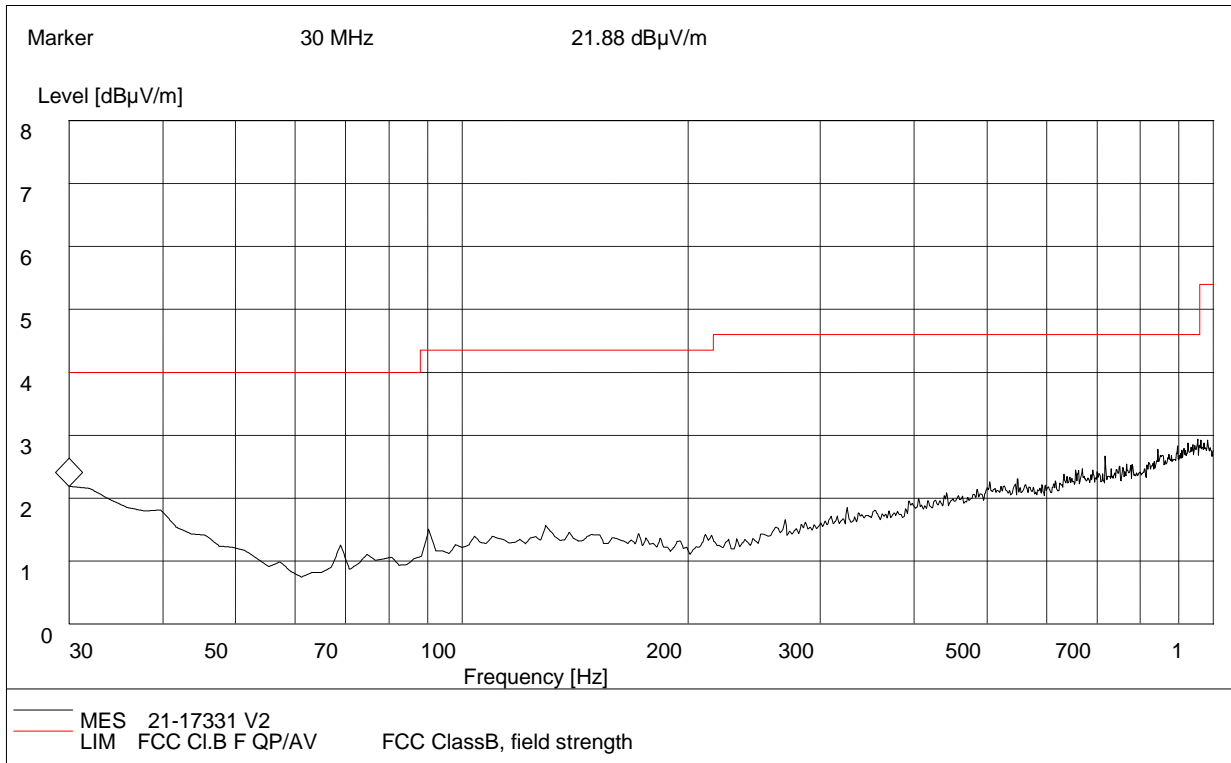

**Plot B: 30MHz to 1GHz, Antenna Vertical**

Frequency (MHz)	QuasiPeak (dB µ V/m)	Bandwidth (kHz)	Corr. Factor (dBµV/m)	Antenna height (cm)	Limit (dB µ V/m)	Margin	Antenna	Verdict
30.000000	20.58	120.000	17.90	100.0	40.0	20.58	Vertical	Pass
39.520000	17.25	120.000	10.80	100.0	40.0	17.25	Vertical	Pass
90.200000	15.00	120.000	7.00	100.0	43.5	15.00	Vertical	Pass
129.510000	14.56	120.000	13.70	100.0	43.5	14.56	Vertical	Pass
504.260000	21.58	120.000	19.30	100.0	46.0	21.58	Vertical	Pass
718.520000	25.23	120.000	22.00	100.0	46.0	25.23	Vertical	Pass

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. Margin value = Limit value - Emission Level
4. The other emission levels were very low against the limit.

**For 1GHz to 25GHz****ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (0CH\_2402MHz)**

No.	Fre. (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	2390	46.28	PK	74.00	-27.72	1.6	120	44.98	5.2	28.60	32.5	1.3
2	2390	36.65	AV	54.00	-17.35	1.6	120	35.35	5.2	28.60	32.5	1.3
3	4804	45.30	PK	74.00	-28.7	1.6	120	38.9	7.4	30.40	31.4	6.4
4	4804	35.66	AV	54.00	-18.34	1.6	120	29.26	7.4	30.40	31.4	6.4
5	7206	50.61	PK	74.00	-23.39	1.6	120	41.31	9.9	31.50	32.1	9.3
6	7206	38.34	AV	54.00	-15.66	1.6	120	29.04	9.9	31.50	32.1	9.3

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (0CH\_2402MHz)**

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	2390	46.83	PK	74.00	-27.17	1.5	110	45.53	5.2	28.60	32.5	1.3
2	2390	36.45	AV	54.00	-17.55	1.5	110	35.15	5.2	28.60	32.5	1.3
3	4804	46.41	PK	74.00	-27.59	1.5	110	40.01	7.4	30.40	31.4	6.4
4	4804	35.70	AV	54.00	-18.30	1.5	110	29.3	7.4	30.40	31.4	6.4
5	7206	49.46	PK	74.00	-24.54	1.5	110	40.16	9.9	31.50	32.1	9.3
6	7206	38.43	AV	54.00	-15.57	1.5	110	29.13	9.9	31.50	32.1	9.3

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (19CH 2440MHz)**

No.	Fre. (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	4880	45.48	PK	74	-28.52	1.6	120	42.55	6.7	31.2	31.5	6.4
2	4880	35.85	AV	54	-18.15	1.6	120	32.18	6.7	31.2	31.5	6.4
3	7320	50.31	PK	74	-23.69	1.6	120	45.94	6.7	31.2	31.5	6.4
4	7320	38.27	AV	54	-15.73	1.6	120	35.75	6.7	31.2	31.5	6.4

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (19CH 2440MHz)**

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	4880	46.19	PK	74	-27.81	1.5	110	44.77	6.7	31.2	31.5	6.4
2	4880	35.37	AV	54	-18.63	1.5	110	34.53	6.7	31.2	31.5	6.4
3	7320	49.71	PK	74	-24.29	1.5	110	45.97	6.7	31.2	31.5	6.4
4	7320	37.99	AV	54	-16.01	1.5	110	35.68	6.7	31.2	31.5	6.4

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (39CH_2480MHz)												
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	2483.5	46.42	PK	74	-27.58	1.6	120	46.45	5.7	29.5	31.8	3.4
2	2483.5	36.46	AV	54	-17.54	1.6	120	36.23	5.7	29.5	31.8	3.4
3	4960	45.43	PK	74	-28.57	1.6	120	45.92	7	30.05	31.5	5.55
4	4960	36.13	AV	54	-17.87	1.6	120	35.74	7	30.05	31.5	5.55
5	7440	50.37	PK	74	-23.63	1.6	120	37.44	16	31.2	32	15.2
6	7440	38.02	AV	54	-15.98	1.6	120	27.19	16	31.2	32	15.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (39CH_2480MHz)												
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	2483.5	47.47	PK	74	-26.53	1.5	110	45.25	5.7	29.5	31.8	3.4
2	2483.5	35.51	AV	54	-18.49	1.5	110	35.1	5.7	29.5	31.8	3.4
3	4960	46.53	PK	74	-27.47	1.5	110	45.89	7	30.05	31.5	5.55
4	4960	35.16	AV	54	-18.84	1.5	110	35.07	7	30.05	31.5	5.55
5	7440	49.63	PK	74	-24.37	1.5	110	38.42	16	31.2	32	15.2
6	7440	38.28	AV	54	-15.72	1.5	110	28.07	16	31.2	32	15.2

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
- Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level - Limit value

## 2.7. Conducted Emission

### 2.7.1. Limit of Conducted Emission


For equipment that is designed to be connected to the public utility (AC) power line, the radiofrequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

### 2.7.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.7.3. Test Setup

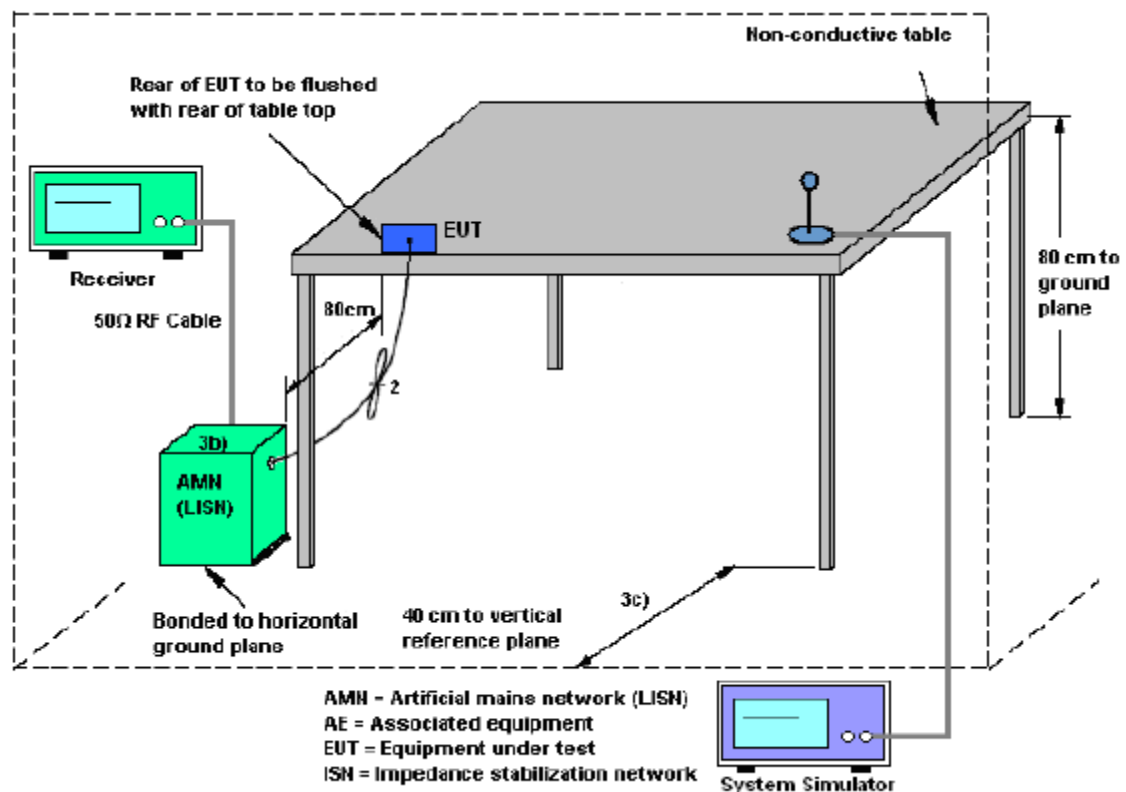


#### **2.7.4. Test Procedures**

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

#### **2.7.5. Test Result**


The EUT configuration of the emission tests is Bluetooth Link + USB Cable (Charging from Adapter)



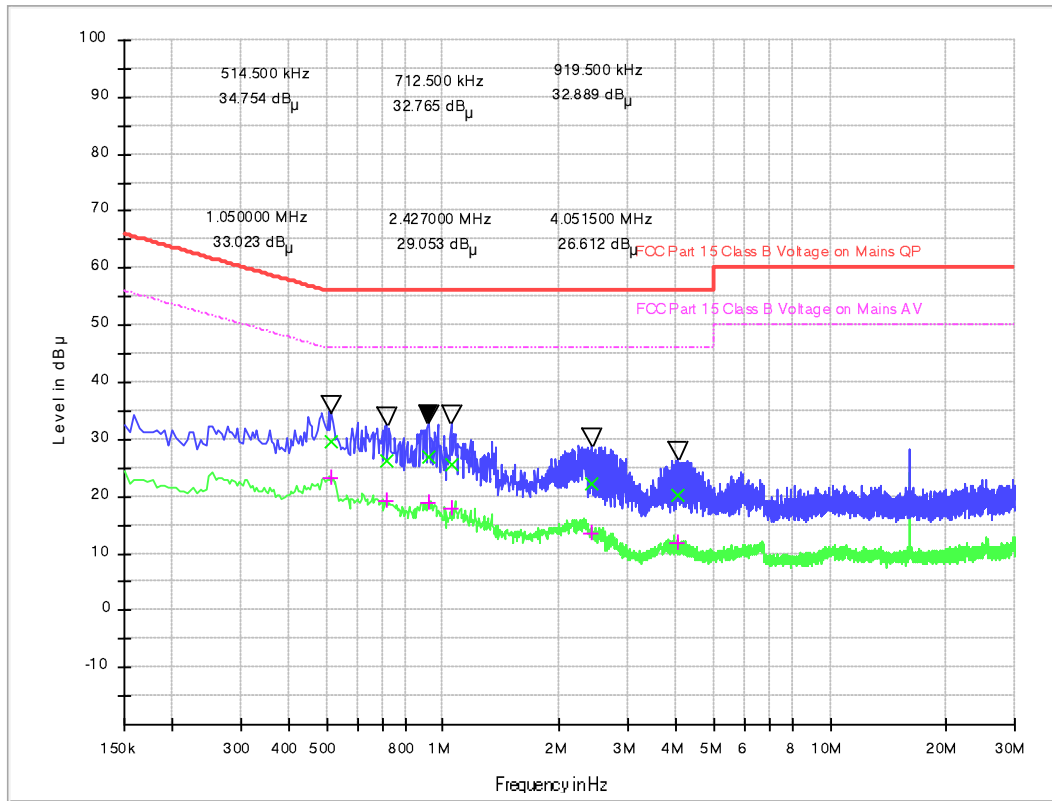

(Plot A: L Phase)

Frequency (MHz)	QuasiPeak (dB µ V)	Average (dB µ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB µ V)
0.514500	29.74	23.26	0.1	10.1	26.26	56.0	22.74	46.0
0.712500	26.32	19.28	0.1	10.1	29.68	56.0	26.72	46.0
0.919500	26.81	18.79	0.1	10.1	29.19	56.0	27.21	46.0
1.050000	25.69	17.85	0.6	10.6	30.31	56.0	28.15	46.0
2.427000	22.37	13.48	0.6	10.6	33.63	56.0	32.52	46.0
4.051500	20.34	11.89	0.6	10.6	35.66	56.0	34.11	46.0

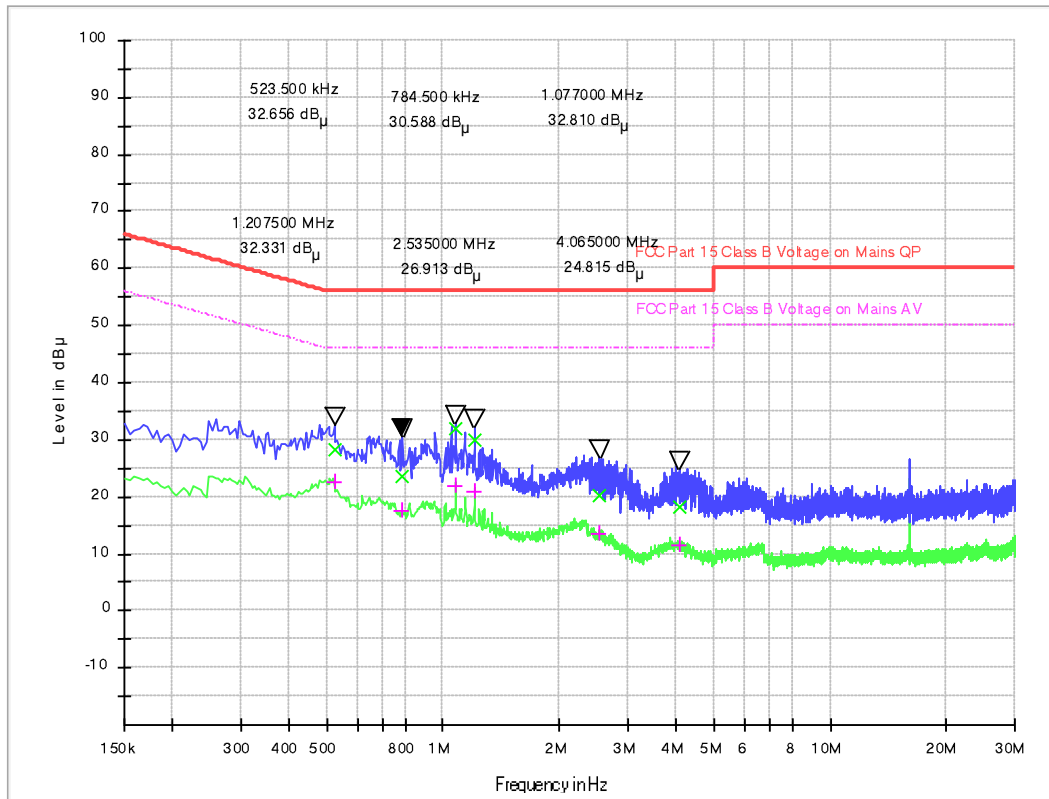

(Plot B: N Phase)

Frequency (MHz)	QuasiPeak (dB µ V)	CAverage (dB µ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB µ V)
0.523500	28.12	22.54	0.1	10.1	27.88	56.0	23.46	46.0
0.784500	23.49	17.69	0.1	10.1	32.51	56.0	28.31	46.0
1.077000	31.88	21.74	0.6	10.6	24.12	56.0	24.26	46.0
1.207500	29.79	20.73	0.6	10.6	26.21	56.0	25.27	46.0
2.535000	20.33	13.50	0.6	10.6	35.67	56.0	32.50	46.0
4.065000	18.34	11.42	0.6	10.6	37.66	56.0	34.58	46.0

**Test Result: PASS**

**Note: Correction factor=Cabel loss+ attenuation factor  
attenuation factor=10dB**

### 3. List of measuring equipment

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI TEST RECEIVER	KEYSIGHT	N9038A	A141202036	2021.04.26	2022.04.25
2	Power Meter	R&S	NRP-Z31	102872	2021.04.26	2022.04.25
3	TURNTABLE	ETS	2088	2149	N/A	N/A
4	ANTENNA MAST	ETS	2075	2346	N/A	N/A
5	EMI TEST Software	R&S	ESK1	N/A	N/A	N/A
6	Horn antenna (18GHz~26.5GHz)	AR	AT4003A	325306	2020.09.16	2022.09.15
7	Amplifier 30M~1GHz	MILMEGA	80RF1000-10004	A140101634	2021.01.26	2022.01.25
8	Amplifier 1G~18GHz	MILMEGA	AS0104R-800/400	A160302517	2021.01.26	2022.01.25
9	High pass filter	Compliance Direction systems	BSU-6	34202	2021.11.09	2022.11.08
10	Horn Antenna	R&S	HF906	A0304225	2019.04.17	2022.04.16
11	Horn Antenna	R&S	ESIB7	A0501375	2020.06.24	2022.06.22
12	ULTRA-BROADBAND ANTENNA	SCHWARZ BECK	VULB9160	A0805560	2019.05.24	2022.05.23
13	Passive Loop Antenna	R&S	HFH2-Z2	100047	2019.04.26	2022.04.25
14	Temperature chamber	TABAI	PS-232	A8708054	2021.09.24	2022.09.23
15	Spectrum Analyzer	KEYSIGHT	N9030A	A160702554	2021.04.26	2022.04.25
16	Power Supply	R&S	ESIB26	A0304218	2021.01.04	2022.01.03
17	LISN	ROHDE&S CHWARZ	ENV216	A140701847	2021.08.11	2022.08.10
18	Test software	ECIT	Eagle	V2.0	N/A	N/A

#### 4. Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All the measurement uncertainty value were shown with a coverage  $K=2$  to indicate 95% level of confidence . The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

##### Uncertainty of AC Power Line Conducted Emission Measurement (150KHz~30MHz)

Measuring Uncertainty for a level of confidence of 95%( $U=2U_c(y)$ )	2.8dB
---	-------

##### Uncertainty of Radiated Emission Measurement (9KHz~30MHz)

Measuring Uncertainty for a level of confidence of 95%( $U=2U_c(y)$ )	3.5dB
---	-------

##### Uncertainty of Radiated Emission Measurement (30MHz~1GHz)

Measuring Uncertainty for a level of confidence of 95%( $U=2U_c(y)$ )	3.91dB
---	--------

##### Uncertainty of Radiated Emission Measurement (1GHz~18GHz)

Measuring Uncertainty for a level of confidence of 95%( $U=2U_c(y)$ )	4.5dB
---	-------

##### Uncertainty of Radiated Emission Measurement (18GHz~40GHz)

Measuring Uncertainty for a level of confidence of 95%( $U=2U_c(y)$ )	4.9dB
---	-------

##### Uncertainty of RF Conducted Measurement (9KHz~40GHz)


Measuring Uncertainty for a level of confidence of 95%( $U=2U_c(y)$ )	1.3dB
---	-------

## 5. Appendix A


### Peak Output Power Test Result and Data

Test Frequency	Conducted Power(dBm)	Limit(dBm)	Result
2402	-0.463	30	Pass
2440	-0.746		Pass
2480	-1.102		Pass


Output Power: 2402MHz

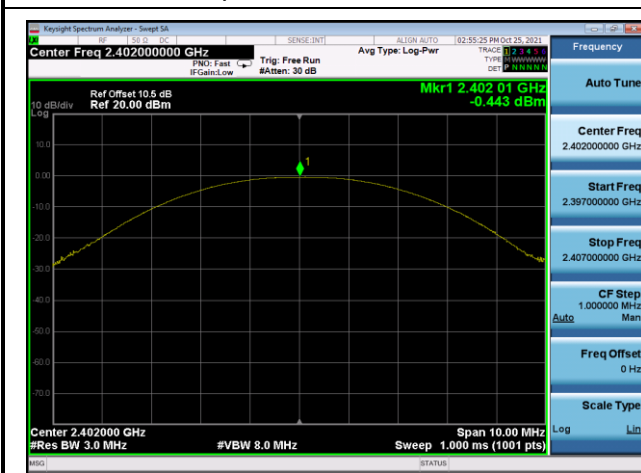

Output Power: 2440MHz

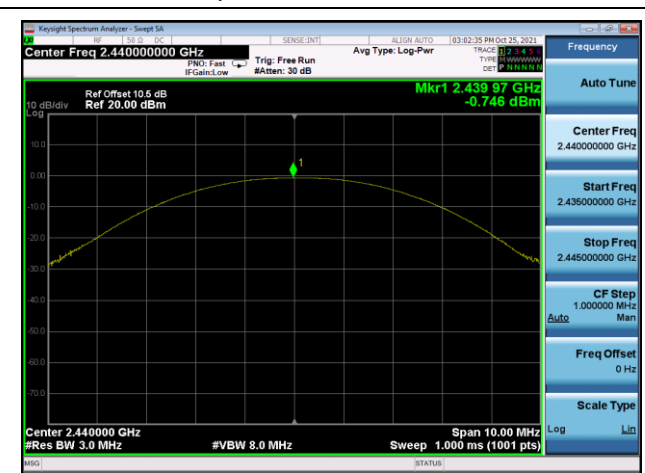


Output Power: 2480MHz

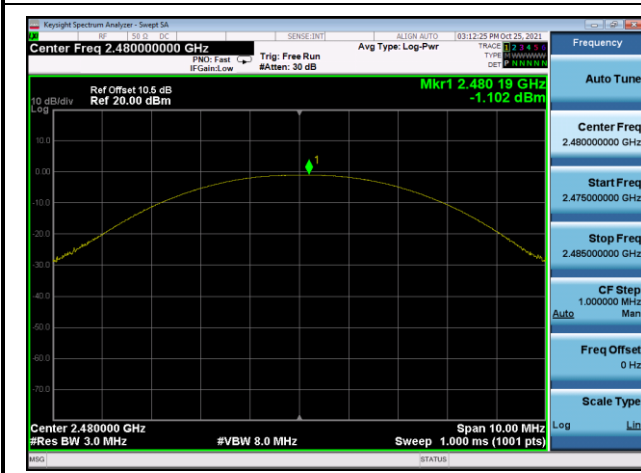


### Power Spectral Density Test Result and Data

Test Frequency	PSD(dBm/3KHz)	Limit(dBm/3KHz)	Result
2402	-23.609	8	Pass
2440	-24.394		Pass
2480	-25.765		Pass


Power spectral density: 2402MHz

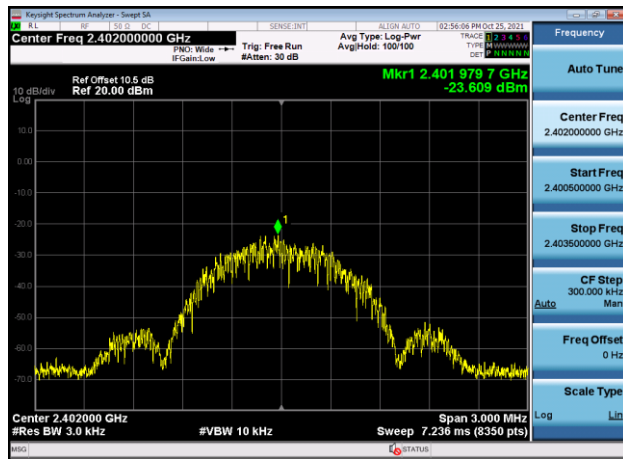

Power spectral density: 2440MHz

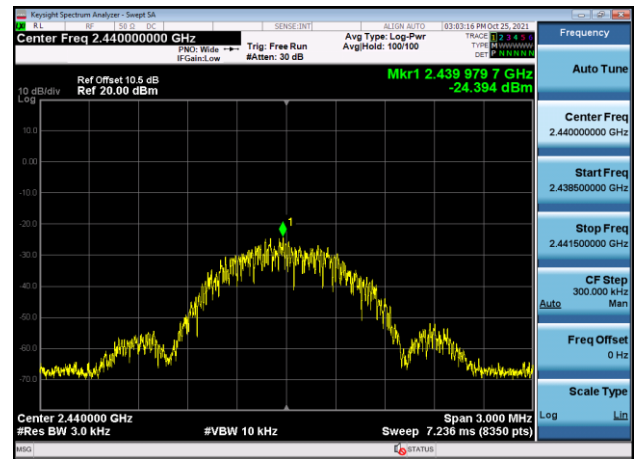

Power spectral density: 2480MHz

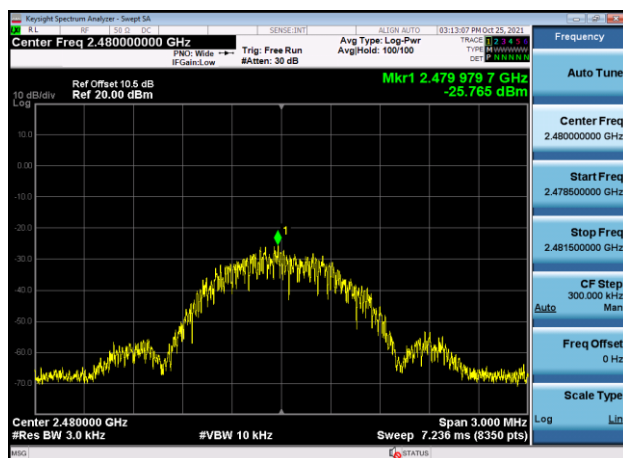

### 6dB BandWidth Test Result and Data

Test Frequency	6dB Occupy Bandwidth(Khz)	Min Limit(kHz)	Result
2402	541.823	500	Pass
2440	547.707		Pass
2480	536.669		Pass

6dB Bandwidth: 2402MHz



6dB Bandwidth: 2440MHz



6dB Bandwidth: 2480MHz



**Conducted Band Edges and Spurious Emissions  
Test Result and Data**

BLE Transmitter Spurious Emission			
Test Frequency (MHz)	Test Range (MHz~MHz)	Power (dBm)	Result
2402	10000MHz~25000MHz	-41.59	Pass
2402	2500MHz~10000MHz	-39.00	Pass
2402	30MHz~2310MHz	-46.44	Pass
2402	Band Edge	-45.80	Pass
2402	Referecy Level	-20.88	Pass
2440	10000MHz~25000MHz	-42.03	Pass
2440	2500MHz~10000MHz	-39.18	Pass
2440	30MHz~2310MHz	-34.57	Pass
2440	Band Edge	-47.89	Pass
2440	Referecy Level	-21.17	Pass
2480	10000MHz~25000MHz	-41.87	Pass
2480	2500MHz~10000MHz	-38.61	Pass
2480	30MHz~2310MHz	-47.17	Pass
2480	Band Edge	-48.96	Pass
2480	Referecy Level	-21.57	Pass




,Plot ,1 Transmitter Spurious Emission : 2402,Referecy Level




,Plot ,1 Transmitter Spurious Emission : 2440,Referecy Level




,Plot ,1 Transmitter Spurious Emission : 2480,Referecy Level

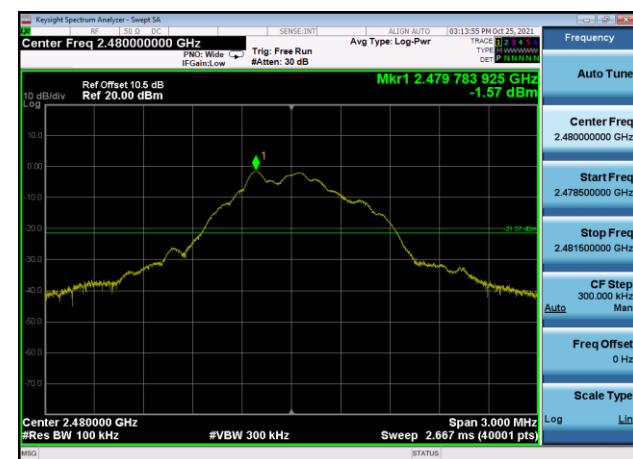


,Plot ,2 Conducted Emission: 2402 ,Band Edge

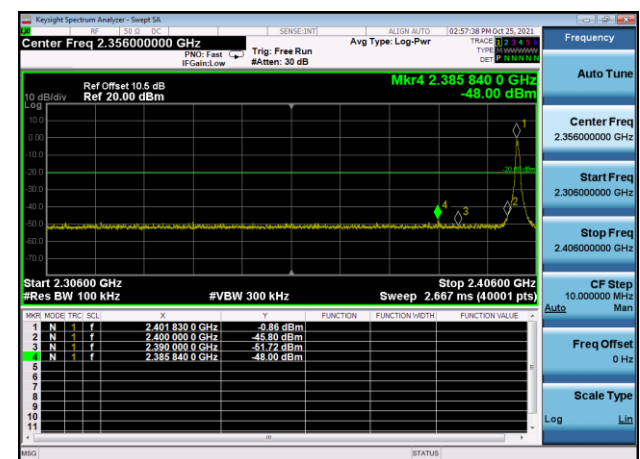

,Plot ,2 Conducted Emission: 2440 ,Band Edge

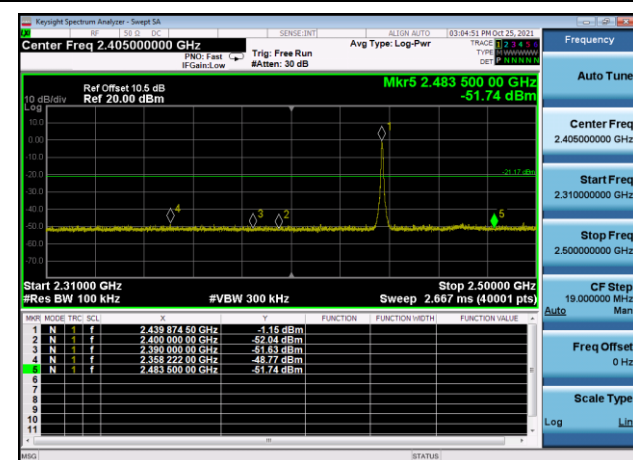

,Plot ,2 Conducted Emission: 2480 ,Band Edge

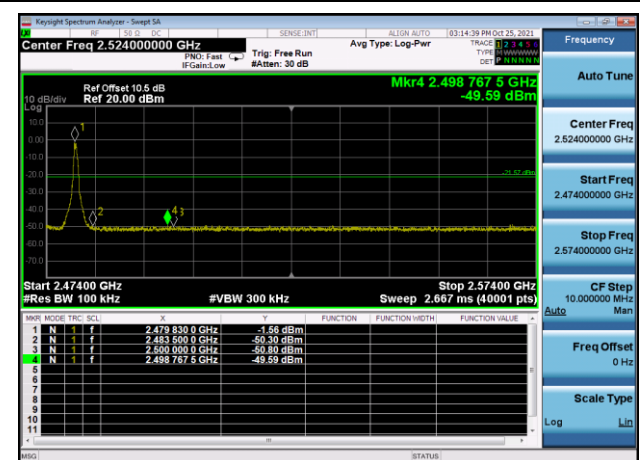


,Plot ,3 Transmitter Spurious Emission : 2402,30MHz~2310MHz




,Plot ,3 Transmitter Spurious Emission : 2440,30MHz~2310MHz




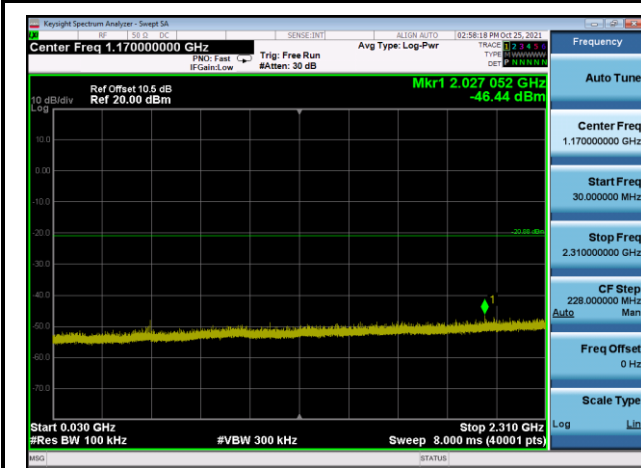


,Plot ,3Transmitter Spurious Emission  
: 2480,30MHz~2310MHz

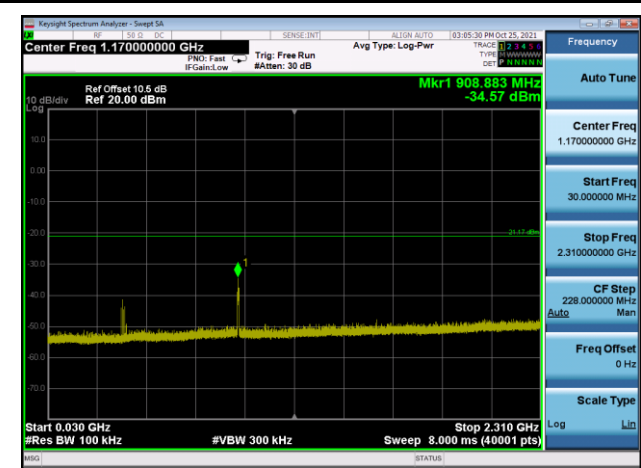


,Plot ,4Transmitter Spurious Emission  
: 2402,2500MHz~10000MHz

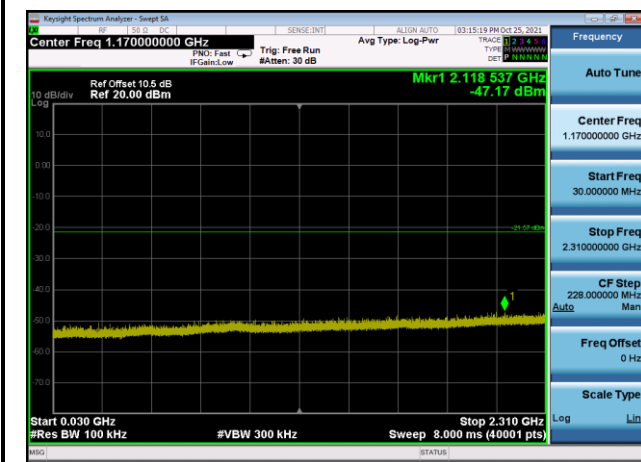


,Plot ,4Transmitter Spurious Emission  
: 2440,2500MHz~10000MHz

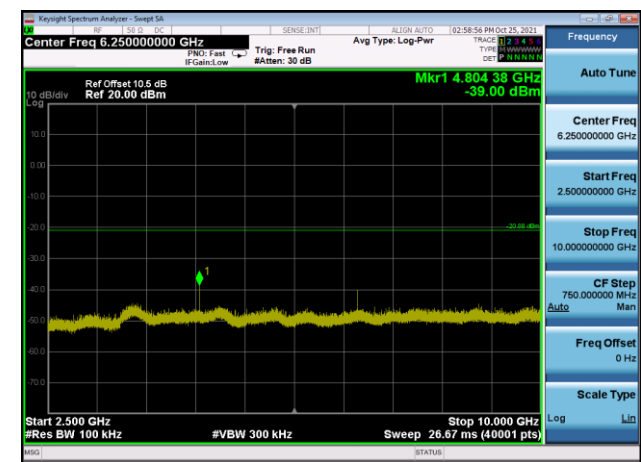



,Plot ,4Transmitter Spurious Emission  
: 2480,2500MHz~10000MHz

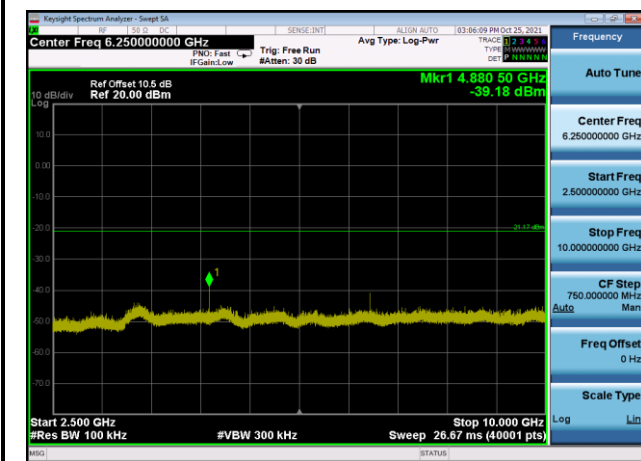


,Plot ,5Transmitter Spurious Emission  
: 2402,1000MHz~2500MHz

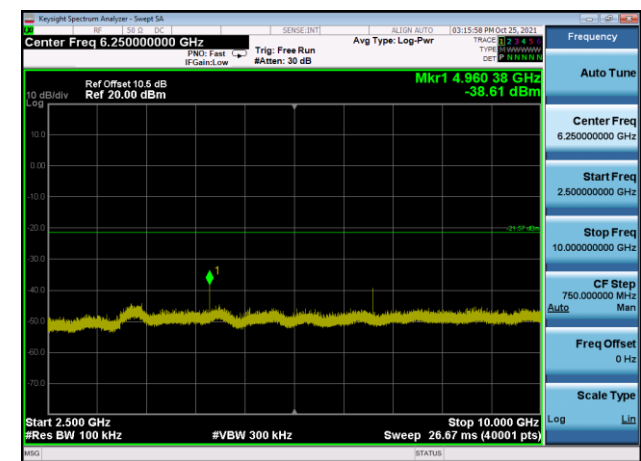

,Plot ,5Transmitter Spurious Emission  
: 2440,1000MHz~2500MHz

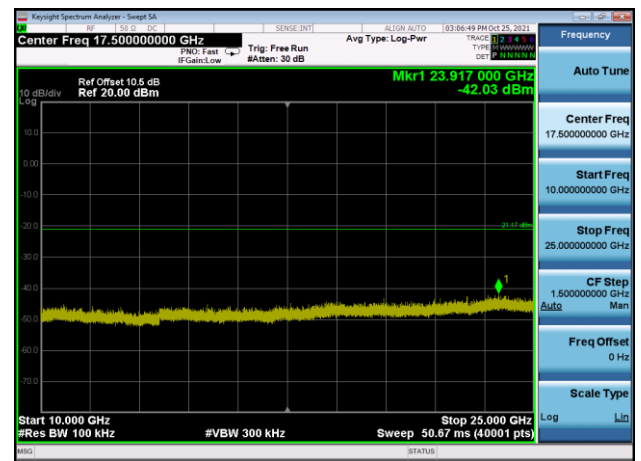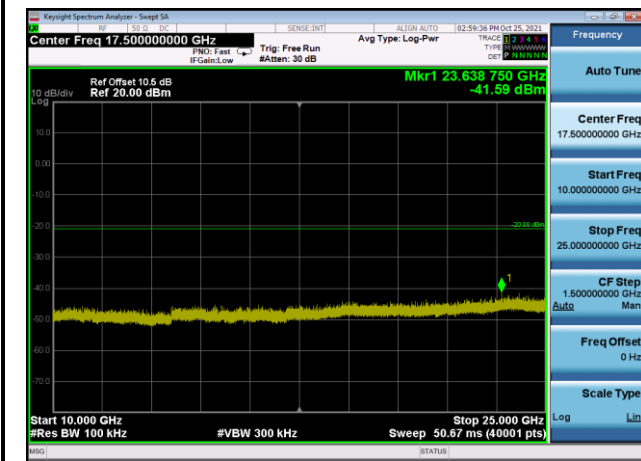

,Plot ,5Transmitter Spurious Emission  
 : 2480,10000MHz~25000MHz

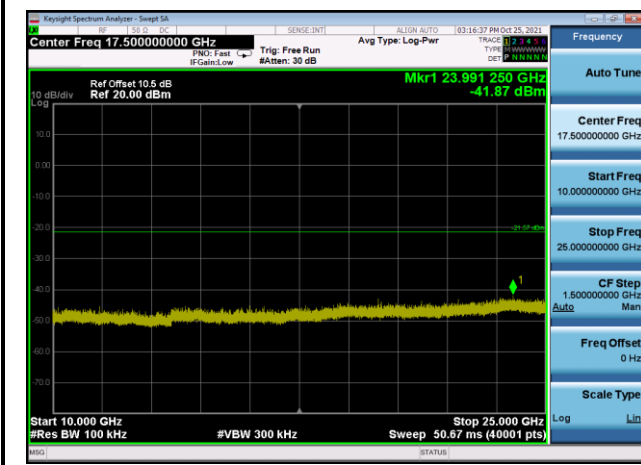

\*\* END OF REPORT \*\*