

FCC REPORT (LTE)

Applicant: Sky Phone LLC

Address of Applicant: 1348 Washington Av. Suite 350, Miami Beach, FL 33139

Equipment Under Test (EUT)

Product Name: 4G Smart Phone

Model No.: Elite L55

Trade mark: SKY DEVICES

FCC ID: 2ABOSSKYELITEL55

Applicable standards: FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22 Subpart H
FCC CFR Title 47 Part 24 Subpart E
FCC CFR Title 47 Part 27 Subpart L
FCC CFR Title 47 Part 27 Subpart H

Date of sample receipt: 03 Dec., 2021

Date of Test: 04 Dec., 2021 to 06 Jan., 2022

Date of report issued: 07 Jan., 2022

Test Result: PASS*

*In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful, and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2. Version

Version No.	Date	Description
00	07 Jan., 2022	Original

Tested by: Janet Wei **Date:** 07 Jan., 2022
Test Engineer

Reviewed by: Winner Zhang **Date:** 07 Jan., 2022
Project Engineer

3. Contents

Page

1.	COVER PAGE.....	1
2.	VERSION.....	2
3.	CONTENTS.....	3
4.	TEST SUMMARY.....	4
5.	GENERAL INFORMATION.....	5
5.1	CLIENT INFORMATION.....	5
5.2	GENERAL DESCRIPTION OF E.U.T.....	5
5.3	TEST ENVIRONMENT AND MODE, AND TEST SAMPLES PLANS.....	12
5.4	DESCRIPTION OF SUPPORT UNITS.....	12
5.5	MEASUREMENT UNCERTAINTY.....	12
5.6	RELATED SUBMITTAL(S) / GRANT (S).....	12
5.7	ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD.....	12
5.8	LABORATORY FACILITY.....	12
5.9	LABORATORY LOCATION.....	13
5.10	TEST INSTRUMENTS LIST.....	13
6.	TEST RESULTS.....	14
6.1	CONDUCTED OUTPUT POWER, ERP AND EIRP.....	14
6.2	PEAK-TO-AVERAGE RATIO.....	15
6.3	OCCUPY BANDWIDTH.....	16
6.4	OUT OF BAND EMISSION AT ANTENNA TERMINALS.....	17
6.5	FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT.....	18
6.6	FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT.....	27
6.7	FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT.....	28
7	TEST SETUP PHOTO.....	29
8	EUT CONSTRUCTIONAL DETAILS.....	31

4. Test Summary

Test Items	Section in CFR 47	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1093	Passed (Please refer to SAR Report)
RF Output Power	Part 2.1046 Part 22.913 (a)(5) Part 24.232 (c) Part 27.50 (c)(10) Part 27.50 (d)(4)	Appendix A – LTE
Peak-to-Average Ratio	Part 24.232 (d) Part 22.913 (d) Part 27.50(d)(5)	Appendix B – LTE
Modulation Characteristics	Part 2.1047	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 22.917(b) Part 24.238(b) Part 27.53(g) Part 27.53(h)	Appendix C – LTE
Out of band emission at antenna terminals	Part 2.1053 Part 22.917(a) Part 24.238 (a) Part 27.53 (g) Part 27.53 (h)	Appendix D – LTE Appendix E – LTE
Field strength of spurious radiation	Part 22.917(a) Part 24.238 (a) Part 27.53 (g) Part 27.53 (h)	Pass
Frequency stability vs. temperature	Part 22.355 Part 24.235 Part 27.54 Part 2.1055(a)(1)(b)	Appendix F – LTE
Frequency stability vs. voltage	Part 22.355 Part 24.235 Part 27.54 Part 2.1055(d)(2)	Appendix F – LTE
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. The cable insertion loss used by “RF Output Power” and other conduction measurement items is 0.5dB(Fundamental Frequency below 1GHz)/1.0dB(Fundamental Frequency above 1GHz) (provided by the customer).		
Test Method:	ANSI/TIA-603-E-2016 ANSI C63.26-2015	

5. General Information

5.1 Client Information

Applicant:	Sky Phone LLC
Address:	1348 Washington Av. Suite 350, Miami Beach, FL 33139
Manufacturer:	Sky Phone LLC
Address:	1348 Washington Av. Suite 350, Miami Beach, FL 33139

5.2 General Description of E.U.T.

Product Name:	4G Smart Phone		
Model No.:	Elite L55		
Operation Frequency range:	LTE Band 2:	TX: 1850MHz-1910MHz	RX: 1930MHz-1990MHz
	LTE Band 4:	TX: 1710MHz-1755MHz	RX: 2110MHz-2155MHz
	LTE Band 5:	TX: 824MHz-849MHz	RX: 869MHz-894MHz
	LTE Band 12:	TX: 699MHz-716MHz	RX: 729MHz-746MHz
	LTE Band 17:	TX: 704MHz-716MHz	RX: 734MHz-746MHz
	LTE Band 66:	TX: 1710MHz-1780MHz	RX: 2110MHz-2200MHz
Modulation type:	<input checked="" type="checkbox"/> QPSK	<input checked="" type="checkbox"/> 16QAM	<input checked="" type="checkbox"/> 64QAM
Antenna type:	Internal Antenna		
Antenna gain:	LTE Band 2:	1.05 dBi(declare by Applicant)	
	LTE Band 4:	0.13 dBi(declare by Applicant)	
	LTE Band 5:	1.85 dBi(declare by Applicant)	
	LTE Band 12:	0.23 dBi(declare by Applicant)	
	LTE Band 17:	0.25 dBi(declare by Applicant)	
	LTE Band 66:	0.18 dBi(declare by Applicant)	
Power supply:	Rechargeable Li-ion Battery DC3.7V-2000mAh		
AC adapter:	Input: AC100-240V 50/60Hz 0.2A Output: DC 5.0V, 1000mA		
Test Sample Condition:	The applicant provided engineering samples for staying in continuously transmitting for testing.		

Operation Frequency List:

LTE Band 2 (1.4MHz)		LTE Band 2 (3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
18607	1850.70	18615	1851.50
18608	1850.80	18616	1851.60
....
18899	1879.90	18899	1879.90
18900	1880.00	18900	1880.00
18901	1880.10	18901	1880.10
...
19193	1909.20	19185	1908.40
19194	1909.30	19186	1908.50
LTE Band 2 (5MHz)		LTE Band 2 (10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
18625	1852.50	18650	1855.00
18626	1852.60	18651	1855.10
....
18899	1879.90	18899	1879.90
18900	1880.00	18900	1880.00
18901	1880.10	18901	1880.10
...
19175	1907.40	19150	1904.90
19176	1907.50	19151	1905.00
LTE Band 2 (15MHz)		LTE Band 2 (20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
18675	1857.50	18700	1860.00
18676	1857.60	18701	1860.10
....
18899	1879.90	18899	1879.90
18900	1880.00	18900	1880.00
18901	1880.10	18901	1880.10
...
19125	1902.40	19100	1899.90
19126	1902.50	19101	1900.00

LTE Band 4 (1.4MHz)		LTE Band 4 (3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
19957	1710.70	19965	1711.50
19958	1710.80	19966	1711.60
....
20174	1732.40	20174	1732.40
20175	1732.50	20175	1732.50
20176	1732.60	20176	1732.60
...
20392	1754.20	20384	1753.40
20393	1754.30	20385	1753.50
LTE Band 4 (5MHz)		LTE Band 4 (10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
19975	1712.50	20000	1715.00
19976	1712.60	20001	1715.10
....
20174	1732.40	20174	1732.40
20175	1732.50	20175	1732.50
20176	1732.60	20176	1732.60
...
20374	1752.40	20349	1749.90
20375	1752.50	20350	1750.00
LTE Band 4 (15MHz)		LTE Band 4 (20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20025	1717.50	20050	1720.00
20026	1717.60	20051	1720.10
....
20174	1732.40	20174	1732.40
20175	1732.50	20175	1732.50
20176	1732.60	20176	1732.60
...
20324	1747.40	20299	1744.90
20325	1747.50	20300	1745.00

LTE Band 5 (1.4MHz)		LTE Band 5 (3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20407	824.70	20415	825.50
20408	824.80	20416	825.60
....
20524	836.40	20524	836.40
20525	836.50	20525	836.50
20526	836.60	20526	836.60
...
20642	848.20	20634	847.40
20643	848.30	20635	847.50
LTE Band 5 (5MHz)		LTE Band 5 (10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20425	826.50	20450	829.00
20426	826.60	20451	829.10
....
20524	836.40	20524	836.40
20525	836.50	20525	836.50
20526	836.60	20526	836.60
...
20624	846.40	20599	839.90
20625	846.50	20600	844.00

LTE Band 12 (1.4MHz)		LTE Band 12 (3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
23017	699.70	23025	700.50
23756	699.80	23026	700.60
....
23094	707.40	23094	707.40
23095	707.50	23095	707.50
23096	707.60	23096	707.60
...
23172	715.20	23164	714.40
23173	715.30	23165	714.50
LTE Band 12 (5MHz)		LTE Band 12 (10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
23035	701.50	23060	704.00
23036	701.60	23061	704.10
....
23094	707.40	23094	707.40
23095	707.50	23095	707.50
23096	707.60	23096	707.60
...
23154	713.40	23129	710.90
23155	713.50	23130	711.00

LTE Band 17 (5MHz)		LTE Band 17 (10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
23755	706.50	23780	709.00
23756	706.60	23781	709.10
....
23789	709.90	23789	709.90
23790	710.00	23790	710.00
23791	710.10	23791	710.10
...
23824	713.40	23799	710.90
23825	713.50	23800	711.00

LTE Band 66 (1.4MHz)		LTE Band 66 (3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
131979	1710.70	131987	1711.50
131980	1710.80	131988	1711.60
....
132321	1744.90	132321	1744.90
132322	1745.00	132322	1745.00
132323	1745.10	132323	1745.10
...
132664	1779.20	132656	1778.40
132665	1779.30	132657	1778.50
LTE Band 66 (5MHz)		LTE Band 66 (10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
131997	1712.50	132022	1715.00
131998	1712.60	132023	1715.10
....
132321	1744.90	132321	1744.90
132322	1745.00	132322	1745.00
132323	1745.10	132323	1745.10
...
136246	1777.40	132621	1774.90
136247	1777.50	132622	1775.00
LTE Band 66 (15MHz)		LTE Band 66 (20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
132047	1717.50	132072	1720.00
132048	1717.60	132073	1720.10
....
132321	1744.90	132321	1744.90
132322	1745.00	132322	1745.00
132323	1745.10	132323	1745.10
...
132596	1772.40	132571	1769.90
132597	1772.50	132572	1770.00

Regards to the operating frequency range, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channels as below:

LTE Band 2 (1.4MHz)			LTE Band 2 (3MHz)		
Channel	Frequency (MHz)		Channel	Frequency (MHz)	
Lowest channel	18607	1850.70	Lowest channel	18615	1851.50
Middle channel	18900	1880.00	Middle channel	18900	1880.00
Highest channel	19193	1909.30	Highest channel	19185	1908.50
LTE Band 2 (5MHz)			LTE Band 2 (10MHz)		
Channel	Frequency (MHz)		Channel	Frequency (MHz)	
Lowest channel	18625	1852.50	Lowest channel	18650	1855.00
Middle channel	18900	1880.00	Middle channel	18900	1880.00
Highest channel	19175	1907.50	Highest channel	19150	1905.00
LTE Band 2 (15MHz)			LTE Band 2 (20MHz)		
Channel	Frequency (MHz)		Channel	Frequency (MHz)	
Lowest channel	18675	1857.50	Lowest channel	18700	1860.00
Middle channel	18900	1880.00	Middle channel	18900	1880.00
Highest channel	19125	1902.50	Highest channel	19100	1900.00

LTE Band 5 (1.4MHz)			LTE Band 5 (3MHz)		
Channel:	Frequency (MHz)		Channel	Frequency (MHz)	
Lowest channel	20407	824.70	Lowest channel	20415	825.50
Middle channel	20525	836.50	Middle channel	20525	836.50
Highest channel	20643	848.30	Highest channel	20635	847.50
LTE Band 5 (5MHz)			LTE Band 5 (10MHz)		
Channel	Frequency (MHz)		Channel	Frequency (MHz)	
Lowest channel	20425	826.50	Lowest channel	20450	829.00
Middle channel	20525	836.50	Middle channel	20525	836.50
Highest channel	20625	846.50	Highest channel	20600	844.00

LTE Band 12 includes LTE Band 17:

LTE Band 12(1.4MHz)			LTE Band 12(3MHz)		
Channel	Frequency (MHz)		Channel	Frequency (MHz)	
Lowest channel	23017	699.70	Lowest channel	23025	700.50
Middle channel	23095	707.50	Middle channel	23095	707.50
Highest channel	23173	715.30	Highest channel	23165	714.50
LTE Band 12(5MHz)			LTE Band 12(10MHz)		
Channel	Frequency (MHz)		Channel	Frequency (MHz)	
Lowest channel	23035	701.50	Lowest channel	23060	704.00
Middle channel	23095	707.50	Middle channel	23095	707.50
Highest channel	23155	713.50	Highest channel	23130	711.00

LTE Band 66 includes LTE Band 4:

LTE Band 66 (1.4MHz)			LTE Band 66 (3MHz)		
Channel	Frequency (MHz)		Channel	Frequency (MHz)	
Lowest channel	131979	1710.7	Lowest channel	131987	1711.5
Middle channel	132322	1745.0	Middle channel	132322	1745.0
Highest channel	132665	1779.3	Highest channel	132657	1778.5
LTE Band 66 (5MHz)			LTE Band 66 (10MHz)		
Channel	Frequency (MHz)		Channel	Frequency (MHz)	
Lowest channel	131997	1712.5	Lowest channel	132022	1715.0
Middle channel	132322	1745.5	Middle channel	132322	1745.0
Highest channel	132647	1777.5	Highest channel	132622	1775.0
LTE Band 66 (15MHz)			LTE Band 66 (20MHz)		
Channel	Frequency (MHz)		Channel	Frequency (MHz)	
Lowest channel	132047	1717.5	Lowest channel	132072	1720.0
Middle channel	132322	1745.0	Middle channel	132322	1745.0
Highest channel	132597	1772.5	Highest channel	132572	1770.0

Note: LTE Band 4 (1710~1755MHz) covered by Band 66, Band 17 (704~716MHz) covered by Band 12, Because they are with the same output power and supported bandwidths

5.3 Test environment and mode, and test samples plans

Operating Environment:	
Temperature:	Normal: 15°C ~ 35°C, Extreme: -30°C ~ +50°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 3.7Vdc, Extreme: Low 3.5Vdc, High 4.20Vdc
Test mode:	
LTE QPSK mode	Keep the EUT communication with simulated station in QPSK mode
LTE 16-QAM mode	Keep the EUT communication with simulated station in 16-QAM mode
Remark: The EUT has been tested under continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes. Just the worst case position (H mode) shown in report.	

5.4 Description of Support Units

Test Equipment	Manufacturer	Model No.	Serial No.
Simulated Station	Anritsu	MT8820C	6201026545

5.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission (9kHz ~ 30MHz electric field) for 3m SAC	3.13 dB
Radiated Emission (9kHz ~ 30MHz magnetic field) for 3m SAC	3.13 dB
Radiated Emission (30MHz ~ 1GHz) for 3m SAC	4.45 dB
Radiated Emission (1GHz ~ 18GHz) for 3m SAC	5.34 dB
Radiated Emission (18GHz ~ 40GHz) for 3m SAC	5.34 dB

5.6 Related Submittal(s) / Grant (s)

This is an original grant, no related submittals and grants.

5.7 Additions to, deviations, or exclusions from the method

No

5.8 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**
JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.
- **ISED – CAB identifier.: CN0021**
The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.
- **CNAS - Registration No.: CNAS L15527**
JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.
- **A2LA - Registration No.: 4346.01**
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.9 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://www.ccis-cb.com>

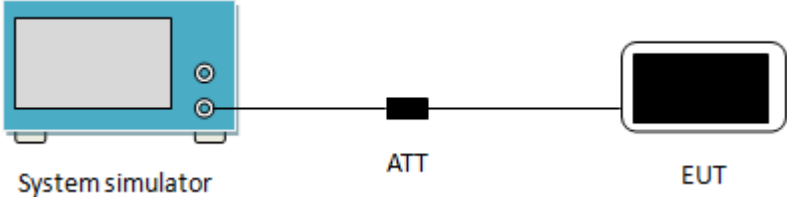
5.10 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
3m SAC	ETS	RFD-100	Q1984	04-14-2021	04-13-2024
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-044	03-07-2021	03-06-2022
BiConiLog Antenna	SCHWARZBECK	VULB9163	9163-1246	03-07-2021	03-06-2022
Biconical Antenna	SCHWARZBECK	VUBA 9117	9117#359	06-17-2021	06-17-2022
Horn Antenna	SCHWARZBECK	BBHA9120D	912D-916	03-07-2021	03-06-2022
Broad-Band Horn Antenna	SCHWARZBECK	BBHA9170	1067	04-02-2021	04-01-2022
Broad-Band Horn Antenna	SCHWARZBECK	BBHA9170	1068	04-02-2021	04-01-2022
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-03-2021	03-02-2022
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-03-2021	03-02-2022
Spectrum analyzer	Keysight	N9010B	MY60240202	10-27-2021	10-26-2022
Simulated Station	Anritsu	MT8820C	6201026545	03-03-2021	03-02-2022
Low Pre-amplifier	SCHWARZBECK	BBV9743B	00305	03-07-2021	03-06-2022
High Pre-amplifier	SKET	LNPA_0118G-50	MF280208233	03-07-2021	03-06-2022
Cable	Qualwave	JYT3M-1G-NN-8M	JYT3M-1	03-07-2021	03-06-2022
Cable	Qualwave	JYT3M-18G-NN-8M	JYT3M-2	03-07-2021	03-06-2022
Cable	Qualwave	JYT3M-1G-BB-5M	JYT3M-3	03-07-2021	03-06-2022
Cable	Bost	JYT3M-40G-SS-8M	JYT3M-4	04-02-2021	04-01-2022
EMI Test Software	Tonscend	TS+	Version:3.0.0.1		

Conducted method:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Spectrum Analyzer	Keysight	N9020B	MY57431500	07-02-2021	07-01-2022
Simulated Station	Rohde & Schwarz	CMW500	108209	07-02-2021	07-01-2022
RF Control Unit	Tonscend	JS0806-1	N/A	N/A	N/A
Band Reject Filter Group	Tonscend	JS0806-F	21A8060360	N/A	N/A
Test Software	Tonscend	TS+	Version: 2.6.9.0526		

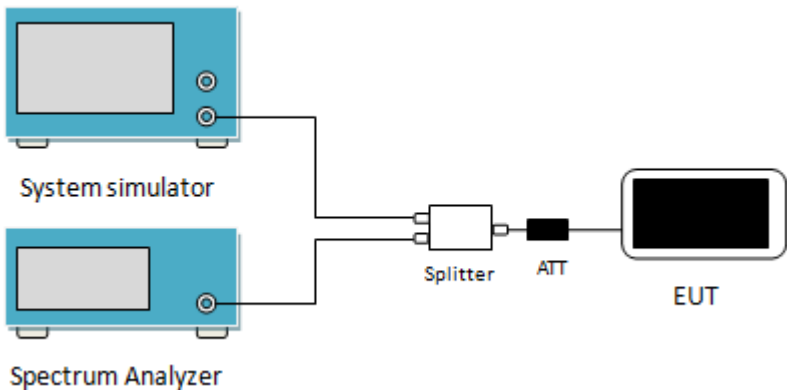
6. Test results

6.1 Conducted Output Power, ERP and EIRP

Test Requirement:	Part 22.913(a)(5), Part 24.232(c), part 27.50(c)(10), Part 27.50(d)(4),
Limit:	LTE Band 2: 2W, LTE Band 4: 1W, LTE Band 5: 7W, LTE Band 12: 3W, LTE Band 17: 3W, Band 66: 1W
Test Setup:	 <p>The diagram illustrates the test setup. On the left is a blue 'System simulator' with a screen and two ports. A line connects it to a black 'ATT' (attenuator) block. Another line connects the 'ATT' to a black 'EUT' (Equipment Under Test) device.</p>
Test Procedure:	The transmitter output was connected to a calibrated attenuator, the other end of which was connected to the CMW500. Transmitter output power was read off in dBm.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

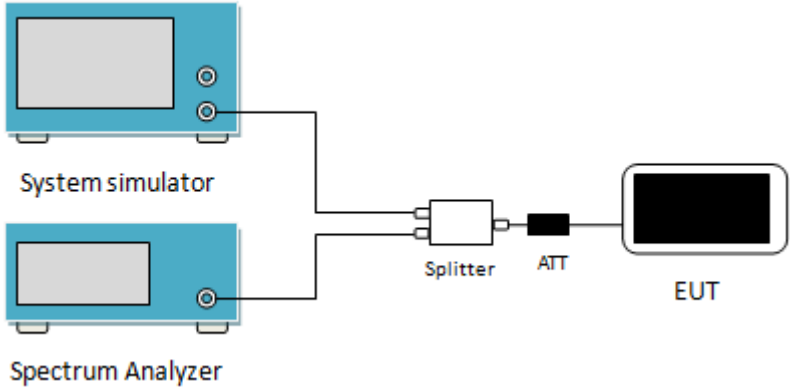
Measurement Data: Refer to Appendix A – LTE

6.2 Peak-to-Average Ratio

Test Requirement:	Part 24.232 (d), Part 27.50(d)(5)
Limit:	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
Test Setup:	 <p>The diagram shows a test setup for measuring Peak-to-Average Ratio (PAR). It includes a System simulator, a Spectrum Analyzer, a Splitter, an ATT (Attenuator), and an EUT (Equipment Under Test). The System simulator and Spectrum Analyzer are connected to the Splitter. The Splitter is connected to the ATT, which is then connected to the EUT.</p>
Test Procedure:	<ol style="list-style-type: none"> 1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 Set the CCDF option in spectrum analyzer, $RBW \geq OBW$, 3 Set the EUT working in highest power level, measured and recorded the 0.1% as PAPR level. 4 Repeat step 1~3 at other frequency and modulations.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

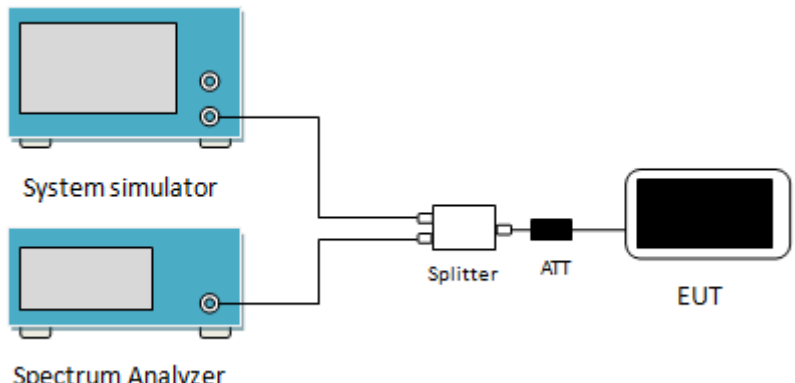
Measurement Data: Refer to Appendix B – LTE

6.3 Occupy Bandwidth

Test Requirement:	Part 22.917(b), Part 24.238(b), Part 27.53(g), Part 27.53(h),
Test Setup:	 <p>The diagram shows a test setup. On the left, there are two blue rectangular units: the top one is labeled 'System simulator' and the bottom one is labeled 'Spectrum Analyzer'. Both have a single circular connector on their right side. These two connectors are joined by a single line that leads to a 'Splitter' box. From the 'Splitter', one line goes to an 'ATT' (Attenuator) box, and another line goes to an 'EUT' (Equipment Under Test) box, which is depicted as a smartphone.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% ~ 5% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data: Refer to Appendix C – LTE

6.4 Out of band emission at antenna terminals

Test Requirement:	Part 22.917(a), Part 24.238 (a), part 27.53(g), part 27.53(h),
Limit:	LTE Band 2 & 4 & 5 & 12 & 17 & 66: The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB (-13 dBm).
Test Setup:	 <p>The diagram illustrates the test setup. On the left, there are two blue rectangular units: the top one is labeled 'System simulator' and the bottom one is labeled 'Spectrum Analyzer'. Both have a screen and two ports on the right side. A single line connects the top port of the System simulator to the top port of the Spectrum Analyzer. From the bottom port of the System simulator, a line goes to the left input of a white 'Splitter' box. From the right output of the Splitter, a line goes to a black 'ATT' (attenuator) box. Finally, a line connects the ATT box to the left side of a black 'EUT' (Equipment Under Test) device.</p>
Test Procedure:	<ol style="list-style-type: none"> 1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 For the out of band: For Band 5 & 12 & 17 set the RBW=100 kHz, VBW=300 kHz and for Band 2 & 4 & 7 set the RBW=1 MHz, VBW=3 MHz when below 1 GHz, RBW =1 MHz, VBW=3 MHz when above 1 GHz, Start=30MHz, Stop= 10th harmonic. 3 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	Pre-scan all RB Size and offset, and found the RB Size and offset of worst case, so the report shows only the worst case test data.

Measurement Data:

Band edge emission: Refer to Appendix D – LTE

Spurious emission: Refer to Appendix E – LTE

6.5 Field strength of spurious radiation measurement

Test Requirement:	Part 22.917(a), Part 24.238 (a), Part 27.53(g), Part 27.53(h)
Limit:	LTE Band 2 & 4 & 5 & 12 & 17 & 66: The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB (-13 dBm).
Test setup:	<p>Below 1GHz</p> <p>Above 1GHz</p>
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter camber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. 4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $ERP / EIRP = S.G. \text{ output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details.
Test results:	Passed

Measurement Data:

LTE Band 2 part:

Band 2 (1.4MHz)						
Lowest channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3701.40	-56.51	-1.60	-58.11	-13.00	45.11	Vertical
5552.10	-51.88	5.43	-46.45	-13.00	33.45	Vertical
7402.00	-48.08	13.11	-34.97	-13.00	21.97	Vertical
3701.40	-56.34	-2.09	-58.43	-13.00	45.43	Horizontal
5552.10	-54.31	3.81	-50.50	-13.00	37.50	Horizontal
7402.00	-49.56	11.38	-38.18	-13.00	25.18	Horizontal
Middle channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3760.00	-56.41	-1.31	-57.72	-13.00	44.72	Vertical
5640.00	-51.66	6.98	-44.68	-13.00	31.68	Vertical
7520.00	-47.86	11.74	-36.12	-13.00	23.12	Vertical
3760.00	-56.63	-1.80	-58.43	-13.00	45.43	Horizontal
5640.00	-54.59	4.30	-50.29	-13.00	37.29	Horizontal
7520.00	-50.06	10.25	-39.81	-13.00	26.81	Horizontal
Highest channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3816.60	-56.09	-1.02	-57.11	-13.00	44.11	Vertical
5724.90	-51.19	8.20	-42.99	-13.00	29.99	Vertical
7633.20	-47.52	11.17	-36.35	-13.00	23.35	Vertical
3816.60	-56.20	-1.49	-57.69	-13.00	44.69	Horizontal
5724.90	-54.92	5.68	-49.24	-13.00	36.24	Horizontal
7633.20	-49.58	10.01	-39.57	-13.00	26.57	Horizontal
<i>Remark:</i>						
<i>The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.</i>						

Band 2 (20MHz)						
Lowest channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3720.00	-56.28	-1.51	-57.79	-13.00	44.79	Vertical
5580.00	-51.15	5.80	-45.35	-13.00	32.35	Vertical
7440.00	-47.41	12.61	-34.80	-13.00	21.80	Vertical
3720.00	-56.52	-2.00	-58.52	-13.00	45.52	Horizontal
5580.00	-54.66	3.95	-50.71	-13.00	37.71	Horizontal
7440.00	-49.66	10.94	-38.72	-13.00	25.72	Horizontal
Middle channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3760.00	-55.95	-1.31	-57.26	-13.00	44.26	Vertical
5640.00	-51.25	6.98	-44.27	-13.00	31.27	Vertical
7520.00	-47.29	11.74	-35.55	-13.00	22.55	Vertical
3760.00	-56.49	-1.80	-58.29	-13.00	45.29	Horizontal
5640.00	-54.58	4.30	-50.28	-13.00	37.28	Horizontal
7520.00	-49.39	10.25	-39.14	-13.00	26.14	Horizontal
Highest channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3800.00	-55.85	-1.11	-56.96	-13.00	43.96	Vertical
5700.00	-51.45	8.28	-43.17	-13.00	30.17	Vertical
7600.00	-47.33	11.38	-35.95	-13.00	22.95	Vertical
3800.00	-56.52	-1.61	-58.13	-13.00	45.13	Horizontal
5700.00	-54.52	4.67	-49.85	-13.00	36.85	Horizontal
7600.00	-49.55	10.20	-39.35	-13.00	26.35	Horizontal
<i>Remark:</i>						
<i>The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.</i>						

LTE Band 5 part:

Band 5 (1.4MHz)						
Lowest channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1649.40	-67.28	-11.10	-78.38	-13.00	65.38	Vertical
2474.10	-62.45	-6.20	-68.65	-13.00	55.65	Vertical
3298.80	-61.20	-4.96	-66.16	-13.00	53.16	Vertical
1649.40	-65.96	-11.00	-76.96	-13.00	63.96	Horizontal
2474.10	-62.13	-6.54	-68.67	-13.00	55.67	Horizontal
3298.80	-61.03	-5.25	-66.28	-13.00	53.28	Horizontal
Middle channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1673.30	-66.91	-11.13	-78.04	-13.00	65.04	Vertical
2509.50	-62.00	-6.20	-68.20	-13.00	55.20	Vertical
3346.00	-61.02	-5.03	-66.05	-13.00	53.05	Vertical
1673.30	-66.24	-11.04	-77.28	-13.00	64.28	Horizontal
2509.50	-62.40	-6.51	-68.91	-13.00	55.91	Horizontal
3346.00	-61.32	-5.23	-66.55	-13.00	53.55	Horizontal
Highest channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1696.60	-66.66	-11.15	-77.81	-13.00	64.81	Vertical
2544.90	-62.15	-6.07	-68.22	-13.00	55.22	Vertical
3393.20	-61.36	-5.09	-66.45	-13.00	53.45	Vertical
1696.60	-66.43	-11.09	-77.52	-13.00	64.52	Horizontal
2544.90	-62.64	-6.38	-69.02	-13.00	56.02	Horizontal
3393.20	-61.66	-5.20	-66.86	-13.00	53.86	Horizontal
<i>Remark:</i>						
<i>The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.</i>						

Band 5 (10MHz)						
Lowest channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1658.00	-66.73	-11.11	-77.84	-13.00	64.84	Vertical
2487.00	-62.38	-6.22	-68.60	-13.00	55.60	Vertical
3316.00	-61.20	-4.98	-66.18	-13.00	53.18	Vertical
1658.00	-66.77	-11.02	-77.79	-13.00	64.79	Horizontal
2487.00	-62.93	-6.54	-69.47	-13.00	56.47	Horizontal
3316.00	-61.46	-5.24	-66.70	-13.00	53.70	Horizontal
Middle channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1673.30	-66.50	-11.13	-77.63	-13.00	64.63	Vertical
2509.50	-61.92	-6.20	-68.12	-13.00	55.12	Vertical
3346.00	-61.29	-5.03	-66.32	-13.00	53.32	Vertical
1673.30	-66.68	-11.05	-77.73	-13.00	64.73	Horizontal
2509.50	-62.73	-6.51	-69.24	-13.00	56.24	Horizontal
3346.00	-61.18	-5.23	-66.41	-13.00	53.41	Horizontal
Highest channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1688.00	-66.12	-11.14	-77.26	-13.00	64.26	Vertical
2532.00	-61.46	-6.11	-67.57	-13.00	54.57	Vertical
3376.00	-61.19	-5.07	-66.26	-13.00	53.26	Vertical
1688.00	-66.27	-11.07	-77.34	-13.00	64.34	Horizontal
2532.00	-62.42	-6.42	-68.84	-13.00	55.84	Horizontal
3376.00	-61.56	-5.21	-66.77	-13.00	53.77	Horizontal
<i>Remark:</i>						
<i>The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.</i>						

LTE Band 12 includes LTE Band 17 part:

Band 12 (1.4MHz)						
Lowest channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1399.40	-65.47	-8.61	-74.08	-13.00	61.08	Vertical
2099.10	-63.57	-7.11	-70.68	-13.00	57.68	Vertical
2798.80	-61.56	-5.44	-67.00	-13.00	54.00	Vertical
1399.40	-65.30	-9.09	-74.39	-13.00	61.39	Horizontal
2099.10	-63.00	-6.80	-69.80	-13.00	56.80	Horizontal
2798.80	-62.22	-5.44	-67.66	-13.00	54.66	Horizontal
Middle channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1415.00	-65.61	-8.88	-74.49	-13.00	61.49	Vertical
2122.50	-63.84	-6.68	-70.52	-13.00	57.52	Vertical
2830.00	-61.65	-5.32	-66.97	-13.00	53.97	Vertical
1415.00	-64.86	-9.31	-74.17	-13.00	61.17	Horizontal
2122.50	-62.57	-6.49	-69.06	-13.00	56.06	Horizontal
2830.00	-61.76	-5.38	-67.14	-13.00	54.14	Horizontal
Highest channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1430.60	-65.82	-9.15	-74.97	-13.00	61.97	Vertical
2145.90	-63.90	-6.20	-70.10	-13.00	57.10	Vertical
2861.20	-61.88	-5.20	-67.08	-13.00	54.08	Vertical
1430.60	-64.90	-9.54	-74.44	-13.00	61.44	Horizontal
2145.90	-62.70	-6.15	-68.85	-13.00	55.85	Horizontal
2861.20	-62.01	-5.32	-67.33	-13.00	54.33	Horizontal
<i>Remark:</i>						
<i>The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.</i>						

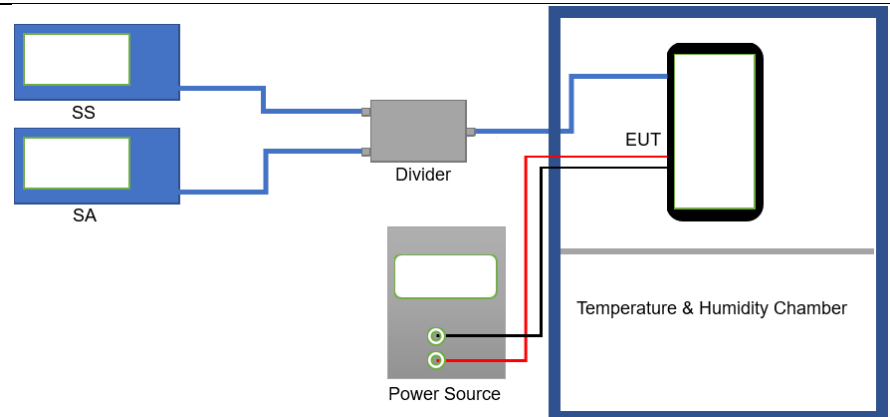
Band 12 (10MHz)						
Lowest channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1408.00	-65.38	-8.75	-74.13	-13.00	61.13	Vertical
2112.00	-63.63	-6.85	-70.48	-13.00	57.48	Vertical
2816.00	-61.42	-5.37	-66.79	-13.00	53.79	Vertical
1408.00	-65.02	-9.21	-74.23	-13.00	61.23	Horizontal
2112.00	-62.75	-6.62	-69.37	-13.00	56.37	Horizontal
2816.00	-61.78	-5.40	-67.18	-13.00	54.18	Horizontal
Middle channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1415.00	-65.87	-8.88	-74.75	-13.00	61.75	Vertical
2122.50	-63.87	-6.88	-70.75	-13.00	57.75	Vertical
2830.00	-61.75	-5.32	-67.07	-13.00	54.07	Vertical
1415.00	-64.92	-9.31	-74.23	-13.00	61.23	Horizontal
2122.50	-63.19	-6.49	-69.68	-13.00	56.68	Horizontal
2830.00	-62.04	-5.38	-67.42	-13.00	54.42	Horizontal
Highest channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
1422.00	-65.47	-9.00	-74.47	-13.00	61.47	Vertical
2133.00	-64.30	-6.46	-70.76	-13.00	57.76	Vertical
2844.00	-61.58	-5.27	-66.85	-13.00	53.85	Vertical
1422.00	-65.42	-9.41	-74.83	-13.00	61.83	Horizontal
2133.00	-63.57	-6.33	-69.90	-13.00	56.90	Horizontal
2844.00	-61.96	-5.35	-67.31	-13.00	54.31	Horizontal
<p><i>Remark:</i> <i>The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.</i></p>						

LTE Band 66 includes LTE Band 4 part:

Band 66 (1.4MHz)						
Lowest channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3421.40	-59.61	-7.52	-67.13	-13.00	54.13	Vertical
5132.10	-50.20	-1.45	-51.65	-13.00	38.65	Vertical
6842.80	-45.41	3.48	-41.93	-13.00	28.93	Vertical
3421.40	-58.67	-7.52	-66.19	-13.00	53.19	Horizontal
5132.10	-51.41	-1.45	-52.86	-13.00	39.86	Horizontal
6842.80	-46.22	3.48	-42.74	-13.00	29.74	Horizontal
Middle channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3490.00	-59.86	-6.98	-66.84	-13.00	53.84	Vertical
5235.00	-50.40	-0.84	-51.24	-13.00	38.24	Vertical
6980.00	-45.40	3.10	-42.30	-13.00	29.30	Vertical
3490.00	-59.11	-6.98	-66.09	-13.00	53.09	Horizontal
5235.00	-51.84	-0.84	-52.68	-13.00	39.68	Horizontal
6980.00	-46.69	3.10	-43.59	-13.00	30.59	Horizontal
Highest channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3558.60	-60.08	-6.75	-66.83	-13.00	53.83	Vertical
5337.90	-50.69	-0.37	-51.06	-13.00	38.06	Vertical
7117.20	-45.11	3.51	-41.60	-13.00	28.60	Vertical
3558.60	-59.35	-6.75	-66.10	-13.00	53.10	Horizontal
5337.90	-51.40	-0.37	-51.77	-13.00	38.77	Horizontal
7117.20	-46.46	3.51	-42.95	-13.00	29.95	Horizontal
<i>Remark:</i>						
<i>The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.</i>						

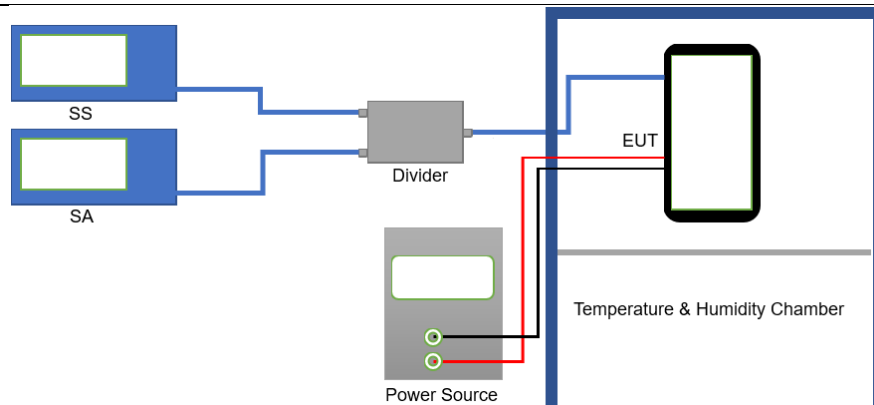
Band 66 (20MHz)						
Lowest channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3440.00	-60.44	-7.39	-67.83	-13.00	54.83	Vertical
5160.00	-51.19	-1.22	-52.41	-13.00	39.41	Vertical
6880.00	-45.12	3.66	-41.46	-13.00	28.46	Vertical
3440.00	-58.89	-7.39	-66.28	-13.00	53.28	Horizontal
5160.00	-51.77	-1.22	-52.99	-13.00	39.99	Horizontal
6880.00	-46.74	3.66	-43.08	-13.00	30.08	Horizontal
Middle channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3490.00	-60.72	-6.98	-67.70	-13.00	54.70	Vertical
5235.00	-50.97	-0.84	-51.81	-13.00	38.81	Vertical
6980.00	-44.79	3.10	-41.69	-13.00	28.69	Vertical
3490.00	-58.92	-6.98	-65.90	-13.00	52.90	Horizontal
5235.00	-51.50	-0.84	-52.34	-13.00	39.34	Horizontal
6980.00	-46.79	3.10	-43.69	-13.00	30.69	Horizontal
Highest channel						
Frequency (MHz)	Spurious Emission level (dBm)	Factor (dB)	Level at antenna terminals (dBm)	Limit Line (dBm)	Margin (dB)	Polarization
3540.00	-60.91	-6.81	-67.72	-13.00	54.72	Vertical
5310.00	-51.04	-0.55	-51.59	-13.00	38.59	Vertical
7080.00	-44.74	3.37	-41.37	-13.00	28.37	Vertical
3540.00	-59.41	-6.81	-66.22	-13.00	53.22	Horizontal
5310.00	-51.50	-0.55	-52.05	-13.00	39.05	Horizontal
7080.00	-46.47	3.37	-43.10	-13.00	30.10	Horizontal
<i>Remark:</i>						
<i>The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.</i>						

6.6 Frequency stability V.S. Temperature measurement

Test Requirement:	Part 22.355, Part 24.235, Part 27.54, Part 2.1055(a)(1)(b)
Limit:	±2.5 ppm for Band 5 Within authorized band for Band 2 & 4 & 17 & 66
Test setup:	
Test procedure:	<ol style="list-style-type: none"> 1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data: Refer to Appendix F – LTE

6.7 Frequency stability V.S. Voltage measurement

Test Requirement:	Part 22.355, Part 24.235, Part 27.54, Part 2.1055(d)(2)
Limit:	±2.5 ppm for Band 5 Within authorized band for Band 2 & 4 & 17 & 66
Test setup:	
Test procedure:	<ol style="list-style-type: none"> 1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specify extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data: Refer to Appendix F – LTE

8 EUT Constructional Details

Reference to the test report No. JYTSZB-R12-2102727

-----End of report-----