


FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.....: MWR1403002702

FCC ID.....: 2ABOSSKYMINI

Compiled by
(position+printed name+signature)..: File administrators Martin Ao



Supervised by
(position+printed name+signature)..: Test Engineer Martin Ao



Approved by
(position+printed name+signature)..: Manager Dixon Hao



Date of issue.....: Mar 23, 2014

Representative Laboratory Name : Maxwell International Co., Ltd.

Address: Room 509, Hongfa center building, Baoan District, Shenzhen, Guangdong, China

Testing Laboratory Name: DTT Services Co.,Ltd

Address: 1F,2 Block, Jiaquan Building, Guanlan High-tech Park, Bao'an District, Shenzhen, Guangdong, China. 518110

Applicant's name.....: SKY PHONE LLC

Address: 1348 Washington Av. Suite 350

Test specification

Standard: **FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**


TRF Originator.....: DTT Services Co.,Ltd

Master TRF.....: Dated 2011-05

DTT Services Co.,Ltd All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the DTT Services Co.,Ltd as copyright owner and source of the material. DTT Services Co.,Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description SKY Mini

Trade Mark: 

Model/Type reference.....: MX012

Listed Models: MC012xy(x:0-9,y:A-Z), PRO0120xy(x:0-9,y:A-Z), F108

Manufacturer.....: SKY PHONE LLC

Modulation Type.....: GFSK

Operation Frequency.....: From 2402MHz to 2480MHz

Rating: DC 3.70V

Hardware version: V1.01

Software version: V1.01

Result.....: **PASS**

TEST REPORT

Test Report No. :	MWR1403002702	Mar 23, 2014
		Date of issue

Equipment under Test : SKY Mini

Model /Type : MX012

Listed Models : MC012xy(x:0-9,y:A-Z), PRO0120xy(x:0-9,y:A-Z), F108

Applicant : **SKY PHONE LLC**

Address : 1348 Washington Av. Suite 350

Manufacturer : **SKY PHONE LLC**

Address : 1348 Washington Av. Suite 350

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1.	<u>TEST STANDARDS</u>	4
2.	<u>SUMMARY</u>	5
2.1.	General Remarks	5
2.2.	Product Description	5
2.3.	Equipment Under Test	5
2.4.	Short description of the Equipment under Test (EUT)	5
2.5.	EUT operation mode	5
2.6.	Internal Identification of AE used during the test	6
2.7.	Related Submittal(s) / Grant (s)	7
2.8.	Modifications	7
2.9.	NOTE	7
3.	<u>TEST ENVIRONMENT</u>	8
3.1.	Address of the test laboratory	8
3.2.	Test Facility	8
3.3.	Environmental conditions	8
3.4.	Test Description	8
3.5.	Statement of the measurement uncertainty	8
3.6.	Equipments Used during the Test	9
4.	<u>TEST CONDITIONS AND RESULTS</u>	10
4.1.	AC Power Conducted Emission	10
4.2.	Radiated Emission	12
4.3.	Maximum Peak Output Power	16
4.4.	20dB Bandwidth	19
4.5.	Band Edge	21
4.6.	Frequency Separation	29
4.7.	Number of hopping frequency	32
4.8.	Time Of Occupancy(Dwell Time)	33
4.9.	Spurious RF Conducted Emission	39
4.10.	Pseudorandom Frequency Hopping Sequence	45
4.11.	Antenna Requirement	46
5.	<u>TEST SETUP PHOTOS OF THE EUT</u>	47
6.	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	48

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2009](#): American National Standard for Testing Unlicensed Wireless Devices

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Mar 10, 2014
Testing commenced on	:	Mar 10, 2014
Testing concluded on	:	Mar 23, 2014

2.2. Product Description

The **SKY PHONE LLC**'s Model: MX012 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	SKY Mini
Model Number	MX012, MC012xy(x:0-9,y:A-Z), PRO0120xy(x:0-9,y:A-Z), F108
FCC ID	2ABOSSKYMINI
Modulation Type	GMSK for GSM
Antenna Type	External
GSM/EDGE/GPRS	Not Supported GPRS/EDGE
Extreme temp. Tolerance	-30°C to +50°C
Extreme vol. Limits	3.40VDC to 4.20VDC (nominal: 3.70VDC)
GSM Operation Frequency Band	GSM 850MHz/ PCS 1900MHz
GSM Release Version	R99
GPRS operation mode	Not Supported
GPRS Multislot Class	Not Supported
EGPRS Multislot Class	Not Supported

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 3.70V

2.4. Short description of the Equipment under Test (EUT)

2.4GHz (SKY Mini (M/N: MX012))

For more details, refer to the user's manual of the EUT.

2.5. EUT operation mode

The EUT has been tested under typical operating condition. There are only BDR (Basic Data Rate) mode. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. There are 79 channels of EUT, and the test carried out at the lowest channel, middle channel and highest channel.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
00	2402	40	2442
01	2403	41	2443
02	2404	42	2444
03	2405	43	2445
04	2406	44	2446
05	2407	45	2447
06	2408	46	2448
07	2409	47	2449
08	2410	48	2450
09	2411	49	2451
10	2412	50	2452
11	2413	51	2453
12	2414	52	2454
13	2415	53	2455
14	2416	54	2456
15	2417	55	2457
16	2418	56	2458
17	2419	57	2459
18	2420	58	2460
19	2421	59	2461
20	2422	60	2462
21	2423	61	2463
22	2424	62	2464
23	2425	63	2465
24	2426	64	2466
25	2427	65	2467
26	2428	66	2468
27	2429	67	2469
28	2430	68	2470
29	2431	69	2471
30	2432	70	2472
31	2433	71	2473
32	2434	72	2474
33	2435	73	2475
34	2436	74	2476
35	2437	75	2477
36	2438	76	2478
37	2439	77	2479
38	2440	78	2480
39	2441		

2.6. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Charger

AE1
 Model: MX012
 Manufacturer: SKY PHONE LLC
 Capacitance:400mAh
 Nominal Voltage:3.70V

AE2:
 Model: MX012
 Manufacturer: SKY PHONE LLC

*AE ID: is used to identify the test sample in the lab internally.

2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2ABOSSKYMINI** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8. Modifications

No modifications were implemented to meet testing criteria.

2.9. NOTE

1. The EUT is a SKY Mini with Bluetooth function, The functions of the EUT listed as below:

	Test Standards	Reference Report
GSM/GPRS	FCC Part 22/FCC Part 24	MWR1403002701
Bluetooth	FCC Part 15 C 15.247	MWR1403002702
USB Port	FCC Part 15 B	MWR1403002703
SAR	FCC Part 2 §2.1093	MWR1403002704

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

DTT Services Co.,Ltd
 1F,2 Block, Jiaquan Building, Guanlan High-tech Park, Bao'an District, Shenzhen, Guangdong, China.
 518110
 The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9783A

The 3m alternate test site of DTT Services Co.,Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Aug, 2011.

FCC-Registration No.: 214666

DTT Services Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 214666, Sep 19, 2011

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	<u>15-35 ° C</u>
Humidity:	<u>30-60 %</u>
Atmospheric pressure:	<u>950-1050mbar</u>

3.4. Test Description

FCC PART 15 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(1)(i)	20dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.247(b)	Pseudorandom Frequency Hopping Sequence	PASS
FCC Part 15.247(a)(1)(iii)	Number of hopping frequency& Time of Occupancy	PASS
FCC Part 15.247(a)(1)	Frequency Separation	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge Compliance of RF Emission	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

Remark: The measurement uncertainty is not included in the test result.

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the DTT Services Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for DTT Services Co.,Ltd laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-40 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emissio 1~18GHz	5.16 dB	(1)
Radiated Emissio 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

3.6. Equipments Used during the Test

AC Power Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2013/10/26
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	100038	2013/10/26
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2013/10/26
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/A

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2013/10/27
2	EMI TEST RECEIVER	Rohde&Schwarz	ESI 26	100009	2013/10/25
3	EMI TEST Software	Audix	E3	N/A	N/A
4	EMI TEST Software	Rohde&Schwarz	ESK1	N/A	N/A
5	HORN ANTENNA	ShwarzBeck	9120D	1011	2013/10/27
6	Amplifer	Sonoma	310N	E009-13	2013/10/27
7	Preamplifier	ShwarzBeck	BBV 9718	BBV 9718	2013/10/25
8	High pass filter	Compliance Direction systems	BSU-6	34202	2013/10/25
9	Amplifer	Compliance Direction systems	PAP1-4060	120	2013/10/26
10	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	2013/10/25
11	TURNTABLE	MATURO	TT2.0	----	N/A
12	ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A
13	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2013/10/27


Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Spectrum Analyzer	Rohde&Schwarz	FSU26	201141	2013/10/25

The Cal.Interval was one year

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

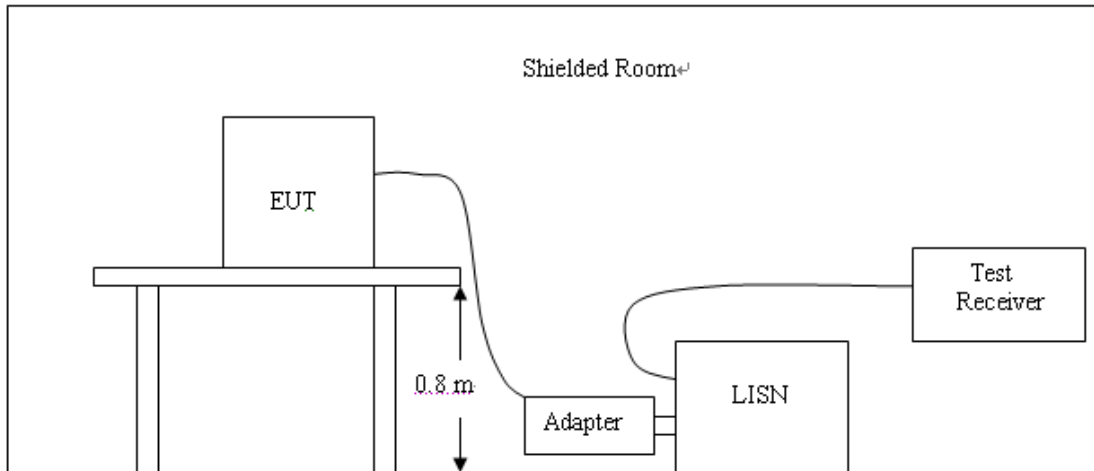

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2009.
2. Support equipment, if needed, was placed as per ANSI C63.10-2009
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2009
4. The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit


For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dBµV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

TEST RESULTS

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

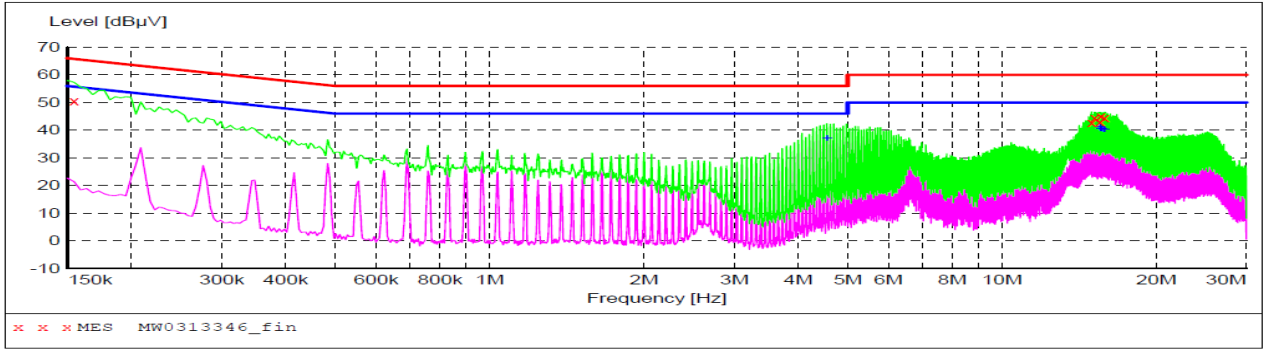

MEASUREMENT RESULT: "MW0313346_fin"

3/13/2014 7:59PM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.154500	50.70	10.1	66	15.1	QP	N	GND
14.977500	42.60	10.6	60	17.4	QP	N	GND
15.180000	44.40	10.6	60	15.6	QP	N	GND
15.531000	43.00	10.7	60	17.0	QP	N	GND
15.594000	45.00	10.7	60	15.0	QP	N	GND
15.868500	44.50	10.7	60	15.5	QP	N	GND

MEASUREMENT RESULT: "MW0313346_fin2"

3/13/2014 7:59PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
4.555500	37.00	10.2	46	9.0	AV	N	GND
15.526500	40.90	10.7	50	9.1	AV	N	GND
15.594000	40.50	10.7	50	9.5	AV	N	GND
15.666000	40.50	10.7	50	9.5	AV	N	GND
15.801000	40.10	10.7	50	9.9	AV	N	GND
15.873000	40.00	10.7	50	10.0	AV	N	GND

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

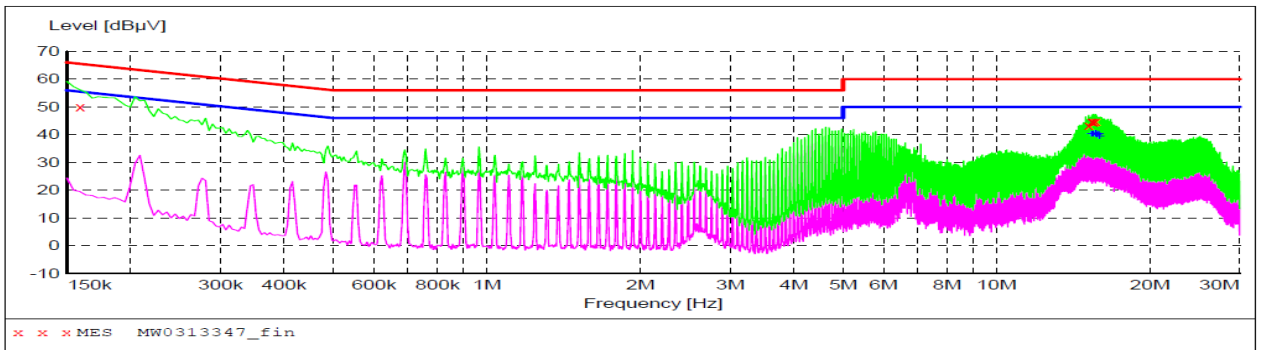

MEASUREMENT RESULT: "MW0313347_fin"

3/13/2014 8:02PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.159000	50.10	10.1	66	15.4	QP	L1	GND
15.180000	43.20	10.6	60	16.8	QP	L1	GND
15.382500	44.60	10.7	60	15.4	QP	L1	GND
15.450000	44.80	10.7	60	15.2	QP	L1	GND
15.522000	44.40	10.7	60	15.6	QP	L1	GND
15.657000	44.80	10.7	60	15.2	QP	L1	GND

MEASUREMENT RESULT: "MW0313347_fin2"

3/13/2014 8:02PM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
15.382500	40.20	10.7	50	9.8	AV	L1	GND
15.450000	40.20	10.7	50	9.8	AV	L1	GND
15.657000	40.30	10.7	50	9.7	AV	L1	GND
15.729000	39.90	10.7	50	10.1	AV	L1	GND
15.864000	40.00	10.7	50	10.0	AV	L1	GND
15.931500	39.20	10.7	50	10.8	AV	L1	GND

4.2. Radiated Emission


TEST CONFIGURATION

Radiated Emission Test Set-Up


Frequency range 9KHz – 30MHz

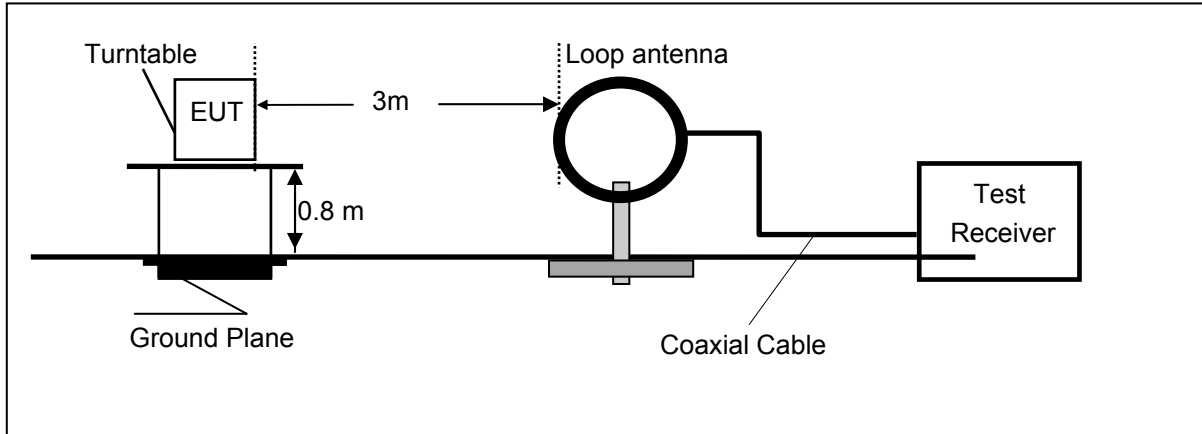

Frequency range 30MHz – 1000MHz

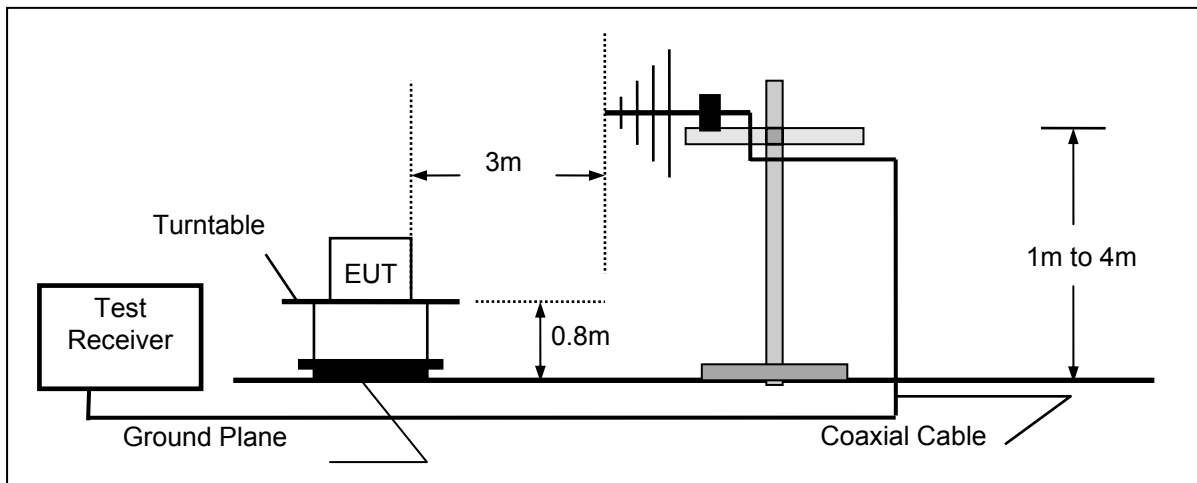

Frequency range above 1GHz-25GHz

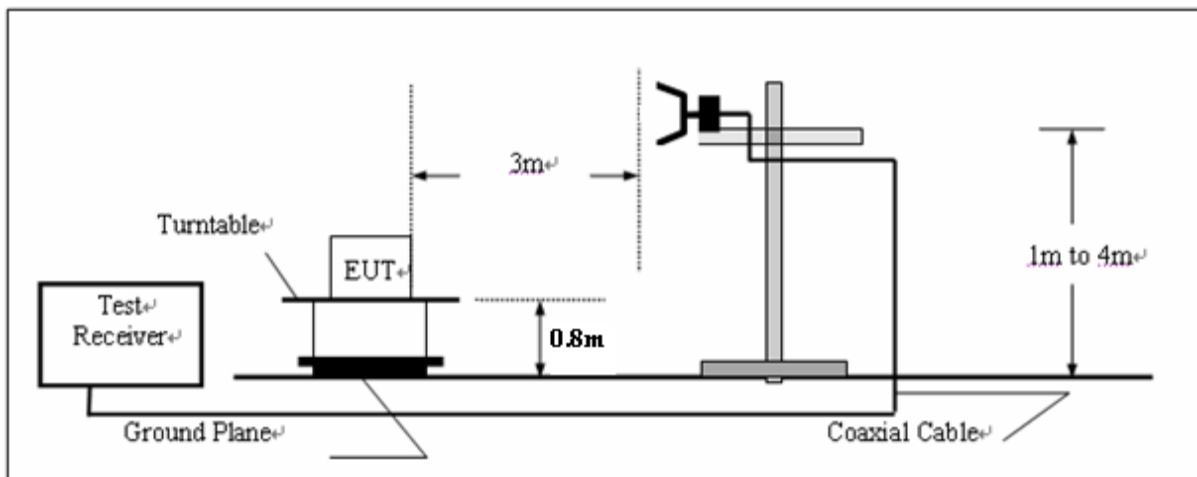

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.

2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 26MHz and maximum operation frequency was 2480MHz.so radiated emission test frequency band from 9KHz to 25GHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example

Frequency (MHz)	FS (dBµV/m)	RA (dBµV/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
300.00	40	58.1	12.2	1.6	31.90	-18.1

$$Transd=AF +CL-AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the100kHz bandwidth within the band that contains the highest level of desired power.

The frequency spectrum above 1 GHz for Transmitter was investigated. All emission not reported are much lower than the prescribed limits. Set the RBW=1MHz,VBW=3MHz for Peak Detector while the RBW=1MHz,VBW=10Hz for Average Detector,Readings are both peak and average values. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Note:1. We tested both battery powered and charging mode at three orientations,recored woest case at charging mode.


For 9KHz to 30MHz

Frequency (MHz)	Corrected Reading (dBµV/m)@3m	FCC Limit (dBµV/m) @3m	Margin (dB)	Detector	Result
12.00	46.85	69.54	22.69	QP	PASS
26.00	45.11	69.54	24.43	QP	PASS

For 30MHz to 1000MHz

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength				Transducer
Start	Stop	Detector	Meas.	IF		
Frequency	Frequency		Time	Bandw.		
30.0 MHz	1.1 GHz	MaxPeak	Coupled	100 kHz		VULB9163

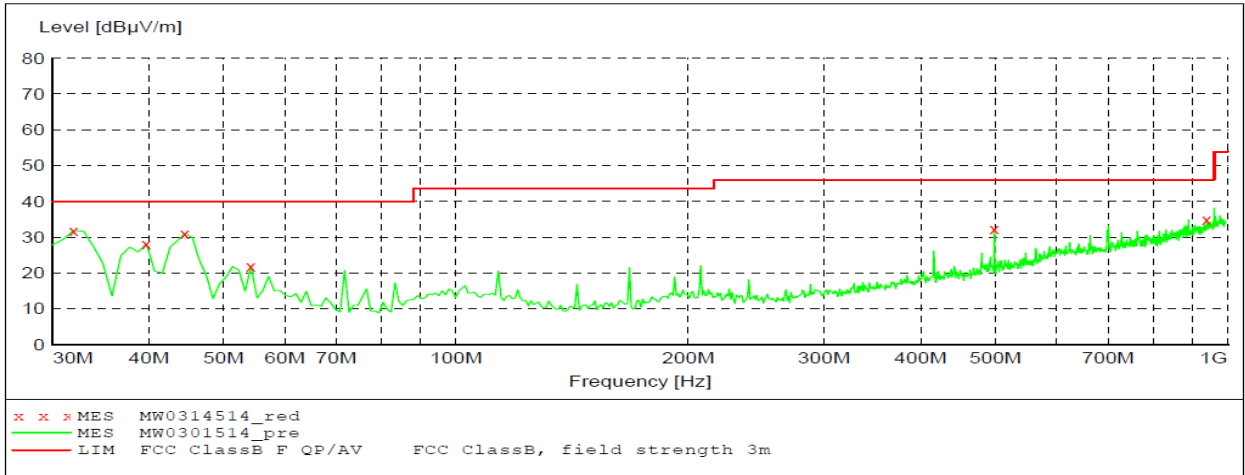


MEASUREMENT RESULT: "MW0314514_red"

3/14/2014 3:48PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
31.940000	31.80	-16.3	40.0	8.2	Peak	100.0	118.00	VERTICAL
39.700000	28.20	-15.1	40.0	11.8	Peak	100.0	52.00	VERTICAL
44.550000	31.10	-15.0	40.0	8.9	Peak	100.0	232.00	VERTICAL
54.250000	21.90	-15.4	40.0	18.1	Peak	100.0	181.00	VERTICAL
498.510000	32.30	-7.2	46.0	13.7	Peak	100.0	166.00	VERTICAL
939.860000	35.00	3.3	46.0	11.0	Peak	100.0	359.00	VERTICAL

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength				Transducer
Start	Stop	Detector	Meas.	IF		
Frequency	Frequency		Time	Bandw.		
30.0 MHz	1.1 GHz	MaxPeak	Coupled	100 kHz		VULB9163

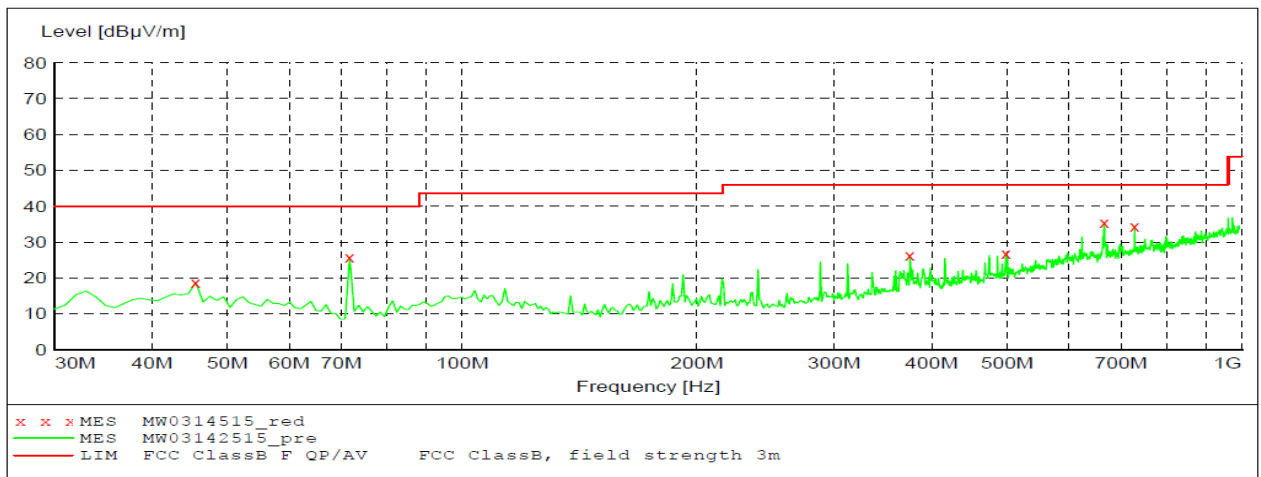

MEASUREMENT RESULT: "MW0314515_red"

3/14/2014 3:50PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
45.520000	18.70	-15.0	40.0	21.3	Peak	100.0	354.00	HORIZONTAL
71.710000	25.70	-19.6	40.0	14.3	Peak	100.0	144.00	HORIZONTAL
375.320000	26.30	-11.6	46.0	19.7	Peak	100.0	191.00	HORIZONTAL
498.510000	26.90	-7.2	46.0	19.1	Peak	100.0	274.00	HORIZONTAL
666.320000	35.50	-2.2	46.0	10.5	Peak	100.0	226.00	HORIZONTAL
728.400000	34.50	-0.8	46.0	11.5	Peak	100.0	109.00	HORIZONTAL

For 1GHz to 25GHz

Low Channel @ Channel 00 @ 2402 MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M												
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4804.00	58.36	PK	74.00	15.64	1.00 H	125	56.28	31.58	7.00	36.5	2.08
2	4804.00	48.69	AV	54.00	5.31	1.00 H	125	46.61	31.58	7.00	36.5	2.08
3	7206.00	49.60	PK	74.00	24.40	1.00 H	33	38.94	37.06	8.90	35.3	10.66

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M												
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4804.00	57.68	PK	74.00	16.32	1.00 V	57	55.60	31.58	7.00	36.5	2.08
2	4804.00	48.15	AV	54.00	5.85	1.00 V	57	46.07	31.58	7.00	36.5	2.08
3	7206.00	49.02	PK	74.00	24.98	1.00 V	123	38.36	37.06	8.90	35.3	10.66

Middle Channel @ Channel 39 @ 2441 MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M												
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4882.00	58.36	PK	74.00	15.64	1.00 H	115	56.22	31.04	7.60	36.5	2.14
2	4882.00	48.16	AV	54.00	5.84	1.00 H	115	46.02	31.04	7.60	36.5	2.14
3	7323.00	49.75	PK	74.00	24.25	1.00 H	27	38.61	37.84	8.60	35.3	11.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M												
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4882.00	58.33	PK	74.00	15.67	1.00 V	35	56.19	31.04	7.60	36.5	2.14
2	4882.00	48.16	AV	54.00	5.84	1.00 V	35	46.02	31.04	7.60	36.5	2.14
3	7323.00	50.69	PK	74.00	23.31	1.00 V	128	39.55	37.84	8.60	35.3	11.14

High Channel @ Channel 78 @ 2480 MHz


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M												
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4960.00	57.69	PK	74.00	16.31	1.00 H	110	55.26	31.63	7.00	36.2	2.43
2	4960.00	47.16	AV	54.00	6.84	1.00 H	110	44.73	31.63	7.00	36.2	2.43
3	7340.00	50.17	PK	74.00	23.83	1.00 H	90	38.57	38.40	8.50	35.3	11.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M												
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4960.00	58.16	PK	74.00	15.84	1.00 V	184	55.73	31.63	7.00	-36.2	2.43
2	4960.00	48.69	AV	54.00	5.31	1.00 V	184	46.26	31.63	7.00	-36.2	2.43
3	7340.00	50.78	PK	74.00	23.22	1.00 V	155	39.18	38.40	8.50	-35.3	11.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
 3. The other emission levels were very low against the limit.
 4. Margin value = Limit value - Emission level.
 5. The average measurement was not performed when the peak measured data under the limit of average detection.

4.3. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to ANSI C63.10:2009 Maximum peak conducted output power

1. Set the RBW =3MHz.
2. Set VBW \geq 3RBW
3. Set span \geq 3RBW
4. Sweep time = auto couple
5. Detector = peak
6. Trace mode = max hold
7. Allow trace to fully stabilize
8. Use peak marker function to determine the peak amplitude level

LIMIT

The Maximum Peak Output Power Measurement is 30dBm.

TEST RESULTS


4.3.1 GFSK Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Refer to Plot	Limits (dBm)	Verdict
00	2402	2.17	Plot 4.3.1 A	30	PASS
39	2441	2.38	Plot 4.3.1 B	30	PASS
78	2480	2.11	Plot 4.3.1 C	30	PASS


Note: 1.The test results including the cable lose.

B. Test Plots

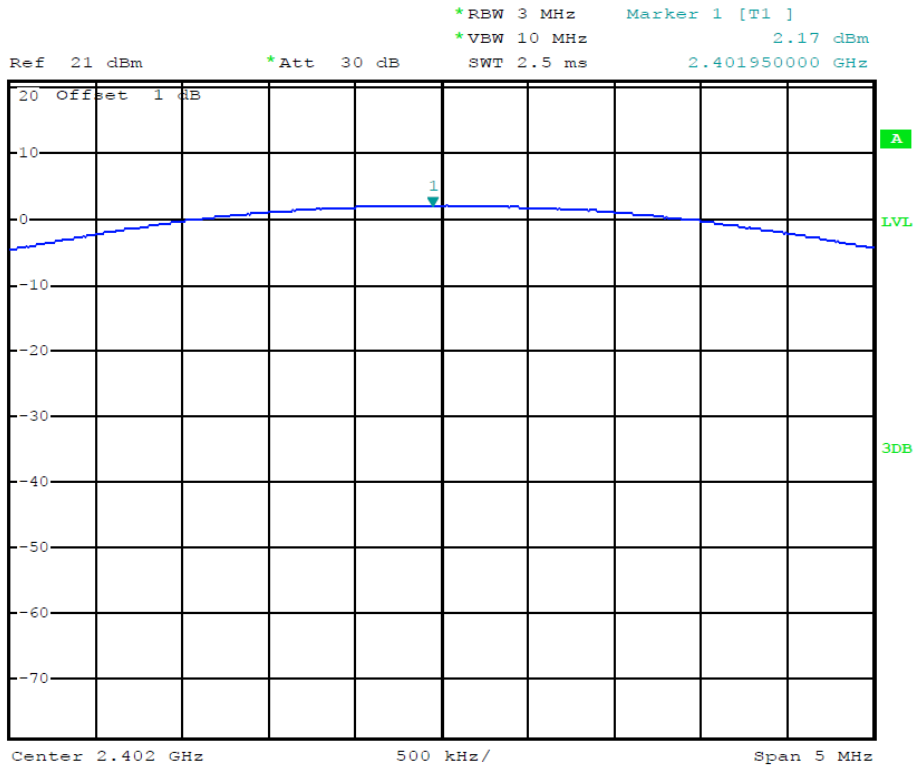


Date: 16.MAR.2014 20:09:37

(Plot 4.3.1 A: Channel 00: 2402MHz @ GFSK)

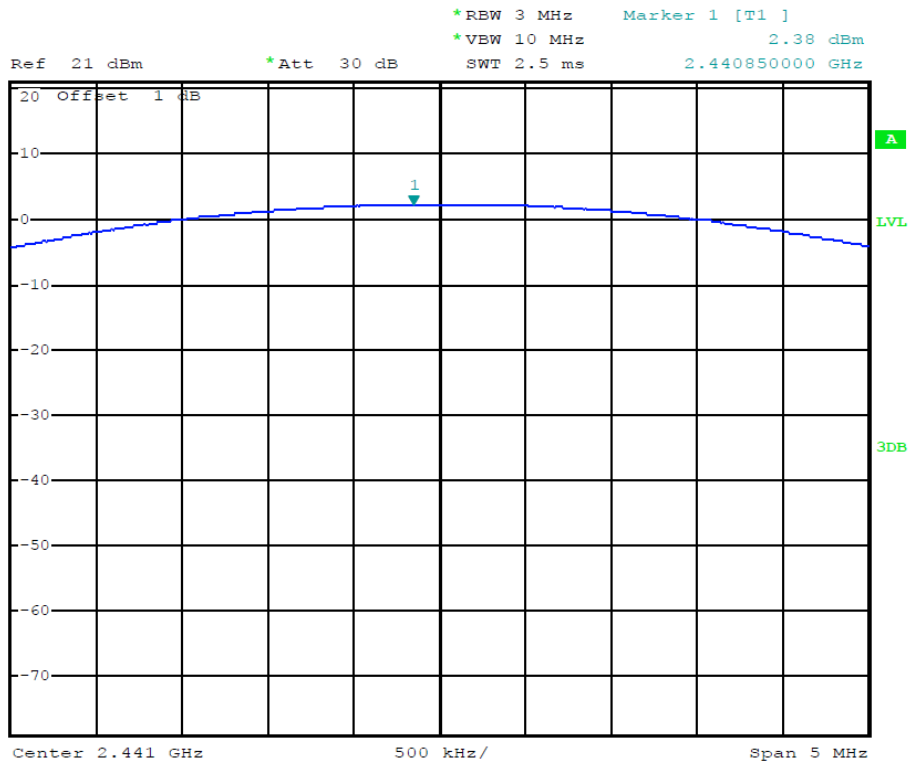


Date: 16.MAR.2014 20:09:53

(Plot 4.3.1 B: Channel 39: 2441MHz @ GFSK)

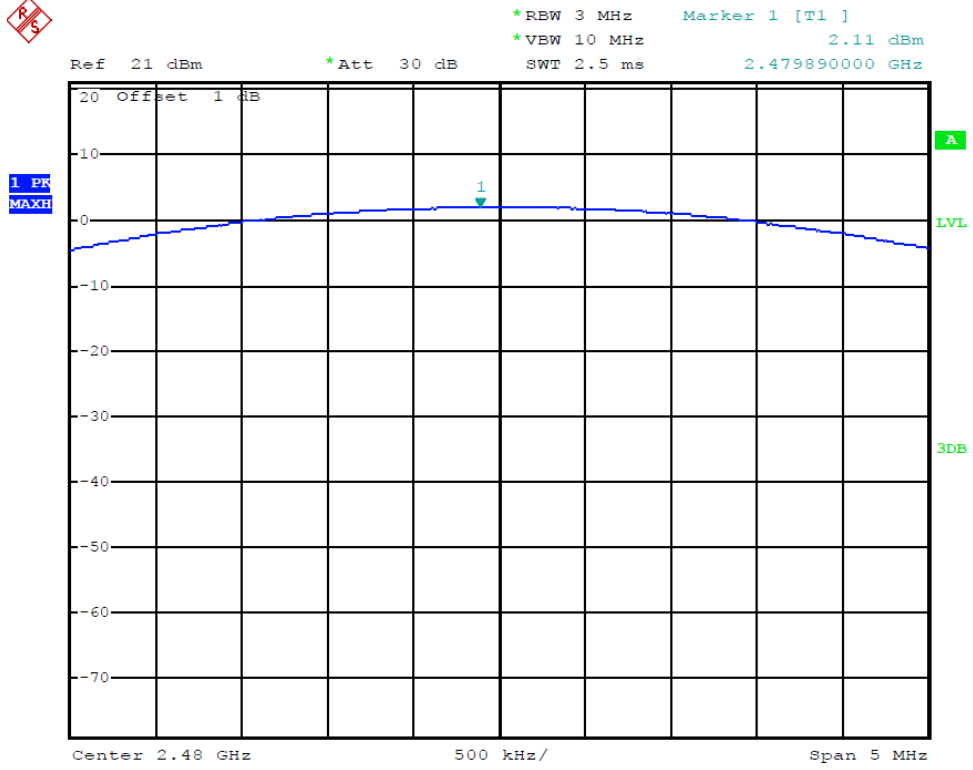


Date: 16.MAR.2014 20:10:11

(Plot 4.3.1 C: Channel 78: 2480MHz @ GFSK)

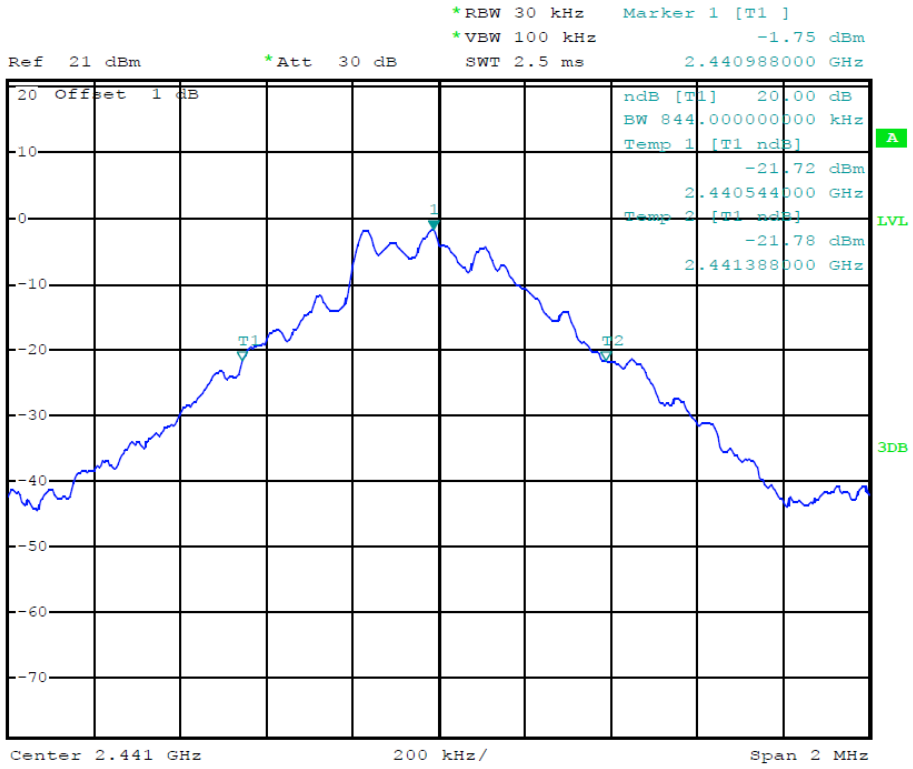

Date: 16.MAR.2014 11:37:28

(Plot 4.4.1 B: Channel 39: 2441MHz @ GFSK)

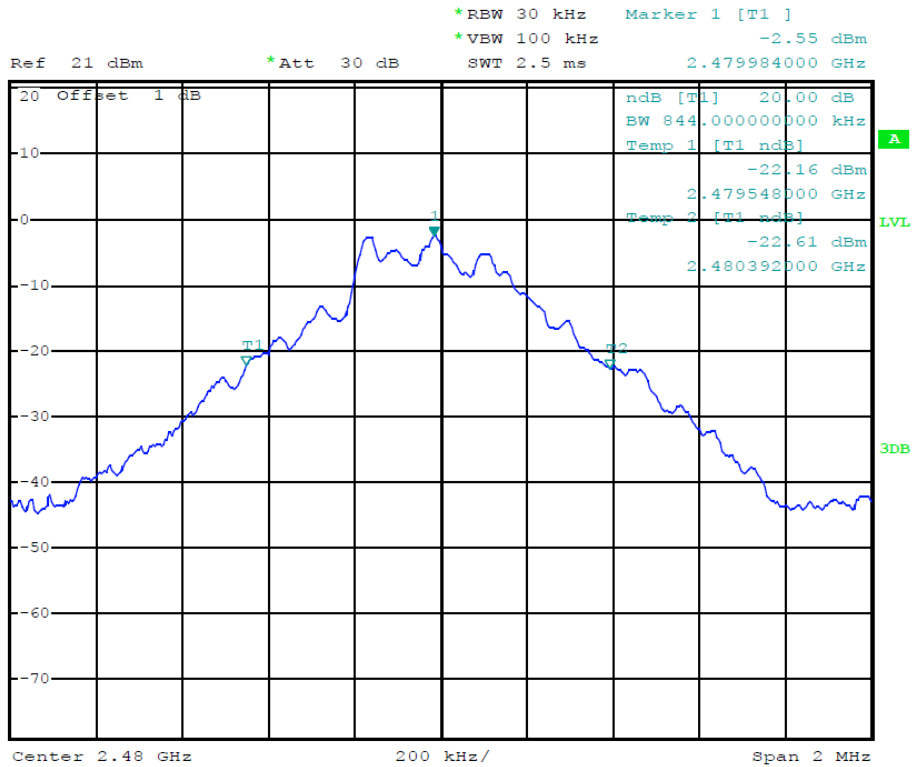

Date: 16.MAR.2014 11:38:05

(Plot 4.4.1 C: Channel 78: 2480MHz @ GFSK)

4.5. Band Edge

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


TEST RESULTS

Remark: we measured all conditions(DH1,DH3,DH5) and recorded worst case at DH1


4.5.1 For Radiated Bandedge Measurement

Remark: we tested radiated bandedge at both hopping and no-hopping modes,recorded worst case at no-hopping mode


4.5.1.1 GFSK Test Mode

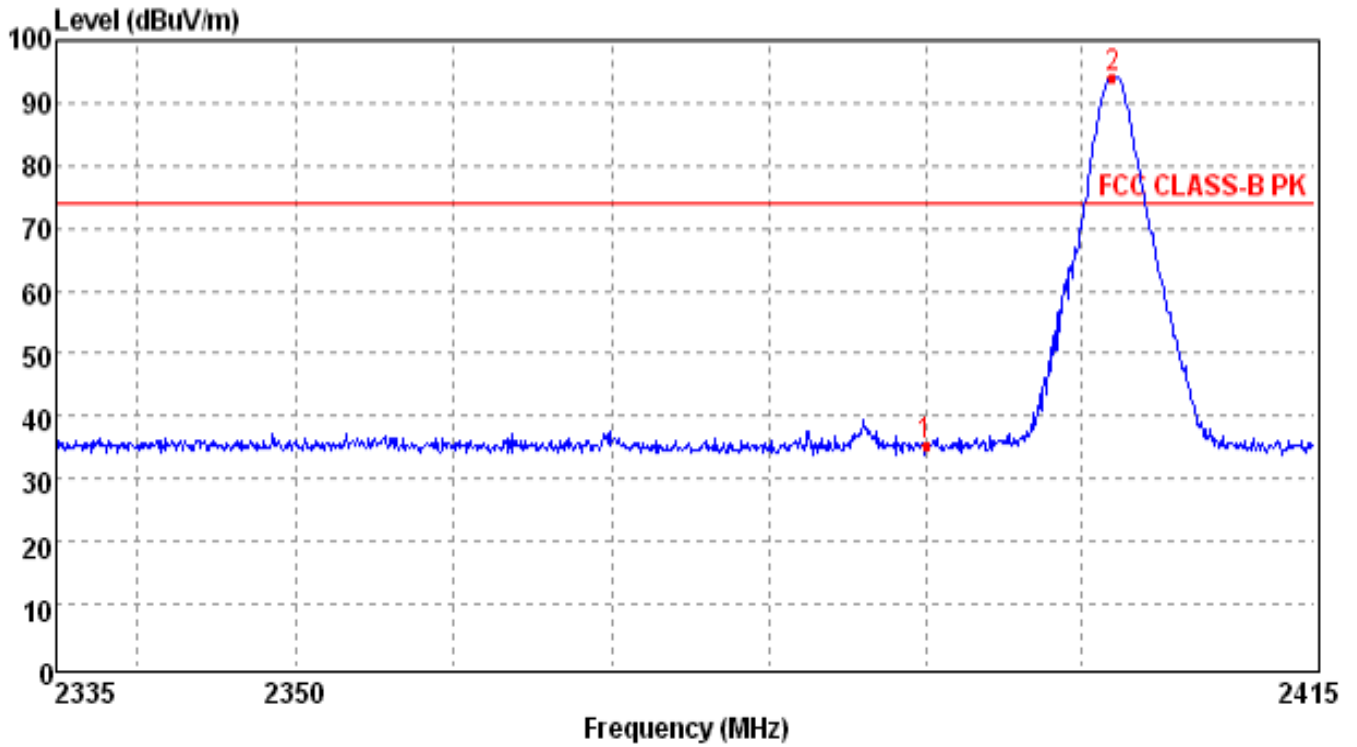

Mark	Frequency (MHz)	Level (dBUV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Reading Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Polarization	Detector
1	2390.00	35.10	3.32	27.49	36.12	40.08	74.00	38.90	Hor	Peak
2	2401.94	94.13	3.32	27.49	36.12	99.44	74.00	-20.13	Hor	Peak

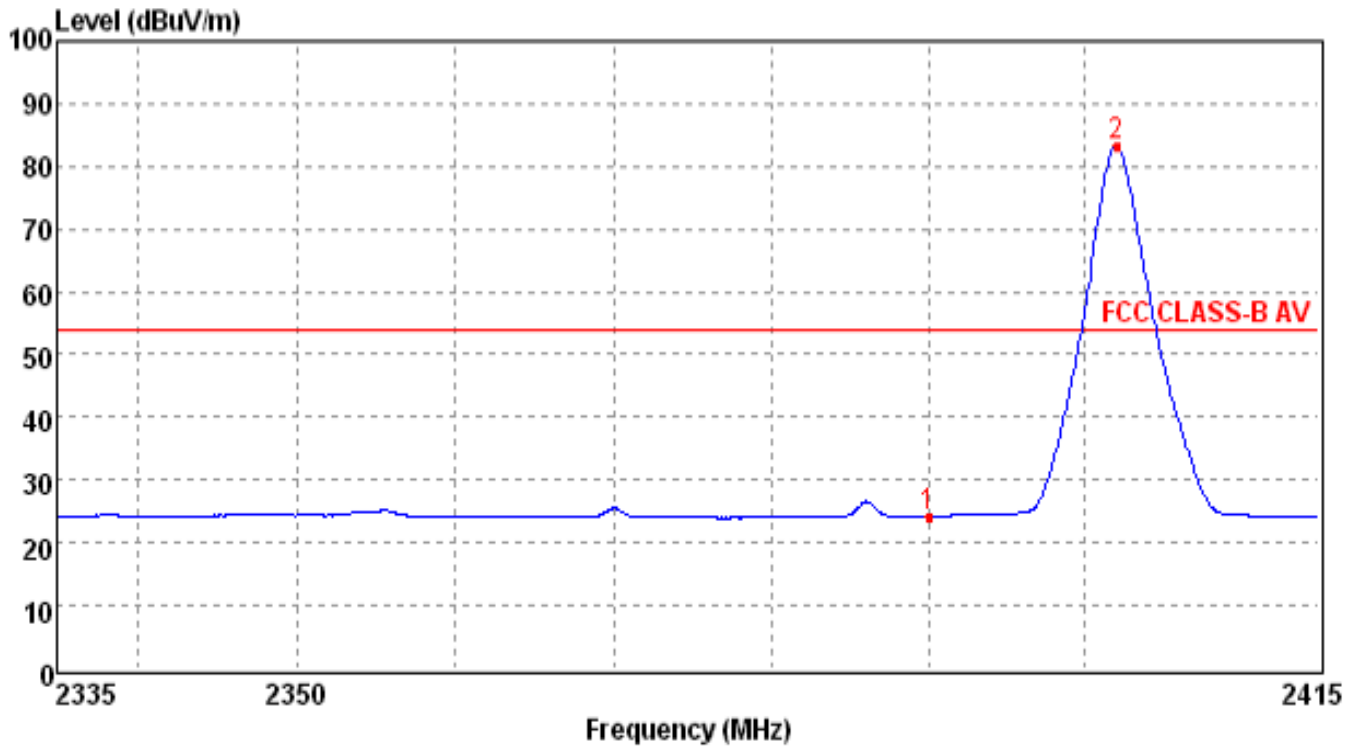


Mark	Frequency (MHz)	Level (dBUV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Reading Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Polarization	Detector
1	2390.00	24.25	3.32	27.49	36.12	29.53	54.00	29.75	Hor	Average
2	2402.02	83.43	3.32	27.49	36.12	88.74	54.00	-29.43	Hor	Average

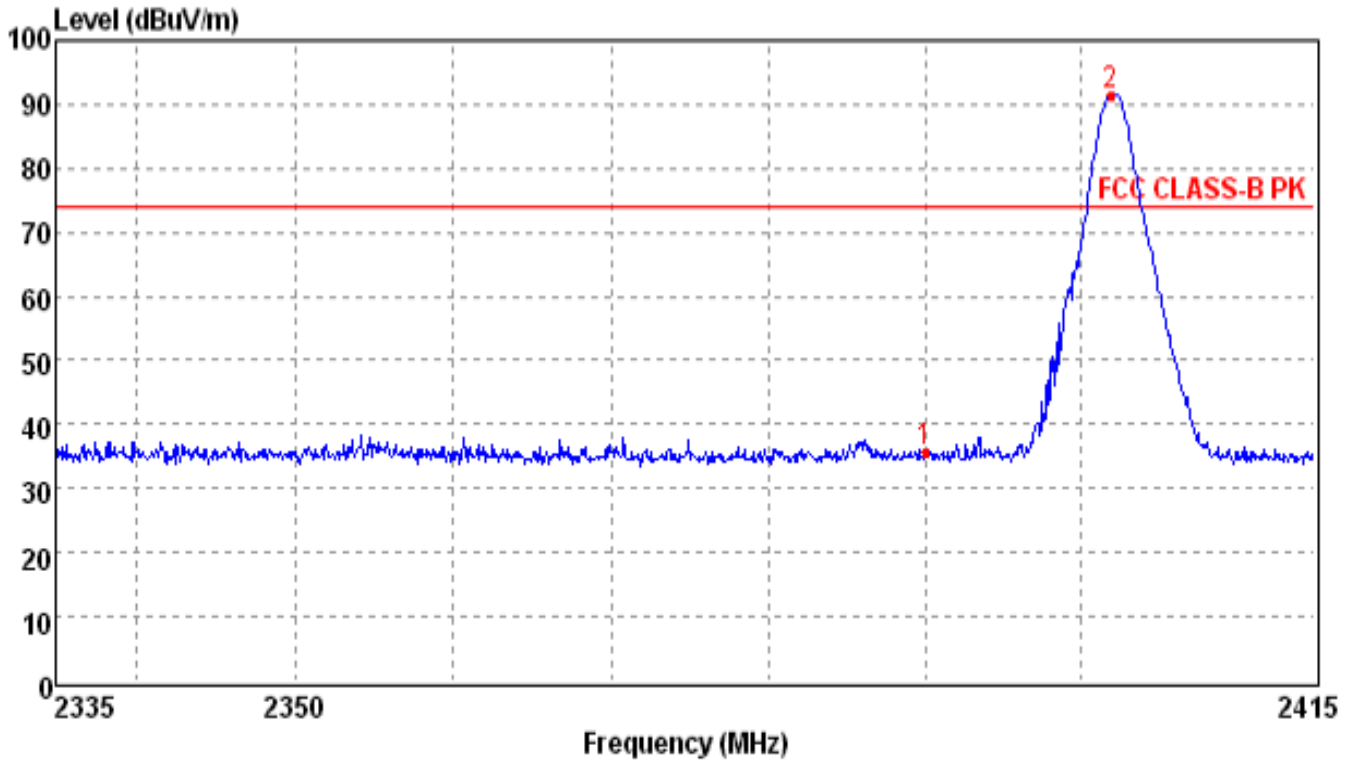


Mark	Frequency (MHz)	Level (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Reading Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization	Detector
1	2390.00	35.63	3.32	27.49	36.12	40.91	74.00	38.37	Ver	Peak
2	2401.86	91.50	3.32	27.49	36.12	96.81	74.00	-17.50	Ver	Peak


Data: 139

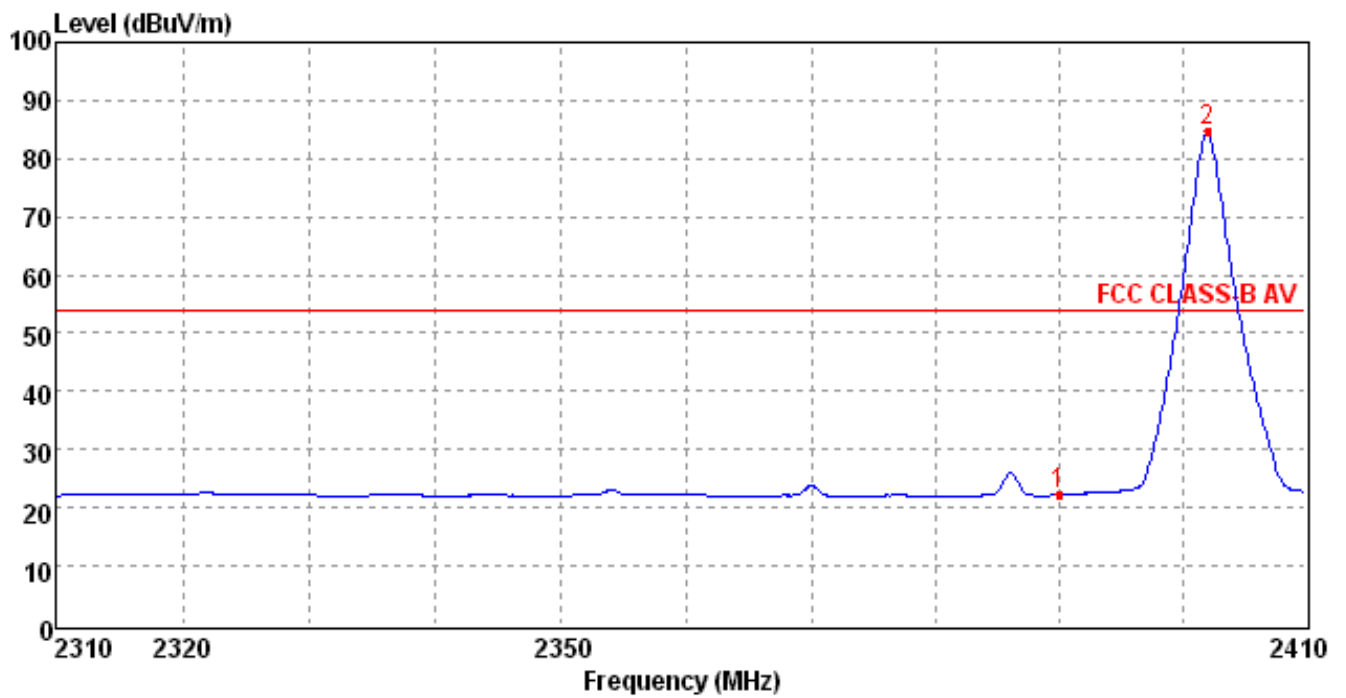


Mark	Frequency (MHz)	Level (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Reading Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization	Detector
1	2390.00	24.21	3.32	27.49	36.12	29.49	54.00	29.79	Ver	Average
2	2402.02	80.86	3.32	27.49	36.12	86.17	54.00	-26.86	Ver	Average

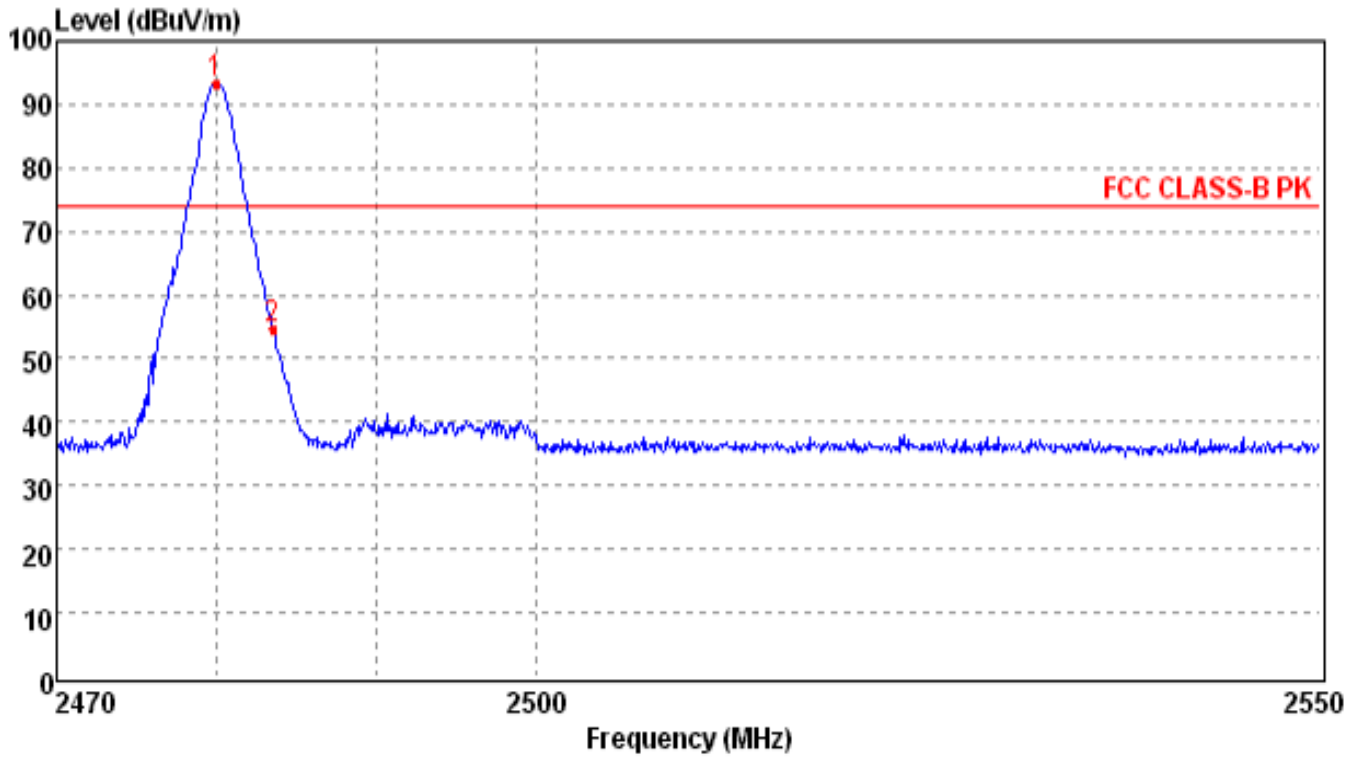


Mark	Frequency (MHz)	Level (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Reading Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization	Detector
1	2479.94	93.33	3.88	27.45	36.55	98.55	74.00	-19.33	Hor	Peak
2	2483.50	54.70	3.88	27.45	36.55	59.92	74.00	19.30	Hor	Peak

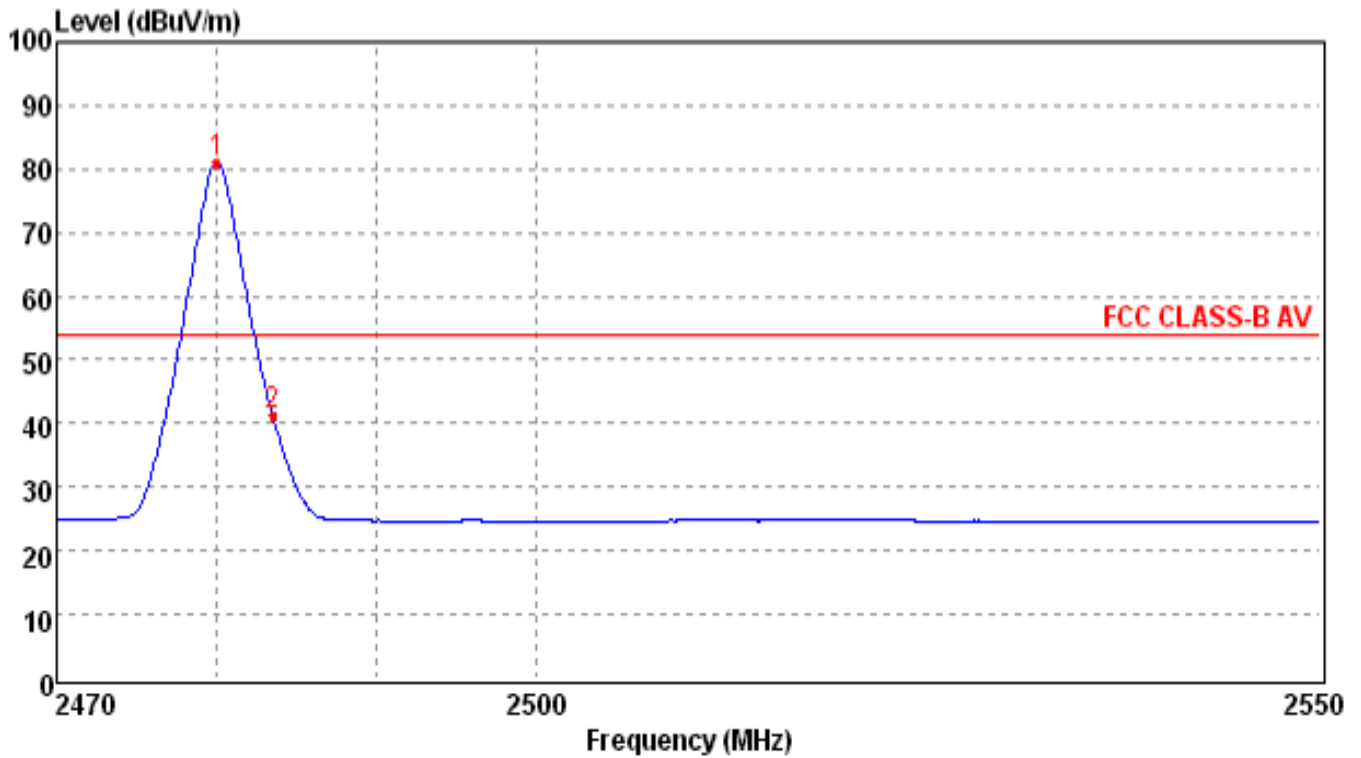

Mark	Frequency (MHz)	Level (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Reading Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization	Detector
1	81.09	3.88	27.45	36.55	86.31	54.00	-27.09	-29.30	Hor	Average
2	41.33	3.88	27.45	36.55	46.55	54.00	12.67	11.98	Hor	Average

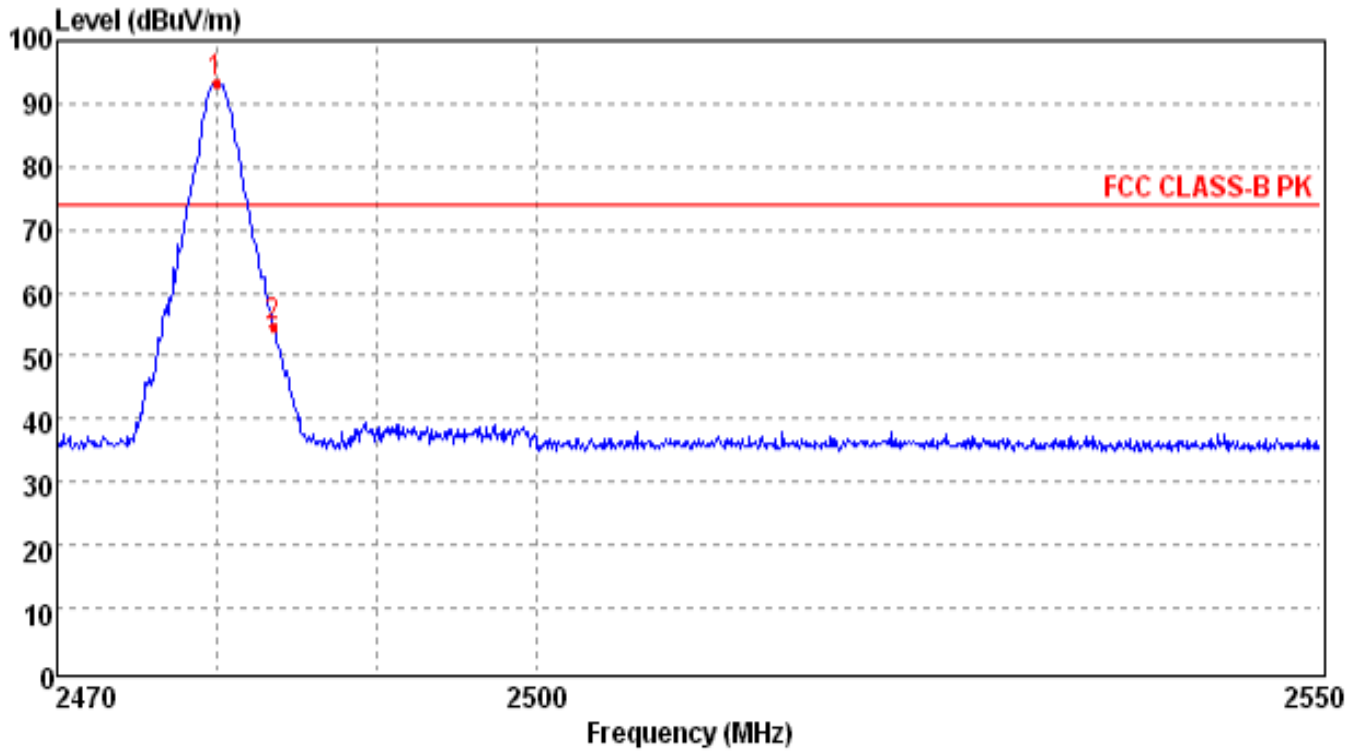

Mark	Frequency (MHz)	Level (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Reading Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization	Detector
1	2479.94	93.42	3.88	27.45	36.55	98.64	74.00	-19.42	Ver	Peak
2	2483.50	54.56	3.88	27.45	36.55	59.78	74.00	19.44	Ver	Peak

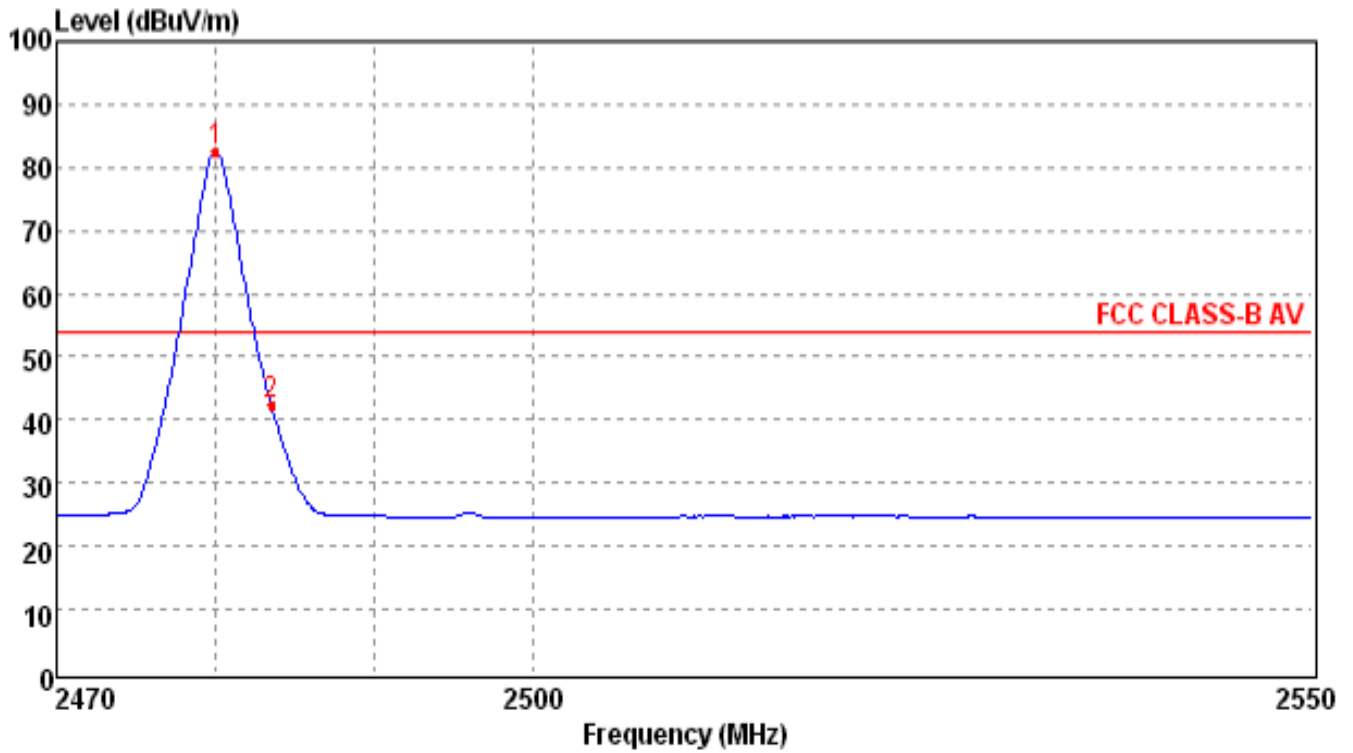

Mark	Frequency (MHz)	Level (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Reading Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization	Detector
1	2480.02	82.69	3.88	27.45	36.55	87.91	54.00	-28.69	Ver	Average
2	2483.50	42.39	3.88	27.45	36.55	47.61	54.00	11.61	Ver	Average


4.5.2 For Conducted Bandedge Measurement

4.5.2.1 GFSK Test Mode

A. Test Verdict


Frequency (MHz)	Delta Peak to Band emission (dBc)	Hopping Mode	Detector	Limit (dBc)	Refer to Plot	Verdict
2400.00	-43.73	OFF	Peak	-20	Plot 4.5.2.1 A	PASS
2400.00	-46.25	ON	Peak	-20	Plot 4.5.2.1 B	PASS
2483.50	-47.87	OFF	Peak	-20	Plot 4.5.2.1 C	PASS
2483.50	-42.78	ON	Peak	-20	Plot 4.5.2.1 D	PASS

B. Test Plots

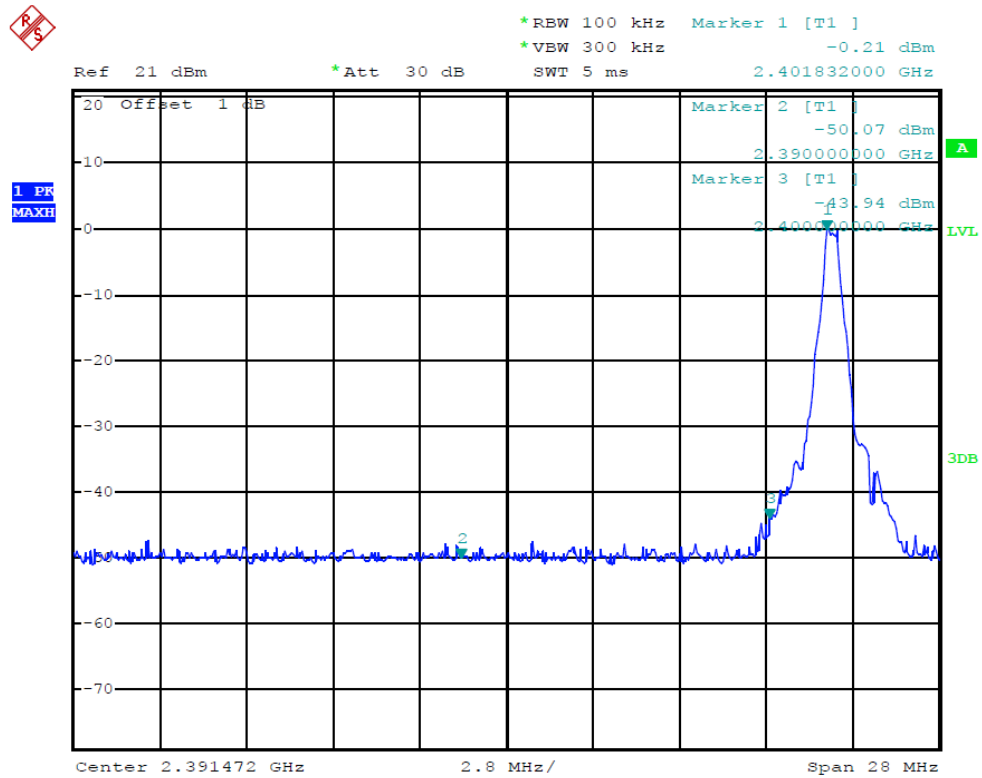


Date: 16.MAR.2014 12:10:53

(Plot 4.5.2.1 A: Channel 00: 2402MHz @ GFSK)

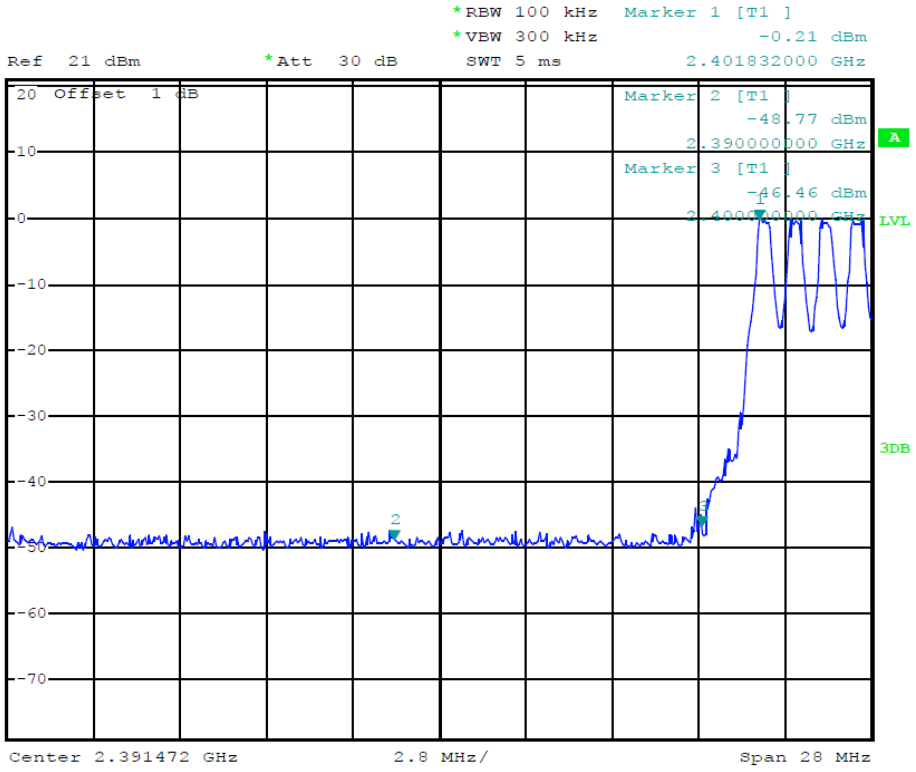


Date: 16.MAR.2014 12:12:02

(Plot 4.5.2.1 B: Hopping Mode @ GFSK)

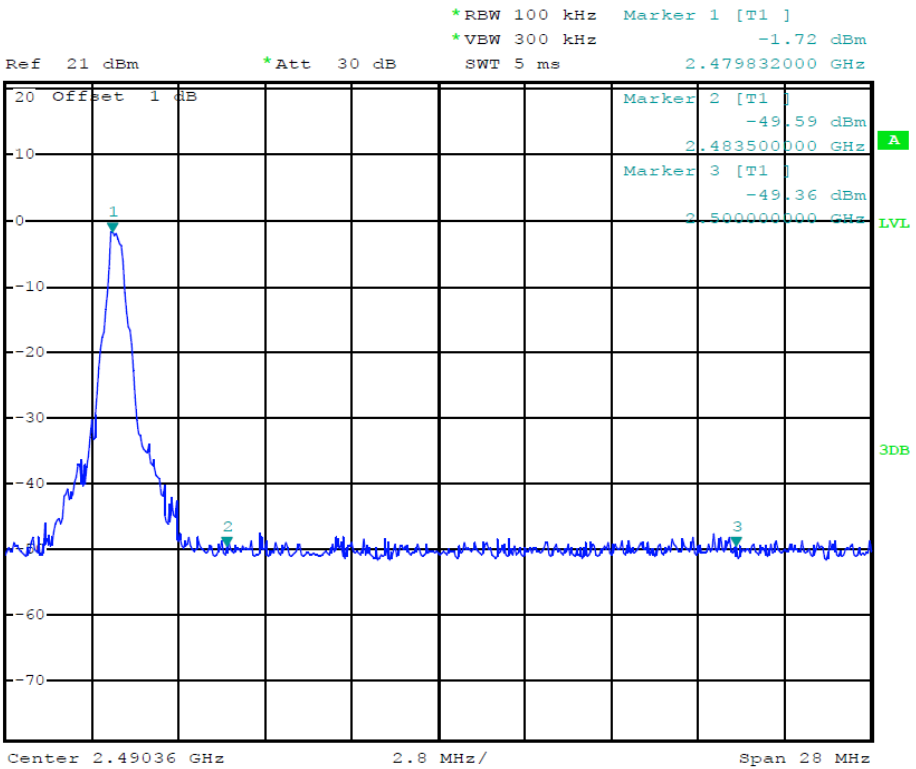

Date: 16.MAR.2014 12:19:11

(Plot 4.5.2.1 C: Channel 78: 2480MHz @ GFSK)

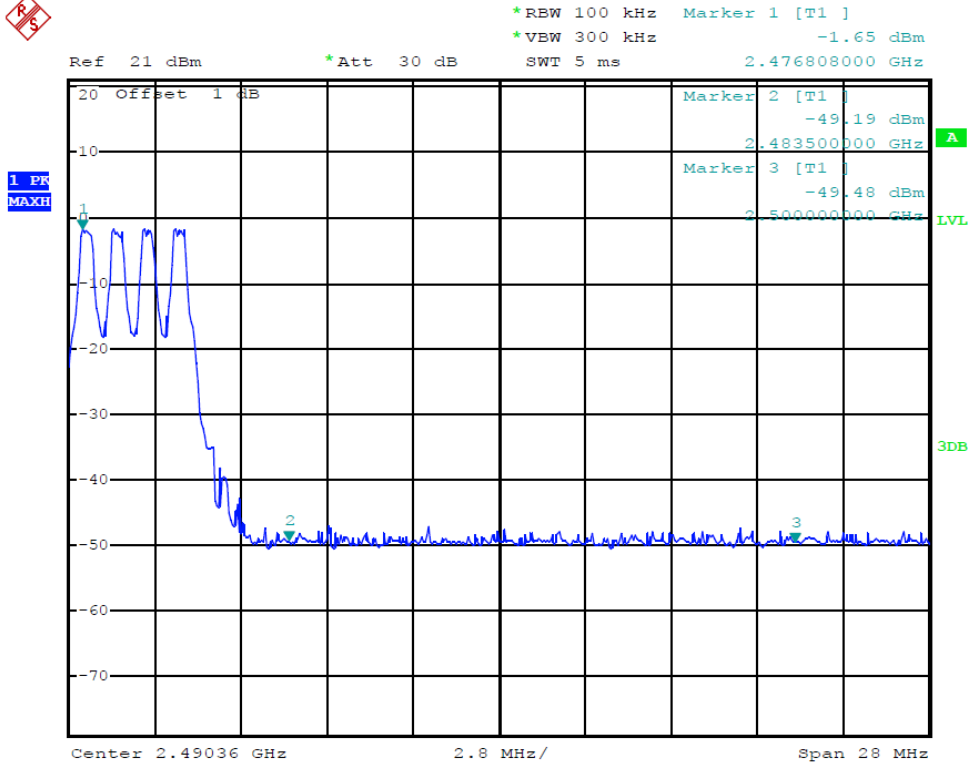


Date: 16.MAR.2014 12:20:10

(Plot 4.5.2.1 D: Hopping Mode @ GFSK)

4.6. Frequency Separation

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30 KHz and VBW=100KHz.

LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the $2/3 \times 20\text{dB}$ bandwidth of the hopping channel, whichever is greater.


TEST RESULTS

4.6.1 GFSK Test Mode

A. Test Verdict


Channel	Frequency (MHz)	Channel Separation (MHz)	Refer to Plot	Limits (KHz)	Verdict
00	2402	1.004	Plot 4.6.1 A	848	PASS
01	2403				
38	2440	1.004	Plot 4.6.1 B	844	PASS
39	2441				
77	2479	1.004	Plot 4.6.1 C	844	PASS
78	2480				

B. Test Plots

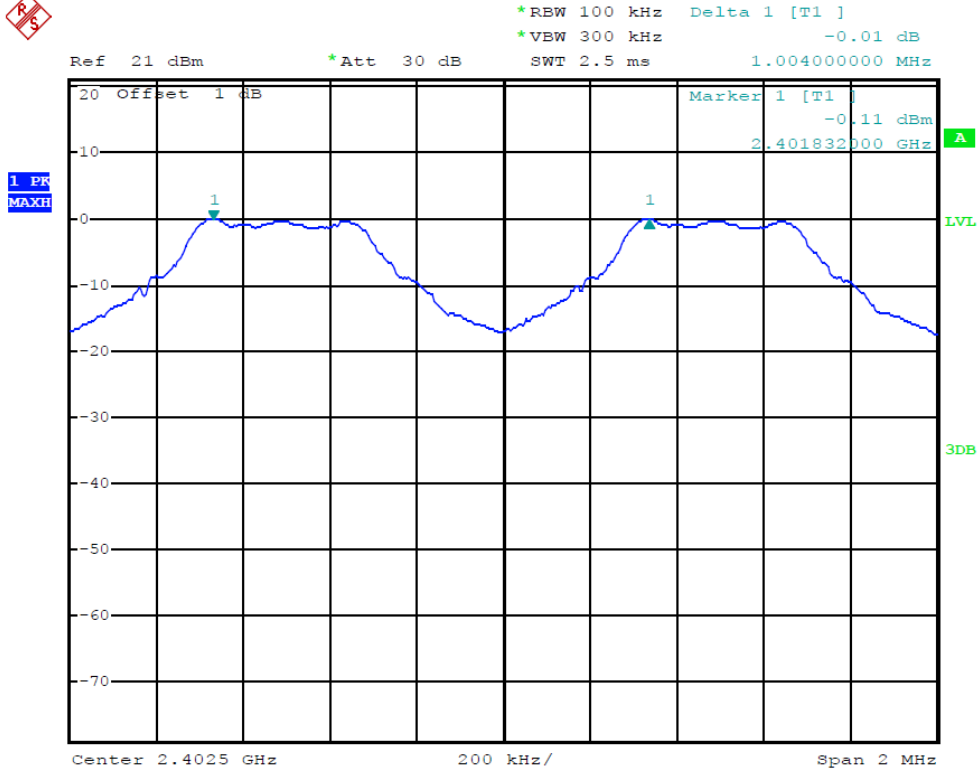


Date: 16.MAR.2014 12:24:14

(Plot 4.6.1 A: Channel 00: 2402MHz @ GFSK)

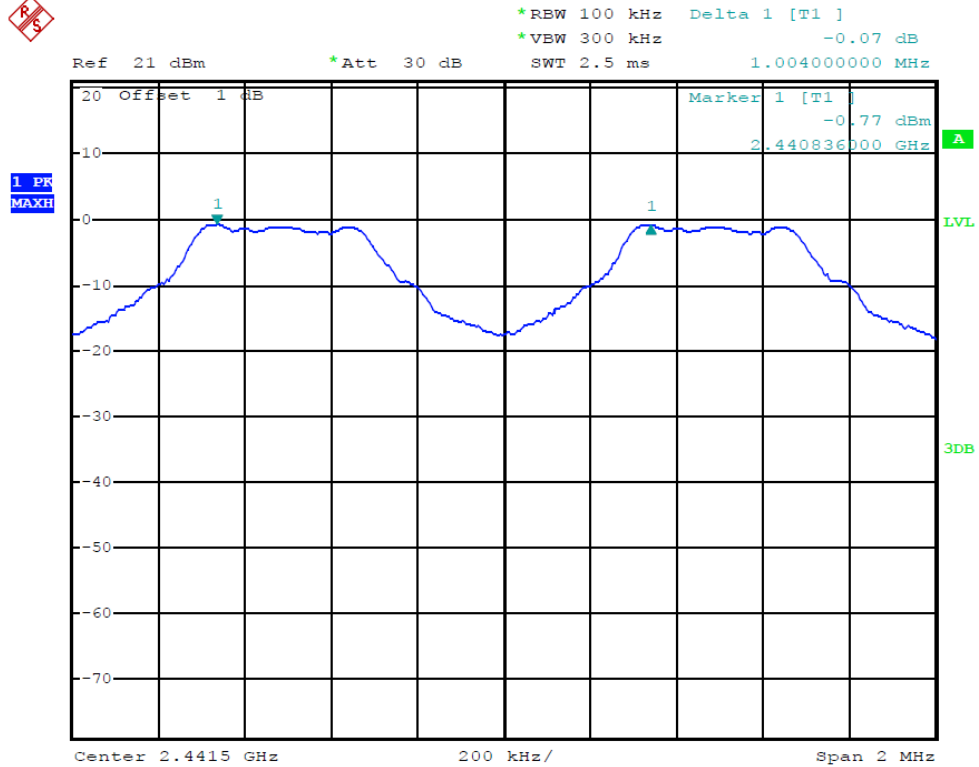

Date: 16.MAR.2014 12:25:24

(Plot 4.6.1 B: Channel 39: 2441MHz @ GFSK)

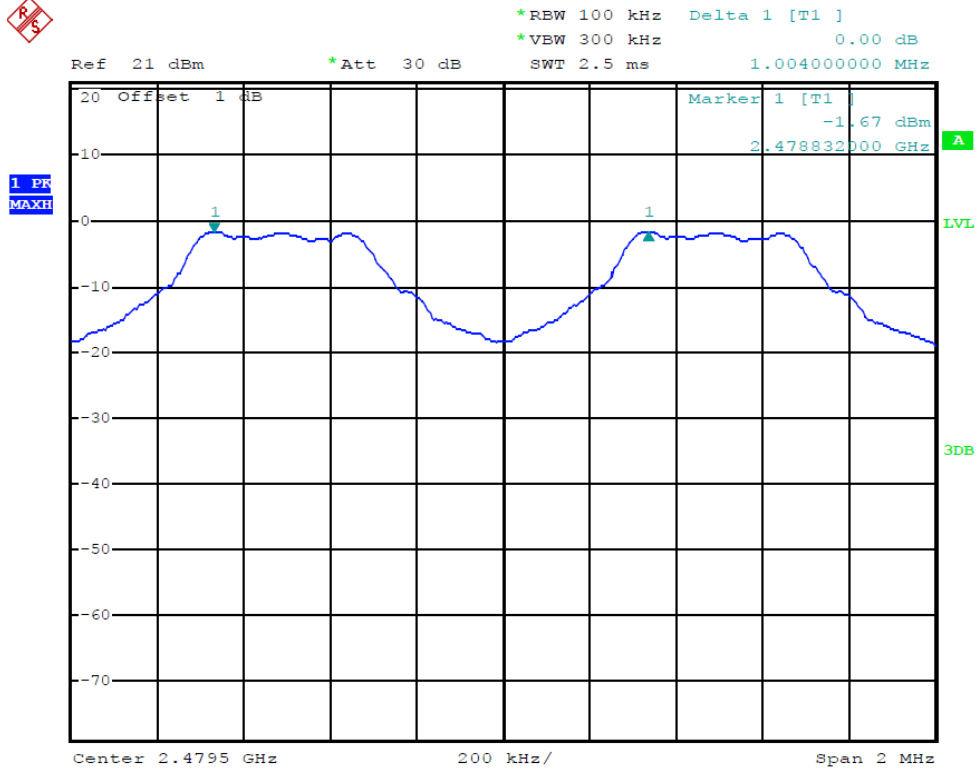


Date: 16.MAR.2014 12:27:02

(Plot 4.6.1 C: Channel 78: 2480MHz @ GFSK)

4.7. Number of hopping frequency

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with RBW=30 KHz and VBW=100KHz.

LIMIT

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.


TEST RESULTS

4.7.1 GFSK Test Mode

A. Test Verdict

Hopping Channel Frequency Range (MHz)	Number of Hopping Channel	Refer to Plot	Limit	Verdict
2400-2483.5	79	Plot 4.7.1 A	≥15	PASS

B. Test Plots

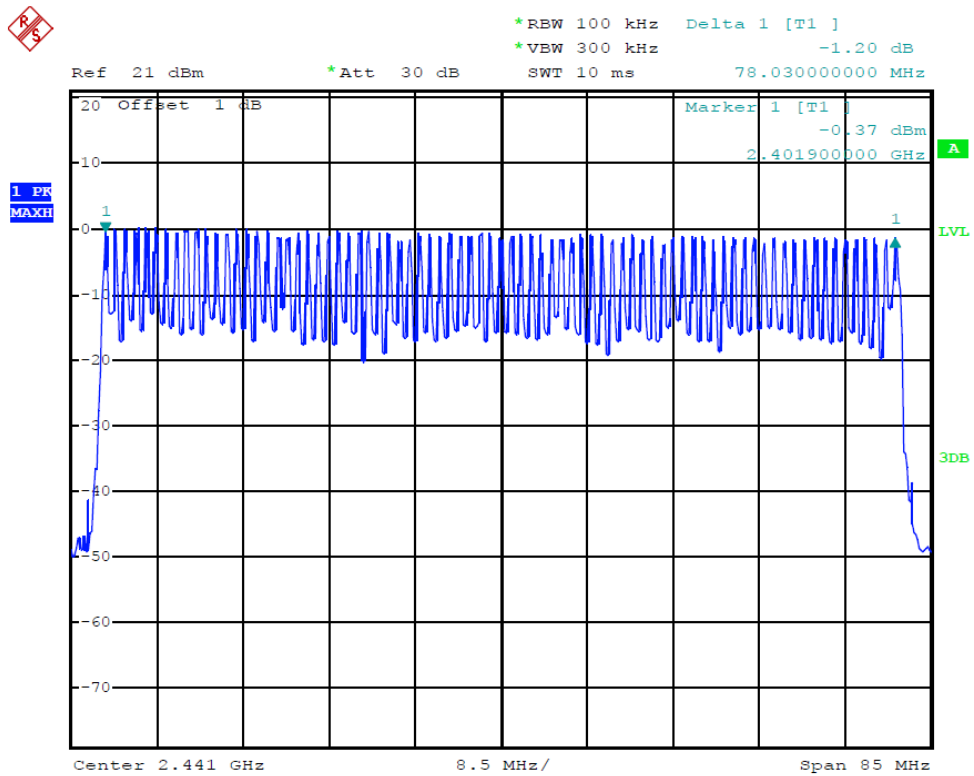


Date: 16.MAR.2014 11:45:51

(Plot 4.7.1 A: @ GFSK)

4.8. Time Of Occupancy(Dwell Time)

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with RBW=1MHz and VBW=3MHz, Span=0Hz.

LIMIT

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.


TEST RESULTS

4.8.1 GFSK Test Mode

A. Test Verdict


Mode	Frequency (MHz)	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Refer to Plot	Verdict
DH 1	2402	0.420	0.1344	0.4	Plot 4.8.1 A1	PASS
	2441	0.420	0.1344	0.4	Plot 4.8.1 A2	PASS
	2480	0.425	0.1360	0.4	Plot 4.8.1 A3	PASS
Note: Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second						
DH 3	2402	1.695	0.2712	0.4	Plot 4.8.1 B1	PASS
	2441	1.695	0.2712	0.4	Plot 4.8.1 B2	PASS
	2480	1.695	0.2712	0.4	Plot 4.8.1 B3	PASS
Note: Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second						
DH 5	2402	2.955	0.3152	0.4	Plot 4.8.1 C1	PASS
	2441	2.955	0.3152	0.4	Plot 4.8.1 C2	PASS
	2480	2.955	0.3152	0.4	Plot 4.8.1 C3	PASS
Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second						

B. Test Plots

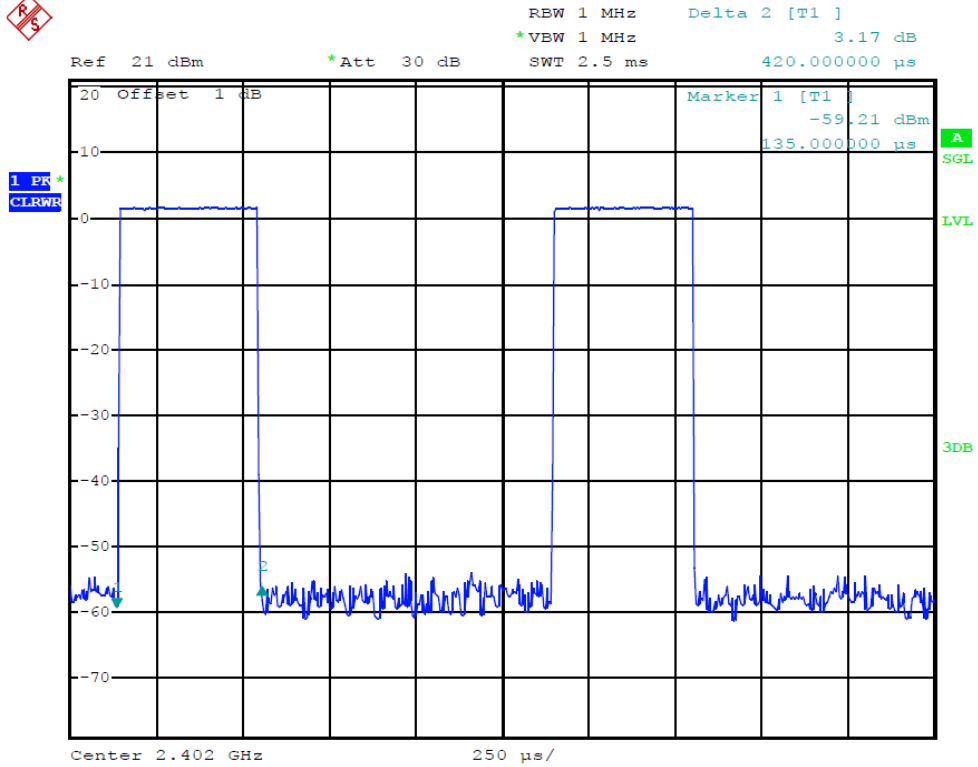


Date: 16.MAR.2014 20:20:53

(Plot 4.8.1.A1: Channel 00: 2402MHz @ GFSK @ DH1)

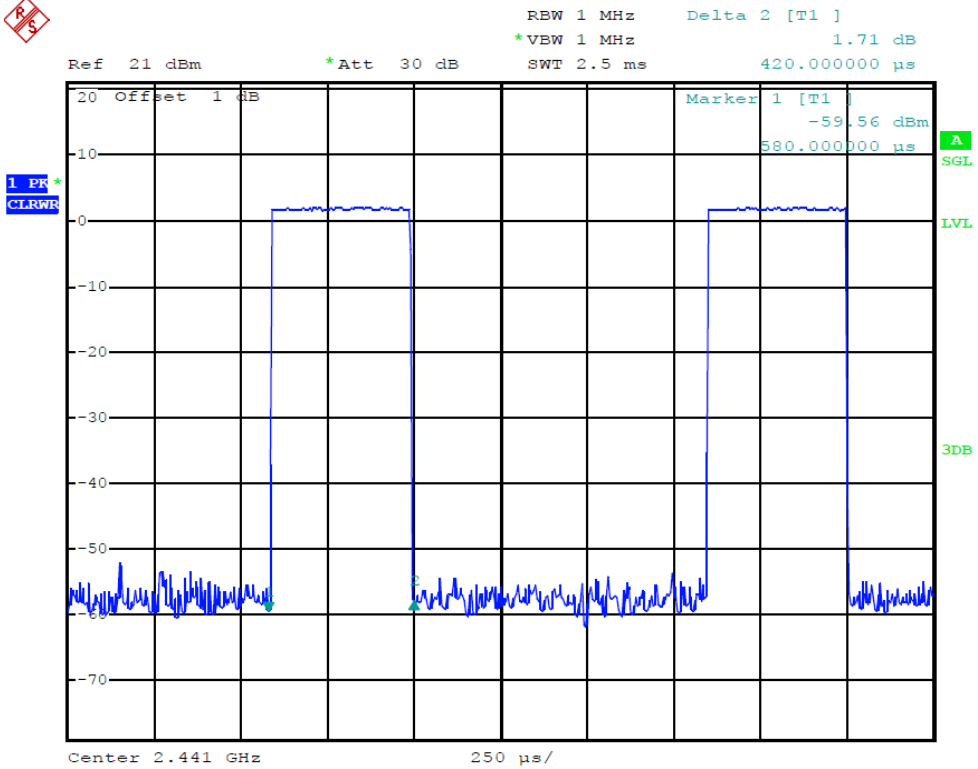


Date: 16.MAR.2014 20:21:17

(Plot 4.8.1.A2: Channel 39: 2441MHz @ GFSK @ DH1)

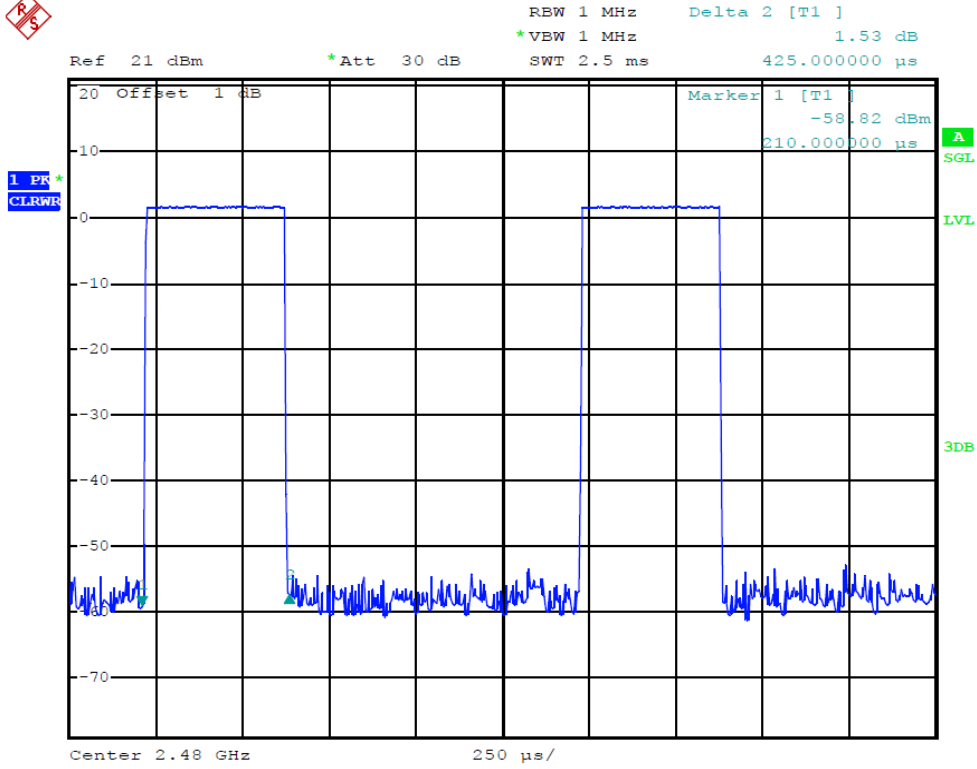


Date: 16.MAR.2014 20:21:40

(Plot 4.8.1.A3: Channel 78: 2480MHz @ GFSK @ DH1)

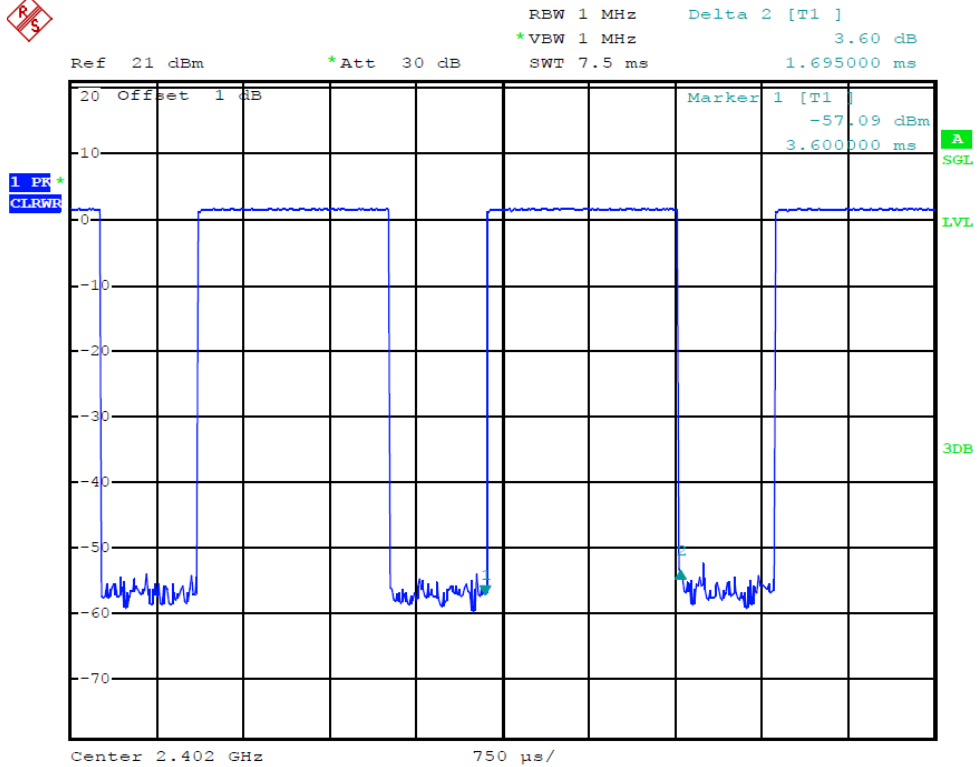


Date: 16.MAR.2014 20:26:45

(Plot 4.8.1.B1: Channel 00: 2402MHz @ GFSK @ DH3)

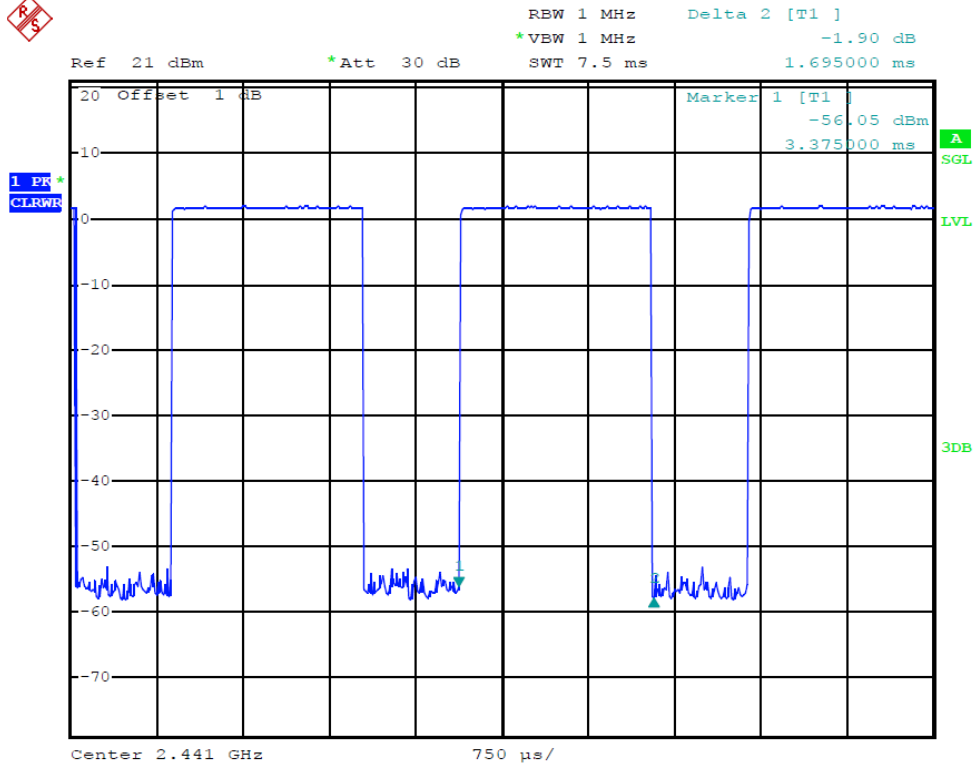


Date: 16.MAR.2014 20:27:19

(Plot 4.8.1.B2: Channel 39: 2441MHz @ GFSK @ DH3)

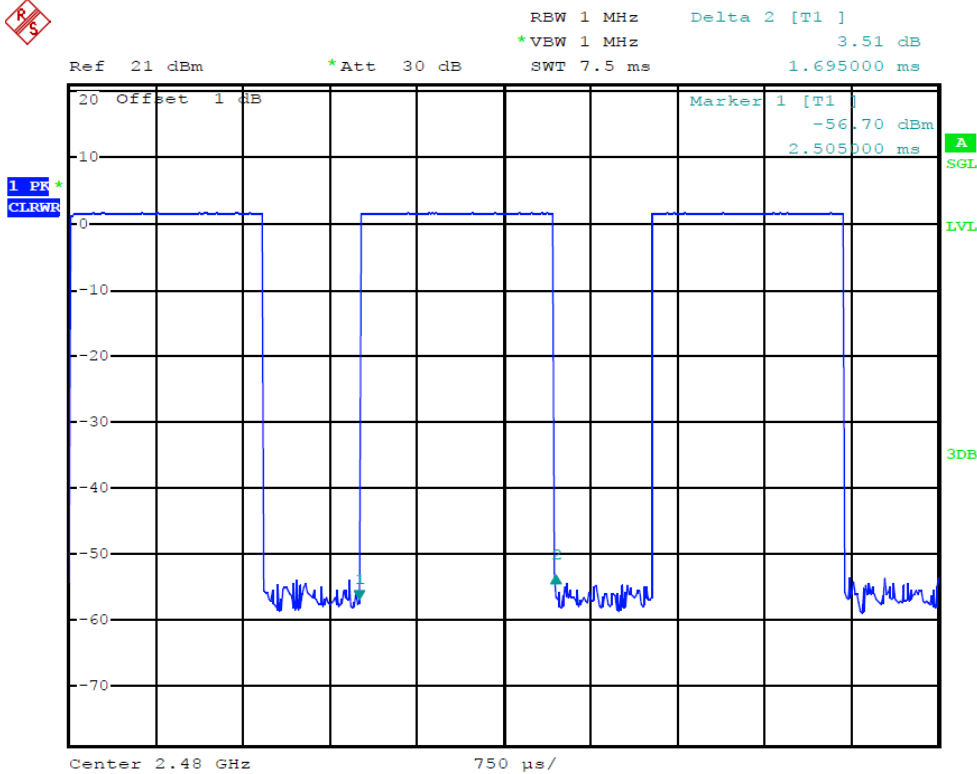


Date: 16.MAR.2014 20:27:42

(Plot 4.8.1.B3: Channel 78: 2480MHz @ GFSK @ DH3)

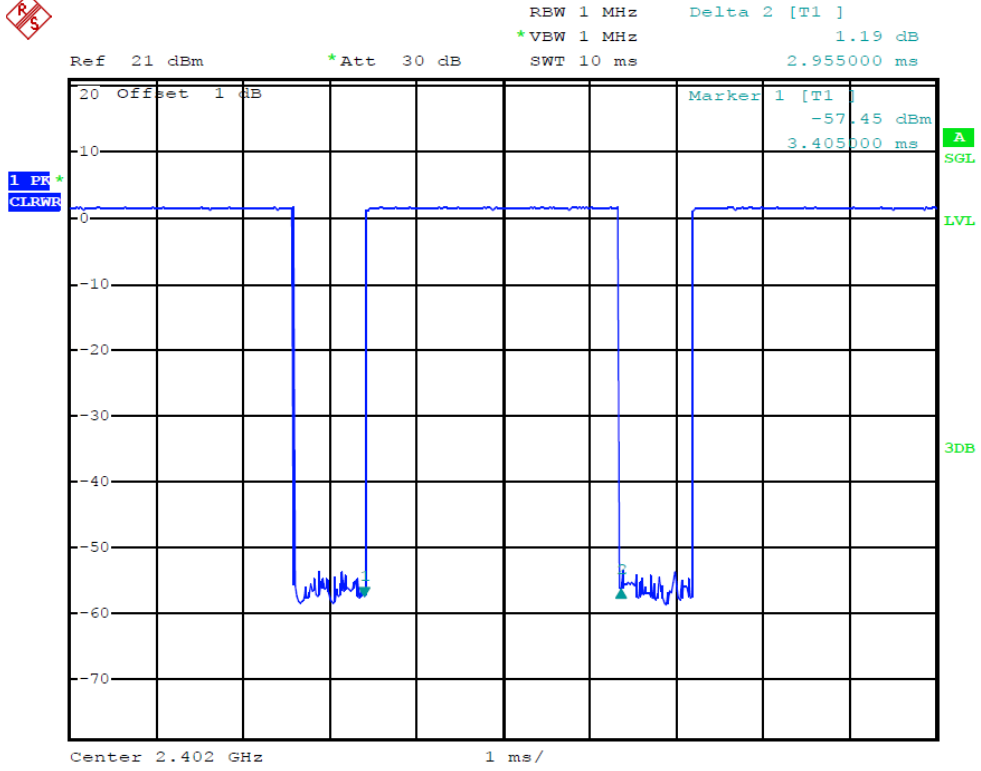


Date: 16.MAR.2014 20:32:06

(Plot 4.8.1.C1: Channel 00: 2402MHz @ GFSK @ DH5)

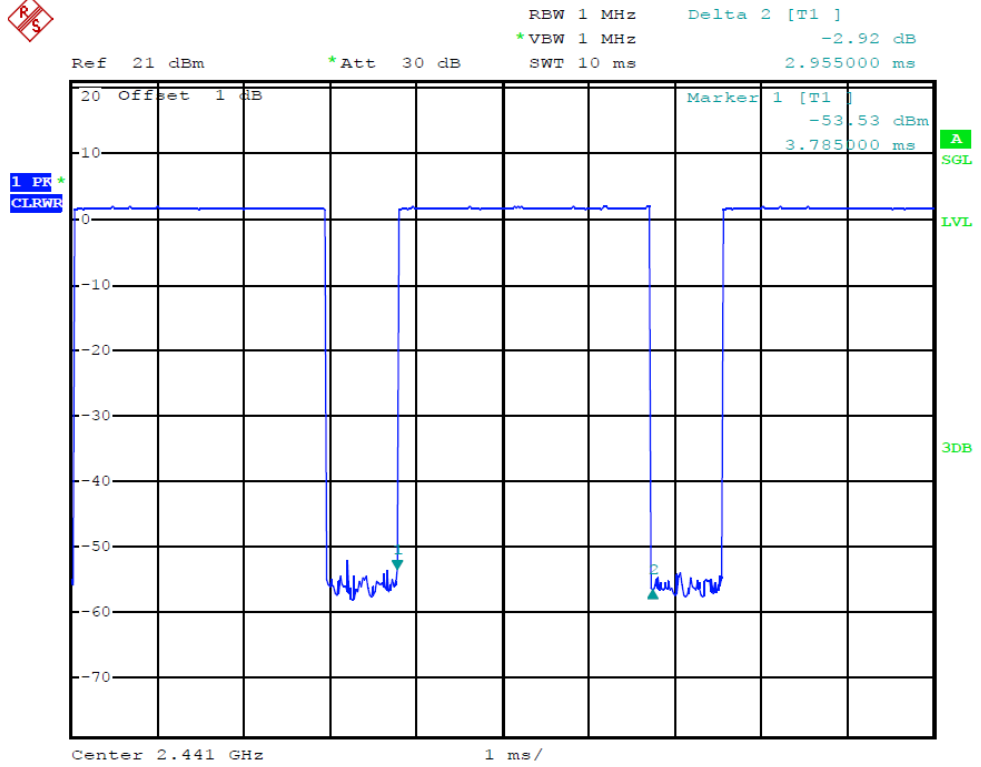

Date: 16.MAR.2014 20:32:29

(Plot 4.8.1.C2: Channel 39: 2441MHz @ GFSK @ DH5)

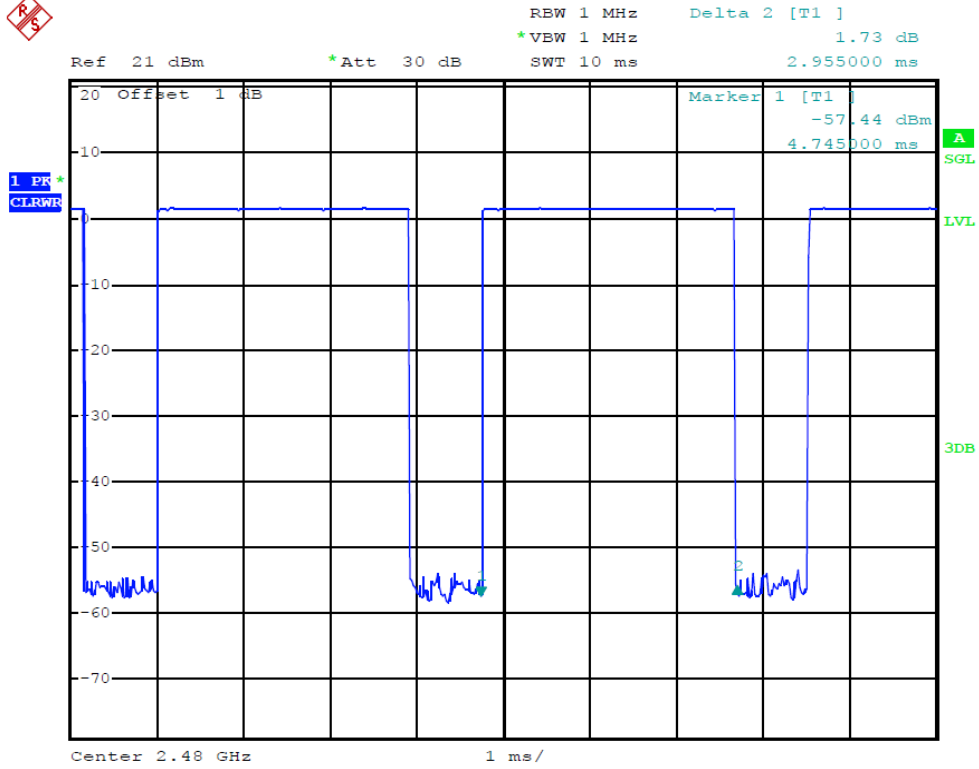


Date: 16.MAR.2014 20:32:50

(Plot 4.8.1.C3: Channel 78: 2480MHz @ GFSK @ DH5)

4.9. Spurious RF Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2009 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBM= 300KHz to measure the peak field strength , and measurement frequency range from 30MHz to 26.5GHz.

LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

TEST RESULTS


Remark: we measured all conditions(DH1,DH3,DH5) and recorded worst case at DH1

4.9.1 GFSK Test Mode

A. Test Verdict


Channel	Frequency (MHz)	Frequency Range	Limit (dBc)	Refer to Plot	Verdict
00	2402	30MHz-3GHz	-20	Plot 4.9.1 A1	PASS
		3GHz-15GHz	-20	Plot 4.9.1 A2	PASS
		15GHz-25GHz	-20	Plot 4.9.1 A3	PASS
39	2441	30MHz-3GHz	-20	Plot 4.9.1 B1	PASS
		3GHz-15GHz	-20	Plot 4.9.1 B2	PASS
		15GHz-25GHz	-20	Plot 4.9.1 B3	PASS
78	2480	30MHz-3GHz	-20	Plot 4.9.1 C1	PASS
		3GHz-15GHz	-20	Plot 4.9.1 C2	PASS
		15GHz-25GHz	-20	Plot 4.9.1 C3	PASS

B. Test Plots

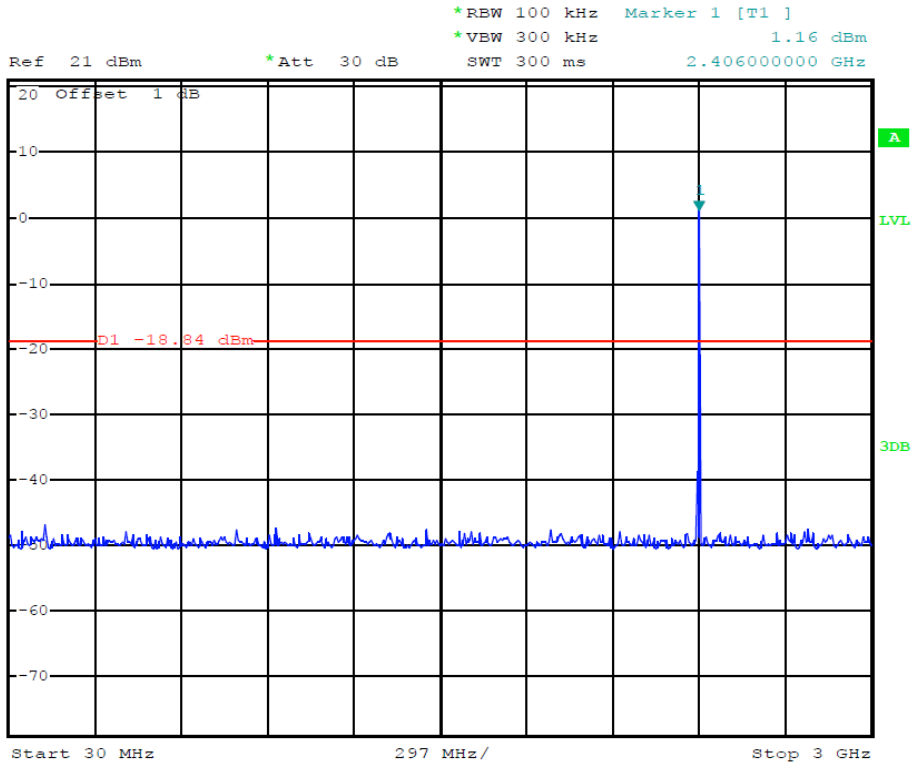


Date: 16.MAR.2014 20:42:01

(Plot 4.9.1.A1: Channel 00: 2402MHz @ GFSK)

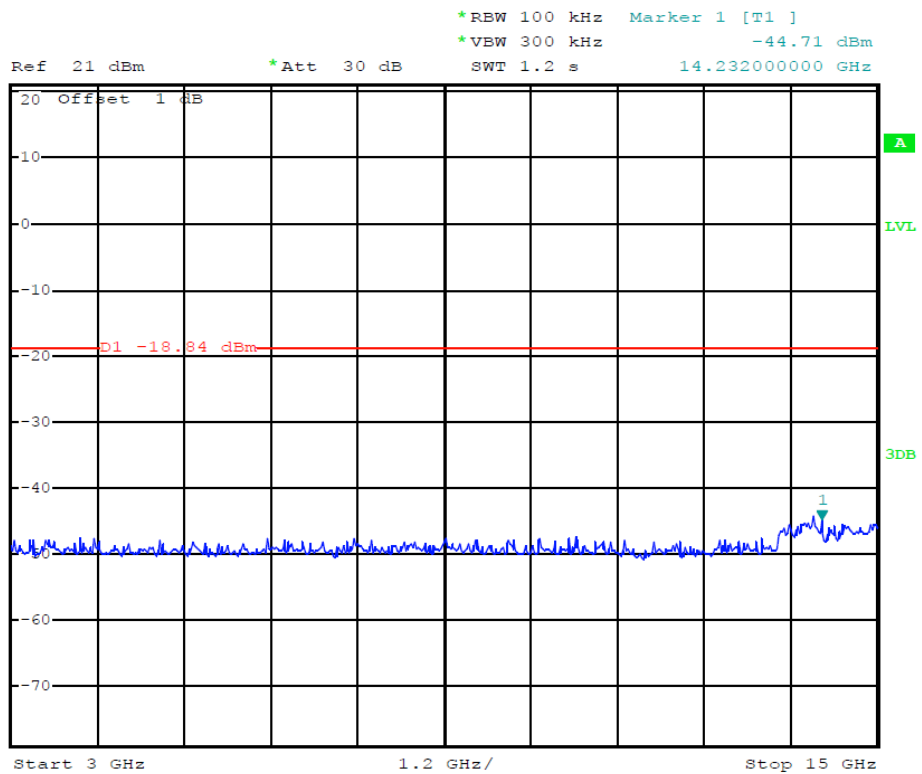


Date: 16.MAR.2014 20:42:18

(Plot 4.9.1.A2: Channel 00: 2402MHz @ GFSK)

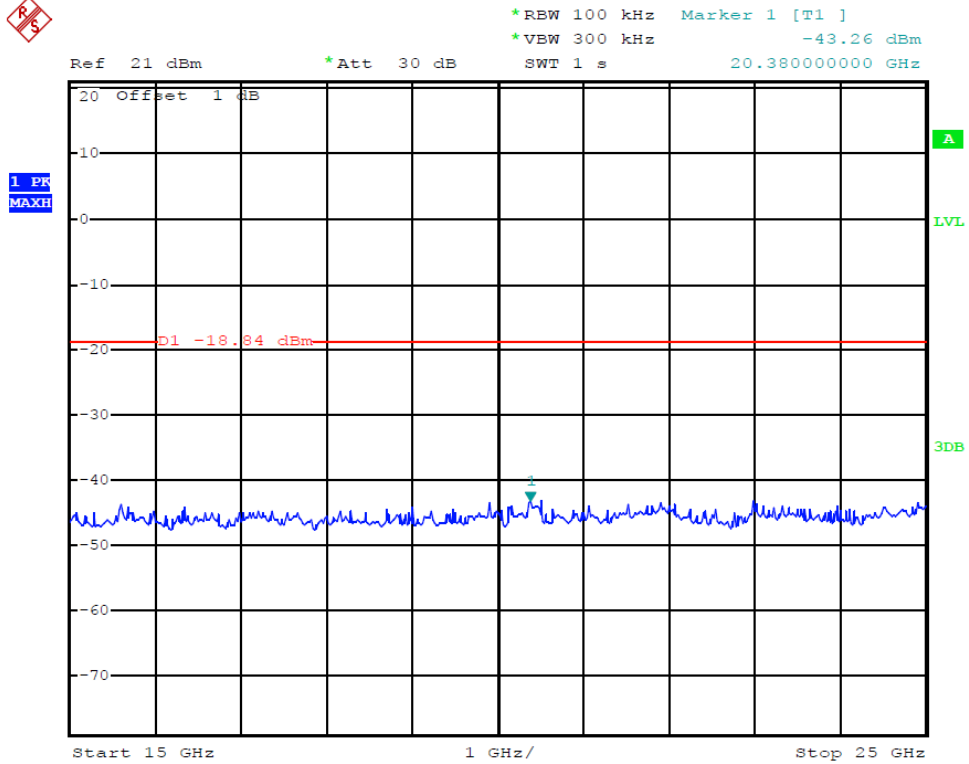

Date: 16.MAR.2014 20:42:33

(Plot 4.9.1.A3: Channel 00: 2402MHz @ GFSK)

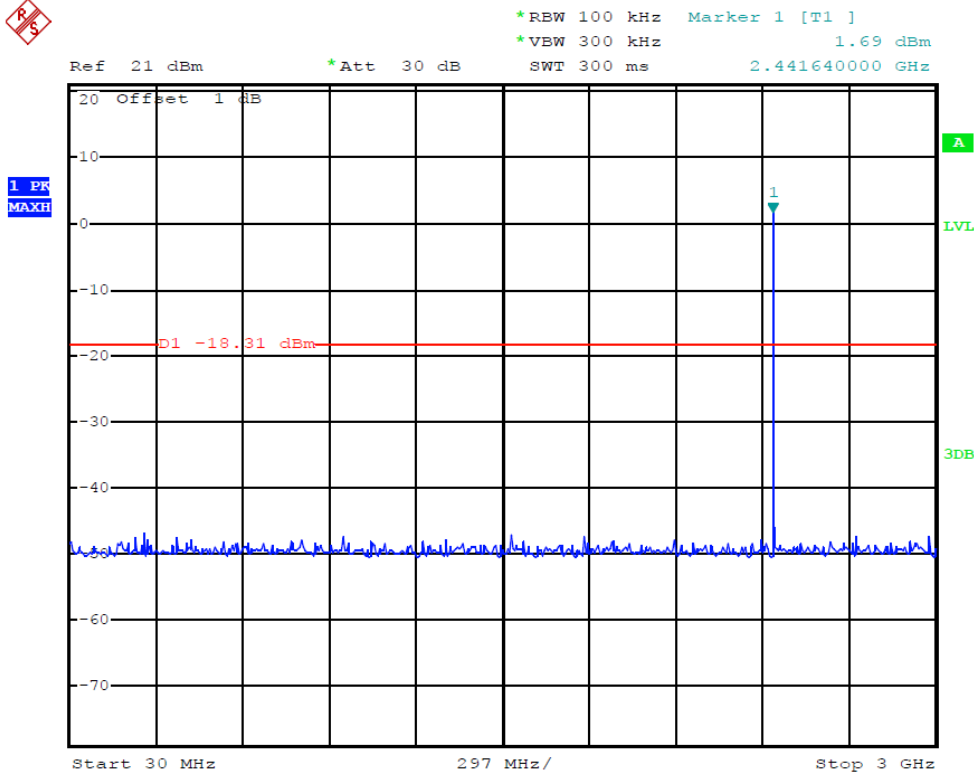


Date: 16.MAR.2014 20:43:06

(Plot 4.9.1.B1: Channel 39: 2441MHz @ GFSK)



*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz -44.93 dBm
Ref 21 dBm *Att 30 dB SWT 1.2 s 14.136000000 GHz

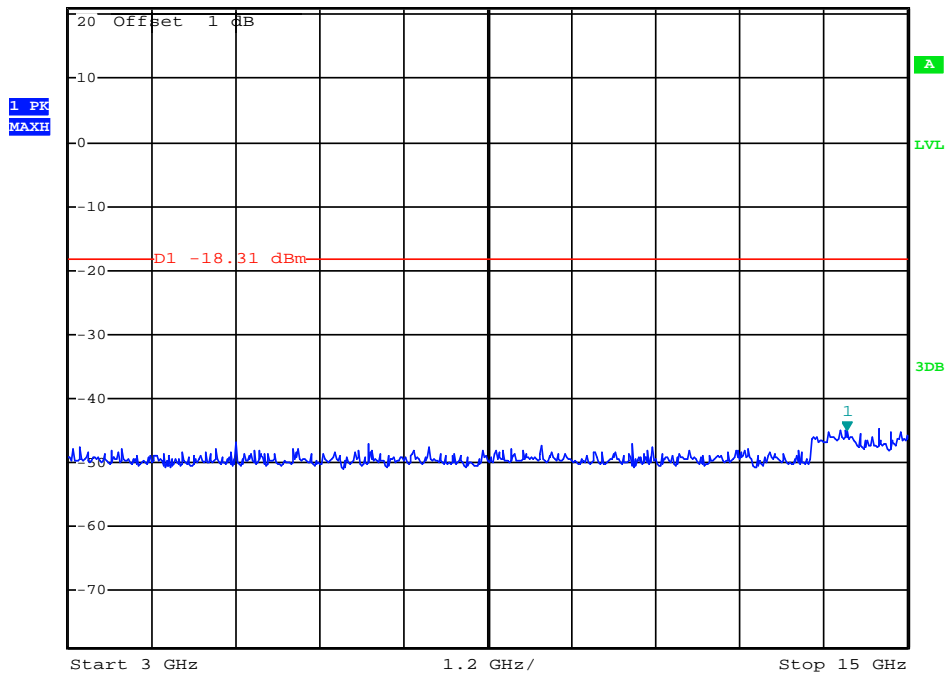


Date: 6.JAN.2014 20:43:17

(Plot 4.9.1.B2: Channel 39: 2441MHz @ GFSK)




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz -44.93 dBm
Ref 21 dBm *Att 30 dB SWT 1.2 s 14.136000000 GHz

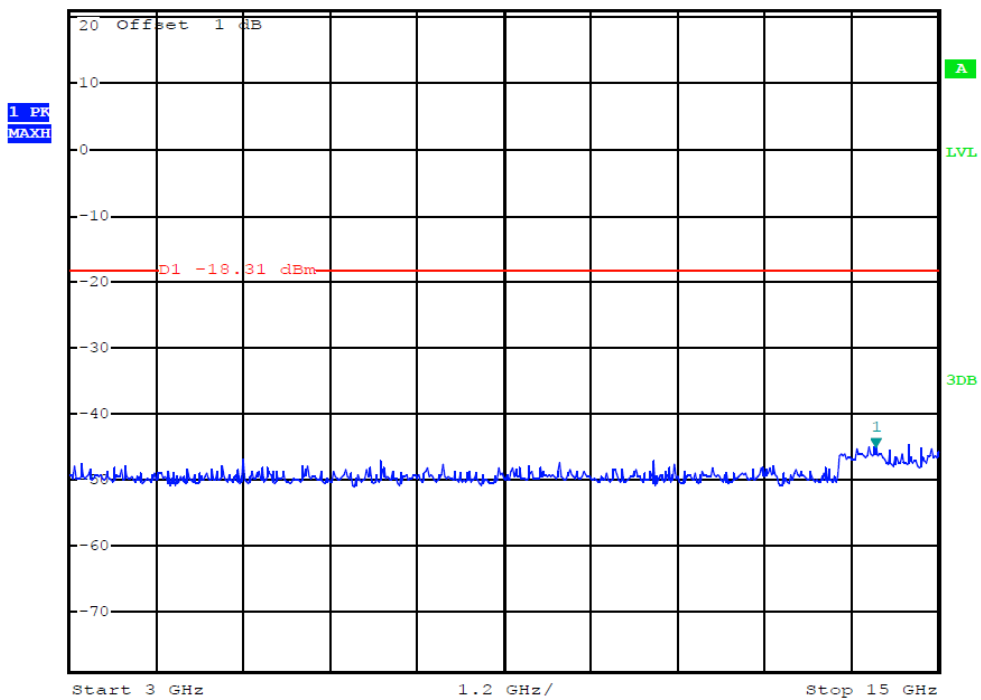


Date: 16.MAR.2014 20:43:17

(Plot 4.9.1.B3: Channel 39: 2441MHz @ GFSK)

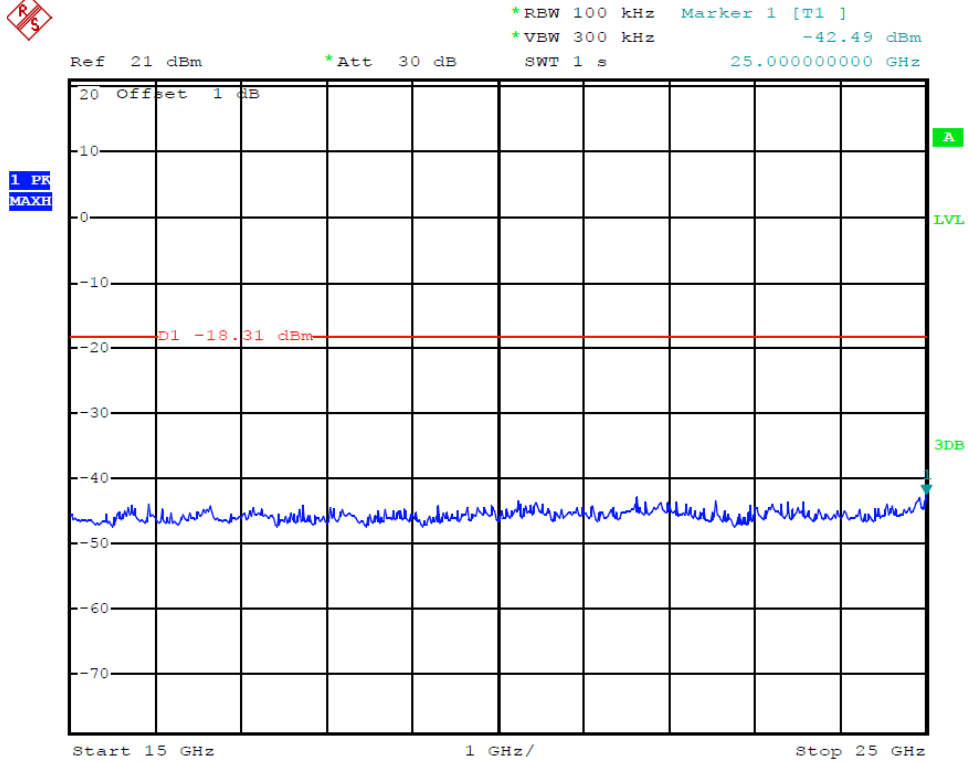


Date: 16.MAR.2014 20:43:30

(Plot 4.9.1.C1: Channel 78: 2480MHz @ GFSK)

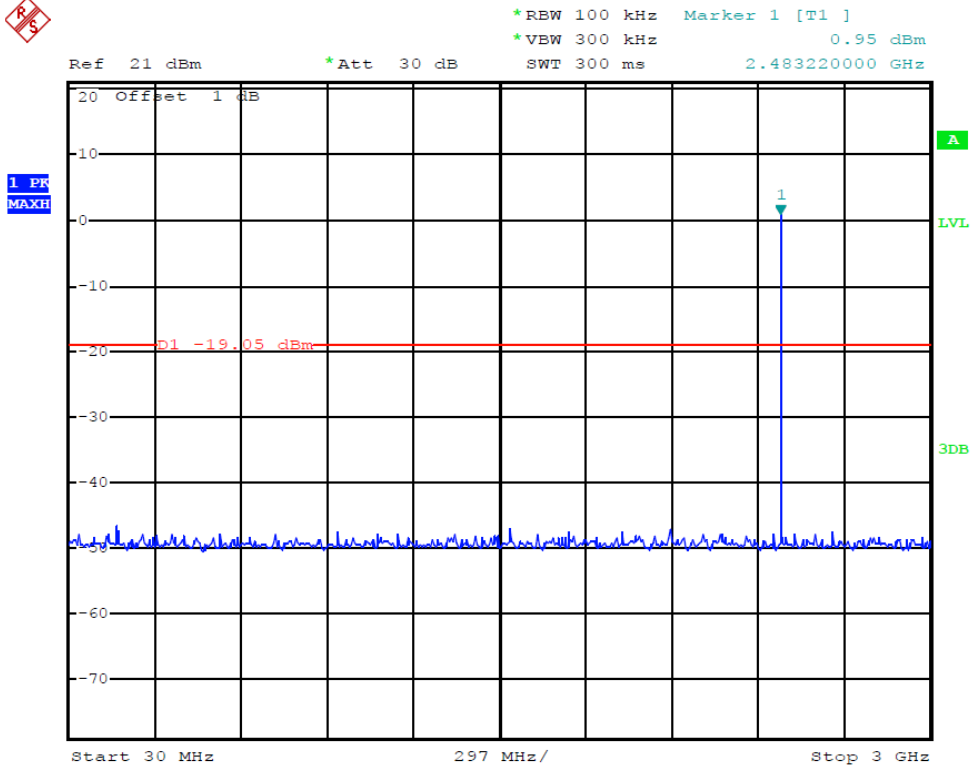

Date: 16.MAR.2014 20:44:09

(Plot 4.9.1.C2: Channel 78: 2480MHz @ GFSK)

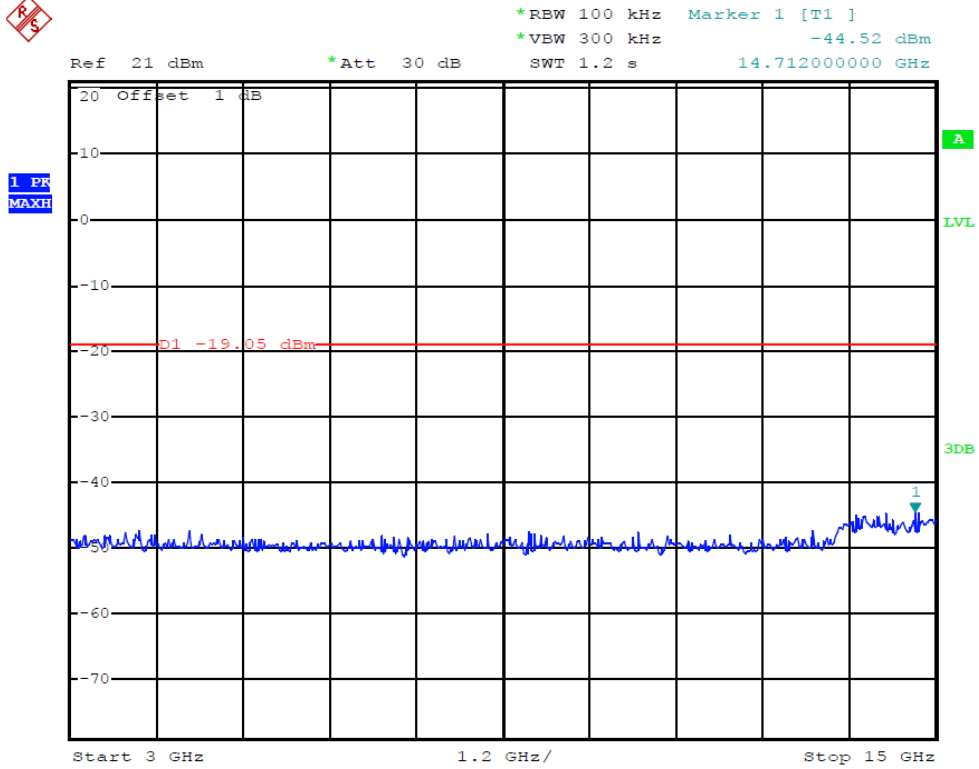

Date: 16.MAR.2014 20:44:22

(Plot 4.9.1.C3: Channel 78: 2480MHz @ GFSK)

4.10. Pseudorandom Frequency Hopping Sequence

TEST APPLICABLE


For 47 CFR Part 15C section 15.247 (a)(1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

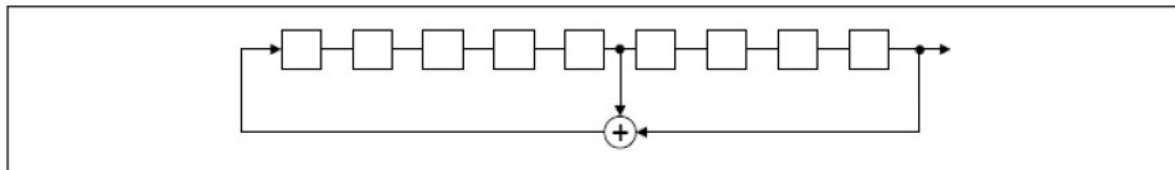

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

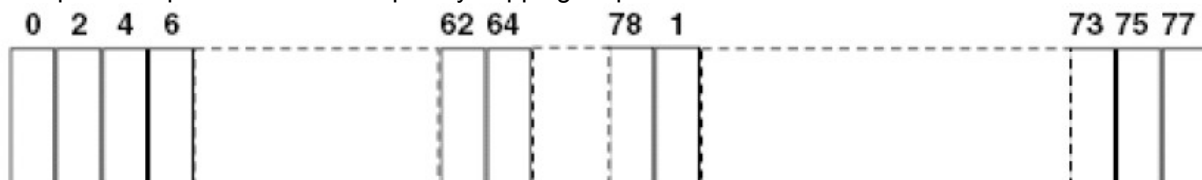

Each frequency used equally on the average by each transmitter. The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

4.11. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The maximum antenna gain of Bluetooth used was 1.00 dBi.

Bluetooth
Antenna



5. Test Setup Photos of the EUT

Radiated Emission (30MHz-1GHz)



Radiated Emission (above 1GHz)



Conducted Emission (AC Mains)



6. External and Internal Photos of the EUT

External photos of the EUT













Internal photos of the EUT

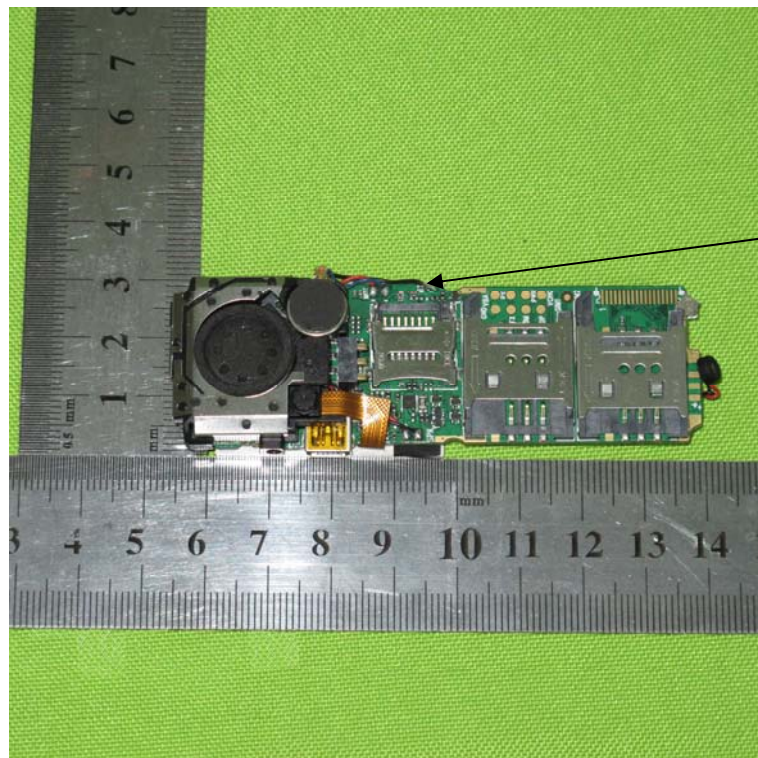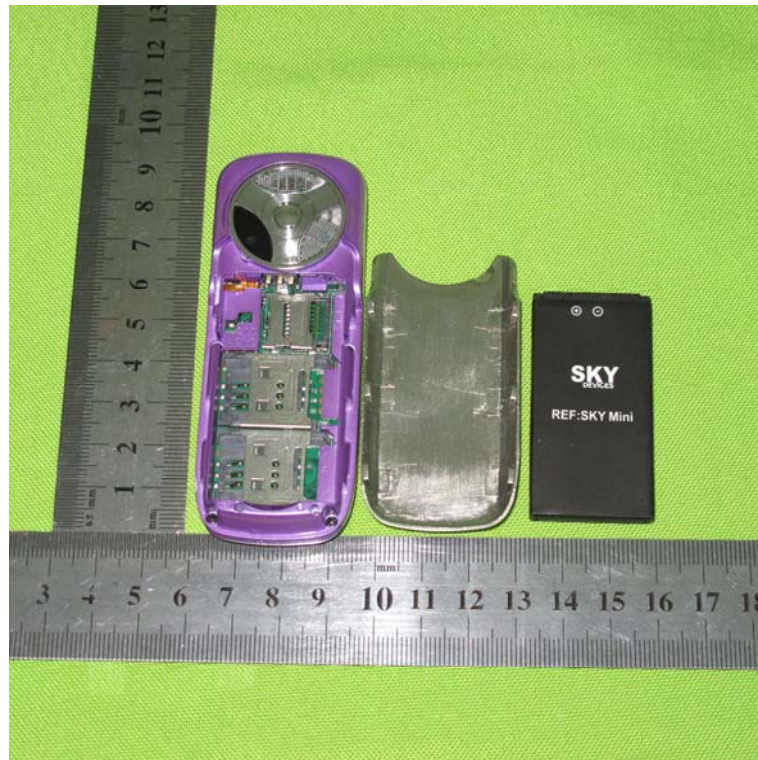



BT Antenna

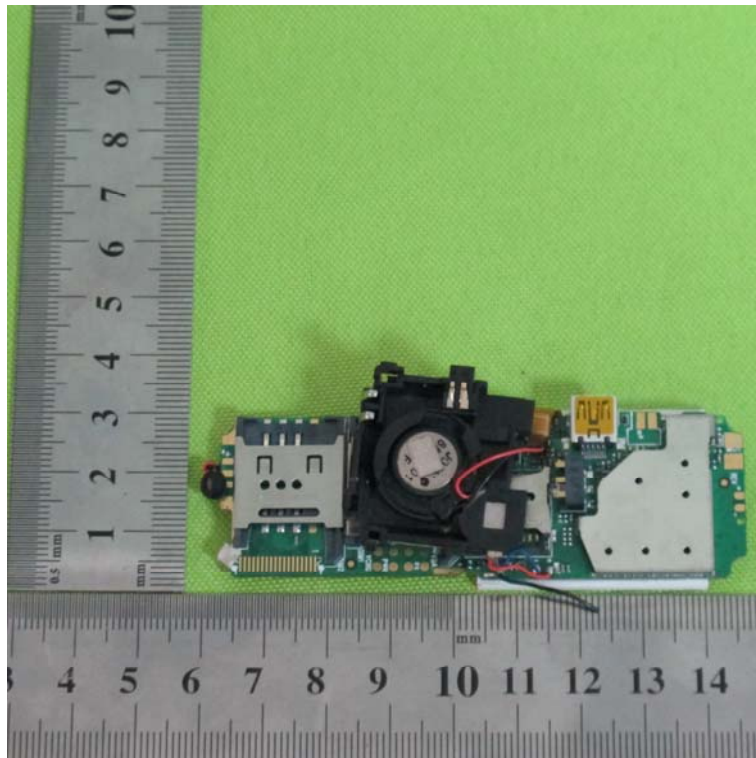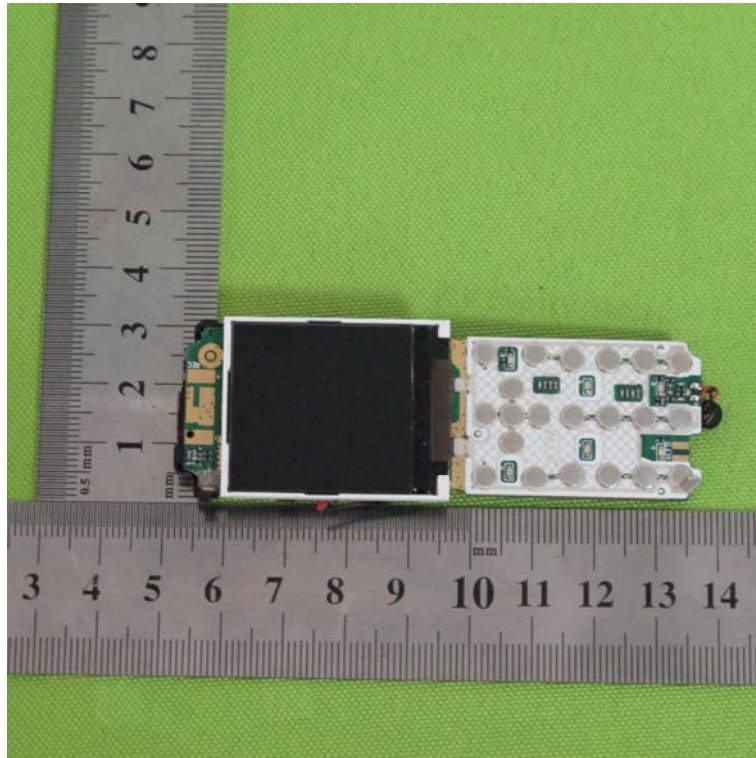



GSM Antenna

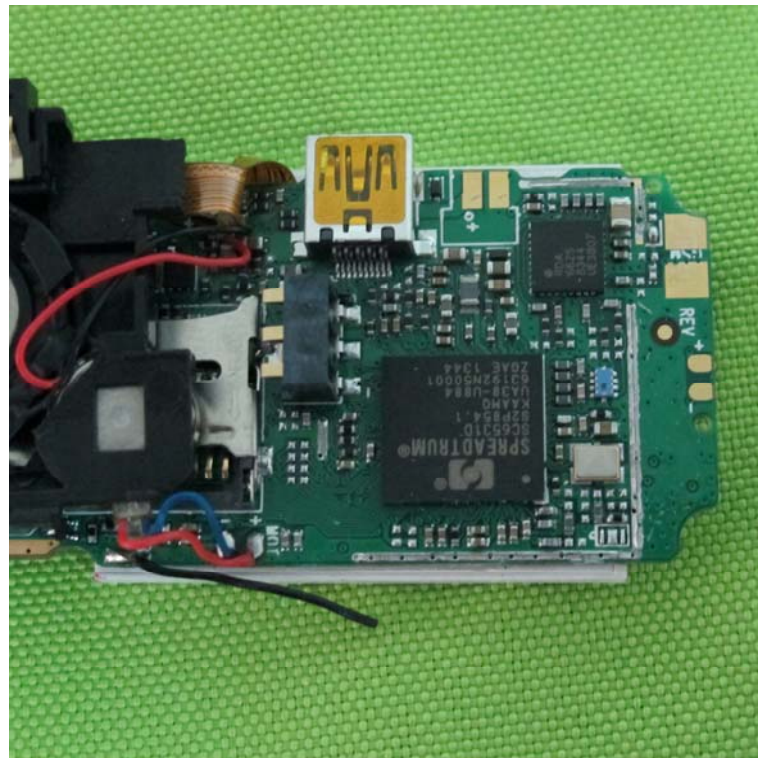

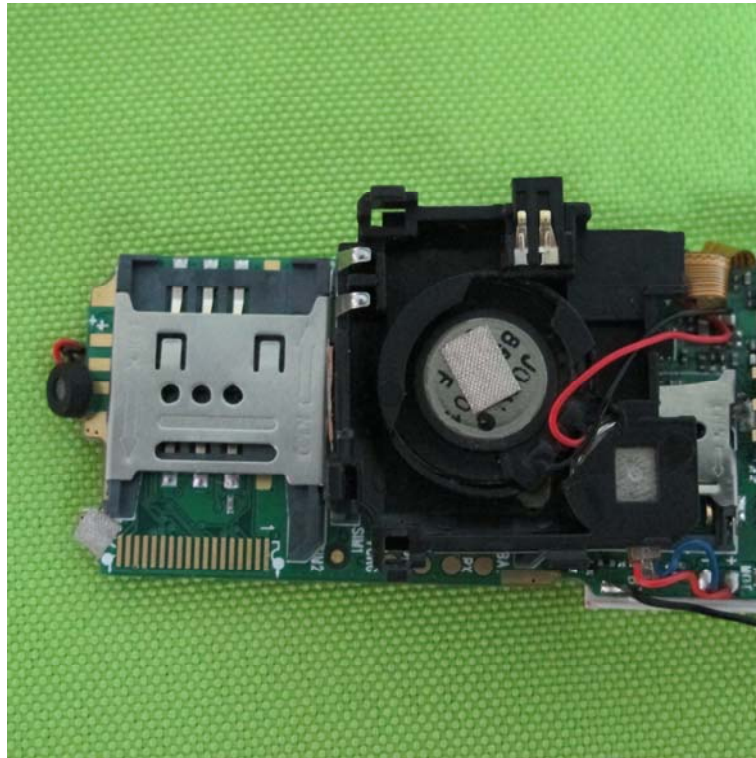

.....End of Report.....