




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	5.313	30	Pass
NVNT	BLE	2442	Ant1	6.735	30	Pass
NVNT	BLE	2480	Ant1	4.993	30	Pass



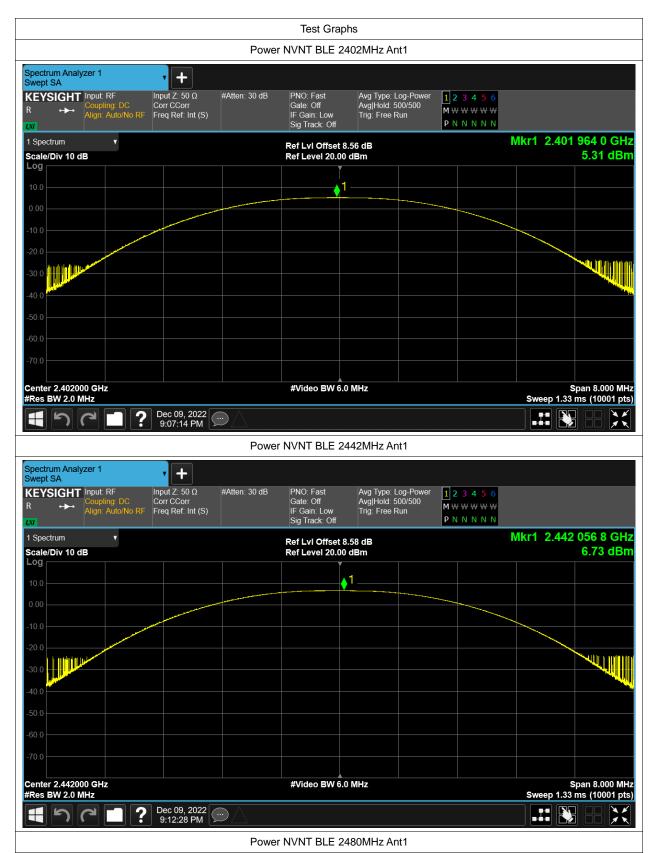










-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.661	0.5	Pass
NVNT	BLE	2442	Ant1	0.659	0.5	Pass
NVNT	BLE	2480	Ant1	0.663	0.5	Pass

Project No.: JYTSZR2212015



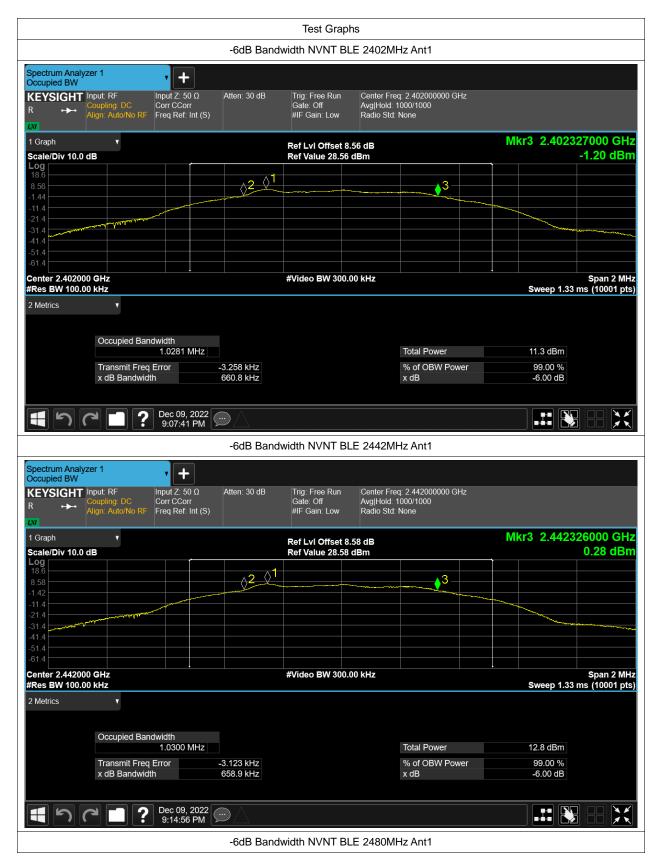










Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	1.017	
NVNT	BLE	2442	Ant1	1.017	
NVNT	BLE	2480	Ant1	1.019	

Project No.: JYTSZR2212015



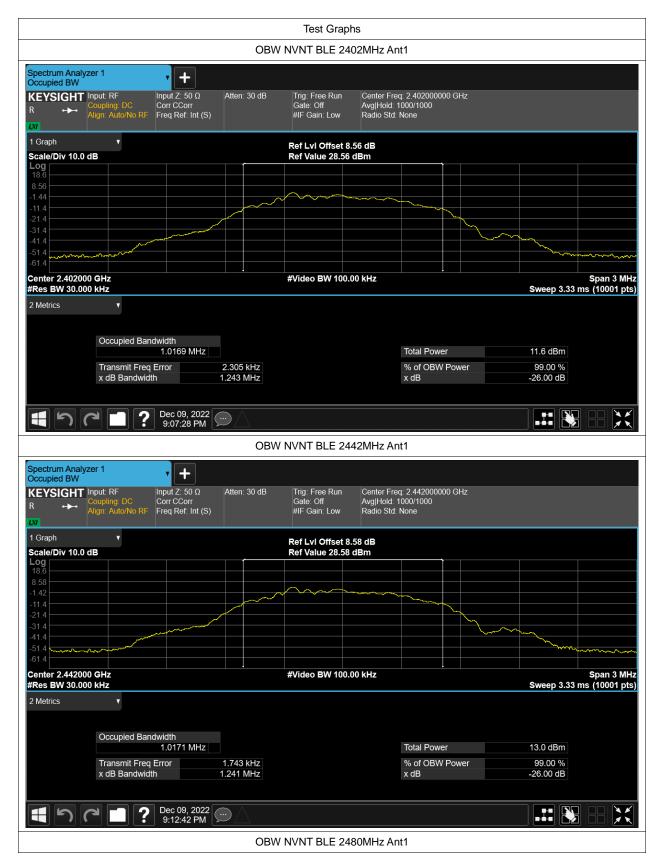










Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-9.731	8	Pass
NVNT	BLE	2442	Ant1	-8.34	8	Pass
NVNT	BLE	2480	Ant1	-10.152	8	Pass

Project No.: JYTSZR2212015



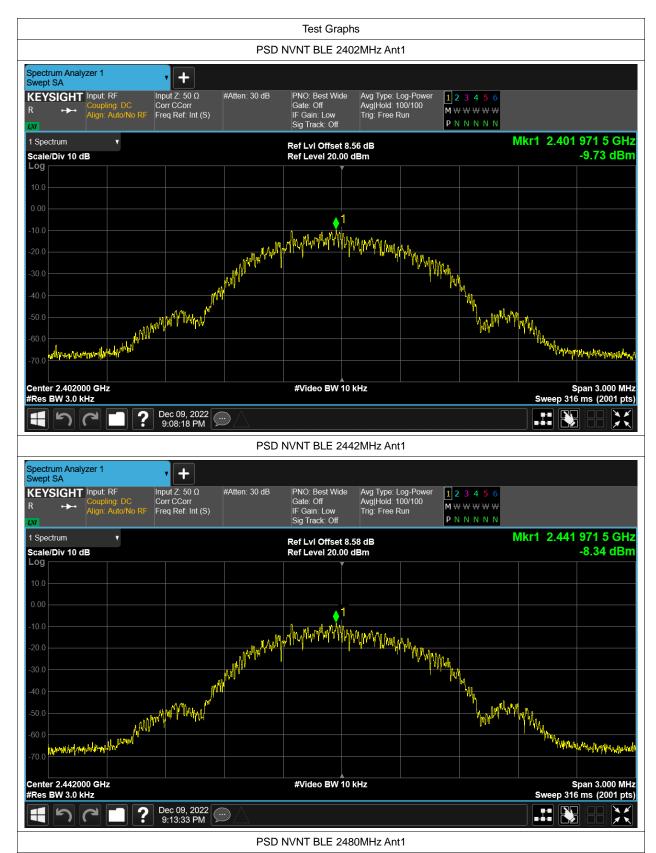










Band Edge

	Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
	NVNT	BLE	2402	Ant1	-55.33	-20	Pass
Ī	NVNT	BLE	2480	Ant1	-53.28	-20	Pass







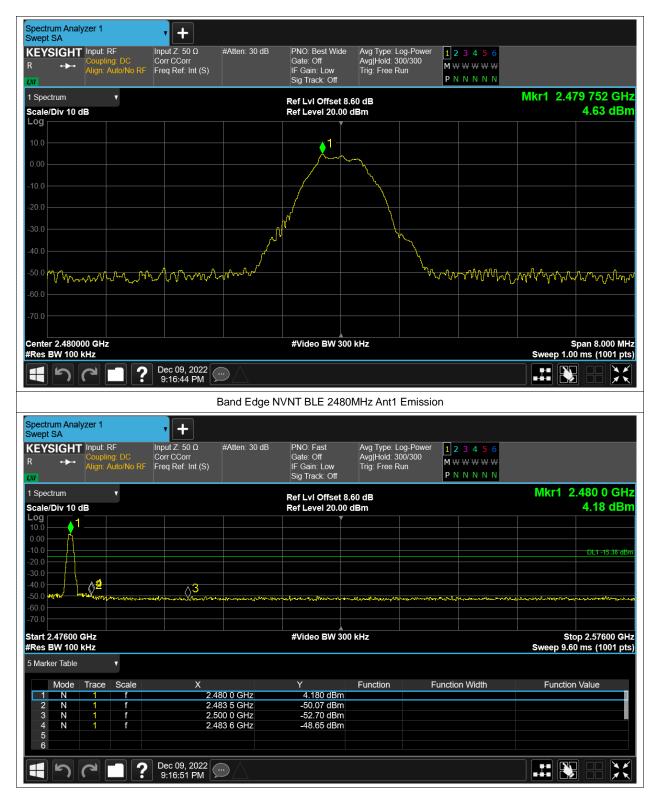





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-48.15	-20	Pass
NVNT	BLE	2442	Ant1	-43.89	-20	Pass
NVNT	BLE	2480	Ant1	-37.59	-20	Pass







