

TEST REPORT

FCC BT LE Test for T9

APPLICANT

VC Inc.

REPORT NO.

HCT-RF-2112-FC046

DATE OF ISSUE

December 24, 2021

Tested by
Chang Hee Hwang



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

**TEST
REPORT**

FCC BT LE Test for
T9

REPORT NO.

HCT-RF-2112-FC046

DATE OF ISSUE

December 24, 2021

Additional Model

-

Applicant

VC Inc.

3F-4F, Hwawon Building, 417, Nonhyeon-ro, Gangnam-gu, Seoul, Republic of Korea

**Eut Type
Model Name**

Voice Caddie GPS Golf Watch
T9

FCC ID

2ABTKT9

Max. RF Output Power

0.698 dBm (1.17 mW)

Modulation type

GFSK

FCC Classification

Digital Transmission System(DTS)

FCC Rule Part(s)

Part 15.247

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	December 24, 2021	Initial Release

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

If this report is required to confirmation of authenticity, please contact to www.hct.co.kr

CONTENTS

1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	7
3. INSTRUMENT CALIBRATION	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS	9
8. SUMMARY TEST OF RESULTS	24
9. TEST RESULT	25
9.1 DUTY CYCLE	25
9.2 6dB BANDWIDTH	28
9.3 OUTPUT POWER	37
9.4 POWER SPECTRAL DENSITY	39
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	42
9.6 RADIATED SPURIOUS EMISSIONS	59
9.7 RADIATED RESTRICTED BAND EDGES	65
9.8 POWERLINE CONDUCTED EMISSIONS	67
10. LIST OF TEST EQUIPMENT	71
11. ANNEX A_ TEST SETUP PHOTO	73

1. EUT DESCRIPTION

Model	T9	
Additional Model	-	
EUT Type	Voice Caddie GPS Golf Watch	
Power Supply	DC 3.7 V	
Frequency Range	2402 MHz - 2480 MHz	
Max. RF Output Power	Peak	1 M Bit/s : 0.649 dBm (1.16 mW) 2 M Bit/s : 0.698 dBm (1.17 mW)
	Average	1M Bit/s : 0.55 dBm (1.13 mW) 2M Bit/s : 0.58 dBm (1.14 mW)
Modulation Type	GFSK	
Bluetooth Version	5.0	
Number of Channels	40 Channels	
Antenna type	Dielectric Chip Antenna	
Antenna Peak Gain	1.8 dBi	
Date(s) of Tests	December 8, 2021 ~ December 16, 2021	
EUT serial numbers	Radiated: VCT9G2100184	
	Conducted: VCT9G2100130	

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 (Confidence level about 95 %, $k=2$)

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

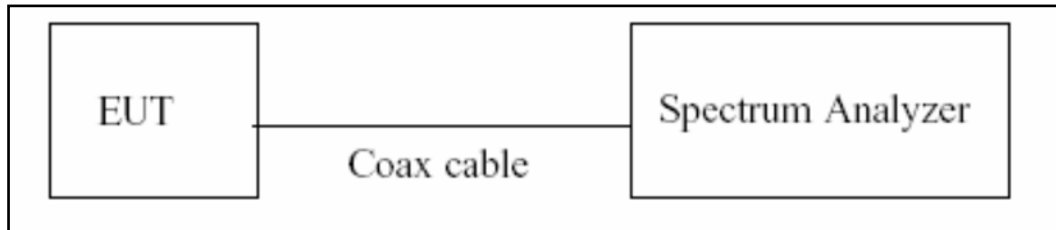

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05r02, Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW \geq 3 x RBW
- 3) Detector = Peak
- 4) Trace mode = Max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 8.3.2.3 in KDB 558074 v05r02, Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Measured Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = Peak
- 7) Trace mode = Max hold
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Measured Value + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 20 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05r02, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW \geq 3 x RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = Max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points \geq 2 x Span/VBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	10.04
100	10.07
200	10.12
300	10.17
400	10.20
500	10.21
600	10.21
700	10.23
800	10.24
900	10.26
1000	10.27
2000	10.40
2400	10.43
2500	10.45
3000	10.52
4000	10.60
5000	10.71
6000	10.73
7000	10.80
8000	10.85
9000	10.91
10000	10.97
11000	11.02
12000	11.10
13000	11.19
14000	11.16
15000	11.21
16000	11.22
17000	11.25
18000	11.30
19000	11.32
20000	11.36
21000	11.48
22000	11.55
23000	11.55
24000	11.59
25000	11.68

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(10 dB) + Cable loss(1ea)

3. EUT Cable loss = 0.5 dB


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

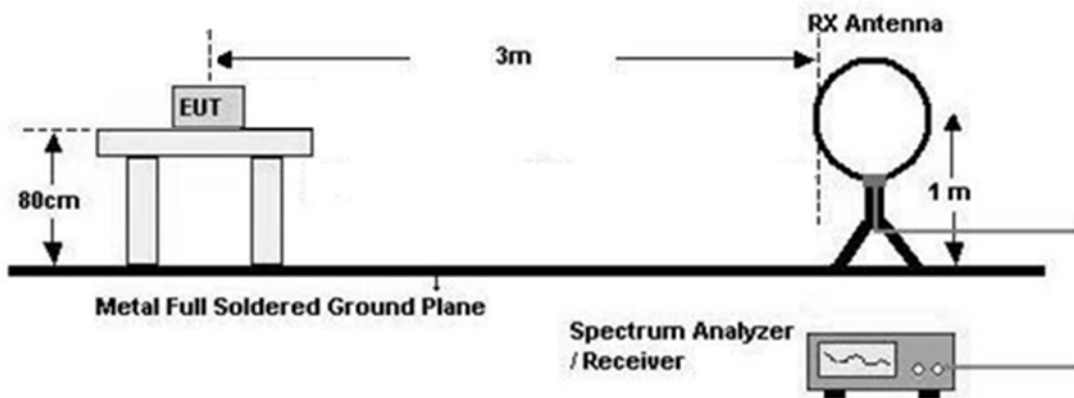

30 MHz - 1 GHz

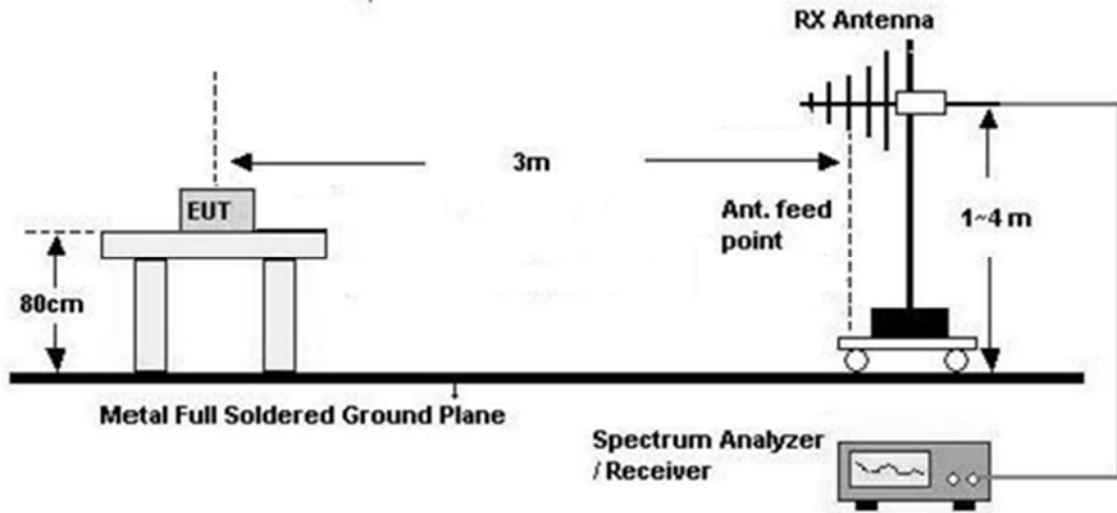

Above 1 GHz

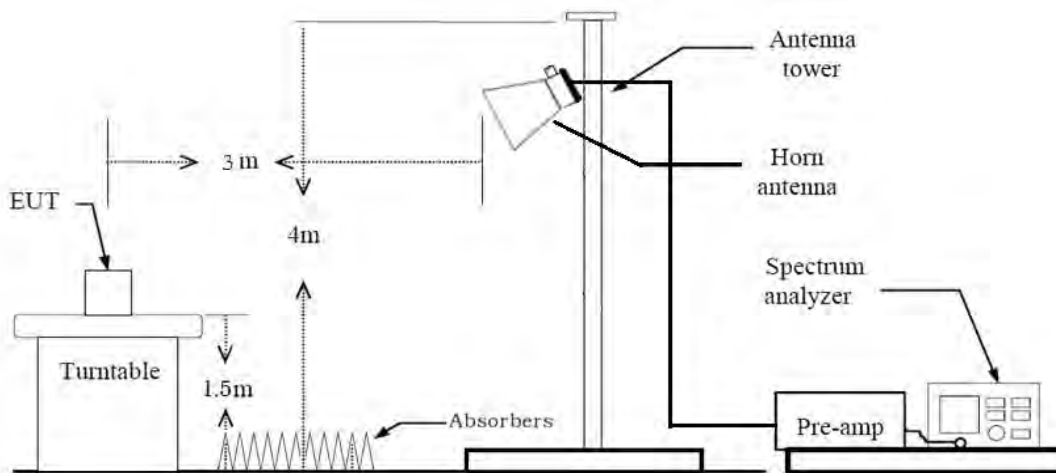

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz

In general, (1) is used mainly
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average):
 - Duty cycle < 98 %, duty cycle variations are less than ± 2 %
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
 - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total (Measurement Type : Peak)

= Peak Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance

Factor(D.F)

Total (Measurement Type : Average)

= Average Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)

+ Distance Factor(D.F) + Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

7. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average):

- Duty cycle < 98 %, duty cycle variations are less than ± 2 %
- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.
- 8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- 9. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
- 10. Total(Measurement Type : Peak)
 - = Peak Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
- Total(Measurement Type : Average)
 - = Average Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
 - + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Worst case configuration and mode

Radiated Test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone+ Travel adaptor + charge cable
 - Worstcase : Stand alone
2. EUT Axis:
 - Radiated Spurious Emissions : X, Y
 - Radiated Restricted Band Edge : Y, Z
3. All packet length of operation were investigated and the test results are worst case in lowest packet length.
 - Worst case : 1M 37Bytes
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + Travel adaptor + charge cable + Notebook
 - Worst case : Stand alone + Travel adaptor + charge cable + Notebook

Conducted test

1. The EUT was configured with packet length of highest power.
EUT supported All mode was tested.

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS


9. TEST RESULT

9.1 DUTY CYCLE

Data rate (Bit/s)	Packet length (Byte)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
1 M	37	0.362	0.480	0.754	1.23
	255	2.108	2.224	0.948	0.23
2 M	37	0.188	0.306	0.614	2.12
	255	1.061	1.179	0.900	0.46

▣ 1 M Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

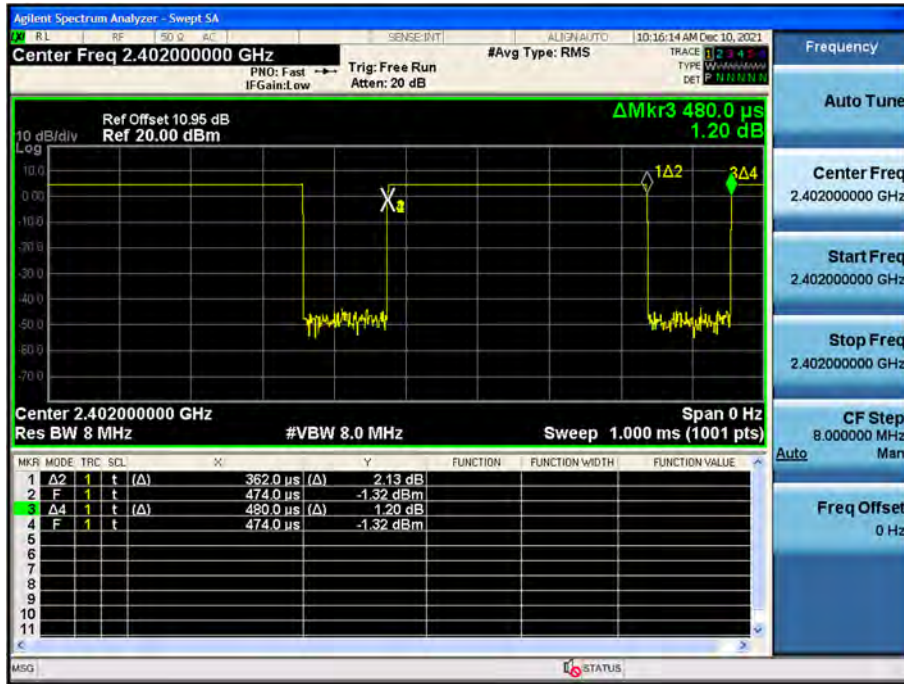


▣ 1 M Bit/s(255 Byte) Test Plots

Duty Cycle (Low-CH 0)




2 M Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

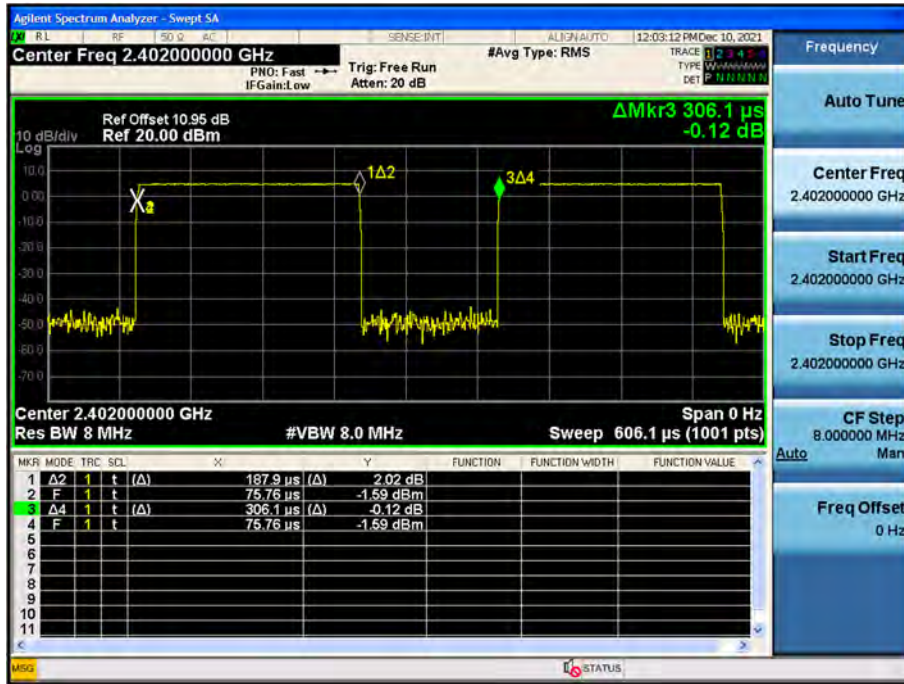

2 M Bit/s(255 Byte) Test Plots

Duty Cycle (Low-CH 0)

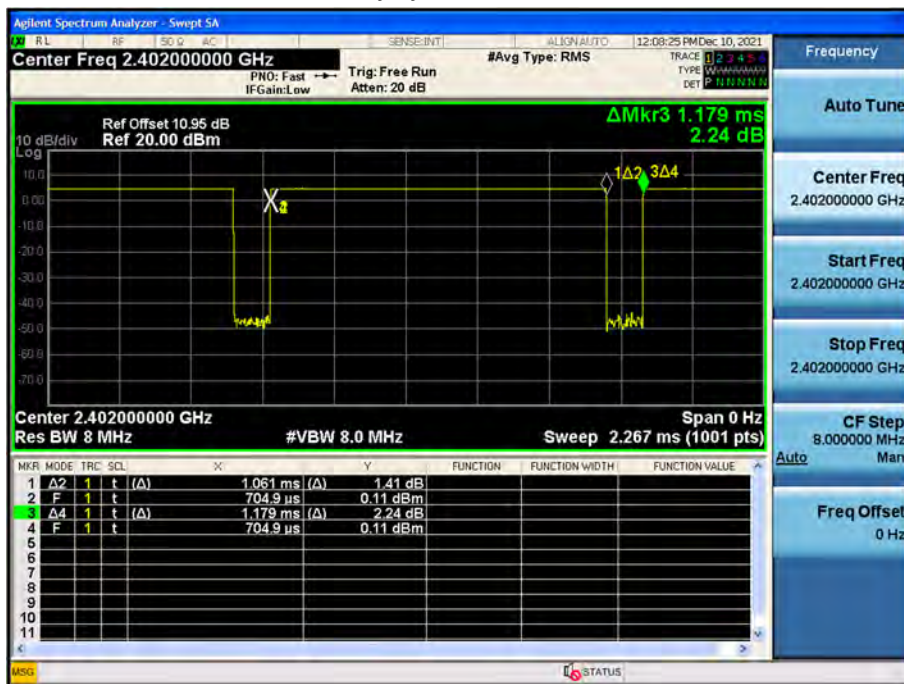


9.2 6dB BANDWIDTH


Mode (Bit/s)	Channel	6 dB Bandwidth (kHz)	Limit (kHz)
1 M 37 Byte	0	520.8	> 500
	19	521.0	
	39	511.7	
1 M 255 Byte	0	518.5	> 500
	19	520.2	
	39	522.4	
2 M 37 Byte	0	896.0	> 500
	19	837.6	
	39	697.3	
2 M 255 Byte	0	809.4	> 500
	19	813.9	
	39	886.7	

☐ 1 M Bit/s(37 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)

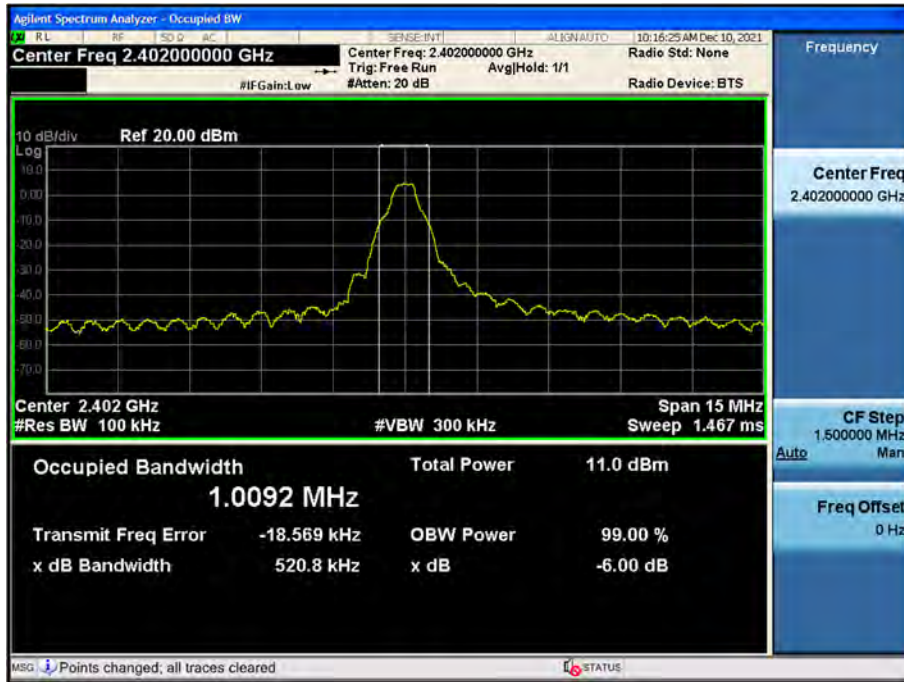

6 dB Bandwidth plot (Mid-CH 19)

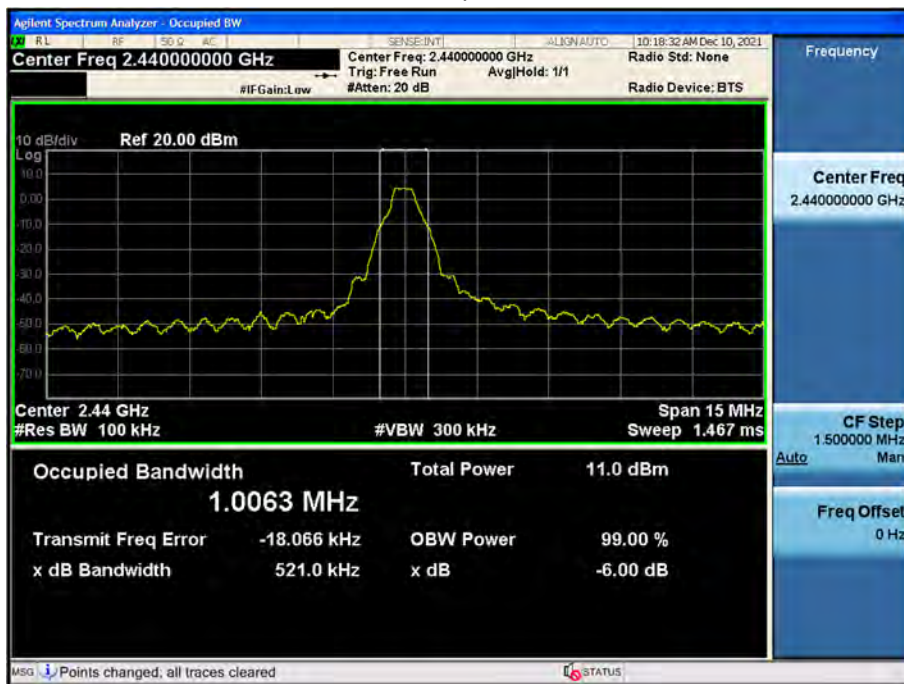


6 dB Bandwidth plot (High-CH 39)

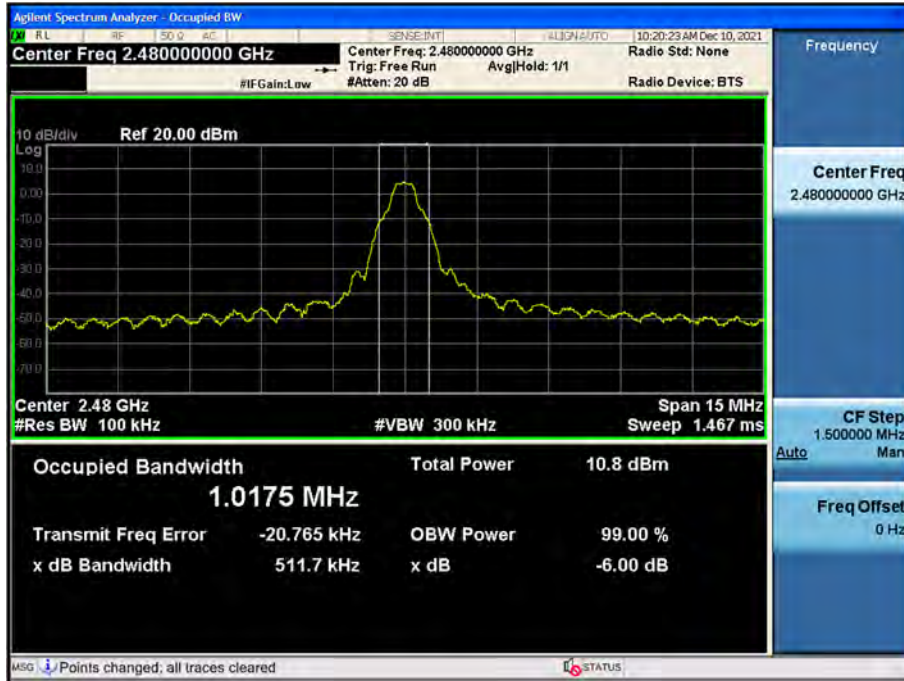


1 M Bit/s(255 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)

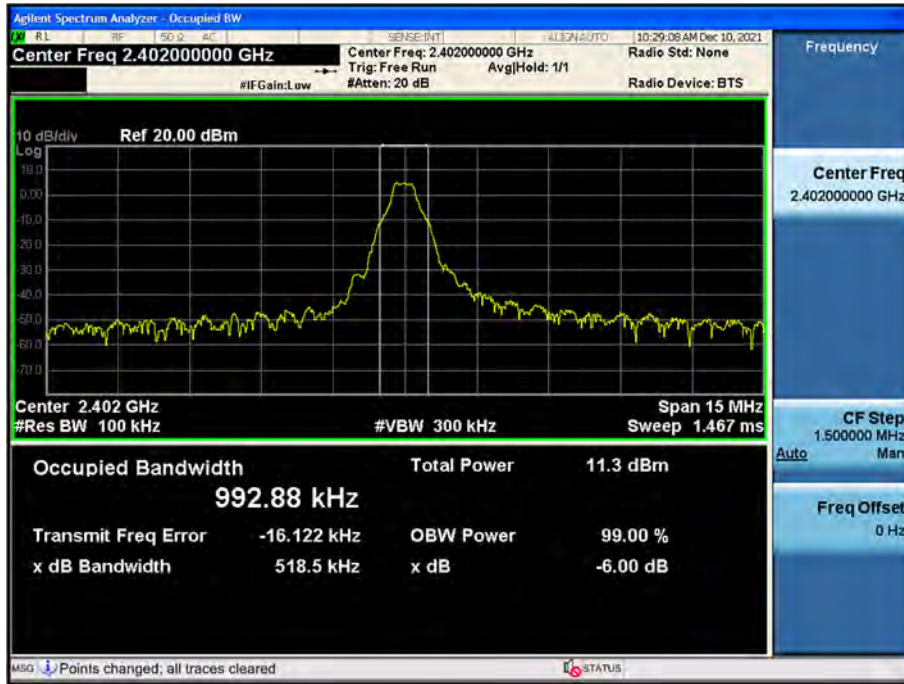

6 dB Bandwidth plot (Mid-CH 19)

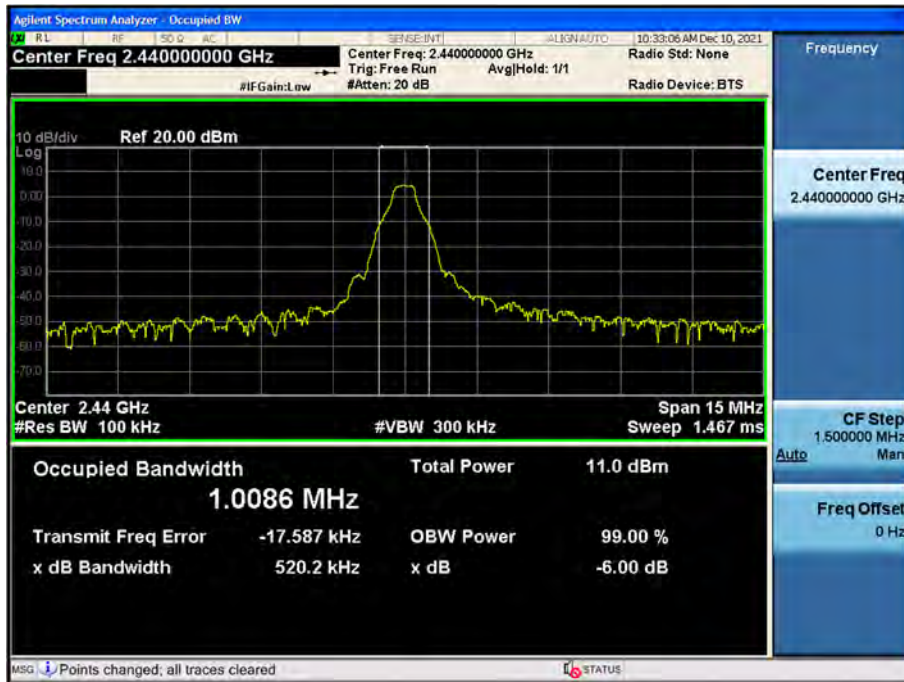


6 dB Bandwidth plot (High-CH 39)

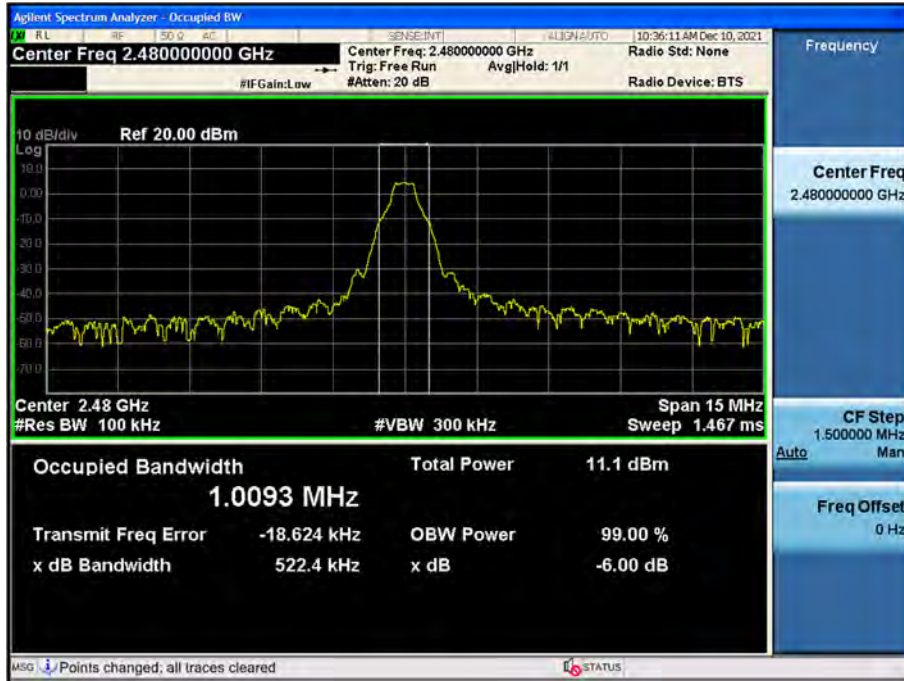


☐ 2 M Bit/s(37 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)

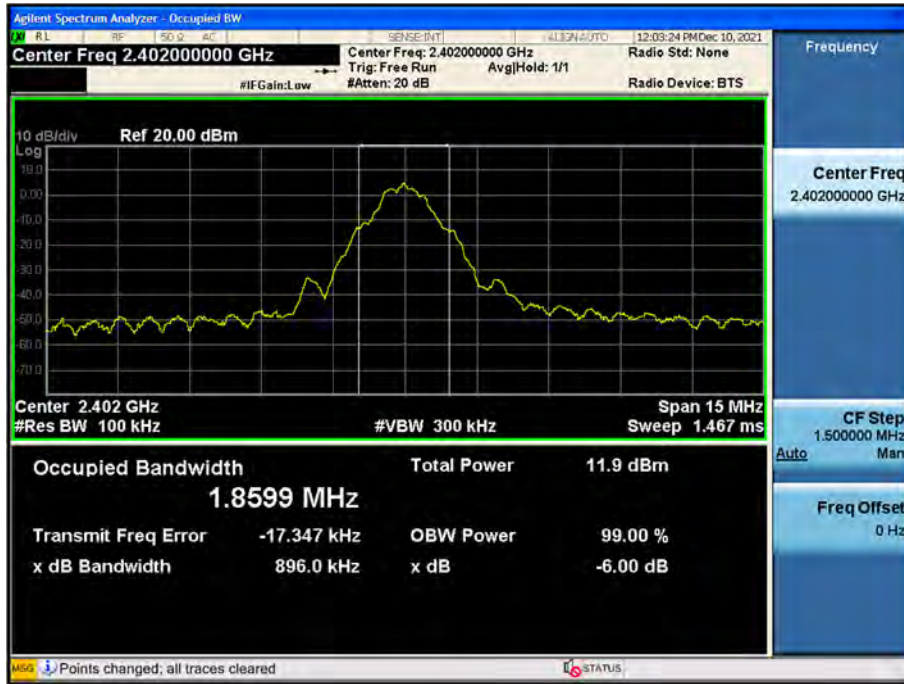

6 dB Bandwidth plot (Mid-CH 19)

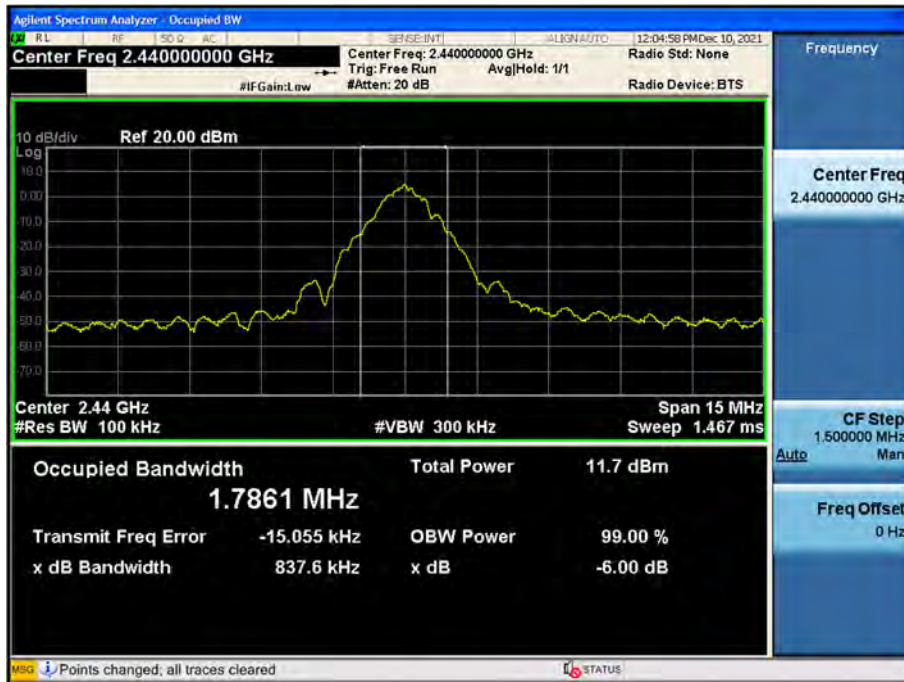


6 dB Bandwidth plot (High-CH 39)

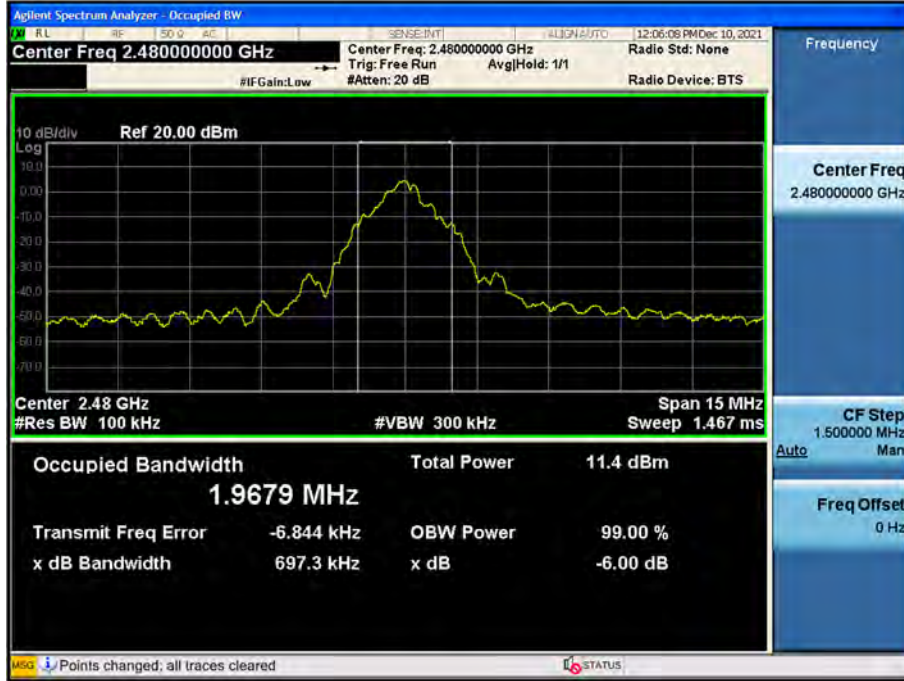


2 M Bit/s(255 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)

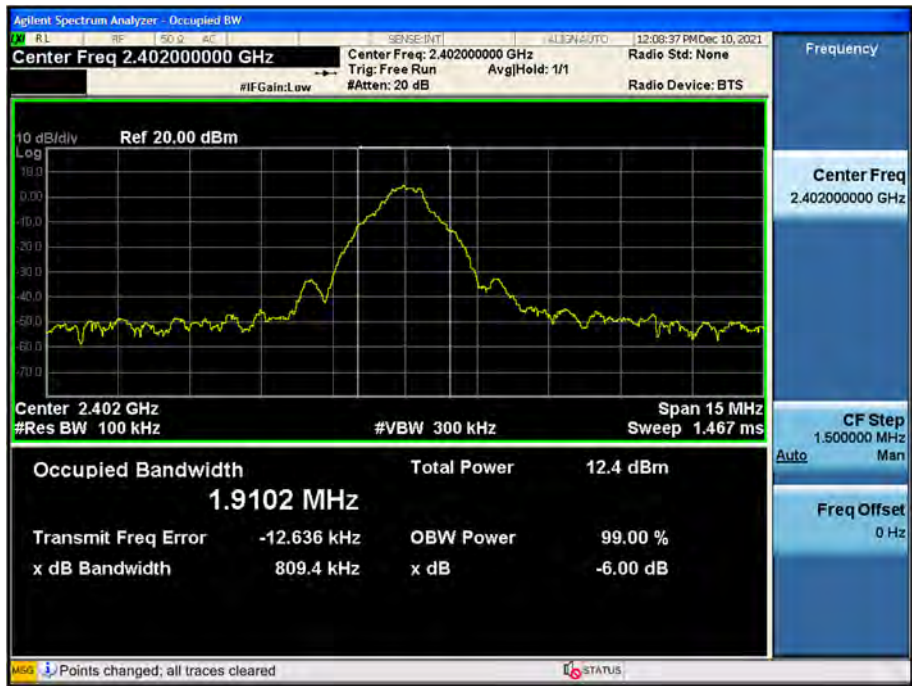

6 dB Bandwidth plot (Mid-CH 19)

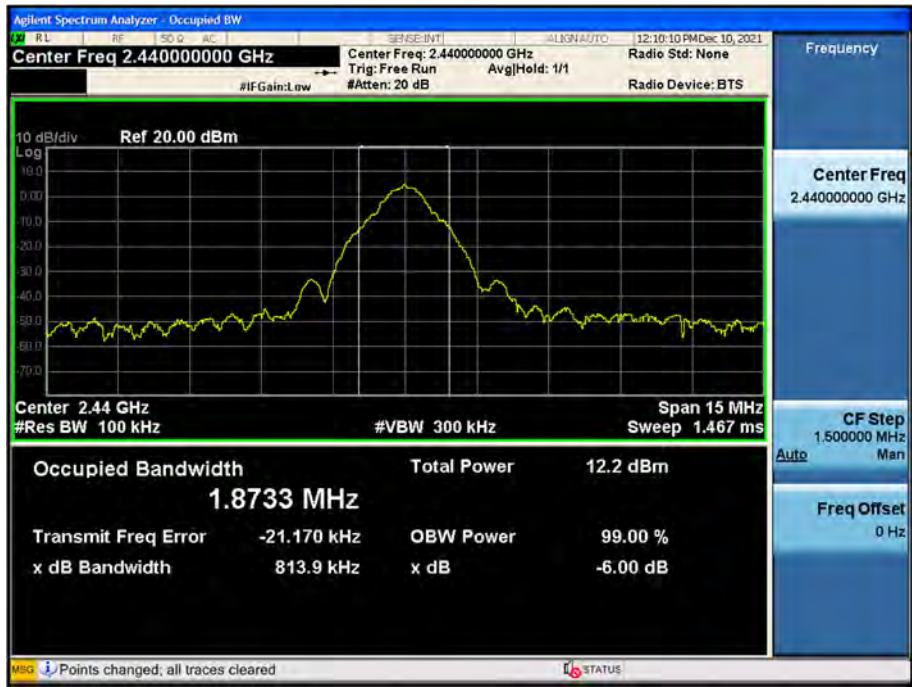

6 dB Bandwidth plot (High-CH 39)

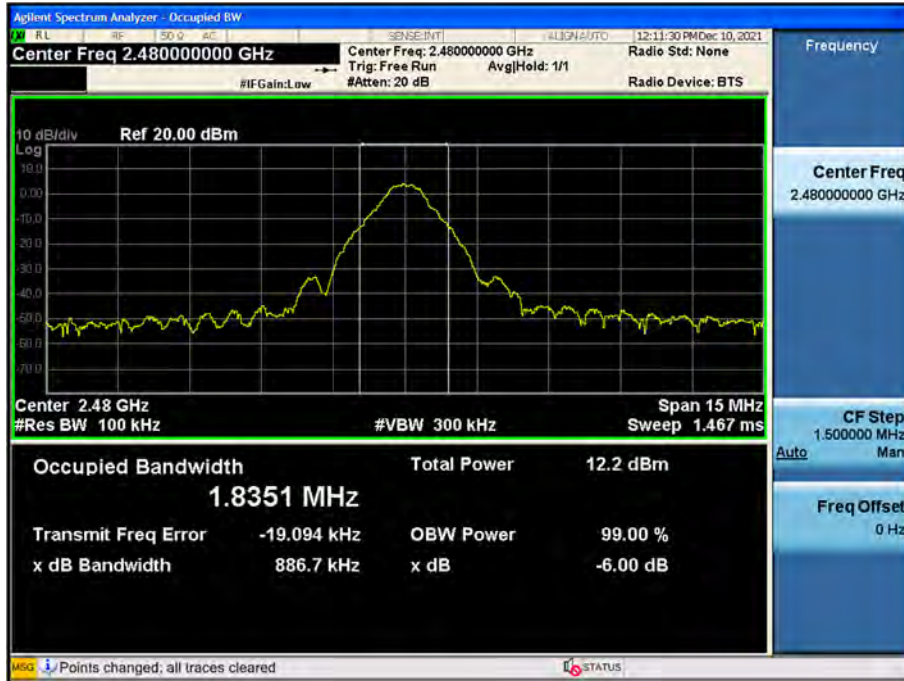

9.3 OUTPUT POWER

Peak Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power (dBm)	Limit (dBm)
		Frequency (MHz)	Channel		
1 M	37	2402	0	0.649	30
		2440	19	0.581	
		2480	39	0.553	
	255	2402	0	0.636	
		2440	19	0.569	
		2480	39	0.539	
2 M	37	2402	0	0.698	30
		2440	19	0.608	
		2480	39	0.602	
	255	2402	0	0.643	
		2440	19	0.594	
		2480	39	0.533	

Average Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power (dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)
		Frequency (MHz)	Channel				
1 M	37	2402	0	-0.68	1.23	0.55	30
		2440	19	-0.75	1.23	0.48	
		2480	39	-0.81	1.23	0.42	
	255	2402	0	0.31	0.23	0.54	
		2440	19	0.29	0.23	0.52	
		2480	39	0.25	0.23	0.48	
2 M	37	2402	0	-1.54	2.12	0.58	
		2440	19	-1.66	2.12	0.46	
		2480	39	-1.69	2.12	0.43	
	255	2402	0	0.08	0.46	0.54	
		2440	19	0.06	0.46	0.52	
		2480	39	0.02	0.46	0.48	

Note :

1. Power meter offset = Attenuator loss + Cable loss + EUT Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
 So, 10.95 dB is offset for 2.4 GHz Band.

9.4 POWER SPECTRAL DENSITY

Frequency (MHz)	Channel No.	Mode (Bit/s)	Test Result	
			Measured Power(dBm)	Limit (dBm)
2402	0	1 M 37 Byte	0.591	8
2440	19		0.521	
2480	39		0.488	
2402	0	1 M 255 Byte	0.555	
2440	19		0.527	
2480	39		0.478	
2402	0	2 M 37 Byte	0.607	
2440	19		0.514	
2480	39		0.491	
2402	0	2 M 255 Byte	0.542	
2440	19		0.498	
2480	39		0.434	

Note :

1. The PSD measured results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss + EUT cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 10.95 dB is offset for 2.4 GHz Band.

☐ 2 M Bit/s (37 Byte) Test Plots

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)





Power Spectral Density (High-CH 39)



9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

1 M Bit/s (37 Byte) Test Plots -BandEdge

Low-CH 0




High-CH 39



☐ 1 M Bit/s (37 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (Low-CH 0)

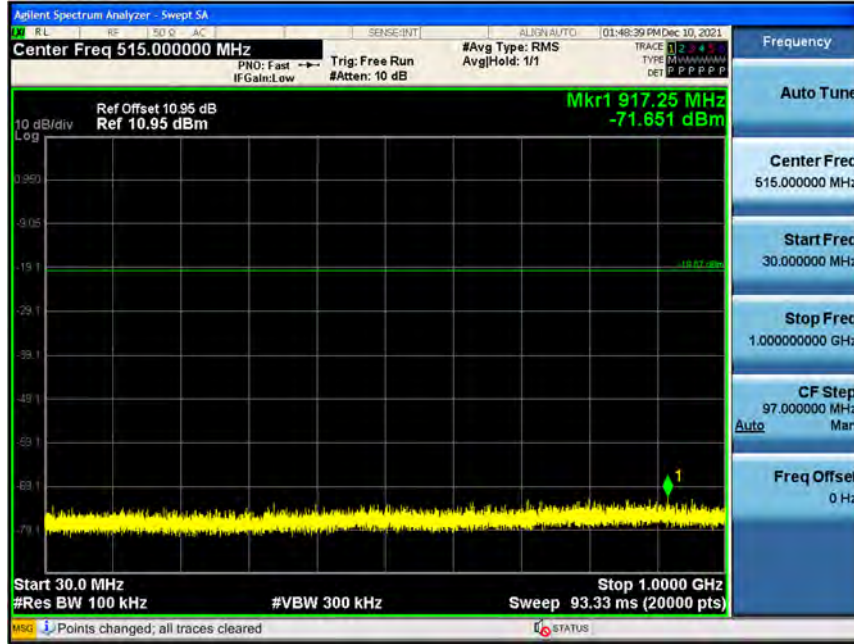


1 GHz ~ 3 GHz

Conducted Spurious Emission (Low-CH 0)

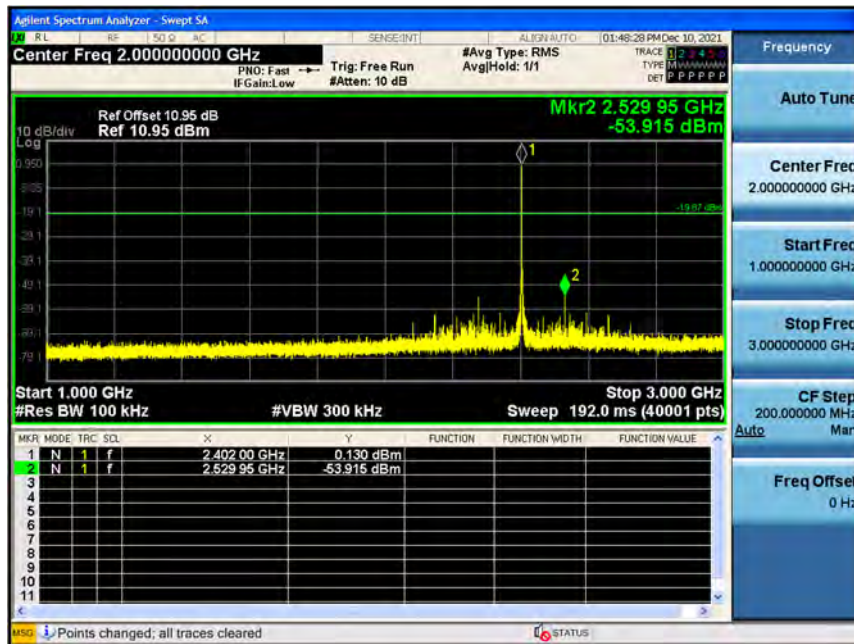


3 GHz ~ 5 GHz

Conducted Spurious Emission (Low-CH 0)

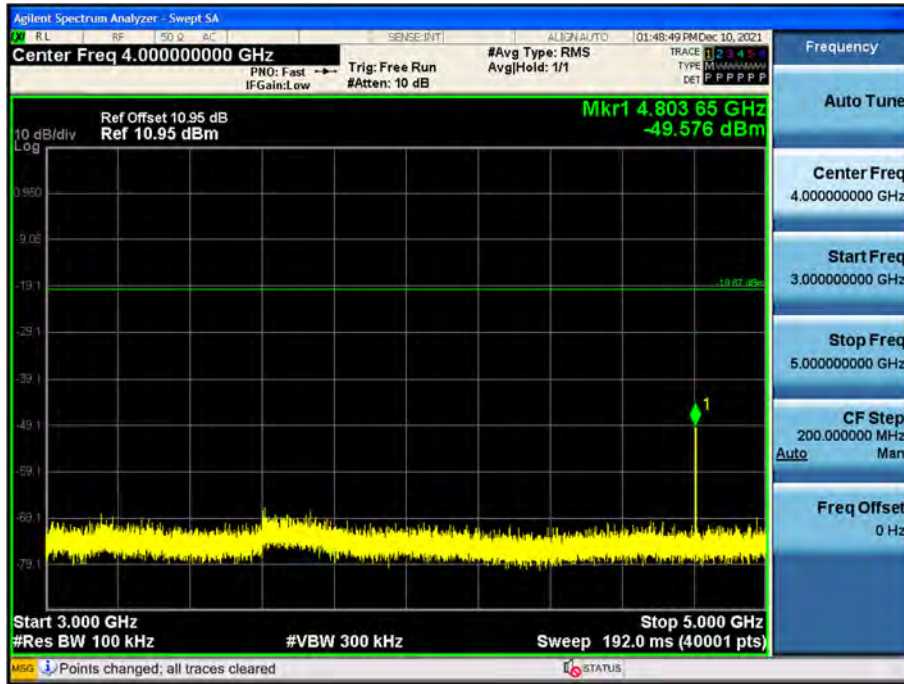

5 GHz ~ 7 GHz


Conducted Spurious Emission (Low-CH 0)

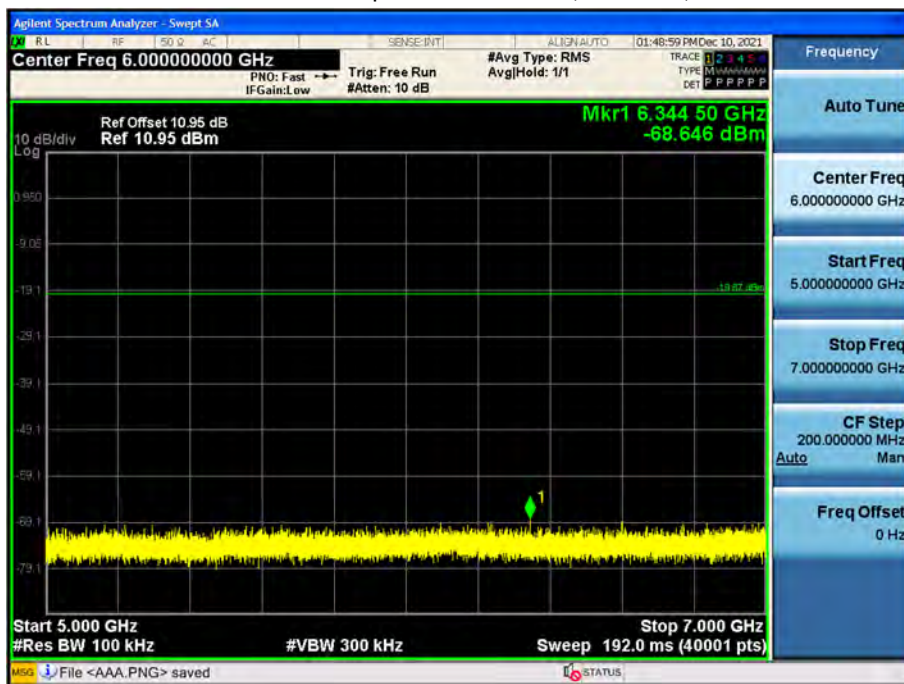




7 GHz ~ 9 GHz

Conducted Spurious Emission (Low-CH 0)

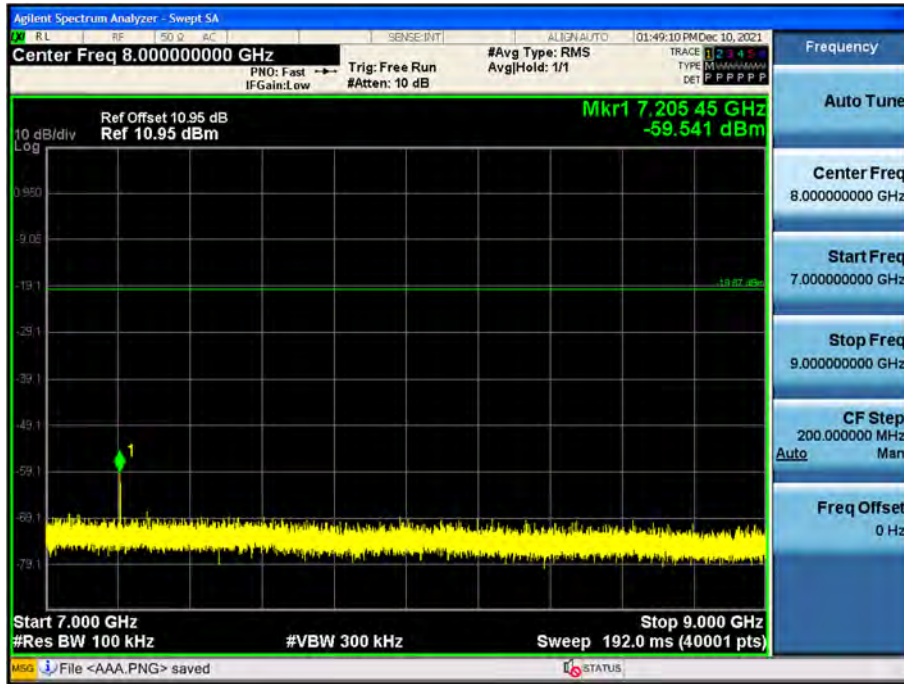


9 GHz ~ 11 GHz

Conducted Spurious Emission (Low-CH 0)

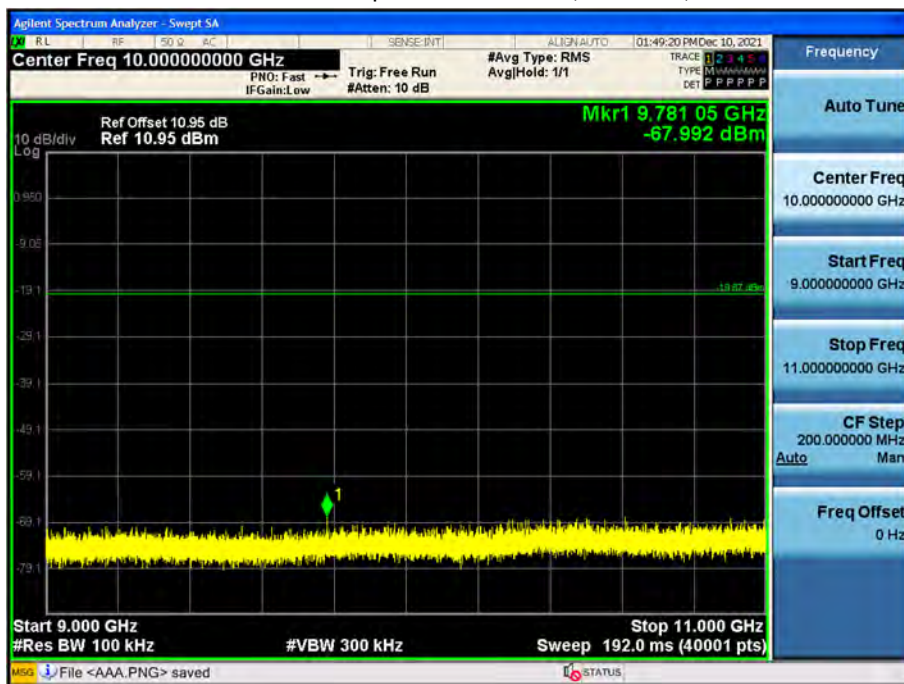


11 GHz ~ 13 GHz

Conducted Spurious Emission (Low-CH 0)

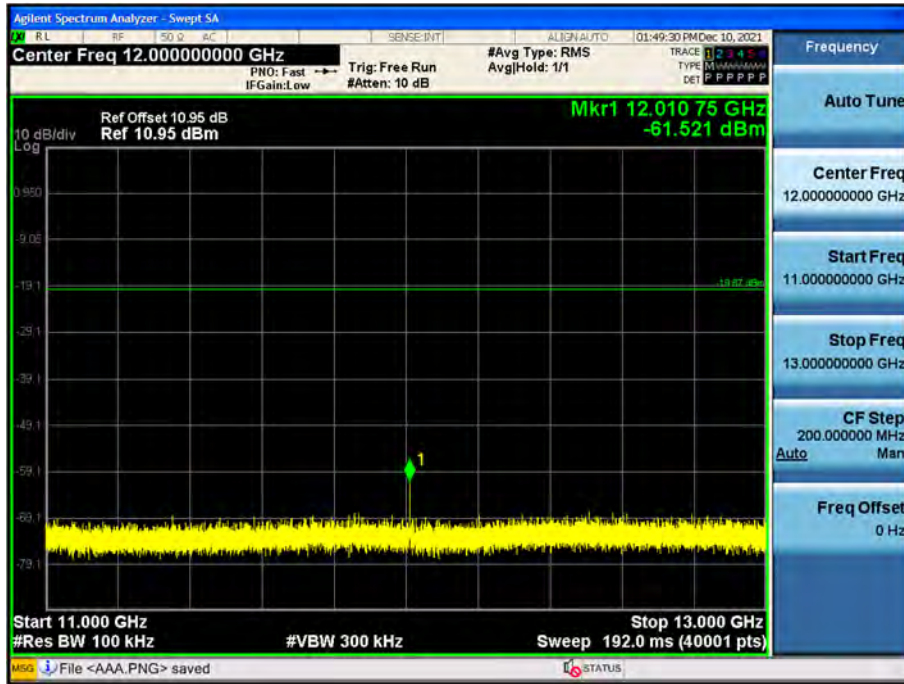


13 GHz ~ 15 GHz

Conducted Spurious Emission (Low-CH 0)

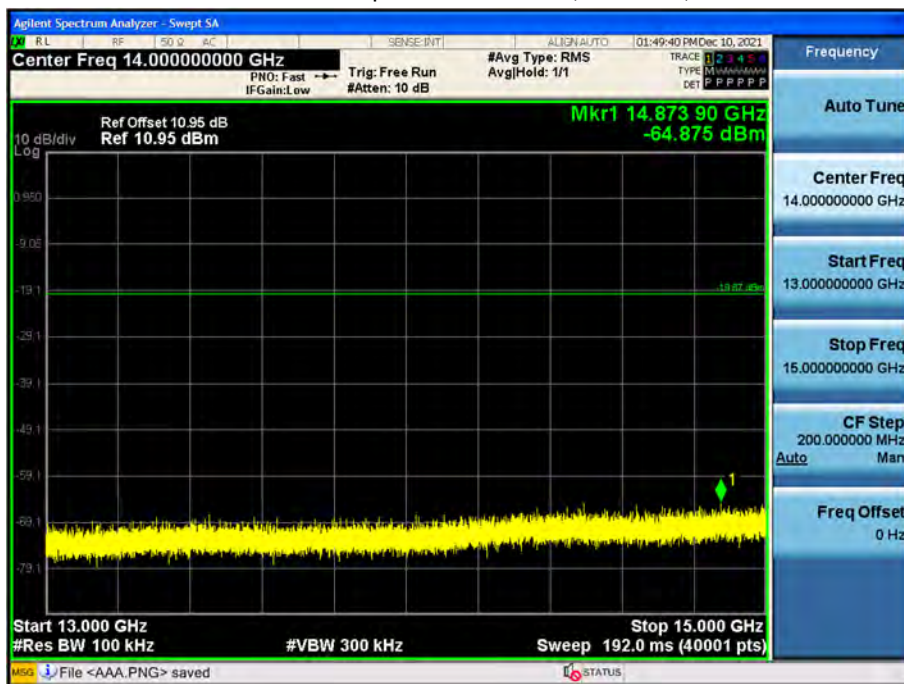


15 GHz ~ 17 GHz

Conducted Spurious Emission (Low-CH 0)

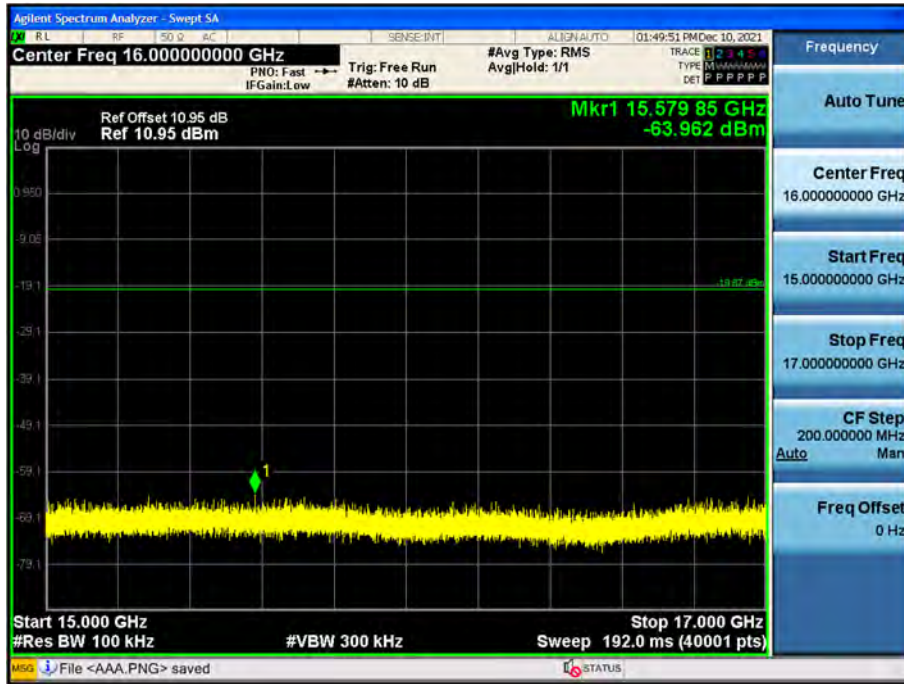


17 GHz ~ 19 GHz

Conducted Spurious Emission (Low-CH 0)

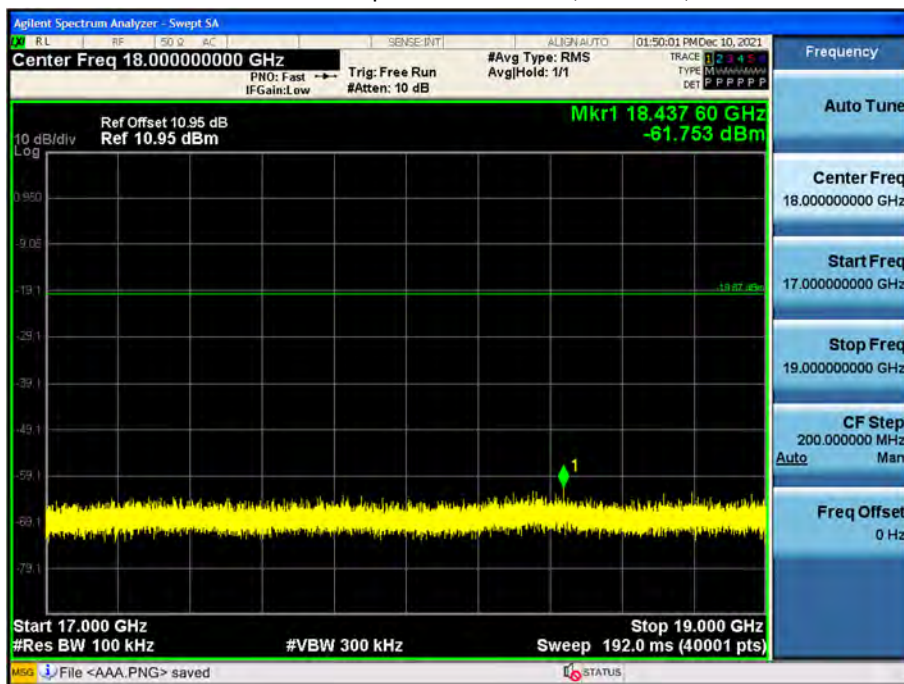


19 GHz ~ 21 GHz

Conducted Spurious Emission (Low-CH 0)

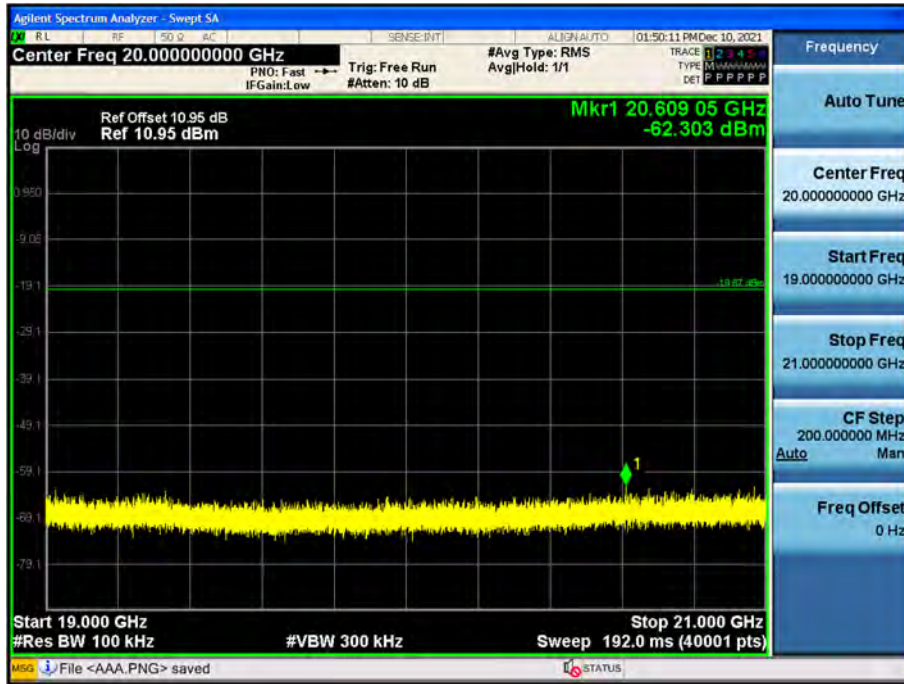


21 GHz ~ 23 GHz

Conducted Spurious Emission (Low-CH 0)

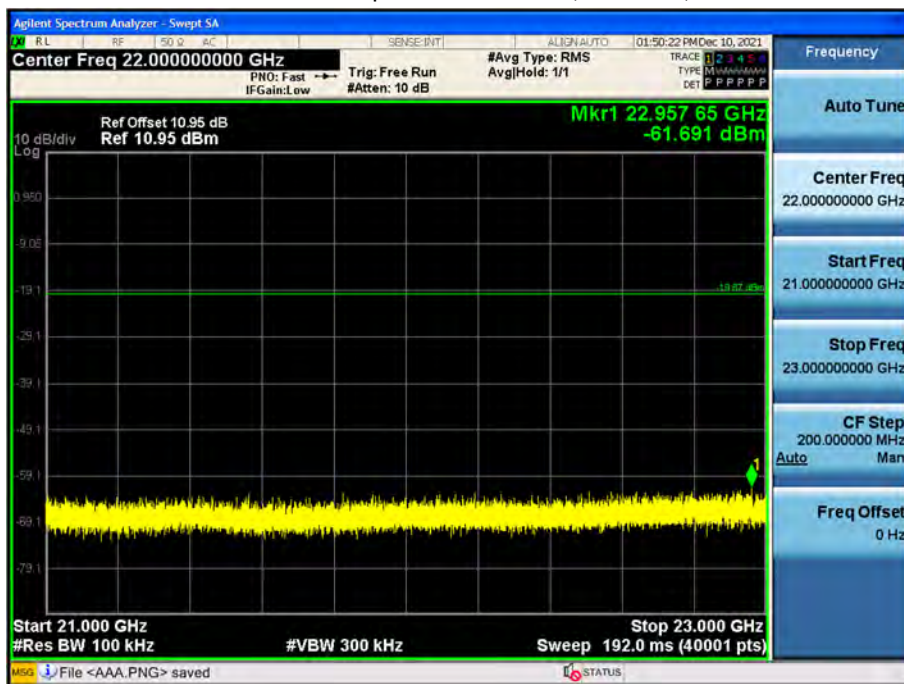

23 GHz ~ 25 GHz

Conducted Spurious Emission (Low-CH 0)

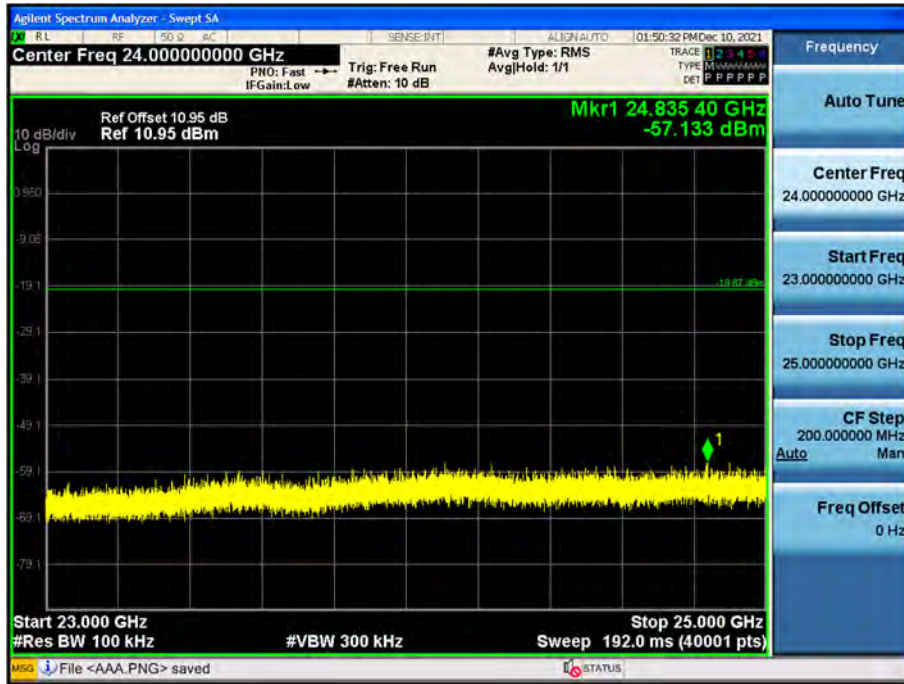

Note :


Limit : -19.87 dBm

2 M Bit/s (255 Byte) Test Plots -BandEdge

Low-CH 0




High-CH 39

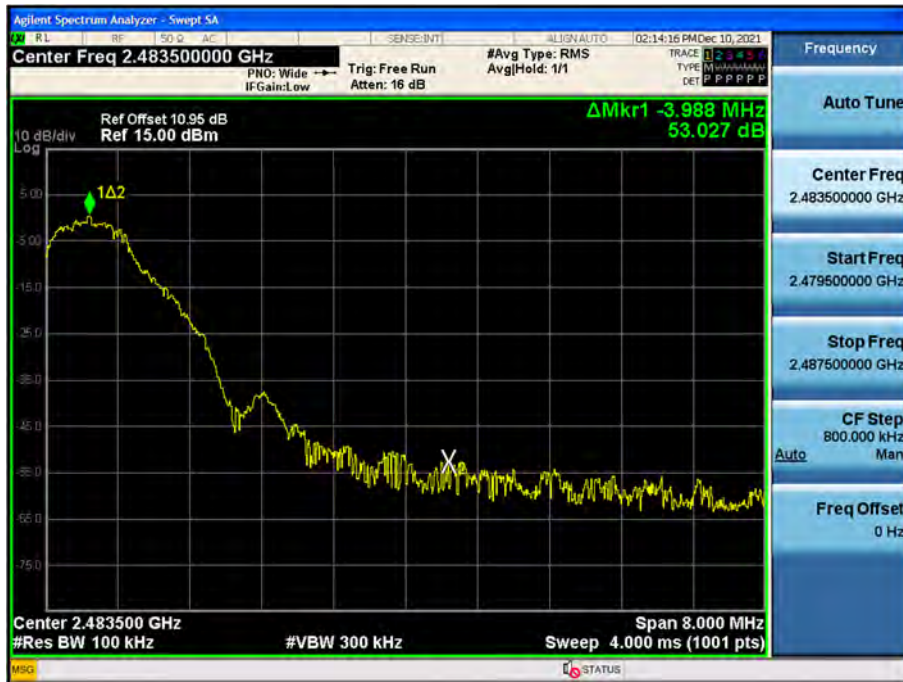

☐ 2 M Bit/s (37 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (Low-CH 0)

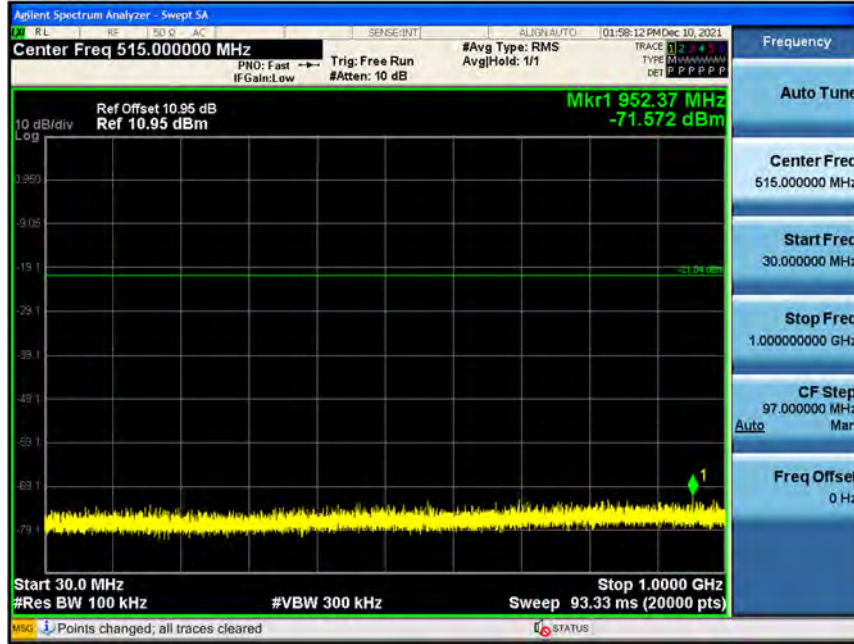


1 GHz ~ 3 GHz

Conducted Spurious Emission (Low-CH 0)

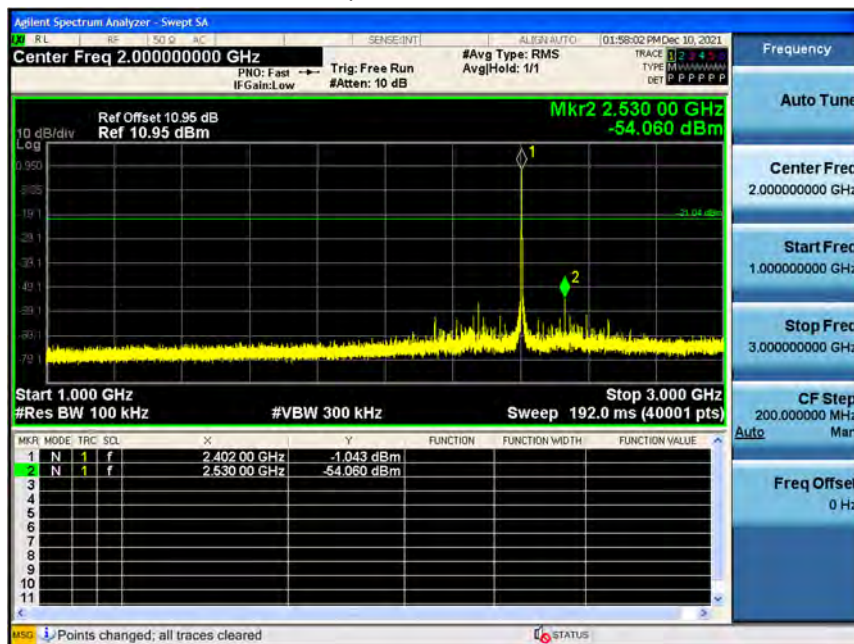


3 GHz ~ 5 GHz

Conducted Spurious Emission (Low-CH 0)

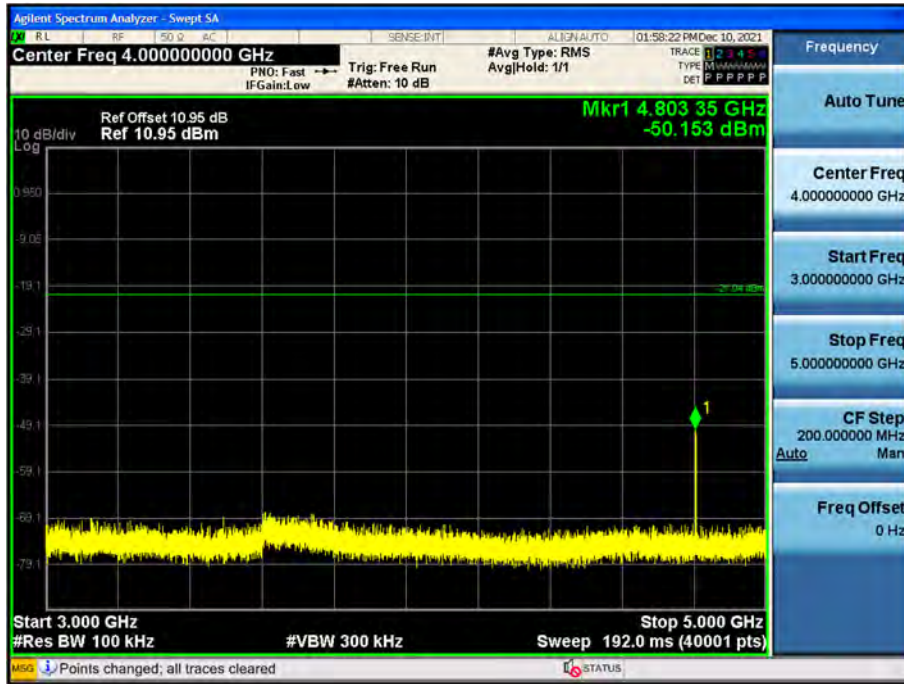


5 GHz ~ 7 GHz

Conducted Spurious Emission (Low-CH 0)

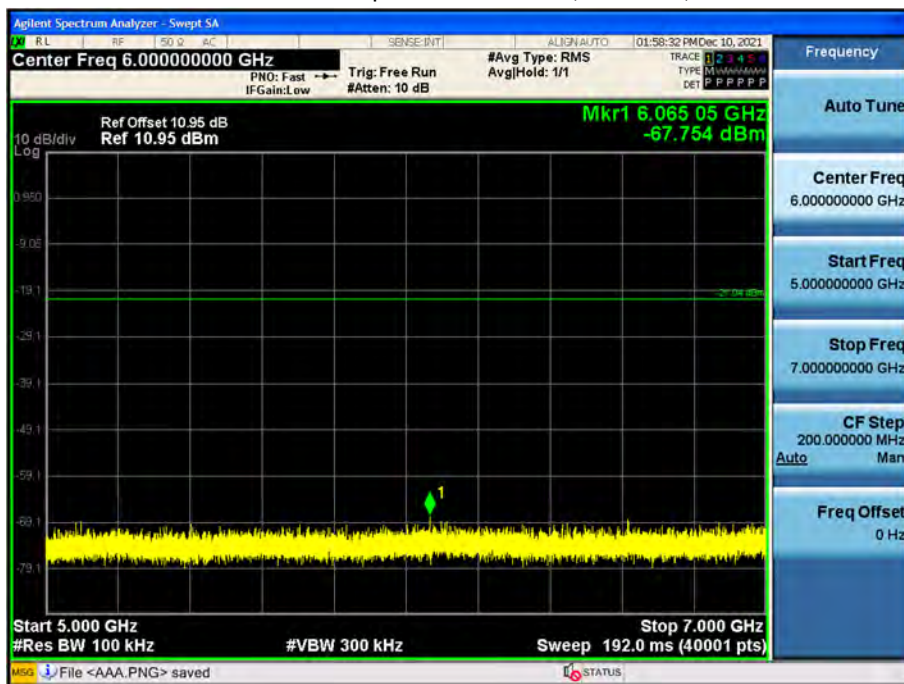


7 GHz ~ 9 GHz

Conducted Spurious Emission (Low-CH 0)

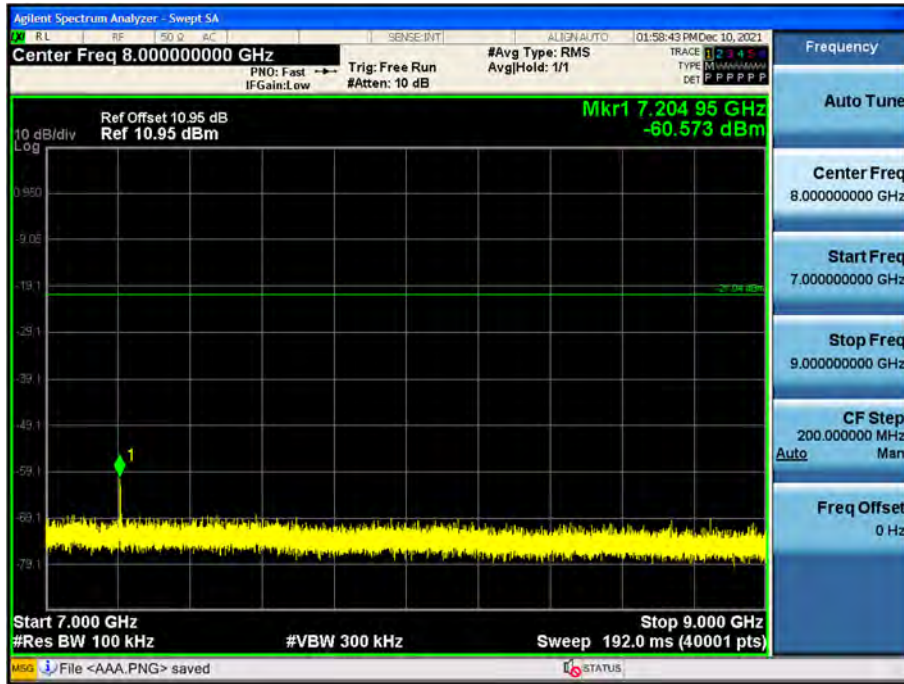


9 GHz ~ 11 GHz

Conducted Spurious Emission (Low-CH 0)

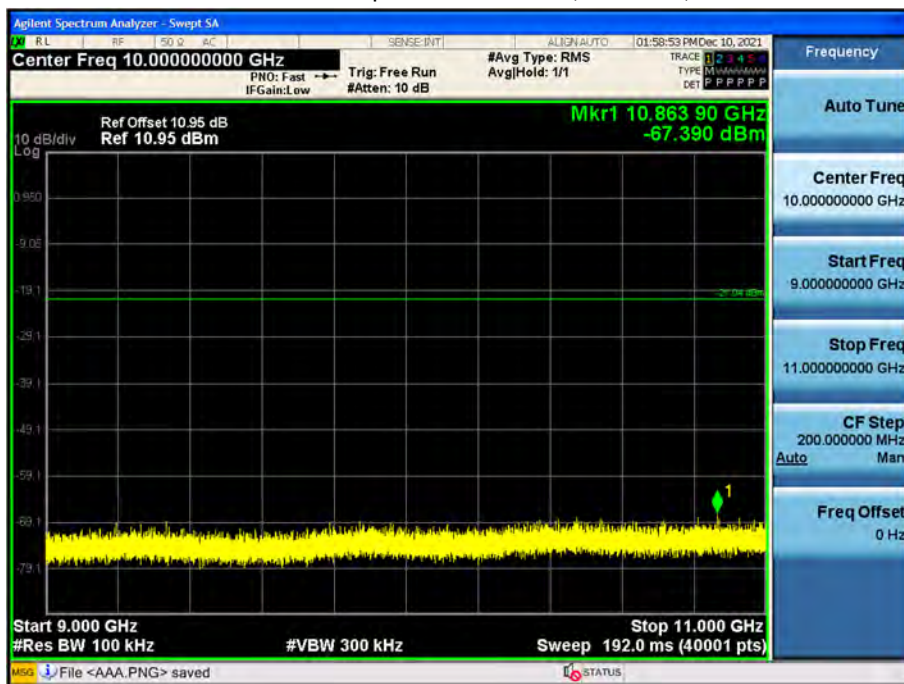


11 GHz ~ 13 GHz

Conducted Spurious Emission (Low-CH 0)

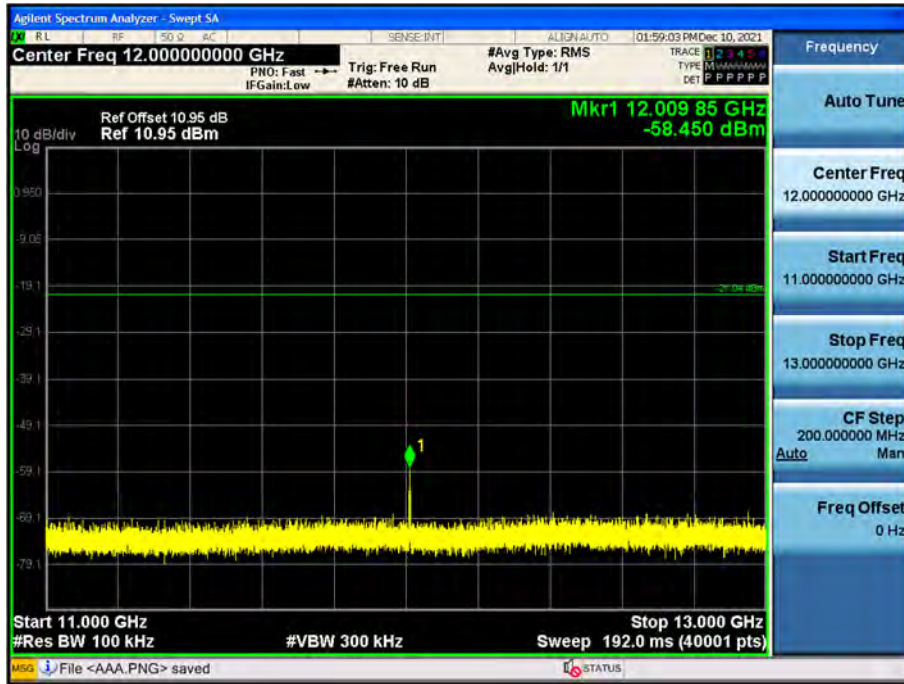


13 GHz ~ 15 GHz

Conducted Spurious Emission (Low-CH 0)

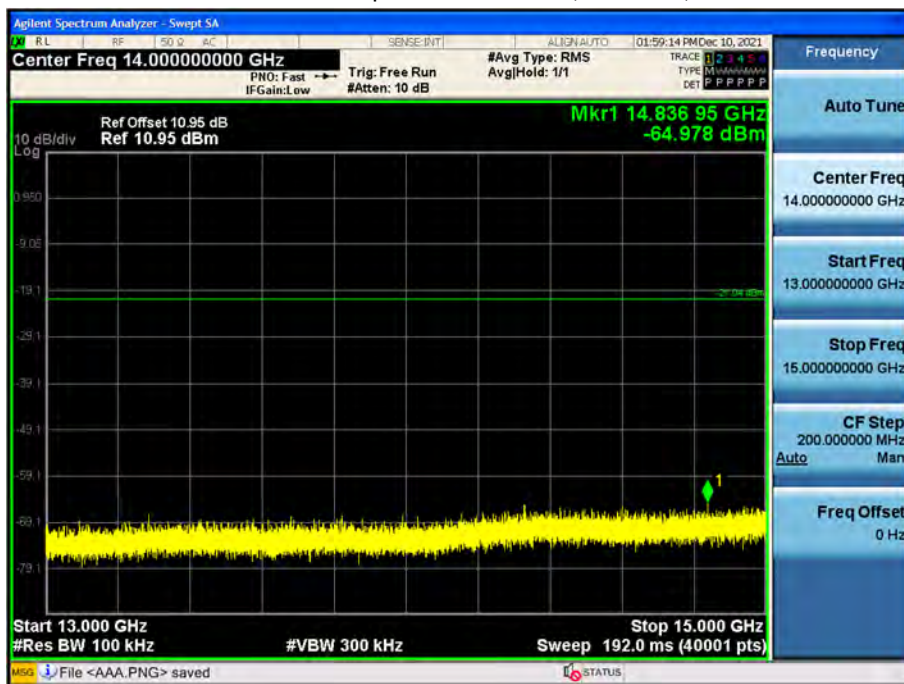


15 GHz ~ 17 GHz

Conducted Spurious Emission (Low-CH 0)

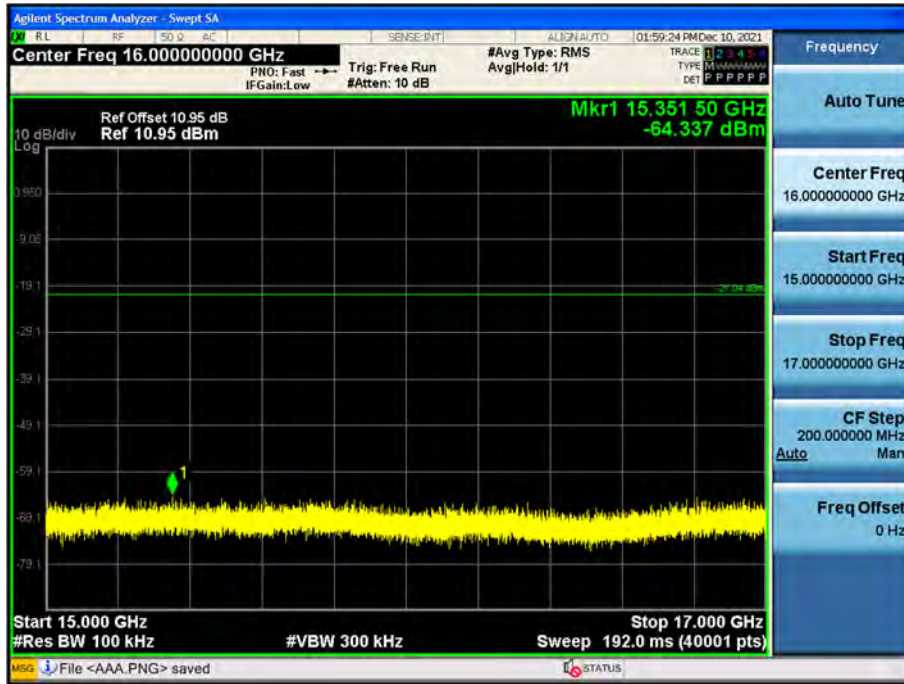


17 GHz ~ 19 GHz

Conducted Spurious Emission (Low-CH 0)

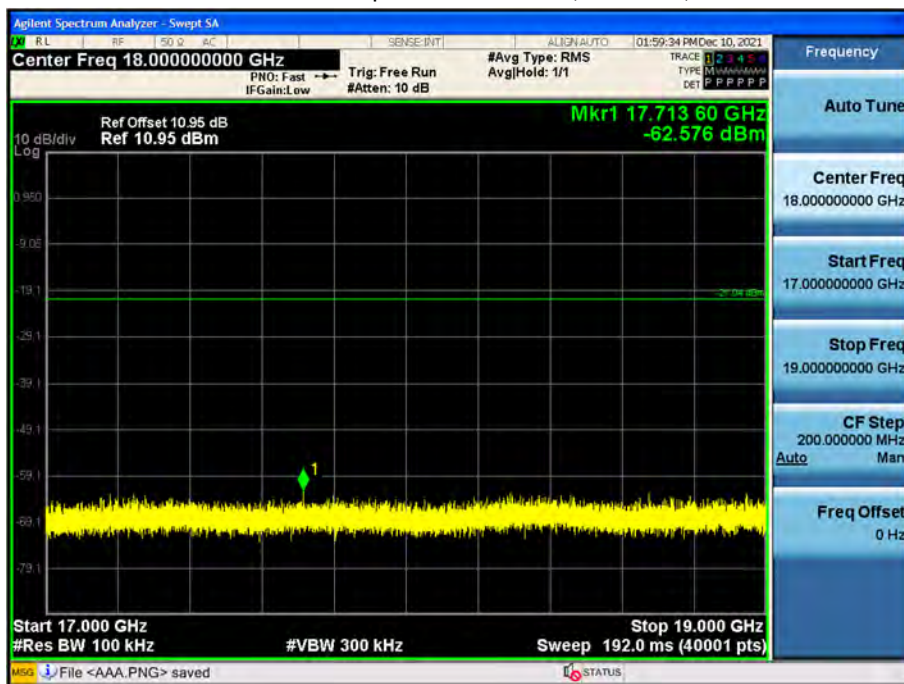


19 GHz ~ 21 GHz

Conducted Spurious Emission (Low-CH 0)

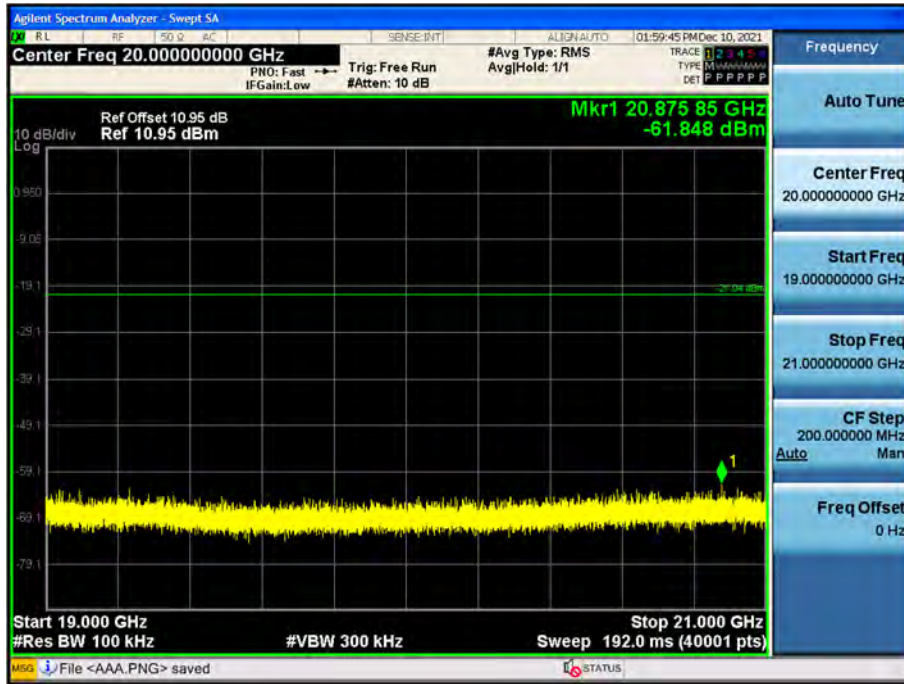


21 GHz ~ 23 GHz

Conducted Spurious Emission (Low-CH 0)

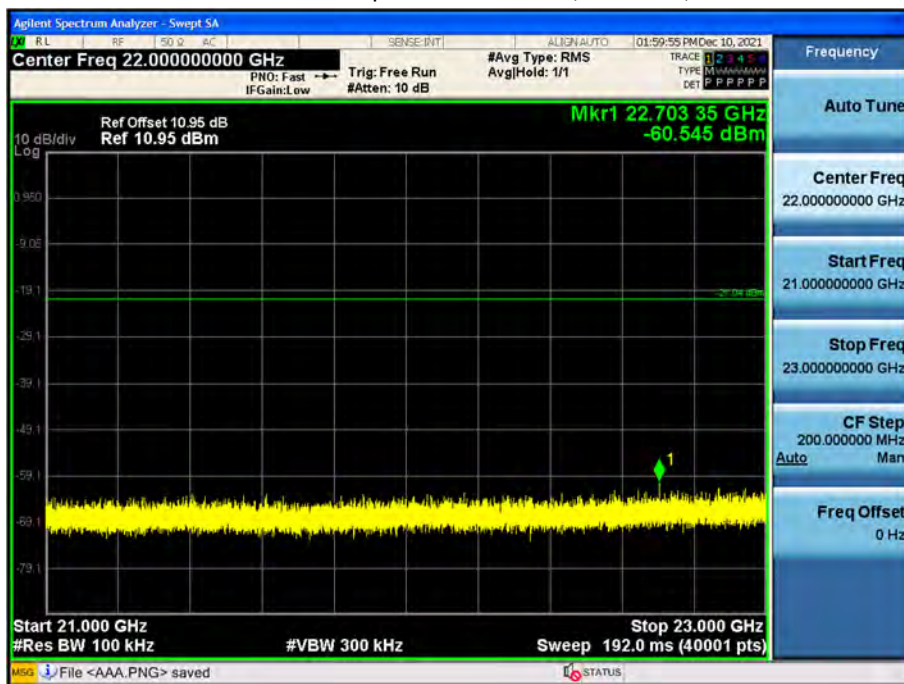

23 GHz ~ 25 GHz

Conducted Spurious Emission (Low-CH 0)

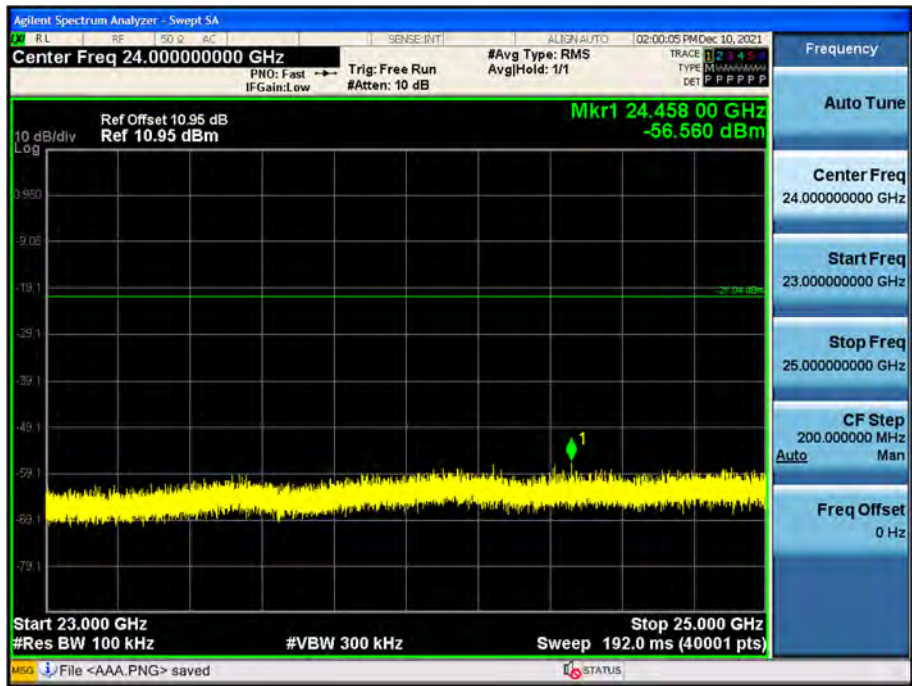

Note :

Limit : -21.04 dBm

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Measured Value	A.F+C.L+D.F	Ant. POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. The Measured Level of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	Ant. POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Mode : 1 M Bit/s (37 Byte)

Operation Mode: CH Low

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+D.F	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4804	51.01	0.00	3.75	V	54.76	73.98	19.22	PK
4804	45.02	1.23	3.75	V	50.00	53.98	3.98	AV
7206	41.11	0.00	12.70	V	53.81	73.98	20.17	PK
7206	31.51	1.23	12.70	V	45.44	53.98	8.54	AV
4804	51.31	0.00	3.75	H	55.06	73.98	18.92	PK
4804	45.71	1.23	3.75	H	50.69	53.98	3.29	AV
7206	41.35	0.00	12.70	H	54.05	73.98	19.93	PK
7206	31.78	1.23	12.70	H	45.71	53.98	8.27	AV

Operation Mode: CH Mid

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+D.F	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4880	47.92	0.00	3.71	V	51.63	73.98	22.35	PK
4880	41.88	1.23	3.71	V	46.82	53.98	7.16	AV
7320	41.22	0.00	11.70	V	52.92	73.98	21.06	PK
7320	30.81	1.23	11.70	V	43.74	53.98	10.24	AV
4880	48.26	0.00	3.71	H	51.97	73.98	22.01	PK
4880	42.01	1.23	3.71	H	46.95	53.98	7.03	AV
7320	41.43	0.00	11.70	H	53.13	73.98	20.85	PK
7320	31.15	1.23	11.70	H	44.08	53.98	9.90	AV

Operation Mode: CH High

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+D.F	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4960	48.08	0.00	4.49	V	52.57	73.98	21.41	PK
4960	40.52	1.23	4.49	V	46.24	53.98	7.74	AV
7440	41.31	0.00	12.08	V	53.39	73.98	20.59	PK
7440	29.52	1.23	12.08	V	42.83	53.98	11.15	AV
4960	47.82	0.00	4.49	H	52.31	73.98	21.67	PK
4960	40.22	1.23	4.49	H	45.94	53.98	8.04	AV
7440	41.45	0.00	12.08	H	53.53	73.98	20.45	PK
7440	29.72	1.23	12.08	H	43.03	53.98	10.95	AV

Mode : 2 M Bit/s (37 Byte)

Operation Mode: CH Low

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+D.F	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4804	50.91	0.00	3.75	V	54.66	73.98	19.32	PK
4804	42.98	2.12	3.75	V	48.85	53.98	5.13	AV
7206	41.12	0.00	12.70	V	53.82	73.98	20.16	PK
7206	29.78	2.12	12.70	V	44.60	53.98	9.38	AV
4804	51.09	0.00	3.75	H	54.84	73.98	19.14	PK
4804	43.19	2.12	3.75	H	49.06	53.98	4.92	AV
7206	41.31	0.00	12.70	H	54.01	73.98	19.97	PK
7206	29.85	2.12	12.70	H	44.67	53.98	9.31	AV

Operation Mode: CH Mid


Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+D.F	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4880	48.02	0.00	3.71	V	51.73	73.98	22.25	PK
4880	39.89	2.12	3.71	V	45.72	53.98	8.26	AV
7320	41.51	0.00	11.70	V	53.21	73.98	20.77	PK
7320	29.32	2.12	11.70	V	43.14	53.98	10.84	AV
4880	48.39	0.00	3.71	H	52.10	73.98	21.88	PK
4880	40.01	2.12	3.71	H	45.84	53.98	8.14	AV
7320	41.72	0.00	11.70	H	53.42	73.98	20.56	PK
7320	29.55	2.12	11.70	H	43.37	53.98	10.61	AV

Operation Mode: CH High


Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+D.F	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4960	47.21	0.00	4.49	V	51.70	73.98	22.28	PK
4960	38.72	2.12	4.49	V	45.33	53.98	8.65	AV
7440	40.02	0.00	12.08	V	52.10	73.98	21.88	PK
7440	28.22	2.12	12.08	V	42.42	53.98	11.56	AV
4960	47.02	0.00	4.49	H	51.51	73.98	22.47	PK
4960	38.51	2.12	4.49	H	45.12	53.98	8.86	AV
7440	40.38	0.00	12.08	H	52.46	73.98	21.52	PK
7440	28.48	2.12	12.08	H	42.68	53.98	11.30	AV

▣ 1 M Bit/s (37 Byte) Test Plots (Worst case : X-H)

Radiated Spurious Emissions plot – Average Result (Ch.0 2rd Harmonic)

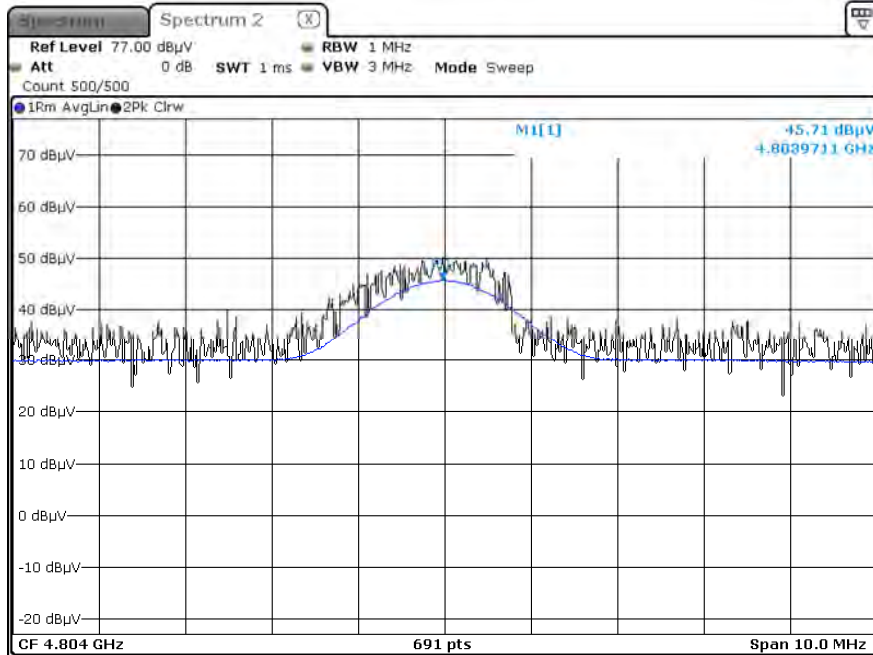

Radiated Spurious Emissions plot – Peak Result (Ch.0 2rd Harmonic)

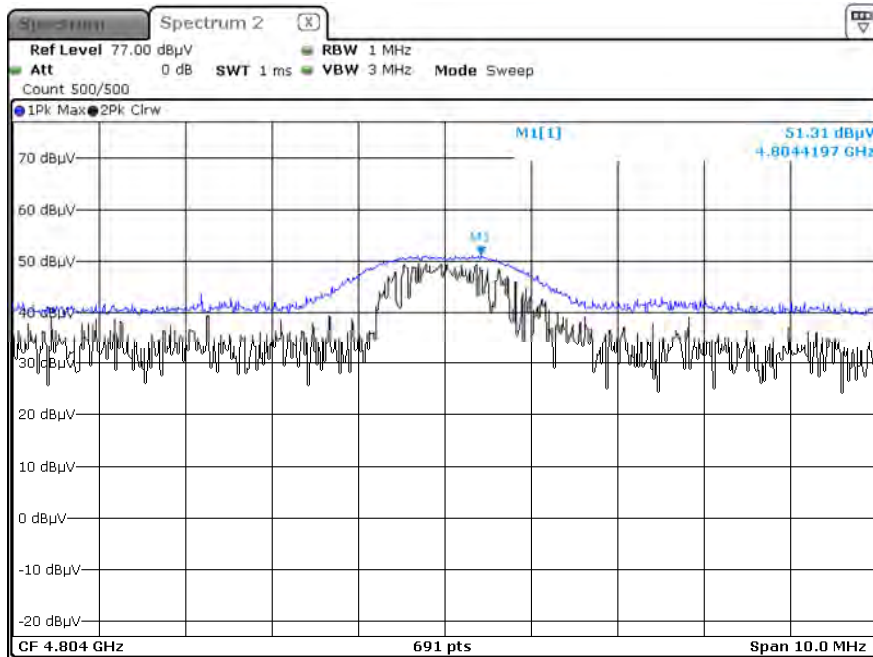

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

Mode : 1 M Bit/s (37 Byte)

Operating Frequency	2402 MHz & 2480 MHz
Channel No.	0 & 39

Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
2390.0	16.882	0.00	34.04	H	50.92	73.98	23.06	PK
2390.0	5.426	1.23	34.04	H	40.70	53.98	13.28	AV
2390.0	16.768	0.00	34.04	V	50.81	73.98	23.17	PK
2390.0	5.401	1.23	34.04	V	40.67	53.98	13.31	AV
2483.5	26.880	0.00	35.00	H	61.88	73.98	12.10	PK
2483.5	6.383	1.23	35.00	H	42.61	53.98	11.37	AV
2483.5	26.576	0.00	35.00	V	61.58	73.98	12.40	PK
2483.5	6.312	1.23	35.00	V	42.54	53.98	11.44	AV


Mode : 2 M Bit/s (37 Byte)

Operating Frequency	2402 MHz & 2480 MHz
Channel No.	0 & 39

Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
2390.0	16.625	0.00	34.04	H	50.67	73.98	23.32	PK
2390.0	5.459	2.12	34.04	H	41.62	53.98	12.36	AV
2390.0	16.552	0.00	34.04	V	50.59	73.98	23.39	PK
2390.0	5.435	2.12	34.04	V	41.60	53.98	12.39	AV
2483.5	26.402	0.00	35.00	H	61.40	73.98	12.58	PK
2483.5	7.135	2.12	35.00	H	44.26	53.98	9.73	AV
2483.5	26.138	0.00	35.00	V	61.14	73.98	12.84	PK
2483.5	7.067	2.12	35.00	V	44.19	53.98	9.79	AV

☐ 2 M Bit/s (37 Byte) Test Plots (Worst case : Z-H)

Radiated Restricted Band Edges plot – Average Result (Ch.39)

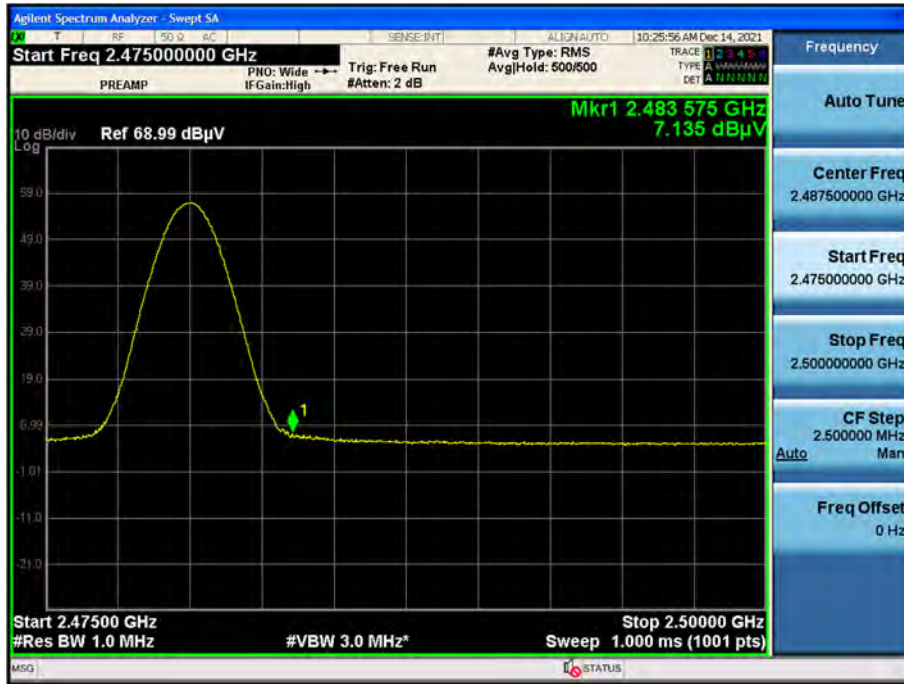

Radiated Restricted Band Edges plot – Peak Result (Ch.39)



Note:

Plot of worst case are only reported.

9.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

T9_N


1 / 2

Test Report

Common Information

EUT :	T9 N
Manufacturer :	Voice caddie
Test Site:	SHIELD ROOM
Operating Conditions :	N
Operator Name:	
Comment:	

Full Spectrum

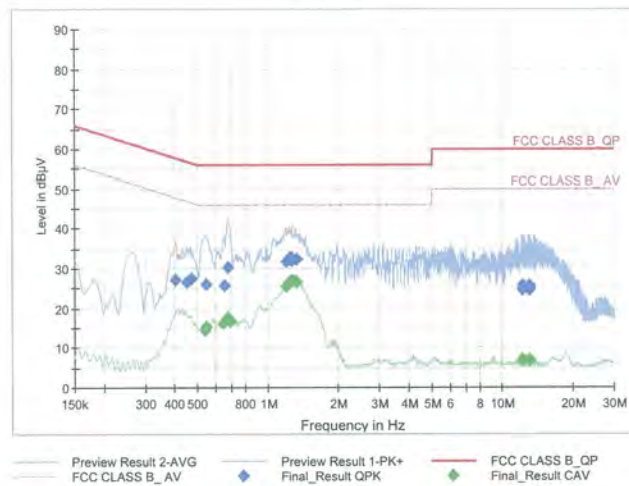

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.4043	27.10	57.77	30.67	9.000	N	OFF	9.6
0.4515	26.63	56.85	30.22	9.000	N	OFF	9.6
0.4718	27.35	56.48	29.13	9.000	N	OFF	9.6
0.5473	26.08	56.00	29.92	9.000	N	OFF	9.6
0.6530	25.55	56.00	30.45	9.000	N	OFF	9.6
0.6755	30.43	56.00	25.57	9.000	N	OFF	9.6
1.1975	31.74	56.00	24.26	9.000	N	OFF	9.7
1.2358	32.22	56.00	23.78	9.000	N	OFF	9.7
1.2425	32.39	56.00	23.61	9.000	N	OFF	9.7
1.2560	32.94	56.00	23.06	9.000	N	OFF	9.7
1.2673	32.15	56.00	23.85	9.000	N	OFF	9.7
1.3280	32.25	56.00	23.75	9.000	N	OFF	9.7
12.1978	24.62	60.00	35.38	9.000	N	OFF	10.2
12.2135	25.56	60.00	34.44	9.000	N	OFF	10.2
12.9875	24.95	60.00	35.05	9.000	N	OFF	10.2
12.9943	25.71	60.00	34.29	9.000	N	OFF	10.2
13.0010	25.49	60.00	34.51	9.000	N	OFF	10.2
13.0100	24.55	60.00	35.45	9.000	N	OFF	10.2

2021-12-17

오전 9:16:47

T9_N

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.5383	14.53	46.00	31.47	9.000	N	OFF	9.6
0.5495	15.26	46.00	30.74	9.000	N	OFF	9.6
0.6463	16.27	46.00	29.73	9.000	N	OFF	9.6
0.6643	16.98	46.00	29.02	9.000	N	OFF	9.6
0.6755	17.63	46.00	28.37	9.000	N	OFF	9.6
0.6935	16.61	46.00	29.39	9.000	N	OFF	9.6
1.1953	25.42	46.00	20.58	9.000	N	OFF	9.7
1.2313	26.23	46.00	19.77	9.000	N	OFF	9.7
1.2425	26.49	46.00	19.51	9.000	N	OFF	9.7
1.2538	26.72	46.00	19.28	9.000	N	OFF	9.7
1.2650	26.68	46.00	19.32	9.000	N	OFF	9.7
1.3145	26.76	46.00	19.24	9.000	N	OFF	9.7
1.3258	26.65	46.00	19.35	9.000	N	OFF	9.7
12.2068	6.82	50.00	43.18	9.000	N	OFF	10.2
12.2158	6.76	50.00	43.24	9.000	N	OFF	10.2
12.2203	6.65	50.00	43.35	9.000	N	OFF	10.2
13.0010	6.78	50.00	43.22	9.000	N	OFF	10.2
13.0055	6.79	50.00	43.21	9.000	N	OFF	10.2

2021-12-17

오전 9:16:47

Conducted Emissions (Line 2)

T9_L1


1 / 2

Test Report

Common Information

EUT :	T9 L1
Manufacturer :	Voice caddie
Test Site:	SHIELD ROOM
Operating Conditions :	L1
Operator Name:	
Comment:	

Full Spectrum

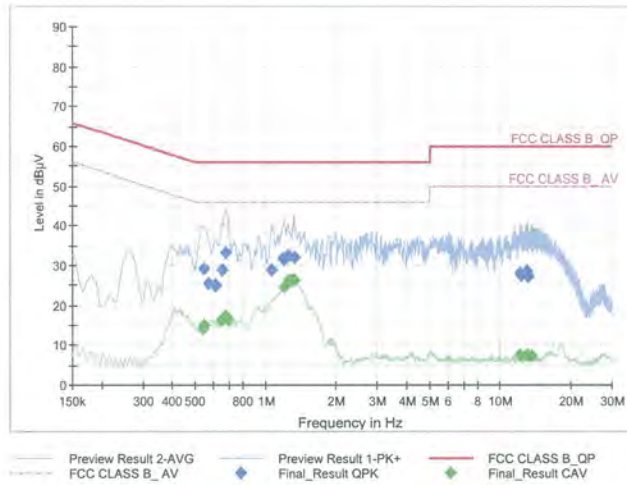

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.5473	29.04	56.00	26.96	9.000	L1	OFF	9.7
0.5698	25.48	56.00	30.52	9.000	L1	OFF	9.7
0.6103	24.90	56.00	31.10	9.000	L1	OFF	9.7
0.6148	25.04	56.00	30.96	9.000	L1	OFF	9.7
0.6553	28.98	56.00	27.02	9.000	L1	OFF	9.7
0.6800	33.09	56.00	22.91	9.000	L1	OFF	9.7
1.0648	28.88	56.00	27.12	9.000	L1	OFF	9.7
1.1908	31.59	56.00	24.41	9.000	L1	OFF	9.7
1.1998	31.47	56.00	24.53	9.000	L1	OFF	9.7
1.2403	32.17	56.00	23.83	9.000	L1	OFF	9.7
1.2560	32.24	56.00	23.76	9.000	L1	OFF	9.7
1.3235	31.89	56.00	24.11	9.000	L1	OFF	9.7
12.2068	28.09	60.00	31.91	9.000	L1	OFF	10.1
12.3395	27.33	60.00	32.67	9.000	L1	OFF	10.1
13.0010	28.42	60.00	31.58	9.000	L1	OFF	10.2
13.0100	28.34	60.00	31.66	9.000	L1	OFF	10.2
13.1293	27.19	60.00	32.81	9.000	L1	OFF	10.2
13.1405	27.16	60.00	32.84	9.000	L1	OFF	10.2

2021-12-17

오전 9:19:43

T9_L1

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.5383	14.23	46.00	31.77	9.000	L1	OFF	9.7
0.5495	15.01	46.00	30.99	9.000	L1	OFF	9.7
0.6463	16.01	46.00	29.99	9.000	L1	OFF	9.7
0.6643	16.73	46.00	29.28	9.000	L1	OFF	9.7
0.6755	17.35	46.00	28.65	9.000	L1	OFF	9.7
0.6935	16.48	46.00	29.52	9.000	L1	OFF	9.7
1.1953	24.62	46.00	21.38	9.000	L1	OFF	9.7
1.2425	25.71	46.00	20.29	9.000	L1	OFF	9.7
1.2538	26.21	46.00	19.79	9.000	L1	OFF	9.7
1.3033	26.16	46.00	19.84	9.000	L1	OFF	9.7
1.3145	26.15	46.00	19.85	9.000	L1	OFF	9.7
1.3258	26.16	46.00	19.84	9.000	L1	OFF	9.7
12.2158	7.53	50.00	42.47	9.000	L1	OFF	10.1
12.2225	7.37	50.00	42.63	9.000	L1	OFF	10.1
13.0055	7.64	50.00	42.36	9.000	L1	OFF	10.2
13.0123	7.41	50.00	42.59	9.000	L1	OFF	10.2
13.1405	7.30	50.00	42.70	9.000	L1	OFF	10.2
13.6648	7.34	50.00	42.66	9.000	L1	OFF	10.2

2021-12-17

오전 9:19:43

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/23/2022	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/17/2022	Annual
Temperature Chamber	SU-642	ESPAC	0093008124	03/15/2022	Annual
Signal Analyzer	N9030A	Agilent	MY49431210	01/11/2022	Annual
Power Measurement Set	OSP 120	Rohde & Schwarz	101231	07/02/2022	Annual
BLUETOOTH TESTER	CBT	Rohde & Schwarz	100808	02/23/2022	Annual
Power Meter	N1911A	Agilent	MY45100523	04/08/2022	Annual
Power Sensor	N1921A	Keysight	MY57820067	04/08/2022	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2022	Annual
Power Splitter	11667B	Hewlett Packard	05001	05/20/2022	Annual
DC Power Supply	E3632A	Hewlett Packard	MY50360067	02/16/2022	Annual
Attenuator(10 dB)	8493C	Hewlett Packard	07560	06/18/2022	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	N/A	Audix	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/19/2022	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	760	02/22/2023	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	02299	05/19/2022	Biennial
Horn Antenna (15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170541	11/16/2023	Biennial
Spectrum Analyzer	FSV40-N	Rohde & Schwarz	102168	07/05/2022	Annual
Signal Analyzer	N9030A	Agilent	MY49431210	01/11/2022	Annual
Band Reject Filter	WRCJV12-4900-5100- 5900-6100-50SS	Wainwright Instruments	5	06/24/2022	Annual
Band Reject Filter	WRCJV12-4900-5100- 5900-6100-50SS	Wainwright Instruments	6	06/24/2022	Annual
Band Reject Filter	WRCJV2400/2483.5- 2370/2520-60/12SS	Wainwright Instruments	2	01/06/2022	Annual
Band Reject Filter	WRCJV5100/5850- 40/50-8EEK	Wainwright Instruments	1	02/08/2022	Annual
High Pass Filter	WHK3.0/18G-10EF	Wainwright Instruments	8	02/03/2022	Annual
High Pass Filter	WHKX8-6090-7000- 18000-40SS	Wainwright Instruments	25	02/03/2022	Annual
Attenuator (3 dB)	18B-03	Api tech.	1	02/03/2022	Annual
Attenuator(10 dB)	8493C-10	Agilent	08285	02/03/2022	Annual
Power Amplifier	CBLU1183540	CERNEX	22964	02/03/2022	Annual
Power Amplifier	CBL06185030	CERNEX	22965	02/03/2022	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/02/2022	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/23/2022	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2112-FC046-P