

FCC PART 15.249

TEST REPORT

For

Beijing Noitom Technology Ltd.

Room 432, Main Tower 28 Xijiekouwai Blvd, Beijing, China

FCC ID: 2ABTRRECEIVER

Report Type: Original Report		Product Type: PERCEPTION Receiver	
Test Engineer:	Dean Liu	<i>Dean Liu</i>	
Report Number:	R2BJ140604051-00A		
Report Date:	2014-08-11		
Reviewed By:	Leon Chen RF Engineer	<i>leon chen</i>	
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn		

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	4
JUSTIFICATION	4
EUT EXERCISE SOFTWARE	4
SUPPORT EQUIPMENT LIST AND DETAILS	4
EXTERNAL I/O CABLE.....	4
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
FCC§15.203 - ANTENNA REQUIREMENT.....	7
APPLICABLE STANDARD	7
ANTENNA CONNECTOR CONSTRUCTION	7
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	8
APPLICABLE STANDARD	8
MEASUREMENT UNCERTAINTY.....	8
EUT SETUP.....	8
EMI TEST RECEIVER SETUP.....	9
TEST PROCEDURE	9
CORRECTED AMPLITUDE & MARGIN CALCULATION	9
TEST EQUIPMENT LIST AND DETAILS.....	10
TEST RESULTS SUMMARY	10
TEST DATA	10
FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS	13
APPLICABLE STANDARD	13
MEASUREMENT UNCERTAINTY.....	13
EUT SETUP.....	14
TEST EQUIPMENT SETUP.....	15
TEST PROCEDURE	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST RESULTS SUMMARY	16
TEST DATA	16
FCC §15.215(C) – 20 DB BANDWIDTH TESTING.....	19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST DATA	19
FCC§15.249(D) - OUT OF BAND EMISSION (50 DB ATTENUATION)	21
APPLICABLE STANDARD	22
TEST PROCEDURE	22
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST DATA	22

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Beijing Noitom Technology Ltd.*'s product, model number: *TM-syn-96 (FCC ID: 2ABTRRECEIVER)* (the "EUT") in this report was a *PERCEPTION Receiver*, which was measured approximately: 8.0 cm (L) x 5.9 cm (W) x 1.1 cm (H), rated input voltage: 5V_{DC}.

All measurement and test data in this report was gathered from production sample serial number: 140604051 (Assigned by BACL, Dongguan). The EUT was received on 2014-06-11.

Objective

This type approval report is prepared on behalf of *Beijing Noitom Technology Ltd.* in accordance with Part 2-Subpart J, and Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: *2ABTRRECEIVER*.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a testing mode.

78 channels were provided by the manufacturer:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2403	--	---	39	2441	--	--
2	2404	--	--	40	2442	--	--
3	2405	--	--	--	--	77	2479
--	--	38	2440	--	--	78	2480

EUT was tested with Channel 2403MHz, 2441MHz and 2480MHz.

EUT Exercise Software

The software "RF Test Tool" was used in test.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	PC	EX 39L	JP890W1
DELL	Keyboard	L100	CNORH656658907BL0 5DC
DELL	Mouse	MOSGUOA	F0Y02P7Y
HP	Printer	C3941A	JPTVOB2337
SAST	Modem	AEM-2100	0293
Samsung	Monitor	S22C330H	2XDCHTHD101491K

External I/O Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Serial Cable	Yes	No	1.2	Serial Port of PC	Modem
parallel Cable	Yes	No	1.2	parallel Port of PC	Printer
keyboard Cable	Yes	No	1.5	USB Port of PC	Keyboard
Mouse cable	Yes	No	1.5	USB Port of PC	Mouse
USB Cable	Yes	No	1.1	USB Port of PC	EUT

Block Diagram of Test Setup

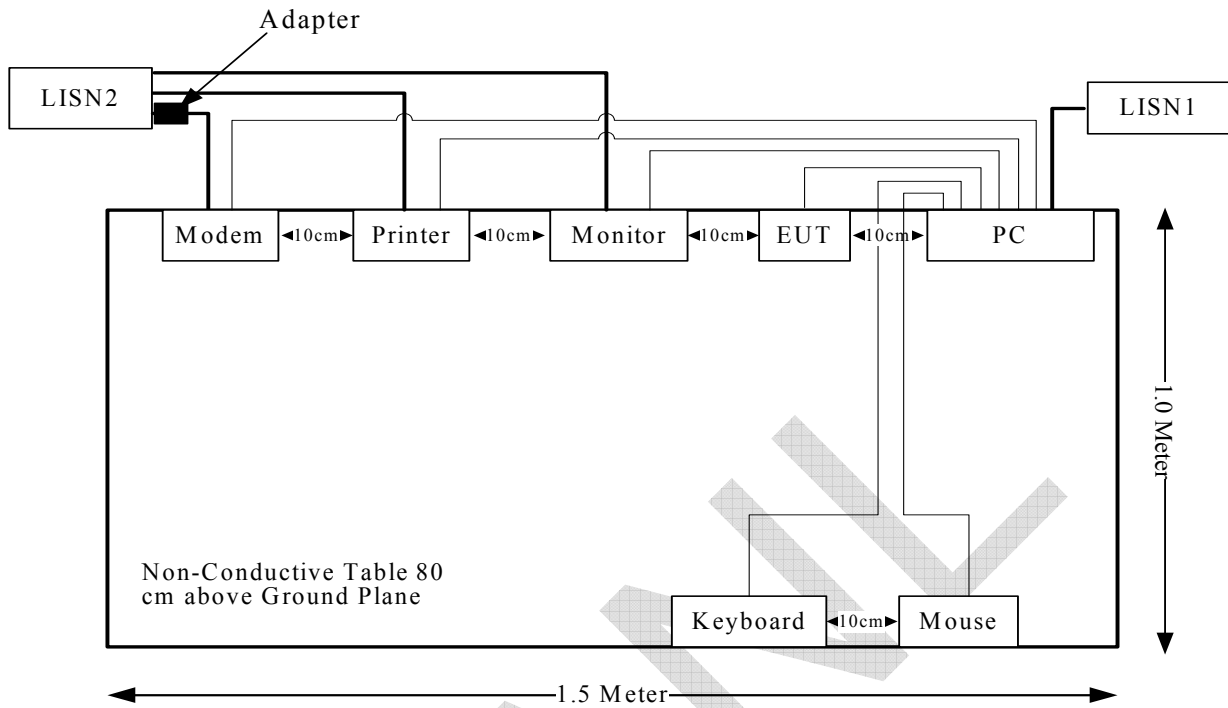

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conduction Emissions	Compliance
15.205, §15.209, §15.249	Radiated Emissions	Compliance
§15.215 (c)	20 dB Bandwidth	Compliance
§15.249(d)	Outside of Band Emission (50dB attenuation)	Compliance

FLANW

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Antenna Connector Construction

There are two types of antenna that uses a unique coupling to the EUT. The maximum gain of both antennas is 5.0dBi. Please refer to the EUT photos.

Result: Compliant.

FLANN

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

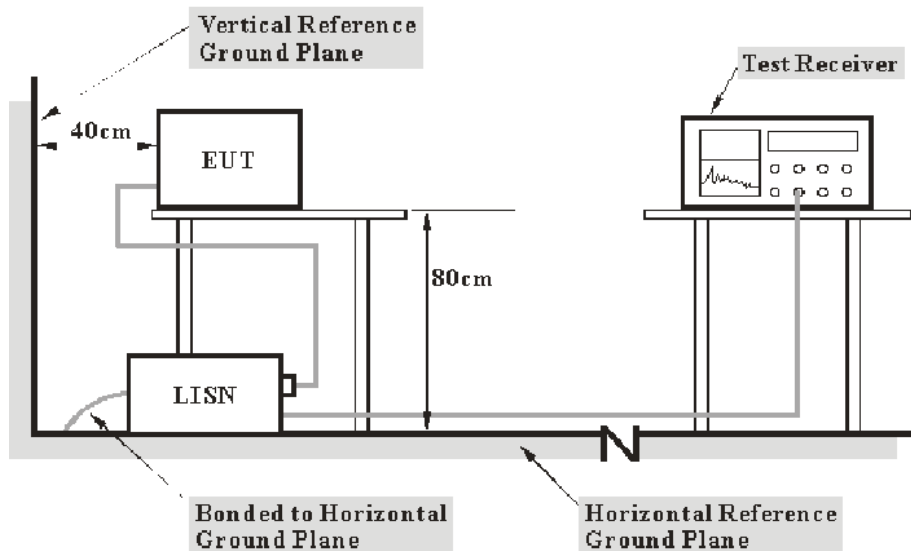

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The PC was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the PC was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2013-11-20	2014-11-20
R&S	L.I.S.N	ESH3-Z5	843331/015	2013-09-25	2014-09-25
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-01-22	2015-01-22
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

8.4 dB at 0.2146920 MHz in the Neutral conducted mode

Test Data


Environmental Conditions

Temperature:	27.2 °C
Relative Humidity:	55 %
ATM Pressure:	100.3 kPa

The testing was performed by Dean Liu on 2014-07-01.

Test Mode: Transmitting


AC 120 V, 60 Hz, Line:

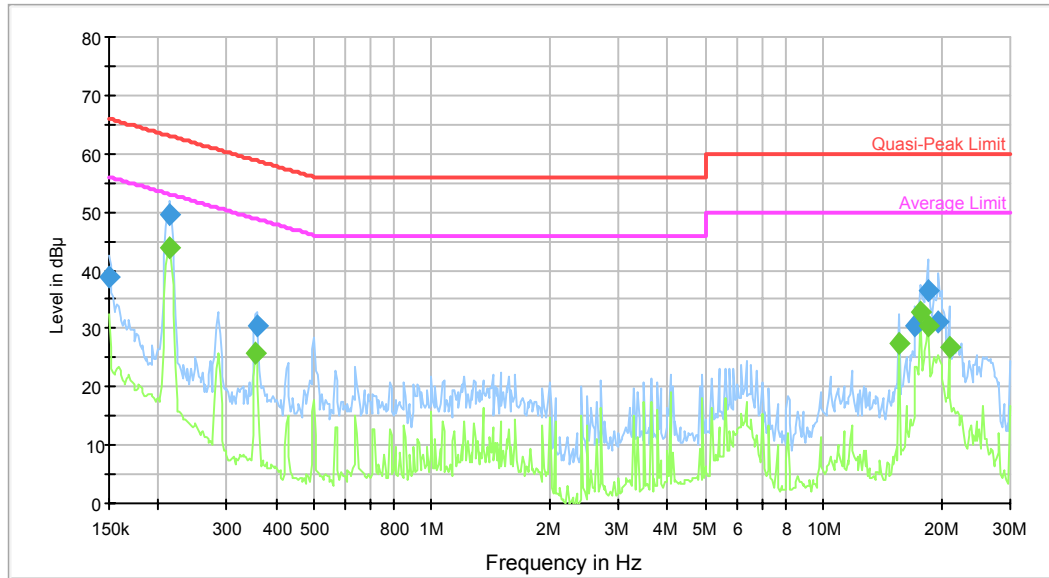

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	39.0	9.000	L1	10.1	27.0	66.0	Compliance
0.214692	49.5	9.000	L1	10.8	13.5	63.0	Compliance
0.357511	30.5	9.000	L1	10.7	28.3	58.8	Compliance
17.183363	30.3	9.000	L1	10.8	29.7	60.0	Compliance
18.460903	36.6	9.000	L1	11.0	23.4	60.0	Compliance
19.676017	31.3	9.000	L1	11.1	28.7	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.214692	43.8	9.000	L1	10.8	9.2	53.0	Compliance
0.354674	25.9	9.000	L1	10.7	23.0	48.9	Compliance
15.616430	27.3	9.000	L1	10.7	22.7	50.0	Compliance
17.739864	32.6	9.000	L1	10.9	17.4	50.0	Compliance
18.460903	30.3	9.000	L1	11.0	19.7	50.0	Compliance
20.971112	26.7	9.000	L1	11.2	23.3	50.0	Compliance

AC 120 V, 60 Hz, Neutral:

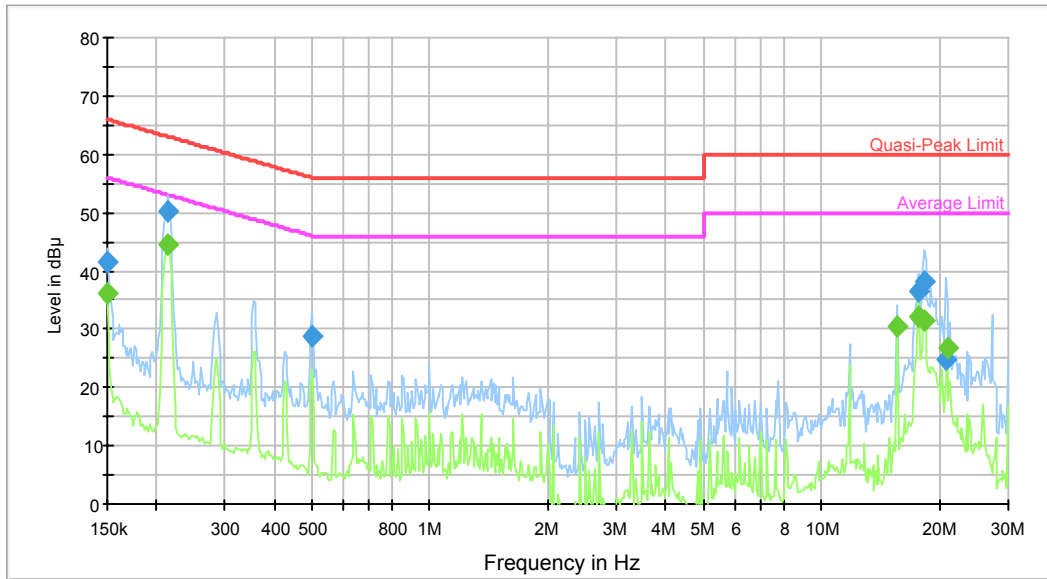

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.150000	41.4	9.000	N	10.3	24.6	66.0	Compliance
0.214692	50.4	9.000	N	11.3	12.6	63.0	Compliance
0.499611	28.9	9.000	N	10.4	27.1	56.0	Compliance
17.739864	36.6	9.000	N	10.9	23.4	60.0	Compliance
18.314388	38.3	9.000	N	11.0	21.7	60.0	Compliance
20.804674	24.8	9.000	N	11.2	35.2	60.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.150000	36.2	9.000	N	10.3	19.8	56.0	Compliance
0.214692	44.6	9.000	N	11.3	8.4	53.0	Compliance
15.616430	30.4	9.000	N	10.7	19.6	50.0	Compliance
17.739864	32.0	9.000	N	10.9	18.0	50.0	Compliance
18.314388	31.5	9.000	N	11.0	18.5	50.0	Compliance
20.971112	26.7	9.000	N	11.2	23.3	50.0	Compliance

FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS

Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB

Table 1 – Values of U_{cispr}


Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1 GHz:

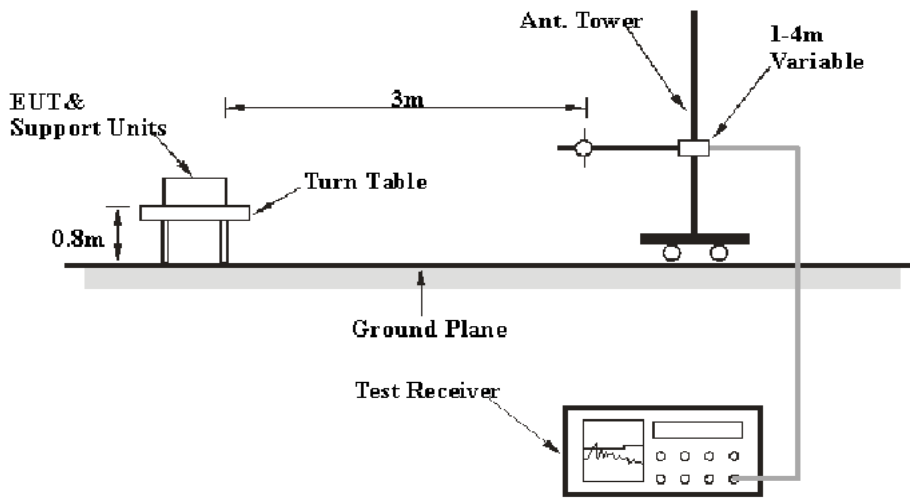

Above 1 GHz:

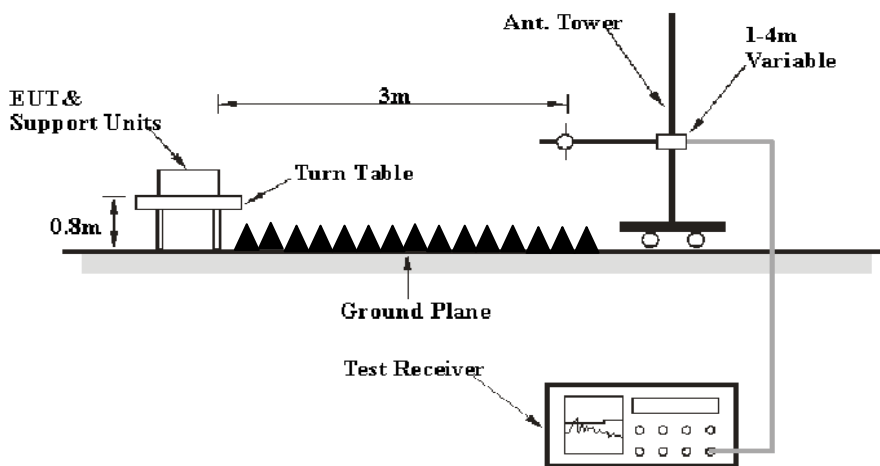

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The PC was connected to a 120 VAC/60 Hz power source

Test Equipment Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

For the radiated emissions test, the PC was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz, Peak and average detection mode above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-09
Sunol Sciences	Antenna	JB3	A060611-1	2011-09-06	2014-09-05
HP	Amplifier	8447E	2434A02181	2013-09-06	2014-09-06
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2013-09-06	2014-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 & 15.205 & 15.249, with the worst margin reading of:

0.18 dB at 2403 MHz in the Horizontal polarization

Test Data**Environmental Conditions**

Temperature:	26.8 °C
Relative Humidity:	56 %
ATM Pressure:	99.7 kPa

The testing was performed by Dean Liu on 2014-08-04.

Test Mode: Transmitting
Terminal Antenna:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB(1/m))					
Low Channel: 2403 MHz									
2403	62.06	PK	H	25.65	4.42	0.00	92.13	114.00	21.87
2403	48.56	AV	H	25.65	4.42	0.00	78.63	94.00	15.37
2403	68.82	PK	V	25.65	4.42	0.00	98.89	114.00	15.11
2403	54.96	AV	V	25.65	4.42	0.00	85.03	94.00	8.97
2390	18.03	PK	V	25.61	4.39	0.00	48.03	74.00	25.97
2390	13.69	AV	V	25.61	4.39	0.00	43.69	54.00	10.31
4806	35.91	PK	V	30.60	5.98	27.41	45.08	74.00	28.92
4806	23.59	AV	V	30.60	5.98	27.41	32.76	54.00	21.24
7209	30.25	PK	V	34.10	7.45	25.91	45.89	74.00	28.11
7209	19.13	AV	V	34.10	7.45	25.91	34.77	54.00	19.23
9612	30.54	PK	V	35.97	8.80	27.54	47.77	74.00	26.23
9612	19.42	AV	V	35.97	8.80	27.54	36.65	54.00	17.35
2836	34.79	PK	V	26.77	5.78	27.55	39.79	74.00	34.21
2836	20.46	AV	V	26.77	5.78	27.55	25.46	54.00	28.54
268.62	33.60	QP	V	13.61	2.01	21.50	27.72	46.00	18.28
Middle Channel: 2441 MHz									
2441	62.69	PK	H	25.75	4.40	0.00	92.84	114.00	21.16
2441	44.09	AV	H	25.75	4.40	0.00	74.24	94.00	19.76
2441	69.09	PK	V	25.75	4.40	0.00	99.24	114.00	14.76
2441	55.26	AV	V	25.75	4.40	0.00	85.41	94.00	8.59
4882	35.43	PK	V	30.79	6.08	27.42	44.88	74.00	29.12
4882	24.02	AV	V	30.79	6.08	27.42	33.47	54.00	20.53
7323	30.15	PK	V	34.38	7.51	25.88	46.16	74.00	27.84
7323	19.11	AV	V	34.38	7.51	25.88	35.12	54.00	18.88
9764	30.28	PK	V	36.33	8.83	27.20	48.24	74.00	25.76
9764	19.52	AV	V	36.33	8.83	27.20	37.48	54.00	16.52
2836	34.38	PK	V	26.77	5.78	27.55	39.38	74.00	34.62
2836	15.53	AV	V	26.77	5.78	27.55	20.53	54.00	33.47
1723.42	36.32	PK	V	24.05	3.53	27.64	36.26	74.00	37.74
1723.42	16.87	AV	V	24.05	3.53	27.64	16.81	54.00	37.19
268.62	33.50	QP	V	13.61	2.01	21.50	27.62	46.00	18.38
High Channel: 2480 MHz									
2480	60.42	PK	H	25.85	4.48	0.00	90.75	114.00	23.25
2480	46.51	AV	H	25.85	4.48	0.00	76.84	94.00	17.16
2480	69.71	PK	V	25.85	4.48	0.00	100.04	114.00	13.96
2480	55.91	AV	V	25.85	4.48	0.00	86.24	94.00	7.76
2483.5	26.89	PK	V	25.86	4.49	0.00	57.24	74.00	16.76
2483.5	14.23	AV	V	25.86	4.49	0.00	44.58	54.00	9.42
4960	36.88	PK	V	31.00	5.90	27.43	46.35	74.00	27.65
4960	25.36	AV	V	31.00	5.90	27.43	34.83	54.00	19.17
7440	30.39	PK	V	34.66	7.58	25.97	46.66	74.00	27.34
7440	19.07	AV	V	34.66	7.58	25.97	35.34	54.00	18.66
9920	30.25	PK	V	36.71	8.87	26.66	49.17	74.00	24.83
9920	19.06	AV	V	36.71	8.87	26.66	37.98	54.00	16.02
2836	34.28	PK	V	26.77	5.78	27.55	39.28	74.00	34.72
2836	15.43	AV	V	26.77	5.78	27.55	20.43	54.00	33.57
268.62	33.80	QP	V	13.61	2.01	21.50	27.92	46.00	18.08

Wall mount Antenna:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB(1/m))					
Low Channel: 2403 MHz									
2403	77.74	PK	H	25.65	4.42	0.00	107.81	114.00	6.19
2403	63.75	AV	H	25.65	4.42	0.00	93.82	94.00	0.18*
2403	58.83	PK	V	25.65	4.42	0.00	88.90	114.00	25.10
2403	45.09	AV	V	25.65	4.42	0.00	75.16	94.00	18.84
2390	26.11	PK	H	25.61	4.39	0.00	56.11	74.00	17.89
2390	15.39	AV	H	25.61	4.39	0.00	45.39	54.00	8.61
4806	34.03	PK	H	30.60	5.98	27.41	43.20	74.00	30.80
4806	21.26	AV	H	30.60	5.98	27.41	30.43	54.00	23.57
7209	31.85	PK	H	34.10	7.45	25.91	47.49	74.00	26.51
7209	18.97	AV	H	34.10	7.45	25.91	34.61	54.00	19.39
9612	30.45	PK	H	35.97	8.80	27.54	47.68	74.00	26.32
9612	19.52	AV	H	35.97	8.80	27.54	36.75	54.00	17.25
2832	35.06	PK	H	26.76	5.73	27.56	39.99	74.00	34.01
2832	21.97	AV	H	26.76	5.73	27.56	26.90	54.00	27.10
268.62	35.40	QP	H	13.61	2.01	21.50	29.52	46.00	16.48
Middle Channel: 2441 MHz									
2441	76.73	PK	H	25.75	4.40	0.00	106.88	114.00	7.12
2441	62.78	AV	H	25.75	4.40	0.00	92.93	94.00	1.07*
2441	58.89	PK	V	25.75	4.40	0.00	89.04	114.00	24.96
2441	45.23	AV	V	25.75	4.40	0.00	75.38	94.00	18.62
4882	34.49	PK	H	30.79	6.08	27.42	43.94	74.00	30.06
4882	21.81	AV	H	30.79	6.08	27.42	31.26	54.00	22.74
7323	30.95	PK	H	34.38	7.51	25.88	46.96	74.00	27.04
7323	19.42	AV	H	34.38	7.51	25.88	35.43	54.00	18.57
9764	30.58	PK	H	36.33	8.83	27.20	48.54	74.00	25.46
9764	19.41	AV	H	36.33	8.83	27.20	37.37	54.00	16.63
2836	34.11	PK	H	26.77	5.78	27.55	39.11	74.00	34.89
2836	15.02	AV	H	26.77	5.78	27.55	20.02	54.00	33.98
1723.42	35.86	PK	H	24.05	3.53	27.64	35.80	74.00	38.20
1723.42	16.37	AV	H	24.05	3.53	27.64	16.31	54.00	37.69
268.62	35.80	QP	H	13.61	2.01	21.50	29.92	46.00	16.08
High Channel: 2480 MHz									
2480	76.13	PK	H	25.85	4.48	0.00	106.46	114.00	7.54
2480	61.98	AV	H	25.85	4.48	0.00	92.31	94.00	1.69*
2480	58.62	PK	V	25.85	4.48	0.00	88.95	114.00	25.05
2480	44.36	AV	V	25.85	4.48	0.00	74.69	94.00	19.31
2483.5	32.36	PK	H	25.86	4.49	0.00	62.71	74.00	11.29
2483.5	14.98	AV	H	25.86	4.49	0.00	45.33	54.00	8.67
4960	34.96	PK	H	31.00	5.90	27.43	44.43	74.00	29.57
4960	21.97	AV	H	31.00	5.90	27.43	31.44	54.00	22.56
7440	31.54	PK	H	34.66	7.58	25.97	47.81	74.00	26.19
7440	18.91	AV	H	34.66	7.58	25.97	35.18	54.00	18.82
9920	28.96	PK	H	36.71	8.87	26.66	47.88	74.00	26.12
9920	17.23	AV	H	36.71	8.87	26.66	36.15	54.00	17.85
2836	34.18	PK	H	26.77	5.78	27.55	39.18	74.00	34.82
2836	15.36	AV	H	26.77	5.78	27.55	20.36	54.00	33.64
268.62	35.80	QP	H	13.61	2.01	21.50	29.92	46.00	16.08

*Within measurement uncertainty!

FCC §15.215(c) – 20 dB BANDWIDTH TESTING

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through § 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	29.1 °C
Relative Humidity:	65 %
ATM Pressure:	99.8 kPa

* The testing was performed by Dean Liu on 2014-07-02.


Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2403	0.933
Middle	2441	0.876
High	2480	0.872


Low Channel

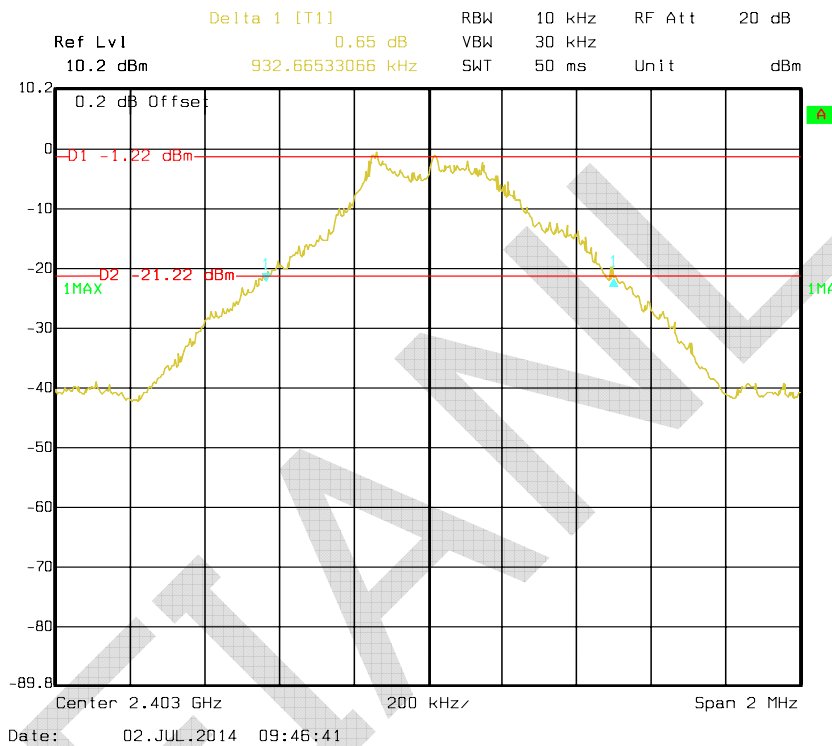

Middle Channel

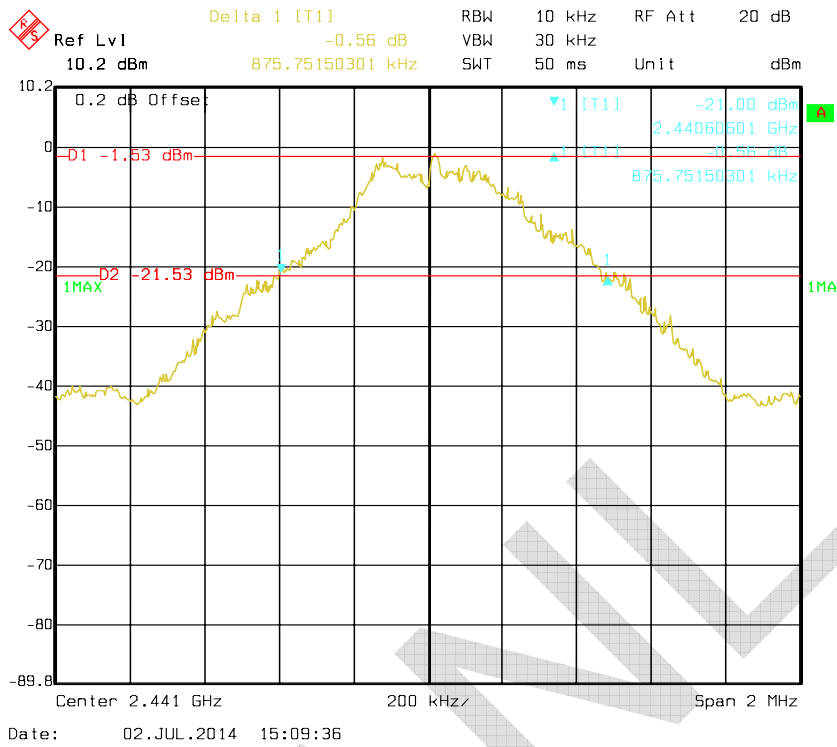

High Channel

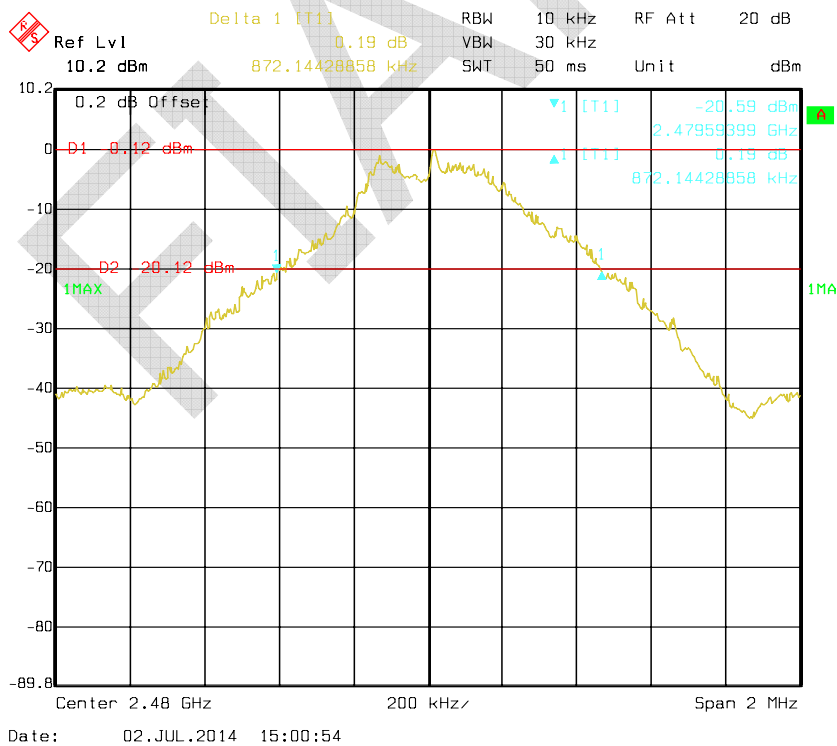

FCC§15.249(d) - OUT OF BAND EMISSION (50 dB ATTENUATION)

Applicable Standard

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	29.1~29.9 °C
Relative Humidity:	63~65 %
ATM Pressure:	99.8~99.9 kPa

* The testing was performed by Dean Liu from 2014-07-02 to 2014-07-04.

Please refer to the following table and plots:

Channel (MHz)	Delta Peak to Band Emission (dBc)	Delta Limit (dBc)
2403	41.81(note)	50
2480	43.44(note)	50


Note: The delta peak to band emission compliance with 15.209 requirement

Please refer to the following plots:

Band Edge, Left Side



Band Edge, Right Side

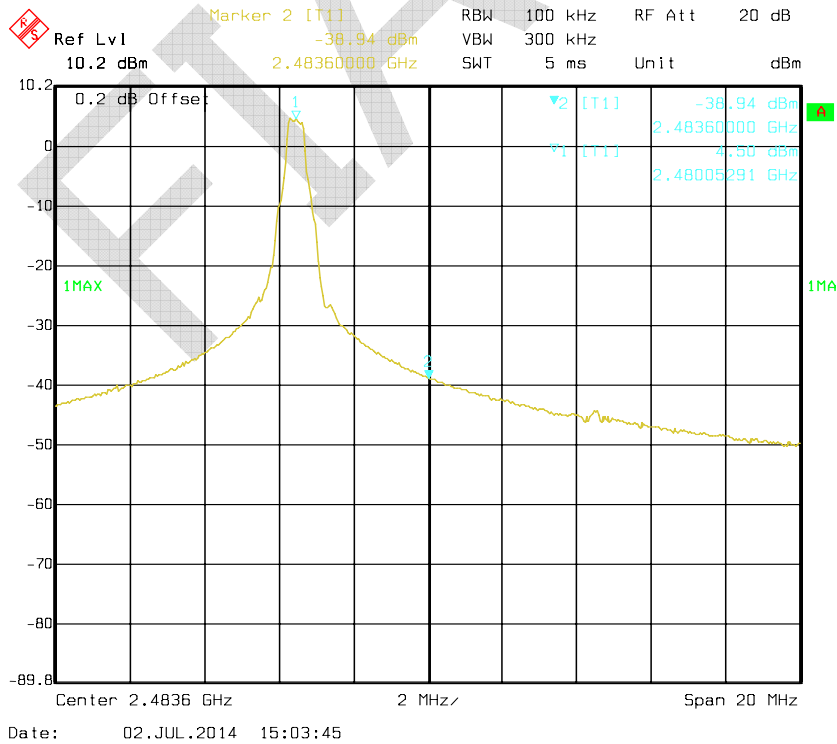

***** END OF REPORT *****