



# TEST REPORT

Report Reference No..... : **TRE15120074** R/C.....: **45214**  
FCC ID..... : **2ABUBST3**  
Applicant's name..... : **SHENZHEN SAMHOO SCI&TECH CO.,LTD.**  
Address..... : Room 401, Building 2, Huaqiangyun Industrial Park, Meixiu Rd.,  
Meilin, Futian District, Shenzhen, China  
Manufacturer.....: **SHENZHEN SAMHOO SCI&TECH CO.,LTD.**  
Address..... : Room 401, Building 2, Huaqiangyun Industrial Park, Meixiu Rd.,  
Meilin, Futian District, Shenzhen, China  
Test item description ..... : **Digital Two Way Radio**  
Trade Mark ..... : -  
Model/Type reference.....: ST3  
Listed Model(s)..... : -  
Standard ..... : **FCC Part 90**  
**FCC Part 2**  
**FCC Part 15B**  
Date of receipt of test sample.....: Dec 11, 2015  
Date of testing.....: Dec 14, 2015- Feb 23, 2016  
Date of issue.....: Feb 23, 2016  
Result.....: **PASS**

Compiled by  
( position+printed name+signature)...: File administrators Shayne Zhu

Supervised by  
( position+printed name+signature)...: Project Engineer Jerry Wang

Approved by  
( position+printed name+signature)...: RF Manager Hans Hu

Testing Laboratory Name ..... : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address.....: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao,  
Gongming, Shenzhen, China

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

*The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.*

## Contents

<b>1.</b>	<b><u>TEST STANDARDS AND TEST DESCRIPTION</u></b>	<b>3</b>
1.1.	Test Standards	3
1.2.	Test Description	3
<b>2.</b>	<b><u>SUMMARY</u></b>	<b>4</b>
2.1.	Client Information	4
2.2.	Product Description	4
2.3.	Test frequency list	5
2.4.	EUT operation mode	5
2.5.	EUT configuration	5
<b>3.</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>6</b>
3.1.	Address of the test laboratory	6
3.2.	Test Facility	6
3.3.	Environmental conditions	7
3.4.	Statement of the measurement uncertainty	7
3.5.	Equipments Used during the Test	8
<b>4.</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b>10</b>
4.1.	Effective Radiated Power	10
4.2.	Occupied Bandwidth	12
4.3.	Emission Mask	17
4.4.	Modulation Characteristics	22
4.5.	Frequency Stability Test	25
4.6.	Transmitter Frequency Behaviour	28
4.7.	Transmitter Radiated Spurious Emission	31
4.8.	Conducted Emissions Test	37
4.9.	Radiated Emission	40
<b>5.</b>	<b><u>TEST SETUP PHOTOS OF THE EUT</u></b>	<b>44</b>
<b>6.</b>	<b><u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u></b>	<b>45</b>

## 1. TEST STANDARDS AND TEST DESCRIPTION

### 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 90: 2014](#) Private land mobile radio services.

[TIA/EIA 603 D: June 2010](#) Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[FCC Part 15 Subpart B: 2014](#) Unintentional Radiators

[FCC Part 2: 2014](#) Frequency allocations and radio treaty matters, general rules and regulations.

[KDB579009 D01 v03r01](#): Questions and Answers on Re-farming Part 90 frequencies

[KDB 579009 D02 v01r02](#): Transition Summary Table

### 1.2. Test Description

Transmitter Requirement			
Test item	Standards requirement	Result	
		Pass	N/A
Effective Radiated Power	FCC Part 90.205	<input checked="" type="checkbox"/>	
Modulation Characteristic	FCC Part 90.207	<input checked="" type="checkbox"/>	
Occupied Bandwidth	FCC Part 90.209	<input checked="" type="checkbox"/>	
Emission Mask	FCC Part 90.210	<input checked="" type="checkbox"/>	
Frequency Stability	FCC Part 90.213	<input checked="" type="checkbox"/>	
Transmitter Frequency Behavior	FCC Part 90.214	<input checked="" type="checkbox"/>	
Transmitter Radiated Spurious Emission	FCC Part 90.210	<input checked="" type="checkbox"/>	
Receiver Requirement			
Test item	Standards requirement	Result	
		Pass	N/A
Conducted Emission	FCC Part 15.107	<input checked="" type="checkbox"/>	
Radiated Emission	FCC Part 15.109	<input checked="" type="checkbox"/>	

## 2. SUMMARY

### 2.1. Client Information

Applicant:	SHENZHEN SAMHOO SCI&TECH CO.,LTD.
Address:	Room 401,Building 2th,Huaqiangyun Industrial Park,Meixiu Road, Meilin, Futian District,Shenzhen,China
Manufacturer:	SHENZHEN SAMHOO SCI&TECH CO.,LTD.
Address:	Room 401,Building 2th,Huaqiangyun Industrial Park,Meixiu Road, Meilin, Futian District,Shenzhen,China

### 2.2. Product Description

Name of EUT:	Digital Two Way Radio	
Trade mark:	-	
Model/Type reference:	ST3	
Listed mode(s):	-	
Power supply:	DC 3.6V	
Battery information:	Model:MZ701L1 3.6V,1500mAh	
Adapter information:	Model:GEO061T-050100 Input:100-240Va.c.,50/60Hz,0.2A Output:5.0Vd.c., 1000mA	
Operation Frequency Range:	From 400MHz to 470 MHz	
Rated Output Power:	1W (30.00dBm)	
Modulation Type:	Analog Voice:	FM
	Digital Voice /Digital Data:	4FSK
Digital Type:	DMR	
Channel Separation:	Analog Voice:	<input checked="" type="checkbox"/> 12.5kHz
	Digital Voice /Digital Data:	<input checked="" type="checkbox"/> 12.5kHz <input checked="" type="checkbox"/> 6.25kHz
Emission Designator:	Analog Voice:	<input checked="" type="checkbox"/> 12.5kHz Channel Separation: 10K1F3E
	Digital Voice:	<input checked="" type="checkbox"/> 12.5kHz Channel Separation: 7K66FXW <input checked="" type="checkbox"/> 6.25kHz Channel Separation: 3K62FXW
	Digital Data:	<input checked="" type="checkbox"/> 12.5kHz Channel Separation: 7K66FXD <input checked="" type="checkbox"/> 6.25kHz Channel Separation: 3K62FXD
Support data rate:	9.6kbps	
Antenna Type:	Internal	
Maximum Transmitter Power (ERP):	Digital	0.97W for 12.5kHz Channel Separation
	Digital	0.97W for 6.25kHz Channel Separation
	Analog	0.97W for 12.5kHz Channel Separation

Note:

- 1)The product has the same digital working characters when operating in both two digitized voice/data mode.  
So only one set of test results for digital modulation modes are provided in this test report.

### 2.3. Test frequency list

Mode	Modulation	Operation Frequency Range	Test Frequency (MHz)	
Digital	4FSK	406.1MHz~420MHz	CH <sub>L</sub>	406.1125
			CH <sub>M</sub>	413.0500
			CH <sub>H</sub>	419.9875
		421MHz~470MHz	CH <sub>L</sub>	421.0125
			CH <sub>M</sub>	445.0000
			CH <sub>H</sub>	469.9875
Analog	FM	406.1MHz~420MHz	CH <sub>L</sub>	406.1125
			CH <sub>M</sub>	413.0500
			CH <sub>H</sub>	419.9875
		421MHz~470MHz	CH <sub>L</sub>	421.0125
			CH <sub>M</sub>	445.0000
			CH <sub>H</sub>	469.9875

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above listed frequency for testing.

### 2.4. EUT operation mode

Test mode	Transmitting	Receiving	Digital		Analog	Charging
			12.5KHz	6.25KHz	12.5kHz	
TX1	√		√			
TX2	√			√		
TX3	√				√	
RX1		√	√			√
RX2		√		√		√
RX3		√			√	√

√: is operation mode.

### 2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○ Power Cable	Length (m) :	/
	Shield :	Unshielded
	Detachable :	Undetachable
○ Multimeter	Manufacturer :	/
	Model No. :	/

### **3. TEST ENVIRONMENT**

#### **3.1. Address of the test laboratory**

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Phone: 86-755-26748019 Fax: 86-755-26748089

#### **3.2. Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

##### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: February 28, 2015. Valid time is until February 27, 2018.

##### **A2LA-Lab Cert. No. 3902.01**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until December 31, 2016.

##### **FCC-Registration No.: 317478**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 317478, Renewal date Jul. 18, 2014, valid time is until Jul. 18, 2017.

##### **IC-Registration No.: 5377A&5377B**

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Dec. 31, 2013, valid time is until Dec. 31, 2016.

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B on Dec.03, 2014, valid time is until Dec.03, 2017.

##### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

##### **VCCI**

The 3m Semi-

anechoic chamber (12.2m×7.95m×6.7m) of Shenzhen Huatongwei International Inspection Co., Ltd.

has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 29, 2015.

Radiated disturbance above 1GHz measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2013. Valid time is until Dec. 23, 2016.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 19, 2015.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2013. Valid time is until May 06, 2016.

##### **DNV**

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2016.

### 3.3. Environmental conditions

Normal Conditon	
Relative humidity:	20 % to 75 %.
Air Pressure:	950~1050mba
Voltage:	DC 3.7V

### 3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability	25 Hz	(1)
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.65 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)
Emission Mask	-----	(1)
Modulation Characteristic	-----	(1)
Transmitter Frequency Behavior	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

### 3.5. Equipments Used during the Test

Conducted Emission				
Name of Equipment	Manufacturer	Model	Serial Number	Last Cal.
Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2015/11/2
EMI Test Receiver	Rohde&Schwarz	ESCS 30	100038	2015/11/2
Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2015/11/2
EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/A
RF COMMUNICATION TEST SET	HP	8920A	3813A10206	2015/11/2
Artificial Mains	Rohde&Schwarz	ESH3-Z6	100210	2015/11/2
Artificial Mains	Rohde&Schwarz	ESH3-Z6	100211	2015/11/2

Modulation Characteristic				
Name of Equipment	Manufacturer	Model	Serial Number	Last Cal.
RF COMMUNICATION TEST SET	HP	8920A	3813A10206	2015/11/2

Frequency Stability				
Name of Equipment	Manufacturer	Model	Serial Number	Last Cal.
RF COMMUNICATION TEST SET	HP	8920A	3813A10206	2015/11/2
Signal Generator	Rohde&Schwarz	SMT03	100059	2015/11/2
Climate Chamber	ESPEC	EL-10KA	05107008	2015/11/2

Transmitter Radiated Spurious Emission				
Name of Equipment	Manufacturer	Model	Serial Number	Last Cal.
Ultra-Broadband Antenna	Rohde&Schwarz	HL562	100015	2015/11/2
EMI Test Receiver	Rohde&Schwarz	ESI 26	100009	2015/11/2
RF Test Panel	Rohde&Schwarz	TS / RSP	335015/ 0017	N/A
HORN ANTENNA	Rohde&Schwarz	HF906	100039	2015/12/2
Turntable	ETS	2088	2149	N/A
Antenna Mast	ETS	2075	2346	N/A
EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/A
RF COMMUNICATION TEST SET	HP	8920A	3813A10206	2015/11/2
Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2015/11/2
Ultra-Broadband Antenna	ShwarzBeck	VULB9163	539	2015/11/2
HORN ANTENNA	ShwarzBeck	9120D	1012	2015/11/2
HORN ANTENNA	ShwarzBeck	9120D	1011	2015/11/2
TURNTABLE	MATURO	TT2.0	----	N/A
ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A



Maximum Transmitter Power & Spurious Emission On Antenna Port & Occupied Bandwidth & Emission Mask				
Name of Equipment	Manufacturer	Model	Serial Number	Last Cal.
Receiver	Rohde&Schwarz	ESI 26	100009	2015/11/2
Attenuator	R&S	ESH3-22	100449	2015/11/2
RF COMMUNICATION TEST SET	HP	8920A	3813A10206	2015/11/2
High-Pass Filter	Anritsu	MP526B	6220875256	2015/11/2
High-Pass Filter	Anritsu	MP526D	6220878392	2015/11/2
Spectrum Analyzer	Aglient	E4407B	MY44210775	2015/11/2
Spectrum Analyzer	Rohde&Schwarz	FSP40	1164.4391.40	2015/11/2
SPECTRUM ANALYZER	Agilent	E4407B	MY44210775	2015/11/2

Transient Frequency Behavior				
Name of Equipment	Manufacturer	Model	Serial Number	Last Cal.
Signal Generator	Rohde&Schwarz	SMT03	100059	2015/11/2
Storage Oscilloscope	Tektronix	TDS3054B	B033027	2015/11/2
RF COMMUNICATION TEST SET	HP	8920A	3813A10206	2015/11/2

The calibration interval was one year.

## 4. TEST CONDITIONS AND RESULTS

### 4.1. Effective Radiated Power


Applicants for licenses must request and use no more power than the actual power necessary for satisfactory operation.

#### LIMIT

##### FCC Part 2.1046 and Part 90.205

Maximum ERP is dependent upon the station's antenna HAAT and required service area. The output power shall below the manufacturer's rated power listed in the equipment specifications.

#### TEST CONFIGURATION

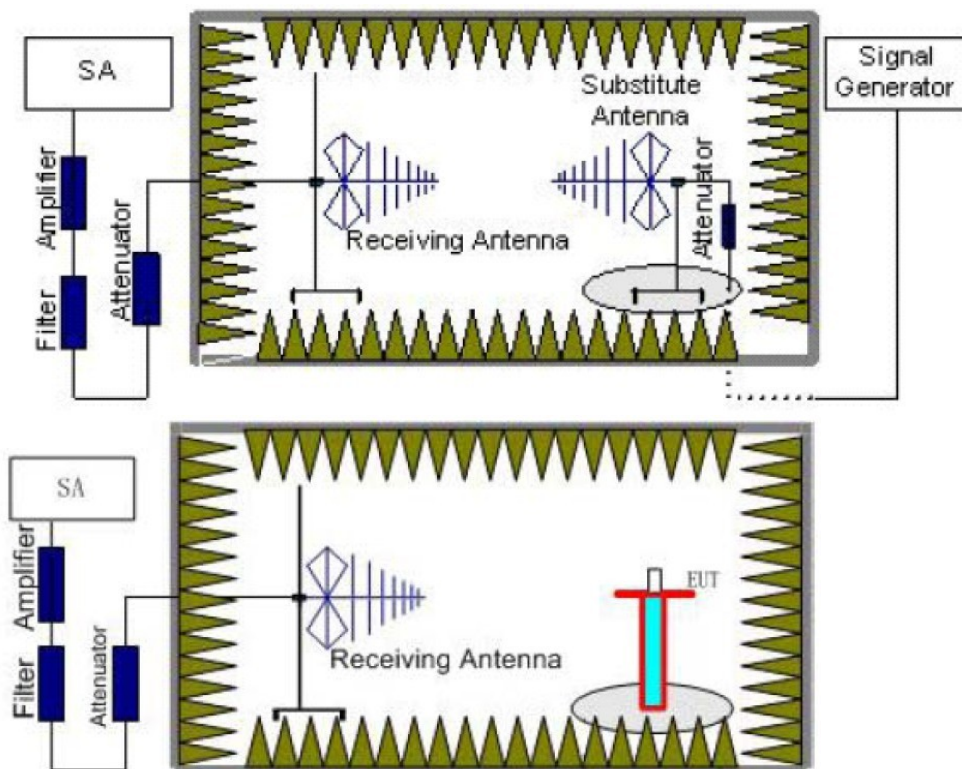

#### TEST PROCEDURE

1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.0 m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in six channels were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz,VBW=3MHz for above 1GHz and RBW=100kHz,VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as ( $P_r$ ).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{\text{Mea}} - P_{\text{Ag}} - P_{\text{cl}} - G_a$$

We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:

$$\text{Power(EIRP)} = P_{\text{Mea}} - P_{\text{cl}} - G_a$$

6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$ .

### TEST MODE:

Please reference to the section 2.4

### TEST RESULTS

Passed       Not Applicable

Please refer to the below test data:

Operation Mode	Test Frequency (MHz)	Measure ERP (dBm)	Limit (dB)	Result
TX1	406.1125	29.71	≤30	Pass
	413.0500	29.42		
	419.9875	29.89		
	421.0125	29.74		
	445.0000	29.31		
	469.9875	29.75		
TX2	406.1125	29.85	≤30	Pass
	413.0500	29.09		
	419.9875	29.54		
	421.0125	29.37		
	445.0000	29.62		
	469.9875	29.51		
TX3	406.1125	29.28	≤30	Pass
	413.0500	29.35		
	419.9875	29.49		
	421.0125	29.77		
	445.0000	29.21		
	469.9875	29.58		

### 4.2. Occupied Bandwidth

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits.


**LIMIT**

**FCC part 90.209**

Bandwidth limitations:

Frequency band (MHz)	Channel spacing (kHz)	Authorized bandwidth (kHz)
Below 252		
25-50	20	20
72-76	20	20
150-174	17.5	1 320/11.25/6
216-2205	6.25	20/11.25/6
220-222	5	4
406-5122	16.25	1 320/11.25/6
806-809/851-854	12.5	20
809-824/854-869	25	20
896-901/935-940	12.5	13.6
902-9284		
929-930	25	20
1427-14325	12.5	12.5
32450-2483.52		
Above 25002		

**TEST CONFIGURATION**

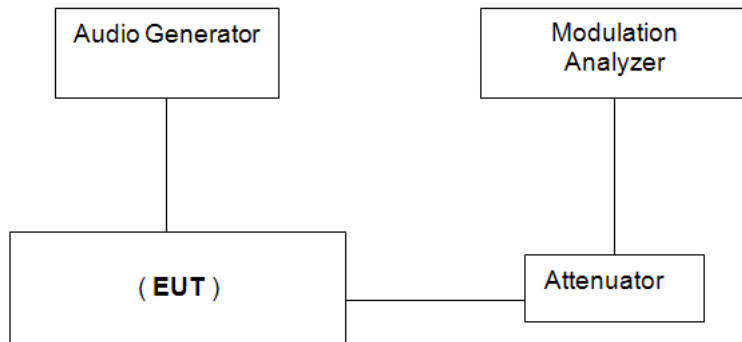

**TEST PROCEDURE**

- 1 The EUT was modulated by 2.5kHz Sine wave audio signal; the level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5kHz channel spacing).
- 2 Set EUT as normal operation.  
Set SPA Center Frequency = fundamental frequency, RBW=100Hz, VBW=300Hz, span=50kHz for 12.5kHz and 6.25kHz channel spacing.
- 3 Set SPA Max hold. Mark peak, Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth.

**TEST MODE:**

Please reference to the section 2.4


**TEST RESULTS**







Passed       Not Applicable


Please refer to the below test data:

Operation Mode	Test Frequency (MHz)	Occupied Bandwidth (kHz)		Limit (kHz)	Result
		99%	26dB		
TX1	406.1125	7.63	9.42	≤11.25	Pass
	413.0500	7.66	9.71		
	419.9875	7.31	9.51		
	421.0125	7.37	9.43		
	445.0000	7.57	9.71		
	469.9875	7.35	9.41		
TX2	406.1125	3.58	4.65	≤6	Pass
	413.0500	3.55	4.76		
	419.9875	3.62	4.82		
	421.0125	3.51	4.75		
	445.0000	3.49	4.87		
	469.9875	3.41	4.35		
TX3	406.1125	10.12	10.36	≤11.25	Pass
	413.0500	10.11	10.47		
	419.9875	10.00	10.33		
	421.0125	10.03	10.32		
	445.0000	10.09	10.36		
	469.9875	10.05	10.77		

Test plot as follows:

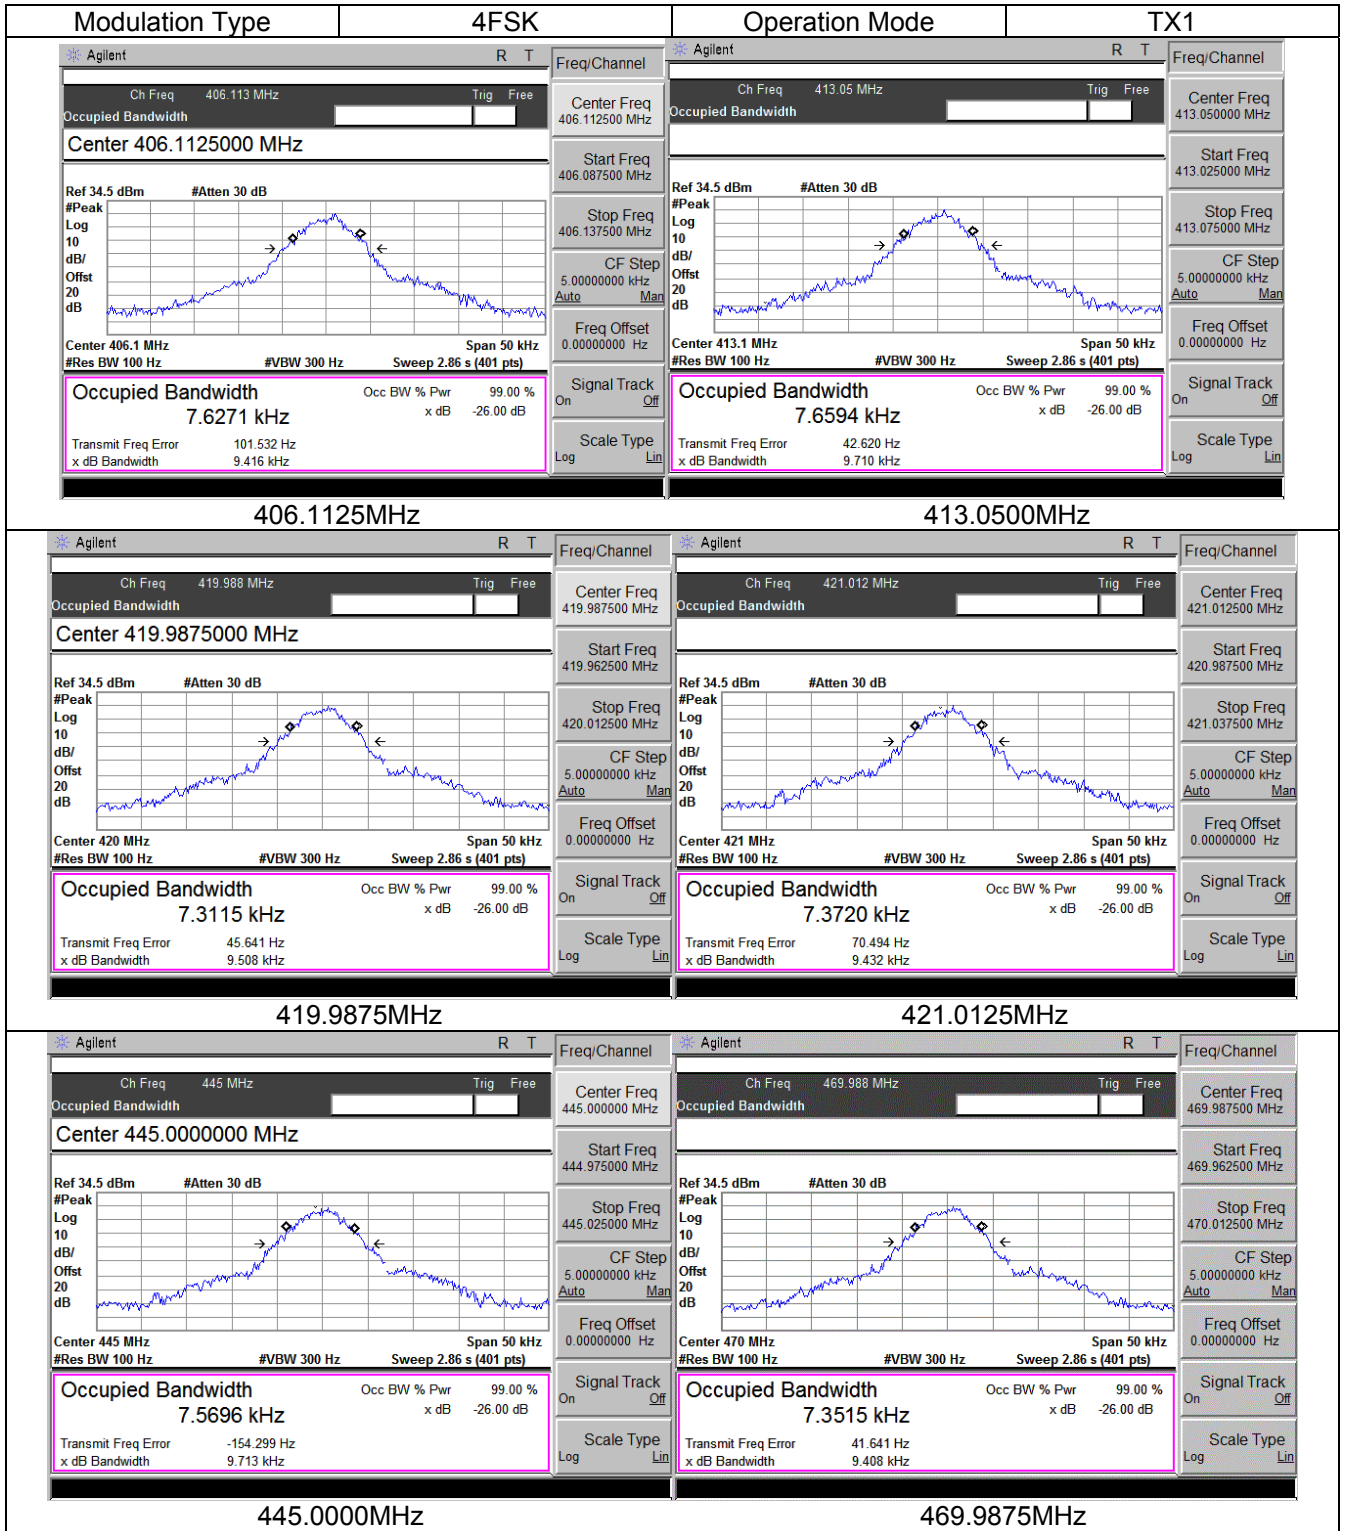

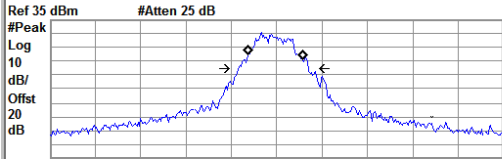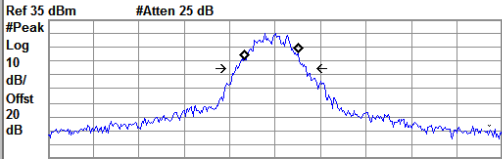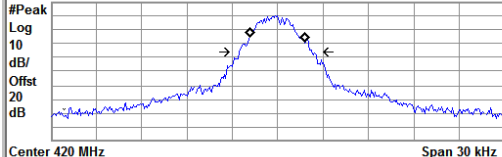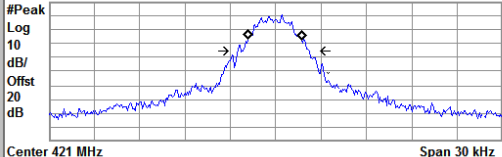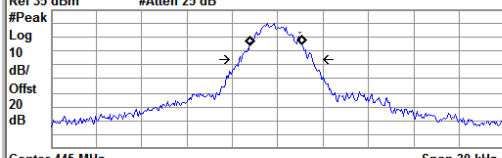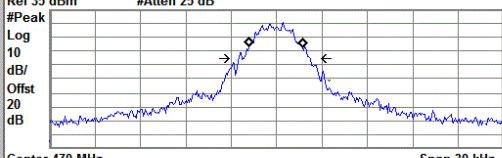Modulation Type		4FSK		Operation Mode		TX2			
<p>Agilent R T</p> <p>Ch Freq 406.113 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 406.1125000 MHz</b></p> <p>Ref 35 dBm #Atten 25 dB</p>  <p>Center 406.1 MHz Span 30 kHz #Res BW 100 Hz #VBW 300 Hz Sweep 1.705 s (401 pts)</p> <p><b>Occupied Bandwidth 3.5815 kHz</b></p> <p>Transmit Freq Error -77.649 Hz x dB Bandwidth 4.645 kHz</p>		<p>Freq/Channel</p> <p>Center Freq 406.112500 MHz</p> <p>Start Freq 406.097500 MHz</p> <p>Stop Freq 406.127500 MHz</p> <p>CF Step 3.00000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>		<p>Agilent R T</p> <p>Ch Freq 413.05 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 413.0500000 MHz</b></p> <p>Ref 35 dBm #Atten 25 dB</p>  <p>Center 413.1 MHz Span 30 kHz #Res BW 100 Hz #VBW 300 Hz Sweep 1.705 s (401 pts)</p> <p><b>Occupied Bandwidth 3.5518 kHz</b></p> <p>Transmit Freq Error -211.814 Hz x dB Bandwidth 4.756 kHz</p>		<p>Freq/Channel</p> <p>Center Freq 421.012500 MHz</p> <p>Start Freq 420.997500 MHz</p> <p>Stop Freq 421.027500 MHz</p> <p>CF Step 3.00000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>		<p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	
406.1125MHz		413.0500MHz							
<p>Agilent R T</p> <p>Ch Freq 419.988 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 419.9875000 MHz</b></p> <p>Ref 35 dBm #Atten 25 dB</p>  <p>Center 420 MHz Span 30 kHz #Res BW 100 Hz #VBW 300 Hz Sweep 1.705 s (401 pts)</p> <p><b>Occupied Bandwidth 3.6190 kHz</b></p> <p>Transmit Freq Error -20.937 Hz x dB Bandwidth 4.824 kHz</p>		<p>Freq/Channel</p> <p>Center Freq 419.987500 MHz</p> <p>Start Freq 419.972500 MHz</p> <p>Stop Freq 420.002500 MHz</p> <p>CF Step 3.00000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>		<p>Agilent R T</p> <p>Ch Freq 421.012 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 421.0125000 MHz</b></p> <p>Ref 35 dBm #Atten 25 dB</p>  <p>Center 421 MHz Span 30 kHz #Res BW 100 Hz #VBW 300 Hz Sweep 1.705 s (401 pts)</p> <p><b>Occupied Bandwidth 3.5110 kHz</b></p> <p>Transmit Freq Error -15.526 Hz x dB Bandwidth 4.753 kHz</p>		<p>Freq/Channel</p> <p>Center Freq 421.012500 MHz</p> <p>Start Freq 420.997500 MHz</p> <p>Stop Freq 421.027500 MHz</p> <p>CF Step 3.00000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>			
419.9875MHz		421.0125MHz							
<p>Agilent R T</p> <p>Ch Freq 445 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 445.0000000 MHz</b></p> <p>Ref 35 dBm #Atten 25 dB</p>  <p>Center 445 MHz Span 30 kHz #Res BW 100 Hz #VBW 300 Hz Sweep 1.705 s (401 pts)</p> <p><b>Occupied Bandwidth 3.4909 kHz</b></p> <p>Transmit Freq Error -84.358 Hz x dB Bandwidth 4.869 kHz</p>		<p>Freq/Channel</p> <p>Center Freq 445.000000 MHz</p> <p>Start Freq 444.985000 MHz</p> <p>Stop Freq 445.015000 MHz</p> <p>CF Step 3.00000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>		<p>Agilent R T</p> <p>Ch Freq 469.988 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 469.9875000 MHz</b></p> <p>Ref 35 dBm #Atten 25 dB</p>  <p>Center 470 MHz Span 30 kHz #Res BW 100 Hz #VBW 300 Hz Sweep 1.705 s (401 pts)</p> <p><b>Occupied Bandwidth 3.4110 kHz</b></p> <p>Transmit Freq Error -12.526 Hz x dB Bandwidth 4.353 kHz</p>		<p>Freq/Channel</p> <p>Center Freq 469.987500 MHz</p> <p>Start Freq 469.972500 MHz</p> <p>Stop Freq 470.002500 MHz</p> <p>CF Step 3.00000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>			
445.0000MHz		469.9875MHz							

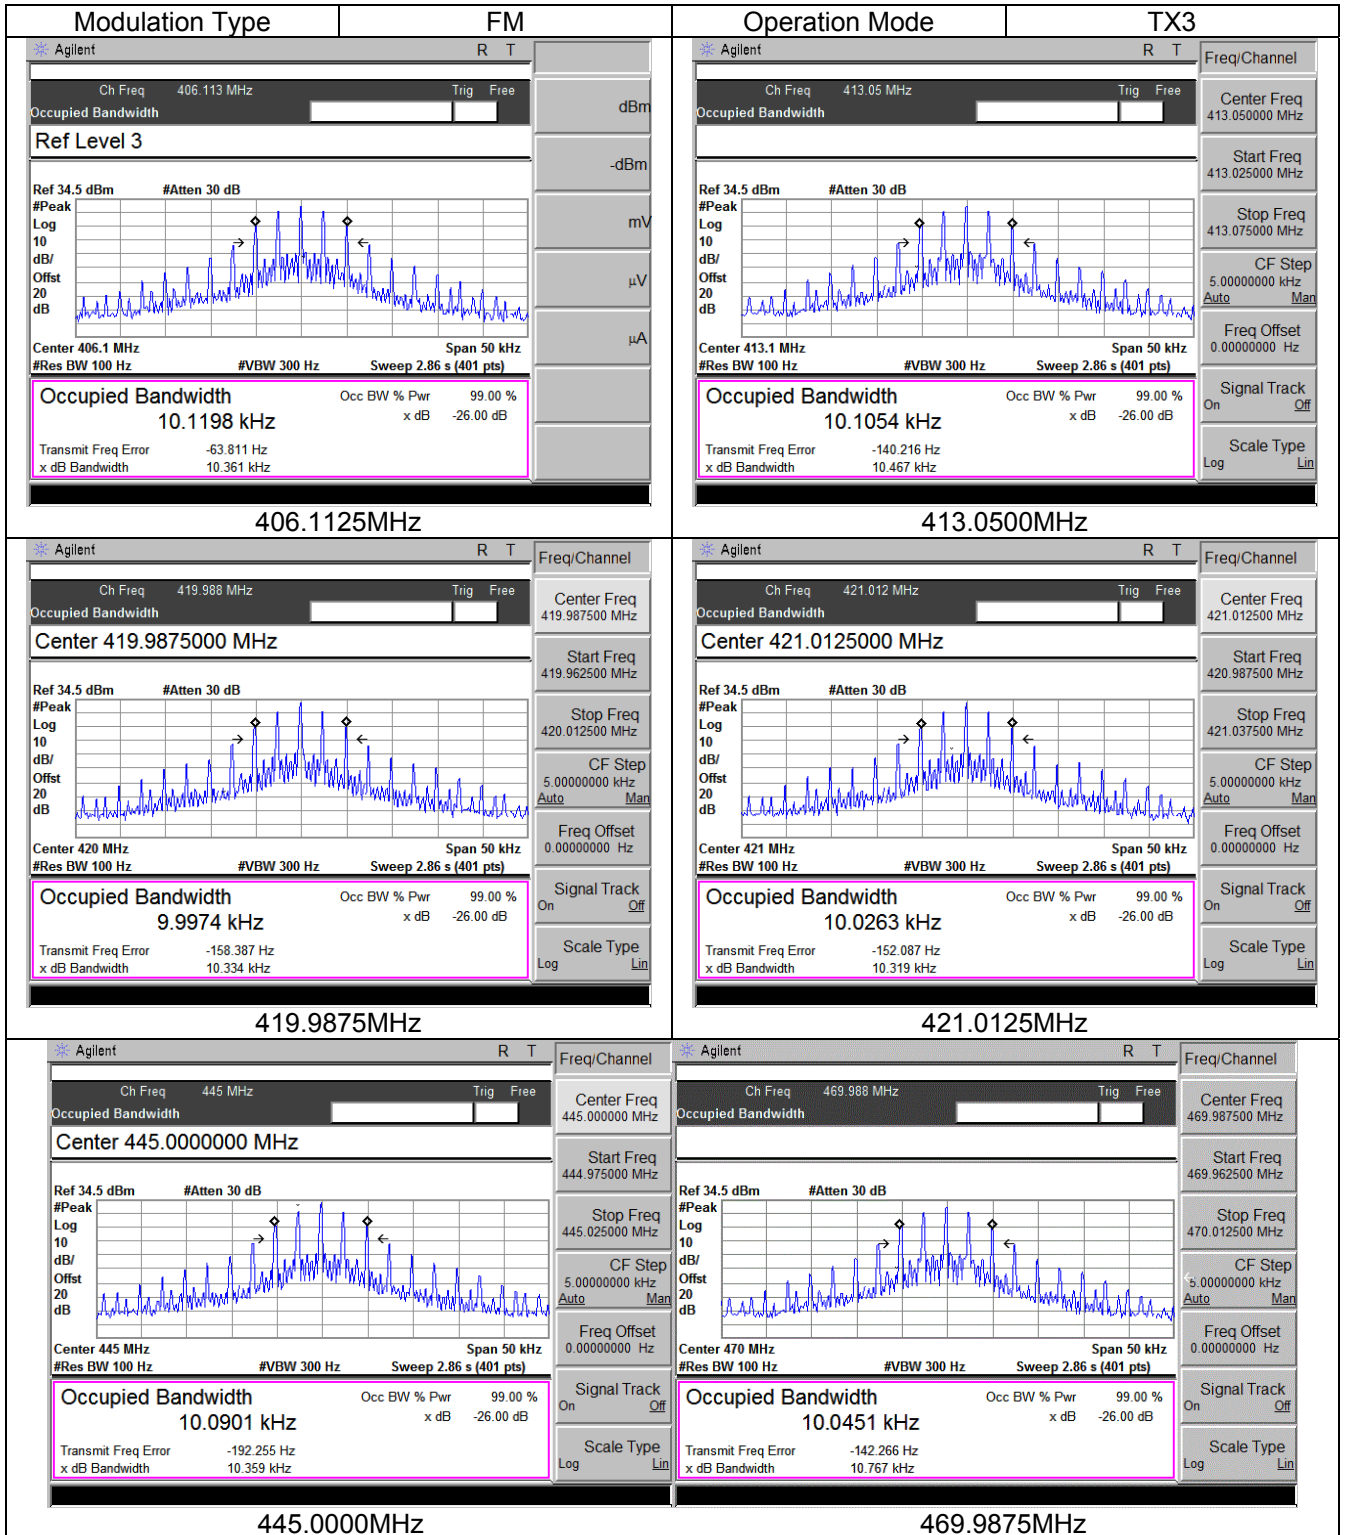



### 4.3. Emission Mask

Transmitters used in the radio services governed by this part must comply with the emission masks outlined in this section.


#### LIMIT

#### FCC part 90.210

Frequency band (MHz)	Mask for equipment with audio low pass filter	Mask for equipment without audio low pass filter
Below 251	A or B	A or C
25-50	B	C
72-76	B	C
150-1742	B, D, or E	C, D or E
150 paging only	B	C
220-222	F	F
421-5122.5	B, D, or E	C, D, or E
450 paging only	B	G
806-809/851-854	B	H
809-824/854-8693.5	B	G
896-901/935-940	I	J
902-928	K	K
929-930	B	G
4940-4990 MHz	L or M	L or M
5850-59254		
All other bands	B	C

1. Emission Mask D  
 12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:
  - 1) On any frequency from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ : Zero dB.
  - 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least  $7.27(f_d - 2.88 \text{ kHz})$  dB.
  - 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: At least  $50 + 10 \log(P)$  dB or 70 dB, whichever is the lesser attenuation.
2. Emission Mask E  
 6.25 kHz or less channel bandwidth equipment. For transmitters designed to operate with a 6.25 kHz or less bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:
  - 1) On any frequency from the center of the authorized bandwidth  $f_0$  to 3.0 kHz removed from  $f_0$ : Zero dB.
  - 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least  $30 + 16.67(f_d - 3 \text{ kHz})$  or  $55 + 10 \log(P)$  or 65 dB, whichever is the lesser attenuation.
  - 3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least  $55 + 10 \log(P)$  or 65 dB, whichever is the lesser attenuation.

#### TEST CONFIGURATION

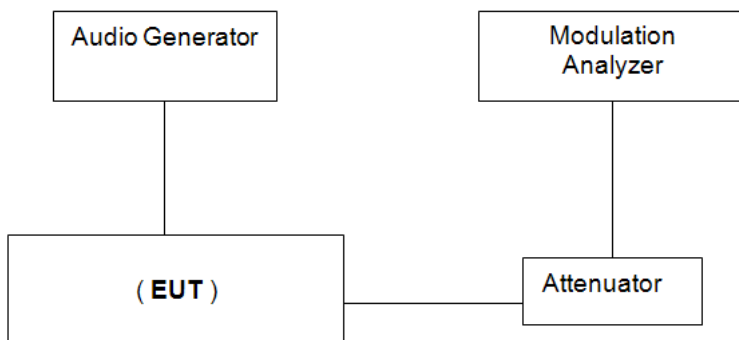

**TEST PROCEDURE**

1. The EUT was modulated by 2.5kHz Sine wave audio signal; the level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5kHz channel spacing) .
2. Set EUT as normal operation. Set SPA Center Frequency = fundamental frequency, RBW=100Hz, VBW=300Hz,span=50kHz for 12.5KHz and 6.25kHz channel spacing.

**TEST MODE:**

Please reference to the section 2.4


**TEST RESULTS**

**Passed**       **Not Applicable**

*Please refer to the below test data:*



*Note: The equipment applicable to Emission Mask D and Mask E .*

Test plot as follows:

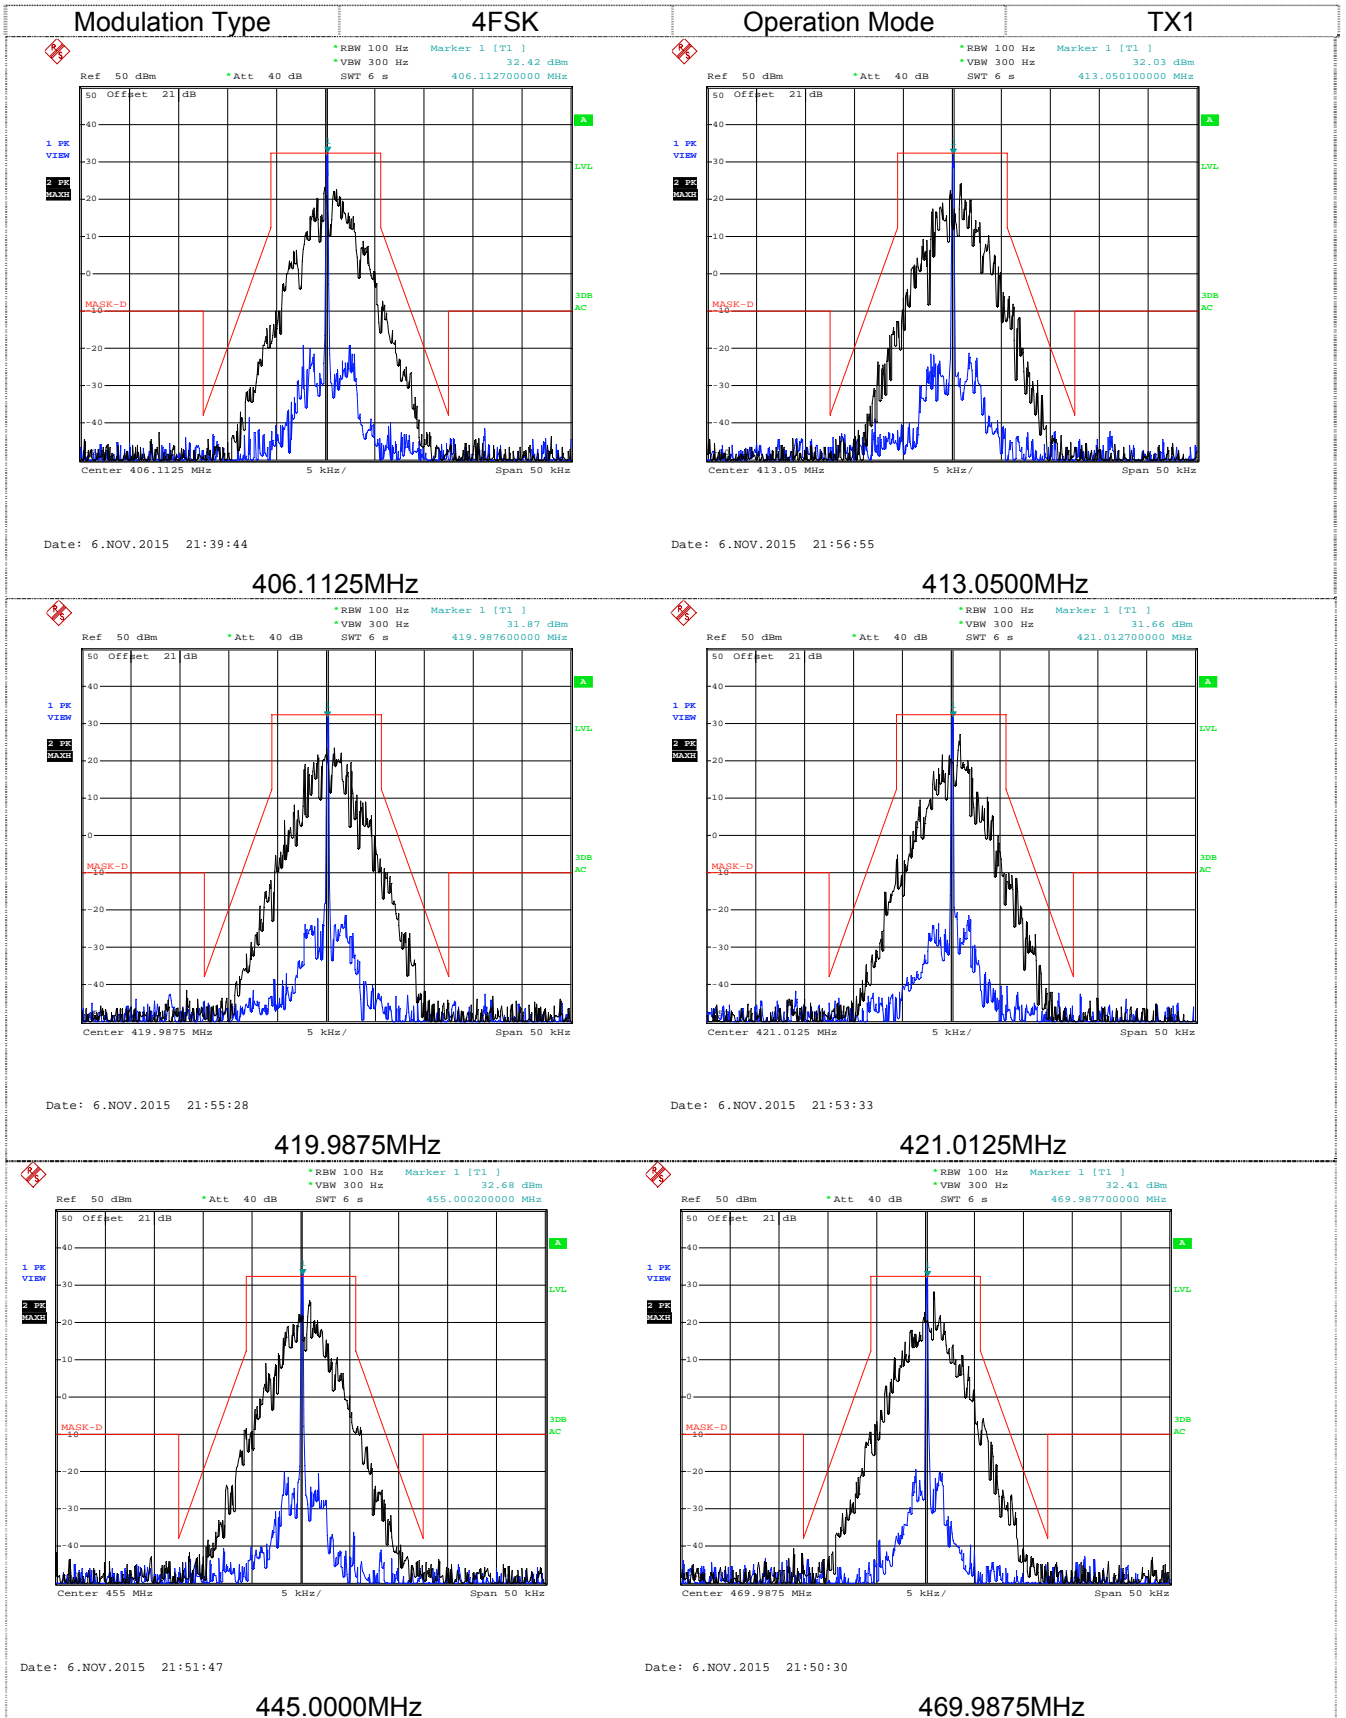

Modulation Type 4FSK

Operation Mode TX2

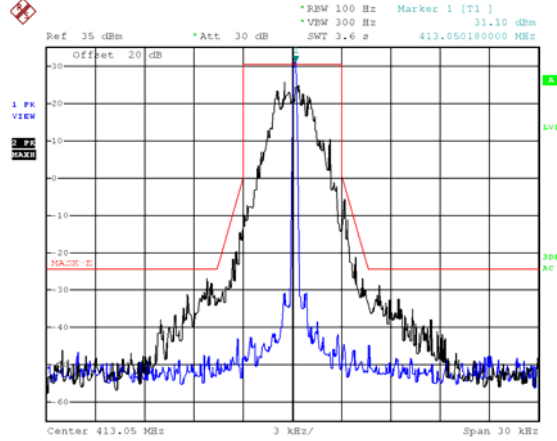
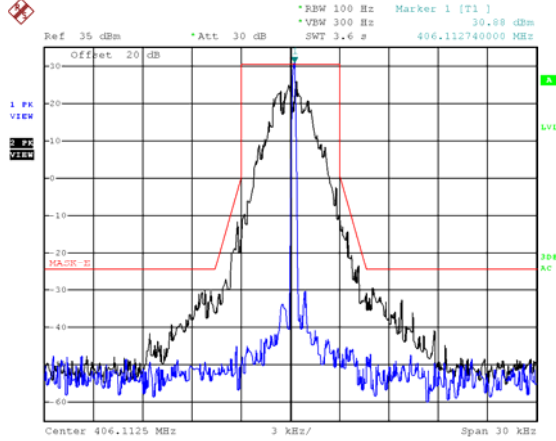


Date: 19.FEB.2016 13:43:47

Date: 19.FEB.2016 14:03:41

406.1125MHz

413.0500MHz

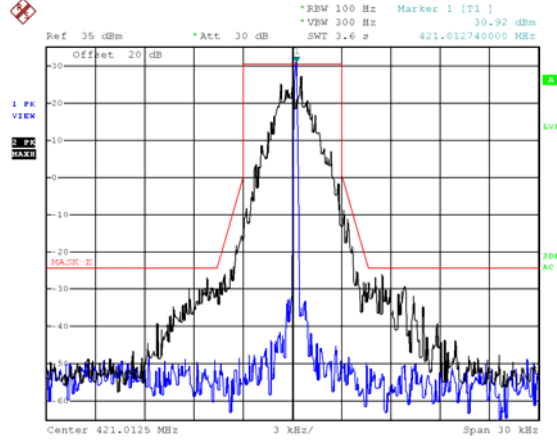
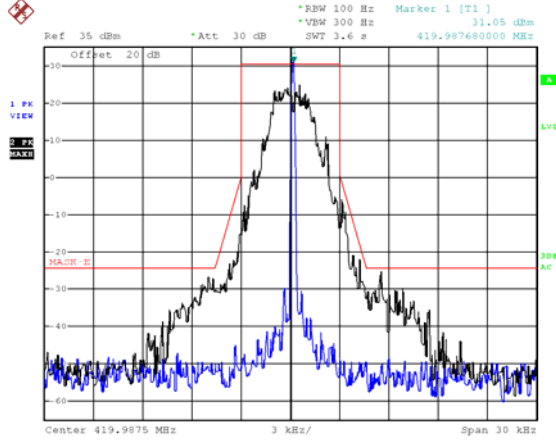


Date: 19.FEB.2016 14:06:02

Date: 19.FEB.2016 14:08:51

419.9875MHz

421.0125MHz

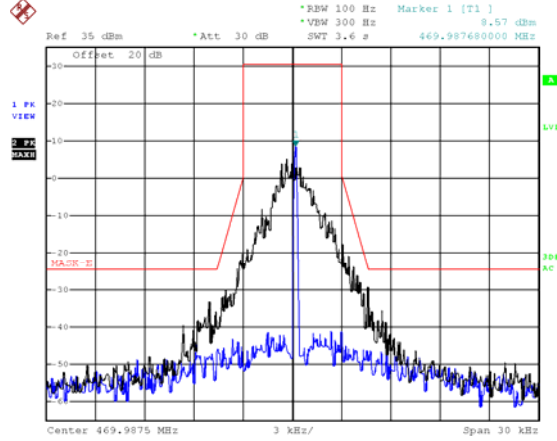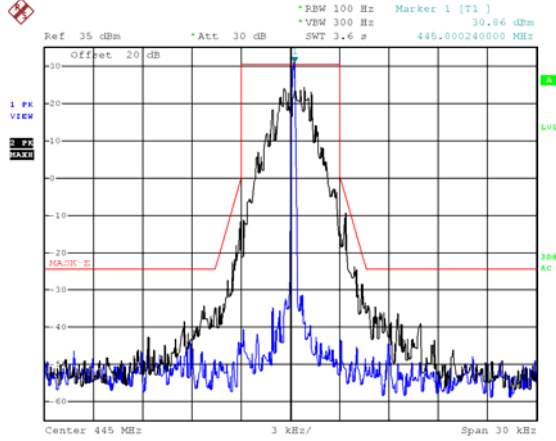


Date: 19.FEB.2016 14:11:13

Date: 19.FEB.2016 14:14:45

445.0000MHz

469.9875MHz

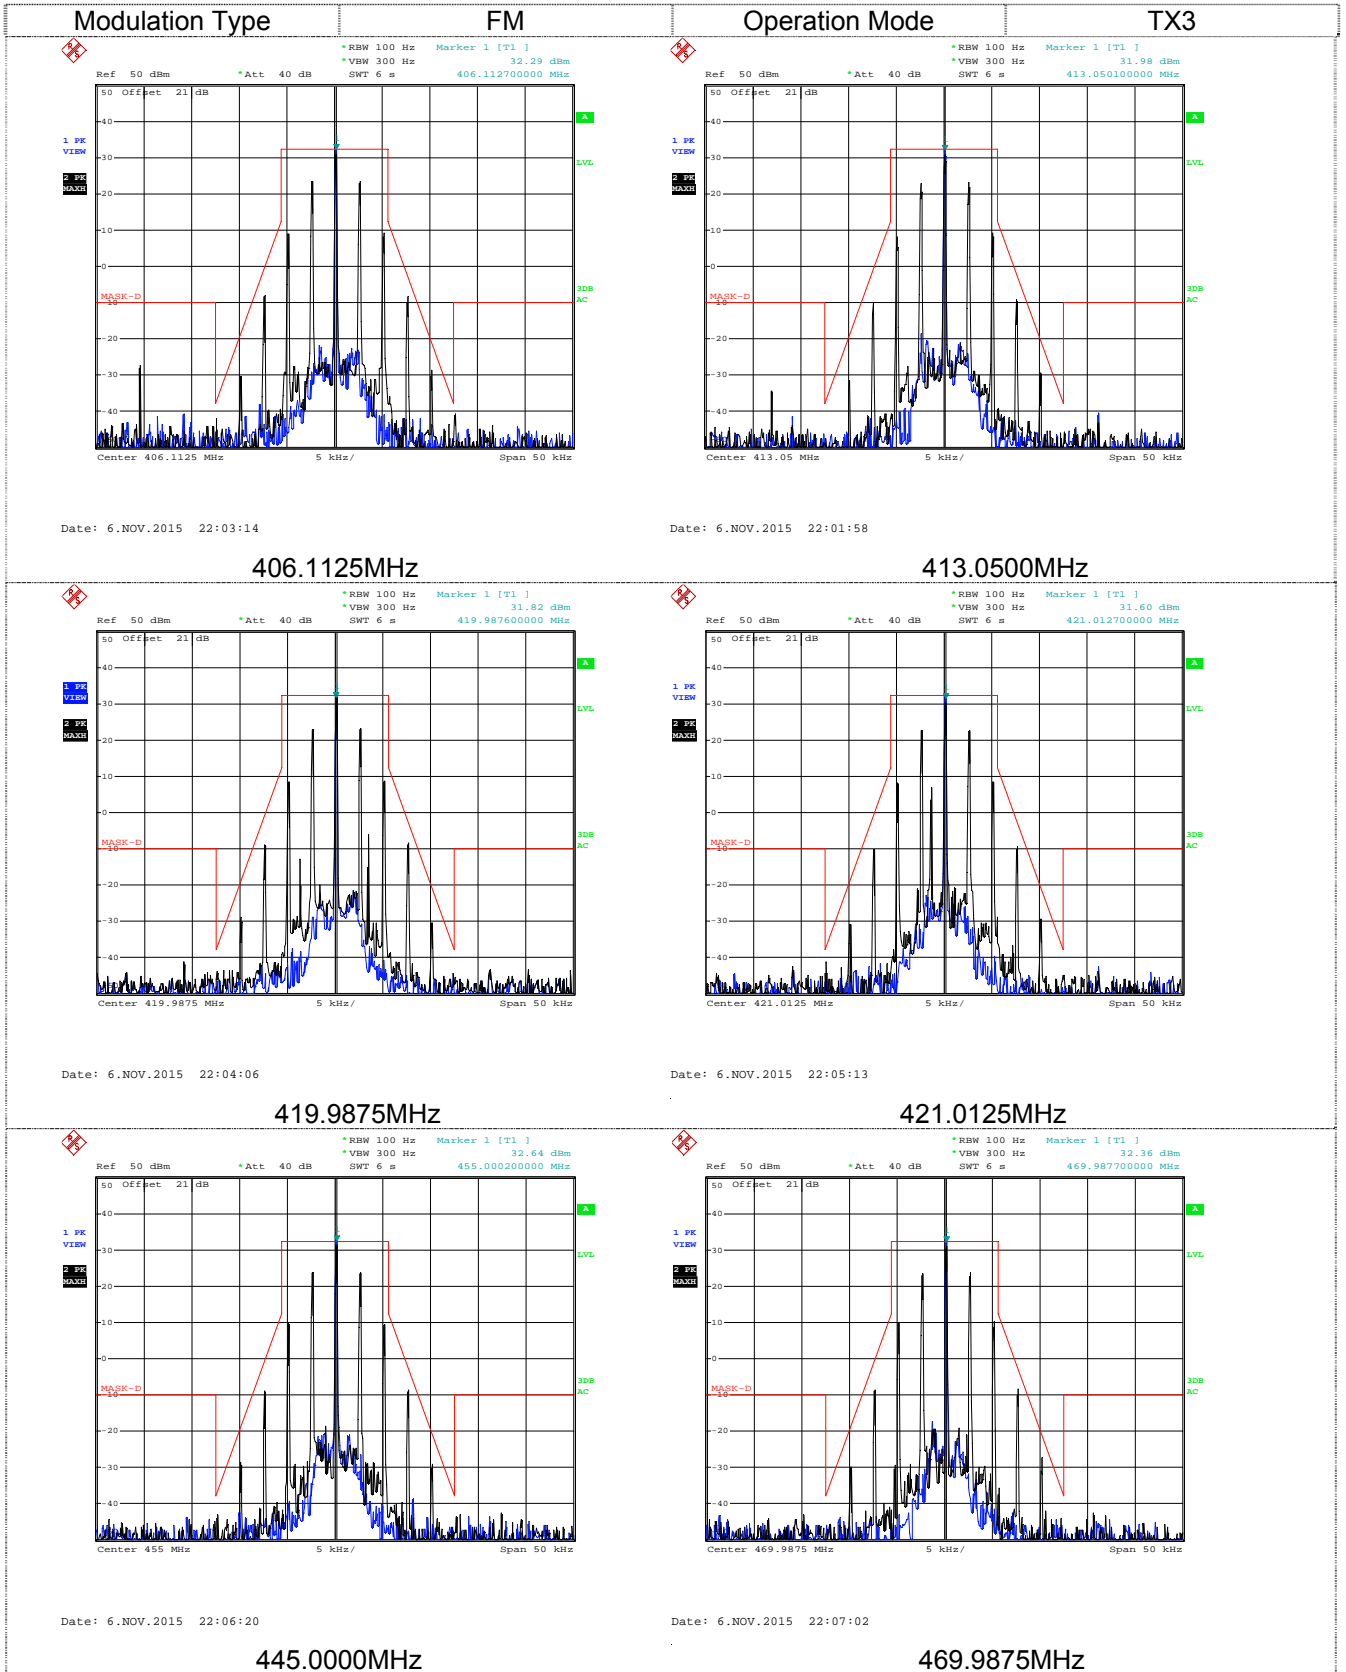

#### 4.4. Modulation Characteristics

Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted.

##### LIMIT

FCC part 2.1047(a)

##### TEST PROCEDURE


##### 1. Modulation Limit:

- 1) Configure the EUT as shown in figure, adjust the audio input for 60% of rated system deviation at 1kHz using this level as a reference (0dB) and vary the input level from -20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- 2) Repeat step 1 with input frequency changing to 300, 1004, 1500 and 2500Hz in sequence.

##### 2. Audio Frequency Response:

- 1) Configure the EUT as shown in figure .
- 2) Adjust the audio input for 20% of rated system deviation at 1kHz using this level as a reference.
- 3) Vary the Audio frequency from 300Hz to 3 kHz and record the frequency deviation.
- 4) Audio Frequency Response =  $20\log_{10} (V_{\text{FREQ}}/V_{\text{REF}})$ .

##### TEST CONFIGURATION

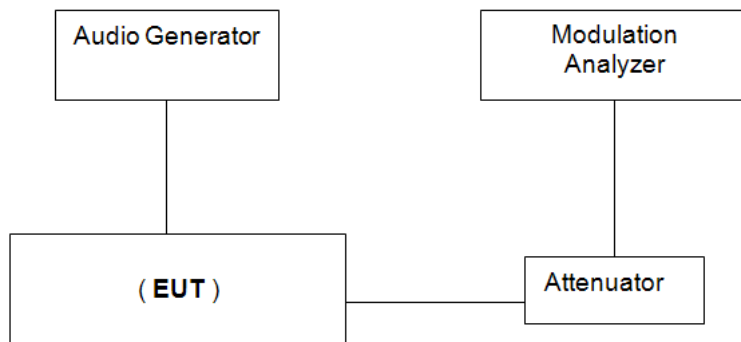

##### TEST MODE:

Please reference to the section 2.4

##### TEST RESULTS

Passed       Not Applicable

Remark:

We tested all channel.recorded worst case at 445MHz.

*Please refer to the below test data:*

**a).Modulation Limit:**

TX3: 445MHz						
Modulation Level (dB)	Peak Freq. Deviation At 300Hz (kHz)	Peak Freq. Deviation At 1004Hz (kHz)	Peak Freq. Deviation At 1500Hz (kHz)	Peak Freq. Deviation At 2500 Hz (kHz)	Limit (kHz)	Result
-20	0.22	0.31	0.44	0.54	2.5	Pass
-15	0.26	0.43	0.61	0.76		
-10	0.31	0.65	0.97	1.21		
-5	0.42	0.99	1.52	2.00		
0	0.62	1.64	2.25	2.27		
5	0.94	2.19	2.24	2.26		
10	1.44	2.20	2.25	2.27		
15	1.77	2.19	2.25	2.28		
20	1.76	2.20	2.25	2.26		


Test plot as follows:



**b). Audio Frequency Response:**

TX3:445MHz			
Frequency (Hz )	Audio Frequency Response (dB)	Frequency (Hz )	Audio Frequency Response (dB)
300	3.77	2000	-6.48
400	6.38	2100	-6.97
500	5.51	2200	-7.39
600	4.38	2300	-7.86
700	3.16	2400	-8.26
800	1.94	2500	-8.61
900	0.91	2600	-8.93
1000	0	2700	-9.27
1200	-1.66	2800	-9.62
1400	-2.95	2900	-9.91
1600	-4.22	3000	-10.24
1800	-5.41		

Test plot as follows:

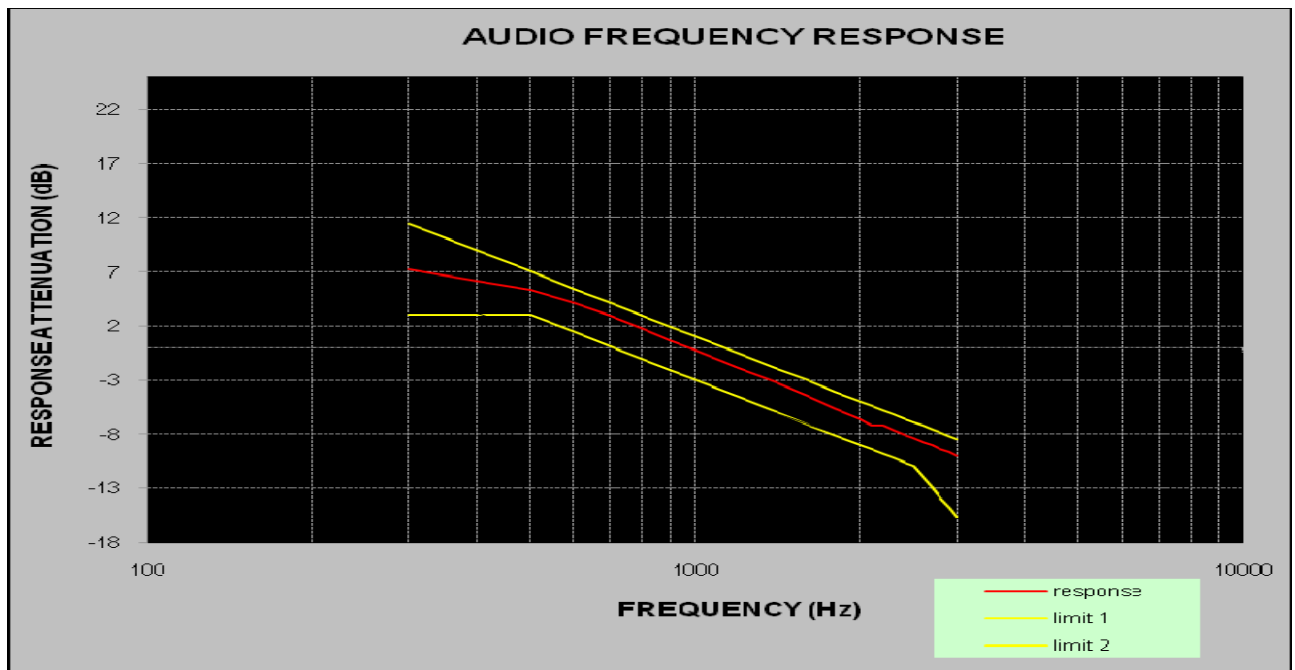

**Note:**The Audio Frequency Response is identical for 12.5 kHz channel separation



### 4.5. Frequency Stability Test

**LIMIT**

**FCC part 90.213**


Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	1 2 3 100	100	200
25-50	20	20	50
72-76	5		50
150-174	5 115	65	4 650
216-220	1.0		1.0
220-222.12	0.1	1.5	1.5
421-512	7 11 142.5	85	85
806-809	141.0	1.5	1.5
809-824	141.5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	140.1	1.5	1.5
902-928	2.5	2.5	2.5
902-928.13	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	9300	300	300
Above 2450.10			

<sup>8</sup>In the 421-512 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.

**TEST PROCEDURE**

1. According to FCC Part 2 Section 2.1055 (a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to +50°C centigrade.
2. According to FCC Part 2 Section 2.1055 (d) (2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.
3. Vary primary supply voltage from 85 to 115 percent of the nominal value.
4. The EUT was set in the climate chamber and connected to an external DC power supply. The RF output was directly connected to Spectrum Analyzer. The coupling loss of the additional cables was recorded and taken in account for all the measurements. After temperature stabilization (approx. 20 min for each stage), the frequency for the lower, the middle and the highest frequency range was recorded. For Frequency stability Vs. Voltage the EUT was connected to a DC power supply and the voltage was adjusted in the required ranges. The result was recorded.

**TEST CONFIGURATION**

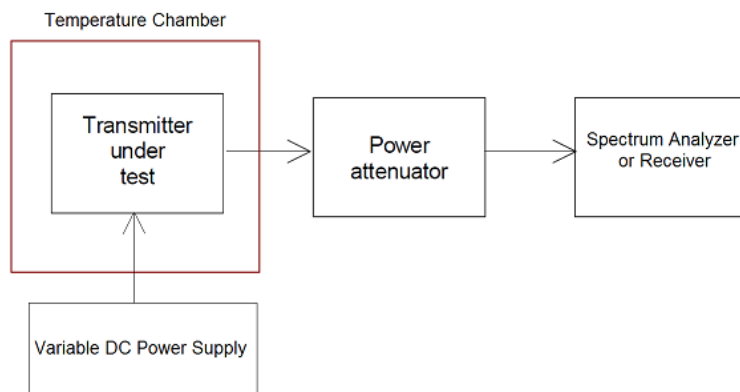

**TEST MODE:**

Please reference to the section 2.4

**TEST RESULTS** **Passed**       **Not Applicable***Please refer to the below test data:*

TX1									
Test conditions		Frequency error (ppm)						Limit (ppm)	Result
Voltage (V)	Temp (°C)	406.1125 MHz	413.05 MHz	419.9875 MHz	421.0125 MHz	445 MHz	469.9875 MHz		
3.7	-30	0.29	0.25	0.31	0.20	0.27	0.29	±2.5	Pass
	-20	0.32	0.24	0.31	0.19	0.26	0.30		
	-10	0.31	0.24	0.30	0.20	0.26	0.29		
	0	0.31	0.24	0.31	0.19	0.26	0.30		
	10	0.30	0.24	0.30	0.20	0.25	0.30		
	20	0.32	0.26	0.31	0.21	0.27	0.31		
	30	0.32	0.26	0.32	0.21	0.27	0.31		
	40	0.35	0.28	0.33	0.22	0.30	0.31		
	50	0.37	0.30	0.33	0.23	0.30	0.34		
3.145 (85% Rated)	20	0.29	0.24	0.30	0.19	0.27	0.30		
4.255 (115% Rated)	20	0.33	0.28	0.34	0.23	0.29	0.34		

TX2									
Test conditions		Frequency error (ppm)						Limit (ppm)	Result
Voltage(V)	Temp (°C)	406.1125 MHz	413.05 MHz	419.9875 MHz	421.0125 MHz	445 MHz	469.9875 MHz		
3.7	-30	0.39	0.43	0.24	0.10	0.15	0.17	±1.0	Pass
	-20	0.36	0.42	0.24	0.11	0.15	0.17		
	-10	0.36	0.44	0.23	0.11	0.16	0.19		
	0	0.36	0.45	0.23	0.10	0.16	0.17		
	10	0.37	0.44	0.24	0.11	0.15	0.18		
	20	0.39	0.45	0.25	0.11	0.16	0.19		
	30	0.41	0.45	0.27	0.12	0.17	0.20		
	40	0.43	0.48	0.28	0.12	0.17	0.20		
	50	0.44	0.52	0.28	0.13	0.18	0.21		
3.145 (85% Rated)	20	0.36	0.44	0.23	0.10	0.16	0.17		
4.255 (115% Rated)	20	0.41	0.47	0.26	0.11	0.18	0.19		

TX3									
Test conditions		Frequency error (ppm)						Limit (ppm)	Result
Voltage(V)	Temp (°C)	406.1125 MHz	413.05 MHz	419.9875 MHz	421.0125 MHz	445 MHz	469.9875 MHz		
3.7	-30	0.24	0.36	0.31	0.35	0.18	0.20	±2.5	Pass
	-20	0.23	0.36	0.30	0.35	0.18	0.21		
	-10	0.23	0.36	0.29	0.36	0.19	0.21		
	0	0.24	0.37	0.29	0.34	0.19	0.20		
	10	0.24	0.35	0.31	0.37	0.19	0.21		
	20	0.25	0.38	0.31	0.37	0.19	0.21		
	30	0.25	0.39	0.34	0.39	0.20	0.22		
	40	0.27	0.40	0.36	0.39	0.21	0.23		
	50	0.28	0.41	0.40	0.42	0.22	0.25		
3.145 (85% Rated)	20	0.23	0.37	0.31	0.36	0.18	0.21		
4.255 (115% Rated)	20	0.25	0.38	0.32	0.38	0.20	0.22		

### 4.6. Transmitter Frequency Behaviour

Transient frequency behavior is a measure of the difference, as a function in time, of the actual transmitter frequency to the assigned transmitter frequency when the transmitted RF output power is switched on or off.

#### LIMIT

#### FCC part 90.214


Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals <sup>1 2</sup>	Maximum frequency difference <sup>3</sup>	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t <sub>1</sub> <sup>4</sup>	±25.0 kHz	5.0 ms	10.0 ms
t <sub>2</sub>	±12.5 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup>	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t <sub>1</sub> <sup>4</sup>	±12.5 kHz	5.0 ms	10.0 ms
t <sub>2</sub>	±6.25 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup>	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t <sub>1</sub> <sup>4</sup>	±6.25 kHz	5.0 ms	10.0 ms
t <sub>2</sub>	±3.125 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup>	±6.25 kHz	5.0 ms	10.0 ms

Note:

1. On is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.
  - 1) t<sub>1</sub> is the time period immediately following t<sub>on</sub>.
  - 2) t<sub>2</sub> is the time period immediately following t<sub>1</sub>.
  - 3) t<sub>3</sub> is the time period from the instant when the transmitter is turned off until t<sub>off</sub>.
  - 4) t<sub>off</sub> is the instant when the 1 kHz test signal starts to rise.
2. During the time from the end of t<sub>2</sub> to the beginning of t<sub>3</sub>, the frequency difference must not exceed the limits specified in § 90.213.
3. Difference between the actual transmitter frequency and the assigned transmitter frequency.
4. If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

#### TEST CONFIGURATION

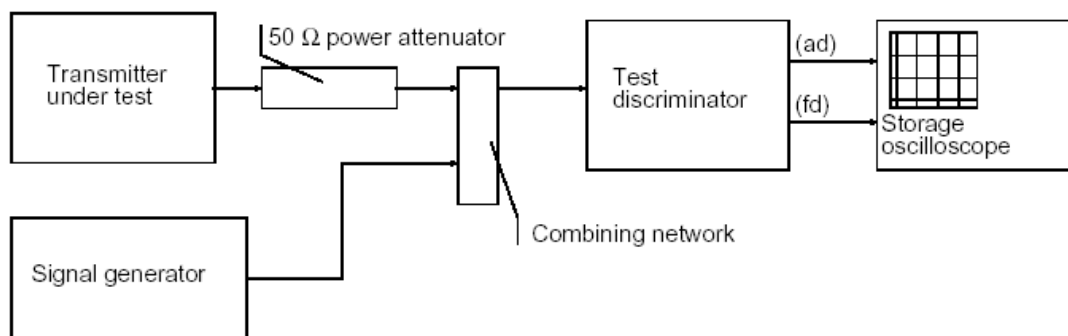

**TEST PROCEDURE**

According to TIA/EIA-603 2.2.19 requirement.As for the product different from PTT,we use test steps as follows:

1. Connect DUT into Test discriminator and Storage Oscilloscope and keep DUT stats ON;
2. Input 1kHz signal into DUT;
3. Set the modulation domain analyzer to trigger on the rising edge of the waveform in order to capture a single-shot turn-on of the transmitter signals;
4. Keep DUT in OFF state and Key the PTT;
5. Observe the stored oscilloscope of modulation domain analyzer.The signal trace shall be maintained within the allowable limits during the periods  $t_1$  and  $t_2$ ,and shall also remain within limits following  $t_2$ ;
6. Adjust the modulation domain anzlyzer to trigger on the falling edge of the transmitter waveform in order to capture a single-shot turn-off transmitter of the transmitter signal.
7. Keep the digital portable radio in ON state and Unkey the PTT;
8. Observe the stored oscilloscope of modulation domain analyzer.The signal trace shall be maintained within the allowable limits during the period  $t_3$ .

**TEST MODE:**

Please reference to the section 2.4

**TEST RESULTS**


**Passed**       **Not Applicable**

Remark:


We tested all channel.recorded worst case at 445MHz.

Please refer to the following plots:

Modulation Type: FM(TX3)  
Transmitter Frequency Behaviour @ 12.5kHz Channel Separation-----Off – On

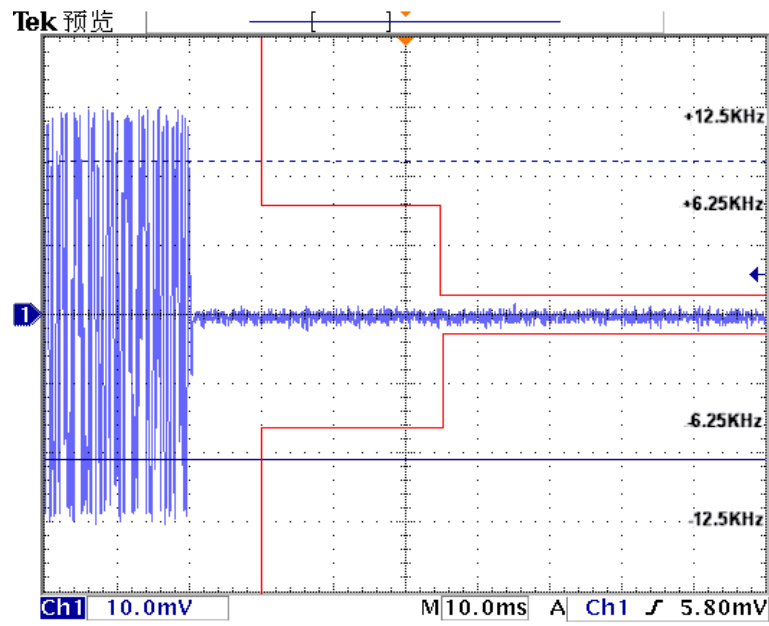

Transmitter Frequency Behaviour @ 12.5kHz Channel Separation-----On – Off

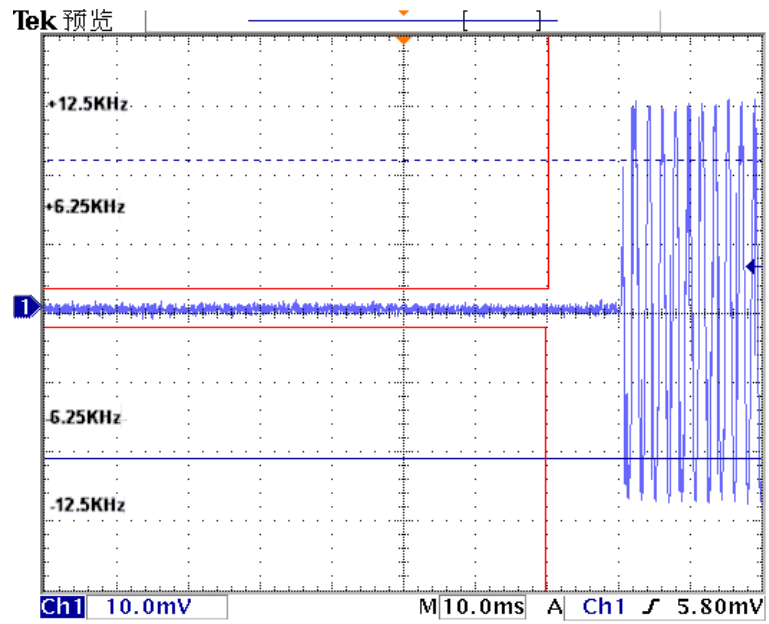

## 4.7. Transmitter Radiated Spurious Emission

Radiated spurious emissions are emissions from the equipment when transmitting into a nonradiating load on a frequency or frequencies that are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

### LIMIT

Modulation type	Bandwidth (KHz)	Limit (dBm)	Note
4FSK	12.5	-20	1
	6.25	-25	1
FM	12.5	-20	2

### Note:

#### 1. Modulation Type: 4FSK

12.5 kHz Bandwidth only:

On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz at least:  $50 + 10 \log (P_{\text{watts}}) = 50 + 10 \log (0.49) = 46.9\text{dB}$   
In general, the worse case attenuation requirement shown above was applied.

Calculation: Limit (dBm) = EL - 50 - 10log<sub>10</sub> (TP)

EL is the emission level of the Output Power expressed in dBm,

In this application, the EL is 30.0 dBm.

Limit (dBm) = 30.0 - 50 - 10log<sub>10</sub> (0.49) = -20dBm

6.25 kHz Bandwidth only:

On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 6.25 kHz at least:

$55 + 10 \log (P_{\text{watts}}) = 55 + 10 \log (0.48) = 51.8\text{dB}$

Note: In general, the worse case attenuation requirement shown above was applied.

Calculation: Limit (dBm) = EL - 55 - 10log<sub>10</sub> (TP)

EL is the emission level of the Output Power expressed in dBm,

In this application, the EL is 30.0 dBm.

Limit (dBm) = 30.0 - 55 - 10log<sub>10</sub> (0.48) = -25dBm

#### 2. Modulation Type: FM

12.5 kHz bandwidth only:

On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz at least:  $50 + 10 \log (P_{\text{watts}}) = 50 + 10 \log (0.48) = 51.8\text{dB}$

Note: In general, the worse case attenuation requirement shown above was applied.

Calculation: Limit (dBm) = EL - 50 - 10log<sub>10</sub> (TP)


EL is the emission level of the Output Power expressed in dBm,

In this application, the EL is 30.0dBm.


Limit (dBm) = 30.0 - 50 - 10log<sub>10</sub> (0.48) = -20 dBm

**TEST CONFIGURATION**

Below 1GHz:

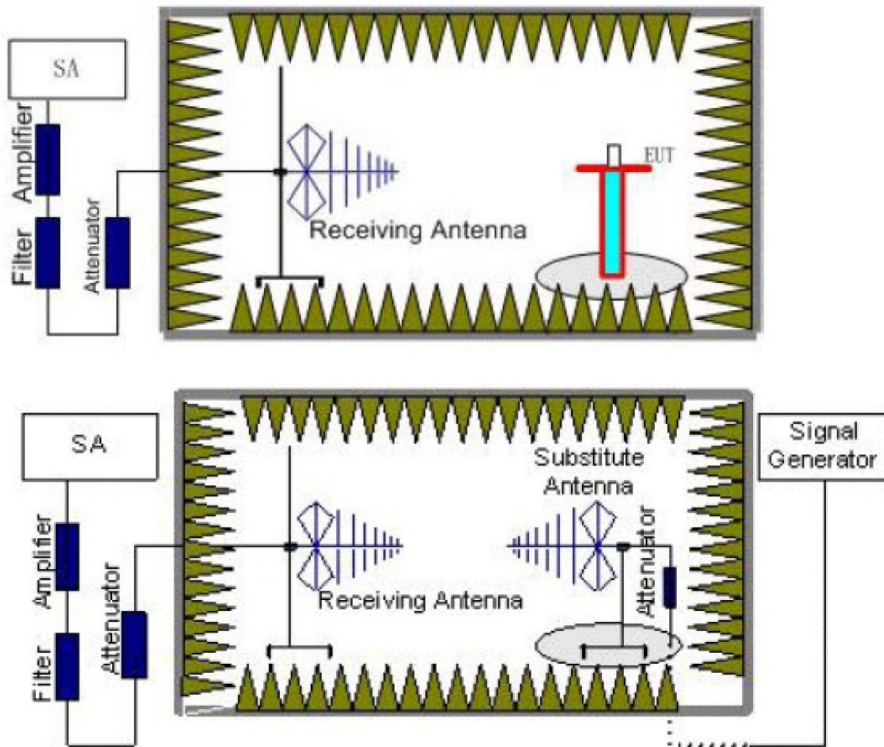

Above 1GHz:

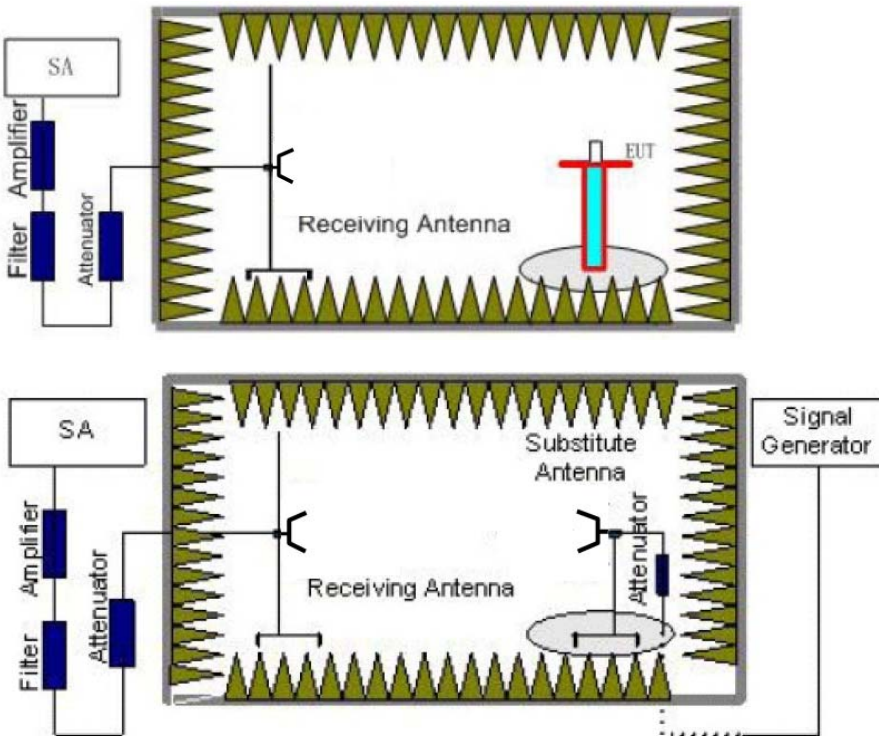



**TEST PROCEDURE**

8. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.0 m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in six channels were measured with peak detector.
9. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
10. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as ( $P_r$ ).
11. The EUT shall be replaced by a substitution antenna. In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
12. An amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test. The measurement results are obtained as described below:  

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$
 We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:  

$$\text{Power(EIRP)} = P_{Mea} - P_{cl} - G_a$$
13. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
14. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

**TEST MODE:**

Please reference to the section 2.4

**TEST RESULTS**

Passed       Not Applicable

Note:

1. The measurement frequency range from 30 MHz to 5 GHz.
2. Absolute Level=SG Level-Cable loss+Antenna Gain, Margin=Limit-Absolute Level

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G.Level (dBm)	Antenna Gain (dBd)	Cable Loss (dB)			
TX1:406.1125 MHz								
812.225	H	60.27	-37.39	5.12	3.34	-35.61	-20	15.61
812.225	V	58.72	-38.15	5.12	3.34	-36.37	-20	16.37
1218.338	H	55.46	-42.91	5.31	4.16	-41.76	-20	21.76
1218.338	V	57.32	-42.42	5.31	4.16	-41.27	-20	21.27
1624.45	H	56.34	-45.28	7.29	5.51	-43.5	-20	23.50
1624.45	V	54.58	-47.56	7.29	5.51	-45.78	-20	25.78
TX1:413.05 MHz								
826.1	H	55.22	-41.19	5.13	3.66	-39.72	-20	19.72
826.1	V	55.54	-42.28	5.13	3.66	-40.81	-20	20.81
1239.15	H	60.89	-39.73	5.32	4.21	-38.62	-20	18.62
1239.15	V	57.12	-44.54	5.32	4.21	-43.43	-20	23.43
1652.2	H	58.1	-43.37	7.31	5.68	-41.74	-20	21.74
1652.2	V	58.69	-43.30	7.31	5.68	-41.67	-20	21.67
TX1:419.9875 MHz								
839.975	H	60.72	-36.13	5.06	3.44	-34.51	-20	14.51
839.975	V	60.89	-37.63	5.06	3.44	-36.01	-20	16.01
1259.963	H	55.35	-46.01	5.32	5.43	-46.12	-20	26.12
1259.963	V	58.31	-42.55	5.32	5.43	-42.66	-20	22.66
1679.95	H	55.69	-46.00	7.32	5.72	-44.4	-20	24.40
1679.95	V	54.16	-48.53	7.32	5.72	-46.93	-20	26.93
TX1:421.0125 MHz								
842.025	H	56.55	-40.96	5.05	3.44	-39.35	-20	19.35
842.025	V	58.54	-38.27	5.05	3.44	-36.66	-20	16.66
1263.038	H	56.79	-43.10	5.32	5.57	-43.35	-20	23.35
1263.038	V	59.96	-40.67	5.32	5.57	-40.92	-20	20.92
1684.05	H	60.83	-40.82	7.31	5.74	-39.25	-20	19.25
1684.05	V	59.01	-42.83	7.31	5.74	-41.26	-20	21.26
TX1:445 MHz								
890	H	57.21	-40.61	4.93	3.62	-39.3	-20	19.30
890	V	5.81	-91.30	4.93	3.66	-90.03	-20	70.03
2350.46	H	60.16	-39.87	7.52	7.51	-39.86	-20	19.86
2350.46	V	54.31	-47.27	7.52	7.51	-47.26	-20	27.26
3186.09	H	56.44	-44.25	9.97	5.78	-40.06	-20	20.06
3186.09	V	60.75	-41.46	9.97	5.78	-37.27	-20	17.27
TX1:469.9875MHz								
939.975	H	58.98	-39.04	5.12	3.02	-36.94	-20	16.94
939.975	V	59.72	-38.90	5.12	3.02	-36.8	-20	16.80
2350.46	H	59.38	-40.54	7.54	7.52	-40.52	-20	20.52
2350.46	V	57.43	-42.93	7.54	7.52	-42.91	-20	22.91
3290.32	H	55.86	-45.09	9.35	7.13	-42.87	-20	22.87
3290.32	V	60.47	-41.40	9.35	7.13	-39.18	-20	19.18

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G.Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
TX2:406.1125 MHz								
812.225	H	60.48	-37.18	5.12	3.34	-35.4	-25	10.40
812.225	V	59.27	-37.60	5.12	3.34	-35.82	-25	10.82
1218.338	H	57.87	-40.50	5.31	4.16	-39.35	-25	14.35
1218.338	V	60.66	-39.08	5.31	4.16	-37.93	-25	12.93
1624.45	H	55.58	-46.04	7.29	5.51	-44.26	-25	19.26
1624.45	V	56.23	-45.91	7.29	5.51	-44.13	-25	19.13
TX2:413.05 MHz								
826.1	H	58.48	-37.93	5.13	3.66	-36.46	-25	11.46
826.1	V	59.62	-38.20	5.13	3.66	-36.73	-25	11.73
1239.15	H	58.91	-41.71	5.32	4.21	-40.6	-25	15.60
1239.15	V	57.29	-44.37	5.32	4.21	-43.26	-25	18.26
1652.2	H	59.67	-41.80	7.31	5.68	-40.17	-25	15.17
1652.2	V	54.32	-47.67	7.31	5.68	-46.04	-25	21.04
TX2:419.9875 MHz								
839.975	H	56.11	-40.74	5.06	3.44	-39.12	-25	14.12
839.975	V	60.58	-37.94	5.06	3.44	-36.32	-25	11.32
1259.963	H	58.23	-43.13	5.32	5.43	-43.24	-25	18.24
1259.963	V	59.95	-40.91	5.32	5.43	-41.02	-25	16.02
1679.95	H	60.92	-40.77	7.32	5.72	-39.17	-25	14.17
1679.95	V	54.28	-48.41	7.32	5.72	-46.81	-25	21.81
TX2:421.0125 MHz								
842.025	H	58.17	-39.34	5.05	3.44	-37.73	-25	12.73
842.025	V	57.96	-38.85	5.05	3.44	-37.24	-25	12.24
1263.038	H	61.02	-38.87	5.32	5.57	-39.12	-25	14.12
1263.038	V	58.36	-42.27	5.32	5.57	-42.52	-25	17.52
1684.05	H	55.22	-46.43	7.31	5.74	-44.86	-25	19.86
1684.05	V	54.86	-46.98	7.31	5.74	-45.41	-25	20.41
TX2:445 MHz								
890	H	58.08	-39.74	4.93	3.62	-38.43	-25	13.43
890	V	60.36	-36.75	4.93	3.66	-35.48	-25	10.48
2350.46	H	54.77	-45.26	7.52	5.67	-43.41	-25	18.41
2350.46	V	56.62	-44.96	7.52	5.67	-43.11	-25	18.11
3186.09	H	54.38	-46.31	9.97	5.78	-42.12	-25	17.12
3186.09	V	58.17	-44.04	9.97	5.78	-39.85	-25	14.85
TX2:469.9875MHz								
939.975	H	60.8	-37.22	5.12	3.02	-35.12	-25	10.12
939.975	V	57.91	-40.71	5.12	3.02	-38.61	-25	13.61
2350.46	H	54.14	-45.78	7.54	6.32	-44.56	-25	19.56
2350.46	V	60.38	-39.98	7.54	6.32	-38.76	-25	13.76
3290.32	H	57.62	-43.33	9.35	7.13	-41.11	-25	16.11
3290.32	V	54.86	-47.01	9.35	7.13	-44.79	-25	19.79

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G.Level (dBm)	Antenna Gain (dBd)	Cable Loss (dB)			
TX3:406.1125 MHz								
812.225	H	61.34	-36.32	5.12	3.34	-34.54	-20	14.54
812.225	V	60.56	-36.31	5.12	3.34	-34.53	-20	14.53
1218.338	H	53.27	-45.10	5.31	4.16	-43.95	-20	23.95
1218.338	V	54.86	-44.88	5.31	4.16	-43.73	-20	23.73
1624.45	H	57.26	-44.36	7.29	5.51	-42.58	-20	22.58
1624.45	V	56.37	-45.77	7.29	5.51	-43.99	-20	23.99
TX3:413.05 MHz								
826.1	H	59.43	-36.98	5.13	3.66	-35.51	-20	15.51
826.1	V	60.03	-37.79	5.13	3.66	-36.32	-20	16.32
1239.15	H	59.24	-41.38	5.32	4.21	-40.27	-20	20.27
1239.15	V	57.9	-43.76	5.32	4.21	-42.65	-20	22.65
1652.2	H	56.41	-45.06	7.31	5.68	-43.43	-20	23.43
1652.2	V	56.58	-45.41	7.31	5.68	-43.78	-20	23.78
TX3:419.9875 MHz								
839.975	H	59.09	-37.76	5.06	3.44	-36.14	-20	16.14
839.975	V	60.35	-38.17	5.06	3.44	-36.55	-20	16.55
1259.963	H	56.07	-45.29	5.32	5.43	-45.4	-20	25.40
1259.963	V	57.05	-43.81	5.32	5.43	-43.92	-20	23.92
1679.95	H	59.17	-42.52	7.32	5.72	-40.92	-20	20.92
1679.95	V	58.06	-44.63	7.32	5.72	-43.03	-20	23.03
TX3:421.0125 MHz								
842.025	H	56.44	-41.07	5.05	3.44	-39.46	-20	19.46
842.025	V	60.5	-36.31	5.05	3.44	-34.7	-20	14.7
1263.038	H	54.27	-45.62	5.32	5.57	-45.87	-20	25.87
1263.038	V	57.53	-43.10	5.32	5.57	-43.35	-20	23.35
1684.05	H	60.34	-41.31	7.31	5.74	-39.74	-20	19.74
1684.05	V	57.32	-44.52	7.31	5.74	-42.95	-20	22.95
TX3:445 MHz								
890	H	55.94	-41.88	4.93	3.62	-40.57	-20	20.57
890	V	58.95	-38.16	4.93	3.66	-36.89	-20	16.89
2350.46	H	60.78	-39.25	7.52	7.51	-39.24	-20	19.24
2350.46	V	58.05	-43.53	7.52	7.51	-43.52	-20	23.52
3186.09	H	59.79	-40.90	9.97	5.78	-36.71	-20	16.71
3186.09	V	59.84	-42.37	9.97	5.78	-38.18	-20	18.18
TX3:469.9875MHz								
939.975	H	56.77	-41.25	5.12	3.02	-39.15	-20	19.15
939.975	V	55.28	-43.34	5.12	3.02	-41.24	-20	21.24
2350.46	H	57.37	-42.55	7.54	7.52	-42.53	-20	22.53
2350.46	V	55.06	-45.30	7.54	7.52	-45.28	-20	25.28
3290.32	H	54.26	-46.69	9.35	7.13	-44.47	-20	24.47
3290.32	V	56.82	-45.05	9.35	7.13	-42.83	-20	22.83

#### 4.8. Conducted Emissions Test


The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm / 50 u Henry as specified by section 5.1 of ANSI C63.4 - 2009. Cables and peripherals were moved to find the maximum emission levels for each frequency.

##### Limit

##### FCC part 15.107(a)

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

##### TEST CONFIGURATION

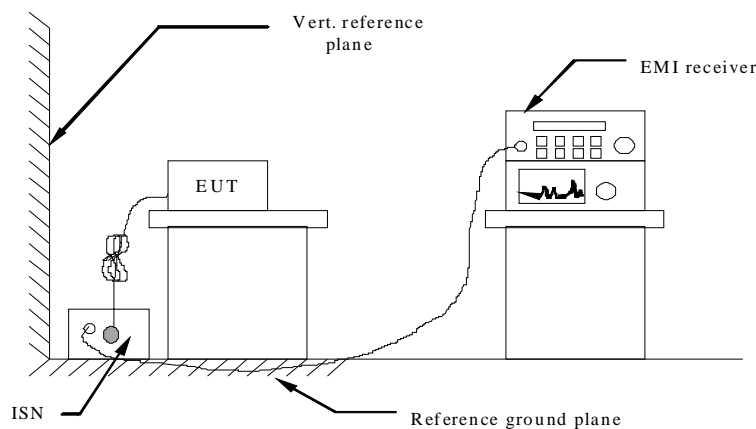

##### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4-2009.
- 2 Support equipment, if needed, was placed as per ANSI C63.4-2009.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4-2009.
- 4 If a EUT received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

**TEST MODE:**


Please reference to the section 2.4

**TEST RESULTS**


**Passed**       **Not Applicable**

Note:

We tested RX1 to RX3,recorded worst case at RX1.

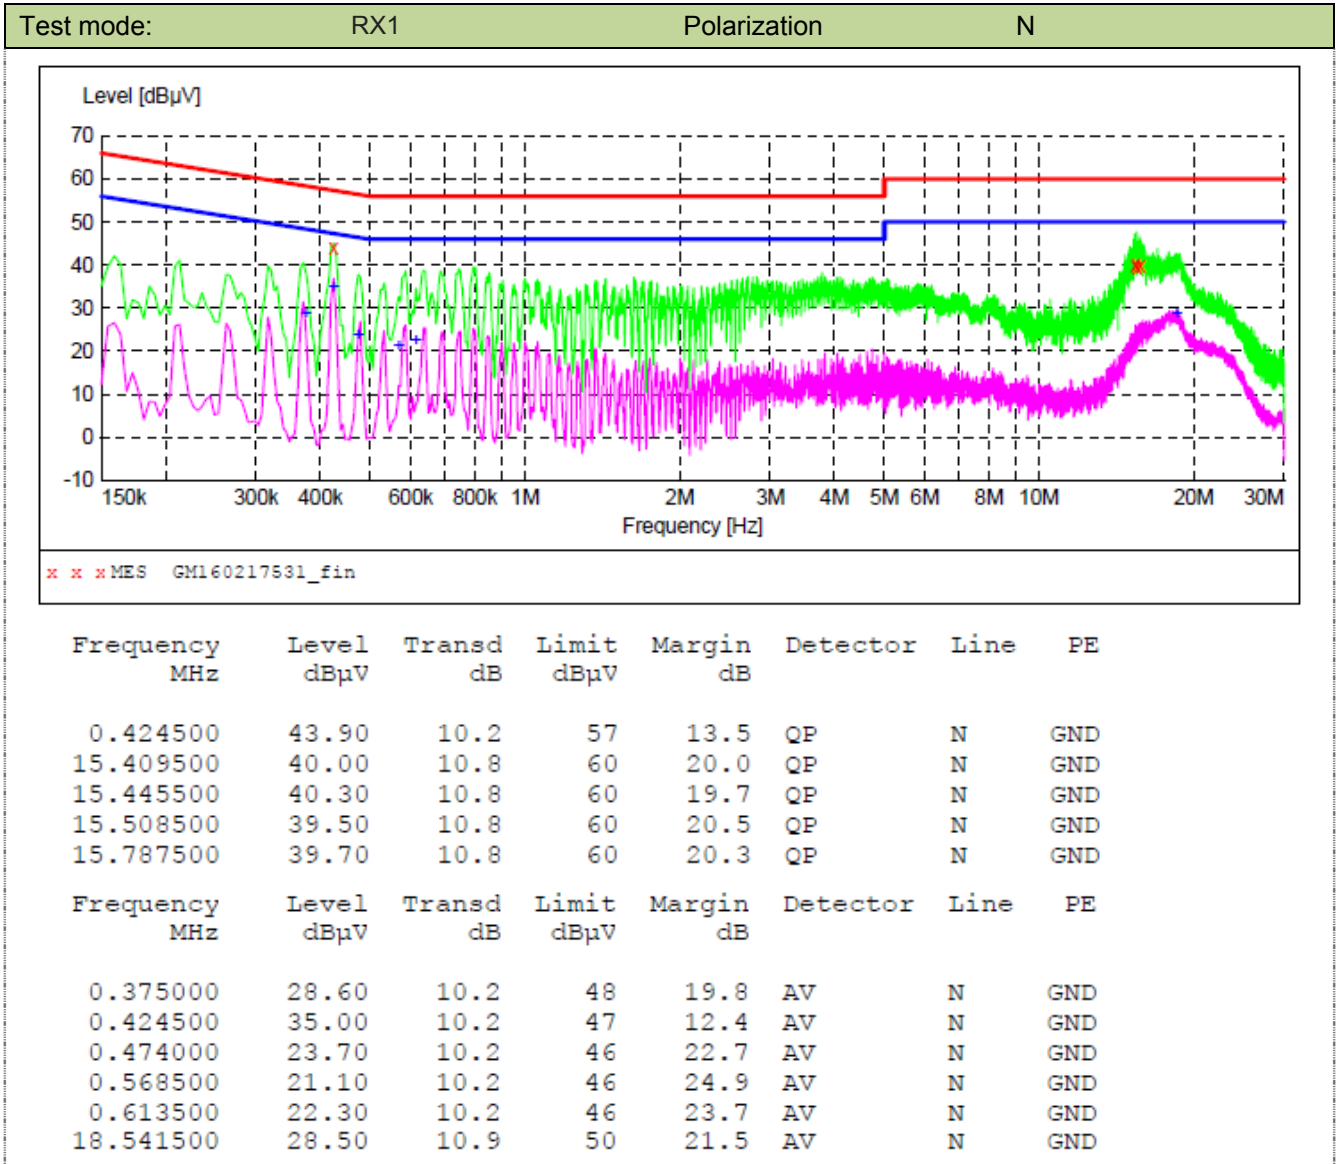

Test mode: RX1 Polarization L1

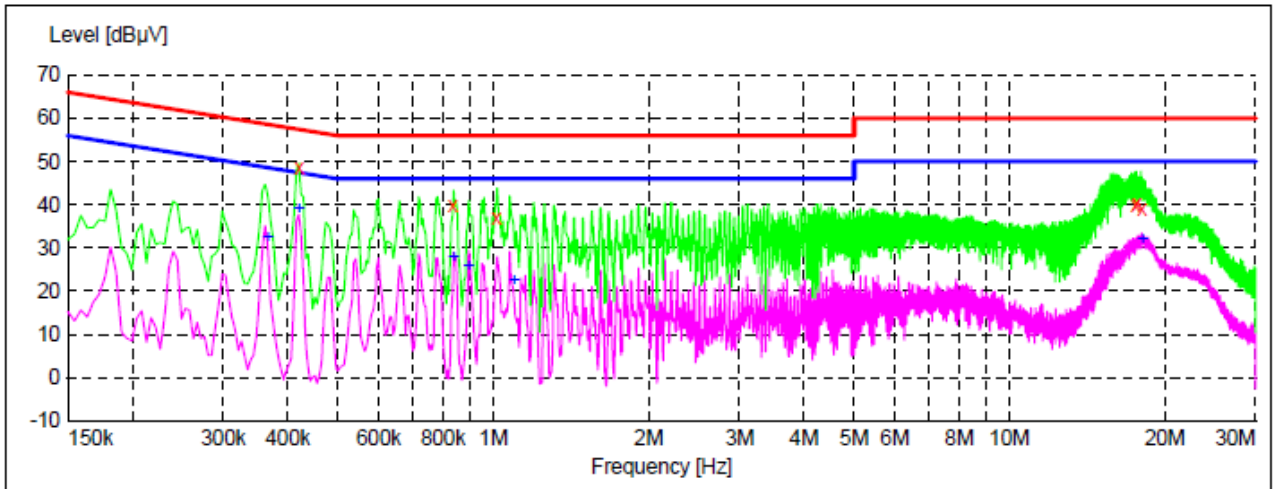

x x x MES GM160217530\_fin

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.420000	48.70	10.2	57	8.7	QP	L1	GND
0.834000	39.80	10.2	56	16.2	QP	L1	GND
1.014000	36.90	10.2	56	19.1	QP	L1	GND
17.538000	39.70	10.9	60	20.3	QP	L1	GND
17.623500	40.30	10.9	60	19.7	QP	L1	GND
18.055500	39.20	10.9	60	20.8	QP	L1	GND
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.366000	32.50	10.2	49	16.1	AV	L1	GND
0.420000	39.00	10.2	47	8.4	AV	L1	GND
0.838500	28.00	10.2	46	18.0	AV	L1	GND
0.897000	25.80	10.2	46	20.2	AV	L1	GND
1.095000	22.50	10.2	46	23.5	AV	L1	GND
18.105000	32.10	10.9	50	17.9	AV	L1	GND

### 4.9. Radiated Emission

#### LIMIT


For unintentional device, according to § 15.109(a) except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500


For intentional device, according to § 15.109(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

#### TEST CONFIGURATION

(A) Radiated Emission Test Set-Up, Frequency below 1000MHz

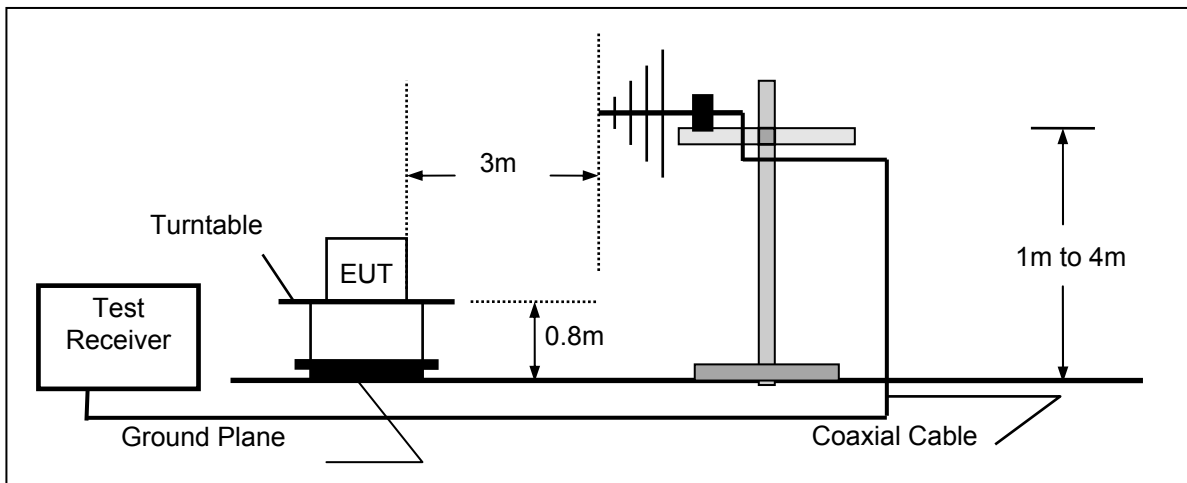

(B) Radiated Emission Test Set-Up, Frequency above 1000MHz

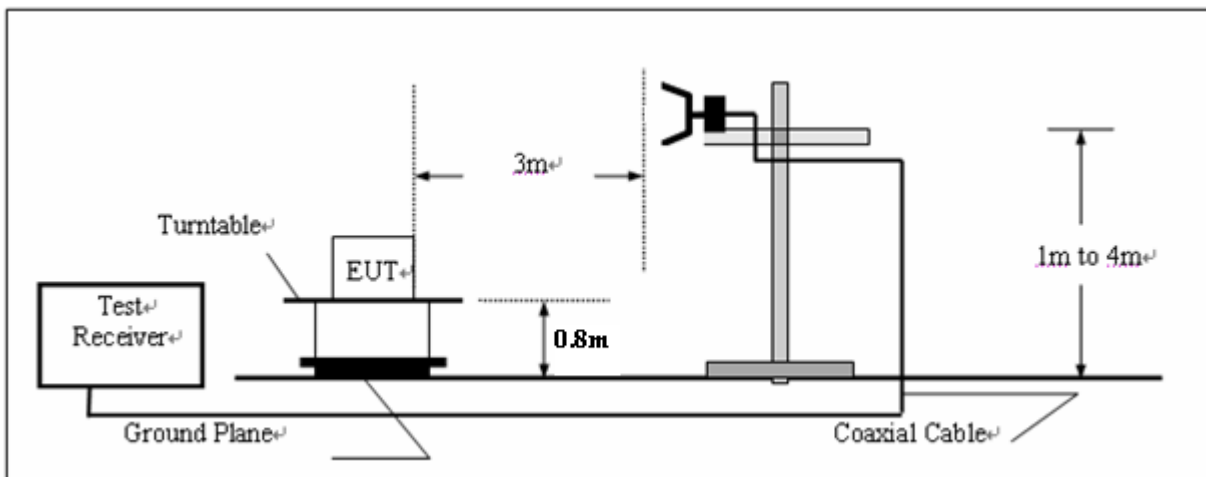



**TEST PROCEDURE**

- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
- 2 Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
- 3 And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4 Repeat above procedures until all frequency measurements have been completed.

**TEST MODE:**

Please reference to the section 2.4

**TEST RESULTS**


**Passed**       **Not Applicable**

Note:

We tested RX1 to RX3, recorded worst case at RX1.


*Please refer to the below test data:*

Test mode:	RX1	Polarity:	Horizontal
------------	-----	-----------	------------

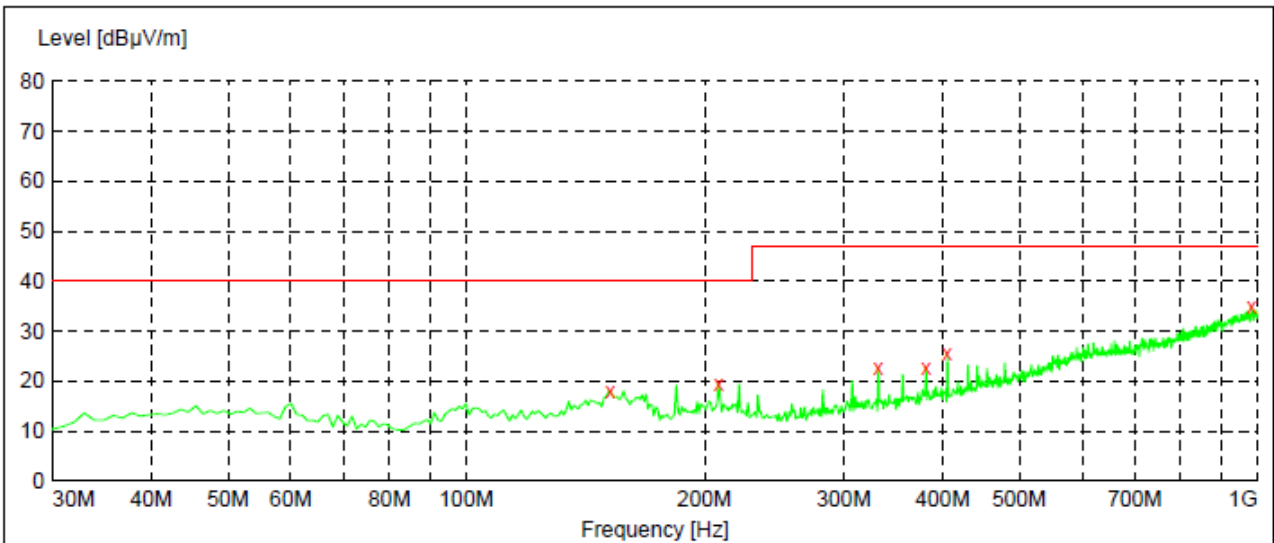


x x x MES GM160217644\_red  
 MES GM160217644\_pre  
 LIM EN 55022B F QP  
 Field Strength QP Limit

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
152.220000	18.10	-17.7	40.0	21.9	QP	300.0	140.00	HORIZONTAL
208.480000	19.50	-13.9	40.0	20.5	QP	100.0	299.00	HORIZONTAL
331.670000	22.70	-12.7	47.0	24.3	QP	100.0	118.00	HORIZONTAL
381.140000	22.80	-11.3	47.0	24.2	QP	100.0	248.00	HORIZONTAL
405.390000	25.50	-10.6	47.0	21.5	QP	100.0	248.00	HORIZONTAL
983.510000	34.90	4.3	47.0	12.1	QP	100.0	98.00	HORIZONTAL

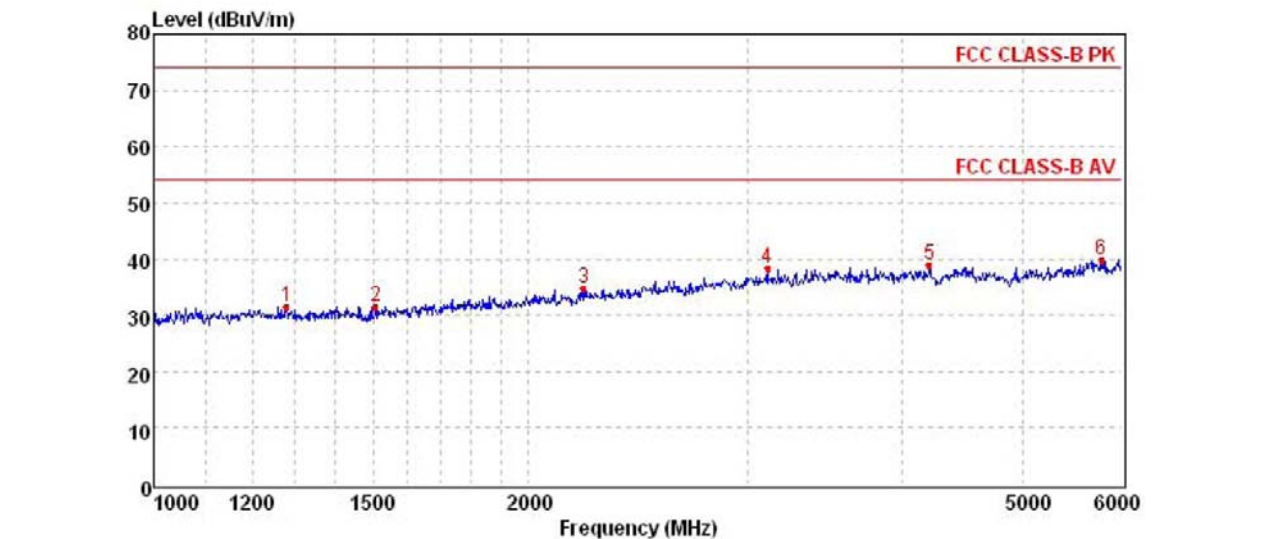


Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1278.22	38.98	24.50	4.71	36.60	31.59	74.00	-42.41	Peak
2	1507.29	38.51	24.73	5.19	36.84	31.59	74.00	-42.41	Peak
3	2215.64	38.77	26.92	6.53	37.44	34.78	74.00	-39.22	Peak
4	3114.21	39.50	28.55	8.33	37.99	38.39	74.00	-35.61	Peak
5	4200.48	38.30	30.09	8.76	38.14	39.01	74.00	-34.99	Peak
6	5778.43	35.35	32.85	9.70	38.05	39.85	74.00	-34.15	Peak

Test mode:	RX1	Polarity:	Vertical
------------	-----	-----------	----------

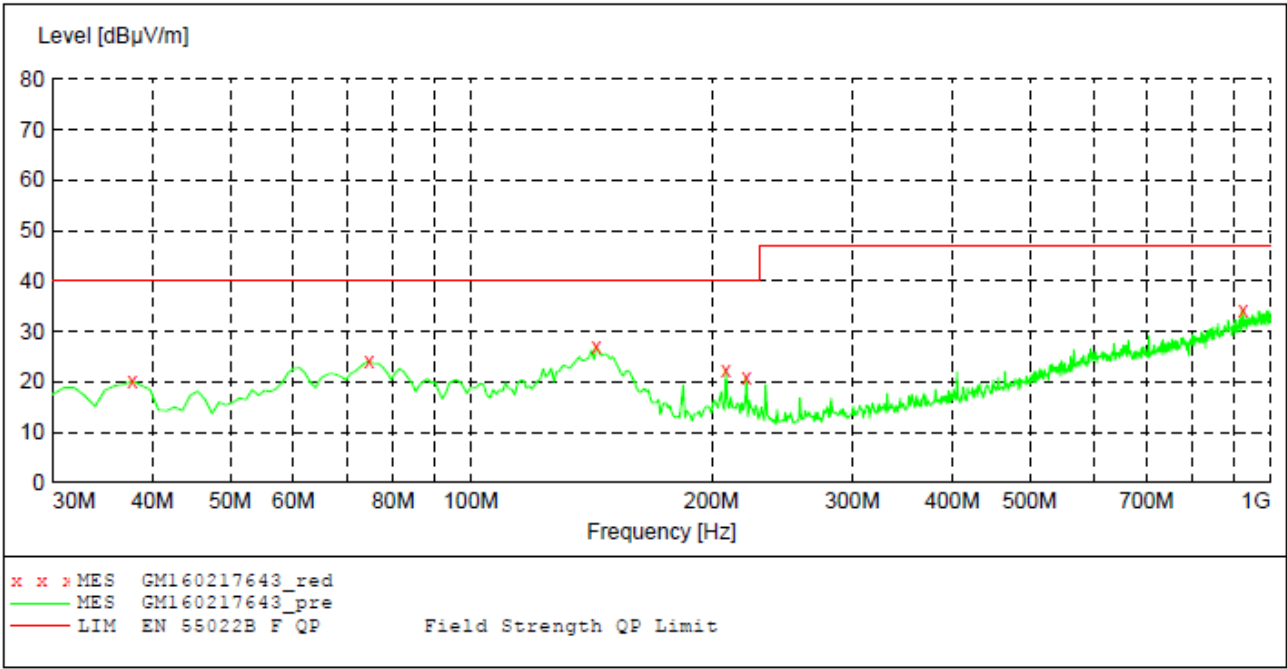

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
37.760000	20.10	-15.6	40.0	19.9	QP	100.0	360.00	VERTICAL
74.620000	24.00	-18.1	40.0	16.0	QP	100.0	197.00	VERTICAL
143.490000	26.80	-18.1	40.0	13.2	QP	100.0	247.00	VERTICAL
208.480000	22.40	-13.9	40.0	17.6	QP	100.0	70.00	VERTICAL
221.090000	20.80	-14.4	40.0	19.2	QP	100.0	197.00	VERTICAL
925.310000	34.20	3.2	47.0	12.8	QP	100.0	263.00	VERTICAL

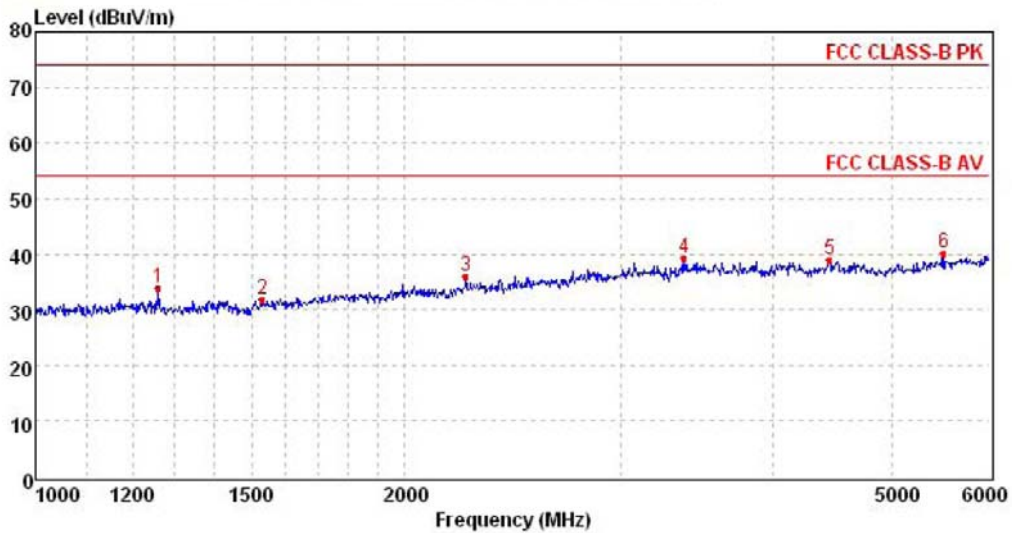

Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1260.03	41.23	24.49	4.67	36.58	33.81	74.00	-40.19	Peak
2	1531.79	38.61	24.81	5.25	36.87	31.80	74.00	-42.20	Peak
3	2243.60	39.73	27.04	6.58	37.46	35.89	74.00	-38.11	Peak
4	3381.76	39.88	28.66	8.67	37.99	39.22	74.00	-34.78	Peak
5	4440.40	37.53	30.76	8.94	38.30	38.93	74.00	-35.07	Peak
6	5505.54	36.38	32.40	9.63	38.26	40.15	74.00	-33.85	Peak

# 5. Test Setup Photos of the EUT

Radiated Emission :

30MHz-1GHz



Above 1GHz



## 6. External and Internal Photos of the EUT

### External photos of the EUT















**Internal photos of the EUT**



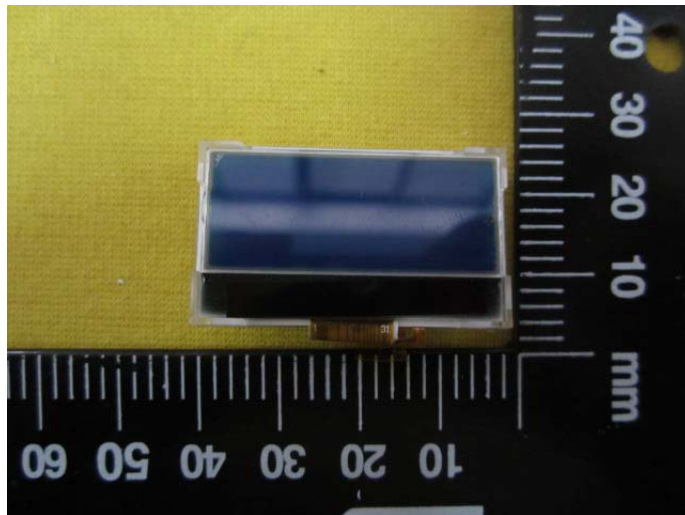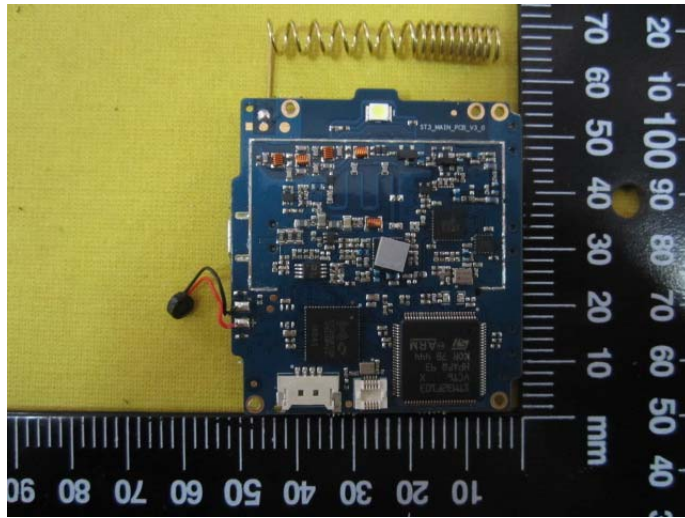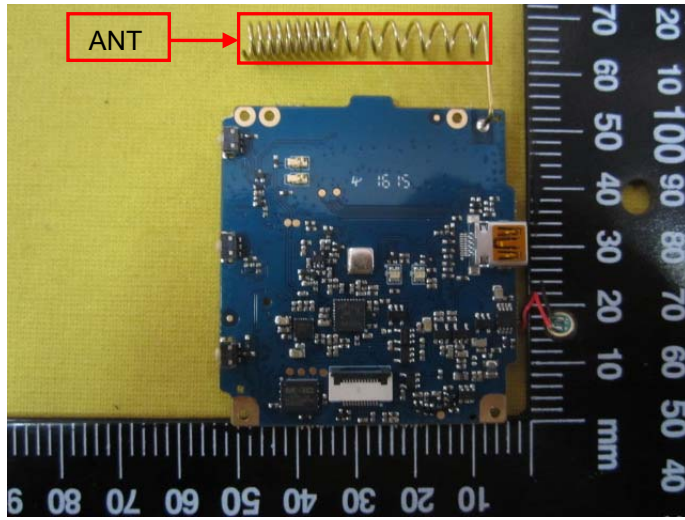

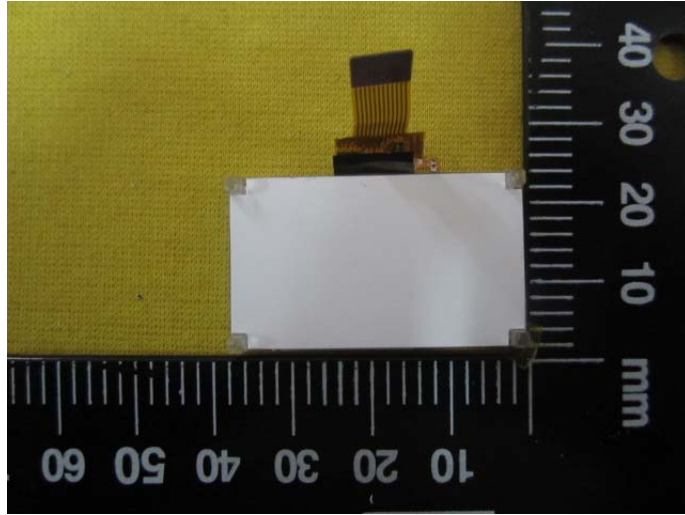

.....End of Report.....