

InterLab[®]
Final Report on
WLAN tranceiver
INARI5-WLAN-1

FCC ID: 2ABVH-INARI51
IC: 11875A-INARI51

Report Reference: MDE_AAVAM_1408_FCCa_rev1
According to:
FCC 47 CFR Ch.1 Part 15 Subpart B, Class B

Date: August 18, 2015

Test Laboratory:

7 layers AG
Borsigstrasse 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7 layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender
Chairman of the Supervisory Board:
Peter Mertel
Vorstand Board:
Dr. H. Ansorge

Registergericht registered in:
Düsseldorf, HRB 44096
USt-IdNr VAT No.:
DE 203159652
TAX No. 147/5869/0385
A Bureau Veritas Group Company

1 Administrative Data

1.1 Project Data

Project Responsible: Dirk Bratsch
Date Of Test Report: 2015/08/18
Date of first test: 2015/01/22
Date of last test: 2015/02/15

1.2 Applicant Data

Company Name: Aava Mobile Oy
Street: Nahkatehtaankatu 2
City: 90130 Oulu
Country: Finland
Contact Person: Mr. Antti Aho
Fax: +3588373811

1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:


7 layers DE

Company Name : 7 layers AG
Street : Borsigstrasse 11
City : 40880 Ratingen
Country : Germany
Contact Person : Mr. Michael Albert
Phone : +49 2102 749 201
Fax : +49 2102 749 444
E Mail : Michael.Albert@7Layers.com

Laboratory Details

<i>Lab ID</i>	<i>Identification</i>	<i>Responsible</i>	<i>Accreditation Info</i>
Lab 1	Conducted Emissions	Mr. Andreas Petz Mr. Wolfgang Richter	DAkKS-Registration no. D-PL-12140-01-01
Lab 2	Radiated Emissions	Mr. Marco Kullik Mr. Robert Machulec	DAkKS-Registration no. D-PL-12140-01-01

1.4 Signature of the Testing Responsible

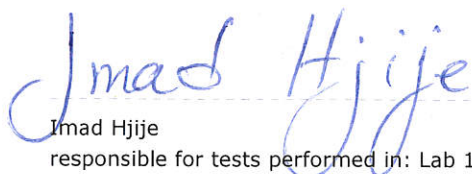

Imad Hjije
responsible for tests performed in: Lab 1, Lab 2

1.5 Signature of the Accreditation Responsible

 [B. RETKA]

Accreditation scope responsible person
responsible for Lab 1, Lab 2

2 Test Object Data

2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

OUT: INARI5-WLAN-1

Type / Model / Family:	WLAN transceiver INARI5-WLAN-1
	FCC ID: 2ABVH-INARI51 IC: 11875A-INARI51
Product Category:	Others
Manufacturer:	
Company Name:	Please see applicant data
Contact Person:	-

Parameter List:

Parameter name	Value
AC Power Supply	120V/60Hz

2.2 Detailed Description of OUT Samples

Sample : aa01

<i>OUT Identifier</i>	INARI5-WLAN-1		
<i>Sample Description</i>	Standard sampel#1		
<i>Serial No.</i>	EB44900055		
<i>HW Status</i>	Preproduction		
<i>SW Status</i>	Android 4.4		
<i>Low Voltage</i>	3.5 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	4.35 V	<i>High Temp.</i>	+55 °C
<i>Nominal Voltage</i>	3.8 V	<i>Normal Temp.</i>	+25 °C

Sample : ab01

<i>OUT Identifier</i>	INARI5-WLAN-1		
<i>Sample Description</i>	SAR Unit #1		
<i>Serial No.</i>	EDB65E0B		
<i>HW Status</i>	Preproduction		
<i>SW Status</i>	Android 4.4		
<i>Low Voltage</i>	3.5 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	4.35 V	<i>High Temp.</i>	+55 °C
<i>Nominal Voltage</i>	3.8 V	<i>Normal Temp.</i>	+25 °C

Sample : ad01

<i>OUT Identifier</i>	INARI5-WLAN-1		
<i>Sample Description</i>	SAR Unit #2		
<i>Serial No.</i>	EDB65F3C		
<i>HW Status</i>	Preproduction		
<i>SW Status</i>	Android 4.4		
<i>Low Voltage</i>	3.5 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	4.35 V	<i>High Temp.</i>	+55 °C
<i>Nominal Voltage</i>	3.8 V	<i>Normal Temp.</i>	+25 °C

2.3 OUT Features

Features for OUT: INARI5-WLAN-1

<i>Designation</i>	<i>Description</i>	<i>Allowed Values</i>	<i>Supported Value(s)</i>
Features for scope: FCC_v2			
AC	The OUT is powered by or connected to AC Mains		
BT	EUT supports Bluetooth data rate of 1 Mbps with GFSK modulation in the band 2400 MHz - 2483.5 MHz		
BTLE	Support of Bluetooth Low Energy		
EDR2	EUT supports Bluetooth using data rate of 2 Mbps with PI/4 DQPSK modulation in the band 2400 MHz - 2483.5 MHz		
EDR3	EUT supports Bluetooth using data rate of 3 Mbps with 8DPSK modulation in the band 2400 MHz - 2483.5 MHz		
Iant	Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment		
TantC	temporary antenna connector, which may be only built-in for testing, designed as an example part of the equipment		
Wa1	EUT supports WLAN in mode a in the band 5150 MHz - 5250 MHz		
Wa2	EUT supports WLAN in mode a in the band 5250 MHz - 5350 MHz		
Wa3	EUT supports WLAN in mode a in the band 5470 MHz - 5725 MHz		
Wa4	EUT supports WLAN in mode a in the band 5725 MHz - 5825 MHz		
Wa5	EUT supports WLAN in mode a in the band 5725 MHz - 5850 MHz		
Wa6	EUT supports WLAN in mode a in the band 5745 MHz - 5805 MHz		
Wa7	EUT supports WLAN in mode a in the band 5180 MHz - 5240 MHz		
Wa8	EUT supports WLAN in mode a in the band 5260 MHz - 5320 MHz		
Wa9	EUT supports WLAN in mode a in the band 5500 MHz - 5600 MHz		
Wa10	EUT supports WLAN in mode a in the band 5650 MHz - 5700 MHz		
Wb	EUT supports WLAN in mode b in the band 2400 MHz - 2483.5 MHz		
Wg	EUT supports WLAN in mode g in the band 2400 MHz - 2483.5 MHz		
Wn	EUT supports WLAN in mode n in the band 5150 MHz - 5850 MHz.		
Wn	EUT supports WLAN in mode n in the band 2400 MHz - 2483.5 MHz		

2.4 Auxiliary Equipment

<i>AE No.</i>	<i>Type Designation</i>	<i>Serial No.</i>	<i>HW Status</i>	<i>SW Status</i>	<i>Description</i>
AE 02	-	-	-	-	Headset
AE 03	-	-	-	-	Temperature Sensor
AE 06	CHERRY RS 6000 USB ON	G 0000273 2P28	-	-	Keyboard
AE 01	Delta Electronics ADP- 10BW C	053W41T00KM	Rev.: 00	-	AC/DC Converter
AE 04	Fujitsu Lifebook Eseries E781	DSCK013817	2012-03	Win7 Prof. Engl.	Laptop
AE 05	Fujitsu Ltd. SED100P2-19.0	07Y17323A	2007.11	-	Laptop Power Supply
AE 08	LG L17MB-P	412WAPLOU560	-	-	TFT Monitor
AE 07	Logitech M-BT58	HC60915A2XC	-	-	Mouse

2.5 Operating Mode(s)

<i>Ref.-No.</i>	<i>Description</i>
01	The product is powered via AC/DC adapter
02	The product is powered via Laptop and has Data transfer with it

2.6 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

<i>Setup No.</i>	<i>List of OUT samples</i>	<i>List of auxiliary equipment</i>	
<i>Sample No.</i>	<i>Sample Description</i>	<i>AE No.</i>	<i>AE Description</i>
S01_AA01 (FCC Computer Peripheral Setup)			
<i>Sample: aa01</i>	Standard sampel#1	AE 02	Headset
		AE 03	Temperature Sensor
		AE 06	Keyboard
		AE 01	AC/DC Converter
		AE 04	Laptop
		AE 05	Laptop Power Supply
		AE 08	TFT Monitor
		AE 07	Mouse
S01_AD01 (FCC Computer Peripheral Setup)			
<i>Sample: ad01</i>	SAR Unit #2	AE 02	Headset
		AE 03	Temperature Sensor
		AE 06	Keyboard
		AE 01	AC/DC Converter
		AE 04	Laptop
		AE 05	Laptop Power Supply
		AE 08	TFT Monitor
		AE 07	Mouse
S02_AB01 (FCC AC/DC Charger Setup)			
<i>Sample: ab01</i>	SAR Unit #1	AE 02	Headset
		AE 03	Temperature Sensor
		AE 01	AC/DC Converter
S02_AD01 (FCC AC/DC Charger Setup)			
<i>Sample: ad01</i>	SAR Unit #2	AE 02	Headset
		AE 03	Temperature Sensor
		AE 01	AC/DC Converter

3 Results

3.1 General

Documentation of tested devices:

Available at the test laboratory.

Interpretation of the test results:

The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.

In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.

In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.

Note:

1. This report contains the abbreviated information content pertaining to services rendered. Supporting documentation not included herein is maintained and available at the laboratory.

2. All tests are performed under environmental conditions within the requirements of the specifications. Environmental conditions are available at the laboratory.

3. This report is a revision of MDE_AAVAM_1408_FCCa. Corresponding revision table can be found in the Annex.

3.2 List of the Applicable Body

(Body for Scope: FCC_v2)

<i>Designation</i>	<i>Description</i>
FCC47CFRChIPART15bRADIO FREQUENCY DEVICES	Part 15, Subpart B - Unintentional Radiators

3.3 List of Test Specification

<i>Test Specification:</i>	FCC part 2 and 15
<i>Version</i>	10-1-13 Edition
<i>Title:</i>	PART 2 - GENERAL RULES AND REGULATIONS PART 15 - RADIO FREQUENCY DEVICES

3.4 Summary

<i>Test Case Identifier / Name Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab Ref.</i>	<i>Setup</i>
15b.1 Conducted Emissions (AC Power Line) §15.107				
15b.1; Mode = Generating a high power consumption	Passed	2015/02/15	Lab 1	S01_AD01
	operating mode: 02			
	Passed	2015/02/15	Lab 1	S02_AD01
	operating mode: 01			
15b.2 Spurious Radiated Emissions §15.109				
15b.2; Mode = Generating a high power consumption	Passed	2015/01/22	Lab 2	S01_AA01
	operating mode: 02			
	Passed	2015/01/22	Lab 2	S02_AB01
	operating mode: 01			

3.5 Detailed Results

3.5.1 15b.1 Conducted Emissions (AC Power Line) §15.107

Test1: 15b.1; Mode = Generating a high power consumption

<i>Result:</i>	Passed
<i>Setup No.:</i>	S02_AD01
<i>Date of Test:</i>	2015/02/15 12:05
<i>Body:</i>	FCC47CFRChIPART15bRADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

AC MAINS CONDUCTED

EUT: (DE1004006ab01)
 Manufacturer: AAVAM
 Operating Condition: Tx on 5240 MHz, WLAN mode a, 6 Mbps, 120V/60Hz
 Test Site: 7 layers Ratingen
 Operator: Moe
 Test Specification: ANSI C63.4; FCC 15.107 / 15.207
 Comment: Class B
 Start of Test: 25.02.2015 / 21:30:49

SCAN TABLE: "FCC Voltage"

Short Description:			FCC Voltage			
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak Average	20.0 ms	9 kHz	ESH3-Z5

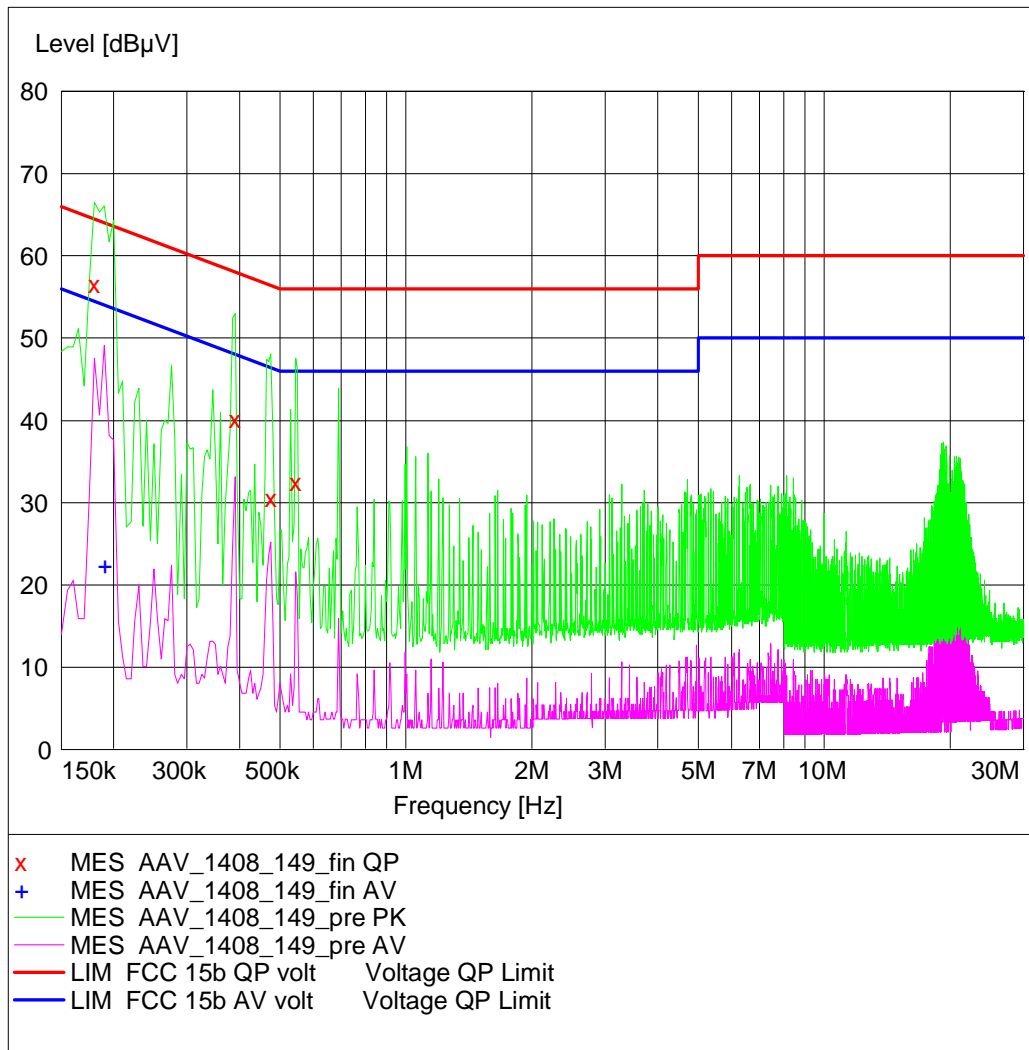

MEASUREMENT RESULT: "AAV_1408_149_fin QP"

25.02.2015 21:37

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.180000	56.50	10.1	65	8.0	N	FLO
0.390000	40.20	10.1	58	17.9	N	FLO
0.475000	30.60	10.1	56	25.9	N	GND
0.545000	32.50	10.1	56	23.5	L1	GND

MEASUREMENT RESULT: "AAV_1408_149_fin AV"

25.02.2015 21:37

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.190000	22.40	10.1	54	31.6	N	GND

Test2: 15b.1; Mode = Generating a high power consumption

Result: Passed

Setup No.: S01_AD01

Date of Test: 2015/02/15 12:45

Body: FCC47CFRChIPART15bRADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15


Detailed Results:

AC MAINS CONDUCTED

EUT: (DE1004006ad01)
 Manufacturer: AAVAM
 Operating Condition: WLAN 6 Mbit/s Ch. 6 (worst case), NFC on, video recording, USB traffic
 Test Site: 7 layers Ratingen
 Operator: URO
 Test Specification: ANSI C63.4; FCC 15.107 / 15.207
 Comment: 120 V / 60 Hz ; computer peripheral setup
 Start of Test: 15.02.2015 / 21:45:14

SCAN TABLE: "FCC Voltage"

Short Description:	FCC Voltage			Meas. Time	IF Bandw.	Transducer
Start Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width				
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	20.0 ms	9 kHz	ESH3-Z5
			Average			

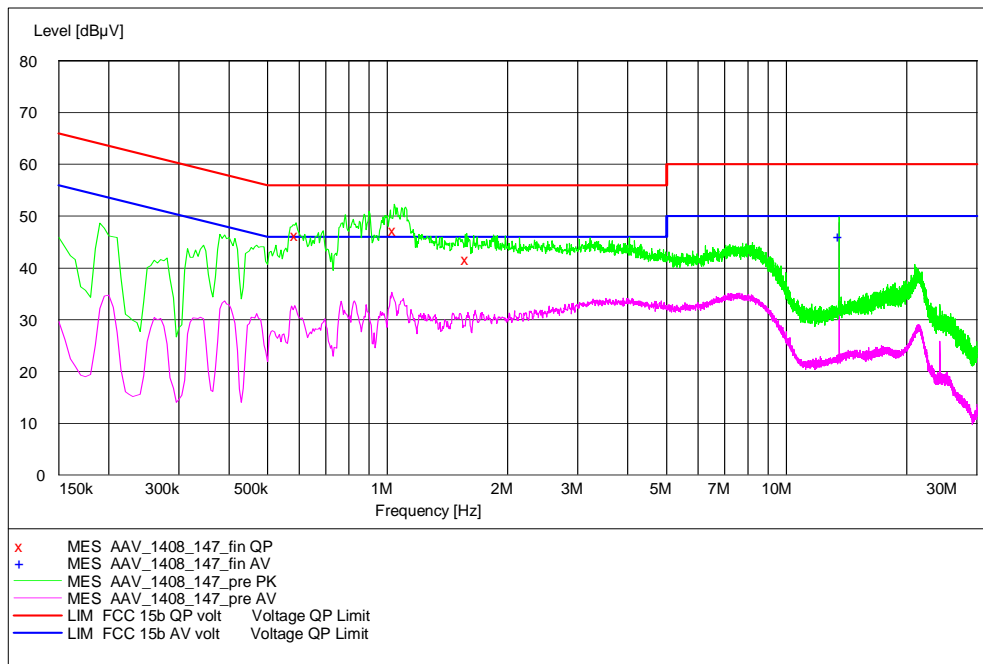

MEASUREMENT RESULT: "AAV_1408_147_fin QP"

15.02.2015 21:52

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.590000	46.30	10.1	56	9.7	N	GND
1.040000	47.30	10.1	56	8.7	N	GND
1.580000	41.80	10.1	56	14.2	N	FLO

MEASUREMENT RESULT: "AAV_1408_147_fin AV"

15.02.2015 21:52

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
13.560000	46.20	10.7	50	3.8	N	GND

3.5.2 15b.2 Spurious Radiated Emissions §15.109

Test1: 15b.2; Mode = Generating a high power consumption

<i>Result:</i>	Passed
<i>Setup No.:</i>	S02_AB01
<i>Date of Test:</i>	2015/01/22 12:08
<i>Body:</i>	FCC47CFRChIPART15bRADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

SPURIOUS EMISSION RADIATED

EUT: (DE1004006ab01)
 Manufacturer: AAVAM
 Operating Condition: WLAN-b 1Mbps TX on 2437 MHz, NFC active, video recording
 Test Site: 7 layers, Ratingen
 Operator: Doe
 Test Specification: FCC Part 15 B Class B
 Comment: vertical + horizontal polarisation
 Start of Test: 22.01.2015 / 20:51:39

SCAN TABLE: "FCC part 15 b"

Start Frequency	Stop Frequency	Step Width	FCC part 15 b Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	60.0 kHz	MaxPeak	1.0 ms	120 kHz	HL562

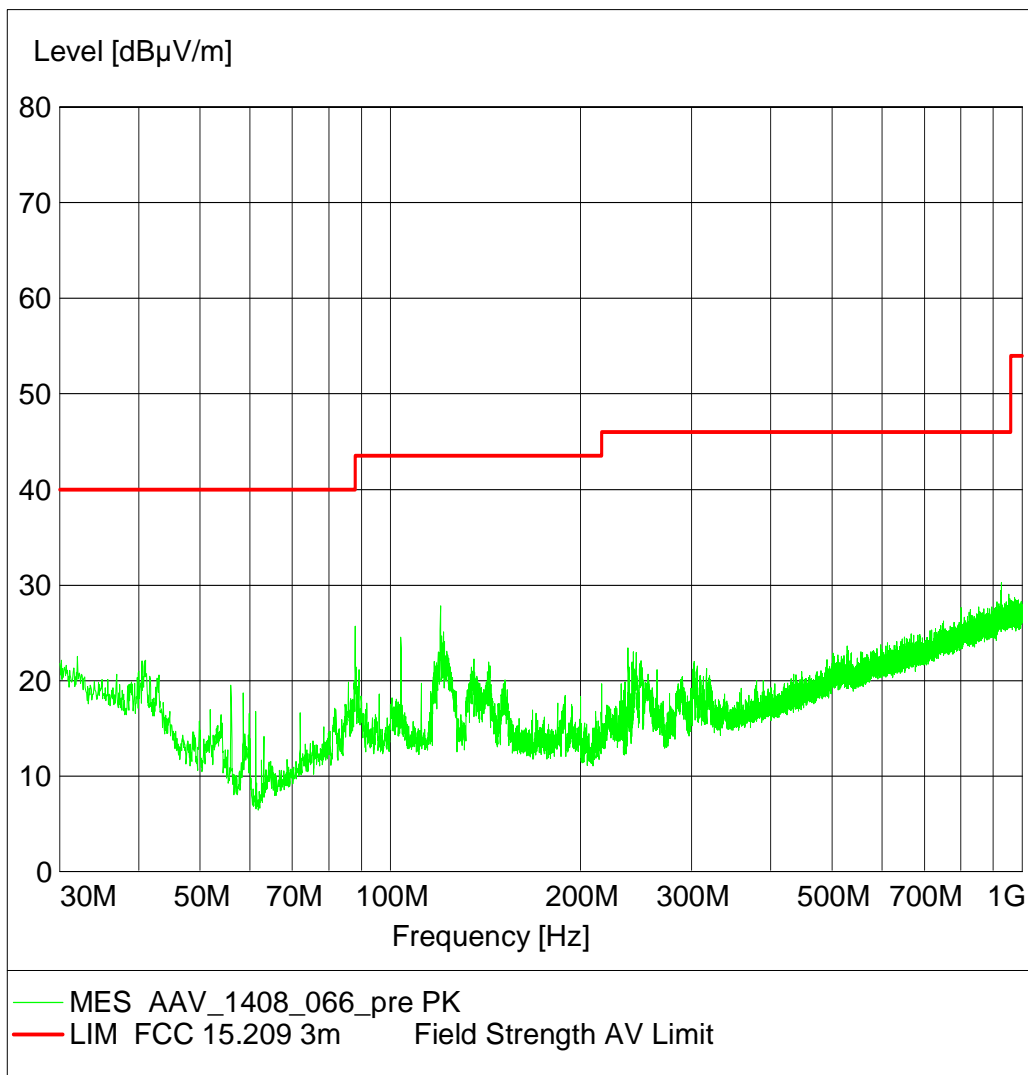

Test1: 15b.2; Mode = Generating a high power consumption

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AA01
<i>Date of Test:</i>	2015/01/22 15:07
<i>Body:</i>	FCC47CFRChIPART15bRADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

SPURIOUS EMISSION RADIATED

EUT: (DE1004006aa01)
 Manufacturer: AAVAM
 Operating Condition: WLAN-b 1Mbps TX on 2437 MHz, USB traffic, NFC active, video recording
 Test Site: 7 layers, Ratingen
 Operator: Doe
 Test Specification: FCC Part 15 B Class B
 Comment: vertical + horizontal polarisation
 Start of Test: 22.01.2015 / 19:00:32

SCAN TABLE: "FCC part 15 b"

Short Description:	FCC part 15 b					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	60.0 kHz	MaxPeak	1.0 ms	120 kHz	HL562

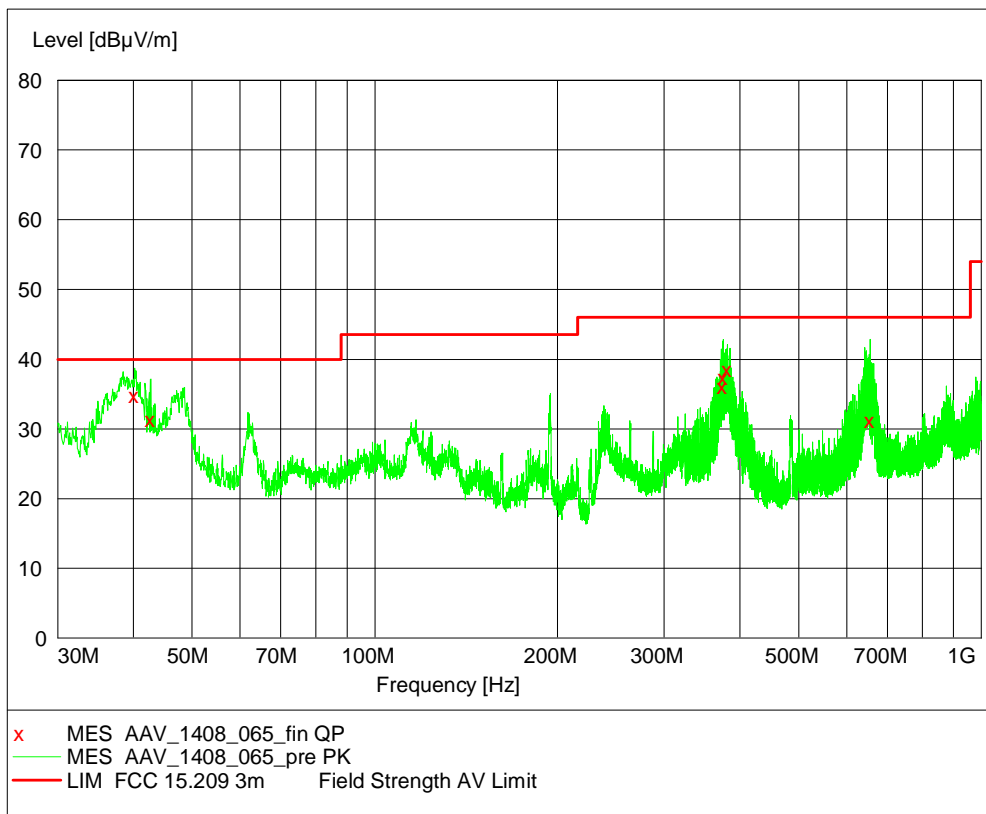

MEASUREMENT RESULT: "AAV_1408_065_fin QP"

22.01.2015 19:49

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
40.200000	34.80	15.7	40.0	5.2	101.0	174.00	VERTICAL
42.720000	31.40	14.3	40.0	8.6	105.0	202.00	VERTICAL
375.060000	36.10	14.9	46.0	9.9	103.0	7.00	HORIZONTAL
375.900000	37.40	15.0	46.0	8.6	100.0	338.00	HORIZONTAL
381.720000	38.50	15.1	46.0	7.5	100.0	338.00	HORIZONTAL
655.980000	31.20	20.0	46.0	14.8	126.0	338.00	VERTICAL

4 Test Equipment Details

4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 2		
Manufacturer:	Frankonia		
Description:	Anechoic Chamber for radiated testing		
Type:	10.58x6.38x6.00 m ³		
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	NSA (FCC)		2014/01/09 2017/01/09

Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	FCC listing 96716 3m Part15/18		2014/01/09 2017/01/08
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

Test Equipment Auxiliary Equipment for Conducted emissions

Lab ID: Lab 1
Manufacturer: Rohde & Schwarz GmbH & Co.KG
Description: EMI Conducted Auxiliary Equipment

Single Devices for Auxiliary Equipment for Conducted emissions

Single Device Name	Type	Serial Number	Manufacturer
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
Impedance Stabilization Network	ISN T800	36159	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2014/02/06 2016/02/28
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2013/03/01 2015/03/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ST08	36292	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2014/01/10 2016/01/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN T8-Cat6	32187	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2014/01/08 2016/01/31
One-Line V-Network	ESH 3-Z6	100489	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	standard calibration		2014/06/18 2017/11/30
One-Line V-Network	ESH 3-Z6	100570	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2013/11/25 2016/11/24
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2013/03/01 2015/03/31
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2013/03/01 2015/02/28

Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID: Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AM 4.0	AM4.0/180/11920 513	Maturo GmbH
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck Mess-Elektronik OHG
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck Mess-Elektronik OHG
Broadband Amplifier 1 GHz - 4 GHz	AFS4-01000400-1Q-10P-4	-	Miteq
Broadband Amplifier 18 GHz - 26 GHz	JS4-18002600-32-5P	849785	Miteq
Broadband Amplifier 30 MHz - 18 GHz	JS4-00101800-35-5P	896037	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01- 2+W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02- 2+W38.02-2	Rosenberger Micro-Coax
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution Next Exec.</i>
Standard Calibration			2012/06/26 2015/06/25
Double-ridged horn-duplicated 2015-07-15 10:47:55	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	5HC3500/18000-1.2-KK	200035008	Trilithic
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
Horn Antenna Schwarzbeck 15-26.5 GHz BBHA 9170	BBHA 9170	BBHA9170262	Schwarzbeck Mess-Elektronik OHG
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution Next Exec.</i>
Standard Calibration			2012/12/18 2015/12/17
Log.-per. Antenna (upgraded)	HL 562 Ultralog new refelector	830547/003	Rohde & Schwarz GmbH & Co. KG
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution Next Exec.</i>
DKD Calibration			2014/11/27 2017/11/27
Standard Gain / Pyramidal Horn Antenna 26.5 GHz	3160-09	00083069	EMCO Elektronik GmbH

Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
Standard Gain / Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5- 10kg/024/379070 9	Maturo GmbH

Test Equipment Auxiliary Test Equipment

Lab ID:	Lab 2
Manufacturer:	see single devices
Description:	Single Devices for various Test Equipment
Type:	various
Serial Number:	none

Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Customized calibration		2013/12/04 2015/12/03
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Signal Analyzer	FSV30	103005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard		2014/02/10 2016/02/09
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard		2012/06/13 2015/06/12
Spectrum Analyser	FSU26	200418	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2014/07/29 2015/07/28
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG

Test Equipment Digital Signalling Devices

Lab ID: Lab 1, Lab 2
Description: Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT	CBT	100589	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standart calibration		2015/01/21 2018/01/19
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/01/27 2016/01/26
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2014/12/02 2017/12/01
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---		2007/07/16
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2014/12/03 2017/12/02
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---		2007/01/02
	SW: K62, K69		2008/11/03
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG

Test Equipment Emission measurement devices

Lab ID: Lab 1, Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer
EMI Receiver / Spectrum Analyser	ESR 7	101424	Rohde & Schwarz
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Initial Factory Calibration		2014/11/13 2016/11/12
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/05/13 2015/05/10
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/05/13 2015/05/10
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/06/24 2017/06/23
Spectrum Analyser	FSW 43	103779	Rohde & Schwarz
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Initial Factory Calibration		2014/11/17 2016/11/16
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/01/07 2016/01/31
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03

Test Equipment Multimeter 03

Lab ID: Lab 2
Description: Fluke 177
Serial Number: 86670383

Single Devices for Multimeter 03

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/12/04 2015/12/03

Test Equipment Shielded Room 02

Lab ID: Lab 1
Manufacturer: Frankonia
Description: Shielded Room for conducted testing
Type: 12 qm
Serial Number: none

Test Equipment T/A Logger 13

Lab ID: Lab 1, Lab 2
Description: Lufft Opus10 TPR
Type: Opus10 TPR
Serial Number: 13936

Single Devices for T/A Logger 13

Single Device Name	Type	Serial Number	Manufacturer
ThermoAirpressure Datalogger 13 (Environ)	Opus10 TPR (8253.00)	13936	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2013/02/07 2015/02/26

Test Equipment T/H Logger 02

Lab ID: Lab 1
Description: Lufft Opus10
Serial Number: 7489

Single Devices for T/H Logger 02

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro Datalogger 02 (Environ)	Opus10 THI (8152.00)	7489	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2013/02/07 2015/02/26

Test Equipment T/H Logger 12

Lab ID: Lab 2
Description: Lufft Opus10
Serial Number: 12482

Single Devices for T/H Logger 12

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro Datalogger 12 (Environ)	Opus10 THI (8152.00)	12482	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2013/01/07 2015/03/09

5 Annex

5.1 Additional Information for Report

Test Description

Conducted emissions (AC power line)

Standard FCC Part 15 Subpart B

The test was performed according to: ANSI C 63.4, 2014

Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2014. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was connected to a 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN), which meets the requirements of ANSI C63.4-2014, Annex B, in the frequency range of the measurements. The LISN's unused connections were terminated with 50 Ohm loads. AC Power supply voltage for EUT: 120 V 60 Hz (if not stated within the measurement plot and/or test result).

The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

Test Requirements / Limits

If not stated within the measurement plot and/or test result, class B limits are applied.

FCC Part 15, Subpart B, §15.107, Class B Limit

Frequency Range (MHz)	QP Limit (dB μ V)	AV Limit (dB μ V)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

FCC Part 15, Subpart B, §15.107, Class A Limit

Frequency Range (MHz)	QP Limit (dBµV)	AV Limit (dBµV)
0.15 - 0.5	79	66
0.5 - 30	73	60

Used conversion factor: Limit (dBµV) = 20 log (Limit (µV)/1µV).

NOTES:

A missing result table in the corresponding test report section means, that no final measurement was performed because no relevant frequencies (peaks) were found in the preliminary scan.

The chosen operating mode is selected as representative mode to generate "worst-case" conditions, i.e. high power consumption.

Spurious radiated emissions

Standard FCC Part 15, Subpart B

The test was performed according to: ANSI C 63.4, 2014

Test Description

Measurement below 1 GHz:

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2014.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The influence of the EUT support table that is used between 30-1000 MHz was evaluated.

The test was performed at the distance of 3 m between the EUT and the receiving antenna. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The radiated emissions measurements were made in a typical installation configuration. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is also performed while the EUT is powered from both AC and DC (battery) power in order to find the worst-case operating condition. AC Power supply voltage for EUT: 120 V 60 Hz (if not stated within the measurement plot and/or test result).

Step 1: Preliminary scan (test to identify the highest amplitudes relative to the limit)

Intention of this step is, to determine the radiated EMI-profile of the EUT.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 - 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 µs
- Turntable angle range: -180° to +180°
- Turntable step size: 90°
- Height variation range: 1 - 3 m
- Height variation step size: 2 m
- Polarization: Horizontal + Vertical

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2:

A further measurement will be performed on the frequencies determined in step 1. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

Settings for step 2:

- Detector: Peak - Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF - Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180° to +180°
- Turntable step size: 45°
- Height variation range: 1 - 4 m
- Height variation step size: 0.5 m
- Polarizations: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)

- Antenna height
- The last two values have now the following accuracy:
- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by +/- 22.5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/- 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: -22.5° to +22.5° around the determined value
- Height variation range: -0.25 m to +0.25 m around the determined value

Step 4: Final measurement (with QP detector)

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak(< 1GHz)
- Measured frequencies: in step 3 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

Measurement above 1 GHz:

The following modifications apply to the measurement procedure for the frequency range above 1 GHz: The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse-linear-distance-squared for the power density measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2-4 as described before, are omitted. Step 1 was performed at one height of the receiving antenna only.

Detector: Peak, Average (simultaneously)
RBW = VBW = 1 MHz; above 7 GHz 100 kHz

Test Requirements / Limits

If not stated within the measurement plot and/or test result, class B limits are applied.

FCC Part 15, Subpart B, §15.109, Radiated Emission Limits

Frequency Range (MHz)	Class B Limit (dBµV/m)
30 – 88	40.0
88 – 216	43.5
216 – 960	46.0
above 960	54.0

Frequency Range (MHz)	Class A Limit (dBµV/m) / @ 3 m!
30 - 88	49.5
88 - 216	54.0
216 - 960	56.9
above 960	60.0


§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)


NOTE: A missing result table in the corresponding test report section means, that no final measurement was performed because no relevant frequencies (peaks) were found in the preliminary scan.

Setup Drawings

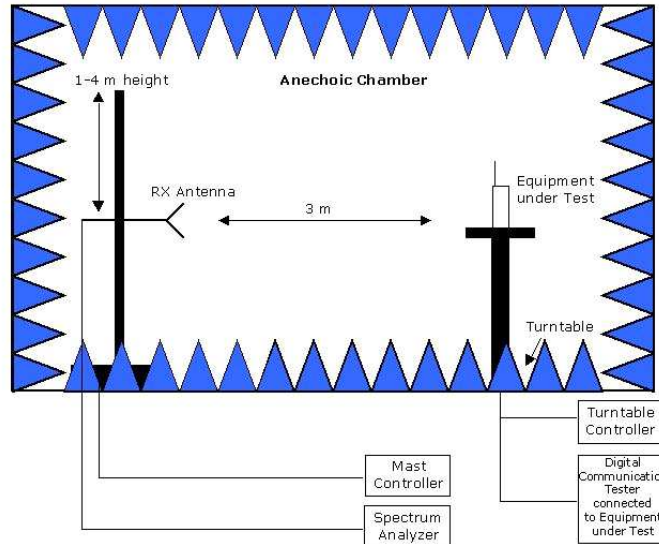

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.

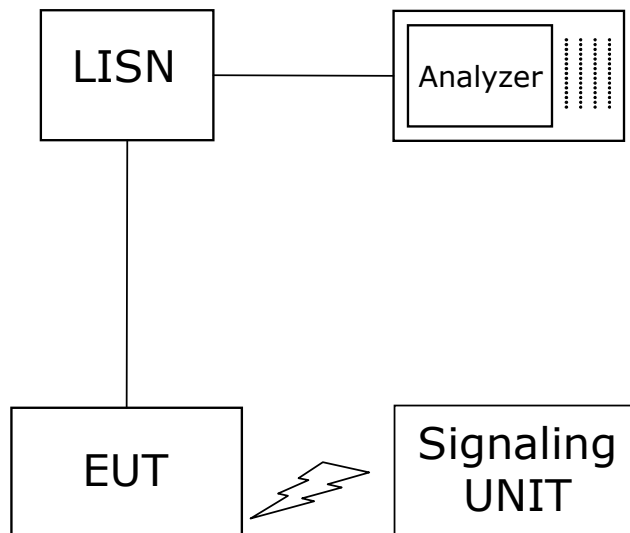

Setup in the shielded room for conducted measurements at AC mains port

November, 2014

To Whom This May Concern

**Correlation of measurement requirements for
 Information Technology Equipment (ITE) / Digital Circuits
 from
 FCC and IC**

Information Technology Equipment (ITE) / Radio Apparatus Containing Digital Circuits

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§15.107	ICES-003 Issue 5: 6.1
Spurious Radiated Emissions	§15.109	ICES-003 Issue 5: 6.2

Revision History

Report version control			
Version	Release date	Change Description	Version validity
initial	2015-07-20	--	invalid
rev1	2015-08-18	<ul style="list-style-type: none"> ANSI 63.4:2009 replaced by ANSI 63.4:2014 Adding IEEE 802.11n (5 GHz) to the supported features Adding WLAN mode tested in AC mains conducted emissions 	valid

6 Index

1	Administrative Data	2
1.1	Project Data	2
1.2	Applicant Data	2
1.3	Test Laboratory Data	2
1.4	Signature of the Testing Responsible	2
1.5	Signature of the Accreditation Responsible	3
2	Test Object Data	3
2.1	General OUT Description	3
2.2	Detailed Description of OUT Samples	4
2.3	OUT Features	5
2.4	Auxiliary Equipment	6
2.5	Operating Mode(s)	6
2.6	Setups used for Testing	7
3	Results	8
3.1	General	8
3.2	List of the Applicable Body	8
3.3	List of Test Specification	8
3.4	Summary	9
3.5	Detailed Results	10
3.5.1	15b.1 Conducted Emissions (AC Power Line) §15.107	10
3.5.2	15b.2 Spurious Radiated Emissions §15.109	14
4	Test Equipment Details	18
4.1	List of Used Test Equipment	18
5	Annex	25
5.1	Additional Information for Report	25
6	Index	31