



Inter**Lab**<sup>®</sup>

Final Report on

INARI8-3GAN-1 Tablet PC

Bluetooth Low Energy Transceiver

FCC ID: 2ABVH-INARI81

IC: 11875A-INARI81

**Report Reference:** MDE\_AAVAM\_1301\_FCCd  
According to  
Title 47 CFR chapter I part 15 subpart C

**Date:** April 11, 2014

**Test Laboratory:**

7Layers AG  
Borsigstr. 11  
40880 Ratingen  
Germany



**Note:**

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7Layers AG  
Borsigstrasse 11  
40880 Ratingen, Germany  
Phone: +49 (0) 2102 749 0  
Fax: +49 (0) 2102 749 350  
www.7Layers.com

Aufsichtsratsvorsitzender •  
Chairman of the Supervisory Board:  
Peter Mertel  
Vorstand • Board:  
Dr. H.-J. Meckelburg  
Dr. H. Ansorge

Registergericht • registered in:  
Düsseldorf, HRB 44096  
USt-IdNr • VAT No.:  
DE 203159652  
TAX No. 147/5869/0385

## 1 Administrative Data

### 1.1 Project Data

*Project Responsible:* Patrick Lomax  
*Date Of Test Report:* 2014/04/11  
*Date of first test:* 2014/03/19  
*Date of last test:* 2014/04/03

### 1.2 Applicant Data

*Company Name:* Aava Mobile  
*Street:* Nahkatehtaankatu 2  
Oulu  
*City:* 90130  
*Country:* Finland  
*Contact Person:* Kari Räisänen  
*Phone:* +3588373800  
*Fax:* +49 (0) 2102 749 380  
*E-Mail:* kari.raisanen@aavamobile.com

### 1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:

#### 7 layers DE

---

*Company Name :* 7 layers AG  
*Street :* Borsigstrasse 11  
*City :* 40880 Ratingen  
*Country :* Germany  
*Contact Person :* Mr. Michael Albert  
*Phone :* +49 2102 749 201  
*Fax :* +49 2102 749 444  
*E Mail :* michael.albert@7Layers.de

#### Laboratory Details


<i>Lab ID</i>	<i>Identification</i>	<i>Responsible</i>	<i>Accreditation Info</i>
Lab 1	Conducted Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkKS-Registration no. D-PL-12140-01-01
Lab 2	Radiated Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkKS-Registration no. D-PL-12140-01-01
Lab 3	Regulatory Bluetooth RF Test Solution	Mr. Jimmy Chatheril Mr. Sören Berentzen	DAkKS-Registration no. D-PL-12140-01-01

**1.4 Signature of the Testing Responsible**



Patrick Lomax  
responsible for tests performed in: Lab 1, Lab 2, Lab 3

**1.5 Signature of the Accreditation Responsible**



Accreditation scope responsible person  
responsible for Lab 1, Lab 2, Lab 3



## 2 Test Object Data

### 2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

#### OUT: INARI8 Tablet PC

*Type / Model / Family:* INARI8-3GAN-1 Tablet PC  
FCC ID: 2ABVH-INARI81  
IC: 11875A-INARI81

*Product Category:* Mobile Computer

**Manufacturer:**  
*Company Name:* Please see applicant data

*Contact Person:* -

#### Parameter List:

<i>Parameter name</i>	<i>Value</i>
<b>Parameter for Scope FCC_v2:</b>	
AC Power Supply	120V/60Hz AC input to charger
Antenna Gain - Bluetooth Antenna	1.9 (dBi)
highest channel (BT)	2480 (MHz)
lowest channel (BT)	2402 (MHz)
mid channel (BT)	2441 (MHz)

#### Ancillary Equipment: AC/DC adapter (EU)

*Product Category:* Computer Accessory

#### Ancillary Equipment: IN0201-1 Tablet Dock

*Type / Model / Family:* FCC.ID: 2ABVH-IN020101  
IC: 11875A-IN020101

*Product Category:* Computer Accessory

**Manufacturer:**  
*Company Name:* Please see applicant data

*Contact Person:* -

#### Ancillary Equipment: Micro-USB cable

*Product Category:* Computer Accessory



## 2.2 Detailed Description of OUT Samples

### **Sample : ae01**

<i>OUT Identifier</i>	INARI8 Tablet PC
<i>Sample Description</i>	RSE #1
<i>Serial No.</i>	IN14060110
<i>HW Status</i>	Pre-Production Sample
<i>SW Status</i>	Windows 8.1
<i>Date of Receipt</i>	2014/02/24

### **Parameter List:**

<i>Parameter Description</i>	<i>Value</i>
<b>Parameter for Scope FCC_v2</b>	
Antenna Gain	1.9 (dBi)
Channel_BW	1 (MHz)

### **Sample : cdc01**

<i>OUT Identifier</i>	AC/DC adapter (EU)
<i>Sample Description</i>	AC adapter
<i>Serial No.</i>	053W3370003
<i>Date of Receipt</i>	2014/02/24

### **Sample : Dock1**

<i>OUT Identifier</i>	IN0201-1 Tablet Dock
<i>Sample Description</i>	Docking station for Tablet
<i>Serial No.</i>	0001
<i>HW Status</i>	Pre-Production Sample

### **Sample : sb1**

<i>OUT Identifier</i>	Micro-USB cable
<i>Sample Description</i>	USB cable
<i>Date of Receipt</i>	2014/02/24



## 2.3 OUT Features

### Features for OUT: INARI8 Tablet PC

<i>Designation</i>	<i>Description</i>	<i>Allowed Values</i>	<i>Supported Value(s)</i>
<b>Features for scope: FCC_v2</b>			
AC	The OUT is powered by or connected to AC Mains		
BT	EUT supports Bluetooth data rate of 1 Mbps with GFSK modulation in the band 2400 MHz - 2483.5 MHz		
BTLE	Support of Bluetooth Low Energy		
EDGE850	EUT supports EDGE in the band 824 MHz - 849 MHz		
EDGE1900	EUT supports EDGE in the band 1850 MHz - 1910 MHz		
EDR2	EUT supports Bluetooth using data rate of 2 Mbps with PI/4 DQPSK modulation in the band 2400 MHz - 2483.5 MHz		
EDR3	EUT supports Bluetooth using data rate of 3 Mbps with 8DPSK modulation in the band 2400 MHz - 2483.5 MHz		
FDD2	EUT supports UMTS FDD2 in the band 1850 MHz - 1910 MHz		
FDD4	EUT supports UMTS FDD4 in the band 1710 MHz - 1755 MHz		
FDD5	EUT supports UMTS FDD5 in the band 824 MHz - 849 MHz		
GSM850	EUT supports GSM850 band 824MHz - 849MHz		
HSDPA-FDD2	EUT supports UMTS FDD2 HSDPA in the band 1850 MHz - 1910 MHz		
HSDPA-FDD4	EUT supports UMTS FDD4 HSDPA in the band 1710 MHz - 1755 MHz		
HSDPA-FDD5	EUT supports UMTS FDD5 HSDPA in the band 824 MHz - 849 MHz		
HSUPA-FDD2	EUT supports UMTS FDD2 HSUPA in the band 1850 MHz - 1910 MHz		
HSUPA-FDD4	EUT supports UMTS FDD4 HSUPA in the band 1710 MHz - 1755 MHz		
HSUPA-FDD5	EUT supports UMTS FDD5 HSUPA in the band 824 MHz - 849 MHz		
Iant	Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment		
PCS1900	EUT supports PCS1900 band 1850MHz - 1910MHz		
SRD	EUT is a short range device		
TantC	temporary antenna connector, which may be only built-in for testing, designed as an example part of the equipment		
Wa1	EUT supports WLAN in mode a in the band 5150 MHz - 5250 MHz		
Wa2	EUT supports WLAN in mode a in the band 5250 MHz - 5350 MHz		
Wa3	EUT supports WLAN in mode a in the band 5470 MHz - 5725 MHz		
Wa4	EUT supports WLAN in mode a in the band 5725 MHz - 5825 MHz		
Wa5	EUT supports WLAN in mode a in the band 5725 MHz - 5850 MHz		
Wa6	EUT supports WLAN in mode a in the band 5745 MHz - 5805 MHz		



Reference: MDE\_AAVAM\_1301\_FCCd  
According to  
Title 47 CFR chapter I part 15 subpart C

**Features for OUT: INARI8 Tablet PC**

<i>Designation</i>	<i>Description</i>	<i>Allowed Values</i>	<i>Supported Value(s)</i>
Wa7	EUT supports WLAN in mode a in the band 5180 MHz - 5240 MHz		
Wa8	EUT supports WLAN in mode a in the band 5260 MHz - 5320 MHz		
Wa9	EUT supports WLAN in mode a in the band 5500 MHz - 5600 MHz		
Wa10	EUT supports WLAN in mode a in the band 5650 MHz - 5700 MHz		
Wb	EUT supports WLAN in mode b in the band 2400 MHz - 2483.5 MHz		
Wg	EUT supports WLAN in mode g in the band 2400 MHz - 2483.5 MHz		
WLAN	EUT supports WLAN channels 2412 MHz - 2462 MHz.		

**2.4 Auxiliary Equipment**

<i>AE No.</i>	<i>Type Designation</i>	<i>Serial No.</i>	<i>HW Status</i>	<i>SW Status</i>	<i>Description</i>
AE 09	E119932-U with 2 fixed mounted				HDMI Cable
AE 02	Fujitsu ADP-80NB A	07Y17323A	120V/60Hz AC		AC Adapter
AE 01	Fujitsu Siemens Lifebook Eseries	DSCK013817		Windows 7 Pro	Laptop RE
AE 03	Logitech M-BT58	HC60915A2XC			Mouse
AE 04	Logitech Ultrax Media Keyboard	ST635J01624			Keyboard
AE 11	Netgear WNDR3300	1TS1847F01363			WLAN access point
AE 05	NXP NFC passive tag				NFC Tag
AE 10	R&M freenet Real 10 S/FTP Cat. 6				LAN Cable ca. 3.2m
AE 08	Samsung AD-3014A		120V/60Hz AC		ACDC Power adapter
AE 07	Samsung S22B350H	0166H4MC40232 8Y			Monitor
AE 06	USB Memory Stick SONY 16 GB				USB Memory Stick

## 2.5 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

<i>Setup No.</i>	<i>List of OUT samples</i>	<i>List of auxiliary equipment</i>	
<i>Sample No.</i>	<i>Sample Description</i>	<i>AE No.</i>	<i>AE Description</i>

### PC\_E01 (Computer peripheral setup)

<i>Sample:</i> Dock1	Docking station for Tablet	AE 09	HDMI Cable
<i>Sample:</i> ae01	RSE #1	AE 02	AC Adapter
		AE 01	Laptop RE
		AE 03	Mouse
		AE 04	Keyboard
		AE 11	WLAN access point
		AE 05	NFC Tag
		AE 10	LAN Cable ca. 3.2m
		AE 08	ACDC Power adapter
		AE 07	Monitor
		AE 06	USB Memory Stick

### S01\_AE01 (Tablet, AC/DC adapter, USB cable)

<i>Sample:</i> cdc01	AC adapter
<i>Sample:</i> sb1	USB cable
<i>Sample:</i> ae01	RSE #1





### 3 Results

#### 3.1 General

**Documentation of tested devices:**

Available at the test laboratory.

**Interpretation of the test results:**

The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.

In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.

In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.

**Note:**

1. This report contains the abbreviated information content pertaining to services rendered. Supporting documentation not included herein is maintained and available at the laboratory.

2. All tests are performed under environmental conditions within the requirements of the specifications. Environmental conditions are available at the laboratory.

3. This test report covers only the Bluetooth Low Energy functionality of this device.

#### 3.2 List of the Applicable Body

(Body for Scope: FCC\_v2)

<i>Designation</i>	<i>Description</i>
FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES	Subpart C - Intentional Radiators; 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

#### 3.3 List of Test Specification

<i>Test Specification:</i>	<b>FCC part 2 and 15</b>
<i>Version</i>	10-1-12 Edition
<i>Title:</i>	PART 2 - GENERAL RULES AND REGULATIONS PART 15 - RADIO FREQUENCY DEVICES



### 3.4 Summary

<i>Test Case Identifier / Name Test (condition)</i>	<i>Cat</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab Ref.</i>	<i>Setup</i>
<b>15c.1 Conducted emissions (AC power line) §15.207</b>					
15c.1; Mode = transmit	-	Passed	2014/03/24	Lab 1	PC_E01
<b>15c.10 Power density §15.247 (e)</b>					
15c.10; Frequency = Low/Mid/High	-	Passed	2014/03/31	Lab 3	S01_AE01
<b>15c.11 6dB Bandwidth §15.247 (a) (2)</b>					
15c.11; Frequency = Low/Mid/High	-	Passed	2014/03/31	Lab 3	S01_AE01
<b>15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209</b>					
15c.2; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = low	-	Passed	2014/03/19	Lab 2	S01_AE01
15c.2; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = mid	-	Passed	2014/03/19	Lab 2	S01_AE01
15c.2; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = highest	-	Passed	2014/03/19	Lab 2	S01_AE01
<b>15c.4 Peak power output §15.247 (b) (1)</b>					
15c.4; Peak power output Summary	-	Passed	2014/03/31	Lab 3	S01_AE01
<b>15c.5 Spurious RF conducted emissions §15.247 (d)</b>					
15c.5; = BT transmit mode: Low/Mid/High Frequency	-	Passed	2014/03/31	Lab 3	S01_AE01
<b>15c.6 Band edge compliance §15.247 (d)</b>					
15c.6; Band edge compliance Summary	-	Passed	2014/03/31	Lab 3	S01_AE01
15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated	-	Passed	2014/04/03	Lab 2	S01_AE01



### 3.5 Detailed Results

#### 3.5.1 15c.1 Conducted emissions (AC power line) §15.207

Test: 15c.1; Mode = transmit

<i>Result:</i>	Passed
<i>Setup No.:</i>	PC_E01
<i>Date of Test:</i>	2014/03/24 10:11
<i>Body:</i>	FCC47CFRCHIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


**Detailed Results:**

**AC MAINS CONDUCTED**

EUT: (DE1004000ae01+DE1004000dock1)  
 Manufacturer: AAVAM  
 Operating Condition: GSM1900 traffic mode / WLANTX / NFC-on / Video / pinging  
 Test Site: 7 layers Ratingen  
 Operator: URO  
 Test Specification: ANSI C63.4; FCC 15.107 / 15.207  
 Comment: computer peripheral setup, 120V / 60 Hz  
 Start of Test: 24.03.2014 / 19:13:10

**SCAN TABLE: "FCC Voltage"**

Short Description:			FCC Voltage			
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak Average	20.0 ms	9 kHz	ESH3-Z5

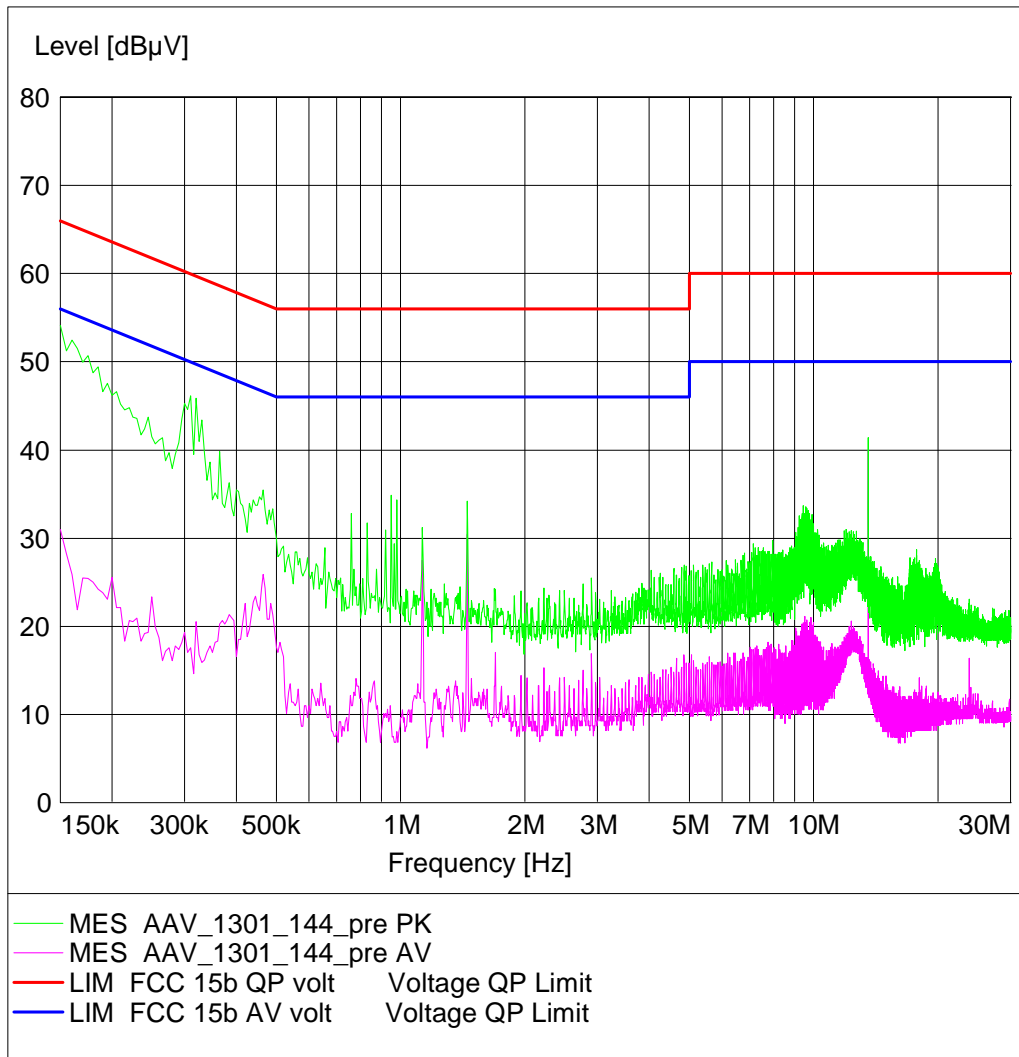



**3.5.2 15c.10 Power density §15.247 (e)**


**Test: 15c.10; Frequency = Low/Mid/High**

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AE01
<i>Date of Test:</i>	2014/03/31 13:04
<i>Body:</i>	NO BODY
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

		Power Density		
		2402 MHz	2440 MHz	2480 MHz
Modulation	Conditions	Power Density (dBm)	Power Density (dBm)	Power Density (dBm)
GFSK	TN, VN	-9.57	-9.04	-9.21

Maximum Power Density	-9.04	dBm
-----------------------	-------	-----

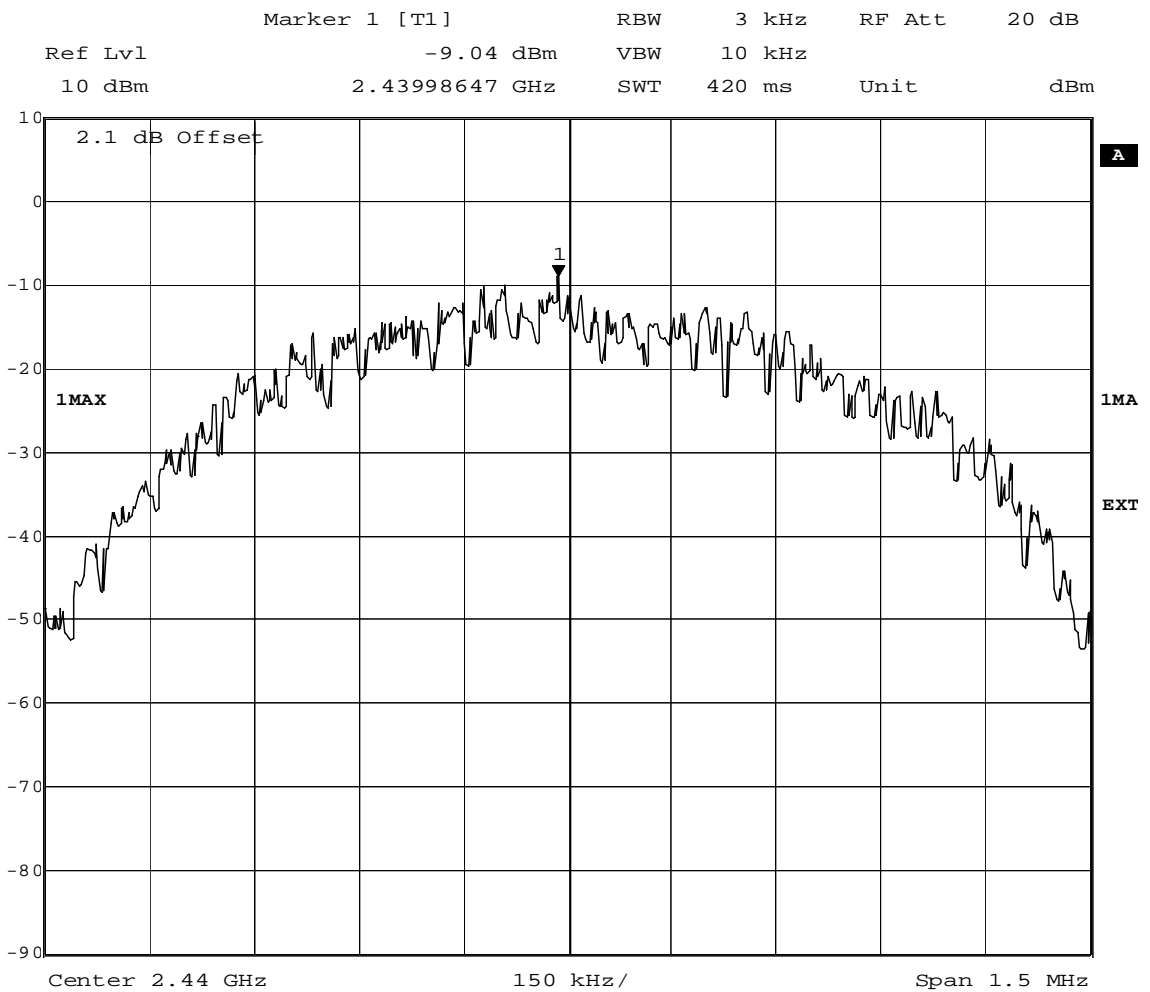

Date: 31.MAR.2014 13:01:04


### 3.5.3 15c.11 6dB Bandwidth §15.247 (a) (2)

Test: 15c.11; Frequency = Low/Mid/High

Result: Passed  
 Setup No.: S01\_AE01  
 Date of Test: 2014/03/31 13:00  
 Body: NO BODY  
 Test Specification: FCC part 2 and 15

Detailed Results:

Modulation	Frequency	6dB Bandwidth KHz
GFSK	2402 MHz	739.478
	2440 MHz	745.491
	2480 MHz	745.491

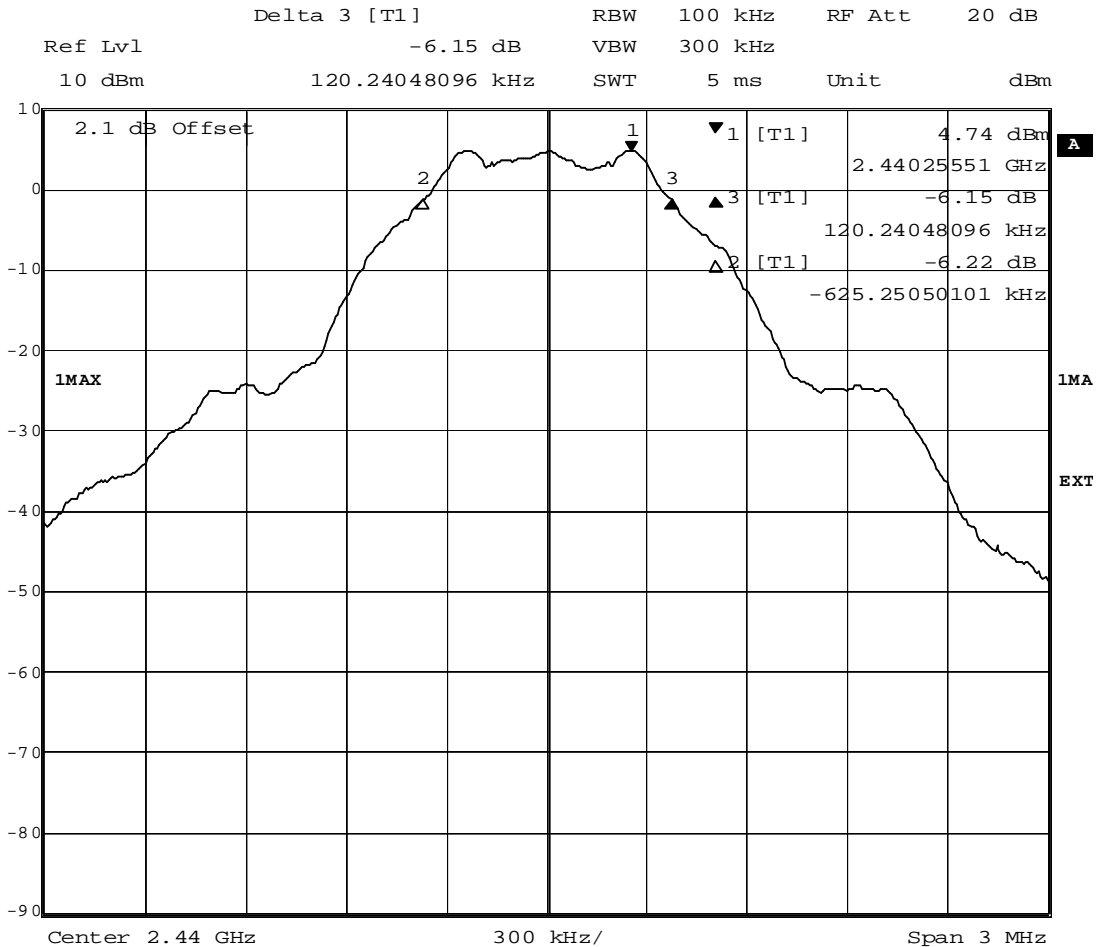

Date: 31.MAR.2014 12:58:39

### 3.5.4 15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209

Test: 15c.2; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = low

Result: Passed  
Setup No.: S01\_AE01  
Date of Test: 2014/03/19 12:35  
Body: NO BODY  
Test Specification: FCC part 2 and 15

#### Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz 1-DH1

Frequency range 30 MHz - 1 GHz

Diagram No.	Ant. Polar.	Limit QPK [dBµV]	Frequency [MHz]	Corrected value QPK [dBµV]	Margin QPK [dB]	Result
112	Ver + Hor					Passed

Frequency range 1 GHz - 25 GHz

Diagram No.	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
1	Ver + Hor								Passed
16	Ver + Hor								Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = mid

Result: Passed  
Setup No.: S01\_AE01  
Date of Test: 2014/03/19 12:36  
Body: NO BODY  
Test Specification: FCC part 2 and 15

#### Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz 1-DH1

Frequency range 9 kHz - 1 GHz

Diagram No.	Ant. Polar.	Limit QPK [dBµV]	Frequency [MHz]	Corrected value QPK [dBµV]	Margin QPK [dB]	Result
146-149	Ver + Hor					Passed
13	Ver + Hor					Passed

Frequency range 1 GHz - 25 GHz

Diagram No.	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
2	Ver + Hor								Passed
17	Ver + Hor								Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.



**Test: 15c.2; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = highest**

*Result:* Passed  
*Setup No.:* S01\_AE01  
*Date of Test:* 2014/03/19 12:37  
*Body:* NO BODY  
*Test Specification:* FCC part 2 and 15

**Detailed Results:**

**Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz 1-DH1**

**Frequency range 30 MHz - 1 GHz**

Diagram No.	Ant. Polar.	Limit QPK [dBµV]	Frequency [MHz]	Corrected value QPK [dBµV]	Margin QPK [dB]	Result
114	Ver + Hor					Passed

**Frequency range 1 GHz - 25 GHz**

Diagram No.	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
3	Ver + Hor								Passed
18	Ver + Hor								Passed

**Remark: No (further) spurious emissions in the range 20 dB below the limit found.**



### **3.5.5 15c.4 Peak power output §15.247 (b) (1)**


#### **Test: 15c.4; Peak power output Summary**

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AE01
<i>Date of Test:</i>	2014/03/31 12:56
<i>Body:</i>	NO BODY
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

		Conducted Transmitter Power					
		2402 MHz		2441 MHz		2480 MHz	
Modulation	Conditions	Output Power (dBm)	Output Power (mW)	Output Power (dBm)	Output Power (mW)	Output Power (dBm)	Output Power (mW)
GFSK	TN, VN	4.97	3.14	5.35	3.43	5.16	3.28

Max Conducted Output Power (FSK Modulation)	5.35	dBm	3.43	mW
---	------	-----	------	----

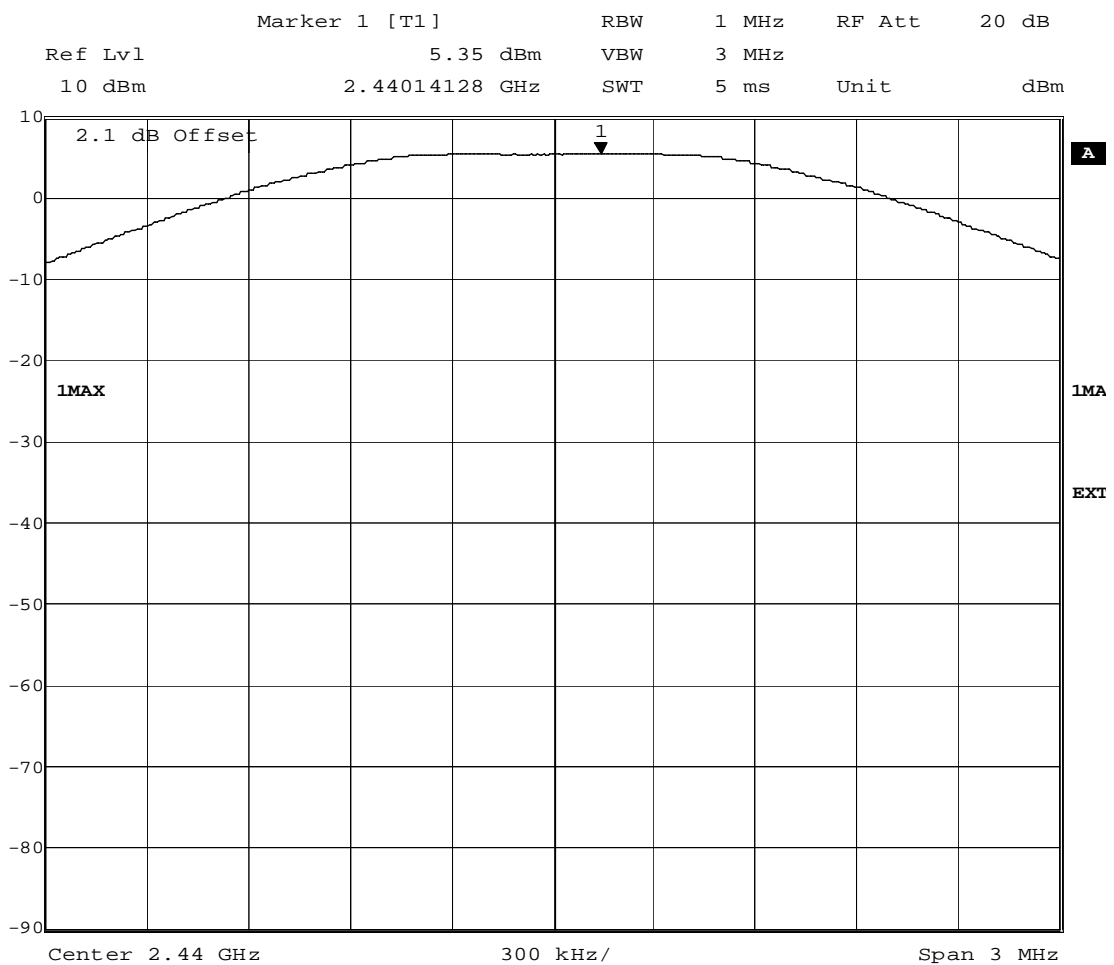

Date: 31.MAR.2014 12:59:26




**3.5.6 15c.5 Spurious RF conducted emissions §15.247 (d)**

**Test: 15c.5; = BT transmit mode: Low/Mid/High Frequency**

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AE01
<i>Date of Test:</i>	2014/03/31 12:48
<i>Body:</i>	NO BODY
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

Mode / Channel	Frequency of emission MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
GFSK / 2402	9587.0	-56.20	5.42	-14.54	41.66
GFSK / 2441	9737.0	-55.72	6.06	-14.06	41.66
GFSK / 2480	6585.0	-56.39	5.66	-14.23	42.16

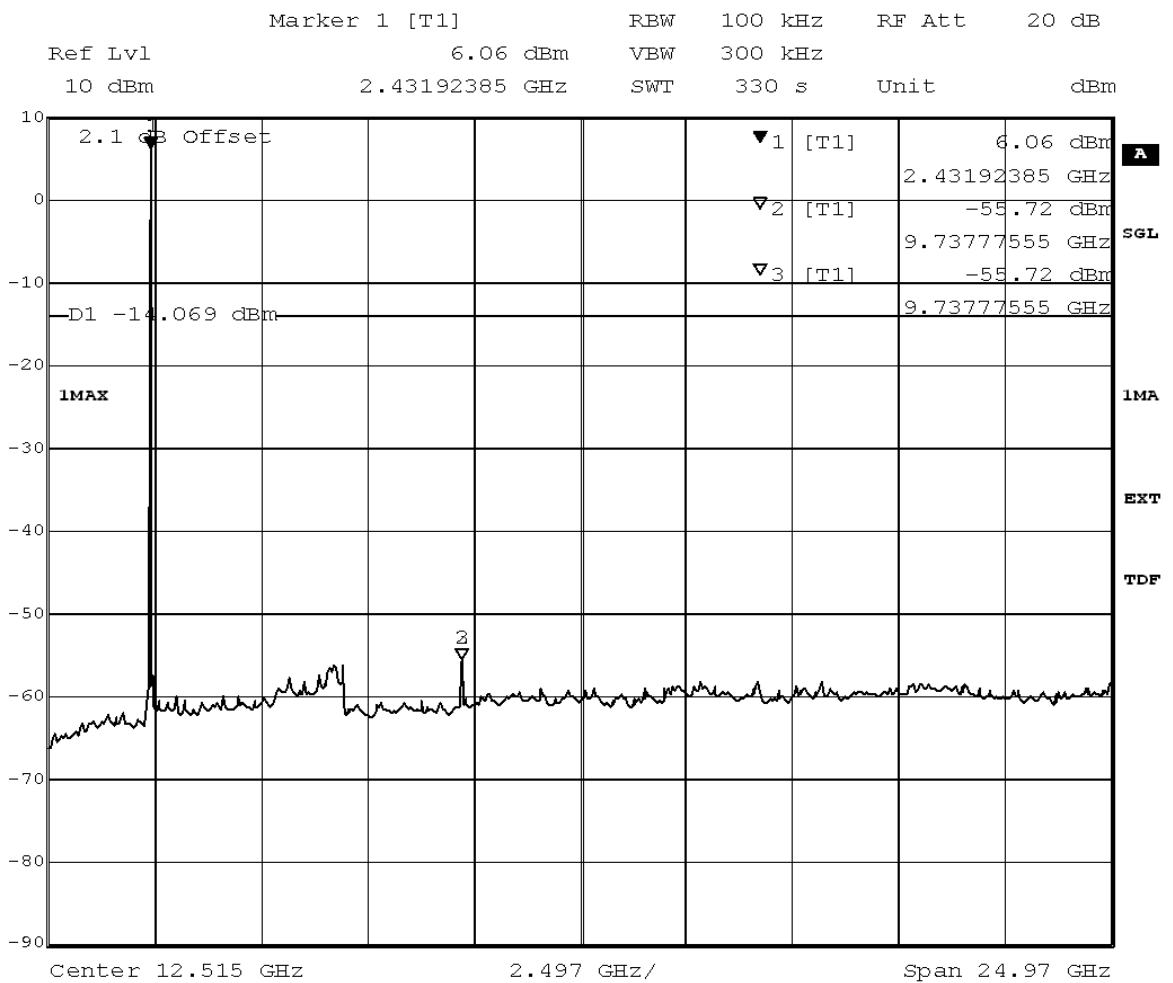

Title: spurious emissions  
 Comment A: CH M2: 2440 MHz  
 Date: 31.MAR.2014 13:13:55




### **3.5.7 15c.6 Band edge compliance §15.247 (d)**

#### **Test: 15c.6; Band edge compliance Summary**

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AE01
<i>Date of Test:</i>	2014/03/31 12:51
<i>Body:</i>	NO BODY
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2400	-54.97	5.46	-14.54	40.43

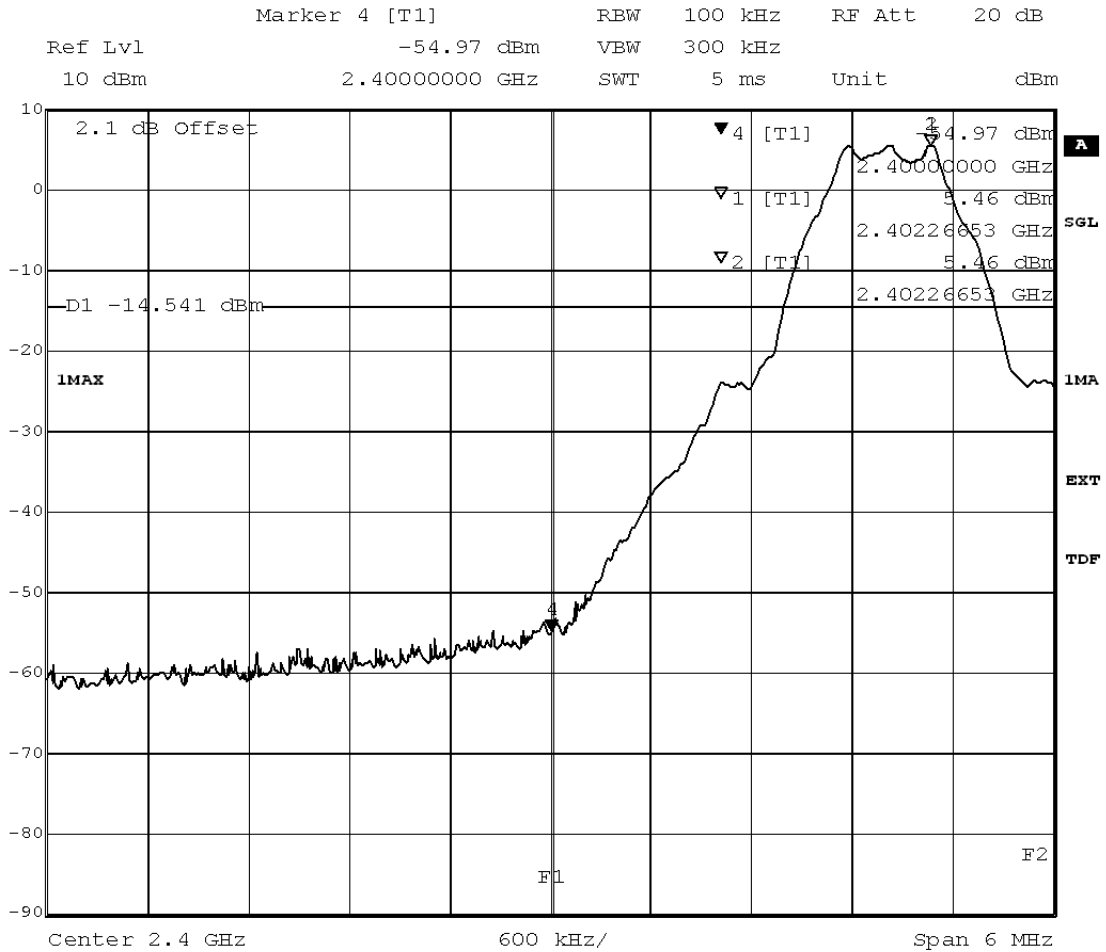

Title: Band Edge Compliance  
 Comment A: CH B: 2402 MHz  
 Date: 31.MAR.2014 11:30:20




Reference: MDE\_AAVAM\_1301\_FCCd

According to

Title 47 CFR chapter I part 15 subpart C

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2484	-58.66	5.76	-14.24	44.43

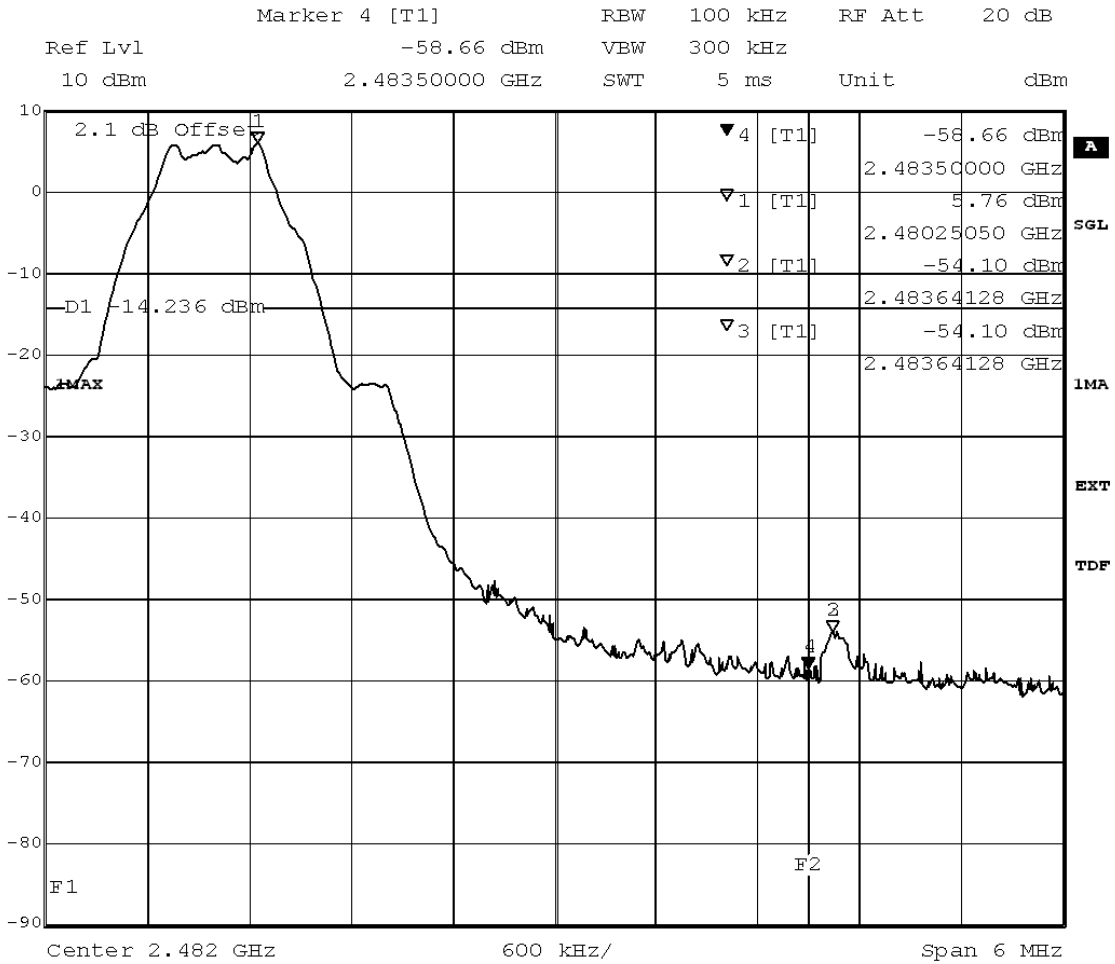

Title: Band Edge Compliance  
 Comment A: CH T:2480 MHz  
 Date: 31.MAR.2014 12:35:28

**Test: 15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated**

Result: Passed  
 Setup No.: S01\_AE01  
 Date of Test: 2014/04/03 12:40  
 Body: NO BODY  
 Test Specification: FCC part 2 and 15






Reference: MDE\_AAVAM\_1301\_FCCd  
According to  
Title 47 CFR chapter I part 15 subpart C

**Detailed Results:**

Diagram No.	TX on	Ant. Polar.	Limit PK [dB $\mu$ V]	Limit AV [dB $\mu$ V]	Frequency [MHz]	Corrected value PK [dB $\mu$ V]	Corrected value AV [dB $\mu$ V]	Margin PK [dB]	Margin AV [dB]	Result
AAV_1301_003	2480 MHz	Ver + Hor	74	54	2483.5	51.94	39.04	22.06	14.96	Passed

**SPURIOUS EMISSION RADIATED**

EUT: (DE1004000ae01)  
 Manufacturer: AAVAM  
 Operating Condition: TX on 2480 MHz  
 Test Site: 7 layers Ratingen  
 Operator: Moh  
 Test Specification: FCC 15.247 (15.35b, 15.209)  
 Comment: vertical + horizontal antenna polarisation  
 Start of Test: 28.02.2014 / 14:37:15

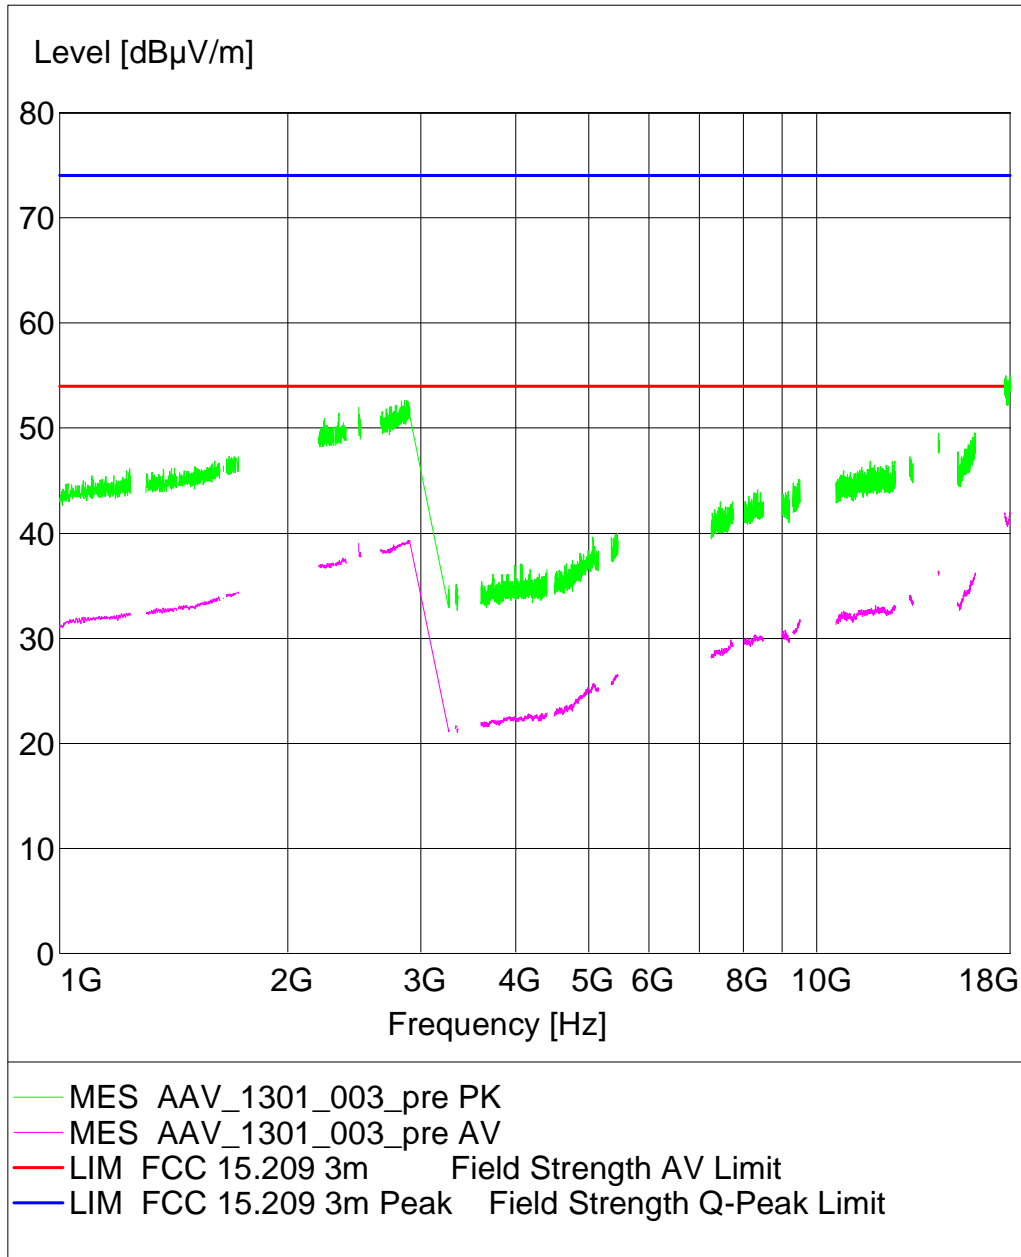

## 4 Test Equipment Details

### 4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

#### Test Equipment Anechoic Chamber

<b>Lab ID:</b>	<b>Lab 2</b>		
<b>Manufacturer:</b>	Frankonia		
<b>Description:</b>	Anechoic Chamber for radiated testing		
<b>Type:</b>	10.58x6.38x6.00 m <sup>3</sup>		
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	NSA (FCC)		2014/01/09 2017/01/09

#### Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m <sup>3</sup>	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	FCC listing 96716 3m Part15/18		2014/01/09 2017/01/08
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

### Test Equipment Auxiliary Equipment for Conducted emissions

**Lab ID:** Lab 1  
**Manufacturer:** Rohde & Schwarz GmbH & Co.KG  
**Description:** EMI Conducted Auxiliary Equipment

### Single Devices for Auxiliary Equipment for Conducted emissions

Single Device Name	Type	Serial Number	Manufacturer
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
Impedance Stabilization Network	ISN T800	36159	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2014/02/06 2016/02/28
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2013/03/01 2015/03/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ST08	36292	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2014/01/10 2016/01/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN T8-Cat6	32187	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2014/01/08 2016/01/31
One-Line V-Network	ESH 3-Z6	100489	Rohde & Schwarz GmbH & Co. KG
One-Line V-Network	ESH 3-Z6	100570	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2013/11/25 2016/11/24
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standart Calibration		2013/03/01 2015/02/28
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2013/03/01 2015/02/28

### Test Equipment Auxiliary Equipment for Radiated emissions

**Lab ID:** Lab 2  
**Description:** Equipment for emission measurements  
**Serial Number:** see single devices

### Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AM 4.0	AM4.0/180/11920 513	Maturo GmbH
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2009/06/04 2014/06/03
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2012/01/18 2015/01/17
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01- 2+W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02- 2+W38.02-2	Rosenberger Micro-Coax
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2012/05/18 2015/05/17
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2012/06/26 2015/06/25
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
Horn Antenna Schwarzbeck 15-26 GHz BBHA 9170	BBHA 9170		
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2012/12/18 2015/12/17
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2011/10/27 2014/10/26

### Single Devices for Auxiliary Equipment for Radiated emissions (continued)

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5-10kg/024/3790709	Maturo GmbH

### Test Equipment Auxiliary Test Equipment

<b>Lab ID:</b>	<b>Lab 2</b>
<b>Manufacturer:</b>	see single devices
<b>Description:</b>	Single Devices for various Test Equipment
<b>Type:</b>	various
<b>Serial Number:</b>	none

### Single Devices for Auxiliary Test Equipment

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2013/12/04 2015/12/03
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard			2012/06/13 2015/06/12
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG



**Test Equipment Digital Signalling Devices**

**Lab ID:** Lab 1, Lab 2  
**Description:** Signalling equipment for various wireless technologies.

**Single Devices for Digital Signalling Devices**

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT	CBT	100589	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/24   2014/11/23
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co.KG
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/28   2014/11/27
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---		2007/07/16
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/12/07   2014/12/06
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---		2007/01/02
	SW: K62, K69		2008/11/03
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG



**Test Equipment Emission measurement devices**

**Lab ID:** Lab 1, Lab 2  
**Description:** Equipment for emission measurements  
**Serial Number:** see single devices

**Single Devices for Emission measurement devices**

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/05/03 2014/05/02
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/04/30 2014/04/29
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
	standard calibration		2011/05/12 2014/05/11
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/01/07 2016/01/31
<i>HW/SW Status</i>			<i>Date of Start</i> <i>Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03

**Test Equipment Multimeter 12**

**Lab ID:** Lab 3  
**Description:** Ex-Tech 520  
**Serial Number:** 05157876

**Single Devices for Multimeter 12**

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/12/04 2015/12/03



### Test Equipment Regulatory Bluetooth RF Test Solution

**Lab ID:** Lab 3  
**Description:** Regulatory Bluetooth RF Tests  
**Type:** Bluetooth RF  
**Serial Number:** 001

### Single Devices for Regulatory Bluetooth RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.
Bluetooth Signalling Unit CBT	CBT	100302	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2013/08/28 2014/08/27
Power Meter NRVD	NRVD	832025/059	
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2013/08/26 2014/08/25
Power Sensor NRV Z1 A	PROBE	832279/013	
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2013/08/28 2014/08/27
Power Supply	NGSM 32/10	2725	
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2013/06/14 2015/06/13
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2013/08/27 2014/08/26
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG
Vector Signal Generator SMIQ03B	SMIQ03B	832870/017	
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2013/06/21 2016/06/20

### Test Equipment Shielded Room 02

**Lab ID:** Lab 1  
**Manufacturer:** Frankonia  
**Description:** Shielded Room for conducted testing  
**Type:** 12 qm  
**Serial Number:** none

### Test Equipment Shielded Room 07

**Lab ID:** Lab 3  
**Description:** Shielded Room 4m x 6m



**Test Equipment T/H Logger 04**

**Lab ID:** Lab 3  
*Description:* Lufft Opus10  
*Serial Number:* 7481

**Single Devices for T/H Logger 04**

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
ThermoHygro Datalogger 04 (Environ)	Opus10 THI (8152.00)	7481	Lufft Mess- und Regeltechnik GmbH

**Test Equipment Temperature Chamber 01**

**Lab ID:** Lab 3  
*Manufacturer:* see single devices  
*Description:* Temperature Chamber KWP 120/70  
*Type:* Weiss  
*Serial Number:* see single devices

**Single Devices for Temperature Chamber 01**

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2014/03/12 2016/03/11



**5 Annex**

**5.1 Additional Information for Report**



Summary of Test Results

---

---

The EUT complied with all performed tests as listed in the summary section of this report.

---

Technical Report Summary

---

---

Type of Authorization :

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15. The following subparts are applicable to the results in this test report

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

- § 15.201 Equipment authorization requirement
- § 15.207 Conducted limits
- § 15.209 Radiated emission limits; general requirements
- § 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

additional documents

The tests were selected and performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000. Instead of applying ANSI C63.4-1992 which is referenced in the FCC Public Note, the newer ANSI C63.4-2009 is applied.

Description of Methods of Measurements

---

---

Conducted emissions (AC power line)

---

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4,

Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 $\mu$ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads. The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

#### Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

#### Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

#### Test Requirements / Limits

FCC Part 15, Subpart C, §15.207

Frequency Range (MHz)	QP Limit (dB $\mu$ V)	AV Limit (dB $\mu$ V)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

Used conversion factor: Limit (dB $\mu$ V) = 20 log (Limit ( $\mu$ V)/1 $\mu$ V).

---

#### Peak power output

---

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

#### Test Description

The Equipment Under Test (EUT) was set up to perform the output power measurements. The resolution bandwidth for measuring the output power was set to 3 MHz. The reference level of the spectrum analyzer was set higher than the output power of the EUT. The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

#### Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (b) (1)

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:  
(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)  
==> Maximum Output Power: 30 dBm

---

#### Spurious RF conducted emissions

---

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

#### Test Description

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements. The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

#### Analyzer settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: 330 s

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance" (cf. chapter 3.6). This value is used to calculate the 20 dBc limit.

#### Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

---

#### Spurious radiated emissions

---

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4,

#### Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4–2009.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The test was performed at the distance of 3 m between the EUT and the receiving antenna. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The radiated emissions measurements were made in a typical installation configuration. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is also performed while the EUT is powered from both AC and DC (battery) power in order to find the worst-case operating condition.

#### 1. Measurement up to 30 MHz

The test set-up was made in accordance to the general provisions of ANSI C63.4.

The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration.

The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

The Loop antenna HFH2-Z2 is used.

#### Step 1: pre-measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 – 0.15 and 0.15 – 30 MHz

- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz – 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100  $\mu$ s (BT Timing 1.25 ms)
- Turntable angle range:  $-180$  to  $+180^\circ$
- Turntable step size:  $90^\circ$
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $-180$  to  $+180^\circ$
- Turntable step size:  $45^\circ$
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable):  $45^\circ$
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by  $\pm 22.5^\circ$  around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by  $\pm 25$  cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $-22.5^\circ$  to  $+22.5^\circ$  around the determined value
- Height variation range:  $-0.25$  m to  $+0.25$  m around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

### 3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2–4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

For the enhanced data rate packets the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at basic data rate. Typically, the measurement for these packets is performed in the frequency range 1 to 8 GHz but it depends on the emissions found during the test for the basic data rate. Please refer to the results for the used frequency range.

### Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit(dBµV/m @10m)
0.009 – 0.49	2400/F(kHz)	300	Limit (dBµV/m)+30dB
0.49 – 1.705	24000/F(kHz)	30	Limit (dBµV/m)+10dB
1.705 - 30	30	30	Limit (dBµV/m)+10dB

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit (dBµV/m)
30 - 88	100	3	40.0
88 - 216	150	3	43.5
216 - 960	200	3	46.0
above 960	500	3	54.0

### §15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit...

Used conversion factor:  $\text{Limit (dBµV/m)} = 20 \log (\text{Limit (µV/m)}/1µV/m)$

---

### Band edge compliance

---

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4, FCC §15.31

### Test Description



The procedure to show compliance with the band edge requirement is divided into two measurements: 1. Show compliance of the lower band edge by a conducted measurement and 2. show compliance of the higher band edge by a radiated and conducted measurement.

For the first measurement the EUT is set to transmit on the lowest channel (2402 MHz). The lower band edge is 2400 MHz.

Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

For the second measurement the EUT is set to transmit on the highest channel (2480 MHz). The higher band edge is 2483.5 MHz.

Analyzer settings for conducted measurement:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

#### Test Requirements / Limits

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

...

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the measurement of the lower band edge the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

For the measurement of the higher band edge the limit is "specified in Section 15.209(a)".

---

#### Power density

---

Standard FCC Part 15, 10-1-11 Subpart C

The test was performed according to: FCC §15.31

#### Test Description

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak-Maxhold
- Resolution Bandwidth (RBW): 3 kHz
- Video Bandwidth (VBW): 30 kHz
- Sweep Time: Coupled

#### Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

...

The same method of determining the conducted output power shall be used to determine the power spectral density.



6-dB bandwidth

Standard FCC Part 15, 10-1-11 Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was setup to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical. The results recorded were measured with the modulation which produce the worst-case (widest) occupied bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: 30 MHz

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Used conversion factor: Output power (dBm) = 10 log (Output power (W) / 1mW)

\*\*\*\*\*  
 FCC and IC Correlation of measurement requirements  
 \*\*\*\*\*

The following tables show the correlation of measurement requirements for Bluetooth equipment and Digital Apparatus from FCC and IC standards.


Bluetooth® equipment:

Measurement	FCC reference	IC reference
Conducted emissions on AC mains	§ 15.207	RSS-Gen Issue 3: 7.2.4
6-dB bandwidth	§ 15.247 (a) (1)	RSS-210 Issue 8: A8.2
Peak power output	§ 15.247 (b) (1)	RSS-210 Issue 8: A8.4
Spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 3: 6;RSS-210 Issue 8: A8.5
Spurious radiated emissions	§ 15.247 (d)	RSS-Gen Issue 3: 6;RSS-210 Issue 8: A8.5
Band edge compliance	§ 15.247 (d)	RSS-210 Issue 8: A8.5
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 3: 7.1.2

Digital Apparatus:

Measurement	FCC reference	IC reference
Conducted Emissions(AC Power Line)	§15.107	ICES-003 Issue 5
Spurious Radiated Emissions	§15.109	ICES-003 Issue 5

## Setup Drawings

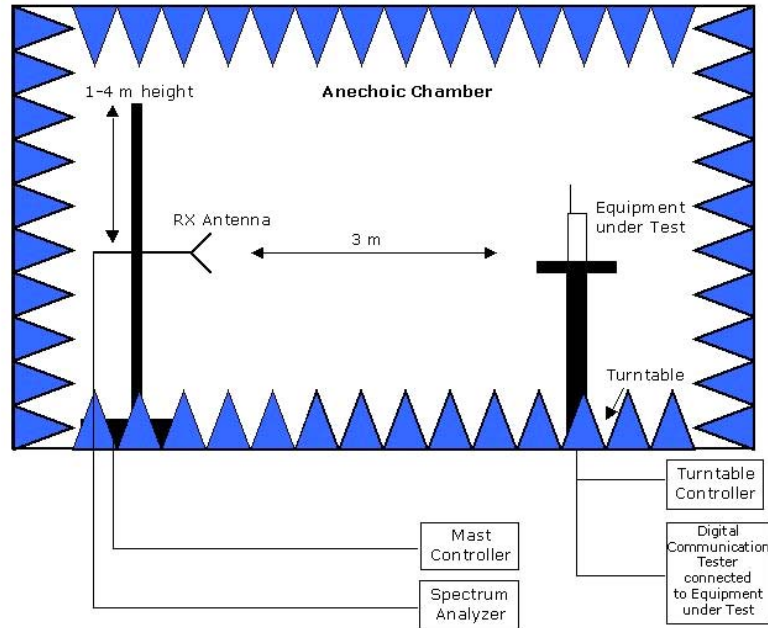

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Setup in the Anechoic chamber:  
Measurements below 1 GHz: Semi-anechoic, conducting ground plane.  
Measurements above 1 GHz: Fully-anechoic, absorbers on all surfaces



## 6 Index

1	Administrative Data	2
1.1	Project Data	2
1.2	Applicant Data	2
1.3	Test Laboratory Data	2
1.4	Signature of the Testing Responsible	3
1.5	Signature of the Accreditation Responsible	3
2	Test Object Data	4
2.1	General OUT Description	4
2.2	Detailed Description of OUT Samples	5
2.3	OUT Features	6
2.4	Auxiliary Equipment	7
2.5	Setups used for Testing	8
3	Results	9
3.1	General	9
3.2	List of the Applicable Body	9
3.3	List of Test Specification	9
3.4	Summary	10
3.5	Detailed Results	11
3.5.1	15c.1 Conducted emissions (AC power line) §15.207	11
3.5.2	15c.10 Power density §15.247 (e)	13
3.5.3	15c.11 6dB Bandwidth §15.247 (a) (2)	15
3.5.4	15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209	16
3.5.5	15c.4 Peak power output §15.247 (b) (1)	18
3.5.6	15c.5 Spurious RF conducted emissions §15.247 (d)	20
3.5.7	15c.6 Band edge compliance §15.247 (d)	22
4	Test Equipment Details	27
4.1	List of Used Test Equipment	27
5	Annex	35



---

Reference: MDE\_AAVAM\_1301\_FCCd  
According to  
Title 47 CFR chapter I part 15 subpart C  
35

5.1 Additional Information for Report

---

6 Index

44

---