

APPLICATION CERTIFICATION FCC Part 15C&RSS-247  
On Behalf of  
Sunwoda Electronic Co., Ltd.

Active stylus

Model No.: SPEN-HP-03

FCC ID: 2ABWESPEN-HP-03

IC: 23012-SPENHP03

Prepared for : Sunwoda Electronic Co., Ltd.  
Address : No.2, Yihe Rd., Shilong Community, Shiyan Street, Baoan District, Shenzhen, China.

Prepared by : Shenzhen Accurate Technology Co., Ltd.  
Address : 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report No. : ATE20172073  
Date of Test : Oct. 08, 2017-Oct. 17, 2017  
Date of Report : Oct. 18, 2017

## TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels .....	6
1.3. Special Accessory and Auxiliary Equipment .....	7
1.4. Description of Test Facility .....	7
1.5. Measurement Uncertainty .....	7
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>8</b>
<b>3. OPERATION OF EUT DURING TESTING .....</b>	<b>9</b>
3.1. Operating Mode .....	9
3.2. Configuration and peripherals .....	9
<b>4. TEST PROCEDURES AND RESULTS .....</b>	<b>10</b>
<b>5. POWER LINE CONDUCTED MEASUREMENT .....</b>	<b>11</b>
5.1. Block Diagram of Test Setup.....	11
5.2. Power Line Conducted Emission Measurement Limits.....	11
5.3. Configuration of EUT on Measurement .....	11
5.4. Operating Condition of EUT .....	11
5.5. Test Procedure .....	12
5.6. DATA SAMPLE .....	12
5.7. Power Line Conducted Emission Measurement Results .....	13
<b>6. 6DB BANDWIDTH MEASUREMENT .....</b>	<b>16</b>
6.1. Block Diagram of Test Setup.....	16
6.2. The Requirement For Section 15.247(a)(2).....	16
6.3. The Requirement for 5.2(1) .....	16
6.4. EUT Configuration on Measurement .....	16
6.5. Operating Condition of EUT .....	16
6.6. Test Procedure .....	17
6.7. Test Result .....	17
<b>7. MAXIMUM PEAK OUTPUT POWER .....</b>	<b>19</b>
7.1. Block Diagram of Test Setup.....	19
7.2. The Requirement For Section 15.247(b)(3).....	19
7.3. The Requirement For Section RSS-247 section 5.4 .....	19
7.4. EUT Configuration on Measurement .....	19
7.5. Operating Condition of EUT .....	19
7.6. Test Procedure .....	20
7.7. Test Result .....	20
<b>8. POWER SPECTRAL DENSITY MEASUREMENT .....</b>	<b>22</b>
8.1. Block Diagram of Test Setup.....	22
8.2. The Requirement For Section 15.247(e).....	22
8.3. The Requirement For Section RSS-247 section 5.2 .....	22
8.4. EUT Configuration on Measurement .....	22
8.5. Operating Condition of EUT .....	22
8.6. Test Procedure .....	23

8.7.	Test Result .....	24
<b>9.</b>	<b>BAND EDGE COMPLIANCE TEST .....</b>	<b>26</b>
9.1.	Block Diagram of Test Setup.....	26
9.2.	The Requirement For Section 15.247(d) .....	26
9.3.	The Requirement For RSS-247 Section 5.5.....	26
9.4.	EUT Configuration on Measurement .....	26
9.5.	Operating Condition of EUT .....	27
9.6.	Test Procedure .....	27
9.7.	Test Result .....	27
<b>10.</b>	<b>RADIATED SPURIOUS EMISSION TEST .....</b>	<b>33</b>
10.1.	Block Diagram of Test Setup.....	33
10.2.	The Emission Limit .....	34
10.3.	Restricted bands of operation .....	35
10.4.	Restricted bands of operation .....	36
10.5.	Configuration of EUT on Measurement .....	36
10.6.	Operating Condition of EUT .....	37
10.7.	Test Procedure .....	37
10.8.	The Field Strength of Radiation Emission Measurement Results .....	37
<b>11.</b>	<b>99% OCCUPIED BANDWIDTH .....</b>	<b>53</b>
11.1.	The Requirement for RSS-Gen Clause 4.6.1 .....	53
11.2.	EUT Configuration on Measurement .....	53
11.3.	Operating Condition of EUT .....	53
11.4.	Test Procedure .....	53
11.5.	Measurement Result .....	54
<b>12.</b>	<b>CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST .....</b>	<b>56</b>
12.1.	Block Diagram of Test Setup.....	56
12.2.	The Requirement For Section 15.247(d) .....	56
12.3.	EUT Configuration on Measurement .....	56
12.4.	Operating Condition of EUT .....	56
12.5.	Test Procedure .....	57
12.6.	Test Result .....	57
<b>13.</b>	<b>ANTENNA REQUIREMENT.....</b>	<b>59</b>
13.1.	The Requirement .....	59
13.2.	Antenna Construction .....	59

## Test Report Certification

Applicant : Sunwoda Electronic Co., Ltd.  
Address : No.2, Yihe Rd., Shilong Community, Shiyan Street, Baoan District, Shenzhen, China.  
Manufacturer : Sunwoda Electronic Co., Ltd.  
Address : No.2, Yihe Rd., Shilong Community, Shiyan Street, Baoan District, Shenzhen, China.  
Product : Active stylus  
Model No. : SPEN-HP-03  
Trade name : hp

Measurement Procedure Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247**

**ANSI C63.10: 2013**

**RSS-247 Issue 2 February 2017**

**RSS-Gen Issue 4 November 2014**

The EUT was tested according to DTS test procedure of Apr 05, 2017 KDB558074 D01 DTS Meas Guidance v04 for compliance to FCC 47CFR 15.247 requirements.

The device described above is tested by Shenzhen ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 and RSS-247. The measurement results are contained in this test report and Shenzhen ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen ACCURATE TECHNOLOGY CO. LTD.

Date of Test : Oct. 08, 2017-Oct. 17, 2017

Date of Report: Oct. 18, 2017

Prepared by :

Tim Zhang  
(Tim Zhang, Engineer)

Approved & Authorized Signer :

Sean Liu  
(Sean Liu, Manager)

**Shenzhen Accurate Technology Co., Ltd.**

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT	:	Portable Speaker
Model Number	:	SPEN-HP-03
HVIN	:	BIGBUN, MP255
Trade Name	:	hp
Bluetooth version	:	BT V4.2 LE
Frequency Range	:	2402MHz-2480MHz
Number of Channels	:	40
Antenna Gain	:	2dBi
Antenna type	:	Internal Antenna
Power Supply	:	DC 5V via Type-C interface for charging DC 3.7V, 50mA via built-in Lithium Battery
Modulation mode	:	GFSK
Applicant	:	Sunwoda Electronic Co., Ltd.
Address	:	No.2, Yihe Rd., Shilong Community, Shiyang Street, Baoan District, Shenzhen, China
Manufacturer	:	Sunwoda Electronic Co., Ltd.
Address	:	No.2, Yihe Rd., Shilong Community, Shiyang Street, Baoan District, Shenzhen, China
Date of sample received	:	Oct. 08, 2017
Date of Test	:	Oct. 08, 2017-Oct. 17, 2017

## 1.2. Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 07, 2017	Jan. 06, 2018
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 07, 2017	Jan. 06, 2018
Spectrum Analyzer	Rohde&Schwarz	FSV-40	101495	Jan. 07, 2017	Jan. 06, 2018
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 07, 2017	Jan. 06, 2018
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 07, 2017	Jan. 06, 2018
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 13, 2017	Jan. 12, 2018
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 13, 2017	Jan. 12, 2018
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 13, 2017	Jan. 12, 2018
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 13, 2017	Jan. 12, 2018
Open Switch and Control Unit	Rohde&Schwarz	OSP120 + OSP-B157	101244 + 100866	Jan. 07, 2017	Jan. 06, 2018
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 07, 2017	Jan. 06, 2018
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 07, 2017	Jan. 06, 2018
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 07, 2017	Jan. 06, 2018
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 07, 2017	Jan. 06, 2018



### 3. OPERATION OF EUT DURING TESTING

#### 3.1. Operating Mode


The mode is used: **BLE Transmitting mode**

Low Channel: 2402MHz

Middle Channel: 2440MHz

High Channel: 2480MHz

#### 3.2. Configuration and peripherals

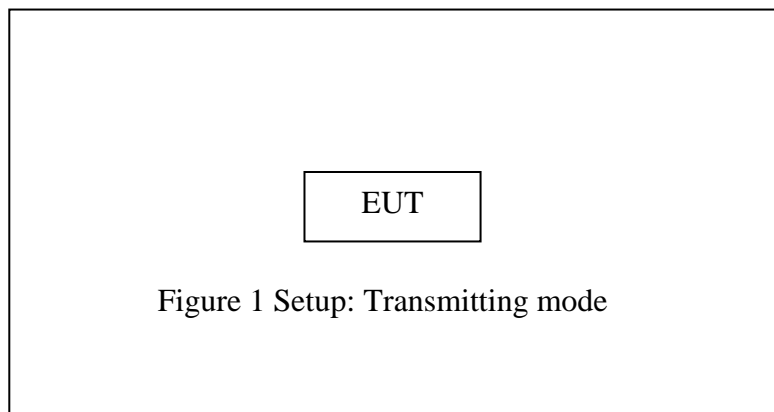


#### 4. TEST PROCEDURES AND RESULTS

<b>FCC&amp;IC Rules</b>	<b>Description of Test</b>	<b>Result</b>
Section 15.247(a)(2) RSS-247 A5.2	6dB Bandwidth Test	Compliant
Section 15.247(e) RSS-247 A5.2	Power Spectral Density Test	Compliant
Section 15.247(b)(3) RSS-247 A5.4	Maximum Peak Output Power Test	Compliant
Section 15.247(d) RSS-247 A5.5	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209 RSS-247 A5.5 RSS-Gen 6.13	Radiated Spurious Emission Test	Compliant
Section 15.247(d) RSS-Gen 6.2	Conducted Spurious Emission Test	Compliant
RSS-Gen Section 6.6	99% Occupied Bandwidth	Compliant
Section 15.207 RSS-Gen Section 8.8	AC Power Line Conducted Emission Test	Compliant
Section 15.203 RSS-Gen 8.3	Antenna Requirement	Compliant

## 5. POWER LINE CONDUCTED MEASUREMENT

### 5.1. Block Diagram of Test Setup

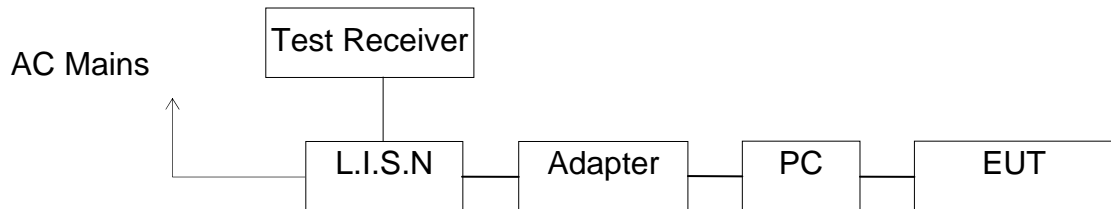

(EUT: Active stylus)

### 5.2. Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB( $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.  
 NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

### 5.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

### 5.4. Operating Condition of EUT

- 5.4.1. Setup the EUT and simulator as shown as Section 5.1.
- 5.4.2. Turn on the power of all equipment.
- 5.4.3. Let the EUT work in test mode and measure it.

### 5.5. Test Procedure

The EUT is put on the plane 0.8 m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 5.6. DATA SAMPLE

Frequency (MHz)	Quasi Peak Level (dB $\mu$ v)	Average Level (dB $\mu$ v)	Transducer value (dB)	QuasiPeak Result (dB $\mu$ v)	Average Result (dB $\mu$ v)	Quasi Peak Limit (dB $\mu$ v)	Average Limit (dB $\mu$ v)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XX	29.4	18.3	11.1	40.5	29.4	56.0	56.0	15.5	16.6	Pass

Transducer value = Insertion loss of LISN + Cable Loss  
 Result = Quasi-peak Level/Average Level + Transducer value  
 Limit = Limit stated in standard

Calculation Formula:

Margin = Limit – Reading level value – Transducer value

## 5.7. Power Line Conducted Emission Measurement Results

**PASS.**

The frequency range from 150kHz to 30MHz is checked.

Test mode : CHARGING&BT Operation(worse case)								
Test Voltage: 120V/60Hz								
<b>MEASUREMENT RESULT: "TUV-1010-1_fin"</b>								
10/10/2017								
Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE	
0.150000	42.90	10.5	66	23.1	QP	L1	GND	
0.185000	40.40	10.5	64	23.9	QP	L1	GND	
0.565000	36.60	10.7	56	19.4	QP	L1	GND	
13.720000	32.30	11.3	60	27.7	QP	L1	GND	
<b>MEASUREMENT RESULT: "TUV-1010-1_fin2"</b>								
10/10/2017								
Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE	
0.150000	28.20	10.5	56	27.8	AV	L1	GND	
0.190000	24.60	10.5	54	29.4	AV	L1	GND	
0.570000	30.90	10.7	46	15.1	AV	L1	GND	
13.645000	25.80	11.3	50	24.2	AV	L1	GND	
<b>MEASUREMENT RESULT: "TUV-1010-2_fin"</b>								
10/10/2017								
Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE	
0.155000	47.90	10.5	66	17.8	QP	N	GND	
0.200000	39.20	10.5	64	24.4	QP	N	GND	
0.560000	36.60	10.7	56	19.4	QP	N	GND	
14.575000	30.90	11.4	60	29.1	QP	N	GND	
<b>MEASUREMENT RESULT: "TUV-1010-2_fin2"</b>								
10/10/2017								
Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE	
0.160000	27.60	10.5	56	27.9	AV	N	GND	
0.195000	25.40	10.5	54	28.4	AV	N	GND	
0.560000	29.20	10.7	46	16.8	AV	N	GND	
14.005000	25.80	11.4	50	24.2	AV	N	GND	

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.


**ACCURATE TECHNOLOGY CO., LTD**

**CONDUCTED EMISSION STANDARD FCC PART 15B**

EUT: Active stylus M/N:SPEN-HP-03  
 Manufacturer: Sunwoda Electronic Co., Ltd.  
 Operating Condition: BT OPERATION&Charging  
 Test Site: 1#Shielding Room  
 Operator: WADE  
 Test Specification: N 120V/60Hz  
 Comment: Mains Port  
 Start of Test: 10/10/2017 /

**SCAN TABLE: "V 9K-30MHz fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	1.0 s	9 kHz	NSLK8126 2008

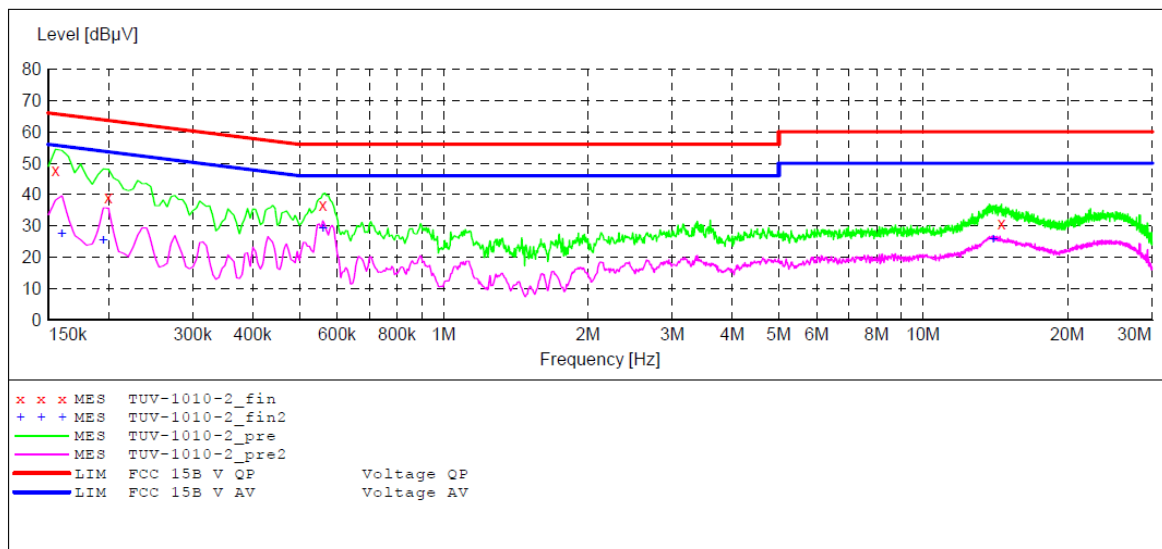

**MEASUREMENT RESULT: "TUV-1010-2\_fin"**

10/10/2017

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.155000	47.90	10.5	66	17.8	QP	N	GND
0.200000	39.20	10.5	64	24.4	QP	N	GND
0.560000	36.60	10.7	56	19.4	QP	N	GND
14.575000	30.90	11.4	60	29.1	QP	N	GND

**MEASUREMENT RESULT: "TUV-1010-2\_fin2"**

10/10/2017

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.160000	27.60	10.5	56	27.9	AV	N	GND
0.195000	25.40	10.5	54	28.4	AV	N	GND
0.560000	29.20	10.7	46	16.8	AV	N	GND
14.005000	25.80	11.4	50	24.2	AV	N	GND

**Shenzhen Accurate Technology Co., Ltd.**

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com


**ACCURATE TECHNOLOGY CO., LTD**

**CONDUCTED EMISSION STANDARD FCC PART 15B**

EUT: Active stylus M/N:SPEN-HP-03  
 Manufacturer: Sunwoda Electronic Co., Ltd.  
 Operating Condition: BT OPERATION&Charging  
 Test Site: 1#Shielding Room  
 Operator: WADE  
 Test Specification: L 120V/60Hz  
 Comment: Mains Port  
 Start of Test: 10/10/2017 /

**SCAN TABLE: "V 9K-30MHz fin"**

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average			
			QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
			Average			

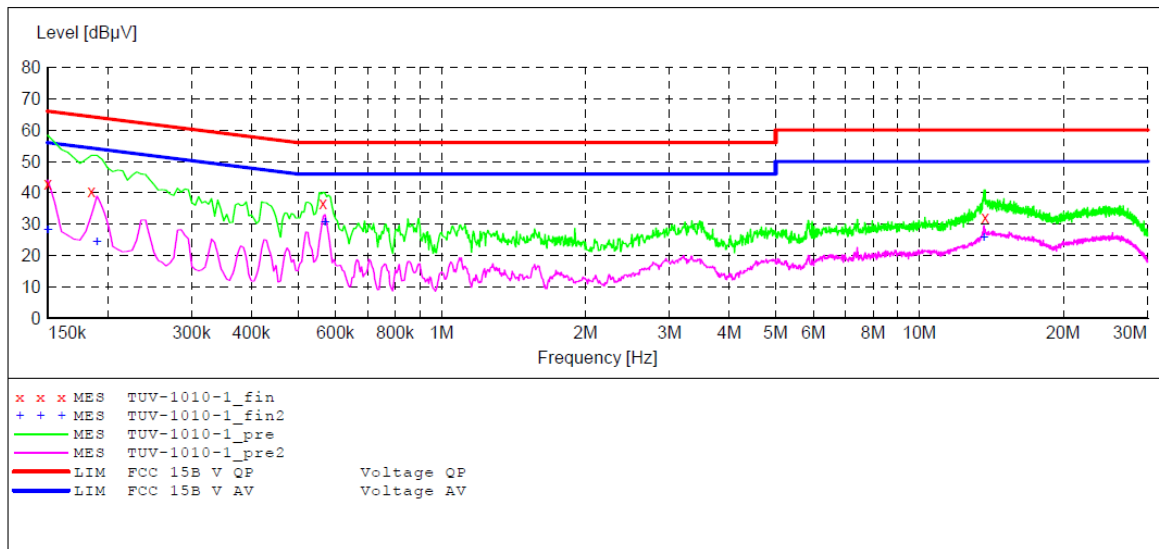

**MEASUREMENT RESULT: "TUV-1010-1\_fin"**

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	42.90	10.5	66	23.1	QP	L1	GND
0.185000	40.40	10.5	64	23.9	QP	L1	GND
0.565000	36.60	10.7	56	19.4	QP	L1	GND
13.720000	32.30	11.3	60	27.7	QP	L1	GND

**MEASUREMENT RESULT: "TUV-1010-1\_fin2"**

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	28.20	10.5	56	27.8	AV	L1	GND
0.190000	24.60	10.5	54	29.4	AV	L1	GND
0.570000	30.90	10.7	46	15.1	AV	L1	GND
13.645000	25.80	11.3	50	24.2	AV	L1	GND

**Shenzhen Accurate Technology Co., Ltd.**

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290


Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com

## 6. 6DB BANDWIDTH MEASUREMENT

### 6.1. Block Diagram of Test Setup



(EUT: Active stylus)

### 6.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.3. The Requirement for 5.2(1)

The minimum -6 dB bandwidth shall be 500 kHz.

### 6.4. EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 6.5. Operating Condition of EUT

6.5.1. Setup the EUT and simulator as shown as Section 6.1.

6.5.2. Turn on the power of all equipment.

6.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.



### 6.6. Test Procedure

6.6.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.6.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.


6.6.3. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

### 6.7. Test Result

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit(MHz)	PASS/FAIL
0	2402	0.729	0.5	PASS
19	2440	0.738	0.5	PASS
39	2480	0.751	0.5	PASS


The spectrum analyzer plots are attached as below.

*channel 0*

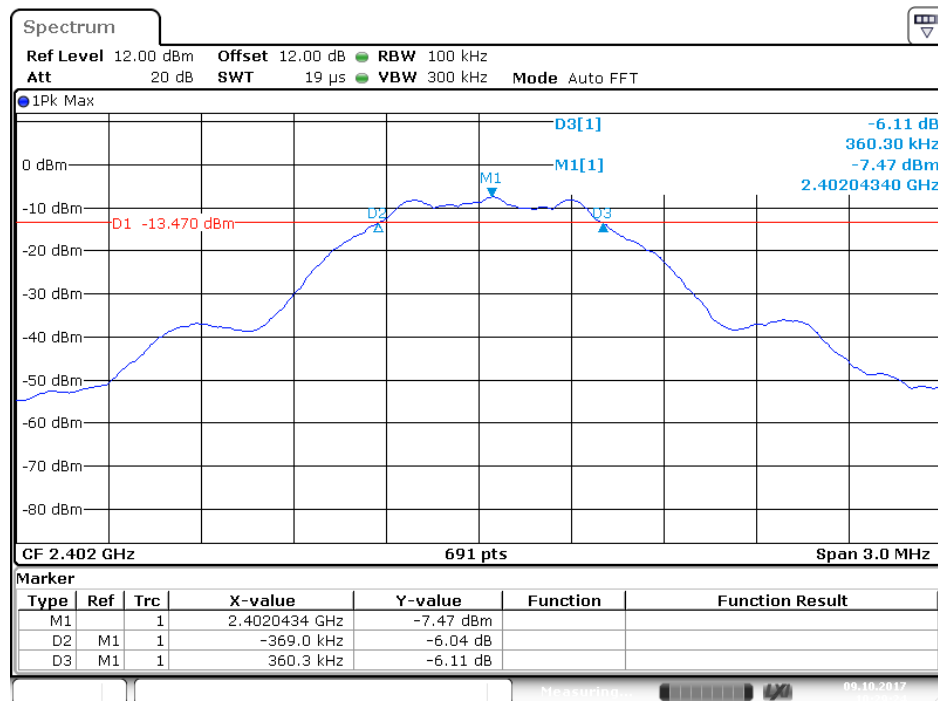


Date: 9.OCT.2017 10:29:24

channel 19

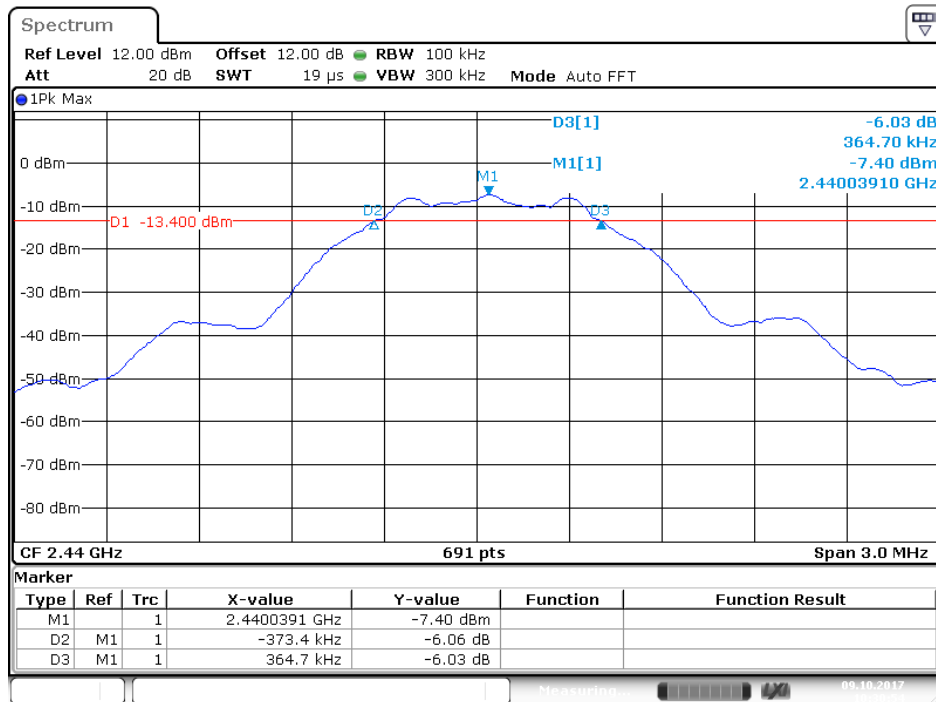

Date: 9.OCT.2017 10:30:54

channel 39

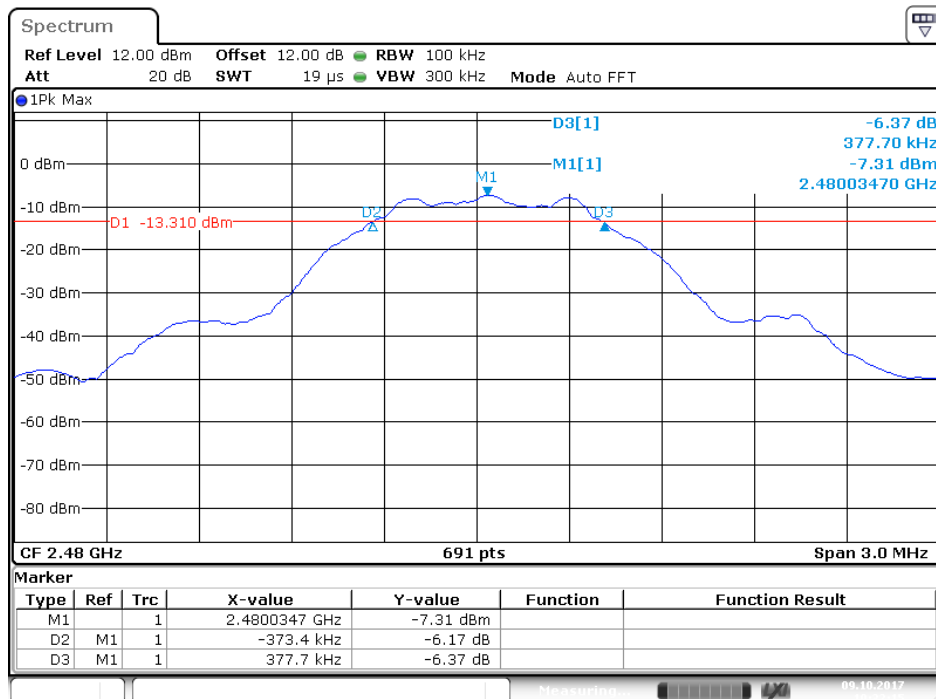

Date: 9.OCT.2017 10:32:15

**Shenzhen Accurate Technology Co., Ltd.**

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com

## 7. MAXIMUM PEAK OUTPUT POWER

### 7.1. Block Diagram of Test Setup



(EUT: Active stylus)

### 7.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

### 7.3. The Requirement For Section RSS-247 section 5.4

5.4 (4): For DTSs employing digital modulation techniques operating in the bands 902-928MHz and 2400-2483.5MHz, the maximum peak conducted output power shall not exceed 1W.

### 7.4. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 7.5. Operating Condition of EUT

7.5.1. Setup the EUT and simulator as shown as Section 7.1.

7.5.2. Turn on the power of all equipment.

7.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

### 7.6. Test Procedure

7.6.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.6.2. Set RBW of spectrum analyzer to 1 MHz and VBW to 3MHz.


7.6.3. Measurement the maximum peak output power.

### 7.7. Test Result

Channel	Frequency (MHz)	Peak Power Output (dBm)	Antenna gain (dBi)	E.I.P.R. (dBm)	Peak Power Limit (dBm)	Pass / Fail
0	2402	-7.47	2	-5.47	30	PASS
19	2440	-7.41	2	-5.41	30	PASS
39	2480	-7.26	2	-5.26	30	PASS


The spectrum analyzer plots are attached as below.

*channel 0*

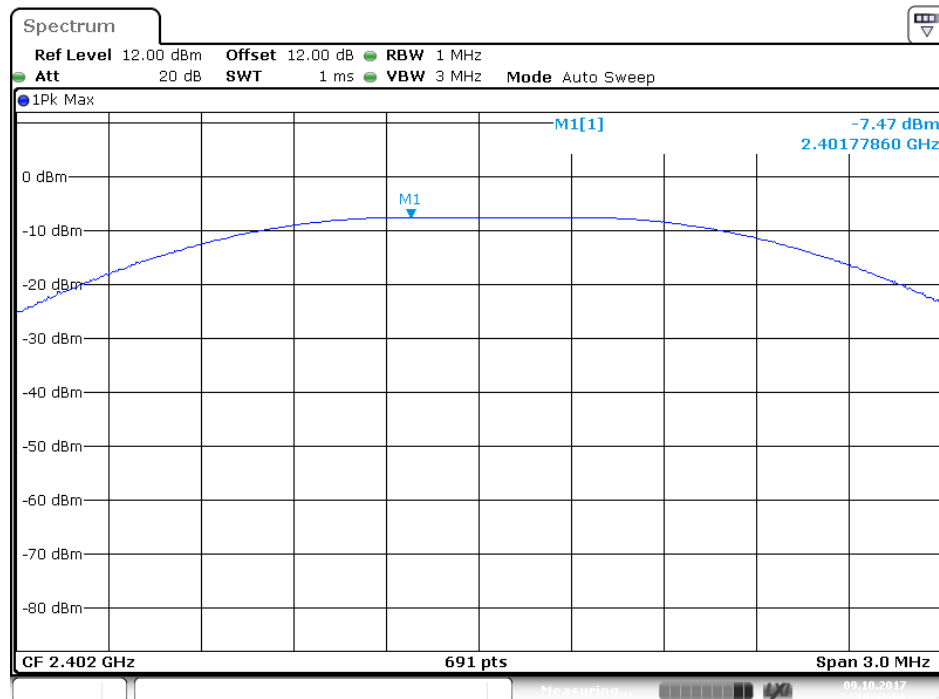


Date: 9.OCT.2017 10:43:06

channel 19

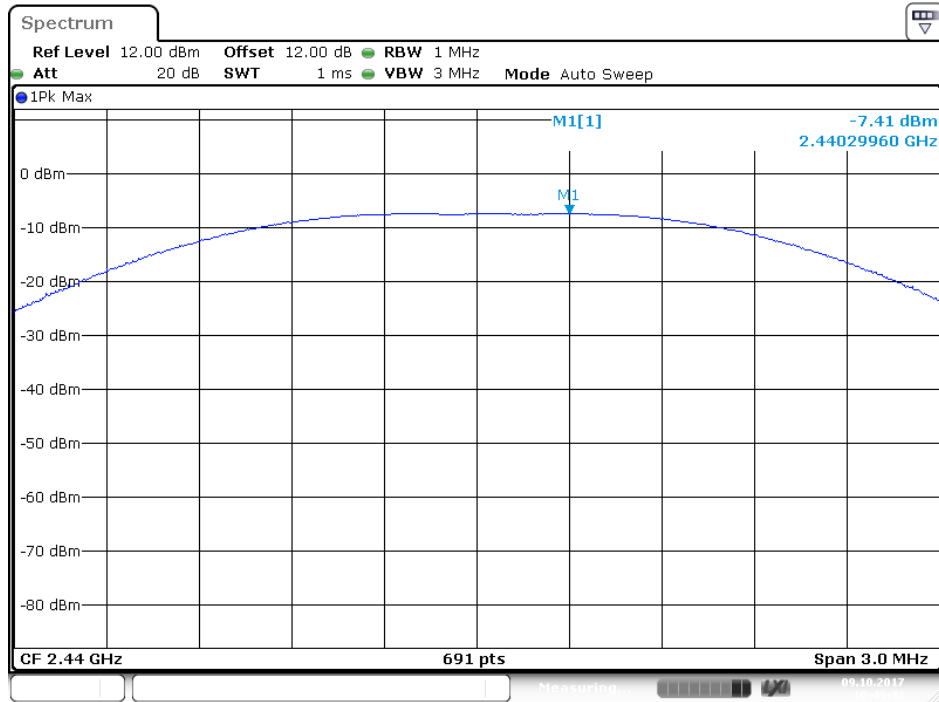


channel 39

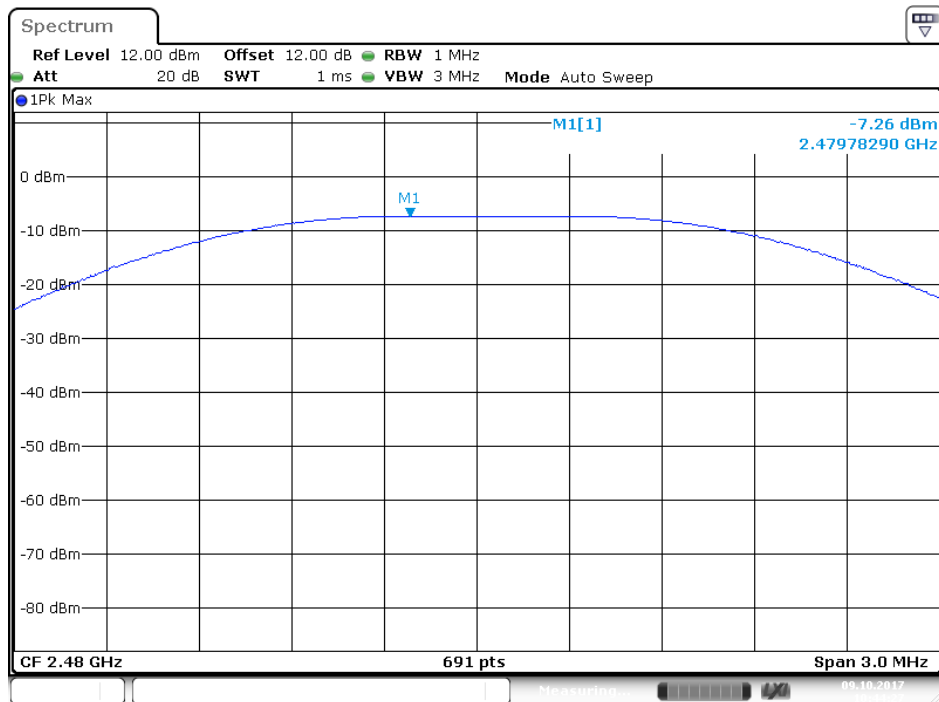

## 8. POWER SPECTRAL DENSITY MEASUREMENT

### 8.1. Block Diagram of Test Setup



(EUT: Active stylus)

### 8.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 8.3. The Requirement For Section RSS-247 section 5.2

Section 5.2(2): The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

### 8.4. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 8.5. Operating Condition of EUT

8.5.1. Setup the EUT and simulator as shown as Section 8.1.

8.5.2. Turn on the power of all equipment.

8.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

## 8.6. Test Procedure

8.6.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.6.2. Measurement Procedure PKPSD:

8.6.3. This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.


8.6.4. Measurement the maximum power spectral density.

### 8.7. Test Result

CHANNEL NUMBER	FREQUENCY (MHz )	PSD (dBm/3kHz)	LIMIT (dBm/3kHz)	PASS/FAIL
0	2402	-22.92	8	PASS
19	2440	-22.93	8	PASS
39	2480	-22.37	8	PASS

The spectrum analyzer plots are attached as below.


*channel 0*

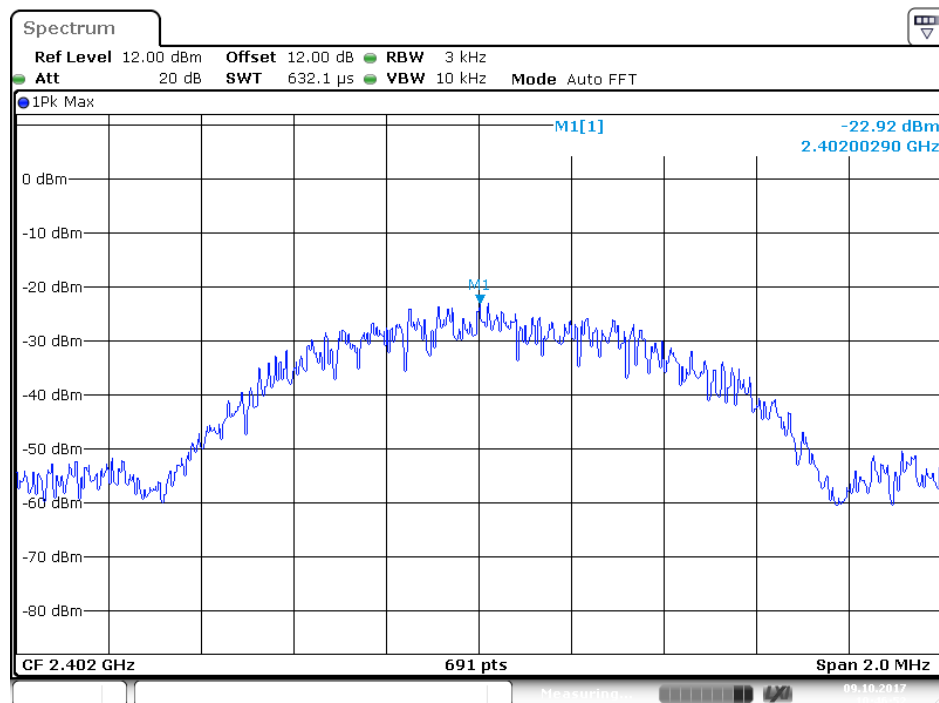


Date: 9.OCT.2017 10:46:52



*channel 19*

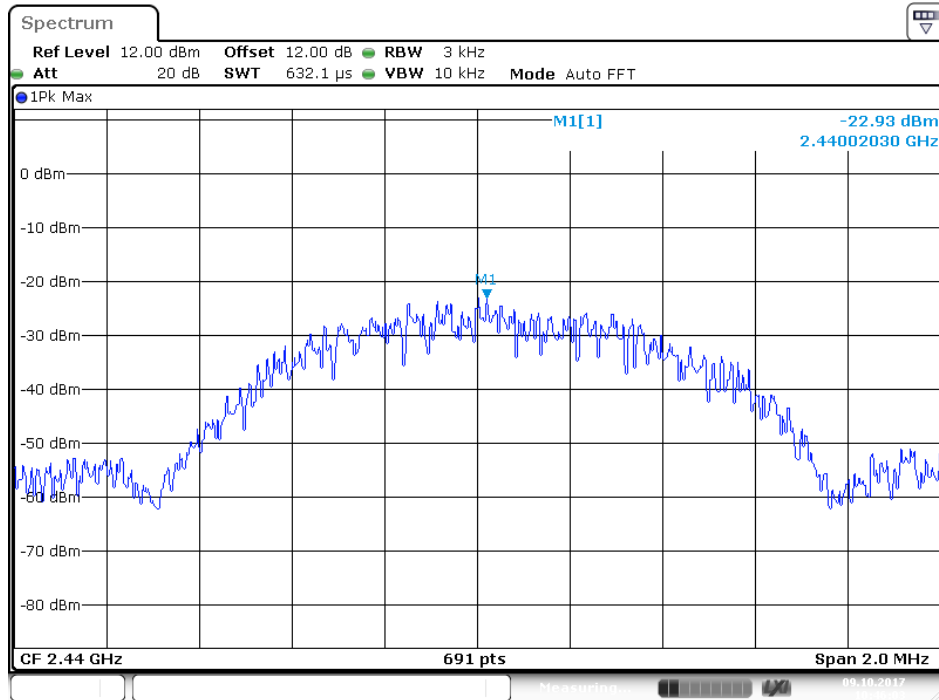


*channel 39*

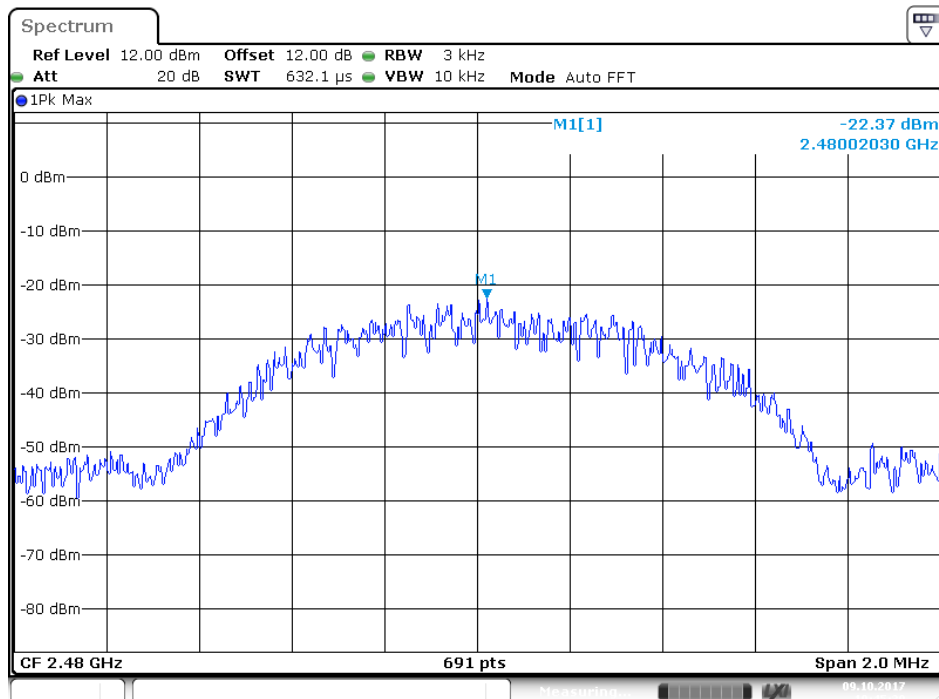

## 9. BAND EDGE COMPLIANCE TEST

### 9.1. Block Diagram of Test Setup



(EUT: Active stylus)

### 9.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 9.3. The Requirement For RSS-247 Section 5.5

5.5: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### 9.4. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 9.5. Operating Condition of EUT

9.5.1. Setup the EUT and simulator as shown as Section 9.1.

9.5.2. Turn on the power of all equipment.

9.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

## 9.6. Test Procedure

### Conducted Band Edge:

9.6.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

9.6.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

9.6.3. Radiate Band Edge:

9.6.4. The EUT is placed on a turntable, which is 0.1m above the ground plane and worked at highest radiated power.

9.6.5. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

9.6.6. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

9.6.7. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

9.6.8. RBW=1MHz, VBW=1MHz


9.6.9. The band edges was measured and recorded.

## 9.7. Test Result


**Pass**

Channel	Frequency	Delta peak to band emission	Limit(dBc)
0	2.4GHz	48.13	20
39	2.4835GHz	49.73	20

channel 0

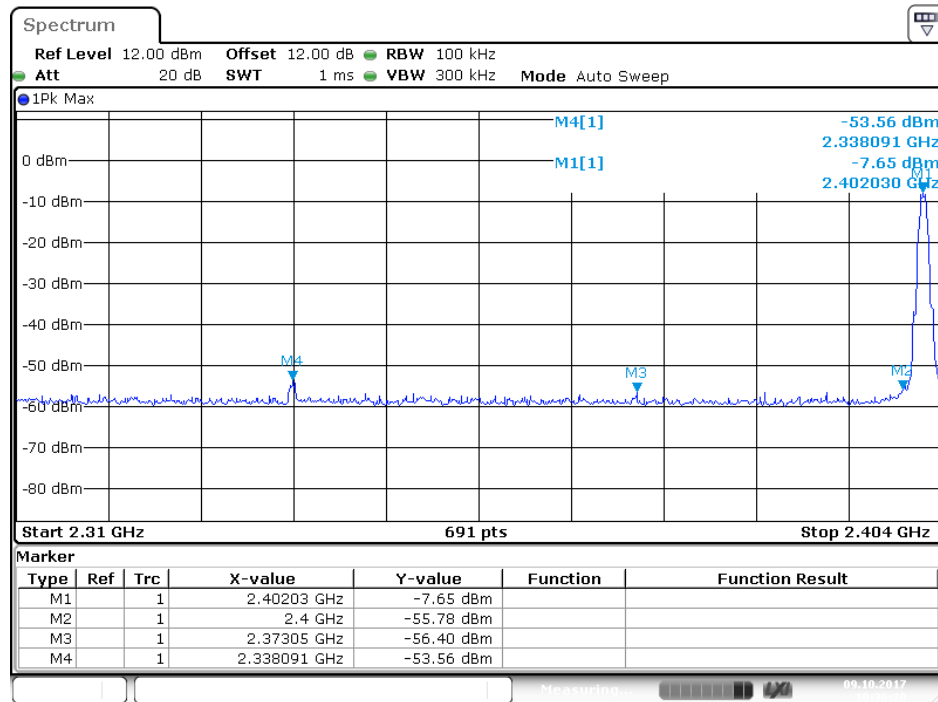

channel 39

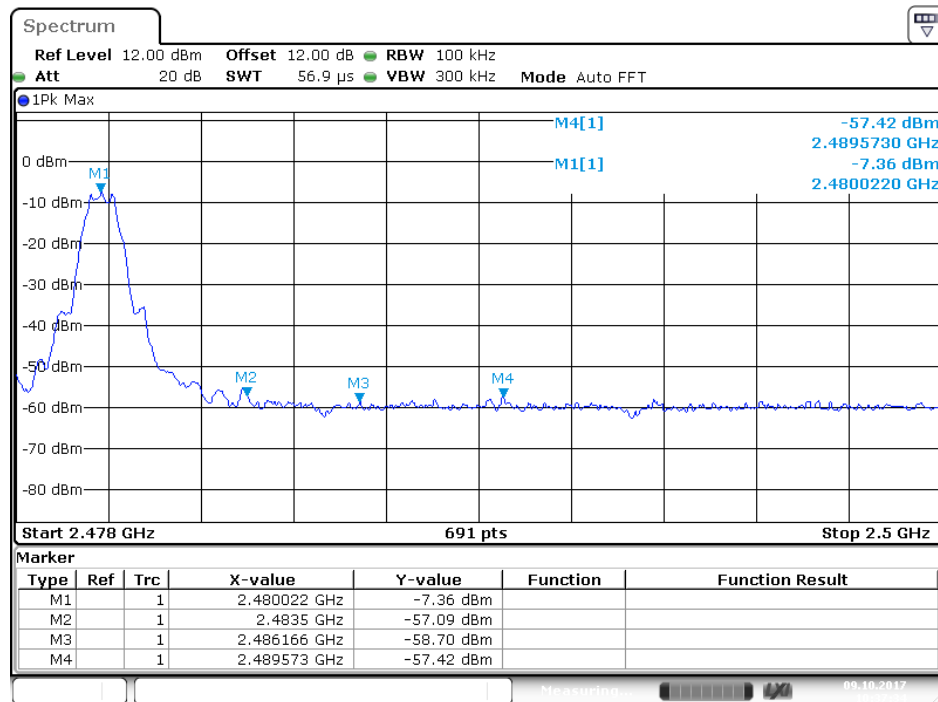

### Radiated Band Edge Result



### ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #4603	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 17/10/09/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Active stylus	Engineer Signature: WADE
Mode: TX 2402MHz	Distance: 3m
Model: SPEN-HP-03	
Manufacturer: Sunwoda Electronic Co., Ltd.	

Note: /

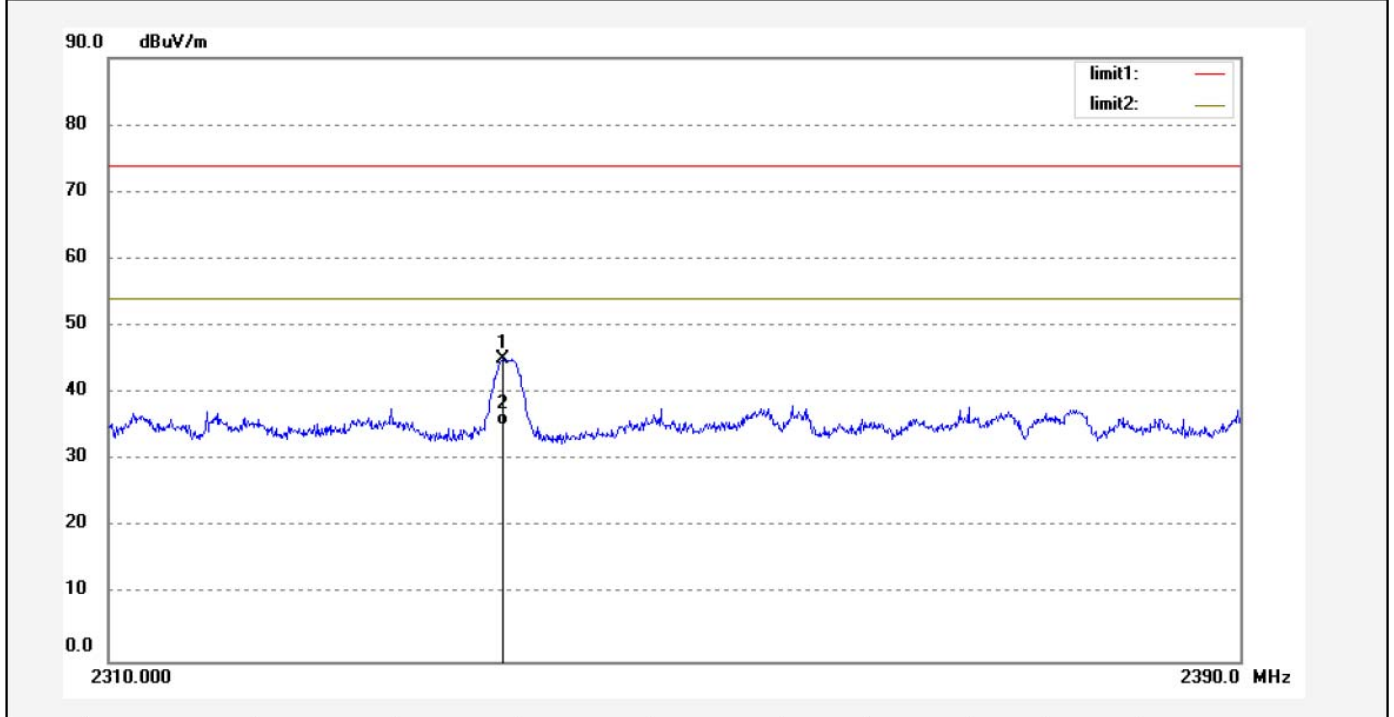

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2337.600	44.59	0.47	45.06	74.00	-28.94	peak			
2	2337.600	34.80	0.47	35.27	54.00	-18.73	AVG			

#### Shenzhen Accurate Technology Co., Ltd.

Address: 1/F., Building A, Changyuan New Material Port, Science &amp; Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com

Job No.: LGW2017 #4602

Standard: FCC PK

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Active stylus

Mode: TX 2402MHz

Model: SPEN-HP-03

Manufacturer: Sunwoda Electronic Co., Ltd.

Polarization: Vertical

Power Source: DC 3.7V


Date: 17/10/09/

Time:

Engineer Signature: WADE

Distance: 3m

Note: /

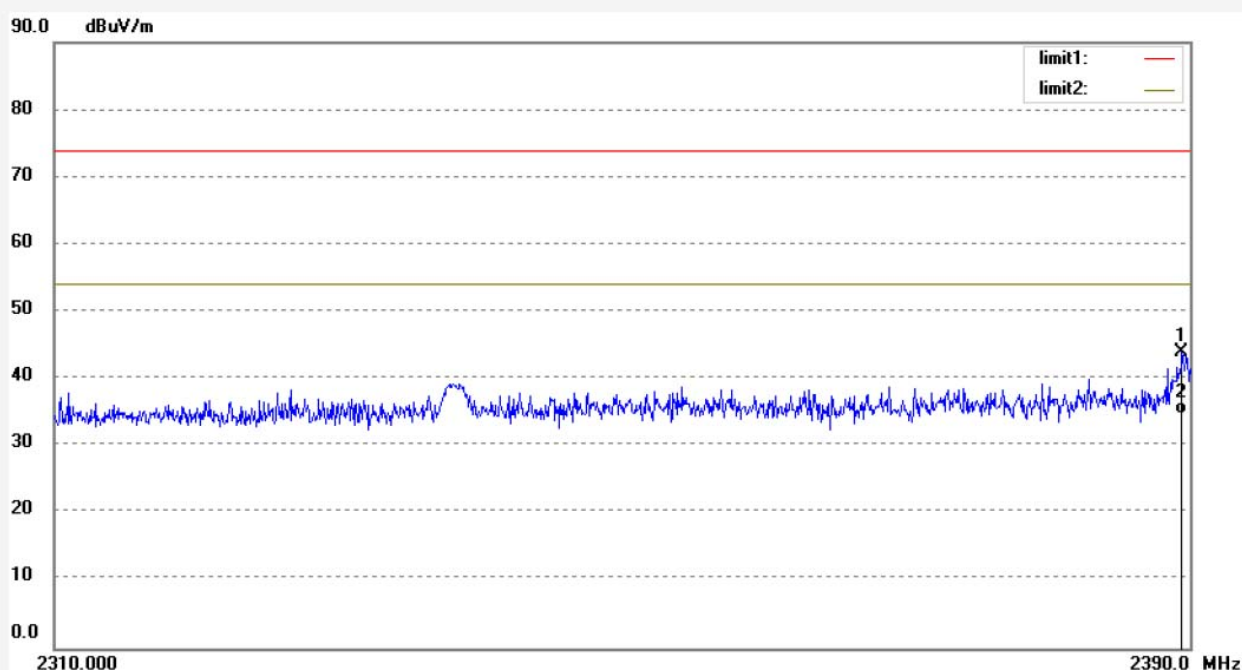

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2389.440	41.30	2.79	44.09	74.00	-29.91	peak			
2	2389.440	31.89	2.79	34.68	54.00	-19.32	AVG			

Job No.: LGW2017 #4608

Standard: FCC PK

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Active stylus

Mode: TX 2480MHz

Model: SPEN-HP-03

Manufacturer: Sunwoda Electronic Co., Ltd.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 17/10/09/

Time:

Engineer Signature: WADE

Distance: 3m


Note: /

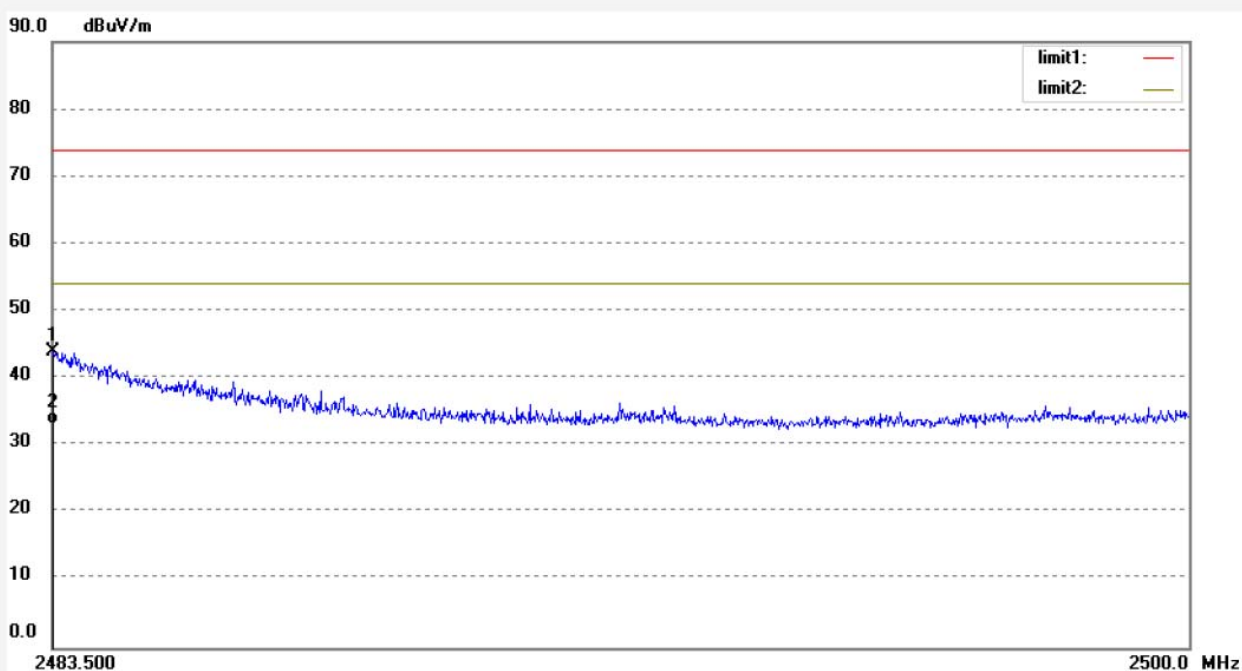

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.517	42.89	1.10	43.99	74.00	-30.01	peak			
2	2483.517	32.14	1.10	33.24	54.00	-20.76	AVG			

Job No.: LGW2017 #4609	Polarization: Vertical
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 17/10/09/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Active stylus	Engineer Signature: WADE
Mode: TX 2480MHz	Distance: 3m
Model: SPEN-HP-03	
Manufacturer: Sunwoda Electronic Co., Ltd.	

Note: /

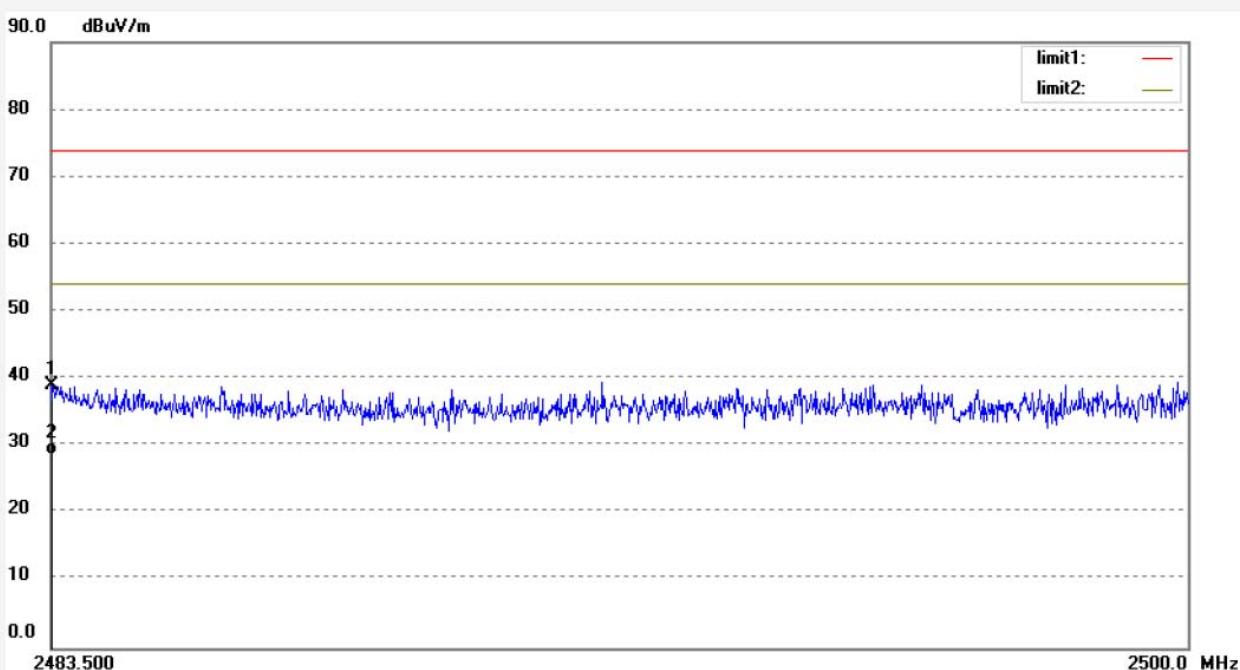

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.517	35.89	3.10	38.99	74.00	-35.01	peak			
2	2483.517	25.54	3.10	28.64	54.00	-25.36	AVG			

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:


$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$



## 10. RADIATED SPURIOUS EMISSION TEST


### 10.1. Block Diagram of Test Setup

#### 10.1.1. Block diagram of connection between the EUT and peripherals

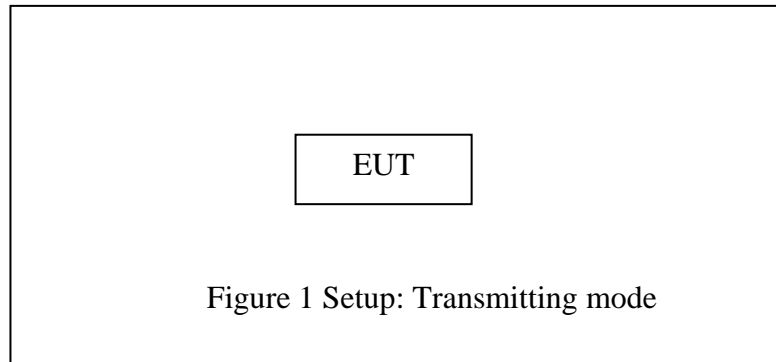


#### 10.1.2. Semi-Anechoic Chamber Test Setup Diagram


(A) Radiated Emission Test Set-Up, Frequency below 30MHz

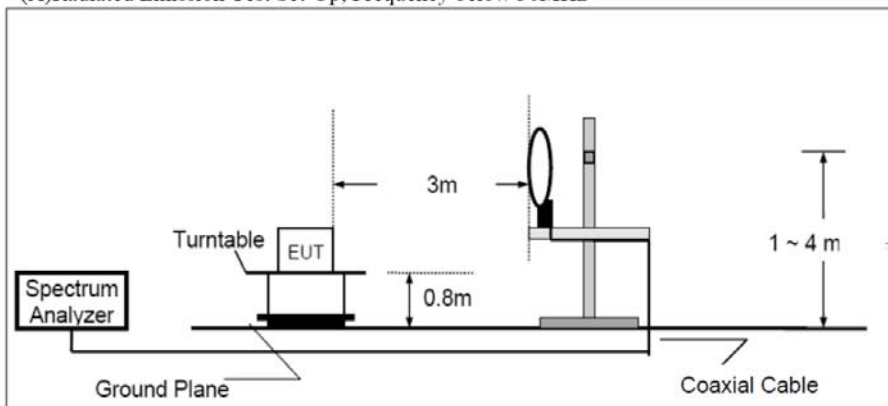

(B) Radiated Emission Test Set-Up, Frequency 30-1000MHz

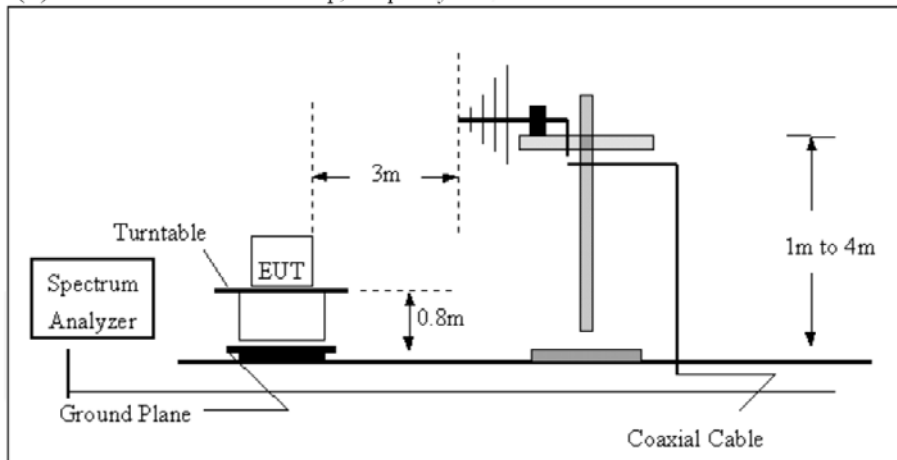

(C) Radiated Emission Test Set-Up, Frequency above 1GHz

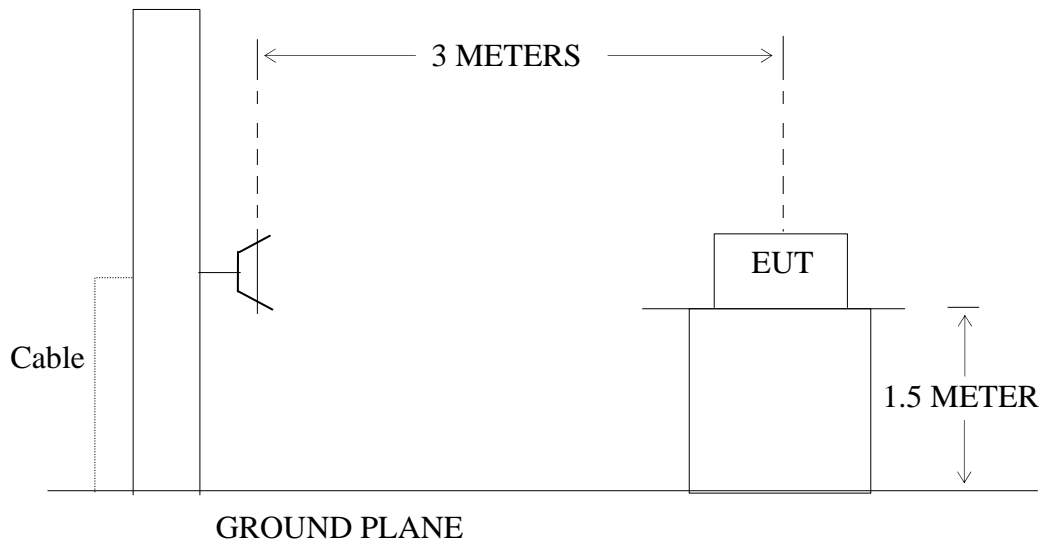

## 10.2. The Emission Limit

### 10.2.1. Measurement Limits According to RSS-Gen Section 7.2.5 Table 5

**Table 5: General Field Strength Limits for Transmitters at Frequencies Above 30 MHz**

Frequency (MHz)	Field Strength (microvolt/m at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960	500

**Note:** Transmitting devices are not permitted in Table 1 bands or, unless stated otherwise, in TV bands (54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-806 MHz).

### 10.3. Restricted bands of operation

#### 10.3.1. RSS-Gen Section 7.2.2 Table 3: Restricted Frequency Bands

**Table 3: Restricted Frequency Bands** <sup>(Note)</sup>

MHz	MHz	GHz
0.090-0.110	240-285	9.0-9.2
2.1735-2.1905	322-335.4	9.3-9.5
3.020-3.026	399.9-410	10.6-12.7
4.125-4.128	608-614	13.25-13.4
4.17725-4.17775	960-1427	14.47-14.5
4.20725-4.20775	1435-1626.5	15.35-16.2
5.677-5.683	1645.5-1646.5	17.7-21.4
6.215-6.218	1660-1710	22.01-23.12
6.26775-6.26825	1718.8-1722.2	23.6-24.0
6.31175-6.31225	2200-2300	31.2-31.8
8.291-8.294	2310-2390	36.43-36.5
8.362-8.366	2655-2900	Above 38.6
8.37625-8.38675	3260-3267	
8.41425-8.41475	3332-3339	
12.29-12.293	3345.8-3358	
12.51975-12.52025	3500-4400	
12.57675-12.57725	4500-5150	
13.36-13.41	5350-5460	
16.42-16.423	7250-7750	
16.69475-16.69525	8025-8500	
16.80425-16.80475		
25.5-25.67		
37.5-38.25		
73-74.6		
74.8-75.2		
108-138		
156.52475-156.52525		
156.7-156.9		

**Note:** Certain frequency bands listed in Table 1 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in the 200- and 300- series RSSs, such as RSS-210 and RSS-310, which contain the requirements that apply to licence-exempt radio apparatus.

- (a) Unwanted emissions falling into restricted bands of Table 1 shall comply with the limits specified in RSS-Gen.
- (b) For licence-exempt transmitters employing pulsed operation for which an average power limit is specified, a peak power limit also applies. Unless otherwise specified, the peak power limit is 20 dB above the average power limit. The average power measurement of the fundamental shall be performed according to the method described in RSS-Gen Section 4.5. The methodology described in Section 4.5 is also applicable to unwanted emission measurements provided that they exhibit similar pulse characteristics as the fundamental.

## 10.4. Restricted bands of operation

### 10.4.1. FCC Part 15.205 Restricted bands of operation

(c) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510

<sup>2</sup>Above 38.6

(d) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

## 10.5. Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 10.6. Operating Condition of EUT

10.6.1. Setup the EUT and simulator as shown as Section 10.1.

10.6.2. Turn on the power of all equipment.

10.6.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

## 10.7. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground (Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground (Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9 kHz to 25GHz is checked.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain


## 10.8. The Field Strength of Radiation Emission Measurement Results

PASS.


**Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**

**2. \*: Denotes restricted band of operation.**


**FCC PART15C(9K-30MHz)(Worse case data)**

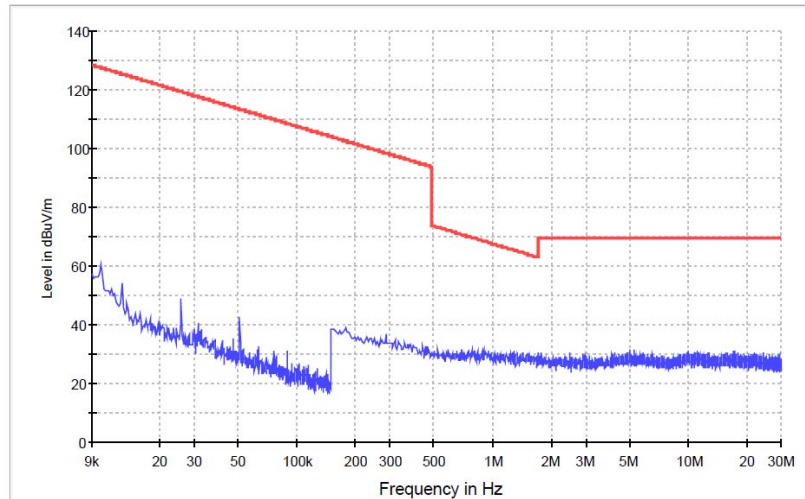

**X(Antenna Polarization)**

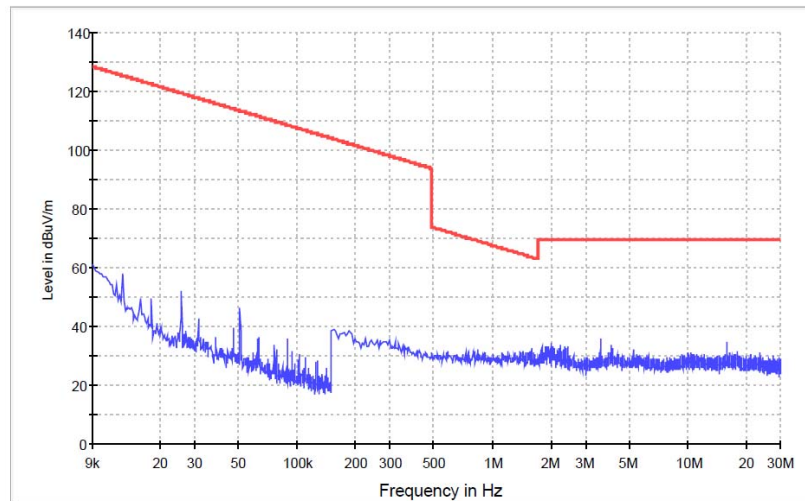

**Y(Antenna Polarization)**

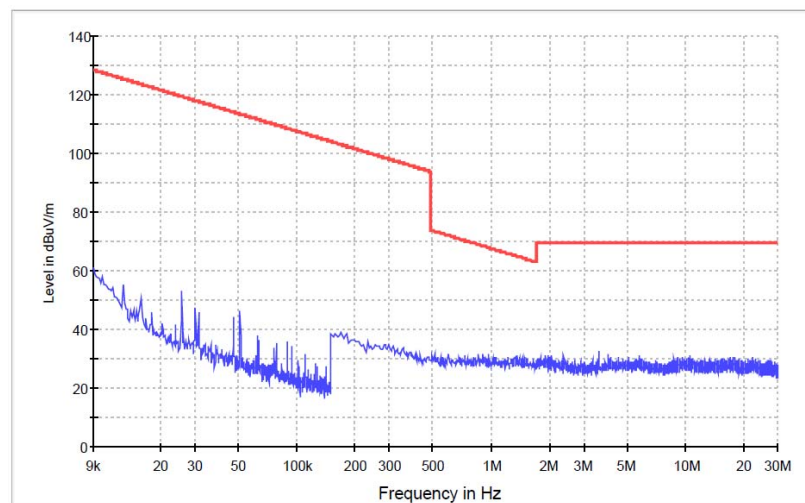

**Z(Antenna Polarization)**

## FCC PART15C(30MHz-1000MHz)


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LGW2017 #4632

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Active stylus

Mode: TX 2402MHz

Model: SPEN-HP-03

Manufacturer: Sunwoda Electronic Co., Ltd.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 17/10/09/

Time:

Engineer Signature: WADE

Distance: 3m

Note: /

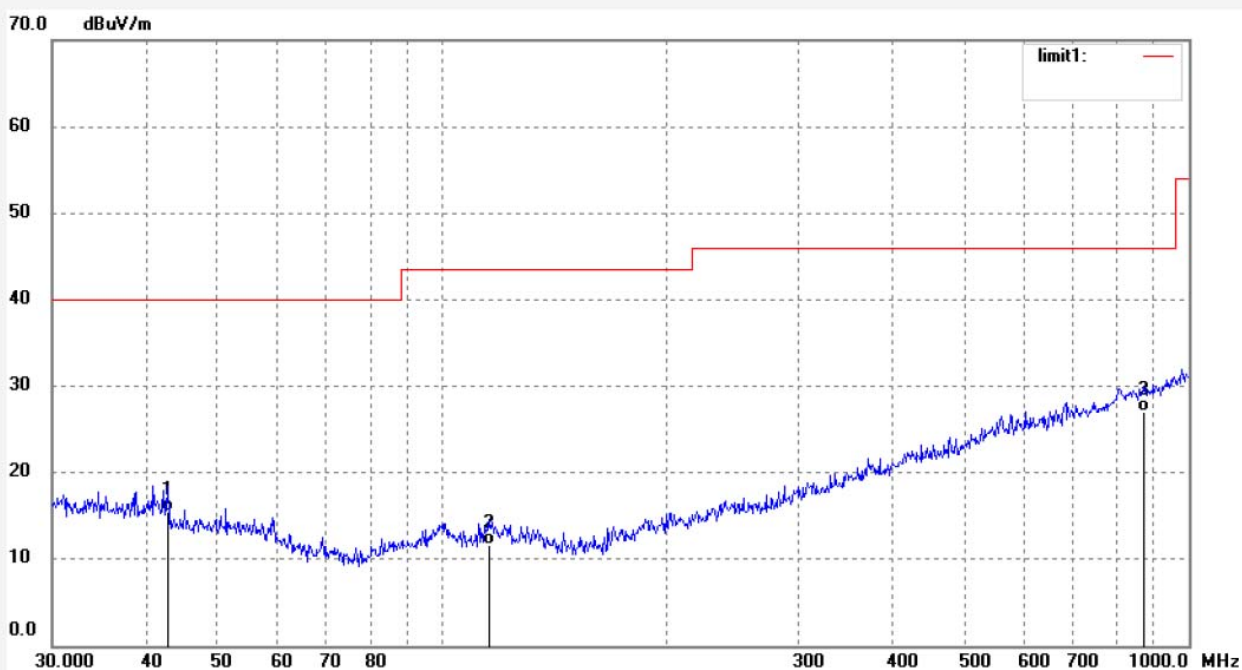

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	42.8997	27.70	-12.16	15.54	40.00	-24.46	QP			
2	115.3204	24.65	-13.06	11.59	43.50	-31.91	QP			
3	872.1832	25.05	1.94	26.99	46.00	-19.01	QP			

**Shenzhen Accurate Technology Co., Ltd.**

Address: 1/F., Building A, Changyuan New Material Port, Science &amp; Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com

Job No.: LGW2017 #4633

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Active stylus

Mode: TX 2402MHz

Model: SPEN-HP-03

Manufacturer: Sunwoda Electronic Co., Ltd.

Polarization: Vertical

Power Source: DC 3.7V


Date: 17/10/09/

Time:

Engineer Signature: WADE

Distance: 3m

Note: /

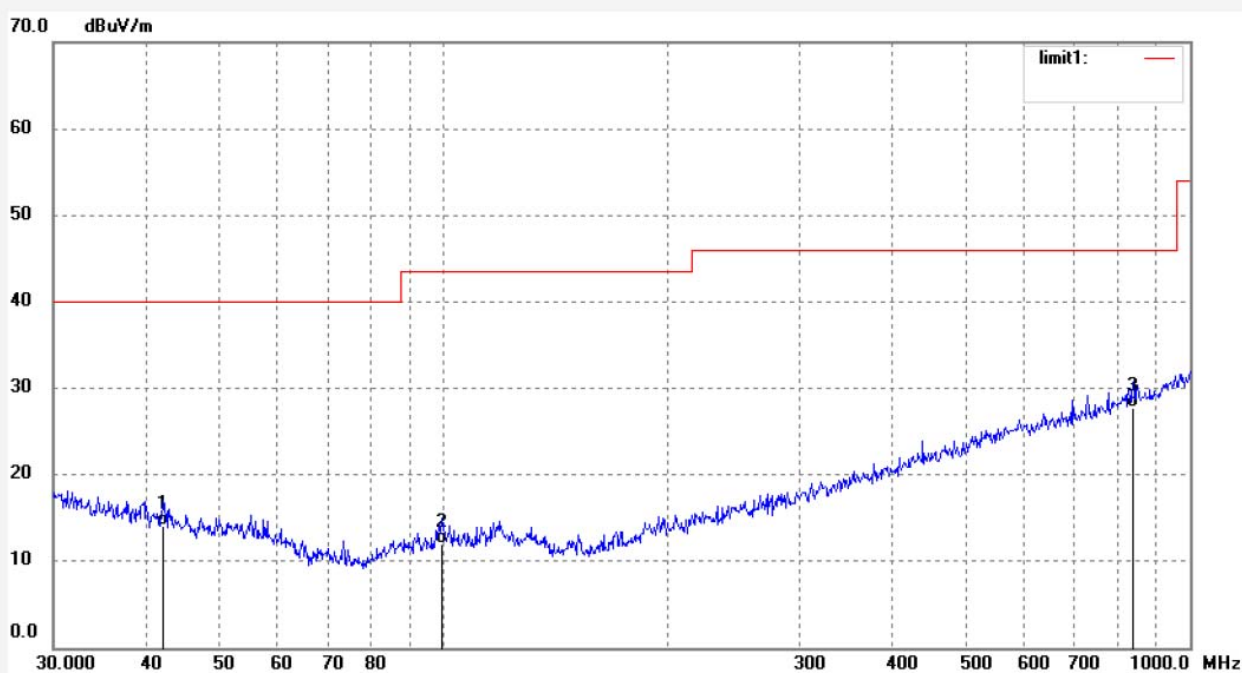

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	42.1542	26.05	-12.01	14.04	40.00	-25.96	QP			
2	99.5279	25.12	-13.21	11.91	43.50	-31.59	QP			
3	839.1817	26.26	1.47	27.73	46.00	-18.27	QP			



**FCC PART15C(1GHz-18GHz)**

**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #4600

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Active stylus

Mode: TX 2402MHz

Model: SPEN-HP-03

Manufacturer: Sunwoda Electronic Co., Ltd.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 17/10/09/

Time:

Engineer Signature: WADE

Distance: 3m

Note: /

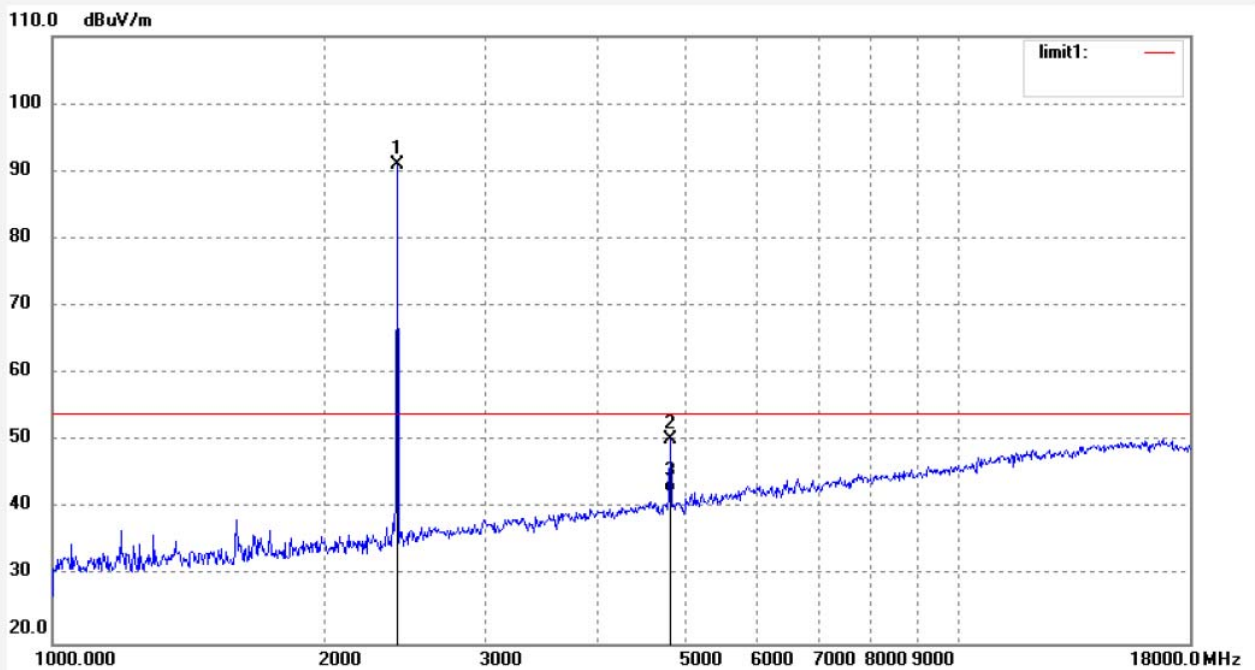

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	90.17	0.89	91.06	/	/	peak			
2	4804.000	42.90	7.40	50.30	74.00	-23.70	peak			
3	4804.000	34.95	7.40	42.35	54.00	-11.65	AVG			

**Shenzhen Accurate Technology Co., Ltd.**

Address: 1/F., Building A, Changyuan New Material Port, Science &amp; Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com

Job No.: LGW2017 #4601

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Active stylus

Mode: TX 2402MHz

Model: SPEN-HP-03

Manufacturer: Sunwoda Electronic Co., Ltd.

Polarization: Vertical

Power Source: DC 3.7V


Date: 17/10/09/

Time:

Engineer Signature: WADE

Distance: 3m

Note: /

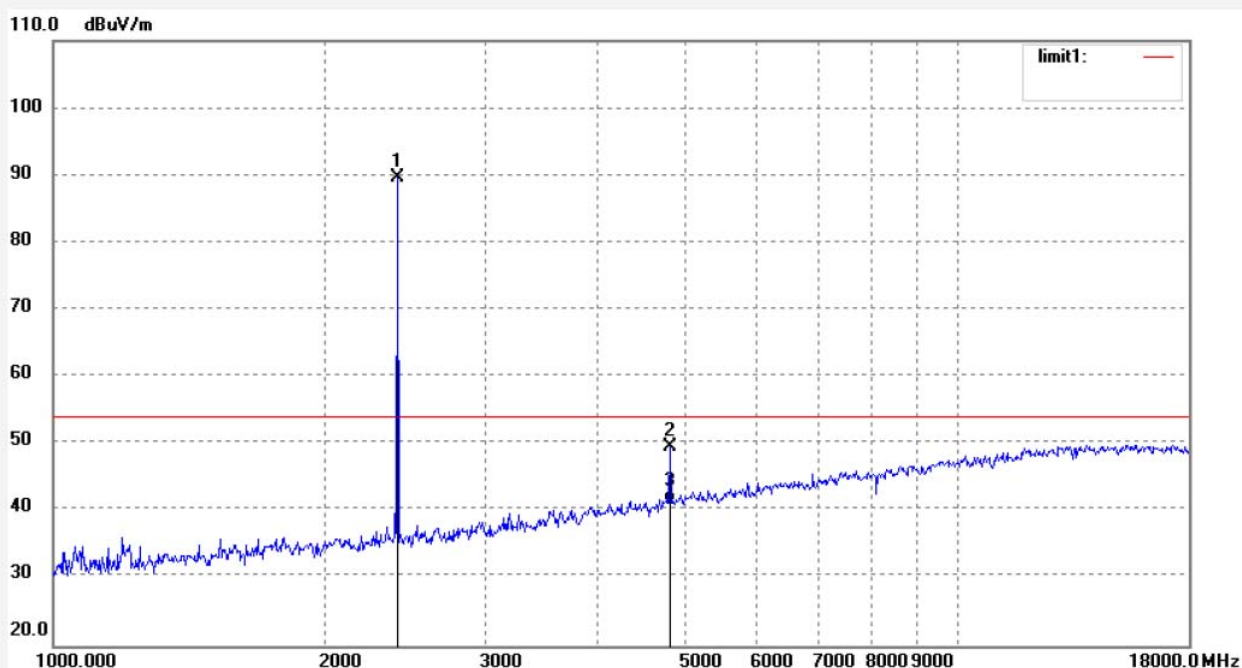

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	86.72	2.89	89.61	/	/	peak			
2	4804.000	40.15	9.40	49.55	74.00	-24.45	peak			
3	4804.000	31.84	9.40	41.24	54.00	-12.76	AVG			

Job No.: LGW2017 #4604

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Active stylus

Mode: TX 2440MHz

Model: SPEN-HP-03

Manufacturer: Sunwoda Electronic Co., Ltd.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 17/10/09/

Time:

Engineer Signature: WADE

Distance: 3m

Note: /

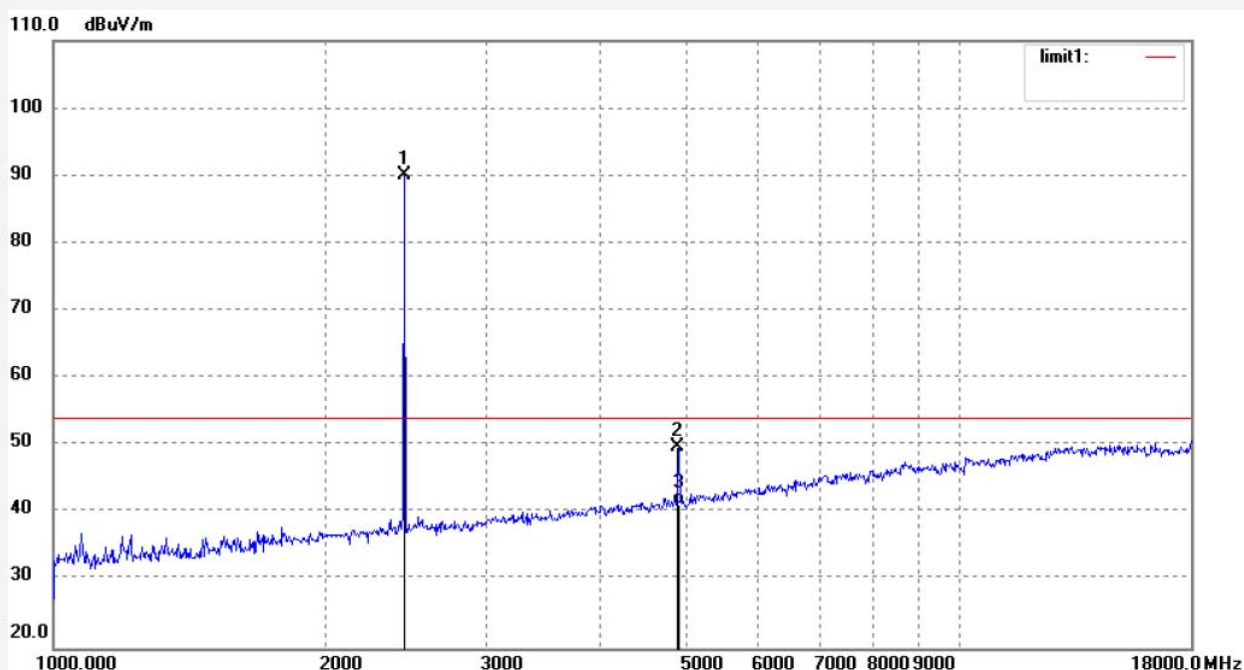

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	89.07	1.04	90.11	/	/	peak			
2	4880.000	41.80	8.10	49.90	74.00	-24.10	peak			
3	4880.000	33.25	8.10	41.35	54.00	-12.65	AVG			

Job No.: LGW2017 #4605

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Active stylus

Mode: TX 2440MHz

Model: SPEN-HP-03

Manufacturer: Sunwoda Electronic Co., Ltd.

Polarization: Vertical

Power Source: DC 3.7V


Date: 17/10/09/

Time:

Engineer Signature: WADE

Distance: 3m

Note: /

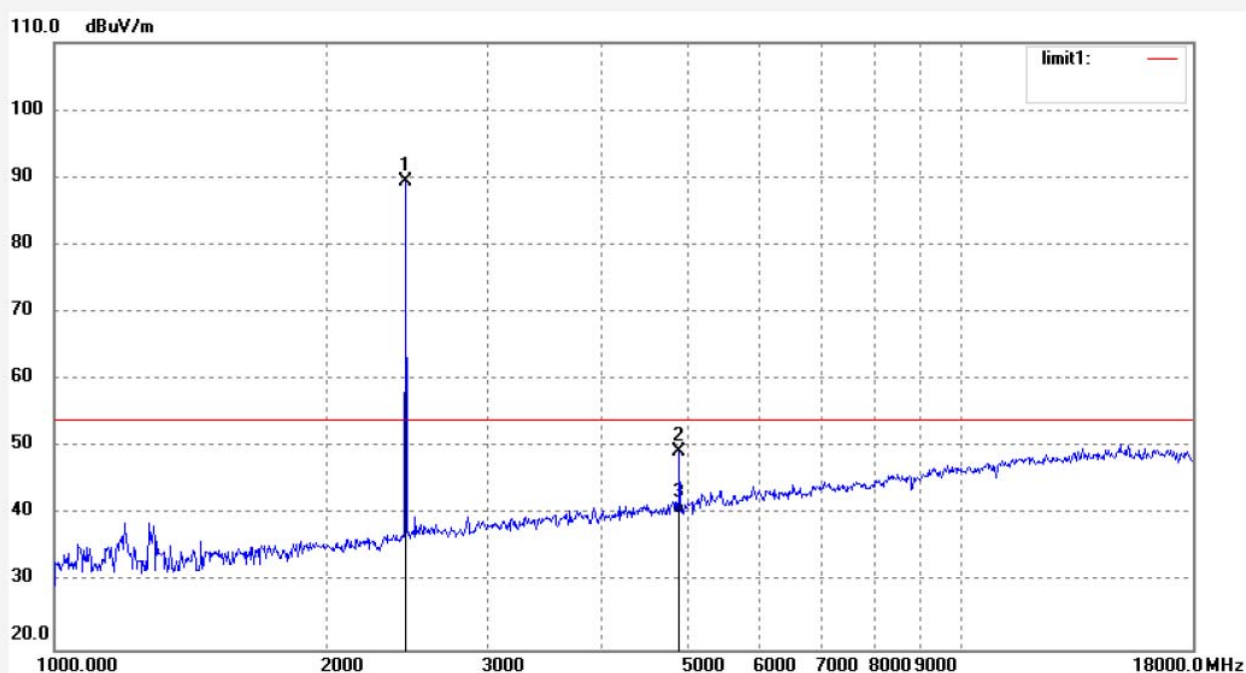

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	86.28	3.04	89.32	/	/	peak			
2	4880.000	39.26	10.10	49.36	74.00	-24.64	peak			
3	4880.000	30.11	10.10	40.21	54.00	-13.79	AVG			

Job No.: LGW2017 #4607

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Active stylus

Mode: TX 2480MHz

Model: SPEN-HP-03

Manufacturer: Sunwoda Electronic Co., Ltd.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 17/10/09/

Time:

Engineer Signature: WADE

Distance: 3m

Note: /

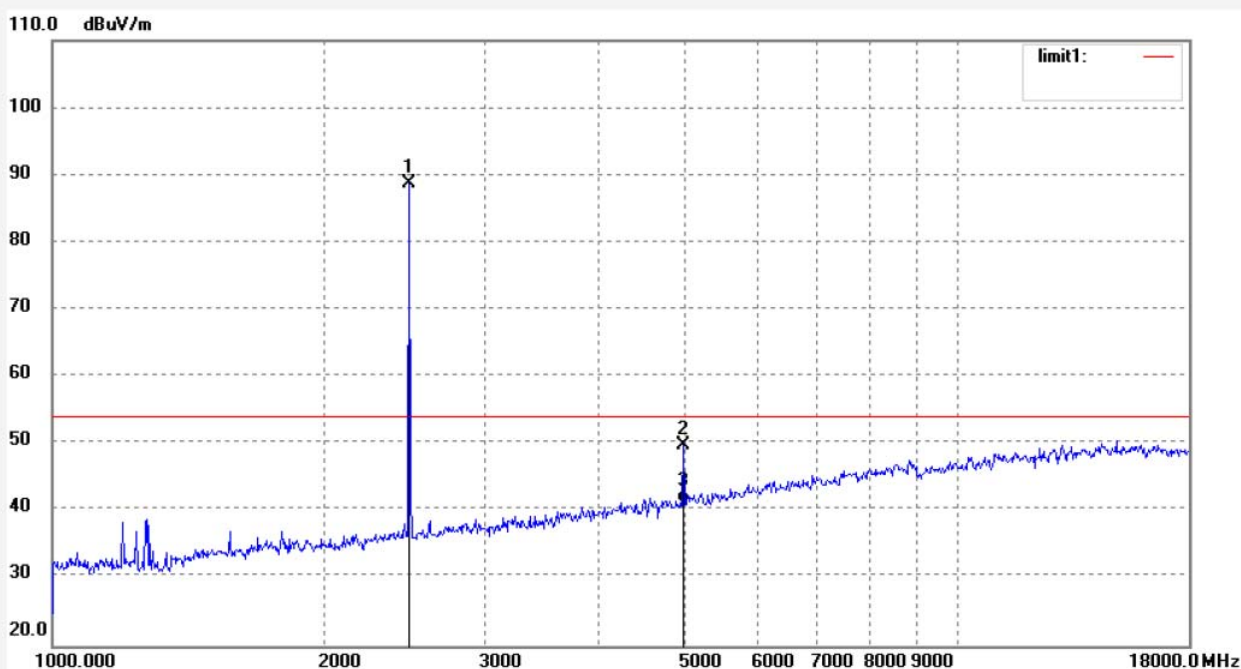

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	87.56	1.10	88.66	/	/	peak			
2	4960.000	41.32	8.60	49.92	74.00	-24.08	peak			
3	4960.000	32.64	8.60	41.24	54.00	-12.76	AVG			

Job No.: LGW2017 #4606

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Active stylus

Mode: TX 2480MHz

Model: SPEN-HP-03

Manufacturer: Sunwoda Electronic Co., Ltd.

Polarization: Vertical

Power Source: DC 3.7V


Date: 17/10/09/

Time:

Engineer Signature: WADE

Distance: 3m

Note: /

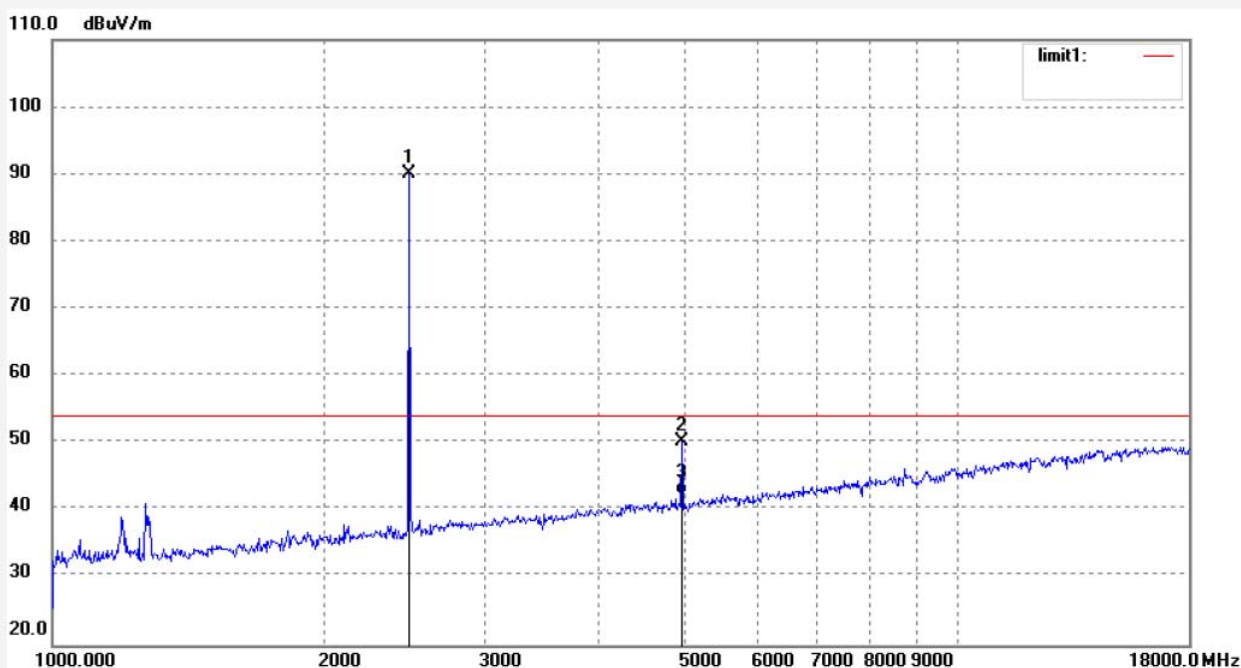

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	86.89	3.10	89.99	/	/	peak			
2	4960.000	39.57	10.60	50.17	74.00	-23.83	peak			
3	4960.000	31.87	10.60	42.47	54.00	-11.53	AVG			

## FCC PART15C(18GHz-26.5GHz)


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #4611

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Active stylus

Mode: TX 2402MHz

Model: SPEN-HP-03

Manufacturer: Sunwoda Electronic Co., Ltd.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 17/10/09/

Time:

Engineer Signature: WADE

Distance: 3m

Note: /

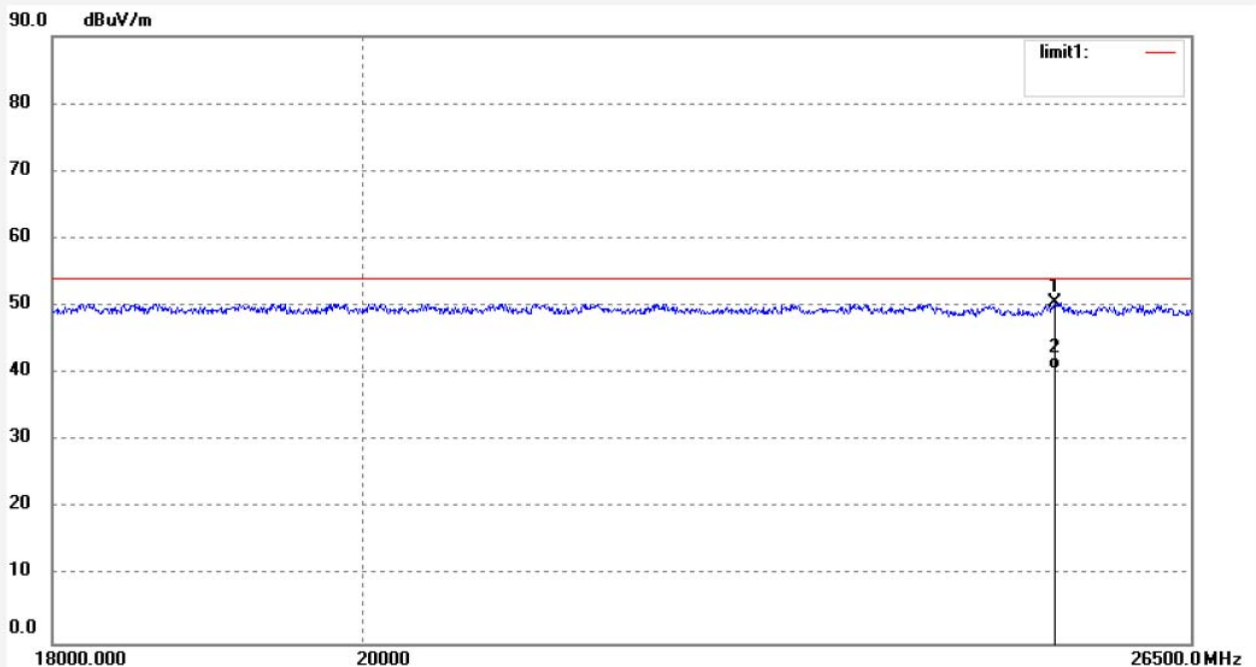

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25307.954	10.54	39.90	50.44	74.00	-23.56	peak			
2	25307.954	0.66	39.90	40.56	54.00	-13.44	AVG			

**Shenzhen Accurate Technology Co., Ltd.**

Address: 1/F., Building A, Changyuan New Material Port, Science &amp; Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com

Job No.: LGW2017 #4610

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Active stylus

Mode: TX 2402MHz

Model: SPEN-HP-03

Manufacturer: Sunwoda Electronic Co., Ltd.

Polarization: Vertical

Power Source: DC 3.7V


Date: 17/10/09/

Time:

Engineer Signature: WADE

Distance: 3m

Note: /

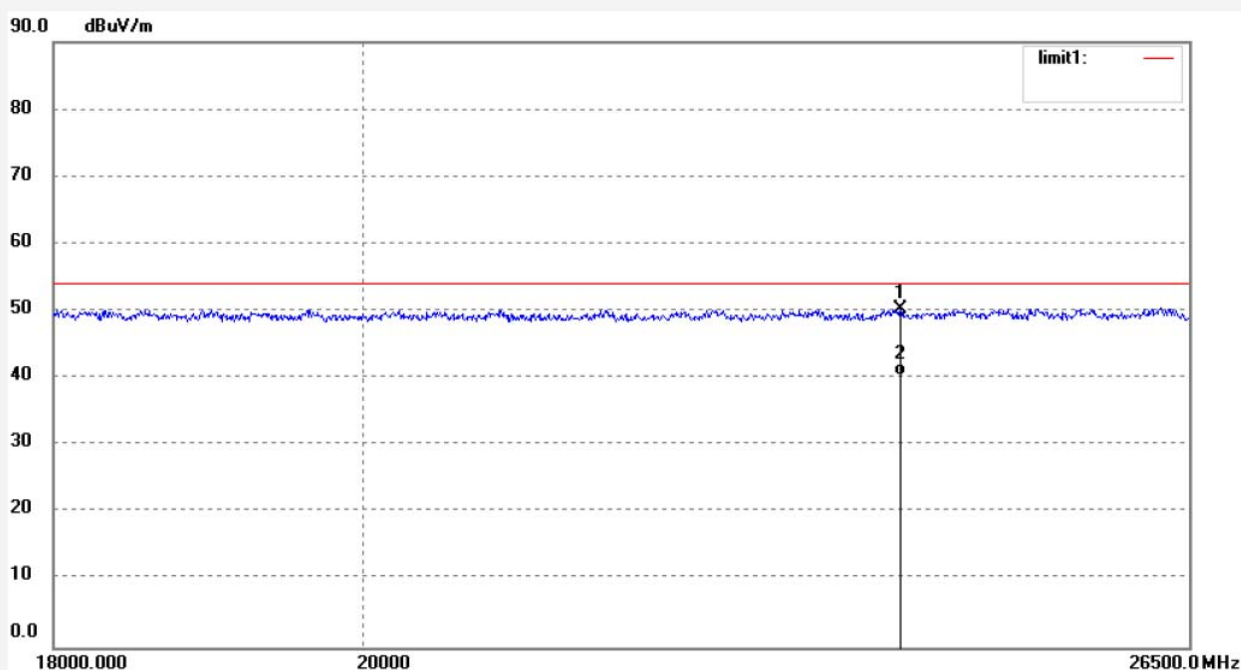

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24020.422	10.52	39.75	50.27	74.00	-23.73	peak			
2	24020.422	0.60	39.75	40.35	54.00	-13.65	AVG			



Job No.: LGW2017 #4612

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Active stylus

Mode: TX 2440MHz

Model: SPEN-HP-03

Manufacturer: Sunwoda Electronic Co., Ltd.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 17/10/09/

Time:

Engineer Signature: WADE

Distance: 3m

Note: /

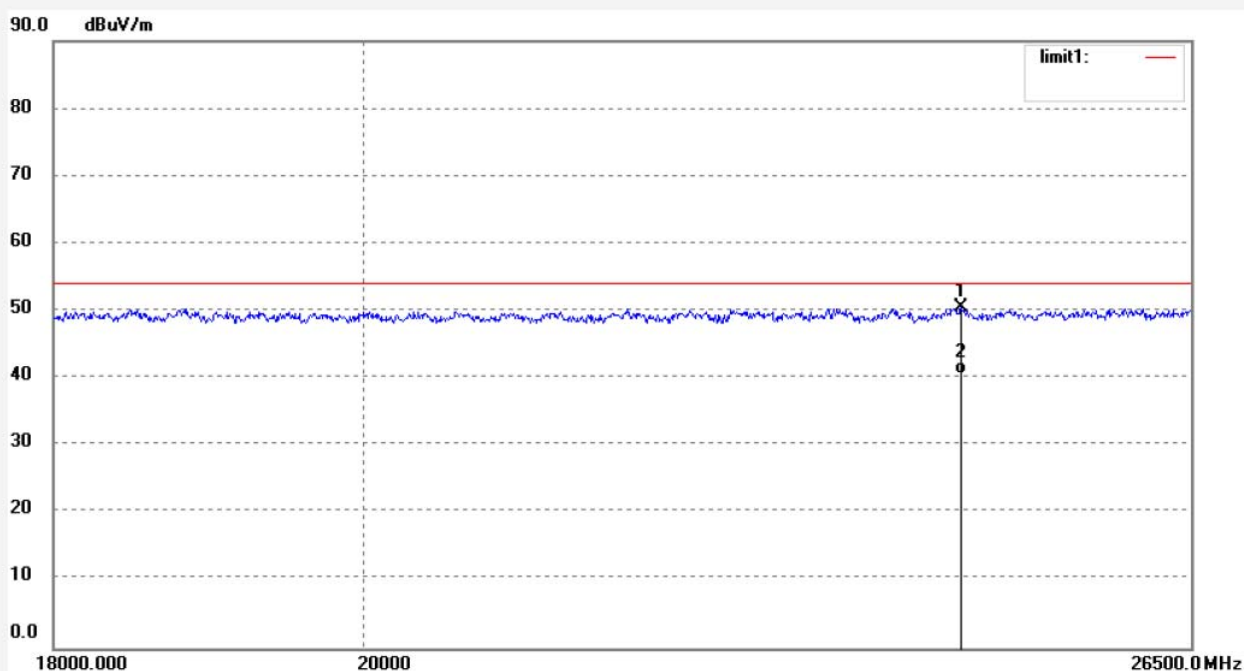

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24508.417	-9.31	59.80	50.49	74.00	-23.51	peak			
2	24508.417	-19.23	59.80	40.57	54.00	-13.43	AVG			

Job No.: LGW2017 #4613

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Active stylus

Mode: TX 2440MHz

Model: SPEN-HP-03

Manufacturer: Sunwoda Electronic Co., Ltd.

Polarization: Vertical

Power Source: DC 3.7V


Date: 17/10/09/

Time:

Engineer Signature: WADE

Distance: 3m

Note: /

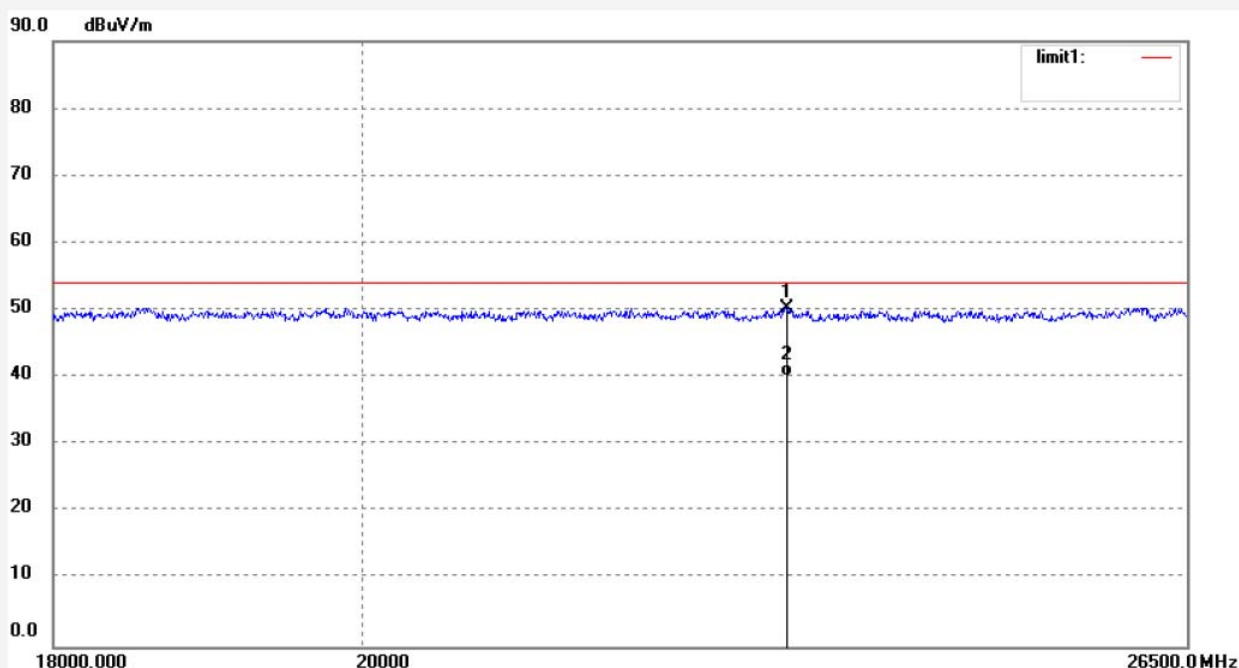

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	23118.054	10.55	39.80	50.35	74.00	-23.65	peak			
2	23118.054	0.44	39.80	40.24	54.00	-13.76	AVG			

Job No.: LGW2017 #4615

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: DC 3.7V

Test item: Radiation Test

Date: 17/10/09/

Temp.( C)/Hum.(%) 23 C / 48 %

Time:

EUT: Active stylus

Engineer Signature: WADE


Mode: TX 2480MHz

Distance: 3m

Model: SPEN-HP-03

Manufacturer: Sunwoda Electronic Co., Ltd.

Note: /

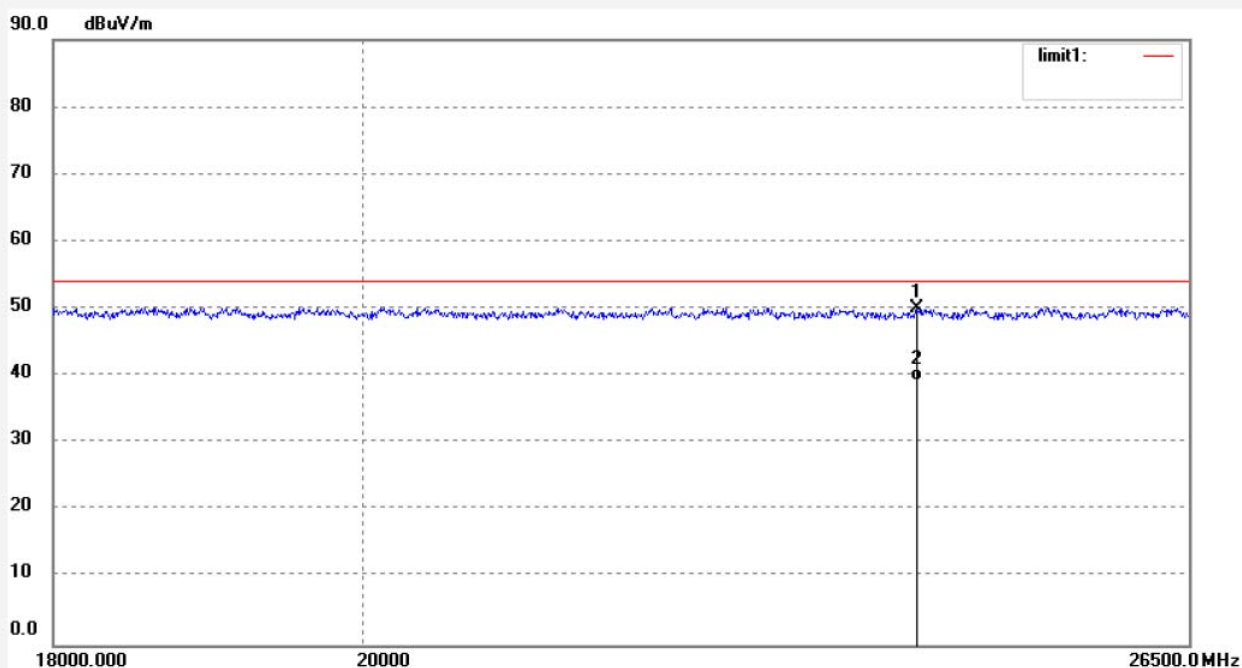

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24150.841	-10.25	60.24	49.99	74.00	-24.01	peak			
2	24150.841	-20.97	60.24	39.27	54.00	-14.73	AVG			

Job No.: LGW2017 #4614

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC 3.7V

Test item: Radiation Test

Date: 17/10/09/

Temp.( C)/Hum.(%) 23 C / 48 %

Time:

EUT: Active stylus

Engineer Signature: WADE


Mode: TX 2480MHz

Distance: 3m

Model: SPEN-HP-03

Manufacturer: Sunwoda Electronic Co., Ltd.

Note: /

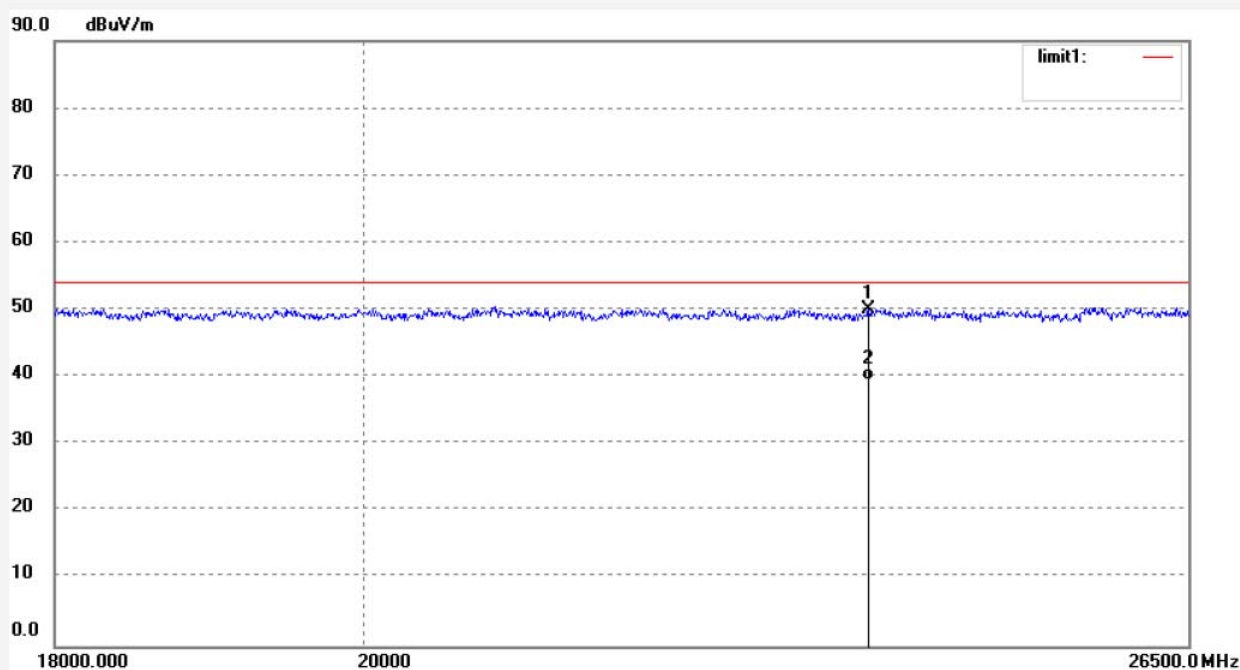

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	23761.693	10.28	39.71	49.99	74.00	-24.01	peak			
2	23761.693	-0.17	39.71	39.54	54.00	-14.46	AVG			

## **11.99% OCCUPIED BANDWIDTH**

### 11.1.The Requirement for RSS-Gen Clause 4.6.1

11.1.1.When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

### 11.2.EUT Configuration on Measurement

The following equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 11.3.Operating Condition of EUT

11.3.1.Setup the EUT and simulator as shown as Section 6.1.

11.3.2.Turn on the power of all equipment.

11.3.3.Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

### 11.4.Test Procedure

11.4.1.The transmitter output was connected to the spectrum analyzer through a low loss cable.

11.4.2.Set RBW of spectrum analyzer to 30 kHz and VBW to 100 kHz.

11.4.3.Set SPA “Meas” function, Select “Occupied Bandwidth” function, Select “99% Power Bandwidth”. The frequency of the upper and lower markers indicating the edges of the transmitters “99% Power” emission bandwidth shall be recorded to automate by SPA.


### 11.5.Measurement Result

The EUT does meet the RSS-Gen requirement.

Frequency (MHz)	99% Occupied Bandwidth (MHz)
2402	1.051
2440	1.051
2480	1.059

The spectrum analyzer plots are attached as below.

#### Low Channel 2402MHz

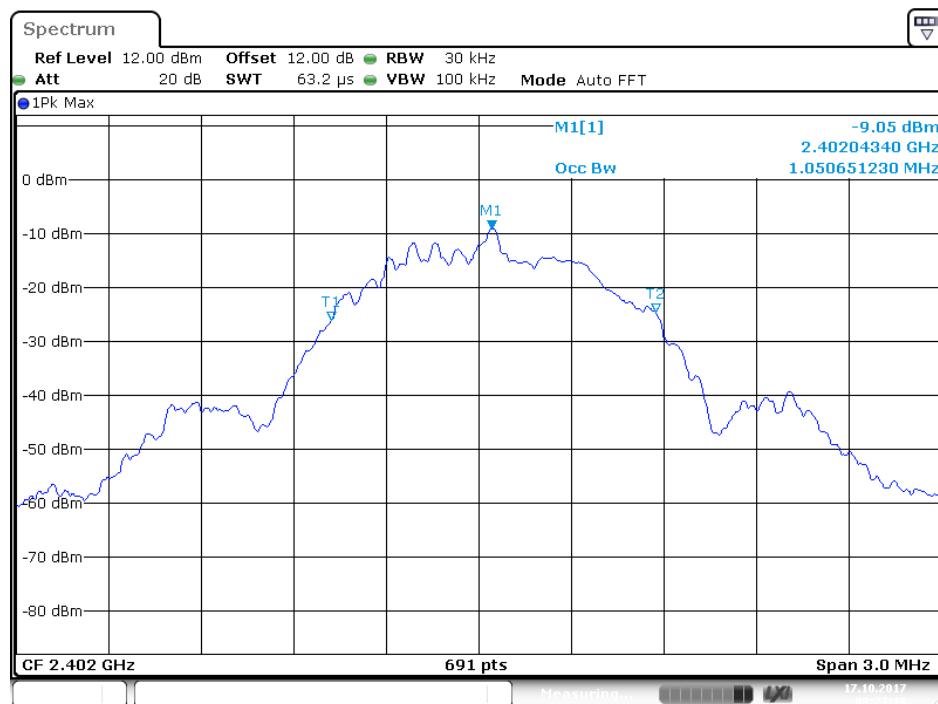


Date: 17.OCT.2017 08:23:18

### Middle Channel 2440MHz




### High Channel 2480MHz

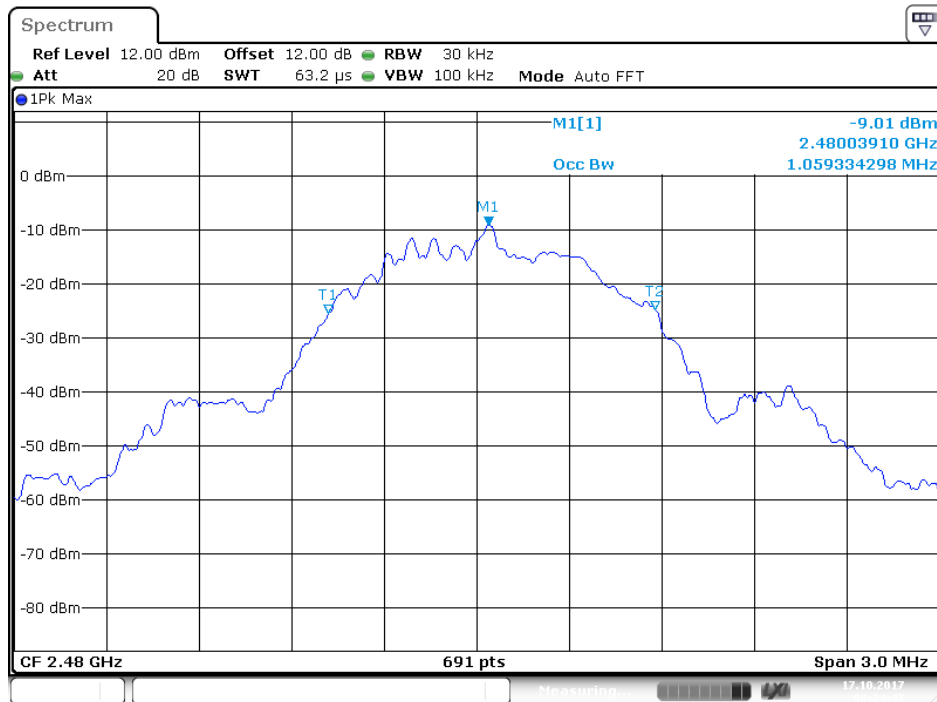

## 12. CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

### 12.1. Block Diagram of Test Setup

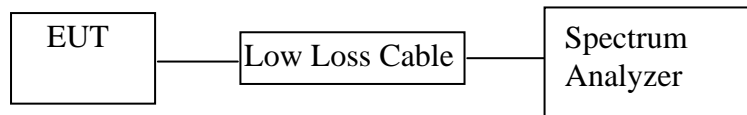

(EUT: Active stylus)

### 12.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 12.3. EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 12.4. Operating Condition of EUT

12.4.1. Setup the EUT and simulator as shown as Section 12.1.

12.4.2. Turn on the power of all equipment.

12.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.



## 12.5. Test Procedure

12.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

12.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz


12.5.3. The Conducted Spurious Emission was measured and recorded.

## 12.6. Test Result

**Pass.**


The spectrum analyzer plots are attached as below.

### Low Channel 2402MHz

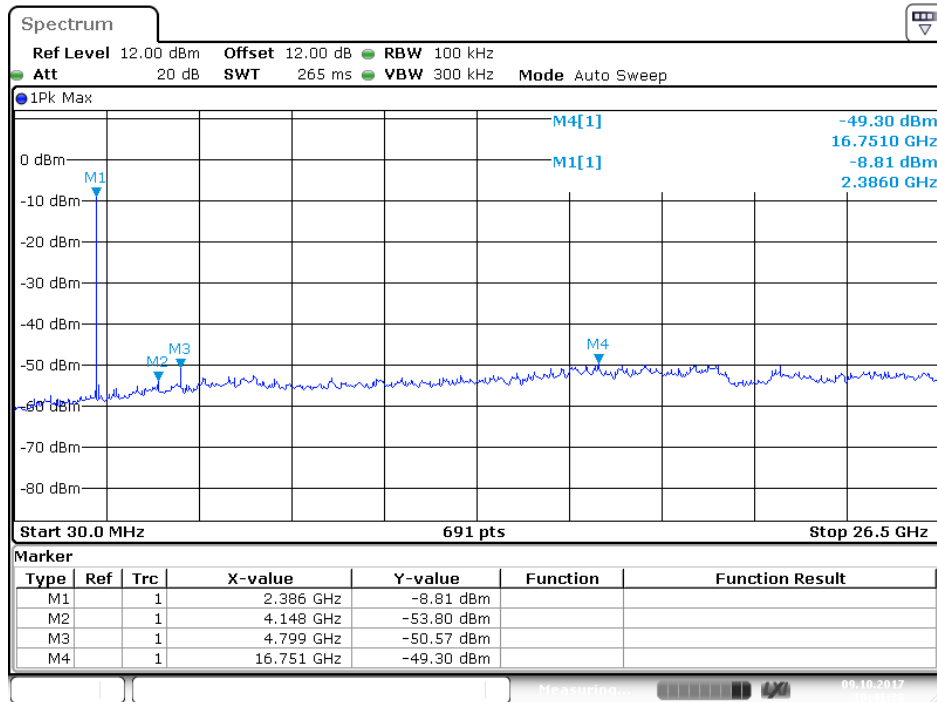


Date: 9.OCT.2017 10:41:38

### Middle Channel 2440MHz

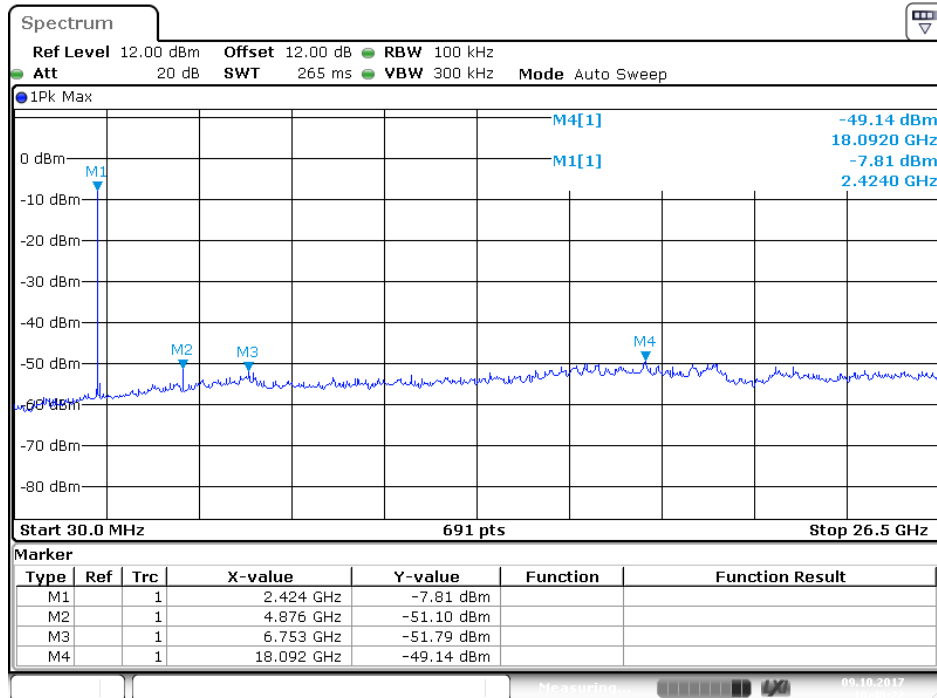

### High Channel 2480MHz

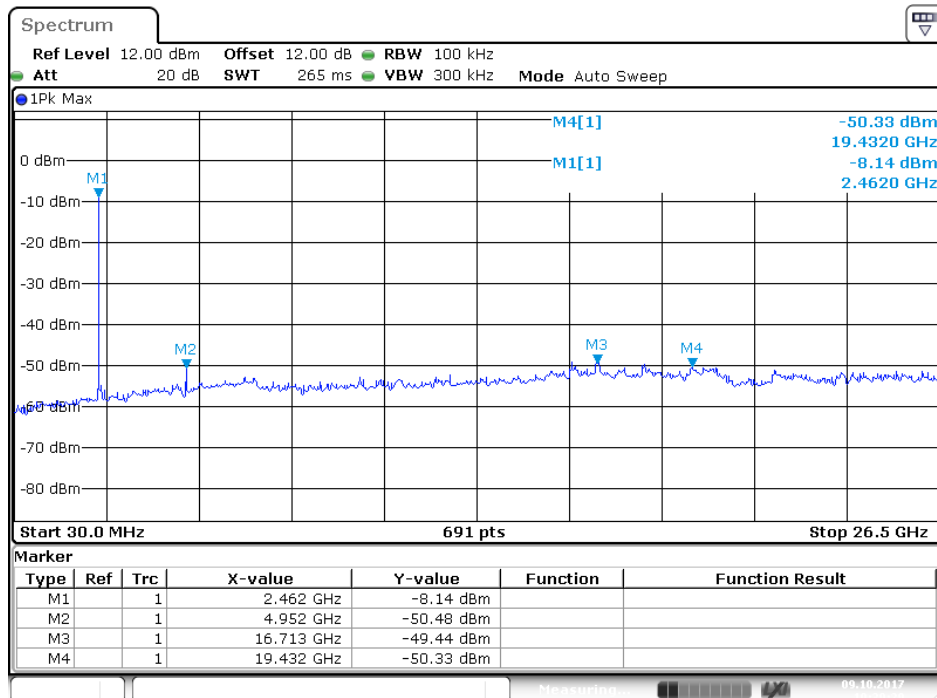

## 13. ANTENNA REQUIREMENT

### 13.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

According to Section RSS GEN 8.3, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

### 13.2. Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 2dBi. Therefore, the equipment complies with the antenna requirement of FCC part 15C Section 15.203 and RSS GEN 8.3.