

TEST REPORT

Applicant: Everex Electronics Ltd.

Address of Applicant: Unit 01,19F .,Block A,Kailey Industrial Centre,12 Fung Yip Street,Chai Wan ,HONGKONG, China

Manufacturer/Factory: Everex Electronics Ltd.

Address of Manufacturer/Factory: Unit 01,19F .,Block A,Kailey Industrial Centre,12 Fung Yip Street,Chai Wan ,HONGKONG, China

Equipment Under Test (EUT)

Product Name: IOEX BOX

Model No.: iHH2001, iHH2002, iHH2003, iHH2004, iHH2005, iHH2006, iHH2007, iHH2008, iHH2009

Trade Mark: iOEX

FCC ID: 2ABWOHH2001

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of sample receipt: April 17, 2020

Date of Test: April 17- April 26, 2020

Date of report issue: April 26, 2020

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	April 26, 2020	Original

Prepared By:




Date:

April 26, 2020

Project Engineer

Check By:



Date:

April 26, 2020

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 TEST FACILITY	7
5.4 TEST LOCATION	7
5.5 DESCRIPTION OF SUPPORT UNITS	7
5.6 DEVIATION FROM STANDARDS	7
5.7 ABNORMALITIES FROM STANDARD CONDITIONS	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	10
7.1 ANTENNA REQUIREMENT:	10
7.2 CONDUCTED EMISSIONS	11
7.3 EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	14
7.4 PEAK TRANSMIT POWER	18
7.5 POWER SPECTRAL DENSITY	20
7.6 BAND EDGE	24
7.7 BAND EDGE(CONDUCTED EMISSION METHOD)	42
7.8 RADIATED EMISSION	47
7.9 SPURIOUS EMISSION (CONDUCTED EMISSION METHOD)	58
7.10 FREQUENCY STABILITY	64
8 TEST SETUP PHOTO	68
9 EUT CONSTRUCTIONAL DETAILS	70

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	PASS
AC Power Line Conducted Emission	15.207	PASS
Peak Transmit Power	15.407(a)(1)	PASS
Power Spectral Density	15.407(a)(1)	PASS
Undesirable Emission	15.407(b)(6), 15.205/15.209	PASS
Radiated Emission	15.205/15.209	PASS
Band Edge	15.407(b)(1)	PASS
Frequency Stability	15.407(g)	PASS

Remark:

Pass: The EUT complies with the essential requirements in the standard.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	IOEX BOX			
Model No.:	iHH2001, iHH2002, iHH2003, iHH2004, iHH2005, iHH2006, iHH2007, iHH2008, iHH2009			
Test model:	iHH2001			
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are system version, product appearance and model name for commercial purpose.				
Serial No.:	H2258FAC			
Hardware Version:	HV1.0			
Software Version:	SV1.0			
Test sample(s) ID:	GTS202004000149-1			
Sample(s) Status:	Engineer sample			
Operation Frequency:	Band	Mode	Frequency Range(MHz)	Number of channels
	U-NII Band I	IEEE 802.11a	5180-5240	4
		IEEE 802.11n 20MHz	5180-5240	4
		IEEE 802.11n 40MHz	5190-5230	2
		IEEE 802.11ac 80MHz	5210	1
Modulation technology:	IEEE for 802.11a: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE for 802.11n: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE for 802.11ac:OFDM (QPSK/BPSK/16QAM/64QAM/256QAM)			
Antenna Type:	FPCB antenna			
Antenna gain:	1.0dBi			
Power supply:	AC120V / 60Hz			

Channel list for 802.11a/n(HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180MHz	40	5200MHz	44	5220MHz	48	5240MHz

Channel list for 802.11n(HT40)			
Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz

Channel list for 802.11ac(HT80)	
Channel	Frequency
42	5210MHz

5.2 Test mode

Transmitting mode	Keep the EUT in transmitting with modulation..
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a/n(HT20)	6/6.5 Mbps
802.11n(HT40)	13.5 Mbps
802.11ac(HT80)	29.3 Mbps

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.4 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, sBaoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.5 Description of Support Units

None.

5.6 Deviation from Standards

None.

5.7 Abnormalities from Standard Conditions

None.

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 26 2019	June. 25 2020
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 26 2019	June. 25 2020
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 26 2019	June. 25 2020
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 26 2019	June. 25 2020
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 26 2019	June. 25 2020
9	Coaxial Cable	GTS	N/A	GTS211	June. 26 2019	June. 25 2020
10	Coaxial cable	GTS	N/A	GTS210	June. 26 2019	June. 25 2020
11	Coaxial Cable	GTS	N/A	GTS212	June. 26 2019	June. 25 2020
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 26 2019	June. 25 2020
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 26 2019	June. 25 2020
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 26 2019	June. 25 2020
15	Band filter	Amindeon	82346	GTS219	June. 26 2019	June. 25 2020
16	Power Meter	Anritsu	ML2495A	GTS540	June. 26 2019	June. 25 2020
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 26 2019	June. 25 2020
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 26 2019	June. 25 2020
19	Splitter	Agilent	11636B	GTS237	June. 26 2019	June. 25 2020
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 26 2019	June. 25 2020
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 19 2019	Oct. 18 2020
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 19 2019	Oct. 18 2020
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 19 2019	Oct. 18 2020
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 26 2019	June. 25 2020

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 26 2019	June. 25 2020
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 26 2019	June. 25 2020
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 26 2019	June. 25 2020
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 26 2019	June. 25 2020
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 26 2019	June. 25 2020
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 26 2019	June. 25 2020

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 26 2019	June. 25 2020
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 26 2019	June. 25 2020
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 26 2019	June. 25 2020
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 26 2019	June. 25 2020
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 26 2019	June. 25 2020
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 26 2019	June. 25 2020
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 26 2019	June. 25 2020
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 26 2019	June. 25 2020

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 26 2019	June. 25 2020
2	Barometer	ChangChun	DYM3	GTS255	June. 26 2019	June. 25 2020

7 Test results and Measurement Data

7.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i>	
E.U.T Antenna:	
The antennas are FPCBantenna, the best case gain of the antennas are 1.0dBi. 	


7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz					
Limit:	Frequency range (MHz)	Limit (dBuV)				
		Quasi-peak		Average		
	0.15-0.5	66 to 56*		56 to 46*		
	0.5-5	56		46		
	5-30	60		50		
* Decreases with the logarithm of the frequency.						
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.					
Test setup:	Reference Plane LISN AUX Equipment E.U.T 40cm 80cm LISN Filter EMI Receiver AC power Test table/Insulation plane Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m					
Test Instruments:	Refer to section 5.10 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.


Measurement data:

Line:

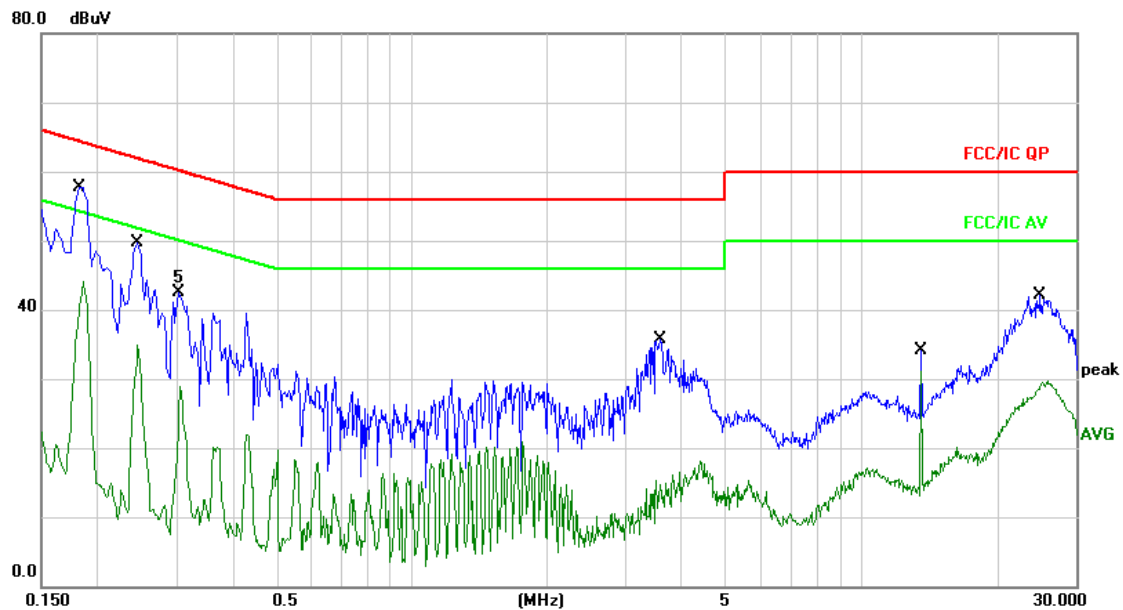

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1820	48.12	9.66	57.78	64.39	-6.61	QP	
2		0.1860	34.46	9.66	44.12	54.21	-10.09	AVG	
3		0.2460	40.07	9.65	49.72	61.89	-12.17	QP	
4		0.2460	25.26	9.65	34.91	51.89	-16.98	AVG	
5		0.3020	32.92	9.66	42.58	60.19	-17.61	peak	
6		0.3020	32.92	9.66	42.58	60.19	-17.61	QP	
7		3.5700	25.97	9.73	35.70	56.00	-20.30	QP	
8		3.5700	8.43	9.73	18.16	46.00	-27.84	AVG	
9		13.5620	24.22	9.84	34.06	60.00	-25.94	QP	
10		13.5620	21.30	9.84	31.14	50.00	-18.86	AVG	
11		25.0260	32.14	9.88	42.02	60.00	-17.98	QP	
12		25.0260	19.78	9.88	29.66	50.00	-20.34	AVG	

Neutral:

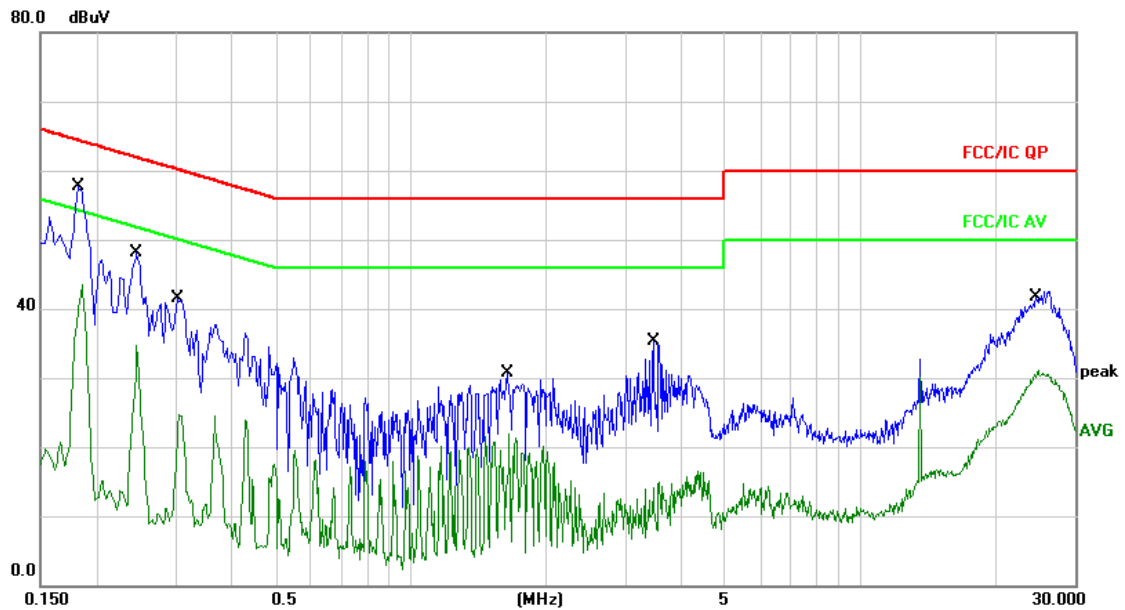


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1819	48.05	9.66	57.71	64.39	-6.68	QP
2		0.1819	33.89	9.66	43.55	54.39	-10.84	AVG
3		0.2460	38.35	9.65	48.00	61.89	-13.89	QP
4		0.2460	25.13	9.65	34.78	51.89	-17.11	AVG
5		0.3020	31.84	9.66	41.50	60.19	-18.69	QP
6		0.3020	14.95	9.66	24.61	50.19	-25.58	AVG
7		1.6380	21.07	9.70	30.77	56.00	-25.23	QP
8		1.6380	12.29	9.70	21.99	46.00	-24.01	AVG
9		3.4700	25.64	9.73	35.37	56.00	-20.63	QP
10		3.4700	5.88	9.73	15.61	46.00	-30.39	AVG
11		24.8580	32.71	9.88	42.59	60.00	-17.41	QP
12		24.8580	21.20	9.88	31.08	50.00	-18.92	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

7.3 Emission Bandwidth and 99% Occupied Bandwidth

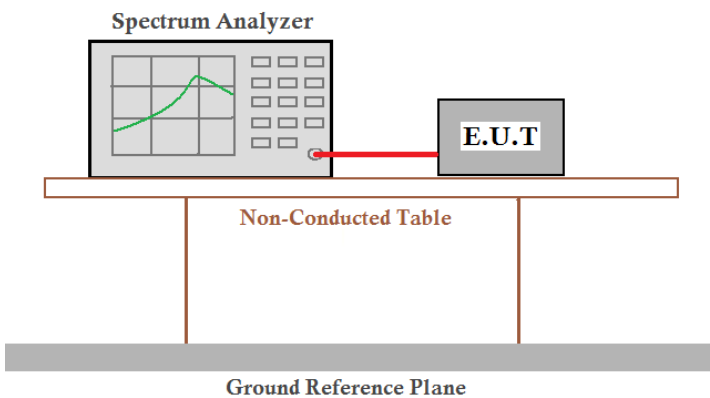Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.
Test procedure:	According to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data:


CH. No.	Frequency (MHz)	99% Occupied Bandwidth (MHz)		26dB Occupied Bandwidth (MHz)	
		802.11a	802.11n (HT20)	802.11a	802.11n(HT20)
36	5180	16.7733	17.8319	21.063	21.465
40	5200	16.7735	17.8123	21.057	21.802
48	5240	16.7591	17.8429	21.208	21.810

CH. No.	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Occupied Bandwidth (MHz)
		802.11n(HT40)	802.11n(HT40)
38	5190	36.1712	41.003
46	5230	36.2105	41.603


CH. No.	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Occupied Bandwidth (MHz)
		802.11ac(HT80)	802.11ac(HT80)
42	5210	75.0437	82.343

Test plots as followed:




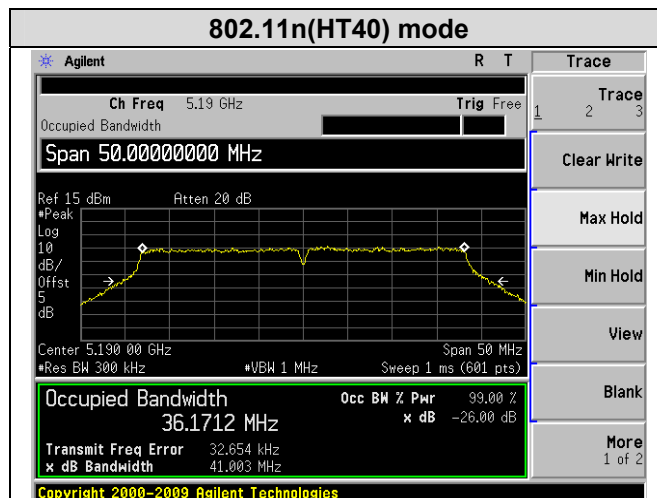

5190

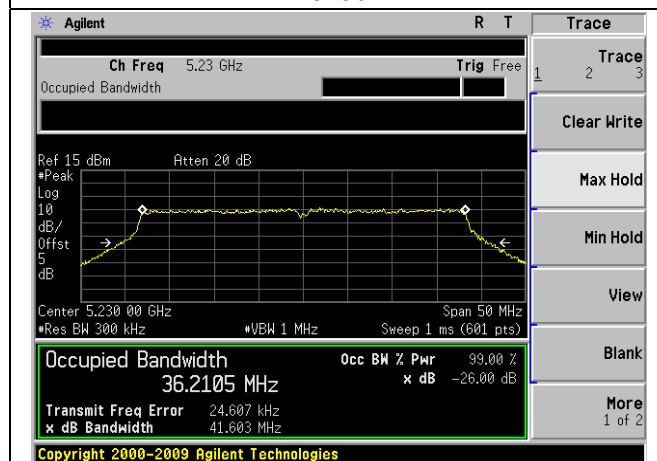


5230

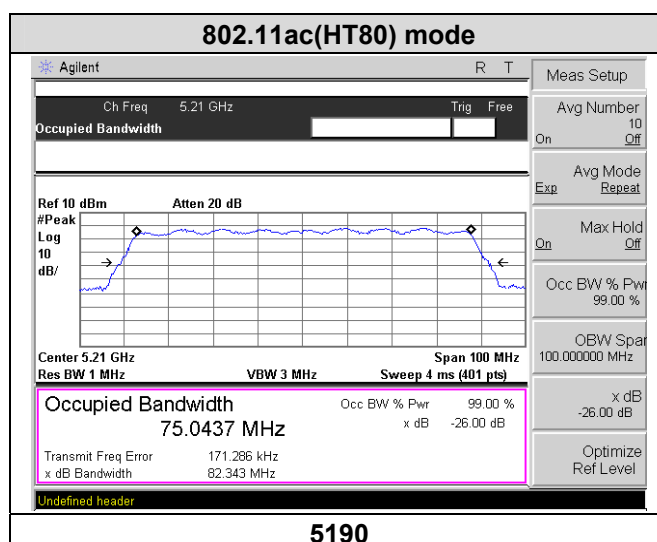

5190

7.4 Peak Transmit Power

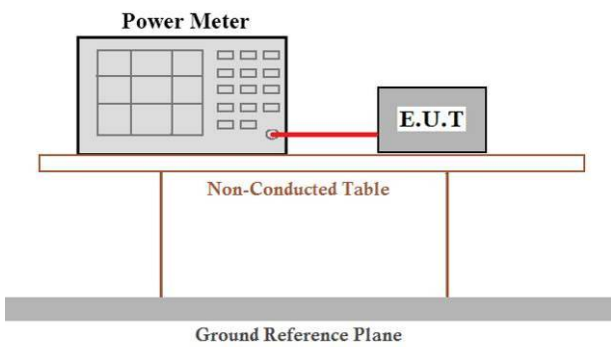Test Requirement:	FCC Part15 E Section 15.407	
Test Method:	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	
Limit:	Frequency band (MHz)	Limit
	5150-5250	$\leq 1\text{W}(30\text{dBm})$ for master device
		$\leq 250\text{mW}(23.98\text{dB})$ for client device
	5250-5350	$\leq 250\text{mW}(23.98\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$
	5470-5725	$\leq 250\text{mW}(23.98\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$
Remark: *Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.		
Test setup:		
Test procedure:	Measurement using an RF average power meter (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle. b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B). (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter. (iv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10\log(1/0.25)$ if the duty cycle is 25 percent).	
Test Instruments:	Refer to section 5.10 for details	
Test mode:	Refer to section 5.2 for details	
Test results:	Pass	

Measurement Data


Modulation	Duty cycle	Duty Factor
802.11a	98.8%	0.05
802.11n(HT20)	98.8%	0.05
802.11n(HT40)	97.5%	0.11
802.11ac(HT20)	98.9%	0.05
802.11ac(HT40)	97.4%	0.11
802.11ac(HT80)	95.2%	0.21

802.11a mode						
CH No.	Frequency (MHz)	Measured Power (dBm)	Duty Factor	Output Power (dBm)	Limit (dBm)	Result
36	5180	20.51	0.05	20.56	23.98	Pass
40	5200	20.43	0.05	20.48	23.98	Pass
48	5240	20.35	0.05	20.40	23.98	Pass
802.11n(HT20) mode						
CH No.	Frequency (MHz)	Measured Power (dBm)	Duty Factor	Output Power (dBm)	Limit (dBm)	Result
36	5180	18.17	0.05	18.22	23.98	Pass
40	5200	18.22	0.05	18.27	23.98	Pass
48	5240	18.05	0.05	18.10	23.98	Pass
802.11n(HT40) mode						
CH No.	Frequency (MHz)	Measured Power (dBm)	Duty Factor	Output Power (dBm)	Limit (dBm)	Result
38	5190	18.29	0.11	18.40	23.98	Pass
46	5230	18.61	0.11	18.72	23.98	Pass
802.11 ac(HT80)						
CH No.	Frequency (MHz)	Measured Power (dBm)	Duty Factor	Output Power (dBm)	Limit (dBm)	Result
42	5210	18.56	0.21	18.77	23.98	Pass

Note: Output Power = Measured Power + Duty Factor

Duty Factor = 10 log (1/Duty Cycle)

7.5 Power Spectral Density

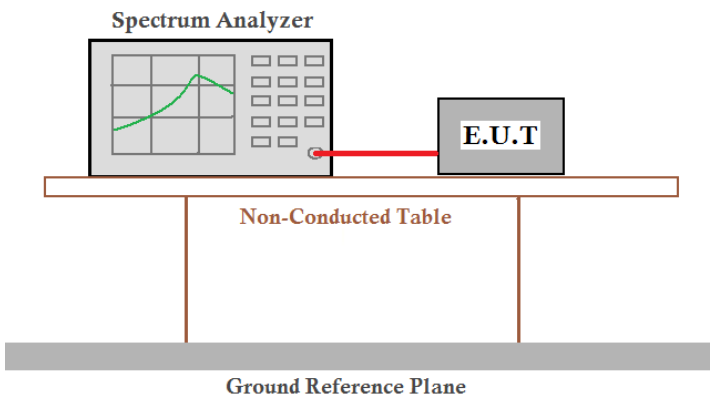Test Requirement:	FCC Part15 E Section 15.407	
Test Method:	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	
Limit:	Frequency band (MHz)	Limit
	5150-5250	≤17dBm in 1 Hz for master device
		≤11dBm in 1MHz for client device
	5250-5350	≤11dBm in 1MHz for client device
	5470-5725	≤11dBm in 1MHz for client device
Remark: The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.		
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.	
Test procedure:	1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". 2) Use the peak search function on the instrument to find the peak of the spectrum. 3) Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum. b) If Method SA-3 Alternative was used and the linear mode was used in step E)2)g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. 4) The result is the PSD.	
Test Instruments:	Refer to section 5.10 for details	
Test mode:	Refer to section 5.2 for details	
Test results:	Pass	

Measurement Data


Modulation	Duty cycle	Duty Factor
802.11a	98.8%	0.05
802.11n(HT20)	98.8%	0.05
802.11n(HT40)	97.5%	0.11
802.11ac(HT20)	98.9%	0.05
802.11ac(HT40)	97.4%	0.11
802.11ac(HT80)	95.2%	0.21




802.11a mode						
CH No.	Frequency (MHz)	Measured PSD (dBm/MHz)	Duty Factor	Total PSD Power(dBm/MHz)	Limit (dBm/MHz)	Result
36	5180	-3.43	0.05	-3.38	11	Pass
40	5200	-2.84	0.05	-2.79	11	Pass
48	5240	-2.09	0.05	-2.04	11	Pass
802.11n(HT20) mode						
CH No.	Frequency (MHz)	Measured PSD (dBm/MHz)	Duty Factor	Total PSD Power(dBm/MHz)	Limit (dBm/MHz)	Result
36	5180	-4.03	0.05	-3.98	11	Pass
40	5200	-4.49	0.05	-4.44	11	Pass
48	5240	-2.92	0.05	-2.87	11	Pass
802.11n(HT40) mode						
CH No.	Frequency (MHz)	Measured PSD (dBm/MHz)	Duty Factor	Total PSD Power(dBm/MHz)	Limit (dBm/MHz)	Result
38	5190	-9.29	0.11	-9.18	11	Pass
46	5230	-8.84	0.11	-8.73	11	Pass
802.11 ac(HT80)						
CH No.	Frequency (MHz)	Measured PSD (dBm/MHz)	Duty Factor	Total PSD Power(dBm/MHz)	Limit (dBm/MHz)	Result
42	5210	-32.68	0.21	-32.47	11	Pass

Note: Output Power = Measured Power + Duty Factor

Duty Factor = 10 log (1/Duty Cycle)


Test plots as followed:

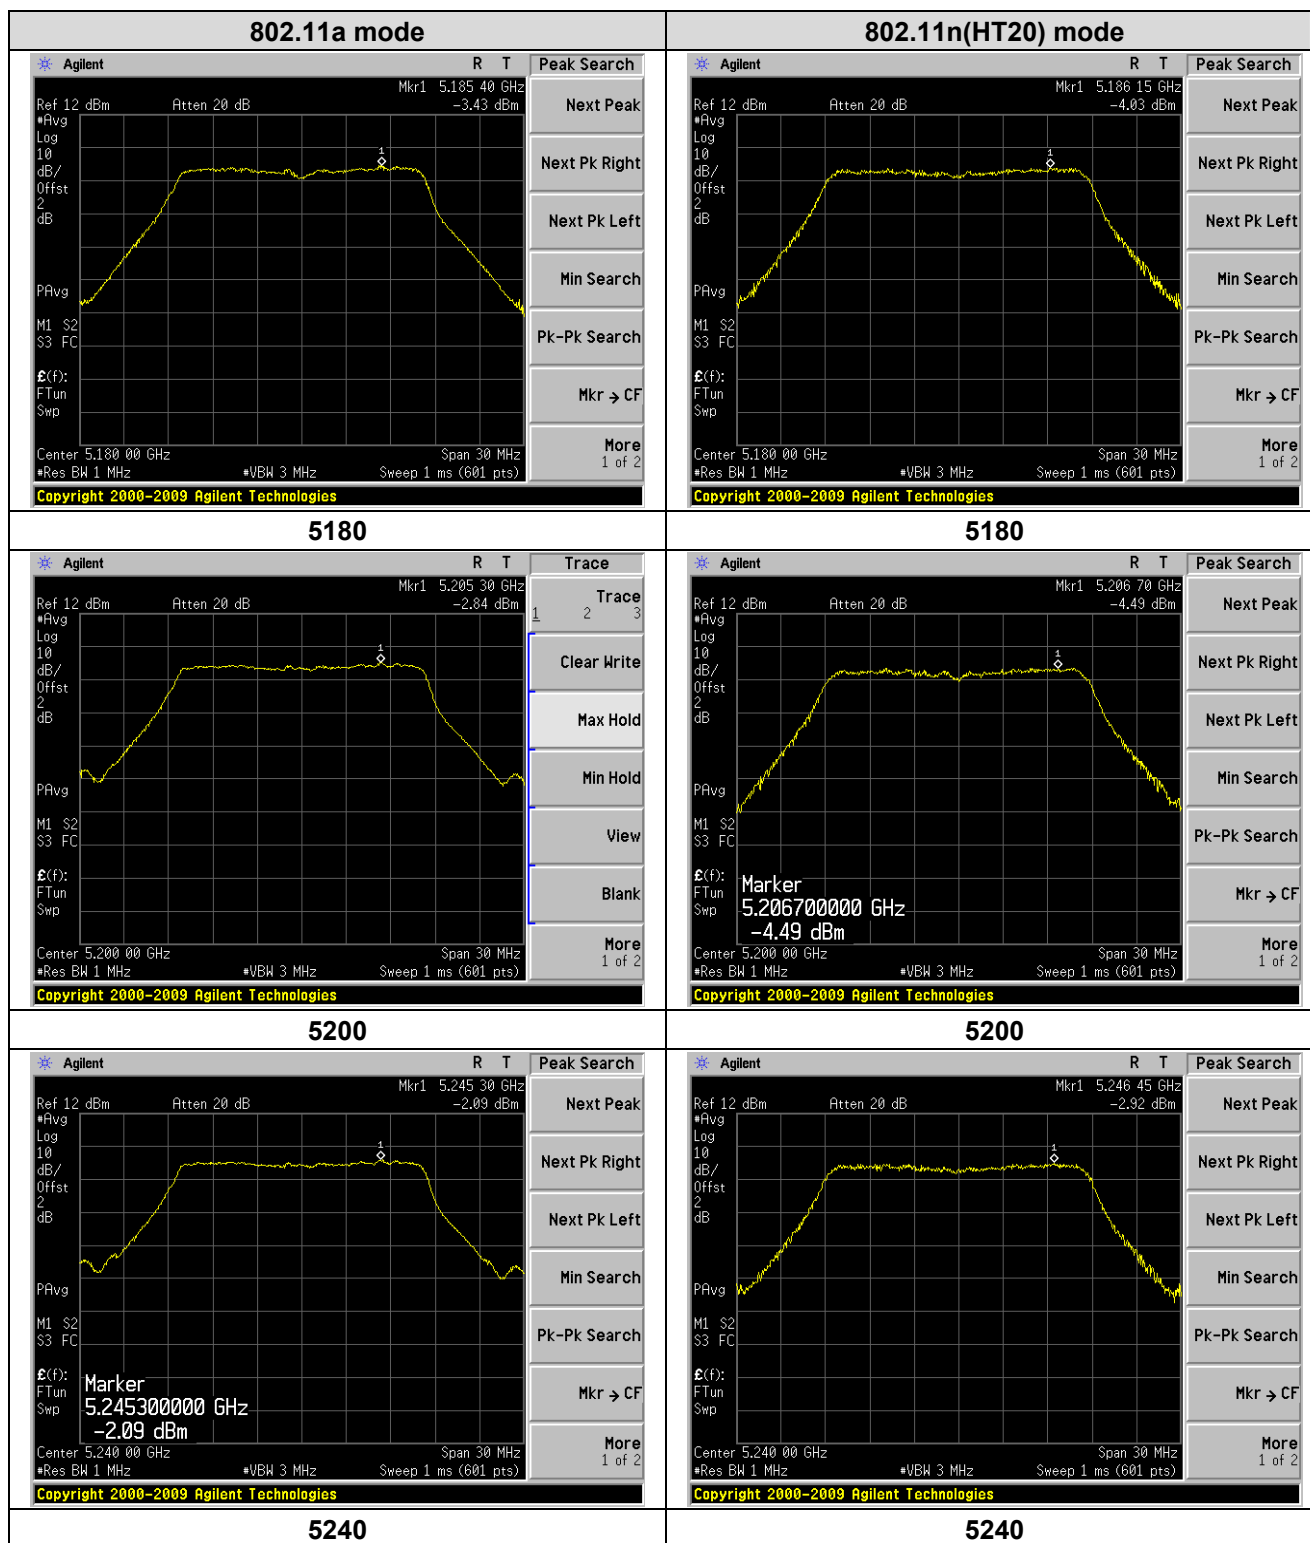

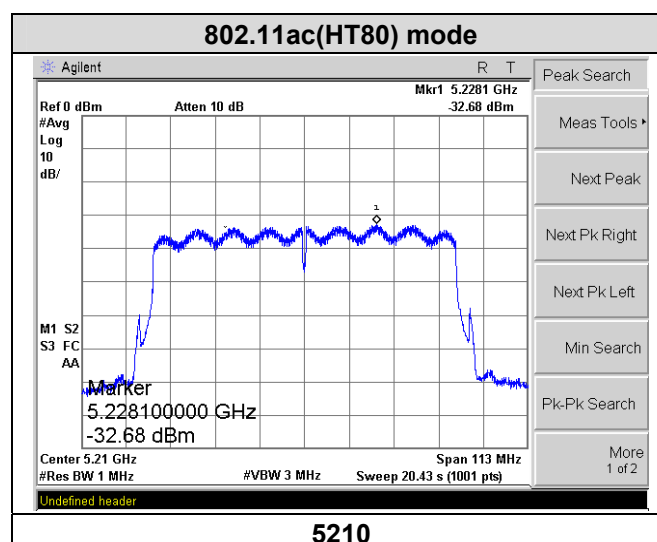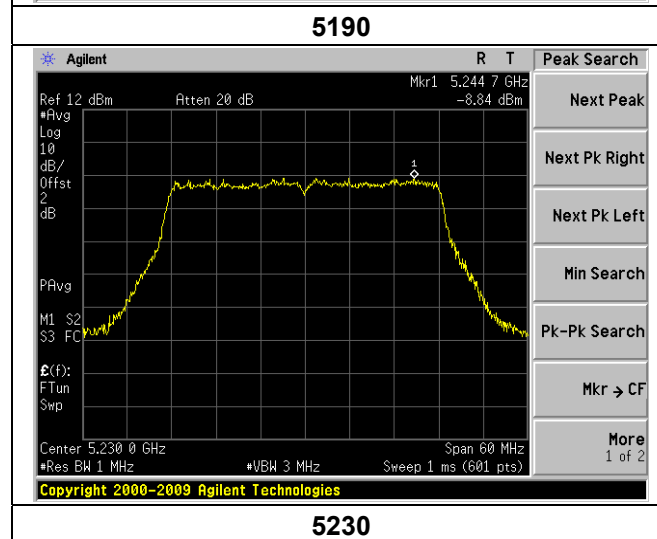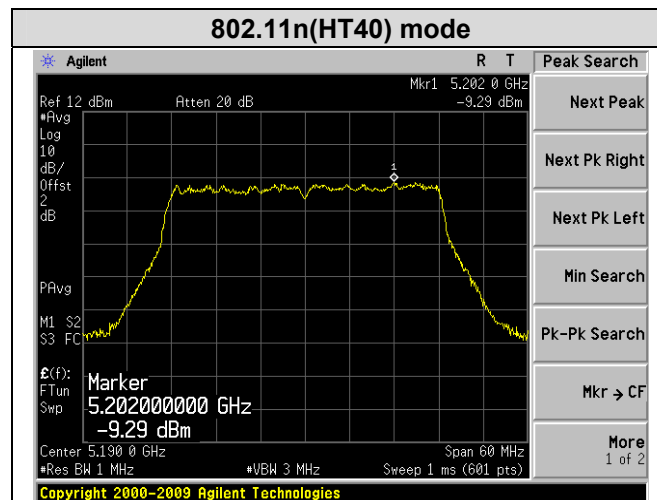

7.6 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 and 5.205																								
Test Method:	ANSI C63.10:2013																								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																								
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>100KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>AV</td><td>1MHz</td><td>3MHz</td><td>Average Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	AV	1MHz	3MHz	Average Value	
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	AV	1MHz	3MHz	Average Value																					
Limit:	<table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr><tr><td>68.2</td><td>Peak Value</td></tr></table> Undesirable emission limits: (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band. (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	68.2	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	68.2	Peak Value																							
Test Procedure:	a. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not																								

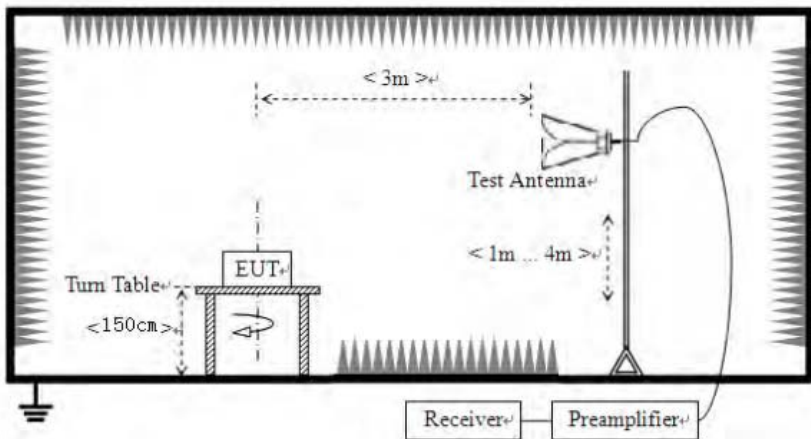	have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test setup:	For radiated emissions above 1GHz 
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remarks:

- Only the worst case Main Antenna test data.
- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
- According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:
 $E[dBuV/m] = EIRP[dBm] + 95.2;$
For example, if $EIRP = -27dBm$
 $E[dBuV/m] = -27 + 95.2 = 68.2dBuV/m.$

Measurement Data:

802.11a(HT20)					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.000	59.40	17.53	5.47	24.80	57.60	74.00	-16.40	Horizontal
5350.000	52.88	17.55	5.49	24.86	51.06	74.00	-22.94	Horizontal
5150.000	58.81	17.53	5.47	24.80	57.01	74.00	-16.99	Vertical
5350.000	52.56	17.55	5.49	24.86	50.74	74.00	-23.26	Vertical

802.11a(HT20)					AV			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.000	45.75	17.91	5.30	24.64	44.32	54.00	-9.68	Horizontal
5350.000	34.35	17.59	5.38	24.71	32.61	54.00	-21.39	Horizontal
5150.000	45.88	17.91	5.30	24.64	44.45	54.00	-9.55	Vertical
5350.000	32.27	17.59	5.38	24.71	30.53	54.00	-23.47	Vertical

802.11n(HT20)					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.000	57.98	17.53	5.47	24.80	56.18	74.00	-17.82	Horizontal
5350.000	51.46	17.55	5.49	24.86	49.64	74.00	-24.36	Horizontal
5150.000	57.39	17.53	5.47	24.80	55.59	74.00	-18.41	Vertical
5350.000	51.14	17.55	5.49	24.86	49.32	74.00	-24.68	Vertical

802.11n(HT20)					AV			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.000	45.09	17.91	5.30	24.64	43.66	54.00	-10.34	Horizontal
5350.000	33.69	17.59	5.38	24.71	31.95	54.00	-22.05	Horizontal
5150.000	45.22	17.91	5.30	24.64	43.79	54.00	-10.21	Vertical
5350.000	31.61	17.59	5.38	24.71	29.87	54.00	-24.13	Vertical



802.11n(HT40)					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.000	59.69	17.53	5.47	24.80	57.89	74.00	-16.11	Horizontal
5350.000	53.17	17.55	5.49	24.86	51.35	74.00	-22.65	Horizontal
5150.000	59.10	17.53	5.47	24.80	57.30	74.00	-16.70	Vertical
5350.000	52.85	17.55	5.49	24.86	51.03	74.00	-22.97	Vertical



802.11n(HT40)					AV			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.000	45.19	17.91	5.30	24.64	43.76	54.00	-10.24	Horizontal
5350.000	33.79	17.59	5.38	24.71	32.05	54.00	-21.95	Horizontal
5150.000	45.32	17.91	5.30	24.64	43.89	54.00	-10.11	Vertical
5350.000	31.71	17.59	5.38	24.71	29.97	54.00	-24.03	Vertical

802.11ac(HT80)					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.000	59.21	17.53	5.47	24.80	57.41	74.00	-16.59	Horizontal
5350.000	52.69	17.55	5.49	24.86	50.87	74.00	-23.13	Horizontal
5150.000	58.62	17.53	5.47	24.80	56.82	74.00	-17.18	Vertical
5350.000	52.37	17.55	5.49	24.86	50.55	74.00	-23.45	Vertical



802.11ac(HT80)					AV			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.000	46.05	17.91	5.30	24.64	44.62	54.00	-9.38	Horizontal
5350.000	34.65	17.59	5.38	24.71	32.91	54.00	-21.09	Horizontal
5150.000	46.18	17.91	5.30	24.64	44.75	54.00	-9.25	Vertical
5350.000	32.57	17.59	5.38	24.71	30.83	54.00	-23.17	Vertical



802.11a (5.15GHz-5.25GHz)
CH 36 (Lower) Data rate 6Mbps

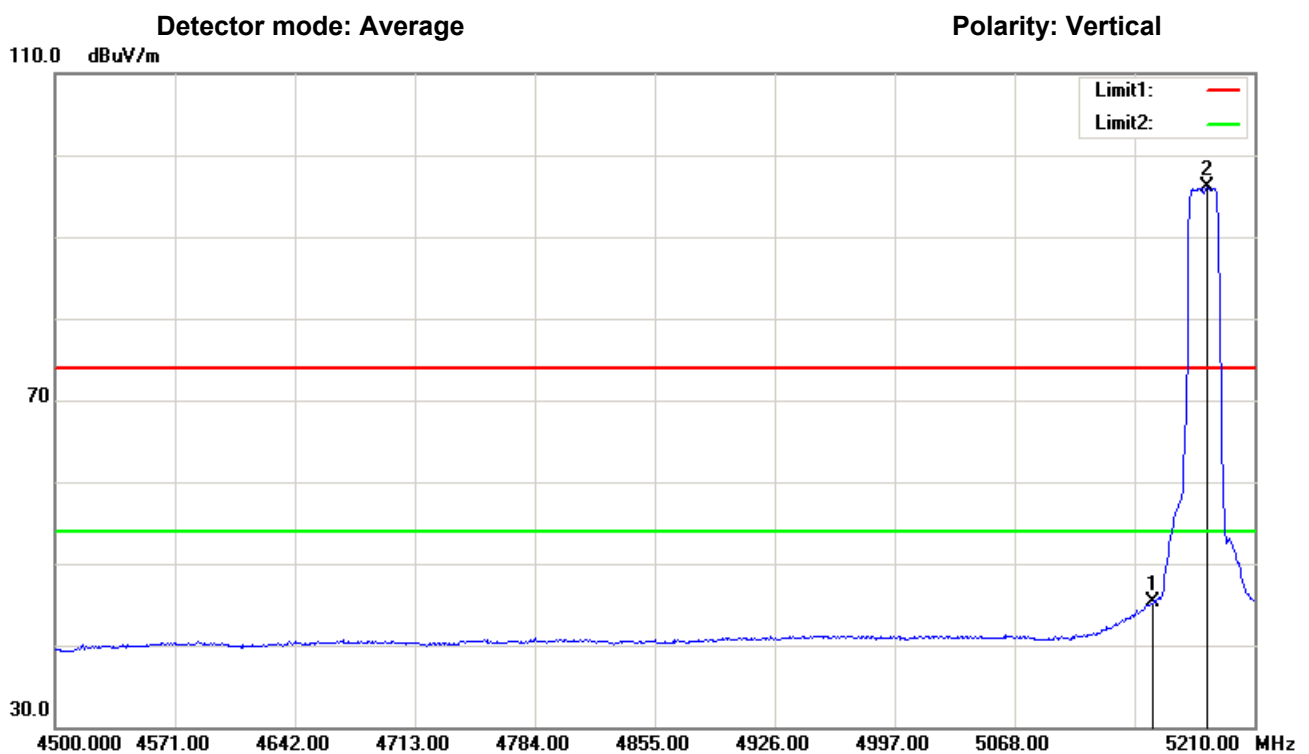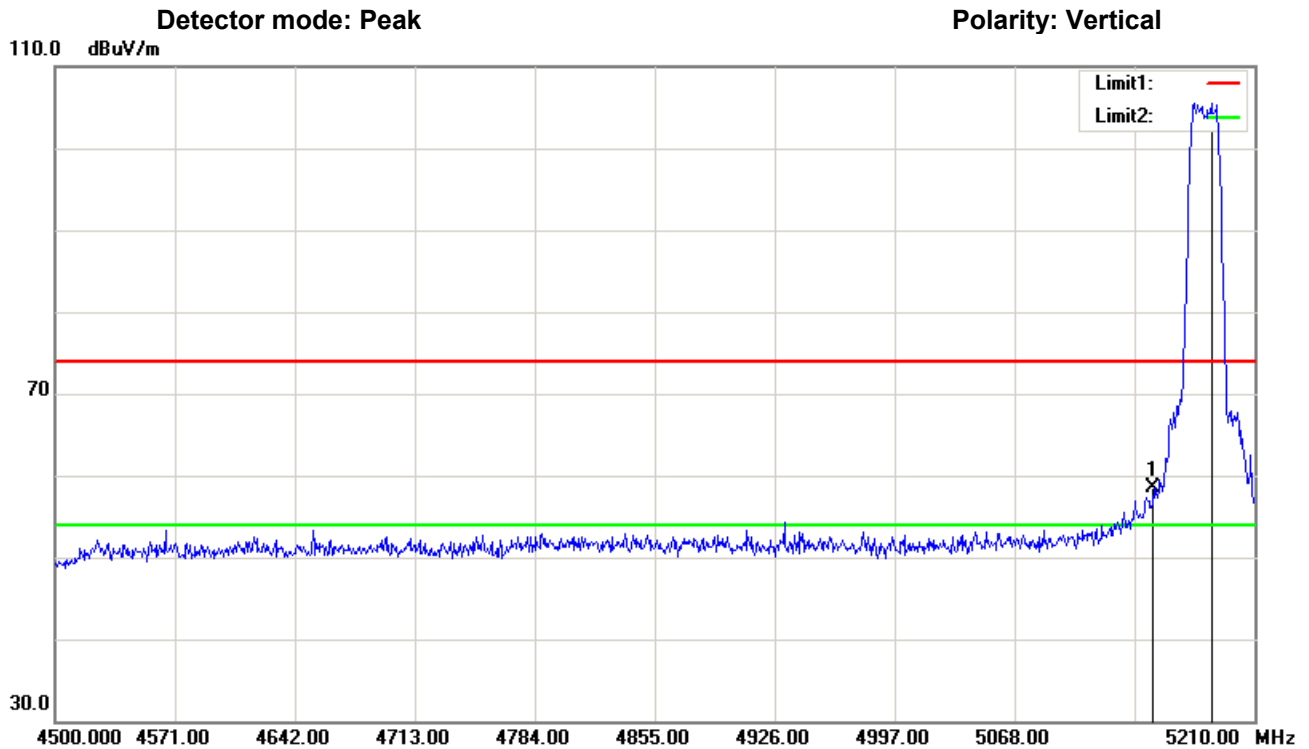

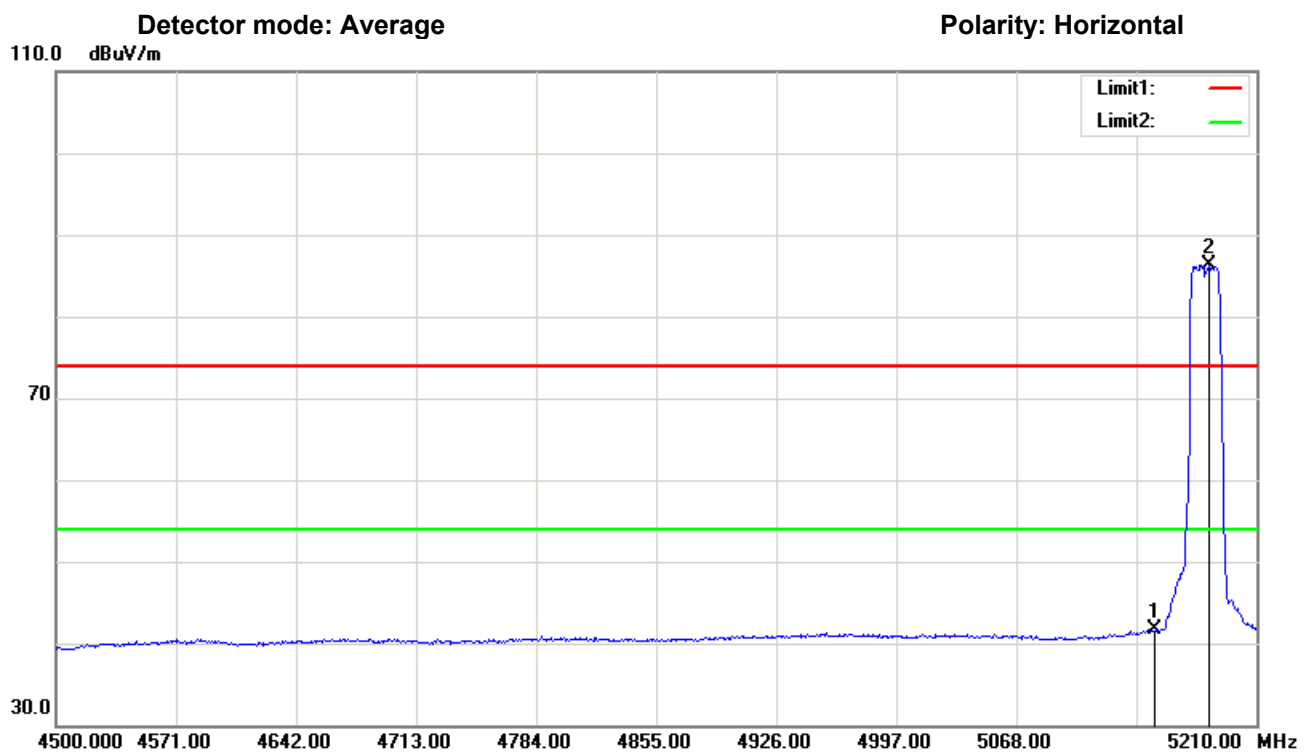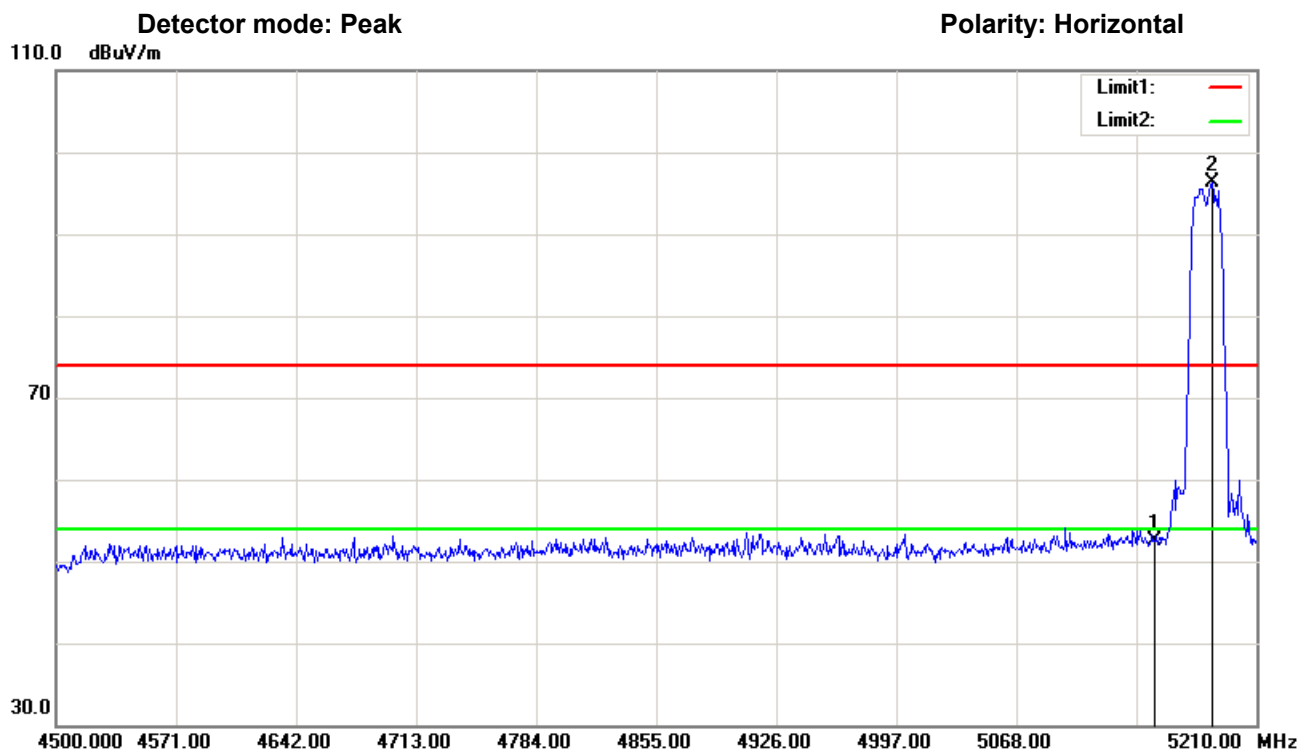



802.11a (5.15GHz-5.25GHz) CH 48 (Upper) Data rate 6Mbps

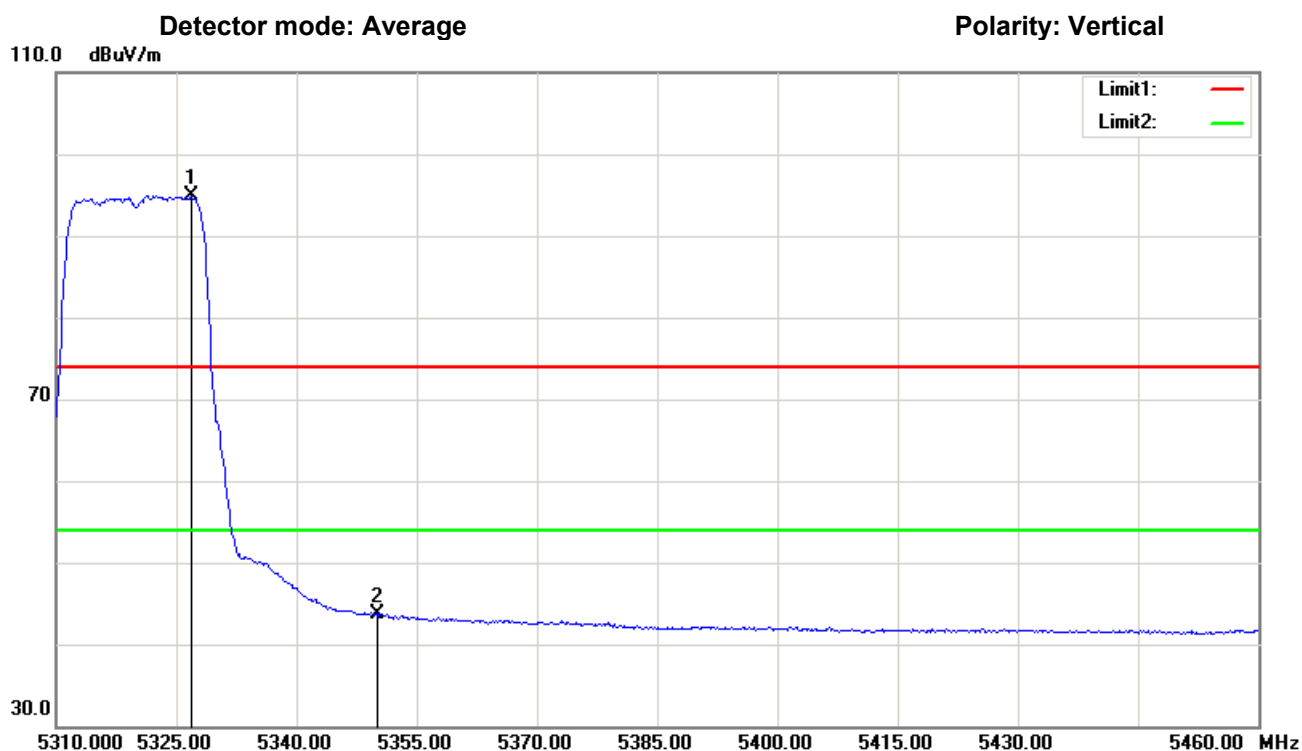
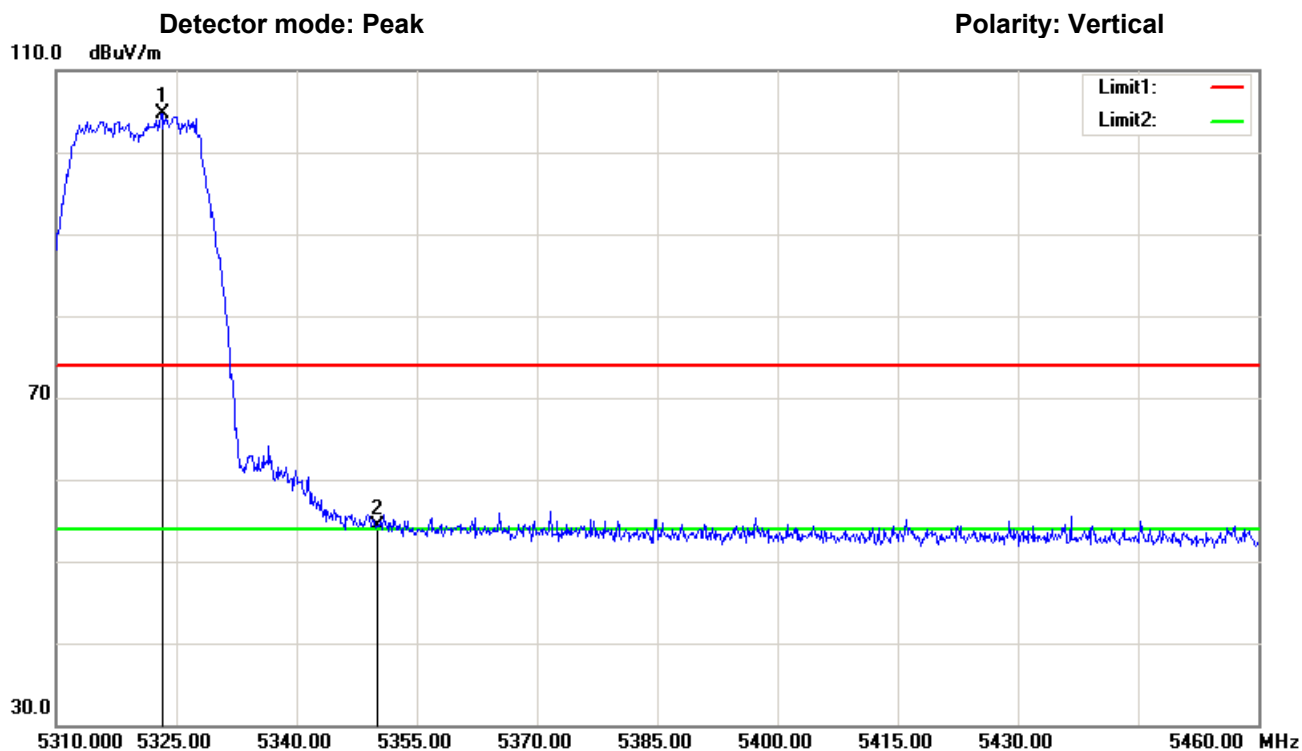


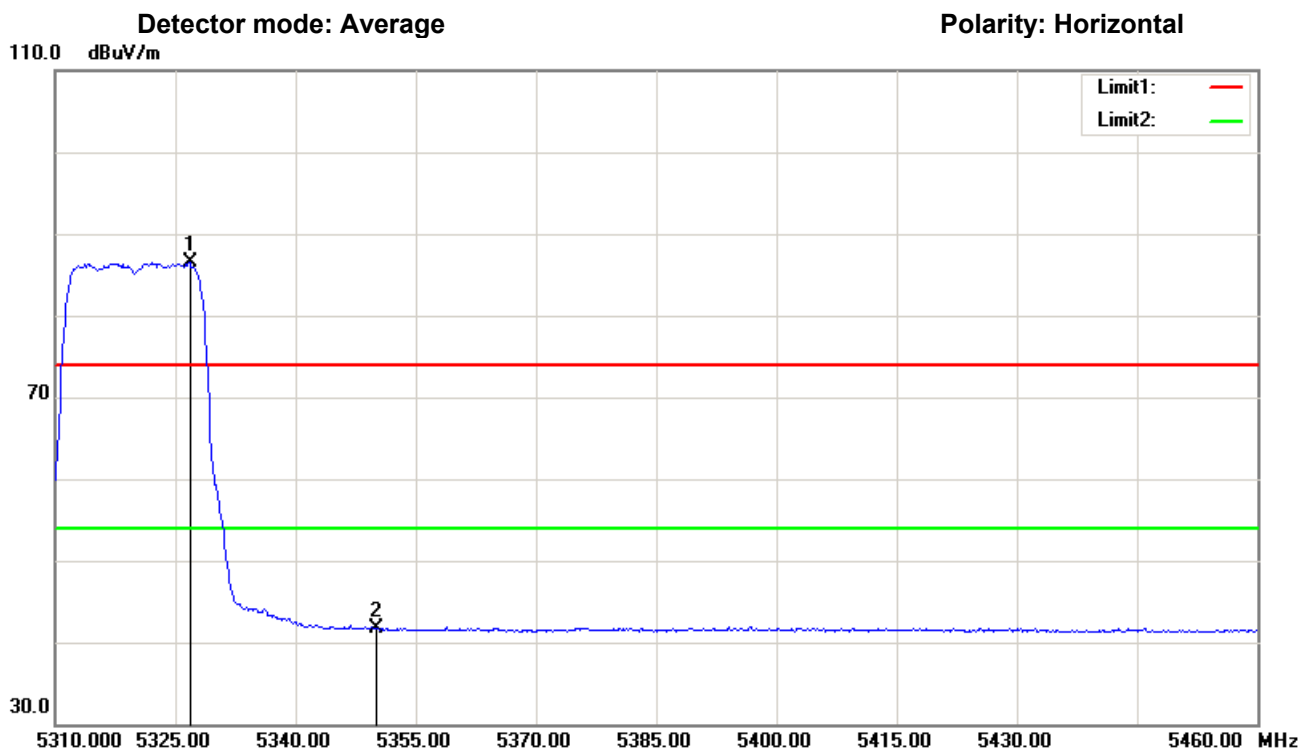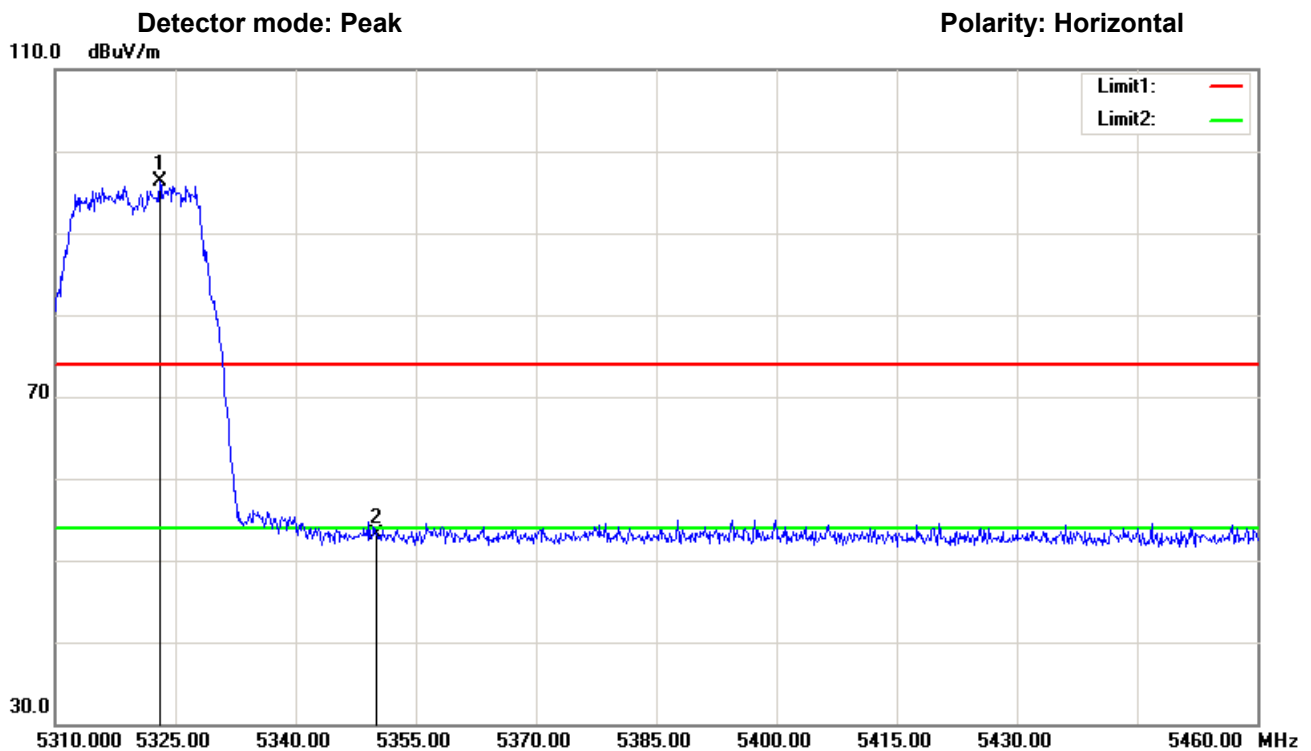

802.11n(20M) (5.15GHz-5.25GHz)



CH 36 (Lower) Data rate 7.2Mbps

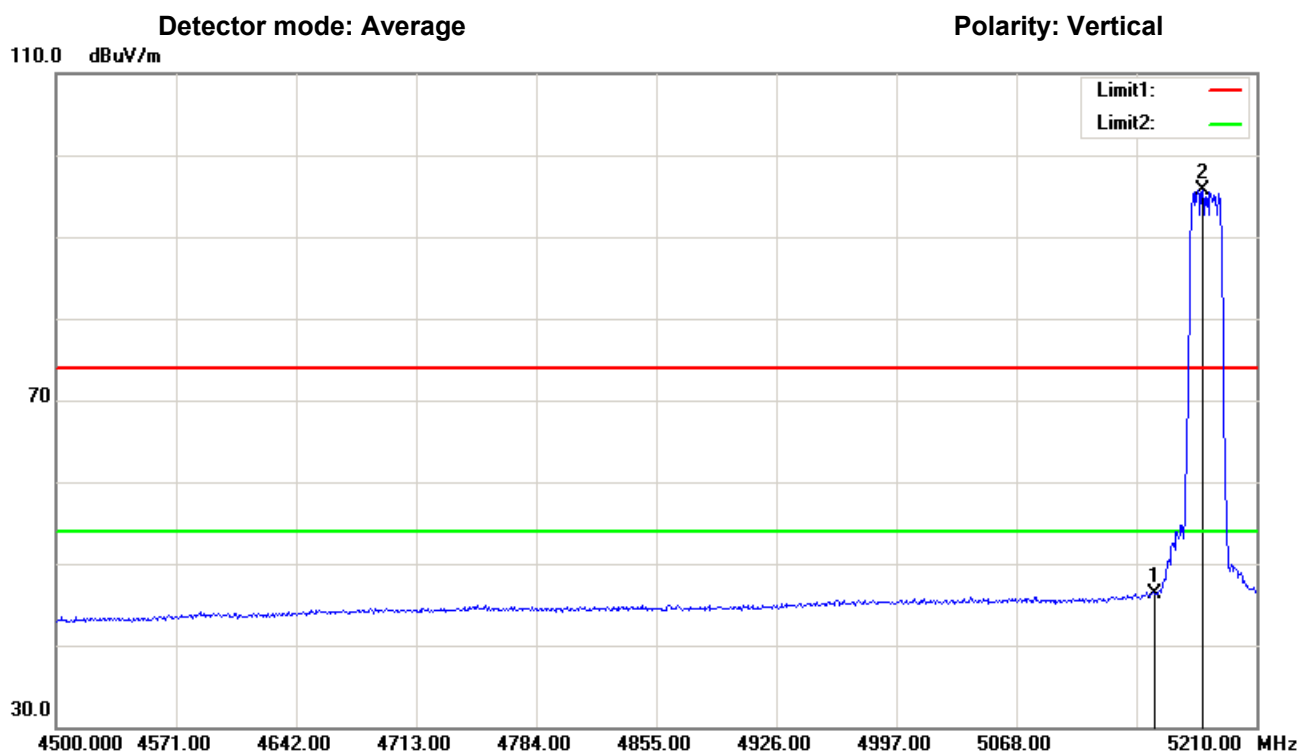
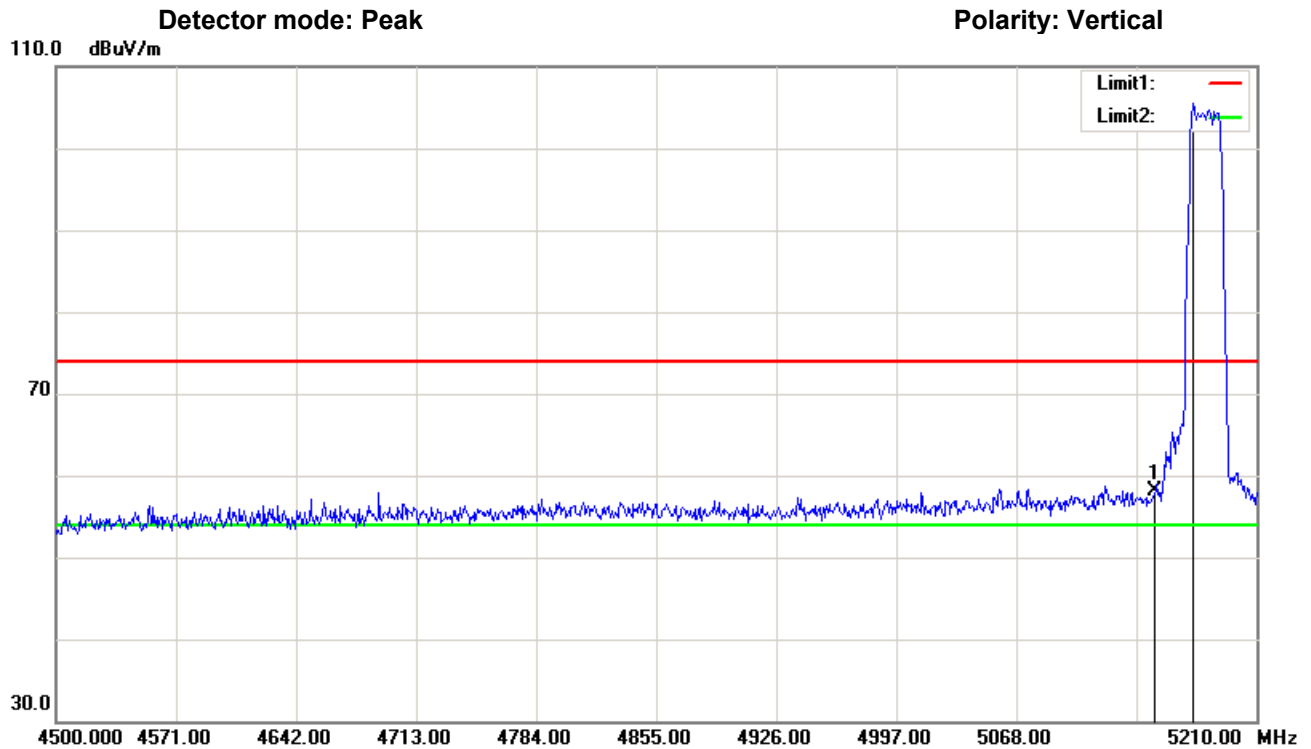


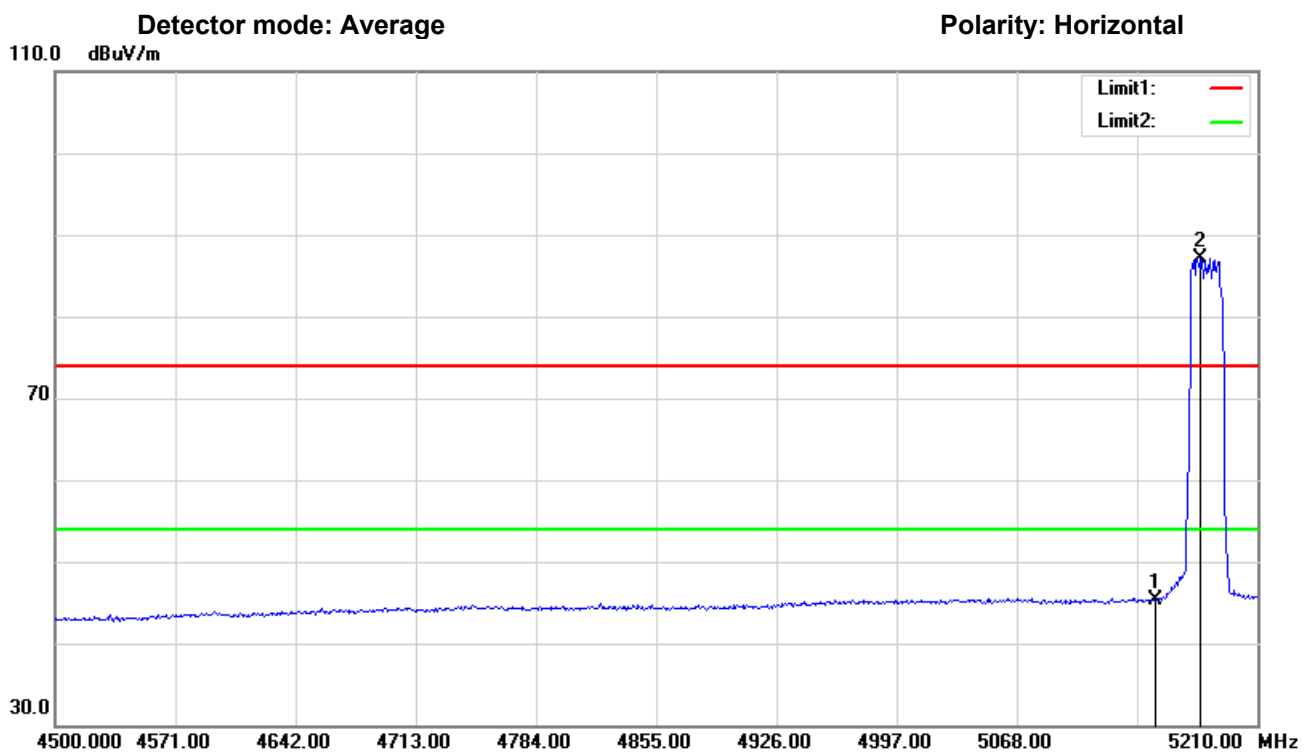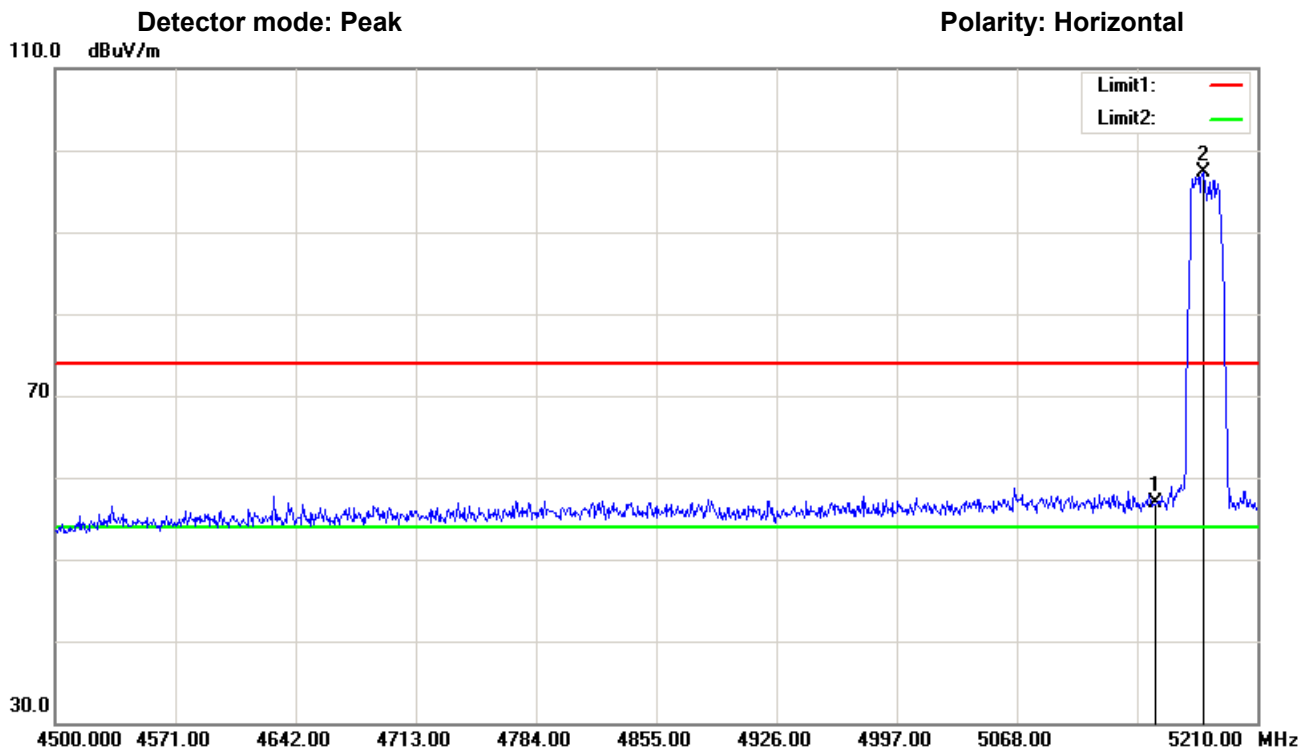

802.11n(20M) (5.15GHz-5.25GHz)



CH 48 (Upper) Data rate 7.2Mbps

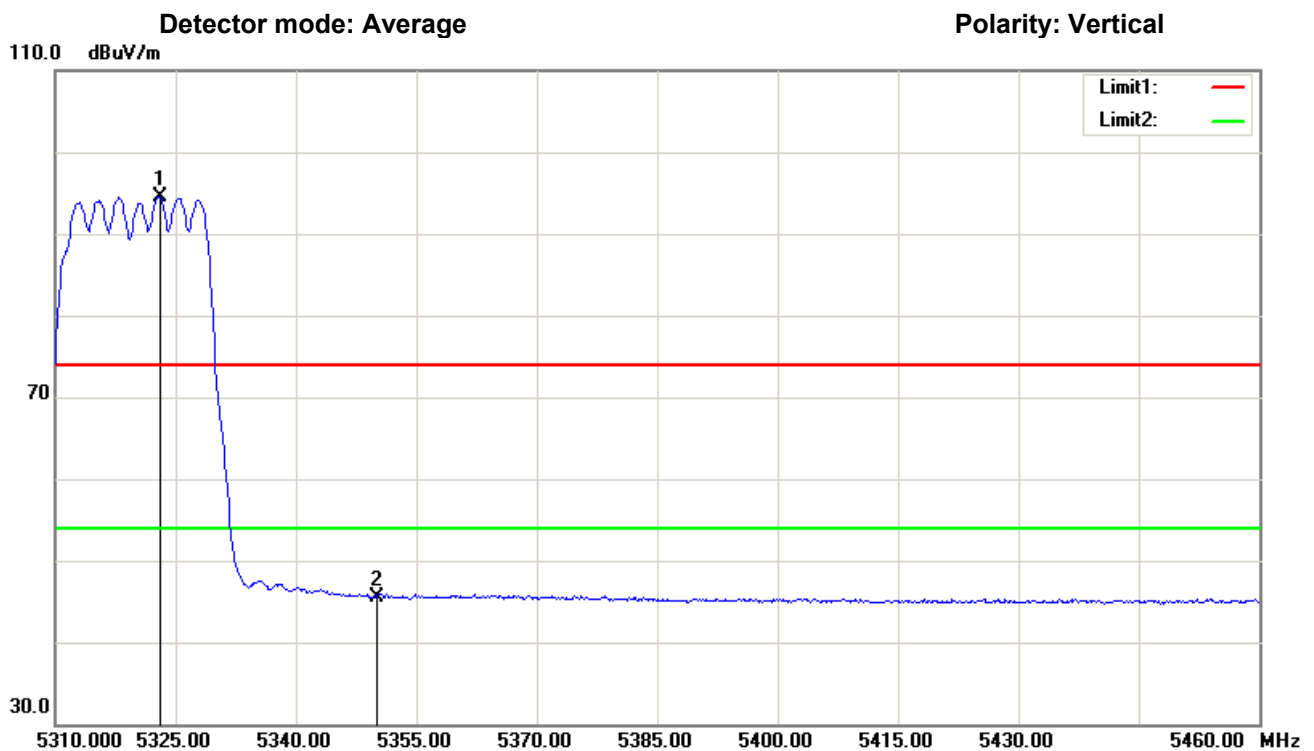
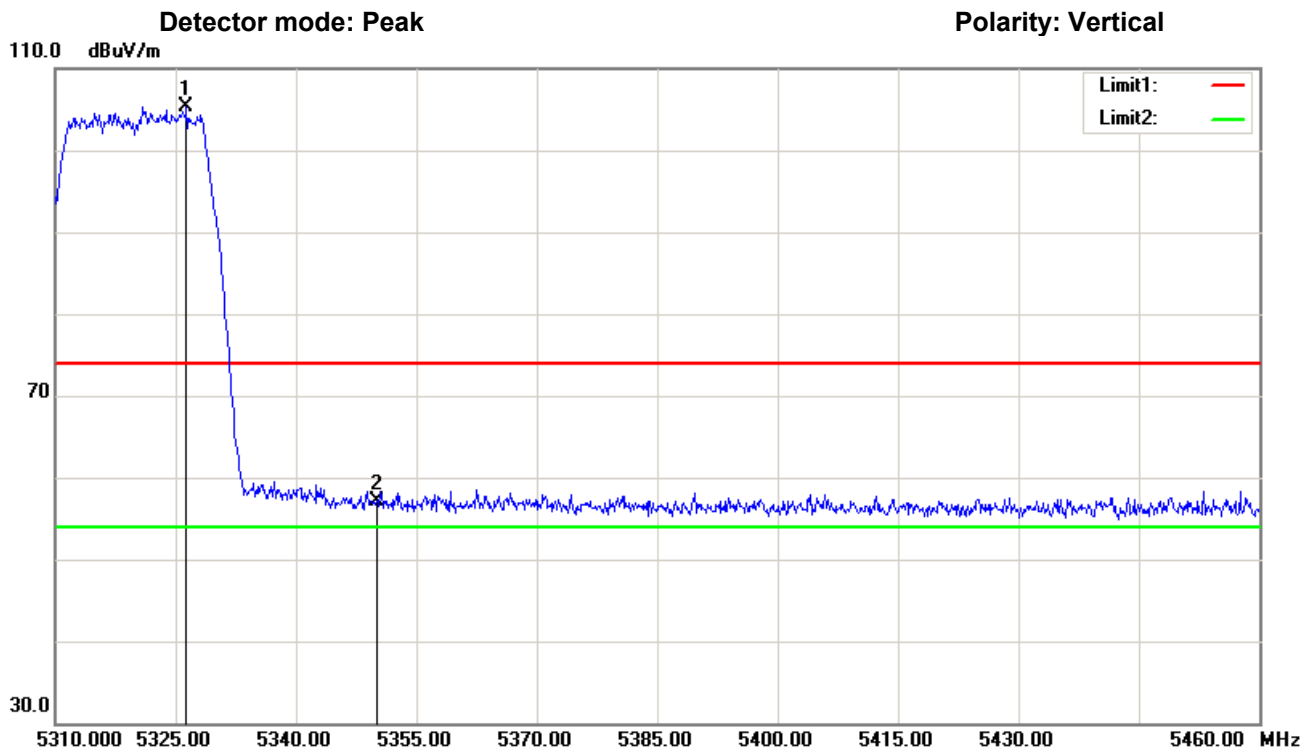


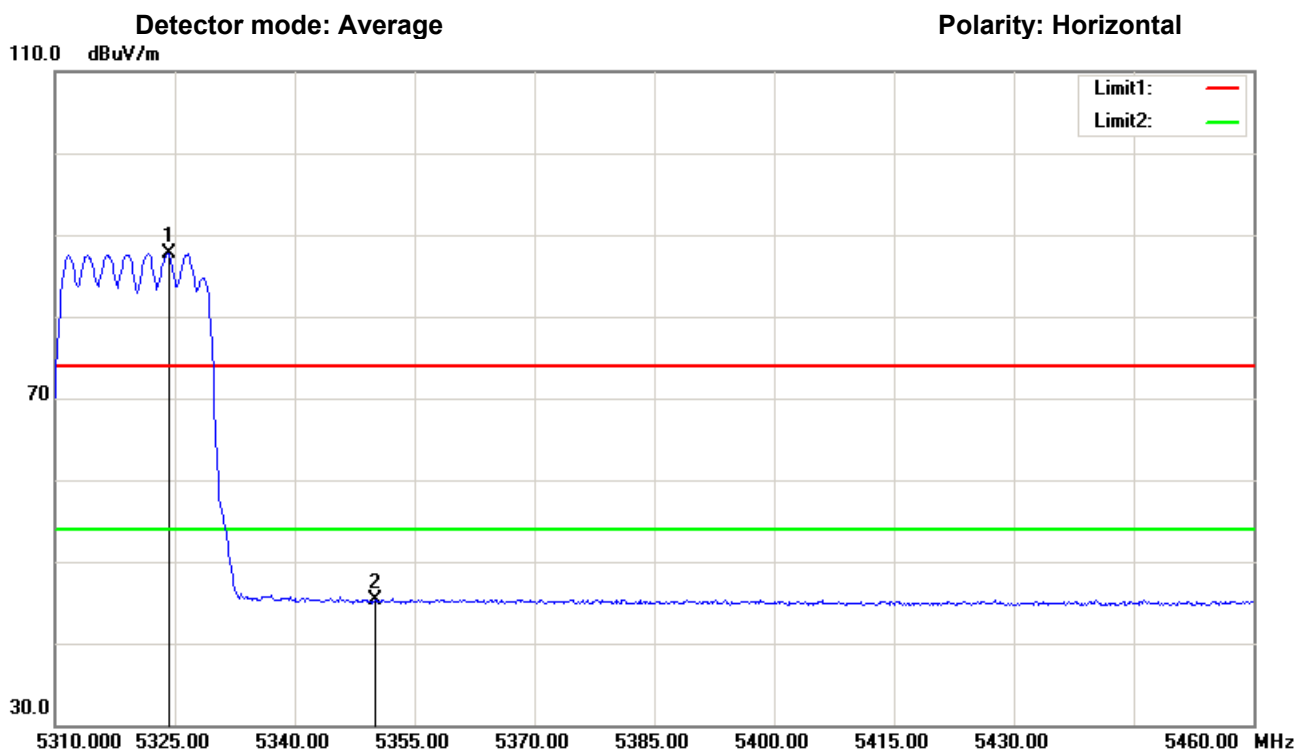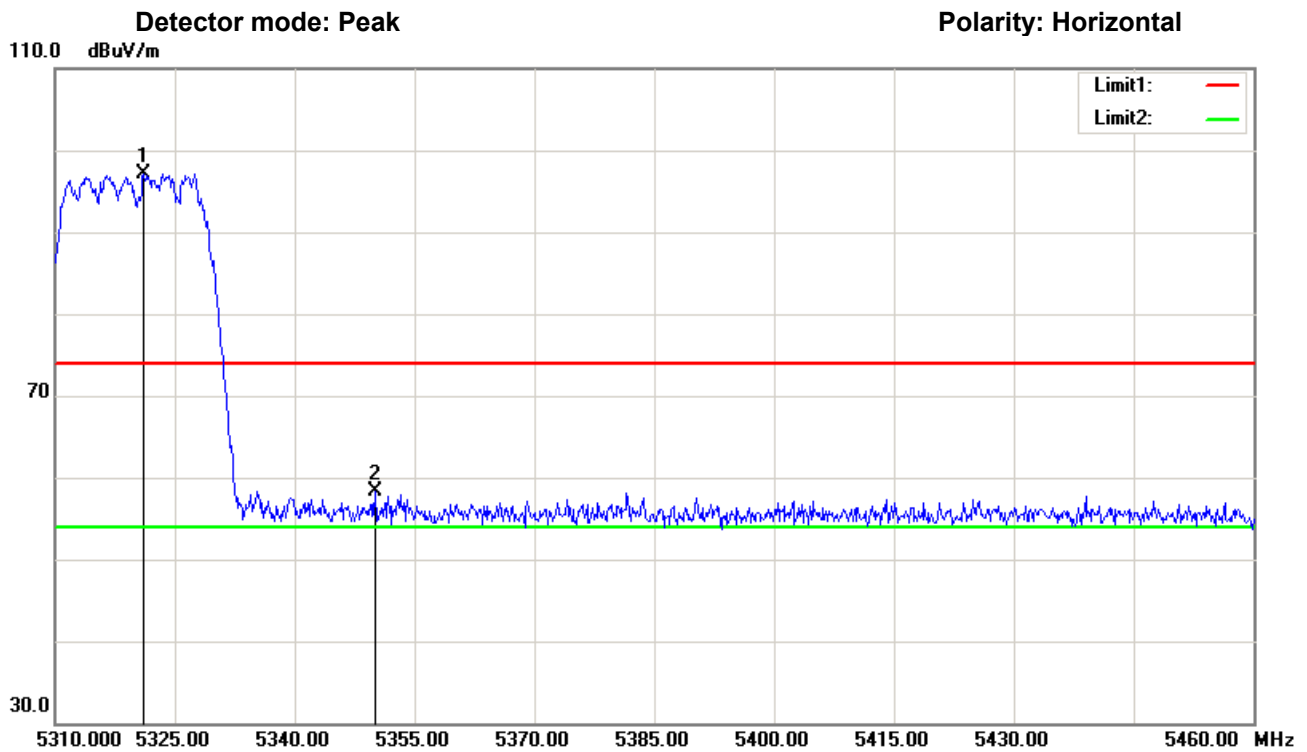

802.11n(40M) (5.15GHz-5.25GHz)



CH 38 (Lower) Data rate 7.2Mbps

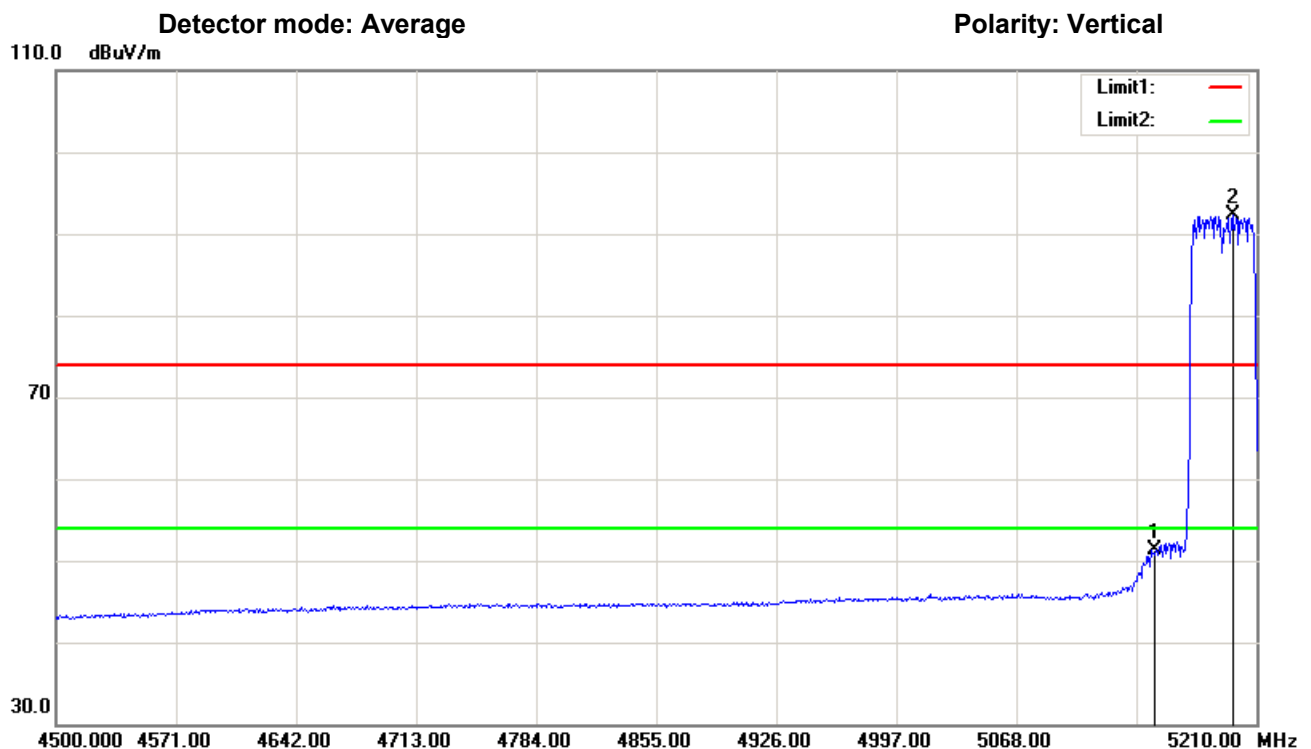
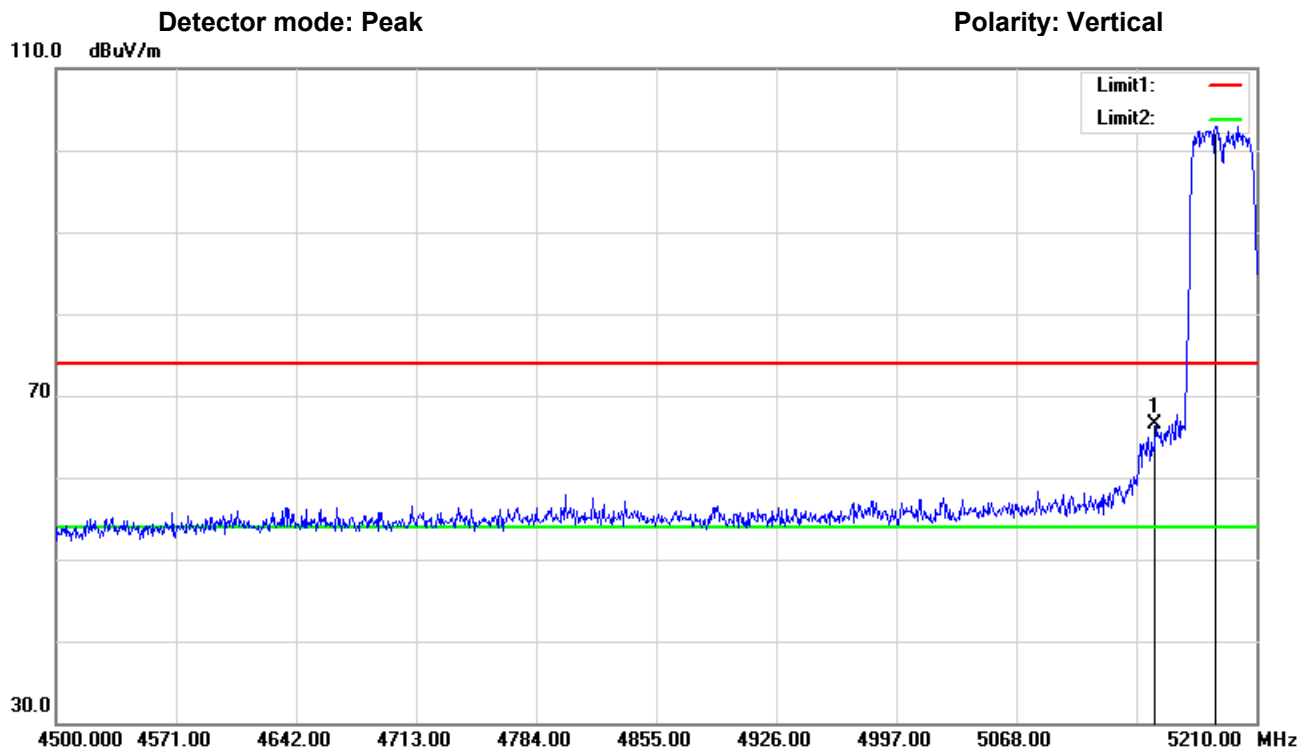


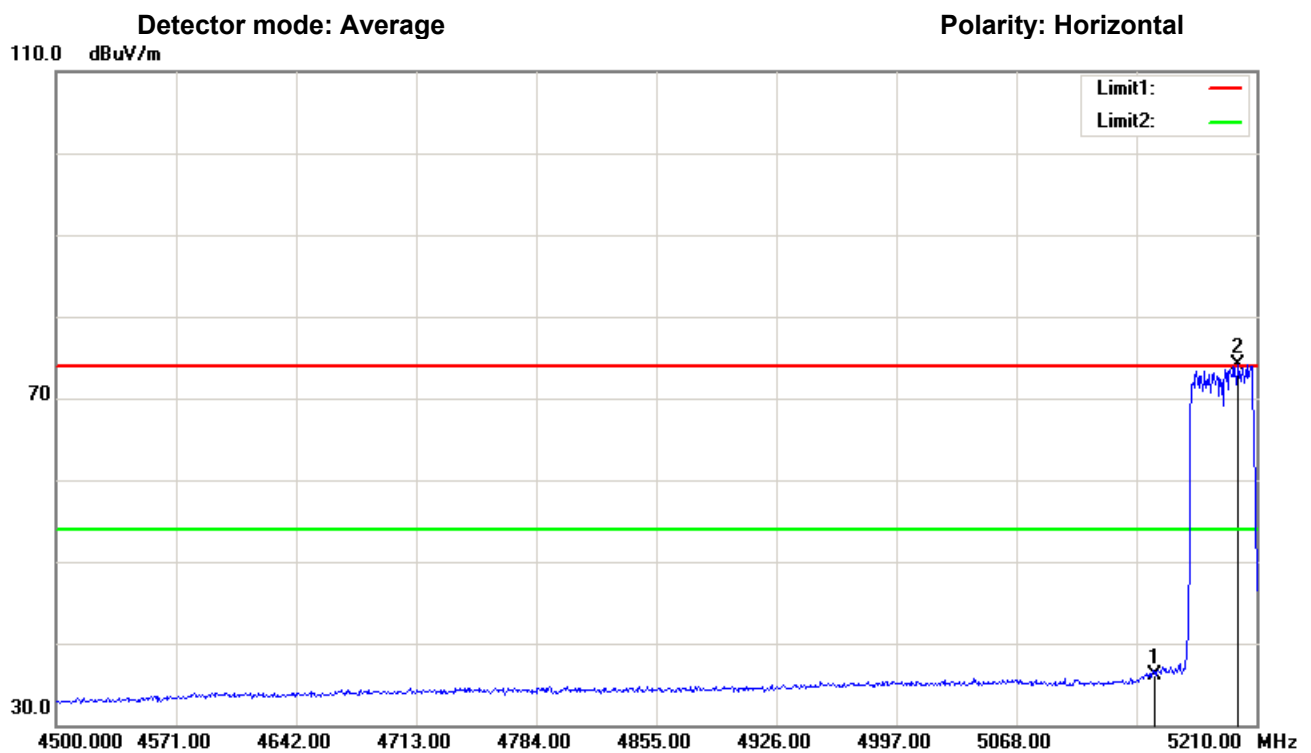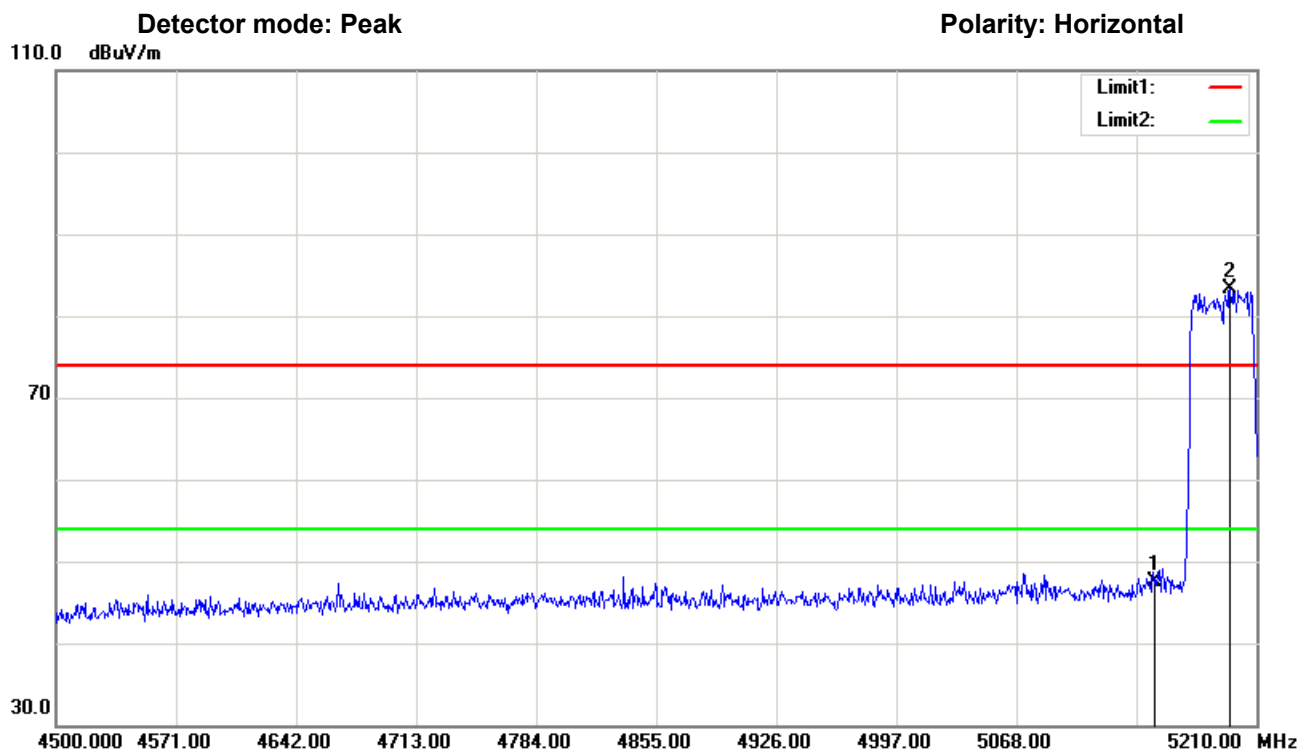

802.11n(40M) (5.15GHz-5.25GHz)



CH 46 (Upper) Data rate 7.2Mbps

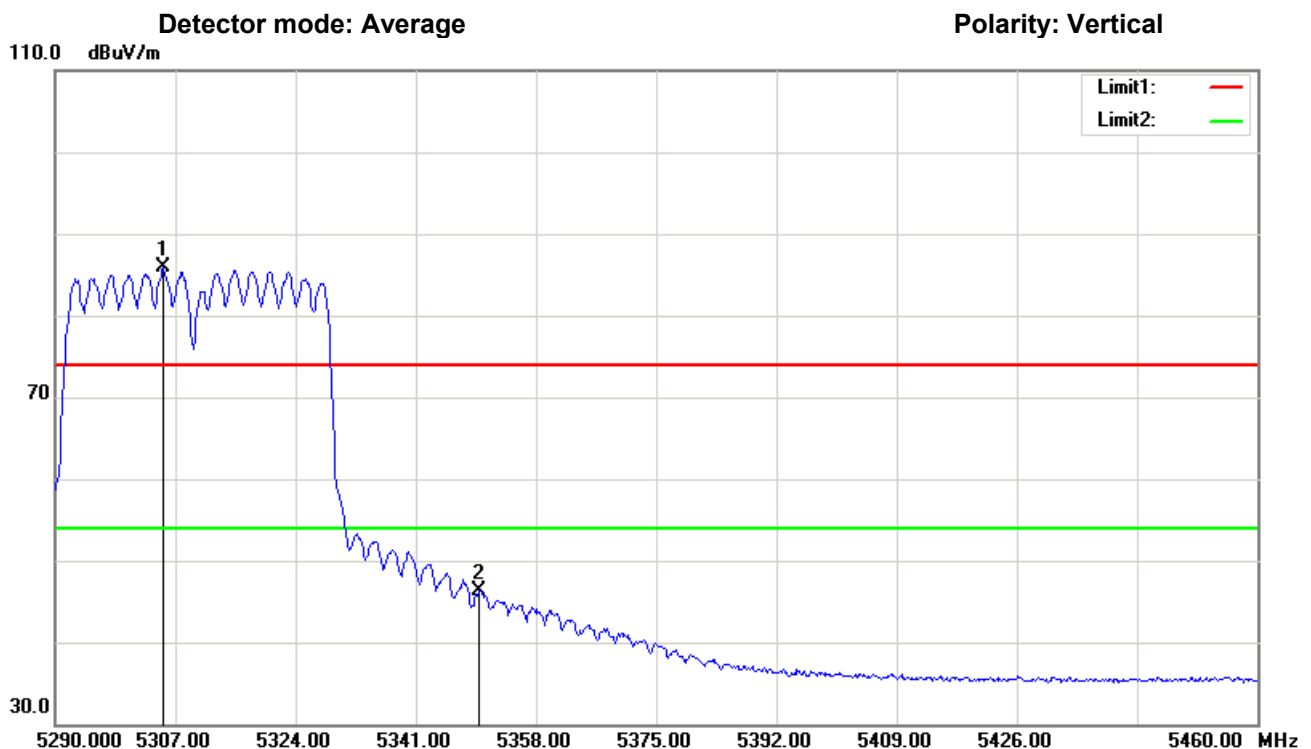
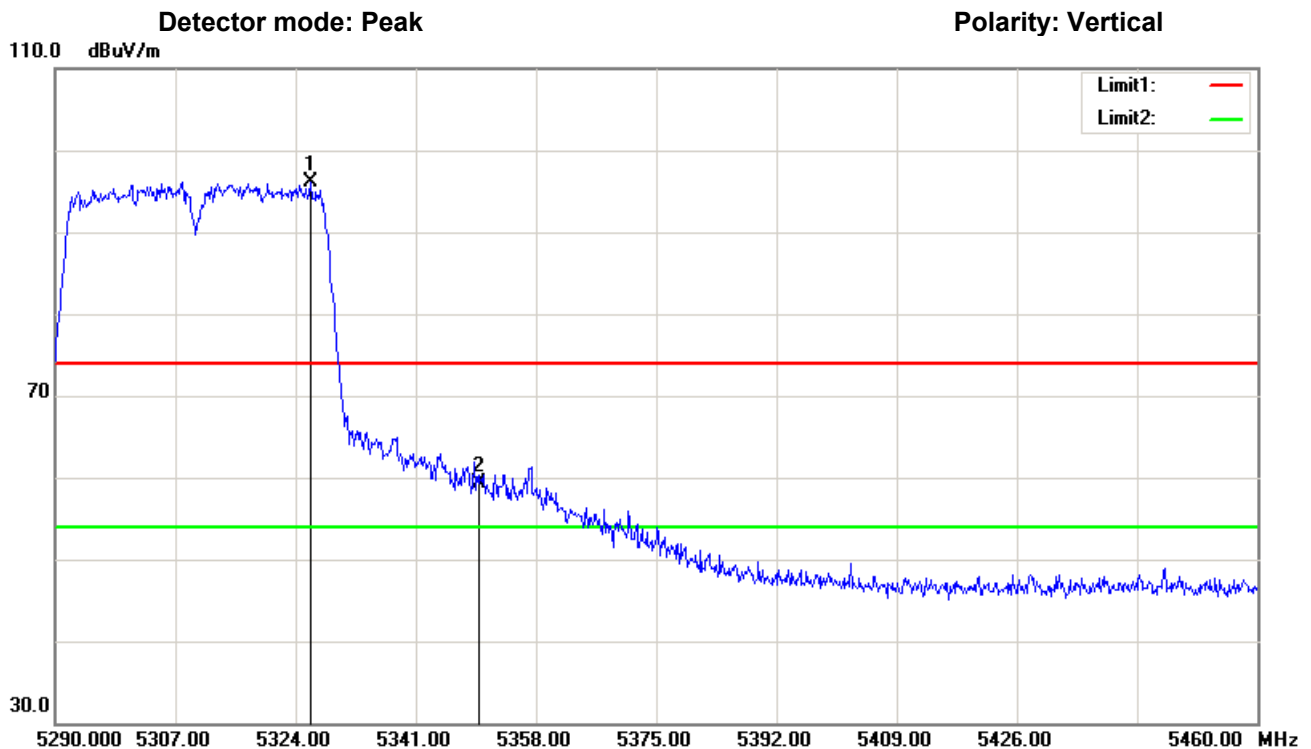


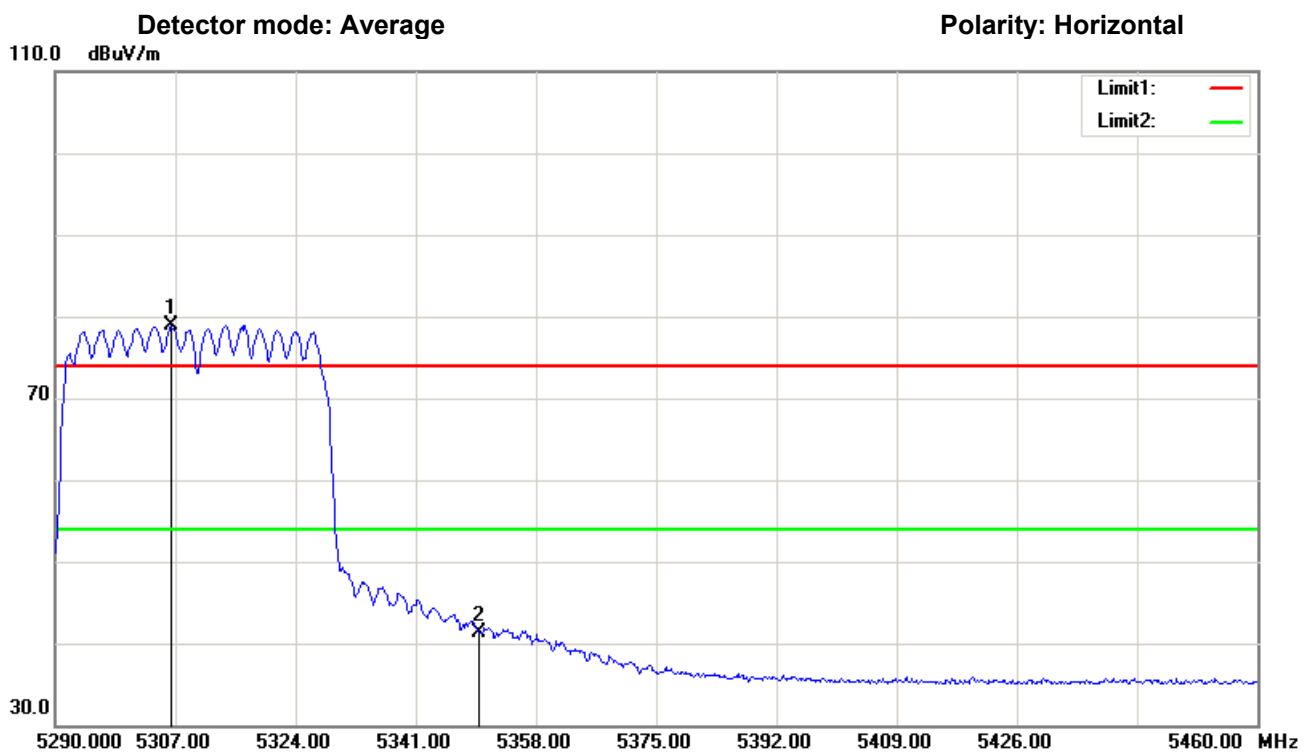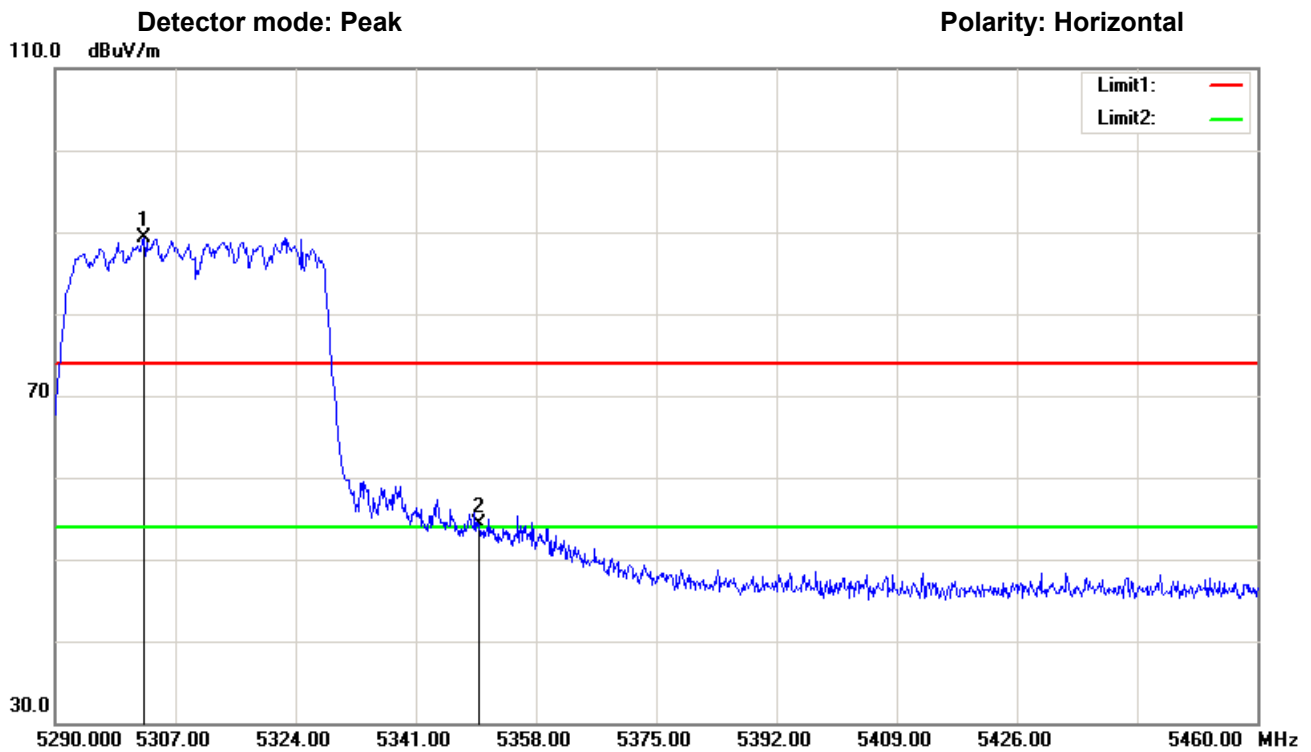


802.11ac(80M) (5.15GHz-5.25GHz)

CH 42 Data rate 7.2Mbps

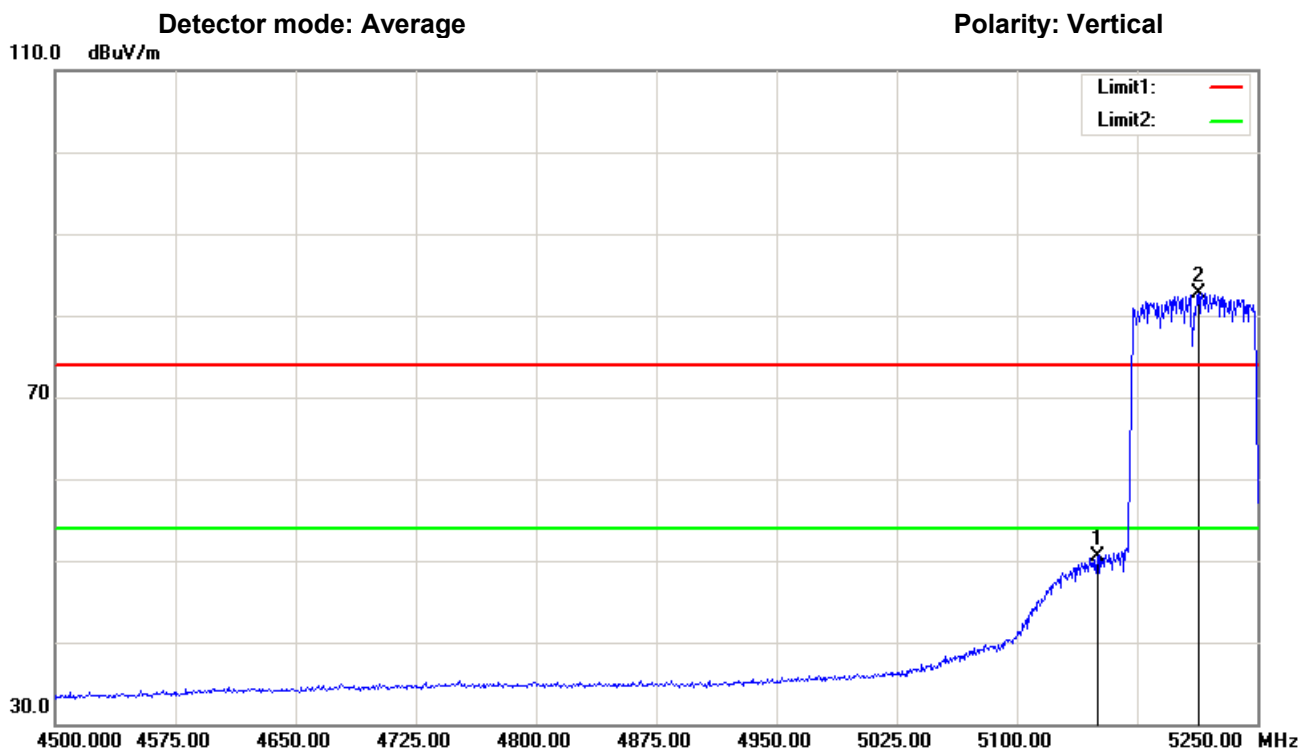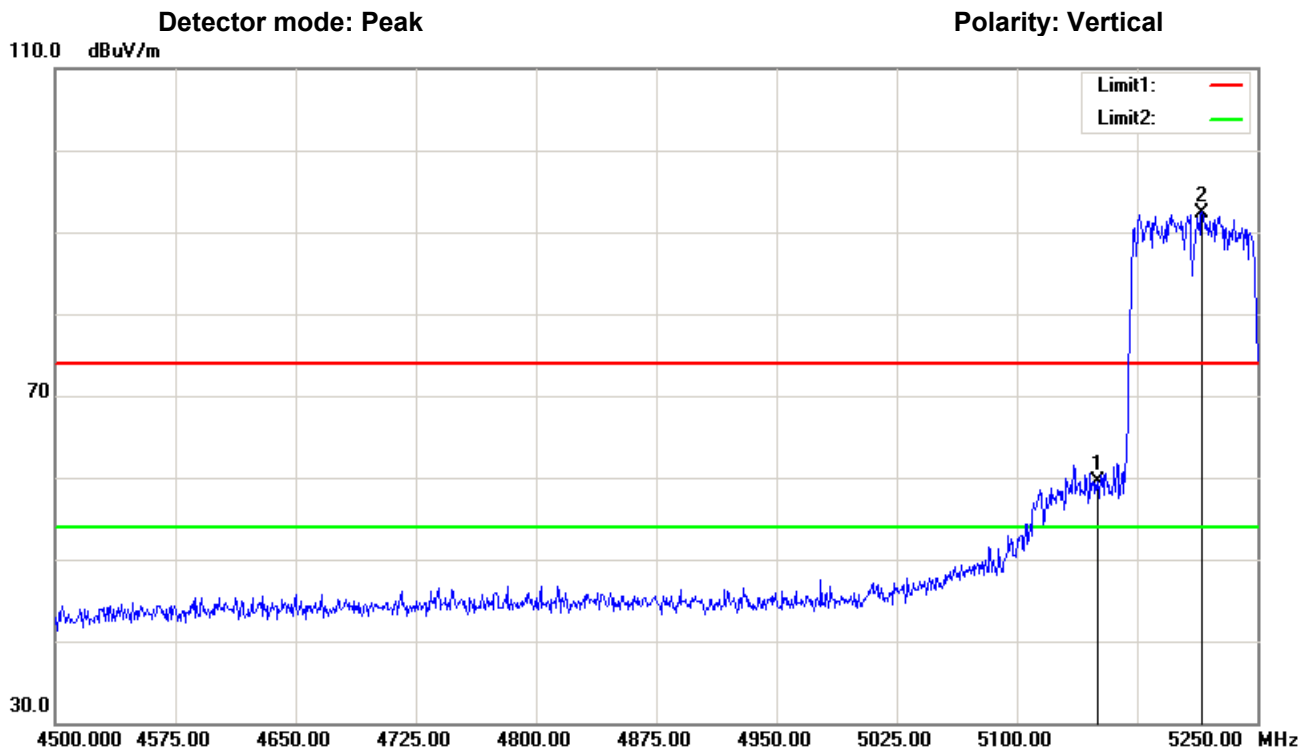


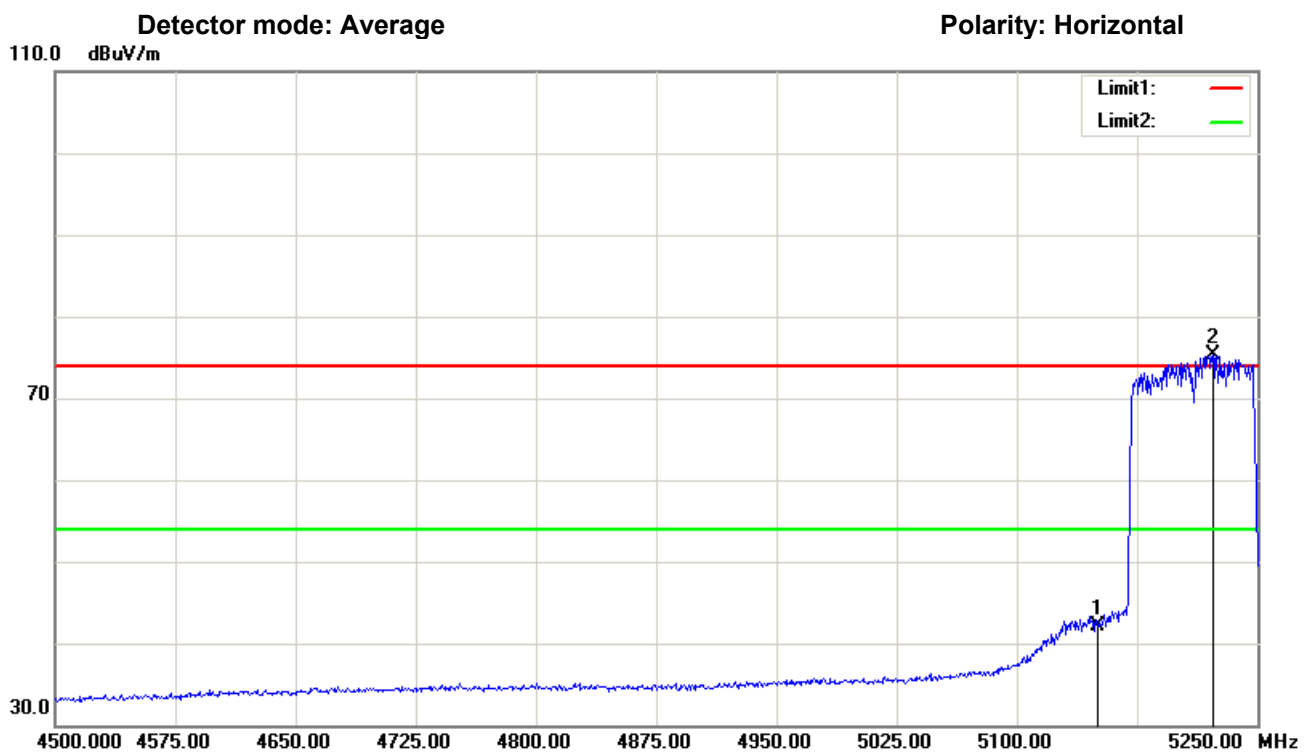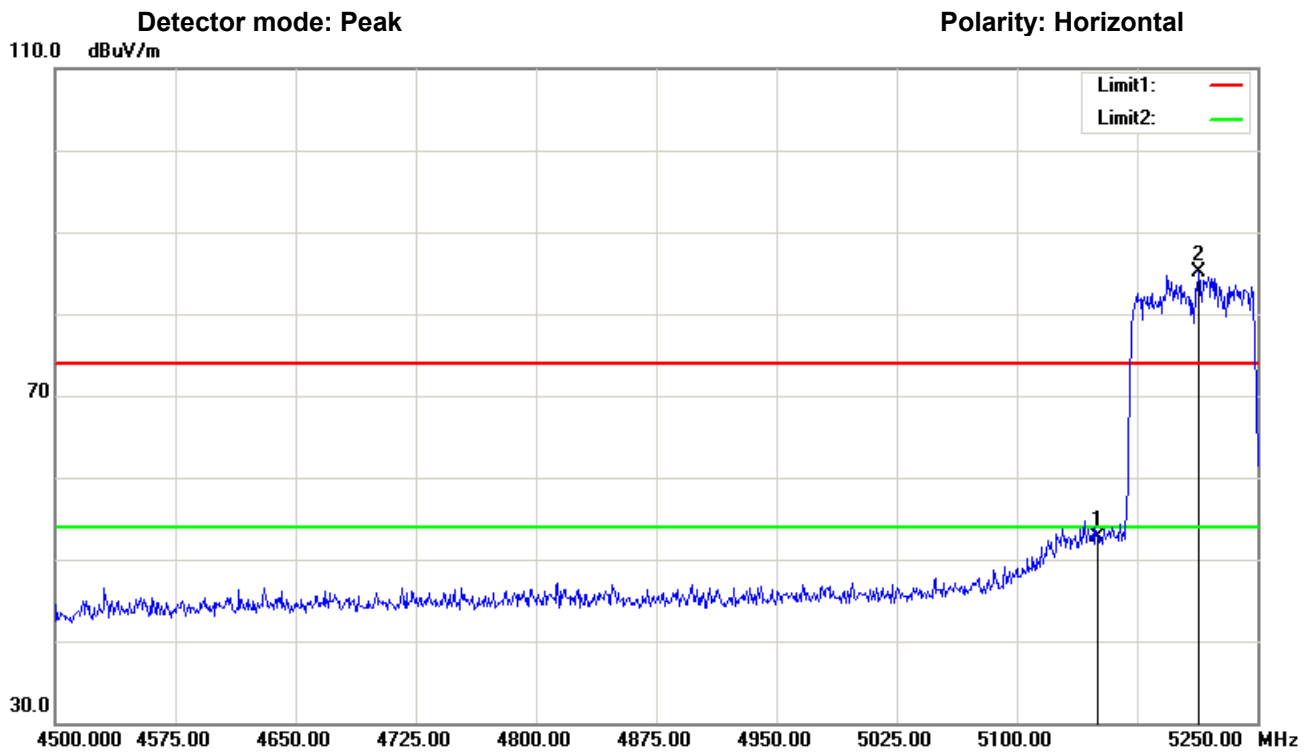



7.7 Band edge(Conducted Emission Method)

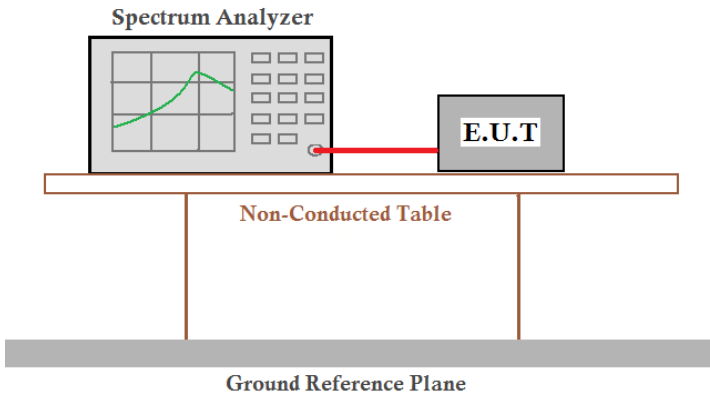Test Requirement:	FCC Part15 C Section 15.407 (b)
Test Method:	Clause 8.7 of KDB558074 D01 DTS Meas Guidance V05r02 and subclause 11.13 of ANSI C63.10
Limit:	In any 1 MHz bandwidth outside the frequency band in which the spread spectrum, the radio frequency power that is produced by the intentional radiator shall be below -27 dBm.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Procedure:	1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range. 3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span. 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. 5. Repeat above procedures until all measured frequencies were complete.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass



802.11 a

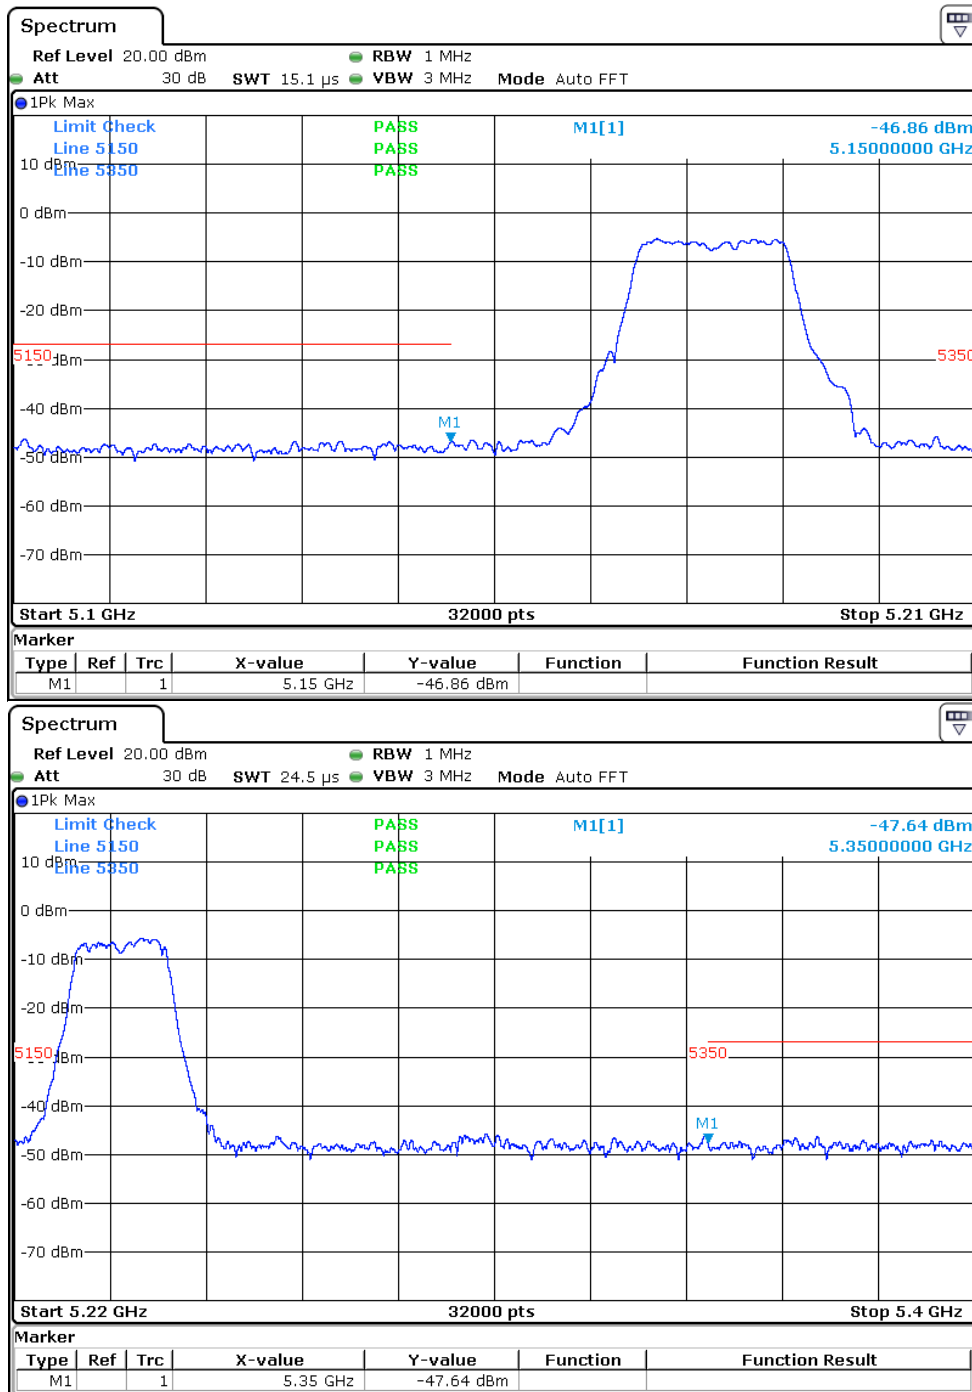


802.11 n20

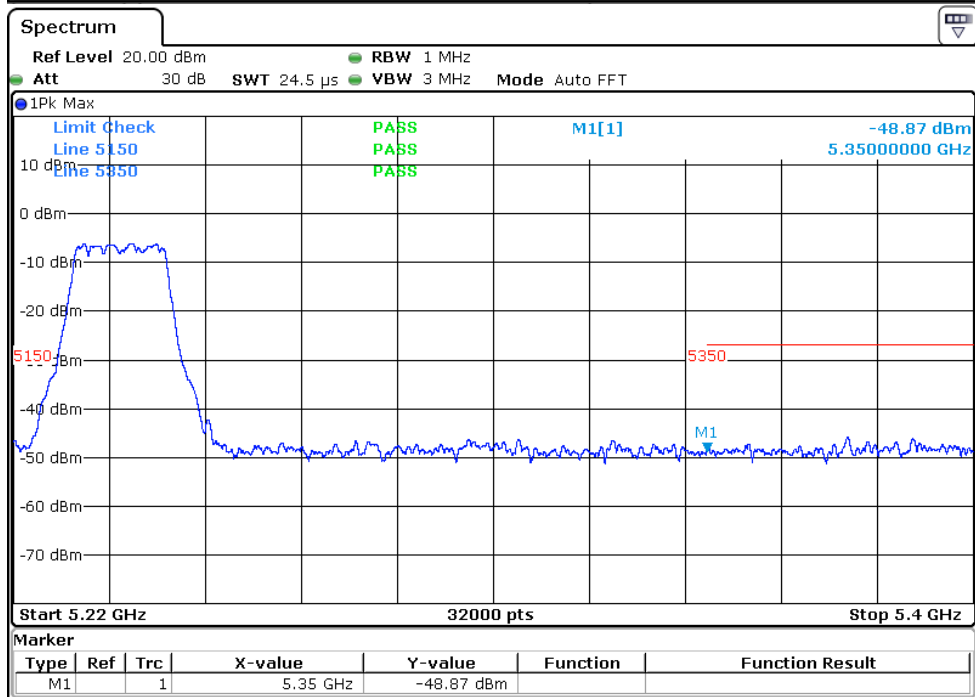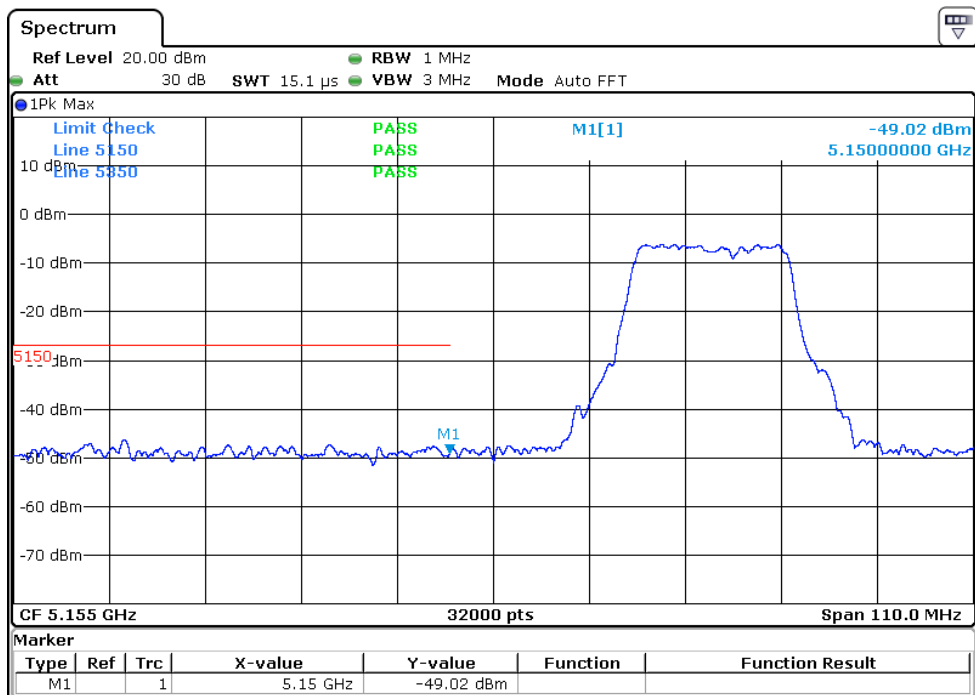

802.11 n40

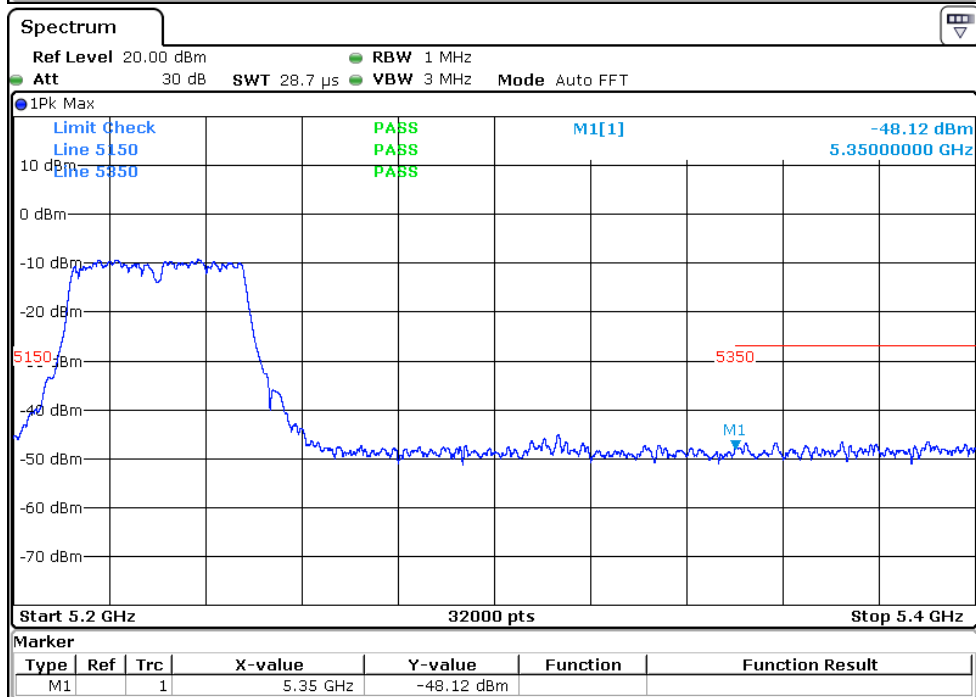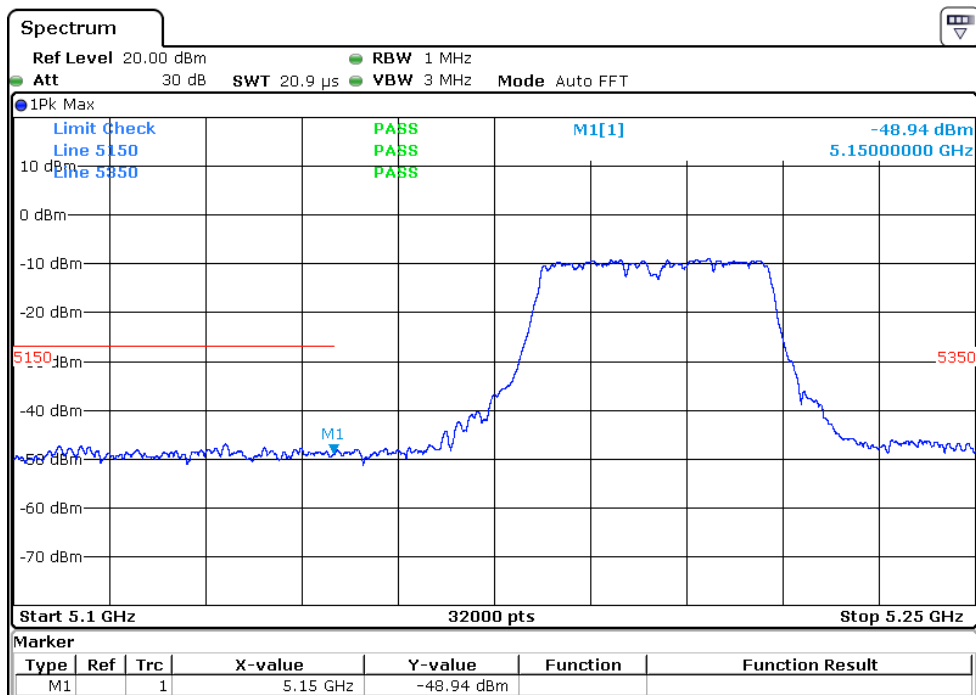




802.11 ac80

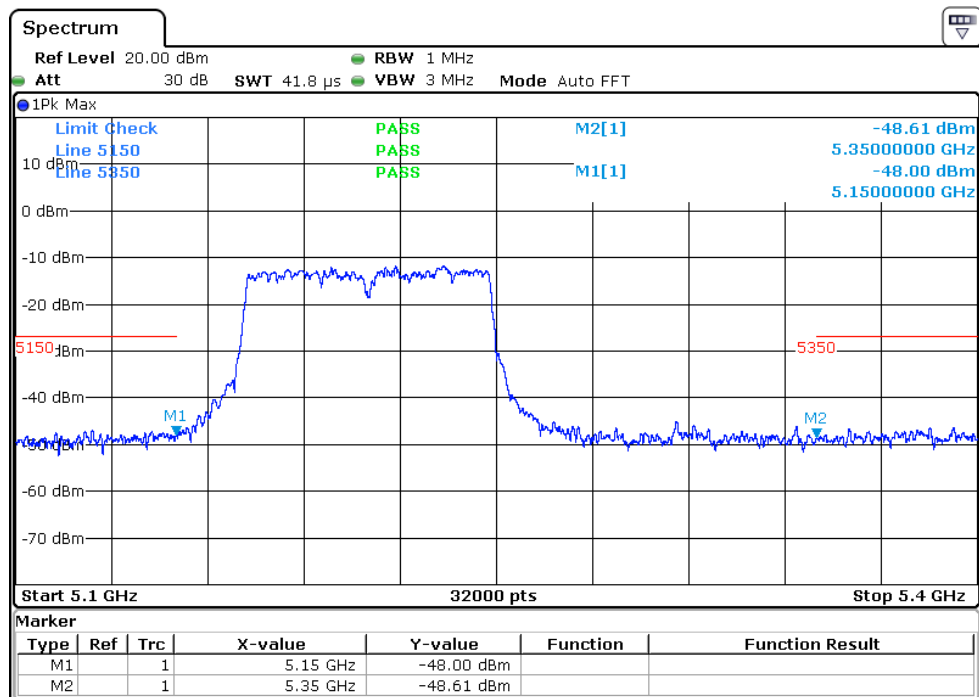

7.8 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 40GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:					
	Frequency	Limit (uV/m)		Value	Measurement Distance
	0.009MHz-0.490MHz	2400/F(KHz)		QP	300m
	0.490MHz-1.705MHz	24000/F(KHz)		QP	300m
	1.705MHz-30MHz	30		QP	30m
	30MHz-88MHz	100		QP	3m
	88MHz-216MHz	150		QP	
	216MHz-960MHz	200		QP	
	960MHz-1GHz	500		QP	
	Above 1GHz	500		Average	
5000		Peak			
Test Procedure:	Substitution method was performed to determine the actual ERP emission levels of the EUT. The following test procedure as below: 1>.Below 1GHz test procedure: 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 2>.Above 1GHz test procedure:				

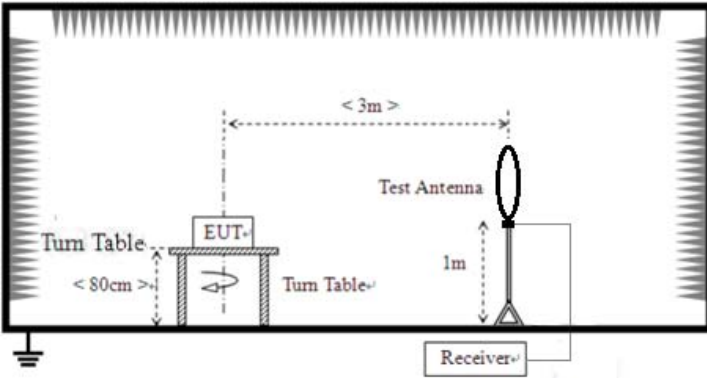	1. On the test site as test setup graph above, the EUT shall be placed at the 0.8m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter. The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test. 4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. 5. Repeat step 4 for test frequency with the test antenna polarized horizontally. 6. Remove the transmitter and replace it with a substitution antenna 7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. 8. Repeat step 7 with both antennas horizontally polarized for each test frequency. 9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ where: Pg is the generator output power into the substitution antenna.
Test setup:	For radiated emissions from 9kHz to 30MHz  For radiated emissions from 30MHz to 1GHz

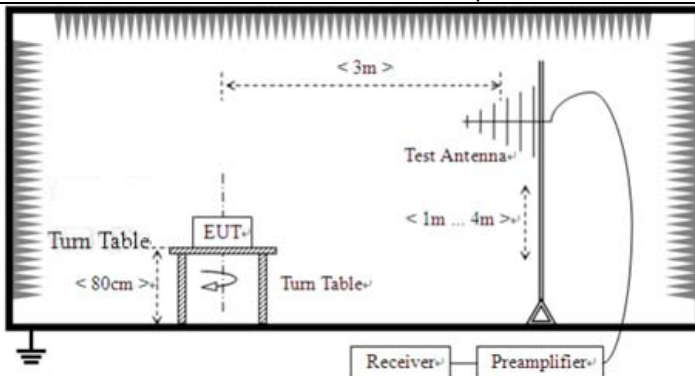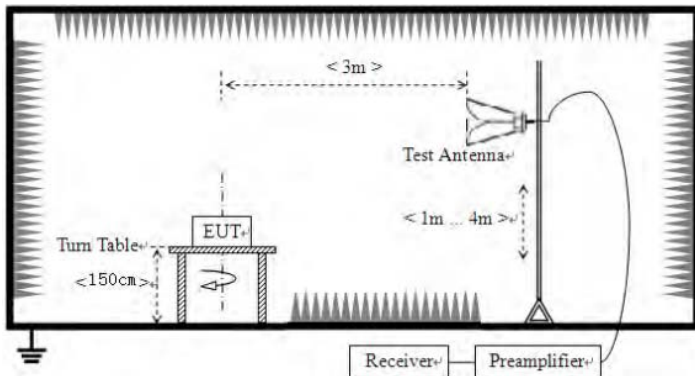									
									
Test Instruments:	Refer to section 5.10 for details								
Test mode:	Refer to section 5.2 for details								
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar			
Test voltage:	AC 120V, 60Hz								
Test results:	Pass								

Remarks:

- Only the worst case Main Antenna test data.
- Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement Data:

9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


30MHz~ 1GHz

Pre-scan all test modes, found worst case at 802.11ac(HT80), and so only show the test result of 802.11ac(HT80)

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
63.5356	33.16	-16.59	16.57	40.00	-23.43	Quasi-Peak
131.7577	35.59	-19.62	15.97	43.50	-27.53	Quasi-Peak
149.4857	37.25	-19.66	17.59	43.50	-25.91	Quasi-Peak
189.7385	33.49	-16.67	16.82	43.50	-26.68	Quasi-Peak
247.6819	27.94	-13.84	14.10	46.00	-31.90	Quasi-Peak
299.3158	31.58	-12.12	19.46	46.00	-26.54	Quasi-Peak


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

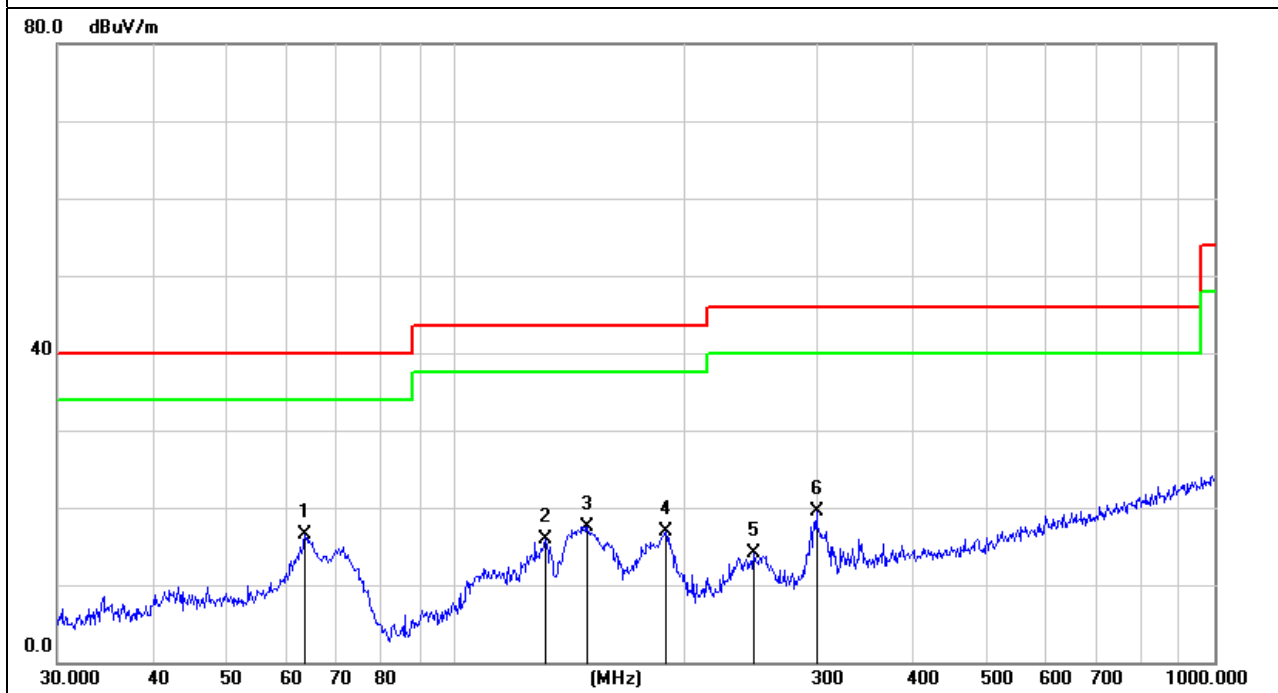

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
34.5173	39.15	-17.58	21.57	40.00	-18.43	Quasi-Peak
65.3432	45.99	-16.96	29.03	40.00	-10.97	Quasi-Peak
126.7723	44.24	-19.28	24.96	43.50	-18.54	Quasi-Peak
144.3348	48.11	-19.89	28.22	43.50	-15.28	Quasi-Peak
178.1327	43.17	-17.93	25.24	43.50	-18.26	Quasi-Peak
299.3158	31.05	-12.12	18.93	46.00	-27.07	Quasi-Peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

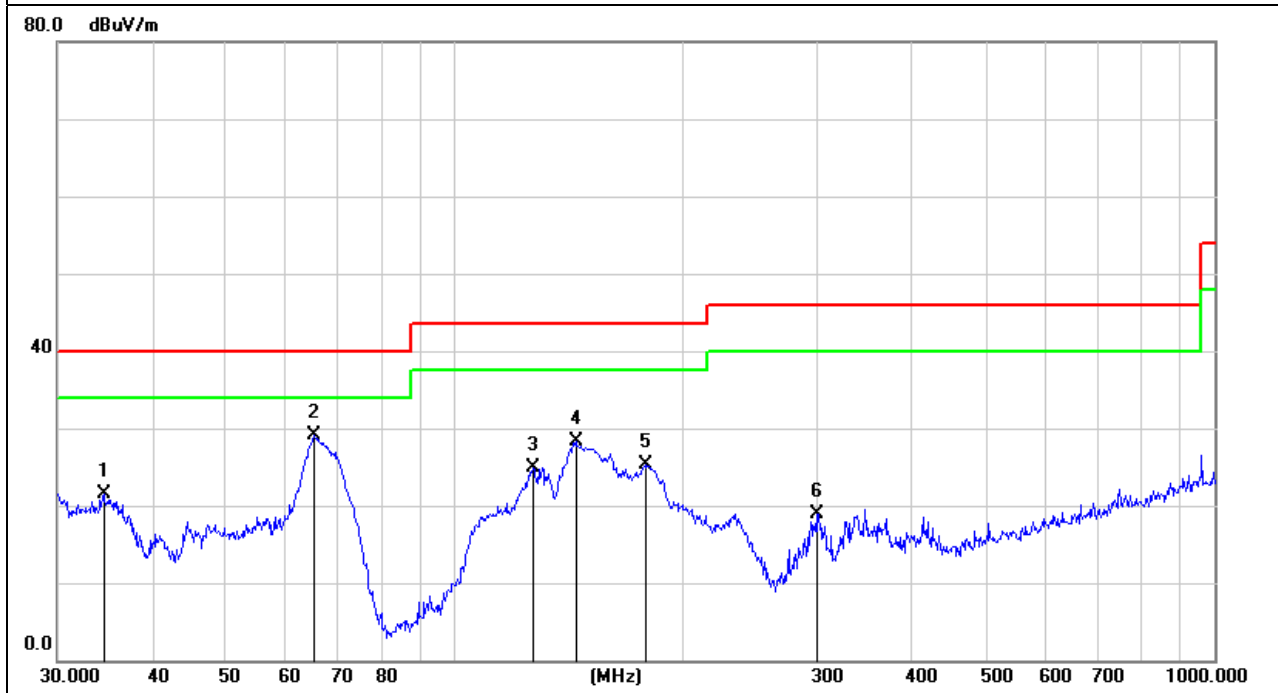

Above 1GHz:

802.11a(HT20) 5180MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	36.86	32.07	16.16	31.56	53.53	74.00	-20.47	Vertical
15540	33.67	32.18	16.32	31.29	50.88	74.00	-23.12	Vertical
10360	35.55	33.07	16.16	31.56	53.22	74.00	-20.78	Horizontal
15540	34.08	32.18	16.32	31.29	51.29	74.00	-22.71	Horizontal

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	25.71	32.07	16.16	31.56	42.38	54.00	-11.62	Vertical
15540	21.54	32.18	16.32	31.29	38.75	54.00	-15.25	Vertical
10360	20.28	33.07	16.16	31.56	37.95	54.00	-16.05	Horizontal
15540	23.62	32.18	16.32	31.29	40.83	54.00	-13.17	Horizontal

802.11a(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	37.14	32.11	16.34	31.61	53.98	74.00	-20.02	Vertical
15600	34.08	32.23	16.58	31.37	51.52	74.00	-22.48	Vertical
10400	36.77	32.11	16.34	31.61	53.61	74.00	-20.39	Horizontal
15600	35.55	32.23	16.58	31.37	52.99	74.00	-21.01	Horizontal

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	26.28	32.11	16.34	31.61	43.12	54.00	-10.88	Vertical
15600	22.15	32.23	16.58	31.37	39.59	54.00	-14.41	Vertical
10400	21.33	32.11	16.34	31.61	38.17	54.00	-15.83	Horizontal
15600	24.07	32.23	16.58	31.37	41.51	54.00	-12.49	Horizontal

802.11a(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	36.08	32.18	16.56	31.74	53.08	74.00	-20.92	Vertical
15720	34.59	32.47	16.70	31.51	52.25	74.00	-21.75	Vertical
10480	37.12	32.18	16.56	31.74	54.12	74.00	-19.88	Horizontal
15720	36.43	32.47	16.70	31.51	54.09	74.00	-19.91	Horizontal

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	25.76	32.18	16.56	31.74	42.76	54.00	-11.24	Vertical
15720	23.19	32.47	16.70	31.51	40.85	54.00	-13.15	Vertical
10480	22.45	32.18	16.56	31.74	39.45	54.00	-14.55	Horizontal
15720	23.28	32.47	16.70	31.51	40.94	54.00	-13.06	Horizontal

802.11n(HT20) 5180MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	37.23	32.07	16.16	31.56	53.90	74.00	-20.10	Vertical
15540	35.04	32.18	16.32	31.29	52.25	74.00	-21.75	Vertical
10360	36.69	33.07	16.16	31.56	54.36	74.00	-19.64	Horizontal
15540	35.82	32.18	16.32	31.29	53.03	74.00	-20.97	Horizontal

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	24.38	32.07	16.16	31.56	41.05	54.00	-12.95	Vertical
15540	21.94	32.18	16.32	31.29	39.15	54.00	-14.85	Vertical
10360	23.66	33.07	16.16	31.56	41.33	54.00	-12.67	Horizontal
15540	22.50	32.18	16.32	31.29	39.71	54.00	-14.29	Horizontal

802.11n(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	37.12	32.11	16.34	31.61	53.96	74.00	-20.04	Vertical
15600	36.06	32.23	16.58	31.37	53.50	74.00	-20.50	Vertical
10400	35.84	32.11	16.34	31.61	52.68	74.00	-21.32	Horizontal
15600	37.42	32.23	16.58	31.37	54.86	74.00	-19.14	Horizontal

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	27.03	32.11	16.34	31.61	43.87	54.00	-10.13	Vertical
15600	24.82	32.23	16.58	31.37	42.26	54.00	-11.74	Vertical
10400	22.96	32.11	16.34	31.61	39.80	54.00	-14.20	Horizontal
15600	23.47	32.23	16.58	31.37	40.91	54.00	-13.09	Horizontal

802.11n(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	36.41	32.18	16.56	31.74	53.41	74.00	-20.59	Vertical
15720	35.28	32.47	16.70	31.51	52.94	74.00	-21.06	Vertical
10480	35.60	32.18	16.56	31.74	52.60	74.00	-21.40	Horizontal
15720	36.35	32.47	16.70	31.51	54.01	74.00	-19.99	Horizontal

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	25.14	32.18	16.56	31.74	42.14	54.00	-11.86	Vertical
15720	23.24	32.47	16.70	31.51	40.90	54.00	-13.10	Vertical
10480	22.65	32.18	16.56	31.74	39.65	54.00	-14.35	Horizontal
15720	23.99	32.47	16.70	31.51	41.65	54.00	-12.35	Horizontal

802.11ac(HT20) 5180MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	36.18	32.07	16.16	31.56	52.85	74.00	-21.15	Vertical
15540	35.92	32.18	16.32	31.29	53.13	74.00	-20.87	Vertical
10360	36.44	33.07	16.16	31.56	54.11	74.00	-19.89	Horizontal
15540	36.35	32.18	16.32	31.29	53.56	74.00	-20.44	Horizontal

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	24.17	32.07	16.16	31.56	40.84	54.00	-13.16	Vertical
15540	23.06	32.18	16.32	31.29	40.27	54.00	-13.73	Vertical
10360	22.84	33.07	16.16	31.56	40.51	54.00	-13.49	Horizontal
15540	23.55	32.18	16.32	31.29	40.76	54.00	-13.24	Horizontal

802.11ac(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	36.94	32.11	16.34	31.61	53.78	74.00	-20.22	Vertical
15600	35.82	32.23	16.58	31.37	53.26	74.00	-20.74	Vertical
10400	37.19	32.11	16.34	31.61	54.03	74.00	-19.97	Horizontal
15600	36.30	32.23	16.58	31.37	53.74	74.00	-20.26	Horizontal

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	24.12	32.11	16.34	31.61	40.96	54.00	-13.04	Vertical
15600	25.08	32.23	16.58	31.37	42.52	54.00	-11.48	Vertical
10400	23.69	32.11	16.34	31.61	40.53	54.00	-13.47	Horizontal
15600	25.06	32.23	16.58	31.37	42.50	54.00	-11.50	Horizontal

802.11ac(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	38.84	32.18	16.56	31.74	55.84	74.00	-18.16	Vertical
15720	36.57	32.47	16.70	31.51	54.23	74.00	-19.77	Vertical
10480	37.26	32.18	16.56	31.74	54.26	74.00	-19.74	Horizontal
15720	36.01	32.47	16.70	31.51	53.67	74.00	-20.33	Horizontal

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	24.25	32.18	16.56	31.74	41.25	54.00	-12.75	Vertical
15720	23.92	32.47	16.70	31.51	41.58	54.00	-12.42	Vertical
10480	24.77	32.18	16.56	31.74	41.77	54.00	-12.23	Horizontal
15720	25.63	32.47	16.70	31.51	43.29	54.00	-10.71	Horizontal

802.11n(HT40) 5190MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380	35.51	32.08	16.17	31.57	52.19	74.00	-21.81	Vertical
15570	36.09	32.20	16.33	31.31	53.31	74.00	-20.69	Vertical
10380	35.47	32.08	16.17	31.57	52.15	74.00	-21.85	Horizontal
15570	36.62	32.20	16.33	31.31	53.84	74.00	-20.16	Horizontal

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380	24.32	32.08	16.17	31.57	41.00	54.00	-13.00	Vertical
15570	25.91	32.20	16.33	31.31	43.13	54.00	-10.87	Vertical
10380	22.62	32.08	16.17	31.57	39.30	54.00	-14.70	Horizontal
15570	23.80	32.20	16.33	31.31	41.02	54.00	-12.98	Horizontal

802.11n(HT40) 5230MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460	35.14	32.18	16.56	31.74	52.14	74.00	-21.86	Vertical
15690	36.83	32.47	16.70	31.51	54.49	74.00	-19.51	Vertical
10460	37.03	32.18	16.56	31.74	54.03	74.00	-19.97	Horizontal
15690	36.22	32.47	16.70	31.51	53.88	74.00	-20.12	Horizontal

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460	25.21	32.18	16.56	31.74	42.21	54.00	-11.79	Vertical
15690	24.46	32.47	16.70	31.51	42.12	54.00	-11.88	Vertical
10460	23.09	32.18	16.56	31.74	40.09	54.00	-13.91	Horizontal
15690	24.22	32.47	16.70	31.51	41.88	54.00	-12.12	Horizontal

802.11ac(HT80) 5210MHz


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420	36.17	32.11	16.34	31.61	53.01	74.00	-20.99	Vertical
15630	35.29	32.23	16.58	31.37	52.73	74.00	-21.27	Vertical
10420	35.46	32.11	16.34	31.61	52.30	74.00	-21.70	Horizontal
15630	34.22	32.23	16.58	31.37	51.66	74.00	-22.34	Horizontal

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420	25.93	32.11	16.34	31.61	42.77	54.00	-11.23	Vertical
15630	23.64	32.23	16.58	31.37	41.08	54.00	-12.92	Vertical
10420	23.04	32.11	16.34	31.61	39.88	54.00	-14.12	Horizontal
15630	22.16	32.23	16.58	31.37	39.60	54.00	-14.40	Horizontal


Notes:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.


7.9 Spurious Emission (Conducted Emission Method)

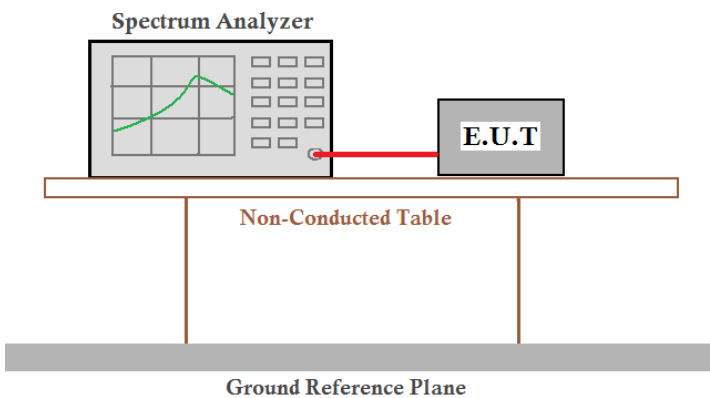Test Requirement:	FCC Part15 C Section 15.407 (b)
Test Method:	Clause 6 of KDB558074 D01 DTS Meas Guidance V05r02 and subclause 6.7 of ANSI C63.10
Limit:	In any 1 MHz bandwidth outside the frequency band in which the spread spectrum, the radio frequency power that is produced by the intentional radiator shall be below -27 dBm.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Procedure:	The EUT which is powered by the adapter, is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1MHz. In order to make an accurate measurement, set the span greater than RBW.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


802.11a (5.15GHz-5.25GHz) The Low Channel 36: 5180MHz

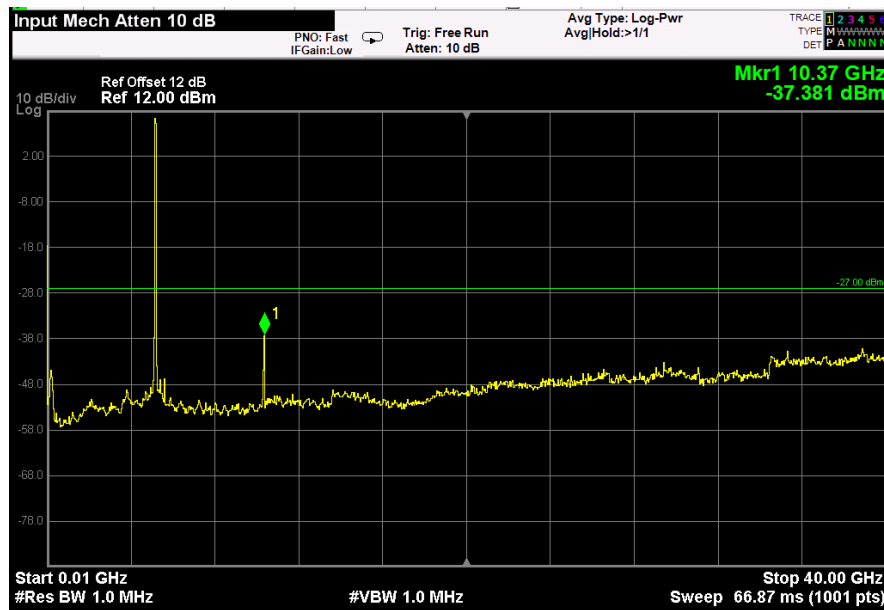


802.11a (5.15GHz-5.25GHz) The Middle Channel 40: 5200MHz

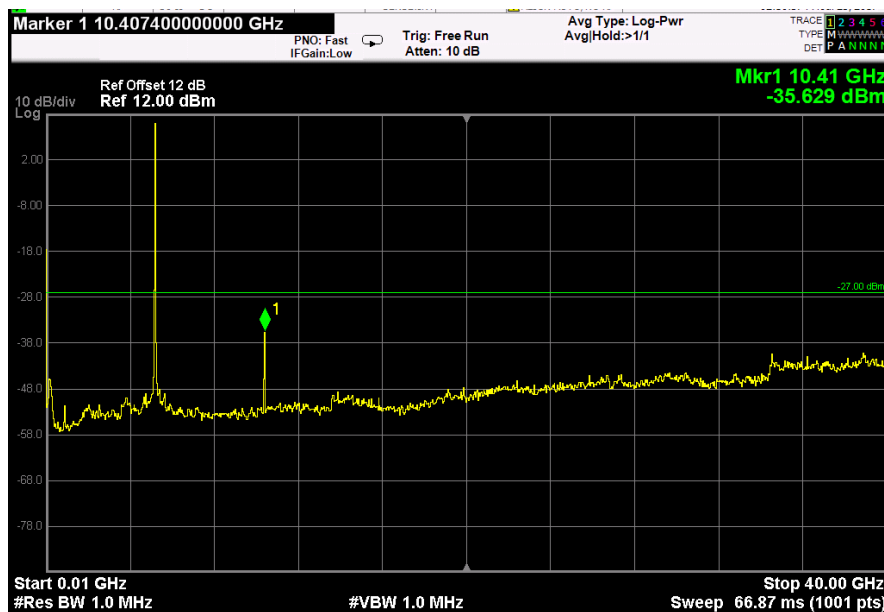

802.11a (5.15GHz-5.25GHz) The High Channel 48: 5240MHz

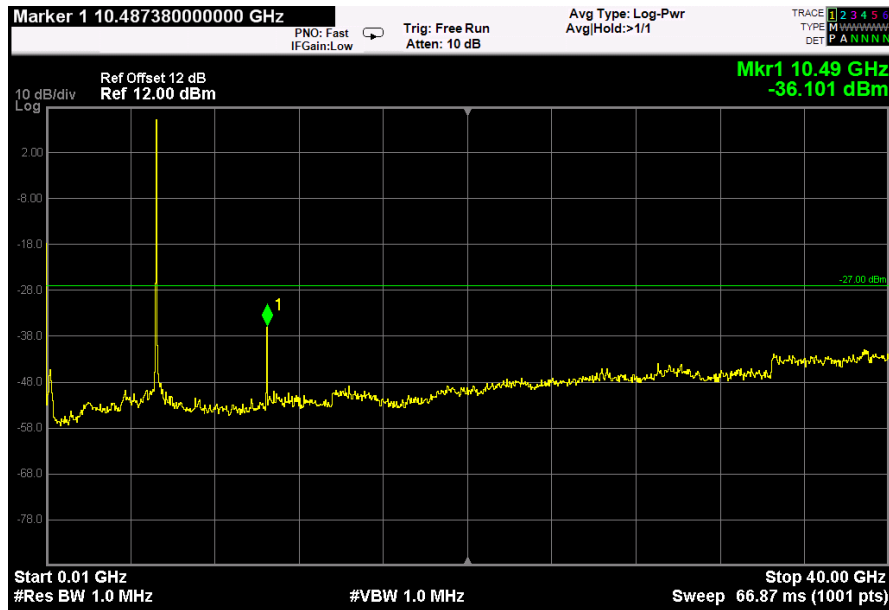


802.11n(20M) (5.15GHz-5.25GHz) The Lowest Channel 36: 5180MHz

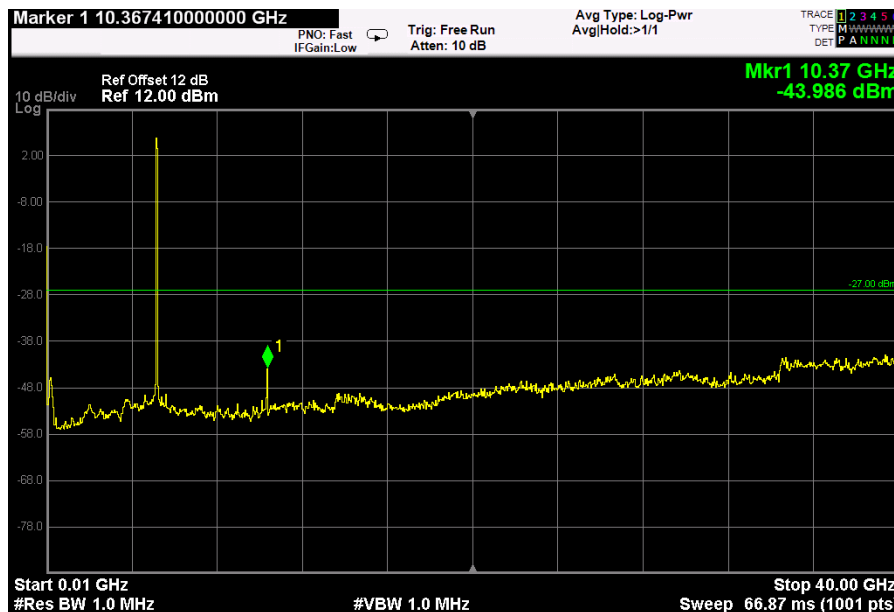


802.11n(20M) (5.15GHz-5.25GHz)

The Middle Channel 40: 5200MHz

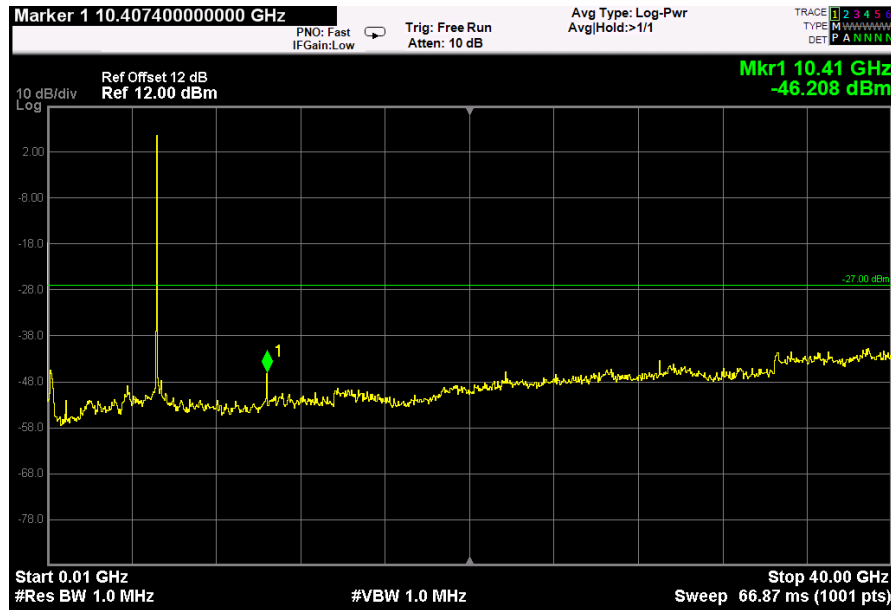


802.11n(20M) (5.15GHz-5.25GHz)

The High Channel 48: 5240MHz

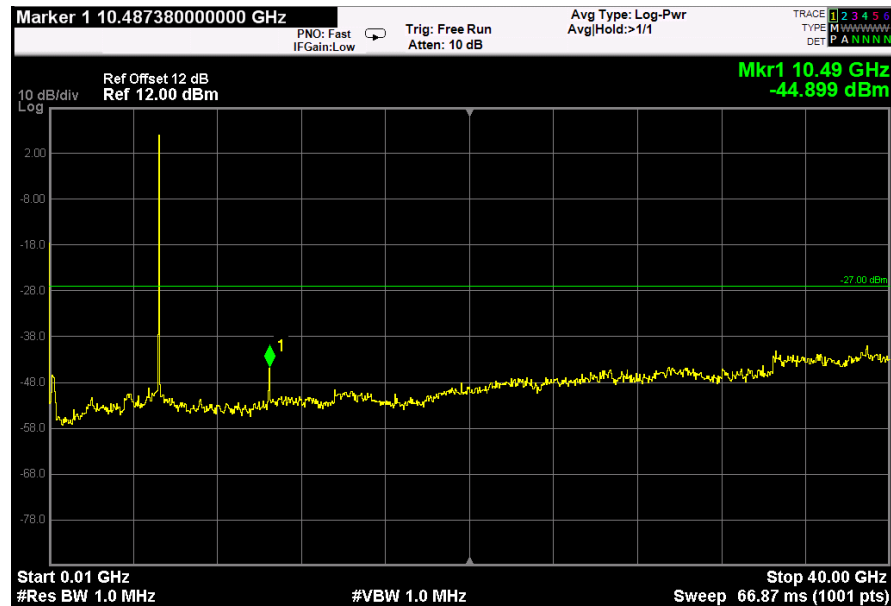


802.11n(40M) (5.15GHz-5.25GHz)

The Lowest Channel 38: 5190MHz

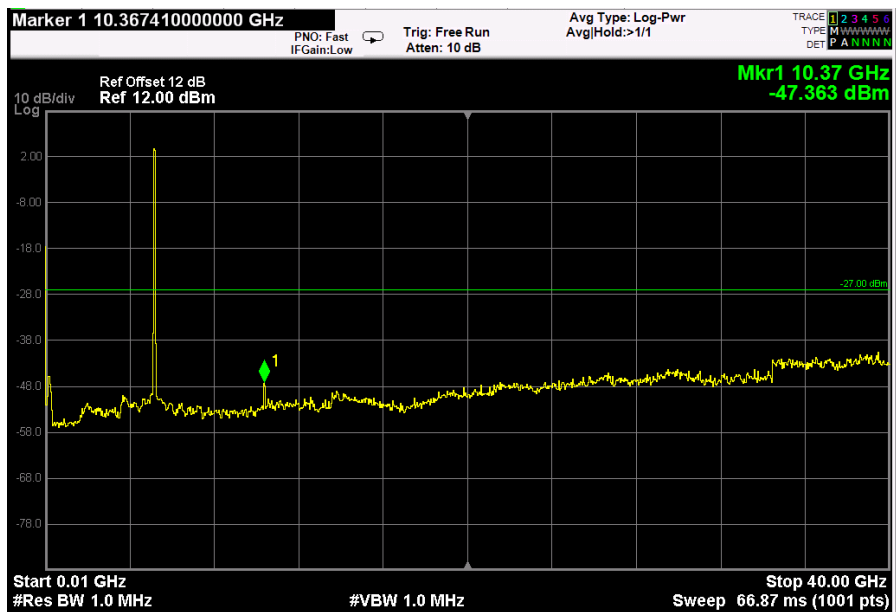


802.11n(40M) (5.15GHz-5.25GHz)

The High Channel 46: 5230MHz

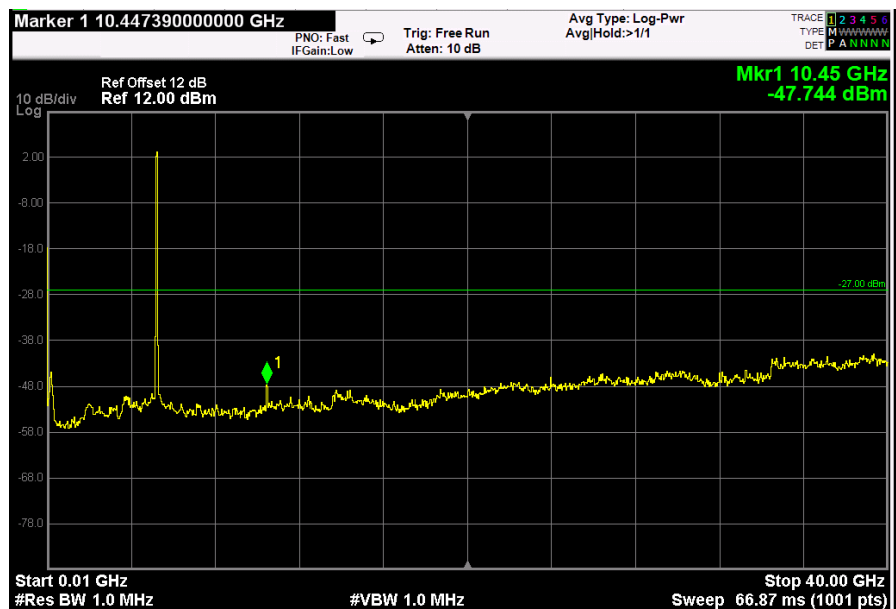


802.11ac(80M) (5.15GHz-5.25GHz)

The Lowest Channel 42: 5210MHz

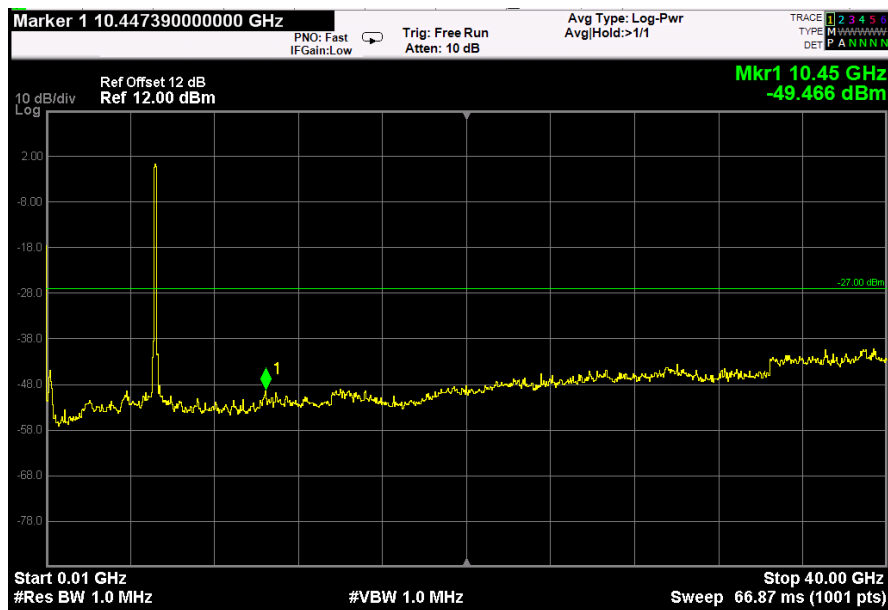

7.10 Frequency stability

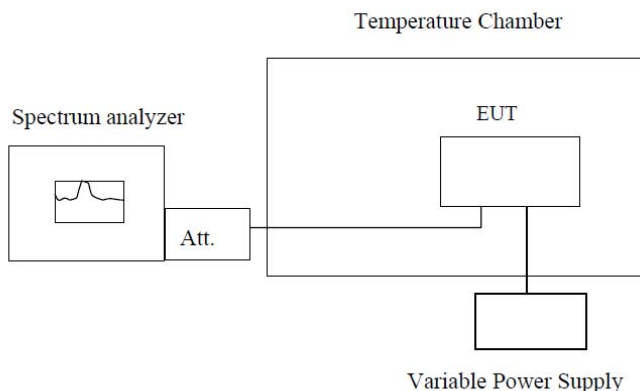Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10:2013, FCC Part 2.1055
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remark: Set the EUT transmits at un-modulation mode to test frequency stability.

Measurement data:


Frequency stability versus Temp.									
Worse Case Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (VAC)	0 minute		2 minute		5 minute		10 minute	
		Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail
-10	108	5180.0175	Pass	5180.0175	Pass	5180.0175	Pass	5180.0175	Pass
25	108	5180.0175	Pass	5180.0175	Pass	5180.0175	Pass	5180.0175	Pass
40	108	5180.0175	Pass	5180.0175	Pass	5180.0175	Pass	5180.0175	Pass
-10	120	5180.0175	Pass	5180.0175	Pass	5180.0175	Pass	5180.0175	Pass
25	120	5180.0175	Pass	5180.0175	Pass	5180.0175	Pass	5180.0175	Pass
40	120	5180.0175	Pass	5180.0175	Pass	5180.0175	Pass	5180.0175	Pass
-10	132	5180.0175	Pass	5180.0175	Pass	5180.0175	Pass	5180.0175	Pass
25	132	5180.0175	Pass	5180.0175	Pass	5180.0175	Pass	5180.0175	Pass
40	132	5180.0175	Pass	5180.0175	Pass	5180.0175	Pass	5180.0175	Pass
Frequency stability versus Temp.									
Worse Case Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (VAC)	0 minute		2 minute		5 minute		10 minute	
		Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail
-10	120	5180.0175	Pass	5180.000	Pass	5180.0175	Pass	5180.0175	Pass
25	120	5180.0175	Pass	5180.000	Pass	5180.0175	Pass	5180.0175	Pass
40	120	5180.0175	Pass	5180.000	Pass	5180.0175	Pass	5180.0175	Pass

Frequency stability versus Temp.									
Worse Case Operating Frequency: 5190MHz									
Temp. (°C)	Power Supply (VAC)	0 minute		2 minute		5 minute		10 minute	
		Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail
-10	108	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass
25	108	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass
40	108	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass
-10	120	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass
25	120	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass
40	120	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass
-10	132	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass
25	132	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass
40	132	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass
Frequency stability versus Temp.									
Worse Case Operating Frequency: 5190MHz									
Temp. (°C)	Power Supply (VAC)	0 minute		2 minute		5 minute		10 minute	
		Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail
-10	120	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass
25	120	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass
40	120	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass	5190.0025	Pass

Frequency stability versus Temp.									
Worse Case Operating Frequency: 5210MHz									
Temp. (°C)	Power Supply (VAC)	0 minute		2 minute		5 minute		10 minute	
		Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail
-10	108	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass
25	108	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass
40	108	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass
-10	120	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass
25	120	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass
40	120	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass
-10	132	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass
25	132	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass
40	132	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass
Frequency stability versus Temp.									
Worse Case Operating Frequency: 5210MHz									
Temp. (°C)	Power Supply (VAC)	0 minute		2 minute		5 minute		10 minute	
		Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail
-10	120	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass
25	120	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass
40	120	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass	5210.0075	Pass

8 Test Setup Photo



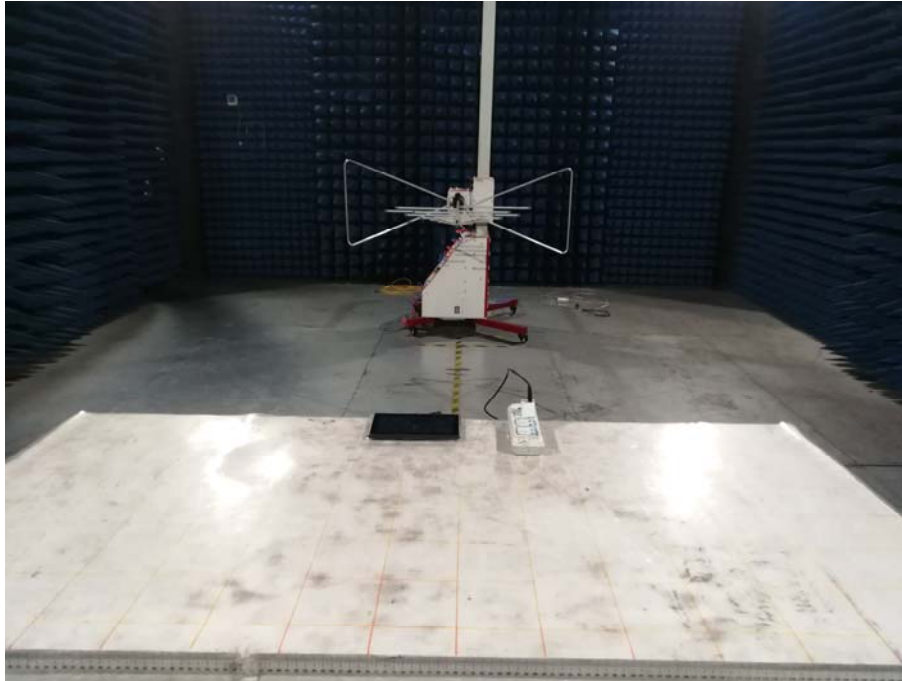

9 EUT Constructional Details

Reference to the report No.GTS202004000149F01.

---END---