

FCC Test Report

Equipment : Ponte AirPad Wireless Charging Pad
Brand Name : Adam Elements
Model No. : AEP-WCPP1
FCC ID : 2ABY9AEP-WCPP1
Standard : 47 CFR FCC Part 15.209
Operating Band : 110-205 kHz
FCC Classification : DCD (for 110-205kHz only)
Equipment Type : Wireless Power Transfer for Consumer Devices
Output power : 5W (from Each Primary Coil)
Applicant : Adam Elements International Co., LTD.
Rm. A, 16F.-1, No.1, Baosheng Rd., Yonghe Dist.,
New Taipei City, 234, Taiwan
Manufacturer : Powergene Technology Co., LTD.
Taiwan Branch
8F.-1, No.1, Wuquan 1st Rd., Xinzhuang Dist.,
New Taipei City, Taiwan

The product sample received on Dec. 25, 2013 and completely tested on Jan. 21, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Wayne Hsu / Assistant Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories	6
1.3	Support Equipment.....	6
1.4	Testing Applied Standards	6
1.5	Testing Location Information	6
1.6	Measurement Uncertainty	7
2	TEST CONFIGURATION OF EUT	8
2.1	The Worst Case Configuration	8
2.2	The Worst Charger Frequencies Configuration	8
2.3	The Worst Case Measurement Configuration.....	8
2.4	Test Setup Diagram	9
3	TRANSMITTER TEST RESULT	11
3.1	AC Power-line Conducted Emissions	11
3.2	Transmitter Radiated Emissions	15
3.3	Emission Bandwidth	25
4	TEST EQUIPMENT AND CALIBRATION DATA	27
APPENDIX A. TEST PHOTOS		
APPENDIX B. PHOTOGRAPHS OF EUT		



Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]:0.1913990MHz 49.72 (Margin 14.26dB) – QP 40.16 (Margin 13.82dB) – AV	FCC 15.207	Complied
3.2	15.209	Transmitter Radiated Emissions	[dBuV/m at 3m]:30.000MHz 33.30 (Margin 6.70dB) - PK	FCC 15.209	Complied
3.3	15.215(c)	Emission Bandwidth	20dB Bandwidth 2.76 [kHz]	N/A	Complied



Revision History

Report No.	Version	Description	Issued Date
FR3D2529-02	Rev. 01	Initial issue of report	Mar. 24, 2014

1 General Description

1.1 Information

1.1.1 General Information

Wireless Power Transfer General Information			
Frequency Range	Modulation	Charging Freq. (kHz)	Field Strength (dBuV/m)
110-205 kHz	ASK	110-205	79.15
Power Transfer Method	Output power from each primary coil	Max. coupling surface area	Charging Method
Magnetic induction and only single primary coil coupling secondary coil	5W	40 cm ²	Client directly contact

Note 1: Field strength performed peak level at 3m.

1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Equipment placed on the market without antennas
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	External antenna (dedicated antennas)

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input checked="" type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/>	Operated normally mode for worst duty cycle
<input checked="" type="checkbox"/>	Operated test mode for worst duty cycle
Test Signal Duty Cycle (x)	
<input checked="" type="checkbox"/>	100%



1.1.5 EUT Operational Condition

Supply Voltage	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> From System

1.2 Accessories

Accessories Information		
Micro-USB Cable	Signal Line	0.5 meter, shielded cable

1.3 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5530	DoC
2	Phone	Samsung S3	GT-I9300	DoC

1.4 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009

1.5 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456	FAX : 886-3-327-0973	
Test Condition	Test Site No.	Test Engineer	Test Environment	
AC Conduction	CO04-HY	Zeus	23.8°C / 54%	
RF Conducted	TH01-HY	Ian	24.8°C / 61%	
Radiated Emission	03CH02-HY	Hsiao	23.8°C / 54%	



1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		±2.26 dB
Emission bandwidth		±1.42 %
Unwanted emissions, conducted	9 – 150 kHz	±0.38 dB
	0.15 – 30 MHz	±0.42 dB
	30 – 1000 MHz	±0.51 dB
All emissions, radiated	9 – 150 kHz	±2.49 dB
	0.15 – 30 MHz	±2.28 dB
	30 – 1000 MHz	±2.56 dB
Temperature		±0.8 °C
Humidity		±3 %
DC and low frequency voltages		±3 %
Time		±1.42 %
Duty Cycle		±1.42 %

2 Test Configuration of EUT

2.1 The Worst Case Configuration

Modulation Mode	Field Strength (dBuV/m at 3m)
Charging	79.15

Wireless charger were performed all charging conditions including variable loading and non-charging operation, the worst mode is full charging loading.




2.2 The Worst Charger Frequencies Configuration

Modulation Mode	Charger Frequencies (kHz)
Charging	131 kHz (F1)


Wireless charger frequencies are variable frequency range (100-205 kHz) and depend on charging loading. The charging frequency is 131 kHz.

2.3 The Worst Case Measurement Configuration


The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	EUT via USB Charging

The Worst Case Mode for Following Conformance Tests			
Tests Item		Transmitter Radiated Emissions, Emission Bandwidth	
Test Condition		Radiated measurement	
User Position		<input checked="" type="checkbox"/> EUT will be placed in fixed position at X plane.	
X Plane	Y Plane	Z Plane	<input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes.
			<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.
Operating Mode < 1GHz		<input checked="" type="checkbox"/> 1. EUT via USB Charging	
Modulation Mode		Charging	


2.4 Test Setup Diagram

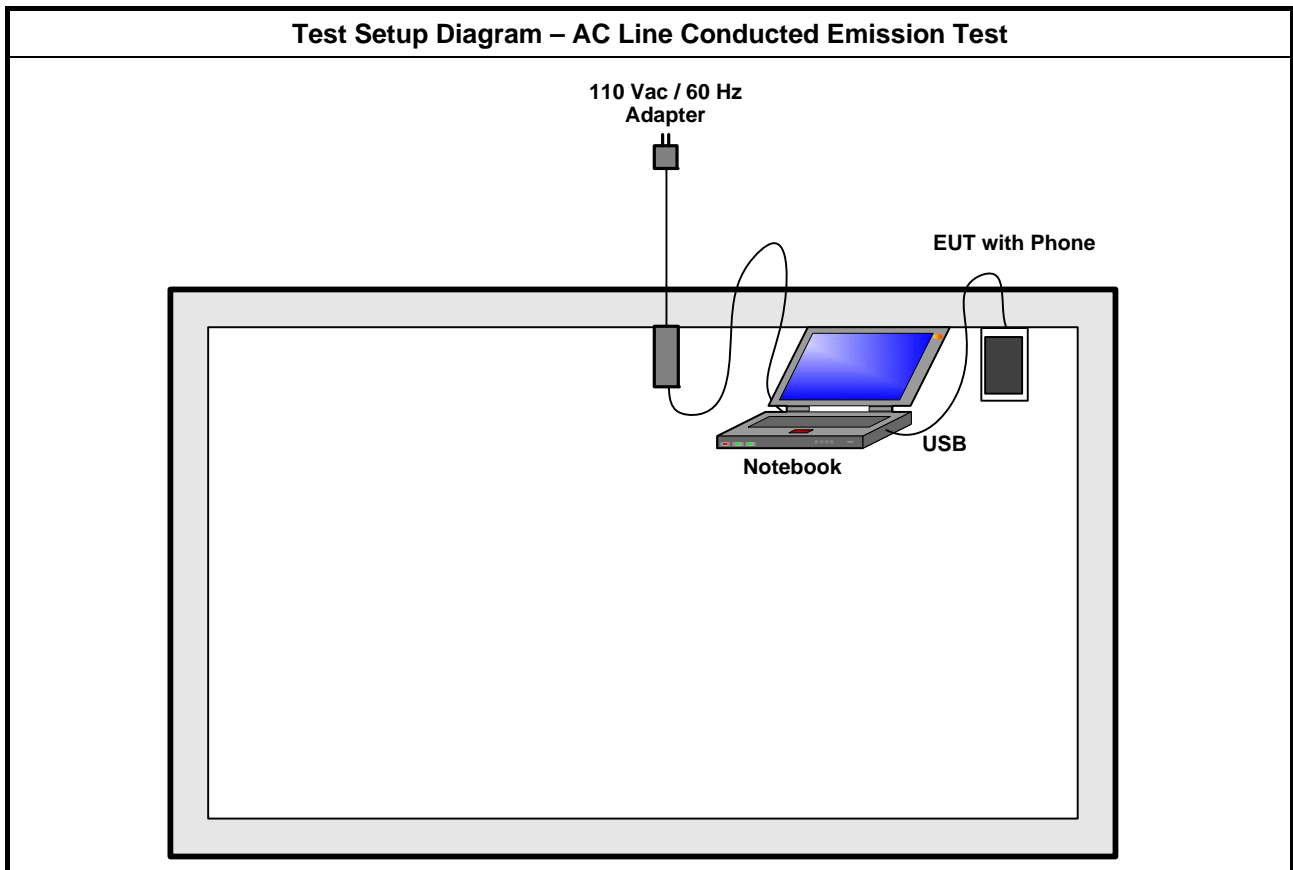

Test Setup Diagram - Radiated Test (9kHz~30MHz)

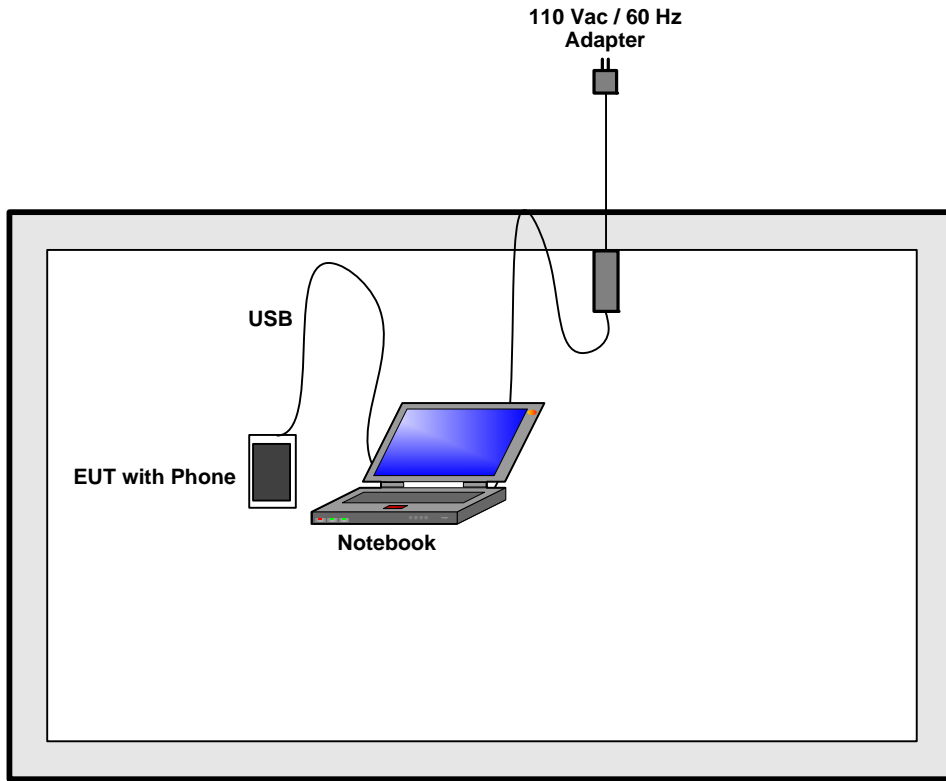

Test Setup Diagram - Radiated Test (30MHz~1GHz)

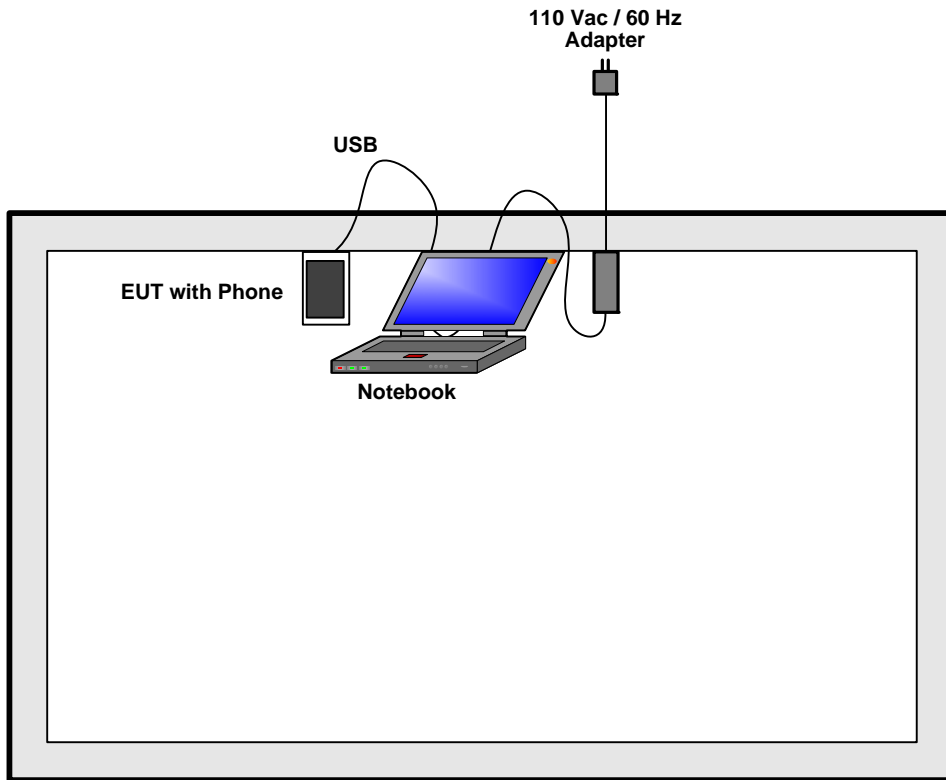

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.
<input checked="" type="checkbox"/>	If AC conducted emissions fall in operating band, then following below test method confirm final result.
<input type="checkbox"/>	Accept measurements done with a suitable dummy load replacing the antenna under the following conditions: (1) Perform the AC line conducted tests with the antenna connected to determine compliance with FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load to determine compliance with FCC 15.207 limits within the transmitter's fundamental emission band.
<input checked="" type="checkbox"/>	For a device with a permanent antenna operating at or below 30 MHz, accept measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) Perform the AC line conducted tests with the permanent antenna to determine compliance with the FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load in lieu of the permanent antenna to determine compliance with the FCC 15.207 limits within the transmitter's fundamental emission band.

3.1.4 Test Setup

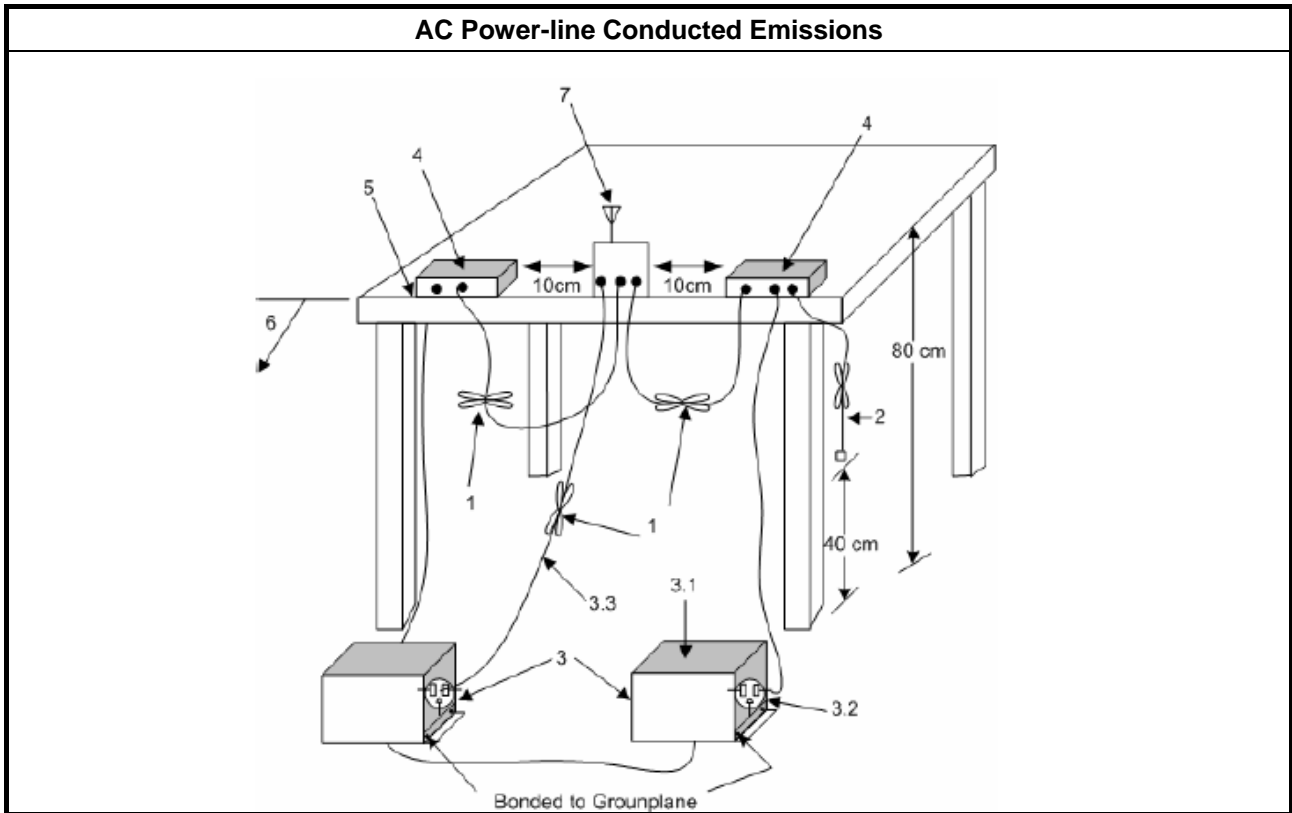

3.1.5 Test Result of AC Power-line Conducted Emissions

AC Power-line Conducted Emissions Result			
Operating Mode	1	Power Phase	Neutral
Operating Function	EUT via USB Charging		

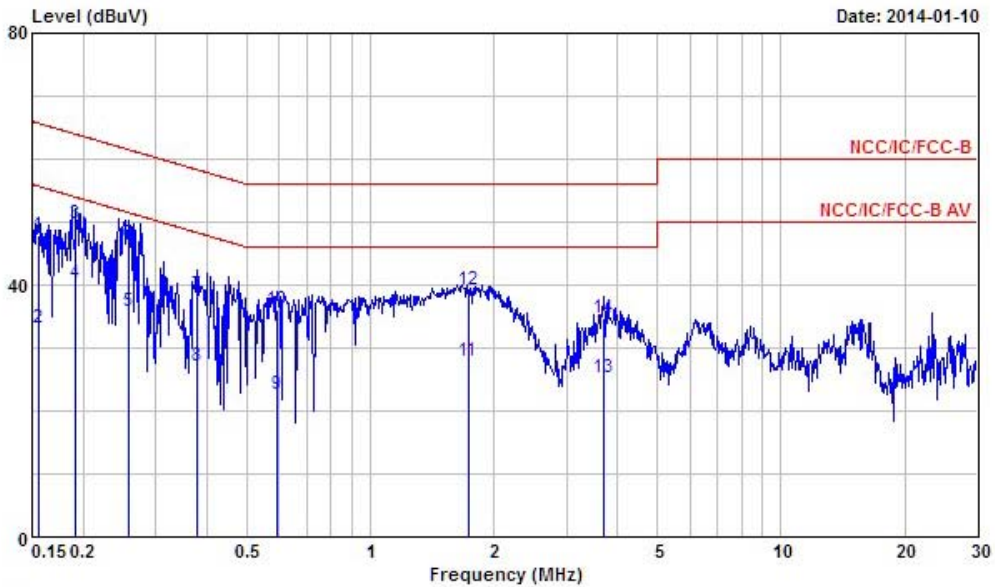


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1556680	47.82	-17.87	65.69	47.33	0.24	0.25	QP
2	0.1556680	33.27	-22.42	55.69	32.78	0.24	0.25	Average
3	0.1913990	49.72	-14.26	63.98	49.37	0.23	0.12	QP
4	0.1913990	40.16	-13.82	53.98	39.81	0.23	0.12	Average
5	0.2575110	35.73	-15.78	51.51	35.40	0.23	0.10	Average
6	0.2575110	46.63	-14.88	61.51	46.30	0.23	0.10	QP
7	0.3771120	38.30	-20.04	58.34	37.98	0.22	0.10	QP
8	0.3771120	27.15	-21.19	48.34	26.83	0.22	0.10	Average
9	0.5947840	22.54	-23.46	46.00	22.18	0.22	0.14	Average
10	0.5947840	36.04	-19.96	56.00	35.68	0.22	0.14	QP
11	1.730	27.99	-18.01	46.00	27.46	0.25	0.28	Average
12	1.730	39.21	-16.79	56.00	38.68	0.25	0.28	QP
13	3.700	25.16	-20.84	46.00	24.66	0.29	0.21	Average
14	3.700	34.68	-21.32	56.00	34.18	0.29	0.21	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)
 Note 3: When emissions are in operating band over limits, retest with a dummy load for final in-band results.



AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	EUT via USB Charging		

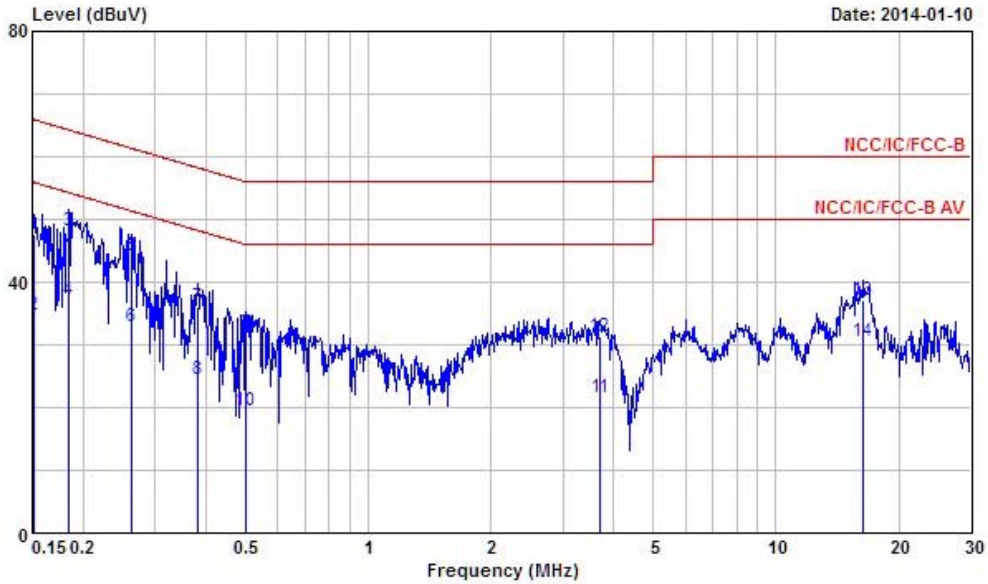

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1507970	47.60	-18.36	65.96	47.23	0.11	0.26	QP
2	0.1507970	34.74	-21.22	55.96	34.37	0.11	0.26	Average
3	0.1844300	48.21	-16.07	64.28	47.95	0.11	0.15	QP
4	0.1844300	36.98	-17.30	54.28	36.72	0.11	0.15	Average
5	0.2616370	44.21	-17.17	61.38	44.00	0.11	0.10	QP
6	0.2616370	32.85	-18.53	51.38	32.64	0.11	0.10	Average
7	0.3831540	36.02	-22.19	58.21	35.82	0.10	0.10	QP
8	0.3831540	24.45	-23.76	48.21	24.25	0.10	0.10	Average
9	0.5020260	31.88	-24.12	56.00	31.66	0.10	0.12	QP
10	0.5020260	19.55	-26.45	46.00	19.33	0.10	0.12	Average
11	3.700	21.67	-24.33	46.00	21.31	0.15	0.21	Average
12	3.700	31.24	-24.76	56.00	30.88	0.15	0.21	QP
13	16.400	37.22	-22.78	60.00	36.80	0.29	0.13	QP
14	16.400	30.57	-19.43	50.00	30.15	0.29	0.13	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)
 Note 3: When emissions are in operating band over limits, retest with a dummy load for final in-band results.

3.2 Transmitter Radiated Emissions

3.2.1 Transmitter Radiated Emissions Limit

Transmitter Radiated Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: the frequency bands 9-90 kHz, 110-490 kHz measurements employing an average detector and other below 1GHz measurements employing a CISPR quasi-peak detector.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.2.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz the frequency bands 9-90 kHz, 110-490 kHz measurements employing an average detector and other below 30MHz measurements employing a CISPR quasi-peak detector. Test distance is 3m.
<input checked="" type="checkbox"/>	At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods.
<input type="checkbox"/>	The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
<input checked="" type="checkbox"/>	The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
<input checked="" type="checkbox"/>	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.2.4 Test Setup

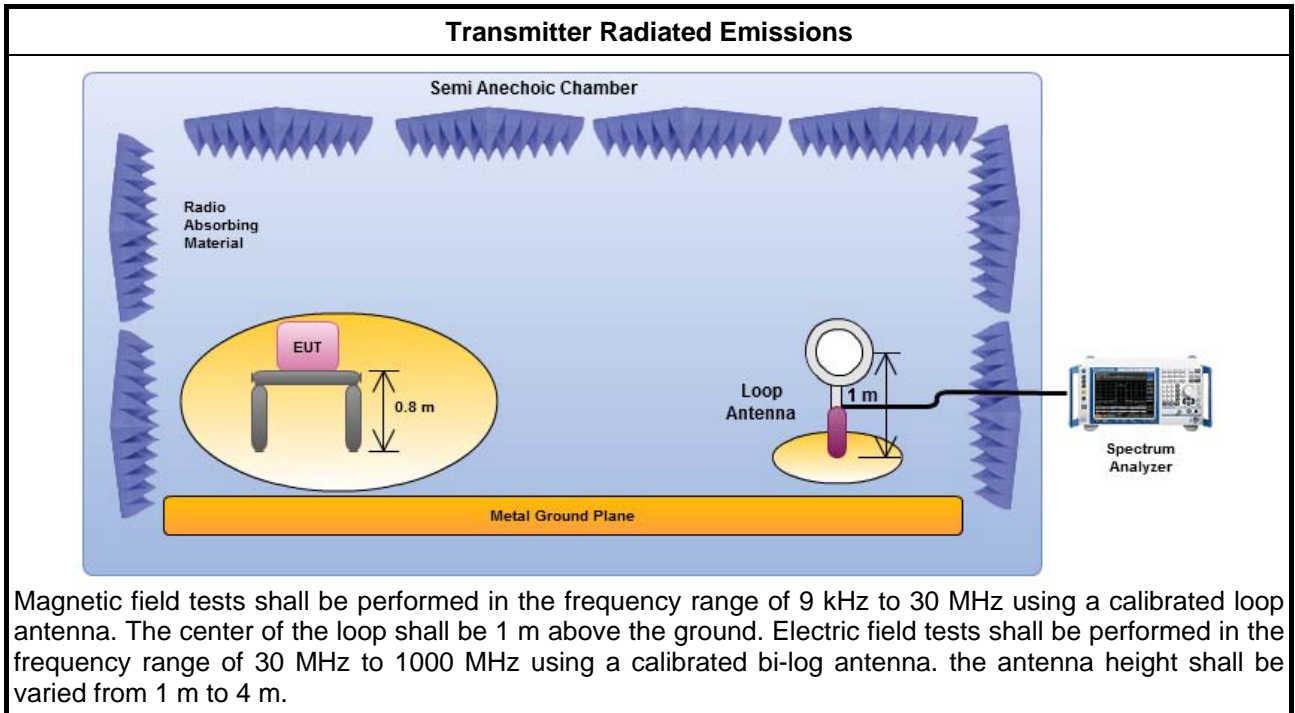

3.2.5 Transmitter Radiated Emissions (Below 30MHz)

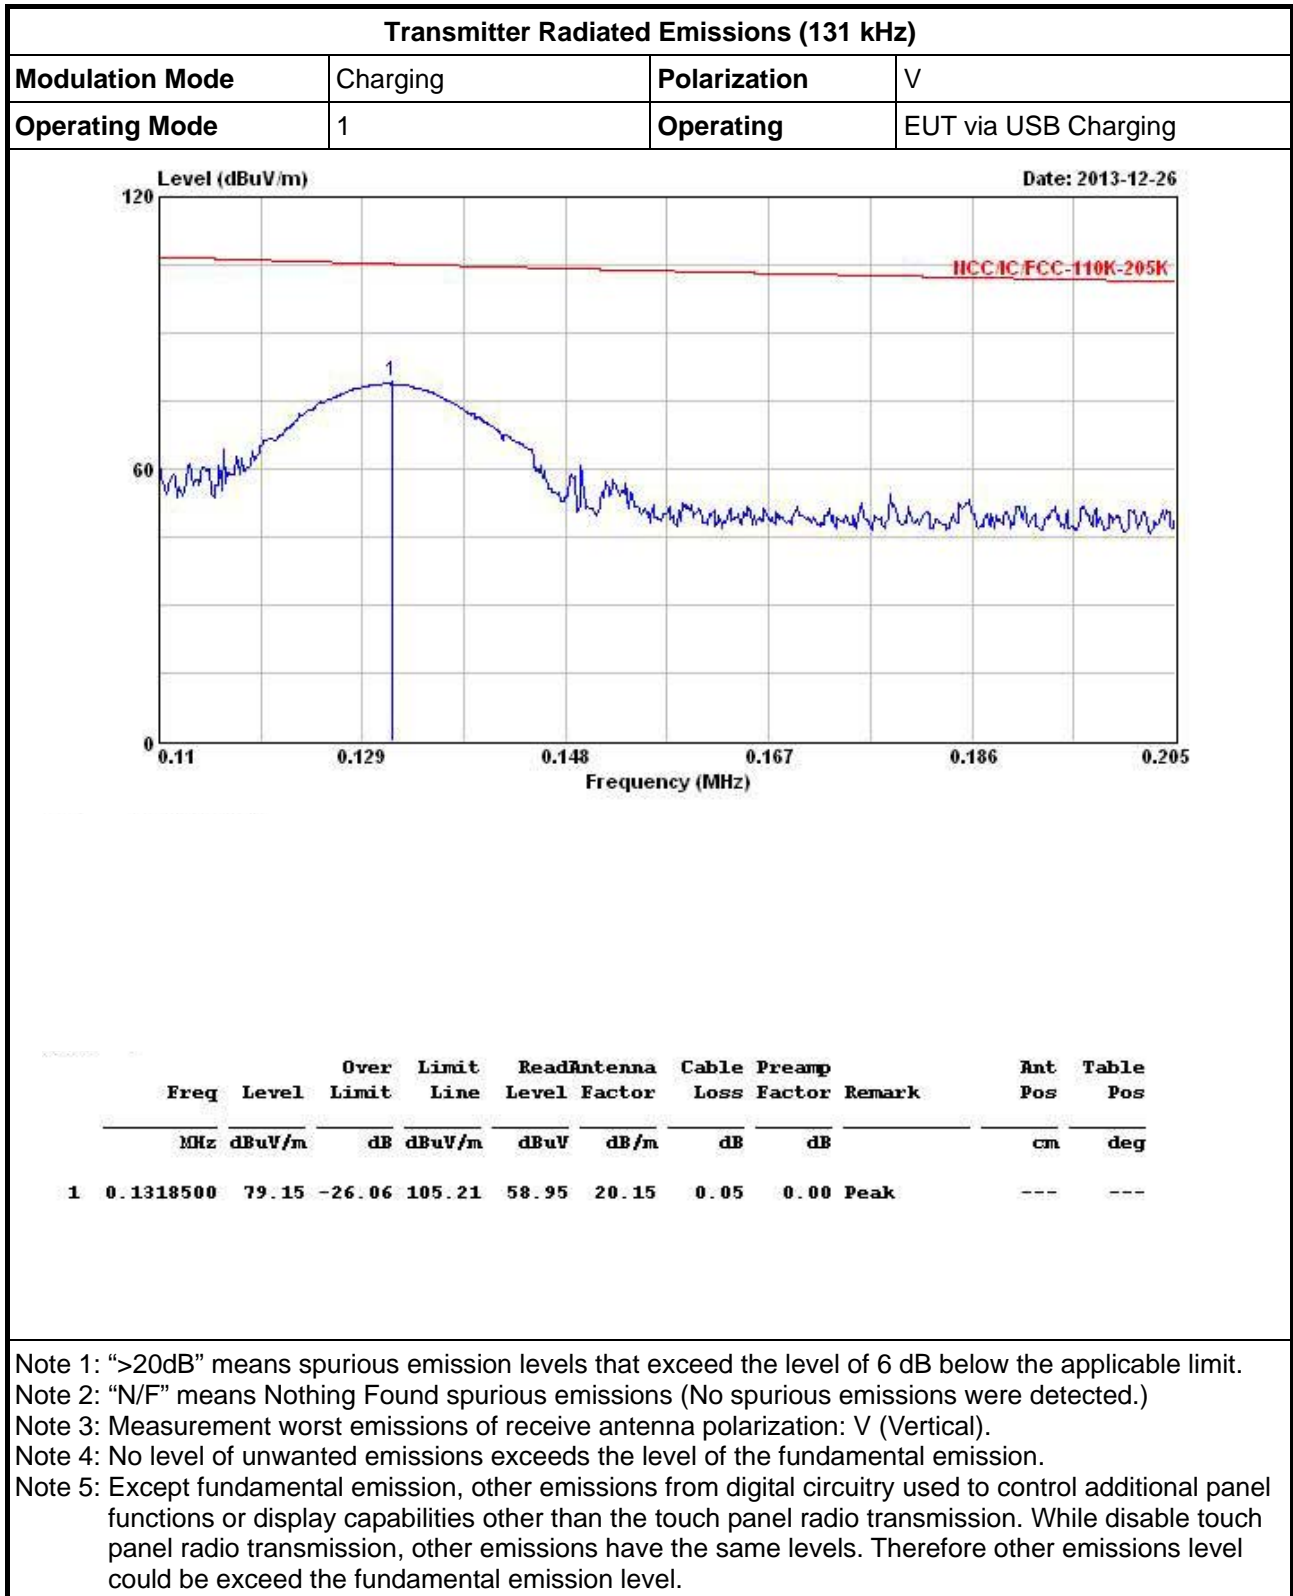


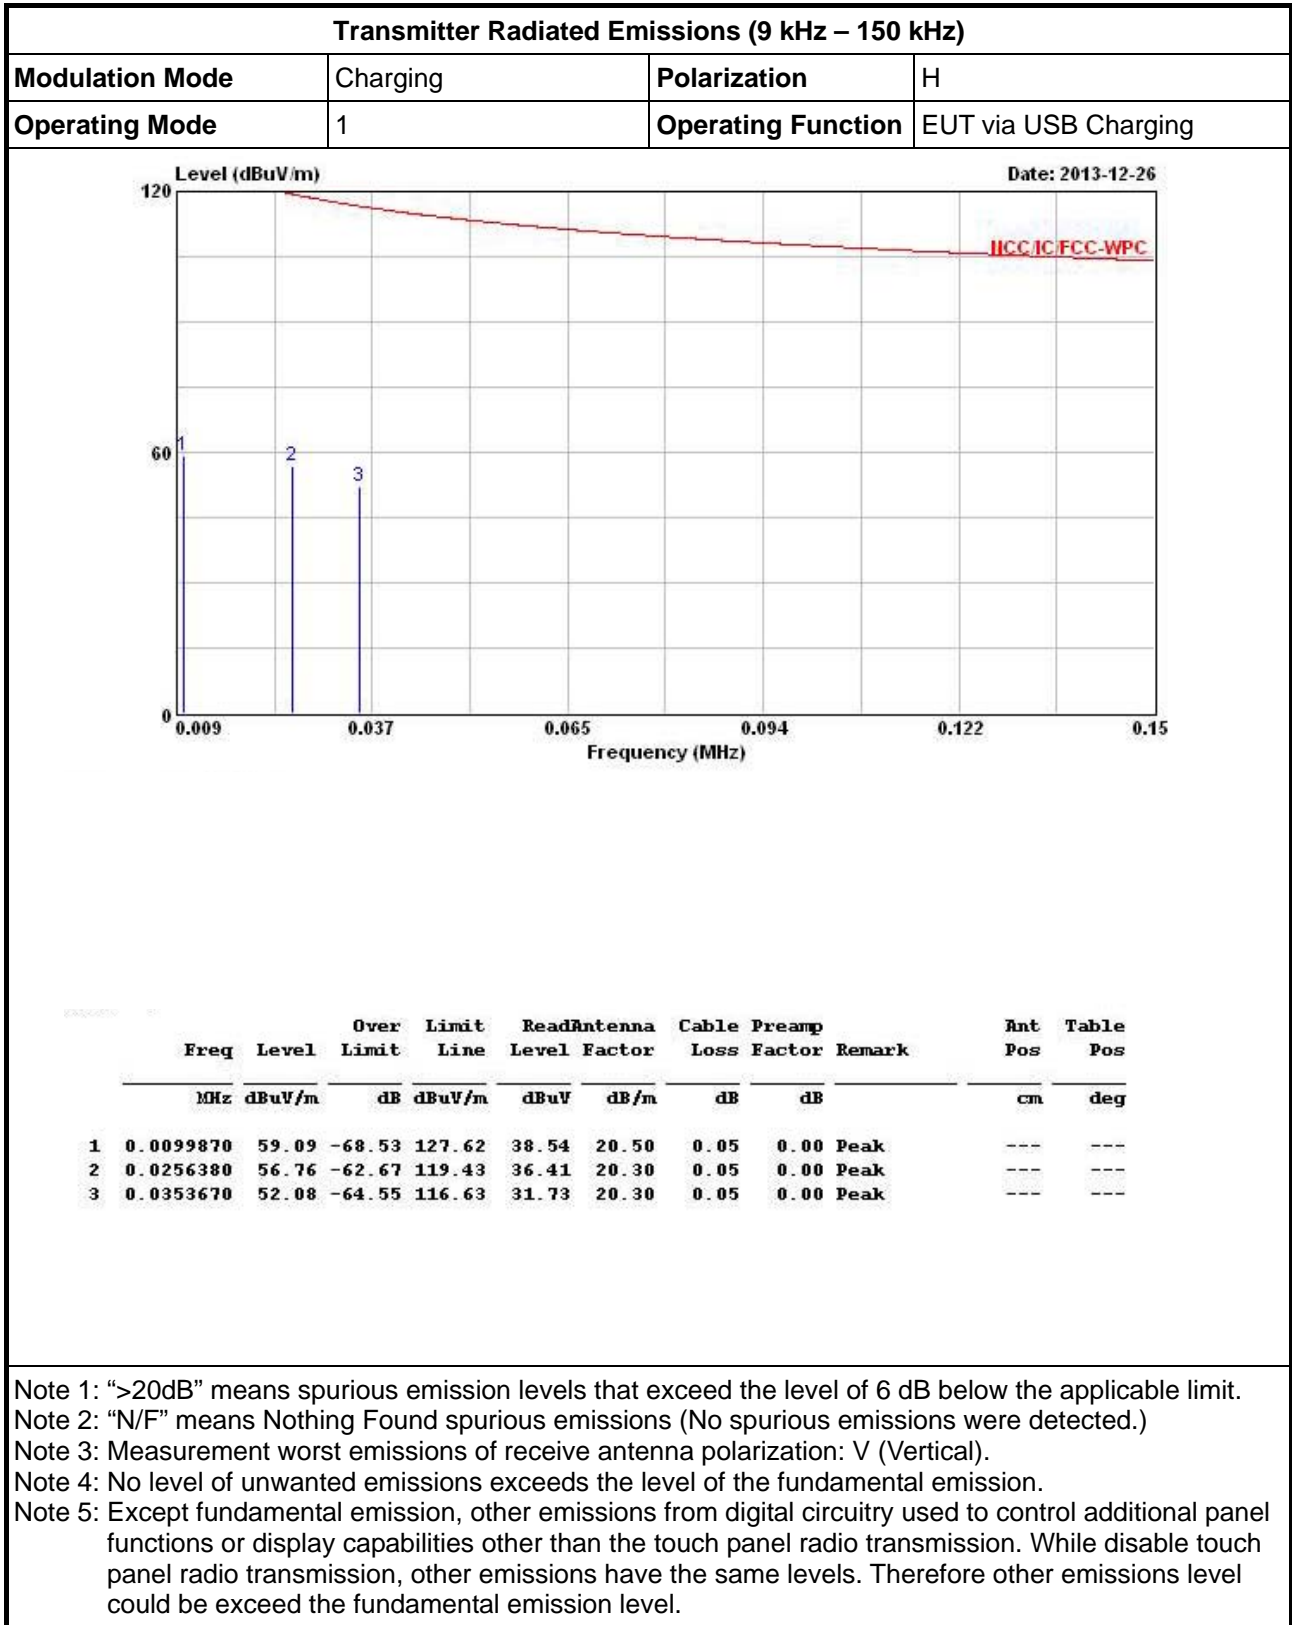




Transmitter Radiated Emissions (150 kHz – 2 MHz)

Modulation Mode	Charging	Polarization	H
Operating Mode	1	Operating Function	EUT via USB Charging

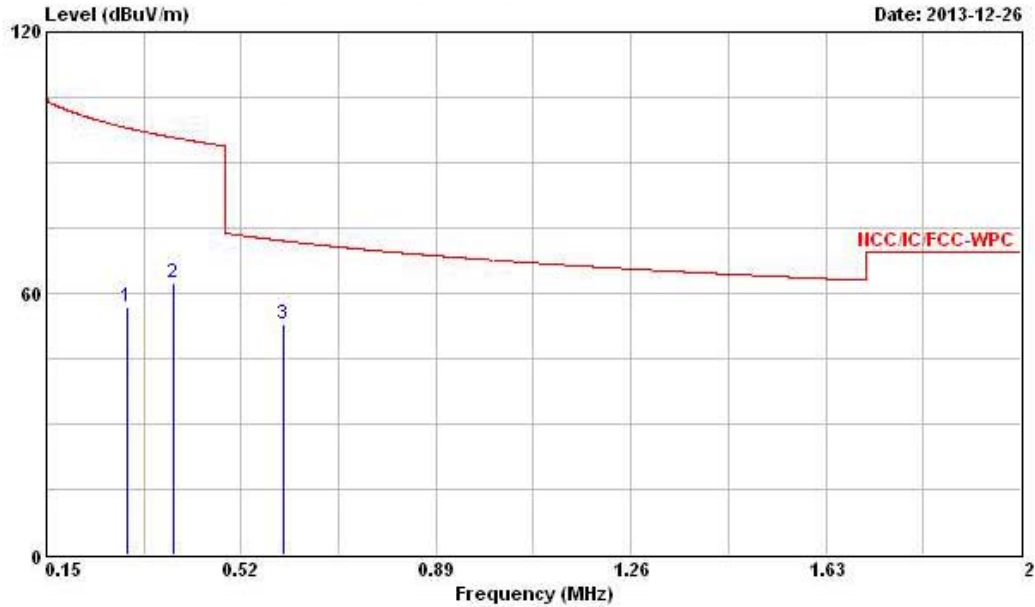


Line	Freq	Level	Over Limit	Limit	Read	Antenna	Cable	Preamp	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB		cm	deg
1	0.3035500	57.03	-40.94	97.97	36.88	20.10	0.05	0.00	Peak	---	---
2	0.3923500	62.18	-33.56	95.74	42.03	20.10	0.05	0.00	Peak	---	---
3	0.5995500	52.77	-19.29	72.06	32.63	20.04	0.10	0.00	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement worst emissions of receive antenna polarization: V (Vertical).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.
 Note 5: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.

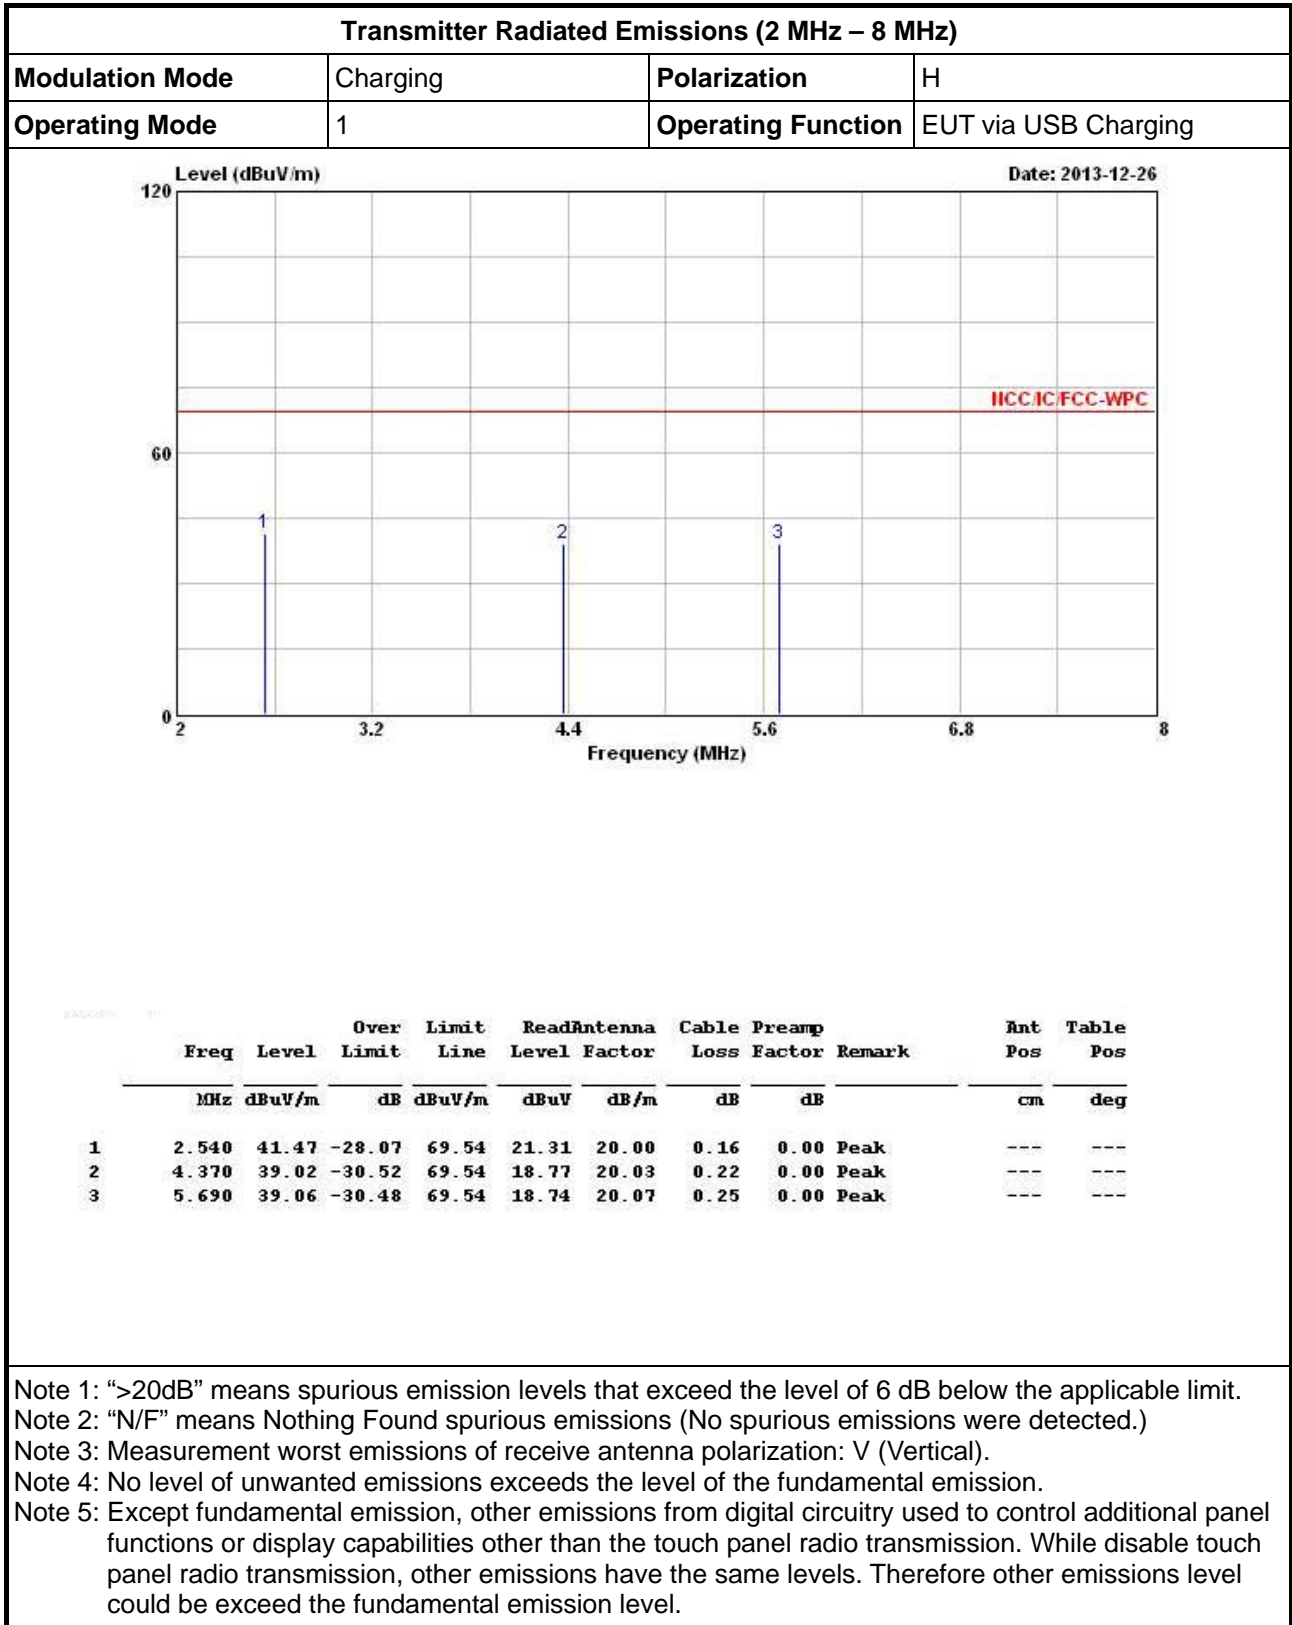



Transmitter Radiated Emissions (8 MHz – 25 MHz)			
Modulation Mode	Charging	Polarization	H
Operating Mode	1	Operating Function	EUT via USB Charging

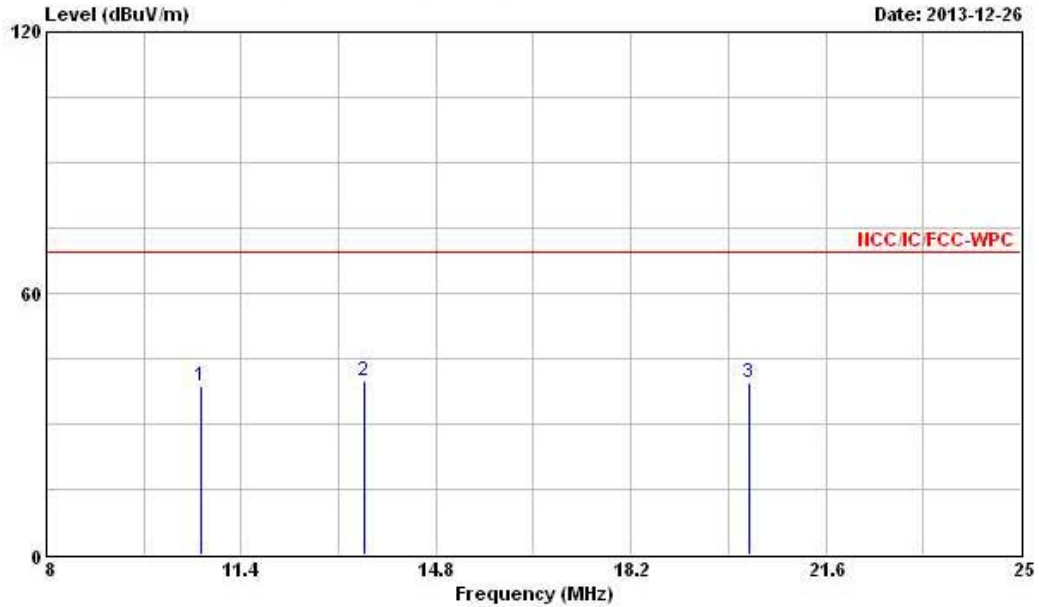


Freq	Level	Over Limit	Limit Line	Read Antenna	Cable	Preamp	Remark	Ant Pos	Table Pos		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		
1	10.690	38.75	-30.79	69.54	18.27	20.10	0.38	0.00	Peak	---	---
2	13.540	39.73	-29.81	69.54	19.15	20.10	0.48	0.00	Peak	---	---
3	20.270	39.54	-30.00	69.54	18.75	20.19	0.60	0.00	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement worst emissions of receive antenna polarization: V (Vertical).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.
 Note 5: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.



Transmitter Radiated Emissions (25 MHz – 30 MHz)

Modulation Mode	Charging	Polarization	H
Operating Mode	1	Operating Function	EUT via USB Charging

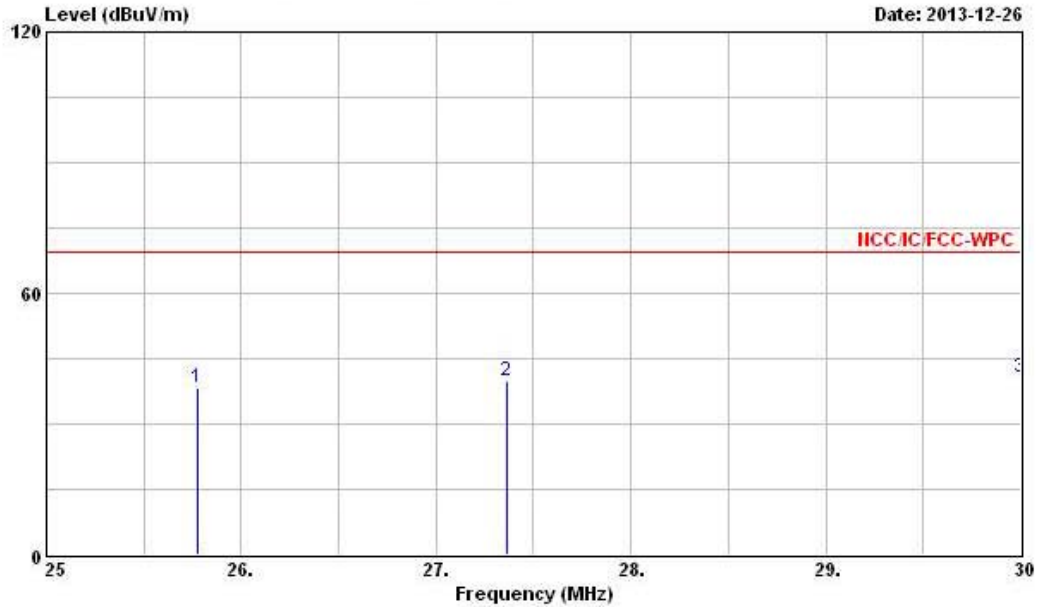


Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB		cm	deg
1	25.780	38.31	-31.23	69.54	17.51	20.10	0.70	0.00 Peak	---	---
2	27.360	39.68	-29.86	69.54	18.86	20.10	0.72	0.00 Peak	---	---
3	30.000	40.53	-29.01	69.54	19.65	20.10	0.78	0.00 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement worst emissions of receive antenna polarization: V (Vertical).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.
 Note 5: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.



3.2.6 Transmitter Radiated Emissions (Above 30MHz)

Transmitter Radiated Emissions (Above 30MHz)			
Modulation Mode	Charging	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	V

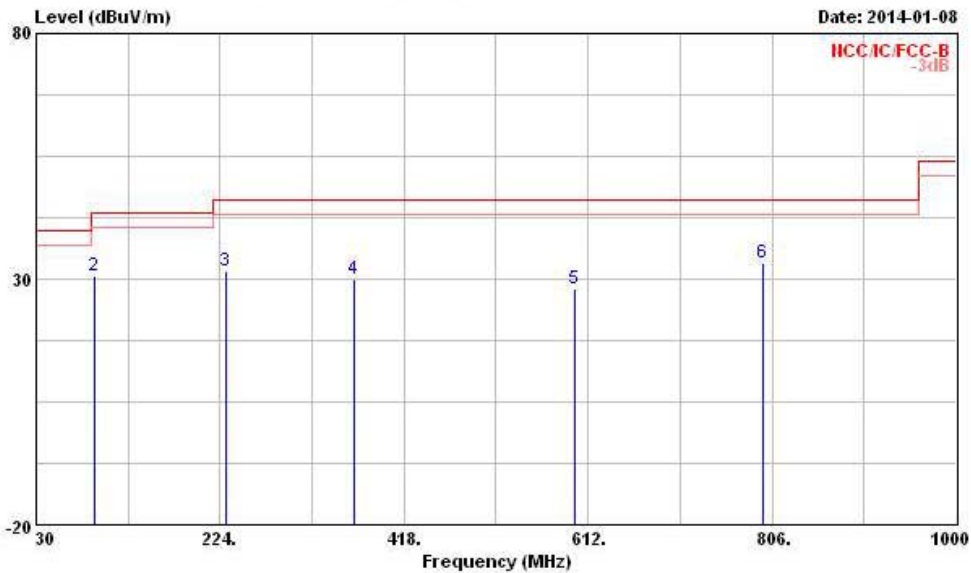


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	30.000	33.30	-6.70	40.00	41.86	18.47	0.78	27.81	Peak	---	---
2	91.110	30.59	-12.91	43.50	47.98	8.97	1.35	27.71	Peak	---	---
3	230.790	31.65	-14.35	46.00	46.36	10.36	2.27	27.34	Peak	---	---
4	365.620	29.88	-16.12	46.00	39.78	14.88	2.87	27.65	Peak	---	---
5	598.420	28.05	-17.95	46.00	34.18	18.69	3.68	28.50	Peak	---	---
6	796.300	33.23	-12.77	46.00	36.97	19.94	4.40	28.08	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.
 Note 5: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.



Transmitter Radiated Emissions (Above 30MHz)

Modulation Mode	Charging	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

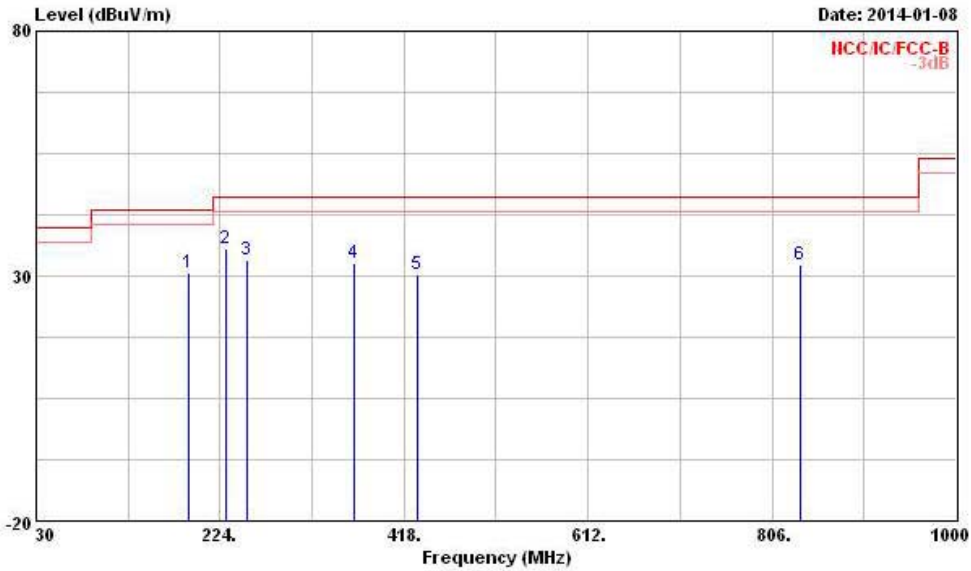

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable Preamp	Loss Factor	Preamp	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	191.020	30.63	-12.87	43.50	46.89	9.18	2.02	27.46	Peak	---	---
2	230.790	35.59	-10.41	46.00	50.30	10.36	2.27	27.34	Peak	---	---
3	253.100	33.32	-12.68	46.00	45.39	12.81	2.40	27.28	Peak	---	---
4	365.620	32.59	-13.41	46.00	42.49	14.88	2.87	27.65	Peak	---	---
5	431.580	30.42	-15.58	46.00	38.67	16.72	3.10	28.07	Peak	---	---
6	835.100	32.19	-13.81	46.00	35.43	20.23	4.49	27.96	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.
 Note 5: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.

3.3 Emission Bandwidth

3.3.1 Emission Bandwidth Limit

Emission Bandwidth Limit
N/A


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method
<input checked="" type="checkbox"/> For the emission bandwidth refer ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/> For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.

3.3.4 Test Setup

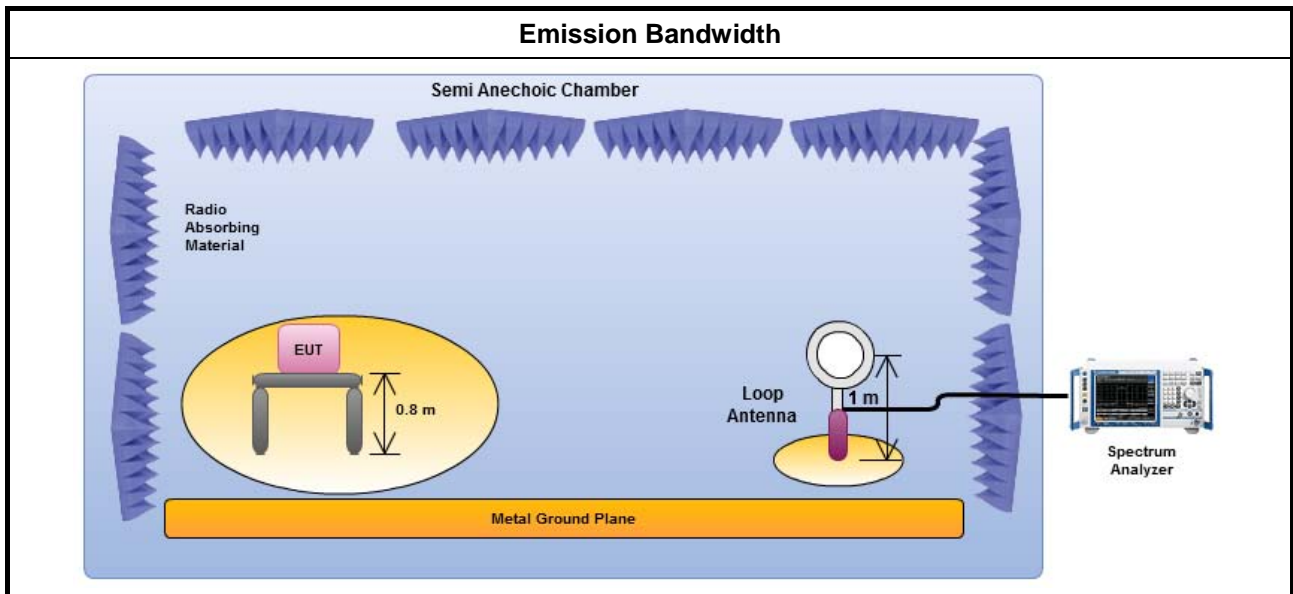

3.3.5 Test Result of Emission Bandwidth

Occupied Channel Bandwidth Result					
Modulation Mode	Frequency (kHz)	20dB Bandwidth (kHz)	F _L at 20dB BW (kHz)	F _H at 20dB BW (kHz)	99% Bandwidth (kHz)
Charging	100-205	2.76	129.58	132.34	2.56
Limit		N/A	N/A	N/A	N/A
Result		Complied			

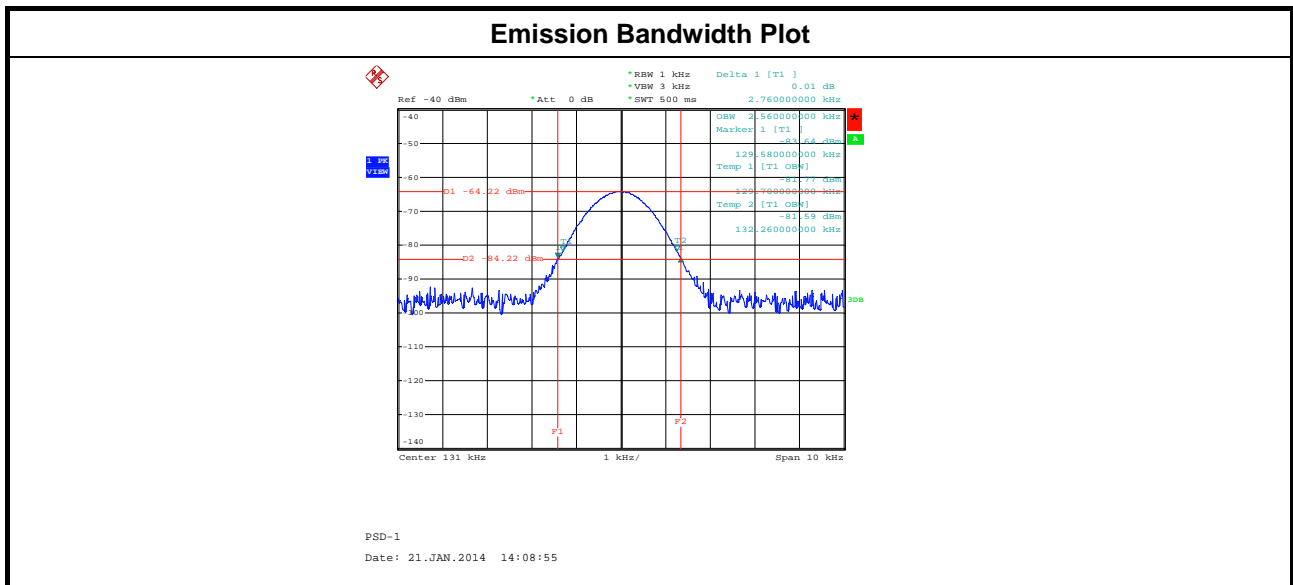



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2013	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2013	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Oct. 30, 2013	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9KHz~40GHz	Jan. 25, 2014	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 11, 2013	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11149	100kHz ~ 1.3GHz	Jul. 18, 2013	Radiation (03CH02-HY)
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Oct. 03, 2013	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 10, 2013	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 09, 2013	Radiation (03CH02-HY)
Turn Table	Chaintek Instruments	3000	MF7802058	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	MF	MF7802	MF780208205	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz - 30 MHz	Dec. 02, 2012	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.