

# FCC Test Report

**Client Name** : **GODOX PHOTO EQUIPMENT CO.,LTD**

**Client Address** : **1st to 4th Floor, Building 2/1st to 4th Floor,  
Building 4 ,Yaochuan Industrial Zone,  
Tangwei Community, Fuhai Street, Baoan  
District, Shenzhen, 518103 China**

**Product Name** : **RGBWW Dive Light**

**Report Date** : **Apr. 04, 2023**

**Shenzhen Anbotek Compliance Laboratory Limited**



# Contents

1. General Information .....	6
1.1. Client Information .....	6
1.2. Description of Device (EUT) .....	6
1.3. Auxiliary Equipment Used During Test .....	7
1.4. Description of Test Configuration .....	7
1.5. Description Of Test Setup .....	8
1.6. Test Equipment List .....	9
1.7. Measurement Uncertainty .....	10
1.8. Description of Test Facility .....	10
2. Summary of Test Results .....	11
3. Conducted Emission Test .....	12
3.1. Test Standard and Limit .....	12
3.2. Test Setup .....	12
3.3. Test Procedure .....	12
3.4. Test Data .....	12
4. Radiation Spurious Emission and Band Edge .....	15
4.1. Test Standard and Limit .....	15
4.2. Test Setup .....	15
4.3. Test Procedure .....	16
4.4. Test Data .....	17
5. Maximum Peak Output Power Test .....	27
5.1. Test Standard and Limit .....	27
5.2. Test Setup .....	27
5.3. Test Procedure .....	27
5.4. Test Data .....	27
6. 6DB Occupy Bandwidth Test .....	28
6.1. Test Standard and Limit .....	28
6.2. Test Setup .....	28
6.3. Test Procedure .....	28
6.4. Test Data .....	28
7. Power Spectral Density Test .....	29
7.1. Test Standard and Limit .....	29
7.2. Test Setup .....	29
7.3. Test Procedure .....	29
7.4. Test Data .....	29
8. 100kHz Bandwidth of Frequency Band Edge Requirement .....	30
8.1. Test Standard and Limit .....	30





8.2. Test Setup .....	30
8.3. Test Procedure .....	30
8.4. Test Data .....	30
9. Antenna Requirement .....	31
9.1. Test Standard and Requirement .....	31
9.2. Antenna Connected Construction .....	31
APPENDIX I -- TEST SETUP PHOTOGRAPH .....	32
APPENDIX II -- EXTERNAL PHOTOGRAPH .....	34
APPENDIX III -- INTERNAL PHOTOGRAPH .....	37
Appendix Test Data .....	41
Appendix A: DTS Bandwidth .....	41
Test Result .....	41
Test Graphs .....	42
Appendix B: Occupied Channel Bandwidth .....	45
Test Result .....	45
Test Graphs .....	46
Appendix C: Maximum conducted output power .....	49
Test Result Peak .....	49
Test Graphs Peak .....	50
Appendix D: Maximum power spectral density .....	53
Test Result .....	53
Test Graphs .....	54
Appendix E: Band edge measurements .....	57
Test Result .....	57
Test Graphs .....	58
Appendix F: Conducted Spurious Emission .....	60
Test Result .....	60
Test Graphs .....	61
Appendix G: Duty Cycle .....	70
Test Result .....	70
Test Graphs .....	71



# TEST REPORT

Applicant : GODOX PHOTO EQUIPMENT CO.,LTD

Manufacturer : GODOX Photo Equipment Co., Ltd.

Product Name : RGBWW Dive Light

Model No. : WT60R

Trade Mark : 

Rating(s) : Input: 20V $\overline{=}$  3.25A  
Li-ion Battery: DC 14.4V, 9000mAh

Test Standard(s) : FCC Part15 Subpart C, Section 15.247

Test Method(s) : ANSI C63.10: 2020, KDB558074 D01 DTS Meas Guidance v05r02

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Feb. 23, 2023

Date of Test

Feb. 23 ~ Mar. 17, 2023

Prepared By



(Nianxiu Chen)

Approved & Authorized Signer



(Kingkong Jin)



**Revision History**

Report Version	Description	Issued Date
R00	Original Issue.	Apr. 04, 2023






## 1. General Information

### 1.1. Client Information

Applicant	:	GODOX PHOTO EQUIPMENT CO.,LTD
Address	:	1st to 4th Floor, Building 2/1st to 4th Floor, Building 4 ,Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Baoan District, Shenzhen, 518103 China
Manufacturer	:	GODOX Photo Equipment Co., Ltd.
Address	:	4th Floor of Building 1, 1st to 4th Floor of Building 2, 4th Floor of Building 3, 1st to 4th Floor of Building 4, Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen 518103, China
Factory	:	GODOX Photo Equipment Co., Ltd.
Address	:	4th Floor of Building 1, 1st to 4th Floor of Building 2, 4th Floor of Building 3, 1st to 4th Floor of Building 4, Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen 518103, China

### 1.2. Description of Device (EUT)

Product Name	:	RGBWW Dive Light
Model No.	:	WT60R
Trade Mark	:	
Test Power Supply	:	AC 120V, 60Hz for adapter/ DC 14.4V battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N.A.
<b>RF Specification</b>		
Operation Mode	:	<input checked="" type="checkbox"/> BT BLE
Support Rate	:	<input checked="" type="checkbox"/> 1Mbps <input checked="" type="checkbox"/> 2Mbps
Operation Frequency	:	2402~2480MHz
Number of Channel	:	40 Channels
Modulation Type	:	GFSK
Antenna Type	:	FPC Antenna
Antenna Gain(Peak)	:	1.29 dBi (Provided by customer)
<b>Remark:</b> 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		



### 1.3. Auxiliary Equipment Used During Test

Description	Rating(s)
Adapter	Model: KT120A2000480M2 Input: 100-240V~50/60Hz 1.8A Output: 20.0V= 4.8A 96.0W

### 1.4. Description of Test Configuration

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
00	2402	09	2420	18	2438	27	2456	36	2474
01	2404	10	2422	19	2440	28	2458	37	2476
02	2406	11	2424	20	2442	29	2460	38	2478
03	2408	12	2426	21	2444	30	2462	39	2480
04	2410	13	2428	22	2446	31	2464		
05	2412	14	2430	23	2448	32	2466		
06	2414	15	2432	24	2450	33	2468		
07	2416	16	2434	25	2452	34	2470		
08	2418	17	2436	26	2454	35	2472		


Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT was tested with channel 00, 19 and 39.




## 1.5. Description Of Test Setup

CE

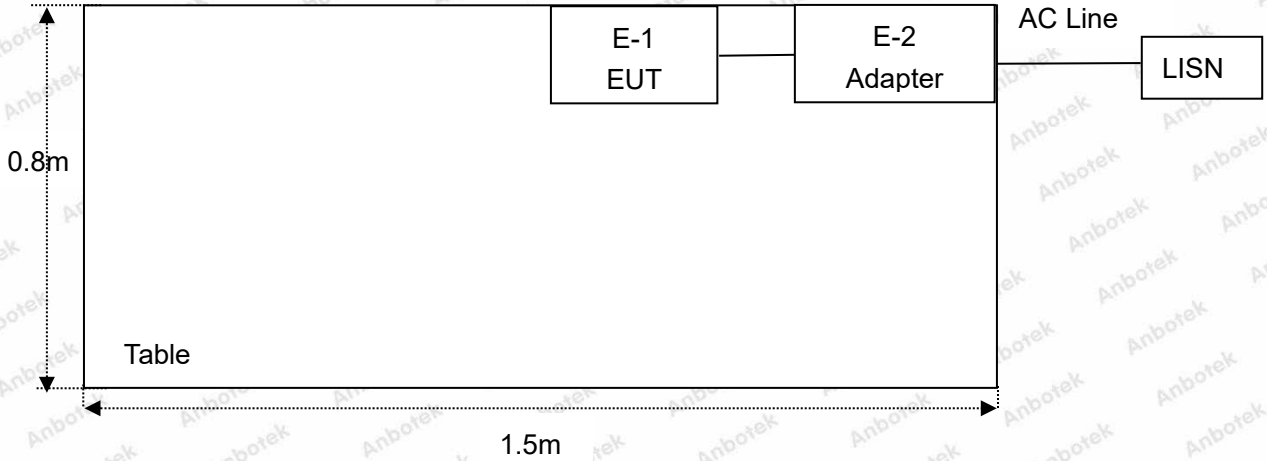

RE

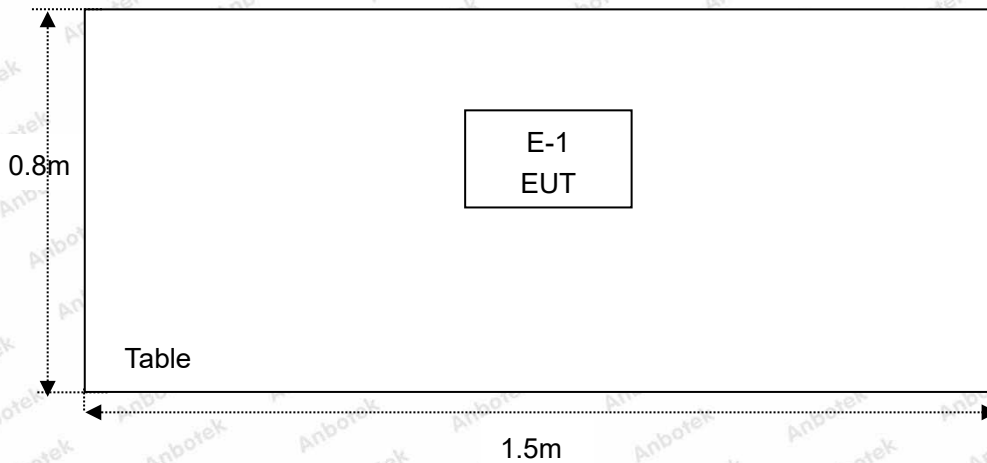



## 1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 23, 2022	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul. 05, 2022	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 13, 2022	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 23, 2022	1 Year
5.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2022	1 Year
6.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 13, 2022	1 Year
7.	EMI Preamplifier	SKET Electronic	LNPA-0118G-45	SKET-PA-002	Oct. 13, 2022	1 Year
8.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	Oct. 16, 2022	3 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 23, 2022	1 Year
10.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 23, 2022	1 Year
11.	Horn Antenna	A-INFO	LB-180400-KF	J211060628	Oct. 23, 2022	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	Oct. 23, 2022	1 Year
13.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
14.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 13, 2022	1 Year
15.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 13, 2022	1 Year
16.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 13, 2022	1 Year
17.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2022	1 Year
18.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 19, 2022	1 Year
19.	Power Meter	Agilent	N1914A	MY50001102	Oct.26, 2022	1 Year



### 1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
	:	Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

### 1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

#### ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

#### Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102





## 2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(3)	Conducted Peak Output Power	PASS
15.247(a)(2)	6dB Occupied Bandwidth	PASS
15.247(e)	Power Spectral Density	PASS
15.247(d)	Band Edge	PASS
<b>Remark:</b> "N/A" is an abbreviation for Not Applicable.		






### 3. Conducted Emission Test

#### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

**Remark:**(1) \*Decreasing linearly with logarithm of the frequency.  
(2) The lower limit shall apply at the transition frequency.

#### 3.2. Test Setup

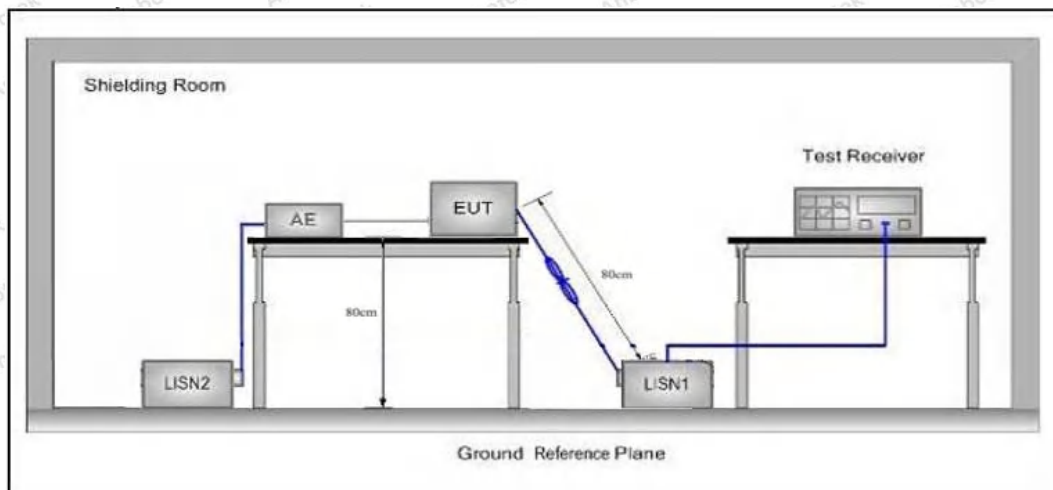

#### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

#### 3.4. Test Data

During the test, pre-scan all modes, only the worst case is recorded in the report.


AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/60Hz modes, recorded worst case AC 120V/60Hz.

Please to see the following pages.



### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: BLE\_1M Low CH (2402MHz)  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Live Line  
 Temp.(°C)/Hum.(%RH): 23.5°C /45%RH

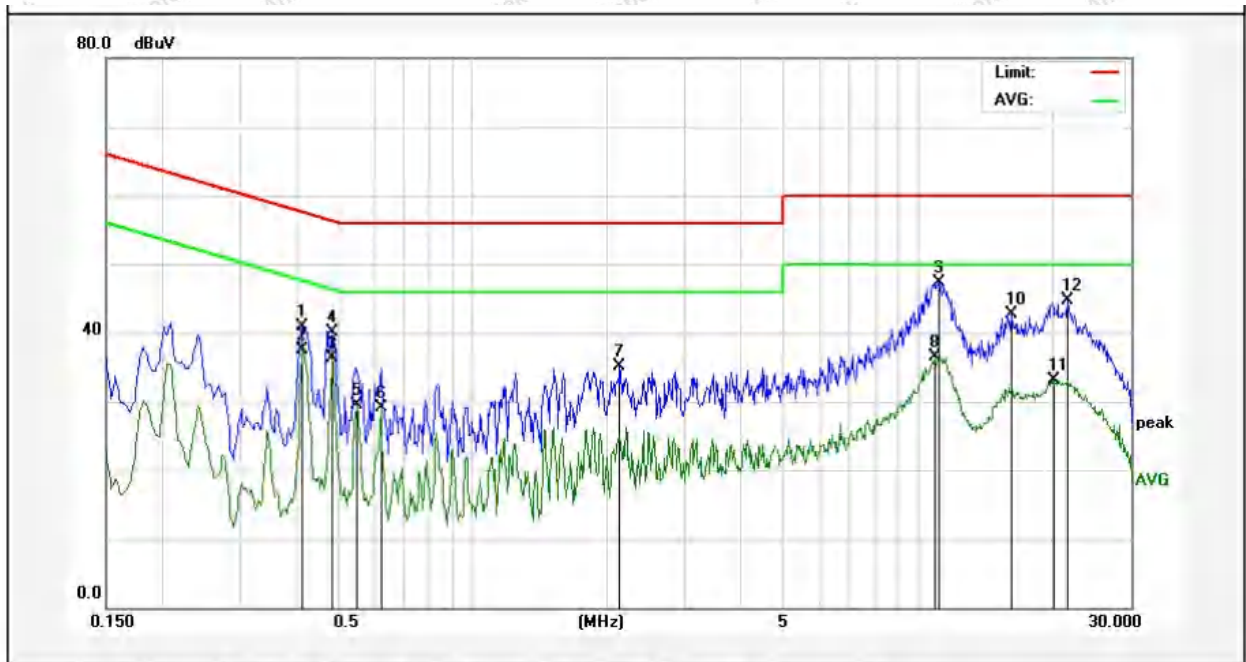


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.4140	31.12	9.77	40.89	57.57	-16.68	QP	
2	0.4140	27.71	9.77	37.48	47.57	-10.09	AVG	
3	0.4820	26.45	9.82	36.27	46.30	-10.03	AVG	
4	0.4860	30.24	9.83	40.07	56.24	-16.17	QP	
5	0.5500	19.73	9.84	29.57	46.00	-16.43	AVG	
6	0.6220	19.22	9.84	29.06	46.00	-16.94	AVG	
7	2.1420	25.33	9.86	35.19	56.00	-20.81	QP	
8	10.8620	26.62	9.85	36.47	50.00	-13.53	AVG	
9	11.1220	37.48	9.85	47.33	60.00	-12.67	QP	
10	16.1700	32.60	10.02	42.62	60.00	-17.38	QP	
11	20.2540	23.06	10.13	33.19	50.00	-16.81	AVG	
12	21.7060	34.60	10.11	44.71	60.00	-15.29	QP	





### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: BLE\_1M Low CH (2402MHz)  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Neutral Line  
 Temp.(°C)/Hum.(%RH): 23.5°C /45%RH

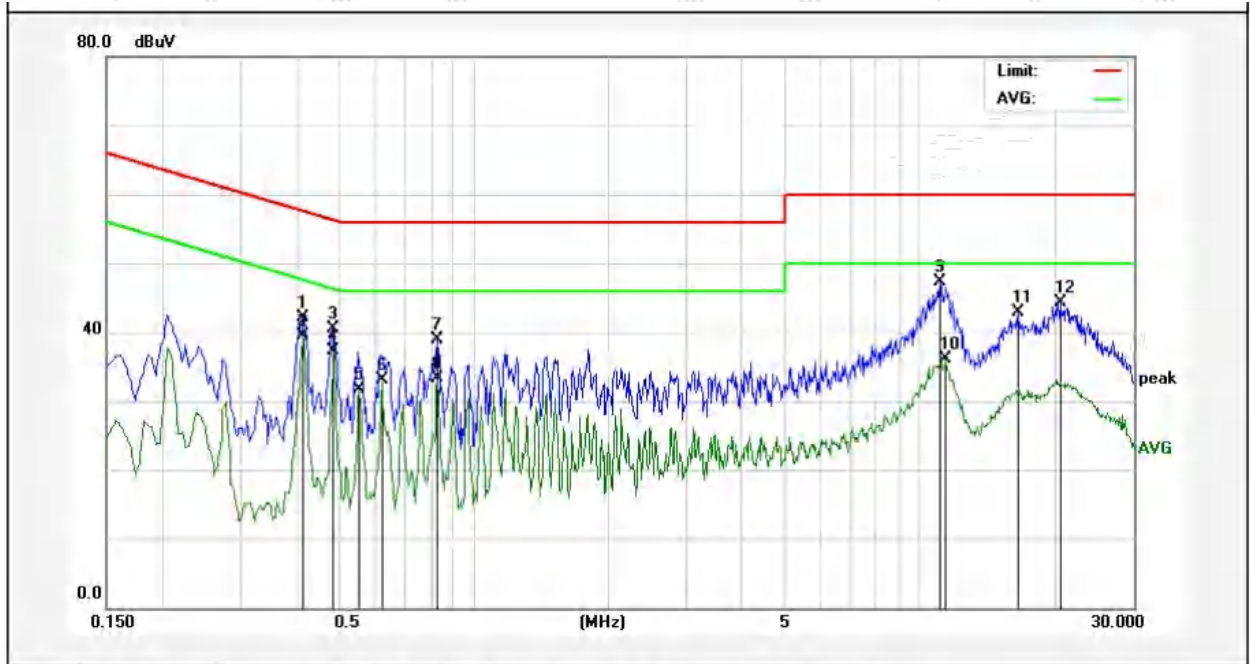

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.4140	32.35	9.77	42.12	57.57	-15.45	QP	
2	0.4140	29.78	9.77	39.55	47.57	-8.02	AVG	
3	0.4860	30.74	9.83	40.57	56.24	-15.67	QP	
4	0.4860	27.40	9.83	37.23	46.24	-9.01	AVG	
5	0.5540	21.81	9.85	31.66	46.00	-14.34	AVG	
6	0.6220	23.33	9.84	33.17	46.00	-12.83	AVG	
7	0.8300	29.16	9.84	39.00	56.00	-17.00	QP	
8	0.8300	23.54	9.84	33.38	46.00	-12.62	AVG	
9	11.0580	37.39	9.85	47.24	60.00	-12.76	QP	
10	11.3940	26.25	9.86	36.11	50.00	-13.89	AVG	
11	16.4860	32.88	10.03	42.91	60.00	-17.09	QP	
12	20.5820	34.10	10.13	44.23	60.00	-15.77	QP	





## 4. Radiation Spurious Emission and Band Edge

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

**Remark:**

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 4.2. Test Setup

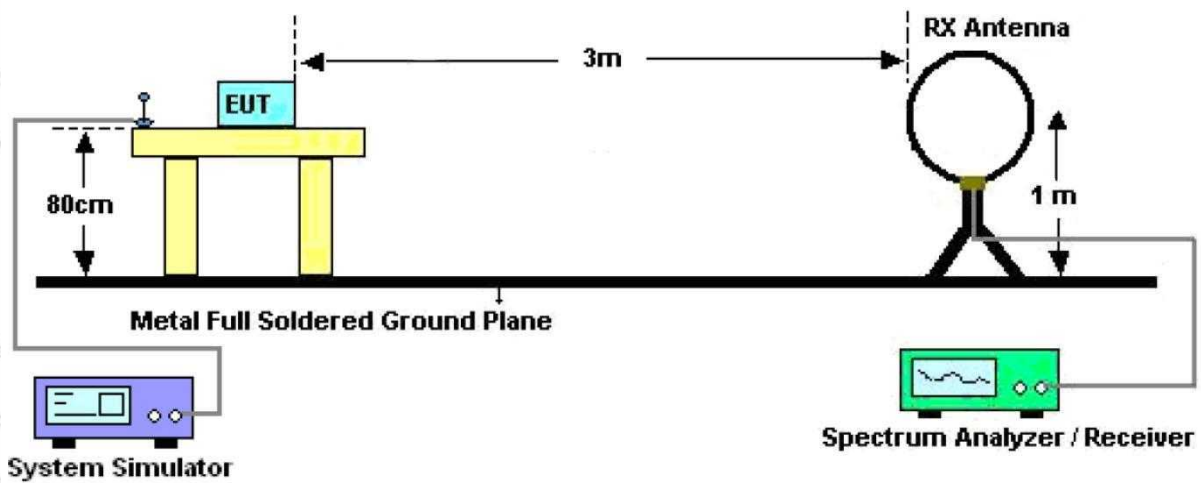


Figure 1. Below 30MHz



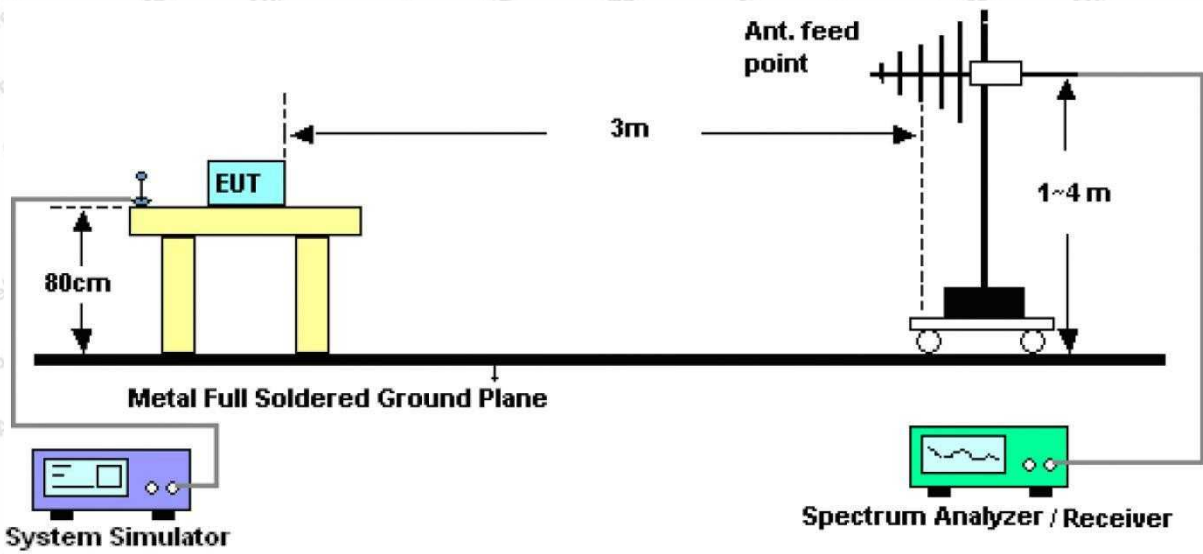


Figure 2. 30MHz to 1GHz

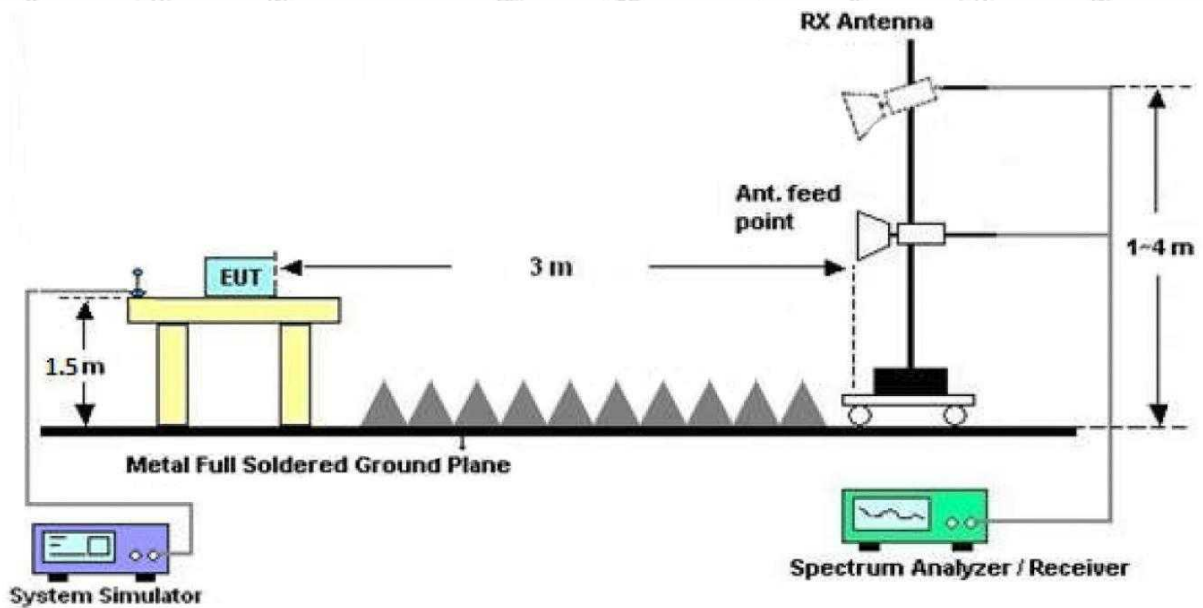


Figure 3. Above 1 GHz

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.





For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

For average measurement:

–VBW=10Hz, When duty cycle is no less than 98 percent

–VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.4 duty cycle.

#### 4.4. Test Data

##### PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, only the worst case is recorded in the report.






**Test Results (30~1000MHz)**

Test Mode: BLE\_1M Low CH (2402MHz)

Power Source: DC 14.4V battery inside

Polarization: Horizontal

Temp.(°C)/Hum.(%RH): 22.5°C /50%RH

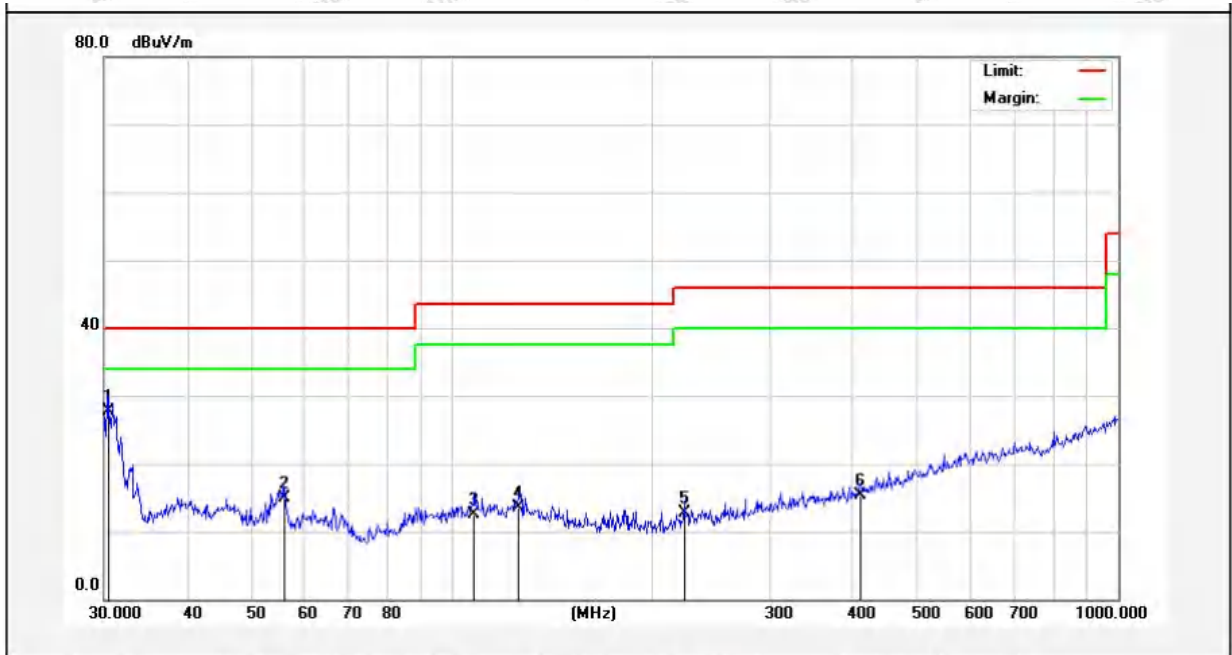


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.4238	47.74	-20.10	27.64	40.00	-12.36	QP			
2	56.0007	32.55	-17.60	14.95	40.00	-25.05	QP			
3	107.8877	35.26	-22.79	12.47	43.50	-31.03	QP			
4	125.8864	36.69	-23.10	13.59	43.50	-29.91	QP			
5	222.9502	34.60	-21.95	12.65	46.00	-33.35	QP			
6	410.3825	31.27	-16.01	15.26	46.00	-30.74	QP			



**Test Results (30~1000MHz)**

Test Mode: BLE\_1M Low CH (2402MHz)  
 Power Source: DC 14.4V battery inside  
 Polarization: Vertical  
 Temp.(°C)/Hum.(%RH): 22.5°C /50%RH

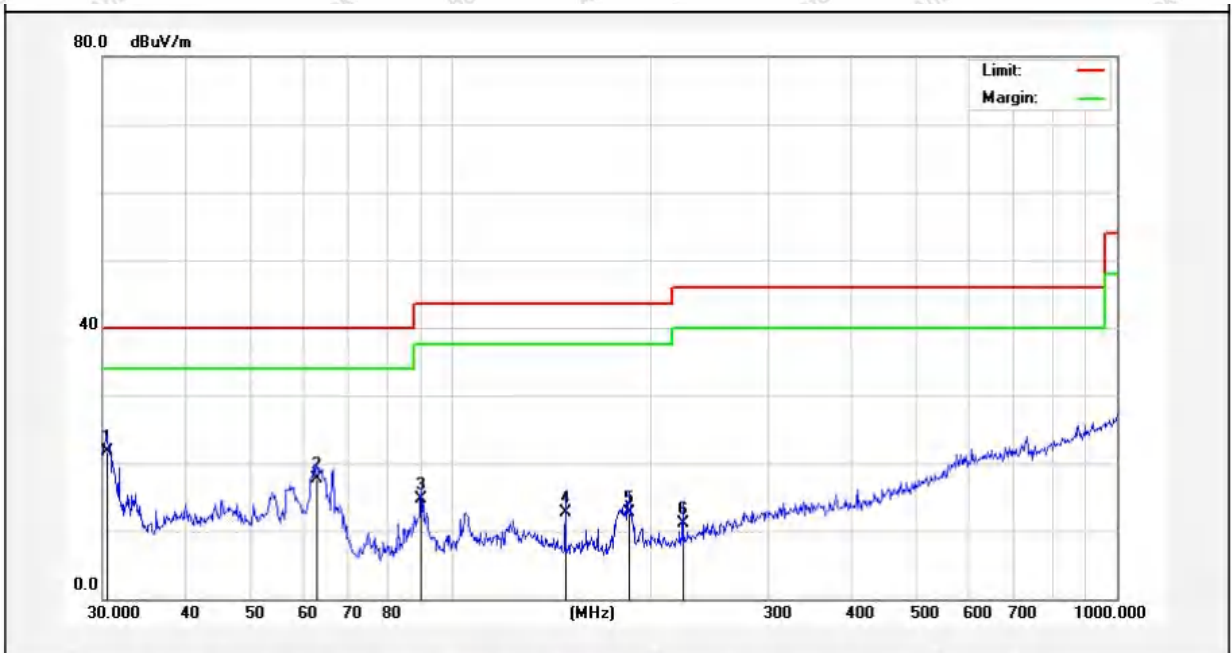

No.	Freq. (MHz)	Reading (dBUV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.4238	39.54	-17.89	21.65	40.00	-18.35	QP			
2	62.8708	36.20	-18.55	17.65	40.00	-22.35	QP			
3	90.2205	32.20	-17.56	14.64	43.50	-28.86	QP			
4	148.4410	34.75	-22.10	12.65	43.50	-30.85	QP			
5	185.1379	32.97	-20.35	12.62	43.50	-30.88	QP			
6	222.9502	29.94	-18.88	11.06	46.00	-34.94	QP			





## Test Results (1GHz-25GHz)

Test Mode: CH00				Test channel: Lowest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4804.00	29.16	15.27	44.43	74.00	-29.57	Vertical
7206.00	29.10	18.09	47.19	74.00	-26.81	Vertical
9608.00	30.19	23.76	53.95	74.00	-20.05	Vertical
12010.00	*			74.00		Vertical
14412.00	*			74.00		Vertical
4804.00	28.76	15.27	44.03	74.00	-29.97	Horizontal
7206.00	29.89	18.09	47.98	74.00	-26.02	Horizontal
9608.00	28.41	23.76	52.17	74.00	-21.83	Horizontal
12010.00	*			74.00		Horizontal
14412.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4804.00	17.43	15.27	32.70	54.00	-21.30	Vertical
7206.00	18.15	18.09	36.24	54.00	-17.76	Vertical
9608.00	19.66	23.76	43.42	54.00	-10.58	Vertical
12010.00	*			54.00		Vertical
14412.00	*			54.00		Vertical
4804.00	17.09	15.27	32.36	54.00	-21.64	Horizontal
7206.00	18.92	18.09	37.01	54.00	-16.99	Horizontal
9608.00	17.92	23.76	41.68	54.00	-12.32	Horizontal
12010.00	*			54.00		Horizontal
14412.00	*			54.00		Horizontal



**Test Results (1GHz-25GHz)**

Test Mode: CH19				Test channel: Middle		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4880.00	28.71	15.42	44.13	74.00	-29.87	Vertical
7320.00	29.07	18.02	47.09	74.00	-26.91	Vertical
9760.00	29.69	23.80	53.49	74.00	-20.51	Vertical
12200.00	*			74.00		Vertical
14640.00	*			74.00		Vertical
4880.00	28.57	15.42	43.99	74.00	-30.01	Horizontal
7320.00	29.76	18.02	47.78	74.00	-26.22	Horizontal
9760.00	28.13	23.80	51.93	74.00	-22.07	Horizontal
12200.00	*			74.00		Horizontal
14640.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4880.00	17.52	15.42	32.94	54.00	-21.06	polarization
7320.00	18.01	18.02	36.03	54.00	-17.97	Vertical
9760.00	19.51	23.80	43.31	54.00	-10.69	Vertical
12200.00	*			54.00		Vertical
14640.00	*			54.00		Vertical
4880.00	17.20	15.42	32.62	54.00	-21.38	Vertical
7320.00	19.27	18.02	37.29	54.00	-16.71	Horizontal
9760.00	18.22	23.80	42.02	54.00	-11.98	Horizontal
12200.00	*			54.00		Horizontal
14640.00	*			54.00		Horizontal





## Test Results (1GHz-25GHz)

Test Mode: CH39				Test channel: Highest		
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4960.00	28.84	15.58	44.42	74.00	-29.58	Vertical
7440.00	29.23	17.93	47.16	74.00	-26.84	Vertical
9920.00	30.39	23.83	54.22	74.00	-19.78	Vertical
12400.00	*			74.00		Vertical
14880.00	*			74.00		Vertical
4960.00	28.71	15.58	44.29	74.00	-29.71	Horizontal
7440.00	29.97	17.93	47.90	74.00	-26.10	Horizontal
9920.00	28.51	23.83	52.34	74.00	-21.66	Horizontal
12400.00	*			74.00		Horizontal
14880.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4960.00	18.64	15.58	34.22	54.00	-19.78	Vertical
7440.00	19.28	17.93	37.21	54.00	-16.79	Vertical
9920.00	20.16	23.83	43.99	54.00	-10.01	Vertical
12400.00	*			54.00		Vertical
14880.00	*			54.00		Vertical
4960.00	18.38	15.58	33.96	54.00	-20.04	Horizontal
7440.00	20.07	17.93	38.00	54.00	-16.00	Horizontal
9920.00	18.37	23.83	42.20	54.00	-11.80	Horizontal
12400.00	*			54.00		Horizontal
14880.00	*			54.00		Horizontal

## Remark:

- 1.Result =Reading + Factor
2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.
3. During the test, pre-scan the BLE\_1M&BLE\_2M, and found the BLE\_1M is worse case, the report only record this mode.




**Radiated Band Edge:**

Test Mode: BLE\_1M 2402MHz

Power Source: DC 14.4V battery inside

Polarization: Horizontal

Temp.(°C)/Hum.(%RH): 22.5°C /50%RH

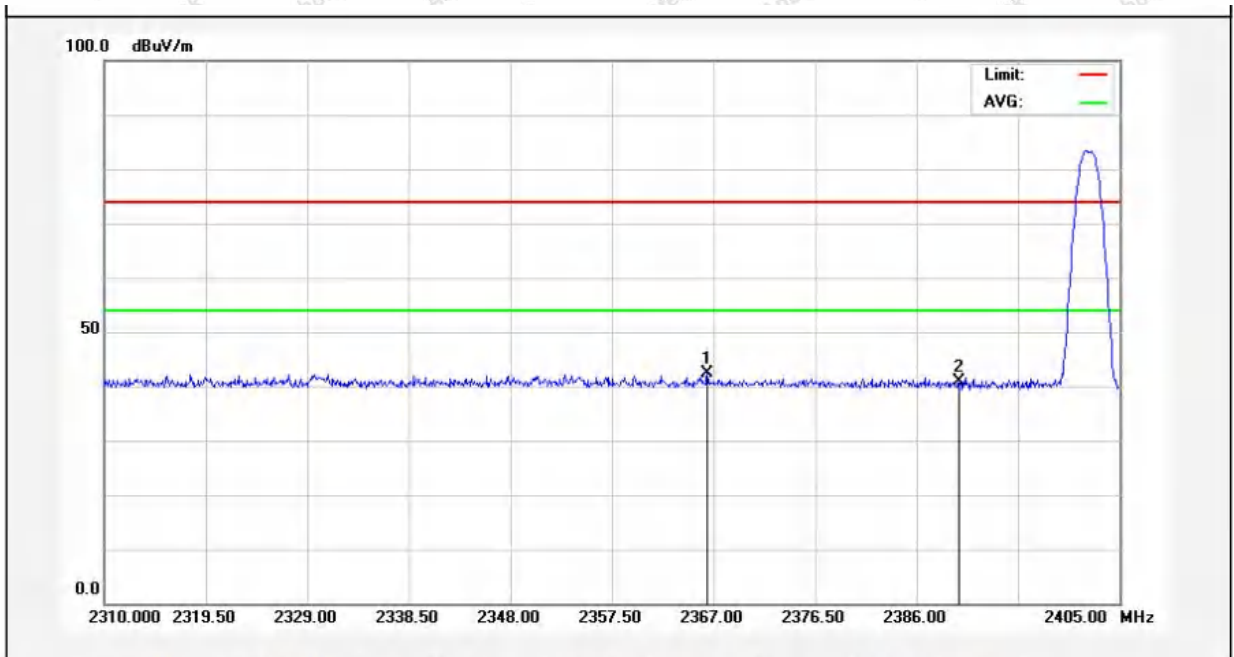


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2366.430	59.81	-17.46	42.35	74.00	-31.65	peak			
2	2390.000	58.24	-17.44	40.80	74.00	-33.20	peak			





**Radiated Band Edge:**

Test Mode: BLE\_1M 2402MHz  
 Power Source: DC 14.4V battery inside  
 Polarization: Vertical  
 Temp.(°C)/Hum.(%RH): 22.5°C /50%RH

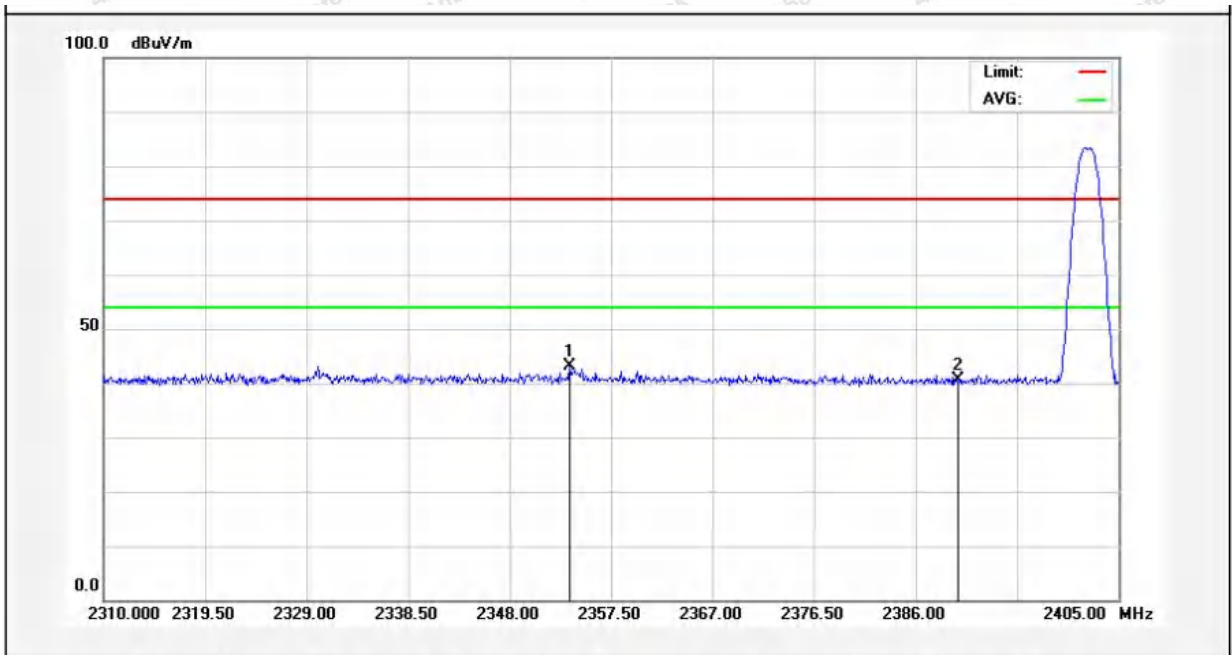


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2353.605	67.68	-24.46	43.22	74.00	-30.78	peak			
2	2390.000	65.18	-24.44	40.74	74.00	-33.26	peak			



**Radiated Band Edge:**

Test Mode: BLE\_1M 2480MHz  
 Power Source: DC 14.4V battery inside  
 Polarization: Horizontal  
 Temp.(°C)/Hum.(%RH): 22.5°C /50%RH

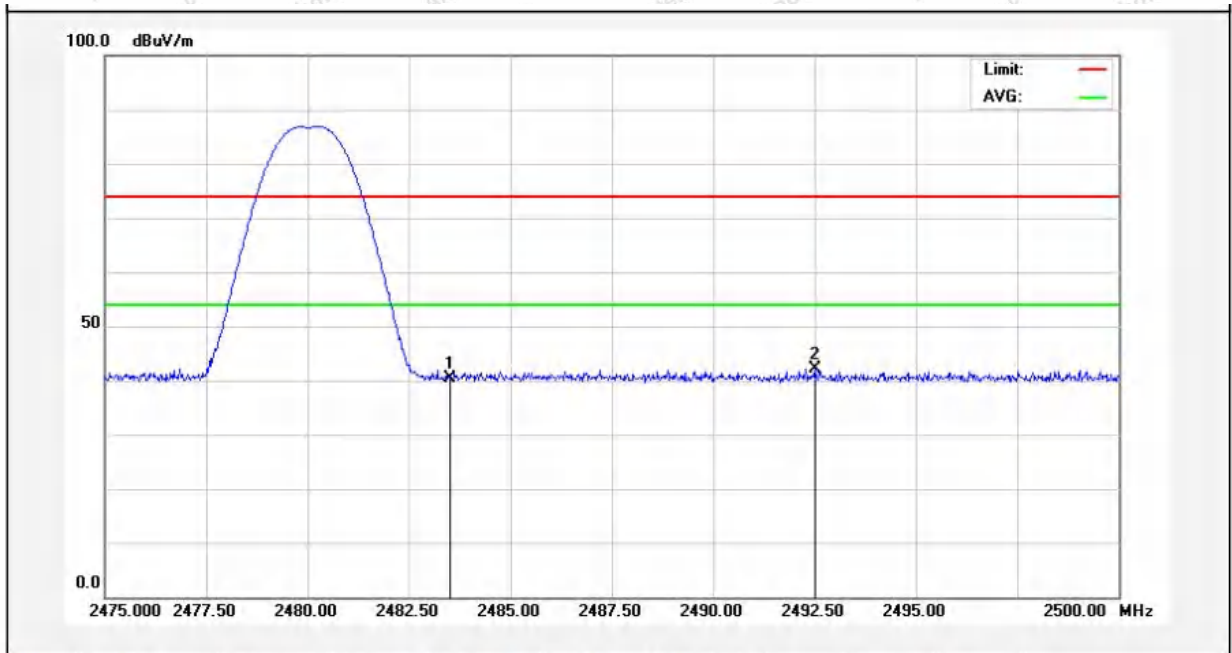


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	57.68	-17.28	40.40	74.00	-33.60	peak			
2	2492.500	59.43	-17.27	42.16	74.00	-31.84	peak			





**Radiated Band Edge:**

Test Mode: BLE\_1M 2480MHz  
 Power Source: DC 14.4V battery inside  
 Polarization: Vertical  
 Temp.(°C)/Hum.(%RH): 22.5°C /50%RH

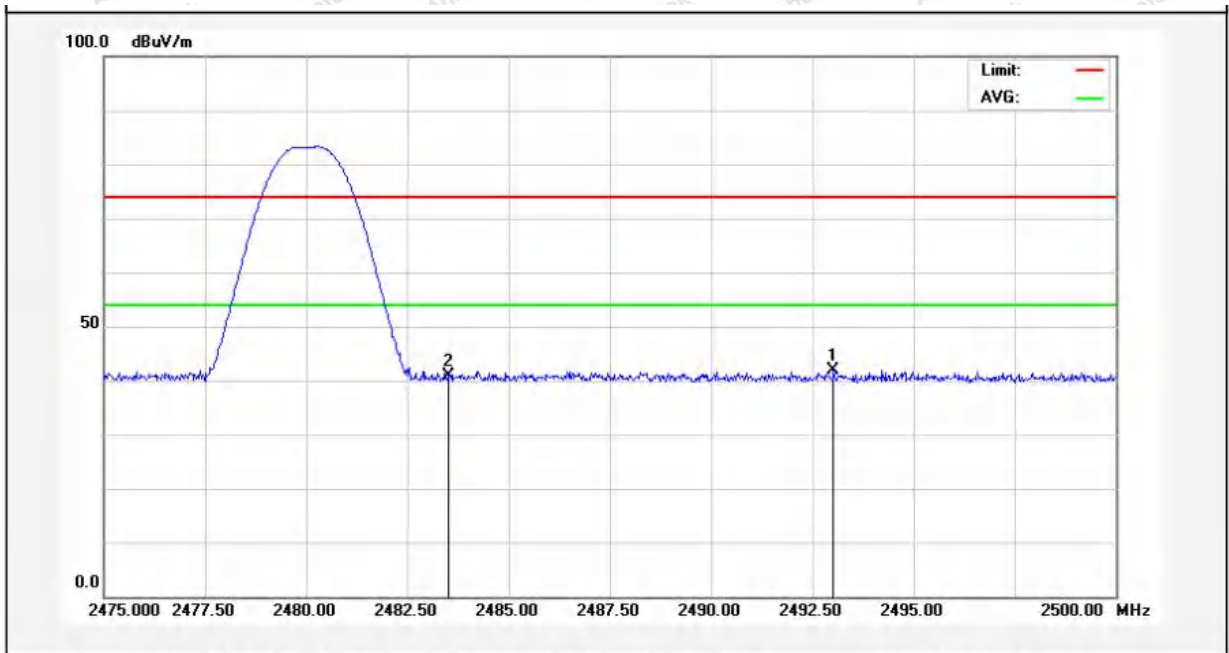

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2493.025	66.16	-24.27	41.89	74.00	-32.11	peak			
2	2483.500	65.06	-24.28	40.78	74.00	-33.22	peak			

**Remark:**

1. During the test, pre-scan the BLE\_1M&BLE\_2M, and found the BLE\_1M is worse case, the report only record this mode.




## 5. Maximum Peak Output Power Test

### 5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	1W (30dBm)

### 5.2. Test Setup

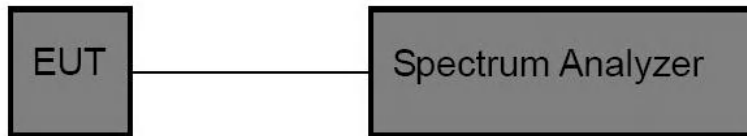

### 5.3. Test Procedure

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

1. Set the RBW  $\geq$  DTS bandwidth.
2. Set the VBW  $\geq 3 \times$  RBW.
3. Set the span  $\geq 3 \times$  RBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

### 5.4. Test Data

Pass

Please refer to Appendix C of the Appendix Test Data.

#### Additional test for duty cycle.

Please refer to Appendix G of the Appendix Test Data.






## 6. 6DB Occupancy Bandwidth Test

### 6.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(2)
Test Limit	≥500kHz

### 6.2. Test Setup



### 6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
  - RBW = 100kHz, VBW≥3\*RBW
  - Detector= Peak
  - Trace mode= Max hold.
  - Sweep- auto couple.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

### 6.4. Test Data

Pass

Please refer to Appendix A of the Appendix Test Data.




## 7. Power Spectral Density Test

### 7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (e)
Test Limit	8dBm/3KHz

### 7.2. Test Setup

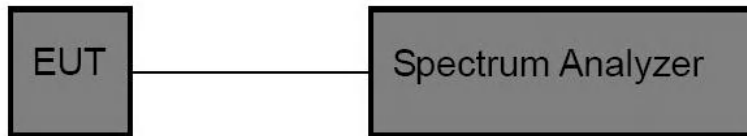

### 7.3. Test Procedure

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW  $\geq 3 \times$  RBW, Span = 1.5x DTS BW
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

### 7.4. Test Data

Pass

Please refer to Appendix D of the Appendix Test Data.






## 8. 100kHz Bandwidth of Frequency Band Edge Requirement

### 8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 8.2. Test Setup



### 8.3. Test Procedure

Using the following spectrum analyzer setting:

1. Set the RBW = 100KHz.
2. Set the VBW = 300KHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

### 8.4. Test Data

Pass

Please refer to Appendix E & Appendix F of the Appendix Test Data.



## 9. Antenna Requirement

### 9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	<p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p>

### 9.2. Antenna Connected Construction

The antenna is a FPC Antenna which permanently attached, and the best case gain of the antenna is 1.29dBi . It complies with the standard requirement.






## APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement




Photo of Radiation Emission Test


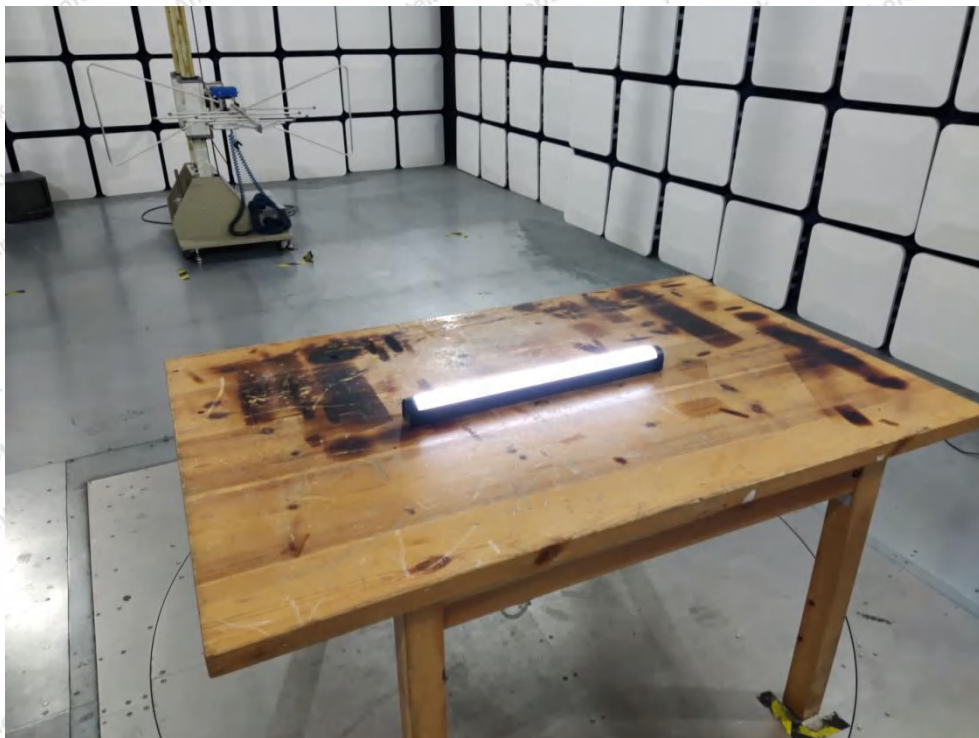







## APPENDIX II -- EXTERNAL PHOTOGRAPH

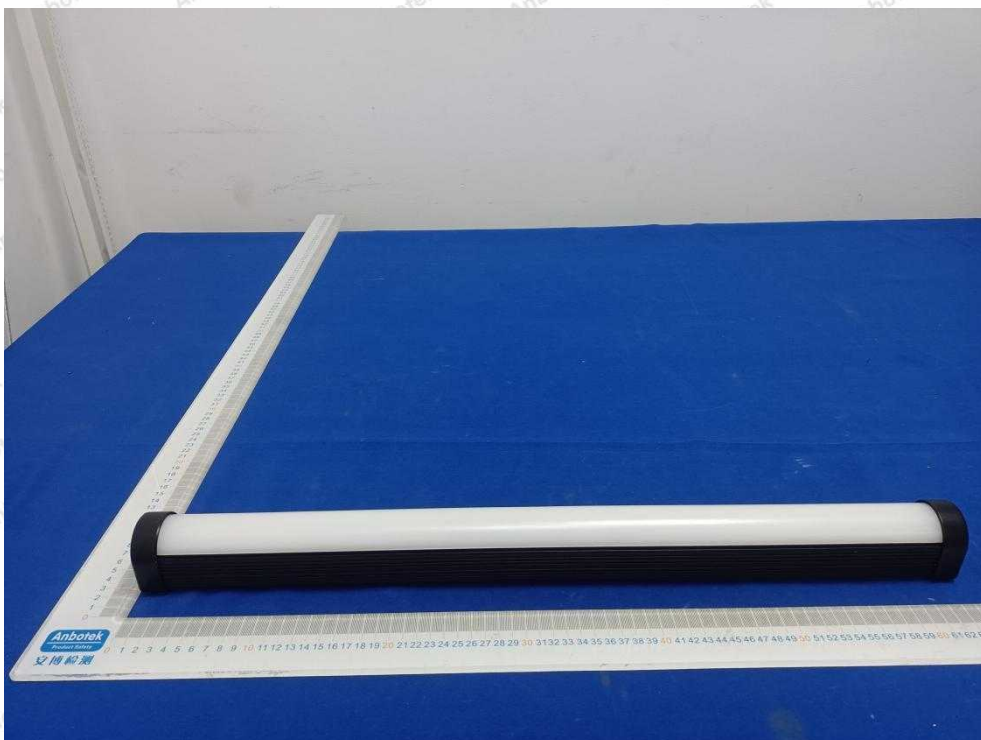

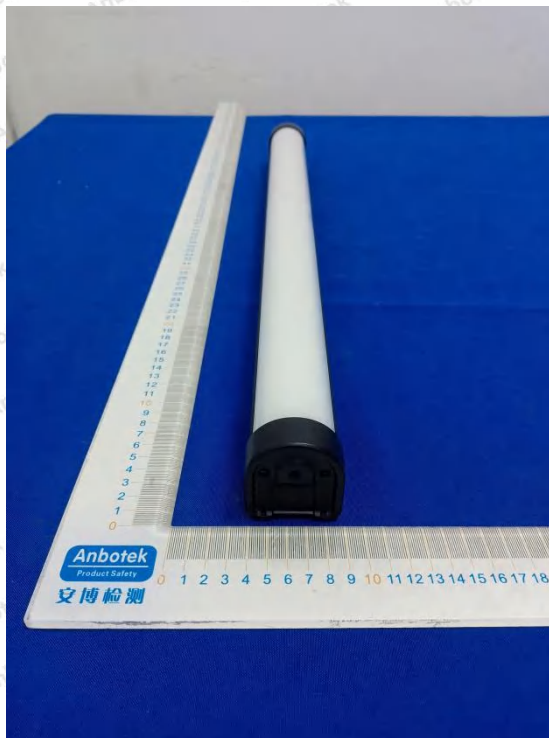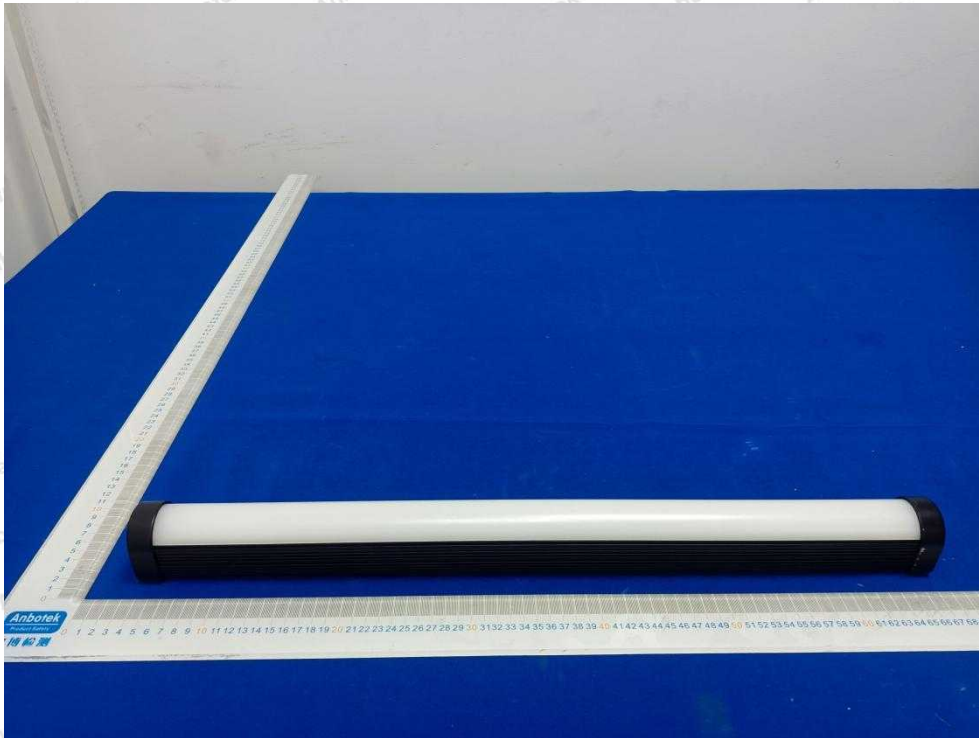





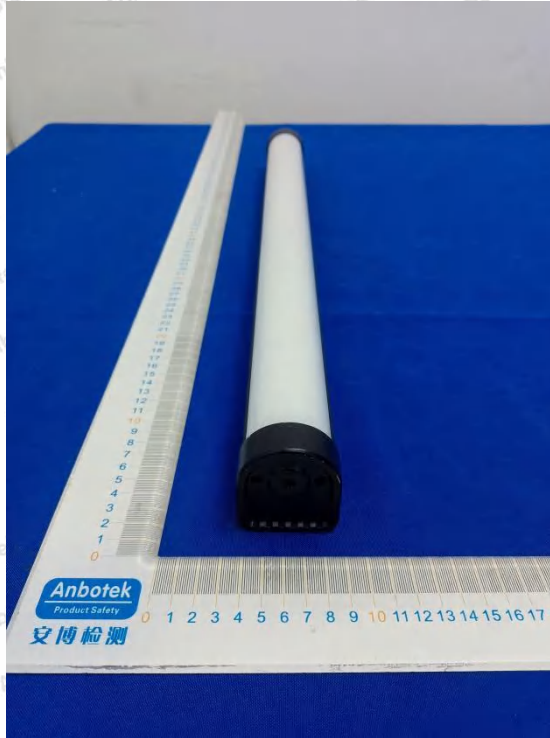






## APPENDIX III -- INTERNAL PHOTOGRAPH

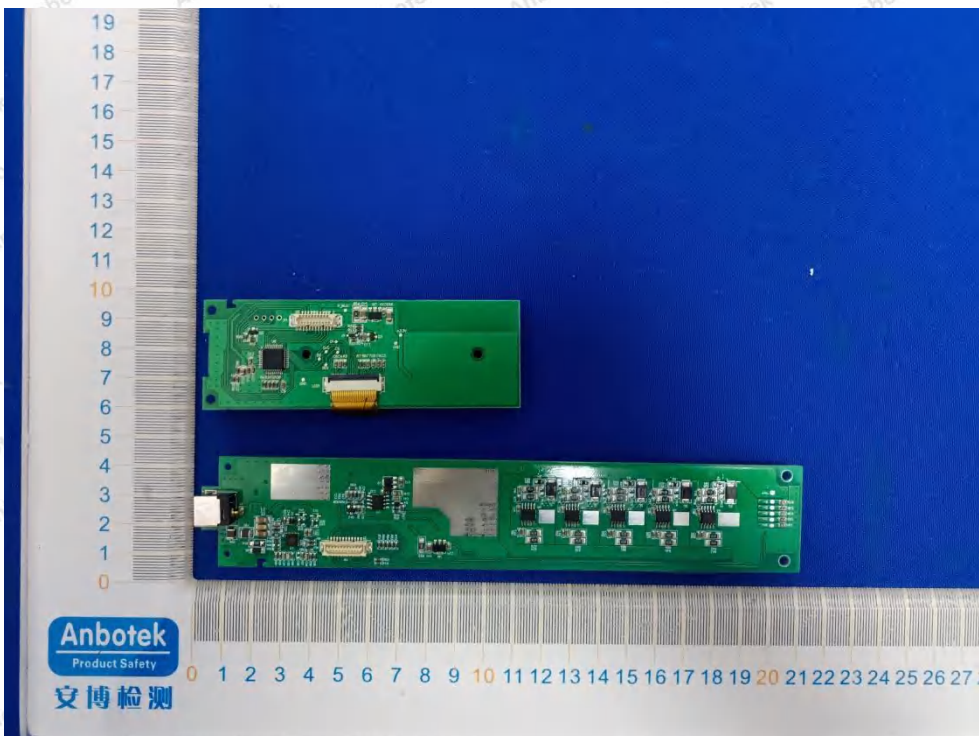




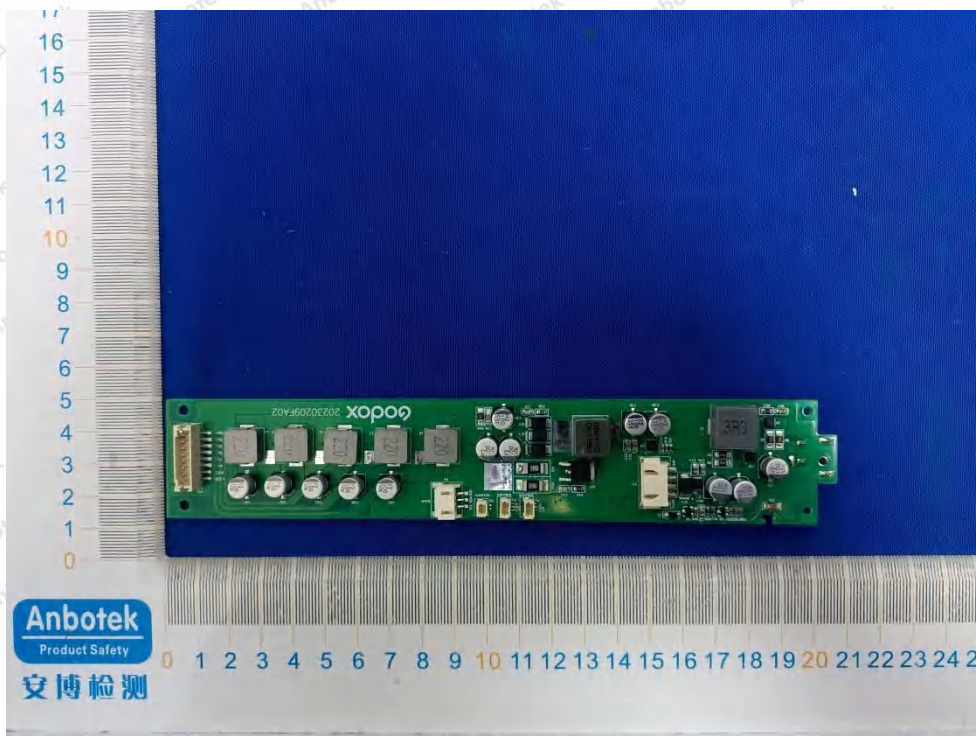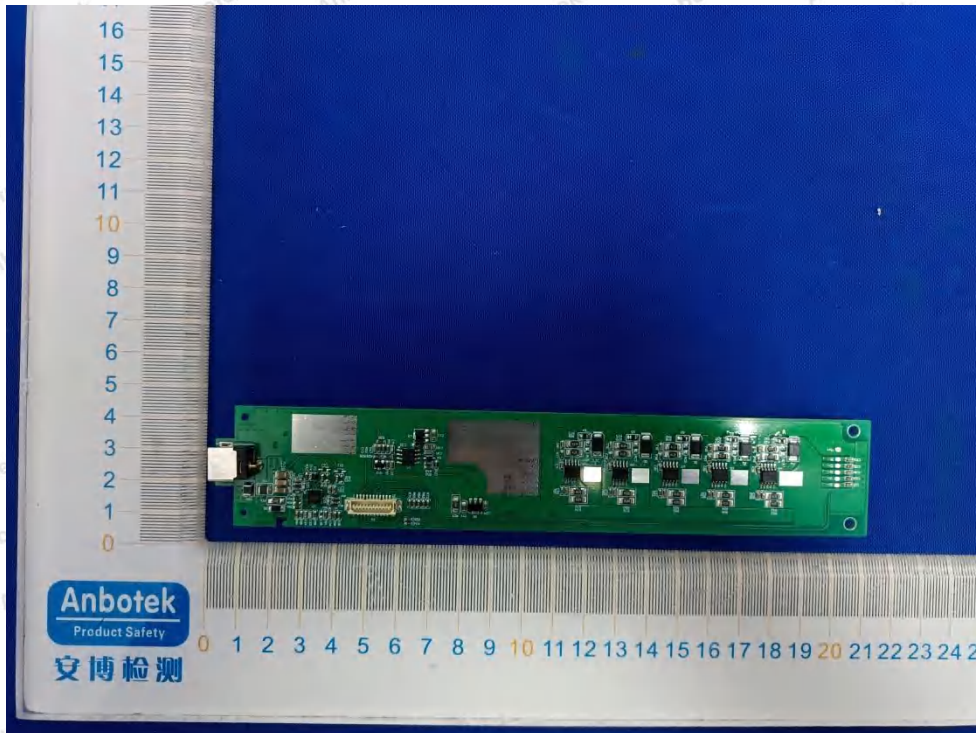



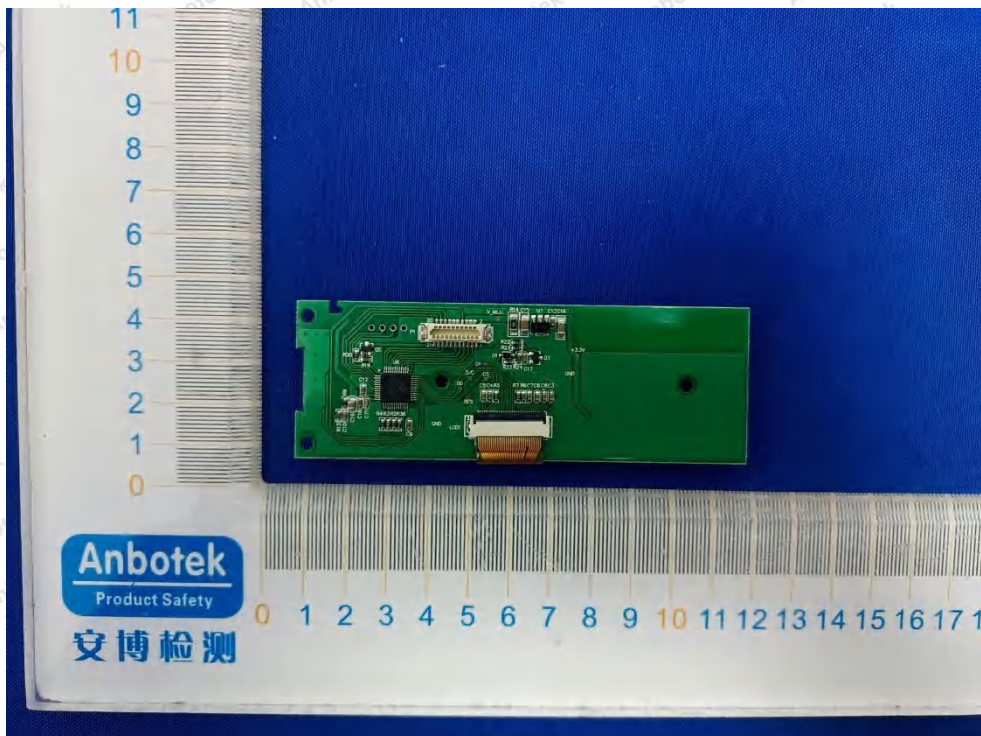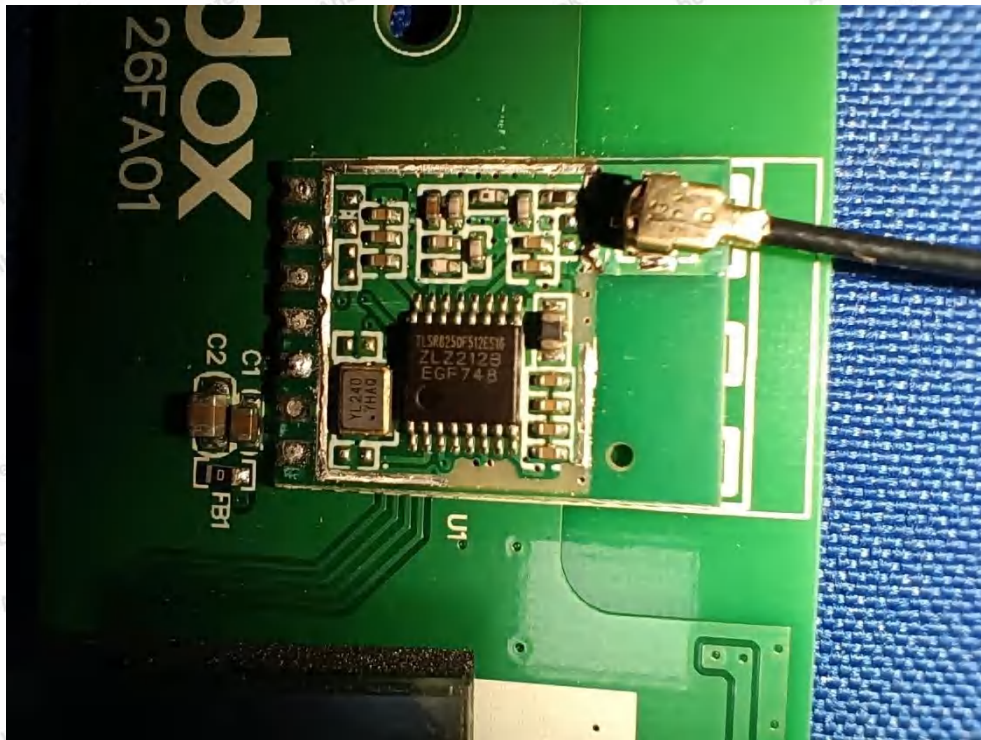



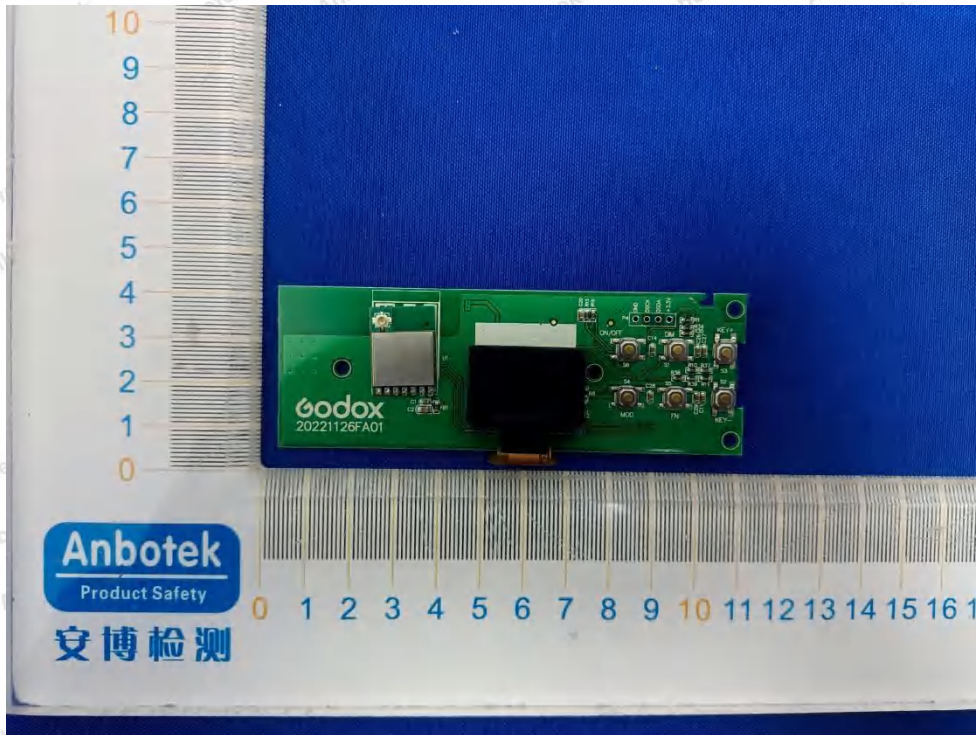

ANT



## Appendix Test Data

Report No.:	18220WC30027901	Test Sample No.:	1-2-2
Start Test Date:	2023.03.10	Finish Test Date:	2023.03.15
Test Engineer:	<i>Jony.He</i>	Auditor:	<i>Edward.Pan</i>
Temperature:	23.5°C	Relative Humidity:	44%
Pressure:	1012 hPa		

### Appendix A: DTS Bandwidth

#### Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.668	2401.704	2402.372	0.5	PASS
		2440	0.692	2439.692	2440.384	0.5	PASS
		2480	0.700	2479.680	2480.380	0.5	PASS
BLE_2M	Ant1	2402	1.280	2401.388	2402.668	0.5	PASS
		2440	1.256	2439.412	2440.668	0.5	PASS
		2480	1.308	2479.416	2480.724	0.5	PASS





## Test Graphs





BLE\_2M\_Ant1\_2402



BLE\_2M\_Ant1\_2440







BLE\_2M\_Ant1\_2480



## Appendix B: Occupied Channel Bandwidth

### Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
BLE_1M	Ant1	2402	1.0067	2401.5276	2402.5343
		2440	1.0397	2439.5080	2440.5477
		2480	1.0478	2479.5078	2480.5556
BLE_2M	Ant1	2402	2.0709	2401.0003	2403.0712
		2440	2.0547	2438.9903	2441.0450
		2480	2.0540	2478.9991	2481.0531





## Test Graphs





BLE\_2M\_Ant1\_2402



BLE\_2M\_Ant1\_2440







BLE\_2M\_Ant1\_2480



## Appendix C: Maximum conducted output power

### Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE_1M	Ant1	2402	-0.11	≤30	PASS
		2440	-0.20	≤30	PASS
		2480	-0.50	≤30	PASS
BLE_2M	Ant1	2402	-0.16	≤30	PASS
		2440	-0.23	≤30	PASS
		2480	-0.51	≤30	PASS





## Test Graphs Peak






BLE\_2M\_Ant1\_2402



BLE\_2M\_Ant1\_2440





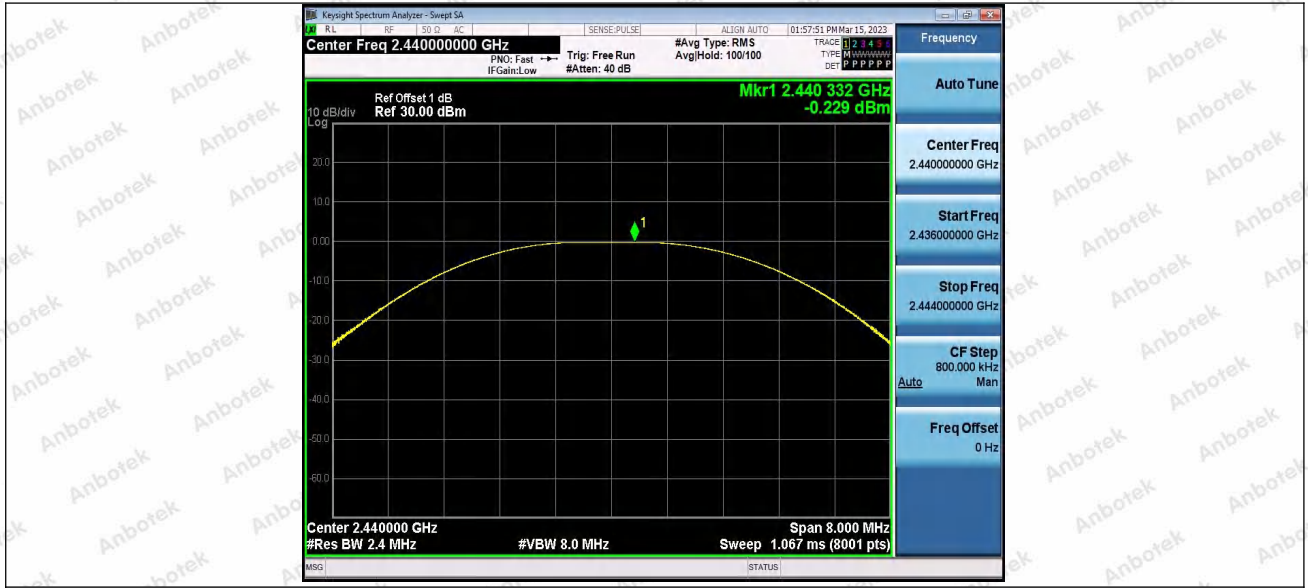

BLE\_2M\_Ant1\_2480



## Appendix D: Maximum power spectral density

### Test Result



Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-10.07	≤8.00	PASS
		2440	-10.12	≤8.00	PASS
		2480	-10.19	≤8.00	PASS
BLE_2M	Ant1	2402	-12.95	≤8.00	PASS
		2440	-13.22	≤8.00	PASS
		2480	-13.54	≤8.00	PASS






## Test Graphs




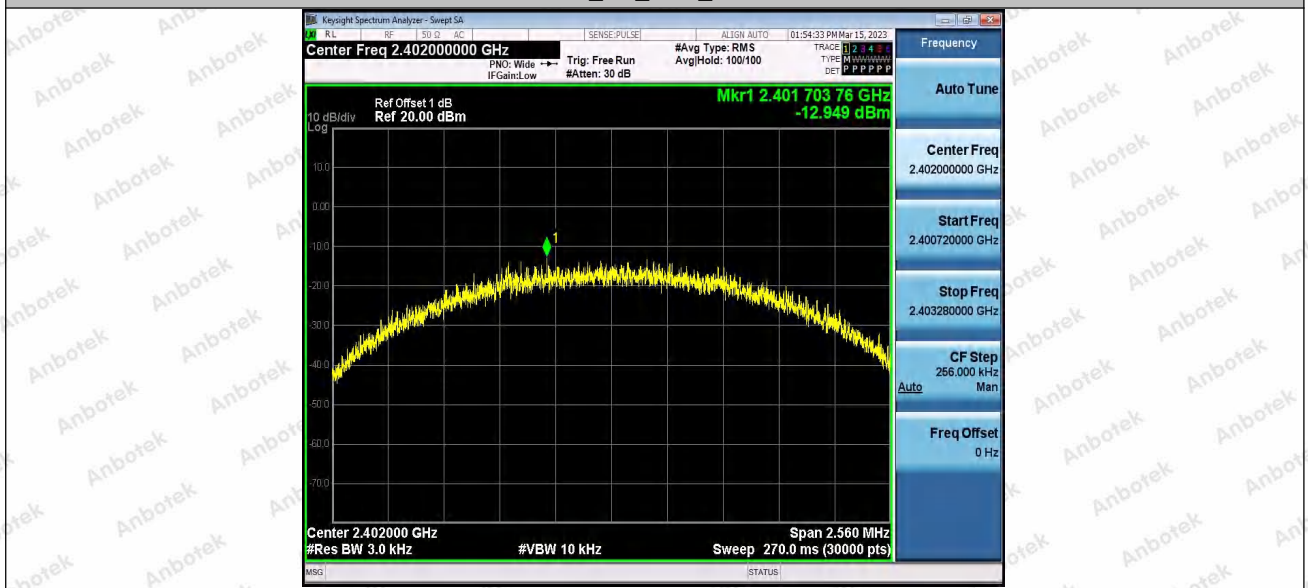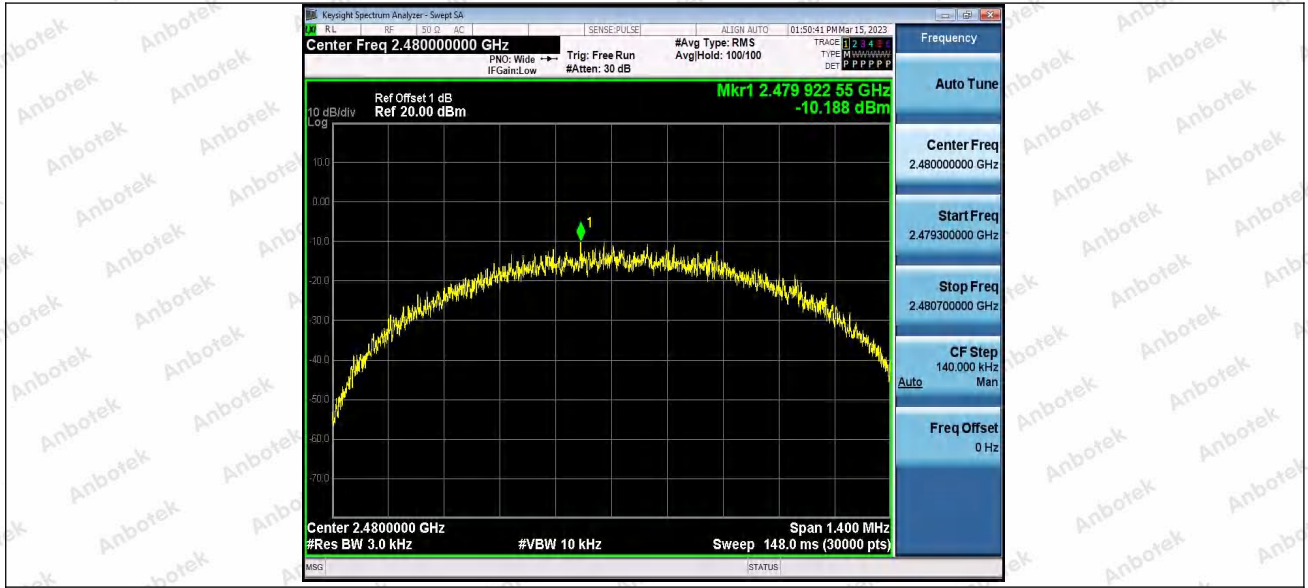



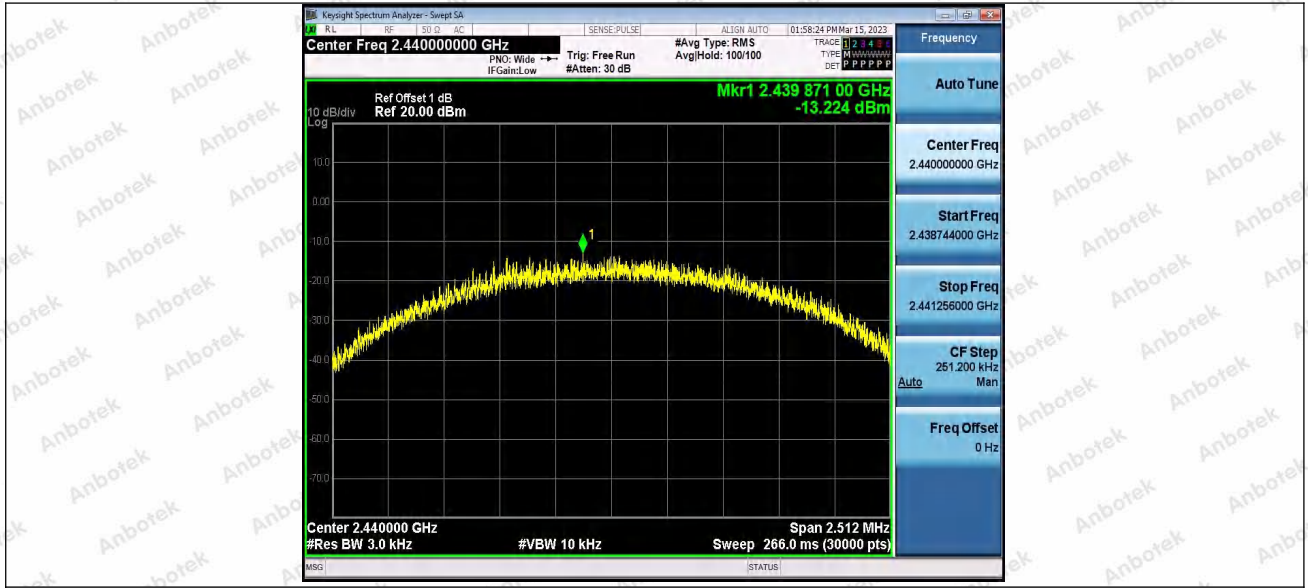

BLE\_2M\_Ant1\_2480

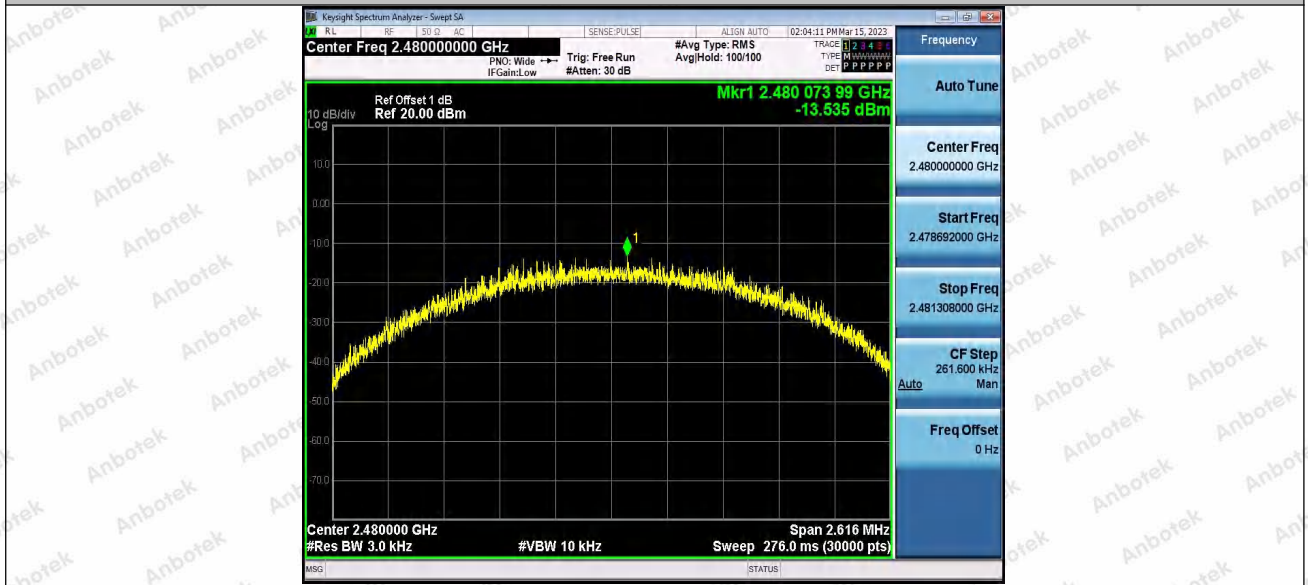

## Appendix E: Band edge measurements


### Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	-0.79	-56.17	≤-20.79	PASS
		High	2480	-1.16	-56.38	≤-21.16	PASS
BLE_2M	Ant1	Low	2402	-2.43	-36.53	≤-22.43	PASS
		High	2480	-2.42	-56.91	≤-22.42	PASS





## Test Graphs

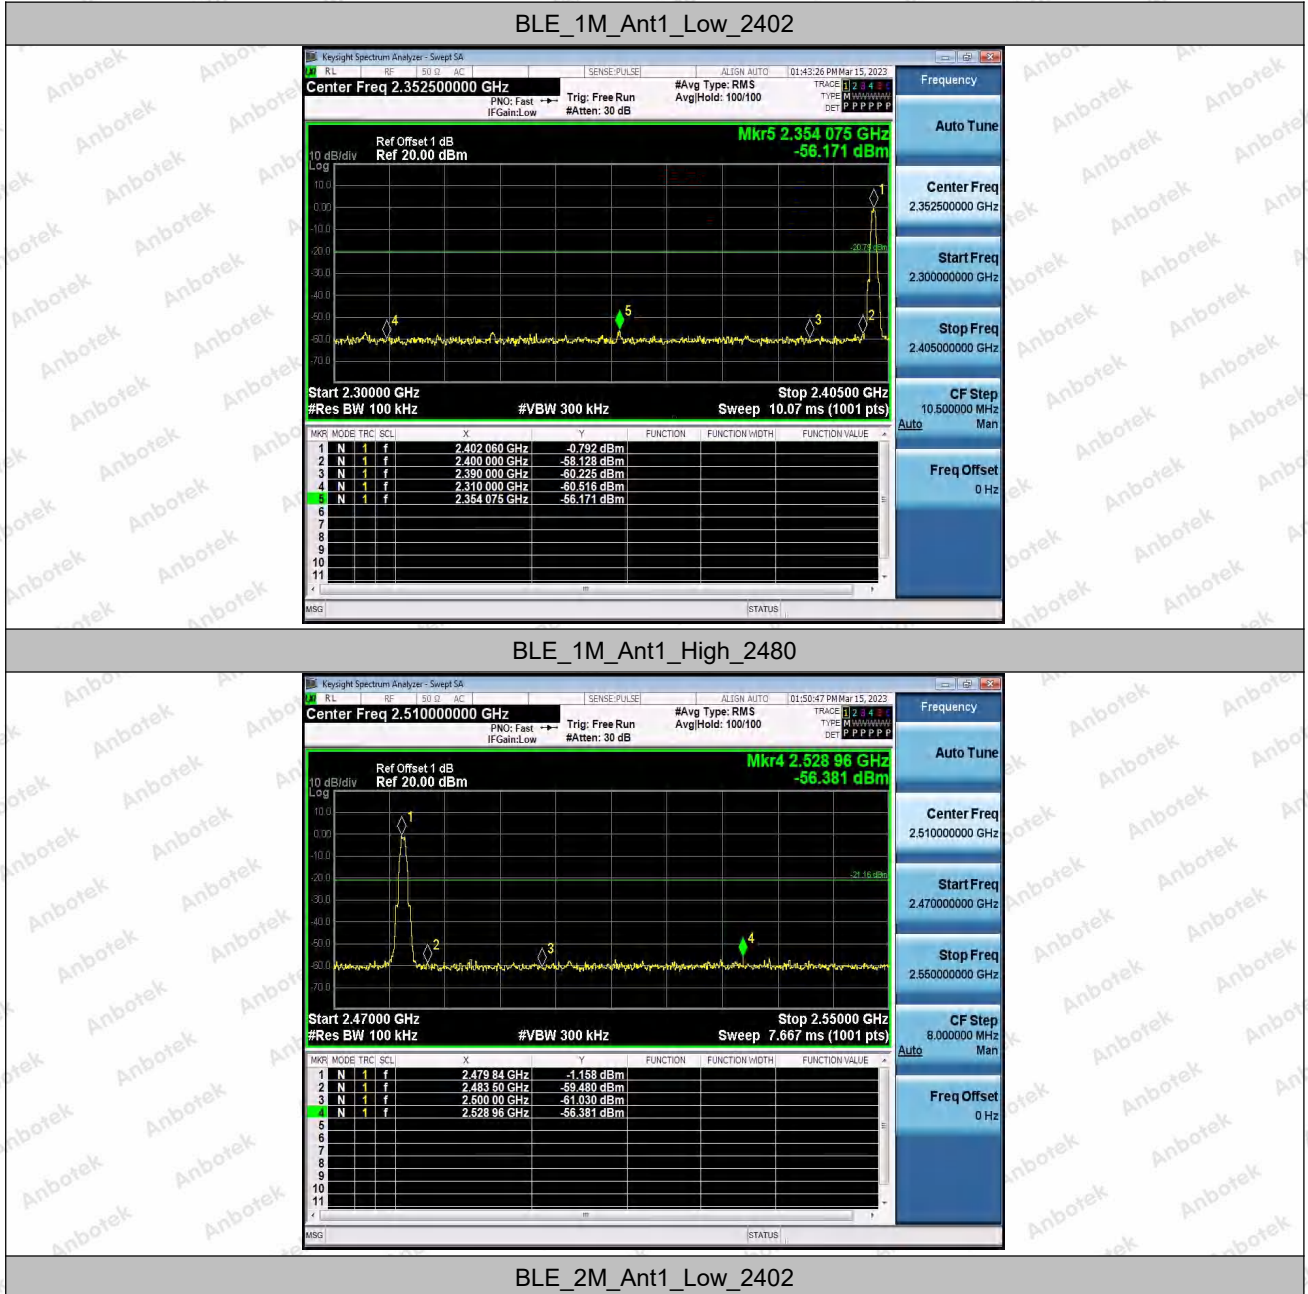

BLE\_2M\_Ant1\_Low\_2402








## Appendix F: Conducted Spurious Emission

### Test Result


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	-1.83	-1.83	---	PASS
			30~1000	-1.83	-62.33	≤-21.83	PASS
			1000~26500	-1.83	-53.53	≤-21.83	PASS
		2440	Reference	-1.89	-1.89	---	PASS
			30~1000	-1.89	-62.92	≤-21.89	PASS
			1000~26500	-1.89	-53.47	≤-21.89	PASS
		2480	Reference	-2.00	-2.00	---	PASS
			30~1000	-2.00	-62.02	≤-22	PASS
			1000~26500	-2.00	-52.8	≤-22	PASS
BLE_2M	Ant1	2402	Reference	-2.07	-2.07	---	PASS
			30~1000	-2.07	-62.91	≤-22.07	PASS
			1000~26500	-2.07	-45.34	≤-22.07	PASS
		2440	Reference	-2.27	-2.27	---	PASS
			30~1000	-2.27	-60.76	≤-22.27	PASS
			1000~26500	-2.27	-53.26	≤-22.27	PASS
		2480	Reference	-3.55	-3.55	---	PASS
			30~1000	-3.55	-61.18	≤-23.55	PASS
			1000~26500	-3.55	-52.94	≤-23.55	PASS



## Test Graphs

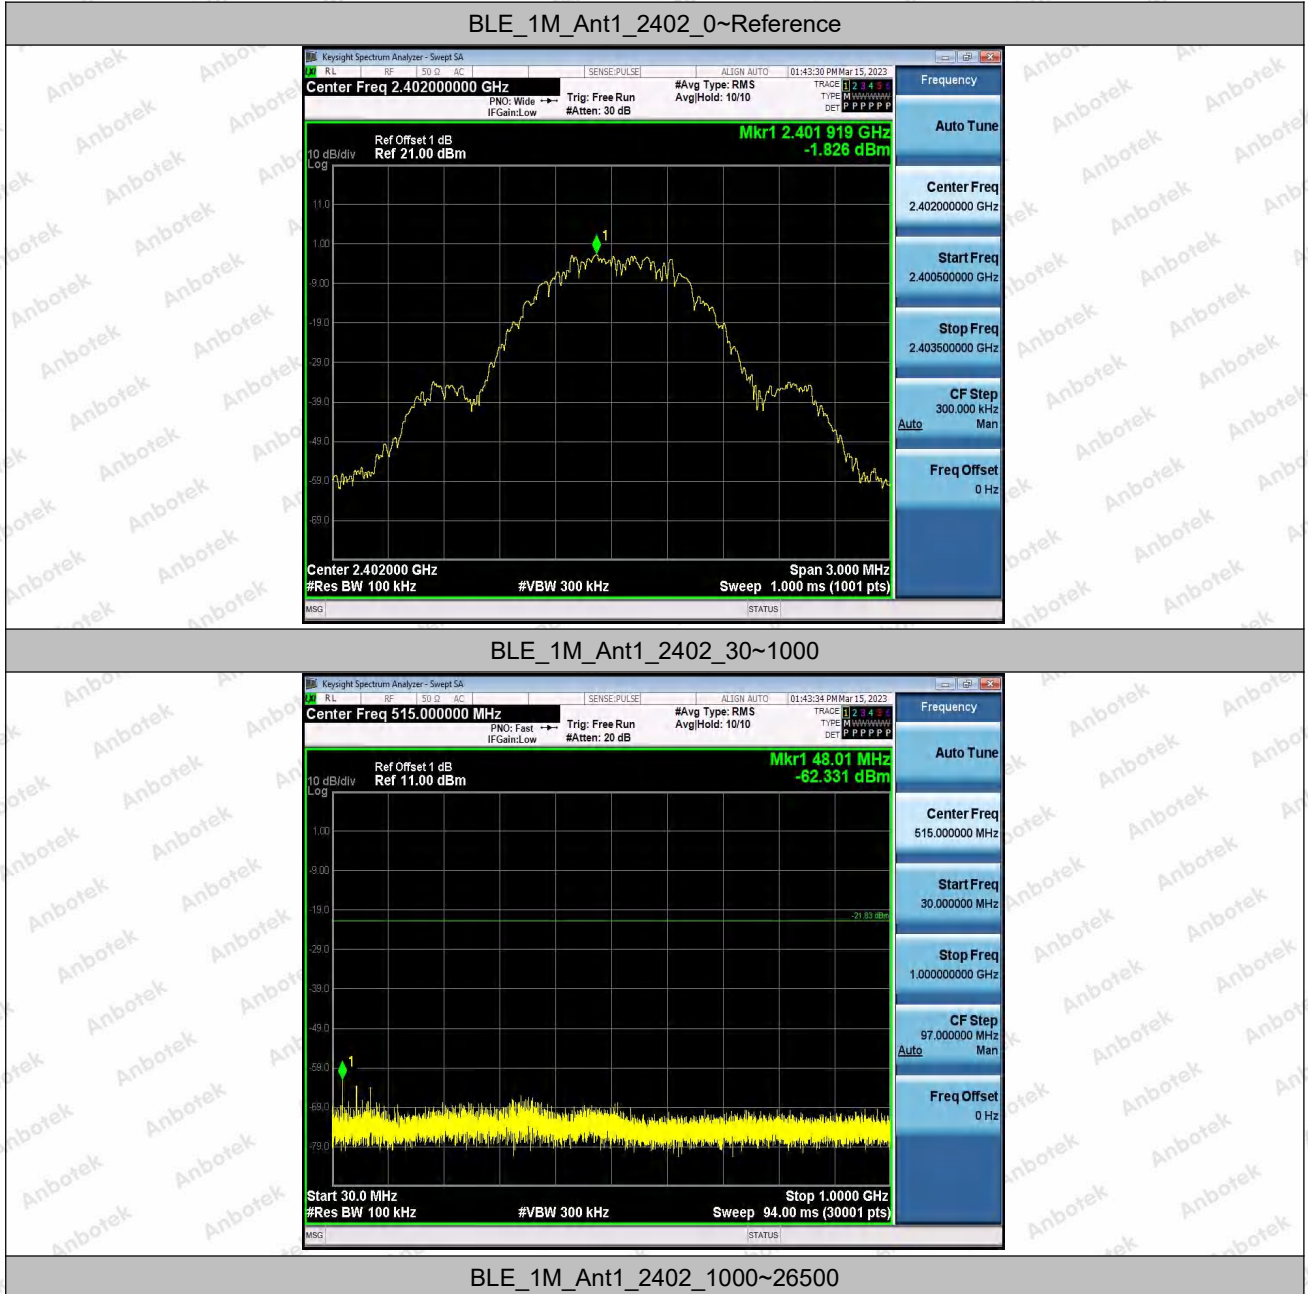



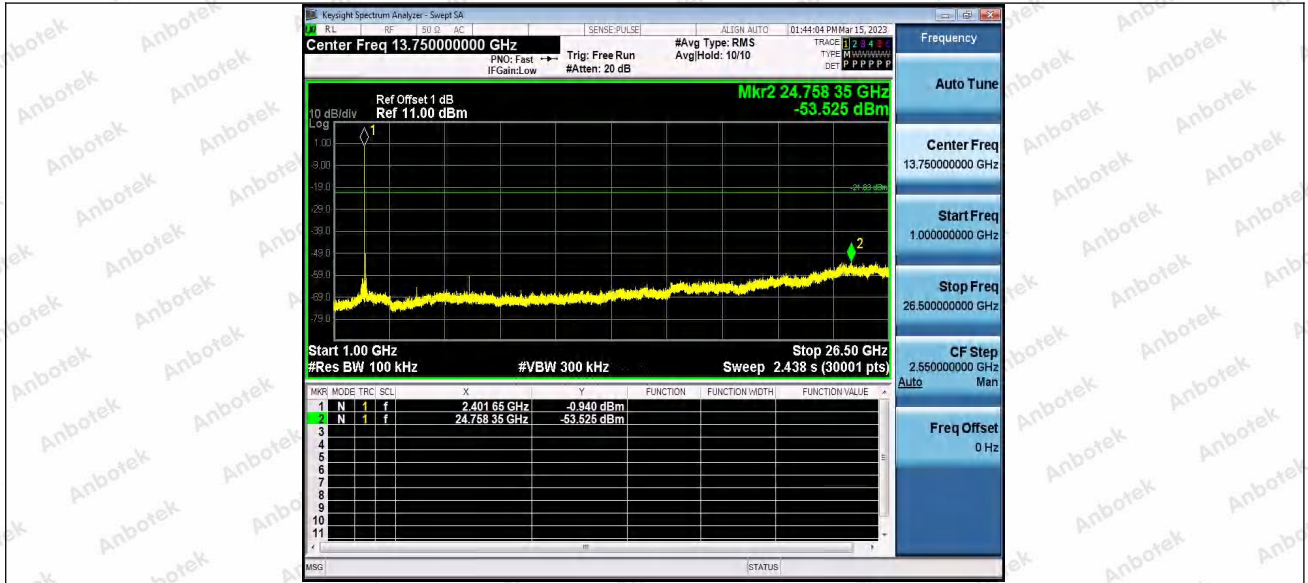


BLE\_1M\_Ant1\_2440\_0~Reference




BLE\_1M\_Ant1\_2440\_30~1000



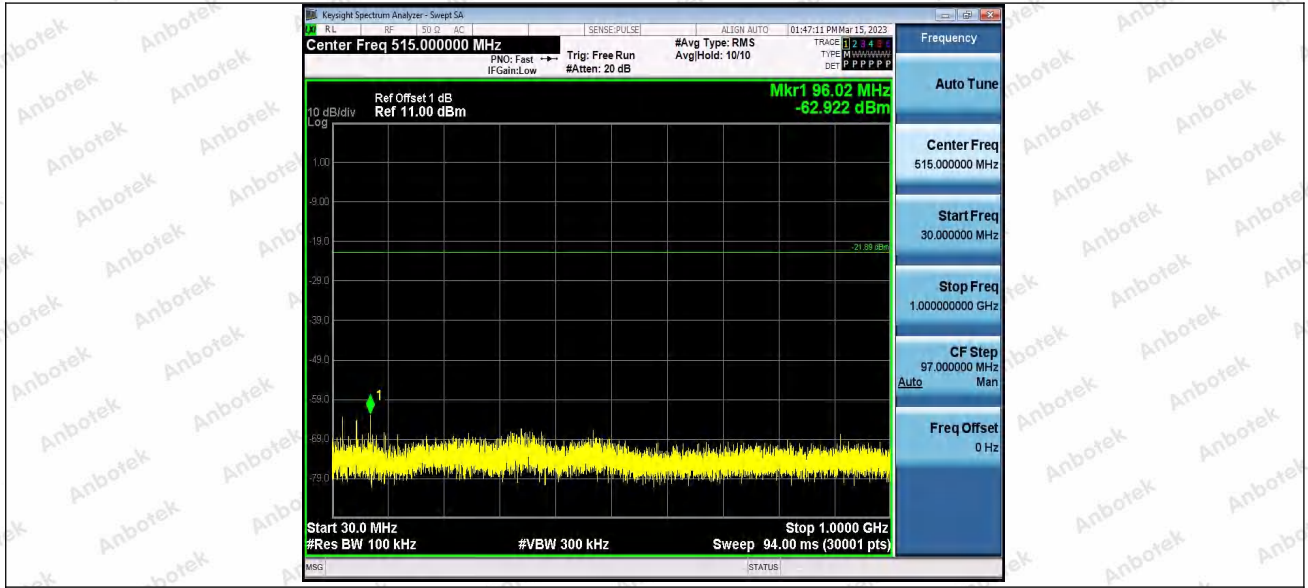

BLE\_1M\_Ant1\_2440\_1000~26500

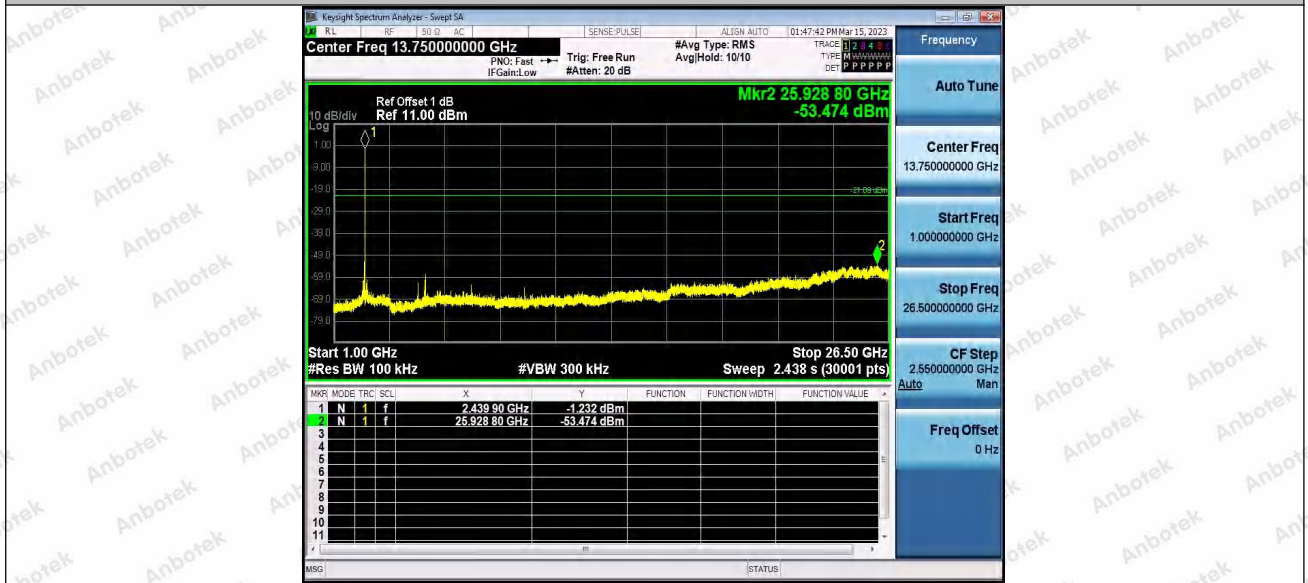


BLE\_1M\_Ant1\_2480\_0~Reference








BLE\_1M\_Ant1\_2480\_30~1000

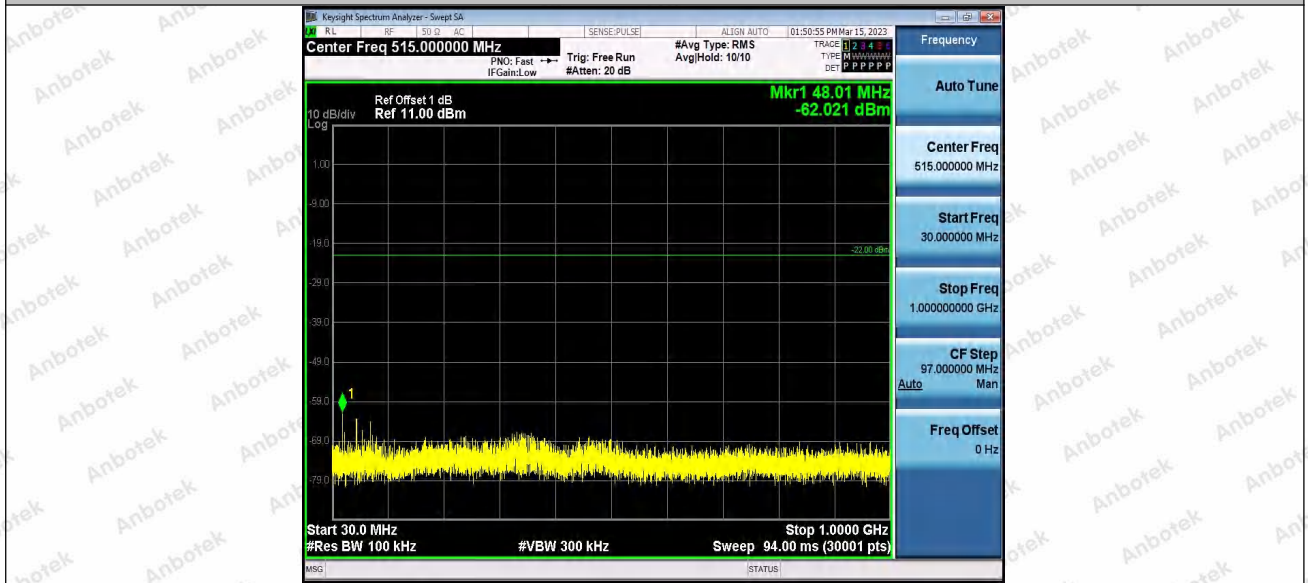

BLE\_1M\_Ant1\_2480\_1000~26500



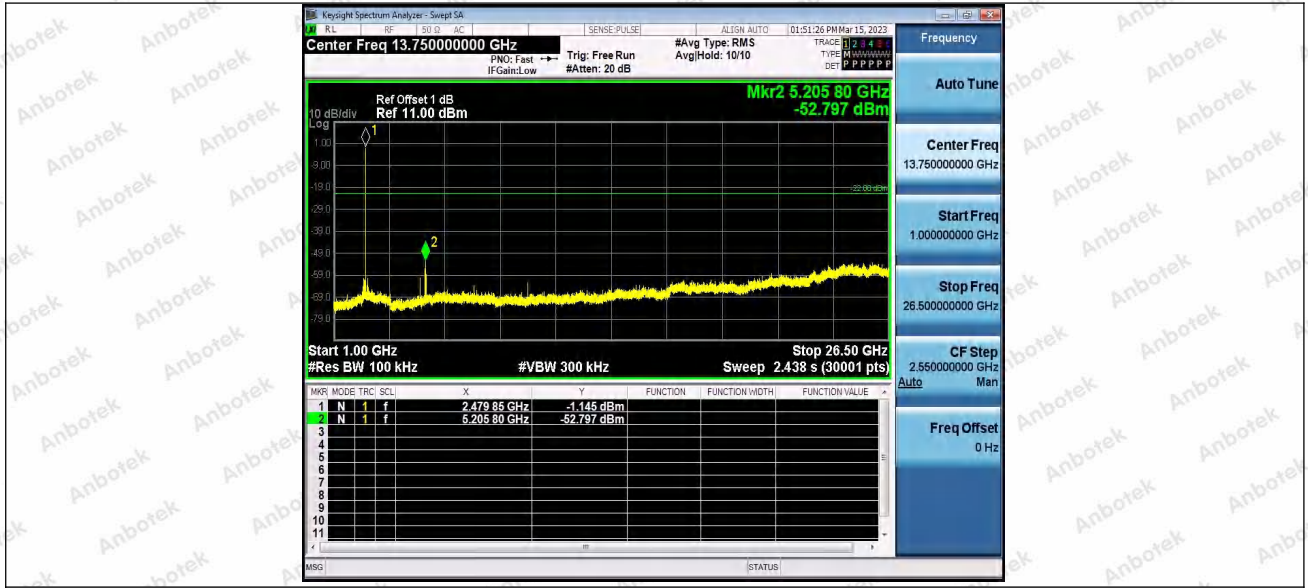


BLE\_2M\_Ant1\_2402\_0~Reference




BLE\_2M\_Ant1\_2402\_30~1000





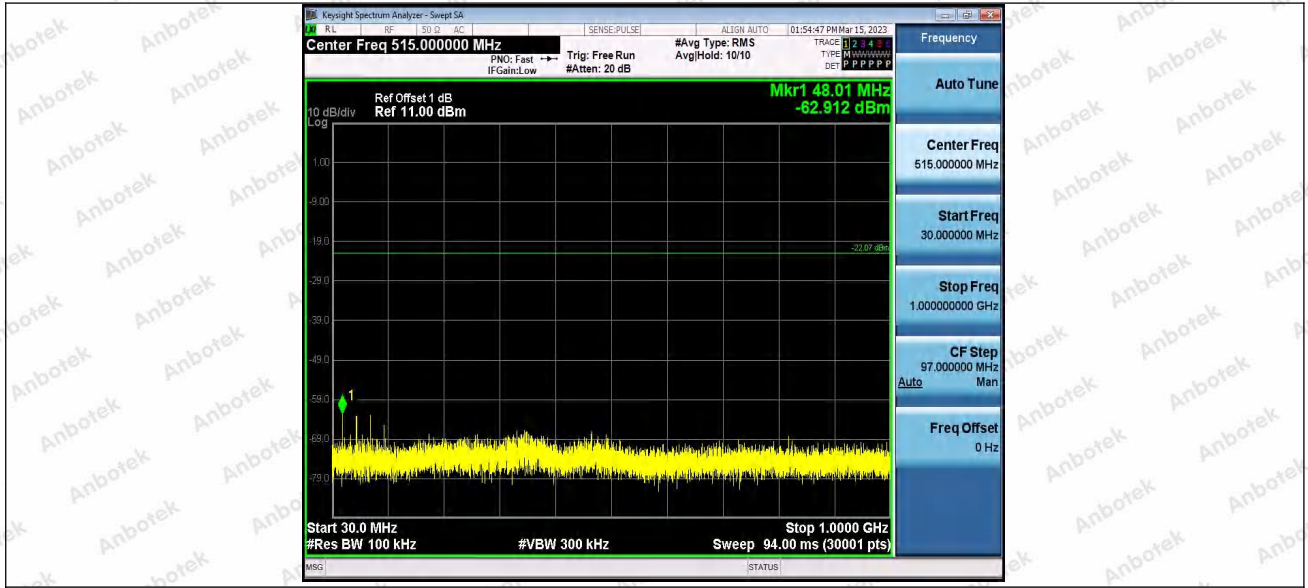

BLE\_2M\_Ant1\_2402\_1000~26500

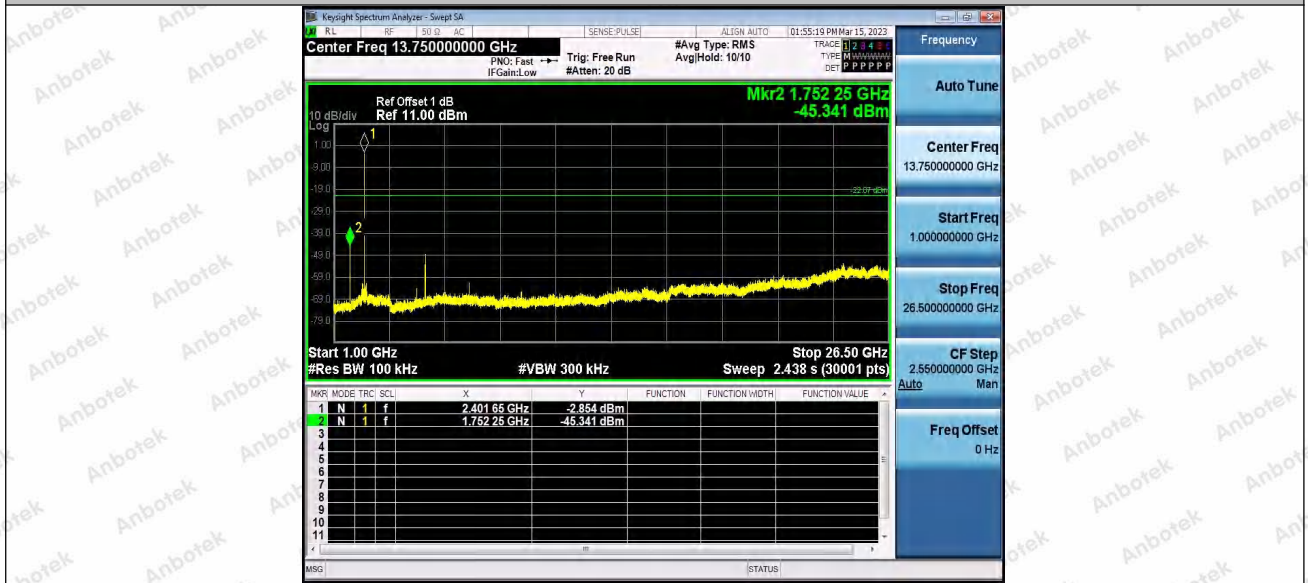


BLE\_2M\_Ant1\_2440\_0~Reference






BLE\_2M\_Ant1\_2440\_30~1000

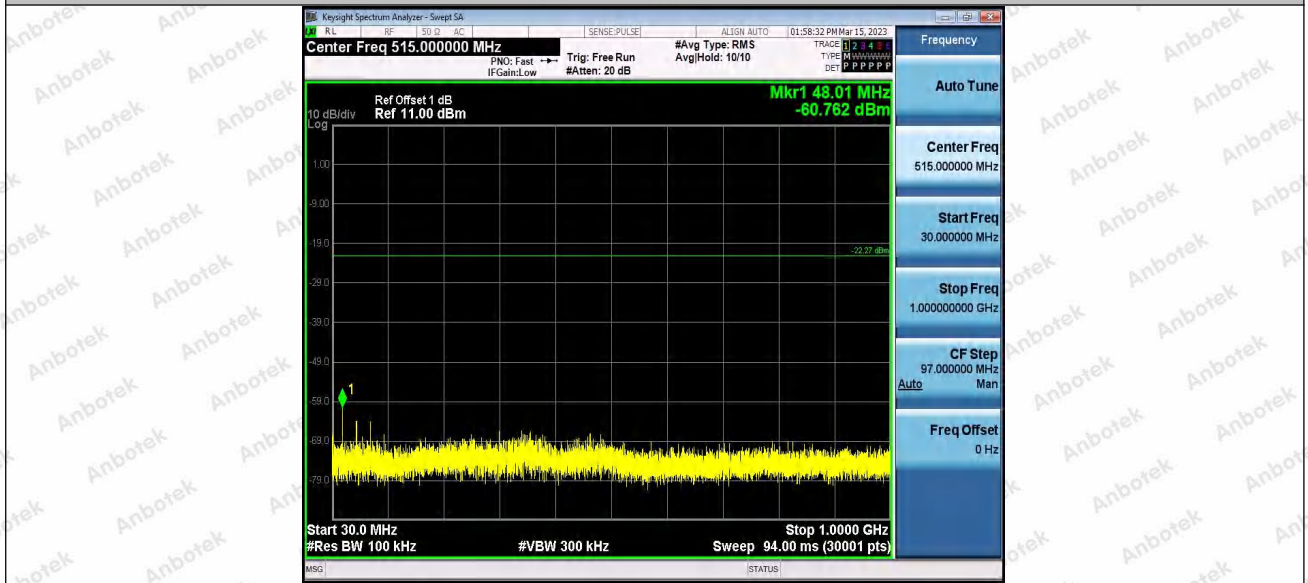

BLE\_2M\_Ant1\_2440\_1000~26500





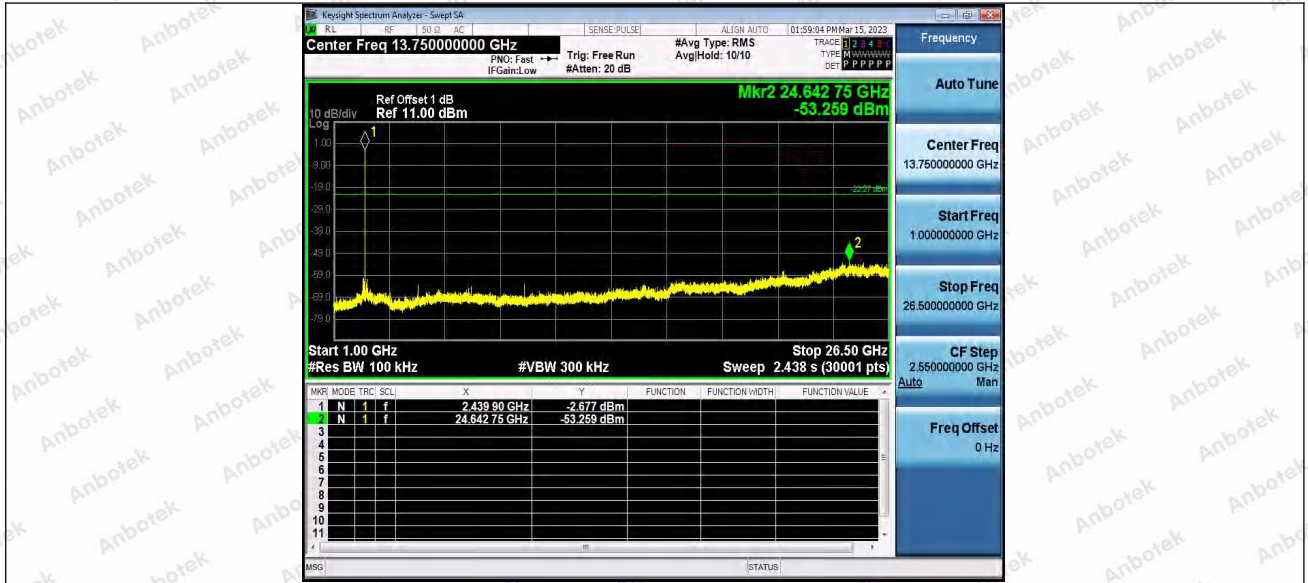


BLE\_2M\_Ant1\_2480\_0~Reference




BLE\_2M\_Ant1\_2480\_30~1000



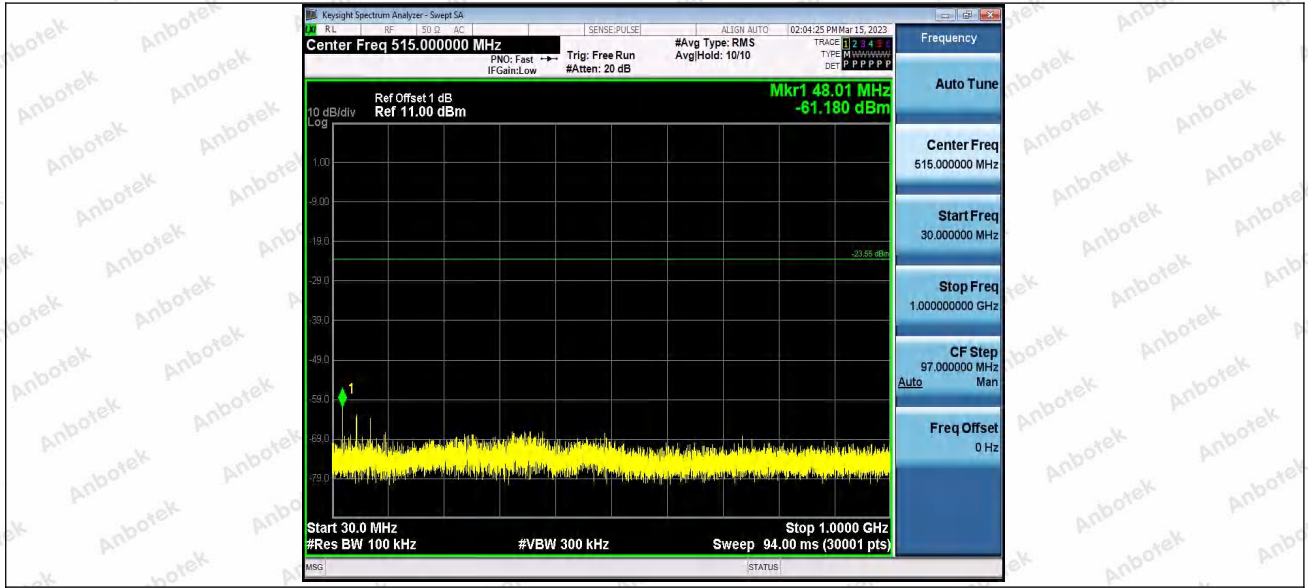

BLE\_2M\_Ant1\_2480\_1000~26500

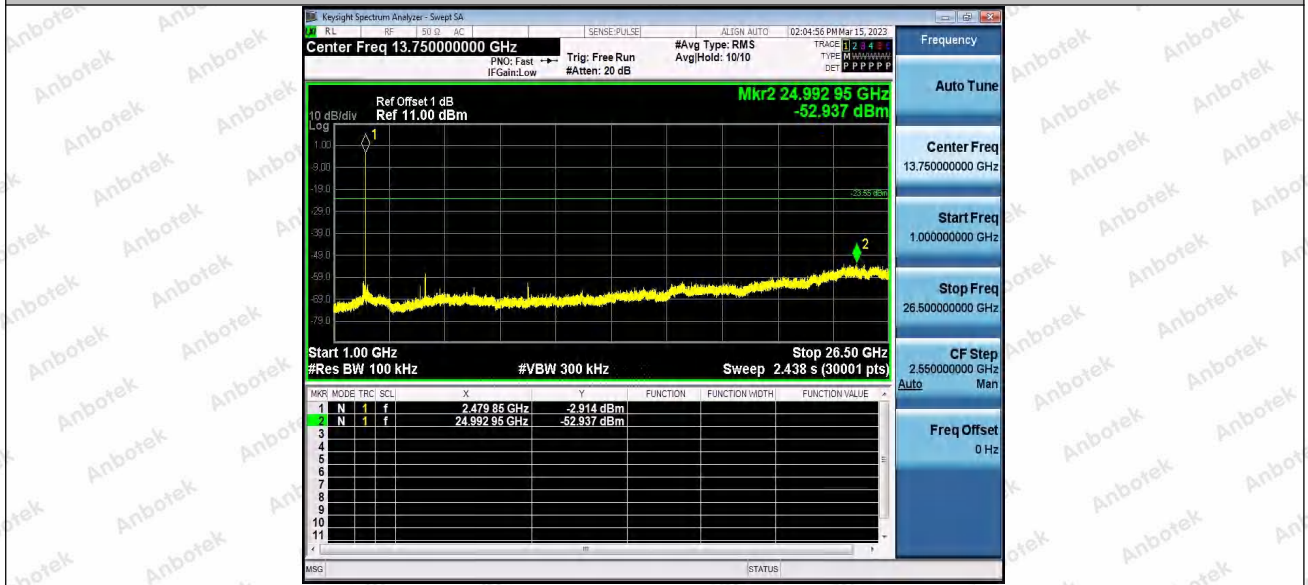



## Appendix G: Duty Cycle

### Test Result


Test Mode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2402	1.00	0.00	100	1.00
		2440	1.00	0.00	100	1.00
		2480	1.00	0.00	100	1.00
BLE_2M	Ant1	2402	1.00	0.00	100	1.00
		2440	1.00	0.00	100	1.00
		2480	1.00	0.00	100	1.00




## Test Graphs





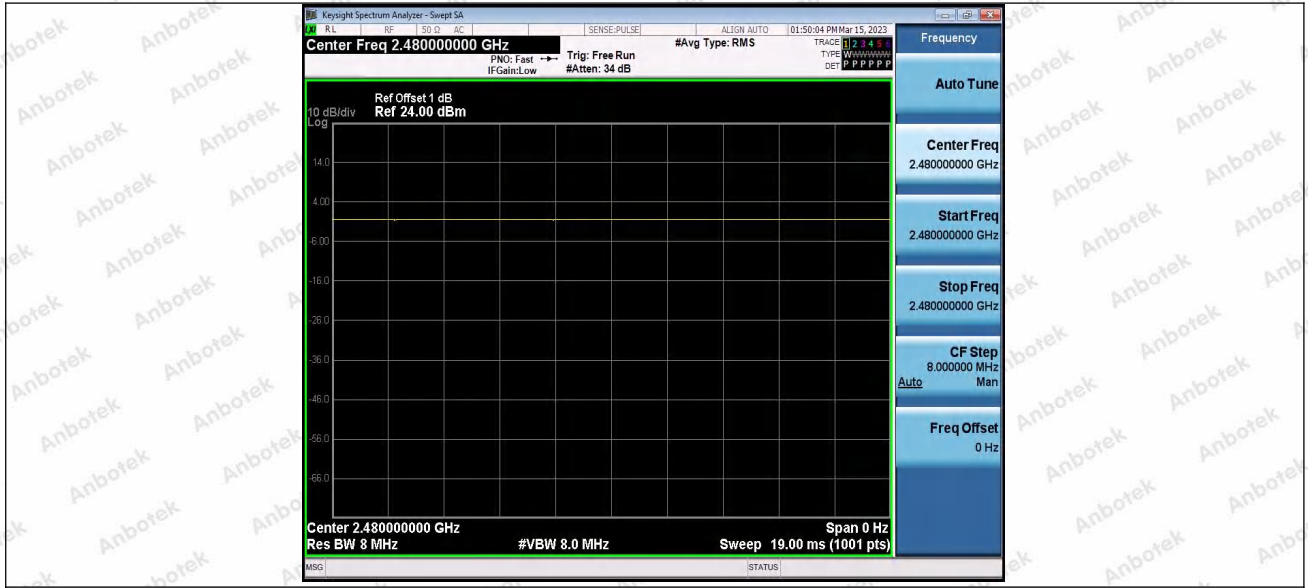


BLE\_2M\_Ant1\_2402

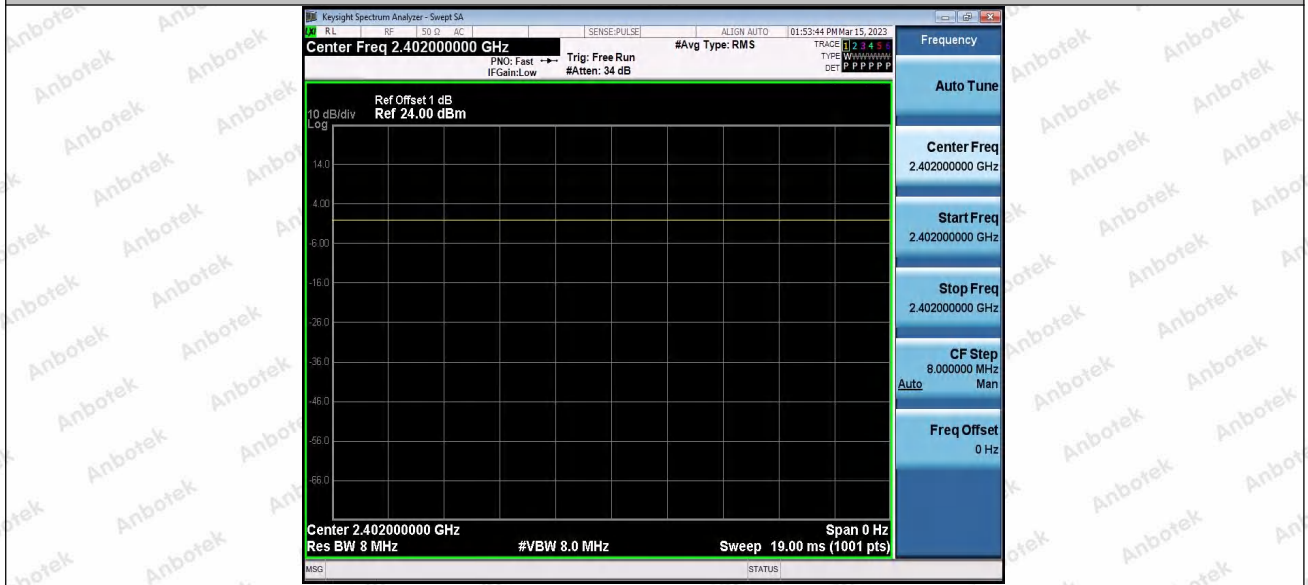


BLE\_2M\_Ant1\_2440



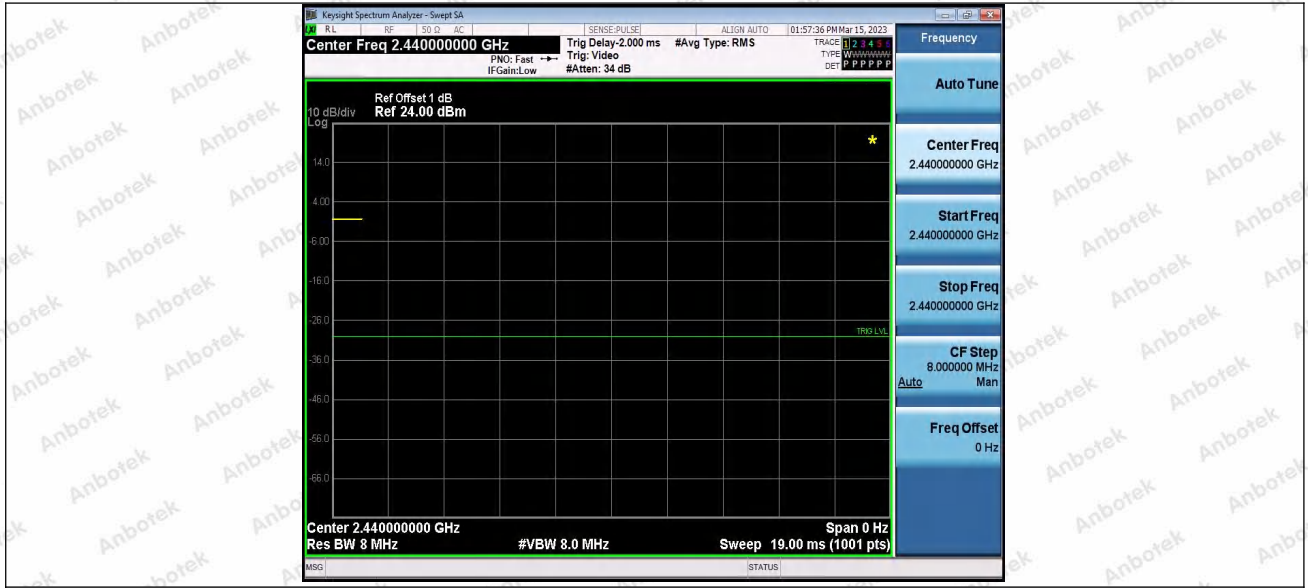

BLE\_2M\_Ant1\_2480

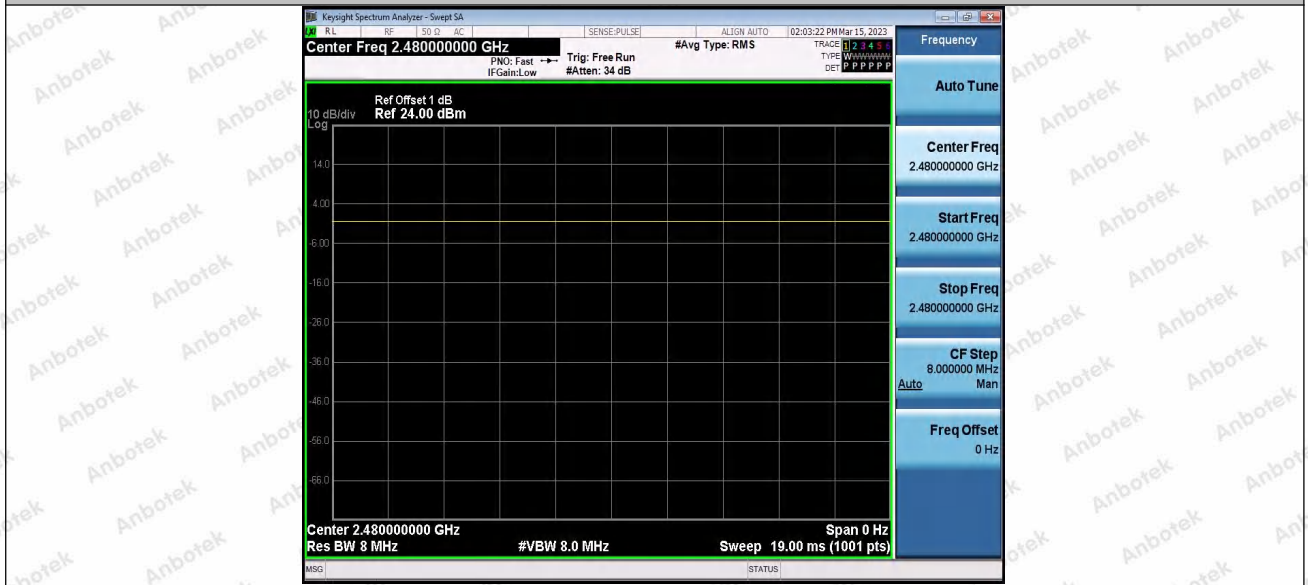

----- End of Report -----

