



# FCC SAR TEST REPORT



Issued to

**Shenzhen OnePlus Science and Technology Co., Ltd**

For

**Mobile Phone**

Model Name : ONE A0001  
 Trade Name : ONEPLUS  
 Brand Name : ONEPLUS  
 FCC ID : 2ABZ2-A0001  
 Standard : 47CFR 2.1093  
                   IEEE 1528-2013  
 MAX SAR : Head: 0.353W/Kg  
                   Body: 0.798W/Kg  
 Test date : 2014-4-9 to 2014-4-16  
 Issue date : 2014-4-28

by

**Shenzhen Morlab Communications Technology Co., Ltd.**

FL.3, Building A, FeiYang Science Park, No.8 LongChang Road,Block 67, BaoAn District,  
ShenZhen, GuangDong Province P. R. China 518101

Tested by

Zou Jian  
Zou Jian  
(Test Engineer)

Date 2014. 4. 28

Approved by



Zeng Dexin  
(Chief Engineer)

Date

2014. 4. 28

Reviewed by

Zhu Zhan  
Zhu Zhan  
( SAR Specialist)

Date

2014. 4. 28

*The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy there of prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate*



---

# DIRECTORY

<b>1. TESTING LABORATORY</b>	<b>4</b>
1.1 IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION	4
1.2 ACCREDITATION CERTIFICATE	4
1.3 LIST OF TEST EQUIPMENTS	4
<b>2. TECHNICAL INFORMATION</b>	<b>5</b>
2.1 IDENTIFICATION OF APPLICANT	5
2.2 IDENTIFICATION OF MANUFACTURER	5
2.3 EQUIPMENT UNDER TEST (EUT)	5
2.3.1 PHOTOGRAPHS OF THE EUT	6
2.3.2 IDENTIFICATION OF ALL USED EUT	6
2.4 APPLIED REFERENCE DOCUMENTS	6
2.5 DEVICE CATEGORY AND SAR LIMITS	6
<b>3. SPECIFIC ABSORPTION RATE (SAR)</b>	<b>7</b>
3.1 INTRODUCTION	7
3.2 SAR DEFINITION	7
<b>4. SAR MEASUREMENT SETUP</b>	<b>8</b>
4.1 THE MEASUREMENT SYSTEM	8
4.2 PROBE	8
4.3 PROBE CALIBRATION PROCESS	10
4.3.1 DOSIMETRIC ASSESSMENT PROCEDURE	10
4.3.2 FREE SPACE ASSESSMENT PROCEDURE	10
4.3.3 TEMPERATURE ASSESSMENT PROCEDURE	10
4.4 PHANTOM	11
4.5 DEVICE HOLDER	11
<b>5. TISSUE SIMULATING LIQUIDS</b>	<b>12</b>
<b>6. UNCERTAINTY ASSESSMENT</b>	<b>14</b>
6.1 UNCERTAINTY EVALUATION FOR EUT SAR TEST	14



6.2	UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK .....	15
<b>7.</b>	<b>SAR MEASUREMENT EVALUATION.....</b>	<b>17</b>
7.1	SYSTEM SETUP.....	17
7.2	VALIDATION RESULTS .....	18
<b>8.</b>	<b>OPERATIONAL CONDITIONS DURING TEST .....</b>	<b>19</b>
8.1	INFORMATION ON THE TESTING .....	19
8.2	BODY-WORN CONFIGURATIONS .....	20
8.3	MEASUREMENT PROCEDURE .....	20
8.4	DESCRIPTION OF INTERPOLATION/EXTRAPOLATION SCHEME .....	20
<b>9.</b>	<b>HOTSPOT MODE EVALUATION PROCEDURE .....</b>	<b>22</b>
<b>10.</b>	<b>INFORMATION RELATED TO LTE TEST PARAMETER(PER 941225 D05V02R02).....</b>	<b>23</b>
<b>11.</b>	<b>SAR EVALUATION PROCEDURES&amp;POWER MEASUREMENT FOR LTE .....</b>	<b>26</b>
<b>12.</b>	<b>WIFI (5GHZ BANDS).....</b>	<b>35</b>
<b>13.</b>	<b>MEASUREMENT OF CONDUCTED OUTPUT POWER.....</b>	<b>37</b>
<b>14.</b>	<b>TEST RESULTS LIST.....</b>	<b>41</b>
<b>15.</b>	<b>MULTIPLE TRANSMITTERS EVALUATION .....</b>	<b>49</b>
<b>16.</b>	<b>ANNEX A PHOTOGRAPHS OF THE EUT.....</b>	<b>52</b>
<b>17.</b>	<b>ANNEX B GRAPH TEST RESULTS AND SYSTEM PERFORMANCE CHECK DATA.....</b>	<b>52</b>

Change History		
Issue	Date	Reason for change
1.0	April 28, 2014	First edition

## 1. TESTING LABORATORY

### 1.1 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China 518101

### 1.2 Accreditation Certificate

Accredited Testing Laboratory: No. CNAS L3572

### 1.3 List of Test Equipments

No.	Instrument	Type	Cal. Date	Cal. Due
1	PC	Dell (Pentium IV 2.4GHz, SN:X10-23533)	(n.a)	(n.a)
2	Network Emulator	Aglient (8960, SN:10752)	2014-2-21	1year
3	Network Analyzer	Agilent(E5071B ,SN:MY42404762 )	2013-9-26	1year
4	Voltmeter	Keithley (2000, SN:1000572)	2013-9-24	1year
5	Signal Generator	Rohde&Schwarz (SMP_02 )	2013-9-24	1year
6	Power Amplifier	PRANA (Ap32 SV125AZ)	2013-9-24	1year
7	Power Meter	Agilent (E4416A, SN:MY45102093)	2013-5-07	1year
8	Power Sensor	Agilent (N8482A, SN:MY41091706)	2013-5-07	1year
9	Directional coupler	Giga-tronics(SN:1829112)	2013-9-24	1year
10	Probe	Satimo (SN:SN 37/08 EP80)	2013-9-25	1year
11	Probe 5-6GHz	Satimo (SN:SN 27/13 EPG193)	2013-9-25	1year
12	Dielectric Probe Kit	Agilent (85033E )	2013-9-24	1year
13	Phantom	Satimo (SN:SN_36_08_SAM62)	2013-9-24	1year
14	Liquid	Satimo(Last Calibration: 2014-4-9 to 2014-4-16)	N/A	N/A
15	Dipole 750MHz	Satimo (SN 30/13 DIP0G750-259)	2013-9-25	1year
16	Dipole 835MHz	Satimo (SN 20/08 DIPC 99)	2013-9-25	1year
17	Dipole 1750MHz	Satimo (SN 30/13 DIP1G750-260)	2013-9-25	1year
18	Dipole 1900MHz	Satimo (SN 30/13 DIP1G900-261)	2013-9-25	1year
19	Dipole 2450MHz	Satimo (SN 30/13 DIP2G450-263)	2013-9-25	1year
20	Waveguide 5-6GHz	Satimo (SN 41/12 WGA21)	2013-9-25	1year

## 2. TECHNICAL INFORMATION

Note: the Following data is based on the information by the applicant.

### 2.1 Identification of Applicant

Company Name:	Shenzhen OnePlus Science and Technology Co., Ltd
Address:	18C01 Shenye Tairan Building, Binhe Road North, Futian District, Shenzhen

### 2.2 Identification of Manufacturer

Company Name:	Shenzhen OnePlus Science and Technology Co., Ltd
Address:	18C01 Shenye Tairan Building, Binhe Road North, Futian District, Shenzhen

### 2.3 Equipment Under Test (EUT)

Model Name:	ONE A0001
Trade Name:	ONEPLUS
Brand Name:	ONEPLUS
Hardware Version:	214001
Software Version:	A0001_12_140215
Tx Frequency Bands:	GSM 850: 824-849 MHz; GSM 1900: 1850-1910 MHz; WCDMA Band II : 1850-1910MHz; WCDMA Band IV: 1710-1755 MHz WCDMA Band V: 824-849 MHz; LTE Band 4:1710-1755 MHz; LTE Band 17: 704-716MHz 802.11 b/g/n20/n40: 2412-2462 MHz; 802.11a/n20/n40/ac: 5.180-5.240GHz,5.745-5825GHz; Bluetooth; Bluetooth4.0;
Uplink Modulations:	GSM/GPRS: GSMK; EDGE: GMSK/8PSK; WiFi: DBPSK/CCK; WCDMA/HSDPA/HSUPA/HSPA+:QPSK; FDD LTE: QPSK/16QAM; Bluetooth: GFSK/ $\pi/4$ -DQPSK/8-DPSK; Bluetooth4.0: GFSK;
Multislot Class:	GPRS: Class 33; EDGE: Class 33;
GPRS Class:	Class B
DTM:	Not support
Antenna type:	Fixed Internal Antenna
Development Stage:	Identical prototype
3GPP Version:	Release 9
Hotspot function:	Support

### 2.3.1 Photographs of the EUT

Please refer to the External Photos for the Photos of the EUT

### 2.3.2 Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the Following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	214001	A0001_12_140215

## 2.4 Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	<b>47 CFR§2.1093</b>	Radiofrequency Radiation Exposure Evaluation: Portable Devices
2	<b>IEEE 1528-2013</b>	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
3	<b>KDB 447498 D01v05r02</b>	General RF Exposure Guidance
4	<b>KDB 248227 D01v01r02</b>	SAR Measurement Procedures for 802.11 a/b/g Transmitters
5	<b>KDB 941225 D5v02r03</b>	SAR for LTE Devices
6	<b>KDB 941225 D01v02</b>	SAR Measurement Procedures for 3G Devices
7	<b>KDB 941225 D02v02r02</b>	HSPA and 1x Advanced
8	<b>KDB 941225 D03v01</b>	SAR Test Reduction GSM GPRS EDGE
9	<b>KDB 941225 D04v01</b>	SAR for GSM E GPRS Dual Xfer Mode
10	<b>KDB941225 D06v01r01</b>	Hotspot Mode SAR
11	<b>KDB 865664 D01v01r02</b>	SAR Measurement 100 MHz to 6 GHz
12	<b>KDB 865664 D02v01r01</b>	SAR Reporting
13	<b>KDB648474 D04v01r02</b>	Handset SAR

## 2.5 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

### 3. SPECIFIC ABSORPTION RATE (SAR)

#### 3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are Middle than the limits for general population/uncontrolled.

#### 3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dv$ ) of a given density. ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by,

$$\text{SAR} = C \left( \frac{\delta T}{\delta t} \right)$$

Where  $C$  is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and  $|E|$  is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 4. SAR MEASUREMENT SETUP

### 4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the Following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The Following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

### 4.2 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 37/08 EP80 with Following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 6.5 mm
- Distance between probe tip and sensor center: 2.5mm
- Distance between sensor center and the inner phantom surface: 4 mm




(repeatability better than +/- 1mm)

- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.25 dB
- Calibration range: 835to 2500MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with CENELEC EN 62209 and IEEE 1528 std, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 622091 annex technique using reference guide at the five frequencies.

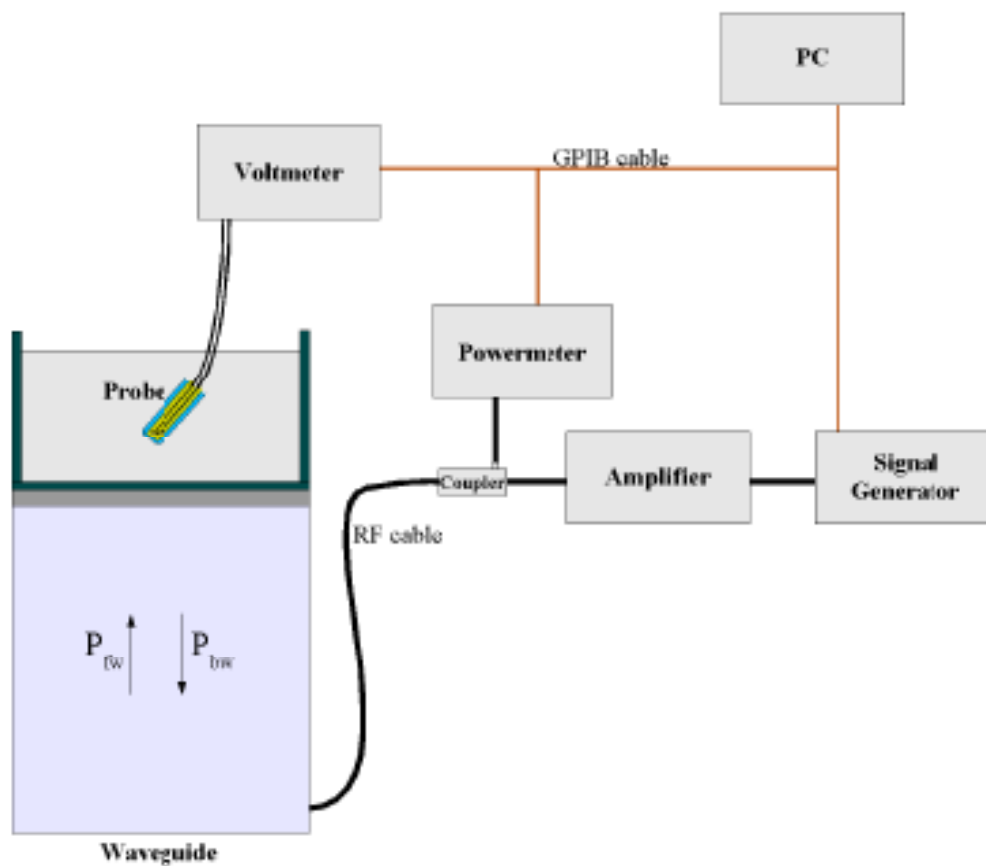

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-2z/\delta}$$

Where :

$P_{fw}$  = Forward Power

$P_{bw}$  = Backward Power

$a$  and  $b$  = Waveguide dimensions

$\delta$  = Skin depth

Keithley configuration:

Rate = Medium; Filter =ON; RDGS=10; FILTER TYPE =MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage  $V_{lin}(N)$  is obtained from the displayed output voltage  $V(N)$  using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

Where DCP is the diode compression point in mV.

## 4.3 Probe Calibration Process

### 4.3.1 Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density ( $1 \text{ mW/cm}^2$ ) using an with CALISAR, Antenna proprietary calibration system.

### 4.3.2 Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to  $1 \text{ mW/cm}^2$

### 4.3.3 Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulating head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$\delta t$  = exposure time (30 seconds),

$$SAR = C \left( \frac{\delta T}{\delta t} \right)$$

C = heat capacity of tissue (brain or muscle),

$\delta T$  = temperature increase due to RF exposure.

SAR is proportional to  $\Delta T/\Delta t$ , the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:

$\sigma$  = simulated tissue conductivity,


$\rho$  = Tissue density (1.25 g/cm<sup>3</sup> for brain tissue)

## 4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

## 4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is Middle than 1°.

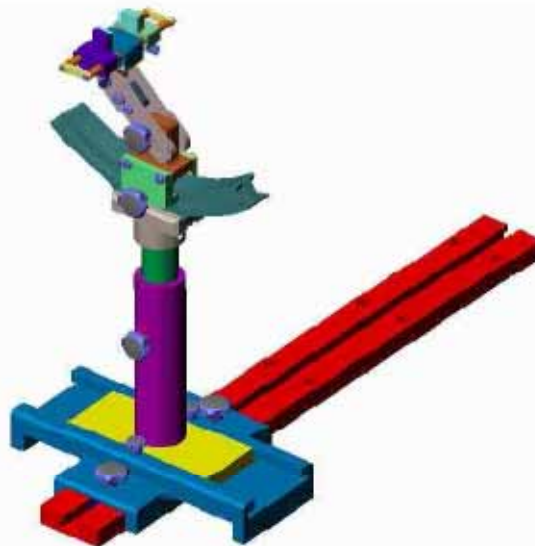

Device holder

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

## 5. TISSUE SIMULATING LIQUIDS

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in below table.

The following table gives the recipes for tissue simulating liquids

Frequency Band (MHz)	750	835		1750		1900		2450	5200-5800	
Tissue Type	Body	Head	Body	Head	Body	Head	Body	Head	Head	Body
Ingredients (% by weight )										
Deionised Water	50.00	50.36	50.20	52.64	68.80	54.90	40.40	62.70	65.52	78.60
Salt(NaCl)	0.80	1.25	0.90	0.36	0.20	0.18	0.50	0.50	0.00	0.00
Sugar	48.80	0.00	48.50	0.00	0.00	0.00	58.00	0.00	0.00	0.00
Tween 20	0.00	48.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HEC	0.20	0.00	0.20	0.00	0.00	0.00	1.00	0.00	0.00	0.00
Bactericide	0.20	0.00	0.20	0.00	0.00	0.00	0.10	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	36.80	17.24	10.70
DGBE	0.00	0.00	0.00	47.00	31.00	44.92	0.00	0.00	0.00	0.00
Diethylenglycol monohexylether	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	17.24	10.70
Measured dielectric parameters										
Dielectric Constant	55.50	41.50	56.10	40.10	53.40	39.90	53.30	39.20	Note	
Conductivity (S/m)	0.96	0.90	0.95	1.37	1.49	1.42	1.52	1.80		

Note: Please refer to the validation results for dielectric parameters of each frequency band.

The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85033E Dielectric Probe Kit and an Agilent Network Analyzer.

**Table 1: Dielectric Performance of Tissue Simulating Liquid (for Head)**

Temperature: 22.0~23.8°C, humidity: 54~60%.						
Date	Freq.(MHz)	Liquid Parameters	Meas.	Target	Delta(%)	Limit±(%)
2014/4/9	Head 835	Relative Permittivity( $\epsilon_r$ ):	41.62	41.5	0.29	5
		Conductivity( $\sigma$ ):	0.88	0.90	-2.22	5
2014/4/11	Head 1750	Relative Permittivity( $\epsilon_r$ ):	39.95	40.1	-0.37	5
		Conductivity( $\sigma$ ):	1.36	1.37	-0.73	5
2014/4/10	Head 1900	Relative Permittivity( $\epsilon_r$ ):	39.96	40.0	-0.10	5
		Conductivity( $\sigma$ ):	1.41	1.40	0.71	5
2014/4/15	Head 2450	Relative Permittivity( $\epsilon_r$ ):	39.34	39.20	0.36	5
		Conductivity( $\sigma$ ):	1.77	1.80	-1.67	5
2014/4/16	Head 5200	Relative Permittivity( $\epsilon_r$ ):	35.87	36.0	-0.36	5
		Conductivity( $\sigma$ ):	4.69	4.66	0.64	5
2014/4/16	Head 5800	Relative Permittivity( $\epsilon_r$ ):	34.96	35.5	-1.52	5
		Conductivity( $\sigma$ ):	5.19	5.27	-1.52	5

**Table 2: Dielectric Performance of Tissue Simulating Liquid (for Body)**

Temperature: 22.0~23.8°C, humidity: 54~60%.						
Date	Freq.(MHz)	Liquid Parameters	Meas.	Target	Delta(%)	Limit±(%)
2014/4/14	Body 750	Relative Permittivity( $\epsilon_r$ ):	54.68	55.55	-1.57	5
		Conductivity( $\sigma$ ):	0.97	0.96	1.04	5
2014/4/9	Body 835	Relative Permittivity( $\epsilon_r$ ):	55.07	55.2	-0.24	5
		Conductivity( $\sigma$ ):	0.96	0.97	-1.03	5
2014/4/11	Body 1750	Relative Permittivity( $\epsilon_r$ ):	53.51	53.40	0.21	5
		Conductivity( $\sigma$ ):	1.48	1.49	-0.67	5
2014/4/10	Body 1900	Relative Permittivity( $\epsilon_r$ ):	53.04	53.3	-0.49	5
		Conductivity( $\sigma$ ):	1.50	1.52	-1.32	5
2014/4/16	Body 5200	Relative Permittivity( $\epsilon_r$ ):	49.17	49.0	0.35	5
		Conductivity( $\sigma$ ):	5.25	5.30	-0.94	5
2014/4/16	Body 5800	Relative Permittivity( $\epsilon_r$ ):	48.06	48.2	-0.29	5
		Conductivity( $\sigma$ ):	5.94	6.00	-1.00	5

## 6. UNCERTAINTY ASSESSMENT

The Following table includes the uncertainty table of the IEEE 1528. The values are determined by Antennessa.

### 6.1 UNCERTAINTY EVALUATION FOR EUT SAR TEST

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/ e	k
Uncertainty Component	Sec.	Tol (+-%)	Prob Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
<b>Measurement System</b>									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.7	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.0	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.6	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.8	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.0	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.1	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Probe positioner	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.1	∞
Mechanical Tolerance								5	
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.0	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.8	∞
9									
<b>Test sample Related</b>									
Test sample positioning	E.4.2.1	0.03	N	1	1	1	0.03	0.0	N-1
Device Holder Uncertainty	E.4.1.1	5.00	N	1	1	1	5.00	5.0	N-1
Output power Power drift - SAR drift measurement	6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.3	∞
3									

Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.13	$\infty$
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.04	$\infty$
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				11.55	10.67	
Expanded Uncertainty (95% Confidence interval)			K=2				23.11	21.33	

## 6.2 UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/ e	k
Uncertainty Component	Sec.	Tol (+-%)	Prob Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
<b>Measurement System</b>									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.7	$\infty$
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.0	$\infty$
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.6	$\infty$
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	$\infty$
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.8	$\infty$
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	$\infty$
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.0	$\infty$
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	$\infty$
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.1	$\infty$
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	$\infty$


Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$
<b>Dipole</b>									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Input power and SAR drift measurement	8,6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.33	$\infty$
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.69	$\infty$
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	$\sqrt{3}$	0.64	0.43	1.85	1.85	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.28	$\infty$
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	$\sqrt{3}$	0.6	0.49	3.46	3.46	M
Combined Standard Uncertainty			RSS				8.83	8.83	
Expanded Uncertainty (95% Confidence interval)			K=2				17.66	17.66	



## 7. SAR MEASUREMENT EVALUATION

### 7.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

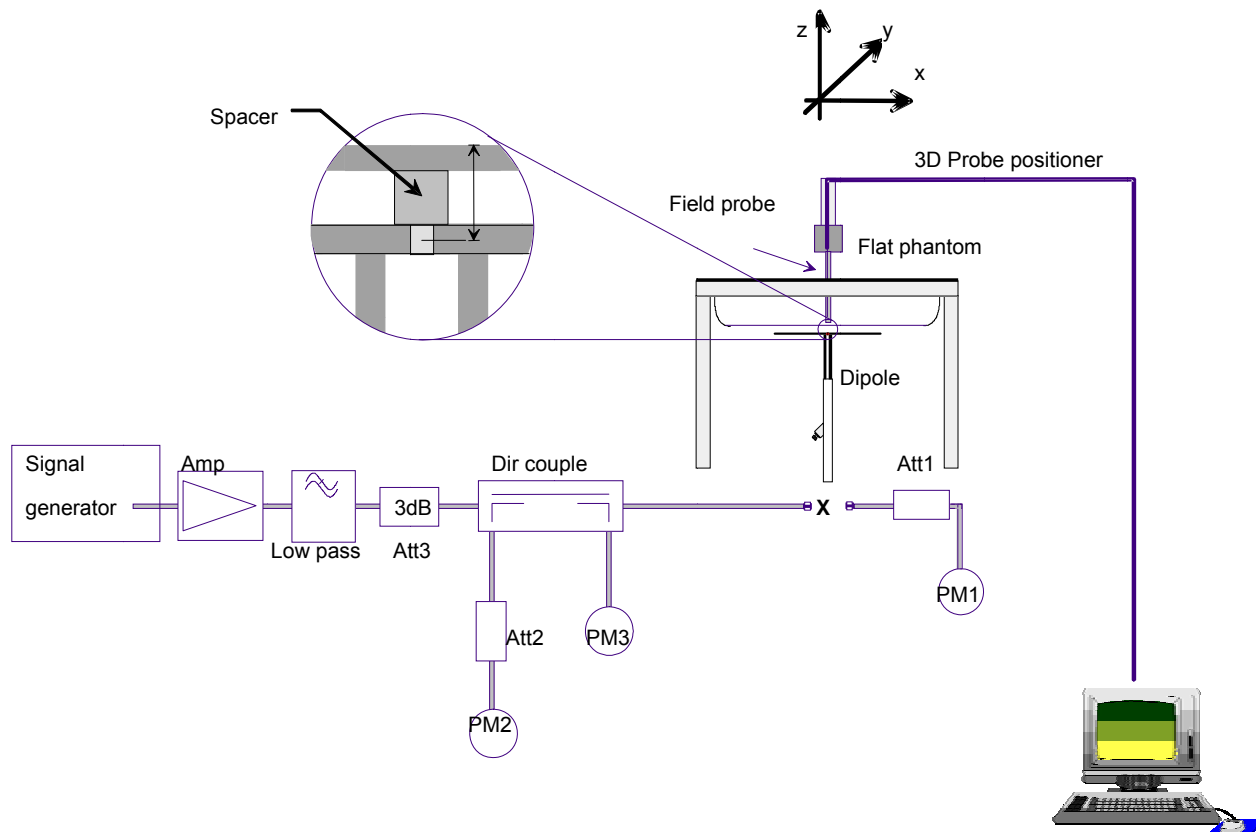

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The power meter PM1 measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

## 7.2 Validation Results

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

Frequency	750MHz(B)	835MHz(H)	835MHz(B)	1750MHz(H)	1750MHz(B)
<b>Target value 1W (1g)</b>	8.81 W/Kg	9.71 W/Kg	10.02 W/Kg	38.29 W/Kg	40.12 W/Kg
<b>Test value 1g (250 mW input power)</b>	2.158 W/Kg (4.14)	2.371 W/Kg (4.9)	2.438 W/Kg (4.9)	9.576 W/Kg (4.11)	9.963 W/Kg (4.11)
<b>Normalized to 1W value(1g)</b>	8.632 W/Kg	9.484 W/Kg	9.752 W/Kg	38.304 W/Kg	39.850 W/Kg

Frequency	1900MHz(H)	1900MHz(B)	2450MHz(H)
<b>Target value 1W (1g)</b>	39.39 W/Kg	42.33 W/Kg	54.77 W/Kg
<b>Test value 1g (250 mW input power)</b>	9.752 W/Kg (4.10)	9.961 W/Kg (4.10)	12.823 W/Kg (4.15)
<b>Normalized to 1W value(1g)</b>	39.008 W/Kg	39.844 W/Kg	51.292 W/Kg

Frequency	5200MHz(H)	5200MHz(B)	5800MHz(H)	5800MHz(B)
<b>Target value 1W (1g)</b>	164.560W/Kg	169.190W/Kg	192.070 W/Kg	201.620 W/Kg
<b>Test value 1g (100 mW input power)</b>	15.751 W/Kg (4.16)	16.084 W/Kg (4.16)	19.234 W/Kg (4.16)	21.372 W/Kg (4.16)
<b>Normalized to 1W value(1g)</b>	157.510W/Kg	160.840 W/Kg	192.340 W/Kg	213.720 W/Kg


**Note:** System checks the specific test data please see Annex B.

## 8. OPERATIONAL CONDITIONS DURING TEST


### 8.1 Information on the testing

The mobile phone antenna and battery are those specified by the manufacturer. The battery is fully charged before each measurement. The output power and frequency are controlled using a base station simulator. The mobile phone is set to transmit at its Highest output peak power level.

The mobile phone is test in the “cheek” and “tilted” positions on the left and right sides of the phantom. The mobile phone is placed with the vertical centre line of the body of the mobile phone and the horizontal line crossing the centre of the earpiece in a plane parallel to the sagittal plane of the phantom.

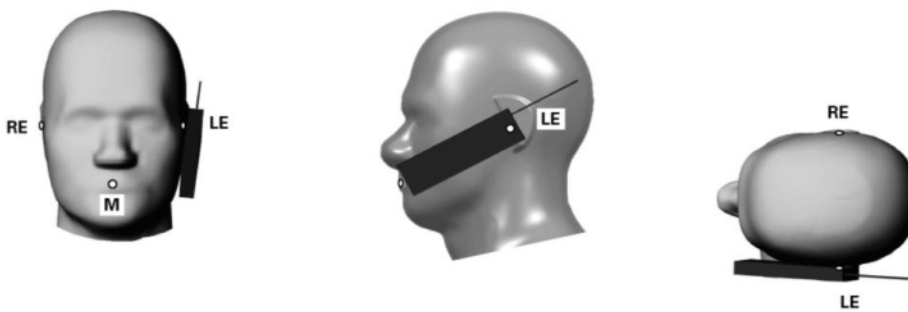

**Illustration for Cheek Position**

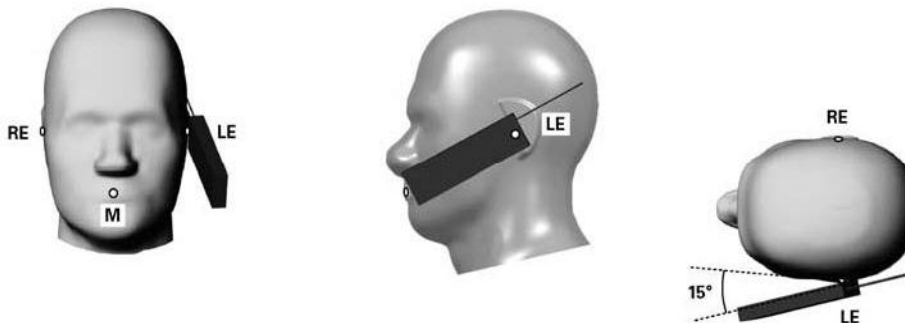

**Illustration for Tilted Position**

Description of the “cheek” position:

The mobile phone is well placed in the reference plane and the earpiece is in contact with the ear. Then the mobile phone is moved until any point on the front side get in contact with the cheek of the phantom or until contact with the ear is lost.

Description of the “tilted” position:

The mobile phone is well placed in the “cheek” position as described above. Then the mobile phone is moved outward away from the month by an angle of 15 degrees or until contact with the ear lost.

Remark: Please refer to Appendix B for the test setup photos.

## 8.2 Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

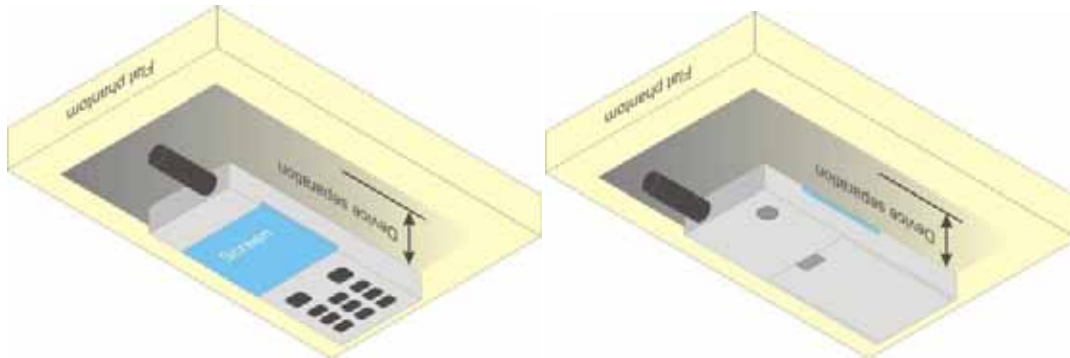


Illustration for Body Worn Position

## 8.3 Measurement procedure

The Following steps are used for each test position

1. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
2. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
3. Measurement of the SAR distribution with a grid of 8 to 16mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
4. Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8\*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

## 8.4 Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.



An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.


The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

## 9. HOTSPOT MODE EVALUATION PROCEDURE

The SAR evaluation procedures for Portable Devices with Wireless Router function is according to KDB 941225 D06 Hot Spot SAR v01r01.

SAR must be tested for all surfaces and edges (side) with a transmitting antenna with in 2.5 cm from that surface or edge, at a test separation distance of 10 mm, in the wireless mode that support wireless routing.

Edge configurations:

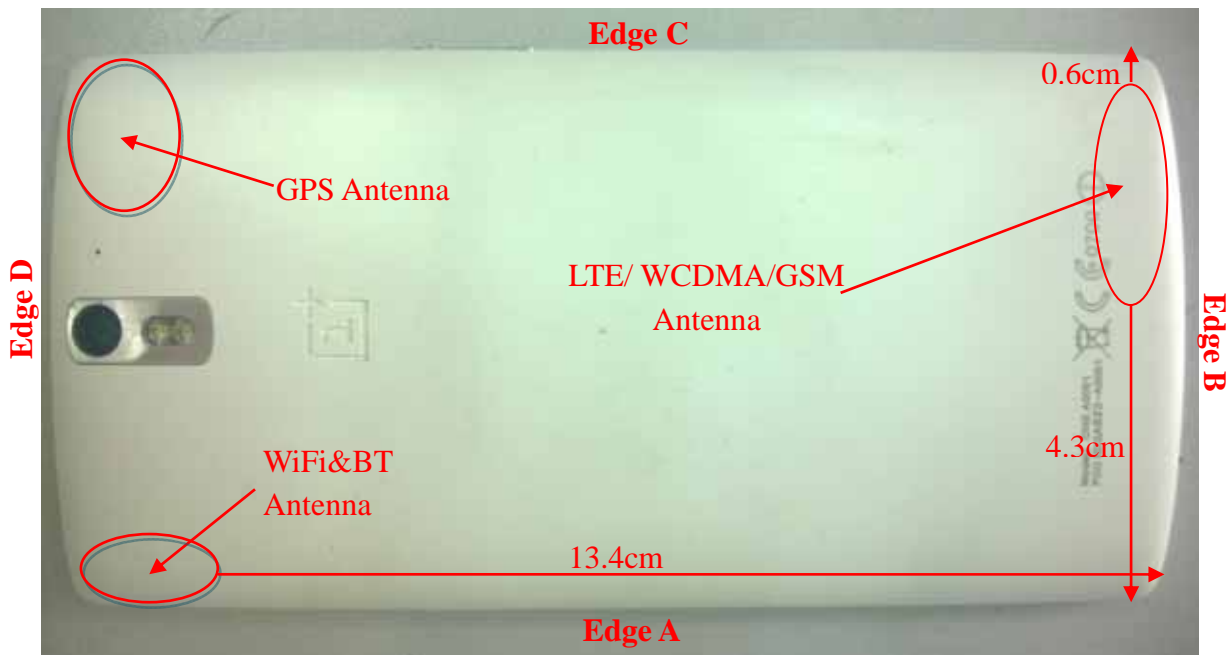

Assessment	Hotspot side for SAR					
	Test distance: 10mm					
Antennas	Back	Front	Edge A	Edge B	Edge C	Edge D
WCDMA/GSM/LTE	Yes	Yes	No	Yes	Yes	No
WLAN&BT	Yes	Yes	Yes	No	No	Yes

**10. Information Related to LTE Test parameter(Per 941225 D05v02r02)**

1	Identify the operating frequency range of each LTE transmission FCC band used by the device	Band 4 Tx:1710-1755 MHz Rx:2100-2155 MHz Band 17 Tx:704-716 MHz Rx:734-746 MHz																																																																						
2	Identify the high, middle and low (L, M, H) channel numbers and frequencies tested in each LTE frequency band	<table border="1"> <thead> <tr> <th data-bbox="600 481 740 528">Band4</th> <th colspan="6" data-bbox="740 481 1557 528">Channel Bandwidth</th> </tr> <tr> <th data-bbox="600 528 740 575"></th> <th data-bbox="740 528 871 575">20Mhz</th> <th data-bbox="871 528 1002 575">15MHz</th> <th data-bbox="1002 528 1133 575">10MHz</th> <th data-bbox="1133 528 1264 575">5MHz</th> <th data-bbox="1264 528 1394 575">3MHz</th> <th data-bbox="1394 528 1557 575">1.4MHz</th> </tr> </thead> <tbody> <tr> <td data-bbox="600 575 740 658">Low</td> <td data-bbox="740 575 871 658">20050/ 1720</td> <td data-bbox="871 575 1002 658">20025/ 1717.5</td> <td data-bbox="1002 575 1133 658">20000/ 1715</td> <td data-bbox="1133 575 1264 658">19975/ 1712.5</td> <td data-bbox="1264 575 1394 658">19965/ 1711.5</td> <td data-bbox="1394 575 1557 658">19957/ 1710.7</td> </tr> <tr> <td data-bbox="600 658 740 741">Middle</td> <td data-bbox="740 658 871 741">20175/ 1732.5</td> <td data-bbox="871 658 1002 741">20175/ 1732.5</td> <td data-bbox="1002 658 1133 741">20175/ 1732.5</td> <td data-bbox="1133 658 1264 741">20175/ 1732.5</td> <td data-bbox="1264 658 1394 741">20175/ 1732.5</td> <td data-bbox="1394 658 1557 741">20175/ 1732.5</td> </tr> <tr> <td data-bbox="600 741 740 824">High</td> <td data-bbox="740 741 871 824">20300/ 1745</td> <td data-bbox="871 741 1002 824">20325/ 1747.5</td> <td data-bbox="1002 741 1133 824">20350/ 1750</td> <td data-bbox="1133 741 1264 824">20375/ 1752.5</td> <td data-bbox="1264 741 1394 824">20385/ 1753.5</td> <td data-bbox="1394 741 1557 824">20393/ 1754.3</td> </tr> <tr> <th data-bbox="600 824 740 871">Band17</th> <th colspan="6" data-bbox="740 824 1557 871">Channel Bandwidth</th> </tr> <tr> <th data-bbox="600 871 740 918"></th> <th data-bbox="740 871 871 918">20Mhz</th> <th data-bbox="871 871 1002 918">15MHz</th> <th data-bbox="1002 871 1133 918">10MHz</th> <th data-bbox="1133 871 1264 918">5MHz</th> <th data-bbox="1264 871 1394 918">3MHz</th> <th data-bbox="1394 871 1557 918">1.4MHz</th> </tr> <tr> <td data-bbox="600 918 740 1001">Low</td> <td data-bbox="740 918 871 1001"></td> <td data-bbox="871 918 1002 1001"></td> <td data-bbox="1002 918 1133 1001">23780/ 709</td> <td data-bbox="1133 918 1264 1001">23755/ 706.5</td> <td data-bbox="1264 918 1394 1001"></td> <td data-bbox="1394 918 1557 1001"></td> </tr> <tr> <td data-bbox="600 1001 740 1084">Middle</td> <td data-bbox="740 1001 871 1084"></td> <td data-bbox="871 1001 1002 1084"></td> <td data-bbox="1002 1001 1133 1084">23790/ 710</td> <td data-bbox="1133 1001 1264 1084">23790/ 710</td> <td data-bbox="1264 1001 1394 1084"></td> <td data-bbox="1394 1001 1557 1084"></td> </tr> <tr> <td data-bbox="600 1084 740 1189">High</td> <td data-bbox="740 1084 871 1189"></td> <td data-bbox="871 1084 1002 1189"></td> <td data-bbox="1002 1084 1133 1189">23800/ 711</td> <td data-bbox="1133 1084 1264 1189">23825/ 713.5</td> <td data-bbox="1264 1084 1394 1189"></td> <td data-bbox="1394 1084 1557 1189"></td> </tr> </tbody> </table>	Band4	Channel Bandwidth							20Mhz	15MHz	10MHz	5MHz	3MHz	1.4MHz	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7	Middle	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3	Band17	Channel Bandwidth							20Mhz	15MHz	10MHz	5MHz	3MHz	1.4MHz	Low			23780/ 709	23755/ 706.5			Middle			23790/ 710	23790/ 710			High			23800/ 711	23825/ 713.5		
Band4	Channel Bandwidth																																																																							
	20Mhz	15MHz	10MHz	5MHz	3MHz	1.4MHz																																																																		
Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7																																																																		
Middle	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5																																																																		
High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3																																																																		
Band17	Channel Bandwidth																																																																							
	20Mhz	15MHz	10MHz	5MHz	3MHz	1.4MHz																																																																		
Low			23780/ 709	23755/ 706.5																																																																				
Middle			23790/ 710	23790/ 710																																																																				
High			23800/ 711	23825/ 713.5																																																																				
3	Specify the UE category and uplink modulations used	The UE Category is 4 and the uplink modulations used are QPSK and 16QAM.																																																																						
4	Descriptions of the LTE transmitter and antenna implementation & identify whether it is a standalone transmitter operating independently of other wireless transmitters in the device or sharing hardware components and/or antenna(s) with other transmitters etc.	The module has a primary antenna for all LTE&UMTS&GSM bands, a WiFi Tx/Rx antenna and a GPS Rx antenna, a NFC antenna.																																																																						
5	Identify the LTE Band Voice/data requirements in each operating mode and exposure condition with respect to head and body test configurations, antenna	Mobile Hotspot Mode will be tested according to Section 9 of this report.																																																																						

	locations, handset flip-cover or slide positions, antenna diversity conditions, etc.																																							
6	<p>Identify if Maximum Power Reduction (MPR) is optional or mandatory, i.e. built-in by design: only mandatory MPR may be considered during SAR testing, when the maximum output power is permanently limited by the MPR implemented within the UE; and only for the applicable RB (resource block) configurations specified in LTE standards</p> <p>b) A-MPR (additional MPR) must be disabled.</p>	<p>As per 3GPP TS 36.101 v11.0.0 (2012-03)</p> <p><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (<math>N_{RB}</math>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p>A-MPR is supported by design, but disable for SAR testing.</p>	Modulation	Channel bandwidth / Transmission bandwidth ( $N_{RB}$ )						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth ( $N_{RB}$ )						MPR (dB)																																	
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																		
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																	
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																	
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																	
7	<p>Include the maximum average conducted output power measured on the required test channels for each channel bandwidth and UL modulation used in each frequency band:</p> <p>a) with 1 RB allocated at the low, centred, high end of a channel</p> <p>b) using 50% RB allocation low, centered, high end within a channel</p> <p>c) using 100% RB allocation</p>	<p>This is included in the section 11 of this report.</p>																																						
8	<p>Include the maximum average conducted output power measured for the other wireless mode and frequency bands</p>	<p>This is included in the section 13 of this report.</p>																																						



10	<p>Identify the simultaneous transmission conditions for the voice and data configurations supported by all wireless modes, device configurations and frequency bands, for the head and body exposure conditions and device operating configurations (handset flip or cover positions, antenna diversity conditions etc.)</p>	<table border="1"> <thead> <tr> <th colspan="7">Simultaneous transmission conditions</th> </tr> <tr> <th rowspan="2">#</th> <th colspan="3">WWAN</th> <th colspan="2">WLAN</th> <th rowspan="2">Sum of WWAN&amp; WLAN</th> </tr> <tr> <th>LTE Data</th> <th>GSM</th> <th>UMTS</th> <th>802.11 a/b/g/n</th> <th>BT</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>x</td> <td></td> <td></td> <td>x</td> <td></td> <td>x</td> </tr> <tr> <td>2</td> <td></td> <td>x</td> <td></td> <td>x</td> <td></td> <td>x</td> </tr> <tr> <td>3</td> <td></td> <td></td> <td>x</td> <td>x</td> <td></td> <td>x</td> </tr> <tr> <td>4</td> <td>x</td> <td></td> <td></td> <td></td> <td>x</td> <td>x</td> </tr> <tr> <td>5</td> <td></td> <td>x</td> <td></td> <td></td> <td>x</td> <td>x</td> </tr> <tr> <td>6</td> <td></td> <td></td> <td>x</td> <td></td> <td>x</td> <td>x</td> </tr> </tbody> </table>	Simultaneous transmission conditions							#	WWAN			WLAN		Sum of WWAN& WLAN	LTE Data	GSM	UMTS	802.11 a/b/g/n	BT	1	x			x		x	2		x		x		x	3			x	x		x	4	x				x	x	5		x			x	x	6			x		x	x
Simultaneous transmission conditions																																																															
#	WWAN			WLAN		Sum of WWAN& WLAN																																																									
	LTE Data	GSM	UMTS	802.11 a/b/g/n	BT																																																										
1	x			x		x																																																									
2		x		x		x																																																									
3			x	x		x																																																									
4	x				x	x																																																									
5		x			x	x																																																									
6			x		x	x																																																									
11	<p>When power reduction is applied to certain wireless modes to satisfy SAR compliance for simultaneous transmission conditions, other equipment certification or operating requirements, include the maximum average conducted output power measured in each power reduction mode applicable to the simultaneous voice/data transmission configurations for such wireless configurations and frequency bands; and also include details of the power reduction implementation and measurement setup</p>	<p>Not applicable.</p>																																																													

## 11. SAR EVALUATION PROCEDURES&POWER MEASUREMENT FOR LTE

### “1. QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and *required test channel* combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each *required test channel*. When the *reported SAR* is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and *required test channels* is not required for 1 RB allocation; otherwise, SAR is required for the remaining *required test channels* and only for the RB offset configuration with the highest output power for that channel.6 When the *reported SAR* of a *required test channel* is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that *required test channel*.

### 2. QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1. are applied to measure the SAR for QPSK with 50% RB allocation.

### 3. QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest *reported SAR* for 1 RB and 50% RB allocation in 1. and 2. are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel and if the *reported SAR* is  $> 1.45$  W/kg, the remaining *required test channels* must also be tested.

### Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 1. and 2.and 3. to determine the QAM configurations that may need SAR measurement.

For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> \frac{1}{2}$  dB higher than the same configuration in QPSK or when the *reported SAR* for the QPSK configuration is  $> 1.45$  W/kg.

### 4. Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 5.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> \frac{1}{2}$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the *reported SAR* of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.

The equivalent channel configuration for the RB allocation, RB offset and modulation etc. Is determined for the smaller channel bandwidth according to the same number of RB allocated in The largest channel bandwidth. For example, 50 RB in 10 MHz channel bandwidth does not apply to 5MHz channel bandwidth; therefore, this cannot be tested in the smaller channel bandwidth. However, 50% RB allocation in 10 MHz channel bandwidth is equivalent to 100% RB allocation in 5 MHz channel bandwidth; therefore, these are the equivalent configurations to be compared to determine the specific channel and configuration in the smaller channel bandwidth that need SAR testing.”



**LTE BAND 4**

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
20MHz	L 20050	1720.0	QPSK	1	0	23.31
				1	49	23.28
				1	99	23.32
				50	0	22.54
				50	25	22.46
				50	49	22.61
			16-QAM	100	0	22.41
				1	0	22.52
				1	49	22.48
				1	99	22.53
				50	0	22.06
				50	25	21.86
	M 20175	1732.5	QPSK	50	49	22.10
				100	0	22.03
				1	0	23.23
				1	49	23.35
				1	99	23.24
				50	0	22.67
			16-QAM	50	25	22.82
				50	49	22.36
				100	0	22.31
				1	0	22.43
				1	49	22.58
				1	99	22.37
	H 20300	1745.0	QPSK	50	0	21.67
				50	25	22.03
				50	49	21.74
100				0	22.11	
1				0	23.26	
1				49	23.41	
16-QAM			1	99	23.27	
			50	0	22.57	
			50	25	22.62	
			50	49	22.45	
			100	0	22.32	
			1	0	22.28	
			16-QAM	1	49	22.33
				1	99	22.29
				50	0	21.95
				50	25	22.00
				50	49	21.76
				100	0	22.05



LTE BAND 4 (Continue)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
15MHz	L 20025	1717.5	QPSK	1	0	23.22
				1	37	23.18
				1	74	23.21
				36	0	22.62
				36	18	22.43
				36	35	22.51
				75	0	22.49
			16-QAM	1	0	22.42
				1	37	22.26
				1	74	22.38
				36	0	21.66
				36	18	21.49
				36	35	21.58
				75	0	21.60
	M 20175	1732.5	QPSK	1	0	23.15
				1	37	23.06
				1	74	23.14
				36	0	22.75
				36	18	22.53
				36	35	22.61
				75	0	22.32
			16-QAM	1	0	22.48
				1	37	22.52
				1	74	22.62
				36	0	21.95
				36	18	22.01
				36	35	21.86
				75	0	21.88
	H 20325	1747.5	QPSK	1	0	23.04
				1	37	23.00
1				74	23.03	
36				0	22.24	
36				18	22.16	
36				35	22.20	
75				0	22.18	
16-QAM			1	0	22.24	
			1	37	22.12	
			1	74	22.35	
			36	0	21.86	
			36	18	21.78	
			36	35	21.92	
			75	0	22.02	



LTE BAND 4 (Continue)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
10MHz	L 20000	1715.0	QPSK	1	0	23.17
				1	24	23.21
				1	49	23.19
				25	0	22.44
				25	12	22.38
				25	24	22.51
			16-QAM	50	0	22.55
				1	0	22.46
				1	24	22.39
				1	49	22.51
				25	0	21.85
				25	12	21.82
	M 20175	1732.5	QPSK	25	24	21.92
				50	0	21.98
				1	0	23.11
				1	24	23.24
				1	49	23.11
				25	0	22.67
			16-QAM	25	12	22.55
				25	24	22.62
				50	0	22.59
				1	0	22.61
				1	24	22.52
				1	49	22.56
	H 20350	1750.0	QPSK	25	0	21.85
				25	12	21.79
				25	24	21.92
50				0	21.89	
1				0	23.13	
1				24	23.22	
16-QAM			1	49	23.12	
			25	0	22.84	
			25	12	22.85	
			25	24	22.71	
			50	0	22.65	
			1	0	22.98	
				1	24	22.85
				1	49	22.96
				25	0	22.13
				25	12	22.20
				25	24	22.17
				50	0	21.85
				50	0	21.85



LTE BAND 4 (Continue)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
5MHz	L 19975	1712.5	QPSK	1	0	23.16
				1	12	23.06
				1	24	23.17
				12	0	22.35
				12	6	22.28
				12	11	22.41
				25	0	22.43
			16-QAM	1	0	22.44
				1	12	22.38
				1	24	22.33
				12	0	21.84
				12	6	21.69
				12	11	21.91
				25	0	21.88
	M 20175	1732.5	QPSK	1	0	23.08
				1	12	23.11
				1	24	23.09
				12	0	22.42
				12	6	22.51
				12	11	22.36
				25	0	22.41
			16-QAM	1	0	22.51
				1	12	22.46
				1	24	22.39
				12	0	21.86
				12	6	21.75
				12	11	21.94
25				0	21.89	
H 20375	1752.5	QPSK	1	0	23.04	
			1	12	23.00	
			1	24	23.01	
			12	0	22.24	
			12	6	22.16	
			12	11	22.21	
			25	0	22.34	
		16-QAM	1	0	22.89	
			1	12	22.71	
			1	24	22.83	
			12	0	22.01	
			12	6	21.89	
			12	11	22.03	
			25	0	21.94	



LTE BAND 4 (Continue)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
3MHz	L 19965	1711.5	QPSK	1	0	23.21
				1	7	23.16
				1	14	23.23
				8	0	22.24
				8	4	22.20
				8	7	22.31
			16-QAM	15	0	22.35
				1	0	22.42
				1	7	22.35
				1	14	22.38
				8	0	21.95
				8	4	21.93
				8	7	21.96
				15	0	21.88
				M 20175	1732.5	QPSK
	1	7	23.11			
	1	14	23.24			
	8	0	22.51			
	8	4	22.46			
	8	7	22.52			
	16-QAM	15	0			22.49
		1	0			22.37
		1	7			22.42
		1	14			22.39
		8	0			21.86
		8	4			21.79
		8	7			21.92
		15	0			21.87
		H 20384	1753.4			QPSK
	1			7	23.15	
1	14			23.12		
8	0			22.43		
8	4			22.57		
8	7			22.31		
16-QAM	15			0	22.44	
	1			0	22.38	
	1			7	22.41	
	1			14	22.36	
	8			0	21.85	
	8			4	21.95	
	8			7	21.88	
	15			0	21.90	



LTE BAND 4 (Continue)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
1.4MHz	L 19957	1710.7	QPSK	1	0	23.21
				1	2	23.16
				1	5	23.20
				3	0	22.34
				3	1	22.28
				3	2	22.41
			16-QAM	6	0	22.29
				1	0	22.42
				1	2	22.39
				1	5	22.51
				3	0	21.86
				3	1	21.91
	M 20175	1732.5	QPSK	3	2	21.89
				6	0	21.88
				1	0	23.12
				1	2	23.09
				1	5	23.10
				3	0	22.19
			16-QAM	3	1	22.16
				3	2	22.24
				6	0	22.36
				1	0	22.35
				1	2	22.24
				1	5	22.26
	H 20392	1754.2	QPSK	3	0	21.76
				3	2	21.68
				3	5	21.84
				6	0	21.86
				1	0	23.02
				1	2	22.94
16-QAM			1	5	23.03	
			3	0	22.16	
			3	1	22.09	
			3	2	22.13	
			6	0	22.21	
			1	0	22.59	
				1	2	22.74
				1	5	22.87
				3	0	22.00
				3	1	21.95
				3	2	21.86
				6	0	22.01
				6	0	22.01





**LTE BAND 17**

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
10MHz	L 23780	709.0	QPSK	1	0	23.16
				1	24	23.02
				1	49	23.17
				25	0	22.38
				25	12	22.26
				25	24	22.40
				50	0	22.33
			16-QAM	1	0	22.21
				1	24	22.19
				1	49	22.26
				25	0	21.85
				25	12	21.76
				25	24	21.87
				50	0	21.89
	M 23790	710.0	QPSK	1	0	23.07
				1	24	23.10
				1	49	23.08
				25	0	22.24
				25	12	22.16
				25	24	22.20
				50	0	22.18
			16-QAM	1	0	22.29
				1	24	22.21
				1	49	22.24
				25	0	21.95
				25	12	21.84
				25	24	21.92
				50	0	21.86
	H 23800	711.0	QPSK	1	0	23.13
				1	24	23.20
1				49	23.12	
25				0	22.51	
25				12	22.46	
25				24	22.57	
50				0	22.43	
16-QAM			1	0	22.41	
			1	24	22.35	
			1	49	22.52	
			25	0	21.95	
			25	12	21.86	
			25	24	21.99	
			50	0	21.85	



LTE BAND 17 (Continue)

Band Width	Channel	Freq.(MHZ)	Modulation	RB Configuration		Average Power (dBm)
				RB Size	RB Offset	
5MHz	L 23755	706.5	QPSK	1	0	23.14
				1	12	23.02
				1	24	23.16
				12	0	22.28
				12	6	22.17
				12	11	22.30
			16-QAM	25	0	22.41
				1	0	22.38
				1	12	22.29
				1	24	22.31
				12	0	21.76
				12	6	21.69
	M 23790	710.0	QPSK	12	11	21.81
				25	0	21.79
				1	0	23.15
				1	12	23.10
				1	24	23.15
				12	0	22.52
			16-QAM	12	6	22.49
				12	11	22.62
				25	0	22.53
				1	0	22.62
				1	12	22.52
				1	24	22.63
	H 23825	713.5	QPSK	12	0	22.03
				12	6	21.76
				12	11	21.92
25				0	21.87	
1				0	23.11	
1				12	23.05	
16-QAM			1	24	23.09	
			12	0	22.41	
			12	6	22.36	
			12	11	22.39	
			25	0	22.51	
			1	0	22.57	
1	12	22.61				
1	24	22.89				
12	0	21.94				
12	6	22.03				
12	11	21.86				
25	0	21.99				

## 12. WIFI (5GHZ BANDS)

Required Test Channels per KDB 248227 D01

Mode		Band	GHz	Channel	"Default Test Channels"	
					802.11	
802.11a	UNII (15.407)	5.2GHz	5.18	36	√	
			5.20	40		*
			5.22	44		*
			5.24	48	√	
	DTS (15.247)	5.8GHz	5.745	149	√	
			5.765	153		*
			5.785	157	√	
			5.805	161		*
			5.825	165	√	

√ = "default test channels"

\* = possible 802.11a channels with maximum average output > the "default test channels"

# = when output power is reduced for channel 1 and/or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested

### Measured Results

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			802.11a	802.11n20	802.11ac20
Wi-Fi 5.2GHz	36	5180	13.78	9.92	10.03
	40	5200	13.72	9.96	9.85
	44	5220	13.73	9.98	9.87
	48	5240	13.82	9.88	9.92

Band	Channel	Frequency (MHz)	Output Power(dBm)	
			802.11n40	802.11ac
Wi-Fi 5.2GHz	38	5190	8.63	8.96
	46	5230	8.52	9.20



Band	Channel	Frequency (MHz)	Output Power(dBm)		
			802.11a	802.11n	802.11ac
Wi-Fi 5.8GHz (UNII)	149	5745	10.61	10.80	10.60
	153	5765	10.74	10.37	10.33
	157	5785	10.53	10.41	10.65
	161	5805	10.94	10.75	10.71
	165	5825	10.80	10.92	10.63

Band	Channel	Frequency (MHz)	Output Power(dBm)	
			802.11n40	802.11ac40
Wi-Fi 5.8GHz (UNII)	151	5755	10.25	7.55
	159	5795	10.21	7.48

### 13. MEASUREMENT OF CONDUCTED OUTPUT POWER

#### 1. WCDMA mode conducted output power values

Item	band	WCDMA 850			WCDMA 1700			WCDMA 1900		
	ARFCN	4132	4175	4233	1312	1412	1513	9262	9400	9538
	subtest	dBm			dBm			dBm		
5.2(WCDMA)	non	24.37	24.43	23.55	20.64	20.76	20.45	23.82	23.68	23.73
HSDPA	1	24.31	24.35	23.47	20.62	20.74	20.45	23.80	23.62	23.73
	2	24.33	24.40	23.42	20.58	20.69	20.42	23.76	23.66	23.70
	3	23.82	23.85	22.92	20.11	20.24	19.93	23.31	23.13	23.21
	4	23.79	23.90	22.91	20.09	20.20	19.95	23.28	23.09	23.18
HSUPA	1	24.31	24.39	23.46	20.43	20.61	20.40	23.76	23.58	23.66
	2	22.27	22.38	21.42	18.52	18.61	18.37	21.77	21.56	21.67
	3	23.32	23.33	22.44	19.44	19.60	19.40	22.71	22.59	22.63
	4	22.31	22.29	21.46	18.49	18.57	18.41	21.69	21.49	21.72
	5	24.25	24.32	23.31	20.37	20.60	20.39	23.78	23.57	23.58
HSPA+	1	24.27	24.35	23.35	20.58	20.71	20.42	23.81	23.59	23.67
Note:	The Conducted RF Output Power test of WCDMA /HSDPA /HSUPA/HSPA+ was tested by power meter.									

#### 2. GSM Mode

Band	Channel	Frequency (MHz)	Output Power(dBm)
GSM 850	128	824.2	33.10
	190	836.6	33.08
	251	848.8	33.39
PCS 1900	512	1850.2	32.25
	661	1880.0	32.21
	810	1909.8	32.00

**3. GPRS Mode Conducted peak output power**

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	31.05	29.99	29.23	28.74
	190	836.6	31.16	30.10	29.34	28.85
	251	848.8	31.30	30.24	29.48	28.99
PCS 1900	512	1850.2	27.58	26.52	25.76	25.27
	661	1880.0	27.58	26.52	25.76	25.27
	810	1909.8	27.66	26.60	25.84	25.35

**GPRS Time-based Average Power**

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	22.02	23.97	24.97	25.73
	190	836.6	22.13	24.08	25.08	25.84
	251	848.8	22.27	24.22	25.22	25.98
PCS 1900	512	1850.2	18.55	20.50	21.50	22.26
	661	1880.0	18.55	20.50	21.50	22.26
	810	1909.8	18.63	20.58	21.58	22.34

**Timeslot consignations:**

No. Of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2Up2Down	3Up2Down	4Up1Down
Duty Cycle	1:8	1:4	1:2.67	1:2
Correct Factor	-9.03dB	-6.02dB	-4.26dB	-3.01dB

**4. EDGE Mode Conducted peak output power**

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	30.04	28.98	28.16	27.69
	190	836.6	30.05	28.99	28.17	27.70
	251	848.8	30.34	29.28	28.46	27.99
PCS 1900	512	1850.2	28.62	27.56	26.74	26.27
	661	1880.0	28.40	27.34	26.52	26.05
	810	1909.8	28.46	27.40	26.58	26.11

**EDGE Time-based Average Power**

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	21.01	22.96	23.9	24.68
	190	836.6	21.02	22.97	23.91	24.69
	251	848.8	21.31	23.26	24.20	24.98
PCS 1900	512	1850.2	19.59	21.54	22.48	23.26
	661	1880.0	19.37	21.32	22.26	23.04
	810	1909.8	19.43	21.38	22.32	23.10

**5. WiFi peak output power**

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			802.11b (DSSS)	802.11g (OFDM)	802.11n20 (OFDM)
WiFi	1	2412	10.61	9.07	8.78
	6	2437	10.84	9.72	9.55
	11	2462	10.91	9.27	9.60

Band	Channel	Frequency (MHz)	Output Power(dBm)
			802.11n40
WiFi	3	2422	8.96
	6	2437	9.36
	9	2452	9.05

6. BT+EDR 2.1 peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			GFSK	$\pi/4$ -DQPSK	8-DPSK
BT	0	2402	6.477	7.404	7.615
	39	2441	9.925	10.830	11.02
	78	2480	7.165	8.058	8.238

Band	Channel	Frequency (MHz)	Output Power(dBm)
			GFSK
BT 4.0	0	2402	-0.845
	19	2440	0.231
	39	2480	-1.053



## 14. TEST RESULTS LIST

Summary of Measurement Results (GSM 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.						
Phantom Configurations		Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head		Cheek/Touch	251	0.156	1.026	0.160
		Ear/Tilt		0.084		0.086
Left Side Of Head		Cheek/Touch		0.090		0.092
		Ear/Tilt		0.064		0.066
Body (10mm Separation)	GSM	Back upward		0.269	0.276	
		Front upward		0.238	0.244	
	GPRS	Back upward		0.254	1.002	0.255
		Front upward		0.244		0.244
		Edge B	0.132	0.132		
		Edge C	0.031	0.031		
	EDGE	Back upward	0.250	1.002	0.251	

Summary of Measurement Results (GSM 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.						
Phantom Configurations		Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head		Cheek/Touch	512	0.067	1.059	0.071
		Ear/Tilt		0.036		0.038
Left Side Of Head		Cheek/Touch		0.114		0.121
		Ear/Tilt		0.029		0.031
Body (10mm Separation)	GSM	Back upward		0.193	0.204	
		Front upward		0.334	0.354	
	EDGE	Back upward		0.218	1.054	0.230
		Front upward		0.449		0.473
		Edge B	0.439	0.463		
		Edge C	0.019	0.020		
	GPRS	Front upward	810	0.407	1.035	0.421

Note:

1. GPRS/EDGE test Scenario(Based on the Max. Time-based Average Power)

Band	Channel	Slots	Power level	Duty Cycle
<b>GPRS850</b>	251	4	5	1:2
<b>EDGE850</b>	251	4	5	1:2
<b>GPRS1900</b>	810	4	0	1:2
<b>EDGE1900</b>	512	4	0	1:2

Summary of Measurement Results (WCDMA 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head	Cheek/Touch	4175	0.098	1.140	0.112
	Ear/Tilt		0.041		0.047
Left Side Of Head	Cheek/Touch		0.086		0.098
	Ear/Tilt		0.041		0.047
Body (10mm Separation)	Back upward		0.178		0.203
	Front upward		0.150		0.171
	Edge B		0.115		0.131
	Edge C		0.116		0.132

Summary of Measurement Results (WCDMA 1700MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head	Cheek/Touch	1412	0.266	1.057	0.281
	Ear/Tilt		0.045		0.048
Left Side Of Head	Cheek/Touch		0.334		0.353
	Ear/Tilt		0.078		0.082
Body (10mm Separation)	Back upward		0.549		0.580
	Front upward		0.755		0.798
	Edge B		0.751		0.794
	Edge C		0.399		0.422

**Summary of Measurement Results (WCDMA 1900MHz Band)**

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head	Cheek/Touch	9262	0.171	1.042	0.178
	Ear/Tilt		0.046		0.048
Left Side Of Head	Cheek/Touch		0.174		0.181
	Ear/Tilt		0.028		0.029
Body (10mm Separation)	Back upward		0.326		0.340
	Front upward		0.616		0.642
	Edge B		0.683		0.712
	Edge C		0.299		0.312

**Summary of Measurement Results (WLAN 802.11b Band)**

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head	Cheek/Touch	11	0.146	1.021	0.149
	Ear/Tilt		0.184		0.188
Left Side Of Head	Cheek/Touch		0.205		0.209
	Ear/Tilt		0.164		0.167

**Summary of Measurement Results (Bluetooth)**

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head	Cheek/Touch	39 8-DPSK	0.209	1.117	0.233
	Ear/Tilt		0.107		0.120
Left Side Of Head	Cheek/Touch		0.173		0.193
	Ear/Tilt		0.111		0.124

**Summary of Measurement Results (WLAN 802.11a-5.2GHz Band)**

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head	Cheek/Touch	48	0.228	1.042	0.238
	Ear/Tilt		0.323		0.337
Left Side Of Head	Cheek/Touch		0.287		0.299
	Ear/Tilt		0.334		0.348
Body (10mm Separation)	Back upward		0.080		0.083
	Front upward		0.089		0.093
	Edge A		0.035		0.036
	Edge D		0.097		0.101

**Summary of Measurement Results (WLAN 802.11a-5.8GHz Band)**

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head	Cheek/Touch	161	0.211	1.014	0.214
	Ear/Tilt		0.271		0.275
Left Side Of Head	Cheek/Touch		0.212		0.215
	Ear/Tilt		0.275		0.279
Body (10mm Separation)	Back upward		0.067		0.068
	Front upward		0.088		0.089
	Edge A		0.066		0.067
	Edge D		0.083		0.084

**Note:**

- When the 1-g SAR for the mid-band channel or the channel with the Highest output power satisfy the following conditions, testing of the other channels in the band is not required. (Per KDB 447498 D01 General RF Exposure Guidance v05r01)
  - ≤ 0.8 W/kg and transmission band ≤ 100 MHz
  - ≤ 0.6 W/kg and, 100 MHz < transmission bandwidth ≤ 200 MHz
  - ≤ 0.4 W/kg and transmission band > 200 MHz



- The WCDMA mode is test with 12.2kbps RMC and TPC set to all "1", if maximum SAR for 12.2kbps RMC is  $\leq 75\%$  of the SAR limit (i.e. 1.2W/Kg 1g) and maximum average output of each RF channel with HSDPA/HSUPA active is less than 1/4 dB Middle than that measured without HSDPA/HSUPA using 12.2kbps RMC, according to KDB 941225D01v02, SAR is not required for this handset with HSPA capabilities.
- BT & WiFi SAR test is conducted according to section 12 stand-alone SAR evaluation of this report.
- During 802.11 testing, engineering testing software installed on the EUT can provide continuous transmitting RF signal. The RF signal utilized in SAR measurement has almost 100% duty cycle, and its crest factor is 1.

Summary of Measurement Results (LTE Band 4 bandwidth 20MHz with QPSK 1RB)

Temperature: 21.0~23.8°C, humidity: 50~60%.						
Power Drift limit:-5%~+5% SAR Limit: 1.6W/Kg averaged over 1gram, Spatial Peak						
Phantom Configurations	Test Mode	Device Test Positions	Device Test channel	SAR (W/Kg)	Scaling Factor	Scaled SAR
Body (10mm Separation)	No.1	Back upward	20300	0.489	1.021	0.499
		Front upward	20300	0.683	1.021	0.697
		Edge B	20300	0.554	1.021	0.566
		Edge C	20300	0.326	1.021	0.333

Summary of Measurement Results (LTE Band 4 bandwidth 20MHz with QPSK 50RB)

Temperature: 21.0~23.8°C, humidity: 50~60%.						
Power Drift limit:-5%~+5% SAR Limit: 1.6W/Kg averaged over 1gram, Spatial Peak						
Phantom Configurations	Test Mode	Device Test Positions	Device Test channel	SAR (W/Kg)	Scaling Factor	Scaled SAR
Body (10mm Separation)	No.2	Back upward	20175	0.351	1.042	0.366
		Front upward	20175	0.502	1.042	0.523
		Edge B	20175	0.418	1.042	0.436
		Edge C	20175	0.243	1.042	0.253

Additional LTE test requirement for 100%RB

Not required.

Additional LTE test requirement for 16QAM

Not required.

Additional LTE test requirement for other bandwidth

Not required.

**Summary of Measurement Results (LTE Band 17 bandwidth 10MHz with QPSK 1RB)**

Temperature: 21.0~23.8°C, humidity: 50~60%.						
Power Drift limit:-5%~+5% SAR Limit: 1.6W/Kg averaged over 1gram, Spatial Peak						
Phantom Configurations	Test Mode	Device Test Positions	Device Test channel	SAR (W/Kg)	Scaling Factor	Scaled SAR
Body (10mm Separation)	No.3	Back upward	23800	0.297	1.072	0.318
		Front upward	23800	0.132	1.072	0.142
		Edge B	23800	0.377	1.072	0.404
		Edge C	23800	0.110	1.072	0.118

**Summary of Measurement Results (LTE Band 17 bandwidth 10MHz with QPSK 25RB)**

Temperature: 21.0~23.8°C, humidity: 50~60%.						
Power Drift limit:-5%~+5% SAR Limit: 1.6W/Kg averaged over 1gram, Spatial Peak						
Phantom Configurations	Test Mode	Device Test Positions	Device Test channel	SAR (W/Kg)	Scaling Factor	Scaled SAR
Body (10mm Separation)	No.4	Back upward	23800	0.222	1.104	0.245
		Front upward	23800	0.175	1.104	0.193
		Edge B	23800	0.351	1.104	0.388
		Edge C	23800	0.105	1.104	0.116

Additional LTE test requirement for 100%RB

Not required.

Additional LTE test requirement for 16QAM

Not required.

Additional LTE test requirement for other bandwidth

Not required.

**Note :**

- IEEE Std 1528-2013 require the middle channel to be tested first. This generally applies to wireless devices that are designed to operate in technologies with tight tolerances for maximum output power variations across channels in the band. When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.
- Per KDB 447498, when the SAR procedures require multiple channels to be tested and the 1-g SAR for the highest output channel is less than 0.8 W/kg and peak SAR is less than 1.6W/kg, where the



transmission band corresponding to all channels is  $\leq 100$  MHz, testing for the other channels is not required.

- 7. The WCDMA mode is test with 12.2kbps RMC and TPC set to all "1", if maximum SAR for 12.2kbps RMC is  $\leq 75\%$  of the SAR limit (i.e. 1.2W/Kg 1g) and maximum average output of each RF channel with HSDPA/HSUPA active is less than 1/4 dB higher than that measured without HSDPA/HSUPA using 12.2kbps RMC, according to KDB 941225D01v02, SAR is not required for this handset with HSPA capabilities. This module supports 3GPP release R7 HSPA+ using QPSK only without 16QAM in the uplink. So PBA is not required for HSPA+.
- 8. Refer to power measurement results and 941225D05v02 SAR Evaluation procedure, the test scenarios for each LTE band are as below:

**LTE test configuration for QPSK at largest bandwidth(1RB&50% RB)**

LTE BAND	Scenario NO.	RB Size	RB offset	Channel	Freq.
4	1	1	49	H20300	1745.0
	2	50	25	M20175	1732.5
17	3	1	24	H23800	711.0
	4	25	24	H23800	711.0

Additional LTE test requirement for 100%RB, 16QAM or other smaller bandwidth are based on test results of Scenario NO. 1 to 4, taking power measurement results into account.


## 9. Scaling Factor calculation

Band	Tune-up power tolerance(dBm)	SAR test channel Power (dBm)	Scaling Factor
GSM 850	PCL = 5, PWR =33+-0.5	33.39	1.026
GPRS 850	PCL = 5, PWR =28.5+-0.5(4 slots)	28.99	1.002
EDGE 850	PCL = 5, PWR =27.5+-0.5(4 slots)	27.99	1.002
GSM1900	PCL = 0, PWR =32+-0.5	32.25	1.059
GPRS 1900	PCL=0,PWR= 25+-0.5(4 slots)	25.35	1.035
EDGE 1900	PCL=0,PWR= 26+-0.5(4 slots)	26.27	1.054
WCDMA 850	Max output power =24(+1/-2)	24.43	1.140
WCDMA 1700	Max output power =20(+1/-2)	20.76	1.057
WCDMA 1900	Max output power =23(+1/-2)	23.82	1.042
802.11b	Max output power =10.5+-0.5	10.91	1.021
802.11a	Max output power =13(+1/-2)	13.82(CH48)	1.042
		10.94(CH161)	1.014
LTE BAND4 (QPSK)	Max output power =23+-0.5(1RB)	23.41	1.021
	Max output power =22.5+-0.5(50&100RB)	22.82(50RB)	1.042
LTE BAND17 (QPSK)	Max output power =23+-0.5(1RB)	23.20	1.072
	Max output power =22.5+-0.5(25&50RB)	22.57(25RB)	1.104
Bluetooth	Max output power =11.5+-0.5	11.02	1.117



## 15. MULTIPLE TRANSMITTERS EVALUATION

The are three transmitters build in EUT, as following:

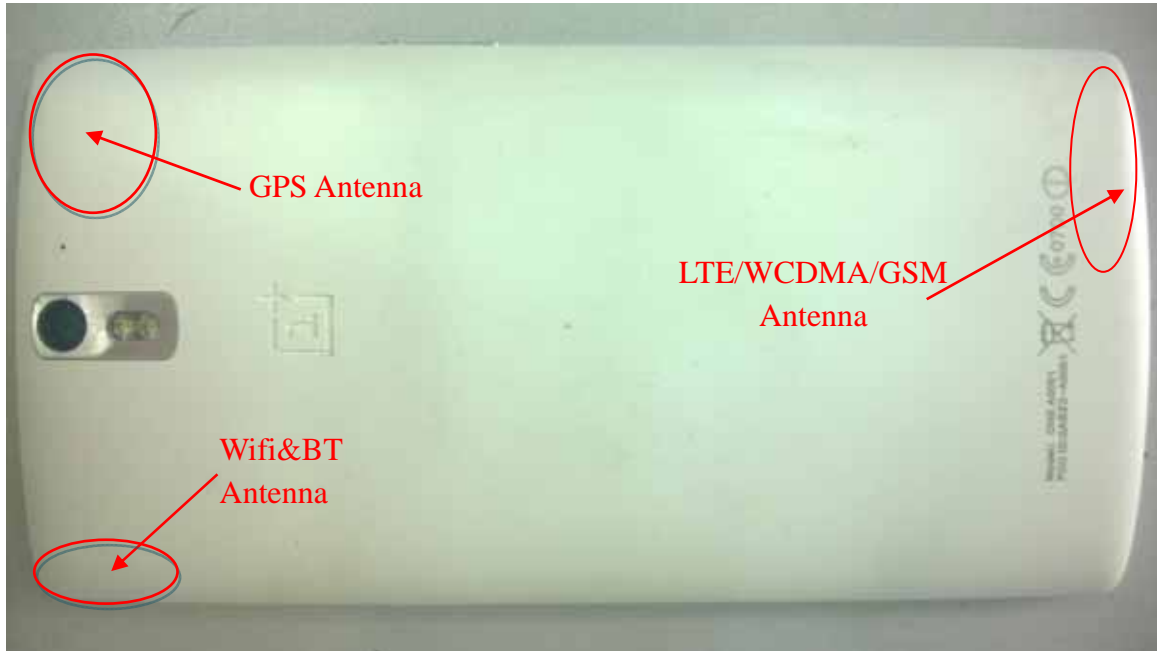

### Stand-alone SAR

Test distance: 5mm			
Band	Highest power(mW) per tune up	1-g SAR test threshold	Test required?
WIFI(2.4G)	12.59	$\left[ \frac{\text{(max. power of channel, including tune-up tolerance, mW)}}{\text{(min. test separation distance, mm)}} \right] \cdot \left[ \sqrt{f(\text{GHz})} \right] \leq 3.0 \text{ for 1-g SAR}$	Yes
WiFi(5.2G)	25.12		Yes
WiFi(5.8G)	12.59		Yes
BT	14.13		Yes

Test distance: 10mm			
Band	Highest power(mW) per tune up	1-g SAR test threshold	Test required?
WIFI(2.4G)	12.59	$\left[ \frac{\text{(max. power of channel, including tune-up tolerance, mW)}}{\text{(min. test separation distance, mm)}} \right] \cdot \left[ \sqrt{f(\text{GHz})} \right] \leq 3.0 \text{ for 1-g SAR}$	No
WiFi(5.2G)	25.12		Yes
WiFi(5.8G)	12.59		Yes
BT	14.13		No



The Head SAR test for BT is required for highest power exceed the power threshold for 2450MHz at the test distance of 5 mm, Body SAR for BT is not required.

The SAR test for 802.11b (2.4GHz) is required, 802.11g/HT20/HT40 is not required, for the maximum average output power is less than 1/4 dB Higher than measured on the corresponding 802.11b channels. As per KDB 248227

The BT&802.11b stand-alone body SAR is not required, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(max. \text{ power of channel, including tune-up tolerance, mW}) / (min. \text{ test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$  W/kg for test separation distances  $\leq 50$  mm;

where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.

( Max power= 14.13 mW ; min. test separation distance= 10mm for body;  $f=2.441\text{GHz}$  )

BT estimated Body SAR = 0.294W/Kg (1g)

( Max power= 12.59 mW ; min. test separation distance= 10mm for body;  $f=2.462\text{GHz}$  )

802.11b estimated Body SAR = 0.263W/Kg (1g)

### Simultaneous SAR

#	Simultaneous transmission conditions					Sum of WWAN& WLAN
	WWAN			WLAN		
	LTE Data	GSM	UMTS	802.11a/b/g/n	BT	
1	x			x		x
2		x		x		x
3			x	x		x
4	x				x	x
5		x			x	x
6			x		x	x

Note:

- When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the Wi-Fi transmitter and another WWAN transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.
- The hotspot SAR result may overlap with the body-worn accessory SAR requirements, per KDB 941225 D06, the more conservative configurations can be considered, thus excluding some unnecessary body-worn accessory SAR tests.

3. GSM supports voice and data transmission, though not simultaneously. WCDMA supports voice and data transmission simultaneously.
4. Simultaneous Transmission SAR evaluation is not required for BT and WiFi, because the software mechanism have been incorporated to guarantee that the WLAN and Bluetooth transmitters would not simultaneously operate.
5. Per KDB 447498D01v05r01, Simultaneous Transmission SAR Evaluation procedures is as followed:  
 Step 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.  
 Step 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.  
 Step 3: If the ratio of SAR to peak separation distance is  $\leq 0.04$ , Simultaneous SAR measurement is not required.  
 Step 4: If the ratio of SAR to peak separation distance is  $> 0.04$ , Simultaneous SAR measurement is required and simultaneous transmission SAR value is calculated.  
 (The ratio is determined by:  $(SAR1 + SAR2)^{1.5}/R_i \leq 0.04$ ,  
 $R_i$  is the separation distance between the peak SAR locations for the antenna pair in mm)
6. The NFC function operates at 13.56MHz, the power threshold of SAR evaluation is 474mW (Per KDB 447498 D01v05r02 Appendix C), the NFC operates at relatively much lower power; The NFC function is not active when carrying on the body. So SAR evaluation is not need for NFC function
7. Applicable Multiple Scenario Evaluation

Test Position	Main Ant. SARMax (W/Kg)	Bluetooth SAR(W/Kg)	WiFi SARMax(W/Kg)	$\Sigma$ 1-g SARMax(W/Kg)	
				BT&Main Ant	WiFi&Main Ant
Head SAR	0.353	0.233	0.348	0.586	0.701
Body SAR	0.798	0.294	0.263	1.092	1.061

Simultaneous Transmission SAR evaluation is not required for WiFi and LTE&WCDMA&GSM, because the sum of 1g SARMax is **1.061W/Kg** < 1.6W/Kg for Wifi and LTE&WCDMA&GSM.

Simultaneous Transmission SAR evaluation is not required for BT and LTE&WCDMA&GSM, because the sum of 1g SARMax is **1.092W/Kg** < 1.6W/Kg for BT and LTE&WCDMA&GSM.

(According to KDB 447498D01v05r01, the sum of the Highest reported SAR of each antenna does not exceed the limit, simultaneous transmission SAR evaluation is not required.)



## 16.ANNEX A PHOTOGRAPHS OF THE EUT

## 17.ANNEX B GRAPH TEST RESULTS AND SYSTEM PERFORMANCE CHECK DATA