



No. 1 Workshop, M-10, Middle section, Science & Technology Park,  
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM180700678201  
Page: 1 of 76

# FCC TEST REPORT

**Application No.:** SZEM1807006782RG  
**Applicant:** OnePlus Technology (Shenzhen) Co., Ltd.  
**Address of Applicant** 18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen  
**Manufacturer:** OnePlus Technology (Shenzhen) Co., Ltd.  
**Address of Manufacturer** 18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen  
**Product Name:** OnePlus Bullets Wireless  
**Model No.(EUT):** BT32B  
**Trade Mark:** ONEPLUS  
**FCC ID:** 2ABZ2-BT32B  
**IC ID:** 12739A-BT32B  
47 CFR Part 15, Subpart C  
**Standards:** IC RSS-Gen (Issue 4, November 2014)  
IC RSS-247 (Issue 2, February 2017)  
**Test Method** ANSI C63.4  
ANSI C63.10  
**Date of Receipt:** 2018-08-01  
**Date of Test:** 2018-08-01 to 2018-08-09  
**Date of Issue:** 2018-08-21

<b>Test Result:</b>	<b>PASS *</b>
---------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Derek Yang

Wireless Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



## 1 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2018-08-21		Original

Authorized for issue by:				
Tested By		<i>Mike Hu</i>		2018-08-21
				Date
Checked By		<i>David Chen</i>		2018-08-21
				Date
		(Mike Hu) /Project Engineer		
		(David Chen) /Reviewer		



## 2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207 RSS-Gen, 8.8	ANSI C63.10 (2013)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (a)(1) RSS-247, 5.4	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1) RSS-247, 5.1	ANSI C63.10 (2013)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1) RSS-247, 5.1	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1) RSS-247, 5.1	ANSI C63.10 (2013)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d) RSS-247, 5.5	ANSI C63.10 (2013)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d) RSS-247, 5.5	ANSI C63.10 (2013)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209 RSS-247, 5.5 RSS-Gen, 6.13	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209 RSS-247, 5.5 RSS-Gen, 6.13	ANSI C63.10 (2013)	PASS



## Contents

	Page
<b>1 VERSION .....</b>	<b>2</b>
<b>2 TEST SUMMARY .....</b>	<b>3</b>
<b>3 GENERAL INFORMATION .....</b>	<b>5</b>
3.1 CLIENT INFORMATION .....	5
3.2 GENERAL DESCRIPTION OF EUT .....	5
3.3 TEST ENVIRONMENT .....	7
3.4 DESCRIPTION OF SUPPORT UNITS .....	7
3.5 TEST LOCATION .....	7
3.6 TEST FACILITY .....	7
3.7 DEVIATION FROM STANDARDS .....	8
3.8 ABNORMALITIES FROM STANDARD CONDITIONS .....	8
3.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	8
3.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2) .....	8
3.11 EQUIPMENT LIST .....	9
<b>4 TEST RESULTS AND MEASUREMENT DATA .....</b>	<b>12</b>
4.1 ANTENNA REQUIREMENT .....	12
4.2 CONDUCTED EMISSIONS .....	12
4.3 CONDUCTED PEAK OUTPUT POWER .....	16
4.4 20DB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH .....	22
4.5 CARRIER FREQUENCIES SEPARATION .....	32
4.6 HOPPING CHANNEL NUMBER .....	35
4.7 DWELL TIME .....	38
4.8 BAND-EDGE FOR RF CONDUCTED EMISSIONS .....	45
4.9 SPURIOUS RF CONDUCTED EMISSIONS .....	52
4.10 RADIATED SPURIOUS EMISSION .....	58
4.10.1 Radiated Emission below 1GHz .....	61
4.10.2 Transmitter Emission above 1GHz .....	63
4.11 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY .....	70
<b>5 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS .....</b>	<b>76</b>



### 3 General Information

#### 3.1 Client Information

Applicant:	OnePlus Technology (Shenzhen) Co., Ltd.
Address of Applicant:	18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen
Manufacturer:	OnePlus Technology (Shenzhen) Co., Ltd.
Address of Manufacturer:	18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

#### 3.2 General Description of EUT

Product Name:	OnePlus Bullets Wireless
Model No.:	BT32B
Trade Mark:	ONEPLUS
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V2.0/3.0
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Portable production
Antenna Type:	PIFA
Antenna Gain:	0dBi



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz



### 3.3 Test Environment

Operating Environment	
Temperature:	24.0 °C
Humidity:	55 % RH
Atmospheric Pressure:	101.30 KPa

### 3.4 Description of Support Units

The EUT has been tested independent unit.

### 3.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

### 3.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.



### 3.7 Deviation from Standards

None.

### 3.8 Abnormalities from Standard Conditions

None.

### 3.9 Other Information Requested by the Customer

None.

### 3.10 Measurement Uncertainty (95% confidence levels, k=2) 、

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	$\pm 0.75\text{dB}$
2	RF power density, conducted	$\pm 2.84\text{dB}$
3	Spurious emissions, conducted	$\pm 0.75\text{dB}$
4	Radiated Spurious emission test	$\pm 4.5\text{dB}$ (30MHz-1GHz)
		$\pm 4.8\text{dB}$ (1GHz-25GHz)
5	Conduct emission test	$\pm 3.12\text{ dB}$ (9KHz- 30MHz)
6	Temperature test	$\pm 1^\circ\text{C}$
7	Humidity test	$\pm 3\%$
8	DC and low frequency voltages	$\pm 0.5\%$





### 3.11 Equipment List

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Duedate (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2017/10/09	2018/10/09
2	LISN	Rohde & Schwarz	ENV216	SEM007-01	2018/02/14	2019/02/13
3	LISN	ETS-LINDGREN	3816/2	SEM007-02	2017/09/28	2018/09/28
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	EMC0120	2017/09/28	2018/09/28
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	EMC0121	2017/09/28	2018/09/28
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	EMC0122	2018/02/14	2019/02/13
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2017/10/09	2018/10/09
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2017/10/09	2018/10/09

RF connected test						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Duedate (yyyy-mm-dd)
1	Dual Output Mobile Communication DC Source	Agilent Technologies Inc	66311B	W009-09	2018/04/28	2019/04/28
2	Signal Analyzer	Rohde &Schwarz	FSV	W005-02	2018/03/13	2019/03/12
3	Signal Generator	Rohde &Schwarz	SML03	SEM006-02	2018/02/14	2019/02/13
4	Power Meter	Rohde &Schwarz	NRVS	SEM014-02	2017/10/09	2018/10/09
5	Power Sensor	Agilent Technologies	U2021XA	SEM009-01	2017/10/09	2018/10/09



RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2018/03/10	2019/03/09
2	EMI Test Receiver	Agilent Technologies	N9038A	SEM004-05	2017/10/09	2018/10/09
3	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2017/11/01	2020/11/01
4	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEM003-11	2015/10/17	2018/10/17
5	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEM003-12	2017/11/24	2020/11/24
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2018/02/14	2019/02/13
7	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-10	2017/10/17	2018/10/17
8	Pre-Amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2018/03/14	2019/03/14
9	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A
10	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2017/10/09	2018/10/09
11	Loop Antenna	Beijing Daze	ZN30401	SEM003-09	2018/03/10	2019/03/09

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2018/03/10	2019/03/09
2	EMI Test Receiver (9k-7GHz)	Rohde & Schwarz	ESR	SEM004-03	2018/02/14	2019/02/13
3	Trilog-Broadband Antenna(30M-1GHz)	Schwarzbeck	VULB9168	SEM003-18	2016/06/29	2019/06/29
4	Pre-amplifier	Sonoma Instrument Co	310N	SEM005-03	2018/04/28	2019/04/28
5	Loop Antenna	ETS-Lindgren	6502	SEM003-08	2018/08/14	2021/08/14



RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	20180/3/10	2019/03/09
2	EXA Spectrum Analyzer	Agilent Technologies Inc	N9010A	SEM004-09	2018/06/18	2019/06/17
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2017/11/15	2020/11/15
4	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2017/10/09	2018/10/09
5	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018/05/14	2020/05/13
6	Horn Antenna (18-26GHz)	ETS-Lindgren	3160	SEM003-12	2017/11/24	2020/11/24
7	HornAntenna (26GHz-40GHz)	A.H.Systems, inc.	SAS-573	SEM003-13	2017/10/17	2020/10/16
8	Low Noise Amplifier	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2017/10/09	2018/10/09
9	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2018/02/14	2019/02/13
10	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-10	2017/10/17	2018/10/17
11	Pre-Amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2018/03/14	2019/03/14
12	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A




## 4 Test results and Measurement Data

### 4.1 Antenna Requirement

<b>Standard requirement:</b>	47 CFR Part 15C Section 15.203 /247(c)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
<p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.</p>	

### 4.2 Conducted Emissions

<b>Test Requirement:</b>	47 CFR Part 15C Section 15.207		
<b>Test Method:</b>	ANSI C63.10: 2013		
<b>Test Frequency Range:</b>	150kHz to 30MHz		
<b>Limit:</b>	<b>Frequency range (MHz)</b>	<b>Limit (dBuV)</b>	
		<b>Quasi-peak</b>	<b>Average</b>
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs</li> </ol>		

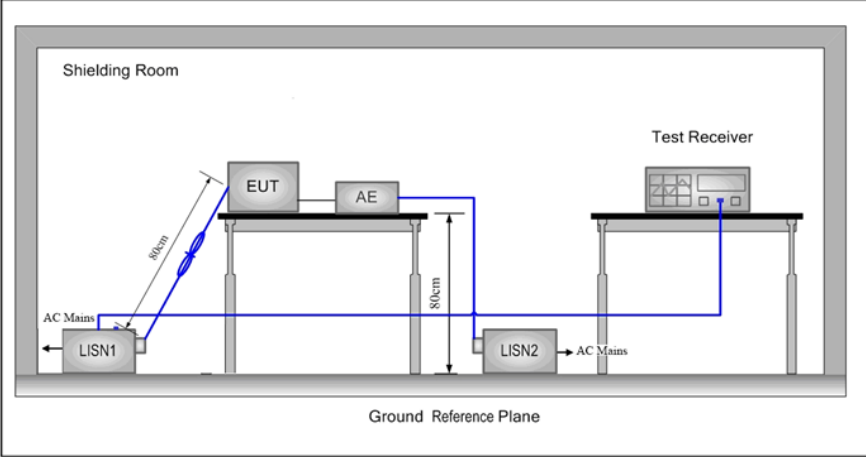	<p>mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</p>
<p>Test Setup:</p>	
<p>Exploratory Test Mode:</p>	<p>Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.          Charge + Transmitting mode.</p>
<p>Final Test Mode:</p>	<p>Through Pre-scan, find the DH5 of data type and GFSK modulation at the lowest channel is the worst case.          Charge + Transmitting mode          Only the worst case is recorded in the report.</p>
<p>Instruments Used:</p>	<p>Refer to section 5.10 for details</p>
<p>Test Results:</p>	<p>Pass</p>

Note: Only the worse test data had been displayed in this report.




**Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

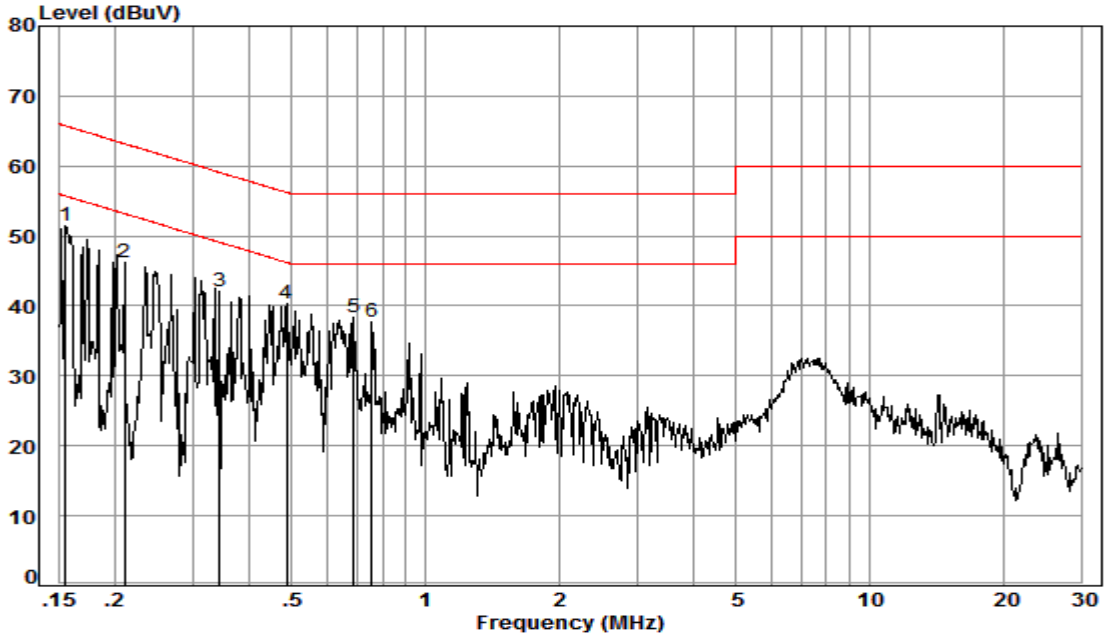


Site : Shielding Room  
 Condition: Line  
 Job No. : 06782RG  
 Test mode: c

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15	0.02	9.51	41.97	51.50	55.74	-4.24	Peak
2	0.21	0.03	9.50	36.76	46.29	53.18	-6.89	Peak
3	0.34	0.03	9.50	32.60	42.13	49.09	-6.96	Peak
4	0.49	0.04	9.49	30.71	40.24	46.23	-5.99	Peak
5	0.69	0.07	9.49	28.89	38.45	46.00	-7.55	Peak
6	0.76	0.07	9.50	28.16	37.73	46.00	-8.27	Peak



Neutral line:

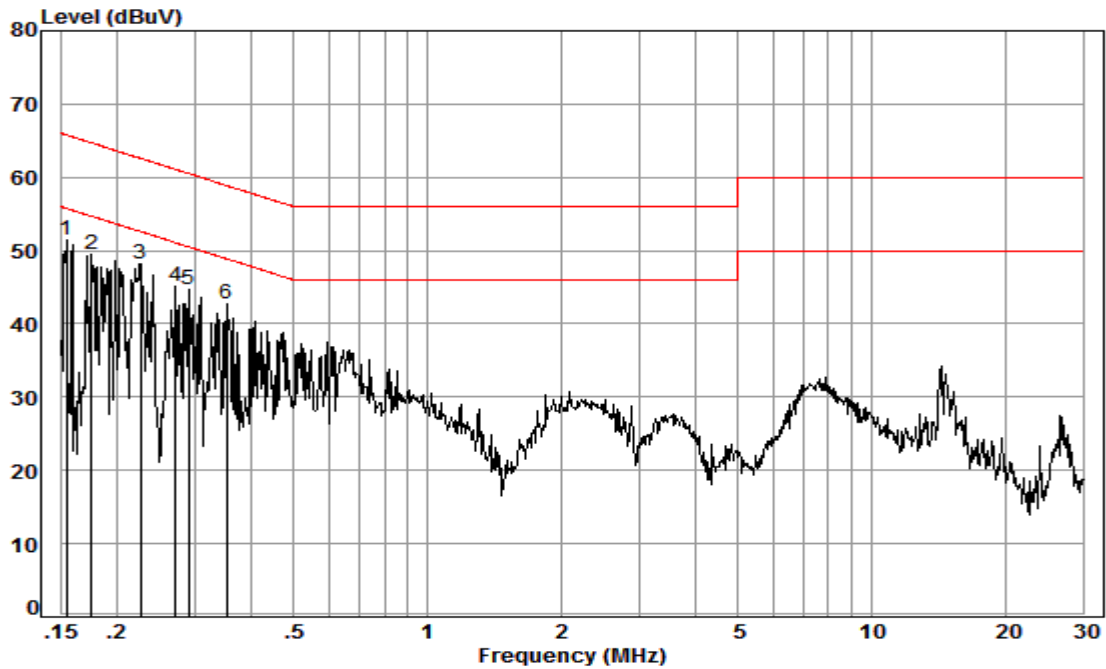


Site : Shielding Room  
 Condition: Neutral  
 Job No. : 06782RG  
 Test mode: c

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15	0.02	9.58	41.91	51.51	55.78	-4.27	Peak
2	0.17	0.03	9.59	39.76	49.38	54.72	-5.34	Peak
3	0.23	0.03	9.58	38.66	48.27	52.61	-4.34	Peak
4	0.27	0.03	9.58	35.41	45.02	51.07	-6.05	Peak
5	0.29	0.03	9.58	35.02	44.63	50.54	-5.91	Peak
6	0.35	0.03	9.58	33.03	42.64	48.87	-6.23	Peak

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

### 4.3 Conducted Peak Output Power

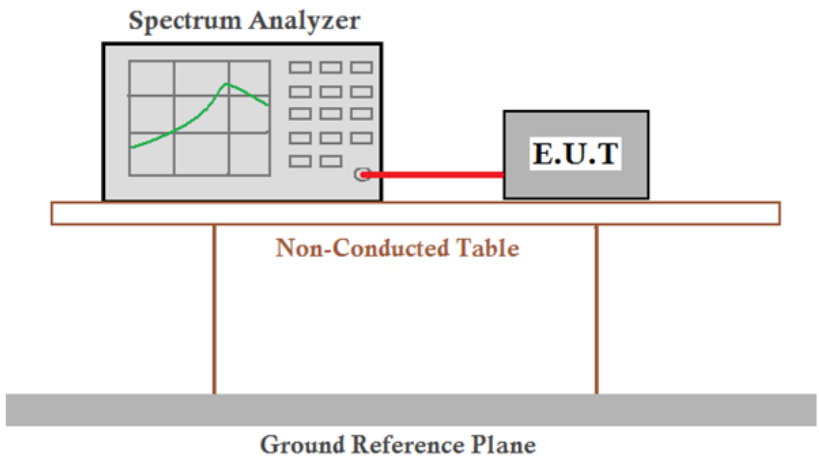Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.5
Test Setup:	 <p><i>Remark:</i>        Offset the High-Frequency cable loss 1dB in the spectrum analyzer.</p>
Limit:	125Mw(20.97dBm)
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass






**Measurement Data**

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	1.93	20.97	Pass
Middle	3.13	20.97	Pass
Highest	2.94	20.97	Pass
π/4DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	0.91	20.97	Pass
Middle	2.01	20.97	Pass
Highest	1.89	20.97	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	1.47	20.97	Pass
Middle	2.57	20.97	Pass
Highest	2.43	20.97	Pass

**Test plot as follows:**


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

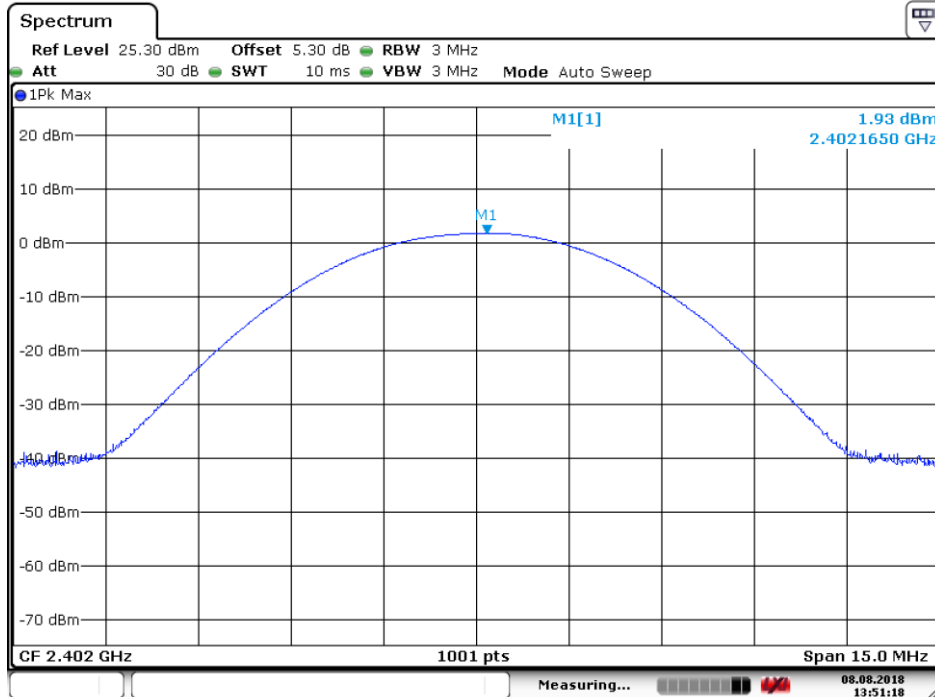

Date: 8.AUG.2018 13:51:18




Test mode: GFSK Test channel: Middle

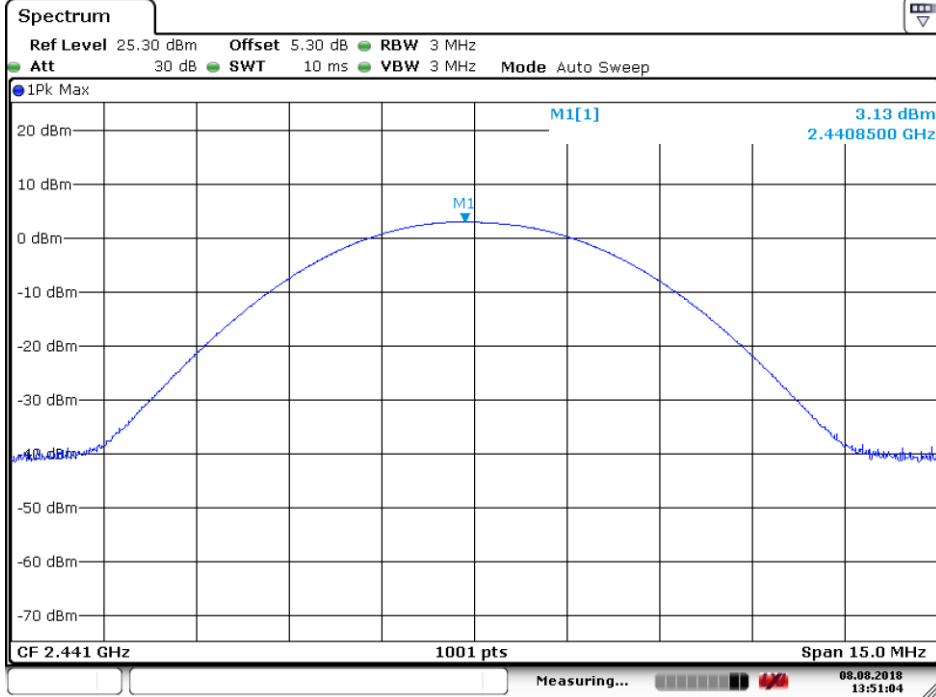

Date: 8.AUG.2018 13:51:04


Test mode: GFSK Test channel: Highest

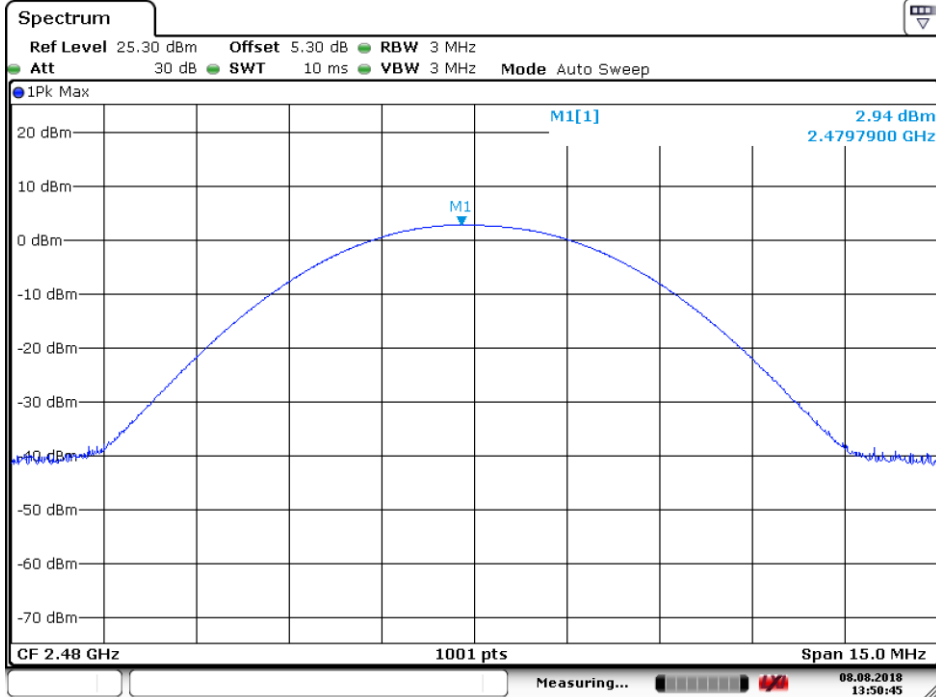

Date: 8.AUG.2018 13:50:45




Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

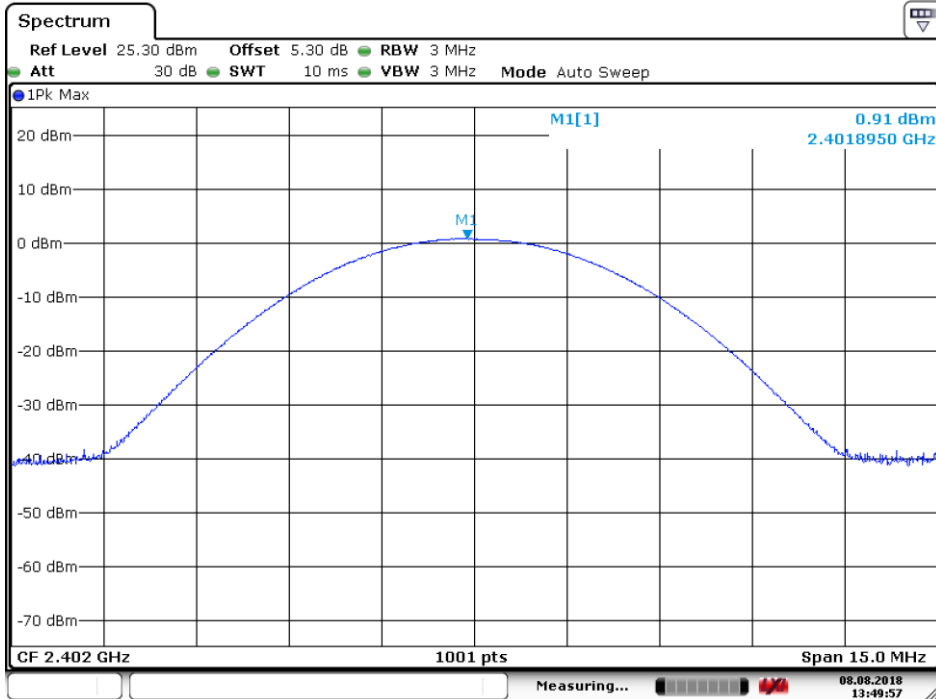

Date: 8.AUG.2018 13:49:57


Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

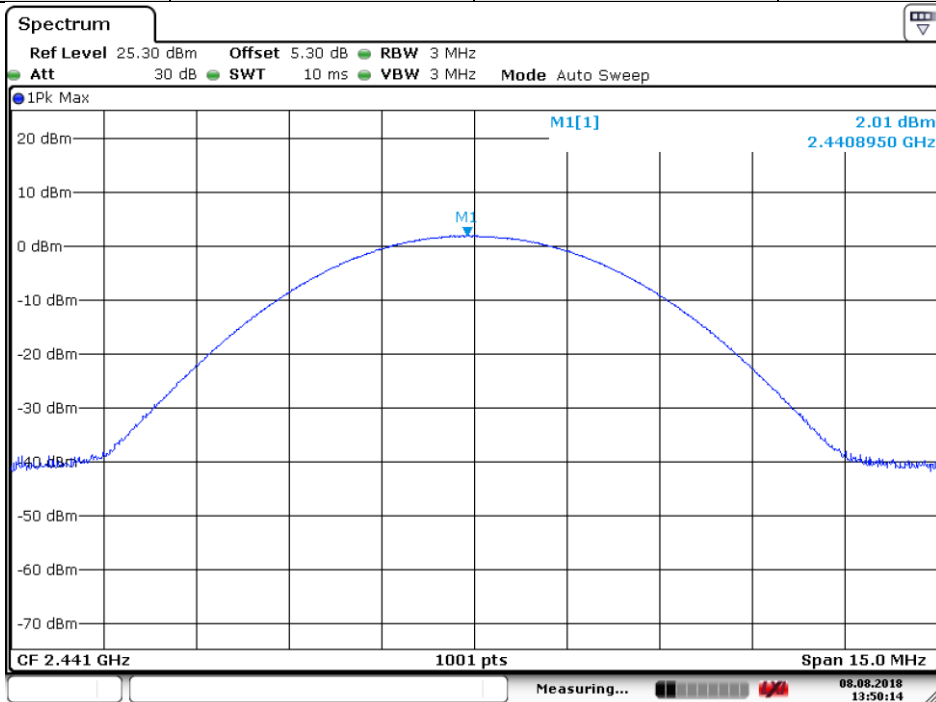

Date: 8.AUG.2018 13:50:15




Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

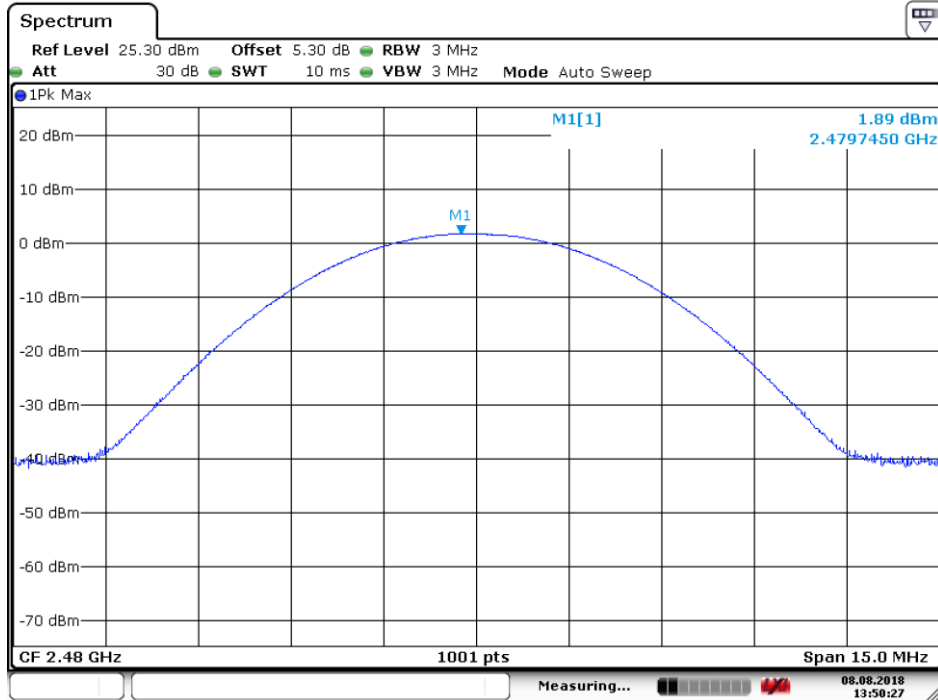

Date: 8.AUG.2018 13:50:28


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

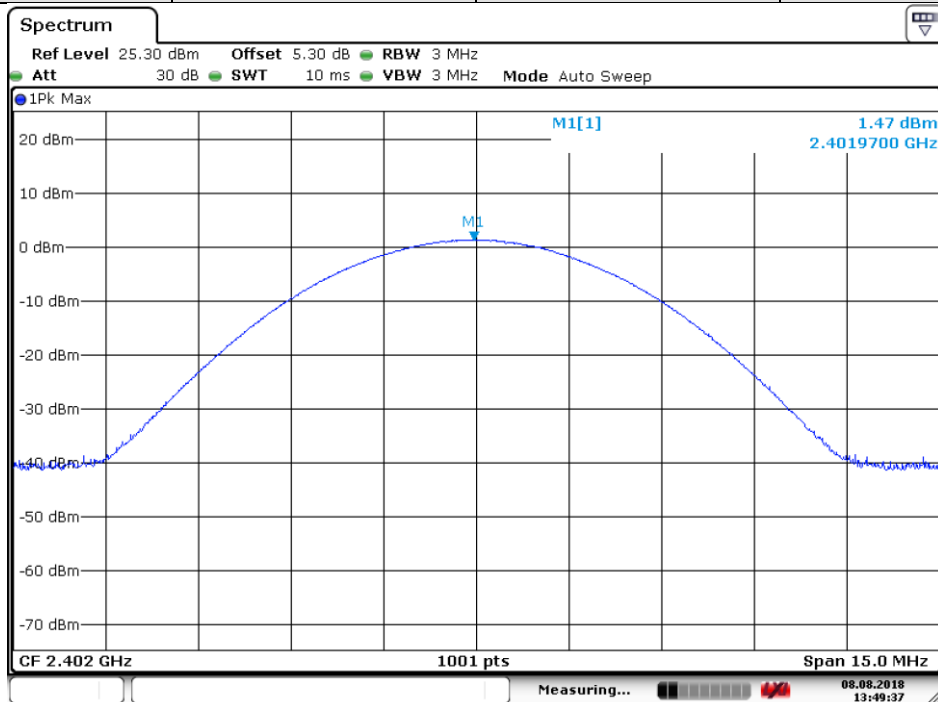

Date: 8.AUG.2018 13:49:37




Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

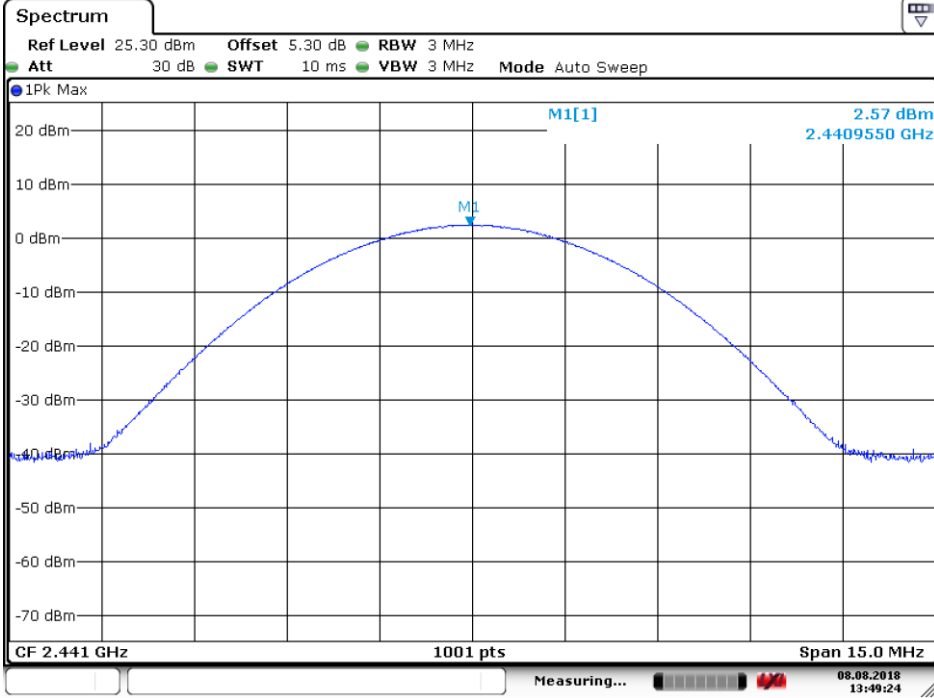


Date: 8.AUG.2018 13:49:24

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

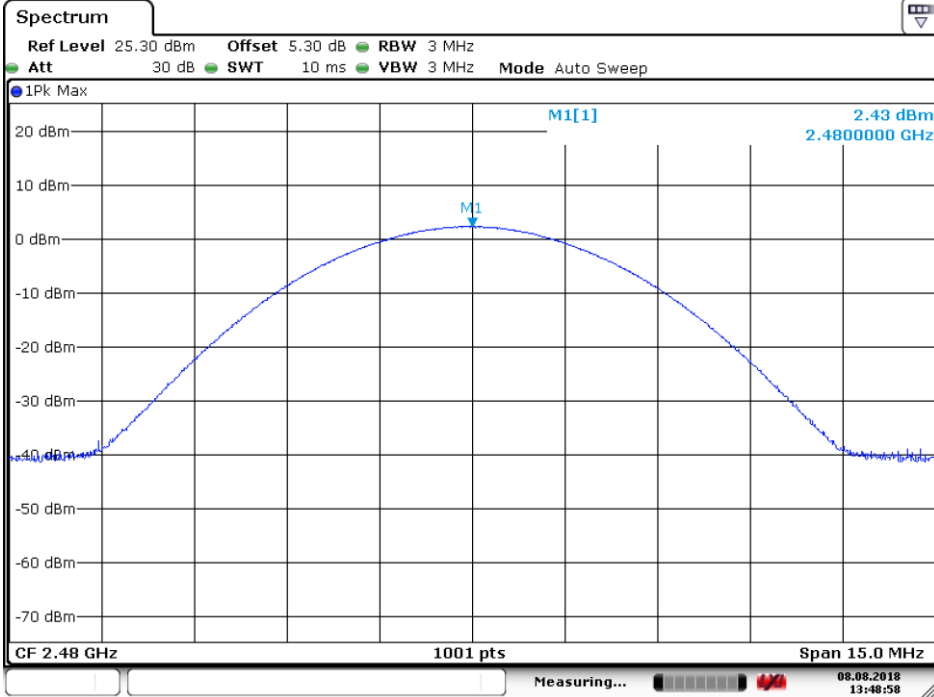

Date: 8.AUG.2018 13:48:59

#### 4.4 20dB Emission Bandwidth & Occupied Bandwidth

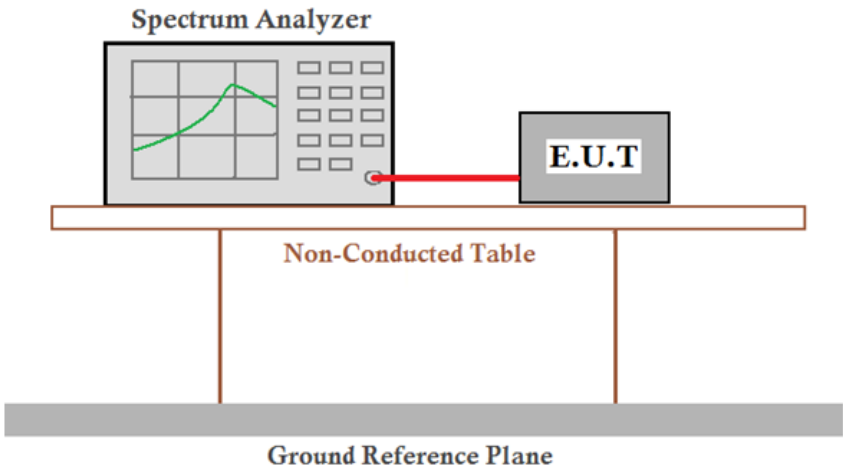Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.7
Test Setup:	
Limit:	NA
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass


#### Measurement Data

Test channel	20dB Emission Bandwidth (kHz)		
	GFSK	$\pi/4$ DQPSK	8DPSK
Lowest	959	1249.8	1258.7
Middle	953	1249.8	1261.7
Highest	950	1252.7	1258.7
Test channel	Occupied Bandwidth (kHz)		
	GFSK	$\pi/4$ DQPSK	8DPSK
Lowest	860	1153.8	1150.8
Middle	857	1153.8	1150.8
Highest	857	1153.8	1150.8




Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

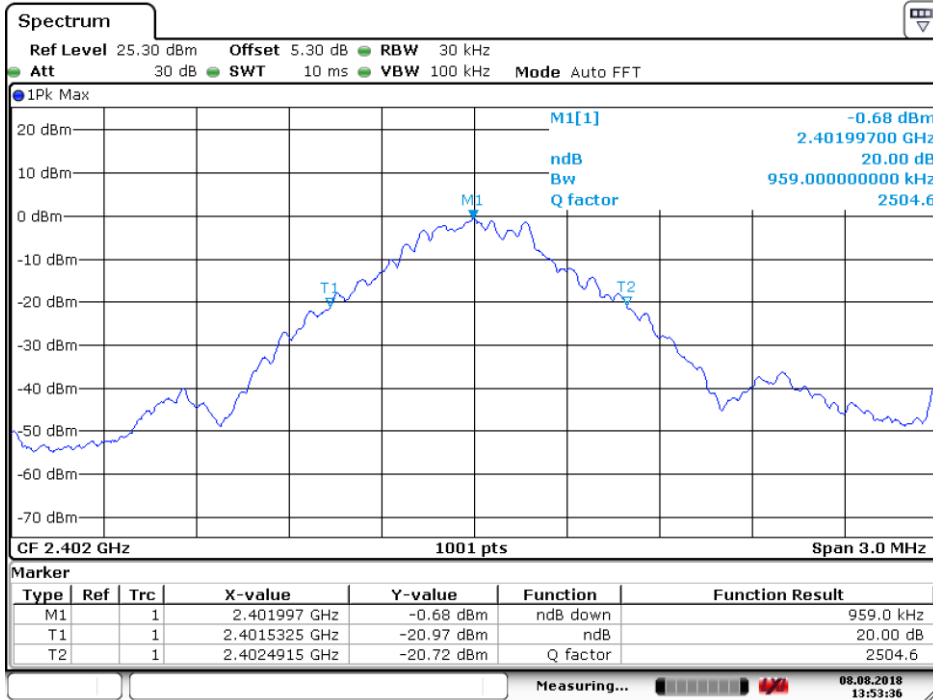


Date: 8.AUG.2018 13:53:36

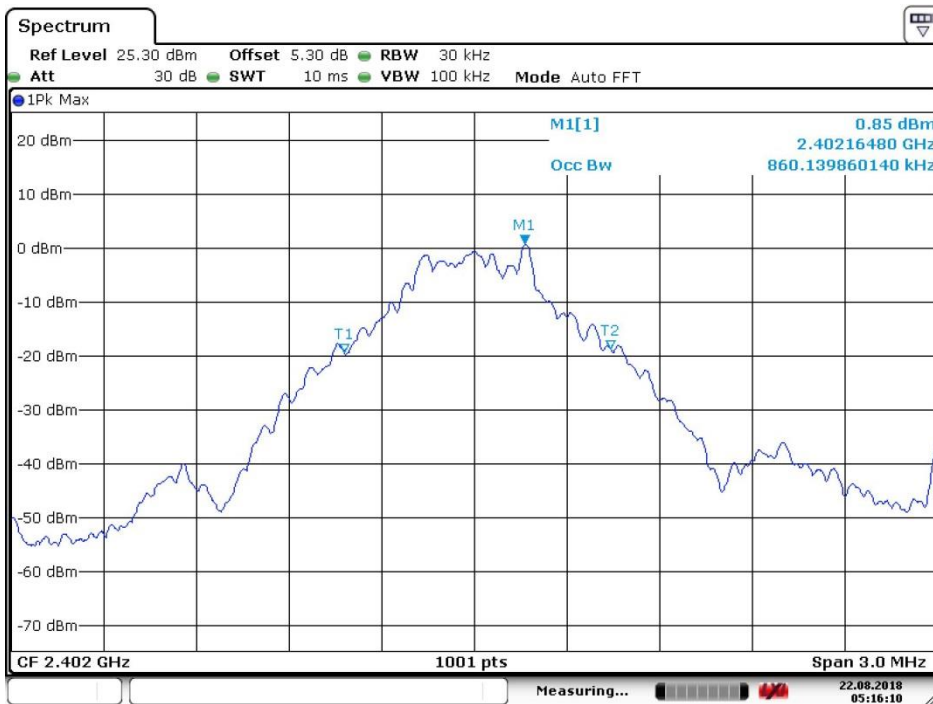


Date: 22.AUG.2018 05:16:10



Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

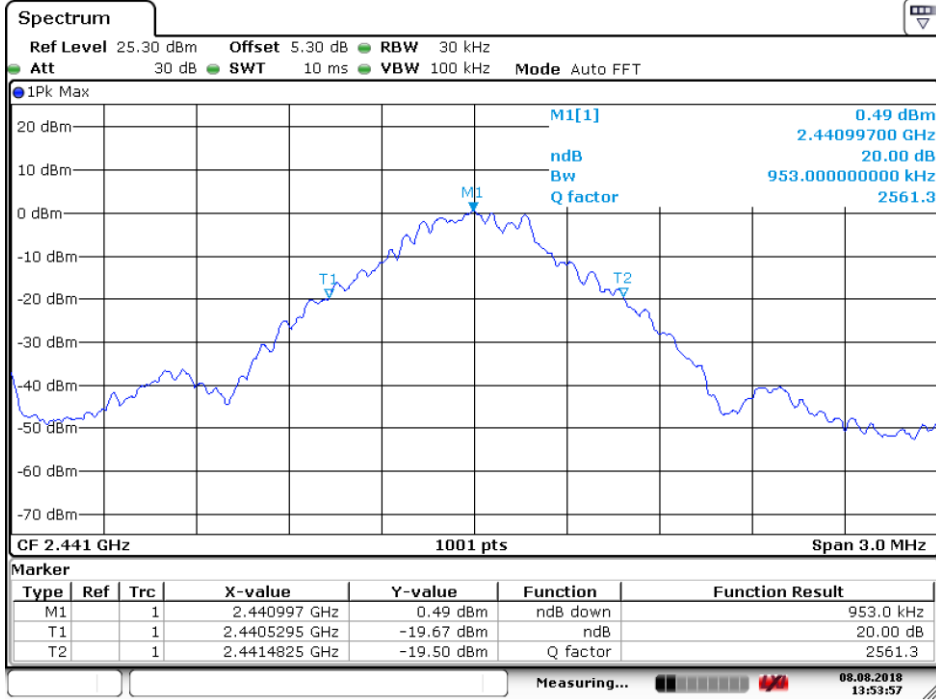


Date: 8.AUG.2018 13:53:57

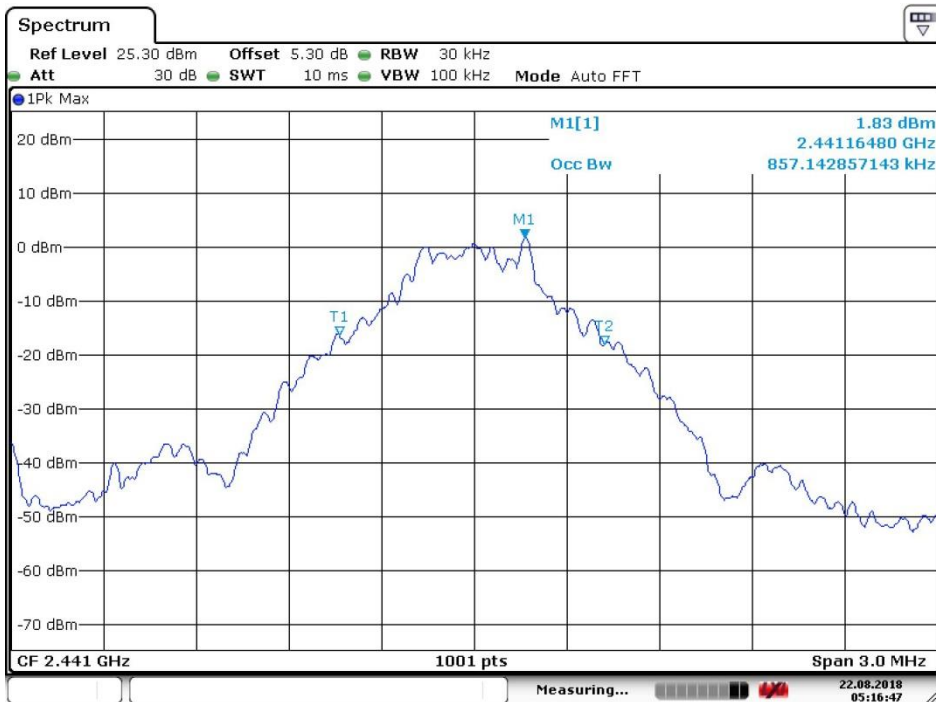

Date: 22.AUG.2018 05:16:48



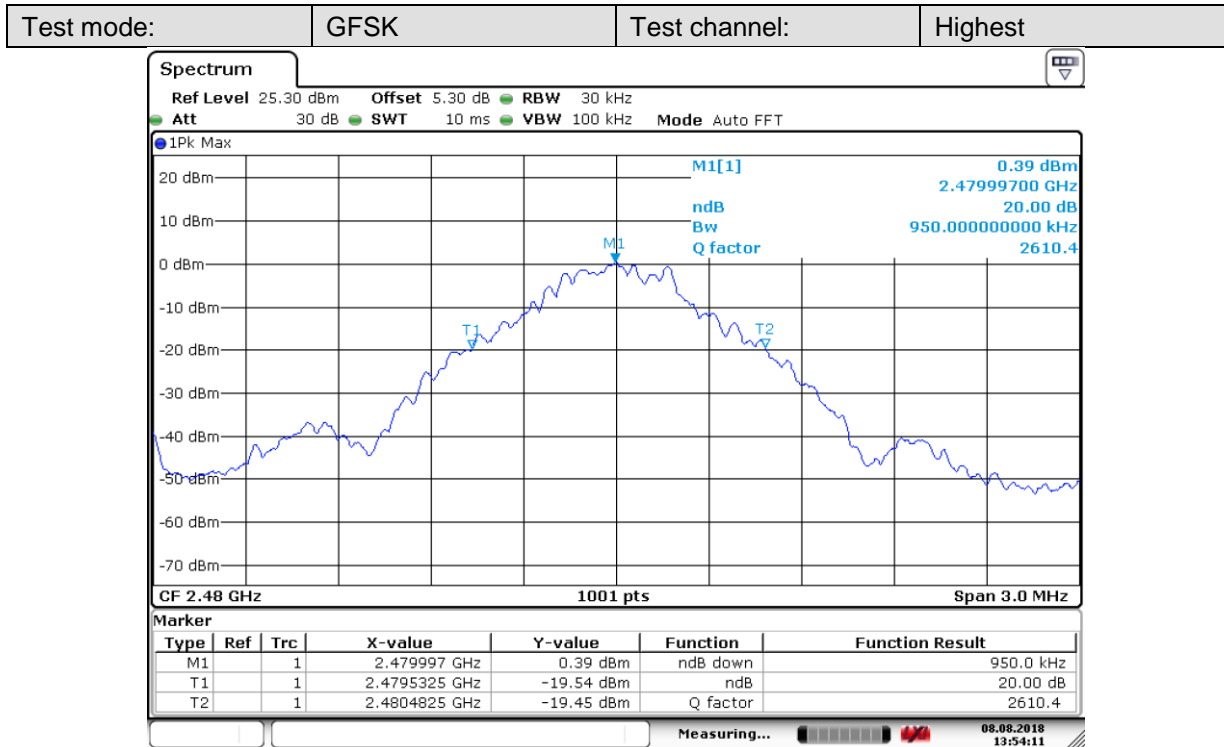


Date: 8.AUG.2018 13:54:12




Date: 22.AUG.2018 05:17:07



Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

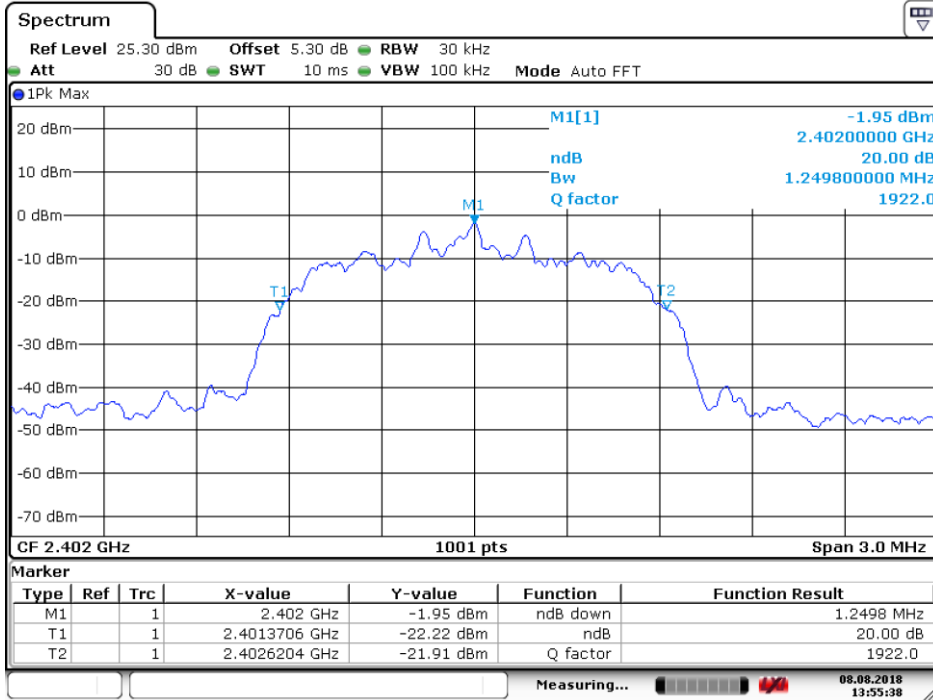


Date: 8.AUG.2018 13:55:38

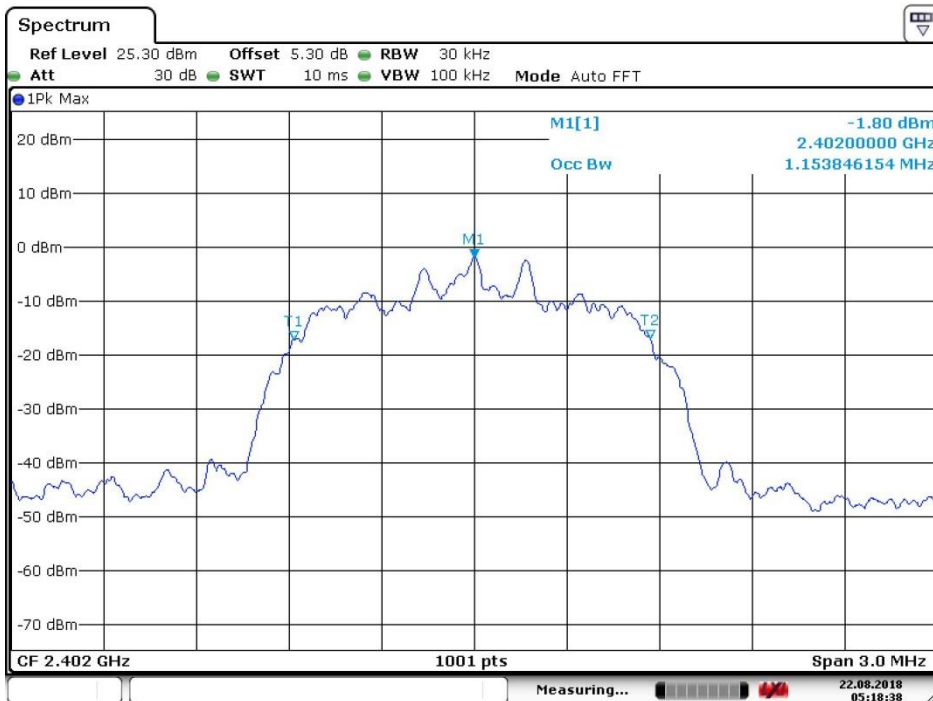


Date: 22.AUG.2018 05:18:38



Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

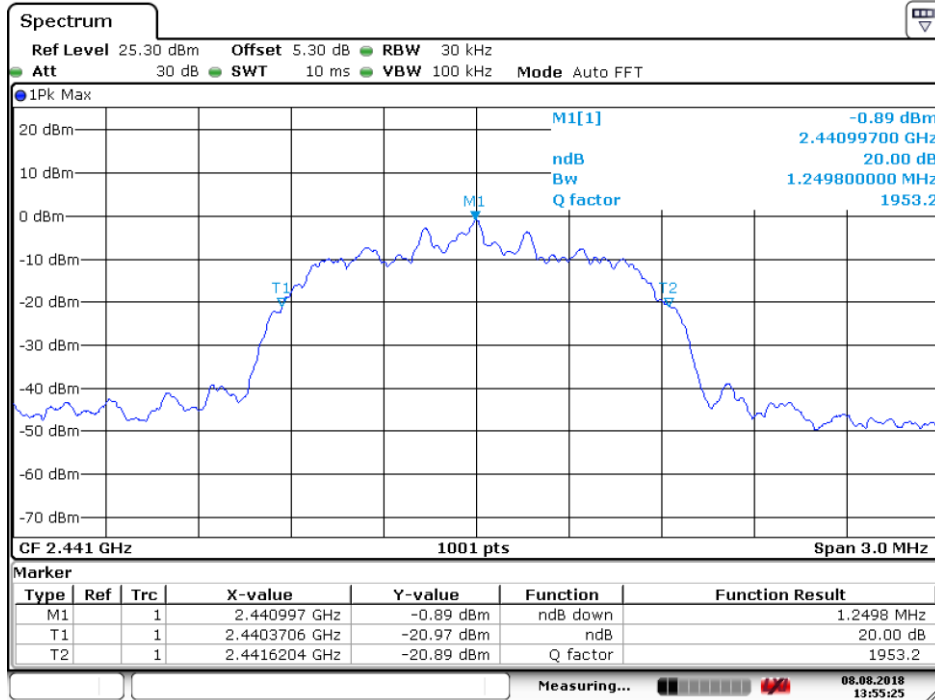


Date: 8.AUG.2018 13:55:25

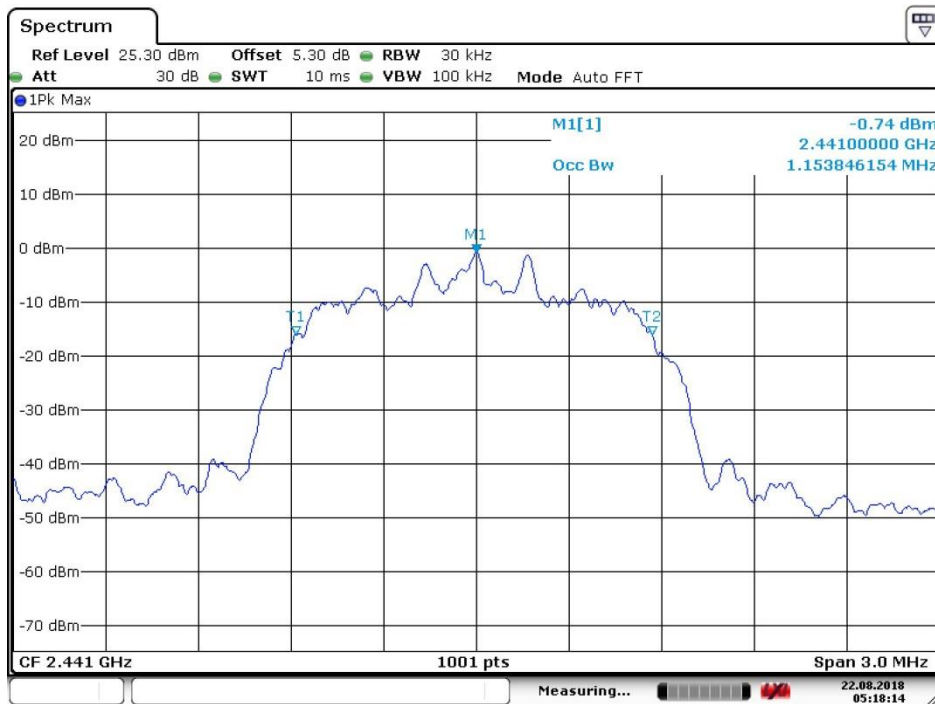


Date: 22.AUG.2018 05:18:14



Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

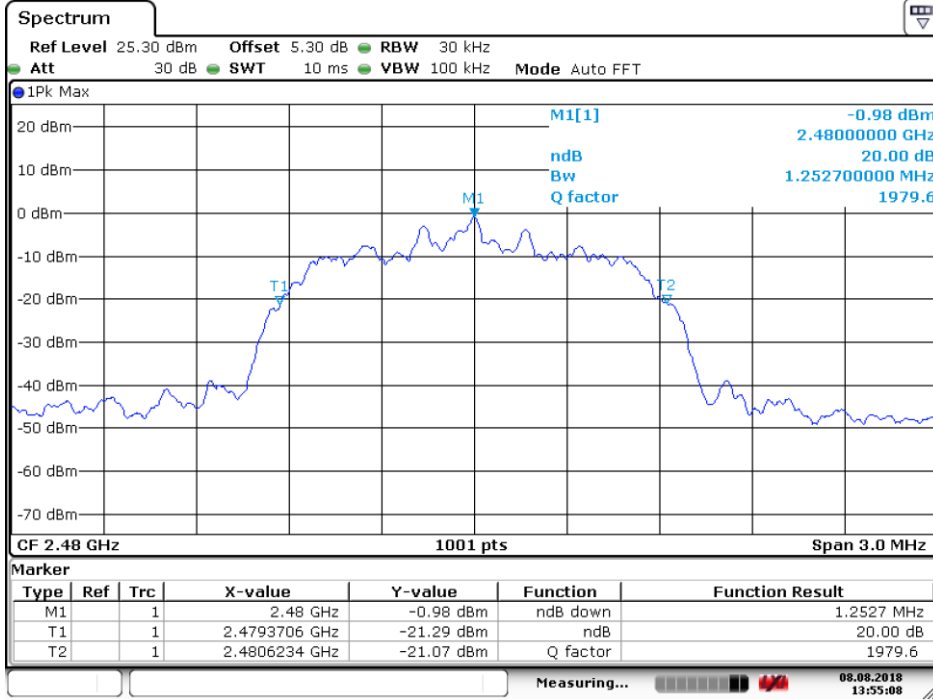


Date: 8.AUG.2018 13:55:09

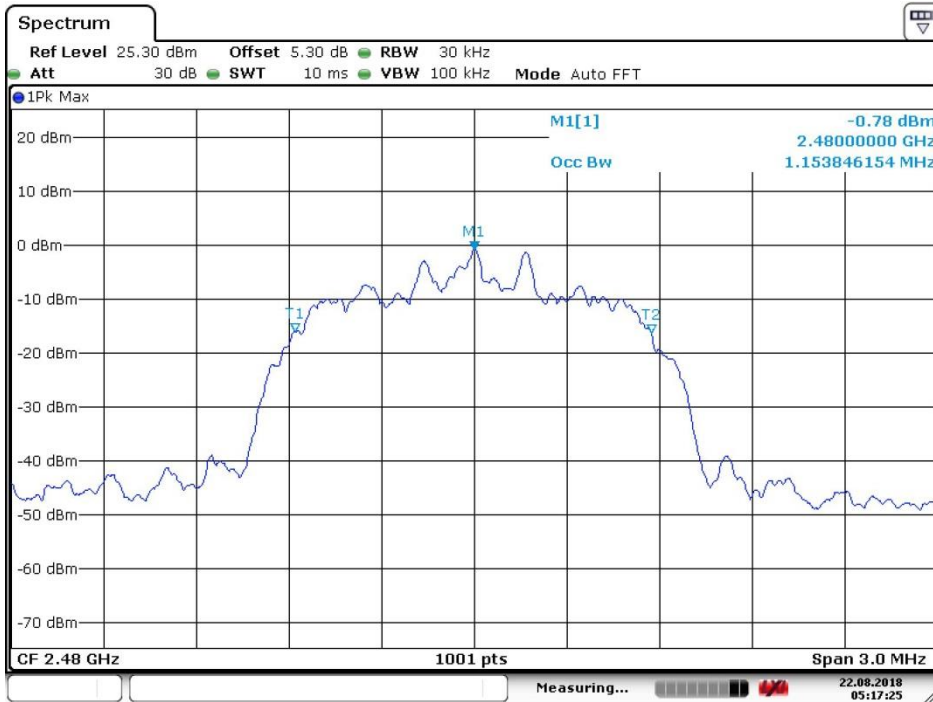


Date: 22.AUG.2018 05:17:25



Test mode: 8DPSK Test channel: Lowest

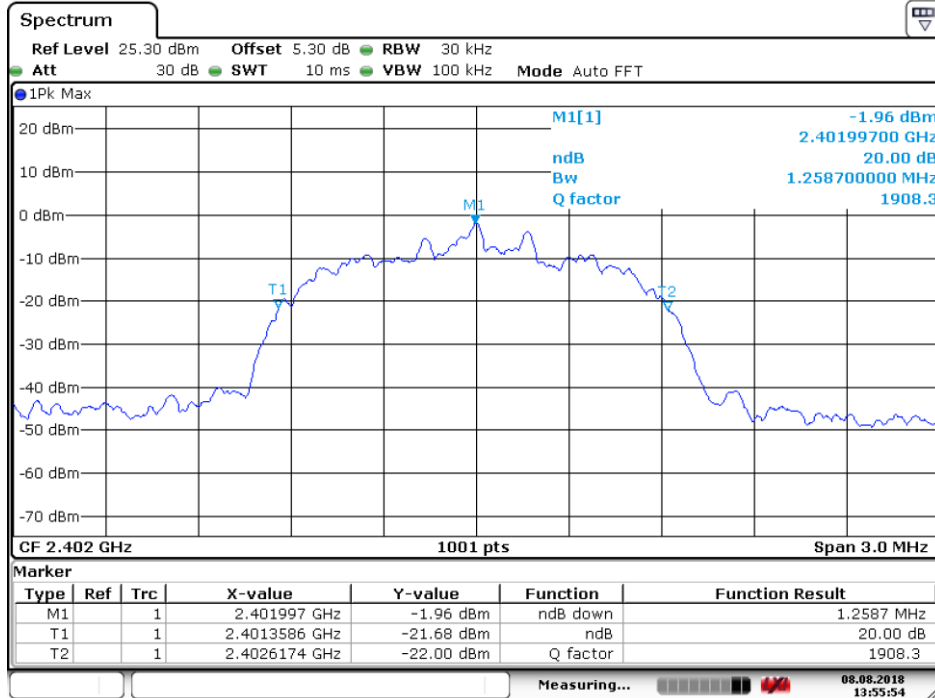


Date: 8.AUG.2018 13:55:54

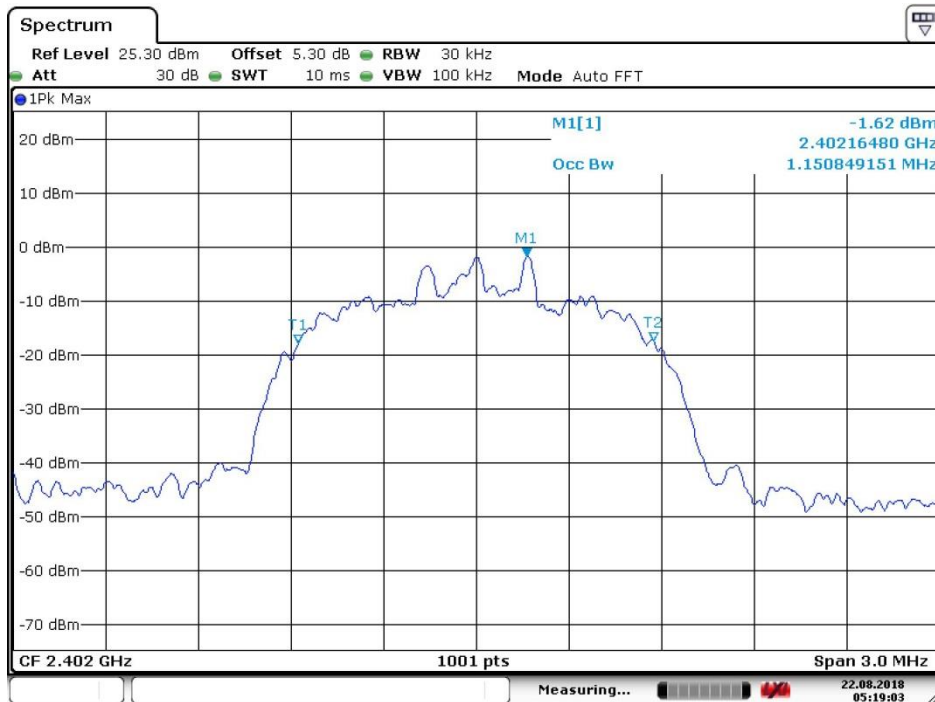


Date: 22.AUG.2018 05:19:03



Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

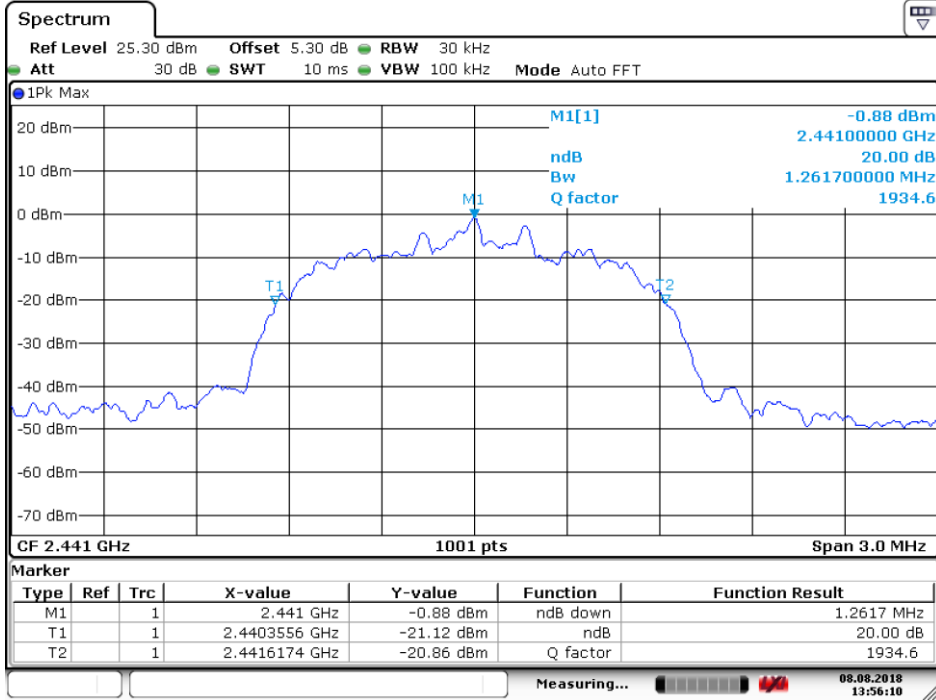


Date: 8.AUG.2018 13:56:11

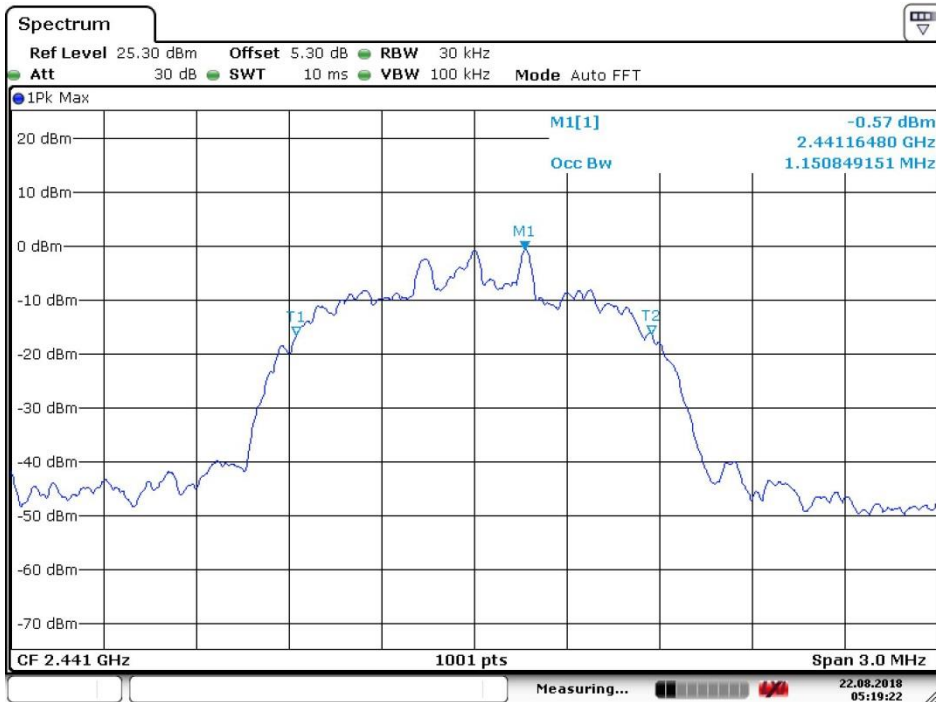


Date: 22.AUG.2018 05:19:23



Test mode: 8DPSK Test channel: Highest

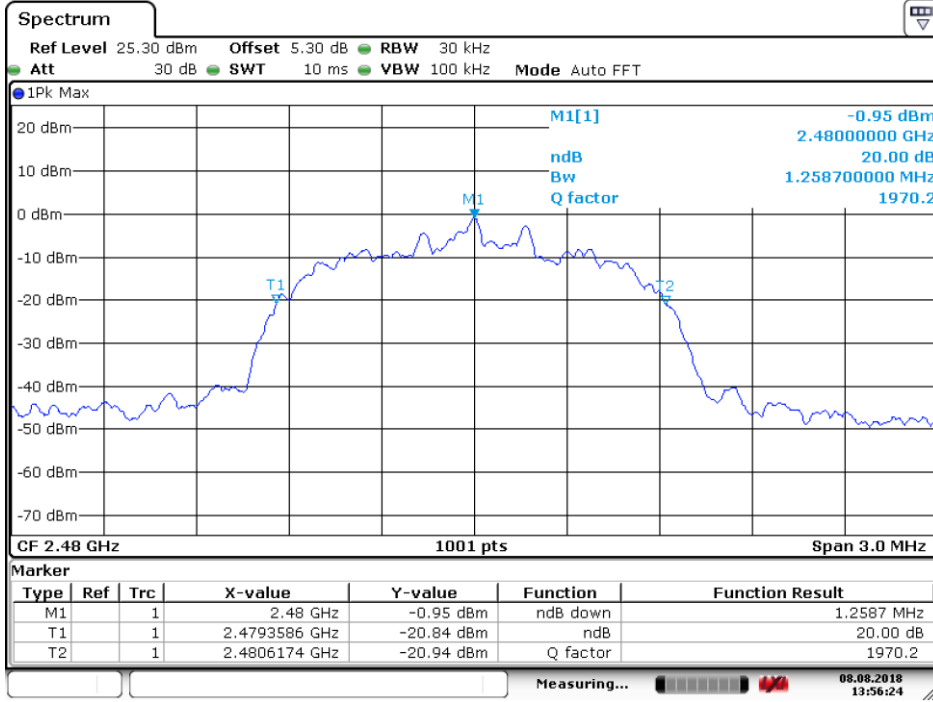


Date: 8.AUG.2018 13:56:25

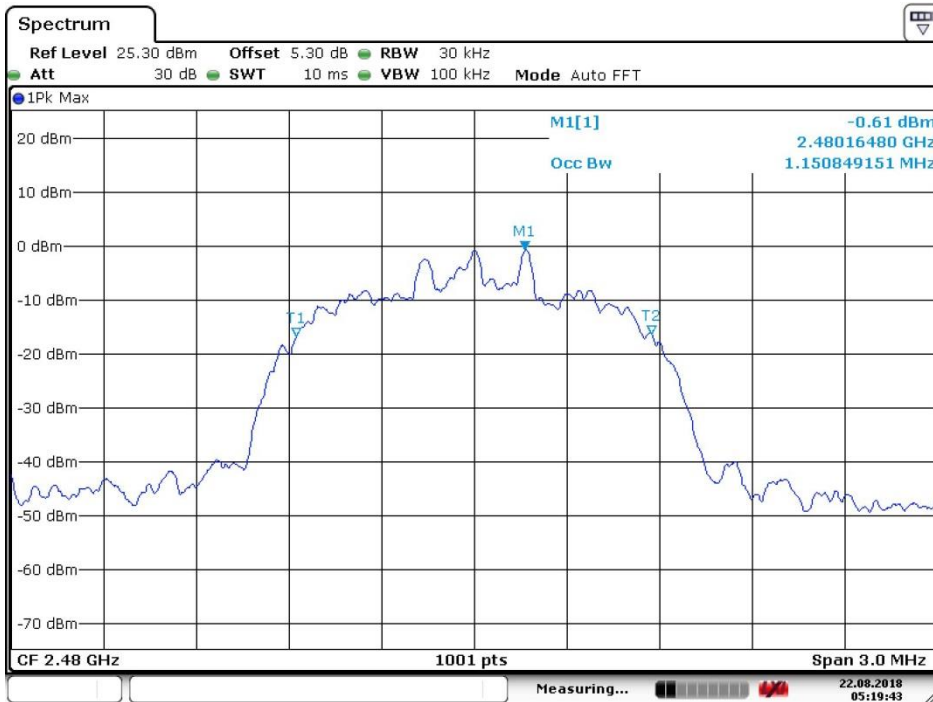

Date: 22.AUG.2018 05:19:44

## 4.5 Carrier Frequencies Separation

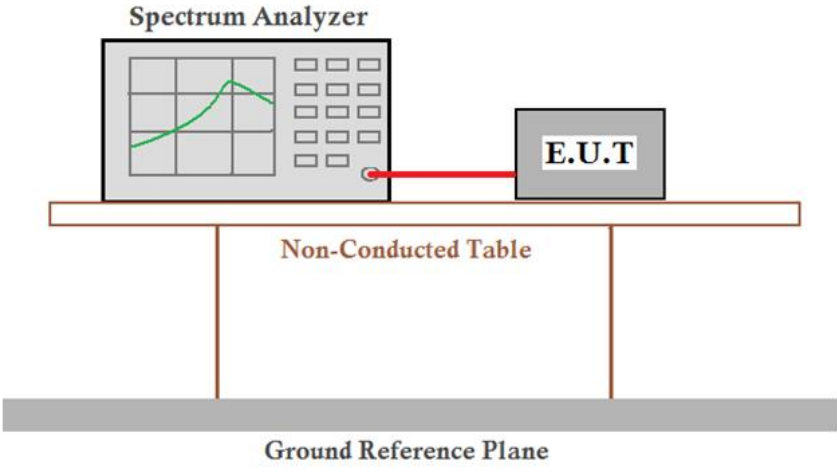Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.2
Test Setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.</p>
Limit:	2/3 of the 20dB bandwidth
	Remark: the transmission power is less than 0.125W.
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass






GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Middle	1001	639.3	Pass
$\pi$ /4DQPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Middle	986	835.1	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Middle	1001	841.1	Pass

Note: According to section 6.4,

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	959	639.3
$\pi$ /4DQPSK	1252.7	835.1
8DPSK	1261.7	841.1

Test plot as follows:


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

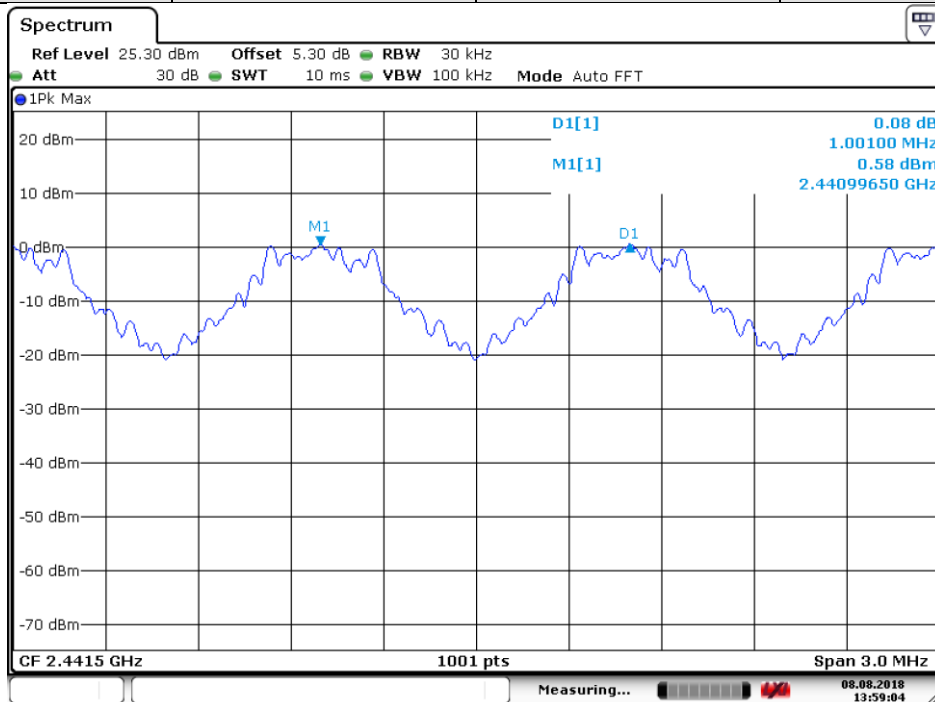

Date: 8.AUG.2018 13:59:04




Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

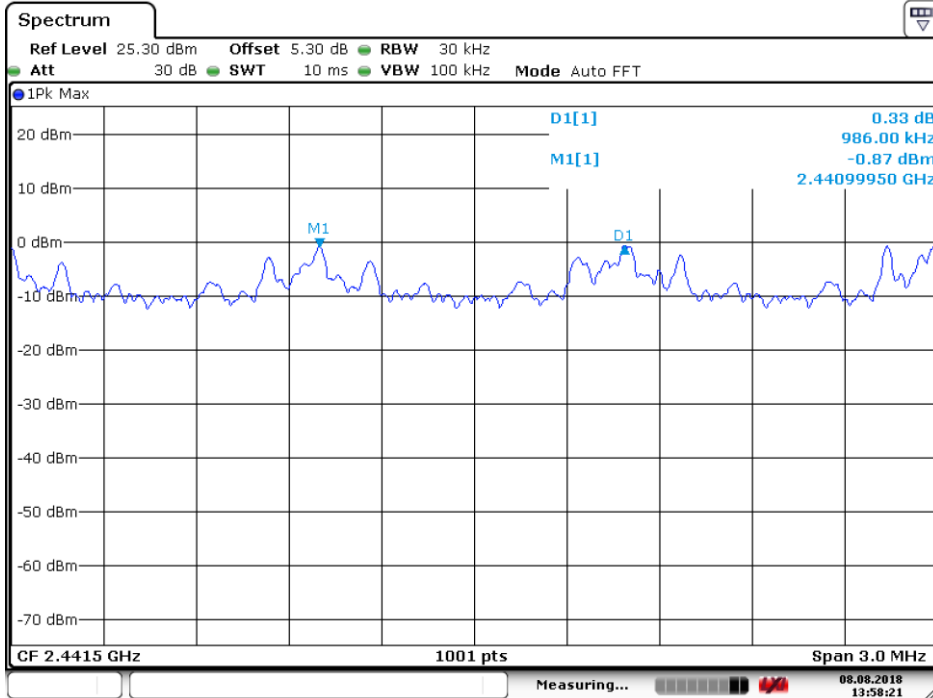


Date: 8.AUG.2018 13:58:21

Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

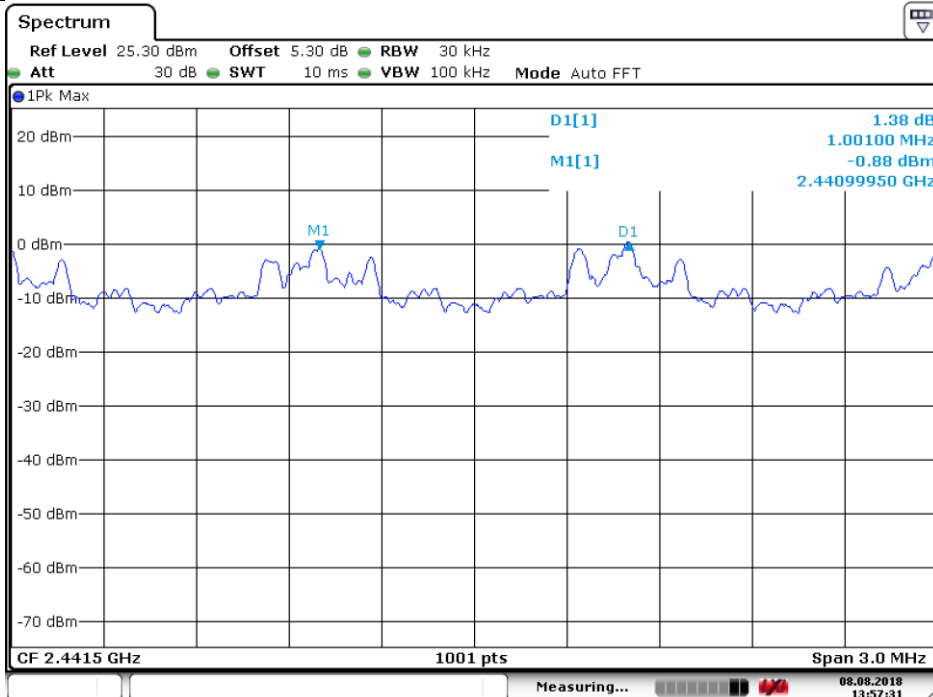

Date: 8.AUG.2018 13:57:31

## 4.6 Hopping Channel Number

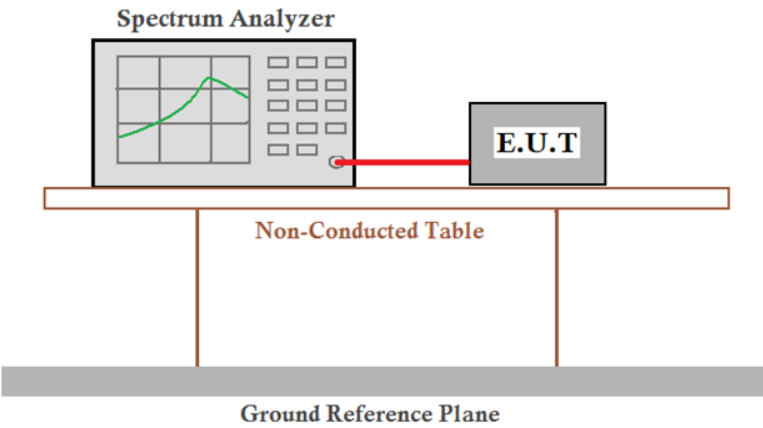Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.3
Test Setup:	
Limit:	At least 15 channels
Test Mode:	Hopping transmitting with all kind of modulation
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass


### Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
$\pi/4$ DQPSK	79	≥15
8DPSK	79	≥15




Test plot as follows

Test mode: GFSK

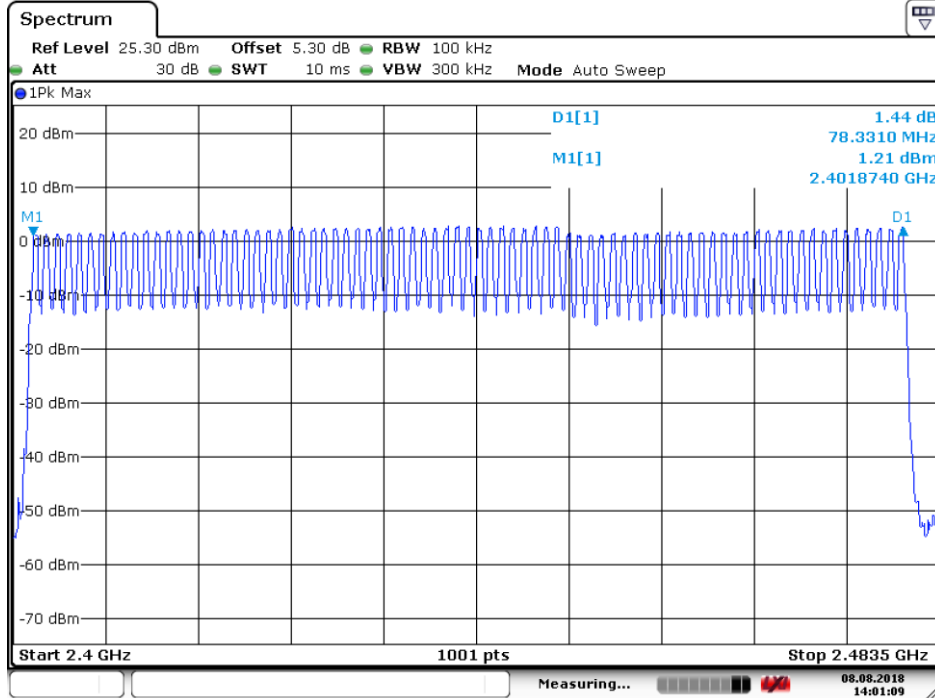

Date: 8.AUG.2018 14:01:10


Test mode:  $\pi/4$ DQPSK

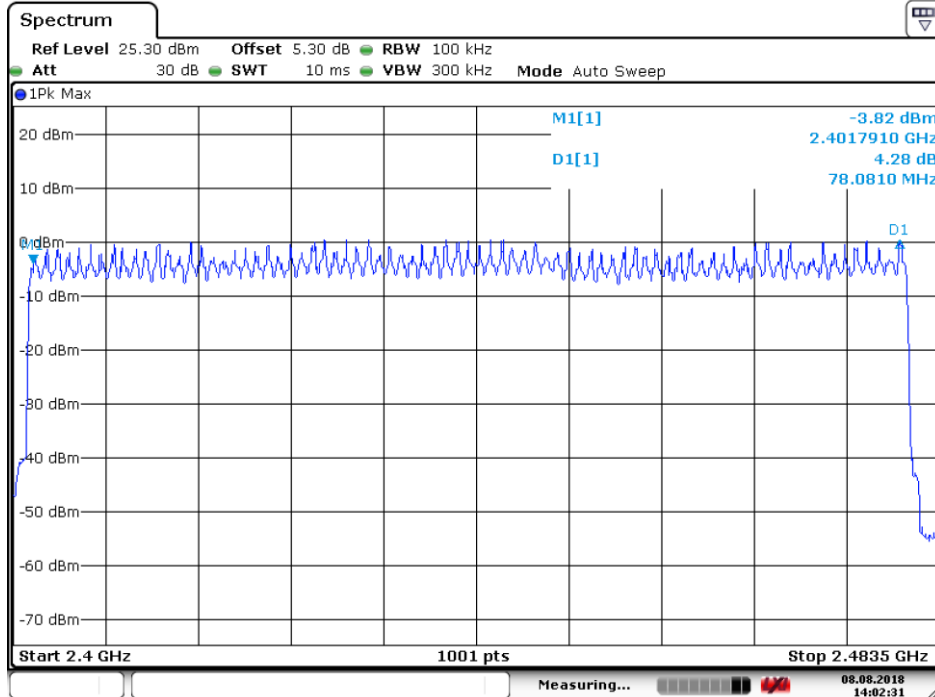

Date: 8.AUG.2018 14:02:32




Test mode: 8DPSK

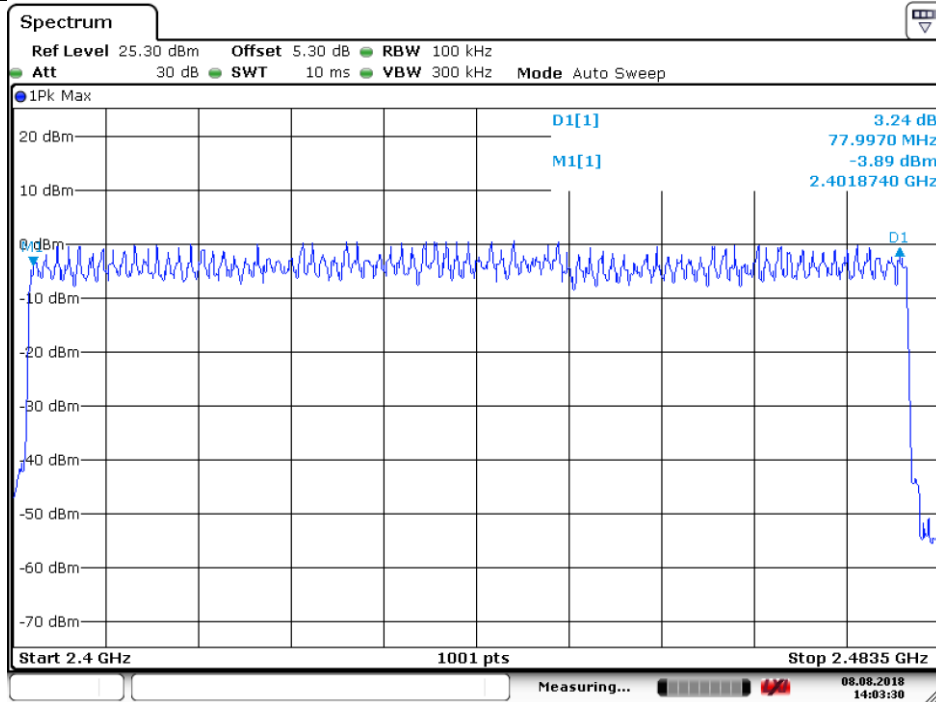

Date: 8.AUG.2018 14:03:31

## 4.7 Dwell Time

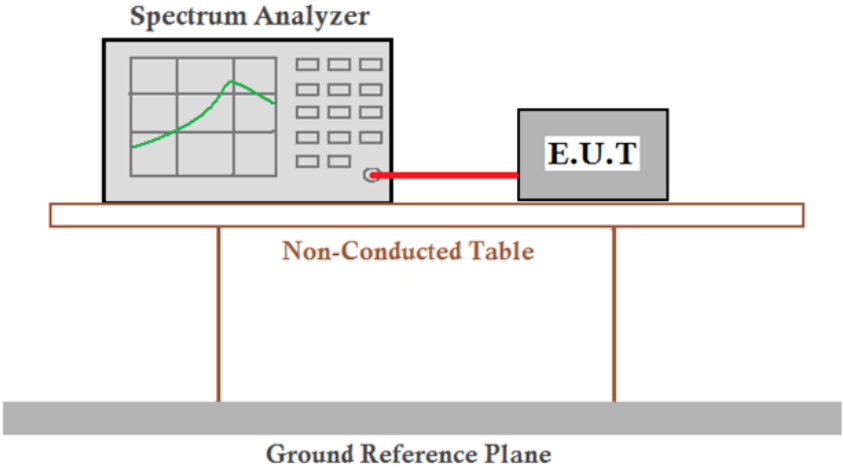Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.4
Test Setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Instruments Used:	Refer to section 5.10 for details
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Limit:	0.4 Second
Test Results:	Pass

### Measurement Data

Operation Modes	On time (ms) on one channel
DH1	0.432
DH3	1.689
DH5	2.949
2-DH1	0.443
2-DH3	1.704
2-DH5	2.969
3-DH1	0.447
3-DH3	1.695
3-DH5	2.954



**Bluetooth Time of Occupancy Calculation**

Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s, since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of  $1600/6=266.67$  hops/slot

$400\text{ms} \times 79 \text{ Channel} = 31.6 \text{ s}$  (Time of Occupancy Limit)

Worst case BT has 266.67 hops/second (for 1x/EDR modes with 2-DH5 operation)

$266.67 \text{ hops/second}/79 \text{ channels}=3.38 \text{ hops/second}$  (# of hops/second on one channel)

$3.38 \text{ hops/second}/\text{channel} \times 31.6 \text{ seconds}=106.67 \text{ hops}$  (#hops over a 31.6 second period)

$106.67 \text{ hops} \times 2.969 \text{ ms/channel} = 316.703 \text{ ms}$ (worst case dwell time for one channel in 1x/EDR modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800hops/s, AFH mode also uses 6 slots so the Bluetooth transmitter hops at a rate of  $800/6=133.3$  hops/s/slot

$400\text{ms} \times 20 \text{ Channel} = 8 \text{ s}$  (Time of Occupancy Limit)

Worst case BT has 133.3 hops/second/slot (for AFH mode with 2-DH5 operation)


$133.3 \text{ hops/second}/20 \text{ channels}=6.67 \text{ hops/second}$  (#hops/second on one channel)

$6.67 \text{ hops/second} \times 8 \text{ seconds}=53.34 \text{ hops}$  (#hops over a 8 seconds period)


$53.34 \text{ hops} \times 2.969 \text{ ms/channel}=158.37 \text{ ms}$ (worst case dwell time for one channel in AFH mode)



Test plot as follows:

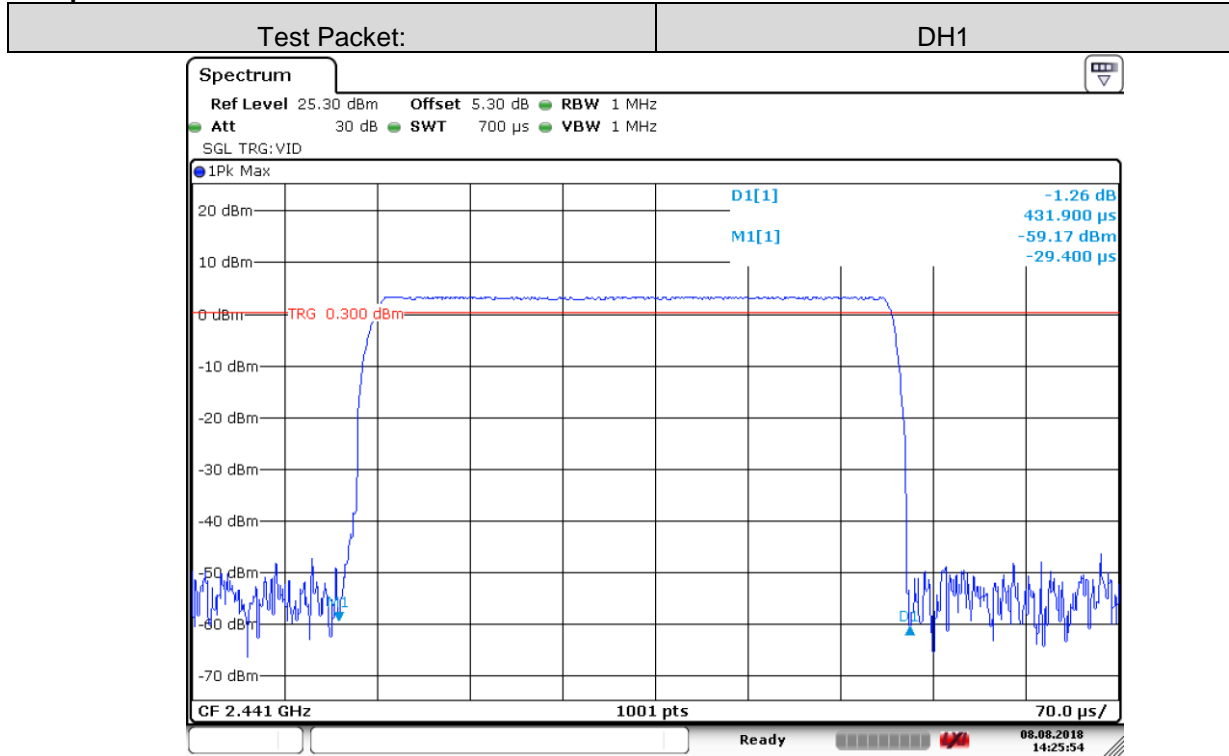

Date: 8.AUG.2018 14:25:54

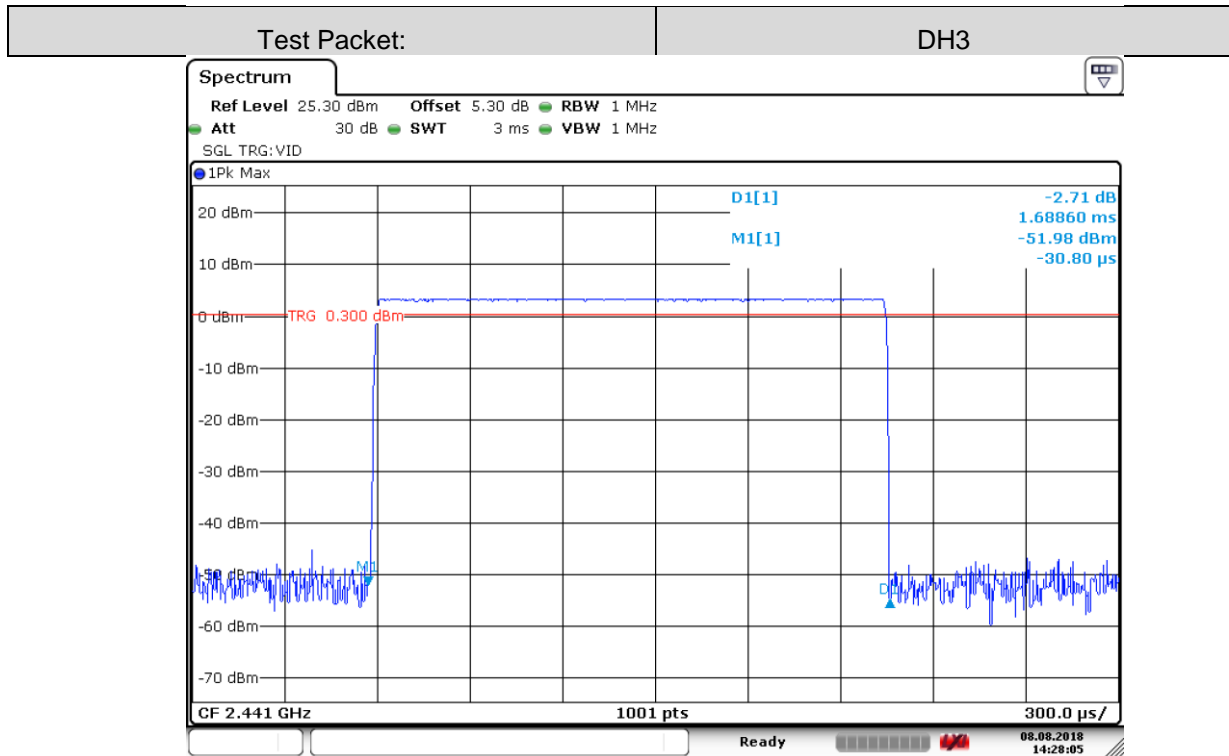


Date: 8.AUG.2018 14:28:05






Test Packet: DH5

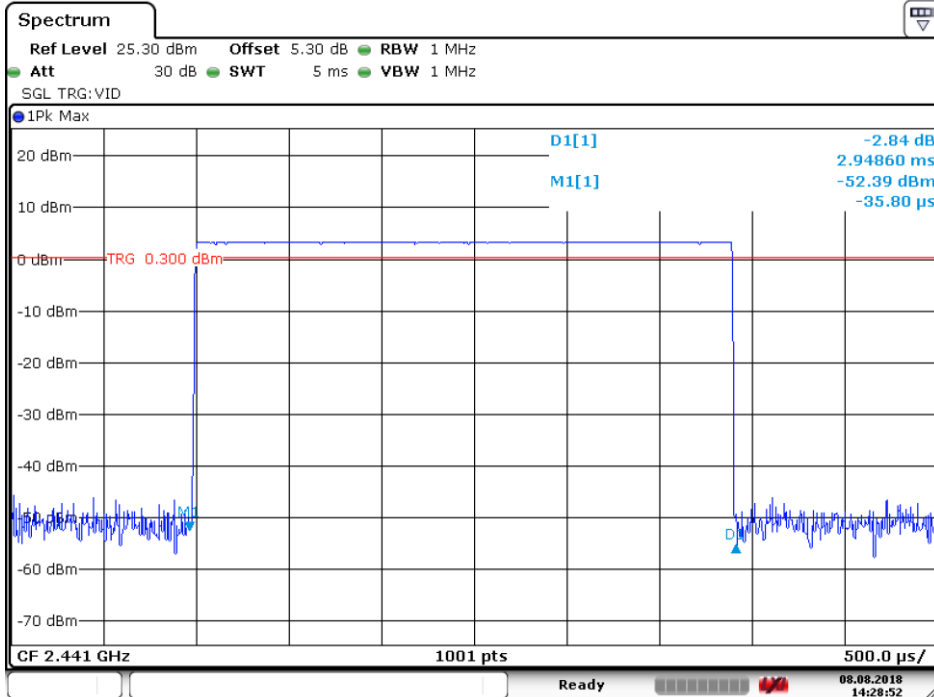

Date: 8.AUG.2018 14:28:53


Test Packet: 2-DH1

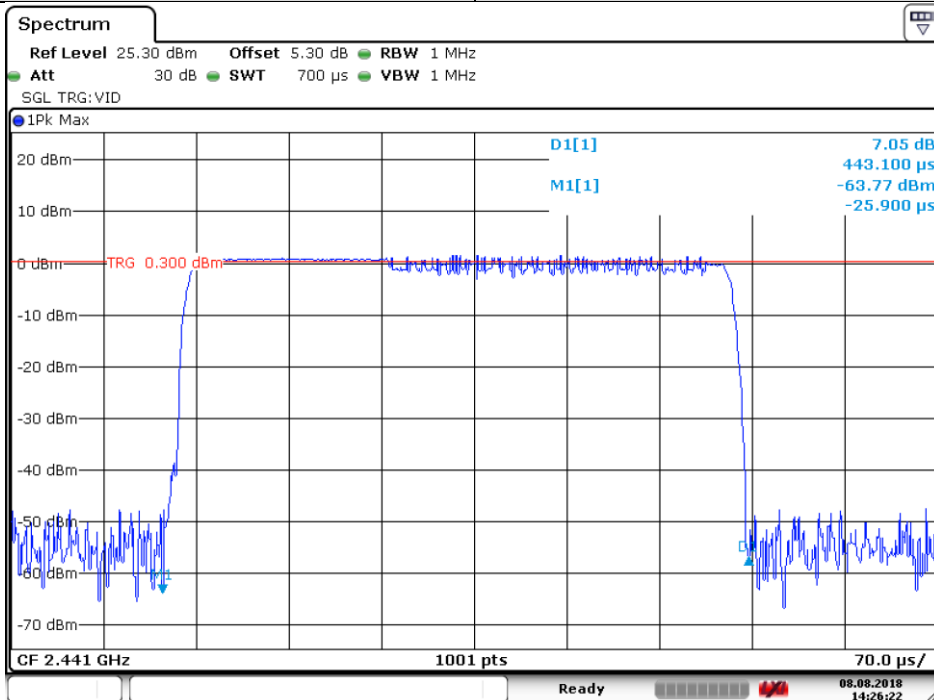

Date: 8.AUG.2018 14:26:23




Test Packet: 2-DH3

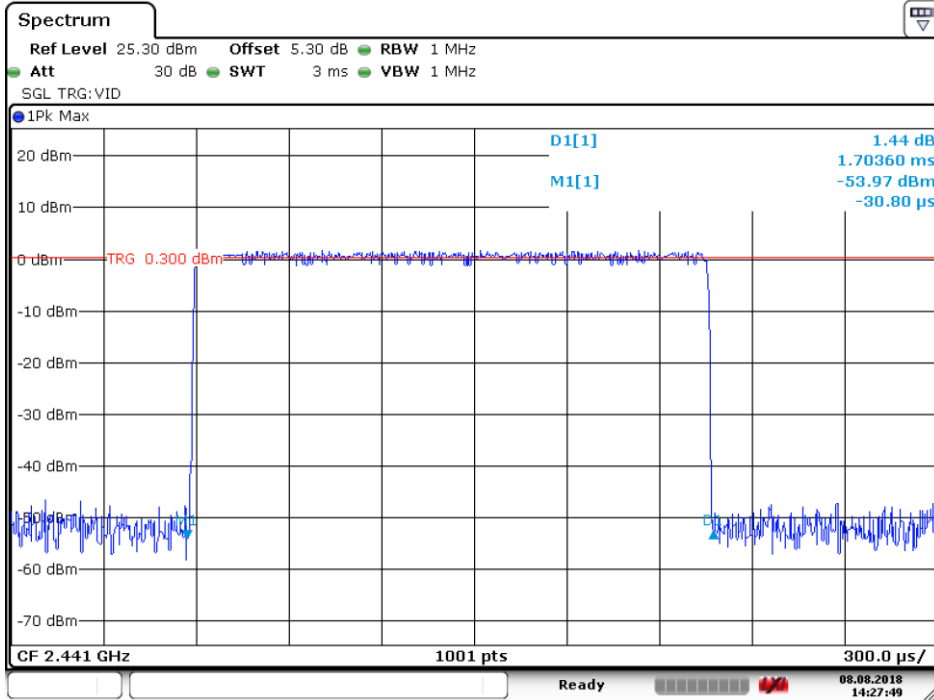

Date: 8.AUG.2018 14:27:49


Test Packet: 2-DH5

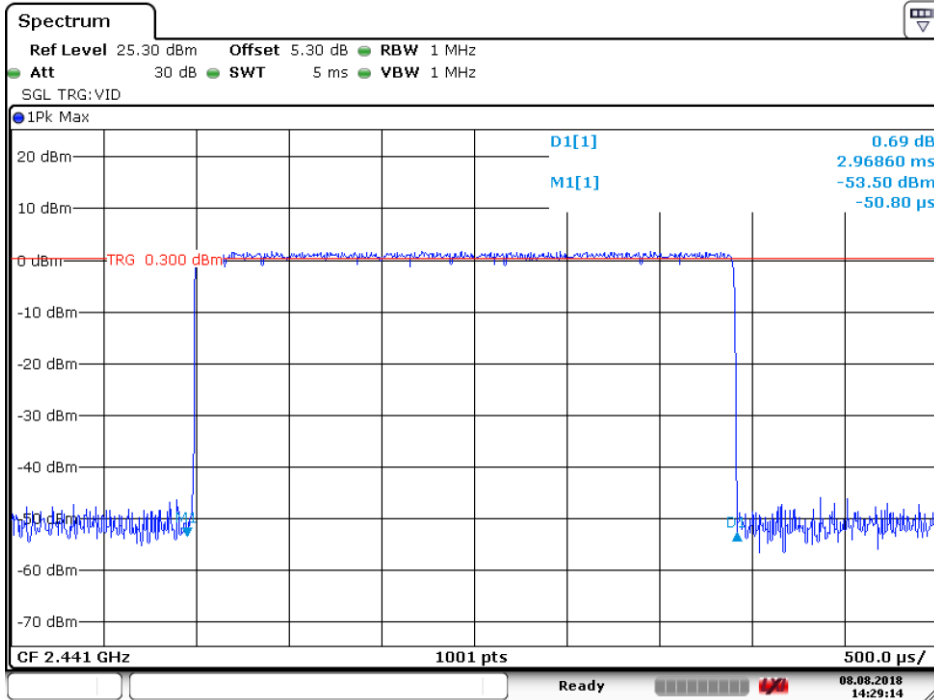

Date: 8.AUG.2018 14:29:14




Test Packet: 3-DH1

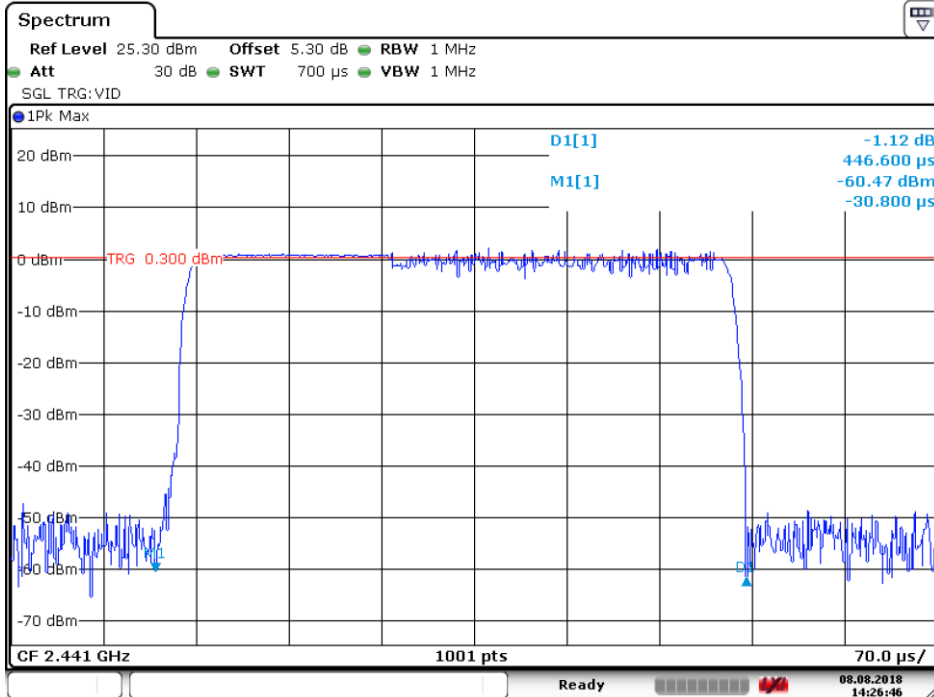

Date: 8.AUG.2018 14:26:47


Test Packet: 3-DH3

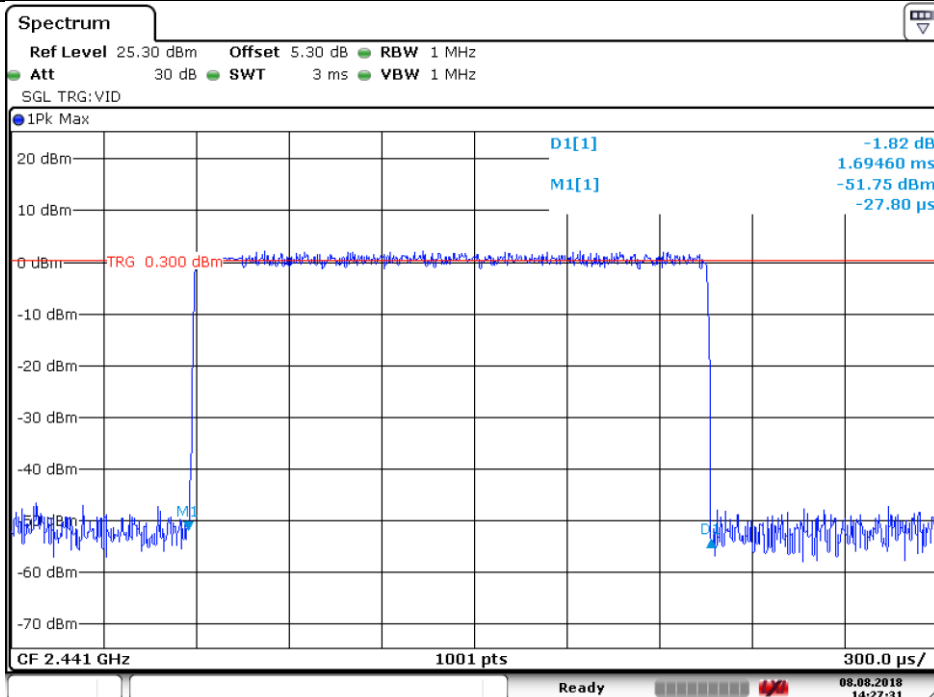

Date: 8.AUG.2018 14:27:32




Test Packet: 3-DH5

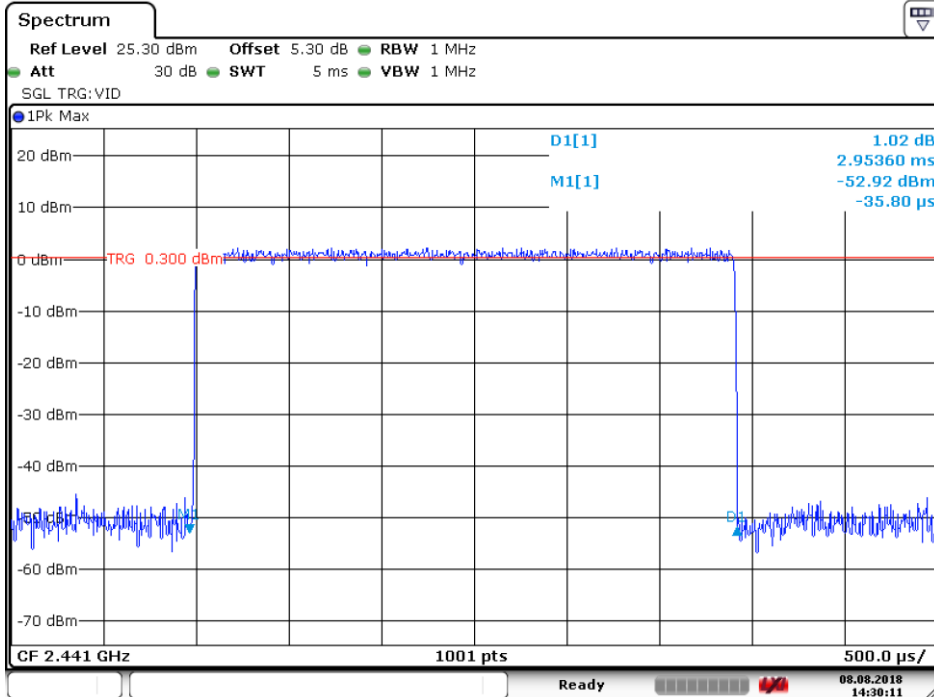

Date: 8.AUG.2018 14:30:12


## 4.8 Band-edge for RF Conducted Emissions

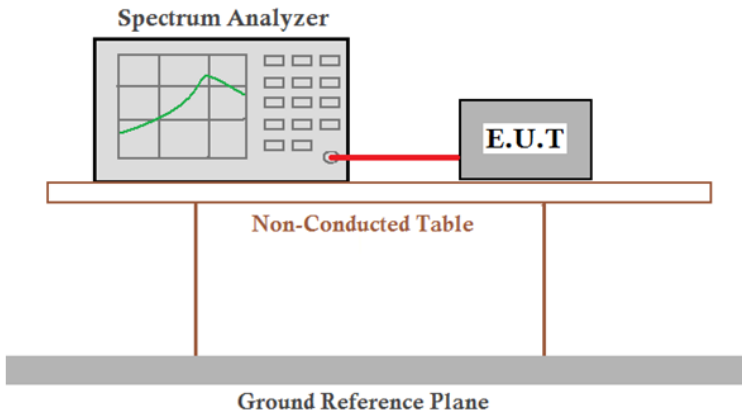Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 Section 7.8.6
Test Setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest	Hopping	ON
------------	------	---------------	--------	---------	----

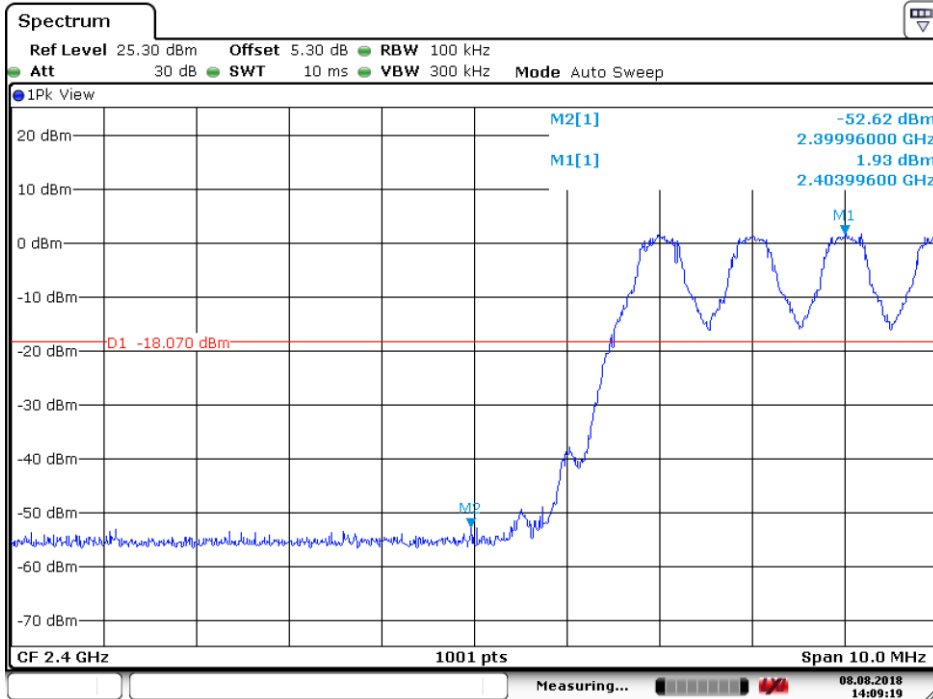

Date: 8.AUG.2018 14:09:19


Test mode:	GFSK	Test channel:	Lowest	Hopping	OFF
------------	------	---------------	--------	---------	-----

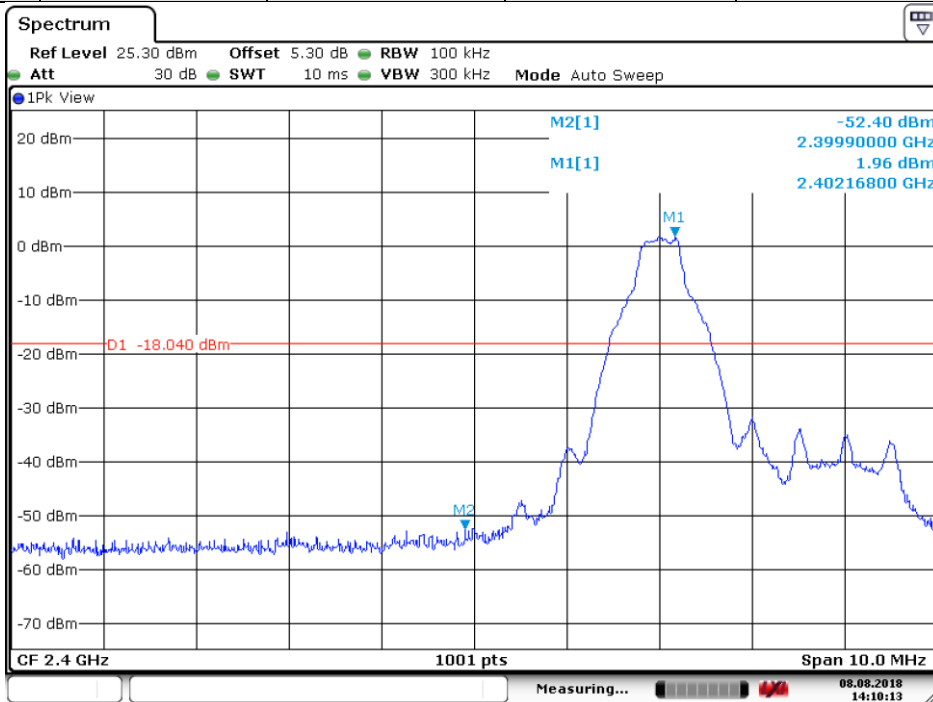

Date: 8.AUG.2018 14:10:14




Test mode:	GFSK	Test channel:	Highest	Hopping	ON
------------	------	---------------	---------	---------	----

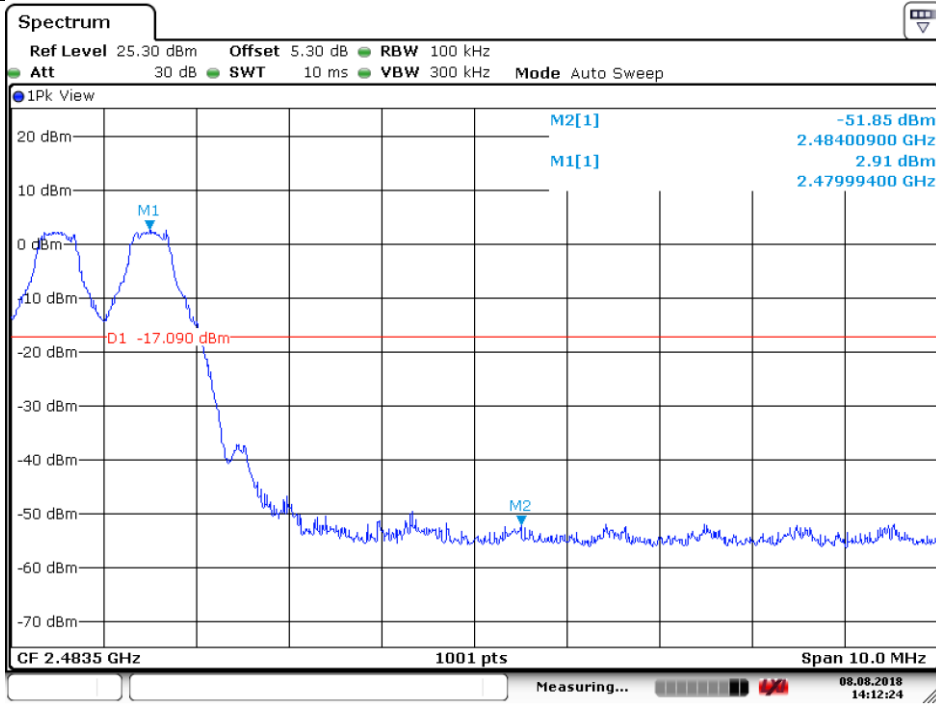

Date: 8.AUG.2018 14:12:24


Test mode:	GFSK	Test channel:	Highest	Hopping	OFF
------------	------	---------------	---------	---------	-----

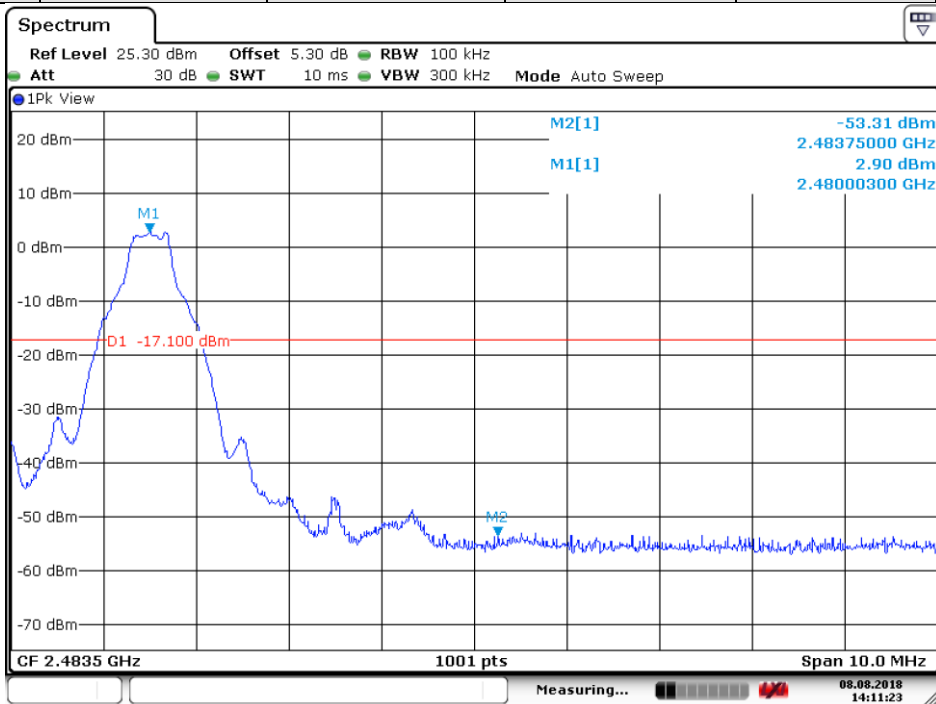

Date: 8.AUG.2018 14:11:23




Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest	Hopping	ON
------------	---------------	---------------	--------	---------	----

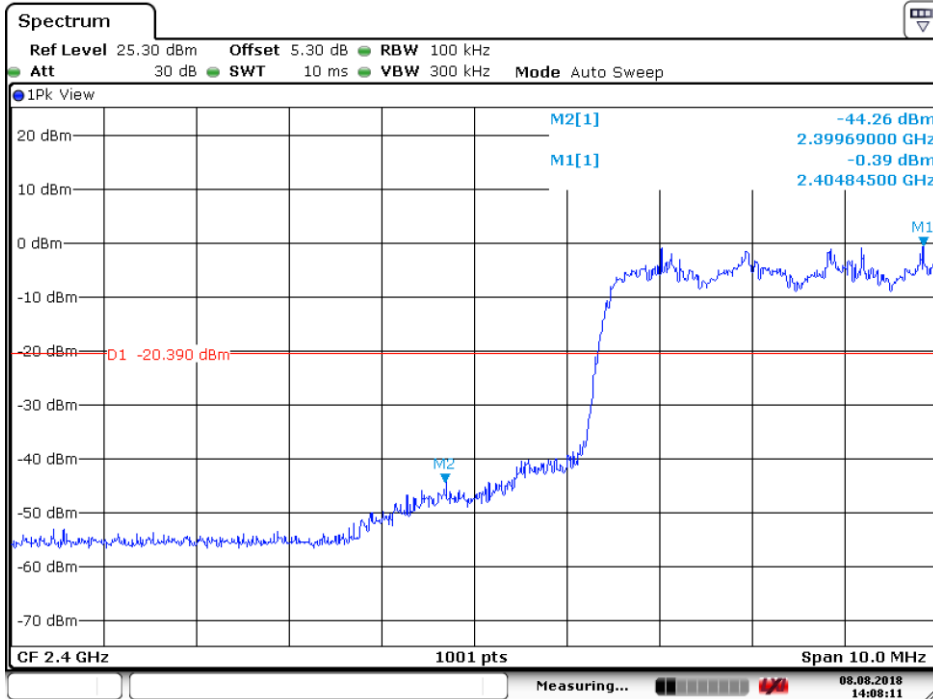

Date: 8.AUG.2018 14:08:11

Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest	Hopping	OFF
------------	---------------	---------------	--------	---------	-----

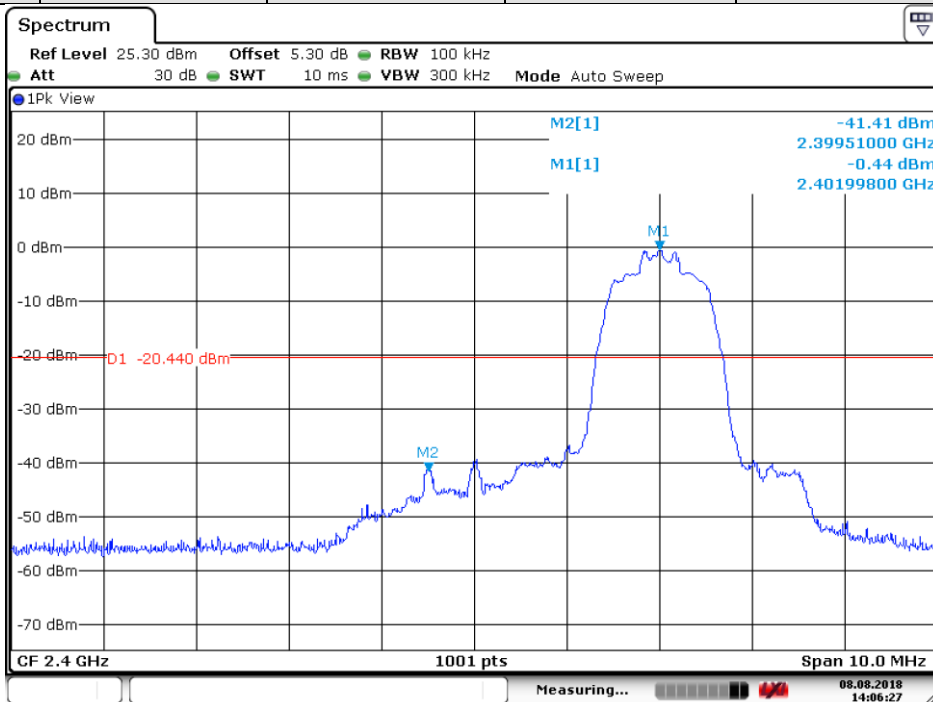


Date: 8.AUG.2018 14:06:28






Test mode:	$\pi/4$ DQPSK	Test channel:	Highest	Hopping	ON
------------	---------------	---------------	---------	---------	----

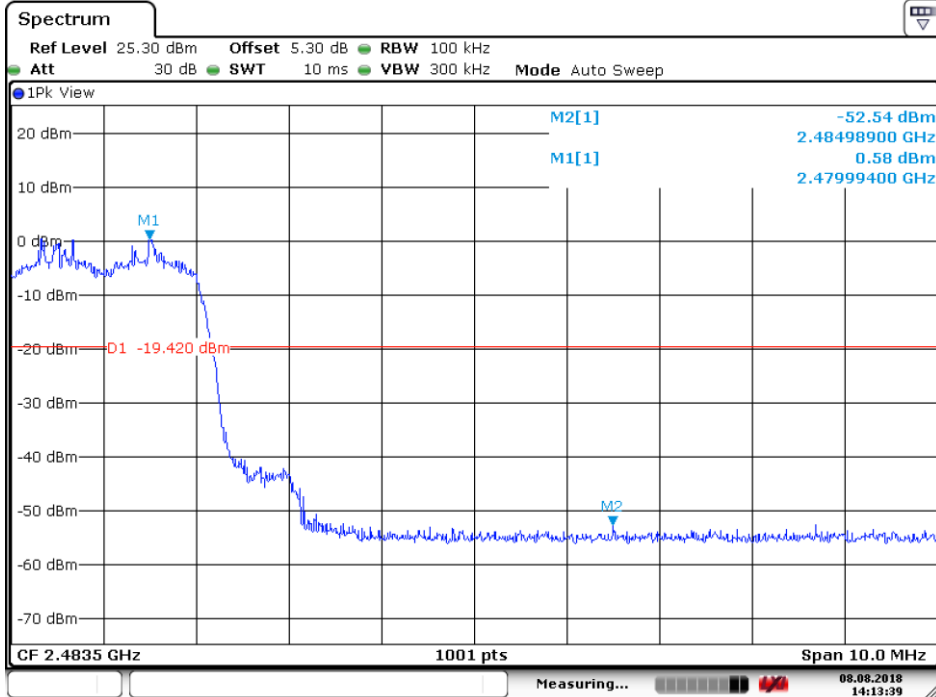

Date: 8.AUG.2018 14:13:39


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest	Hopping	OFF
------------	---------------	---------------	---------	---------	-----

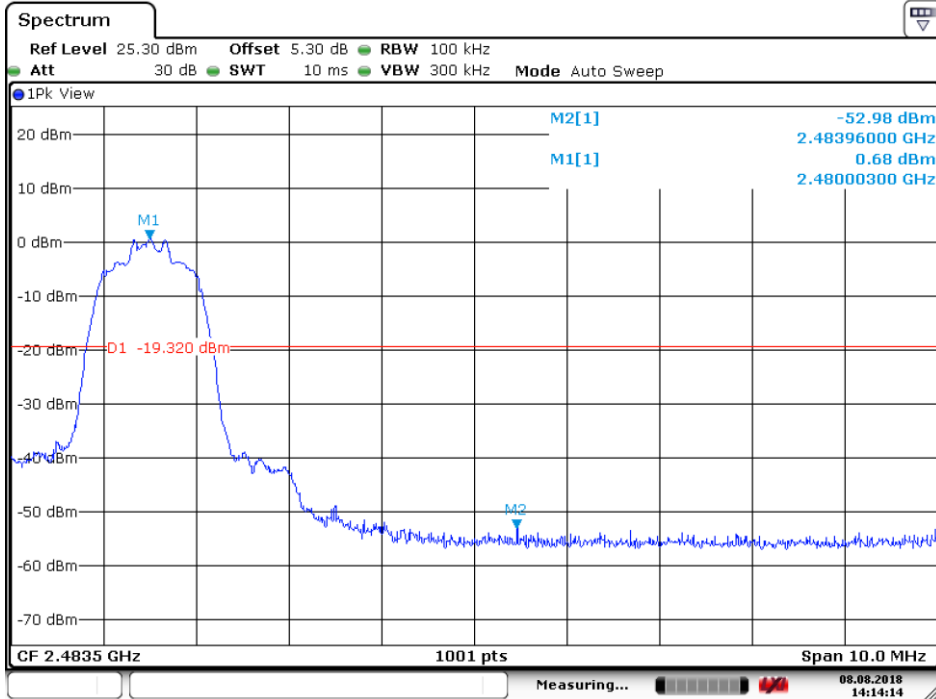

Date: 8.AUG.2018 14:14:15




Test mode:	8DPSK	Test channel:	Lowest	Hopping	ON
------------	-------	---------------	--------	---------	----

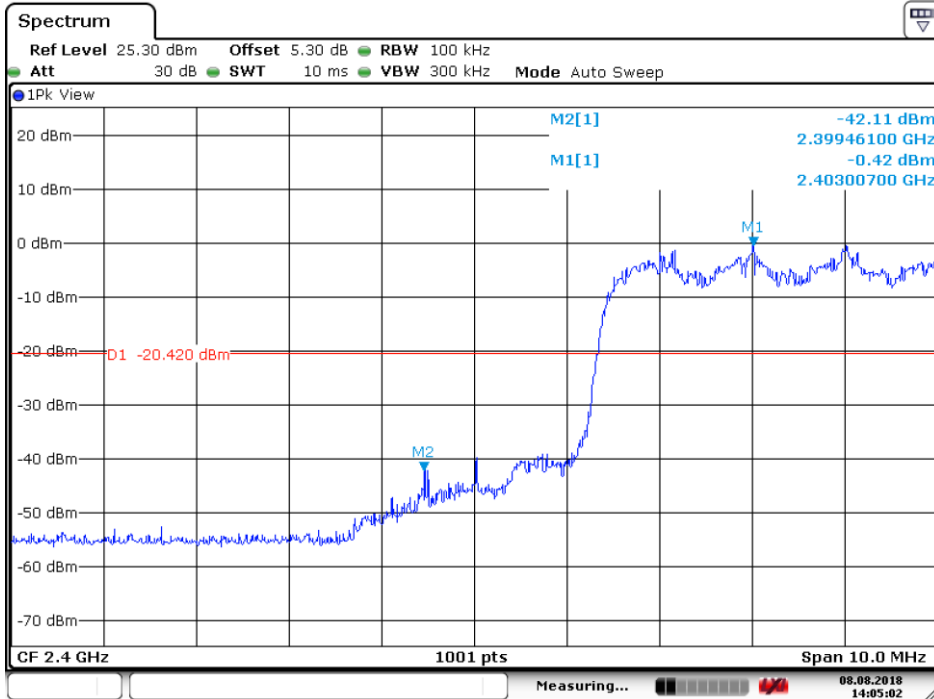

Date: 8.AUG.2018 14:05:02


Test mode:	8DPSK	Test channel:	Lowest	Hopping	OFF
------------	-------	---------------	--------	---------	-----

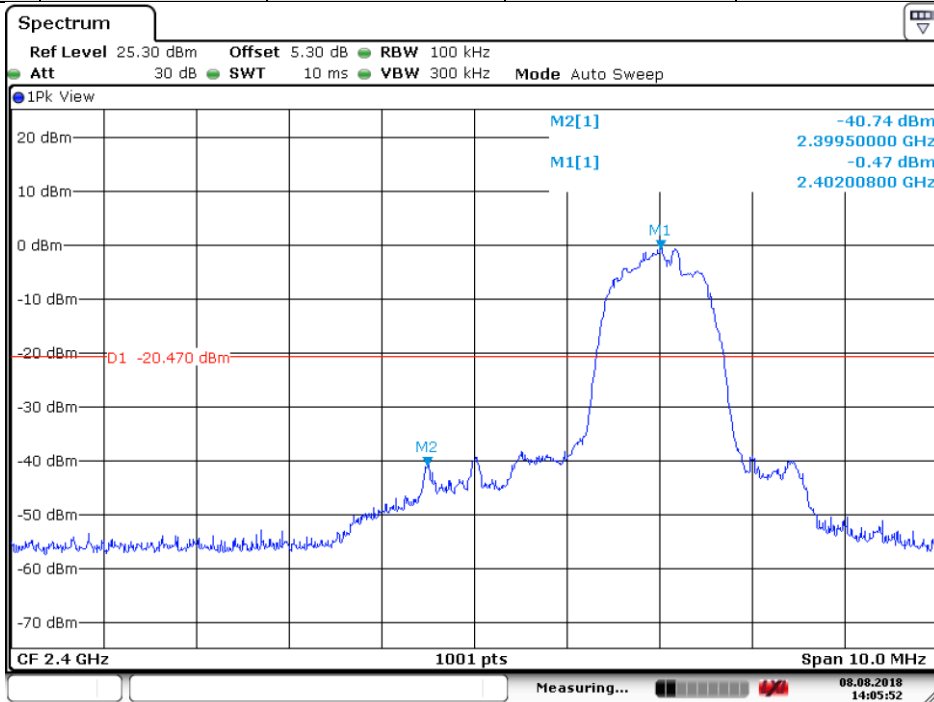

Date: 8.AUG.2018 14:05:52




Test mode:	8DPSK	Test channel:	Highest	Hopping	ON
------------	-------	---------------	---------	---------	----

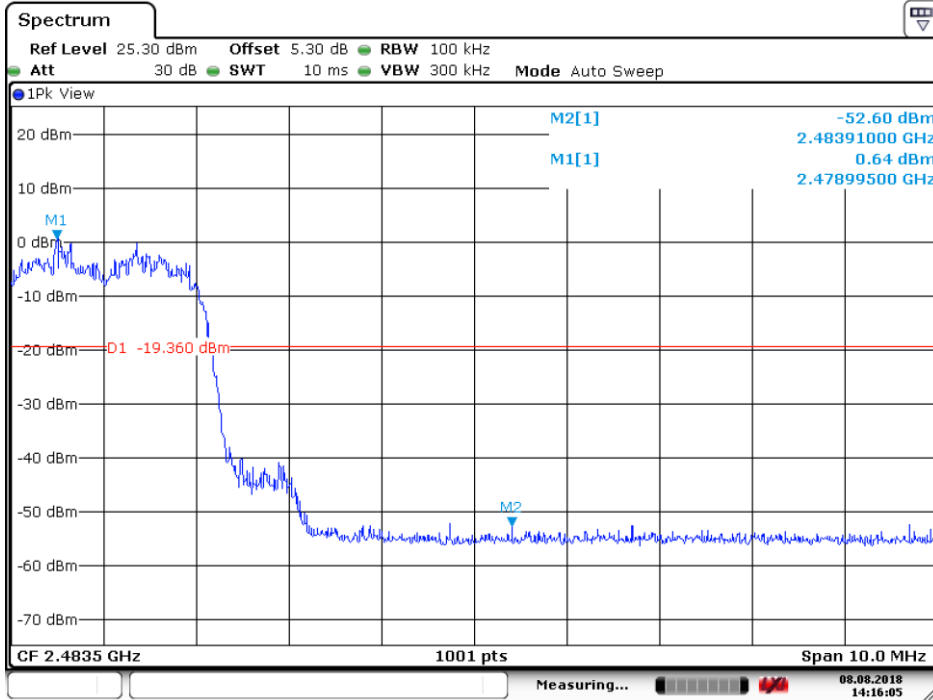


Date: 8.AUG.2018 14:16:05

Test mode:	8DPSK	Test channel:	Highest	Hopping	OFF
------------	-------	---------------	---------	---------	-----

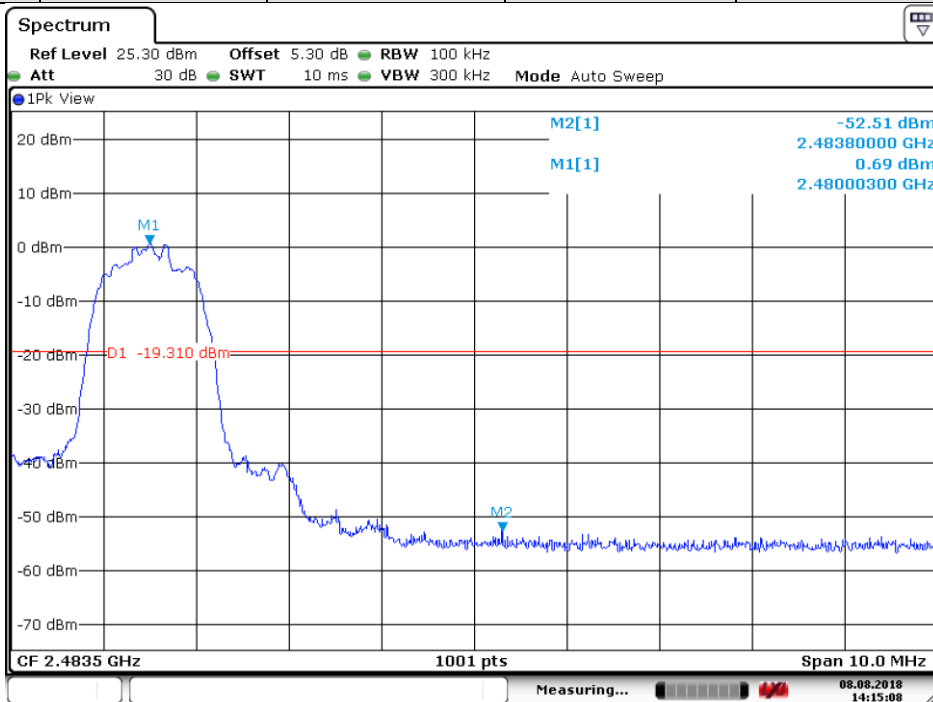

Date: 8.AUG.2018 14:15:08


## 4.9 Spurious RF Conducted Emissions

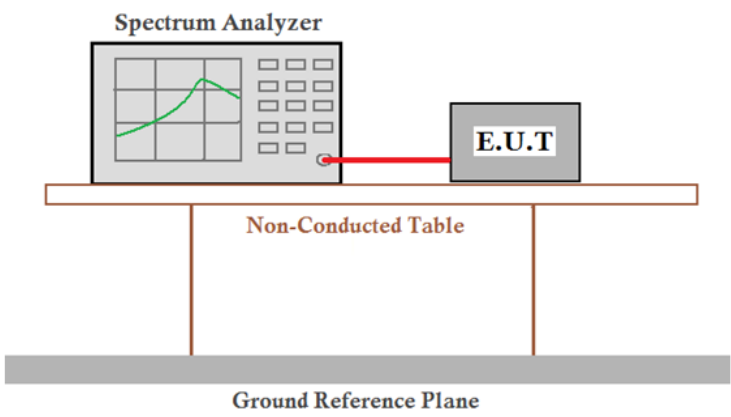Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 Section 7.8.8
Test Setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.</p>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

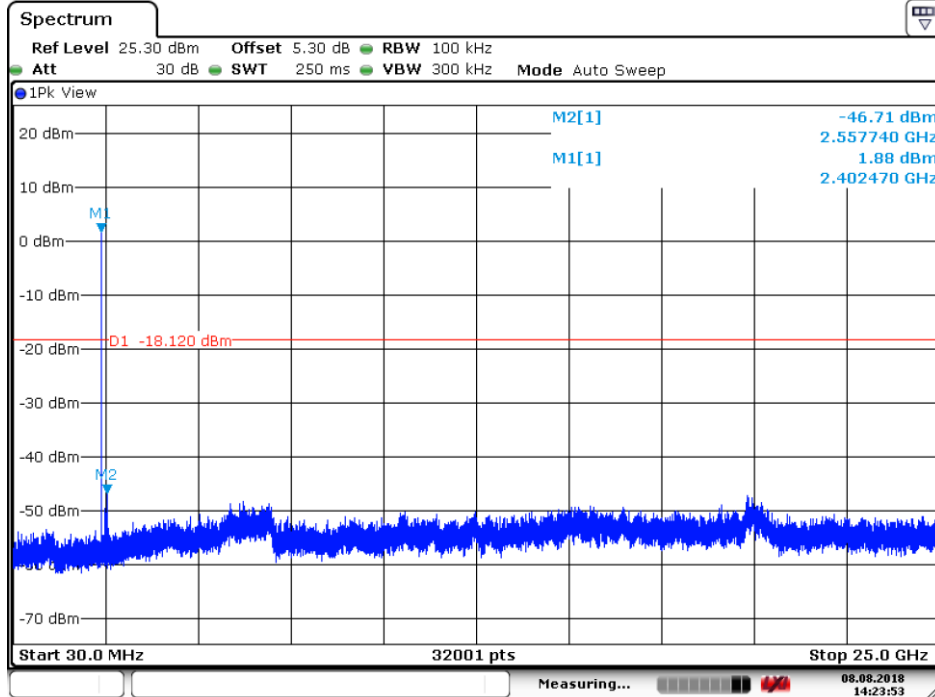

Date: 8.AUG.2018 14:23:54


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

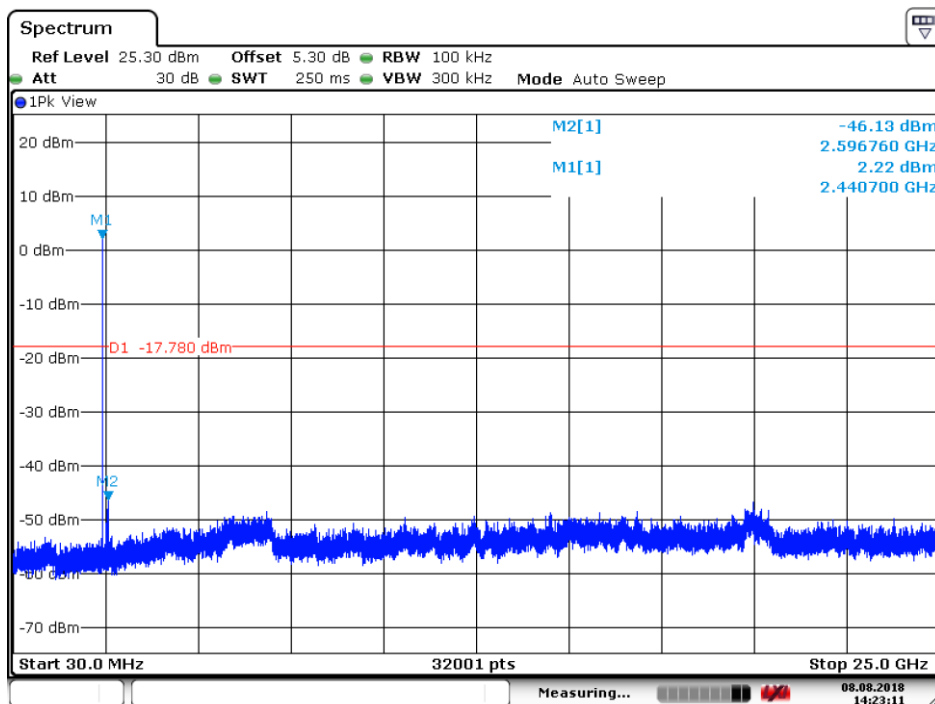

Date: 8.AUG.2018 14:23:10




Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

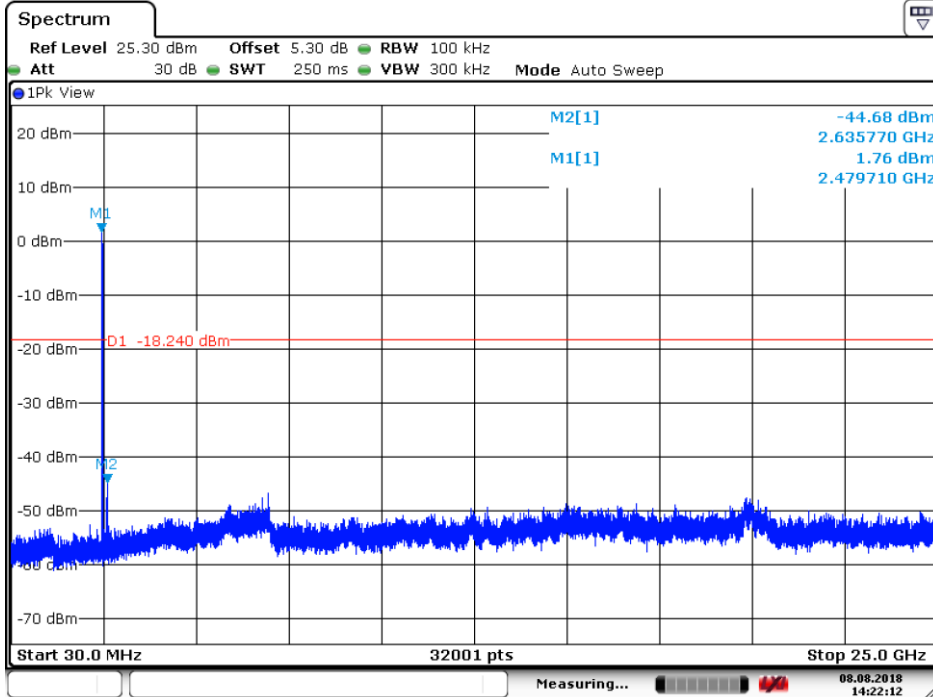

Date: 8.AUG.2018 14:22:12


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

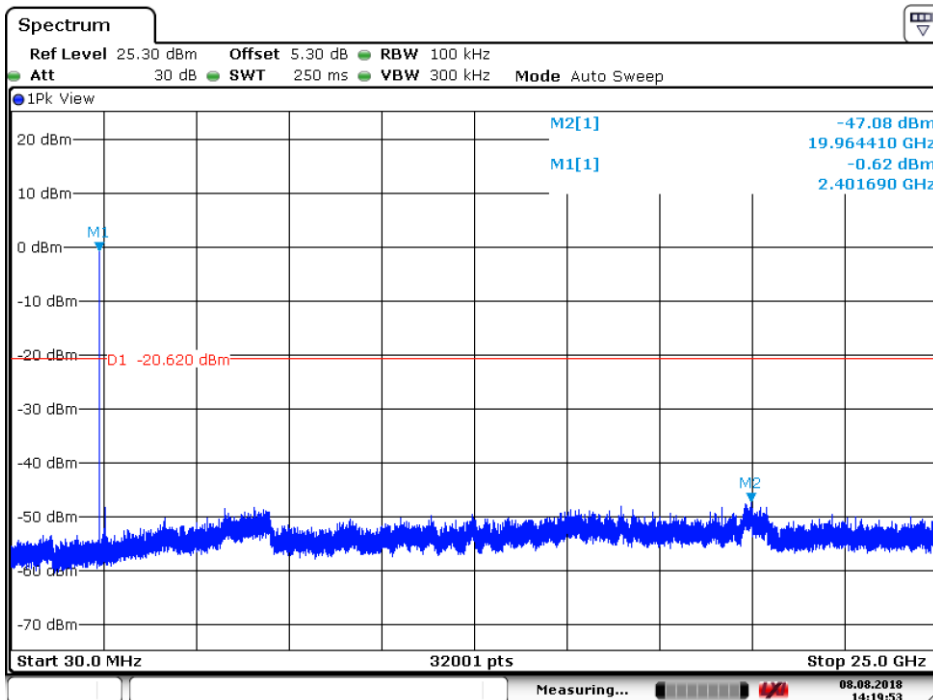

Date: 8.AUG.2018 14:19:53




Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

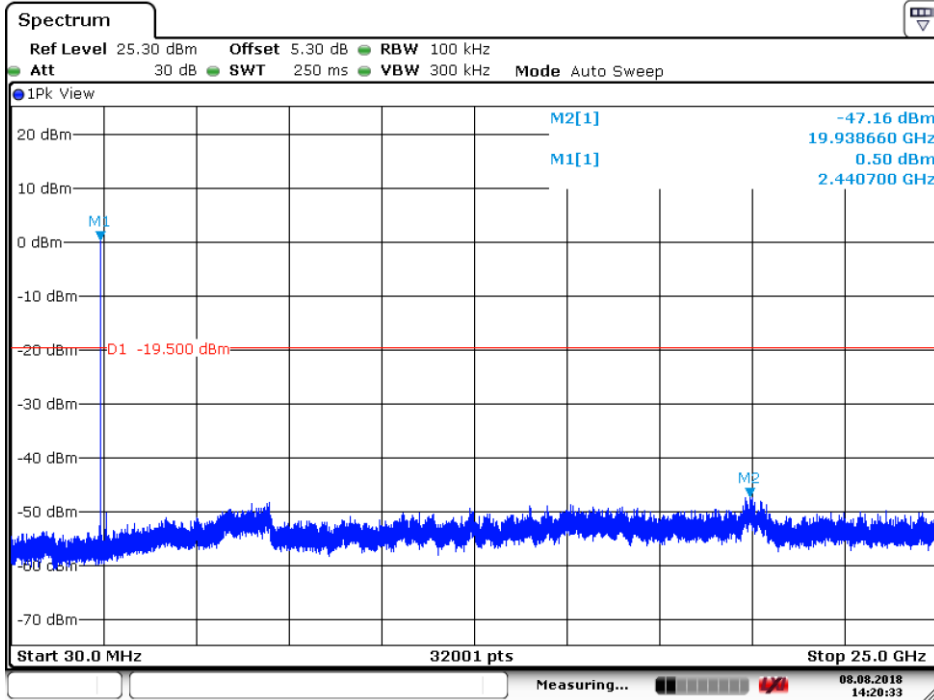

Date: 8.AUG.2018 14:20:34


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

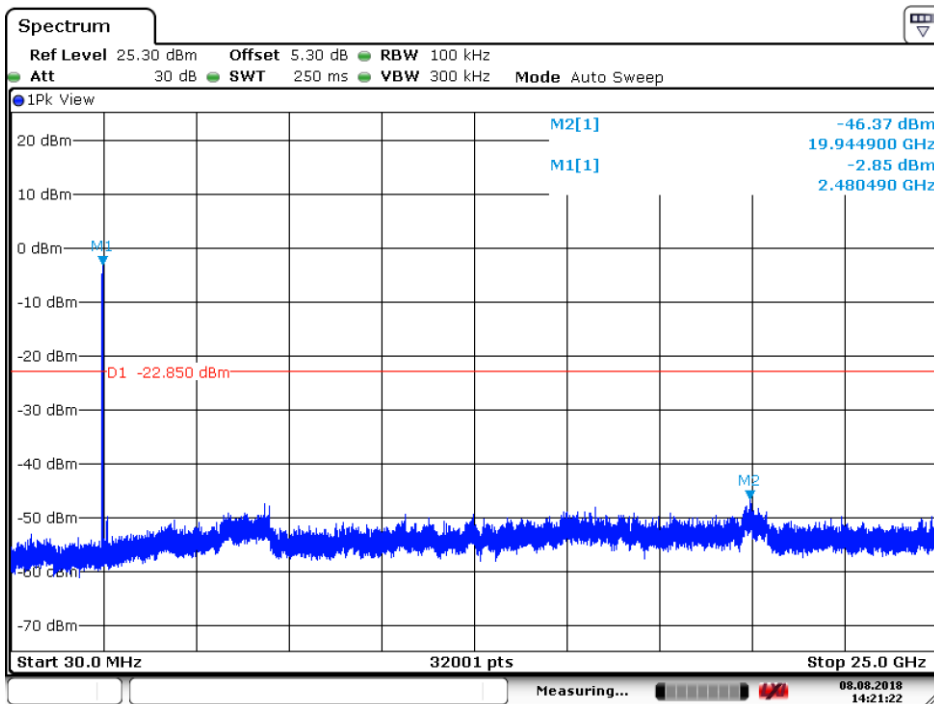

Date: 8.AUG.2018 14:21:22




Test mode: 8DPSK Test channel: Lowest

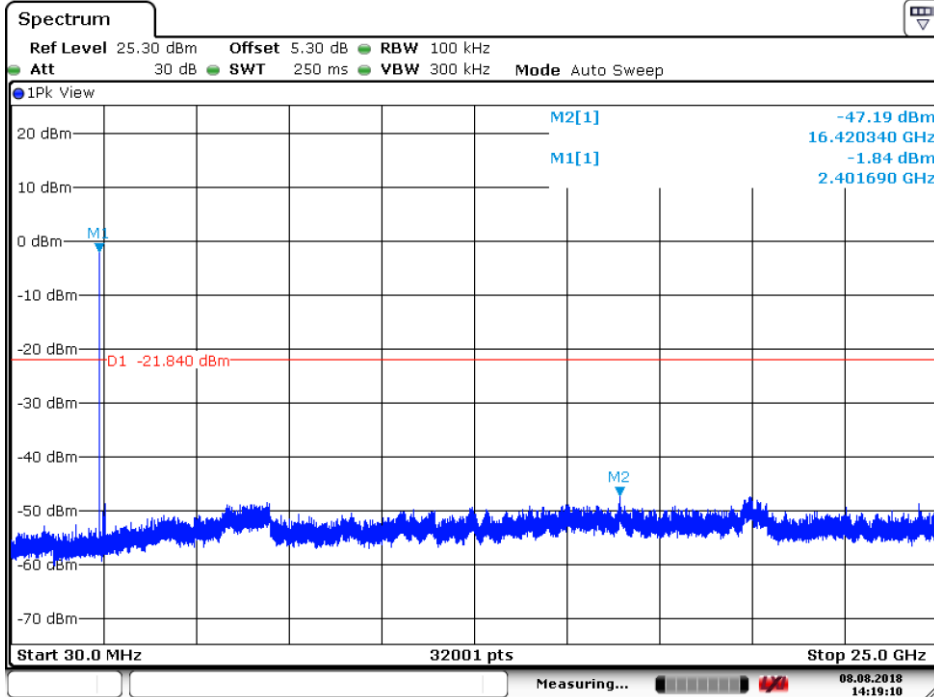

Date: 8.AUG.2018 14:19:11

Test mode: 8DPSK Test channel: Middle

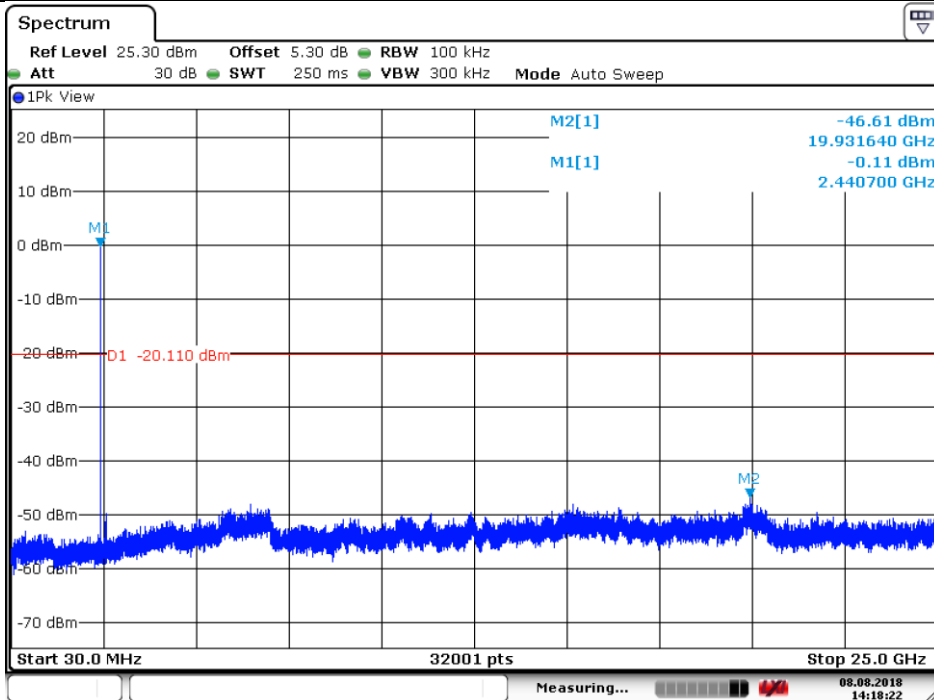


Date: 8.AUG.2018 14:18:22





Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

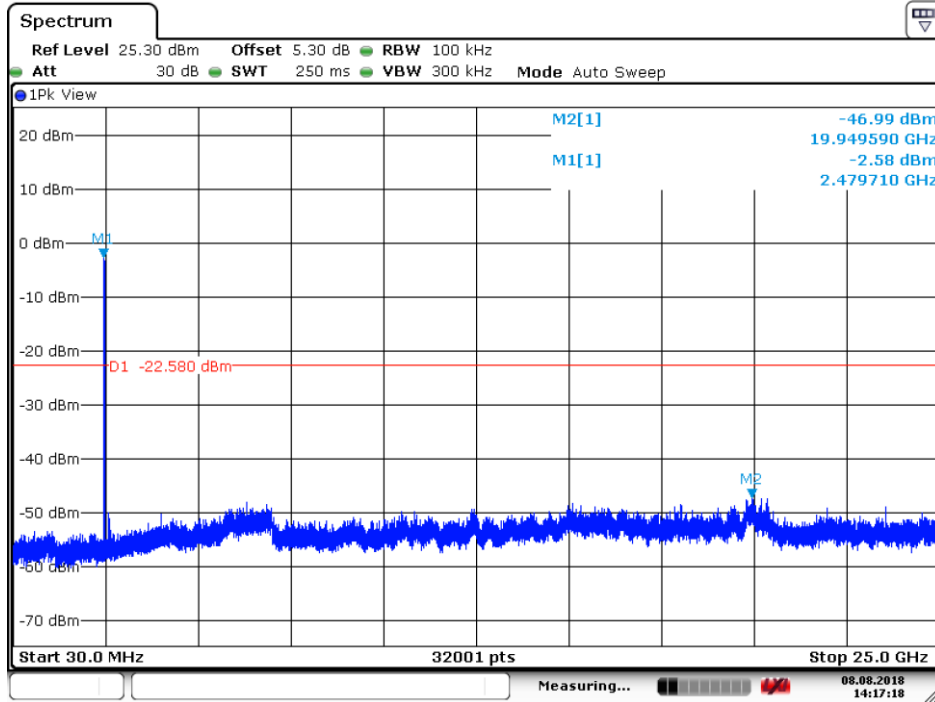

Date: 8.AUG.2018 14:17:18

Remark:

Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



### 4.10 Radiated Spurious Emission

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					

**Test Setup:**

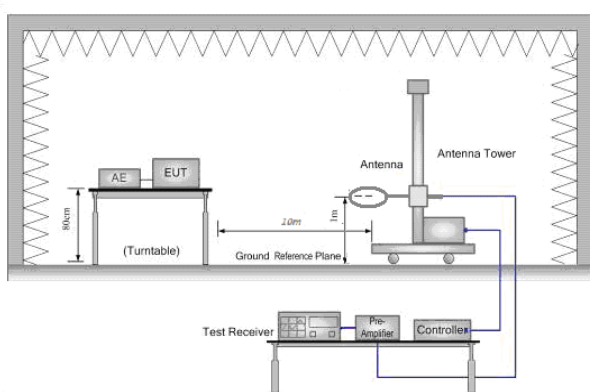


Figure 1. Below 30MHz

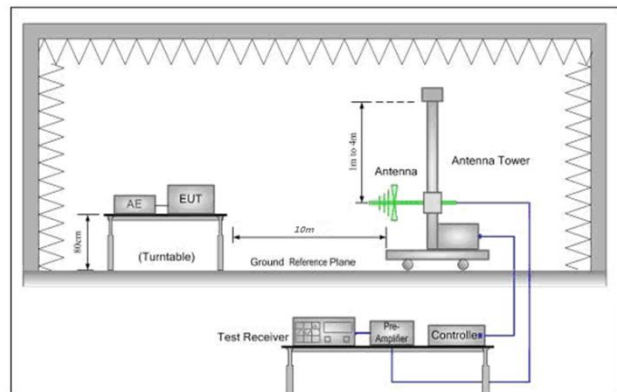


Figure 2. 30MHz to 1GHz

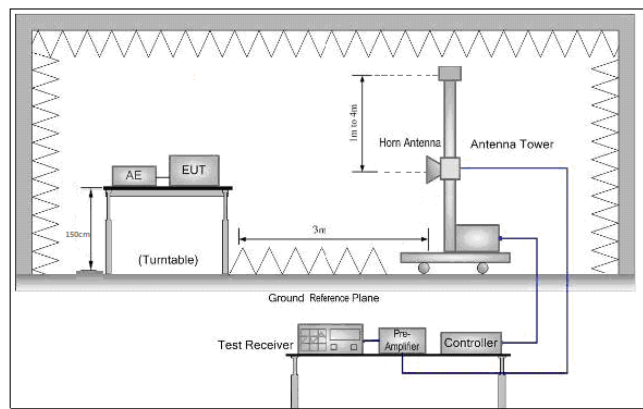


Figure 3. Above 1 GHz



<p>Test Procedure:</p>	<ol style="list-style-type: none"> <li>a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>h. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz)</li> <li>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</li> <li>j. Repeat above procedures until all frequencies measured was complete.</li> </ol>
<p>Exploratory Test Mode:</p>	<p>Non-hopping transmitting mode with all kind of modulation and all kind of data type            Charge + Transmitting mode.</p>
<p>Final Test Mode:</p>	<p>Through Pre-scan, find the DH1 of data type and GFSK modulation is the worst case.            Pretest the EUT at Charge + Transmitting mode            For below 1GHz part, through pre-scan, the worst case is the lowest channel.            Only the worst case is recorded in the report.</p>
<p>Instruments Used:</p>	<p>Refer to section 5.10 for details</p>
<p>Test Results:</p>	<p>Pass</p>


Note1: Mode b=BT RSE from 30MHz-1GHz

Note2: The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the worse test data had been displayed.



### 4.10.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Charge + Transmitting	Vertical

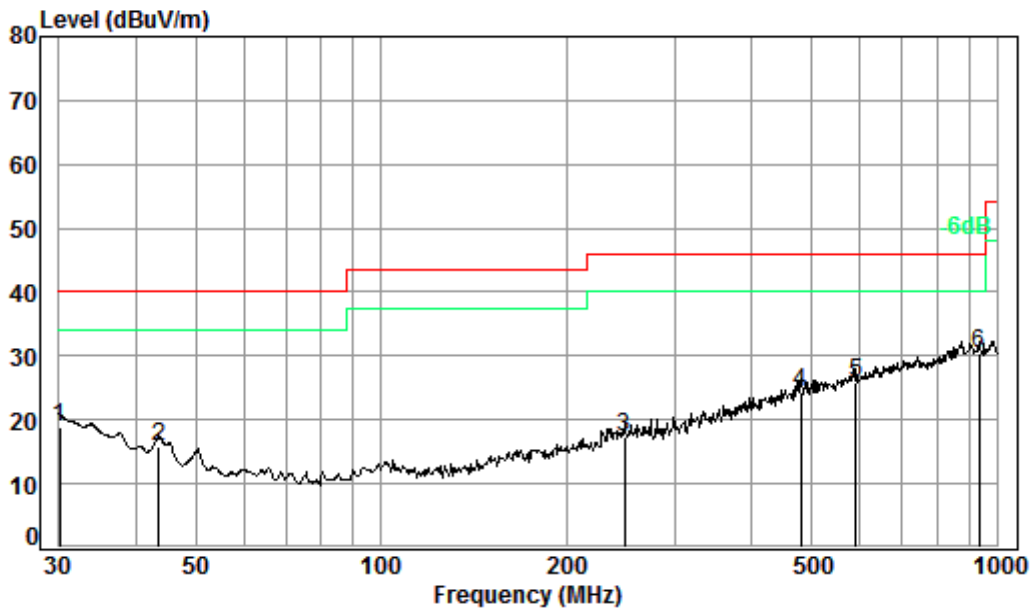

Condition: 3m VERTICAL


Job No. : 06782RG

Test mode: b

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB
1	30.11	0.60	22.44	27.45	23.19	40.00	-21.22
2	43.51	0.68	16.26	27.42	26.25	40.00	-24.23
3	248.55	1.67	18.93	26.76	23.49	46.00	-28.67
4	480.53	2.53	24.21	27.53	25.19	46.00	-21.60
5	590.97	2.69	26.43	27.92	24.72	46.00	-20.08
6 pp	935.55	3.64	29.98	26.86	23.60	46.00	-15.64



Test mode:	Charge + Transmitting	Horizontal
------------	-----------------------	------------

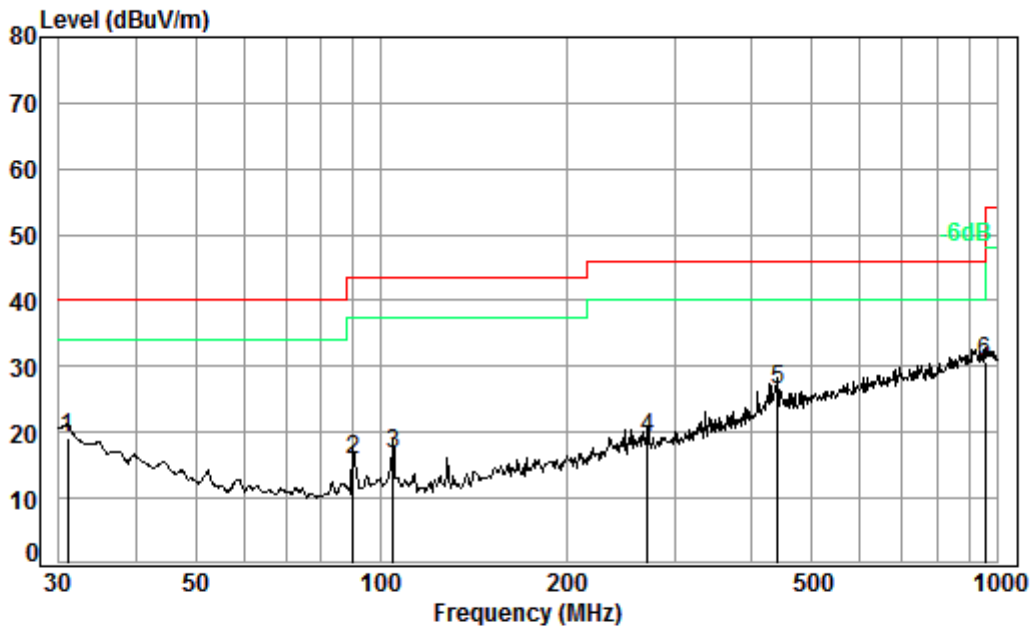

Condition: 3m HORIZONTAL

Job No. : 06782RG


Test mode: b

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.96	0.60	21.95	27.45	24.20	19.30	40.00	-20.70
2	90.22	1.10	13.12	27.36	29.08	15.94	43.50	-27.56
3	104.54	1.21	13.78	27.32	29.14	16.81	43.50	-26.69
4	271.32	1.77	18.93	26.70	25.08	19.08	46.00	-26.92
5	440.20	2.37	23.34	27.36	28.03	26.38	46.00	-19.62
6 pp	955.44	3.66	30.08	26.76	23.85	30.83	46.00	-15.17



**4.10.2 Transmitter Emission above 1GHz**

Test mode:	GFSK(DH5)	Test channel:	Lowest	Remark:	Peak	Vertical
------------	-----------	---------------	--------	---------	------	----------

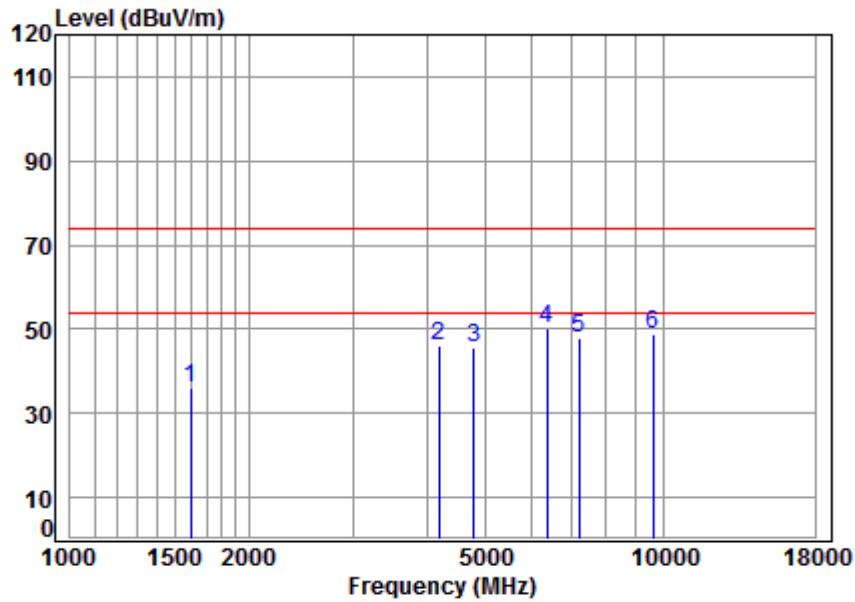

Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 06782RG  
 Mode : 2402 TX RSE  
 Note : BT

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1597.181	5.35	26.24	41.47	45.78	35.90	74.00	-38.10	peak
2	4181.768	7.20	33.04	42.36	48.05	45.93	74.00	-28.07	peak
3	4804.000	7.89	33.97	42.47	46.22	45.61	74.00	-28.39	peak
4 pp	6377.195	11.31	35.48	41.31	44.65	50.13	74.00	-23.87	peak
5	7206.000	10.08	36.07	40.71	42.60	48.04	74.00	-25.96	peak
6	9608.000	10.75	37.67	37.74	38.09	48.77	74.00	-25.23	peak




**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM180700678201

Page: 64 of 76

Test mode:	GFSK(DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------	-----------	---------------	--------	---------	------	------------

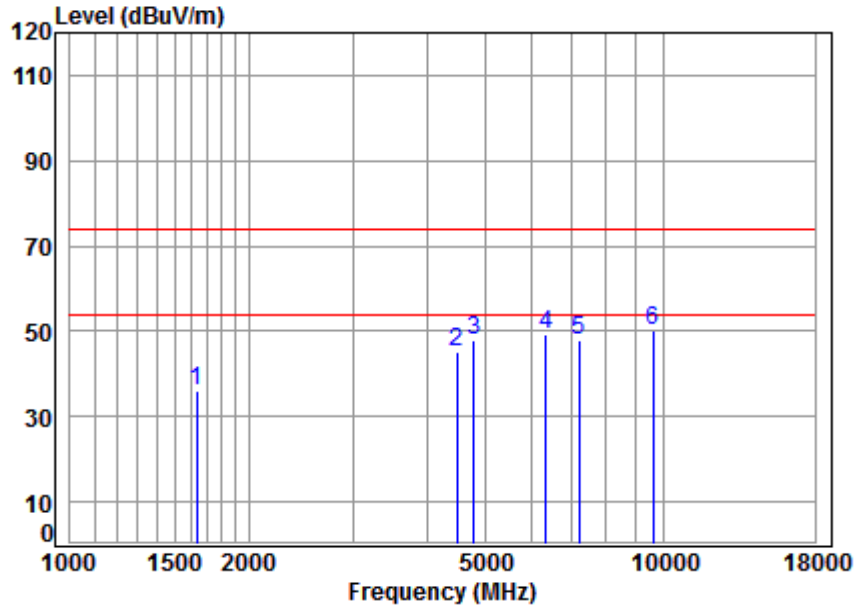


Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No : 06782RG  
 Mode : 2402 TX RSE  
 Note : BT

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1634.543	5.31	26.40	41.49	45.65	35.87	74.00	-38.13	peak
2	4495.125	7.55	33.59	42.42	46.51	45.23	74.00	-28.77	peak
3	4804.000	7.89	33.97	42.47	48.49	47.88	74.00	-26.12	peak
4	6340.436	11.24	35.44	41.34	44.14	49.48	74.00	-24.52	peak
5	7206.000	10.08	36.07	40.71	42.61	48.05	74.00	-25.95	peak
6 pp	9608.000	10.75	37.67	37.74	39.49	50.17	74.00	-23.83	peak





Test mode:	GFSK(DH5)	Test channel:	Middle	Remark:	Peak	Vertical
------------	-----------	---------------	--------	---------	------	----------

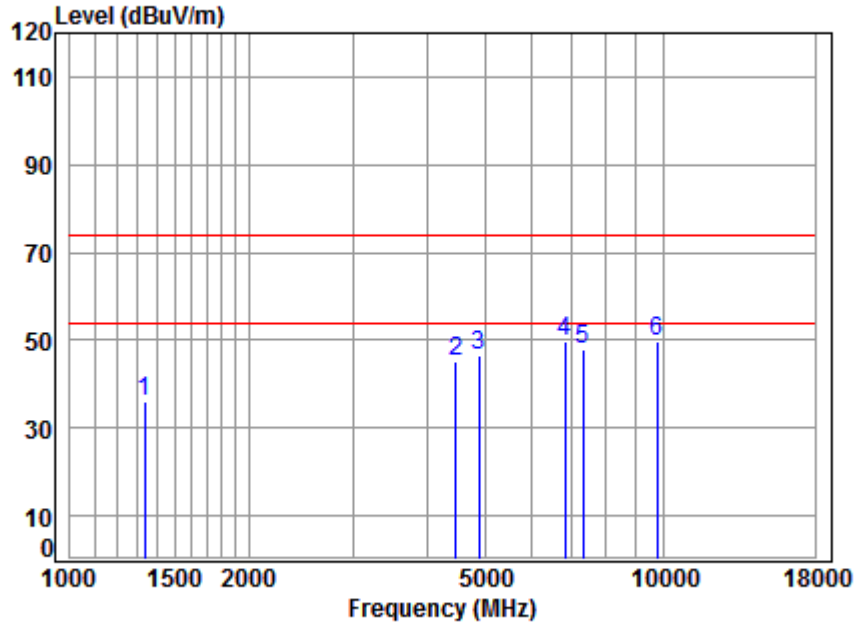


Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 06782RG  
 Mode : 2441 TX RSE  
 Note : BT

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1335.141	4.93	25.17	41.29	47.36	74.00	-37.83	peak
2	4469.214	7.53	33.55	42.41	46.66	74.00	-28.67	peak
3	4882.000	7.97	34.06	42.48	46.94	74.00	-27.51	peak
4	6835.278	10.58	35.80	40.97	44.20	74.00	-24.39	peak
5	7323.000	10.05	36.16	40.63	42.36	74.00	-26.06	peak
6 pp	9764.000	10.82	37.76	37.52	38.77	74.00	-24.17	peak



Test mode:	GFSK(DH5)	Test channel:	Middle	Remark:	Peak	Horizontal
------------	-----------	---------------	--------	---------	------	------------

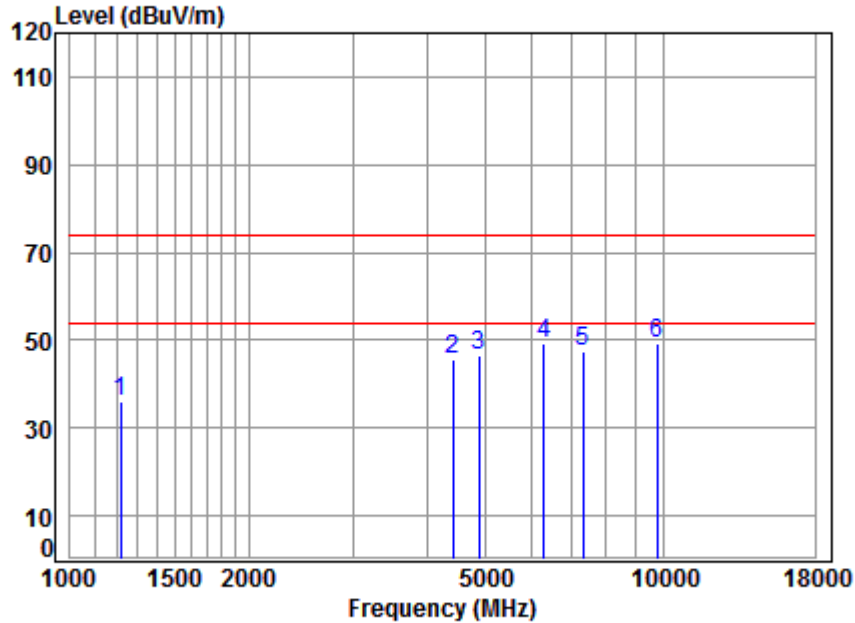


Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No : 06782RG  
 Mode : 2441 TX RSE  
 Note : BT

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1217.190	4.49	24.67	41.20	47.90	35.86	74.00	-38.14	peak
2	4417.841	7.47	33.46	42.40	47.18	45.71	74.00	-28.29	peak
3	4882.000	7.97	34.06	42.48	46.97	46.52	74.00	-27.48	peak
4 pp	6303.890	11.17	35.41	41.37	44.24	49.45	74.00	-24.55	peak
5	7323.000	10.05	36.16	40.63	41.87	47.45	74.00	-26.55	peak
6	9764.000	10.82	37.76	37.52	38.01	49.07	74.00	-24.93	peak



Test mode:	GFSK(DH5)	Test channel:	Highest	Remark:	Peak	Vertical
------------	-----------	---------------	---------	---------	------	----------

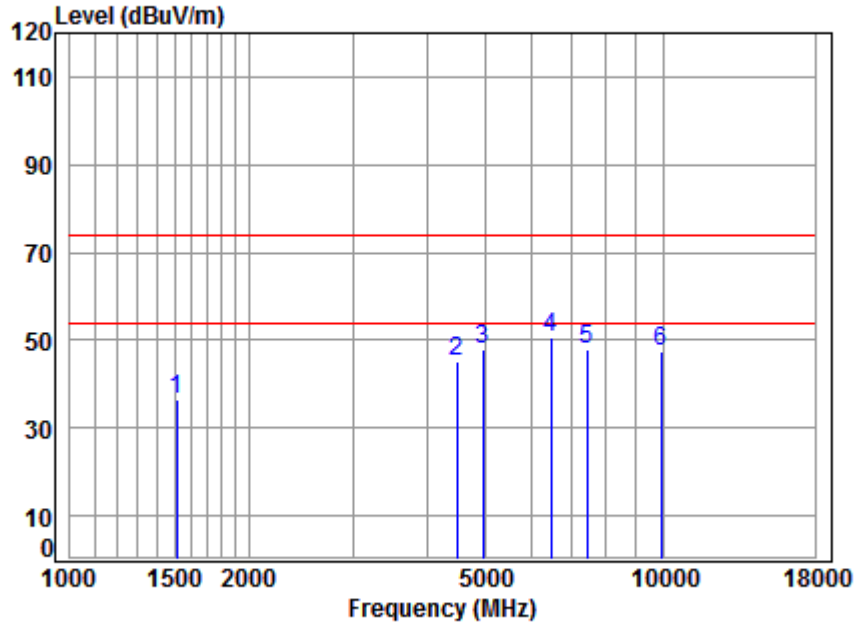


Site : chamber  
Condition: 3m VERTICAL  
Job No : 06782RG  
Mode : 2480 TX RSE  
Note : BT

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1511.833	5.46	25.85	41.41	46.45	36.35	74.00	-37.65	peak
2	4495.125	7.55	33.59	42.42	46.60	45.32	74.00	-28.68	peak
3	4960.000	8.05	34.15	42.49	48.24	47.95	74.00	-26.05	peak
4 pp	6470.026	11.48	35.57	41.24	44.66	50.47	74.00	-23.53	peak
5	7440.000	10.02	36.25	40.56	42.02	47.73	74.00	-26.27	peak
6	9920.000	10.90	37.85	37.31	36.06	47.50	74.00	-26.50	peak



Test mode:	GFSK(DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
------------	-----------	---------------	---------	---------	------	------------

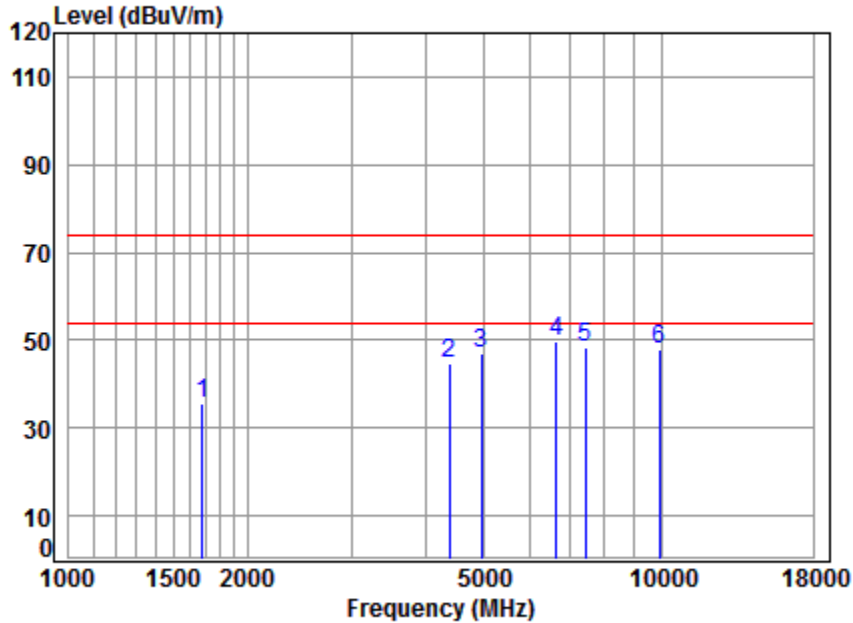

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No : 06782RG  
 Mode : 2480 TX RSE  
 Note : BT

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1677.621	5.25	26.58	41.52	45.26	35.57	74.00	-38.43	peak
2	4392.376	7.44	33.42	42.40	46.25	44.71	74.00	-29.29	peak
3	4960.000	8.05	34.15	42.49	47.34	47.05	74.00	-26.95	peak
4 pp	6640.542	11.13	35.69	41.11	43.86	49.57	74.00	-24.43	peak
5	7440.000	10.02	36.25	40.56	42.80	48.51	74.00	-25.49	peak
6	9920.000	10.90	37.85	37.31	36.49	47.93	74.00	-26.07	peak



Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz and 18GHz to 25GHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

### 4.11 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2013		
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

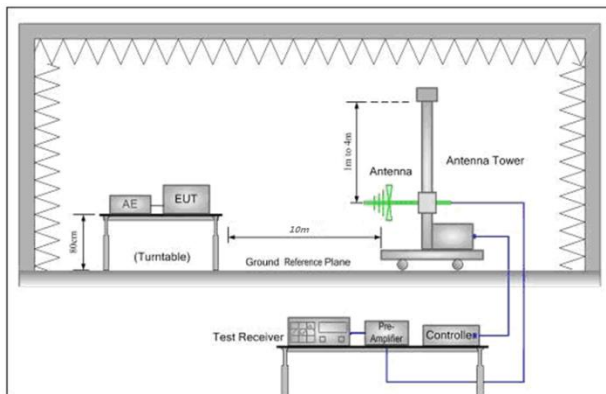


Figure 1. 30MHz to 1GHz

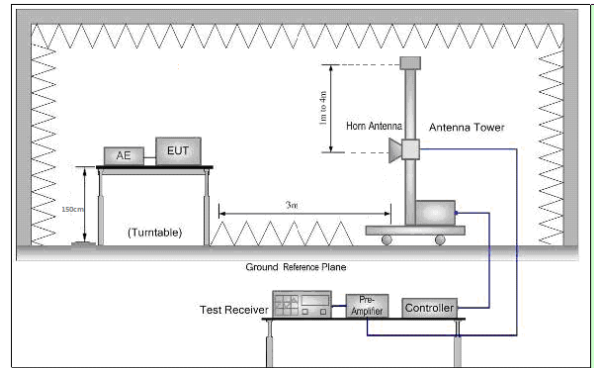


Figure 2. Above 1 GHz




<p>Test Procedure:</p>	<ul style="list-style-type: none"> <li>a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> <li>h. Test the EUT in the lowest channel , the Highest channel</li> <li>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</li> <li>j. Repeat above procedures until all frequencies measured was complete.</li> </ul>
<p>Exploratory Test Mode:</p>	<p>Non-hopping transmitting mode with all kind of modulation and all kind of data type            Charge + Transmitting mode.</p>
<p>Final Test Mode:</p>	<p>Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case.            Pretest the EUT at Charge + Transmitting mode,            Only the worst case is recorded in the report.</p>
<p>Instruments Used:</p>	<p>Refer to section 5.10 for details</p>
<p>Test Results:</p>	<p>Pass</p>



**Test plot as follows:**

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	------------	---------------	--------	---------	------	----------

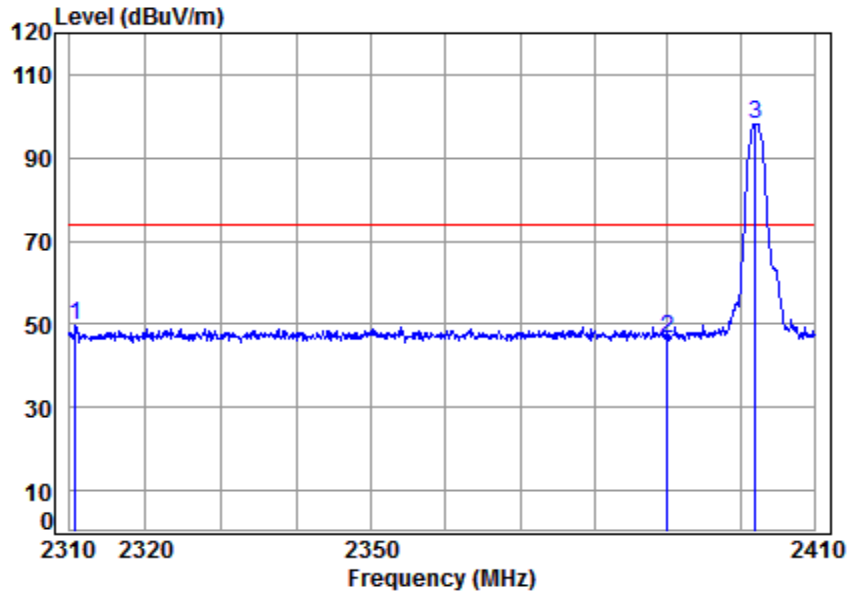


Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 06782RG  
 Mode : 2402 Band edge  
 Note : BT

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2310.783	5.37	28.38	41.84	57.60	49.51	74.00	-24.49 peak
2	2390.000	5.47	28.52	41.87	54.55	46.67	74.00	-27.33 peak
3 pp	2402.000	5.49	28.54	41.88	105.96	98.11	74.00	24.11 peak





Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	------------	---------------	--------	---------	------	------------

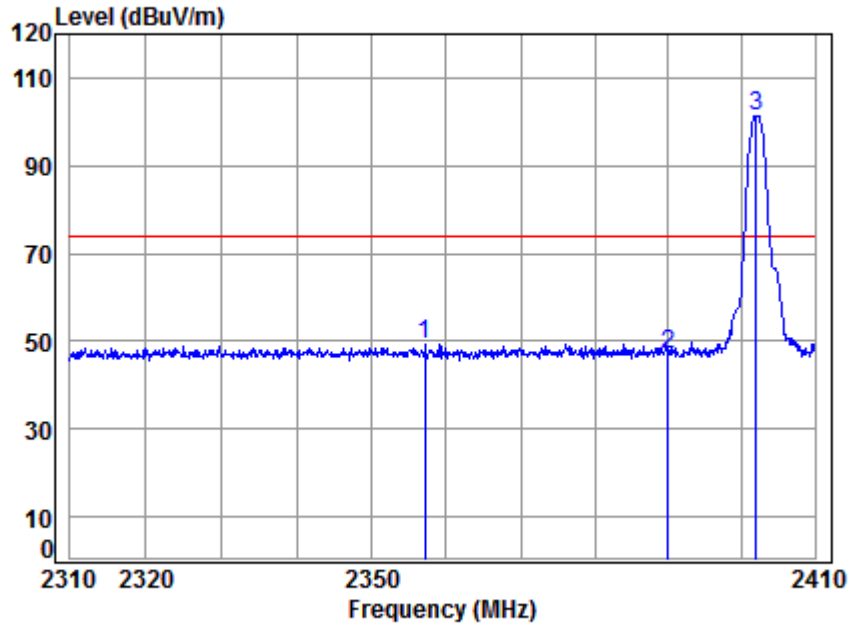


Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No : 06782RG  
 Mode : 2402 Band edge  
 Note : BT

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2357.172	5.43	28.46	41.86	57.22	49.25	74.00	-24.75	peak
2	2390.000	5.47	28.52	41.87	54.69	46.81	74.00	-27.19	peak
3 pp	2402.000	5.49	28.54	41.88	109.26	101.41	74.00	27.41	peak



Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Vertical
------------------	------------	---------------	---------	---------	------	----------

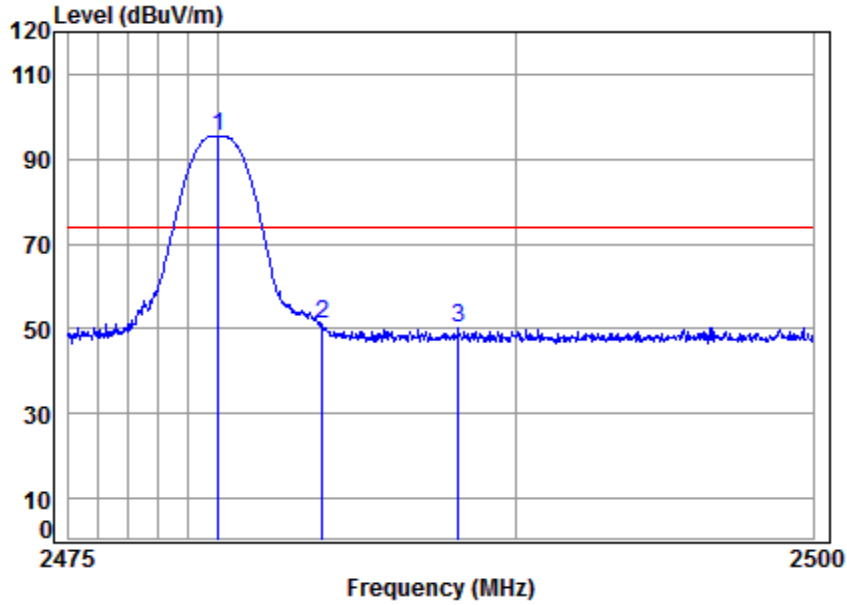


Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 06782RG  
 Mode : 2480 Band edge  
 Note : BT

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2480.000	5.59	28.67	41.91	103.20	95.55	74.00	21.55 peak
2	2483.500	5.60	28.67	41.91	58.89	51.25	74.00	-22.75 peak
3	2488.044	5.60	28.68	41.91	58.03	50.40	74.00	-23.60 peak



Worse case mode:	GFSK(DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	-----------	---------------	---------	---------	------	------------

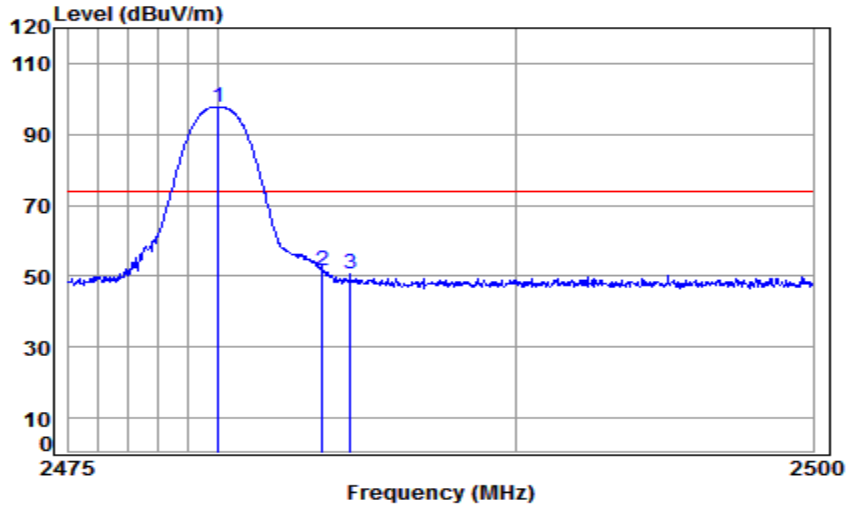

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No : 06782RG  
 Mode : 2480 Band edge  
 Note : BT

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2480.000	5.59	28.67	41.91	105.22	97.57	74.00	23.57	peak
2	2483.500	5.60	28.67	41.91	59.26	51.62	74.00	-22.38	peak
3	2484.420	5.60	28.67	41.91	58.18	50.54	74.00	-23.46	peak

**Note:**

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$



## **5 Photographs - EUT Constructional Details**

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1807006782RG

---

The End