





Bluetooth v5.0 LE For Ant1:

Low Band Edge Plot on Channel 00

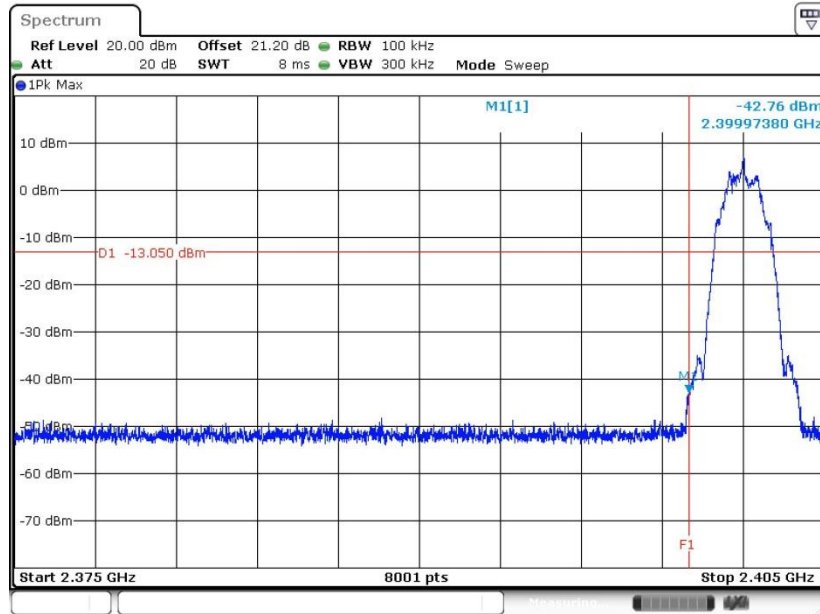

Date: 22.DEC.2019 16:33:37

High Band Edge Plot on Channel 39

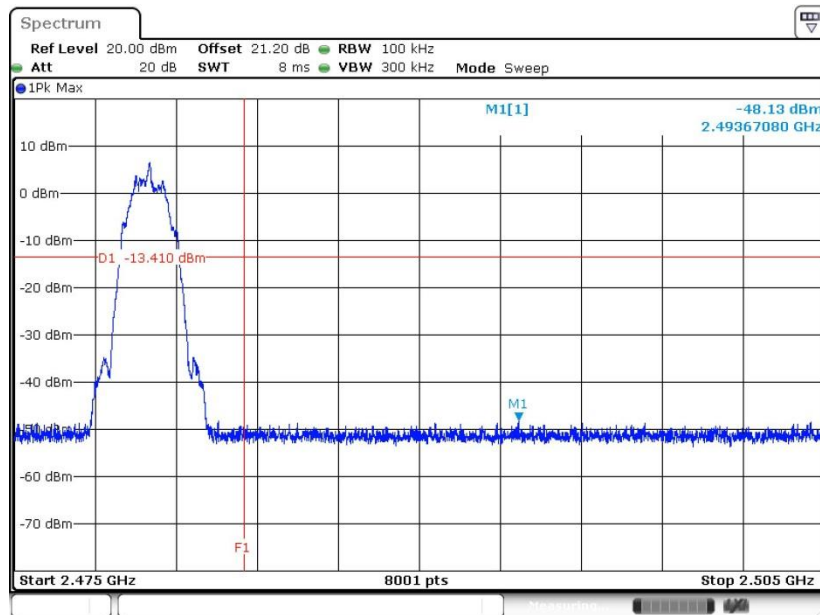


Date: 22.DEC.2019 16:41:08




Bluetooth v4.2 LE For Ant2:

Low Band Edge Plot on Channel 00

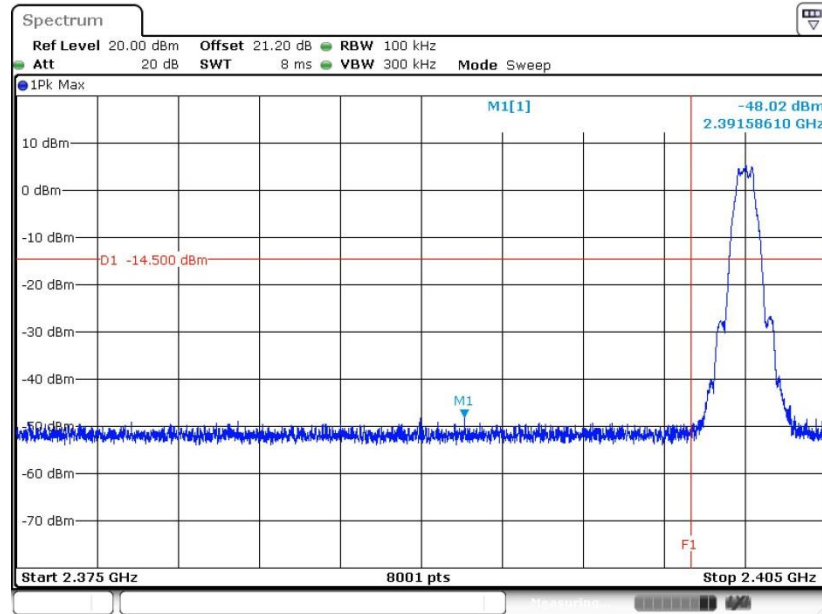

Date: 22.DEC.2019 16:44:55

High Band Edge Plot on Channel 39

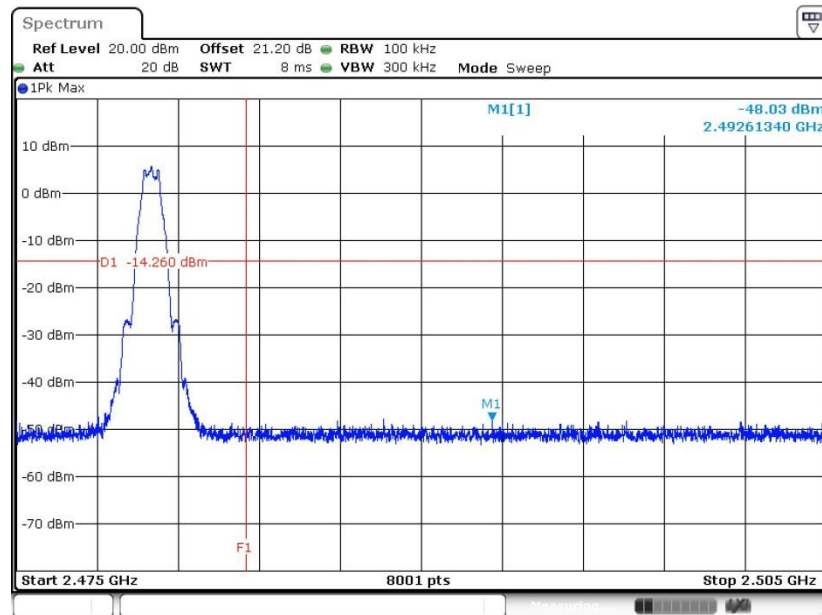


Date: 22.DEC.2019 16:50:54




Bluetooth v5.0 LE For Ant2:

Low Band Edge Plot on Channel 00

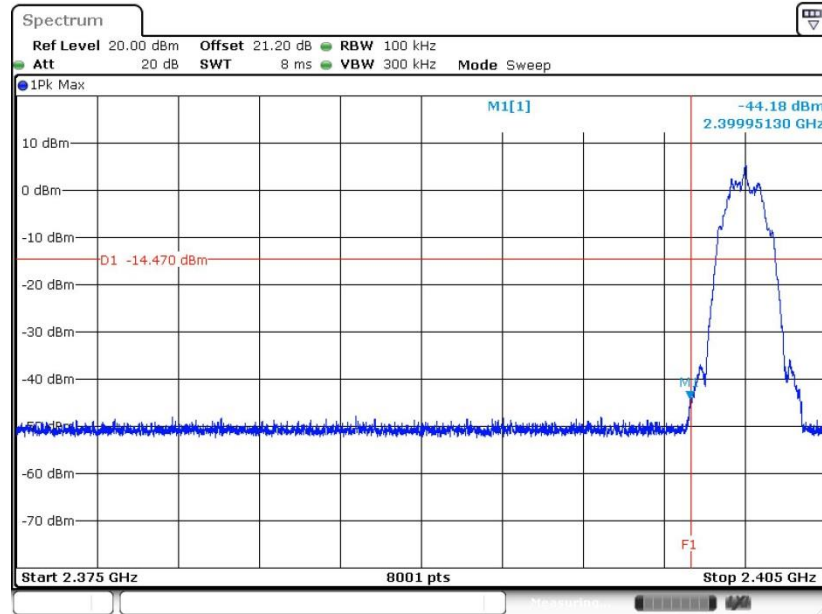

Date: 22.DEC.2019 16:55:58

High Band Edge Plot on Channel 39

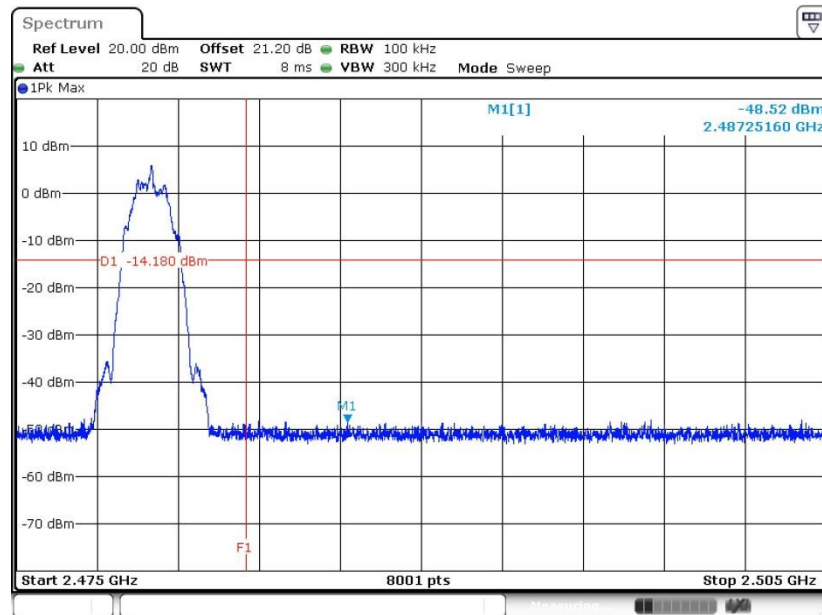


Date: 22.DEC.2019 17:03:04



3.4.6 Test Result of Conducted Spurious Emission Plots


Bluetooth v4.2 LE For Ant1:

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

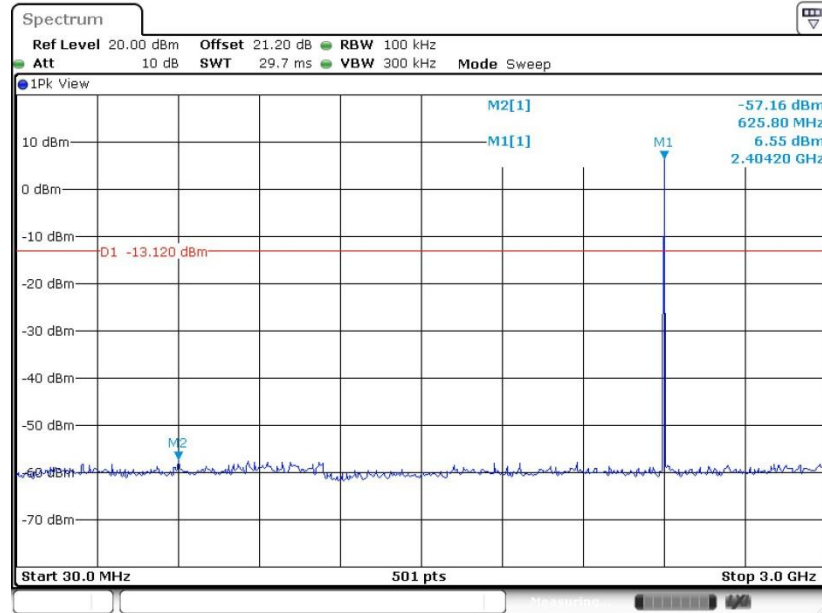

Date: 22 DEC 2019 16:22:26


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

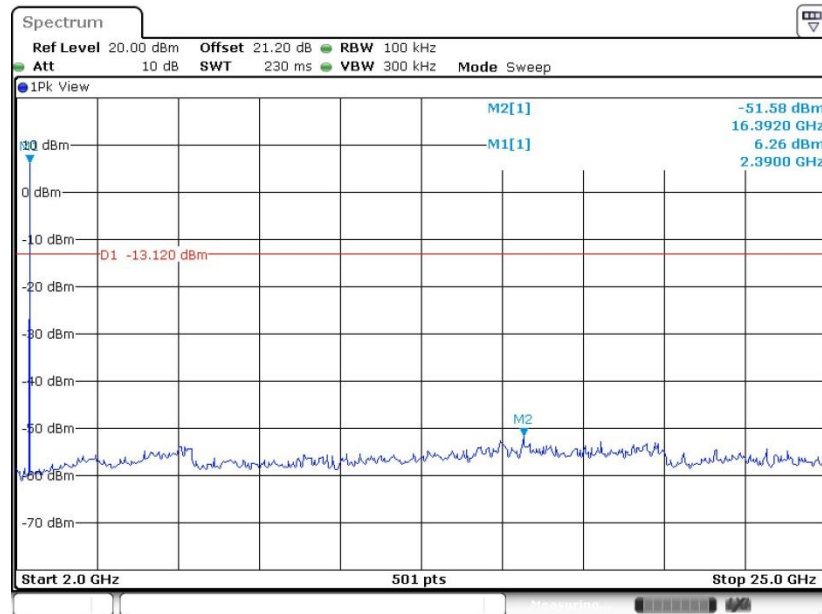

Date: 22 DEC 2019 16:22:38




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

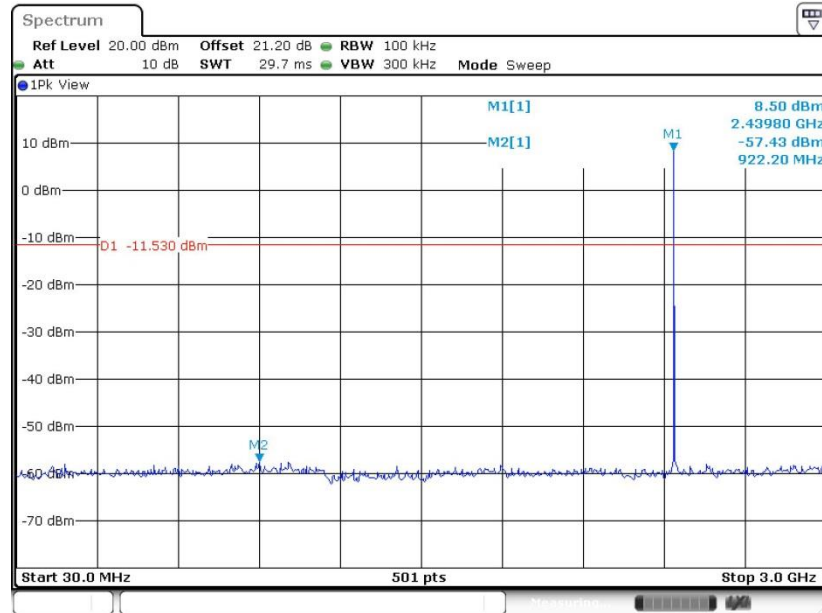

Date: 22.DEC.2019 16:26:09


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

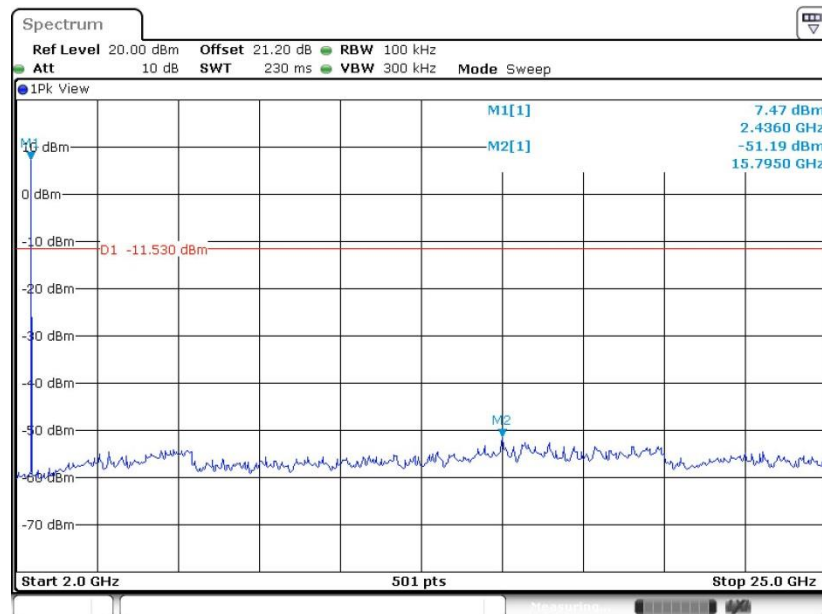

Date: 22.DEC.2019 16:26:20




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

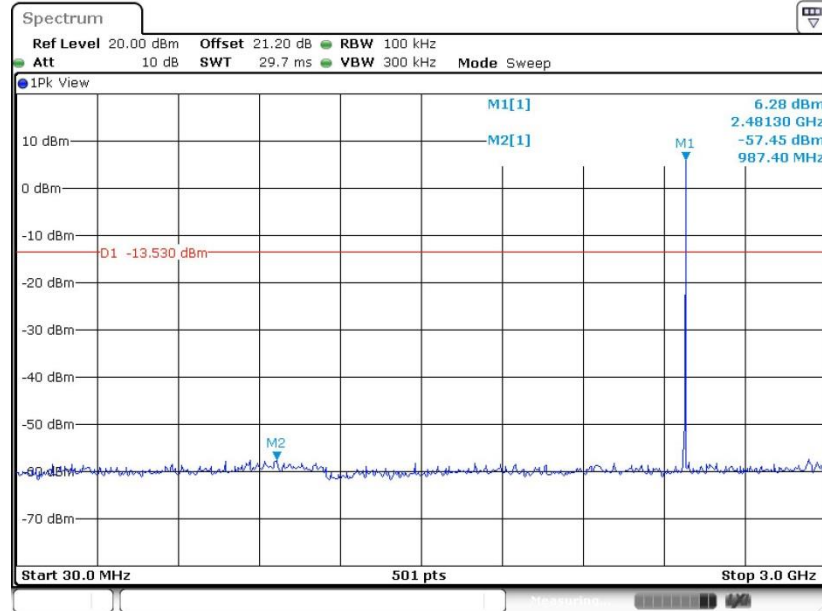

Date: 22.DEC.2019 16:28:50

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

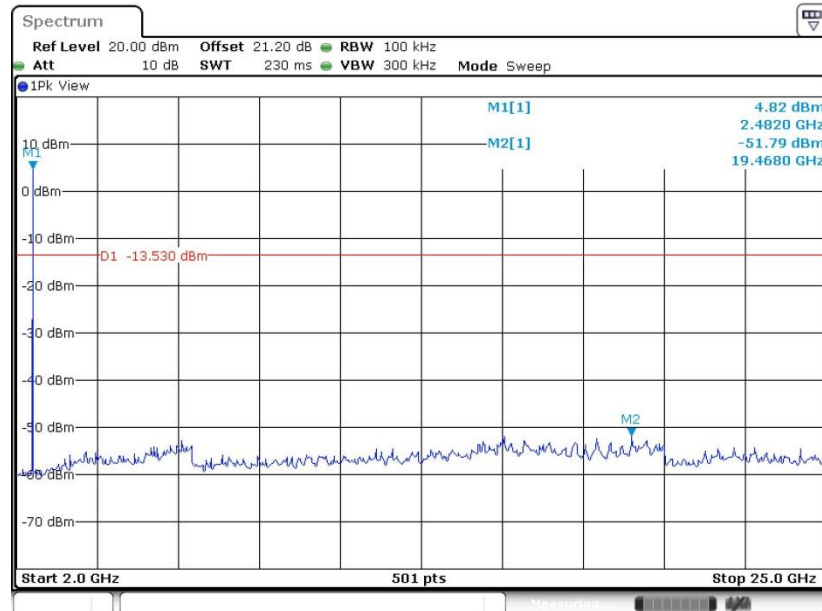


Date: 22.DEC.2019 16:29:03



Bluetooth v5.0 LE For Ant1:

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

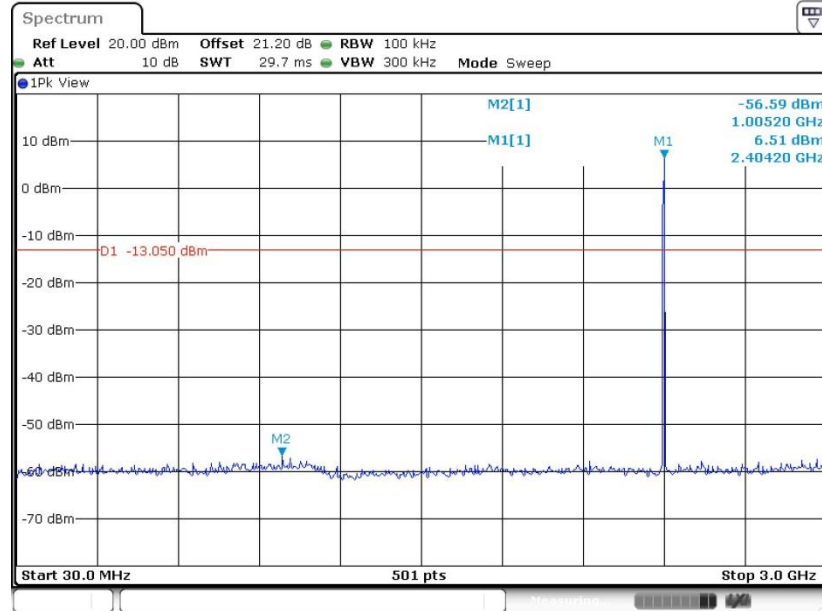

Date: 22.DEC.2019 16:34:39

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

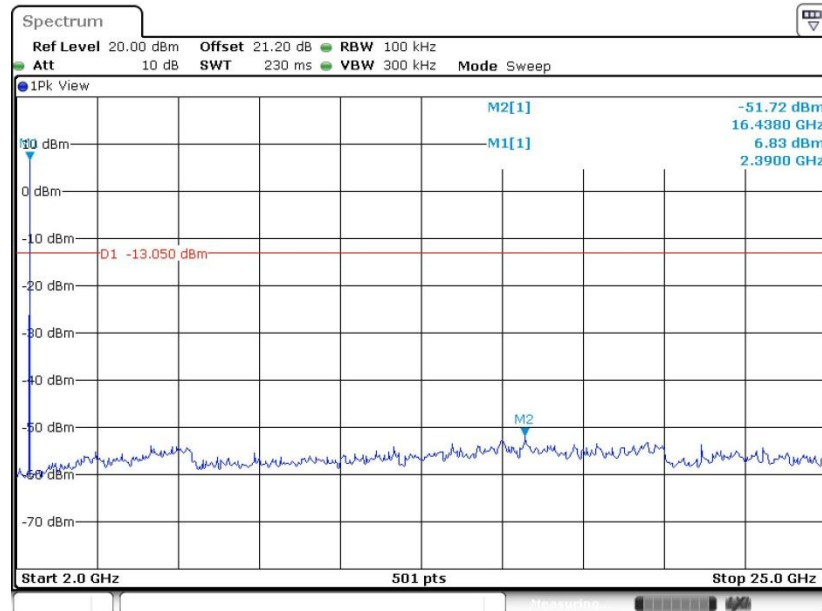

Date: 22.DEC.2019 16:34:53




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

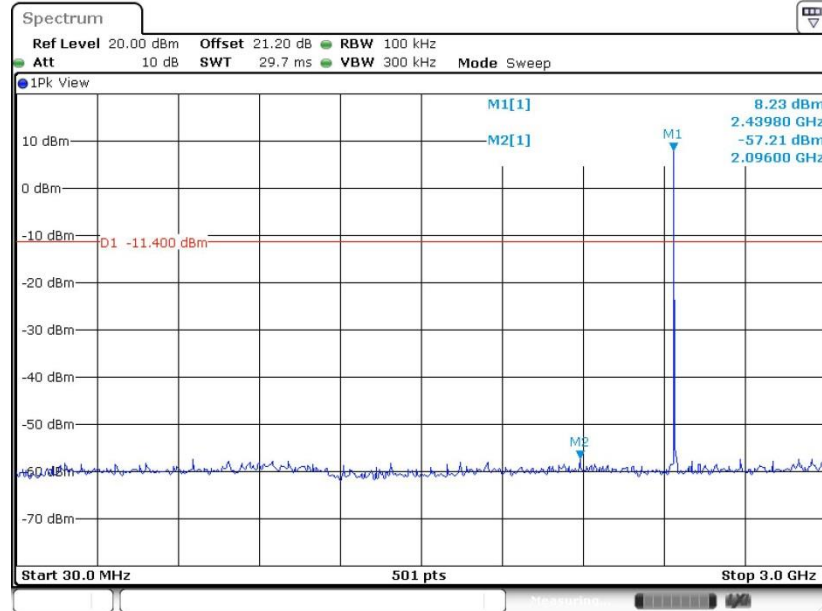

Date: 22.DEC.2019 16:38:07


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

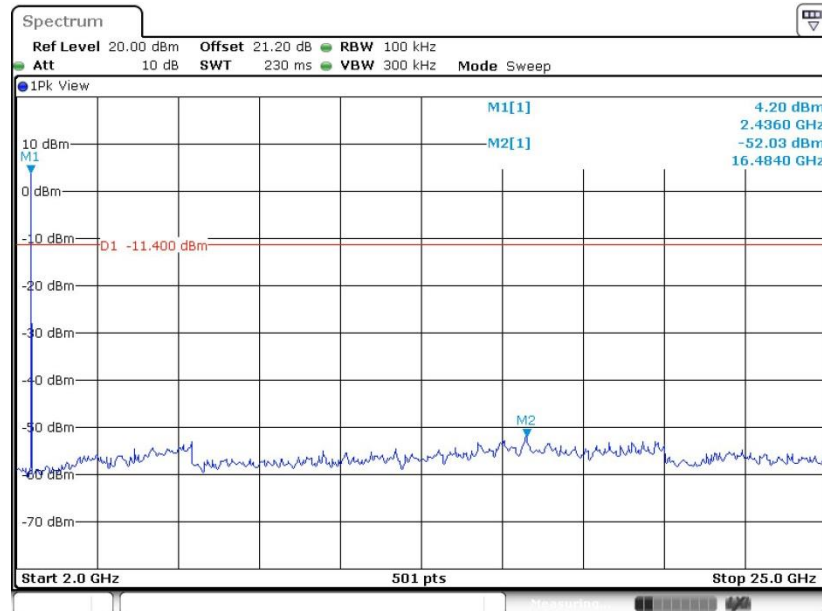

Date: 22.DEC.2019 16:38:20




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

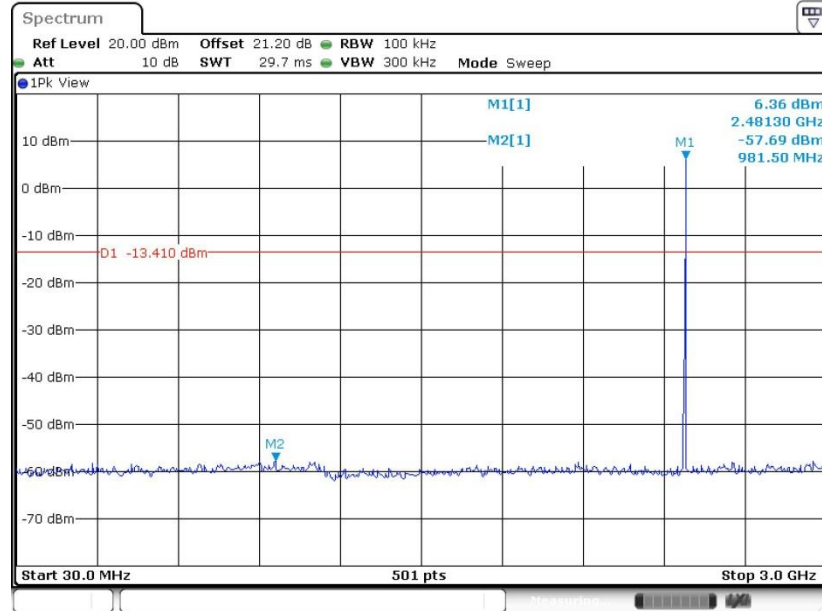

Date: 22.DEC.2019 16:41:24

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

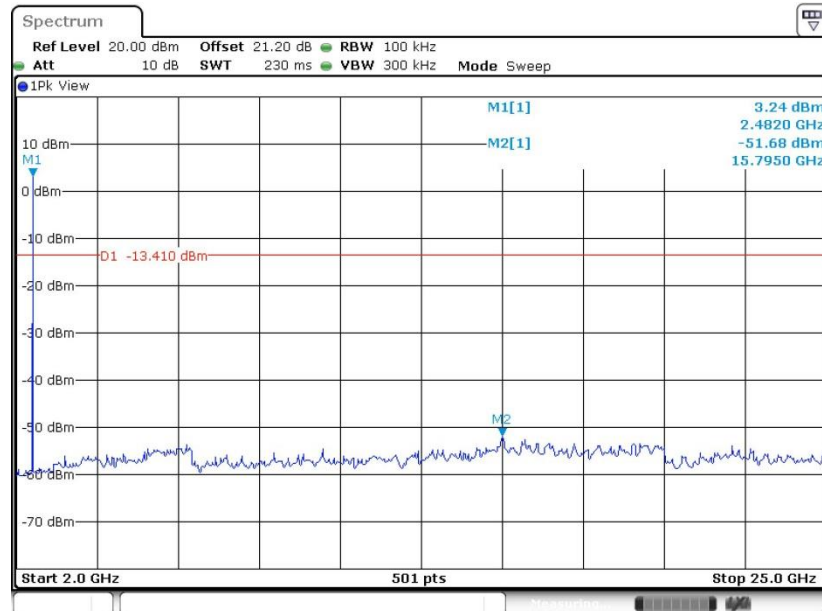


Date: 22.DEC.2019 16:41:36



Bluetooth v4.2 LE For Ant2:

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

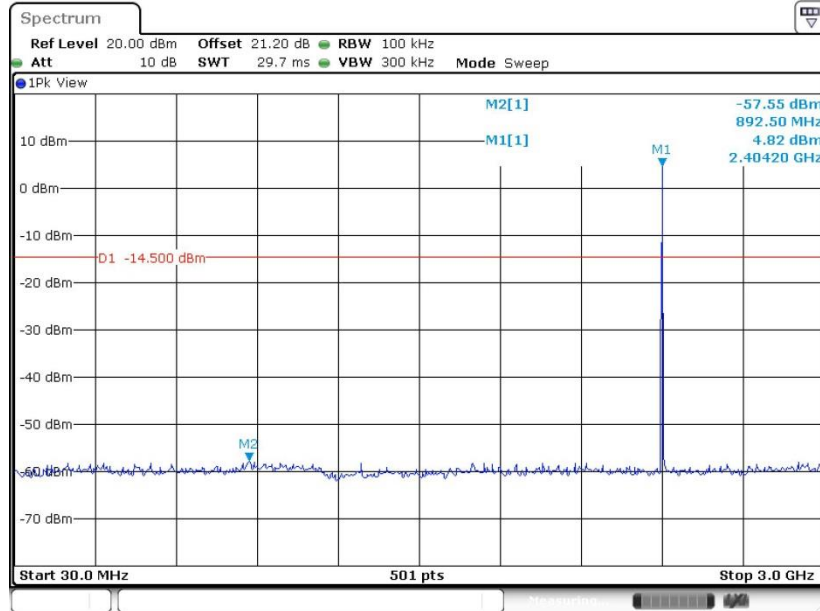

Date: 22.DEC.2019 16:45:16

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

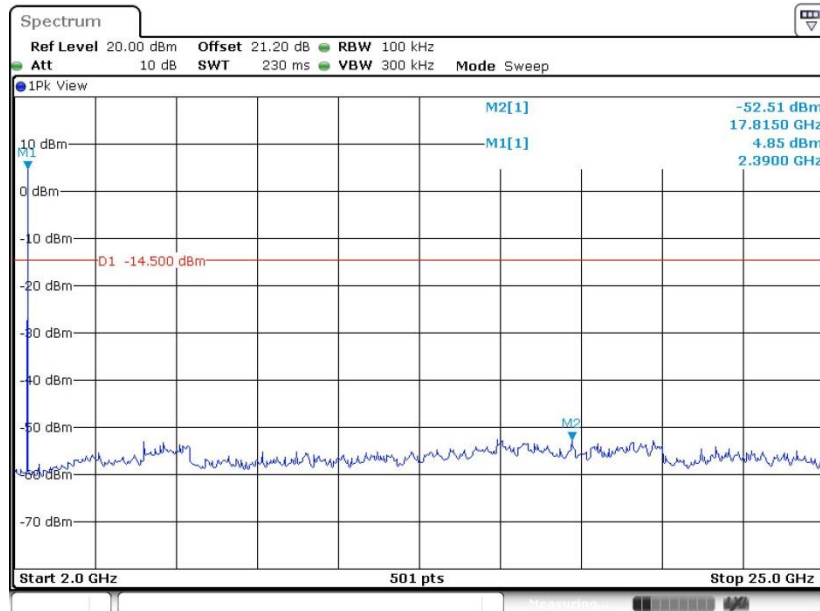

Date: 22.DEC.2019 16:45:28




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

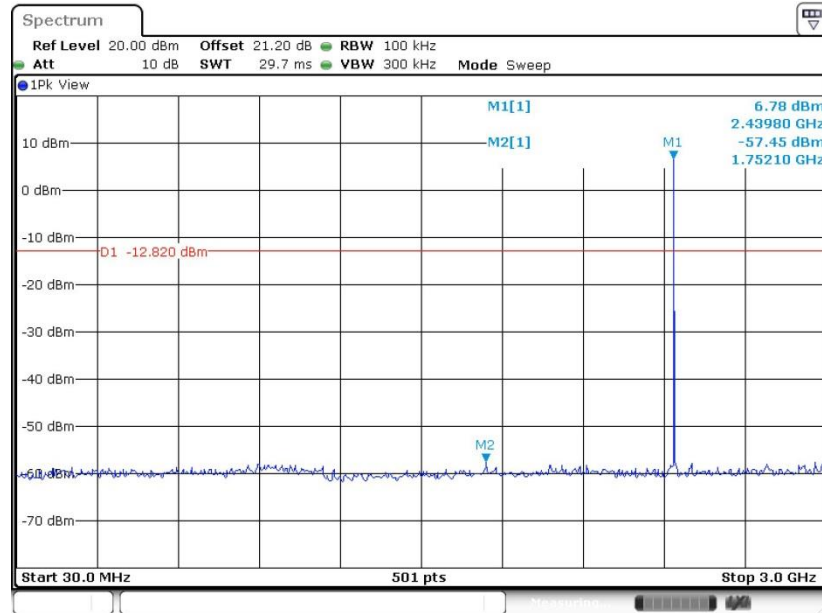

Date: 22.DEC.2019 16:48:26


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

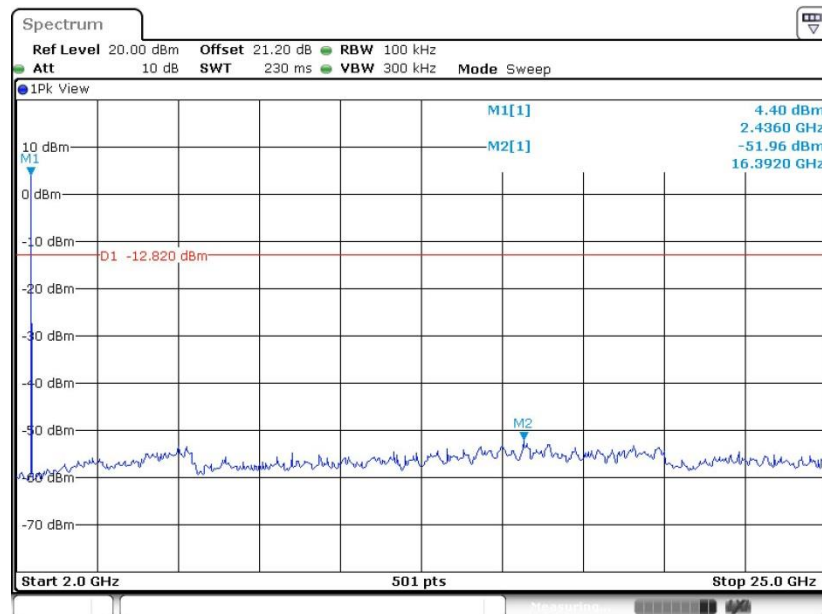

Date: 22.DEC.2019 16:48:37




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

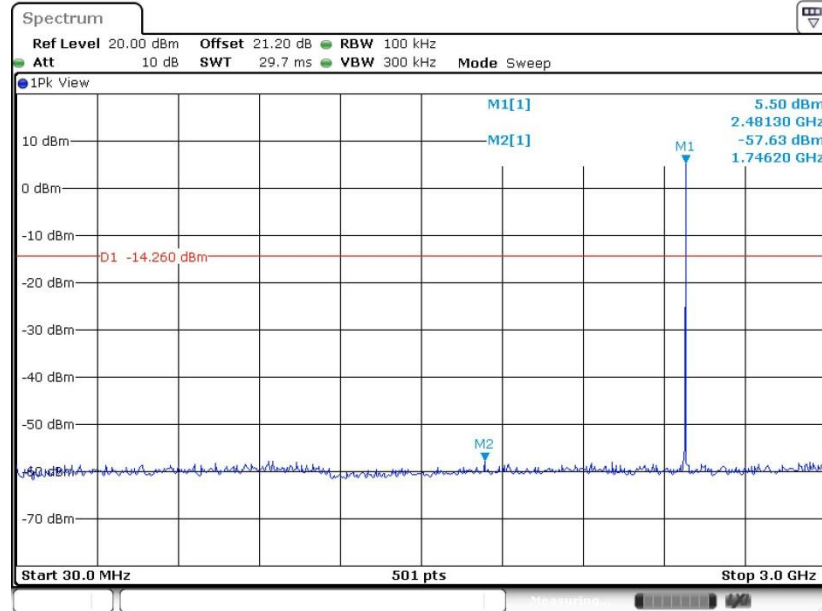

Date: 22.DEC.2019 16:51:09

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

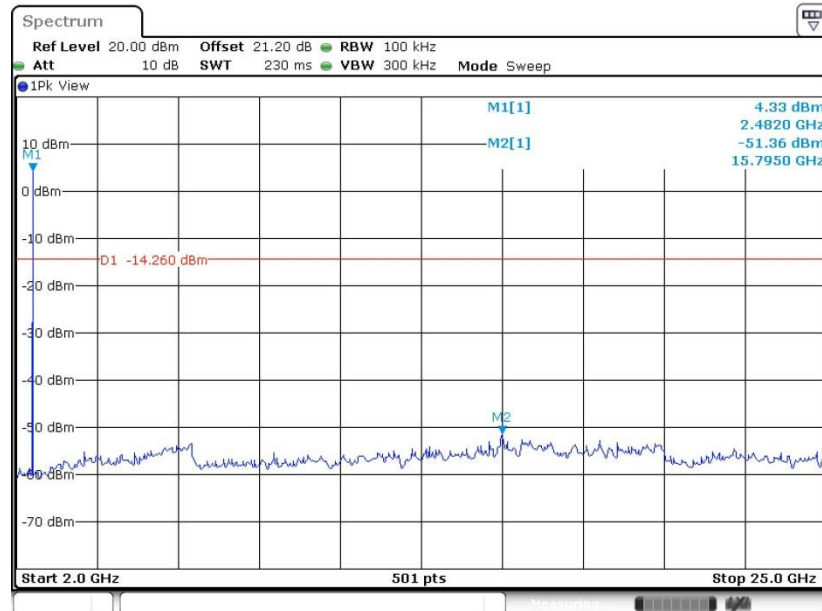


Date: 22.DEC.2019 16:51:22



Bluetooth v5.0 LE For Ant2:

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

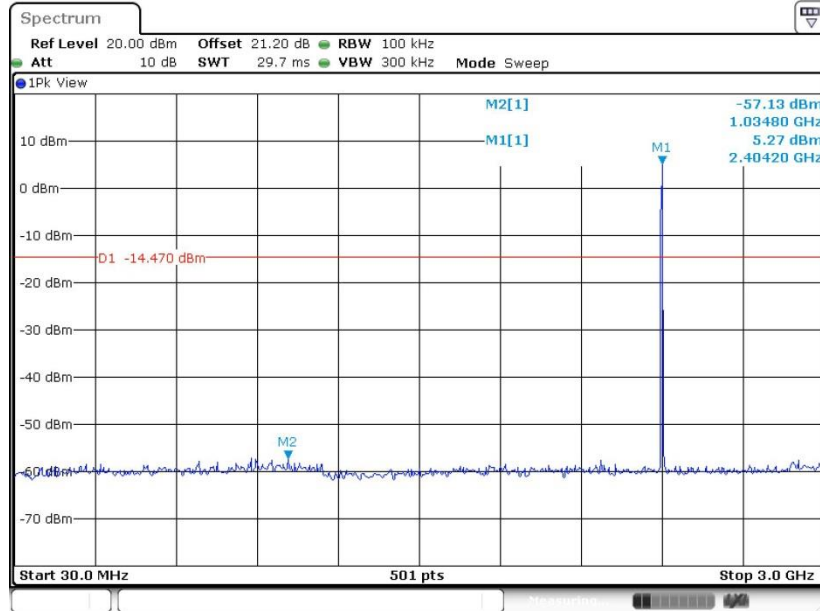

Date: 22.DEC.2019 16:56:25

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

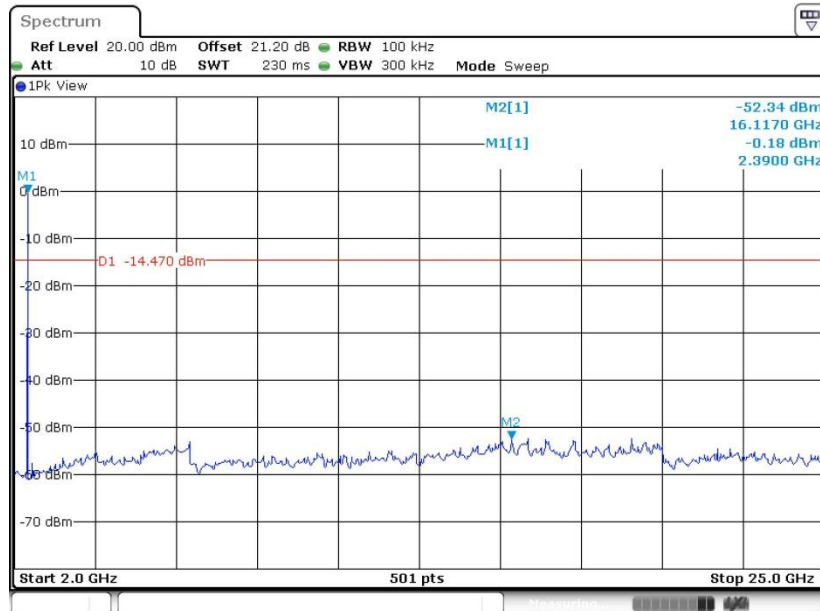

Date: 22.DEC.2019 16:56:37




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

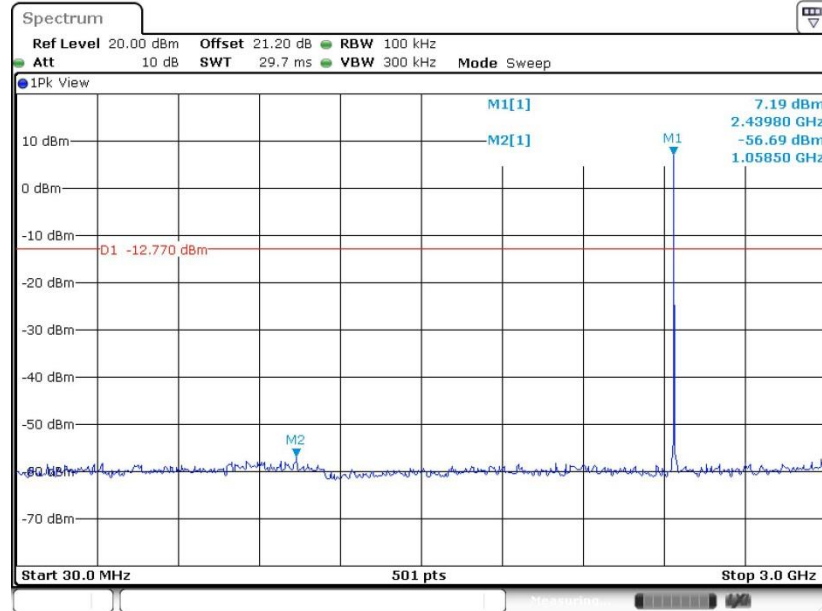

Date: 22.DEC.2019 17:00:17


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

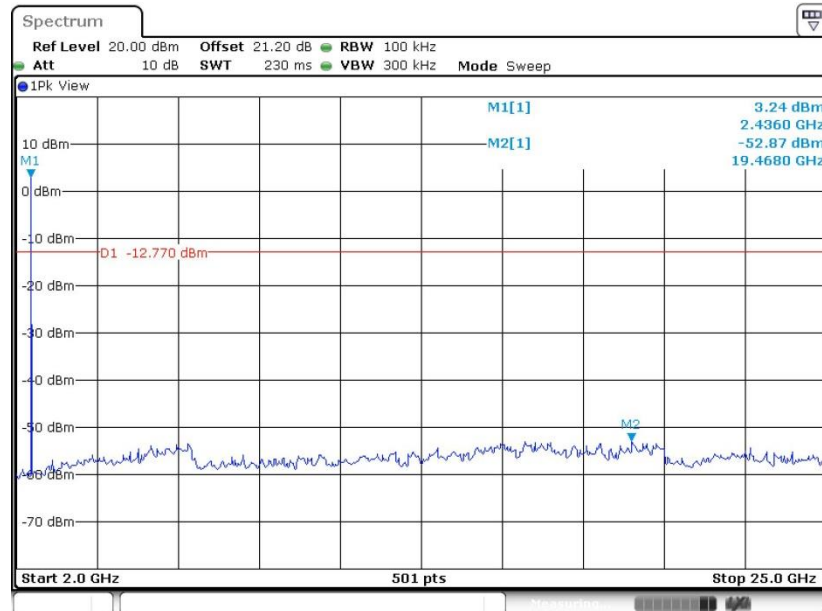

Date: 22.DEC.2019 17:00:30




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

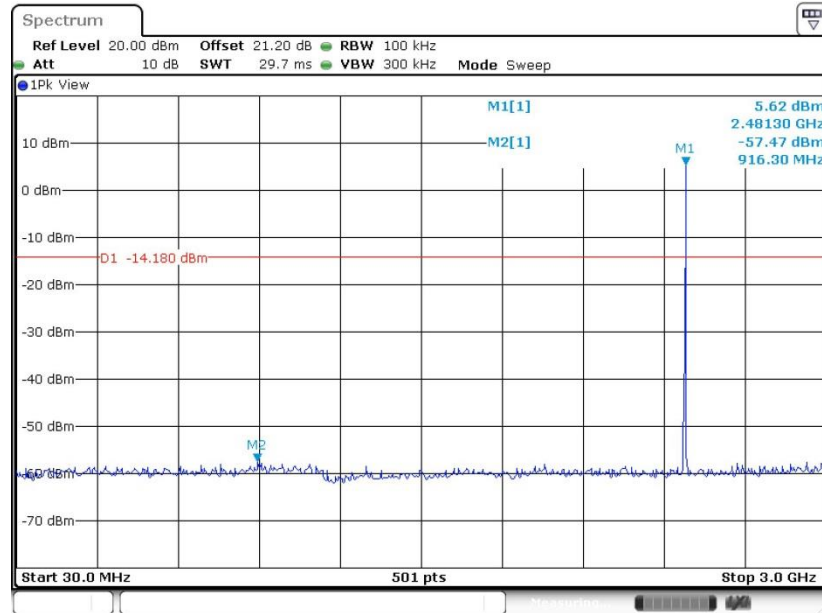

Date: 22.DEC.2019 17:03:22

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

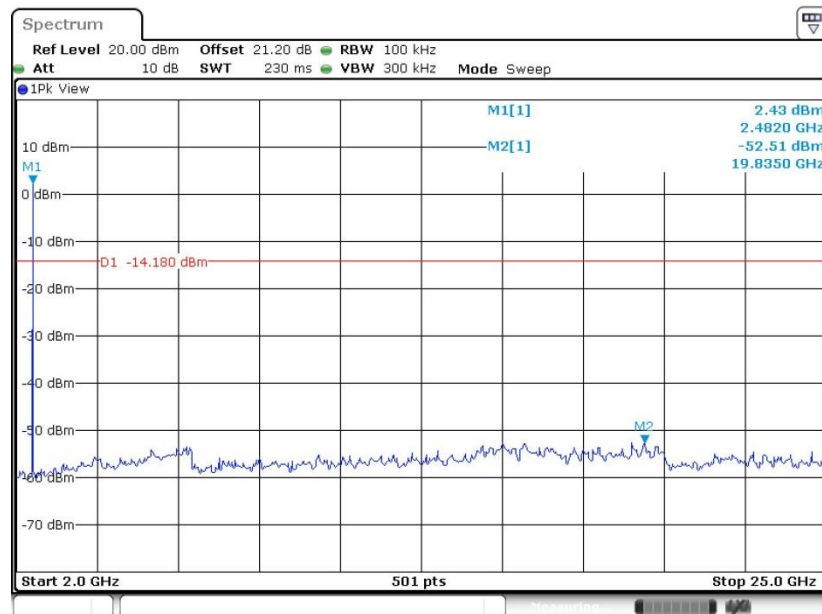

Date: 22.DEC.2019 17:03:34



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

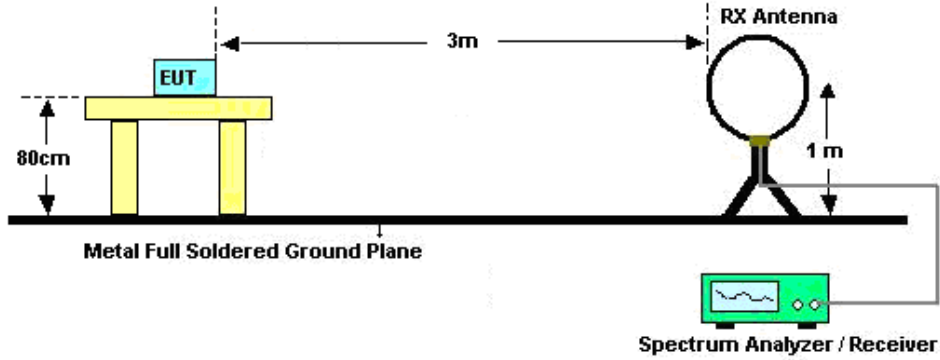

For radiated emissions from 30MHz to 1GHz

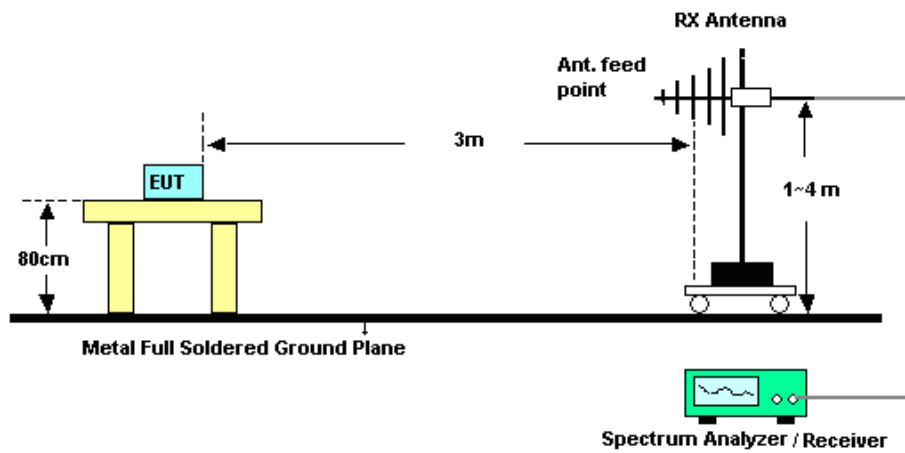

For radiated emissions above 1GHz

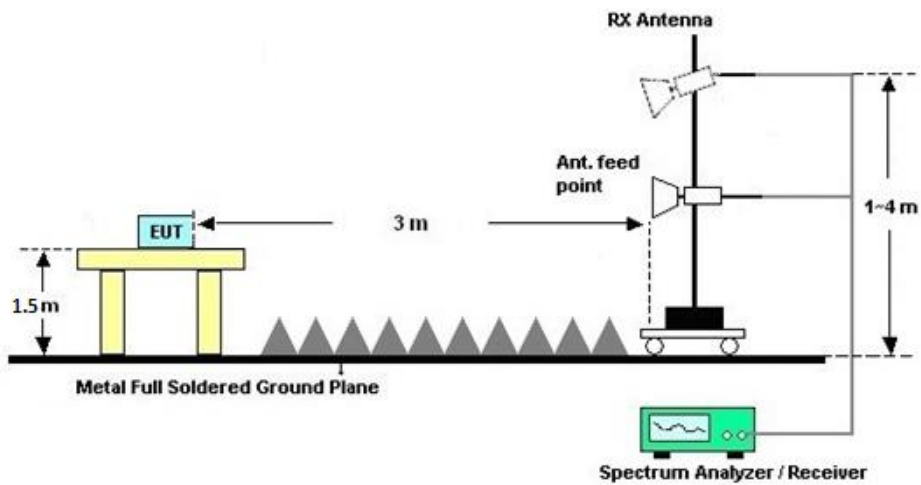



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

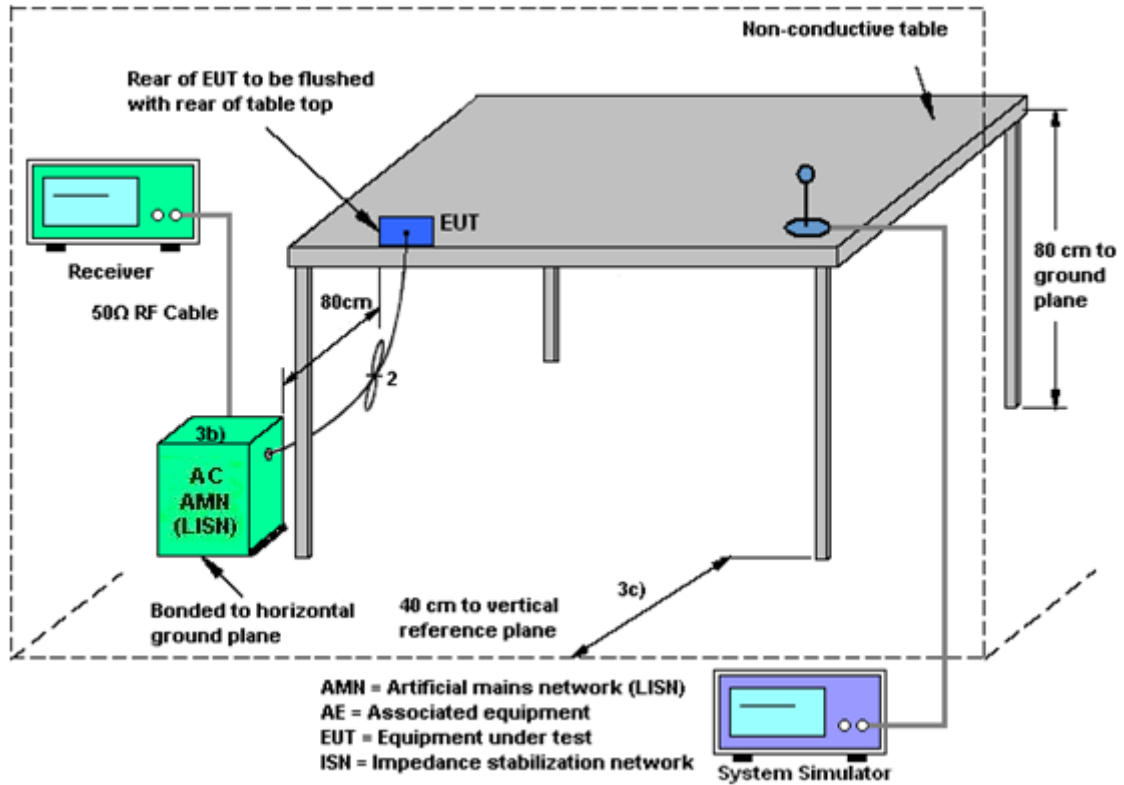

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 18, 2019	Dec. 03, 2019~ Dec. 22, 2019	Apr. 17, 2020	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 27, 2018	Dec. 03, 2019~ Dec. 22, 2019	Dec. 26, 2019	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 27, 2018	Dec. 03, 2019~ Dec. 22, 2019	Dec. 26, 2019	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Apr. 19, 2019	Dec. 11, 2019	Apr. 18, 2020	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 29, 2019	Dec. 11, 2019	May 28, 2020	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Jul. 19, 2019	Dec. 11, 2019	Jul. 18, 2020	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1285	1GHz~18GHz	Jan. 07, 2019	Dec. 11, 2019	Jan. 06, 2020	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 22, 2019	Dec. 11, 2019	Jul. 21, 2020	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Apr. 18, 2019	Dec. 11, 2019	Apr. 17, 2020	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 18, 2019	Dec. 11, 2019	Oct. 17, 2020	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2019	Dec. 11, 2019	Oct. 17, 2020	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 18, 2019	Dec. 11, 2019	Oct. 17, 2020	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	6160100024 70	N/A	NCR	Dec. 11, 2019	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Dec. 11, 2019	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Dec. 11, 2019	NCR	Radiation (03CH02-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 26, 2018	Dec. 13, 2019	Dec. 25, 2019	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Oct. 17, 2019	Dec. 13, 2019	Oct. 16, 2020	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Dec. 27, 2018	Dec. 13, 2019	Dec. 26, 2019	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	6160200008 91	100Vac~250Vac	Jul. 23, 2019	Dec. 13, 2019	Jul. 22, 2020	Conduction (CO01-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.6dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.4dB
---	-------



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Zhang Jiang	Temperature:	21~25	°C
Test Date:	2019/12/03~2019/12/22	Relative Humidity:	51~54	%

Bluetooth v4.2 LE For Ant1:

6 dB Bandwidth Measurement

15.247 (a)(2)

	6 dB Bandwidth (MHz)	Limit
CH 00	0.671	> 0.5MHz
CH 19	0.673	> 0.5MHz
CH 39	0.675	> 0.5MHz

Maximum Peak Output Power Measurement

15.247(b)

	Output Power (dBm)	Output Power (W)	Limit
CH 00	8.310	0.007	< 30dBm
CH 19	9.670	0.009	< 30dBm
CH 39	7.920	0.006	< 30dBm

Occupied Bandwidth Measurement

	99% Bandwidth (MHz)	Max Occupied Bandwidth
CH 00	1.013	1.013 MHz
CH 19	1.013	
CH 39	1.013	

Power Spectral Density Measurement

15.247(d)

	Power Density (dBm/100kHz)	Power Density (dBm/3kHz)	Limit
CH 00	6.880	-7.420	< 8dBm
CH 19	8.470	-5.840	< 8dBm
CH 39	6.470	-7.830	< 8dBm

Bluetooth v4.2 LE For Ant2:

6 dB Bandwidth Measurement

15.247 (a)(2)

	6 dB Bandwidth (MHz)	Limit
CH 00	0.671	> 0.5MHz
CH 19	0.669	> 0.5MHz
CH 39	0.669	> 0.5MHz

Maximum Peak Output Power Measurement

15.247(b)

	Output Power (dBm)	Output Power (W)	Limit
CH 00	7.500	0.006	< 30dBm
CH 19	8.980	0.008	< 30dBm
CH 39	7.790	0.006	< 30dBm

Occupied Bandwidth Measurement

	99% Bandwidth (MHz)	Max Occupied Bandwidth
CH 00	1.015	1.015 MHz
CH 19	1.013	
CH 39	1.013	

Power Spectral Density Measurement

15.247(d)

	Power Density (dBm/100kHz)	Power Density (dBm/3kHz)	Limit
CH 00	5.500	-8.970	< 8dBm
CH 19	7.180	-7.300	< 8dBm
CH 39	5.740	-8.660	< 8dBm

Bluetooth v5.0 LE For Ant1:

6 dB Bandwidth Measurement

15.247 (a)(2)

	6 dB Bandwidth (MHz)	Limit
CH 00	1.158	> 0.5MHz
CH 19	1.158	> 0.5MHz
CH 39	1.158	> 0.5MHz

Maximum Peak Output Power Measurement

15.247(b)

	Output Power (dBm)	Output Power (W)	Limit
CH 00	8.570	0.007	< 30dBm
CH 19	10.070	0.010	< 30dBm
CH 39	8.240	0.007	< 30dBm

Occupied Bandwidth Measurement

	99% Bandwidth (MHz)	Max Occupied Bandwidth
CH 00	1.994	1.994 MHz
CH 19	1.990	
CH 39	1.990	

Power Spectral Density Measurement

15.247(d)

	Power Density (dBm/100kHz)	Power Density (dBm/3kHz)	Limit
CH 00	6.950	-10.370	< 8dBm
CH 19	8.600	-8.670	< 8dBm
CH 39	6.590	-10.690	< 8dBm

Bluetooth v5.0 LE For Ant2:

6 dB Bandwidth Measurement

15.247 (a)(2)

	6 dB Bandwidth (MHz)	Limit
CH 00	1.147	> 0.5MHz
CH 19	1.155	> 0.5MHz
CH 39	1.151	> 0.5MHz

Maximum Peak Output Power Measurement

15.247(b)

	Output Power (dBm)	Output Power (W)	Limit
CH 00	7.760	0.006	< 30dBm
CH 19	9.240	0.008	< 30dBm
CH 39	8.240	0.007	< 30dBm

Occupied Bandwidth Measurement

	99% Bandwidth (MHz)	Max Occupied Bandwidth
CH 00	1.994	1.994 MHz
CH 19	1.990	
CH 39	1.990	

Power Spectral Density Measurement


15.247(d)

	Power Density (dBm/100kHz)	Power Density (dBm/3kHz)	Limit
CH 00	5.530	-11.240	< 8dBm
CH 19	7.230	-9.500	< 8dBm
CH 39	5.820	-10.900	< 8dBm



Appendix B. AC Conducted Emission Test Results

Test Engineer :	ZhangXu	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line

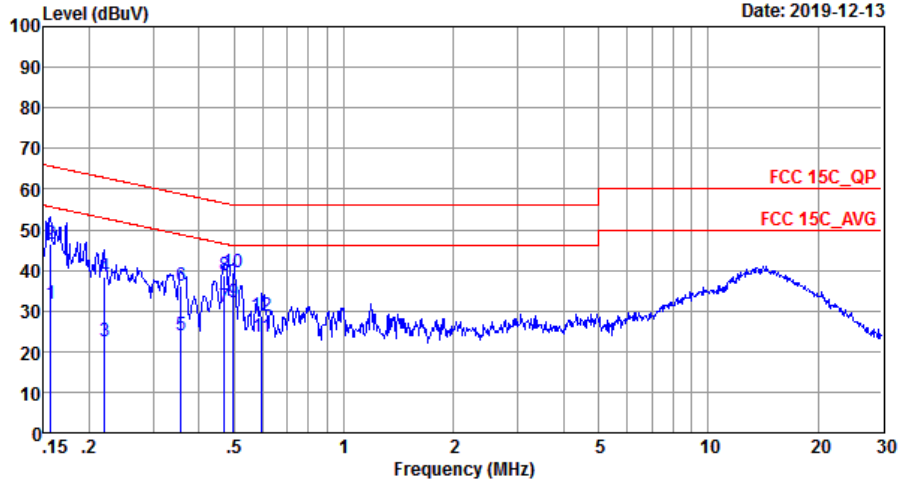


Site : CO01-SZ
 Condition: FCC 15C QP LISN 20190719_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	31.64	-24.01	55.65	21.60	0.03	10.01	Average
2	0.16	46.54	-19.11	65.65	36.50	0.03	10.01	QP
3	0.22	22.34	-30.45	52.79	12.30	0.03	10.01	Average
4	0.22	38.44	-24.35	62.79	28.40	0.03	10.01	QP
5	0.36	24.14	-24.64	48.78	14.10	0.03	10.01	Average
6	0.36	36.04	-22.74	58.78	26.00	0.03	10.01	QP
7	0.47	30.97	-15.52	46.49	20.90	0.02	10.05	Average
8	0.47	38.57	-17.92	56.49	28.50	0.02	10.05	QP
9 *	0.50	31.98	-14.07	46.05	21.90	0.02	10.06	Average
10	0.50	39.38	-16.67	56.05	29.30	0.02	10.06	QP
11	0.59	23.49	-22.51	46.00	13.40	0.02	10.07	Average
12	0.59	28.89	-27.11	56.00	18.80	0.02	10.07	QP



Test Engineer :	ZhangXu	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

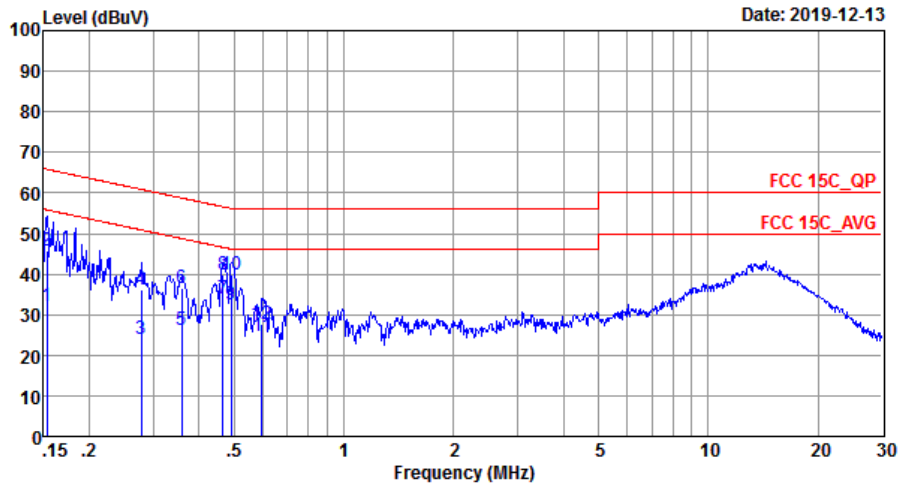

Site : CO01-SZ
 Condition: FCC 15C QP LISN 20190719_N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	32.24	-23.58	55.82	22.20	0.03	10.01	Average
2	0.15	45.84	-19.98	65.82	35.80	0.03	10.01	QP
3	0.28	23.84	-27.06	50.90	13.80	0.03	10.01	Average
4	0.28	36.24	-24.66	60.90	26.20	0.03	10.01	QP
5	0.36	26.13	-22.61	48.74	16.10	0.02	10.01	Average
6	0.36	36.63	-22.11	58.74	26.60	0.02	10.01	QP
7 *	0.47	33.96	-12.62	46.58	23.90	0.02	10.04	Average
8	0.47	39.86	-16.72	56.58	29.80	0.02	10.04	QP
9	0.49	32.58	-13.56	46.14	22.50	0.02	10.06	Average
10	0.49	39.88	-16.26	56.14	29.80	0.02	10.06	QP
11	0.59	24.79	-21.21	46.00	14.70	0.02	10.07	Average
12	0.59	27.79	-28.21	56.00	17.70	0.02	10.07	QP

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2325.01	47.42	-26.58	74	44.85	27.93	7.48	32.84	153	349	P	H
		2367.43	39.52	-14.48	54	36.98	27.83	7.51	32.8	153	349	A	H
	*	2402	104.49	-	-	102.03	27.7	7.54	32.78	153	349	P	H
	*	2402	102.4	-	-	99.94	27.7	7.54	32.78	153	349	A	H
		2333.94	46.95	-27.05	74	44.38	27.93	7.48	32.84	100	113	P	V
		2367.64	39.52	-14.48	54	36.98	27.83	7.51	32.8	100	113	A	V
	*	2402	102.12	-	-	99.66	27.7	7.54	32.78	100	113	P	V
	*	2402	100.06	-	-	97.6	27.7	7.54	32.78	100	113	A	V
BLE CH 19 2440MHz		2366.14	47.08	-26.92	74	44.54	27.83	7.51	32.8	107	37	P	H
		2354.1	39.19	-14.81	54	36.67	27.83	7.51	32.82	107	37	A	H
	*	2440	107.52	-	-	105.14	27.6	7.54	32.76	107	37	P	H
	*	2440	105.41	-	-	103.03	27.6	7.54	32.76	107	37	A	H
		2493.56	46.16	-27.84	74	43.93	27.4	7.53	32.7	107	37	P	H
		2485.02	39.17	-14.83	54	36.89	27.47	7.53	32.72	107	37	A	H
		2318.4	46.73	-27.27	74	44.16	27.93	7.48	32.84	100	66	P	V
		2348.5	39.34	-14.66	54	36.75	27.9	7.51	32.82	100	66	A	V
	*	2440	104.63	-	-	102.25	27.6	7.54	32.76	100	66	P	V
	*	2440	102.75	-	-	100.37	27.6	7.54	32.76	100	66	A	V
		2490.13	46.73	-27.27	74	44.52	27.4	7.53	32.72	100	66	P	V
		2484.32	39.39	-14.61	54	37.11	27.47	7.53	32.72	100	66	A	V



BLE CH 39 2480MHz	*	2480	104.15	-	-	101.87	27.47	7.53	32.72	147	353	P	H
	*	2480	102.09	-	-	99.81	27.47	7.53	32.72	147	353	A	H
		2483.68	50.42	-23.58	74	48.14	27.47	7.53	32.72	147	353	P	H
		2483.64	40.94	-13.06	54	38.66	27.47	7.53	32.72	147	353	A	H
	*	2480	100.04	-	-	97.76	27.47	7.53	32.72	100	63	P	V
	*	2480	97.87	-	-	95.59	27.47	7.53	32.72	100	63	A	V
		2484.6	47.11	-26.89	74	44.83	27.47	7.53	32.72	100	63	P	V
		2484.28	39.7	-14.3	54	37.42	27.47	7.53	32.72	100	63	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	39.85	-34.15	74	53.27	31.1	9.86	54.38	122	249	P	H
		4804	40.25	-33.75	74	53.67	31.1	9.86	54.38	132	141	P	V
BLE CH 19 2440MHz		4880	39.02	-34.98	74	52.36	31.13	9.88	54.35	158	69	P	H
		7320	44.47	-29.53	74	50.72	36.4	11.88	54.53	131	197	P	H
		4880	38.88	-35.12	74	52.22	31.13	9.88	54.35	167	208	P	V
		7320	45.73	-28.27	74	51.98	36.4	11.88	54.53	126	244	P	V
BLE CH 39 2480MHz		4960	40.42	-33.58	74	53.43	31.37	9.93	54.31	127	190	P	H
		7440	44.57	-29.43	74	50.69	36.5	12.03	54.65	135	216	P	H
		4960	40.16	-33.84	74	53.17	31.37	9.93	54.31	119	288	P	V
		7440	45.48	-28.52	74	51.6	36.5	12.03	54.65	104	225	P	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		30	26.56	-13.44	40	32.5	24.8	0.56	31.3	184	161	P	H
		128.94	27.63	-15.87	43.5	40.51	17.44	1.17	31.49	-	-	P	H
		240.49	26.78	-19.22	46	39.15	17.64	1.62	31.63	-	-	P	H
		482.99	26.88	-19.12	46	32.28	23.54	2.35	31.29	-	-	P	H
		624.61	27.56	-18.44	46	30.33	26.02	2.72	31.51	-	-	P	H
		900.09	29.17	-16.83	46	28.35	29	3.32	31.5	-	-	P	H
		30	30.63	-9.37	40	36.57	24.8	0.56	31.3	152	227	P	V
		60.07	21.48	-18.52	40	40.49	11.8	0.79	31.6	-	-	P	V
		132.82	31.14	-12.36	43.5	43.93	17.47	1.2	31.46	-	-	P	V
		256.01	25.45	-20.55	46	35.58	19.85	1.68	31.66	-	-	P	V
		534.4	27.73	-18.27	46	31.96	24.55	2.49	31.27	-	-	P	V
		919.49	30.56	-15.44	46	29.33	29.31	3.35	31.43	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE v5.0 for Ant1	32.29	0.202	4.950	10KHz

Bluetooth LE v5.0 for Ant1

