



# FCC PART 15C TEST REPORT

**BLUETOOTH LOW ENERGY (BLE) PART**

**No. I19Z61344-IOT07**

**for**

**OnePlus Technology (shenzhen) Co., Ltd**

**Smart Phone**

**Model Name: HD1925**

**FCC ID: 2ABZ2-EE143**

**with**

**Hardware Version: 46**

**Software Version: Oxygen OS 10.0.HD61CB**

**Issued Date: 2019-10-30**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL-Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [cttl\\_terminals@caict.ac.cn](mailto:cttl_terminals@caict.ac.cn), website: [www.chinattl.com](http://www.chinattl.com)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I19Z61344-IOT07	Rev.0	1st edition	2019-10-23
I19Z61344-IOT07	Rev.1	Update the value of Power Supply in Chapter 3.1	2019-10-30

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

<b>1. TEST LABORATORY</b> .....	<b>5</b>
1.1. TESTING LOCATION.....	5
1.2. TESTING ENVIRONMENT.....	5
1.3. PROJECT DATA.....	6
1.4. SIGNATURE.....	6
<b>2. CLIENT INFORMATION</b> .....	<b>7</b>
2.1. APPLICANT INFORMATION.....	7
2.2. MANUFACTURER INFORMATION.....	7
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)</b> .....	<b>8</b>
3.1. ABOUT EUT.....	8
3.2. INTERNAL IDENTIFICATION OF EUT.....	8
3.3. INTERNAL IDENTIFICATION OF AE.....	8
3.4. EUT SET-UPS.....	9
3.5. NORMAL ACCESSORY SETTING.....	9
3.6. GENERAL DESCRIPTION.....	9
<b>4. REFERENCE DOCUMENTS</b> .....	<b>10</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT.....	10
4.2. REFERENCE DOCUMENTS FOR TESTING.....	10
<b>5. TEST RESULTS</b> .....	<b>11</b>
5.1. SUMMARY OF EUT MODE.....	11
5.2. SUMMARY OF TEST RESULTS.....	11
5.3. STATEMENTS.....	11
<b>6. TEST FACILITIES UTILIZED</b> .....	<b>12</b>
<b>7. MEASUREMENT UNCERTAINTY</b> .....	<b>13</b>
7.1. PEAK OUTPUT POWER - CONDUCTED.....	13
7.2. FREQUENCY BAND EDGES.....	13
7.3. TRANSMITTER SPURIOUS EMISSION - CONDUCTED.....	13
7.4. TRANSMITTER SPURIOUS EMISSION - RADIATED.....	13
7.5. 6DB BANDWIDTH.....	13
7.6. MAXIMUM POWER SPECTRAL DENSITY LEVEL.....	13
7.7. AC POWERLINE CONDUCTED EMISSION.....	14
<b>ANNEX A: DETAILED TEST RESULTS</b> .....	<b>15</b>
A.1. MEASUREMENT METHOD.....	15
A.2. PEAK OUTPUT POWER - CONDUCTED.....	16
A.3. FREQUENCY BAND EDGES - CONDUCTED.....	17
A.4. TRANSMITTER SPURIOUS EMISSION - CONDUCTED.....	19



No.119Z61344-IOT07

A.5. TRANSMITTER SPURIOUS EMISSION - RADIATED.....	28
A.6. 6dB BANDWIDTH.....	32
A.7. MAXIMUM POWER SPECTRAL DENSITY LEVEL.....	35
A.8. AC POWERLINE CONDUCTED EMISSION.....	38
<b>ANNEX B: ACCREDITATION CERTIFICATE.....</b>	<b>44</b>



## **1. Test Laboratory**

### **1.1. Testing Location**

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

Radiated testing Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

Radiated testing Location 2: CTTL(yizhuang)

Address: No.18, Kangding Street, Beijing Economic-Technology  
Development Area, Beijing, P. R. China 100176

### **1.2. Testing Environment**


Normal Temperature: 15-35°C

Relative Humidity: 20-75%

### 1.3. Project data

Testing Start Date: 2019-8-30  
Testing End Date: 2019-9-30

### 1.4. Signature



---

**Wu Le**  
**(Prepared this test report)**



---

**Sun Zhenyu**  
**(Reviewed this test report)**



---

**Li Zhuofang**  
**(Approved this test report)**



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: OnePlus Technology (shenzhen) Co., Ltd  
Address /Post: 18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen  
City: Shenzhen  
Postal Code: /  
Country: China  
Telephone: 13823398081  
Fax: /

### **2.2. Manufacturer Information**

Company Name: OnePlus Technology (shenzhen) Co., Ltd  
Address /Post: 18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen  
City: Shenzhen  
Postal Code: /  
Country: China  
Telephone: 13823398081  
Fax: /

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

Description	Smart Phone
Model Name	HD1925
FCC ID	2ABZ2-EE143
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation(LE mode)	GFSK (Bluetooth Low Energy)
Number of Channels(LE mode)	40
Power Supply	3.87V DC by Battery

#### 3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
EUT3	990013820049927	46	Oxygen OS 10.0.HD61CB
EUT4	990013820050388	46	Oxygen OS 10.0.HD61CB

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE

AE ID*	Description		
AE1	Battery	/	Inbuilt
AE2	Charger	/	CH007/008
AE3	USB Cable	/	/
AE4	Charger	/	CH019/021
AE1			
Model		BLP745	
Manufacturer		Sunwoda Electronic Co.,Ltd.	
Capacitance		4010mAh	
Nominal voltage		3.87V	
AE2			
Model		WC0506A5HK	
Manufacturer		SHENZHEN HUNTKEY ELECTRIC CO.,LTD.	
Length of cable		/	
AE3			
Model		/	
Manufacturer		/	
Length of cable		/	
AE4			
Model		WC0506A52GB	
Manufacturer		/	





Length of cable /

\*AE ID: is used to identify the test sample in the lab internally.

### 3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.11	EUT3+ AE1+ AE2+ AE3	BT &WIFI
Set.12	EUT3+ AE1+ AE3+ AE4	ADD Charger

### 3.5. Normal Accessory setting

Fully charged battery is used during the test.

### 3.6. General Description

The Equipment Under Test (EUT) is a model of Smart Phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfill the test. Samples undergoing test were selected by the Client.

## 4. Reference Documents

### 4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements;	2018
ANSI C63.10	15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz. American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	June,2013

## 5. Test Results

### 5.1. Summary of EUT Mode

Two mode are provided:

Mode	Conditions
Mode A	1Mbps
Mode B	2Mbps

\*For the test results, the EUT had been tested all conditions. But only the worst case(Mode B) was shown in test report except the " RF output power " test was shown all conditions.

### 5.2. Summary of Test Results

Abbreviations used in this clause:

- P** Pass, The EUT complies with the essential requirements in the standard.
- F** Fail, The EUT does not comply with the essential requirements in the standard
- NA** Not Applicable, The test was not applicable
- NP** Not Performed, The test was not performed by CTTL

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
6dB Bandwidth	15.247 (a)(2)	<b>P</b>
Peak Output Power - Conducted	15.247 (b)(1)	<b>P</b>
Maximum Power Spectral Density Level	15.247(e)	<b>P</b>
Transmitter Spurious Emission - Conducted	15.247 (d)	<b>P</b>
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	<b>P</b>
Frequency Band Edges	15.247 (d)	<b>P</b>
AC Powerline Conducted Emission	15.107, 15.207	<b>P</b>

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

### 5.3. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

## 6. Test Facilities Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	200136	Rohde & Schwarz	1 year	2019-11-21
2	LISN	ENV216	101200	Rohde & Schwarz	1 year	2020-03-14
3	Test Receiver	ESCI	100344	Rohde & Schwarz	1 year	2020-02-14
4	Shielding Room	S81	/	ETS-Lindgren	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100235	Rohde & Schwarz	1 year	2020-03-01
2	BiLog Antenna	VULB9163	9163-1222	Schwarzbeck	1 year	2020-03-14
3	Dual-Ridge Waveguide Horn Antenna	3115	6914	ETS-Lindgren	1year	2020-01-03
4	EMI Antenna	3116	2661	ETS-Lindgren	1 Year	2019-10-15
5	Vector Signal Analyzer	FSV40	101047	Rohde & Schwarz	1 year	2020-05-16

## 7. Measurement Uncertainty

### 7.1. Peak Output Power - Conducted

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

### 7.2. Frequency Band Edges

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

### 7.3. Transmitter Spurious Emission - Conducted

Measurement Uncertainty:

Frequency Range	Uncertainty (k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

### 7.4. Transmitter Spurious Emission - Radiated

Measurement Uncertainty:

Frequency Range	Uncertainty (k=2)
< 1 GHz	4.86dB
> 1 GHz	5.26dB

### 7.5. 6dB Bandwidth

Measurement Uncertainty:

Measurement Uncertainty (k=2)	61.936Hz
-------------------------------	----------

### 7.6. Maximum Power Spectral Density Level

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------



## 7.7. AC Powerline Conducted Emission

### Measurement Uncertainty:

Measurement Uncertainty (k=2)	3.38dB
-------------------------------	--------


## **ANNEX A: Detailed Test Results**

### **A.1. Measurement Method**

#### **A.1.1. Conducted Measurements**

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer



#### **A.1.2. Radiated Emission Measurements**


The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 3MHz;

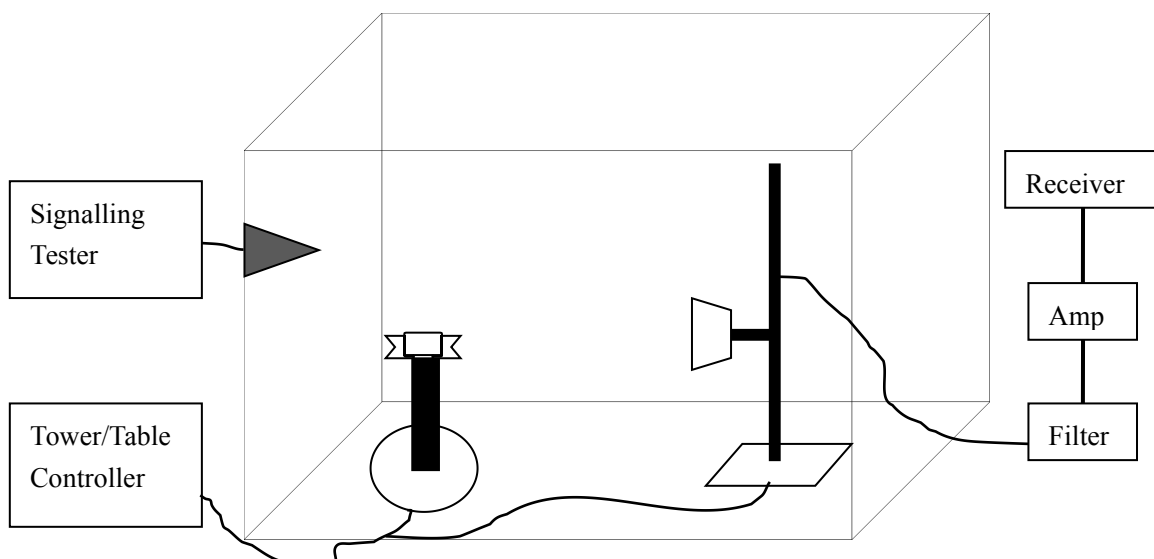

## A.2. Peak Output Power - Conducted

**Method of Measurement: See ANSI C63.10-clause 11.9.1.1**

- a) Set the RBW = 1 MHz.
- b) Set VBW = 3 MHz.
- c) Set span = 3 MHz.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

**Measurement Limit:**

Standard	Limit (dBm)
FCC Part 15.247(b)(1)	< 30

**Measurement Results:**

**For GFSK**

Sample Rate	Channel No.	Frequency (MHz)	Peak Conducted Output Power (dBm)	Conclusion
1Mbps	0	2402	9.34	P
	19	2440	9.62	P
	39	2480	9.95	P
2Mbps	0	2402	9.75	P
	19	2440	9.89	P
	39	2480	10.14	P

**Conclusion: PASS**



### A.3. Frequency Band Edges - Conducted

**Method of Measurement: See ANSI C63.10-clause 6.10.4**

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 8MHz
- b) Sweep Time: Auto
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

**Measurement Limit:**

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	< -20

**Measurement Result:**

**For GFSK**

Channel No.	Frequency (MHz)	Hopping	Band Edge Power ( dBc)		Conclusion
0	2402	Hopping OFF	Fig.1	-37.36	P
39	2480	Hopping OFF	Fig.2	-52.40	P

**Conclusion: PASS**

Test graphs as below

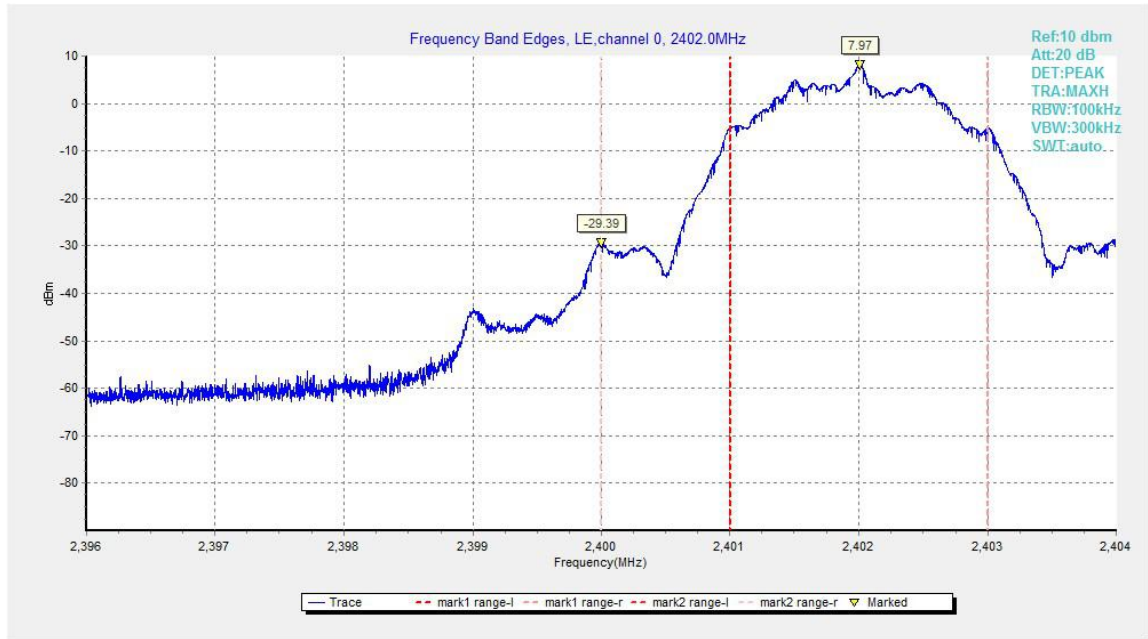


Fig.1. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off

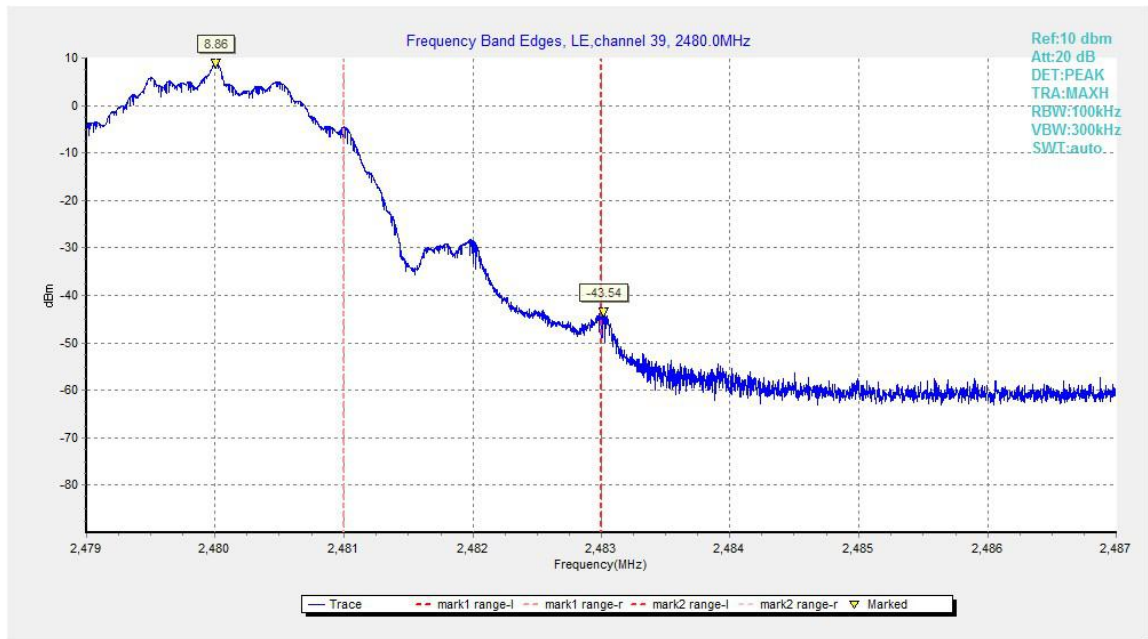


Fig.2. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off

#### A.4. Transmitter Spurious Emission - Conducted

**Method of Measurement: See ANSI C63.10-clause 11.11.2 and clause 11.11.3**

##### **Measurement Procedure – Reference Level**

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to  $\geq 1.5$  times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum PSD level. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

##### **Measurement Procedure - Unwanted Emissions**

1. Set RBW = 100 kHz.
2. Set VBW = 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

##### **Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

**Measurement Results:  
For GFSK**

Channel No.	Frequency (MHz)	Frequency Range	Test Results	Conclusion
0	2402	Center Frequency	Fig.3	P
		30 MHz ~ 1 GHz	Fig.4	P
		1 GHz ~ 3 GHz	Fig.5	P
		3 GHz ~ 10 GHz	Fig.6	P
		10GHz ~ 26 GHz	Fig.7	P
19	2440	Center Frequency	Fig.8	P
		30 MHz ~ 1 GHz	Fig.9	P
		1 GHz ~ 3 GHz	Fig.10	P
		3 GHz ~ 10 GHz	Fig.11	P
		10GHz ~ 26 GHz	Fig.12	P
39	2480	Center Frequency	Fig.13	P
		30 MHz ~ 1 GHz	Fig.14	P
		1 GHz ~ 3GHz	Fig.15	P
		3 GHz ~ 10 GHz	Fig.16	P
		10 GHz ~ 26 GHz	Fig.17	P

**Conclusion: PASS**

**Test graphs as below**

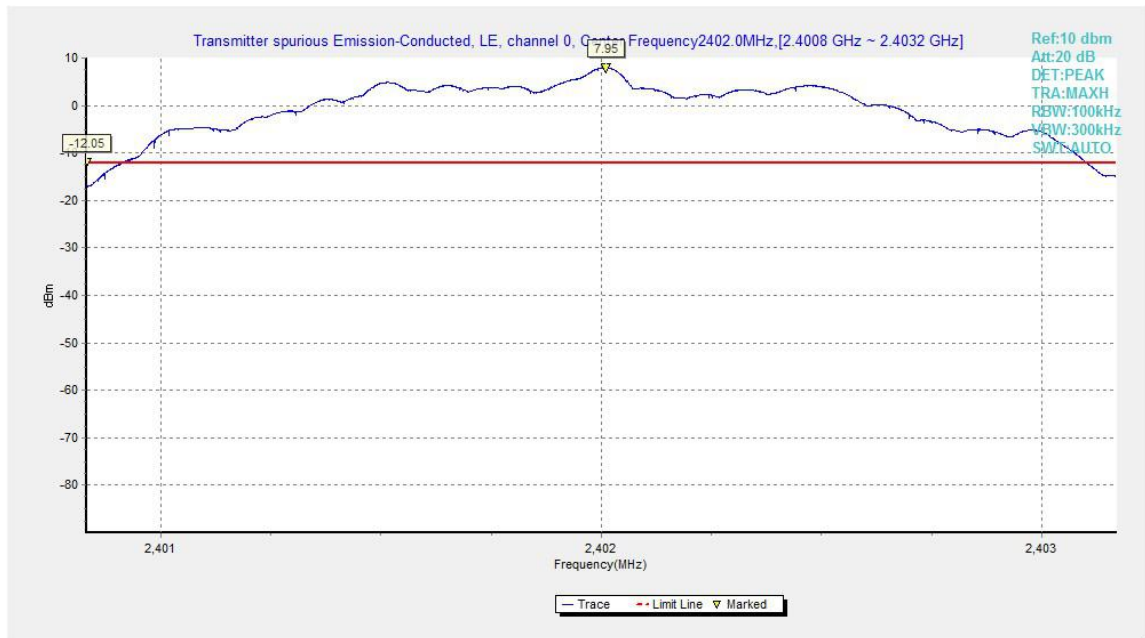


Fig.3. Transmitter Spurious Emission - Conducted: GFSK,2402MHz

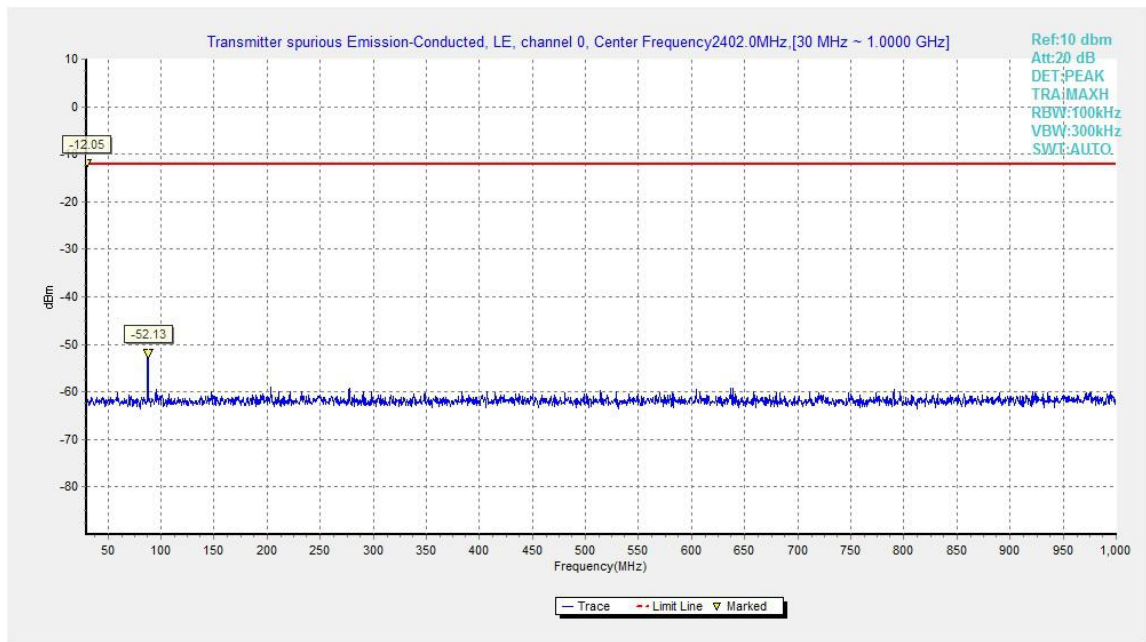


Fig.4. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 30MHz - 1GHz

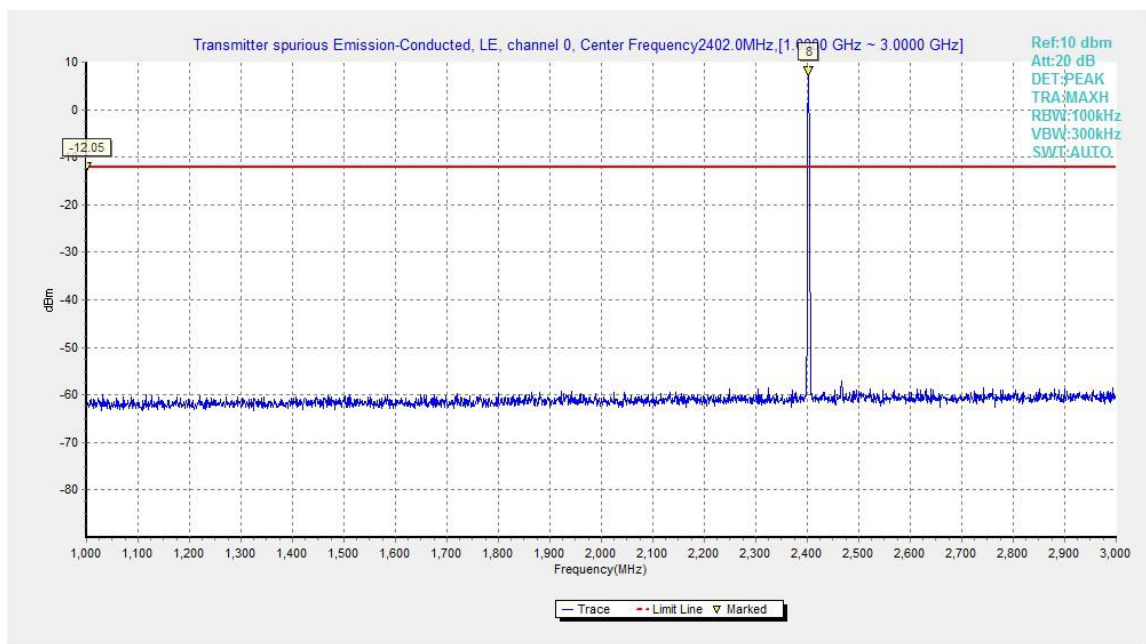


Fig.5. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 1GHz - 3GHz

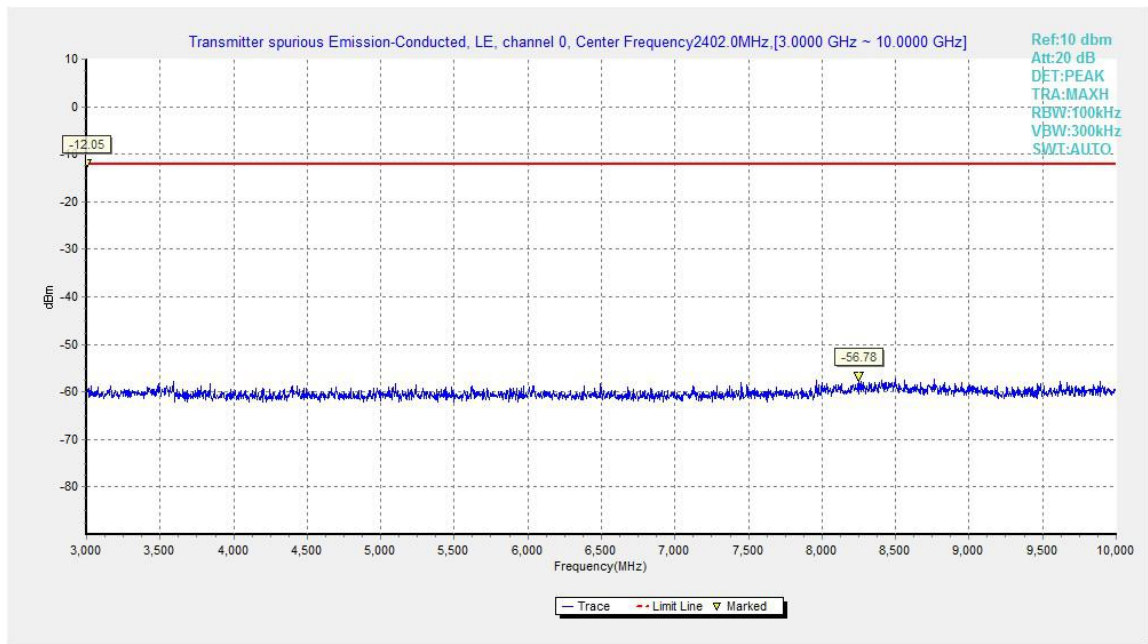


Fig.6. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 3GHz - 10GHz

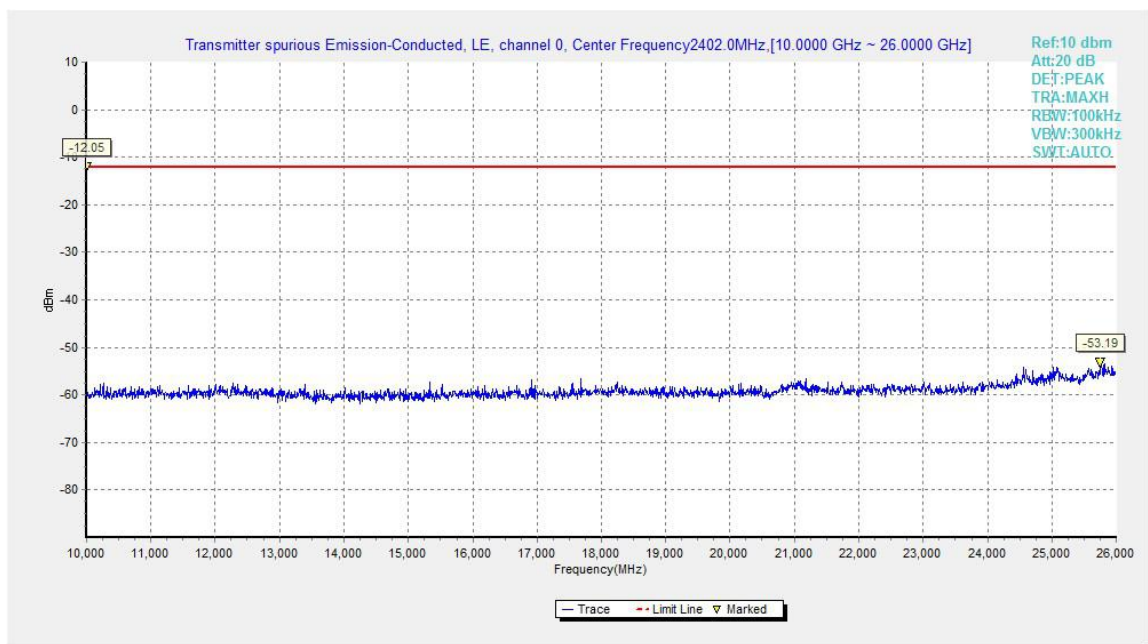


Fig.7. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 10GHz - 26GHz

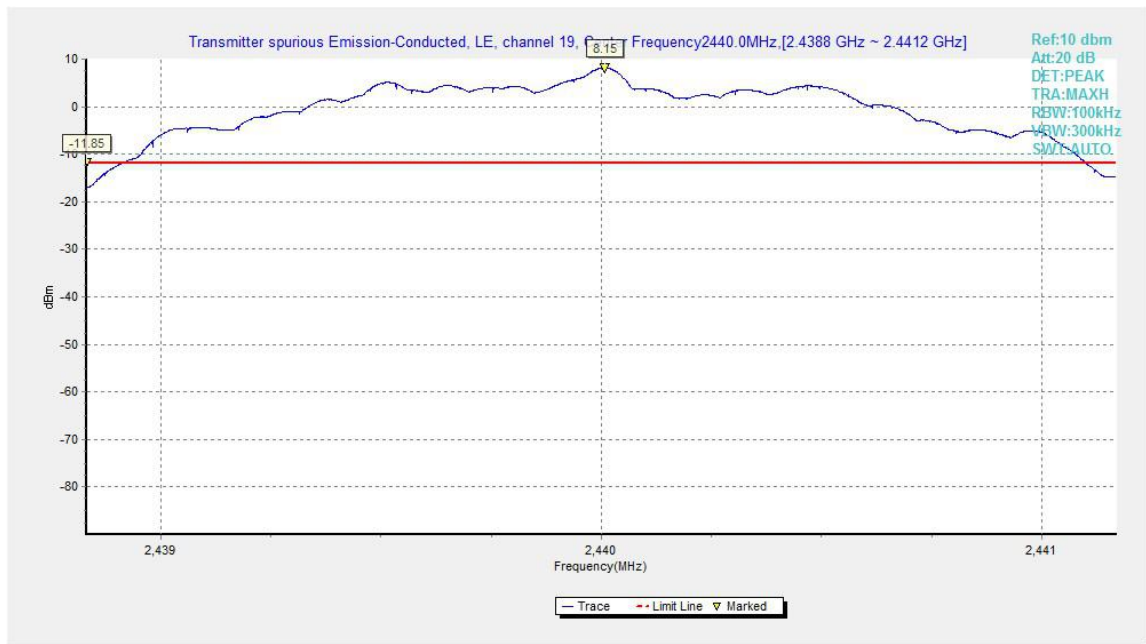


Fig.8. Transmitter Spurious Emission - Conducted: GFSK, 2440MHz

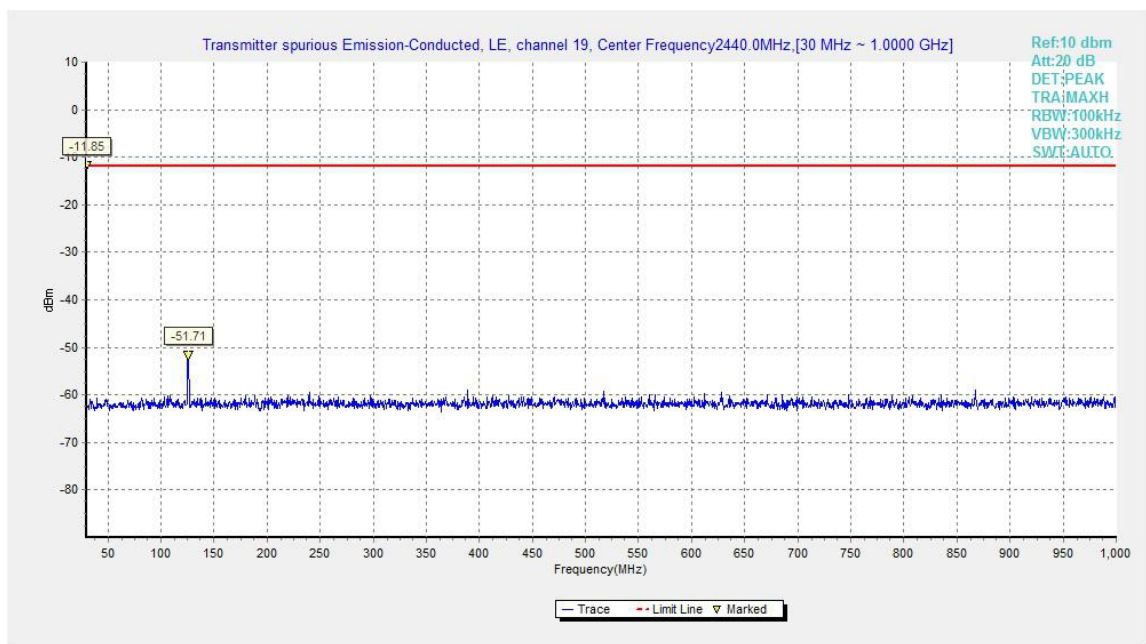


Fig.9. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 30MHz - 1GHz

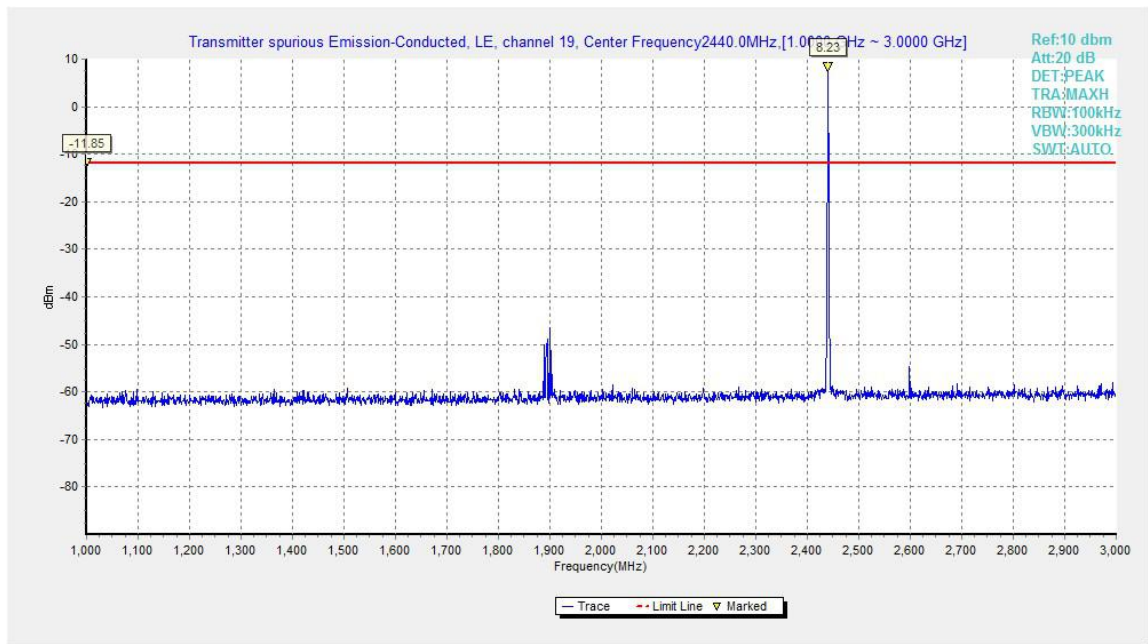


Fig.10. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 1GHz – 3GHz

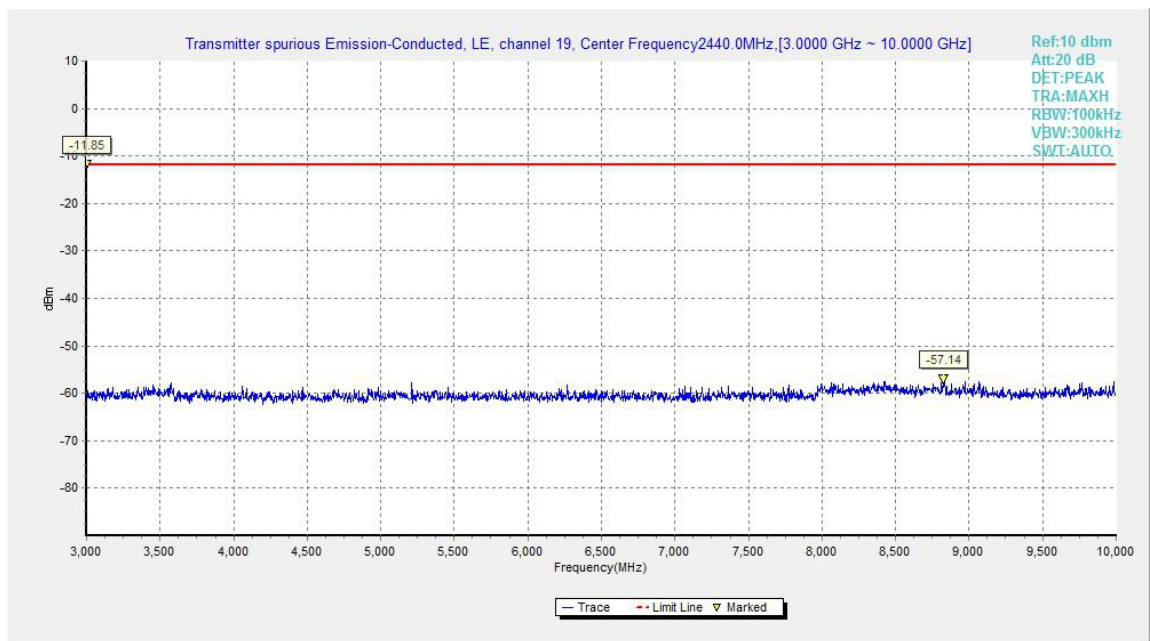


Fig.11. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 3GHz – 10GHz



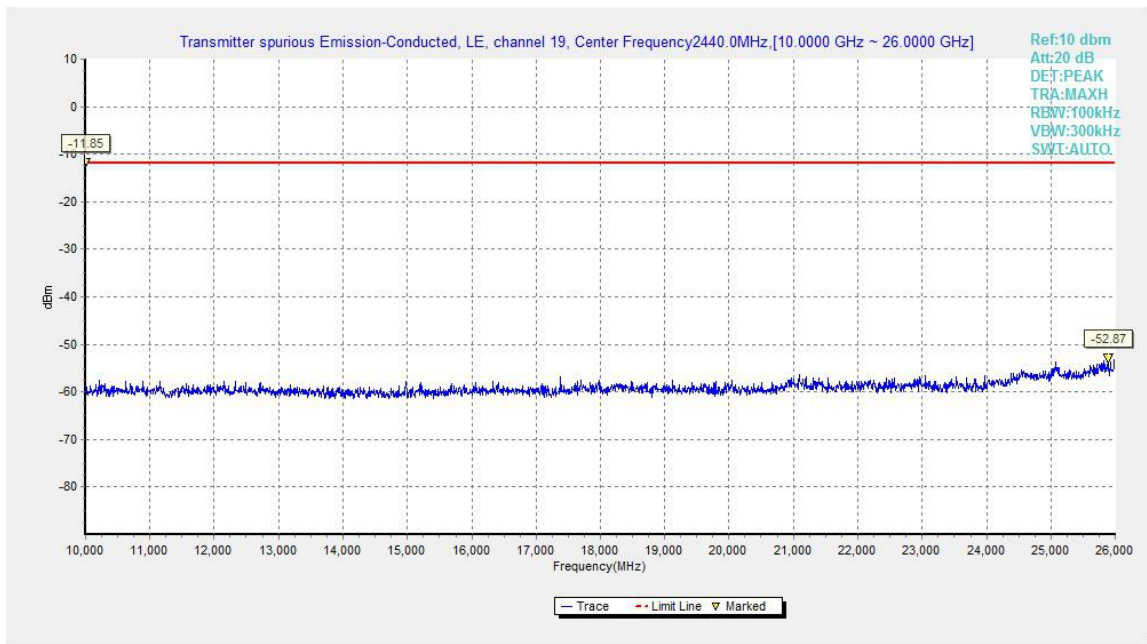


Fig.12. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 10GHz – 26GHz

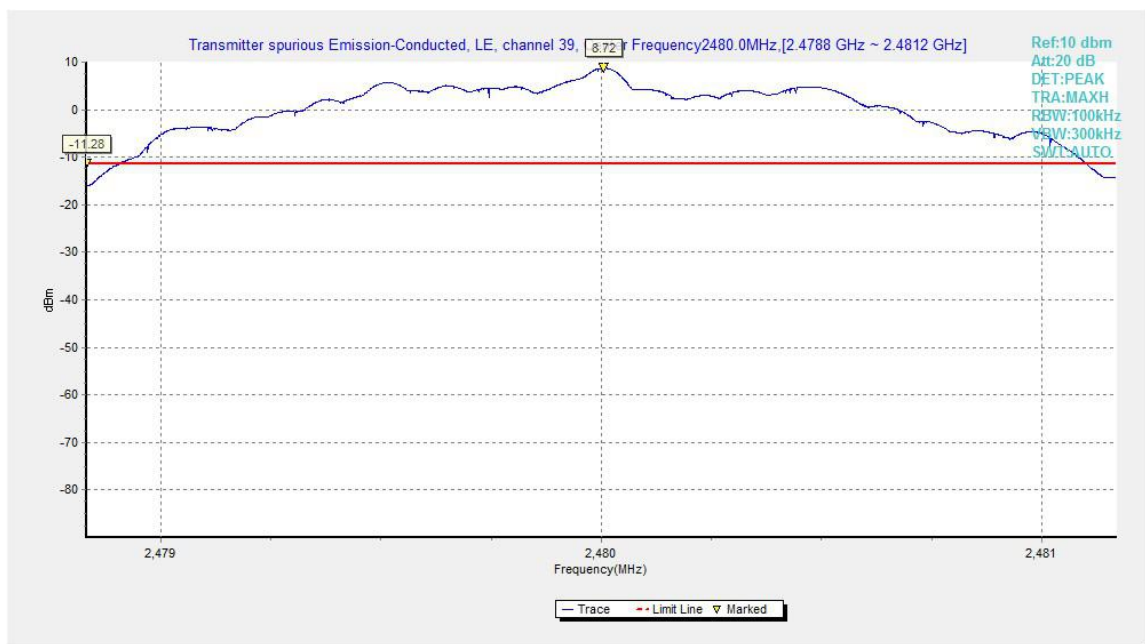


Fig.13. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz

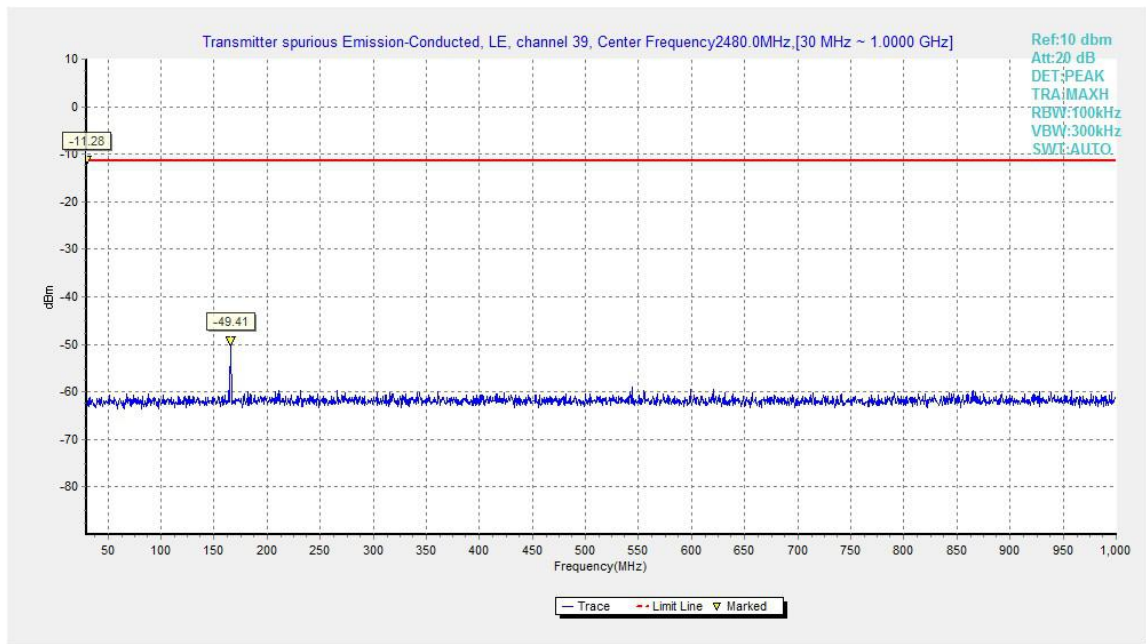


Fig.14. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 30MHz - 1GHz

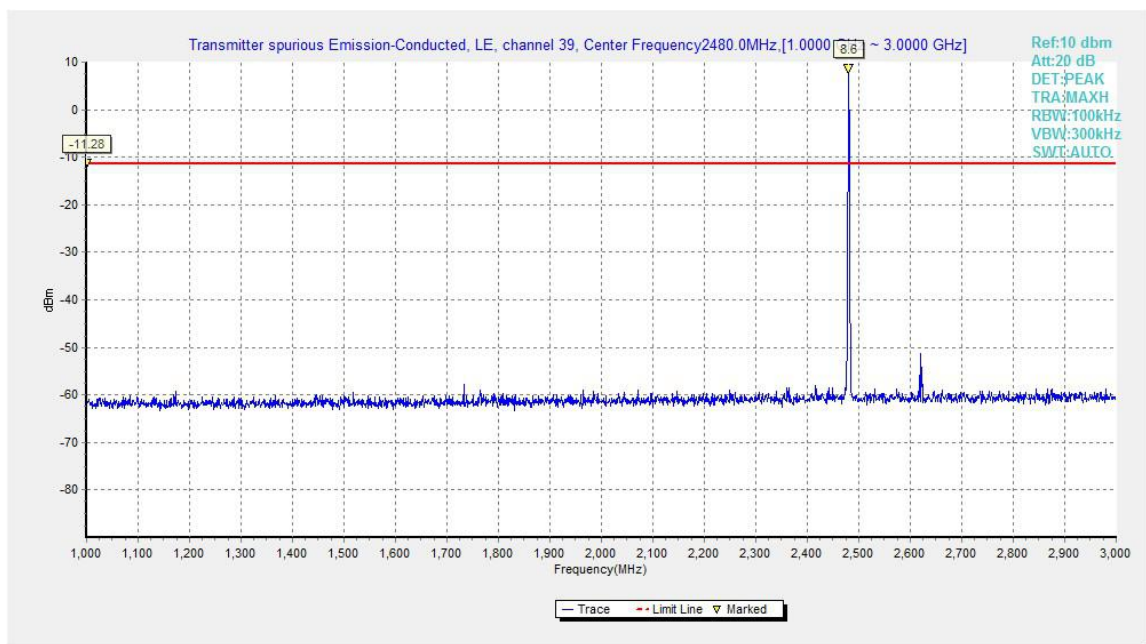


Fig.15. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 1GHz - 3GHz

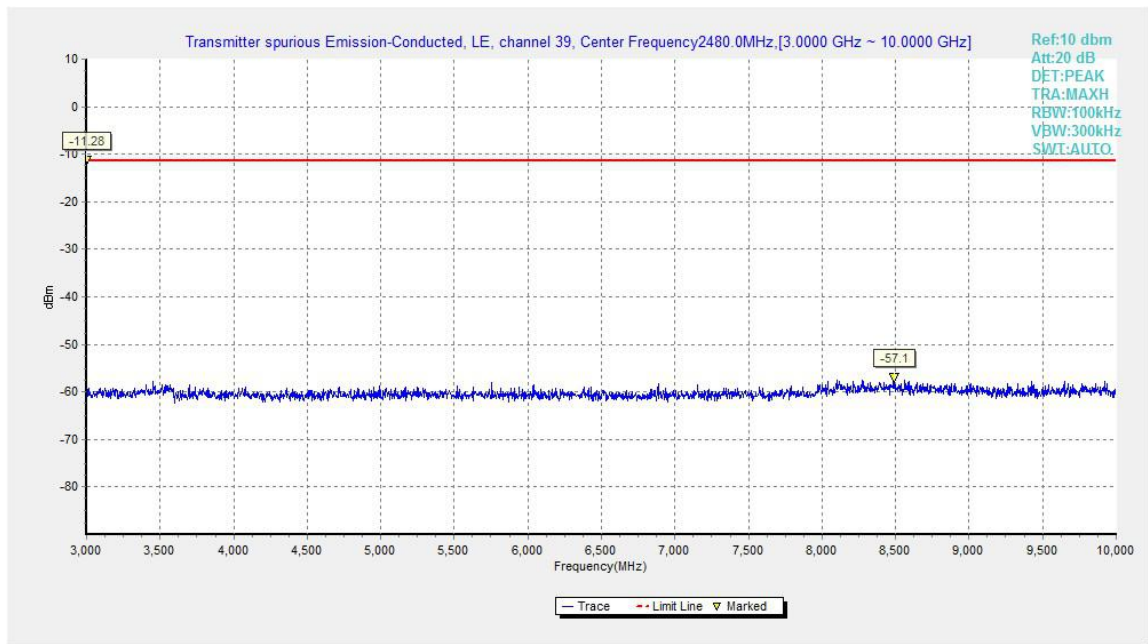


Fig.16. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 3GHz - 10GHz

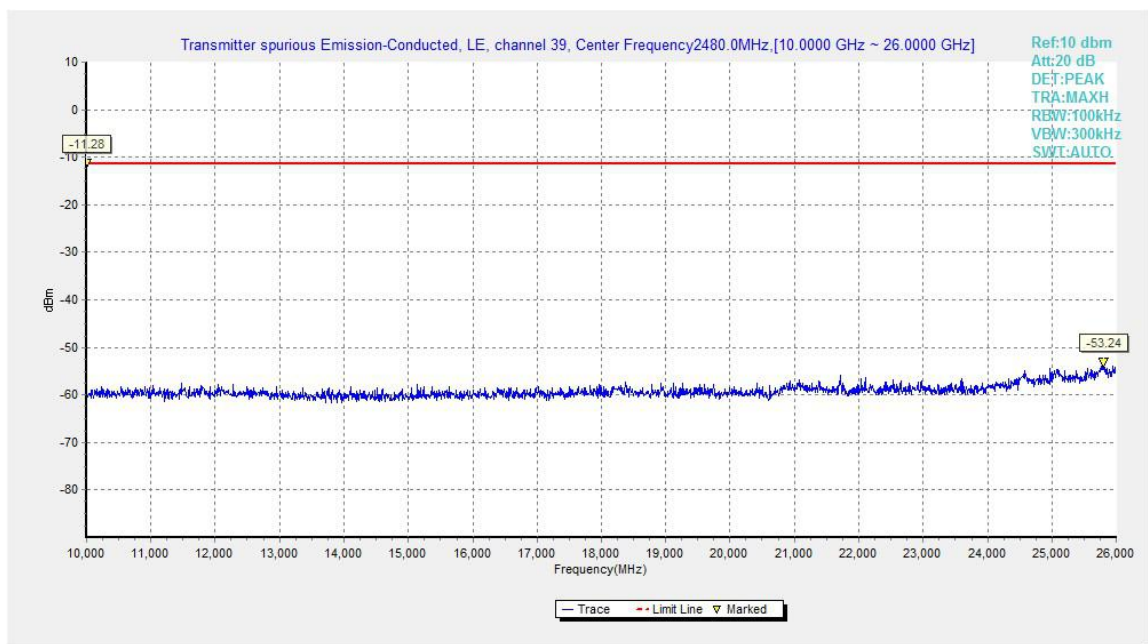


Fig.17. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 10GHz - 26GHz

## A.5. Transmitter Spurious Emission - Radiated

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.10

### Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

### Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

### Measurement Results:

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}}$$

### For BT 5.0

Frequency	Frequency Range	Test Results	Conclusion
Power	2.31GHz~2.43GHz---L	Fig.18	P
Power	2.45GHz~2.50GHz---H	Fig.19	P

**BT 5.0 2402MHz–Average**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
17983.50	35.81	-25.50	43.40	17.91	V
17994.00	35.78	-25.50	43.40	17.88	V
17992.50	35.78	-25.50	43.40	17.88	V
17982.00	35.77	-25.50	43.40	17.87	V
17997.00	35.76	-25.50	43.40	17.86	V
2362.31	40.35	-14.34	27.20	27.49	V

**BT 5.0 2440MHz–Average**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
17992.50	35.87	-25.50	43.40	17.97	V
17983.50	35.81	-25.50	43.40	17.91	V
17994.00	35.76	-25.50	43.40	17.86	V
17985.00	35.75	-25.50	43.40	17.86	H
17977.50	35.75	-25.50	43.40	17.85	V
17953.50	35.72	-25.50	43.40	17.82	V

**BT 5.0 2480MHz–Average**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
17992.50	35.89	-25.50	43.40	17.99	H
17988.00	35.82	-25.50	43.40	17.93	V
17893.50	35.80	-25.50	43.40	17.91	H
17985.00	35.77	-25.50	43.40	17.87	V
17982.00	35.72	-25.50	43.40	17.83	V
2499.89	40.23	-13.95	28.40	25.78	V

**BT 5.0 2402MHz–Peak**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Antenna Pol. (H/V)
17491.50	48.36	-26.85	43.40	31.82	V
17821.50	48.04	-25.50	43.40	30.14	H
17488.50	48.03	-26.85	43.40	31.48	H
17829.00	47.99	-25.50	43.40	30.09	V
17346.00	47.97	-25.95	40.10	33.81	V
2314.68	52.90	-14.55	27.20	40.25	H

**BT 5.0 2440MHz–Peak**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Antenna Pol. (H/V)
17989.50	48.34	-25.50	43.40	30.44	V
17805.00	48.14	-25.50	43.40	30.24	V
17455.50	48.04	-26.85	43.40	31.49	V
17475.00	47.88	-26.85	43.40	31.33	V
17898.00	47.77	-25.50	43.40	29.87	V
17433.00	47.71	-26.85	43.40	31.16	H

**BT 5.0 2480MHz–Peak**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Antenna Pol. (H/V)
17965.50	48.67	-25.50	43.40	30.77	H
17940.00	47.97	-25.50	43.40	30.07	V
17821.50	47.93	-25.50	43.40	30.03	H
17799.00	47.79	-25.50	43.40	29.89	V
17994.00	47.78	-25.50	43.40	29.89	V
2489.87	51.38	-14.17	27.20	38.35	V

**Conclusion: PASS**

**Test graphs as below:**

**Result for Set.11:**

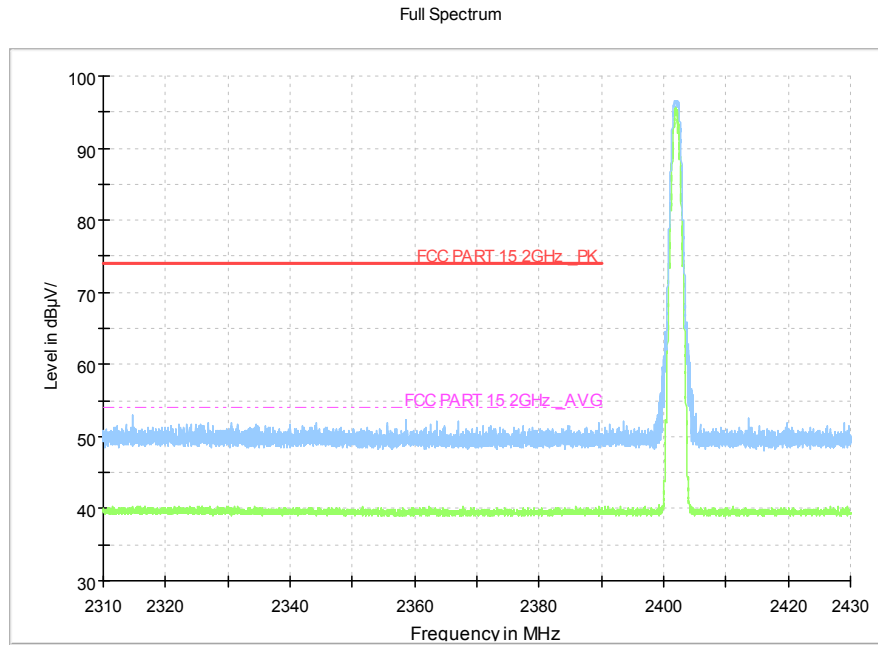


Fig.18. Transmitter Spurious Emission - Radiated (Power): BT 5.0 low channel

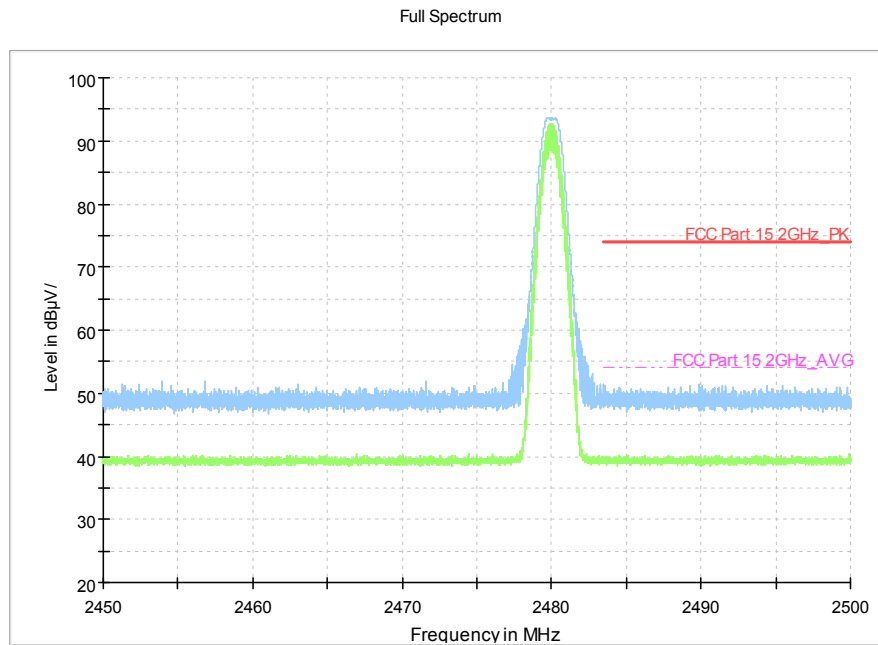


Fig.19. Transmitter Spurious Emission - Radiated (Power): BT 5.0 high channel

## A.6. 6dB Bandwidth

### Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) = 300 kHz.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(2)	$\geq 500\text{KHz}$

### Measurement Results:

#### For GFSK

Channel No.	Frequency (MHz)	6dB Bandwidth (kHz)		Conclusion
0	2402	Fig.20	1140.00	P
19	2440	Fig.21	1140.50	P
39	2480	Fig.22	1142.50	P

**Conclusion: PASS**

**Test graphs as below:**



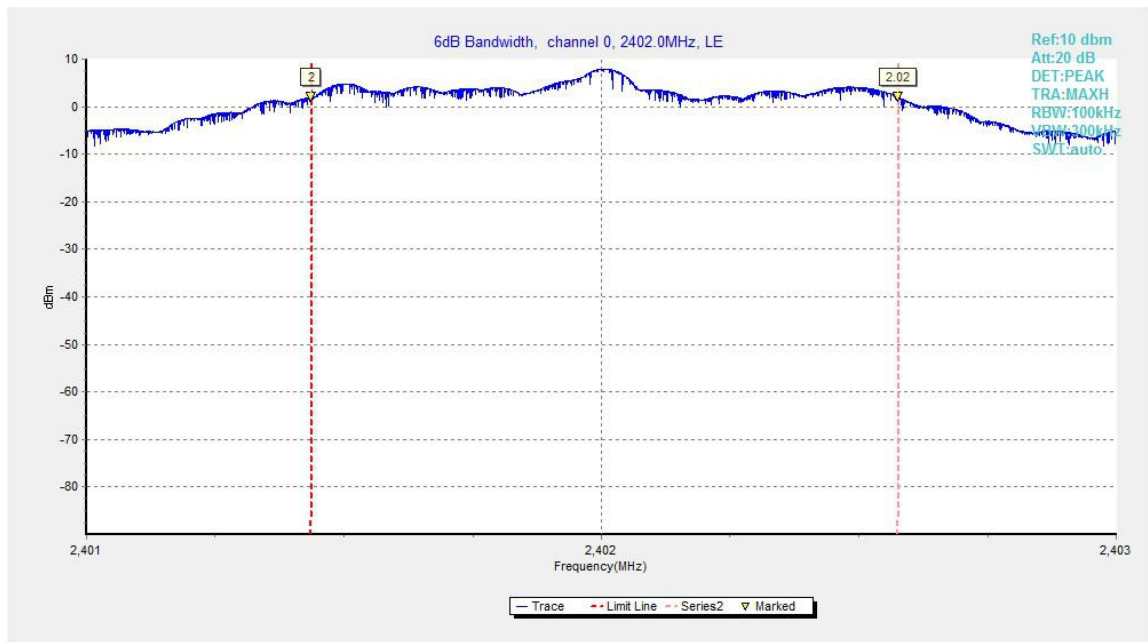


Fig.20. 6dB Bandwidth: GFSK, 2402 MHz

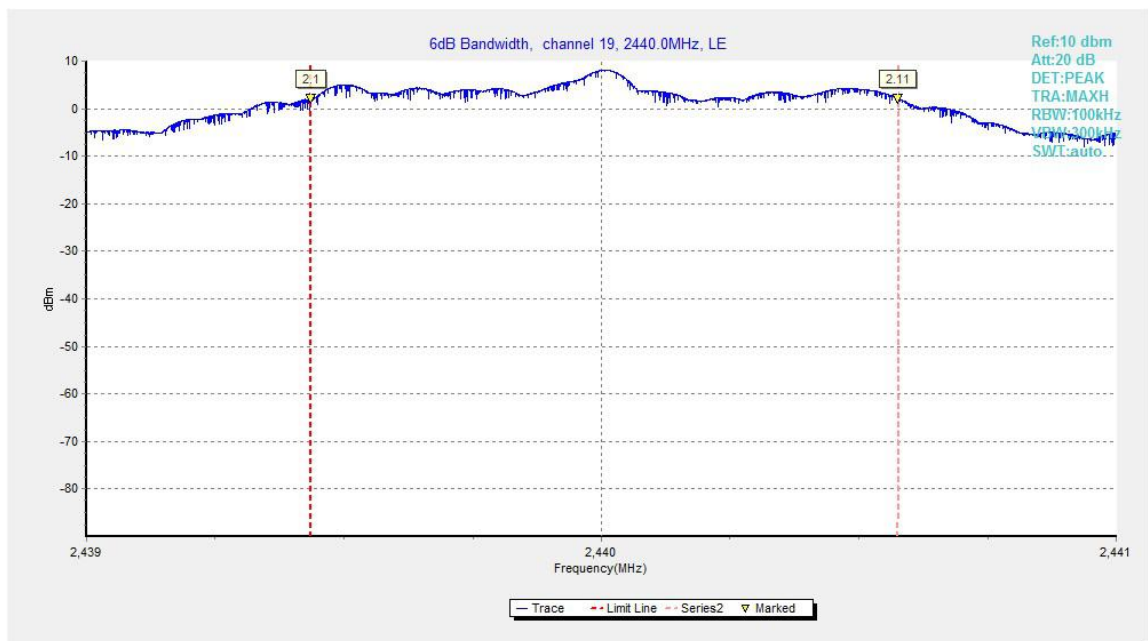


Fig.21. 6dB Bandwidth: GFSK, 2440 MHz

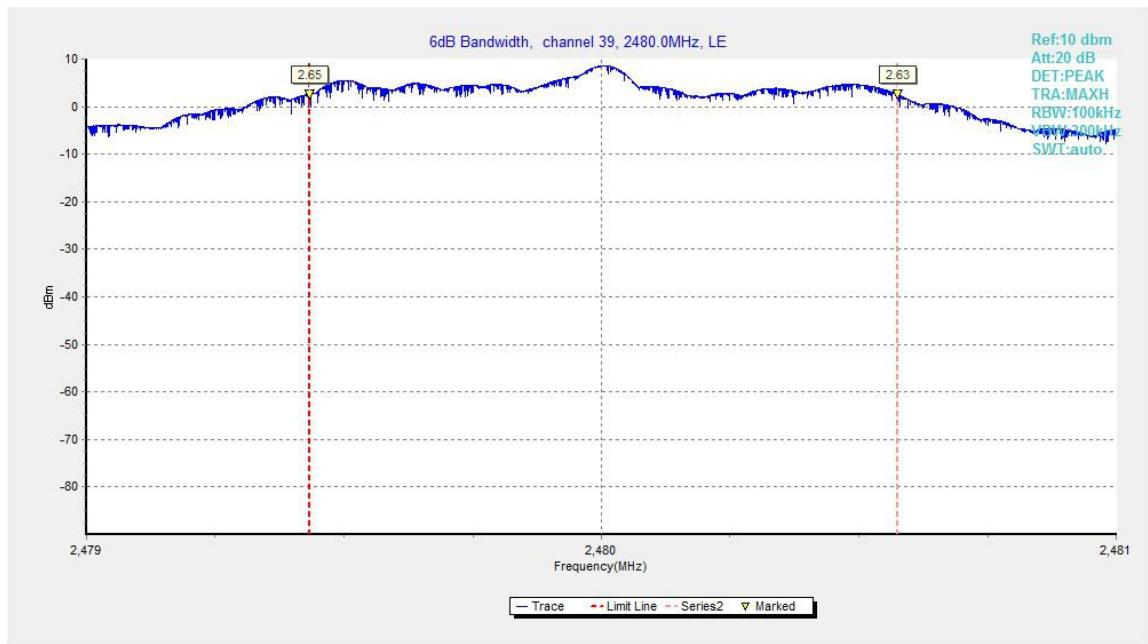


Fig.22. 6dB Bandwidth: GFSK, 2480 MHz

## A.7. Maximum Power Spectral Density Level

### Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.10.2

1. Set the RBW = 3 kHz.
2. Set the VBW = 10 kHz.
3. Set the span to 2 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(e)	$\leq 8.0\text{dBm}/3\text{kHz}$

### Measurement Results:

For GFSK

Channel No.	Frequency (MHz)	Maximum Power Spectral Density Level(dBm/3kHz)		Conclusion
		Fig.	Level	
0	2402	Fig.23	-10.32	P
19	2440	Fig.24	-10.15	P
39	2480	Fig.25	-9.51	P

Test graphs as below:

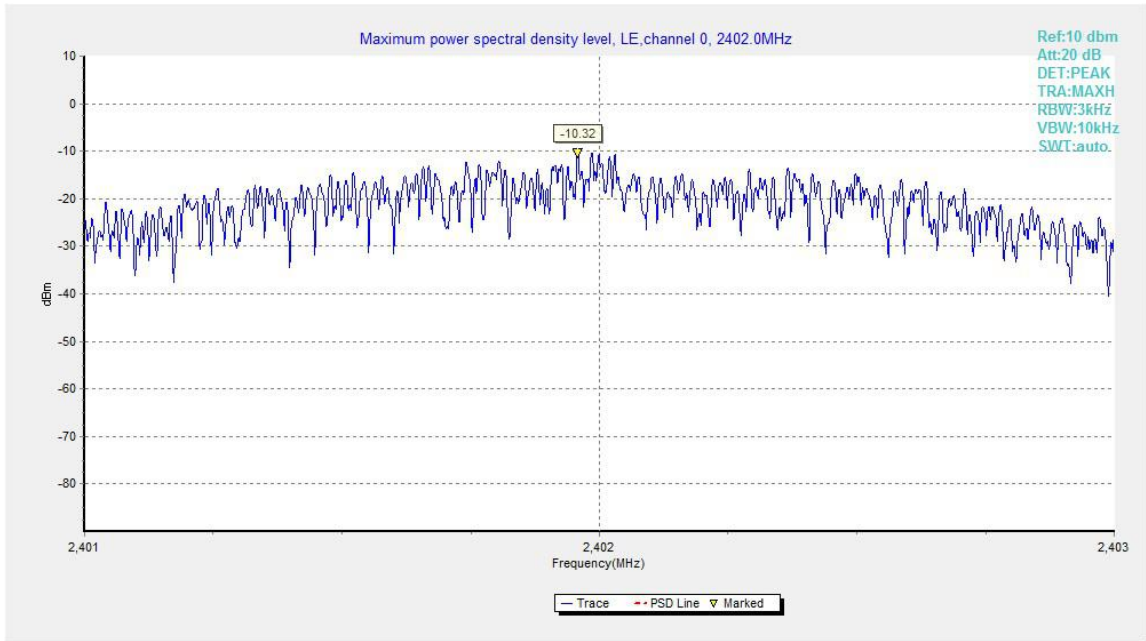


Fig.23. Maximum Power Spectral Density Level Function: GFSK, 2402 MHz

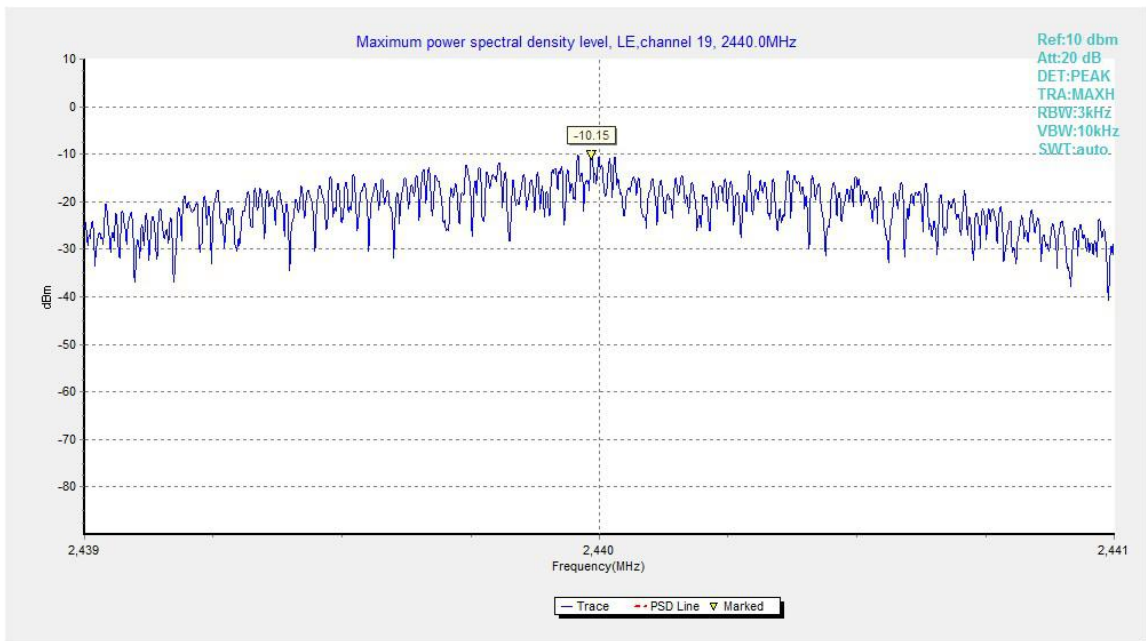


Fig.24. Maximum Power Spectral Density Level Function: GFSK, 2440 MHz

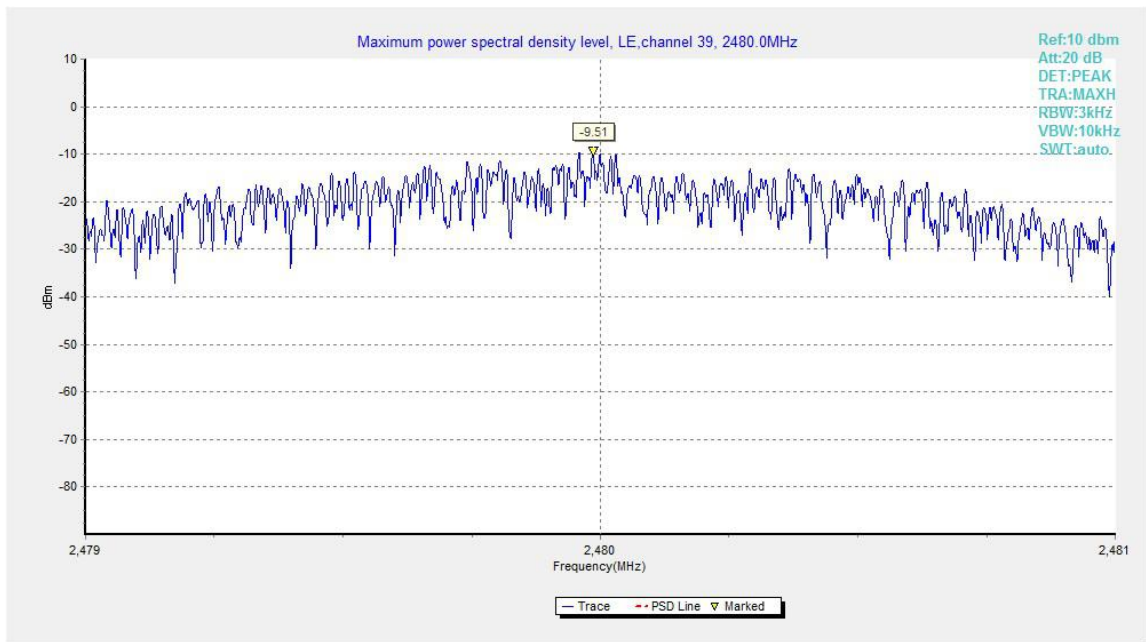


Fig.25. Maximum Power Spectral Density Level Function: GFSK, 2480 MHz

## A.8. AC Powerline Conducted Emission

**Method of Measurement: See ANSI C63.10-clause 6.2**

1. the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
2. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
3. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
4. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
5. If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.<sup>36</sup> Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

### Test Condition

Voltage (V)	Frequency (Hz)
120	60

### Measurement Result and limit:

#### Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**Bluetooth (Average Limit)**


Frequency range (MHz)	Average Limit (dB $\mu$ V)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10

**Conclusion: PASS**

**Test graphs as below:**

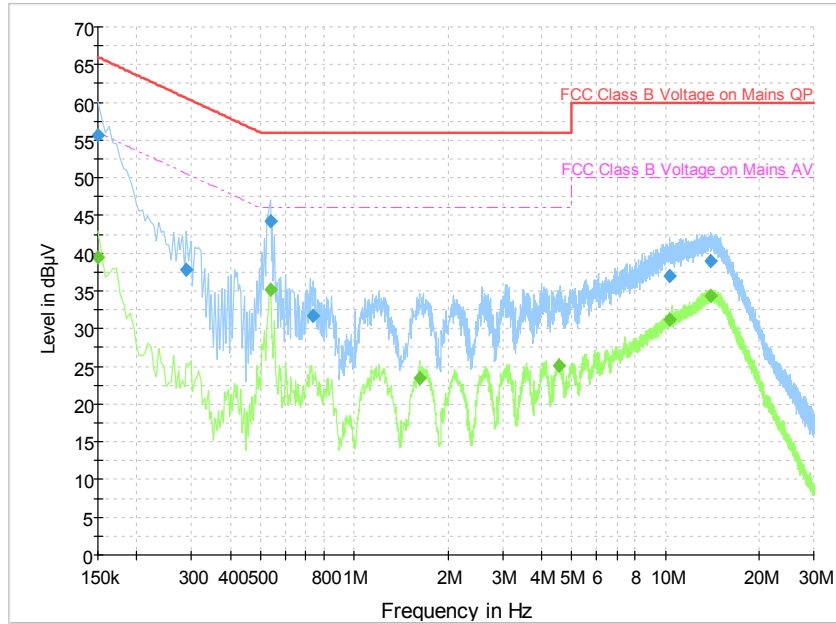
**Result for Set.11-Traffic:**

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	55.7	2000.0	9.000	On	N	30.6	10.3	66.0
0.289500	37.8	2000.0	9.000	On	N	19.8	22.7	60.5
0.537000	44.2	2000.0	9.000	On	N	19.8	11.8	56.0
0.739500	31.6	2000.0	9.000	On	N	19.8	24.4	56.0
10.360500	36.9	2000.0	9.000	On	N	19.7	23.1	60.0
14.041500	38.9	2000.0	9.000	On	N	19.8	21.1	60.0

**Final Result 2**

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	39.4	2000.0	9.000	On	N	30.6	16.6	56.0
0.537000	35.2	2000.0	9.000	On	N	19.8	10.8	46.0
1.621500	23.5	2000.0	9.000	On	N	19.6	22.5	46.0
4.546500	25.1	2000.0	9.000	On	N	19.6	20.9	46.0
10.360500	31.2	2000.0	9.000	On	N	19.7	18.8	50.0
14.005500	34.3	2000.0	9.000	On	N	19.8	15.7	50.0

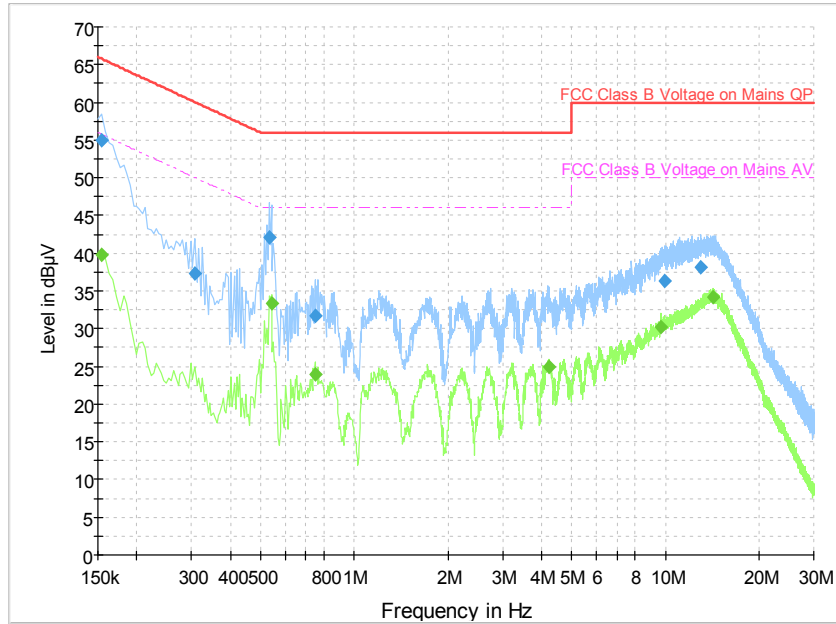


**Result for Set.11-Idle:**

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154500	54.9	2000.0	9.000	On	L1	29.7	10.8	65.8
0.307500	37.3	2000.0	9.000	On	N	19.8	22.7	60.0
0.532500	42.1	2000.0	9.000	On	L1	19.8	13.9	56.0
0.748500	31.7	2000.0	9.000	On	N	19.8	24.3	56.0
9.955500	36.3	2000.0	9.000	On	N	19.7	23.7	60.0
12.997500	38.1	2000.0	9.000	On	N	19.8	21.9	60.0

**Final Result 2**

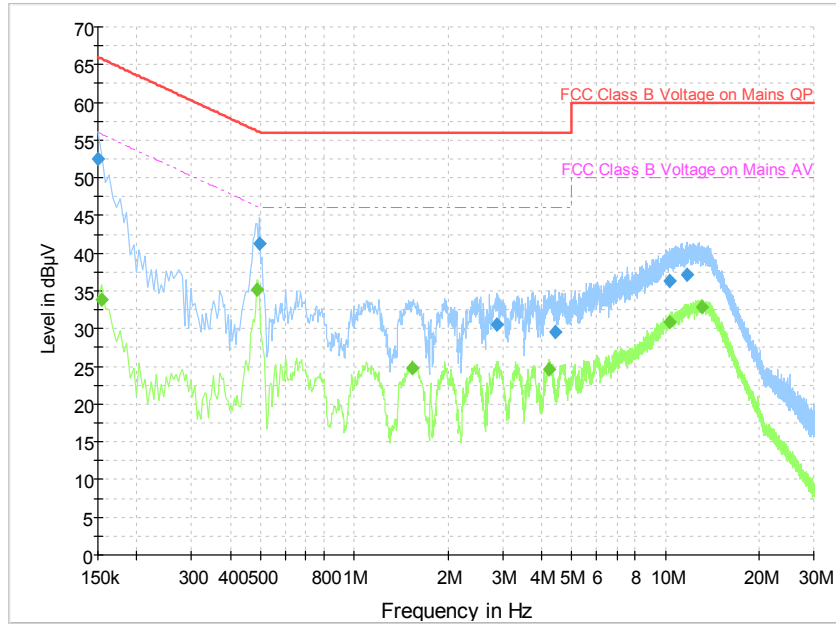Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154500	39.9	2000.0	9.000	On	L1	29.7	15.9	55.8
0.541500	33.3	2000.0	9.000	On	N	19.8	12.7	46.0
0.748500	23.9	2000.0	9.000	On	N	19.8	22.1	46.0
4.227000	24.9	2000.0	9.000	On	N	19.6	21.1	46.0
9.699000	30.2	2000.0	9.000	On	N	19.7	19.8	50.0
14.262000	34.2	2000.0	9.000	On	N	19.8	15.8	50.0


**Result for Set.12-Traffic:**

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	52.4	2000.0	9.000	On	L1	30.7	13.6	66.0
0.496500	41.2	2000.0	9.000	On	N	19.8	14.8	56.1
2.868000	30.6	2000.0	9.000	On	N	19.6	25.4	56.0
4.438500	29.6	2000.0	9.000	On	N	19.6	26.4	56.0
10.329000	36.3	2000.0	9.000	On	N	19.7	23.7	60.0
11.715000	37.1	2000.0	9.000	On	N	19.8	22.9	60.0

**Final Result 2**

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154500	33.9	2000.0	9.000	On	N	29.6	21.9	55.8
0.487500	35.2	2000.0	9.000	On	N	19.8	11.0	46.2
1.536000	24.8	2000.0	9.000	On	N	19.6	21.2	46.0
4.218000	24.6	2000.0	9.000	On	N	19.6	21.4	46.0
10.297500	30.9	2000.0	9.000	On	N	19.7	19.1	50.0
13.087500	32.9	2000.0	9.000	On	N	19.8	17.1	50.0

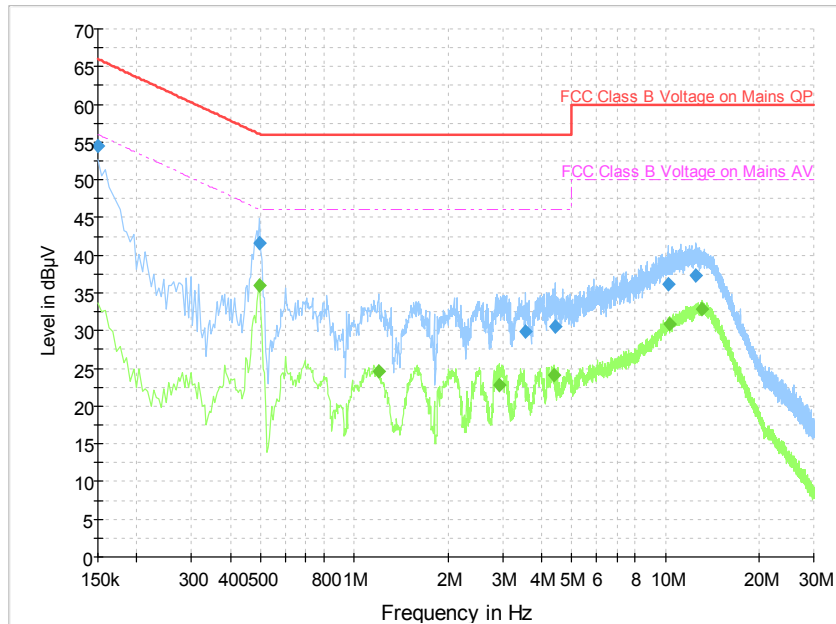**Result for Set.12-Idle:**



**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	54.5	2000.0	9.000	On	N	30.6	11.5	66.0
0.496500	41.6	2000.0	9.000	On	N	19.8	14.5	56.1
3.547500	29.9	2000.0	9.000	On	N	19.6	26.1	56.0
4.438500	30.6	2000.0	9.000	On	N	19.6	25.4	56.0
10.234500	36.1	2000.0	9.000	On	N	19.7	23.9	60.0
12.556500	37.3	2000.0	9.000	On	N	19.8	22.7	60.0

**Final Result 2**

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.496500	36.0	2000.0	9.000	On	N	19.8	10.0	46.1
1.194000	24.5	2000.0	9.000	On	N	19.7	21.5	46.0
2.935500	22.8	2000.0	9.000	On	N	19.6	23.2	46.0
4.402500	24.2	2000.0	9.000	On	N	19.6	21.8	46.0
10.293000	30.8	2000.0	9.000	On	N	19.7	19.2	50.0
13.168500	32.9	2000.0	9.000	On	N	19.8	17.1	50.0

## ANNEX B: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p> 	
<hr/> <p><b>Certificate of Accreditation to ISO/IEC 17025:2005</b></p> <hr/>	
<p>NVLAP LAB CODE: 600118-0</p>	
<p><b>Telecommunication Technology Labs, CAICT</b> Beijing China</p>	
<p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p>	
<p><b>Electromagnetic Compatibility &amp; Telecommunications</b></p>	
<p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p>	
<hr/> <p>2019-09-26 through 2020-09-30 <i>Effective Dates</i></p>	 <hr/> <p><i>[Signature]</i> For the National Voluntary Laboratory Accreditation Program</p>

\*\*\*END OF REPORT\*\*\*