

FCC RF Test Report

APPLICANT : OnePlus Technology (Shenzhen) Co.,Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : ONEPLUS
MODEL NAME : CPH2419, CPH2417
FCC ID : 2ABZ2-AA497
STANDARD : 47 CFR Part 2, 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Jun. 03, 2022 ~ Jun. 17, 2022

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China

TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Maximum EIRP Power and Emission Designator	6
1.7 Testing Site	7
1.8 Test Software.....	7
1.9 Applied Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode	8
2.2 Connection Diagram of Test System.....	9
2.3 Support Unit used in test configuration and system	9
2.4 Measurement Results Explanation Example.....	9
2.5 Frequency List of Low/Middle/High Channels	10
3 CONDUCTED TEST ITEMS	11
3.1 Measuring Instruments	11
3.2 Test Setup	11
3.3 Test Result of Conducted Test	11
3.4 Conducted Output Power Measurement	12
3.5 Peak-to-Average Ratio	13
3.6 EIRP	14
3.7 Occupied Bandwidth.....	15
3.8 Conducted Band Edge Measurement	16
3.9 Conducted Spurious Emission Measurement	17
3.10 Frequency Stability Measurement.....	18
4 RADIATED TEST ITEMS	19
4.1 Measuring Instruments	19
4.2 Test Setup	19
4.3 Test Result of Radiated Test	20
4.4 Radiated Spurious Emission Measurement	21
5 LIST OF MEASURING EQUIPMENT	22
6 UNCERTAINTY OF EVALUATION	23
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG251121I	Rev. 01	Initial issue of report	Jul. 08, 2022

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	-	Peak-to-Average Ratio	—	Report Only	
3.6	§27.50 (a)(3)	EIRP	EIRP < 250mW/5MHz	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (a)(4)	Conducted Band Edge Measurement	Refer standard	PASS	-
3.9	§2.1051 §27.53 (a)(4)	Conducted Spurious Emission	< 70+10log ₁₀ (P[Watts])	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (a)(4)	Radiated Spurious Emission	< 70+10log ₁₀ (P[Watts])	PASS	Under limit 16.92 dB at 9240.00 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Applicant

OnePlus Technology (Shenzhen) Co.,Ltd.

18C02, 18C03, 18C04, 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen, Guangdong, China.

1.2 Manufacturer

OnePlus Technology (Shenzhen) Co.,Ltd.

18C02, 18C03, 18C04, 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen, Guangdong, China.

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	ONEPLUS
Model Name	CPH2419, CPH2417
FCC ID	2ABZ2-AA497
IMEI Code	Conducted: 861677060020347 Radiation: 861677060027938
HW Version	2AA495-0
SW Version	CPH2419_11_A.03
EUT Stage	Production Unit

Remark: The different model name is for different market purpose.

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx Frequency	5G NR n30 : 2305 MHz ~ 2315 MHz
Rx Frequency	5G NR n30 : 2350 MHz ~ 2360 MHz
SCS / Bandwidth	15kHz : 5MHz / 10MHz
Maximum Output Power	Ant. 2 : 23.41 dBm Ant. 3 : 23.54 dBm
Antenna Gain / Type	Ant. 2 : -3.0 dBi / Fixed Internal Antenna Ant. 3 : -2.0 dBi / Fixed Internal Antenna
Type of Modulation	5G NR: DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM)

Remark: .

1. 5G NR n30 supports SA and NSA mode for SCS 15kHz. According to the maximum power between SA and NSA mode, NSA covers SA mode.
2. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP of Antenna 3 is shown in the report
3. The EN-DC mode combination could be referred to the SAR report.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP Power and Emission Designator

5G NR n30 (EN DC_5A-n30A)		PI/2 BPSK/QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	2307.5 ~ 2312.5	0.1371	4M49G7D	0.1130	4M49W7D
10	2310.0	0.1426	9M28G7D	0.1156	9M30W7D

1.7 Testing Site

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, Part 27(D)
- ANSI C63.26-2015
- FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission(Z plane).

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation					RB #			Test Channel			
		1.4	3	5	10	15	20	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H	
Max. Output Power	n30	-	-	V		-	-	V	V	V	V	V	V	V	V	V	V	V	
		-	-		V	-	-	V	V	V	V	V	V	V	V		V		
Peak-to-Average Ratio	n30	-	-	V		-	-		V				V		V		V		
E.I.R.P	n30	-	-	V		-	-	V	V	V	V	V	V	V	V	V	V	V	
		-	-		V	-	-	V	V	V	V	V	V	V	V		V		
26dB and 99% Bandwidth	n30	-	-	V		-	-	V	V	V	V	V			V		V		
		-	-		V	-	-	V	V	V	V	V			V		V		
Conducted Band Edge	n30	-	-	V		-	-	V	V				V		V	V		V	
		-	-		V	-	-	V	V				V		V		V		
Conducted Spurious Emission	n30	-	-	V		-	-	V	V				V			V	V	V	
		-	-		V	-	-	V	V				V				V		
Frequency Stability	n30	-	-		V	-	-		V						V		V		
Radiated Spurious Emission	n30	Worst case																V	
Note	1. The mark “v “ means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 7.78V ; Low Voltage =6.0V ; High Voltage =8.96V																		

2.2 Connection Diagram of Test System

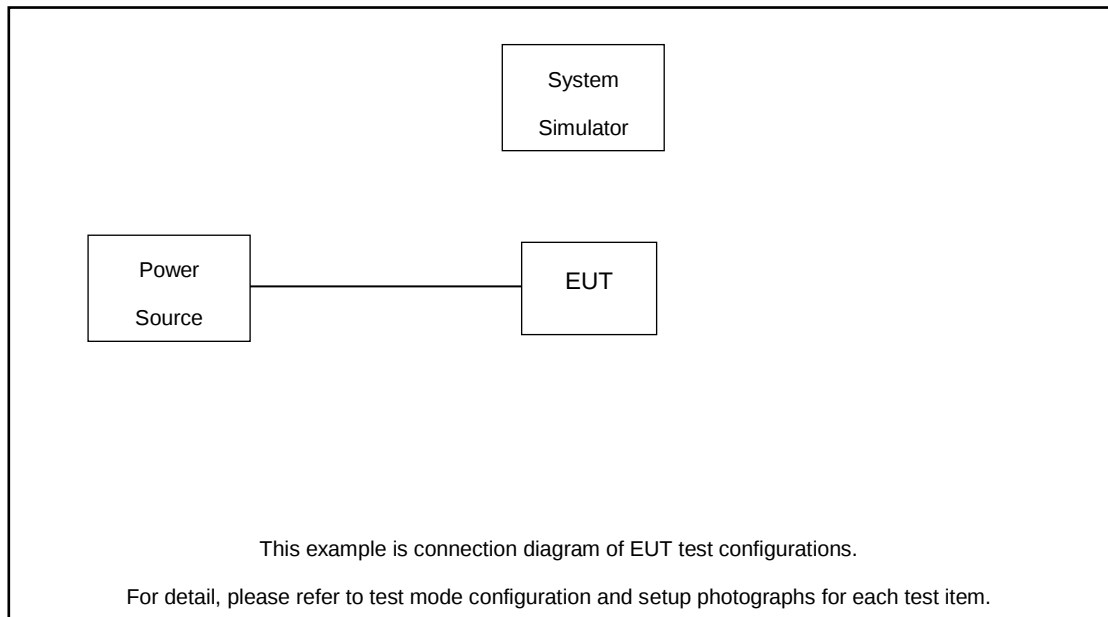

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable los.

Following shows an offset computation example with cable loss 8.0 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 8.0 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	471000	-
	Frequency	-	2310	-
5	Channel	470500	471000	471500
	Frequency	2307.5	2310	2312.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

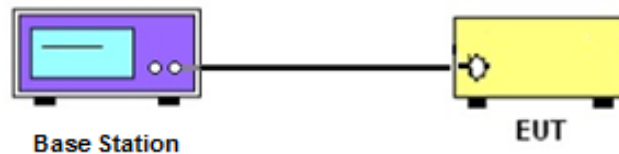

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth ,Band-Edge and Conducted Spurious Emission

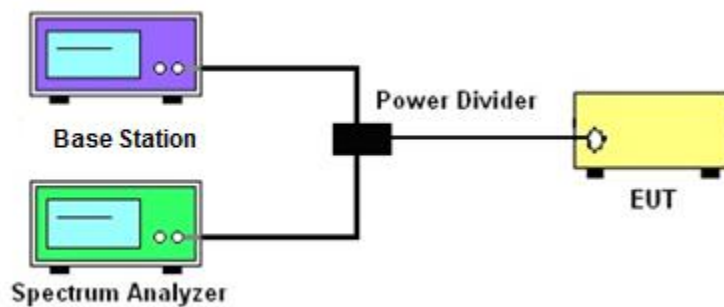

3.2.3 Frequency Stability

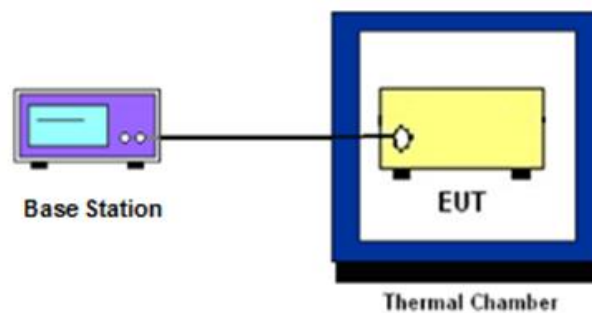

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 EIRP

3.6.1 Description of EIRP

For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2. $EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.7 Occupied Bandwidth

3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.8 Conducted Band Edge Measurement

3.8.1 Description of Conducted Band Edge Measurement

27.53 (a)(4)

For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

- (i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;
- (ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;
- (iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

3.9 Conducted Spurious Emission Measurement

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $70 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10th harmonic.

3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $70 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [70 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[70 + 10\log(P)]$ (dB)
= -40dBm

3.10 Frequency Stability Measurement

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

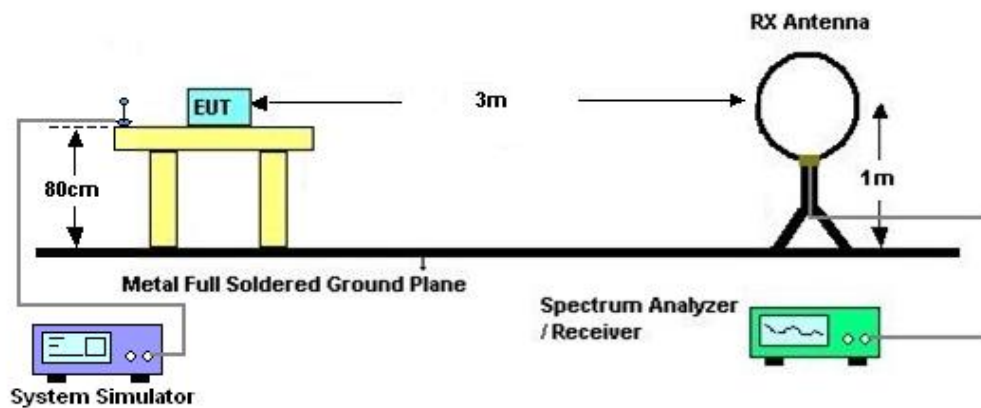

4.2.2 For radiated test from 30MHz to 1GHz

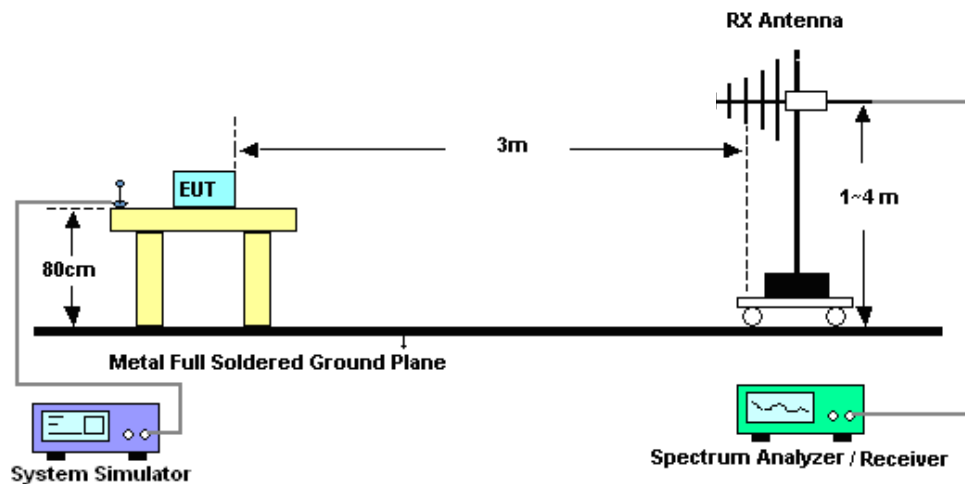

4.2.3 For radiated test above 1GHz

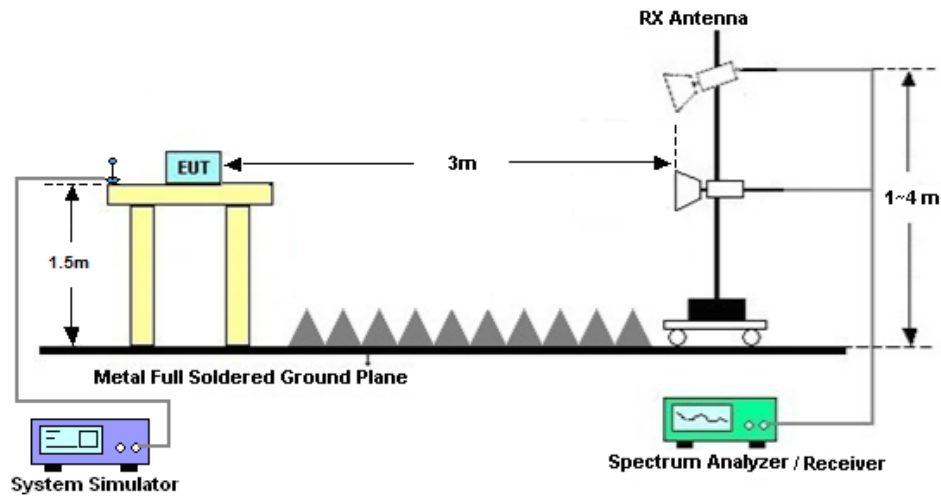

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $70 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.

$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$

$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$

10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $70 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [70 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [70 + 10\log(P)] \text{ (dB)}$$

$$= -40\text{dBm}.$$

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 07, 2022	Jun. 03, 2022~ Jun. 17, 2022	Apr. 06, 2023	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 25, 2021	Jun. 03, 2022~ Jun. 17, 2022	Oct. 24, 2022	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2021	Jun. 03, 2022~ Jun. 17, 2022	Dec. 24, 2022	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 14, 2021	Jun. 03, 2022~ Jun. 17, 2022	Jul. 13, 2022	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2021	Jun. 17, 2022	Dec. 26, 2022	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Jun. 17, 2022	Jun. 21, 2022	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Sep. 28, 2021	Jun. 17, 2022	Sep. 27, 2022	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 18, 2021	Jun. 17, 2022	Jul. 17, 2022	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 10, 2022	Jun. 17, 2022	Apr. 09, 2023	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 06, 2022	Jun. 17, 2022	Apr. 05, 2023	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 22, 2021	Jun. 17, 2022	Oct. 21, 2022	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 22, 2021	Jun. 17, 2022	Oct. 21, 2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 13, 2021	Jun. 17, 2022	Jul. 12, 2022	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Jun. 17, 2022	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jun. 17, 2022	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jun. 17, 2022	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	± 1.34 dB
Conducted Emissions	± 1.34 dB
Occupied Channel Bandwidth	± 0.13 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.48dB
--	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.53dB
--	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.02dB
--	--------

Appendix A. Test Results of Conducted Test

Test Engineer :	Jason Zhang	Temperature :	24~26°C
		Relative Humidity :	50~53%

Conducted Output Power (Average power) and EIRP

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
30	15	5	470500	2307.5	DFT-s-OFDM QPSK	1@1	23.35	21.35	0.1365
30	15	5	470500	2307.5	DFT-s-OFDM 16 QAM	1@1	22.47	20.47	0.1114
30	15	5	471000	2310	DFT-s-OFDM QPSK	1@1	23.37	21.37	0.1371
30	15	5	471000	2310	DFT-s-OFDM 16 QAM	1@1	22.43	20.43	0.1104
30	15	5	471500	2312.5	DFT-s-OFDM QPSK	1@1	23.36	21.36	0.1368
30	15	5	471500	2312.5	DFT-s-OFDM 16 QAM	1@1	22.53	20.53	0.1130
30	15	10	471000	2310	DFT-s-OFDM PI/2 BPSK	25@12	22.07	20.07	0.1016
30	15	10	471000	2310	DFT-s-OFDM PI/2 BPSK	1@1	22.02	20.02	0.1005
30	15	10	471000	2310	DFT-s-OFDM PI/2 BPSK	1@50	22.06	20.06	0.1014
30	15	10	471000	2310	DFT-s-OFDM QPSK	25@12	23.47	21.47	0.1403
30	15	10	471000	2310	DFT-s-OFDM QPSK	1@1	23.42	21.42	0.1387
30	15	10	471000	2310	DFT-s-OFDM QPSK	1@50	23.54	21.54	0.1426
30	15	10	471000	2310	DFT-s-OFDM 16 QAM	25@12	22.63	20.63	0.1156
30	15	10	471000	2310	DFT-s-OFDM 16 QAM	1@1	22.55	20.55	0.1135
30	15	10	471000	2310	DFT-s-OFDM 16 QAM	1@50	22.62	20.62	0.1153
30	15	10	471000	2310	DFT-s-OFDM 64 QAM	25@12	21.07	19.07	0.0807
30	15	10	471000	2310	DFT-s-OFDM 64 QAM	1@1	21.15	19.15	0.0822
30	15	10	471000	2310	DFT-s-OFDM 64 QAM	1@50	21.22	19.22	0.0836
30	15	10	471000	2310	DFT-s-OFDM 256 QAM	25@12	19.02	17.02	0.0504
30	15	10	471000	2310	DFT-s-OFDM 256 QAM	1@1	18.39	16.39	0.0436
30	15	10	471000	2310	DFT-s-OFDM	1@50	18.41	16.41	0.0438



256 QAM									
30	15	10	471000	2310	CP-OFDM QPSK	26@13	22.08	20.08	0.1019
30	15	10	471000	2310	CP-OFDM QPSK	1@1	22.07	20.07	0.1016
30	15	10	471000	2310	CP-OFDM QPSK	1@50	22.17	20.17	0.1040

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	50@0	0.00002	PASS	NV
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	50@0	0.00566	PASS	LV
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	50@0	0.00441	PASS	HV
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	50@0	0.00027	PASS	-30°C
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	50@0	0.00614	PASS	-20°C
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	50@0	0.00291	PASS	-10°C
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	50@0	0.00397	PASS	0°C
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	50@0	0.00563	PASS	10°C
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	50@0	0.00513	PASS	20°C
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	50@0	0.00479	PASS	30°C
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	50@0	0.00695	PASS	40°C
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	50@0	0.00055	PASS	50°C

Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
30	15	10	471000	2310.0	DFT-s-OFDM PI/2 BPSK	50@0	4.4	13	PASS
30	15	10	471000	2310.0	DFT-s-OFDM PI/2 BPSK	1@0	3.81	13	PASS
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	50@0	5.75	13	PASS
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	1@0	6.17	13	PASS



B5_N30(10M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full Low CH



B5_N30(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left Low CH



B5_N30(10M)_DFT-s-OFDM_QPSK_Outer_Full_Low CH



B5_N30(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left Low CH




Occupied Bandwidth


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB OBW (MHz)
30	15	5	471000	2310.0	DFT-s-OFDM PI/2 BPSK	25@0	4.4696	5.047
30	15	5	471000	2310.0	DFT-s-OFDM QPSK	25@0	4.4695	4.926
30	15	5	471000	2310.0	CP-OFDM QPSK	25@0	4.4914	5.122
30	15	5	471000	2310.0	CP-OFDM 16 QAM	25@0	4.4868	5.1
30	15	5	471000	2310.0	CP-OFDM 64 QAM	25@0	4.4816	5.139
30	15	5	471000	2310.0	CP-OFDM 256 QAM	25@0	4.4769	5.131
30	15	10	471000	2310.0	DFT-s-OFDM PI/2 BPSK	50@0	8.9035	9.602
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	50@0	8.9056	9.631
30	15	10	471000	2310.0	CP-OFDM QPSK	52@0	9.2777	10.08
30	15	10	471000	2310.0	CP-OFDM 16 QAM	52@0	9.2698	10.09
30	15	10	471000	2310.0	CP-OFDM 64 QAM	52@0	9.2774	10.05
30	15	10	471000	2310.0	CP-OFDM 256 QAM	52@0	9.2954	10.14




B5_N30(5M) DFT-s-OFDM PI 2-BPSK Outer Full Mid_CH B5_N30(5M) DFT-s-OFDM QPSK Outer Full Mid_CH

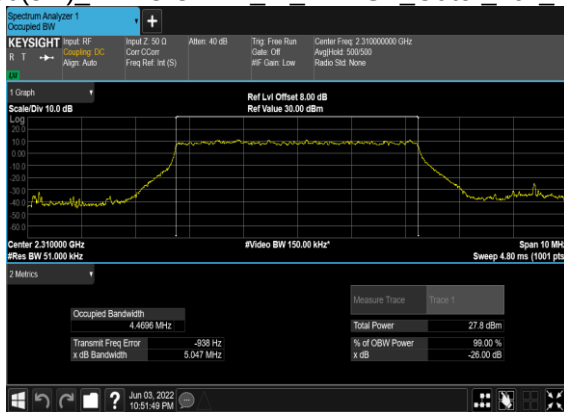


B5_N30(5M) CP-OFDM QPSK Outer Full Mid_CH

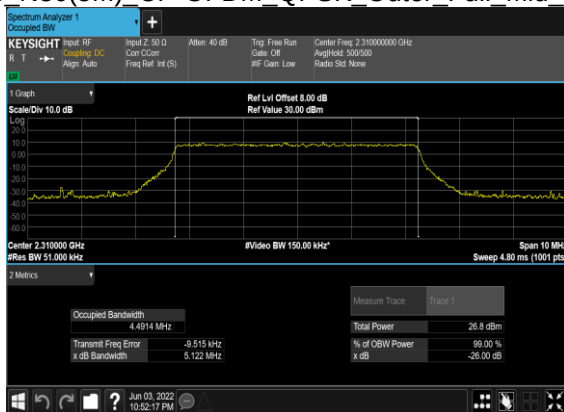


B5_N30(5M) CP-OFDM 16 QAM Outer Full Mid_CH

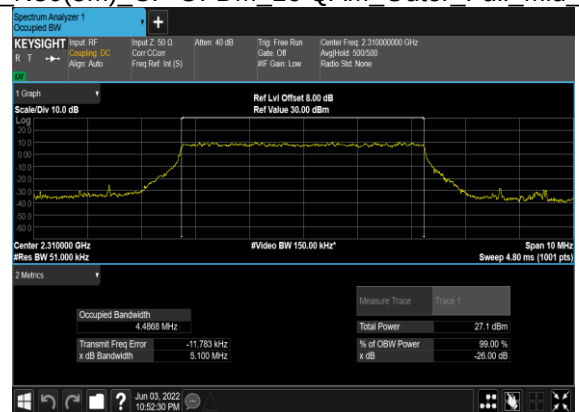

B5_N30(5M) CP-OFDM 64 QAM Outer Full Mid_CH


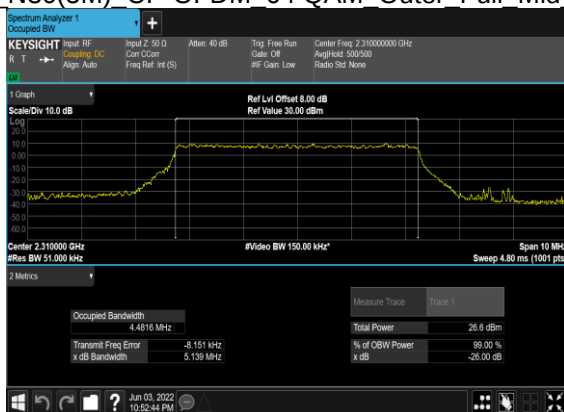


B5_N30(5M) CP-OFDM 256 QAM Outer Full Mid_CH

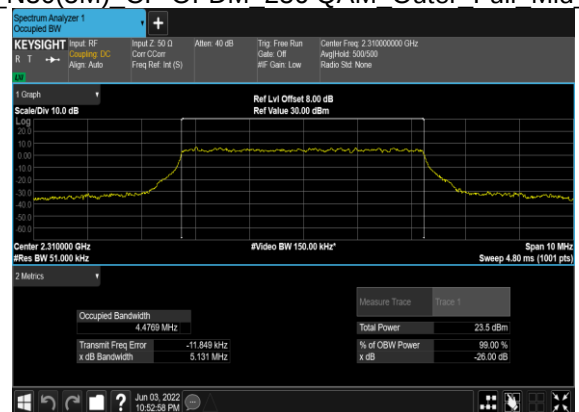





B5_N30(10M) DFT-s-OFDM PI 2-BPSK Outer Full Low_CHB5_N30(10M) DFT-s-OFDM QPSK Outer Full Low_CH

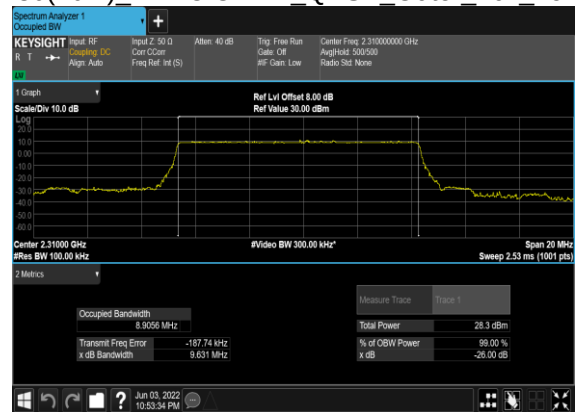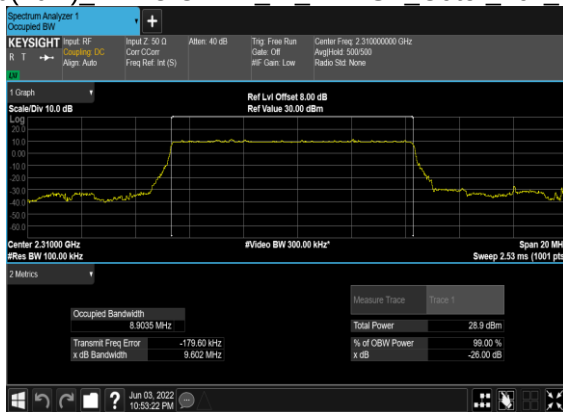


B5_N30(10M) CP-OFDM QPSK Outer Full Low_CH

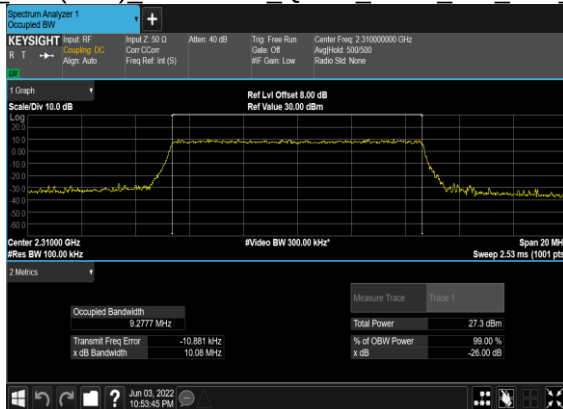


B5_N30(10M) CP-OFDM 16 QAM Outer Full Low_CH

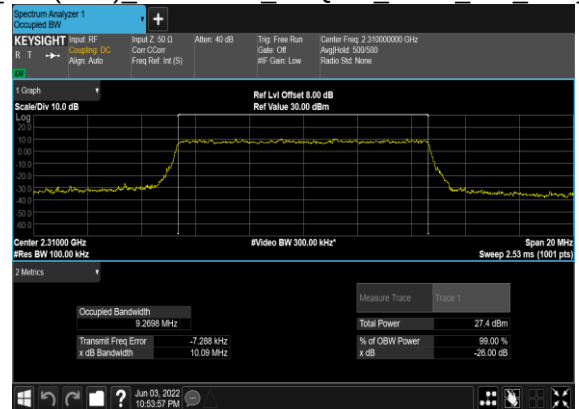

B5_N30(10M) CP-OFDM 64 QAM Outer Full Low_CH

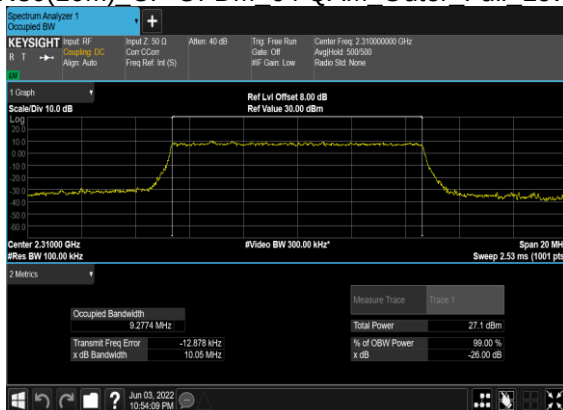

B5_N30(10M)_CP-OFDM_256 QAM Outer Full Low_CH

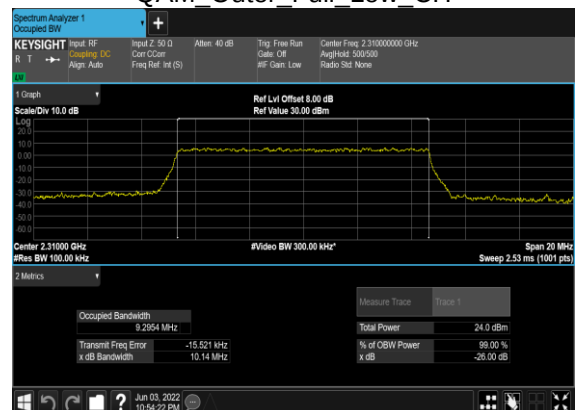

Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
30	15	5	470500	2307.5	DFT-s-OFDM BPSK	1@0	see graph	---
30	15	5	470500	2307.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	470500	2307.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	470500	2307.5	DFT-s-OFDM QPSK	1@0	see graph	---
30	15	5	470500	2307.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	5	470500	2307.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	5	471000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	---
30	15	5	471000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	471000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	471000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	---
30	15	5	471000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	5	471000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	5	471500	2312.5	DFT-s-OFDM BPSK	1@0	see graph	---
30	15	5	471500	2312.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	471500	2312.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	471500	2312.5	DFT-s-OFDM QPSK	1@0	see graph	---
30	15	5	471500	2312.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	5	471500	2312.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	10	471000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	---
30	15	10	471000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	10	471000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	---



30	15	10	471000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	PASS




B5_N30(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left
Low CH

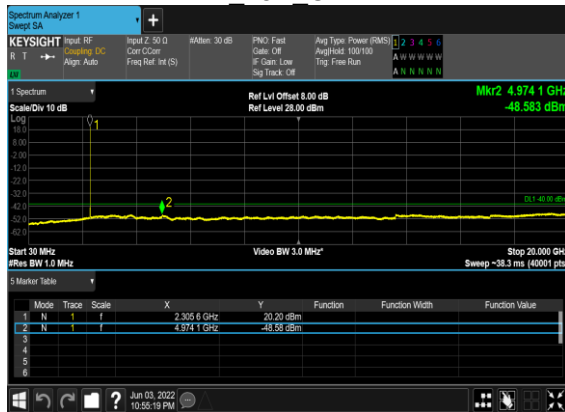

B5_N30(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left
Low CH



B5_N30(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left
Low CH

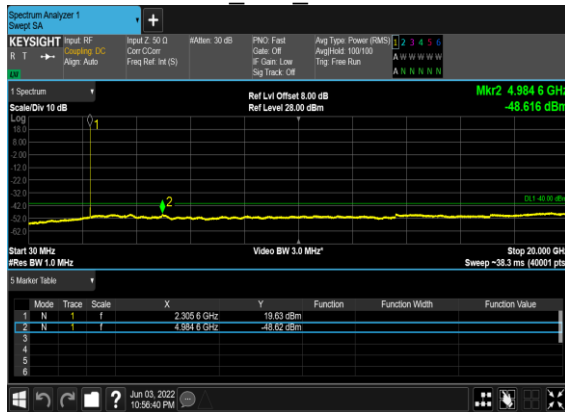

B5_N30(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left
Low CH



B5_N30(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left
Mid CH




B5_N30(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left
Mid CH





B5_N30(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left
Mid_CH

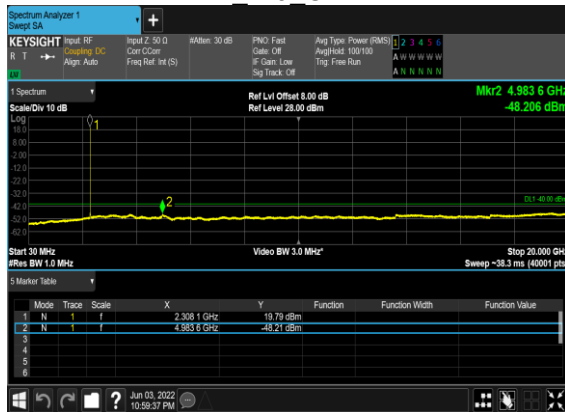

B5_N30(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left
Mid_CH



B5_N30(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left
High_CH




B5_N30(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left
High_CH



B5_N30(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left
High_CH




B5_N30(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left
High_CH

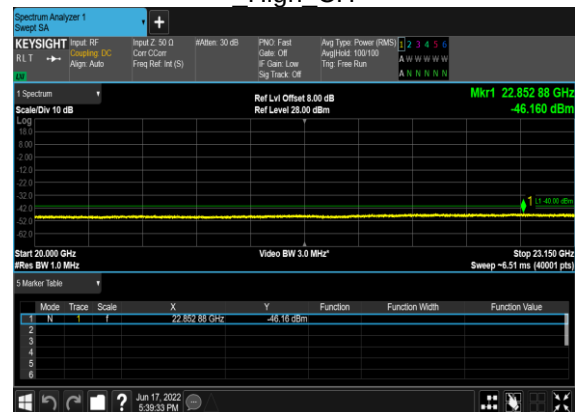




B5_N30(10M) DFT-s-OFDM BPSK Edge_1RBt

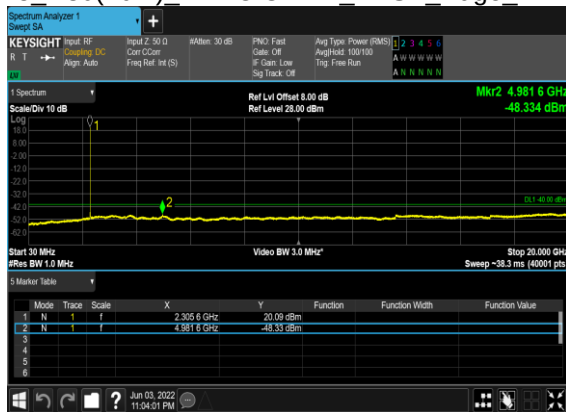


B5_N30(10M) DFT-s-OFDM BPSK Edge_1RB



B5_N30(10M) DFT-s-OFDM QPSK Edge_1RB

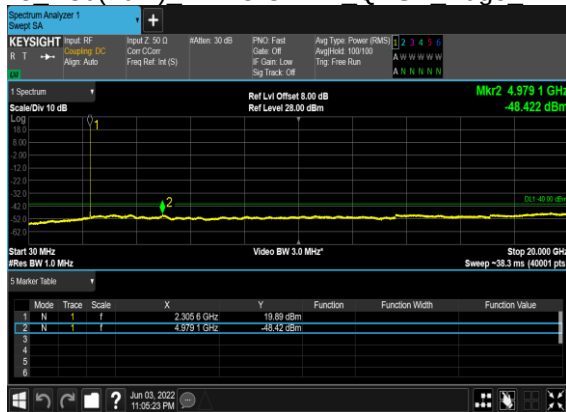

B5_N30(10M) DFT-s-OFDM QPSK Edge_1RB

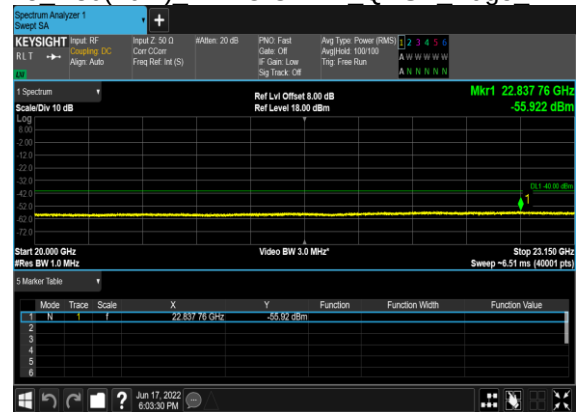


Conducted Band Edge


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
30	15	5	470500	2307.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	470500	2307.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	5	470500	2307.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
30	15	5	470500	2307.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
30	15	5	471500	2312.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
30	15	5	471500	2312.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
30	15	5	471500	2312.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
30	15	5	471500	2312.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
30	15	10	471000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	10	471000	2310.0	DFT-s-OFDM BPSK	1@51	see graph	PASS
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	1@51	see graph	PASS
30	15	10	471000	2310.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
30	15	10	471000	2310.0	DFT-s-OFDM QPSK	50@0	see graph	PASS




B5_N30(5M) DFT-s-OFDM BPSK Edge 1RB Left Low_CH

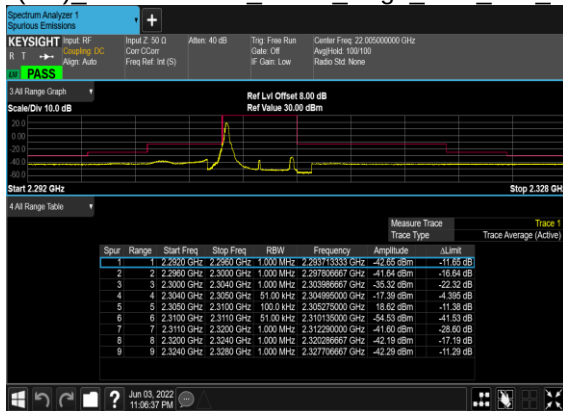


B5_N30(5M) DFT-s-OFDM QPSK Edge 1RB Left Low_CH

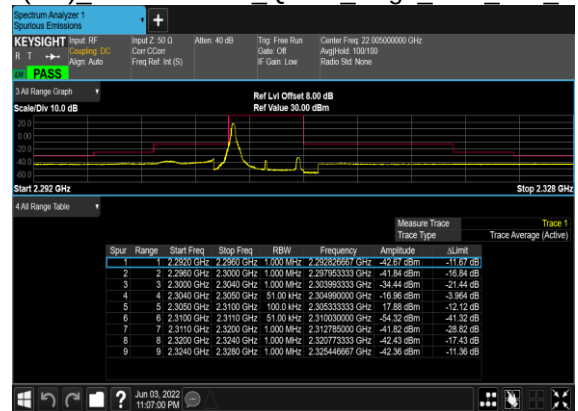



B5_N30(5M) DFT-s-OFDM BPSK Outer Full Low_CH

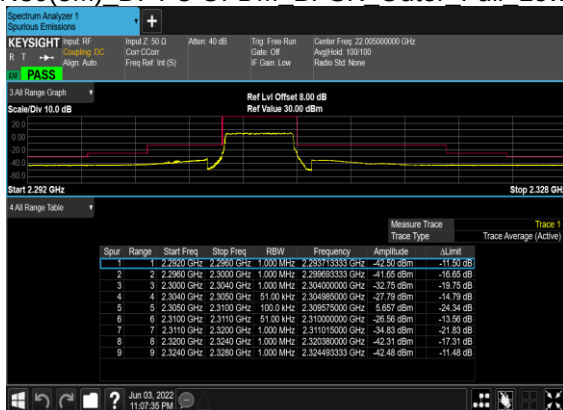

B5_N30(5M) DFT-s-OFDM QPSK Outer Full Low_CH

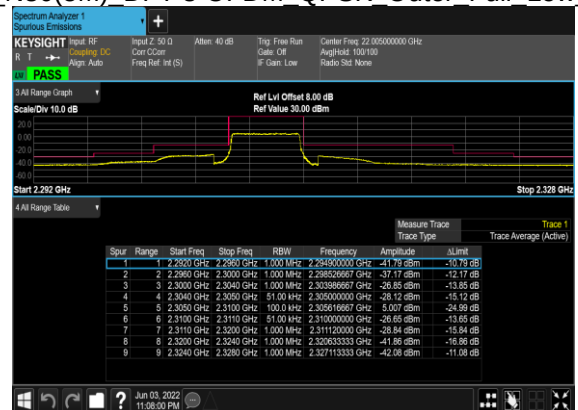


B5_N30(5M) DFT-s-OFDM BPSK Edge 1RB Right High_CH B5_N30(5M) DFT-s-OFDM QPSK Edge 1RB Right High_CH

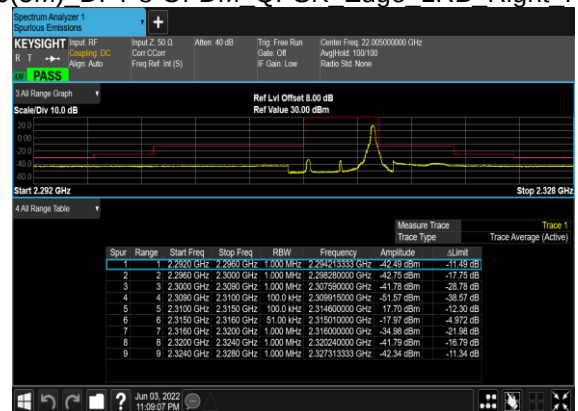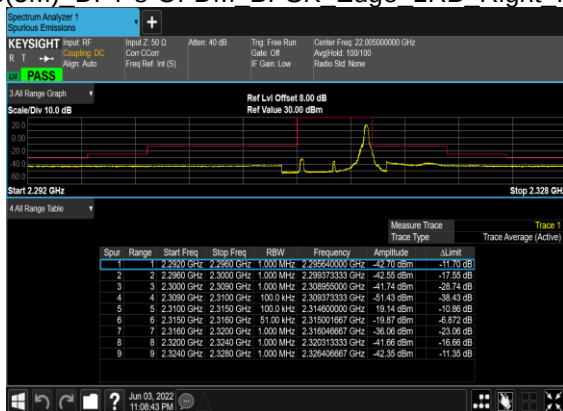





B5_N30(5M) DFT-s-OFDM BPSK Outer Full_High_CH

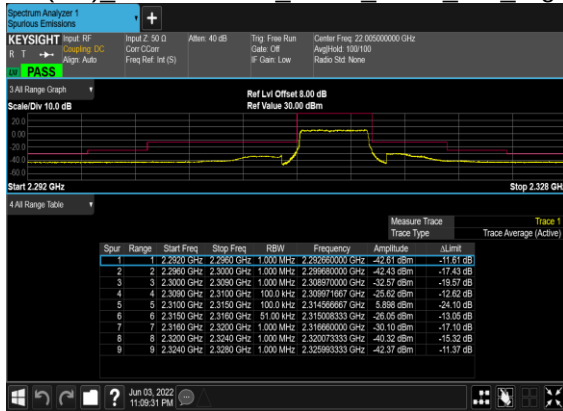


B5_N30(5M) DFT-s-OFDM QPSK Outer Full_High_CH

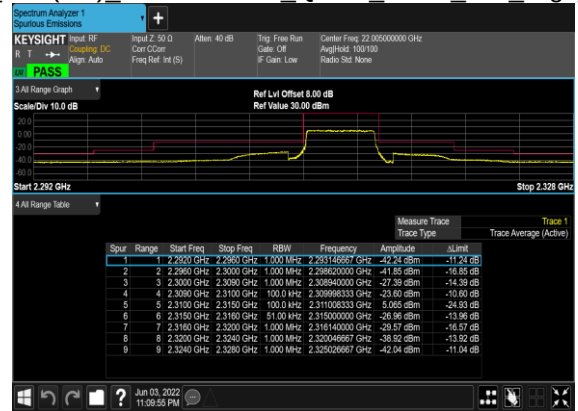



B5_N30(10M) DFT-s-OFDM BPSK Edge 1RB Left Low_CH

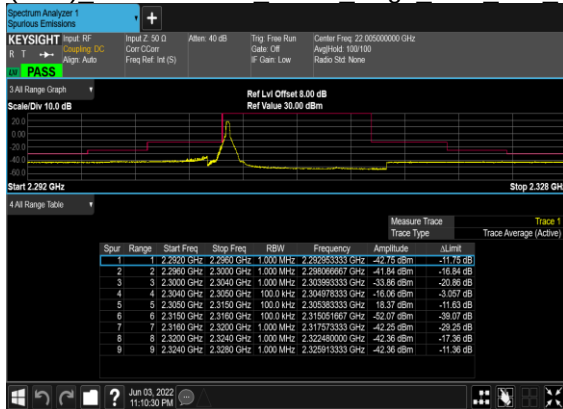

B5_N30(10M) DFT-s-OFDM QPSK Edge 1RB Left Low_CH

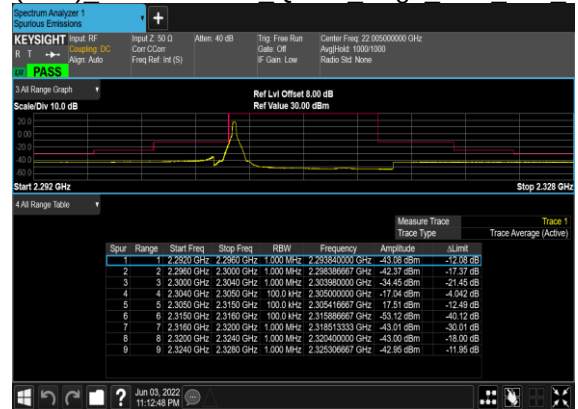


B5_N30(10M) DFT-s-OFDM BPSK Edge 1RB Right Low_CH B5_N30(10M) DFT-s-OFDM QPSK Edge 1RB Right Low_CH

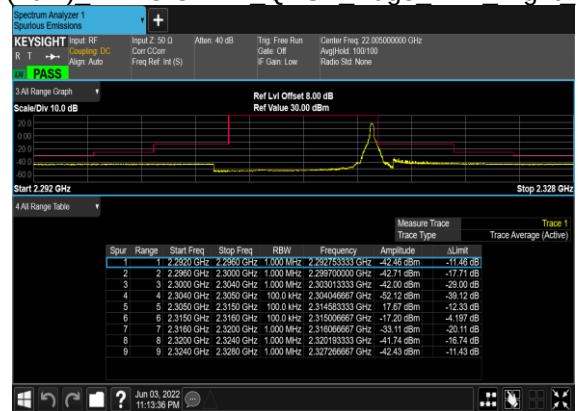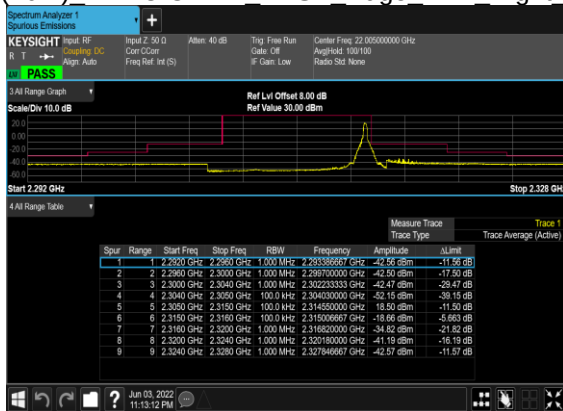




B5 N30(10M) DFT-s-OFDM_BPSK_Outer_Full

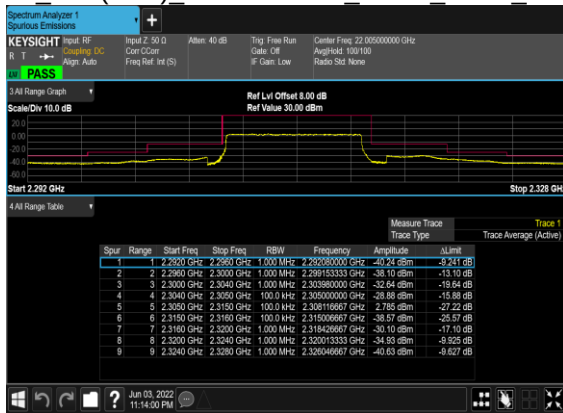

B5 N30(10M) DFT-s-OFDM_QPSK_Outer_Full

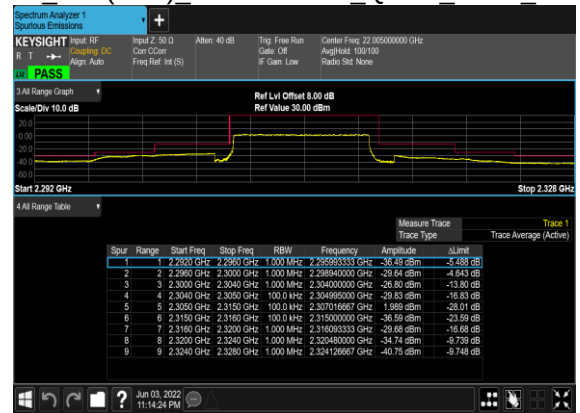

Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Shiwei Wen	Temperature :	22~25°C
		Relative Humidity :	48~52%

RSE pre-scanned harmonic for the different antenna combinations for EN-DC mode, we choose the worst mode to perform final test and show in the report.

SA 5G NR n30 / 10MHz / QPSK / ANT3(NR)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	4620.00	-60.17	-40	-20.17	-64.45	-66.42	6.45	12.70	H
	6930.00	-59.56	-40	-19.56	-66.21	-62.96	8.40	11.80	H
	9240.00	-59.28	-40	-19.28	-68.39	-61.63	9.65	12.00	H
	4620.00	-60.02	-40	-20.02	-64.46	-66.27	6.45	12.70	V
	6930.00	-59.28	-40	-19.28	-66.85	-62.68	8.40	11.80	V
	9240.00	-56.92	-40	-16.92	-68.18	-59.27	9.65	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_5A_n30A / LTE 10MHz + NR 10MHz / QPSK / ANT1(LTE) & ANT3(NR)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE Band5 Middle	1664.18	-71.38	-13	-58.38	-60.47	-74.63	4.00	9.40	H
	2496.27	-67.90	-13	-54.90	-60.56	-71.47	4.88	10.60	H
	3328.36	-65.22	-13	-52.22	-60.75	-70.15	5.52	12.60	H
	1664.18	-70.49	-13	-57.49	-59.72	-73.74	4.00	9.40	V
	2496.27	-67.64	-13	-54.64	-60.39	-71.21	4.88	10.60	V
	3328.36	-65.22	-13	-52.22	-60.73	-70.15	5.52	12.60	V
NR n30 Middle	4611.60	-61.16	-40	-21.16	-61.62	-67.41	6.45	12.70	H
	6917.40	-59.44	-40	-19.44	-64.39	-62.84	8.40	11.80	H
	9223.20	-56.93	-40	-16.93	-65.53	-59.28	9.65	12.00	H
	4611.60	-60.89	-40	-20.89	-61.54	-67.14	6.45	12.70	V
	6917.40	-59.42	-40	-19.42	-64.67	-62.82	8.40	11.80	V
	9223.20	-57.35	-40	-17.35	-65.48	-59.70	9.65	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

———— THE END ————