



**CFR 47 FCC PART 15 SUBPART C  
ISED RSS-247 ISSUE 2**

**CERTIFICATION TEST REPORT**

*For*

**WIFI+BT Module**

**MODEL NUMBER: DCT2RM2501**

**FCC ID: 2AC23-DCT2R**

**IC: 12290A-DCT2R**

**REPORT NUMBER: 4790076800.2-3**

**ISSUE DATE: September 17, 2021**

*Prepared for*

**Hui Zhou Gaoshengda Technology Co.,LTD  
NO.75 Zhongkai Development Area, Huizhou, Guangdong, China**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V0	09/17/2021	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Results
1	6dB Bandwidth and 99% Occupied Bandwidth	FCC Part 15.247 (a) (2) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7	Pass
2	Conducted Output Power	FCC Part 15.247 (b) (3) RSS-247 Clause 5.4 (d)	Pass
3	Power Spectral Density	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d) RSS-247 Clause 5.5	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
6	Conducted Emission Test for AC Power Port	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
7	Antenna Requirement	FCC Part 15.203 RSS-GEN Clause 6.8	Pass
<b>Note:</b> 1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China. 2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C >< ISED RSS-247 > when <Accuracy Method> decision rule is applied.			



## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>6</b>
<b>2. TEST METHODOLOGY .....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>8</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>9</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>9</i>
5.2. <i>CHANNEL LIST.....</i>	<i>9</i>
5.3. <i>MAXIMUM OUTPUT POWER.....</i>	<i>9</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>10</i>
5.6. <i>THE WORSE CASE CONFIGURATIONS .....</i>	<i>11</i>
5.7. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>12</i>
5.8. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>13</i>
<b>6. MEASURING INSTRUMENT AND SOFTWARE USED .....</b>	<b>14</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>16</b>
7.1. <i>ON TIME AND DUTY CYCLE.....</i>	<i>16</i>
7.2. <i>6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH .....</i>	<i>17</i>
7.3. <i>CONDUCTED OUTPUT POWER.....</i>	<i>19</i>
7.4. <i>POWER SPECTRAL DENSITY .....</i>	<i>20</i>
7.5. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....</i>	<i>22</i>
<b>8. RADIATED TEST RESULTS.....</b>	<b>24</b>
8.1. <i>RESTRICTED BANDEDGE.....</i>	<i>30</i>
8.1.1. <i>802.11b MIMO MODE .....</i>	<i>30</i>
8.1.2. <i>802.11g MIMO MODE .....</i>	<i>33</i>
8.1.3. <i>802.11n HT20 MIMO MODE.....</i>	<i>37</i>
8.1.4. <i>802.11n HT40 MIMO MODE.....</i>	<i>41</i>
8.2. <i>SPURIOUS EMISSIONS (1 GHz ~ 3 GHz).....</i>	<i>45</i>
8.2.1. <i>802.11n HT40 MIMO MODE.....</i>	<i>45</i>
8.3. <i>SPURIOUS EMISSIONS (3 GHz ~ 18 GHz).....</i>	<i>51</i>
8.3.1. <i>802.11b MIMO MODE .....</i>	<i>51</i>
8.3.2. <i>802.11g MIMO MODE .....</i>	<i>57</i>
8.3.3. <i>802.11n HT20 MIMO MODE.....</i>	<i>63</i>
8.3.4. <i>802.11n HT40 MIMO MODE.....</i>	<i>69</i>



8.5.	SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)	75
8.5.1.	802.11n HT40 MIMO MODE	75
8.6.	SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)	77
8.6.1.	802.11n HT40 MIMO MODE	77
8.7.	SPURIOUS EMISSIONS BELOW 30 MHz	79
8.7.1.	802.11n HT40 MIMO MODE	79
<b>9.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS</b>	<b>82</b>
9.1.1.	802.11n HT40 MIMO MODE	83
<b>10.</b>	<b>ANTENNA REQUIREMENTS</b>	<b>85</b>
<b>11.</b>	<b>Appendix</b>	<b>86</b>
11.1.	Appendix A: DTS Bandwidth	86
11.1.1.	Test Result	86
11.1.2.	Test Graphs	87
11.2.	Appendix B: Occupied Channel Bandwidth	95
11.2.1.	Test Result	95
11.2.2.	Test Graphs	96
11.3.	Appendix C: Maximum Average Conducted Output power	104
11.3.1.	Test Result	104
11.4.	Appendix D: Maximum Power Spectral Density	105
11.4.1.	Test Result	105
11.4.2.	Test Graphs	106
11.5.	Appendix E: Band Edge Measurements	112
11.5.1.	Test Result	112
11.5.2.	Test Graphs	113
11.6.	Appendix F: Conducted Spurious Emission	117
11.6.1.	Test Result	117
11.6.2.	Test Graphs	118
11.7.	Appendix G: Duty Cycle	136
11.7.1.	Test Result	136
11.7.2.	Test Graphs	137



# 1. ATTESTATION OF TEST RESULTS

## Applicant Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD  
Address: NO.75 Zhongkai Development Area, Huizhou, Guangdong, China

## Manufacturer Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD  
Address: NO.75 Zhongkai Development Area, Huizhou, Guangdong, China

## EUT Information

EUT Name: WIFI+BT Module  
Model: DCT2RM2501  
Sample Received Date: August 23, 2021  
Sample Status: Normal  
Sample ID: 4165024  
Date of Tested: August 24, 2021 ~ September 14, 2021

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-247 Issue 2	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:

Denny Huang  
Project Engineer

Checked By:

Shawn Wen  
Laboratory Leader

Approved By:

Stephen Guo  
Laboratory Manager



## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	---

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	WIFI+BT Module
Model	DCT2RM2501
Radio Technology	WLAN (IEEE 802.11b/g/n HT20/n HT40)
Operation frequency	IEEE 802.11b: 2412 MHz ~ 2462 MHz IEEE 802.11g: 2412 MHz ~ 2462 MHz IEEE 802.11n HT20: 2412 MHz ~ 2462 MHz IEEE 802.11n HT40: 2422 MHz ~ 2452 MHz
Modulation	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT40: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Power Supply	DC 3.3 V

### 5.2. CHANNEL LIST

Channel List for 802.11b/g/n (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List for 802.11n (40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/

### 5.3. MAXIMUM OUTPUT POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)	Maximum AVG EIRP (dBm)
b	2412 ~ 2462	1-11[11]	14.36	16.86
g	2412 ~ 2462	1-11[11]	14.62	17.12
n HT20	2412 ~ 2462	1-11[11]	16.36	18.86
n HT40	2422 ~ 2452	3-9[7]	16.50	19.00

**5.4. TEST CHANNEL CONFIGURATION**

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
g	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)	2422 MHz, 2437 MHz, 2452 MHz

**5.5. THE WORSE CASE POWER SETTING PARAMETER**

The Worst Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		QA Tool					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	1	1E	1E	1E	/		
	2	1E	1E	1E			
802.11g	1	1E	1E	1E			
	2	1E	1E	1E			
802.11n HT20	1	1E	1E	1E			
	2	1E	1E	1E			
802.11n HT40	1	/			1E	1E	1E
	2	/			1E	1E	1E



## 5.6. THE WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps

802.11b mode: 6 Mbps

802.11n HT20 mode: MCS0

802.11n HT40 mode: MCS0

SISO mode and MIMO mode have the same power setting, so only the worst case power mode (MIMO) will be record in the report.

The EUT has 2 separate antennas which correspond to 2 separate antenna ports. Core 1 and Core 2 correspond to antenna 0 and antenna 1 respectively.

Antenna 0 and Antenna 1 have the same power setting, but the power test data are different. (Declared by customer.)

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

The EUT support Cyclic Shift Diversity (CDD), They use the same conducted power per chain in any given mode, so we only chose the worst-case mode CDD 2TX for final testing.



## 5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	Maximum Antenna Gain (dBi)
1	2412 ~ 2462 MHz	PCB	2.5
2	2412 ~ 2462 MHz	PCB	2.5

IEEE Std. 802.11	Transmit and Receive Mode	Description
b	1TX, 1RX	Antenna 1, 2 can be used as transmitting/receiving antenna.
g	1TX, 1RX	Antenna 1, 2 can be used as transmitting/receiving antenna.
n HT20	2TX, 2RX	Antenna 1, 2 can be used as transmitting/receiving antenna.
n HT40	2TX, 2RX	Antenna 1, 2 can be used as transmitting/receiving antenna.

**Note:**

1. Only 802.11 n support MIMO mode.
2. BT&WLAN 2.4G, BT & WLAN 5G, WLAN 2.4G & WLAN 5G can't transmit simultaneously. (declared by client)

Note: The value of the antenna gain was declared by customer.

## 5.8. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	XIAOXIN 5000	/

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	0.3	/


### ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	/	/	/	/

### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

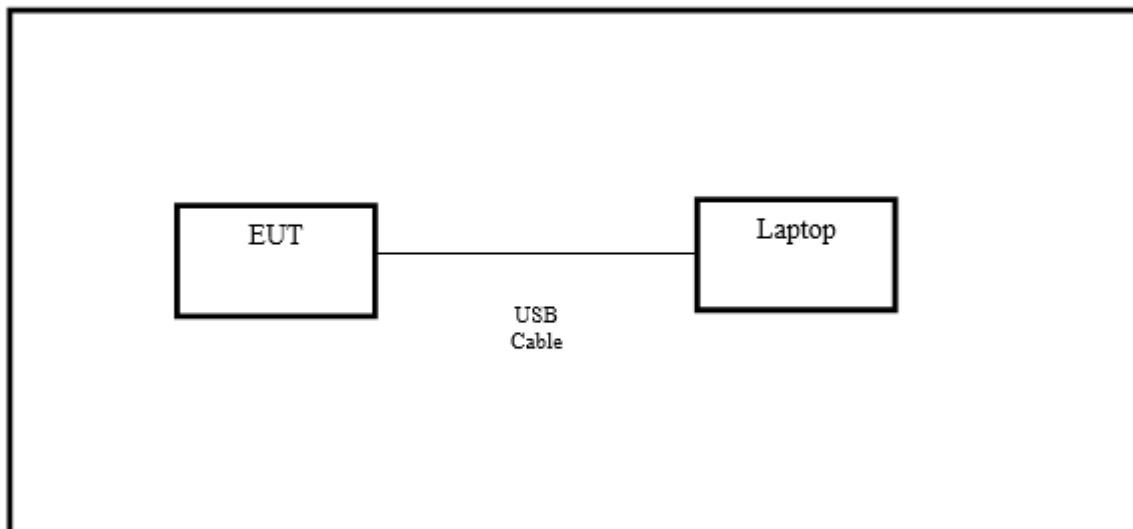

**6. MEASURING INSTRUMENT AND SOFTWARE USED**

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Nov. 12, 2020	Nov. 11, 2021
Two-Line V-Network	R&S	ENV216	101983	Nov. 12, 2020	Nov. 11, 2021
Software					
Description		Manufacturer	Name	Version	
Test Software for Conducted Emissions		Farad	EZ-EMC	Ver. UL-3A1	

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Nov. 12, 2020	Nov. 11, 2021
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Aug. 2, 2021	Aug. 2, 2023
Preamplifier	HP	8447D	2944A09099	Nov. 12, 2020	Nov. 11, 2021
EMI Measurement Receiver	R&S	ESR26	101377	Nov. 12, 2020	Nov. 11, 2021
Horn Antenna	TDK	HRN-0118	130939	Sept. 17, 2018	Sept. 17, 2021
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Nov. 20, 2020	Nov. 19, 2021
Horn Antenna	Schwarzbeck	BBHA9170	#691	Jul. 20, 2021	Jul. 20, 2023
Preamplifier	TDK	PA-02-2	TRS-307-00003	Nov. 12, 2020	Nov. 11, 2021
Preamplifier	TDK	PA-02-3	TRS-308-00002	Nov. 12, 2020	Nov. 11, 2021
Loop antenna	Schwarzbeck	1519B	00008	Jan.17, 2019	Jan.17,2022
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Nov. 12, 2020	Nov. 11, 2021
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Nov. 12, 2020	Nov. 11, 2021
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Nov. 12, 2020	Nov. 11, 2021
Software					
Description		Manufacturer	Name	Version	
Test Software for Radiated Emissions		Farad	EZ-EMC	Ver. UL-3A1	



Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Nov.20,2020	Nov.19,2021
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Nov.20,2020	Nov.19,2021
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Nov.20,2020	Nov.19,2021
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Nov.20,2020	Nov.19,2021
DC power supply	Keysight	E3642A	MY55159130	Nov.24,2020	Nov.23,2021
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		2.6.77.0518	

Other Instruments					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Dual Channel Power Meter	Keysight	N1912A	MY55416024	Nov. 20, 2020	Nov. 19, 2021
Power Sensor	Keysight	USB Wideband Power Sensor	MY5100022	Nov. 20, 2020	Nov. 19, 2021

## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE


#### LIMITS

None; for reporting purposes only

#### PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	24.5 °C	Relative Humidity	61 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

#### RESULTS

Please refer to appendix G.



## 7.2. 6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

### TEST PROCEDURE


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: ≥3 × RBW For 99 % Occupied Bandwidth: ≥3 × RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### TEST SETUP

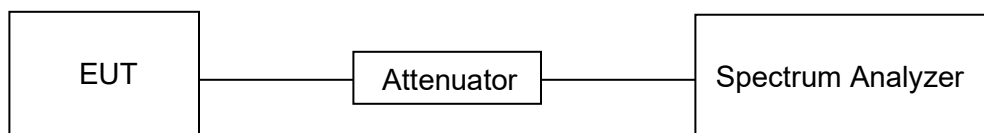



**TEST ENVIRONMENT**

Temperature	24.5 °C	Relative Humidity	61 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

**RESULTS**

Please refer to appendix A & B.

### 7.3. CONDUCTED OUTPUT POWER

#### LIMITS


CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

#### TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

#### TEST SETUP

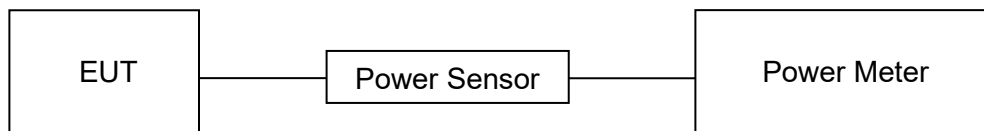

#### TEST ENVIRONMENT

Temperature	24.5 °C	Relative Humidity	61 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

#### RESULTS

Please refer to appendix C.

## 7.4. POWER SPECTRAL DENSITY

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm/3 kHz	2400-2483.5

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	PEAK
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### TEST SETUP



### TEST ENVIRONMENT

Temperature	24.5 °C	Relative Humidity	61 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V



**RESULTS**

Please refer to appendix D.



## 7.5. CONDUCTED BANDEGE AND SPURIOUS EMISSIONS

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

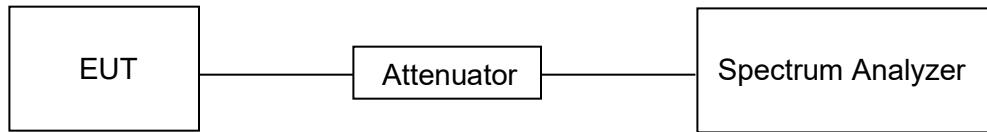**TEST SETUP****TEST ENVIRONMENT**

Temperature	24.5 °C	Relative Humidity	61 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

**RESULTS**

Please refer to appendix E & F.

## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.



ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

**Table 7 – Restricted frequency bands<sup>Note 1</sup>**

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	166.52475 - 166.52525	9.3 - 9.5
2.1735 - 2.1905	166.7 - 166.9	10.6 - 12.7
3.020 - 3.028	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1045.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

**Note 1:** Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

**TEST SETUP AND PROCEDURE**

Below 30 MHz

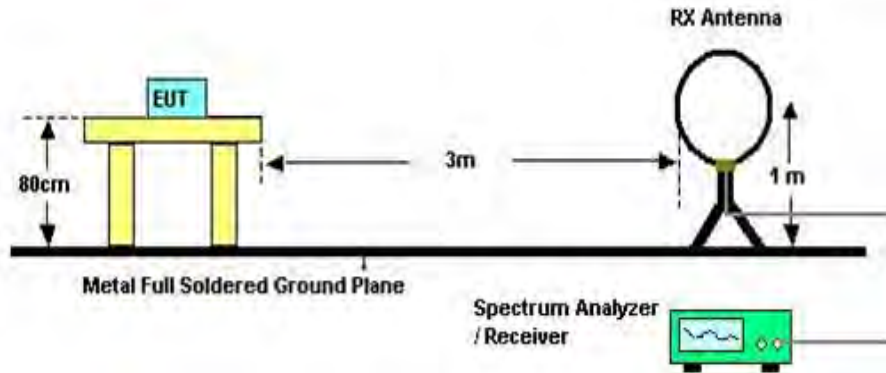


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz) / 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz) / 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1 GHz and above 30 MHz

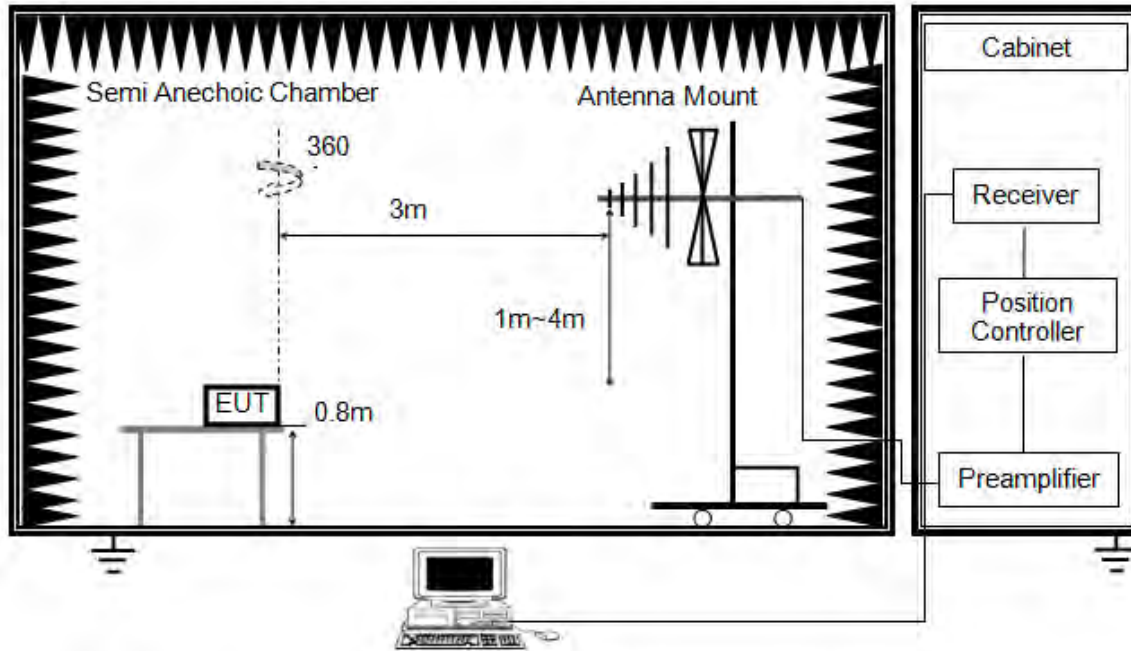


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

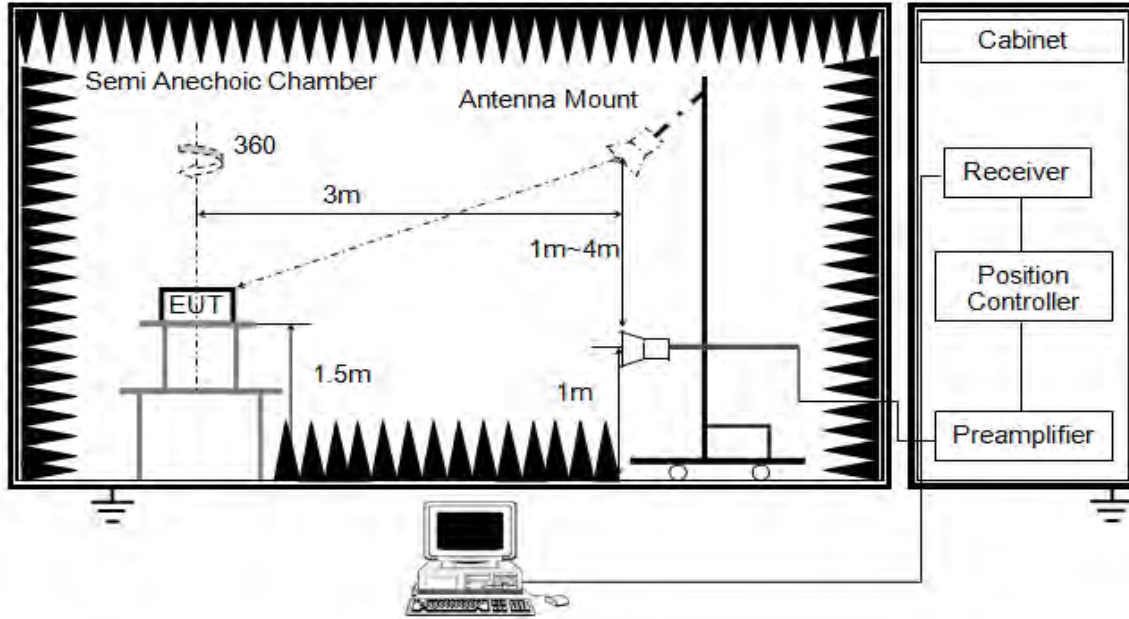

The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.



Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

### **TEST ENVIRONMENT**

Temperature	23.5 °C	Relative Humidity	60 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V


### **RESULTS**

## 8.1. RESTRICTED BANDEDGE

### 8.1.1. 802.11b MIMO MODE

#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

#### PEAK

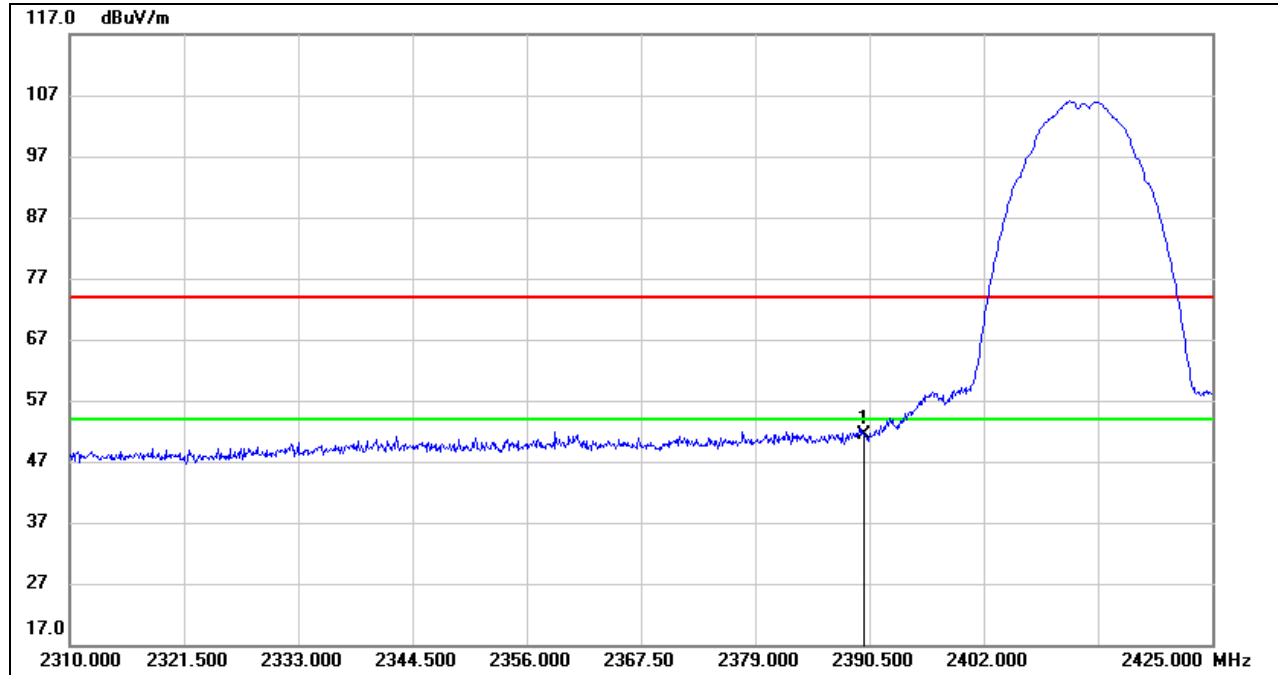

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	18.10	33.35	51.45	74.00	-22.55	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

**PEAK**

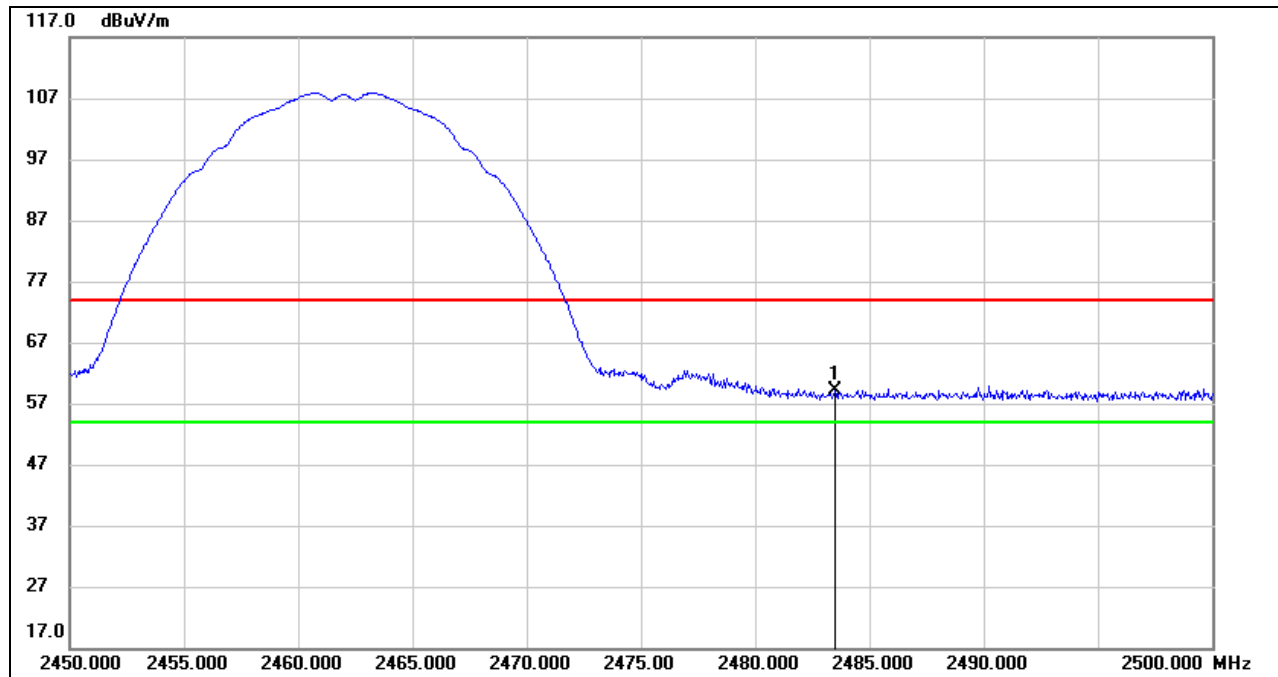


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	25.51	33.71	59.22	74.00	-14.78	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. Peak: Peak detector.  
 3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**AVG**

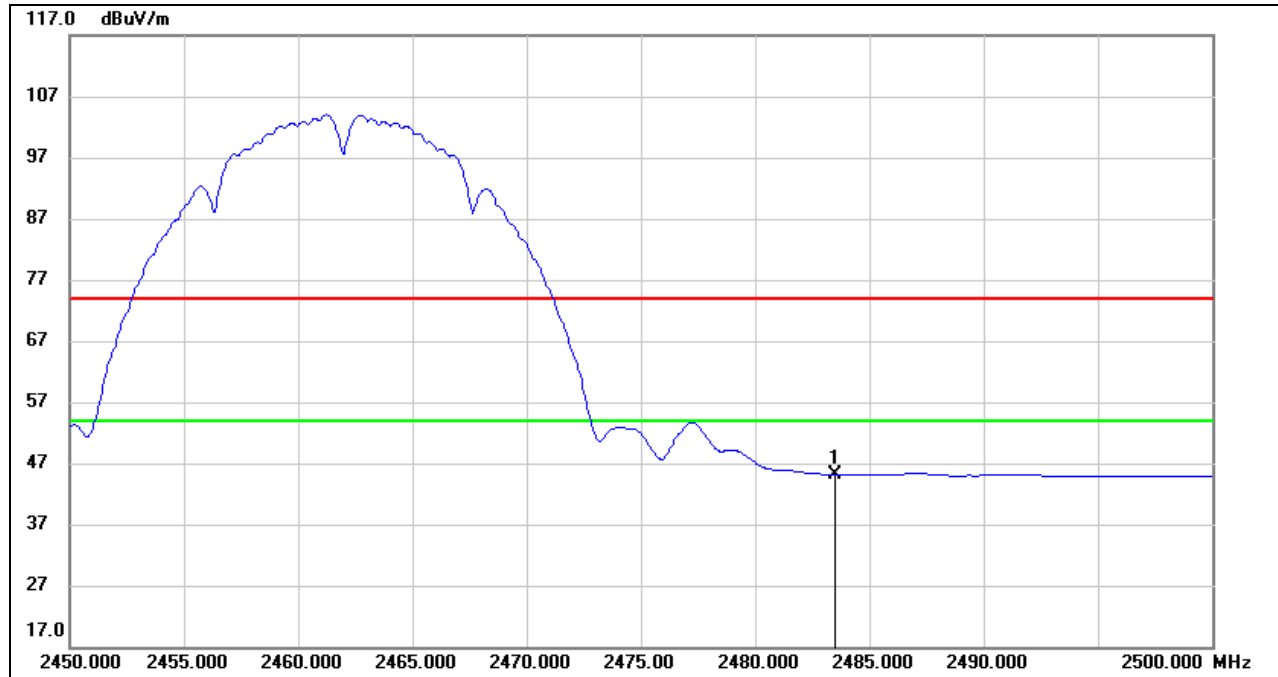

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	11.52	33.71	45.23	54.00	-8.77	AVG

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.



8.1.2. 802.11g MIMO MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

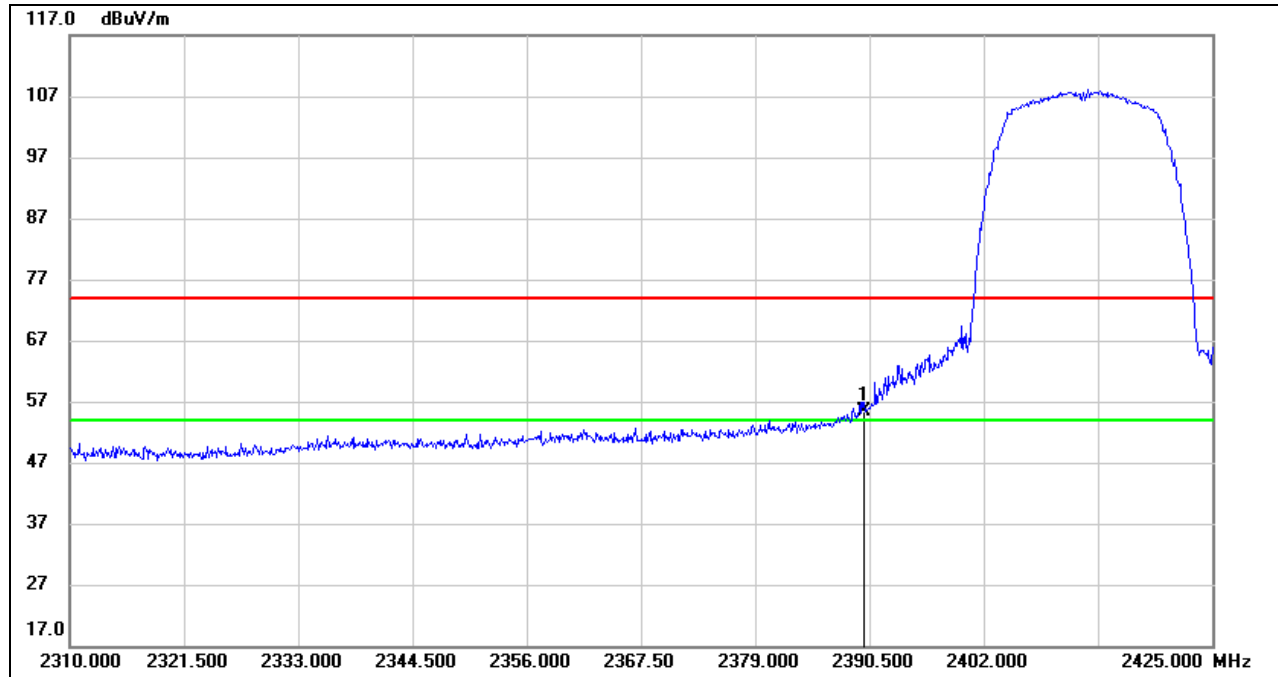


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	21.94	33.35	55.29	74.00	-18.71	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. Peak: Peak detector.  
 3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**AVG**

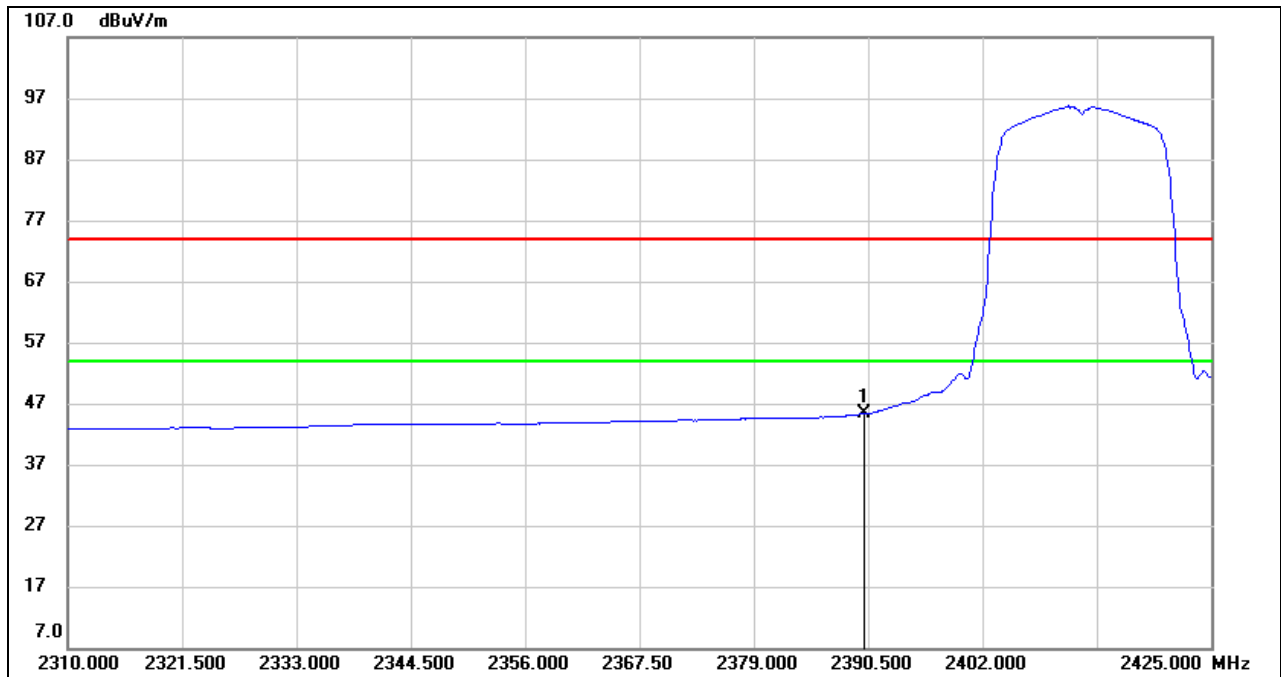


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	11.94	33.35	45.29	54.00	-8.71	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  3. For the transmitting duration, please refer to clause 7.1.
  4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**


**PEAK**

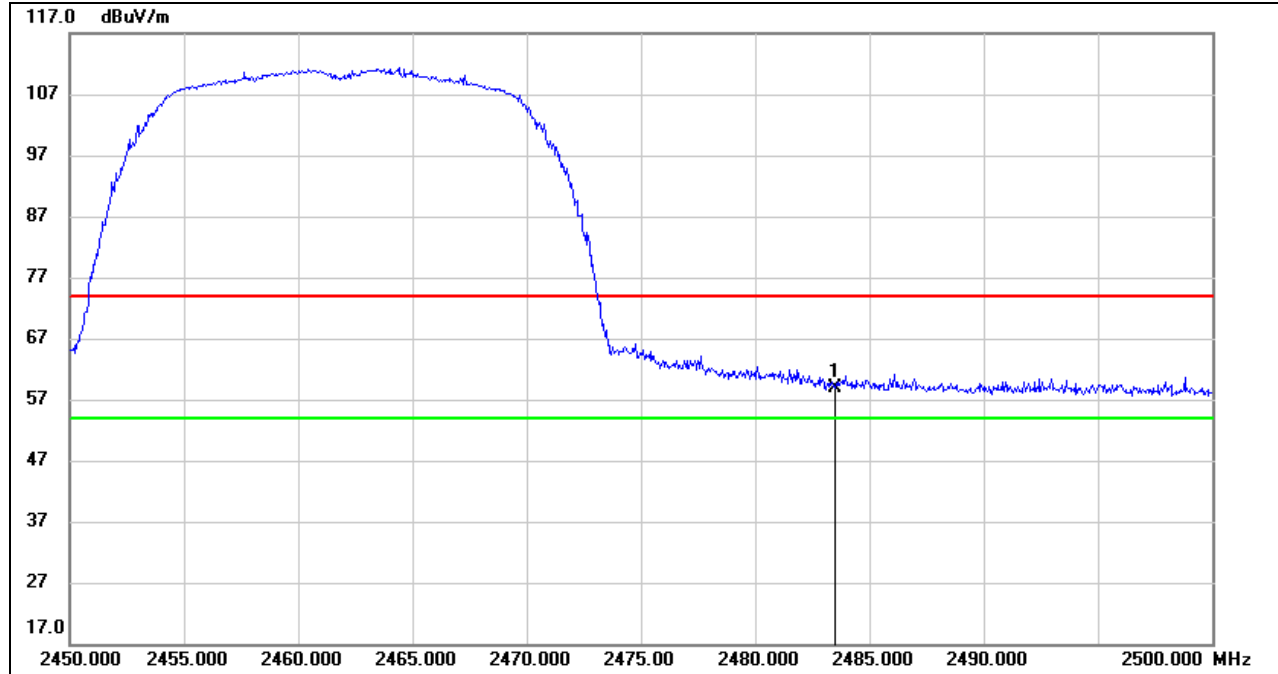

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	25.22	33.71	58.93	74.00	-15.07	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. Peak: Peak detector.  
 3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**AVG**

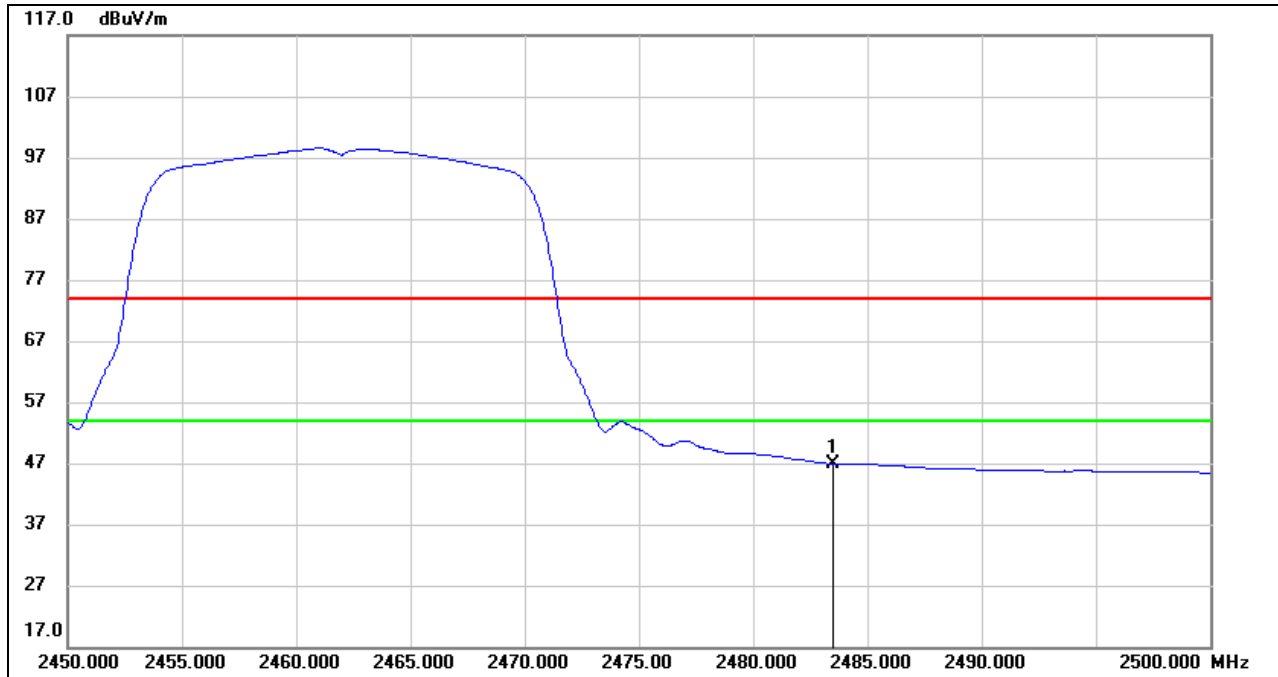

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	13.20	33.71	46.91	54.00	-7.09	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. AVG:  $VBW=1/Ton$ , where:  $Ton$  is the transmitting duration.
  3. For the transmitting duration, please refer to clause 7.1.
  4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.



8.1.3. 802.11n HT20 MIMO MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)


PEAK

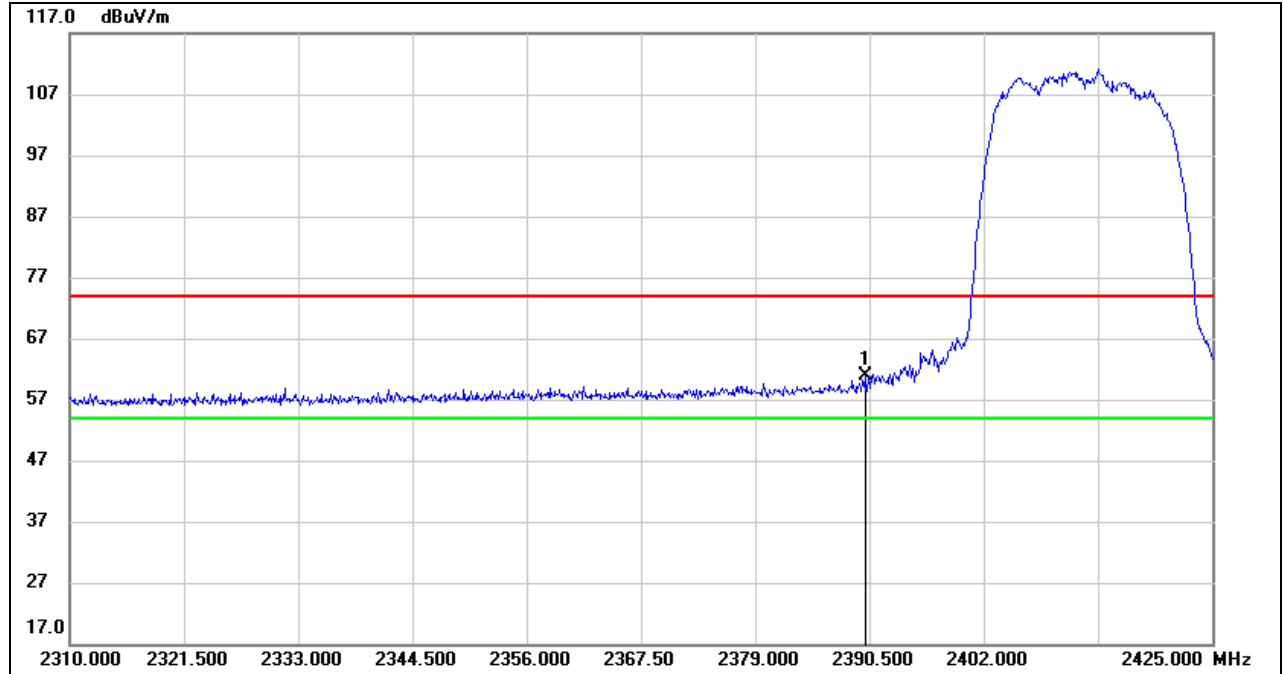

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.63	33.35	60.98	74.00	-13.02	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. Peak: Peak detector.  
 3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

### AVG

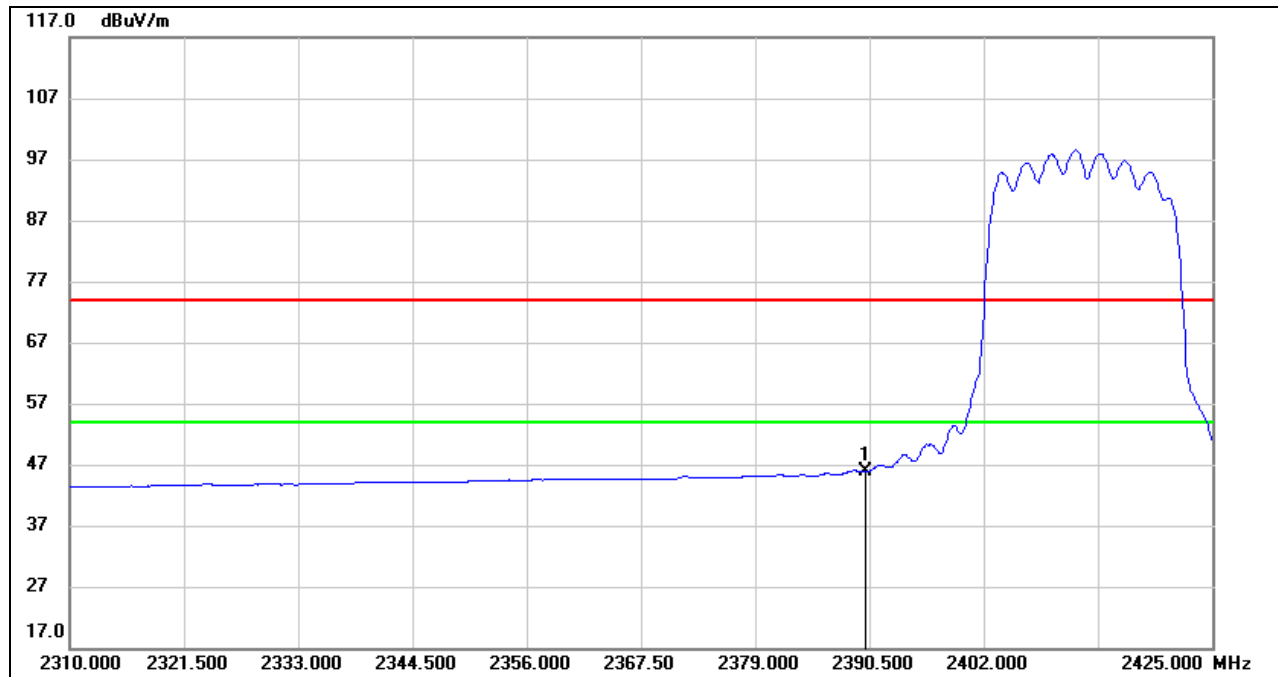


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	12.45	33.35	45.80	54.00	-8.20	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. AVG:  $VBW=1/Ton$ , where:  $Ton$  is the transmitting duration.
  3. For the transmitting duration, please refer to clause 7.1.
  4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

**PEAK**

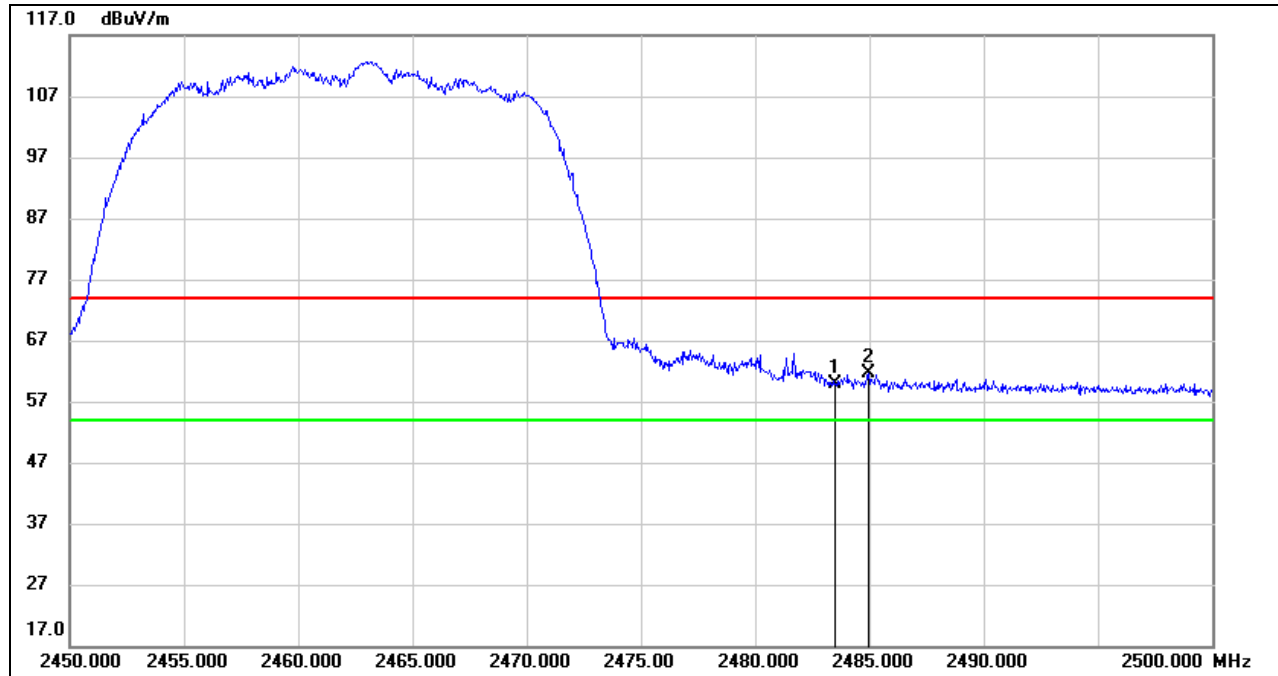


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	26.13	33.71	59.84	74.00	-14.16	peak
2	2484.950	28.03	33.71	61.74	74.00	-12.26	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**AVG**

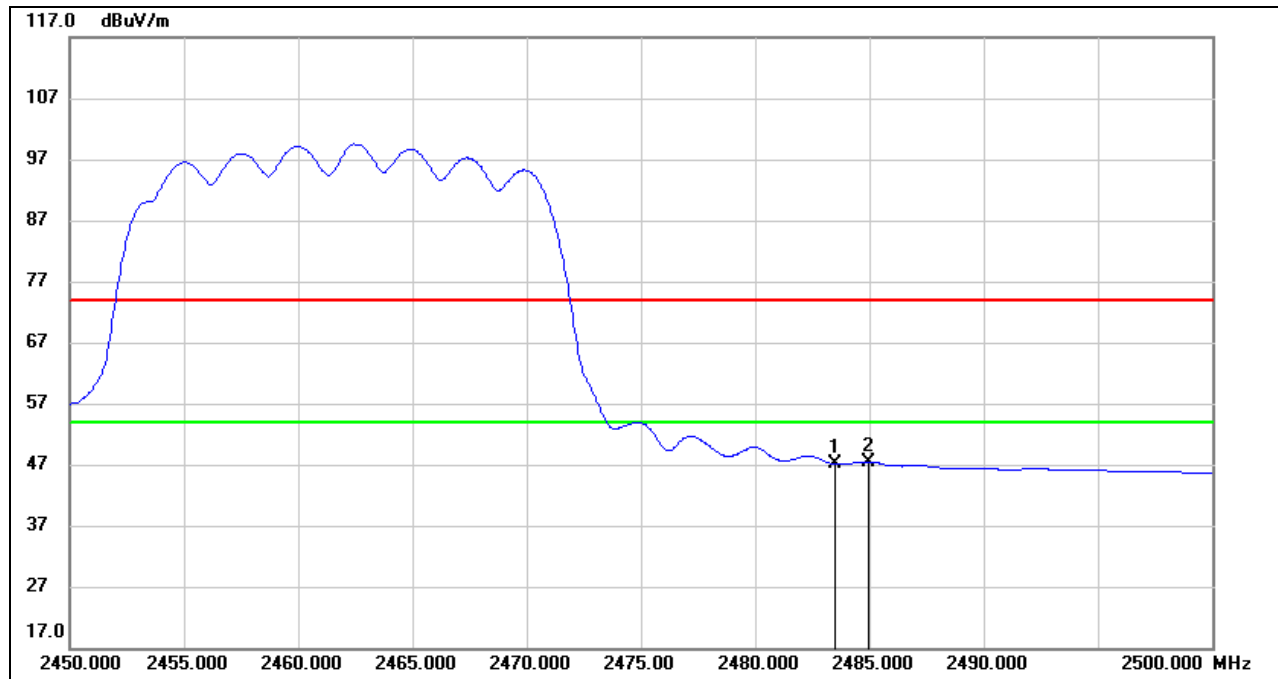

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	13.41	33.71	47.12	54.00	-6.88	AVG
2	2484.950	13.77	33.71	47.48	54.00	-6.52	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  3. For the transmitting duration, please refer to clause 7.1.
  4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.






8.1.4. 802.11n HT40 MIMO MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

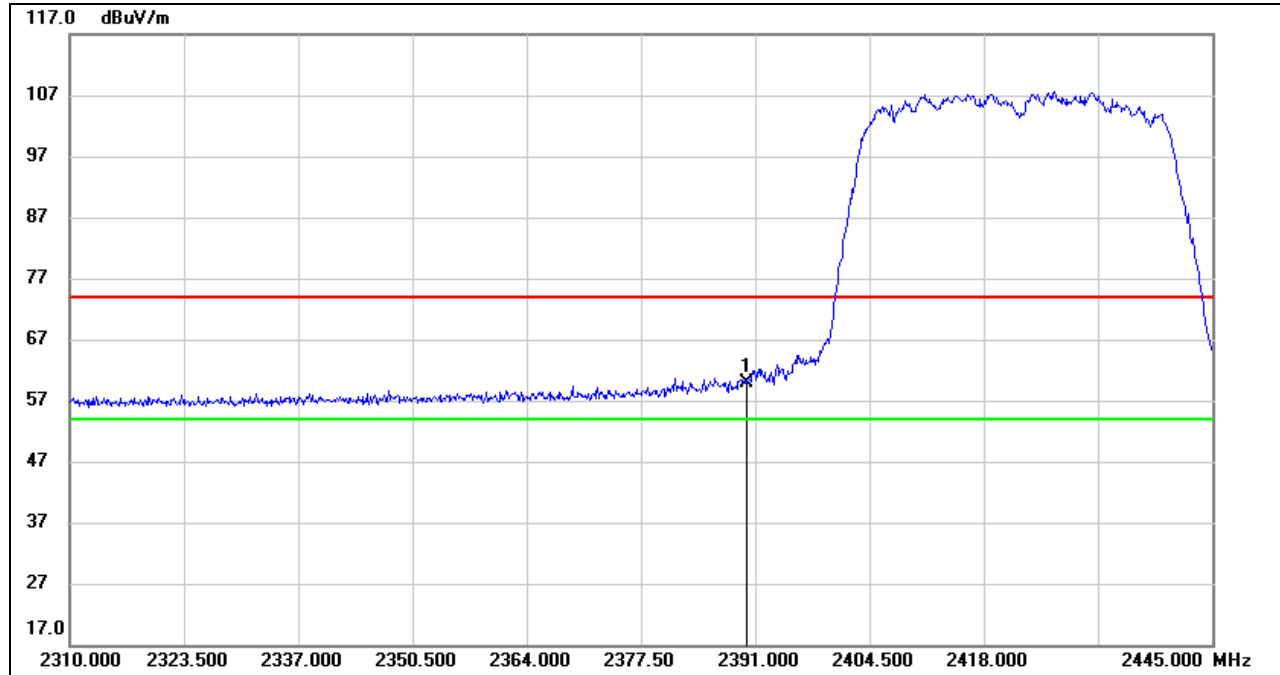

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	26.53	33.35	59.88	74.00	-14.12	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**AVG**

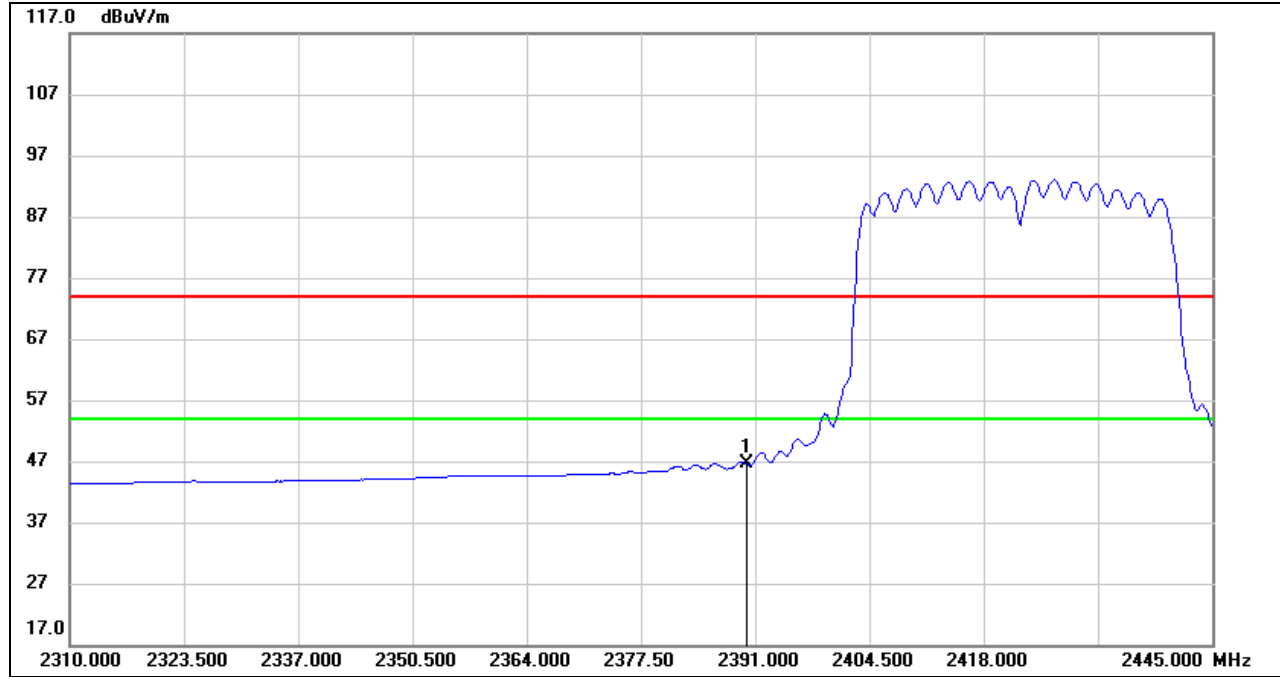


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	13.17	33.35	46.52	54.00	-7.48	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  3. For the transmitting duration, please refer to clause 7.1.
  4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

**PEAK**

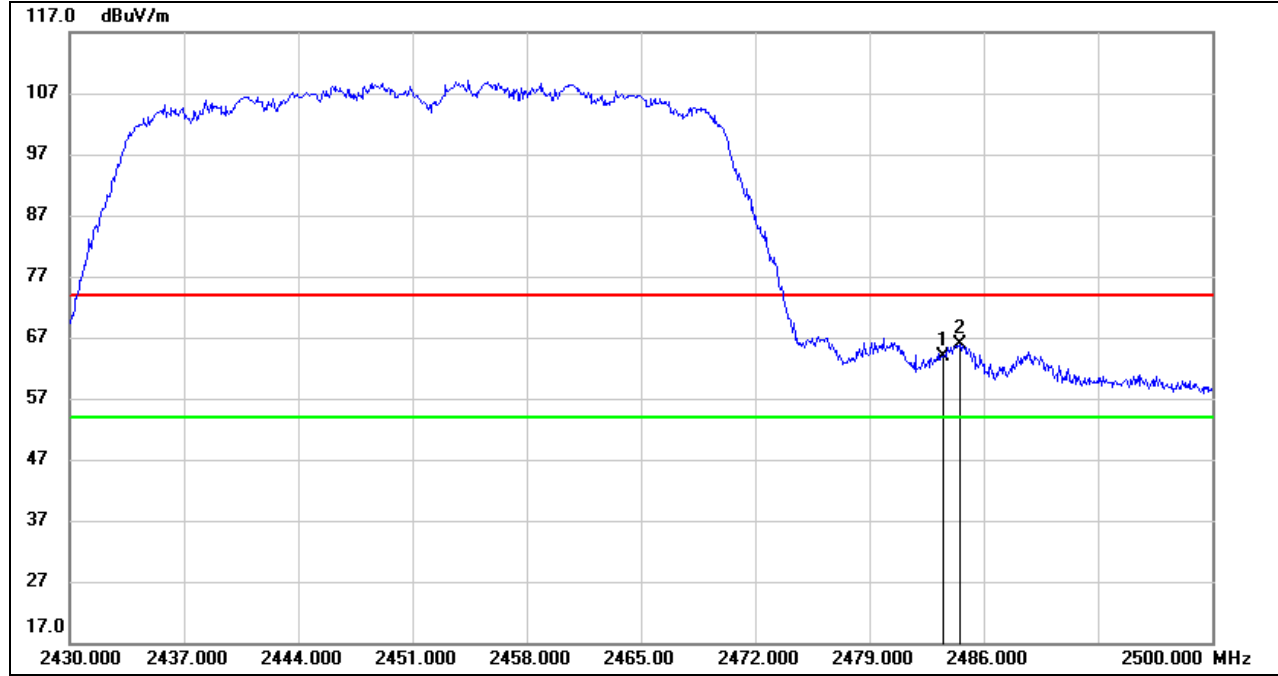


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	30.26	33.71	63.97	74.00	-10.03	peak
2	2484.530	32.05	33.71	65.76	74.00	-8.24	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**AVG**

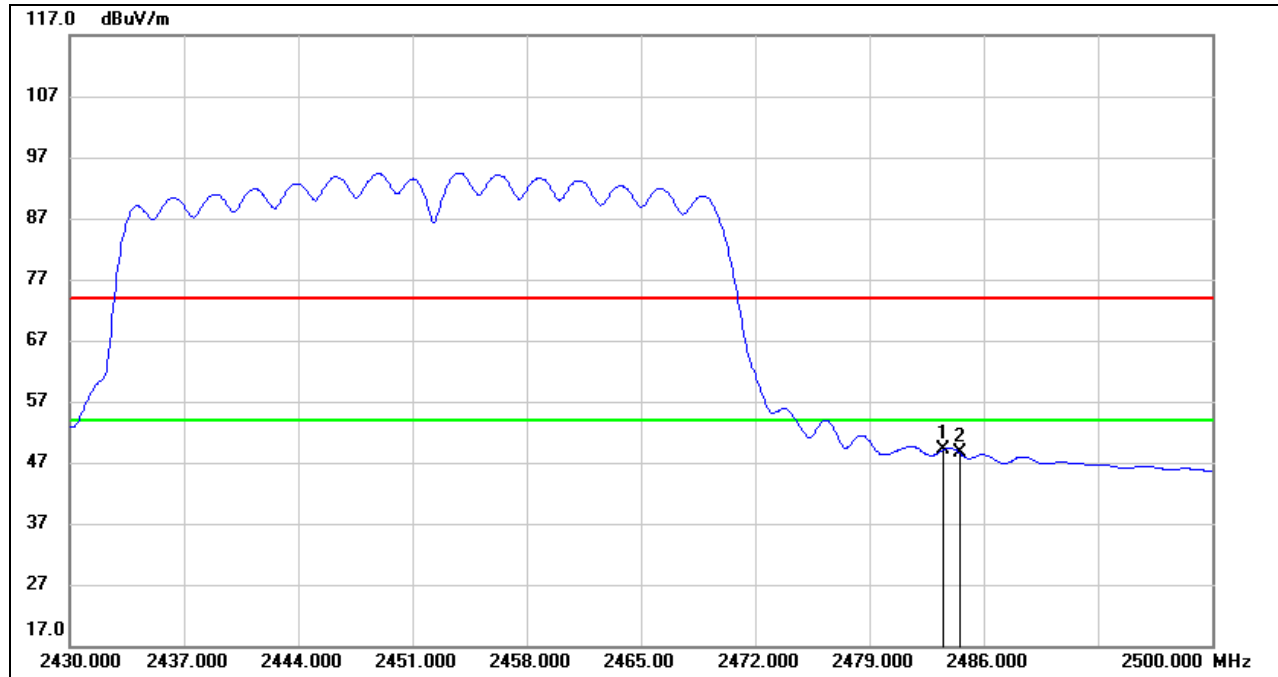

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	15.35	33.71	49.06	54.00	-4.94	AVG
2	2484.530	14.83	33.71	48.54	54.00	-5.46	AVG


- Note:
1. Measurement = Reading Level + Correct Factor.
  2. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  3. For the transmitting duration, please refer to clause 7.1.
  4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

## 8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)

### 8.2.1. 802.11n HT40 MIMO MODE


#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

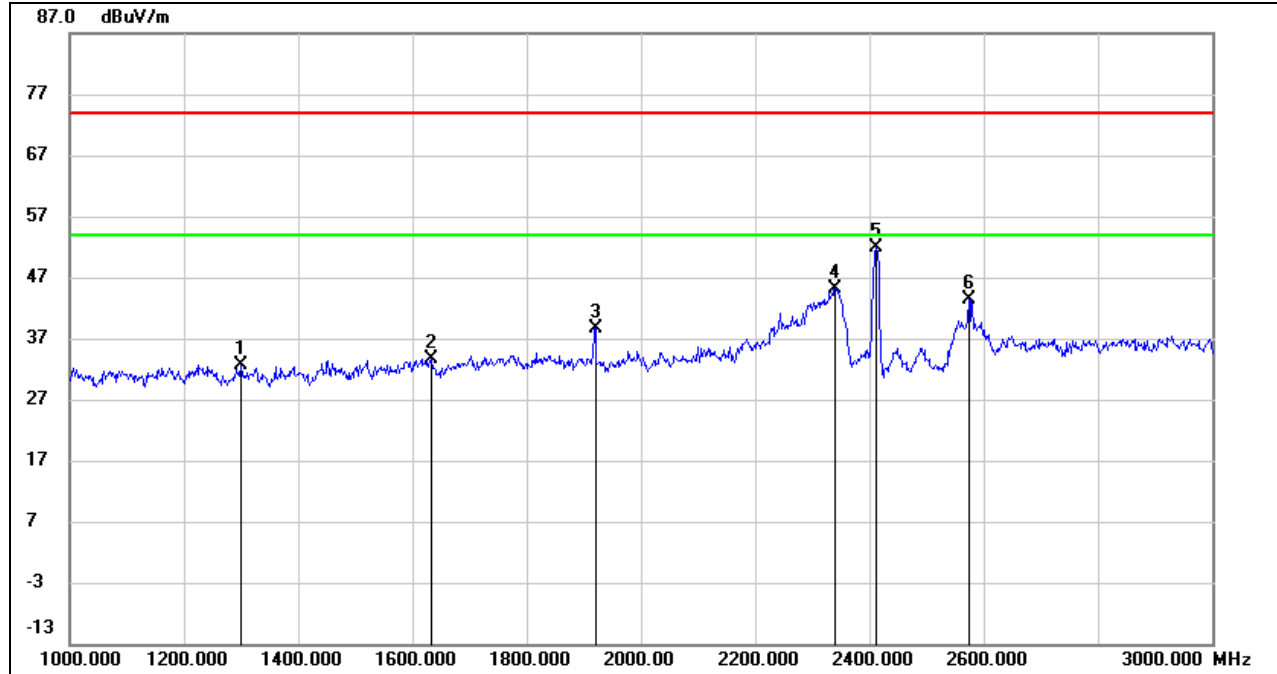

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1300.533	45.59	-12.85	32.74	74.00	-41.26	peak
2	1634.067	44.95	-11.30	33.65	74.00	-40.35	peak
3	1920.000	48.76	-10.13	38.63	74.00	-35.37	peak
4	2341.667	53.84	-8.59	45.25	74.00	-28.75	peak
5	2422.000	60.37	-8.37	52.00	/	/	fundamental
6	2574.000	51.42	-7.95	43.47	74.00	-30.53	peak


- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

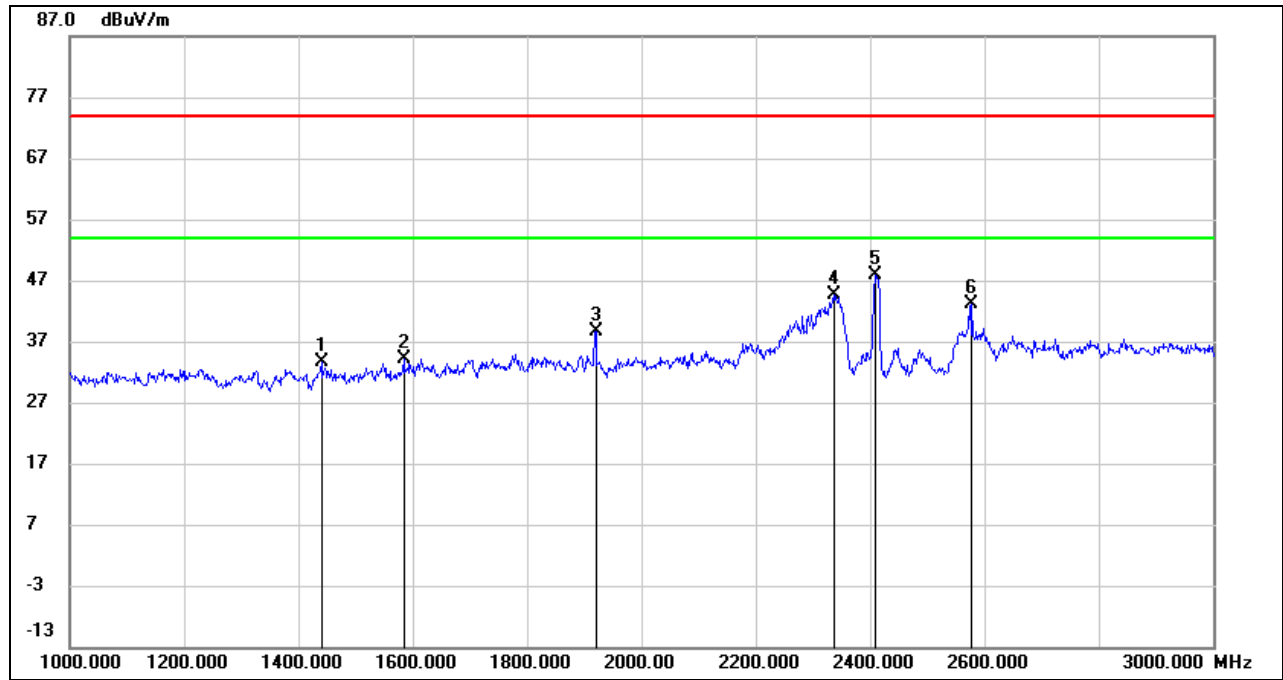


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1440.000	46.24	-12.51	33.73	74.00	-40.27	peak
2	1585.733	45.67	-11.64	34.03	74.00	-39.97	peak
3	1920.200	48.88	-10.13	38.75	74.00	-35.25	peak
4	2336.667	53.34	-8.60	44.74	74.00	-29.26	peak
5	2422.000	56.33	-8.37	47.96	/	/	fundamental
6	2578.533	50.97	-7.94	43.03	74.00	-30.97	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

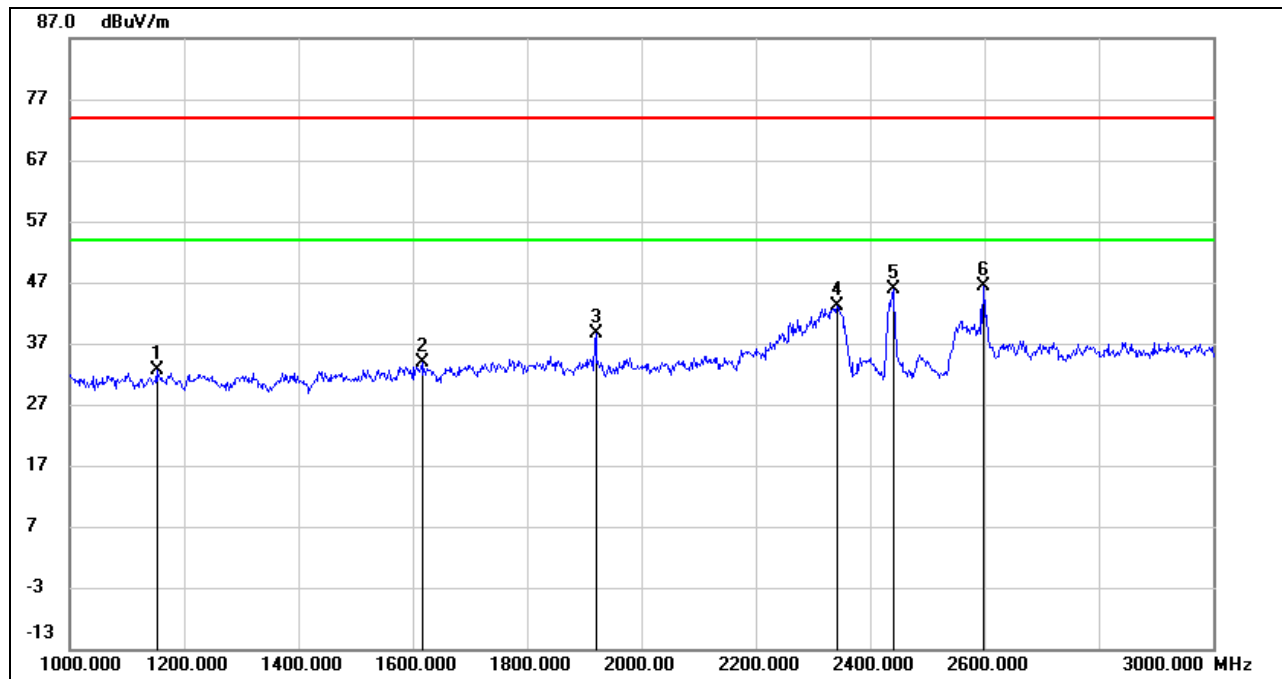**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1153.200	45.74	-13.22	32.52	74.00	-41.48	peak
2	1616.733	45.35	-11.43	33.92	74.00	-40.08	peak
3	1920.067	48.84	-10.13	38.71	74.00	-35.29	peak
4	2343.933	51.80	-8.58	43.22	74.00	-30.78	peak
5	2437.000	54.30	-8.33	45.97	/	/	fundamental
6	2598.267	54.14	-7.88	46.26	74.00	-27.74	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

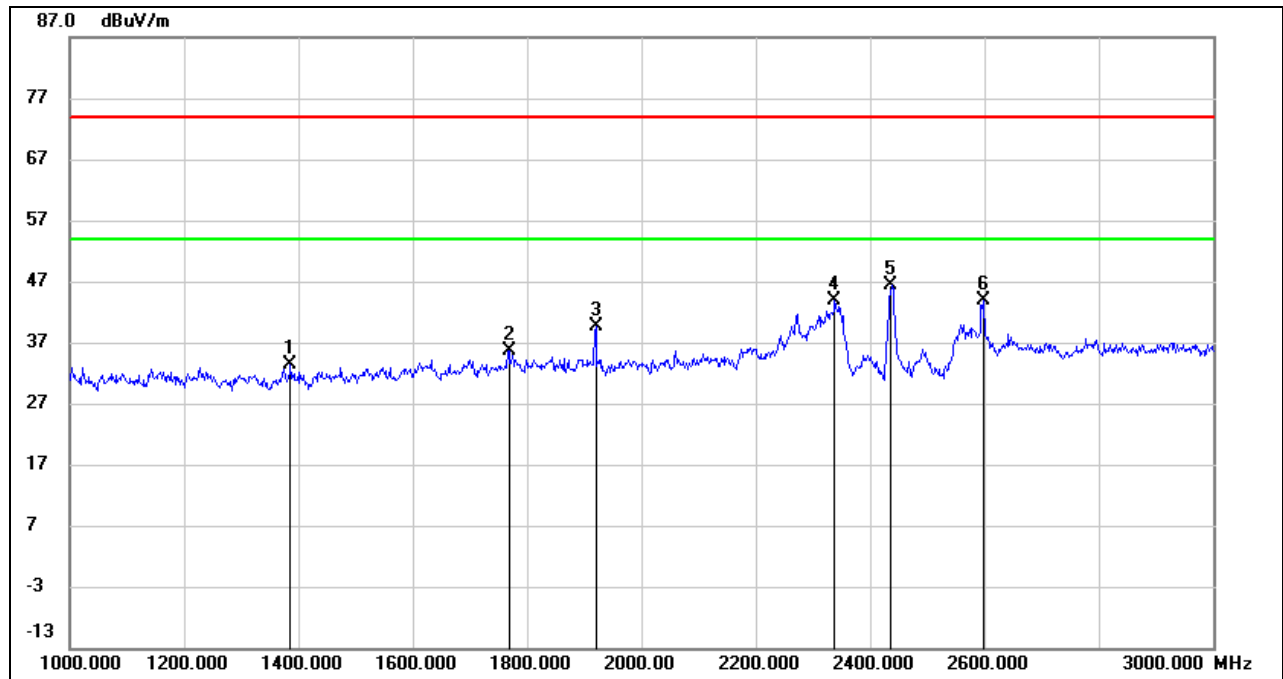**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1387.133	45.98	-12.72	33.26	74.00	-40.74	peak
2	1768.000	45.96	-10.29	35.67	74.00	-38.33	peak
3	1920.000	49.73	-10.13	39.60	74.00	-34.40	peak
4	2338.067	52.46	-8.60	43.86	74.00	-30.14	peak
5	2437.000	54.66	-8.33	46.33	/	/	fundamental
6	2599.067	51.73	-7.86	43.87	74.00	-30.13	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.






**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

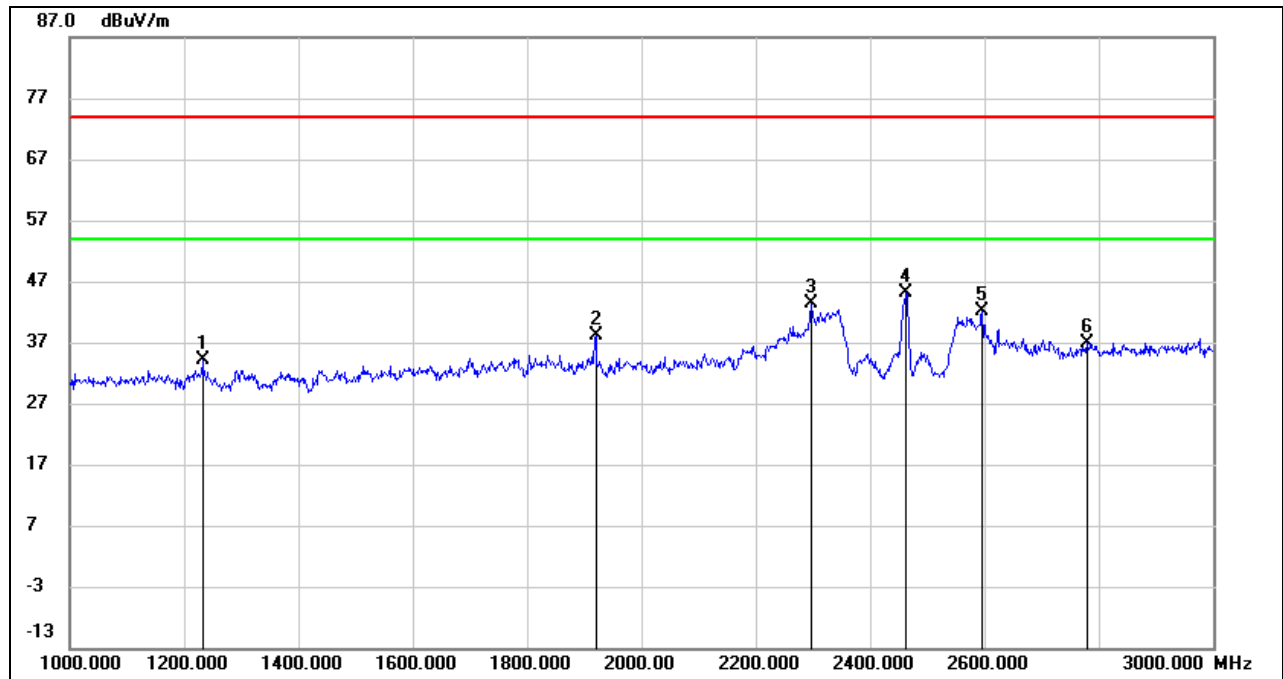

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1233.533	47.02	-12.95	34.07	74.00	-39.93	peak
2	1920.200	48.26	-10.13	38.13	74.00	-35.87	peak
3	2299.133	52.12	-8.72	43.40	74.00	-30.60	peak
4	2452.000	53.39	-8.28	45.11	/	/	fundamental
5	2597.333	49.90	-7.88	42.02	74.00	-31.98	peak
6	2780.400	43.62	-6.68	36.94	74.00	-37.06	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

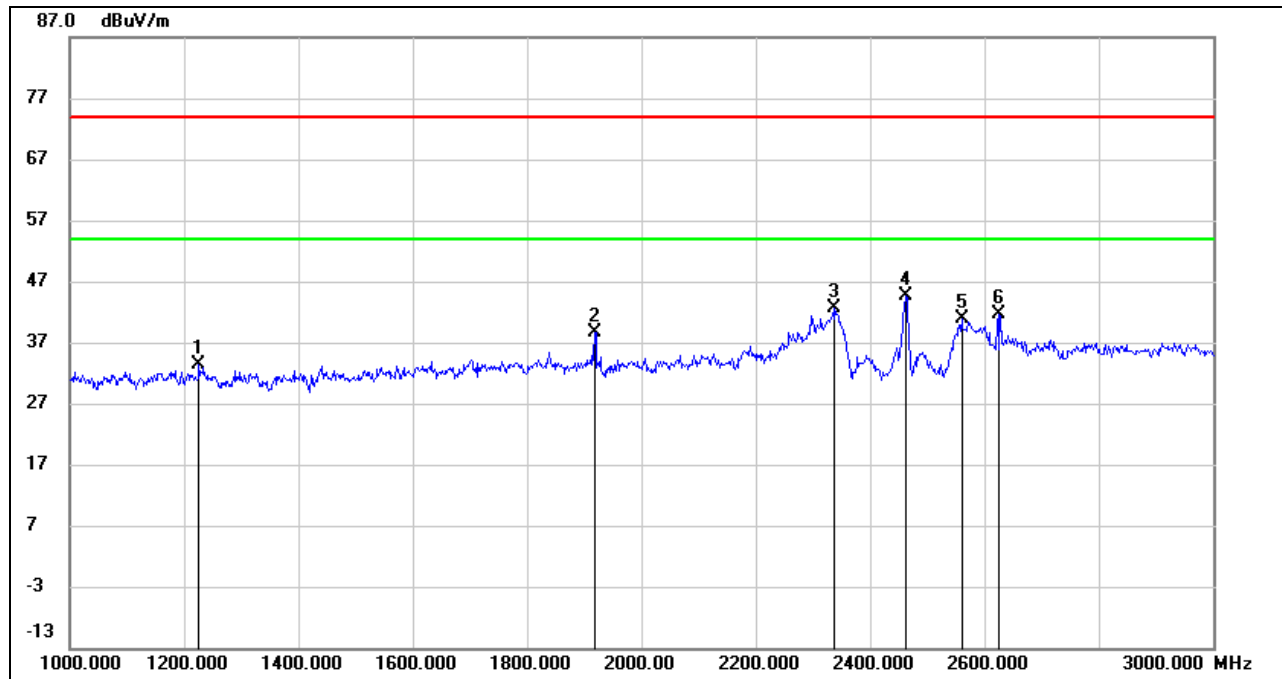**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1227.400	46.39	-12.95	33.44	74.00	-40.56	peak
2	1919.933	48.72	-10.13	38.59	74.00	-35.41	peak
3	2337.867	51.13	-8.60	42.53	74.00	-31.47	peak
4	2452.000	52.80	-8.28	44.52	/	/	fundamental
5	2561.533	48.93	-8.00	40.93	74.00	-33.07	peak
6	2625.333	49.43	-7.70	41.73	74.00	-32.27	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

Note: All modes and channels have been tested, only the worst data was recorded in the report.

### 8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)

#### 8.3.1. 802.11b MIMO MODE

##### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

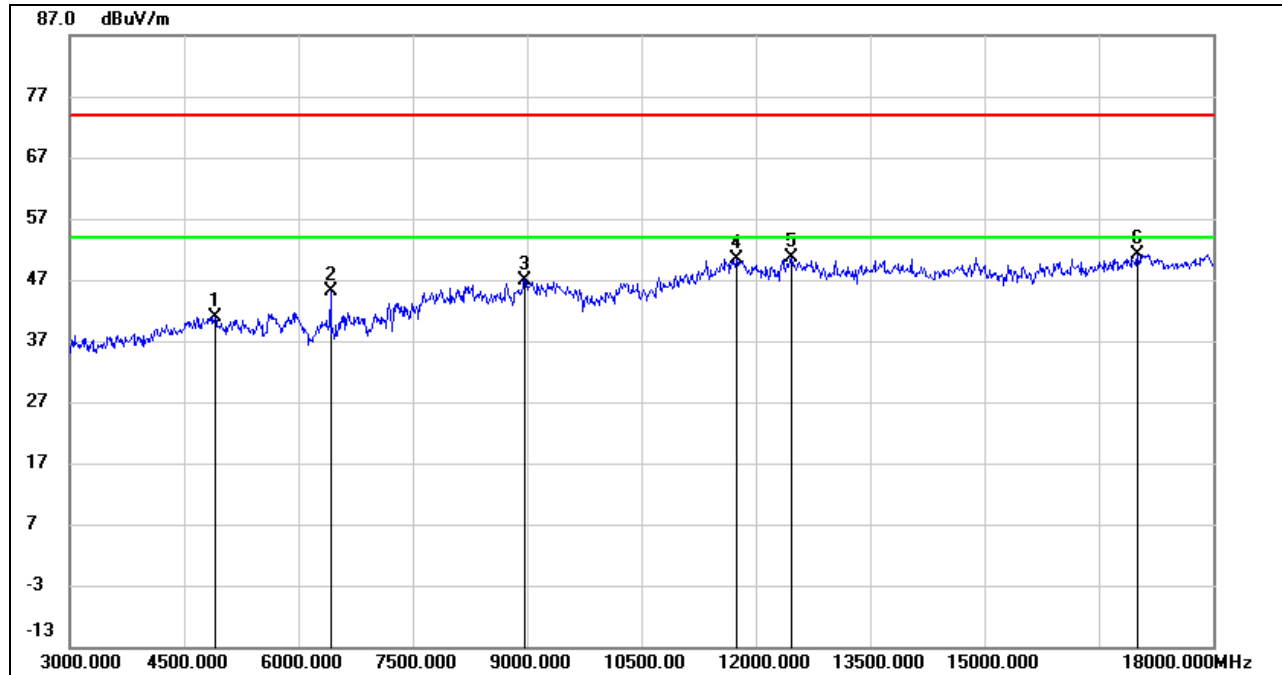

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4911.000	40.02	0.76	40.78	74.00	-33.22	peak
2	6432.000	40.47	4.55	45.02	74.00	-28.98	peak
3	8975.000	36.63	10.37	47.00	74.00	-27.00	peak
4	11757.500	34.96	15.38	50.34	74.00	-23.66	peak
5	12474.500	35.13	15.40	50.53	74.00	-23.47	peak
6	17020.500	30.83	20.32	51.15	74.00	-22.85	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

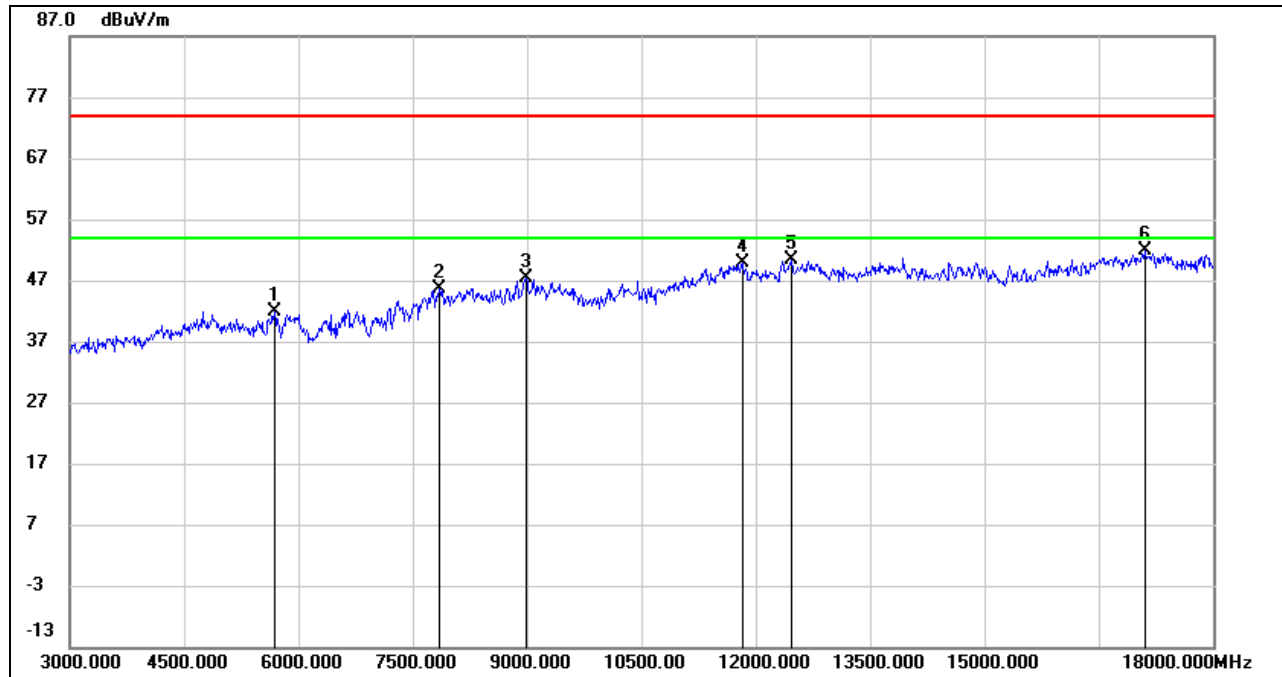**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5688.500	39.51	2.48	41.99	74.00	-32.01	peak
2	7845.500	37.40	8.12	45.52	74.00	-28.48	peak
3	8987.000	36.94	10.49	47.43	74.00	-26.57	peak
4	11828.500	34.28	15.57	49.85	74.00	-24.15	peak
5	12467.000	34.89	15.41	50.30	74.00	-23.70	peak
6	17107.000	31.20	20.67	51.87	74.00	-22.13	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

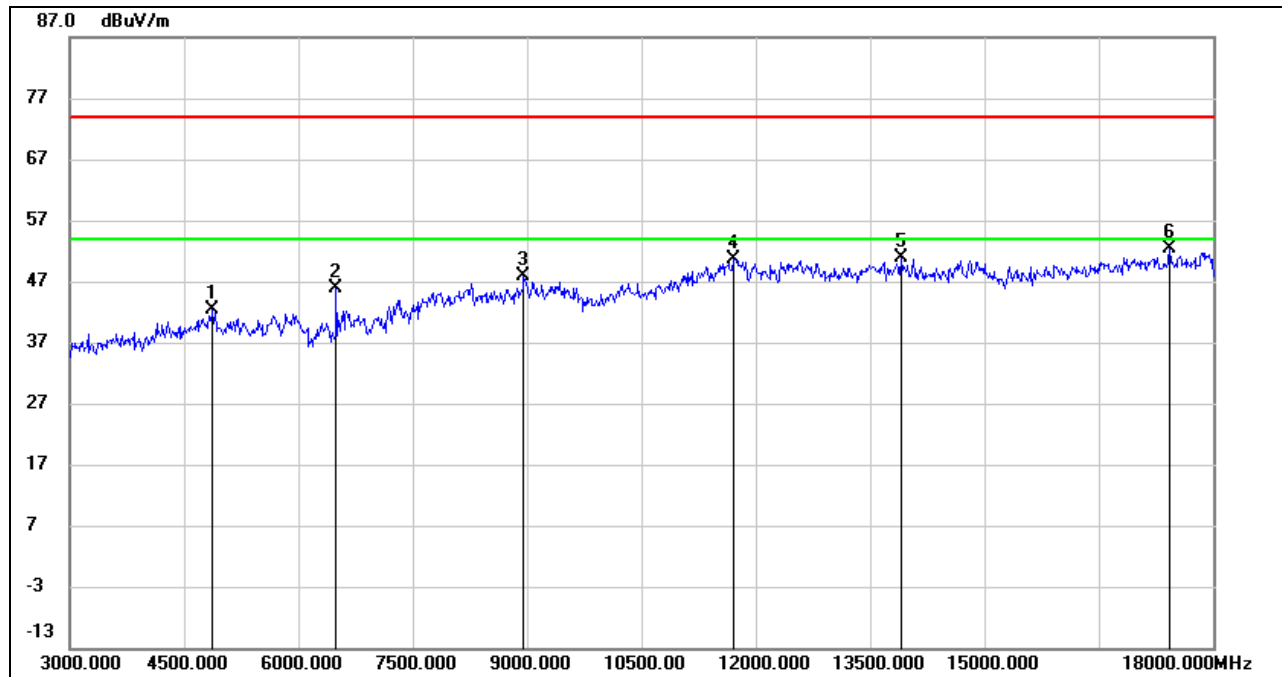**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	41.69	0.71	42.40	74.00	-31.60	peak
2	6496.500	40.98	4.90	45.88	74.00	-28.12	peak
3	8964.000	37.64	10.25	47.89	74.00	-26.11	peak
4	11711.000	35.52	15.13	50.65	74.00	-23.35	peak
5	13913.000	34.01	16.90	50.91	74.00	-23.09	peak
6	17444.500	31.66	20.78	52.44	74.00	-21.56	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

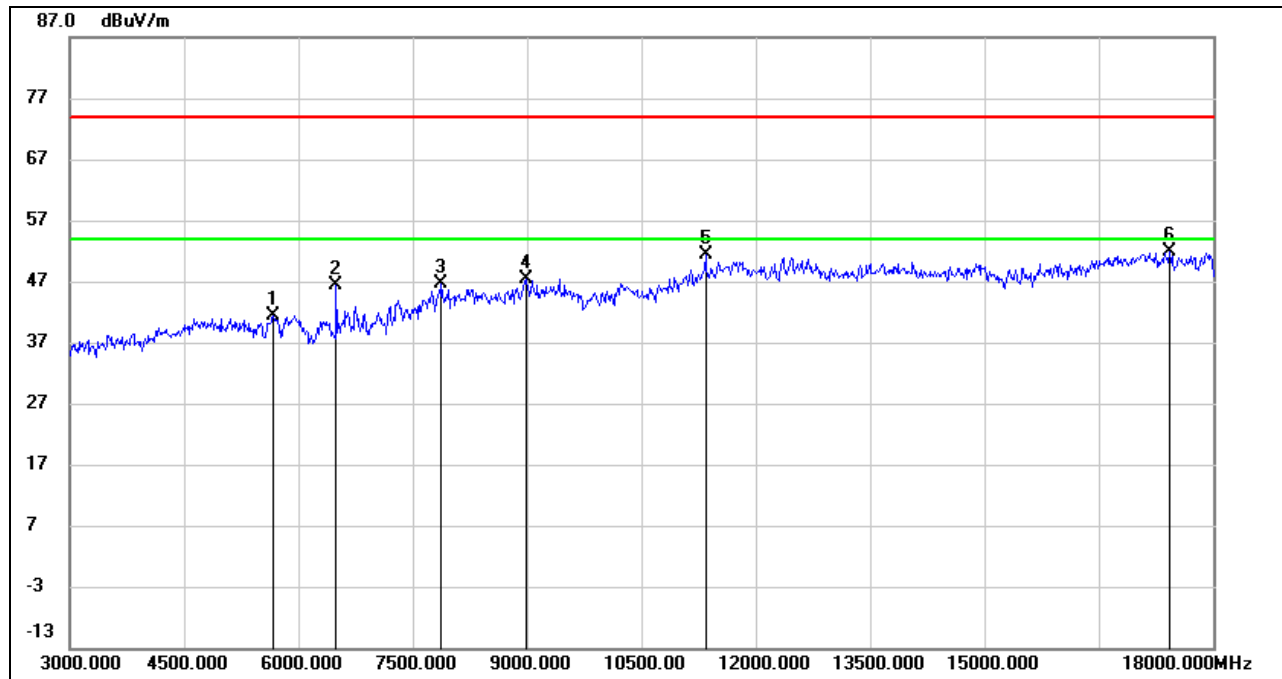**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5683.500	38.85	2.48	41.33	74.00	-32.67	peak
2	6499.000	41.36	4.92	46.28	74.00	-27.72	peak
3	7885.000	38.55	8.00	46.55	74.00	-27.45	peak
4	8993.000	36.87	10.55	47.42	74.00	-26.58	peak
5	11344.000	37.33	14.06	51.39	74.00	-22.61	peak
6	17430.500	31.21	20.76	51.97	74.00	-22.03	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

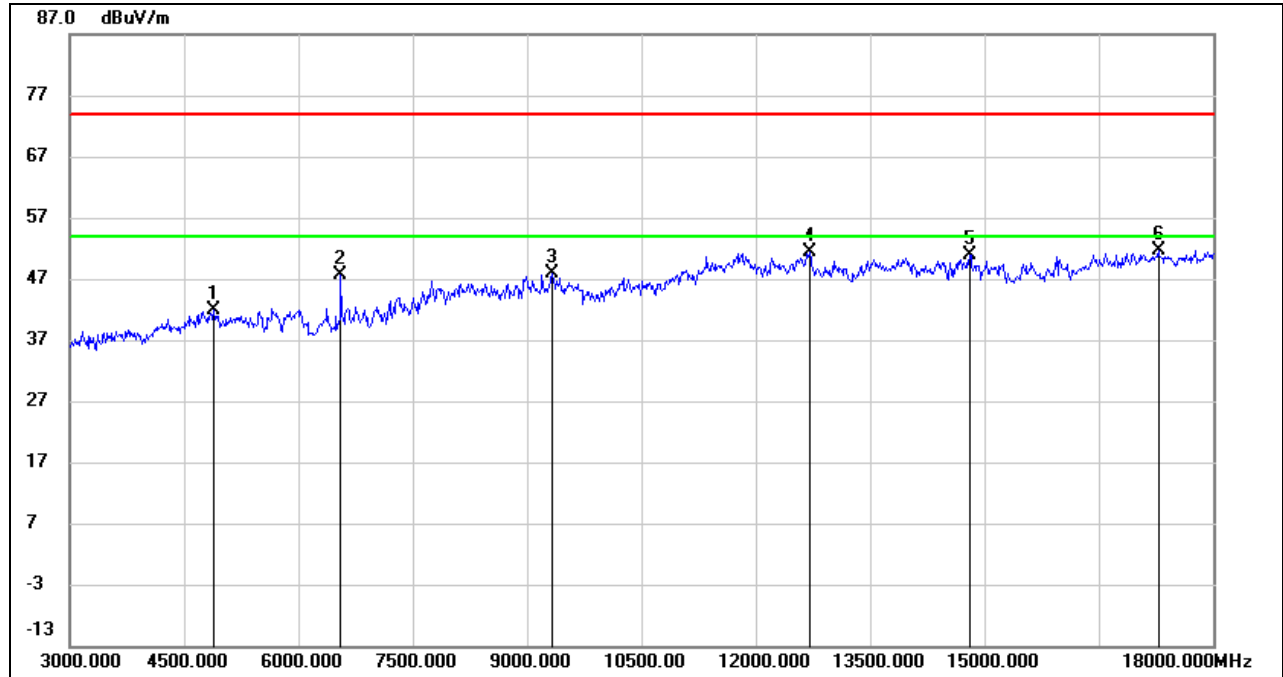**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4890.000	41.04	0.73	41.77	74.00	-32.23	peak
2	6555.000	42.38	5.24	47.62	74.00	-26.38	peak
3	9330.000	37.91	9.95	47.86	74.00	-26.14	peak
4	12705.000	35.97	15.48	51.45	74.00	-22.55	peak
5	14805.000	34.00	16.80	50.80	74.00	-23.20	peak
6	17280.000	30.63	20.92	51.55	74.00	-22.45	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

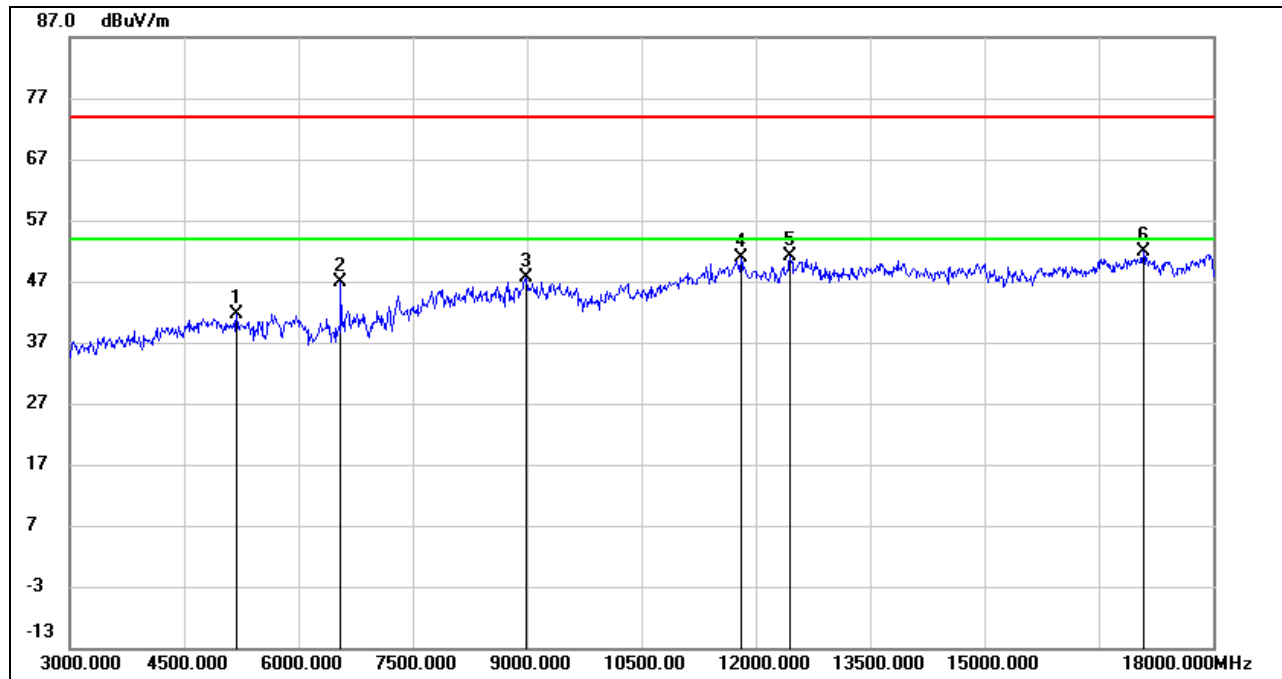**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5194.500	39.45	2.07	41.52	74.00	-32.48	peak
2	6565.500	41.50	5.30	46.80	74.00	-27.20	peak
3	8988.500	37.11	10.51	47.62	74.00	-26.38	peak
4	11817.000	35.30	15.59	50.89	74.00	-23.11	peak
5	12462.500	35.78	15.42	51.20	74.00	-22.80	peak
6	17087.000	31.25	20.58	51.83	74.00	-22.17	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



### 8.3.2. 802.11g MIMO MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

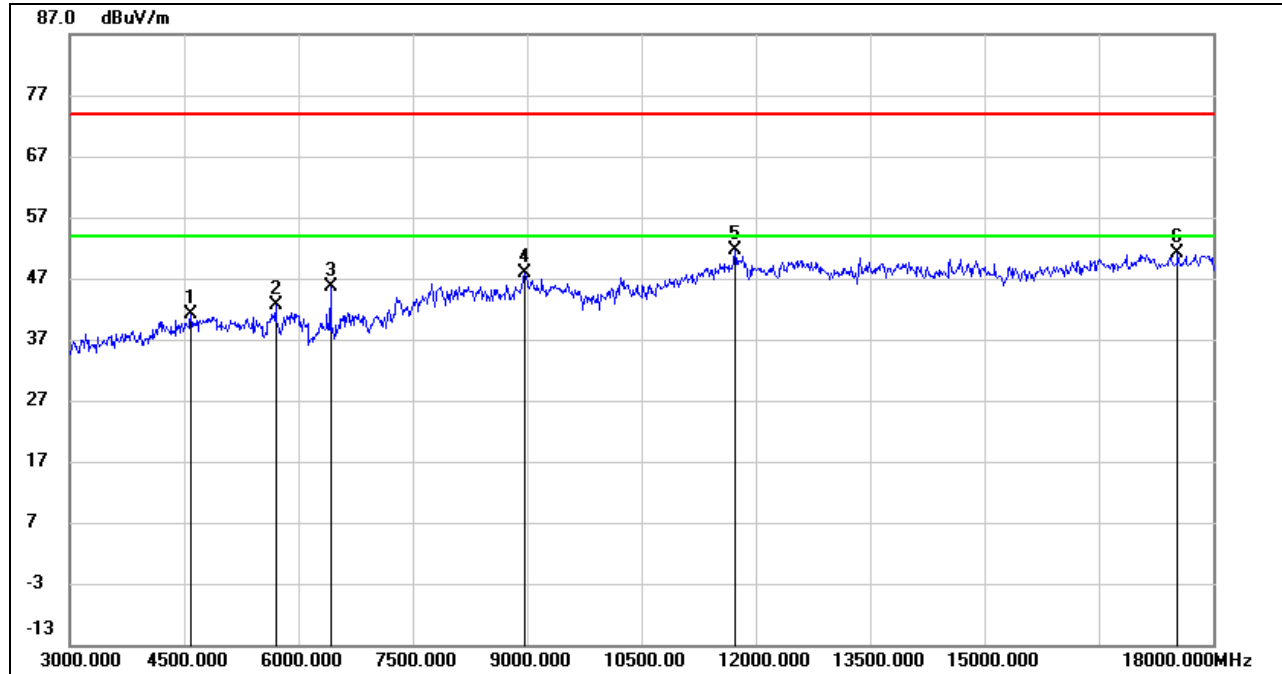

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4598.500	41.62	-0.57	41.05	74.00	-32.95	peak
2	5701.000	40.22	2.48	42.70	74.00	-31.30	peak
3	6432.000	41.00	4.55	45.55	74.00	-28.45	peak
4	8982.500	37.49	10.45	47.94	74.00	-26.06	peak
5	11730.500	36.42	15.23	51.65	74.00	-22.35	peak
6	17547.500	30.15	20.99	51.14	74.00	-22.86	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

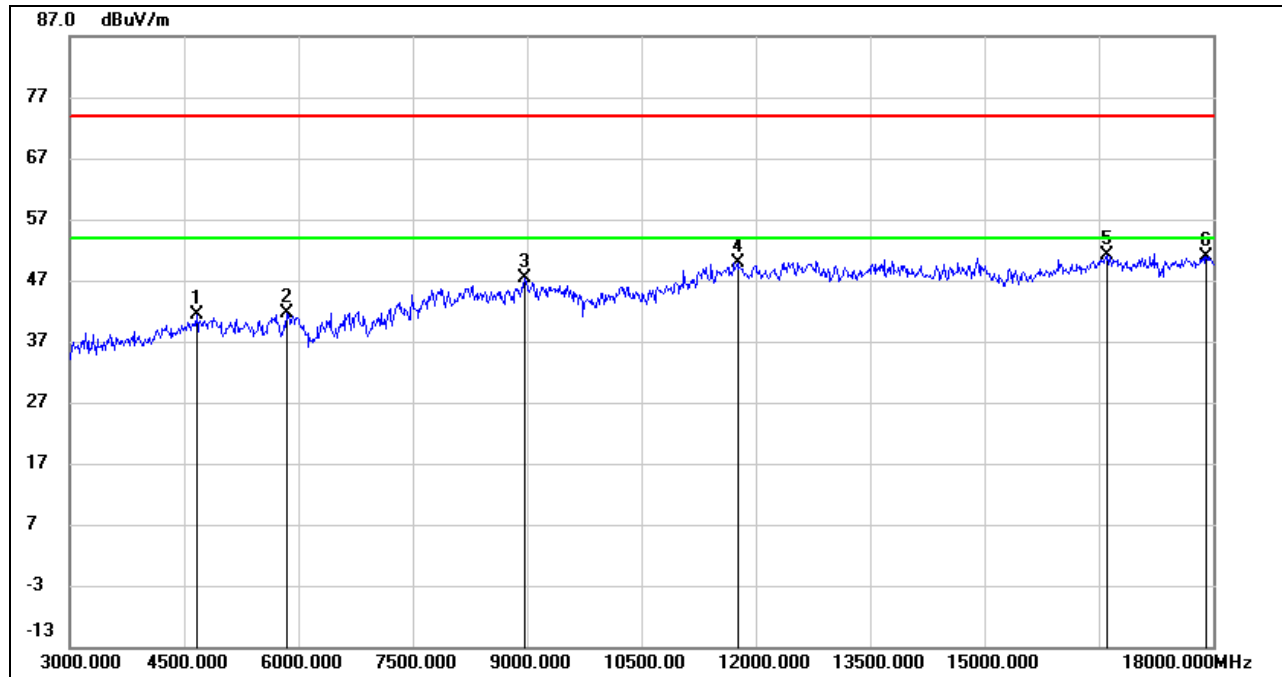**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4667.500	41.43	-0.17	41.26	74.00	-32.74	peak
2	5864.500	38.81	2.77	41.58	74.00	-32.42	peak
3	8976.000	37.09	10.38	47.47	74.00	-26.53	peak
4	11760.000	34.56	15.40	49.96	74.00	-24.04	peak
5	16609.000	31.69	19.54	51.23	74.00	-22.77	peak
6	17924.000	28.22	22.69	50.91	74.00	-23.09	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

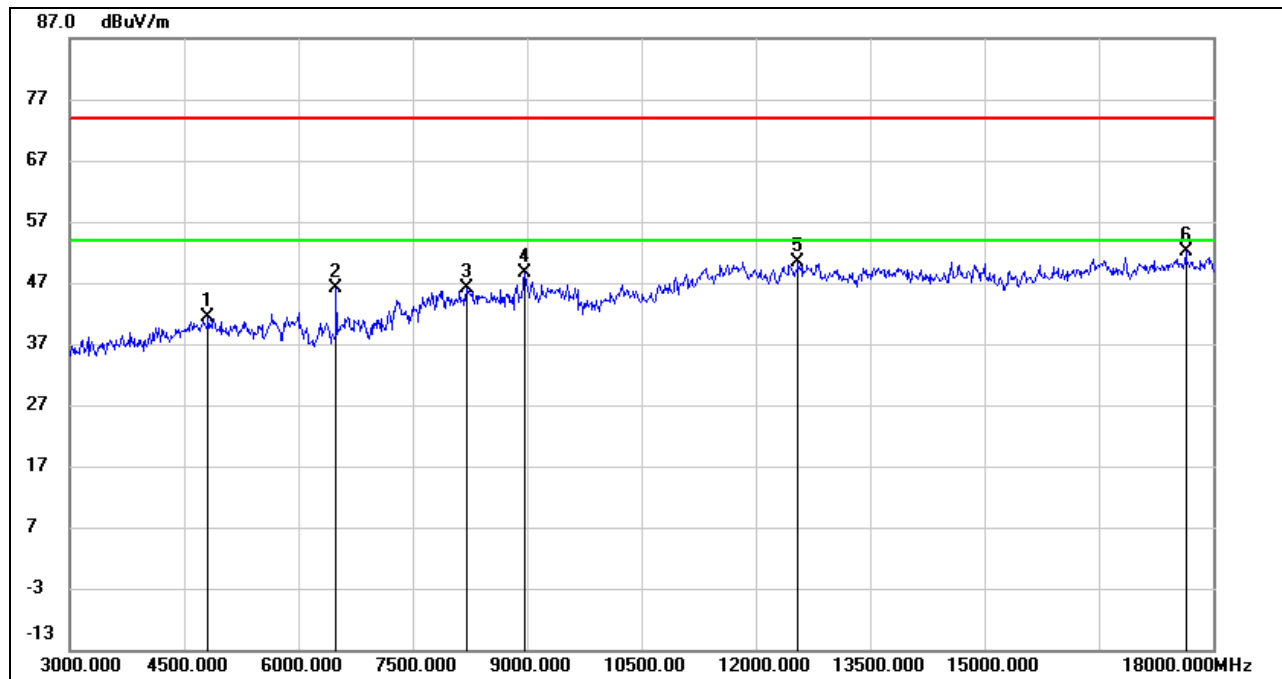**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4828.000	40.75	0.63	41.38	74.00	-32.62	peak
2	6496.500	41.11	4.90	46.01	74.00	-27.99	peak
3	8215.500	36.79	9.30	46.09	74.00	-27.91	peak
4	8984.500	38.04	10.47	48.51	74.00	-25.49	peak
5	12556.000	35.08	15.32	50.40	74.00	-23.60	peak
6	17651.000	30.68	21.56	52.24	74.00	-21.76	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.


5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

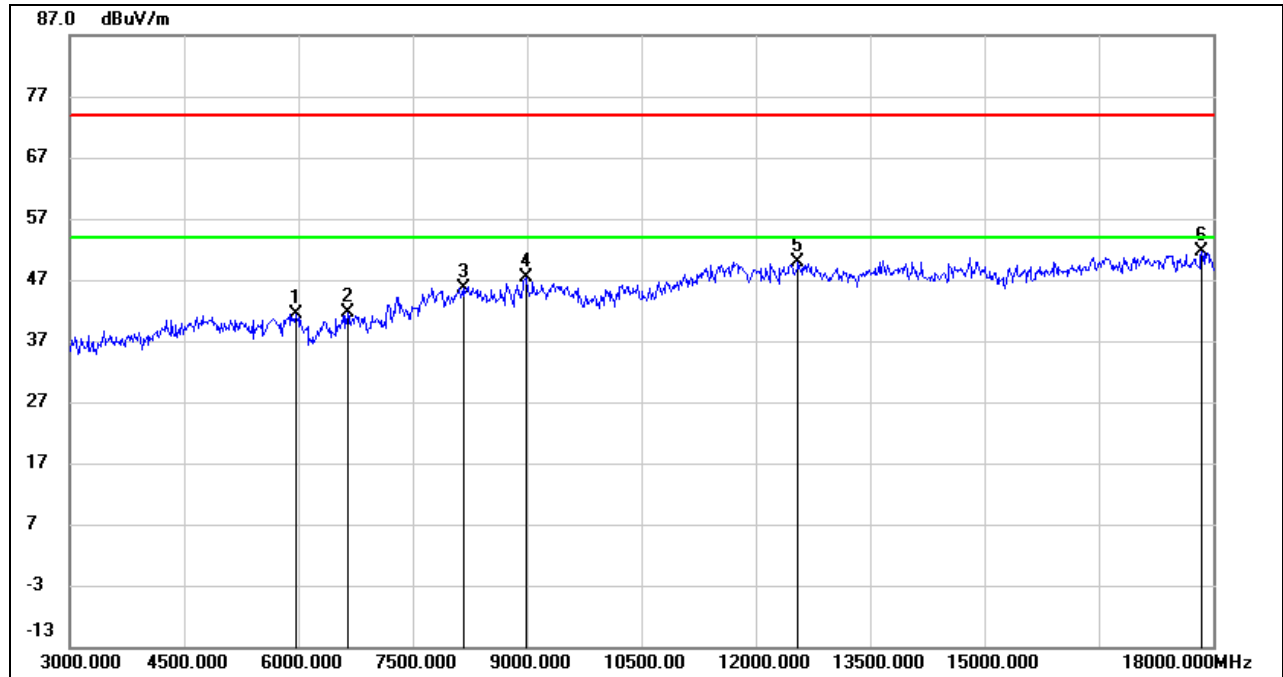

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5977.000	38.27	3.20	41.47	74.00	-32.53	peak
2	6656.000	36.15	5.52	41.67	74.00	-32.33	peak
3	8166.500	36.63	9.08	45.71	74.00	-28.29	peak
4	8987.000	36.80	10.49	47.29	74.00	-26.71	peak
5	12558.000	34.61	15.33	49.94	74.00	-24.06	peak
6	17863.000	29.02	22.70	51.72	74.00	-22.28	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

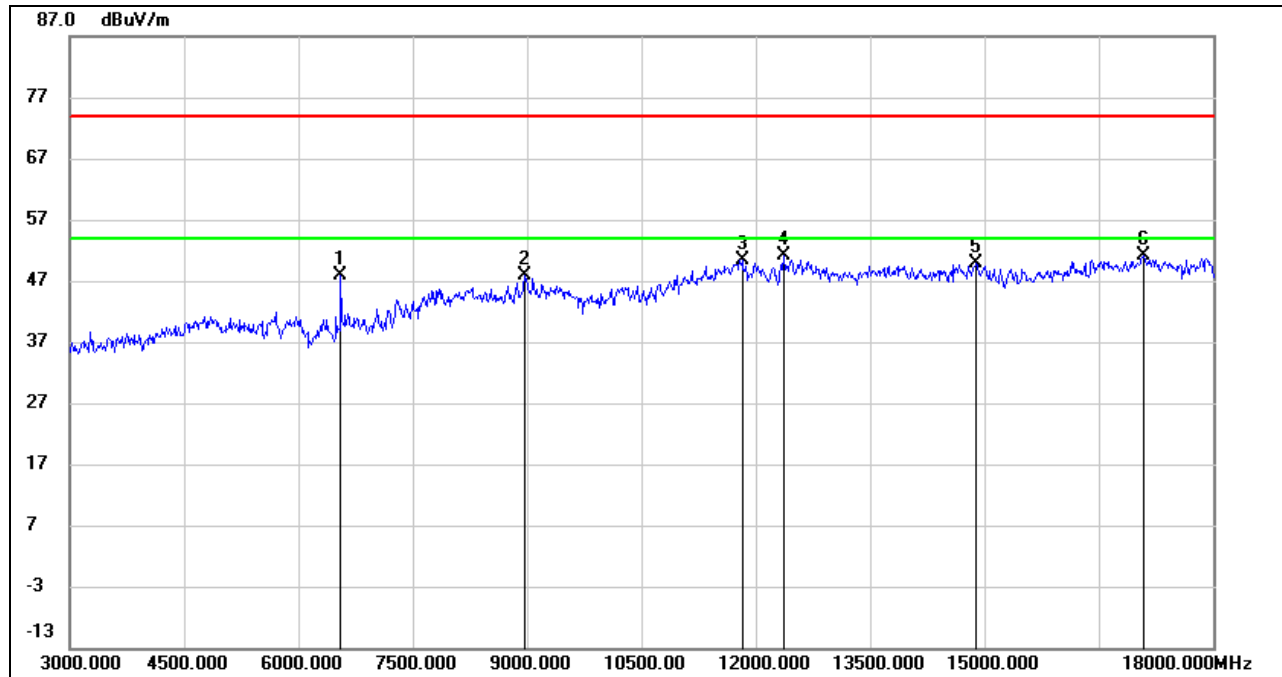**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6565.500	42.55	5.30	47.85	74.00	-26.15	peak
2	8970.500	37.52	10.32	47.84	74.00	-26.16	peak
3	11831.000	34.74	15.56	50.30	74.00	-23.70	peak
4	12365.500	35.76	15.44	51.20	74.00	-22.80	peak
5	14900.500	32.97	16.85	49.82	74.00	-24.18	peak
6	17093.500	30.47	20.60	51.07	74.00	-22.93	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

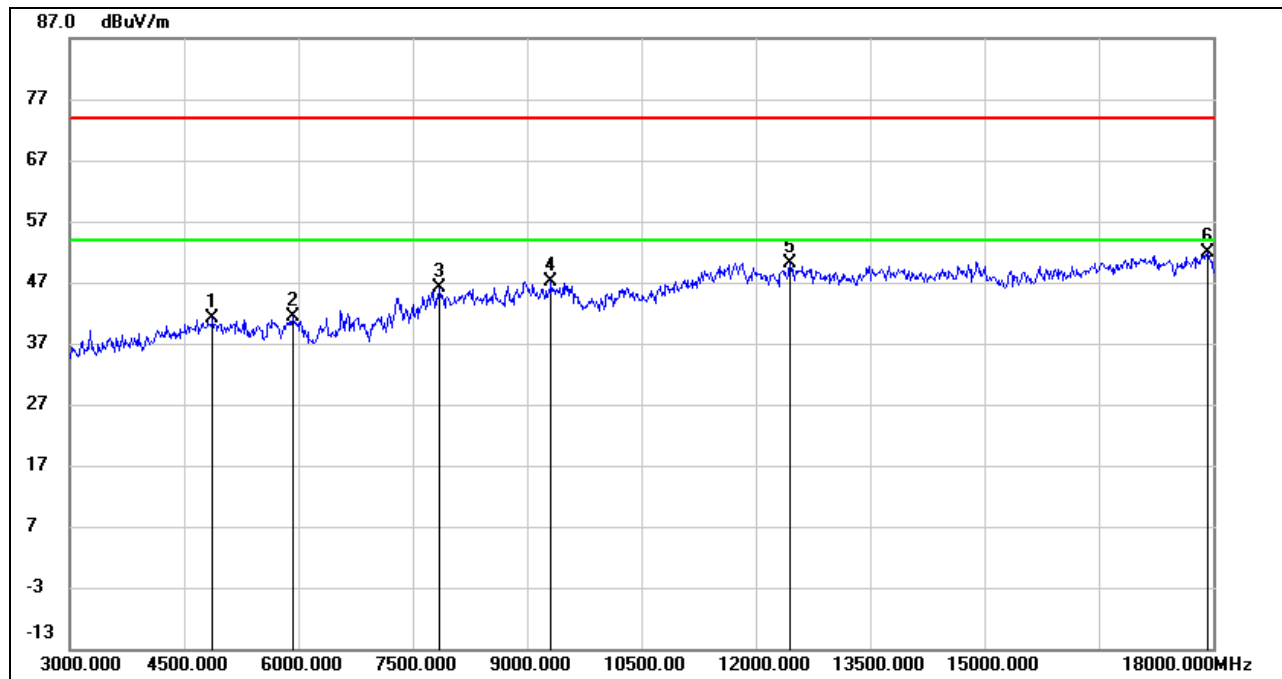**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.500	40.37	0.71	41.08	74.00	-32.92	peak
2	5928.000	38.47	3.01	41.48	74.00	-32.52	peak
3	7848.000	37.98	8.11	46.09	74.00	-27.91	peak
4	9315.500	37.28	9.88	47.16	74.00	-26.84	peak
5	12460.000	34.78	15.42	50.20	74.00	-23.80	peak
6	17925.500	29.10	22.69	51.79	74.00	-22.21	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


### 8.3.3. 802.11n HT20 MIMO MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

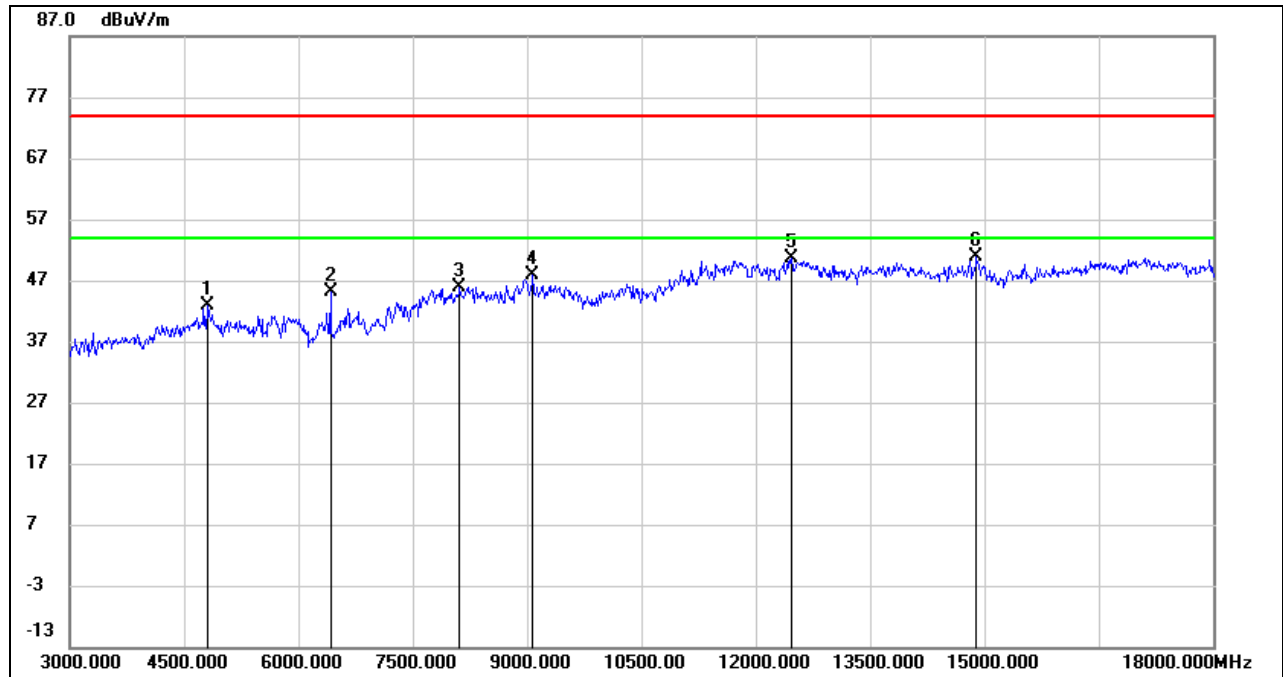

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4827.000	42.31	0.63	42.94	74.00	-31.06	peak
2	6432.500	40.54	4.55	45.09	74.00	-28.91	peak
3	8117.500	37.25	8.66	45.91	74.00	-28.09	peak
4	9076.500	37.83	10.12	47.95	74.00	-26.05	peak
5	12466.500	35.27	15.41	50.68	74.00	-23.32	peak
6	14897.000	34.06	16.85	50.91	74.00	-23.09	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

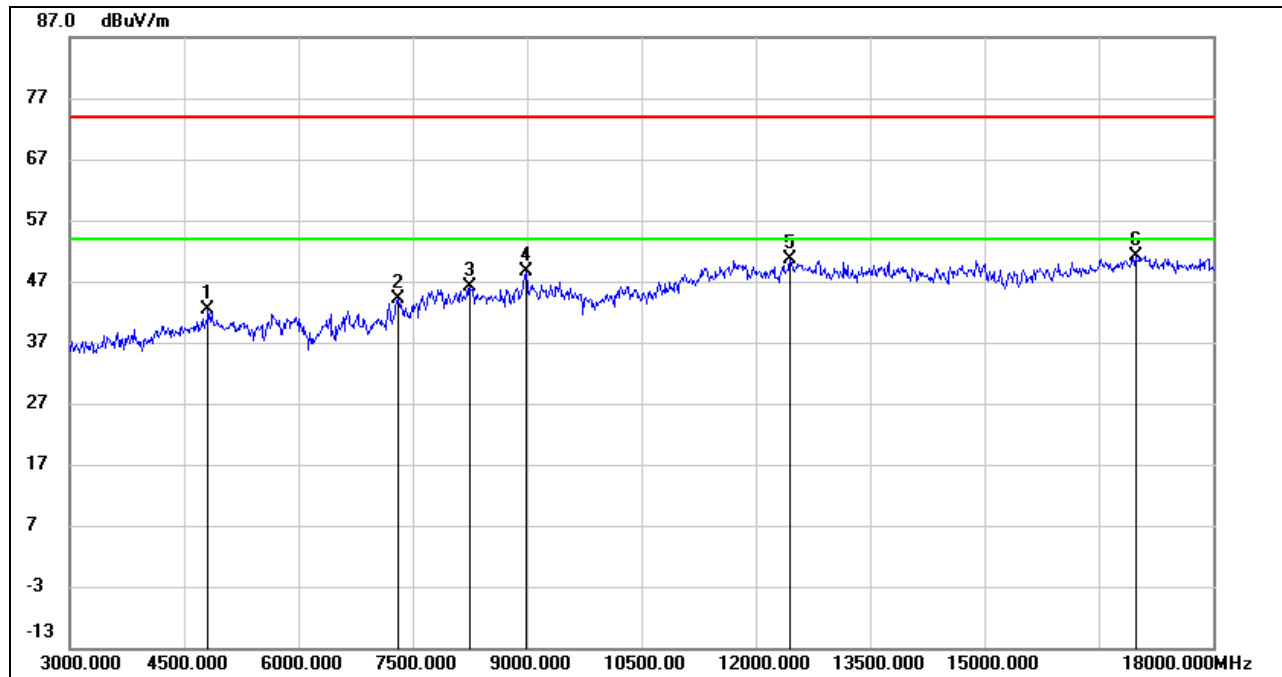**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4827.500	41.66	0.63	42.29	74.00	-31.71	peak
2	7306.000	36.78	7.37	44.15	74.00	-29.85	peak
3	8257.000	36.98	9.14	46.12	74.00	-27.88	peak
4	8997.500	38.11	10.61	48.72	74.00	-25.28	peak
5	12451.500	35.13	15.44	50.57	74.00	-23.43	peak
6	16982.000	30.98	20.19	51.17	74.00	-22.83	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

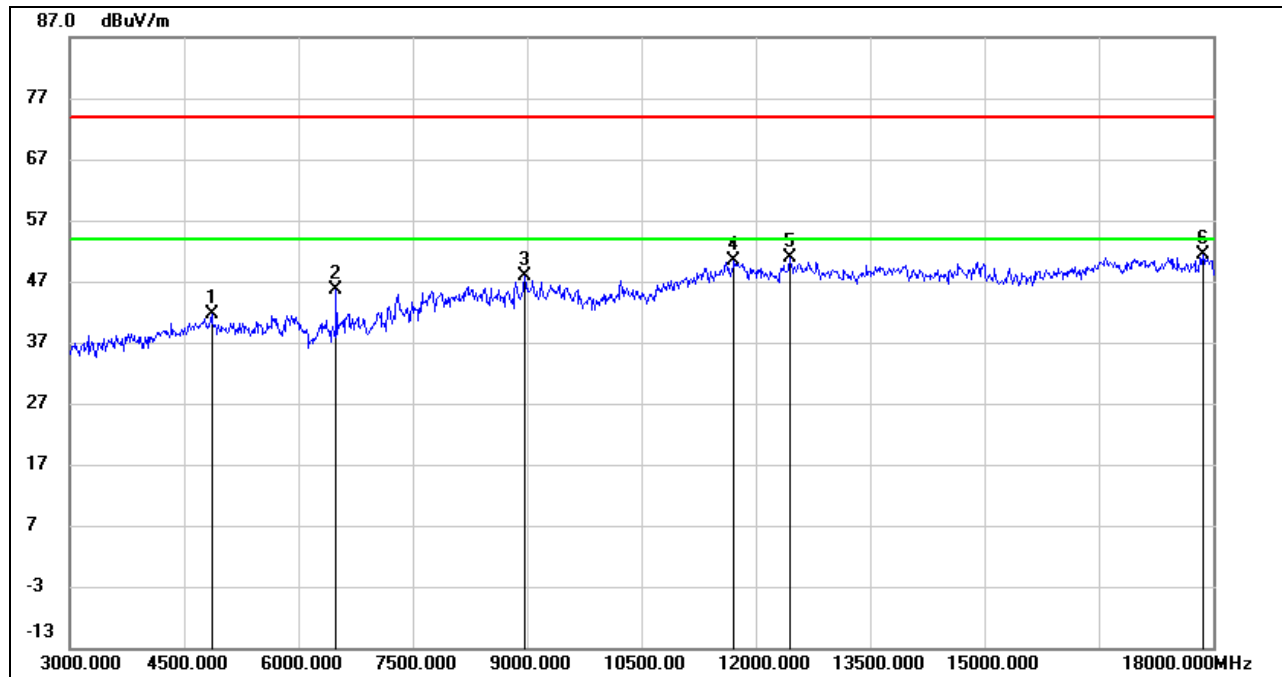


**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4870.000	41.05	0.69	41.74	74.00	-32.26	peak
2	6499.000	40.67	4.92	45.59	74.00	-28.41	peak
3	8970.000	37.57	10.32	47.89	74.00	-26.11	peak
4	11726.500	35.10	15.22	50.32	74.00	-23.68	peak
5	12461.500	35.49	15.42	50.91	74.00	-23.09	peak
6	17868.000	28.56	22.71	51.27	74.00	-22.73	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

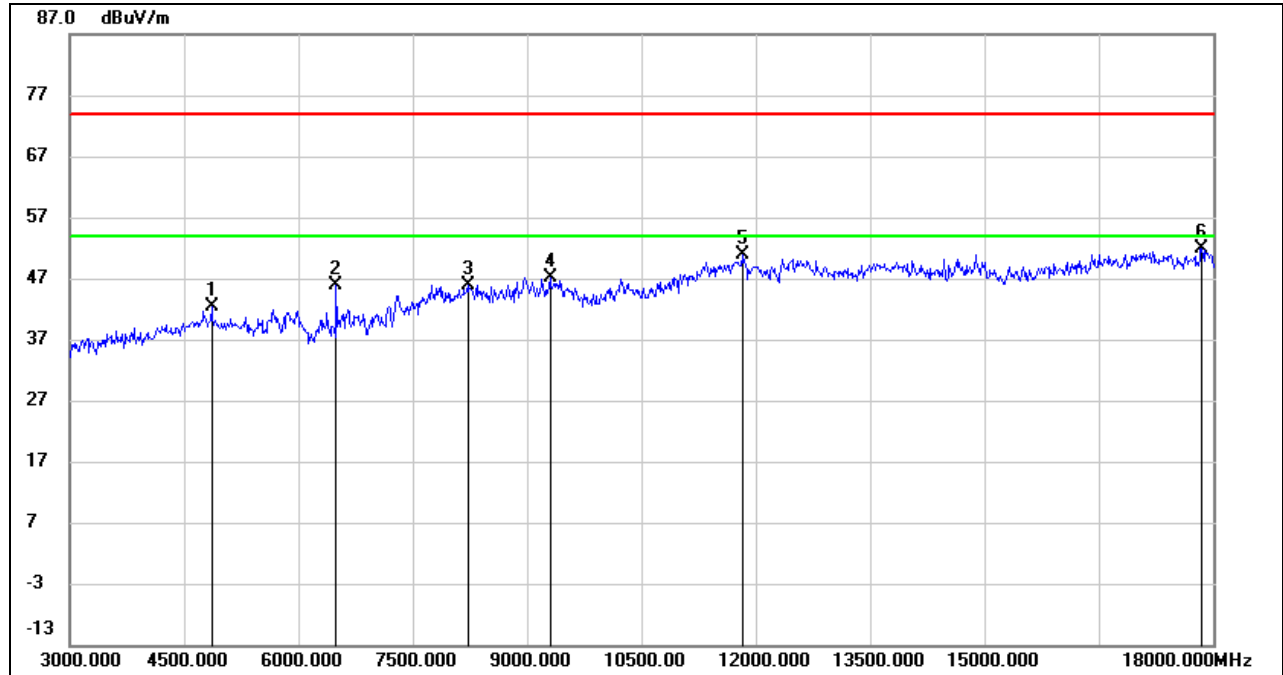

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4871.000	41.57	0.70	42.27	74.00	-31.73	peak
2	6499.000	41.05	4.92	45.97	74.00	-28.03	peak
3	8231.500	36.66	9.23	45.89	74.00	-28.11	peak
4	9306.000	37.34	9.82	47.16	74.00	-26.84	peak
5	11825.500	35.37	15.58	50.95	74.00	-23.05	peak
6	17853.000	29.25	22.71	51.96	74.00	-22.04	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

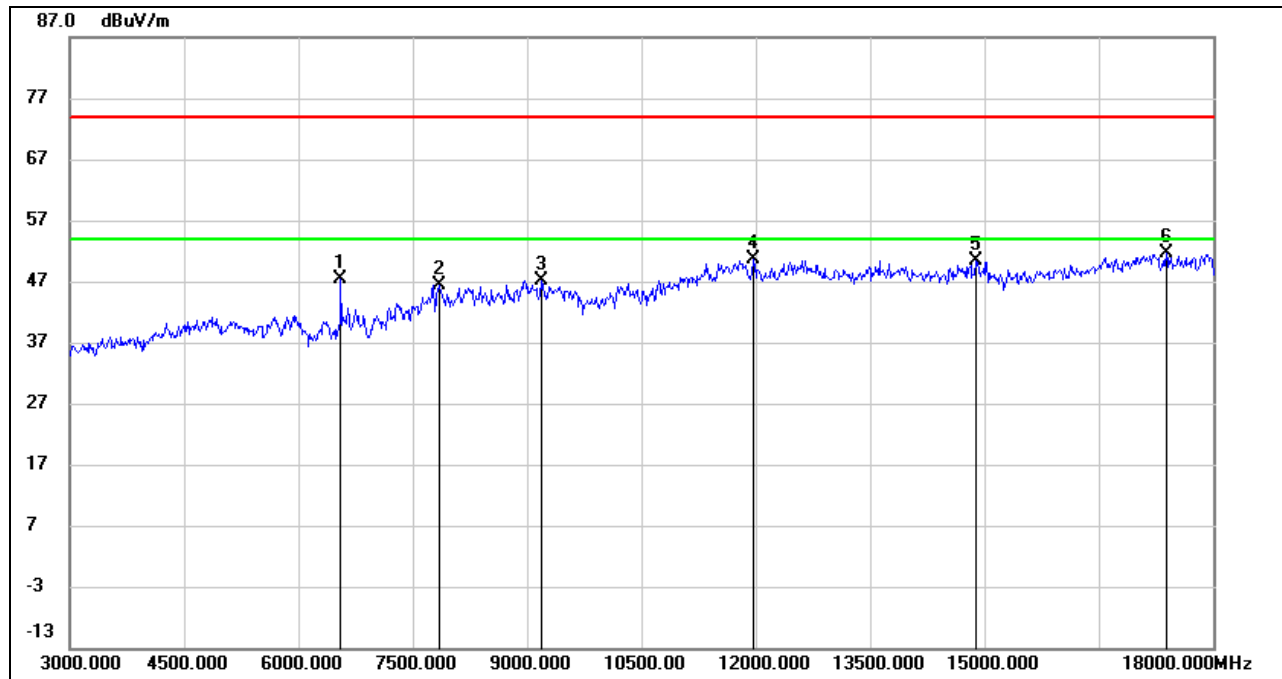**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6565.500	42.20	5.30	47.50	74.00	-26.50	peak
2	7846.500	38.35	8.12	46.47	74.00	-27.53	peak
3	9193.000	37.90	9.33	47.23	74.00	-26.77	peak
4	11977.500	35.17	15.36	50.53	74.00	-23.47	peak
5	14890.500	33.64	16.85	50.49	74.00	-23.51	peak
6	17392.500	30.87	20.74	51.61	74.00	-22.39	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

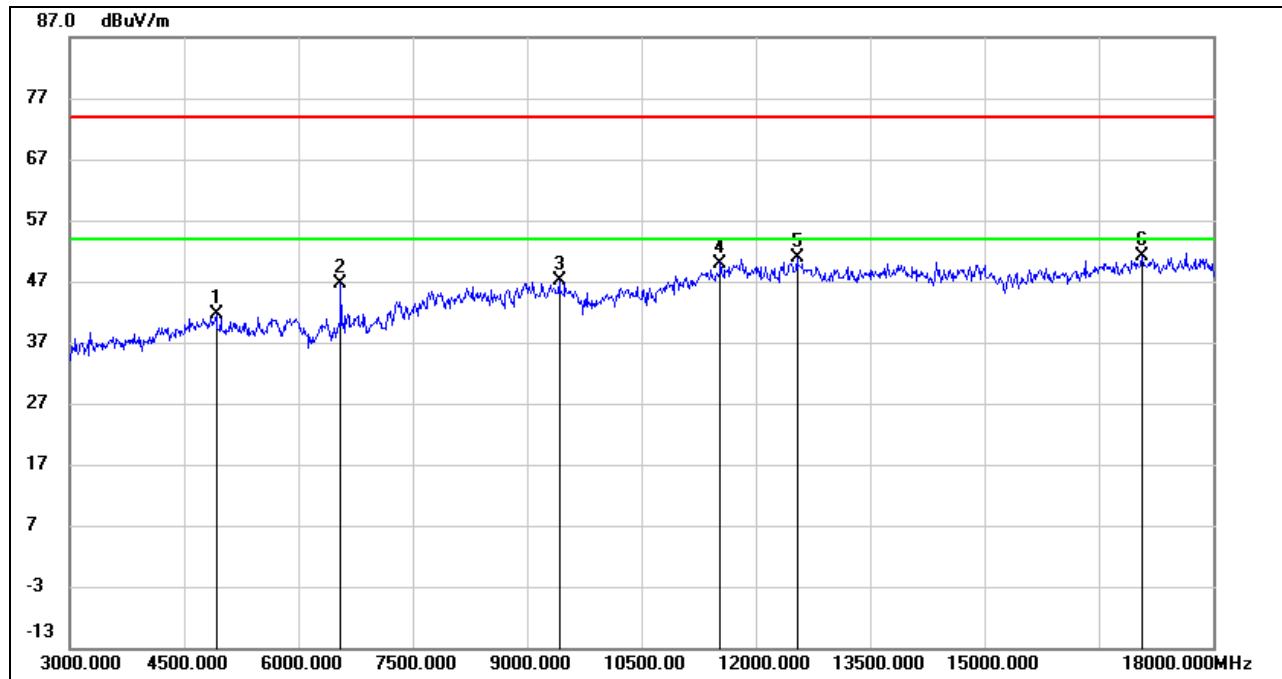**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4927.000	40.76	0.79	41.55	74.00	-32.45	peak
2	6565.000	41.44	5.30	46.74	74.00	-27.26	peak
3	9425.000	36.72	10.35	47.07	74.00	-26.93	peak
4	11546.500	35.57	14.43	50.00	74.00	-24.00	peak
5	12542.500	35.49	15.34	50.83	74.00	-23.17	peak
6	17083.000	30.49	20.57	51.06	74.00	-22.94	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


### 8.3.4. 802.11n HT40 MIMO MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

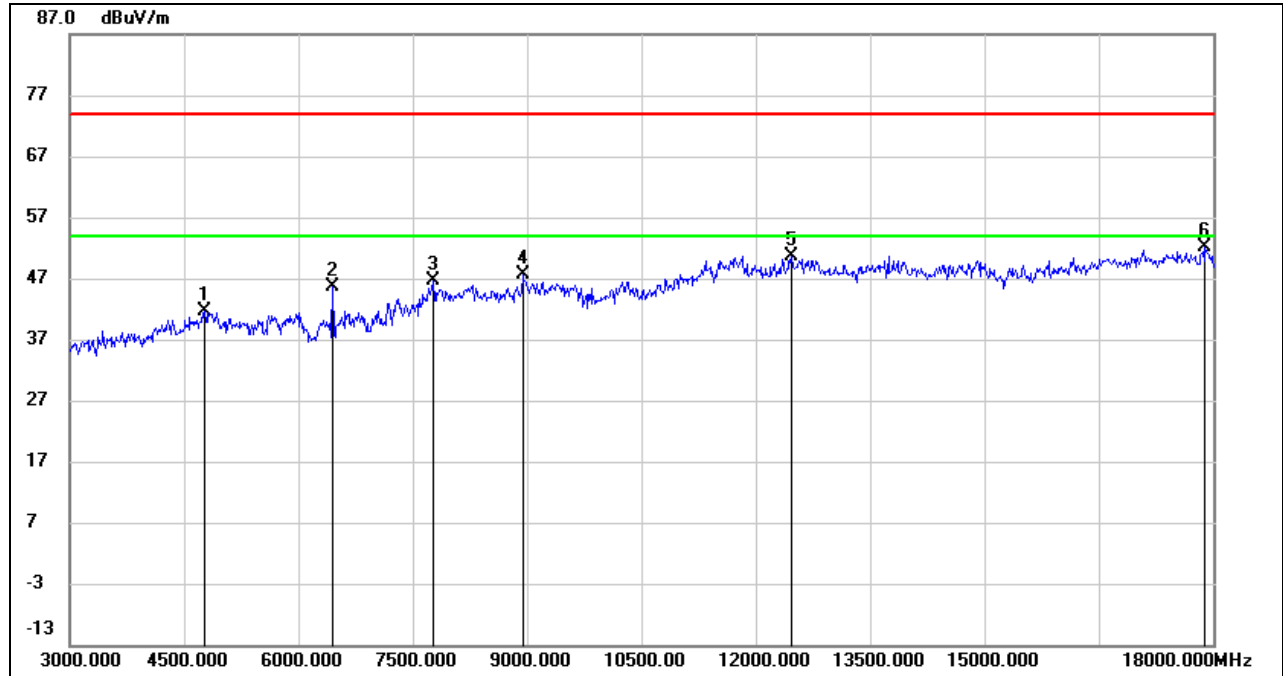

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4778.500	41.12	0.46	41.58	74.00	-32.42	peak
2	6458.500	40.91	4.70	45.61	74.00	-28.39	peak
3	7772.500	38.40	8.15	46.55	74.00	-27.45	peak
4	8951.000	37.51	10.11	47.62	74.00	-26.38	peak
5	12473.500	35.12	15.41	50.53	74.00	-23.47	peak
6	17909.000	29.52	22.69	52.21	74.00	-21.79	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

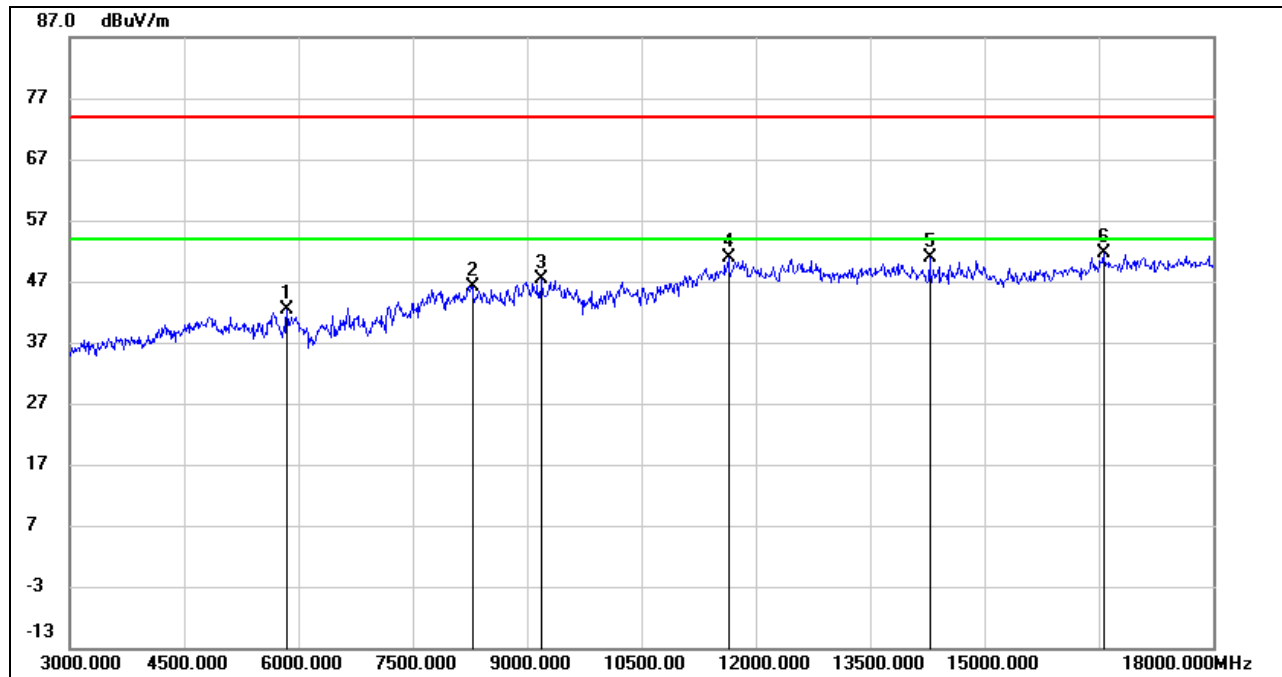**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5861.500	39.71	2.75	42.46	74.00	-31.54	peak
2	8288.500	37.22	9.02	46.24	74.00	-27.76	peak
3	9206.500	38.07	9.32	47.39	74.00	-26.61	peak
4	11642.500	36.03	14.74	50.77	74.00	-23.23	peak
5	14285.500	34.08	16.78	50.86	74.00	-23.14	peak
6	16560.500	32.31	19.37	51.68	74.00	-22.32	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

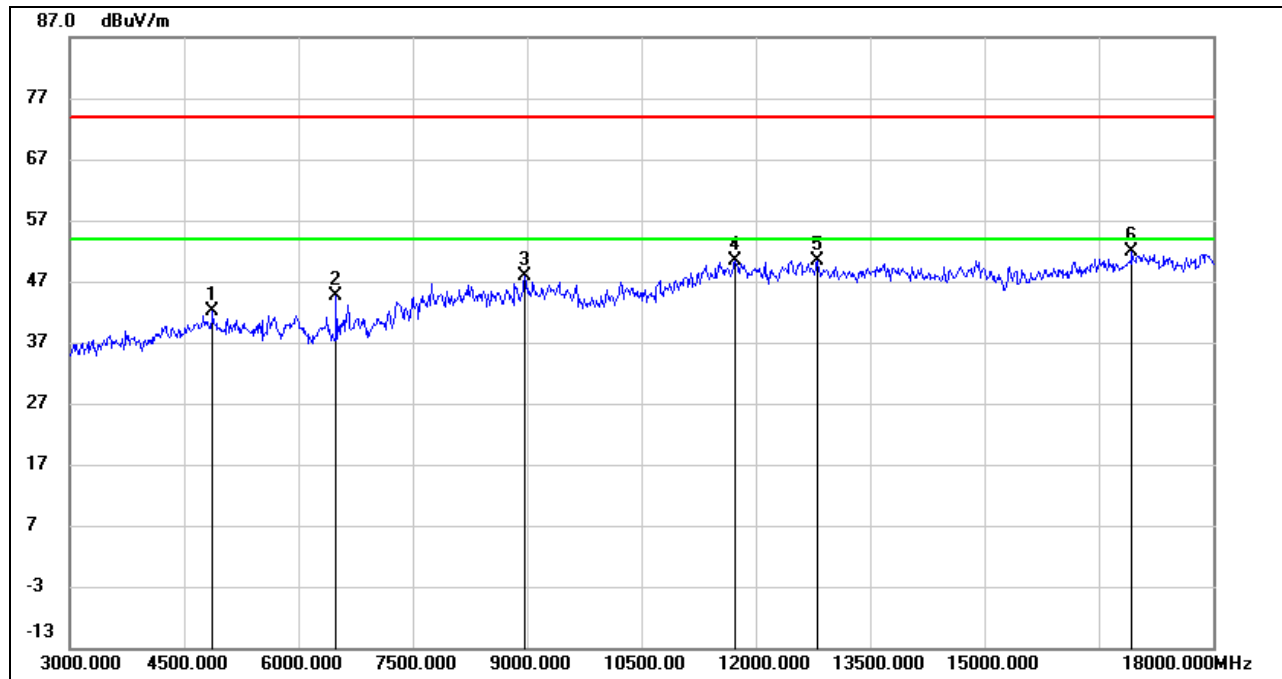**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4876.500	41.41	0.71	42.12	74.00	-31.88	peak
2	6499.000	39.83	4.92	44.75	74.00	-29.25	peak
3	8979.000	37.47	10.41	47.88	74.00	-26.12	peak
4	11740.000	35.10	15.28	50.38	74.00	-23.62	peak
5	12814.500	34.78	15.64	50.42	74.00	-23.58	peak
6	16941.000	31.79	20.09	51.88	74.00	-22.12	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

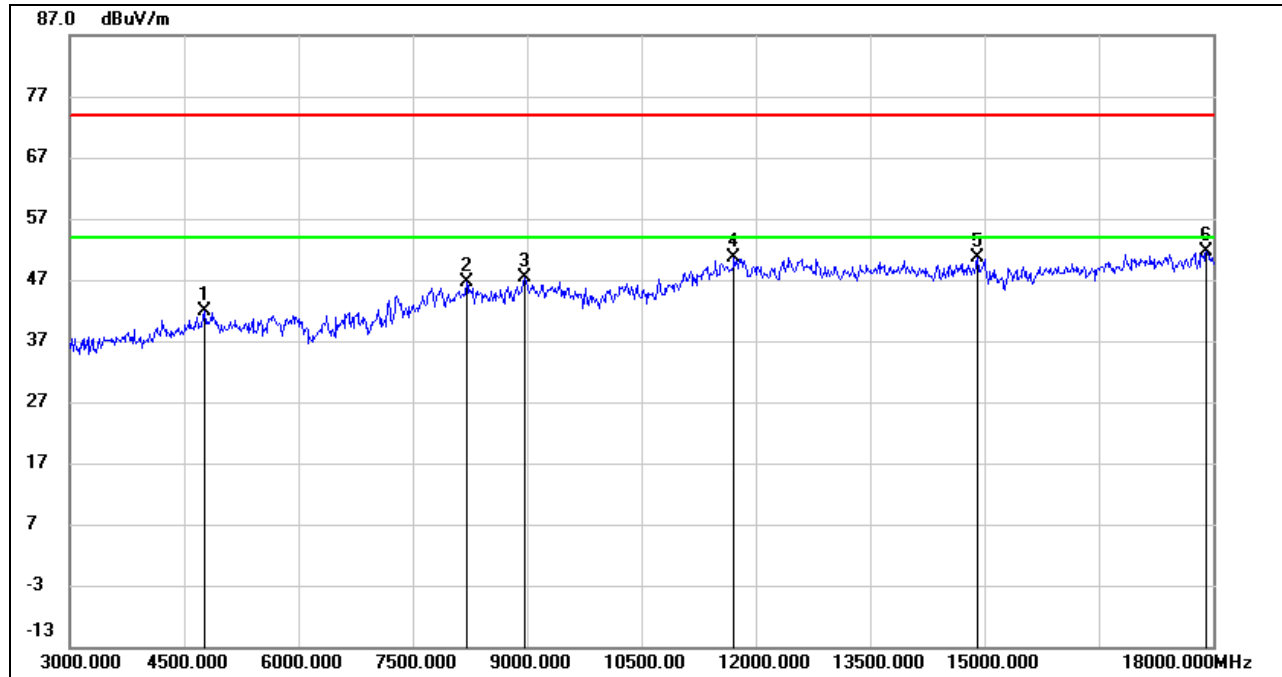**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4778.500	41.35	0.46	41.81	74.00	-32.19	peak
2	8218.500	37.46	9.29	46.75	74.00	-27.25	peak
3	8974.000	37.06	10.36	47.42	74.00	-26.58	peak
4	11727.500	35.42	15.22	50.64	74.00	-23.36	peak
5	14914.000	33.68	16.86	50.54	74.00	-23.46	peak
6	17914.500	28.89	22.69	51.58	74.00	-22.42	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

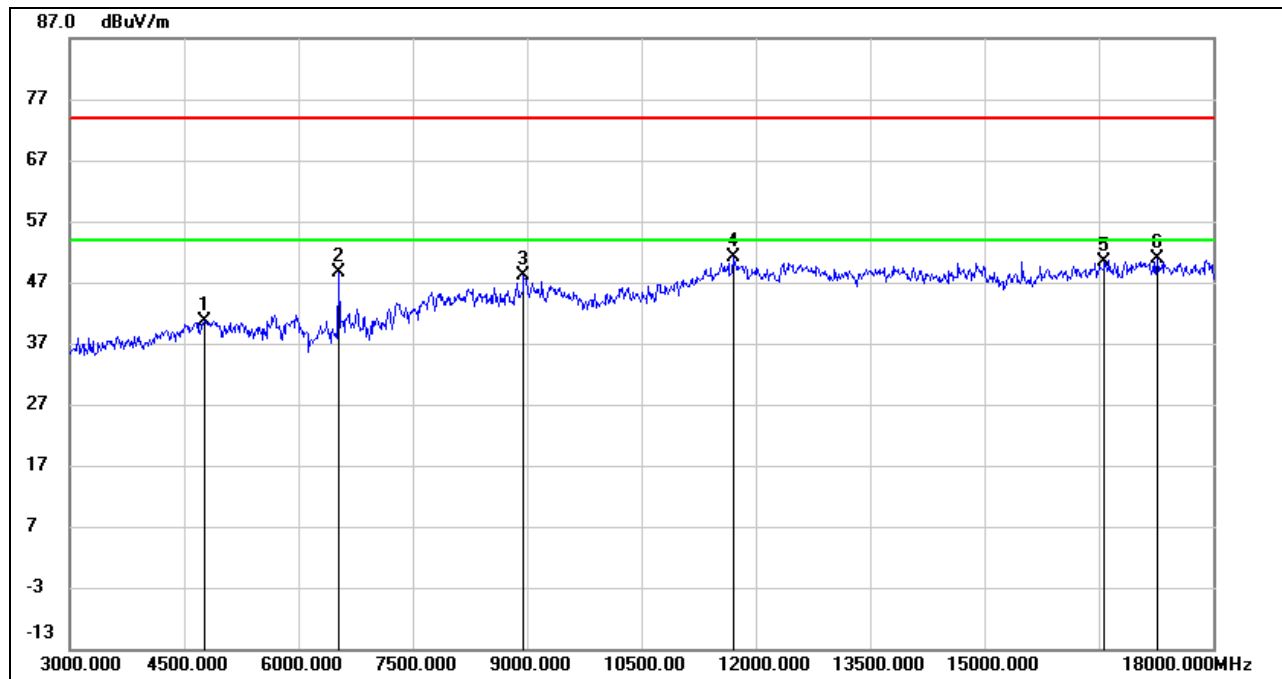

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4780.000	40.18	0.48	40.66	74.00	-33.34	peak
2	6538.500	43.45	5.14	48.59	74.00	-25.41	peak
3	8968.500	37.95	10.29	48.24	74.00	-25.76	peak
4	11714.500	35.93	15.14	51.07	74.00	-22.93	peak
5	16576.500	30.91	19.43	50.34	74.00	-23.66	peak
6	17273.500	30.02	20.93	50.95	74.00	-23.05	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

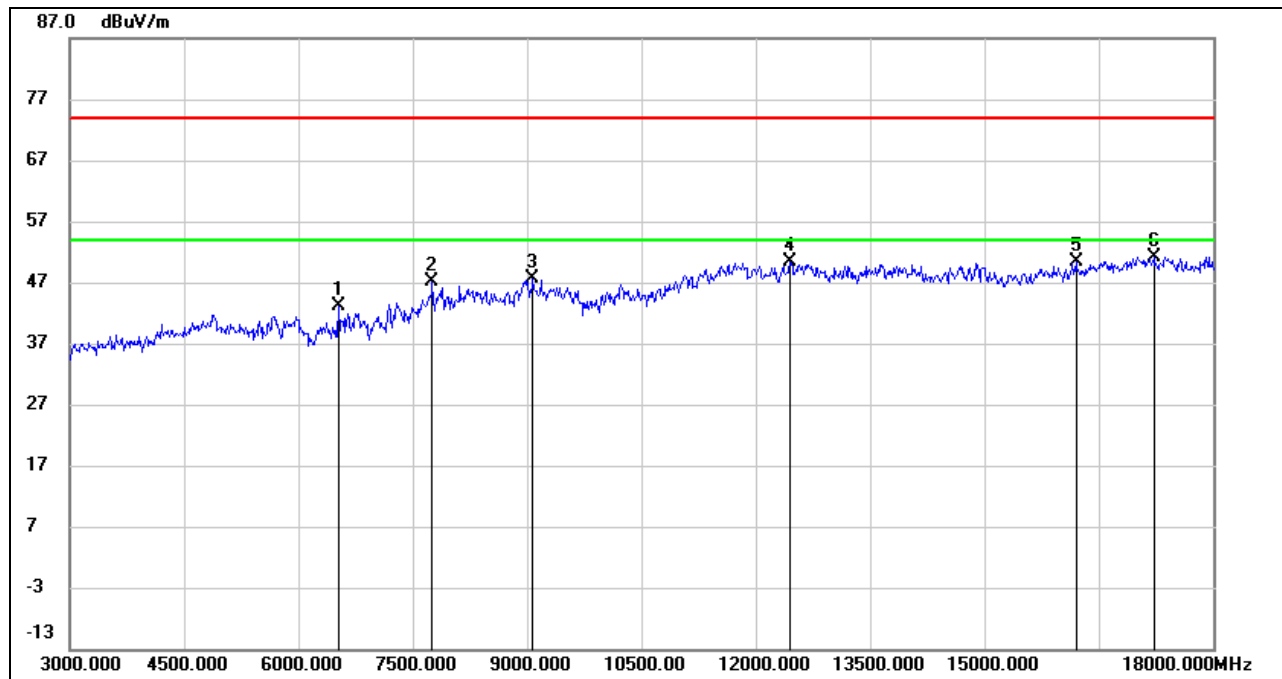**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6538.500	37.96	5.14	43.10	74.00	-30.90	peak
2	7763.000	39.03	8.11	47.14	74.00	-26.86	peak
3	9085.000	37.64	10.06	47.70	74.00	-26.30	peak
4	12462.500	35.06	15.42	50.48	74.00	-23.52	peak
5	16202.000	32.42	17.87	50.29	74.00	-23.71	peak
6	17223.000	30.15	21.00	51.15	74.00	-22.85	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

## 8.5. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)

### 8.5.1. 802.11n HT40 MIMO MODE

#### SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

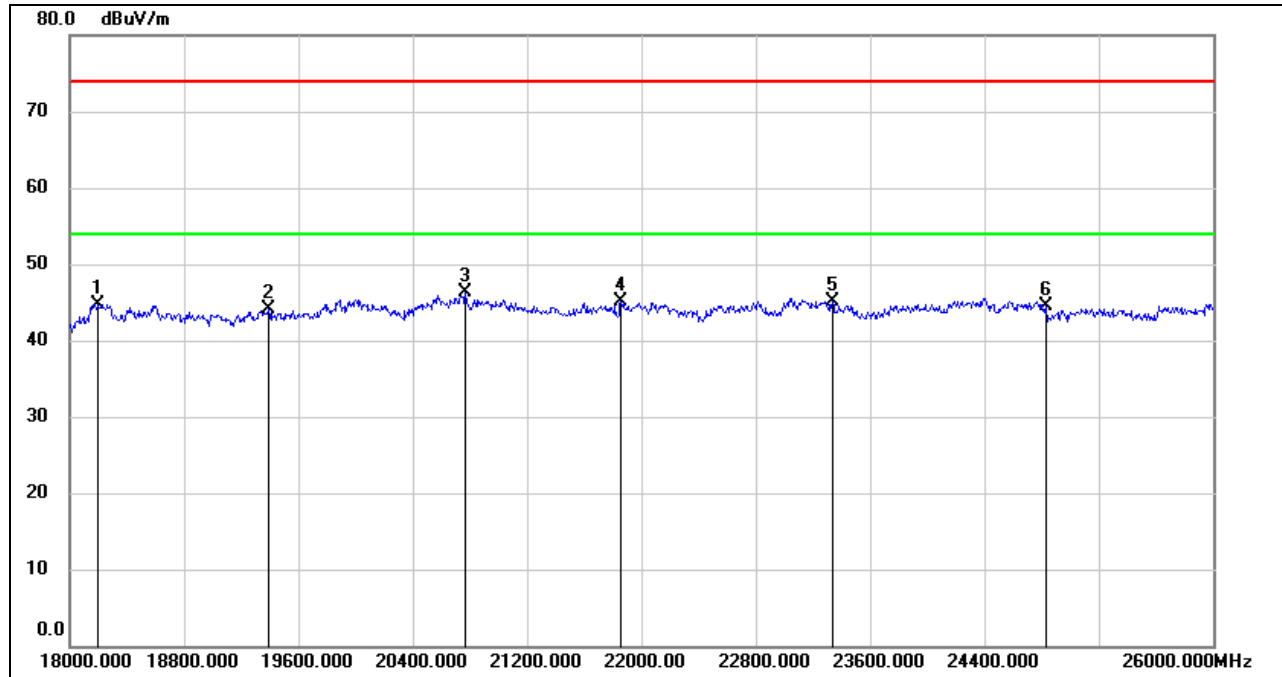

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18200.000	50.29	-5.52	44.77	74.00	-29.23	peak
2	19392.000	49.62	-5.57	44.05	74.00	-29.95	peak
3	20768.000	51.31	-5.10	46.21	74.00	-27.79	peak
4	21856.000	49.52	-4.39	45.13	74.00	-28.87	peak
5	23336.000	48.35	-3.28	45.07	74.00	-28.93	peak
6	24832.000	46.70	-2.24	44.46	74.00	-29.54	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.



**SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

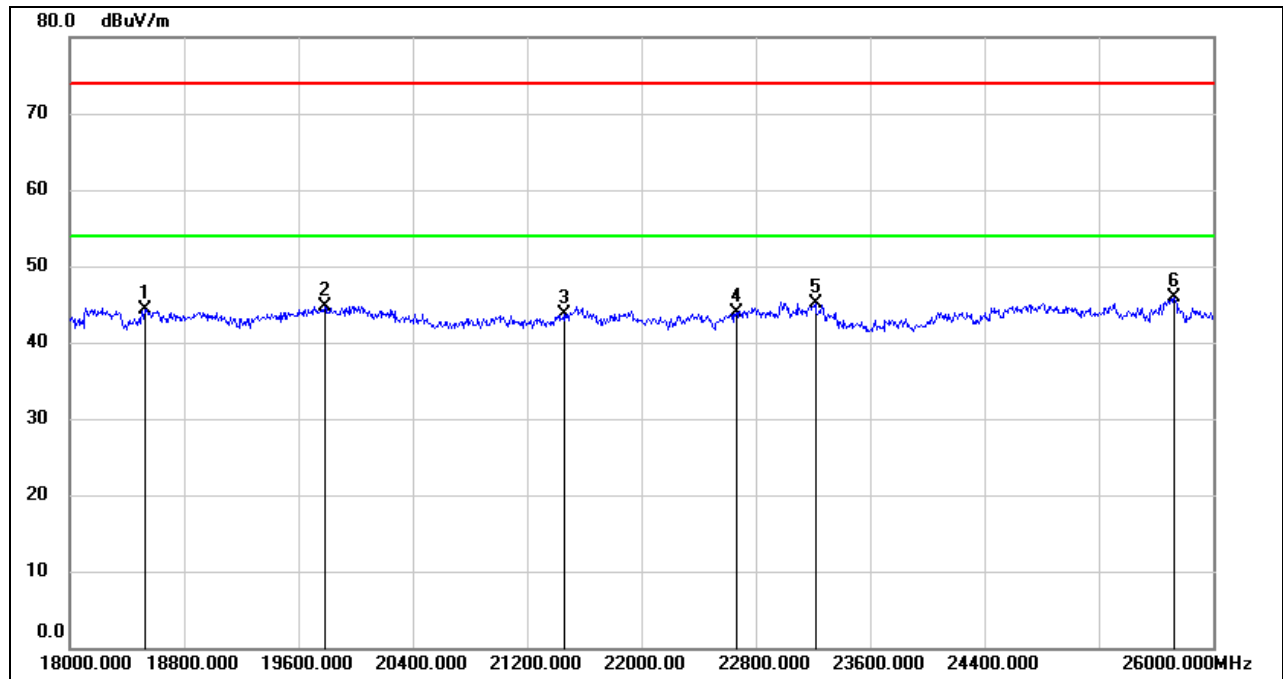

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18528.000	49.61	-5.26	44.35	74.00	-29.65	peak
2	19784.000	50.07	-5.28	44.79	74.00	-29.21	peak
3	21456.000	48.35	-4.70	43.65	74.00	-30.35	peak
4	22664.000	47.71	-3.76	43.95	74.00	-30.05	peak
5	23216.000	48.51	-3.38	45.13	74.00	-28.87	peak
6	25728.000	46.61	-0.72	45.89	74.00	-28.11	peak


- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

Note: All the modes had been tested, but only the worst data was recorded in the report.

## 8.6. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)

### 8.6.1. 802.11n HT40 MIMO MODE


#### SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

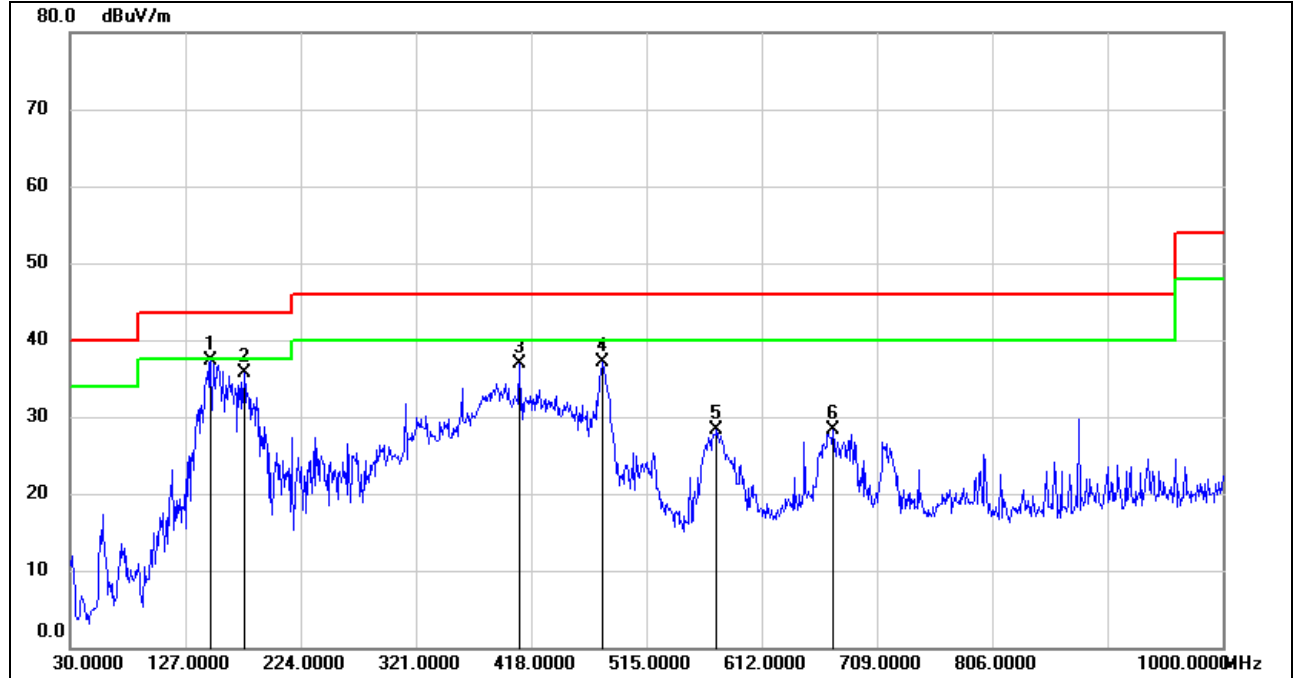

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	148.3400	55.60	-18.36	37.24	43.50	-6.26	QP
2	176.4700	52.79	-17.02	35.77	43.50	-7.73	QP
3	408.3000	50.16	-13.17	36.99	46.00	-9.01	QP
4	478.1400	49.01	-11.83	37.18	46.00	-8.82	QP
5	574.1700	38.34	-10.04	28.30	46.00	-17.70	QP
6	672.1400	36.87	-8.64	28.23	46.00	-17.77	QP

- Note: 1. Result Level = Read Level + Correct Factor.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

**SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

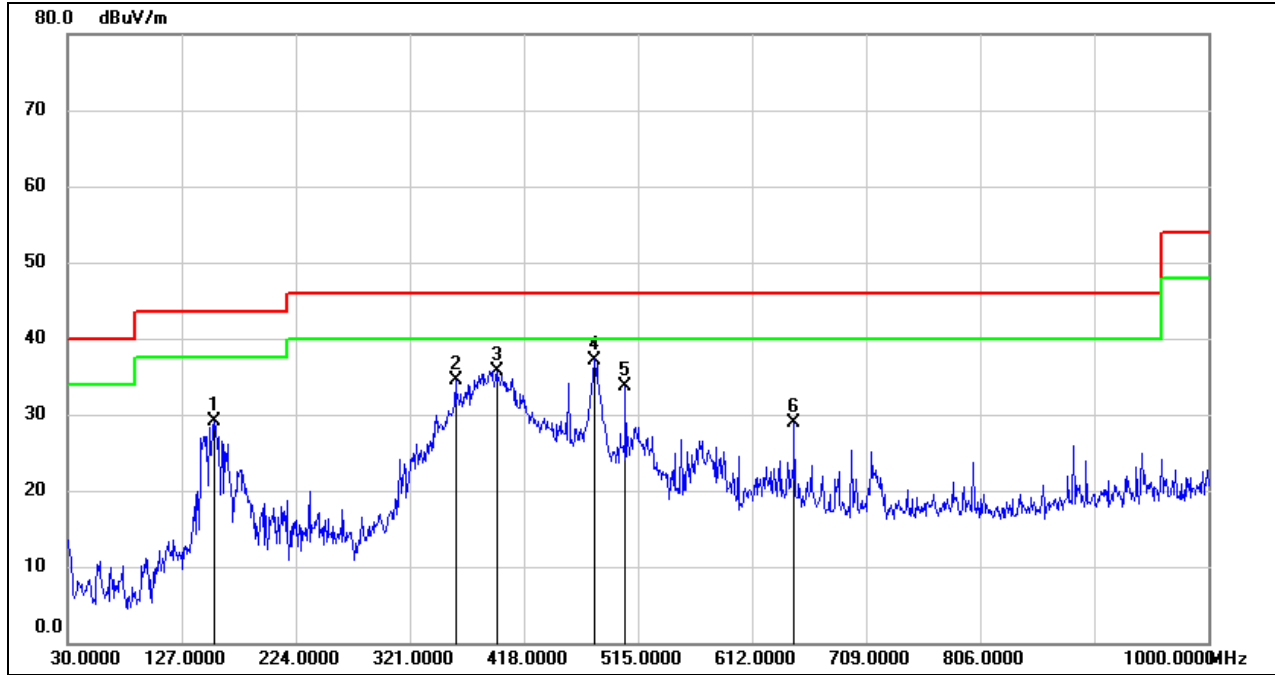

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	154.1600	47.13	-18.06	29.07	43.50	-14.43	QP
2	359.8000	48.68	-14.10	34.58	46.00	-11.42	QP
3	394.7200	49.22	-13.43	35.79	46.00	-10.21	QP
4	478.1400	49.03	-11.83	37.20	46.00	-8.80	QP
5	504.3300	45.15	-11.37	33.78	46.00	-12.22	QP
6	647.8900	38.00	-9.05	28.95	46.00	-17.05	QP

- Note: 1. Result Level = Read Level + Correct Factor.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto


Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

## 8.7. SPURIOUS EMISSIONS BELOW 30 MHz

### 8.7.1. 802.11n HT40 MIMO MODE

#### SPURIOUS EMISSIONS (HIGH CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9 kHz ~ 150 kHz

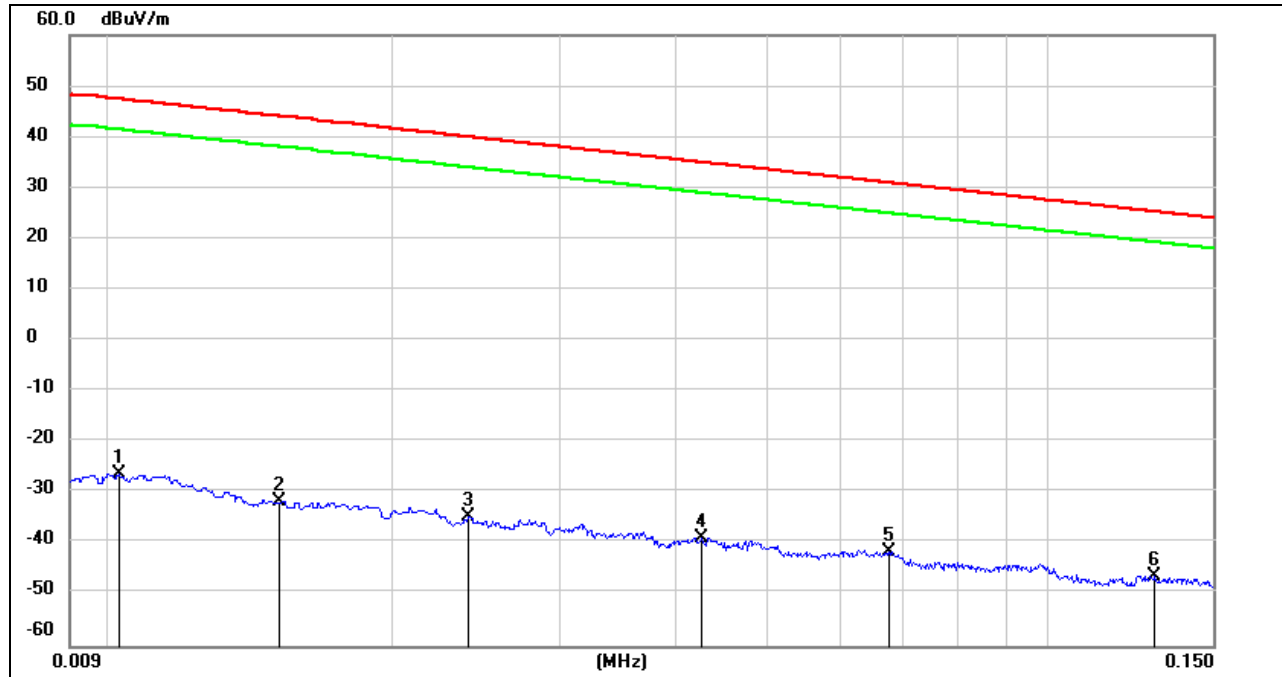

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0102	75.05	-101.40	-26.35	47.43	-77.85	-4.07	-73.78	peak
2	0.0151	69.71	-101.37	-31.66	44.02	-83.16	-7.48	-75.68	peak
3	0.0240	66.82	-101.36	-34.54	40	-86.04	-11.50	-74.54	peak
4	0.0427	62.64	-101.45	-38.81	34.99	-90.31	-16.51	-73.80	peak
5	0.0675	60.14	-101.56	-41.42	31.02	-92.92	-20.48	-72.44	peak
6	0.1300	55.43	-101.70	-46.27	25.33	-97.77	-26.17	-71.60	peak


Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



**150 kHz ~ 490 kHz**

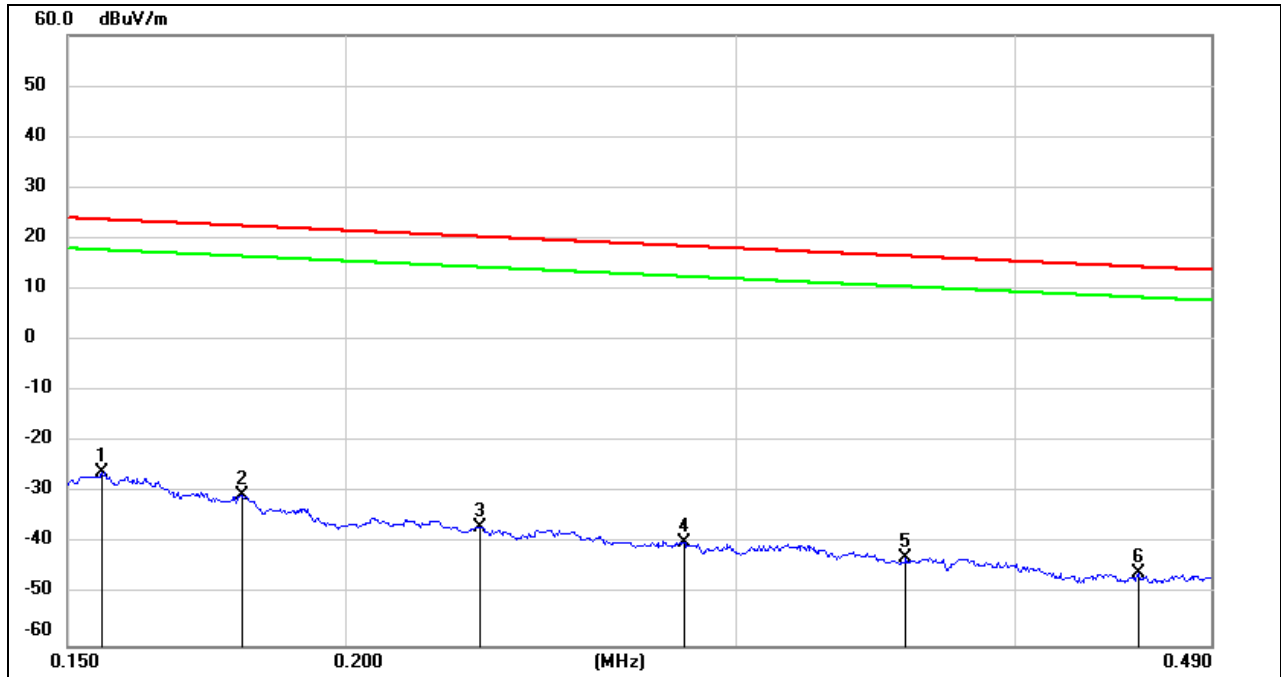

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1554	75.77	-101.65	-25.88	23.77	-77.38	-27.73	-49.65	peak
2	0.1800	71.15	-101.68	-30.53	22.5	-82.03	-29.00	-53.03	peak
3	0.2298	65.05	-101.77	-36.72	20.37	-88.22	-31.13	-57.09	peak
4	0.2837	62.22	-101.83	-39.61	18.54	-91.11	-32.96	-58.15	peak
5	0.3573	59.08	-101.91	-42.83	16.54	-94.33	-34.96	-59.37	peak
6	0.4550	56.14	-102.02	-45.88	14.44	-97.38	-37.06	-60.32	peak


Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



**490 kHz ~ 30 MHz**

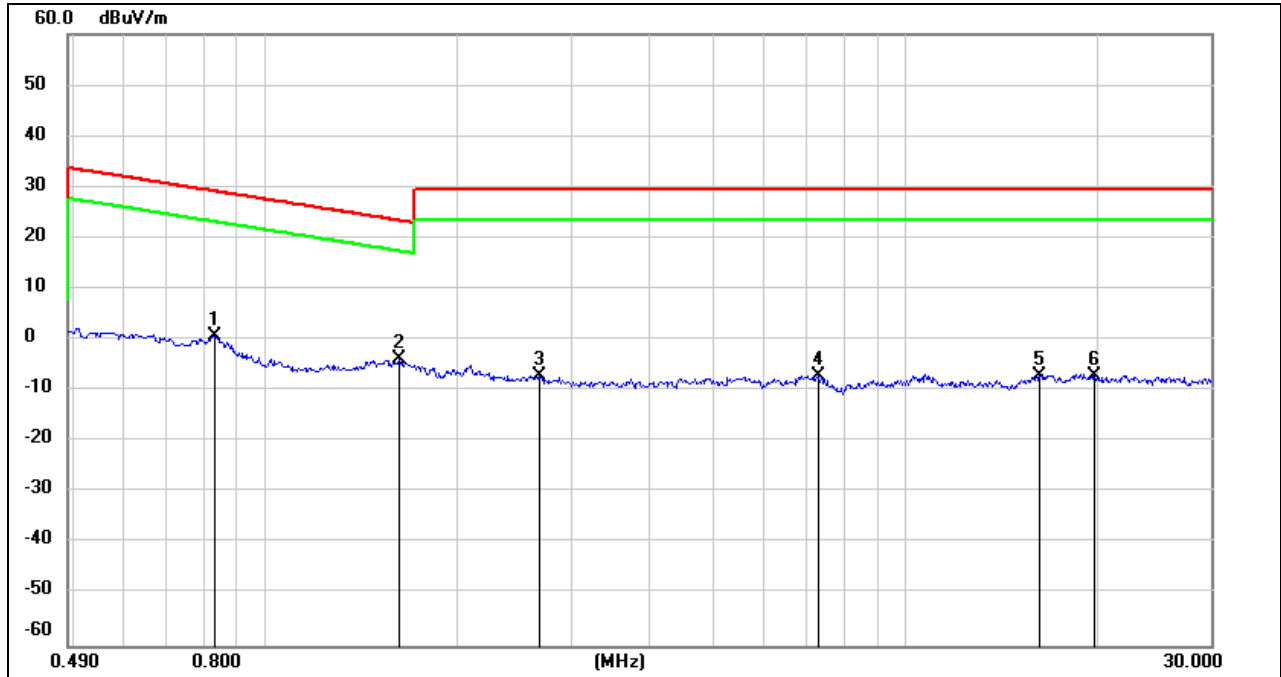

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.8296	62.94	-62.17	0.77	29.23	-50.73	-22.27	-28.46	peak
2	1.6149	58.12	-62.00	-3.88	23.44	-55.38	-28.06	-27.32	peak
3	2.6737	54.64	-61.65	-7.01	29.54	-58.51	-21.96	-36.55	peak
4	7.3361	54.08	-61.17	-7.09	29.54	-58.59	-21.96	-36.63	peak
5	16.1890	53.95	-60.97	-7.02	29.54	-58.52	-21.96	-36.56	peak
6	19.7895	53.92	-60.84	-6.92	29.54	-58.42	-21.96	-36.46	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

## 9. AC POWER LINE CONDUCTED EMISSIONS


### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

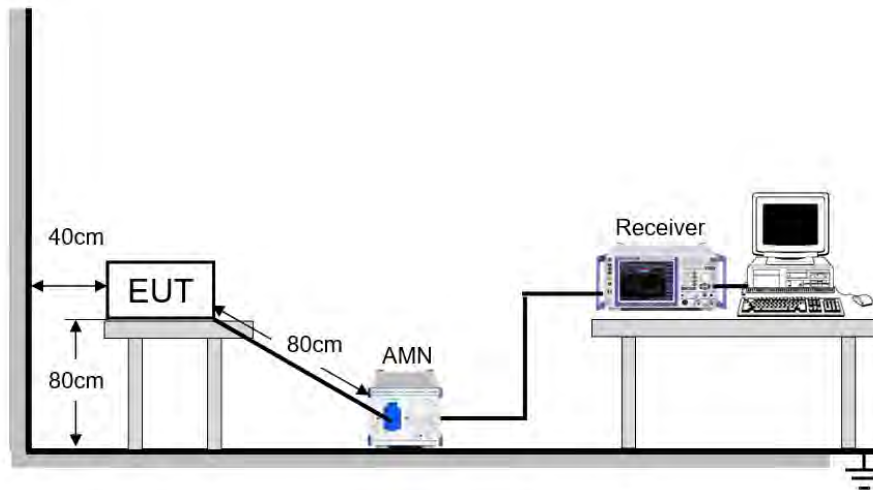

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.


### TEST ENVIRONMENT

Temperature	26.3 °C	Relative Humidity	64.4 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

**RESULTS**

**9.1.1. 802.11n HT40 MIMO MODE**

**LINE L RESULTS (HIGH CHANNEL, WORST-CASE CONFIGURATION)**

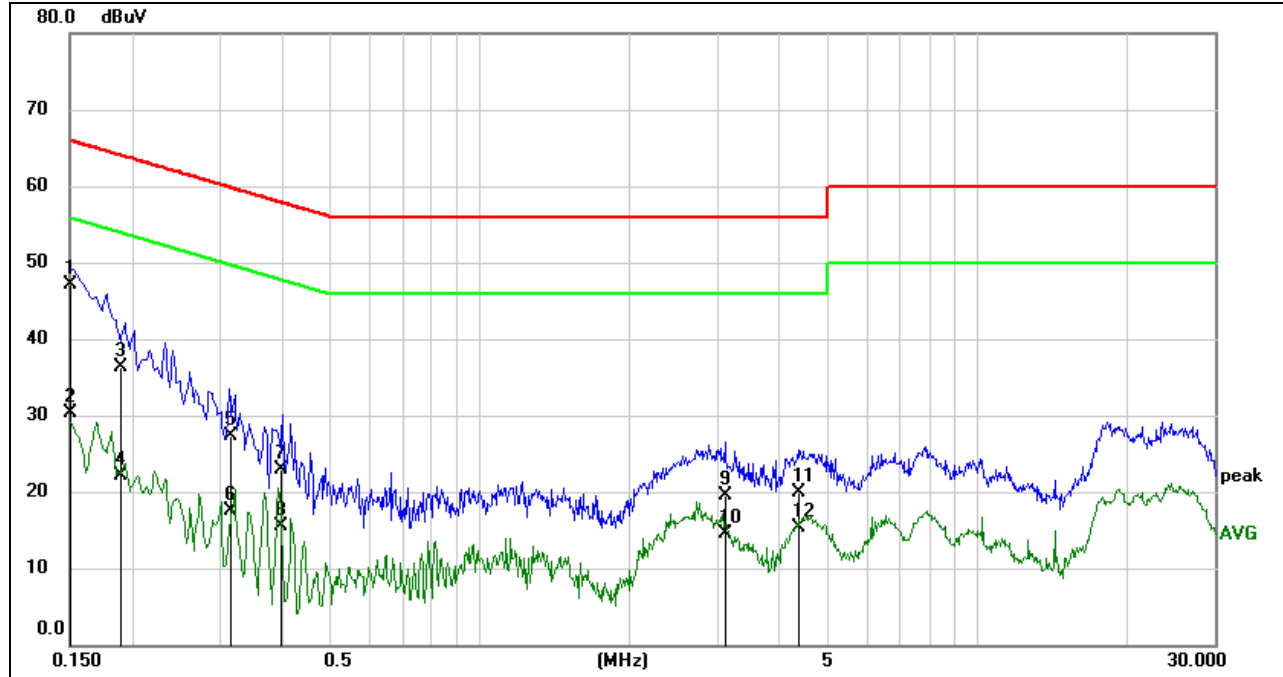


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1503	37.48	9.59	47.07	65.98	-18.91	QP
2	0.1503	20.64	9.59	30.23	55.98	-25.75	AVG
3	0.1901	26.71	9.59	36.30	64.03	-27.73	QP
4	0.1901	12.60	9.59	22.19	54.03	-31.84	AVG
5	0.3178	17.74	9.59	27.33	59.76	-32.43	QP
6	0.3178	7.90	9.59	17.49	49.76	-32.27	AVG
7	0.3988	13.27	9.59	22.86	57.88	-35.02	QP
8	0.3988	5.88	9.59	15.47	47.88	-32.41	AVG
9	3.1269	9.90	9.62	19.52	56.00	-36.48	QP
10	3.1269	4.81	9.62	14.43	46.00	-31.57	AVG
11	4.3582	10.28	9.60	19.88	56.00	-36.12	QP
12	4.3582	5.62	9.60	15.22	46.00	-30.78	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

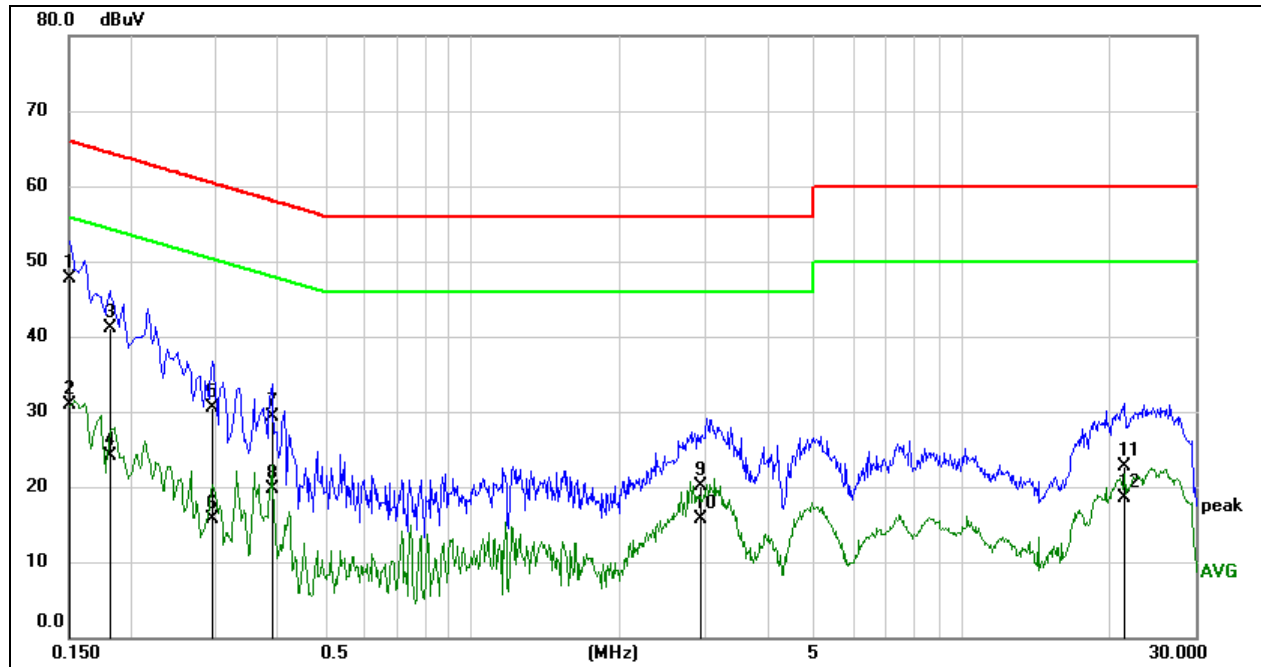**LINE N RESULTS (HIGH CHANNEL, WORST-CASE CONFIGURATION)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	38.11	9.59	47.70	66.00	-18.30	QP
2	0.1500	21.37	9.59	30.96	56.00	-25.04	AVG
3	0.1833	31.55	9.59	41.14	64.33	-23.19	QP
4	0.1833	14.45	9.59	24.04	54.33	-30.29	AVG
5	0.2940	20.86	9.59	30.45	60.41	-29.96	QP
6	0.2940	6.18	9.59	15.77	50.41	-34.64	AVG
7	0.3911	19.77	9.59	29.36	58.04	-28.68	QP
8	0.3911	10.10	9.59	19.69	48.04	-28.35	AVG
9	2.9380	10.54	9.62	20.16	56.00	-35.84	QP
10	2.9380	6.05	9.62	15.67	46.00	-30.33	AVG
11	21.5168	12.89	9.75	22.64	60.00	-37.36	QP
12	21.5168	8.67	9.75	18.42	50.00	-31.58	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes and channels had been tested, but only the worst data was recorded in the report.



## 10. ANTENNA REQUIREMENTS

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### RESULTS

Complies




## 11. Appendix

### 11.1. Appendix A: DTS Bandwidth

#### 11.1.1. Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.100	2407.950	2416.050	0.5	PASS
	Ant2	2412	8.610	2407.440	2416.050	0.5	PASS
	Ant1	2437	8.610	2432.440	2441.050	0.5	PASS
	Ant2	2437	9.120	2432.440	2441.560	0.5	PASS
	Ant1	2462	8.580	2457.440	2466.020	0.5	PASS
	Ant2	2462	8.640	2457.920	2466.560	0.5	PASS
11G	Ant1	2412	14.820	2404.440	2419.260	0.5	PASS
	Ant2	2412	12.840	2405.490	2418.330	0.5	PASS
	Ant1	2437	15.930	2428.840	2444.770	0.5	PASS
	Ant2	2437	16.350	2428.810	2445.160	0.5	PASS
	Ant1	2462	14.520	2455.070	2469.590	0.5	PASS
	Ant2	2462	15.120	2454.410	2469.530	0.5	PASS
11N20MIMO	Ant1	2412	15.150	2404.440	2419.590	0.5	PASS
	Ant2	2412	14.490	2405.070	2419.560	0.5	PASS
	Ant1	2437	15.180	2429.410	2444.590	0.5	PASS
	Ant2	2437	16.320	2428.810	2445.130	0.5	PASS
	Ant1	2462	15.270	2454.320	2469.590	0.5	PASS
	Ant2	2462	15.720	2454.440	2470.160	0.5	PASS
11N40MIMO	Ant1	2422	35.160	2404.360	2439.520	0.5	PASS
	Ant2	2422	33.960	2404.360	2438.320	0.5	PASS
	Ant1	2437	35.220	2419.360	2454.580	0.5	PASS
	Ant2	2437	33.960	2420.620	2454.580	0.5	PASS
	Ant1	2452	35.220	2434.360	2469.580	0.5	PASS
	Ant2	2452	35.160	2434.360	2469.520	0.5	PASS

11.1.2. Test Graphs

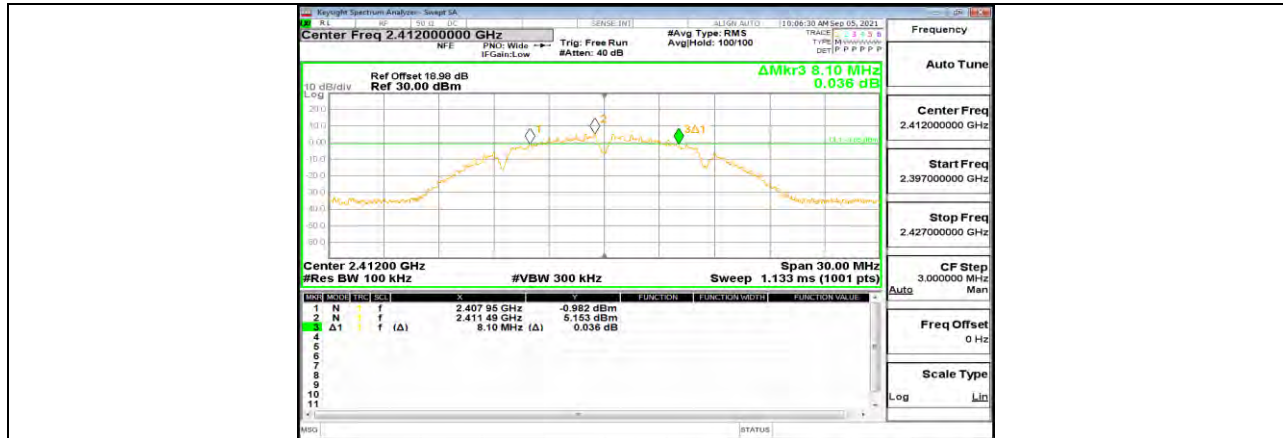


11B Ant1 2412



11B Ant2 2412



11B Ant1 2437

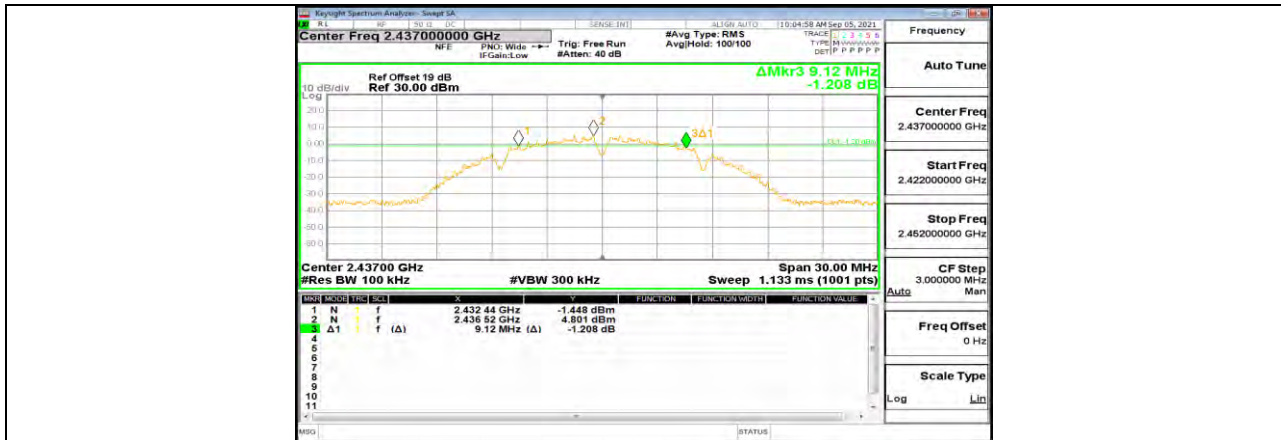

11B Ant2 2437




11B Ant1 2462



11B Ant2 2462



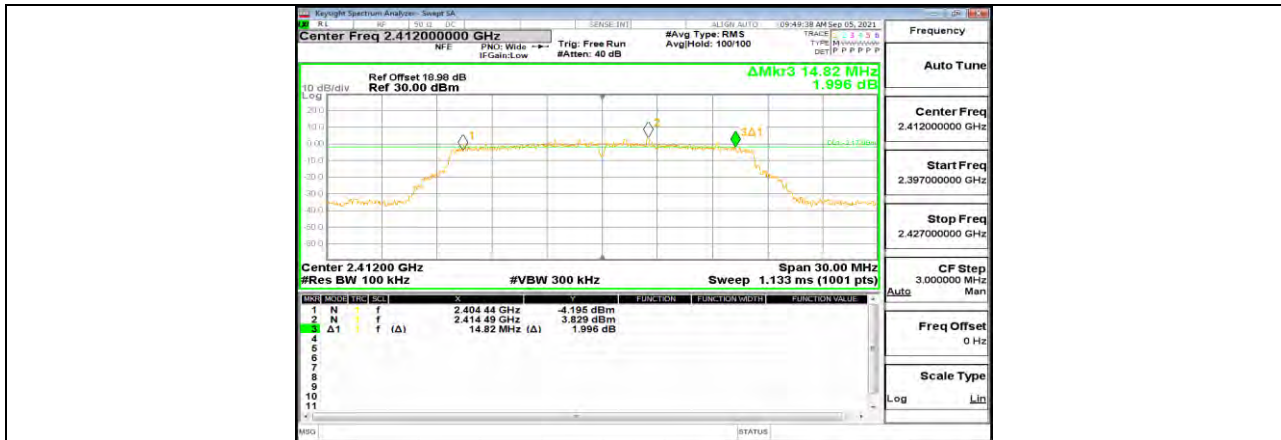

11G Ant1 2412



11G Ant2 2412



11G Ant1 2437




11G Ant2 2437



11G Ant1 2462




11G Ant2 2462

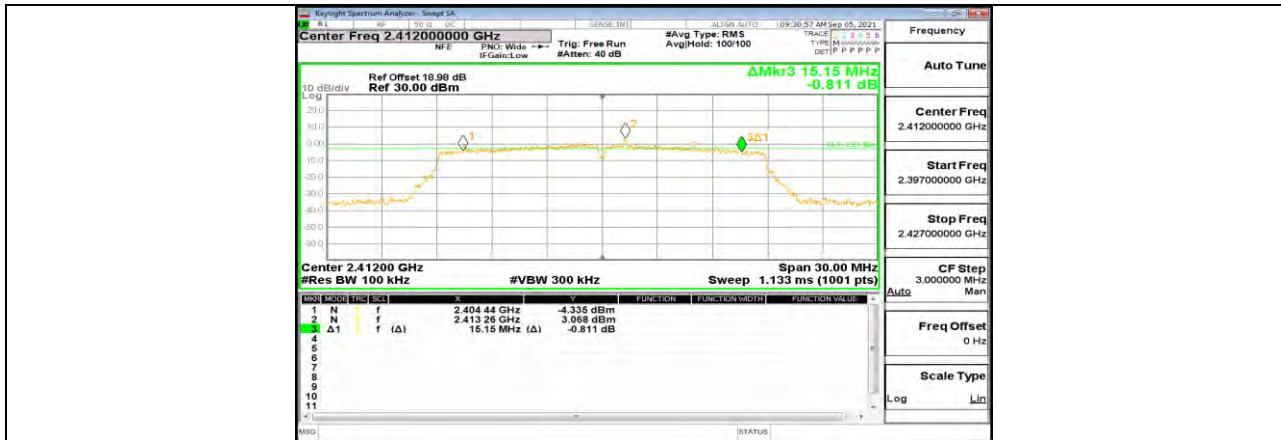


11N20MIMO Ant1 2412



11N20MIMO Ant2 2412

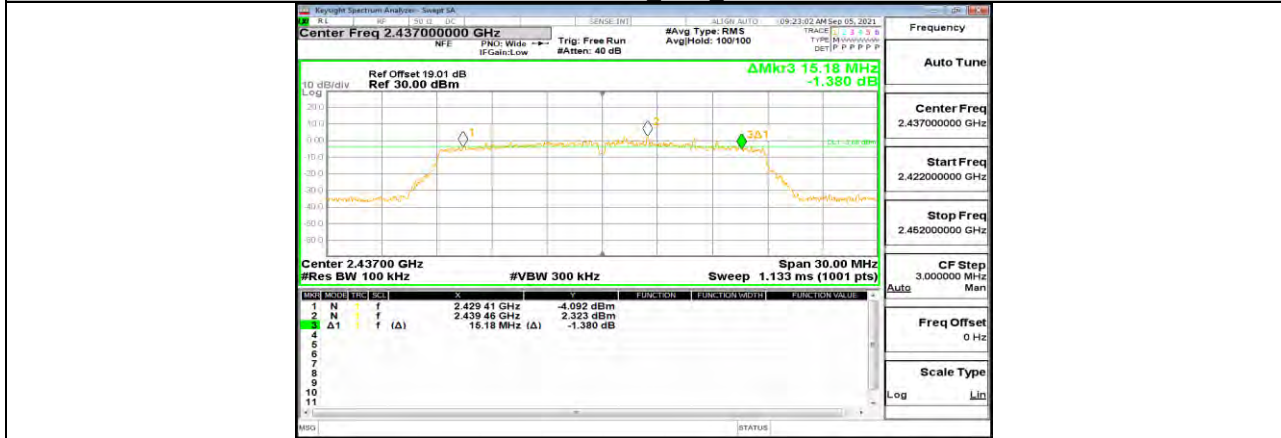

11N20MIMO Ant1 2437

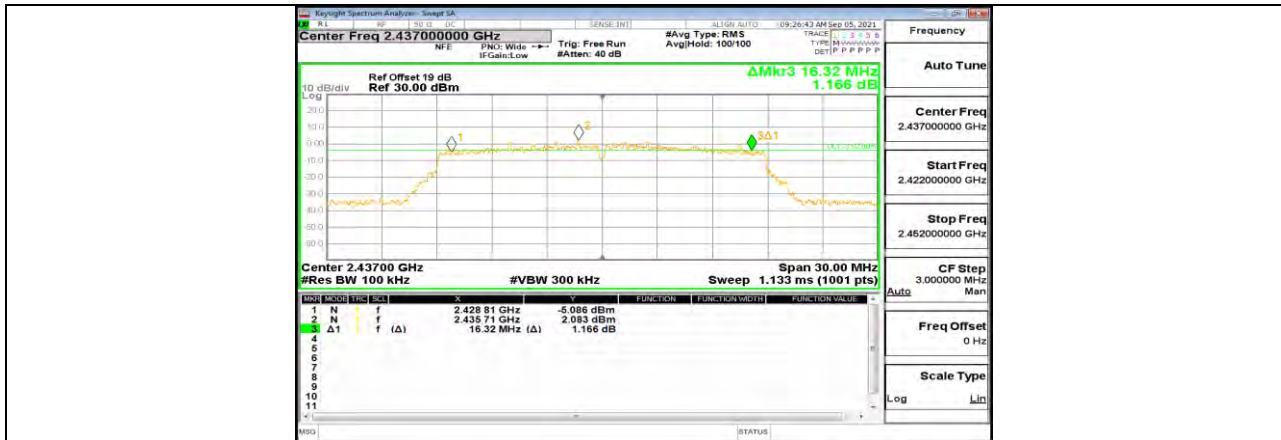

11N20MIMO Ant2 2437



11N20MIMO Ant1 2462



11N20MIMO Ant2 2462




11N40MIMO Ant1 2422



11N40MIMO Ant2 2422



11N40MIMO Ant1 2437

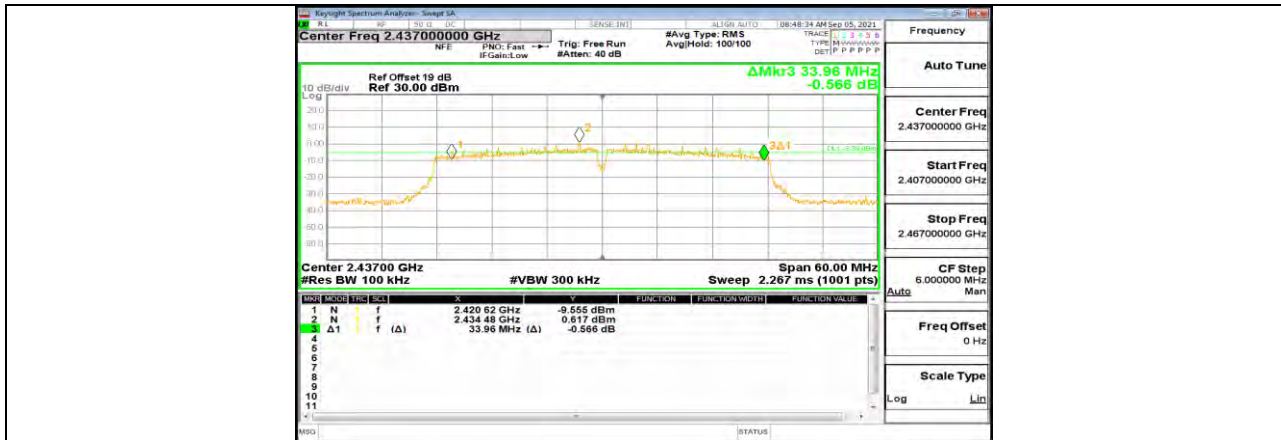

11N40MIMO Ant2 2437



11N40MIMO Ant1 2452




11N40MIMO Ant2 2452

**11.2. Appendix B: Occupied Channel Bandwidth****11.2.1. Test Result**


Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.859	2405.044	2418.903	---	PASS
	Ant2	2412	13.852	2405.102	2418.954	---	PASS
	Ant1	2437	13.901	2430.024	2443.925	---	PASS
	Ant2	2437	13.851	2430.078	2443.929	---	PASS
	Ant1	2462	13.884	2455.027	2468.911	---	PASS
	Ant2	2462	13.836	2455.061	2468.897	---	PASS
11G	Ant1	2412	16.859	2403.554	2420.413	---	PASS
	Ant2	2412	16.882	2403.533	2420.415	---	PASS
	Ant1	2437	16.931	2428.492	2445.423	---	PASS
	Ant2	2437	16.914	2428.521	2445.435	---	PASS
	Ant1	2462	16.839	2453.554	2470.393	---	PASS
	Ant2	2462	16.858	2453.553	2470.411	---	PASS
11N20MIMO	Ant1	2412	17.827	2403.070	2420.897	---	PASS
	Ant2	2412	17.746	2403.090	2420.836	---	PASS
	Ant1	2437	17.839	2428.074	2445.913	---	PASS
	Ant2	2437	17.760	2428.119	2445.879	---	PASS
	Ant1	2462	17.836	2453.066	2470.902	---	PASS
	Ant2	2462	17.700	2453.134	2470.834	---	PASS
11N40MIMO	Ant1	2422	36.172	2403.906	2440.078	---	PASS
	Ant2	2422	36.174	2403.909	2440.083	---	PASS
	Ant1	2437	36.205	2418.872	2455.077	---	PASS
	Ant2	2437	36.032	2418.967	2454.999	---	PASS
	Ant1	2452	36.196	2433.891	2470.087	---	PASS
	Ant2	2452	36.188	2433.915	2470.103	---	PASS




### 11.2.2. Test Graphs

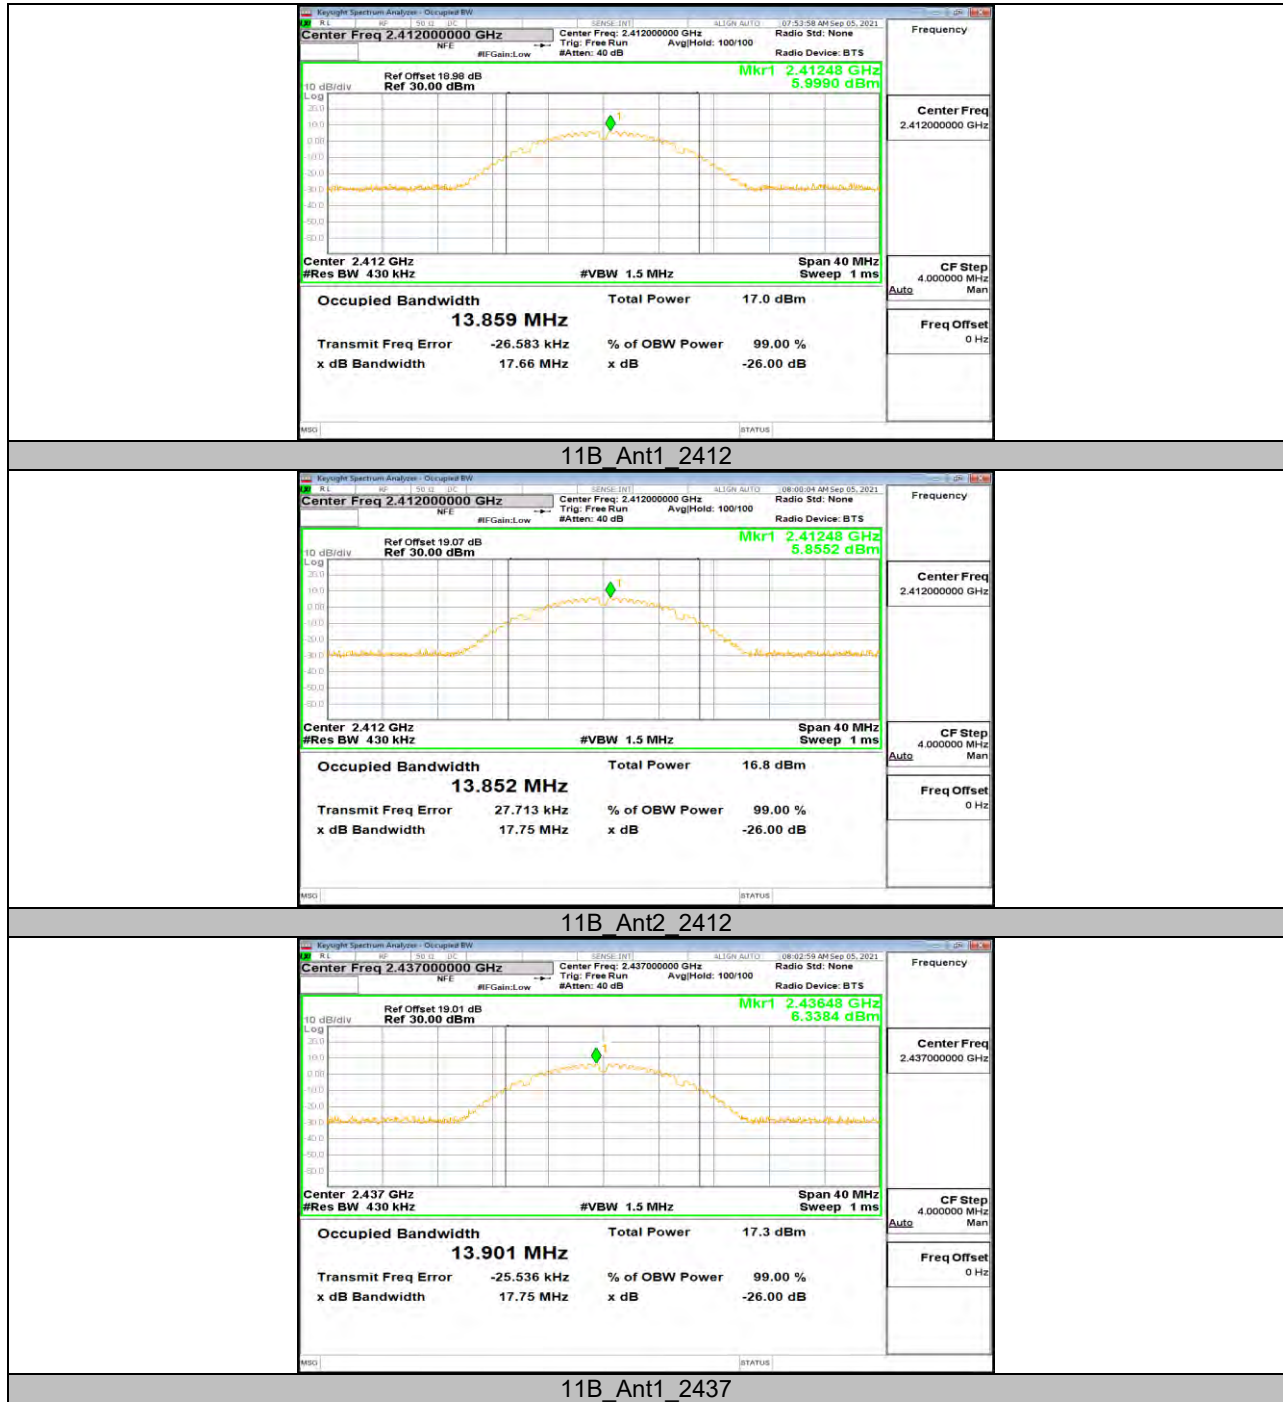




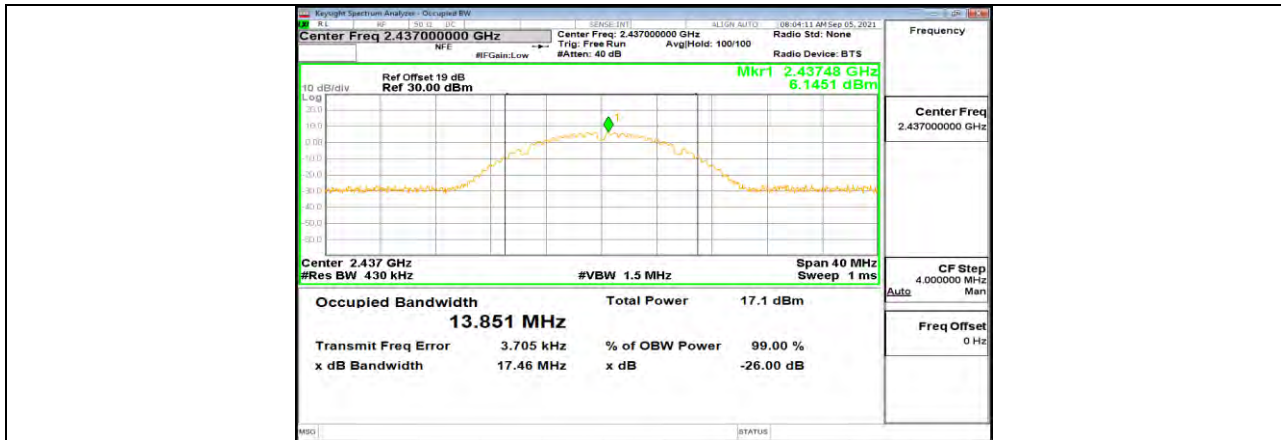


11B Ant2 2437

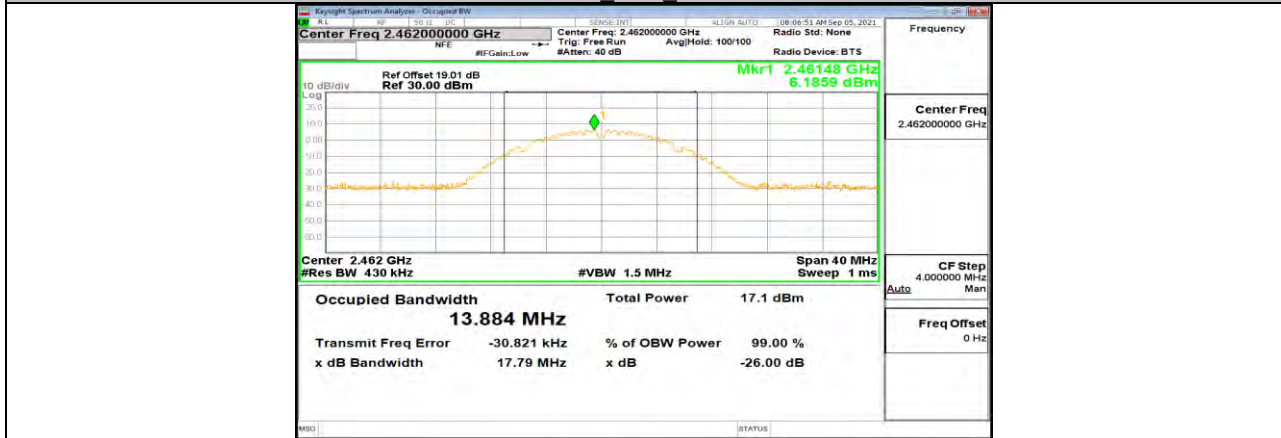


11B Ant1 2462

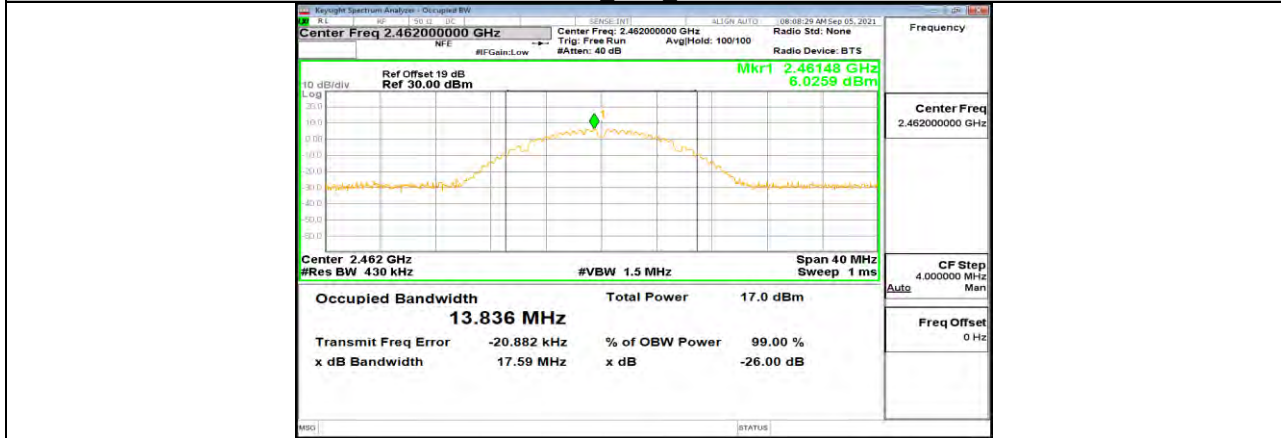


11B Ant2 2462

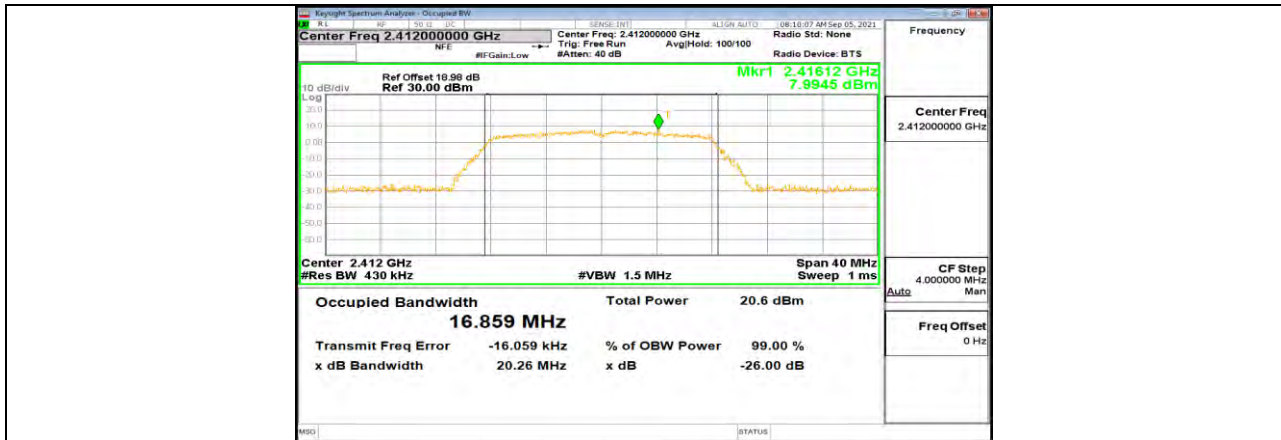


11G Ant1 2412

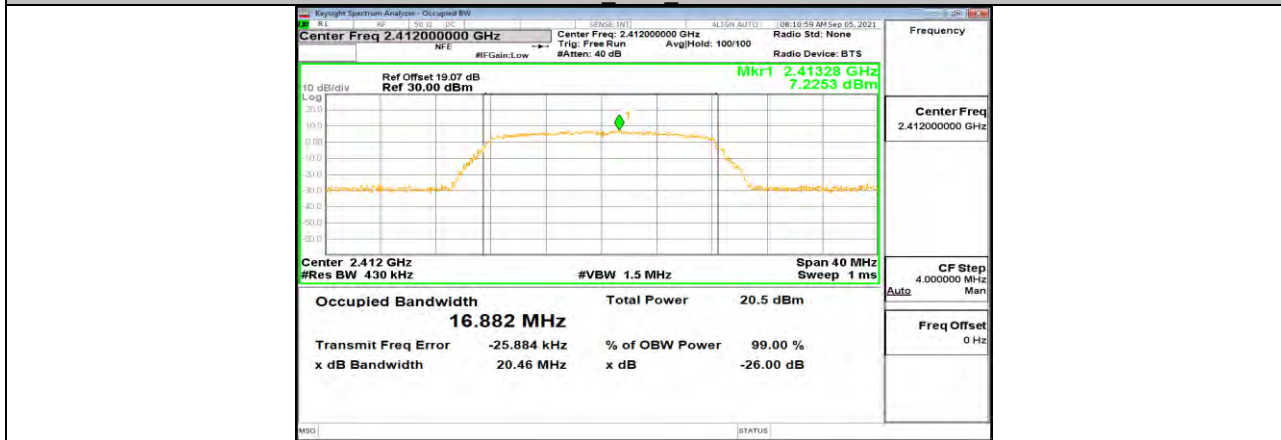


11G Ant2 2412

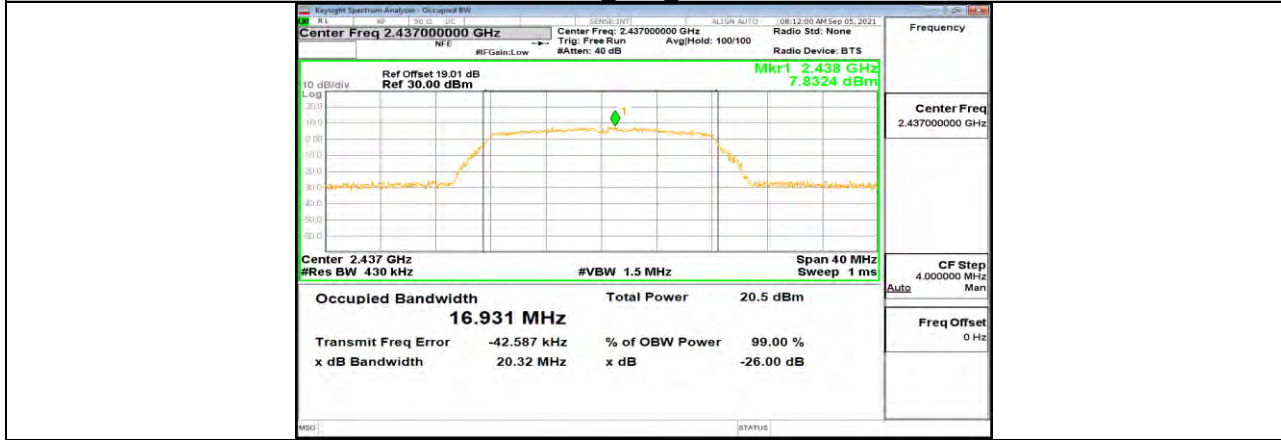


11G Ant1 2437

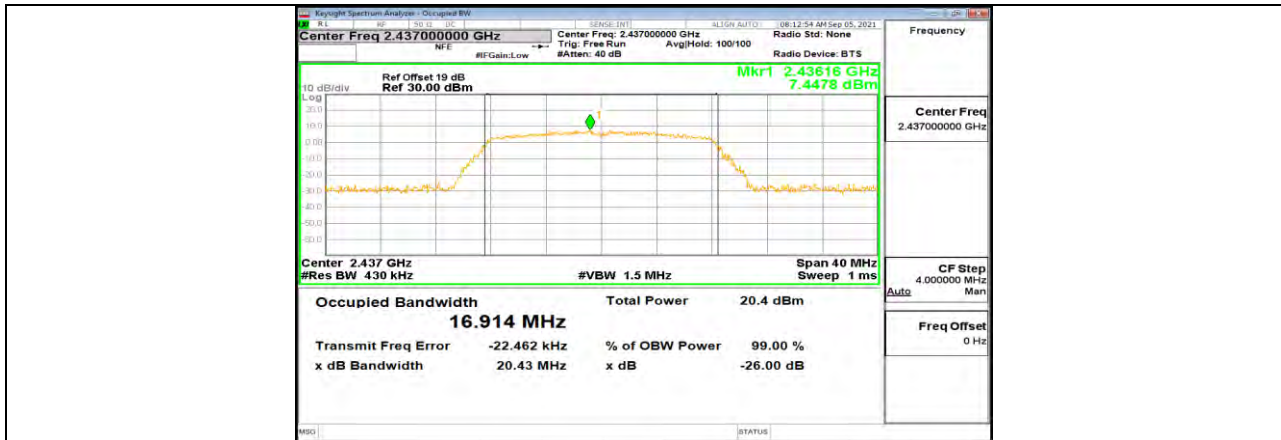


11G Ant2 2437

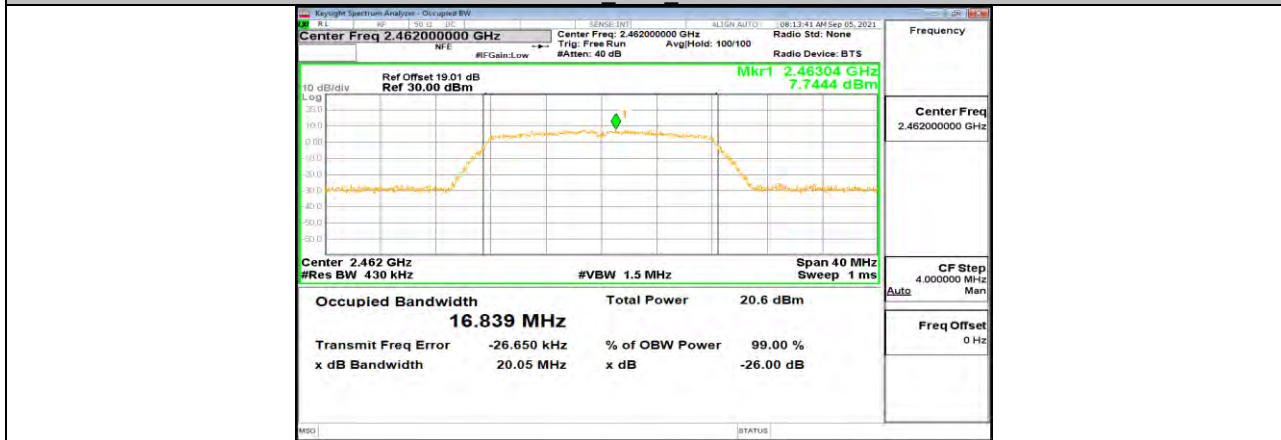


11G Ant1 2462

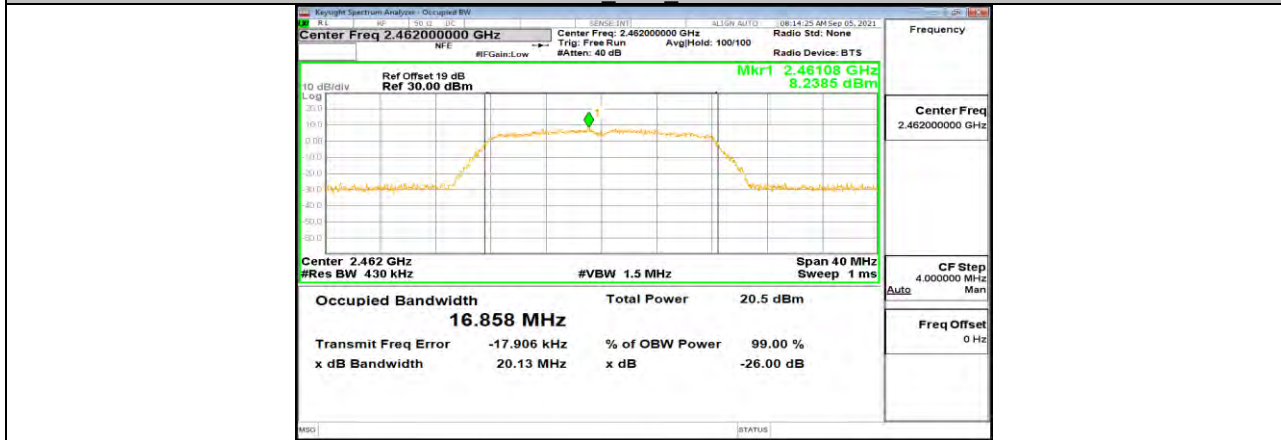


11G Ant2 2462

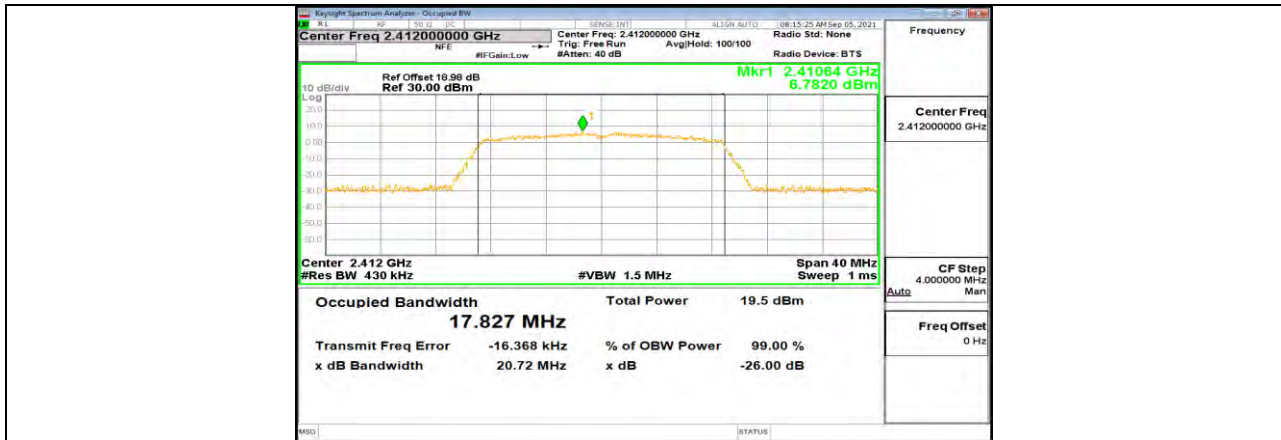


11N20MIMO Ant1 2412

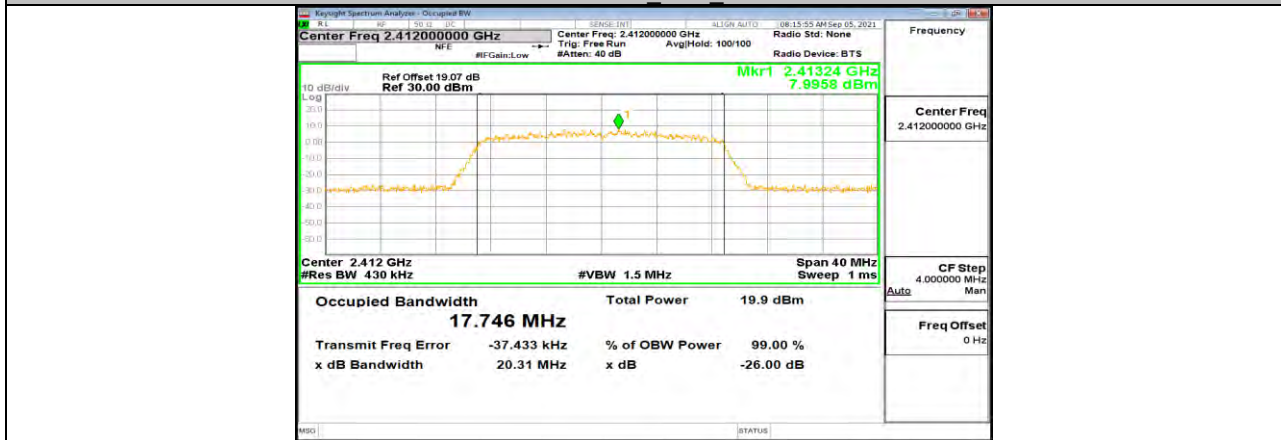


11N20MIMO Ant2 2412

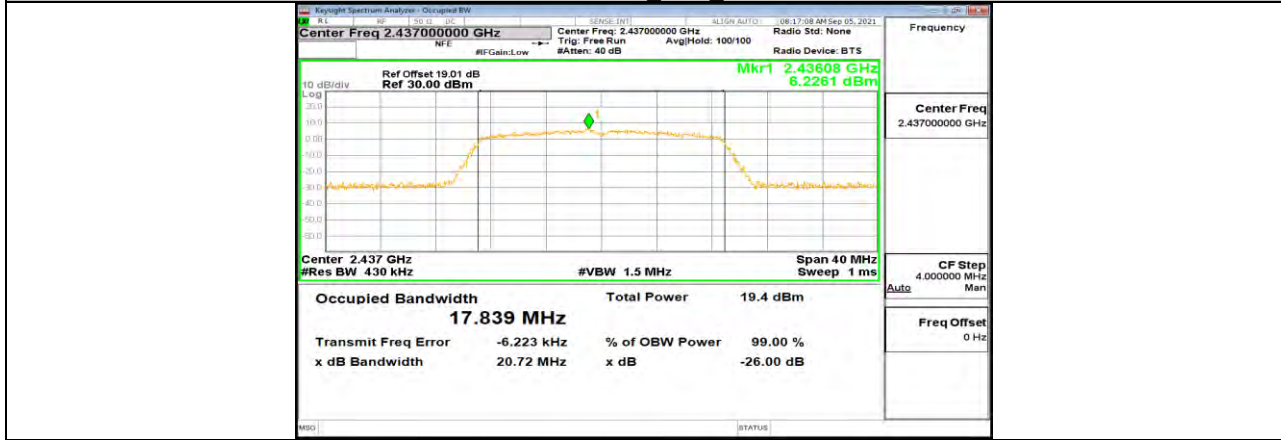


11N20MIMO Ant1 2437

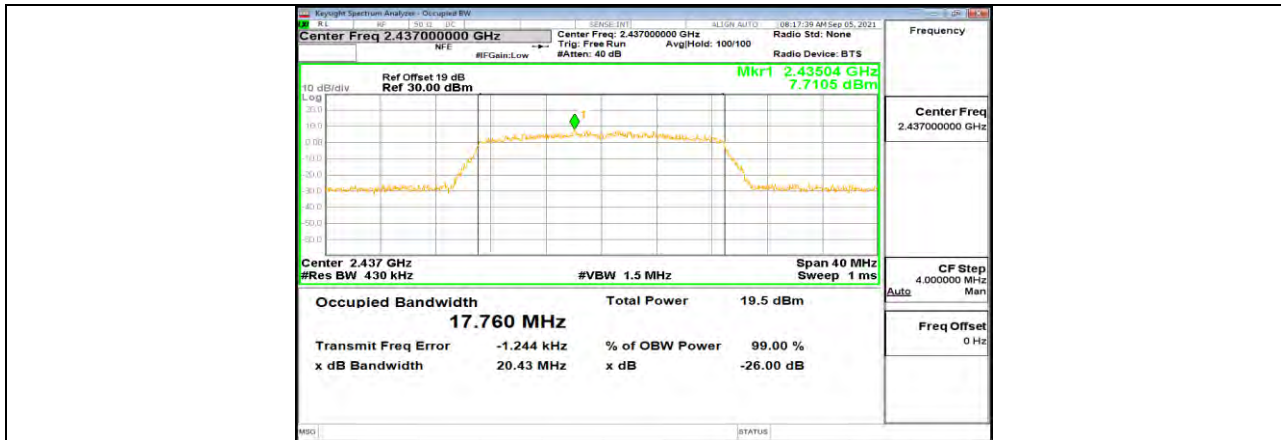


11N20MIMO Ant2 2437

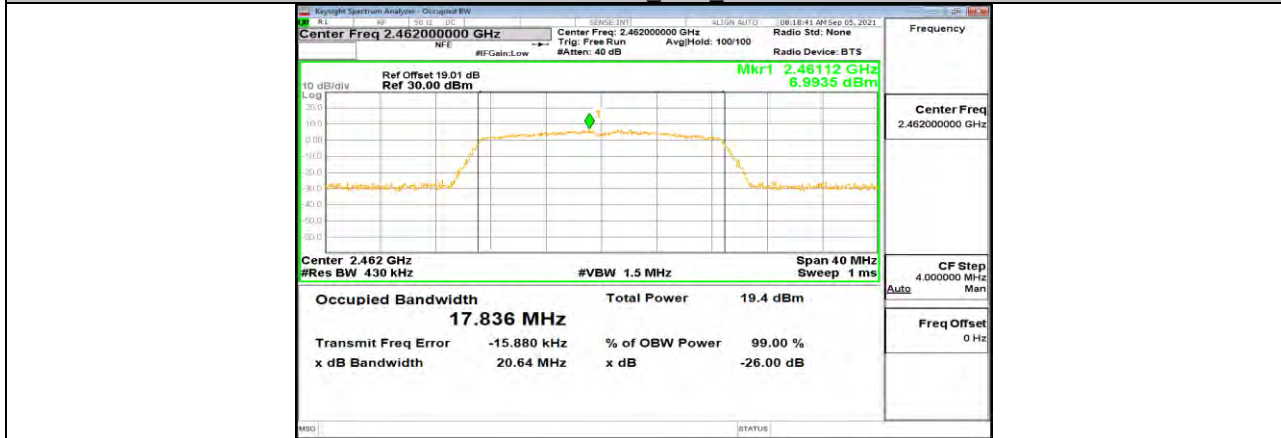


11N20MIMO Ant1 2462

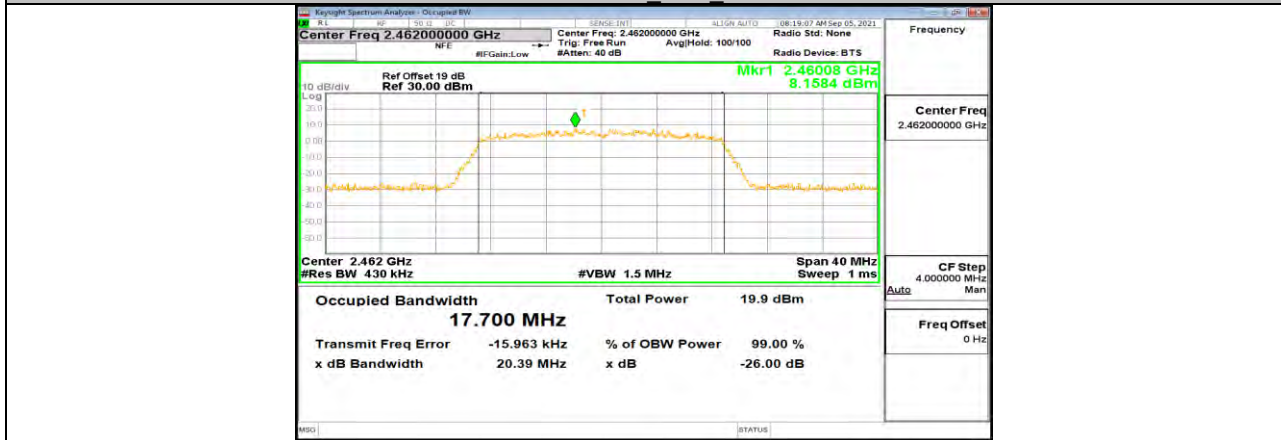


11N20MIMO Ant2 2462

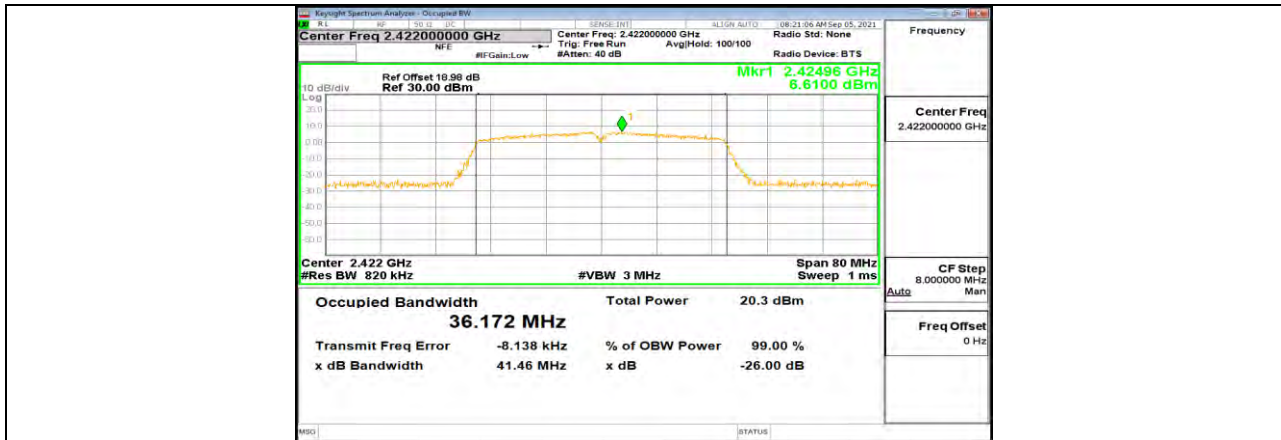


11N40MIMO Ant1 2422

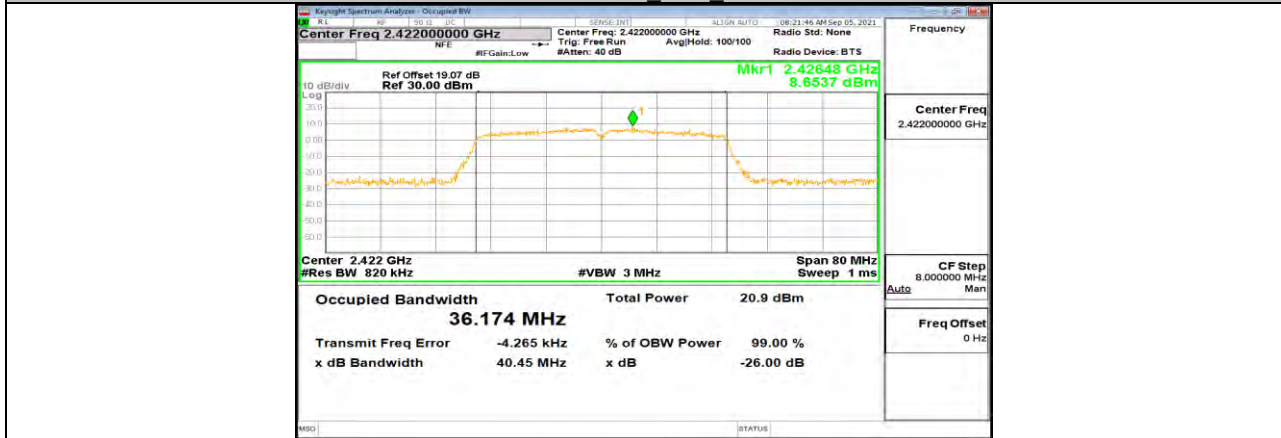


11N40MIMO Ant2 2422

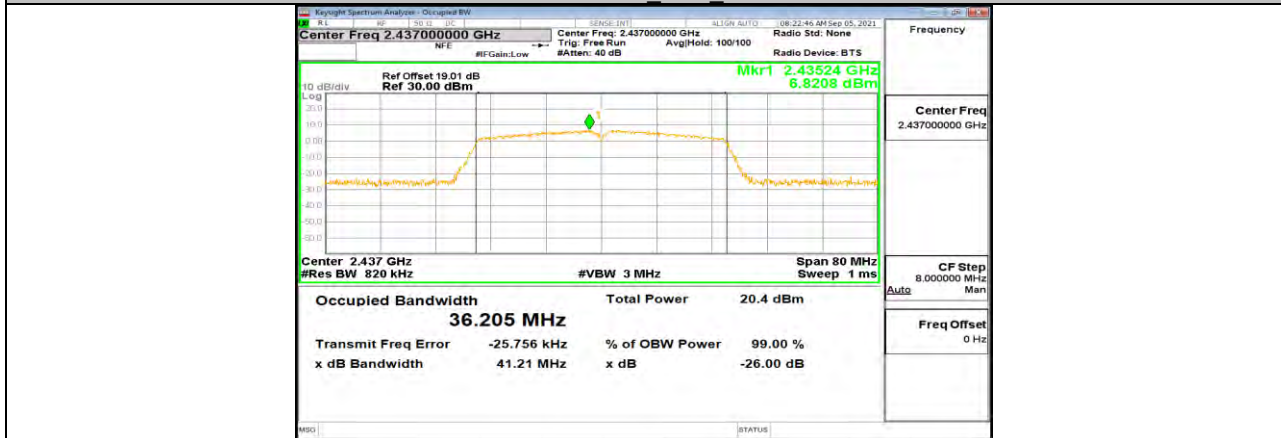


11N40MIMO Ant1 2437

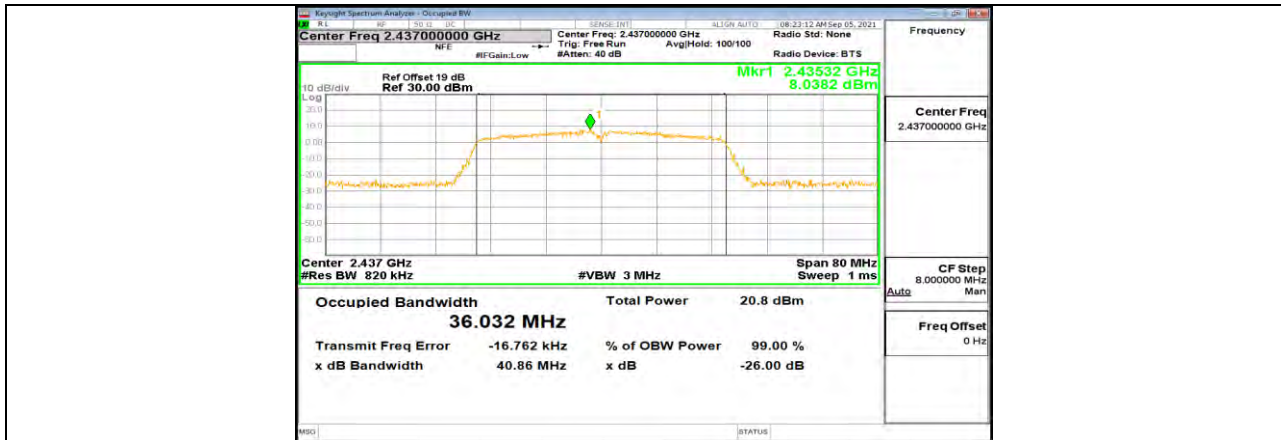

11N40MIMO Ant2 2437

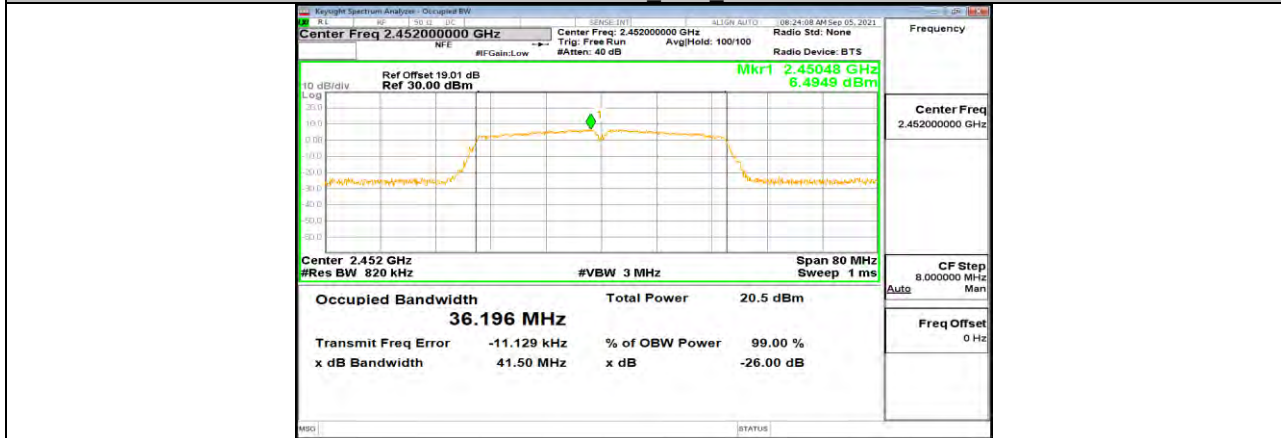

11N40MIMO Ant1 2452

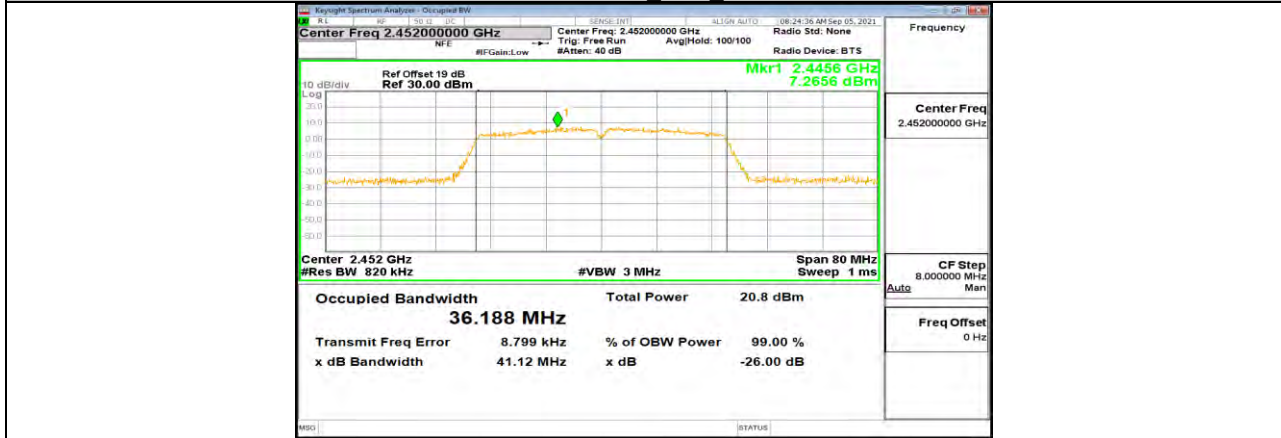

11N40MIMO Ant2 2452

**11.3. Appendix C: Maximum Average Conducted Output power****11.3.1. Test Result**

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	14.05	<=30	PASS
	Ant2	2412	13.84	<=30	PASS
	Ant1	2437	14.36	<=30	PASS
	Ant2	2437	14.20	<=30	PASS
	Ant1	2462	14.18	<=30	PASS
11G	Ant2	2462	14.06	<=30	PASS
	Ant1	2412	14.62	<=30	PASS
	Ant2	2412	14.52	<=30	PASS
	Ant1	2437	14.39	<=30	PASS
	Ant2	2437	14.36	<=30	PASS
	Ant1	2462	14.56	<=30	PASS
11N20MIMO	Ant2	2462	14.44	<=30	PASS
	Ant1	2412	13.40	<=30	PASS
	Ant2	2412	13.29	<=30	PASS
	total	2412	16.36	<=30	PASS
	Ant1	2437	13.28	<=30	PASS
	Ant2	2437	12.95	<=30	PASS
	total	2437	16.13	<=30	PASS
	Ant1	2462	13.30	<=30	PASS
Ant2	2462	13.30	<=30	PASS	
11N40MIMO	total	2462	16.31	<=30	PASS
	Ant1	2422	13.40	<=30	PASS
	Ant2	2422	13.53	<=30	PASS
	total	2422	16.48	<=30	PASS
	Ant1	2437	13.45	<=30	PASS
	Ant2	2437	13.45	<=30	PASS
	total	2437	16.46	<=30	PASS
	Ant1	2452	13.56	<=30	PASS
Ant2	2452	13.42	<=30	PASS	
total	2452	16.50	<=30	PASS	







**11.4. Appendix D: Maximum Power Spectral Density**  
**11.4.1. Test Result**


Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-7.57	<=8	PASS
		2437	-7.34	<=8	PASS
		2462	-7.48	<=8	PASS
11G	Ant1	2412	-9.18	<=8	PASS
		2437	-8.88	<=8	PASS
		2462	-9.93	<=8	PASS
11N20MIMO	Ant1	2412	-10.41	<=8	PASS
	Ant2	2412	-8.27	<=8	PASS
	total	2412	-6.20	<=8	PASS
	Ant1	2437	-9.34	<=8	PASS
	Ant2	2437	-9.82	<=8	PASS
	total	2437	-6.56	<=8	PASS
	Ant1	2462	-10.83	<=8	PASS
	Ant2	2462	-10.23	<=8	PASS
	total	2462	-7.51	<=8	PASS
11N40MIMO	Ant1	2422	-12.92	<=8	PASS
	Ant2	2422	-12.62	<=8	PASS
	total	2422	-9.76	<=8	PASS
	Ant1	2437	-13.44	<=8	PASS
	Ant2	2437	-13.51	<=8	PASS
	total	2437	-10.46	<=8	PASS
	Ant1	2452	-12.64	<=8	PASS
	Ant2	2452	-12.77	<=8	PASS
	total	2452	-9.69	<=8	PASS



### 11.4.2. Test Graphs

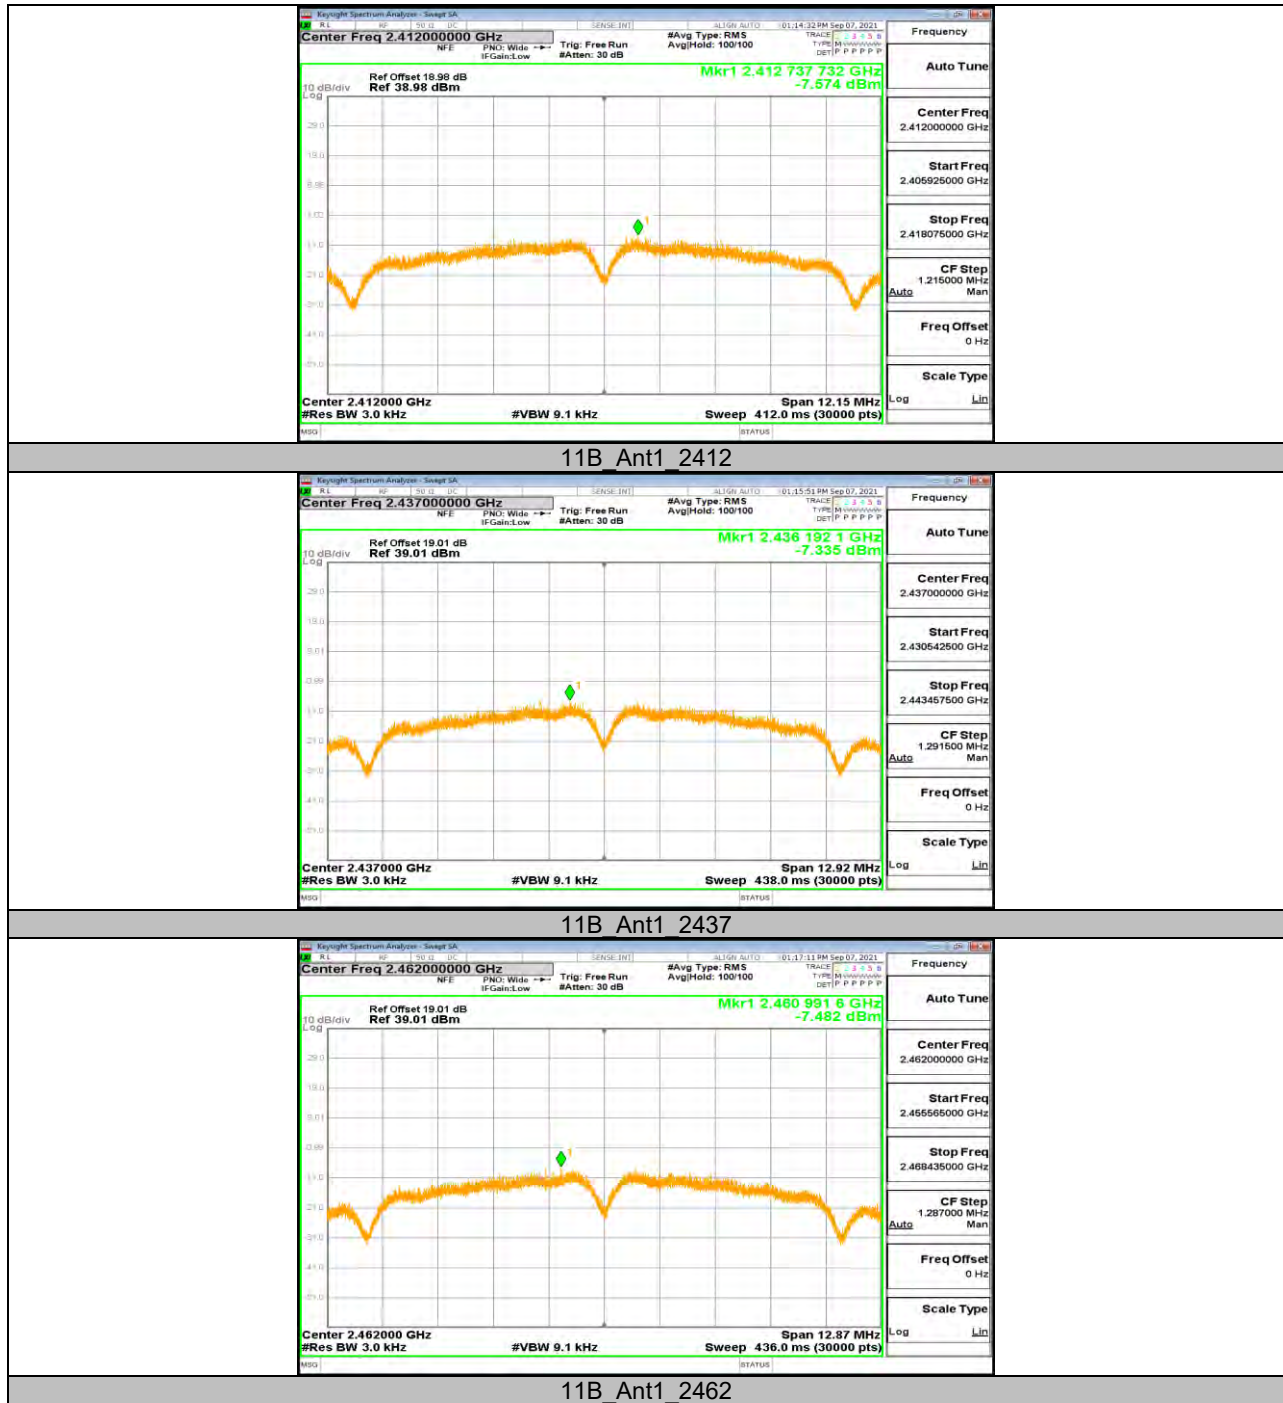

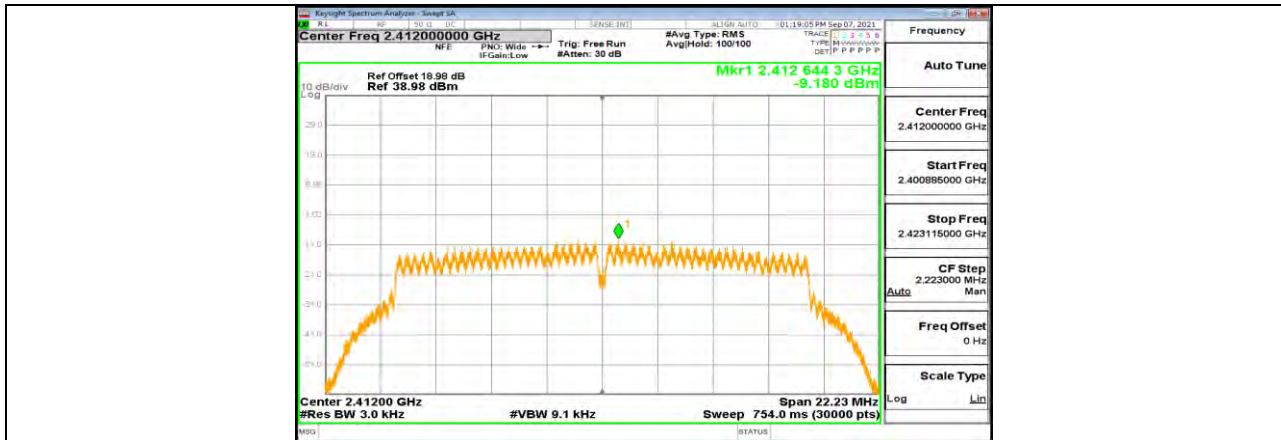


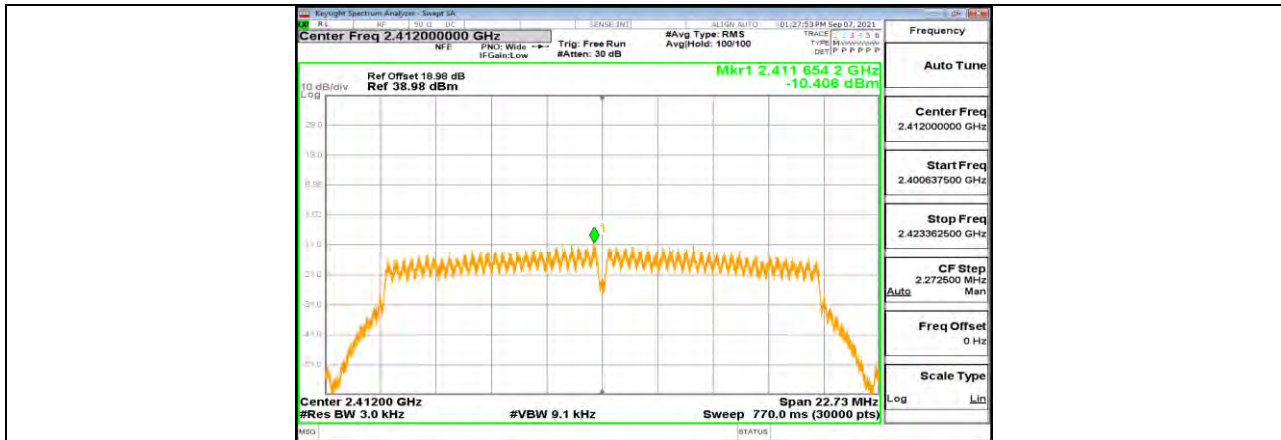

11N20MIMO Ant1 2412



11N20MIMO Ant2 2412

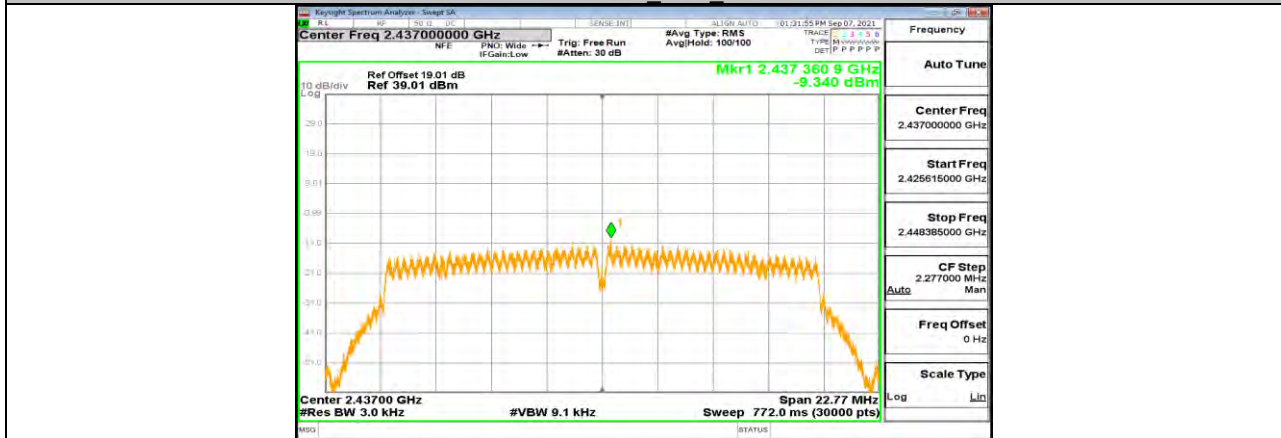

11N20MIMO Ant1 2437




11N20MIMO Ant2 2437



11N20MIMO Ant1 2462



11N20MIMO Ant2 2462

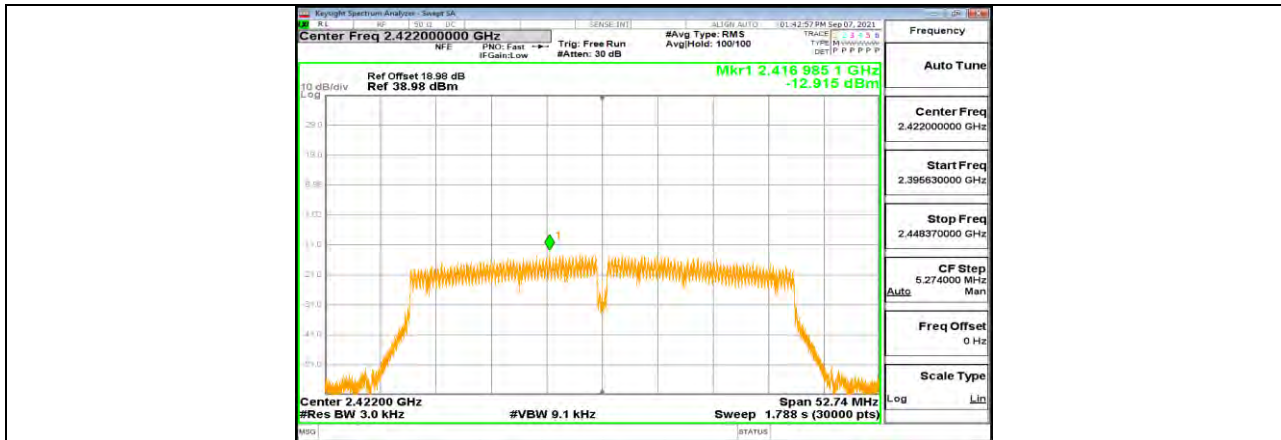


11N40MIMO Ant1 2422



11N40MIMO Ant2 2422



11N40MIMO Ant1 2437

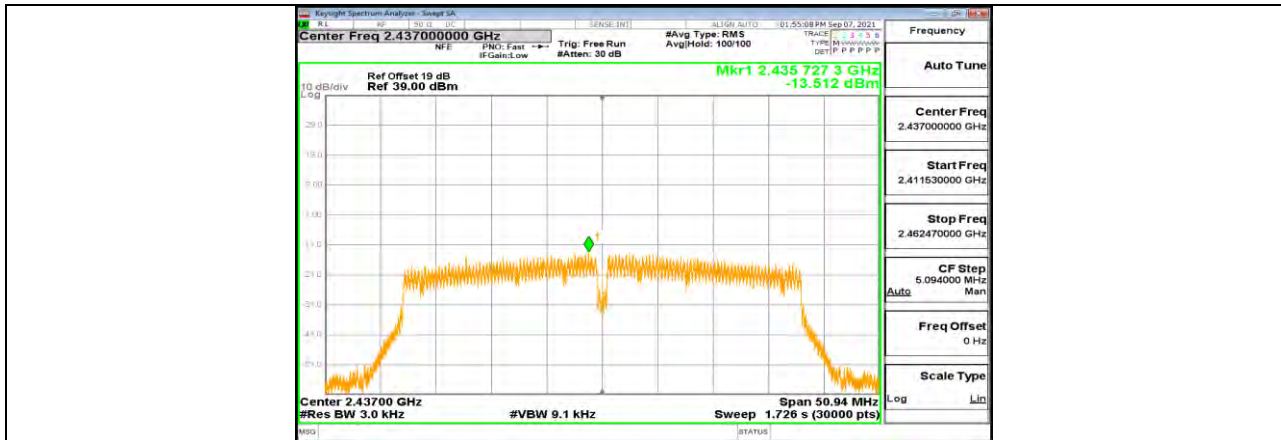

11N40MIMO Ant2 2437



11N40MIMO Ant1 2452



11N40MIMO Ant2 2452



## 11.5. Appendix E: Band Edge Measurements

### 11.5.1. Test Result


Test Mode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	5.62	-39.58	<=-24.38	PASS
		High	2462	5.91	-41.03	<=-24.09	PASS
11G	Ant1	Low	2412	3.41	-38.86	<=-26.59	PASS
		High	2462	3.84	-40.39	<=-26.16	PASS
11N20MIMO	Ant1	Low	2412	3.05	-39.8	<=-26.95	PASS
	Ant2	Low	2412	2.77	-40.18	<=-27.23	PASS
	Ant1	High	2462	2.58	-40.65	<=-27.42	PASS
	Ant2	High	2462	2.78	-40.96	<=-27.23	PASS
11N40MIMO	Ant1	Low	2422	0.22	-36.27	<=-29.78	PASS
	Ant2	Low	2422	0.42	-35.88	<=-29.58	PASS
	Ant1	High	2452	0.65	-41.17	<=-29.35	PASS
	Ant2	High	2452	0.73	-41.09	<=-29.27	PASS




11.5.2. Test Graphs




11B Ant1 Low 2412

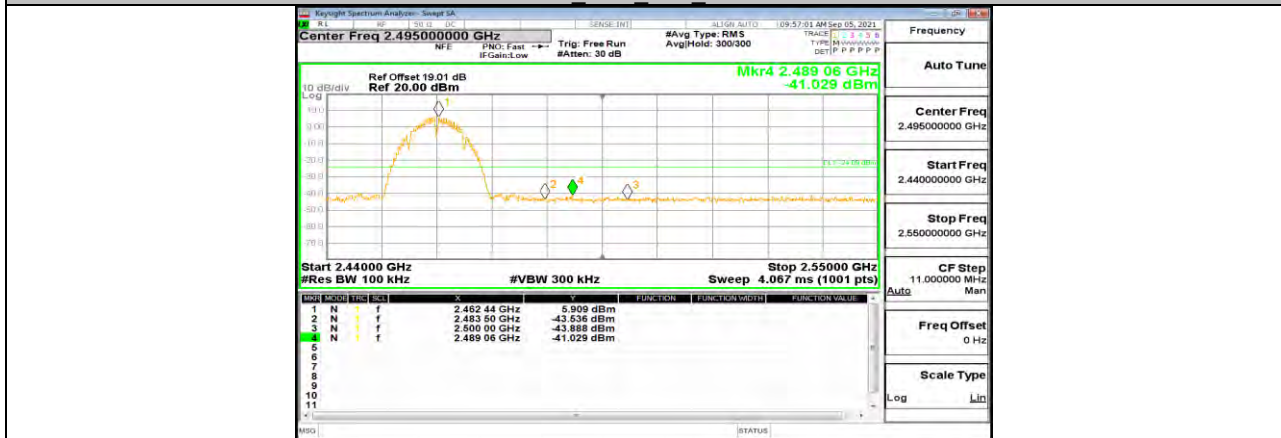

11B Ant1 High 2462

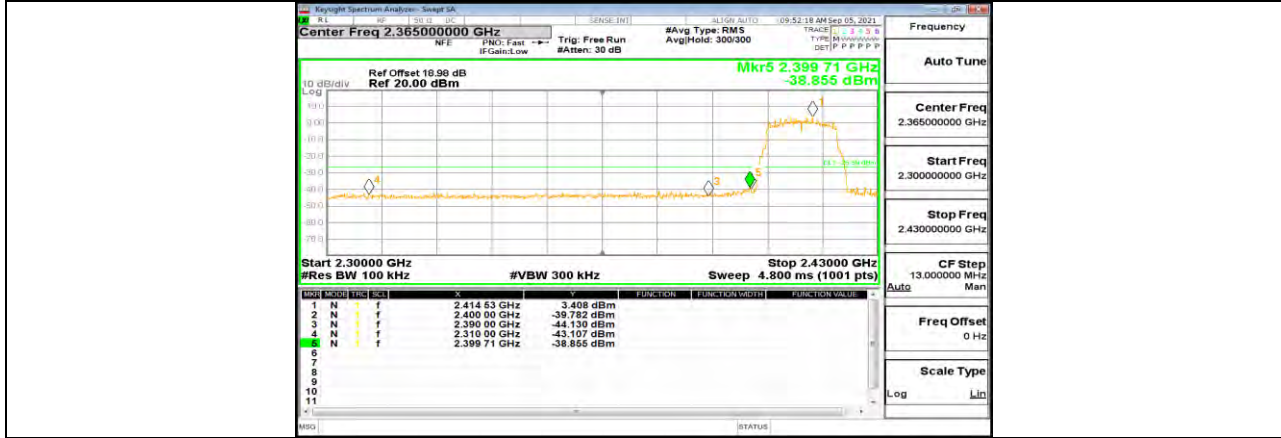


11G Ant1 Low 2412

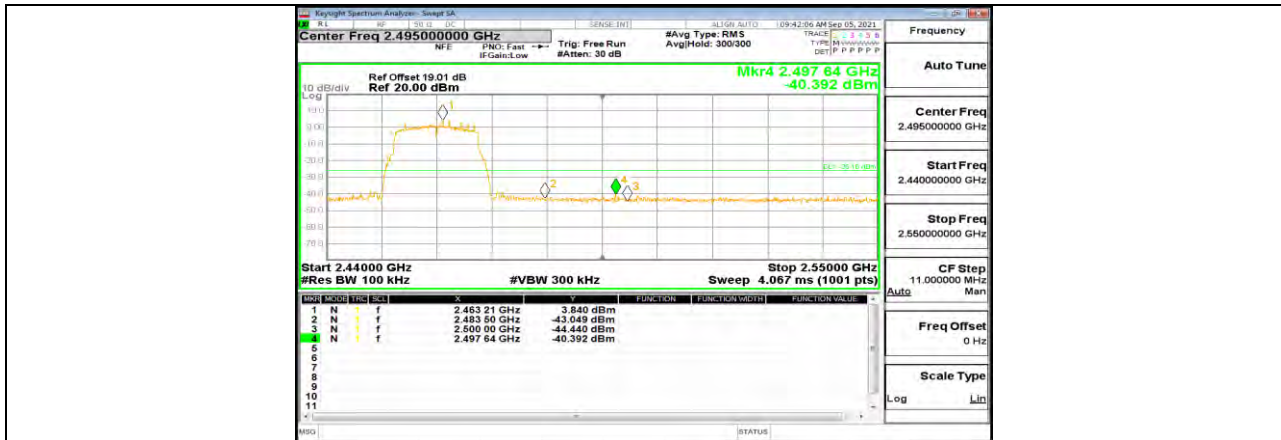


11G Ant1 High 2462



11N20MIMO Ant1 Low 2412

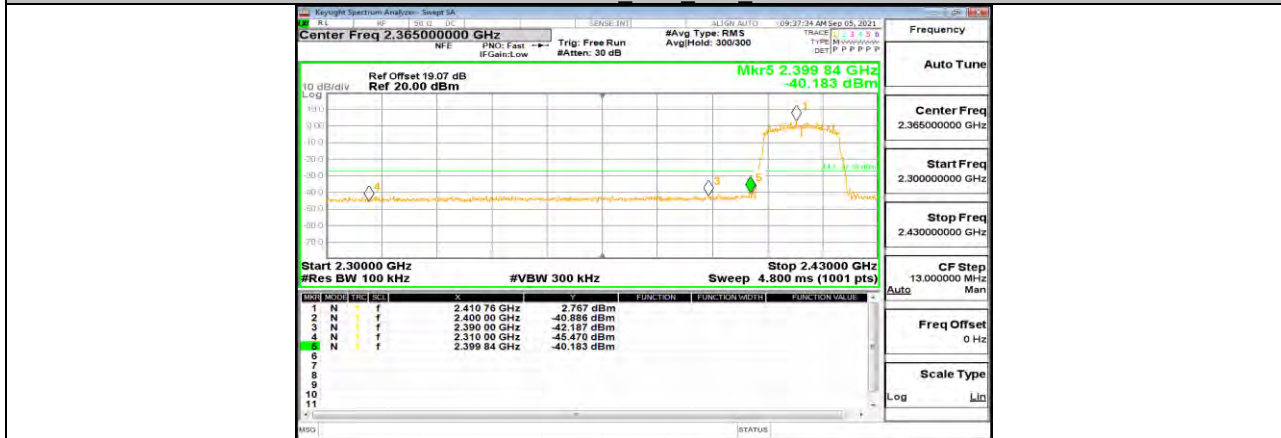


11N20MIMO Ant2 Low 2412

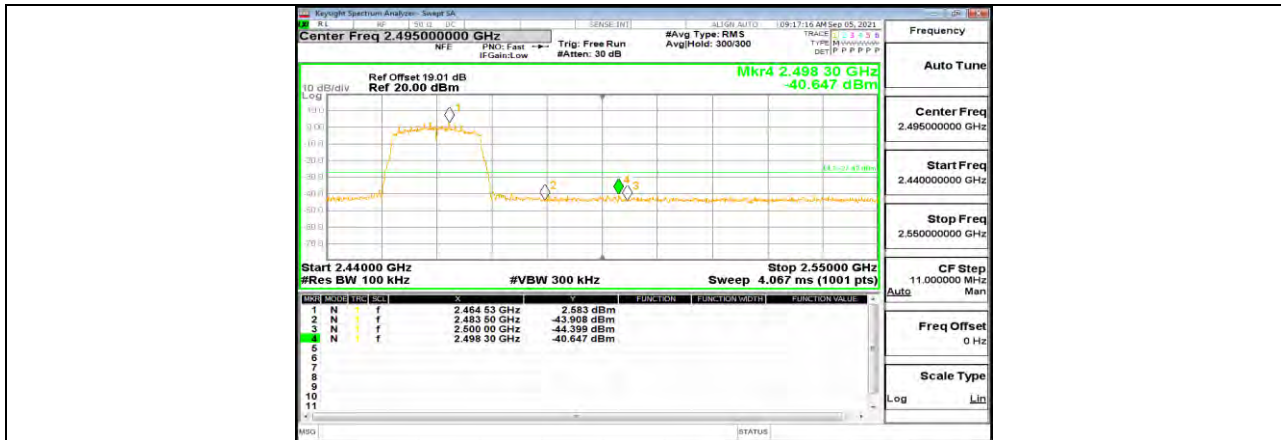

11N20MIMO Ant1 High 2462




11N20MIMO Ant2 High 2462

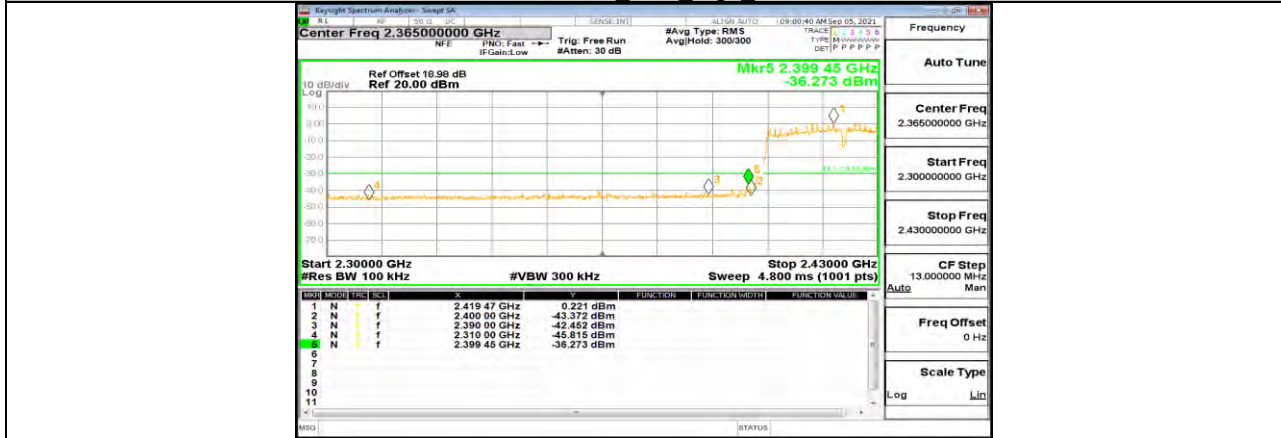


11N40MIMO Ant1 Low 2422



11N40MIMO Ant2 Low 2422

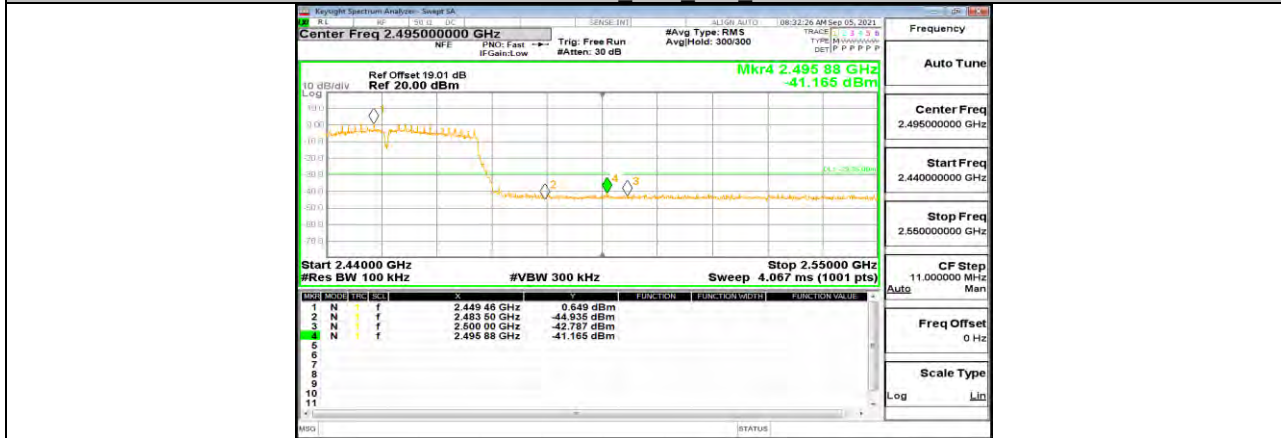

11N40MIMO Ant1 High 2452

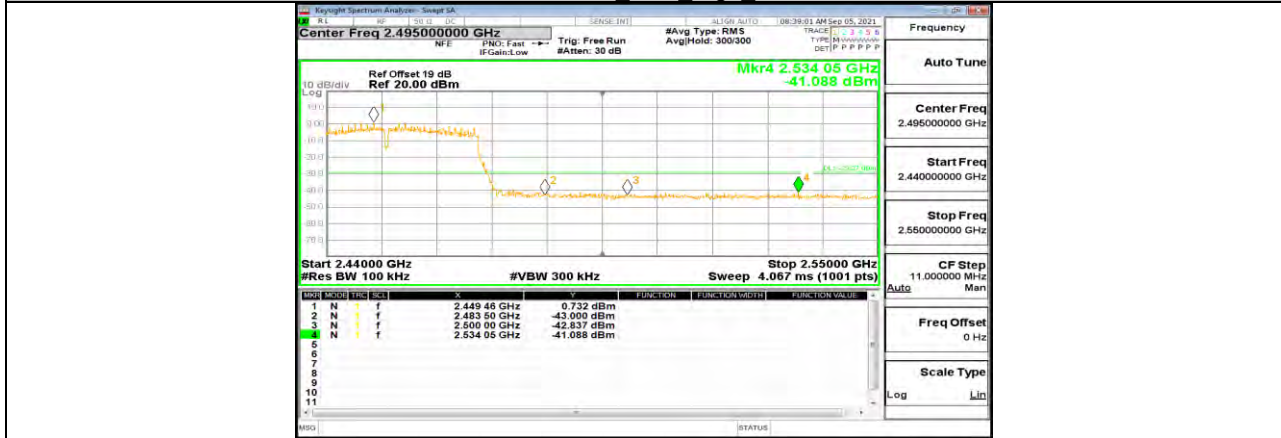


11N40MIMO Ant2 High 2452

## 11.6. Appendix F: Conducted Spurious Emission

### 11.6.1. Test Result


Test Mode	Antenna	Channel	FreqRange [Mhz]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	5.22	---	PASS
			30~1000	-54.41	<=-24.78	PASS
			1000~26500	-44.93	<=-24.78	PASS
		2437	Reference	4.85	---	PASS
			30~1000	-53.74	<=-25.15	PASS
			1000~26500	-44.68	<=-25.15	PASS
		2462	Reference	5.26	---	PASS
			30~1000	-53.12	<=-24.74	PASS
			1000~26500	-44.13	<=-24.74	PASS
11G	Ant1	2412	Reference	2.65	---	PASS
			30~1000	-53.86	<=-27.35	PASS
			1000~26500	-44.74	<=-27.35	PASS
		2437	Reference	3.14	---	PASS
			30~1000	-53.76	<=-26.86	PASS
			1000~26500	-44.63	<=-26.86	PASS
		2462	Reference	3.22	---	PASS
			30~1000	-54.13	<=-26.78	PASS
			1000~26500	-44.2	<=-26.78	PASS
11N20MIMO	Ant1	2412	Reference	2.28	---	PASS
			30~1000	-54.15	<=-27.72	PASS
			1000~26500	-45.14	<=-27.72	PASS
	Ant2	2412	Reference	2.84	---	PASS
			30~1000	-53.16	<=-27.16	PASS
			1000~26500	-45.37	<=-27.16	PASS
	Ant1	2437	Reference	2.73	---	PASS
			30~1000	-53.81	<=-27.27	PASS
			1000~26500	-45.45	<=-27.27	PASS
	Ant2	2437	Reference	2.25	---	PASS
			30~1000	-53.68	<=-27.75	PASS
			1000~26500	-45.27	<=-27.75	PASS
	Ant1	2462	Reference	2.98	---	PASS
			30~1000	-53.16	<=-27.02	PASS
			1000~26500	-44.38	<=-27.02	PASS
	Ant2	2462	Reference	2.19	---	PASS
			30~1000	-52.92	<=-27.81	PASS
			1000~26500	-45.11	<=-27.81	PASS
11N40MIMO	Ant1	2422	Reference	0.69	---	PASS
			30~1000	-53.13	<=-29.32	PASS
			1000~26500	-45.17	<=-29.32	PASS
	Ant2	2422	Reference	0.65	---	PASS
			30~1000	-53.32	<=-29.35	PASS
			1000~26500	-44.93	<=-29.35	PASS
	Ant1	2437	Reference	0.28	---	PASS
			30~1000	-53.3	<=-29.72	PASS
			1000~26500	-44.7	<=-29.72	PASS
	Ant2	2437	Reference	0.27	---	PASS
			30~1000	-53.66	<=-29.73	PASS
			1000~26500	-44.83	<=-29.73	PASS
	Ant1	2452	Reference	0.41	---	PASS
			30~1000	-52.86	<=-29.59	PASS
			1000~26500	-45.16	<=-29.59	PASS
	Ant2	2452	Reference	0.32	---	PASS
			30~1000	-53.32	<=-29.68	PASS
			1000~26500	-44.55	<=-29.68	PASS

### 11.6.2. Test Graphs

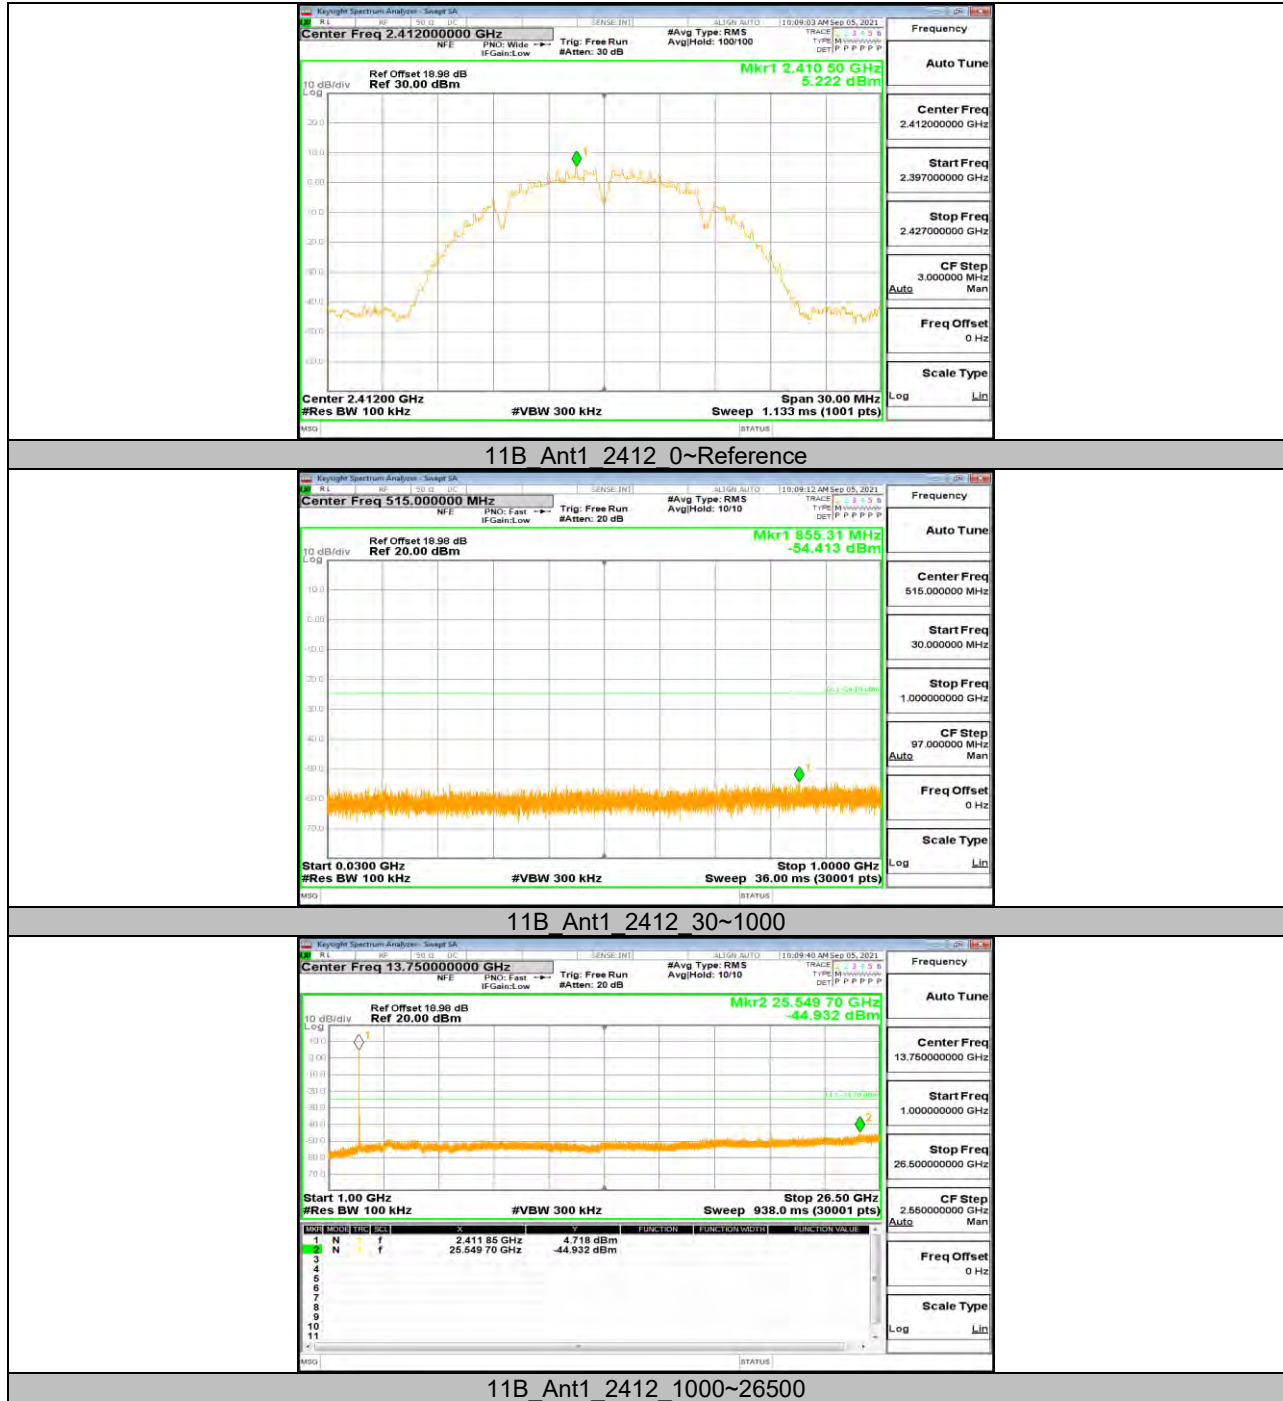




11B Ant1 2437 0-Reference

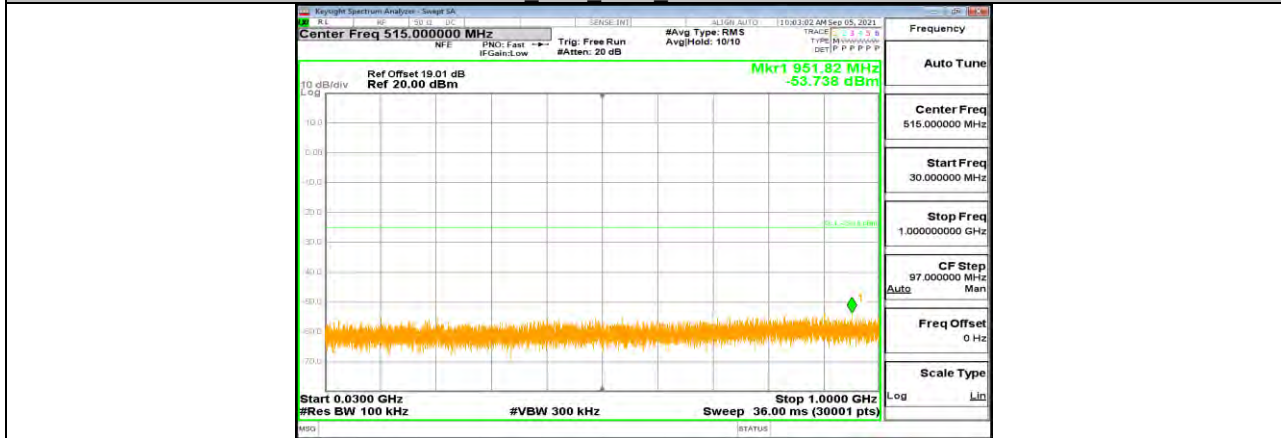


11B Ant1 2437 30~1000

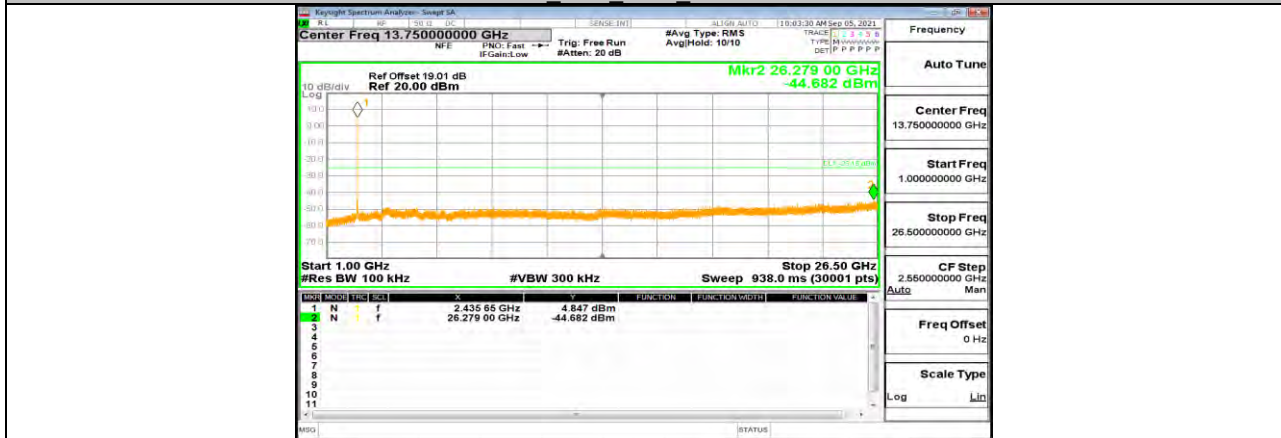


11B Ant1 2437 1000~26500



11B Ant1 2462 0-Reference

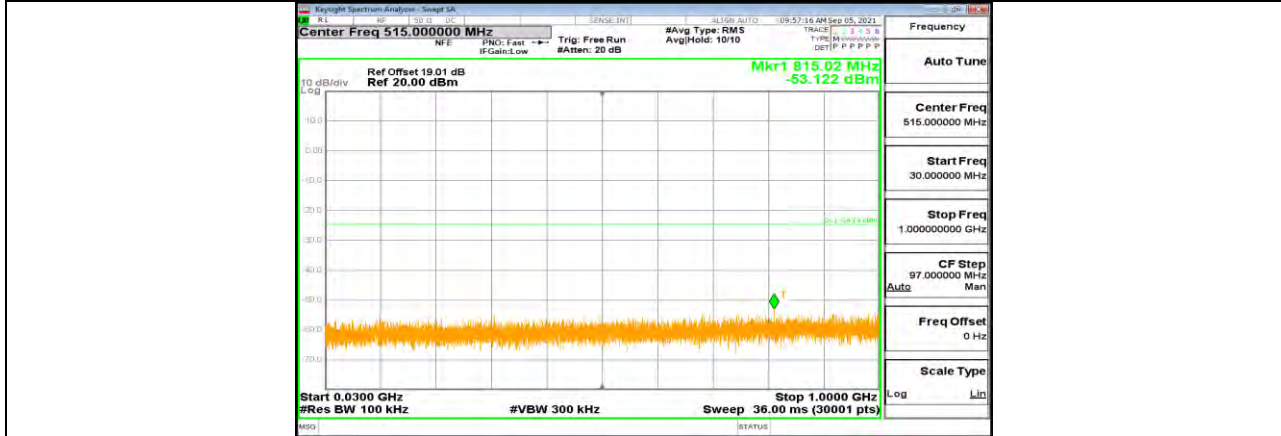

11B Ant1 2462 30~1000

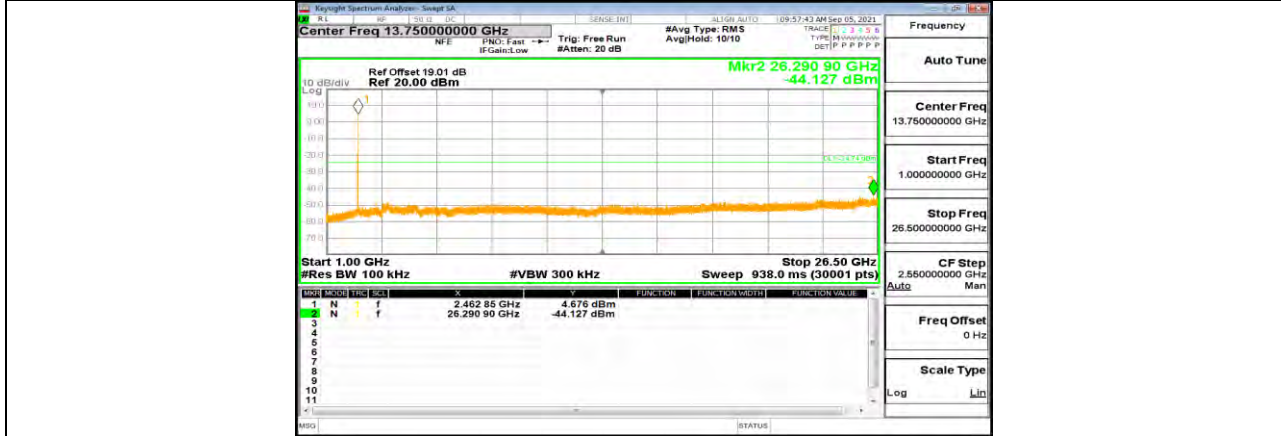


11B Ant1 2462 1000~26500






11G Ant1 2412 0-Reference

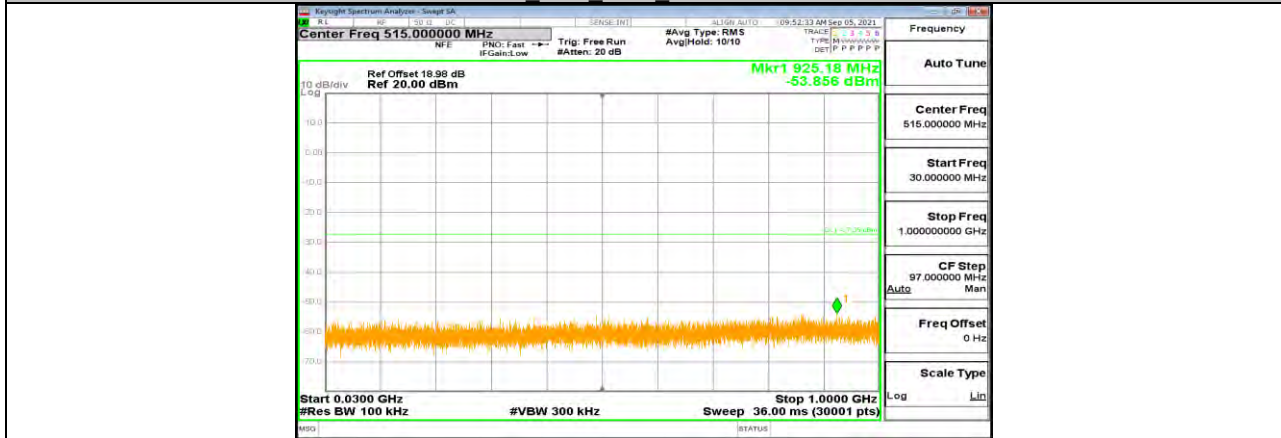


11G Ant1 2412 30~1000

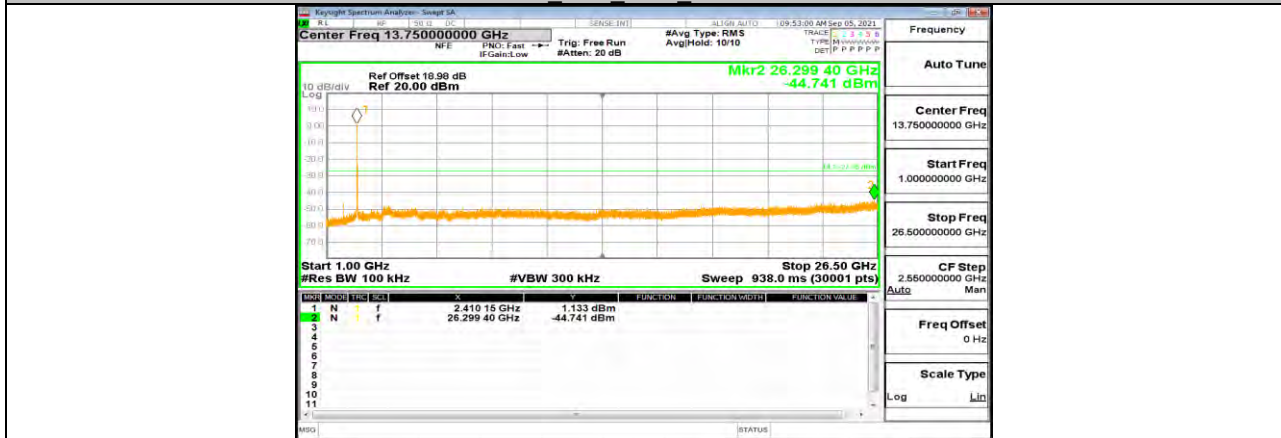


11G Ant1 2412 1000~26500



11G Ant1 2437 0-Reference

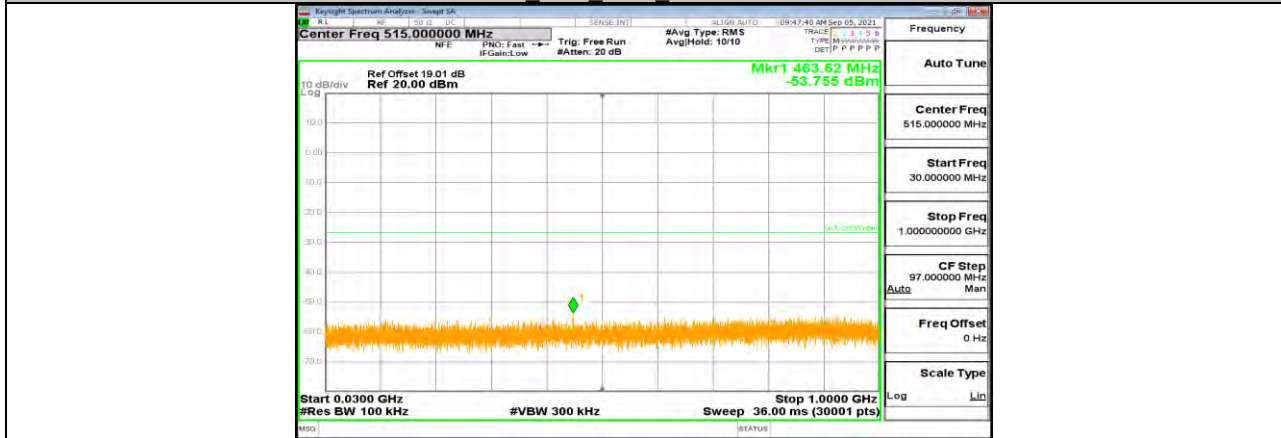


11G Ant1 2437 30~1000

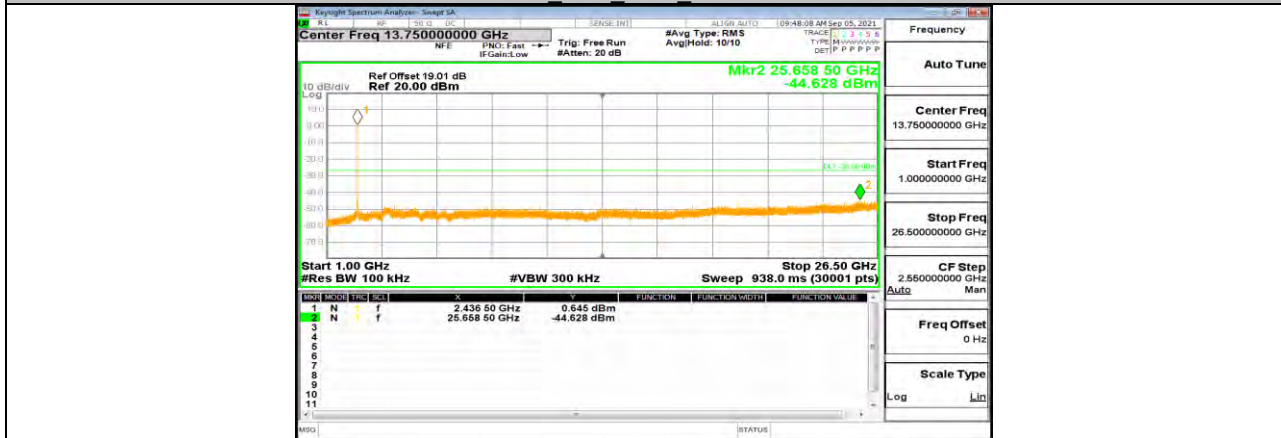


11G Ant1 2437 1000~26500



11G Ant1 2462 0-Reference

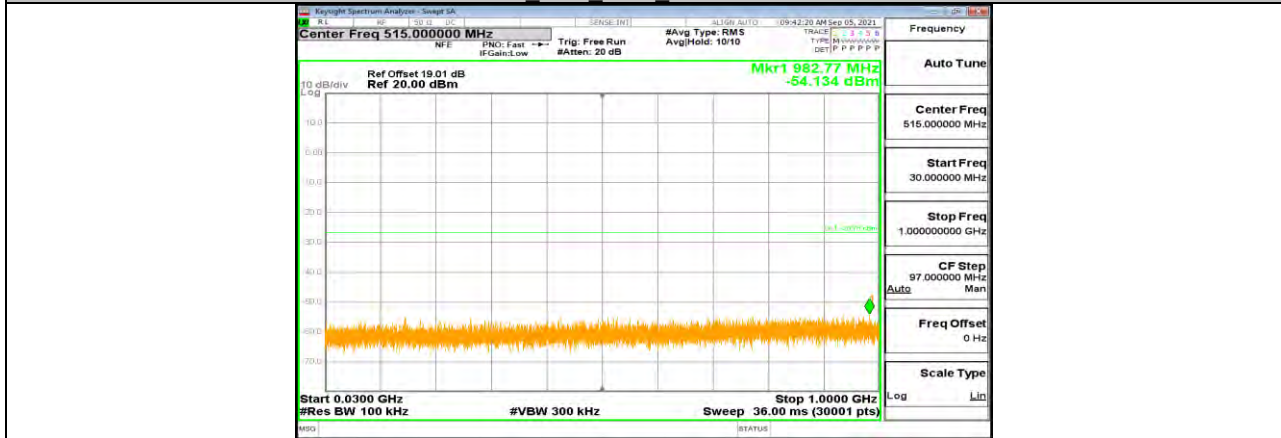


11G Ant1 2462 30~1000

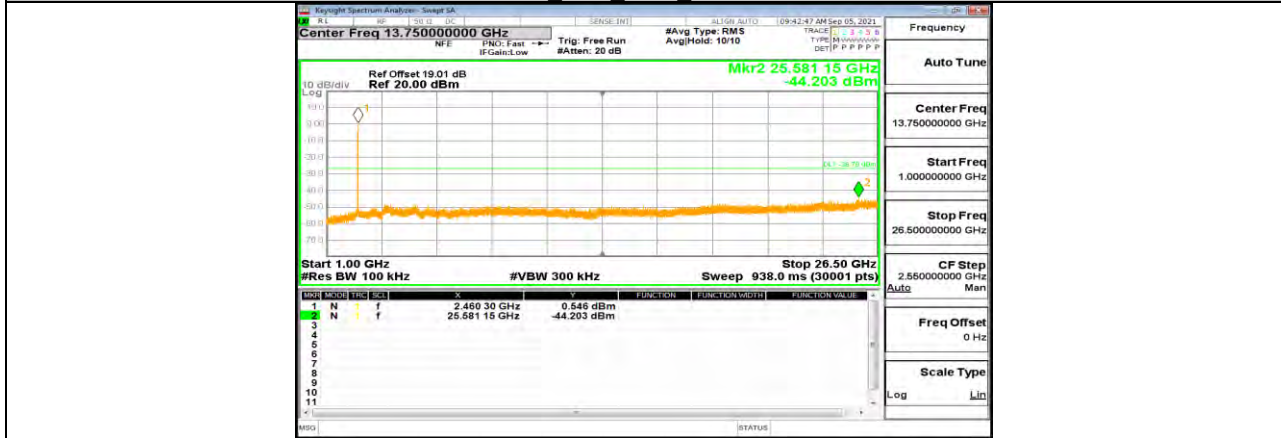


11G Ant1 2462 1000~26500





11N20MIMO Ant1 2412 0-Reference

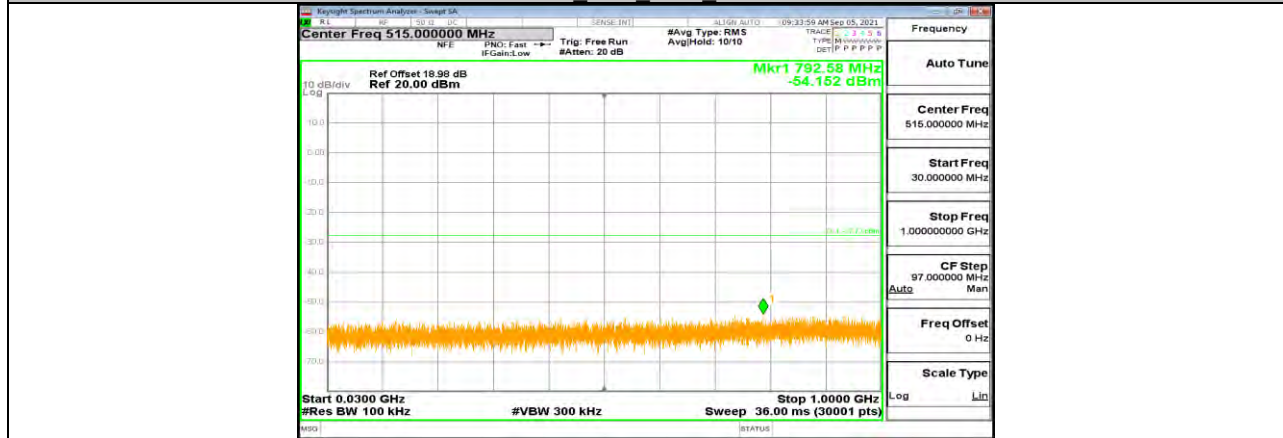

11N20MIMO Ant1 2412 30-1000

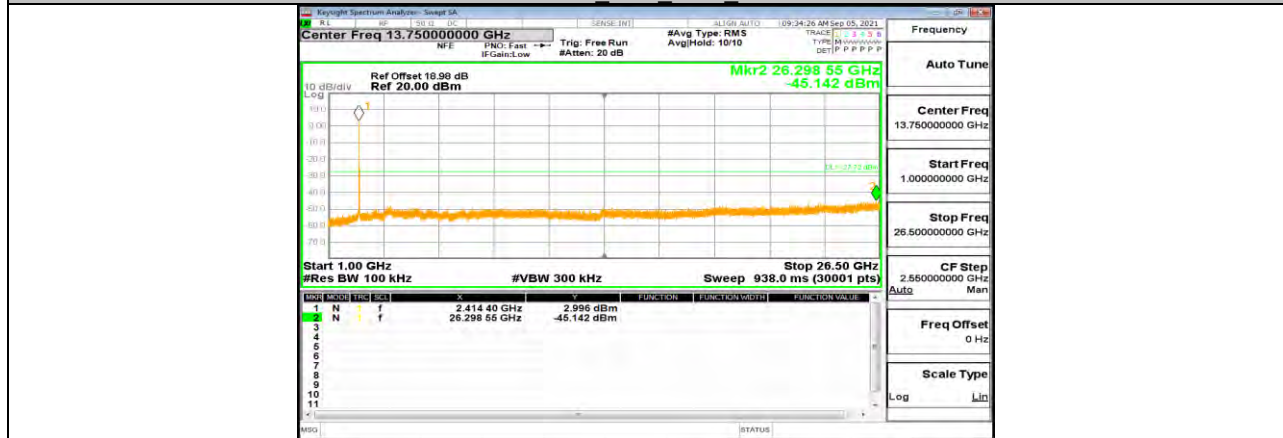


11N20MIMO Ant1 2412 1000-26500

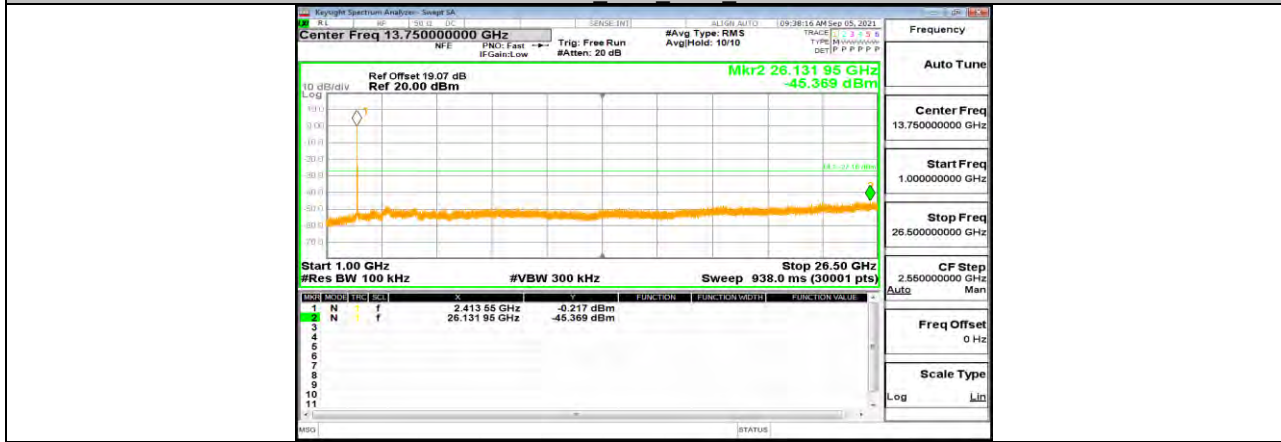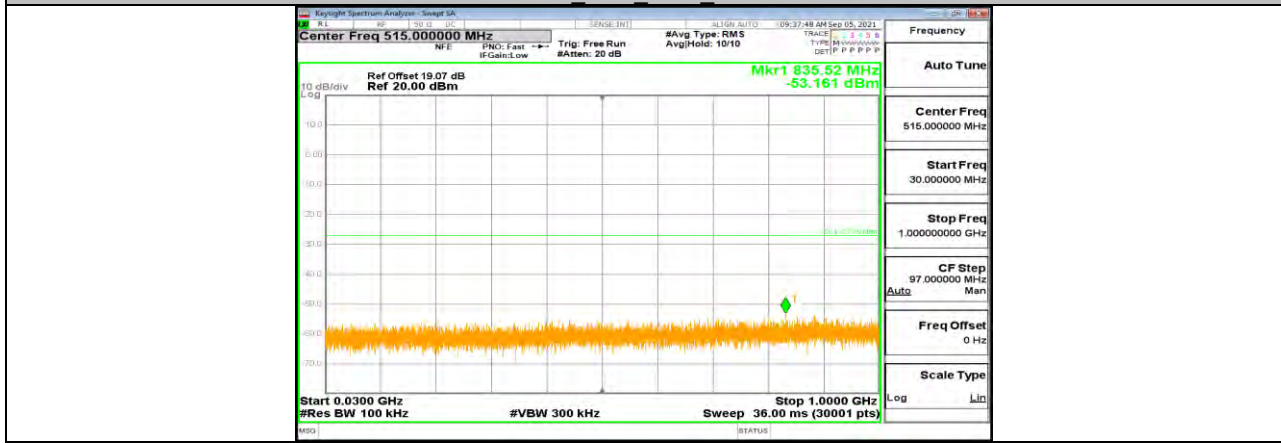





11N20MIMO Ant1 2437 0-Reference

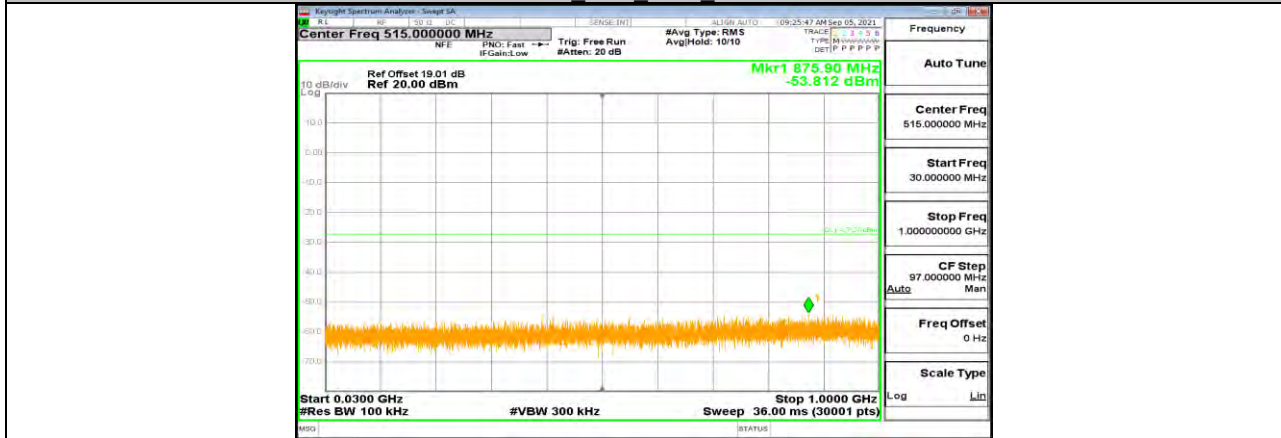


11N20MIMO Ant1 2437 30-1000

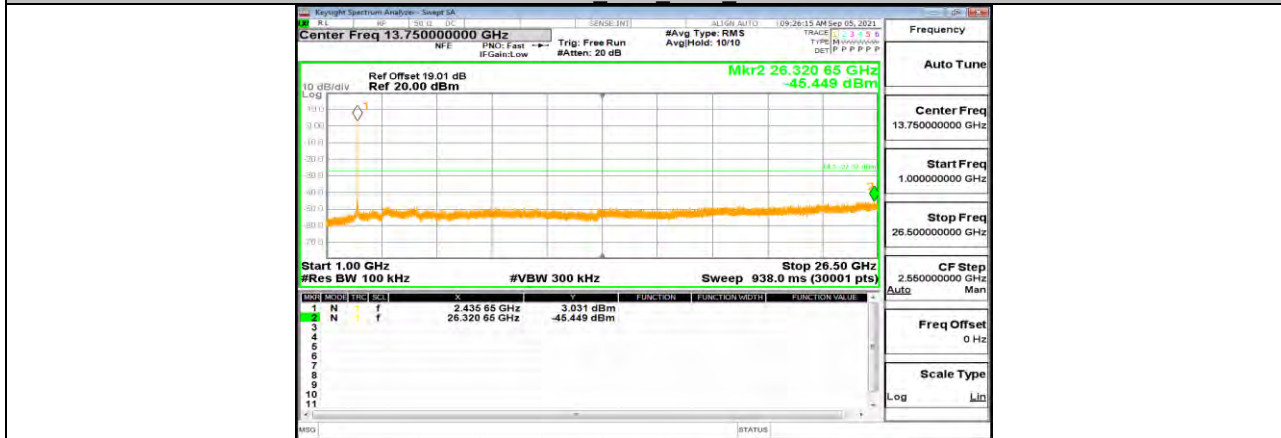


11N20MIMO Ant1 2437 1000-26500

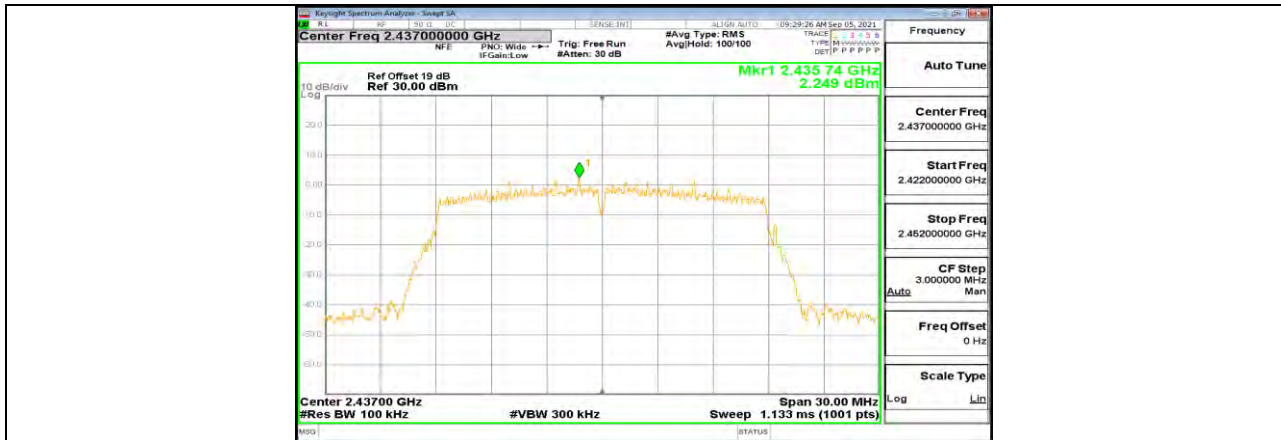


11N20MIMO Ant2 2437 0-Reference

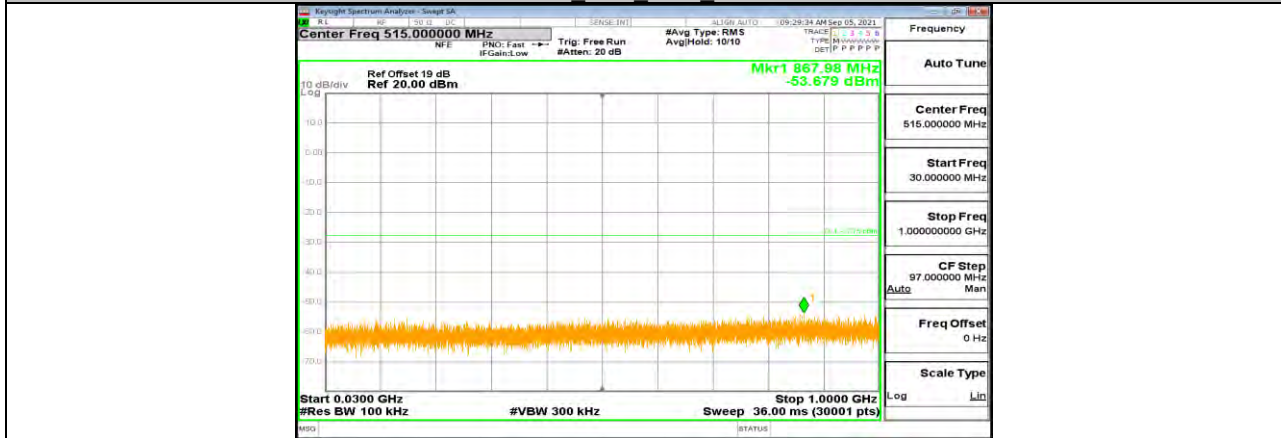


11N20MIMO Ant2 2437 30-1000

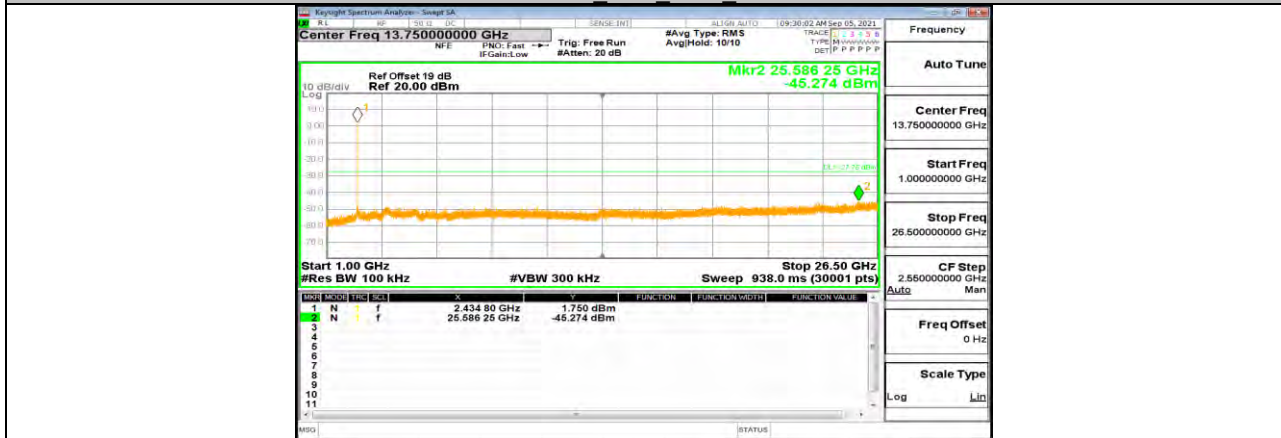


11N20MIMO Ant2 2437 1000-26500

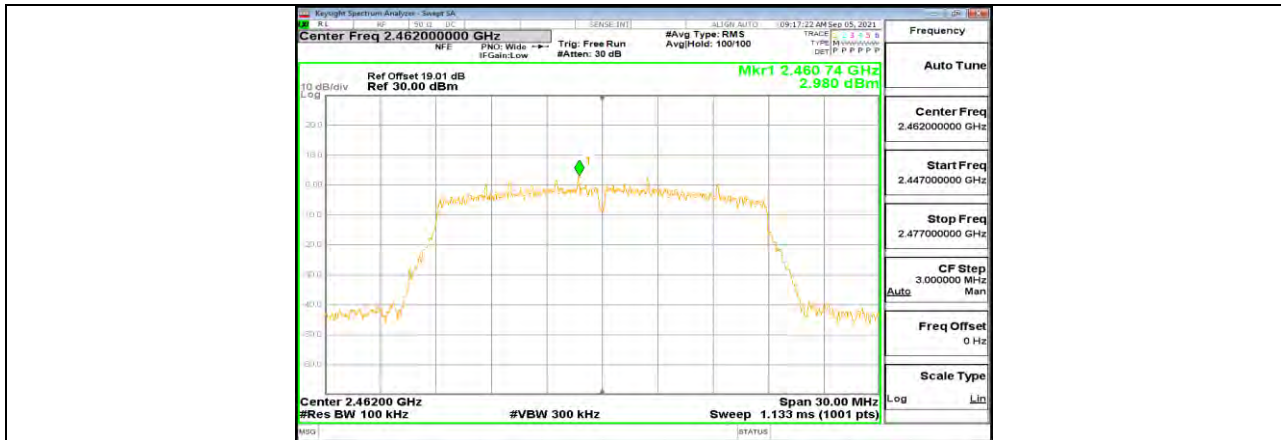

11N20MIMO Ant1 2462 0-Reference

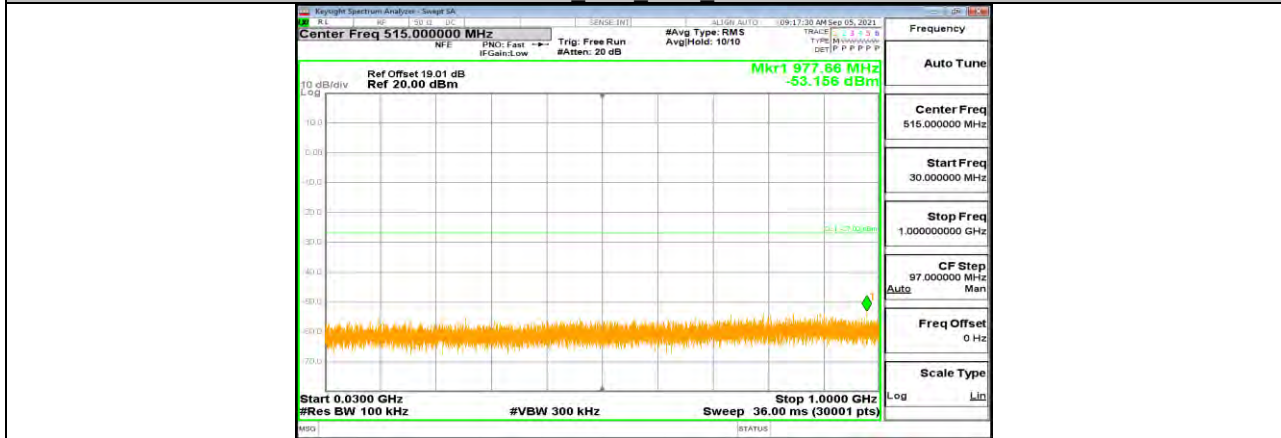

11N20MIMO Ant1 2462 30-1000

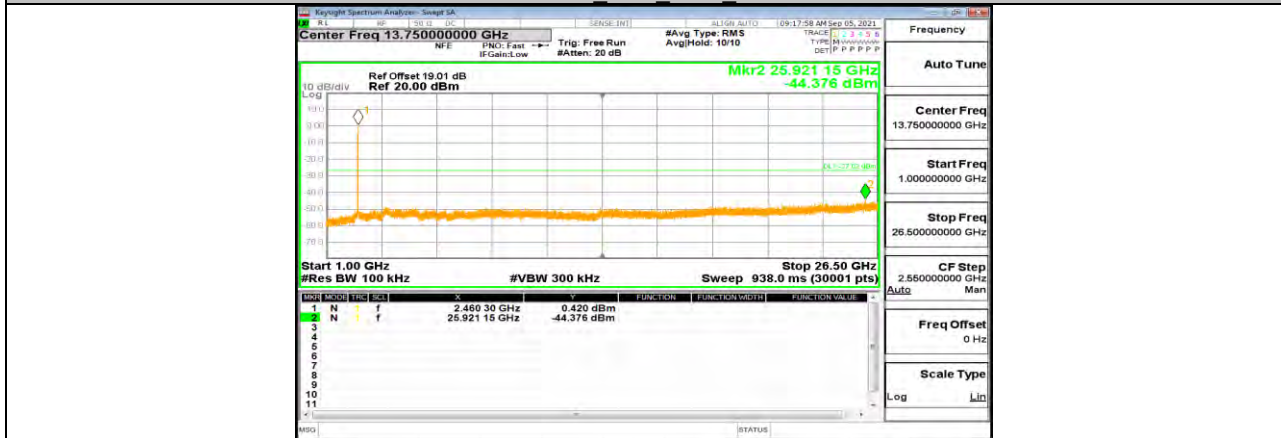


11N20MIMO Ant1 2462 1000-26500






11N20MIMO Ant2 2462 0-Reference

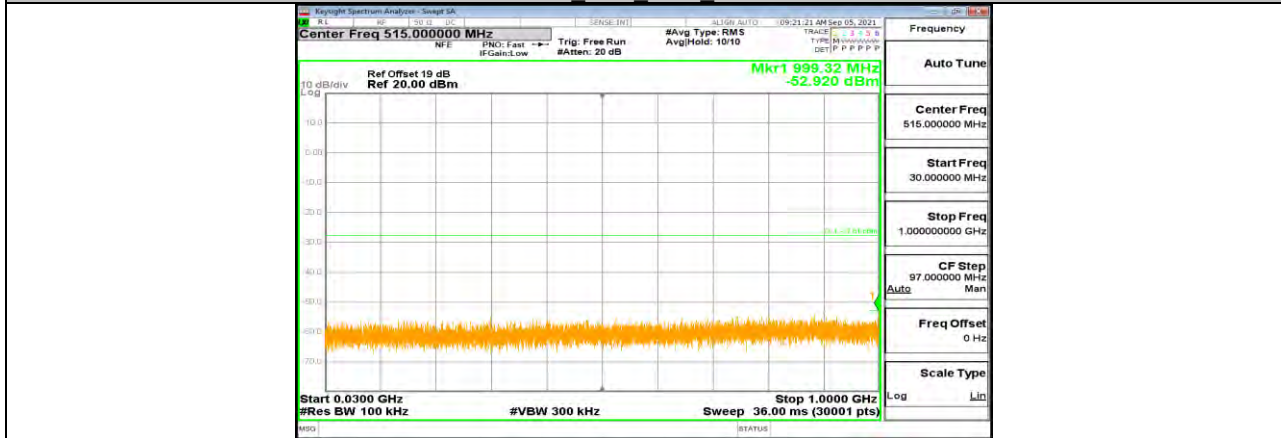


11N20MIMO Ant2 2462 30-1000

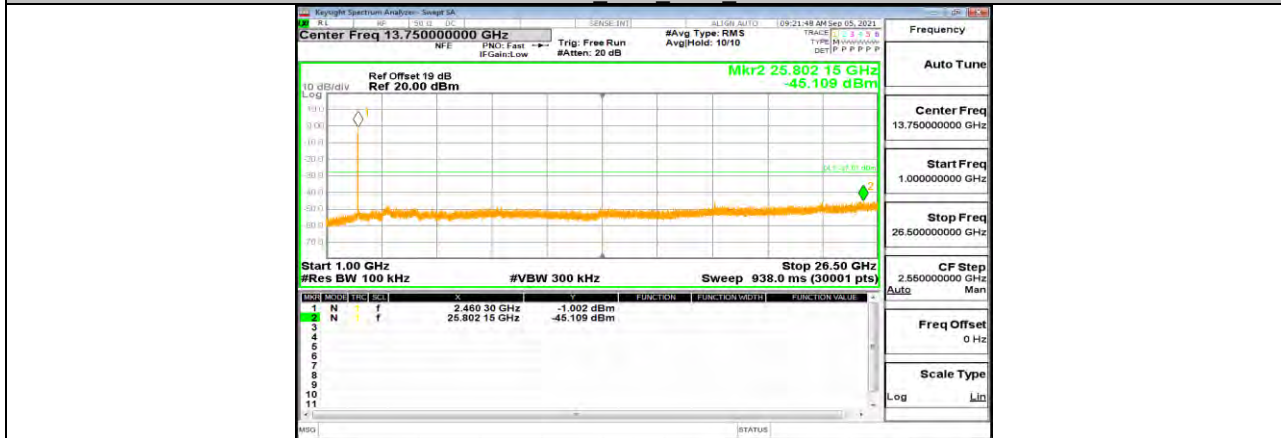


11N20MIMO Ant2 2462 1000-26500



11N40MIMO Ant1 2422 0-Reference

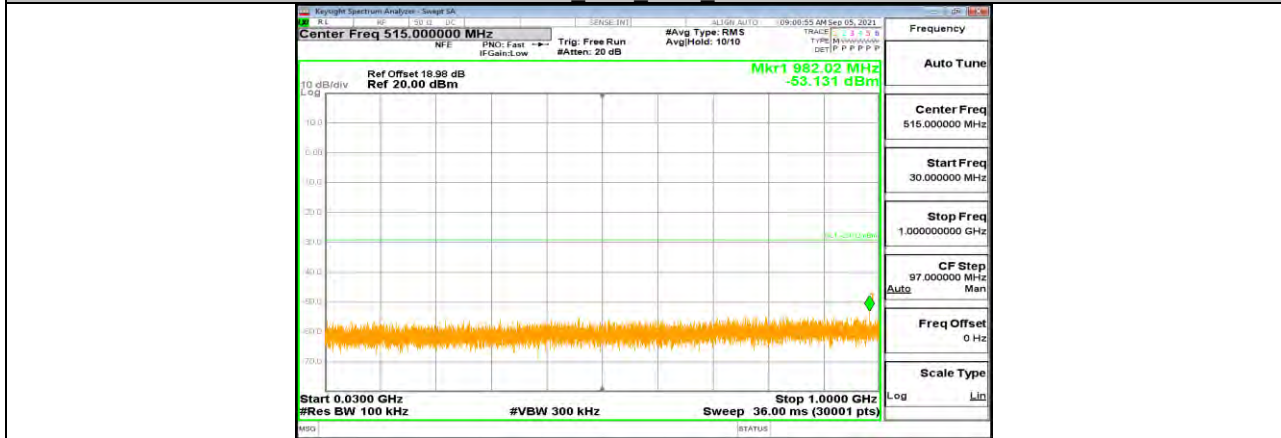


11N40MIMO Ant1 2422 30-1000

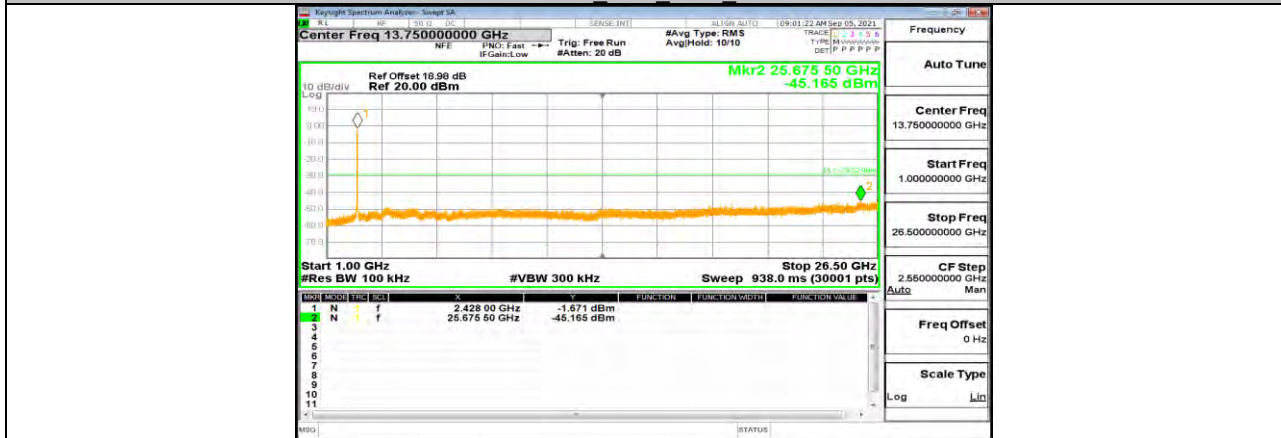


11N40MIMO Ant1 2422 1000-26500



11N40MIMO Ant2 2422 0-Reference

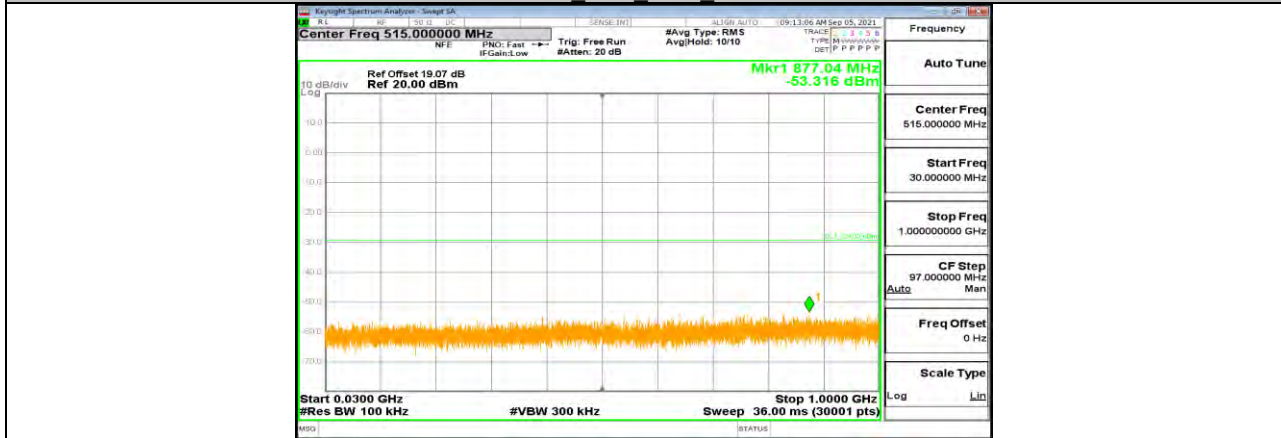


11N40MIMO Ant2 2422 30-1000

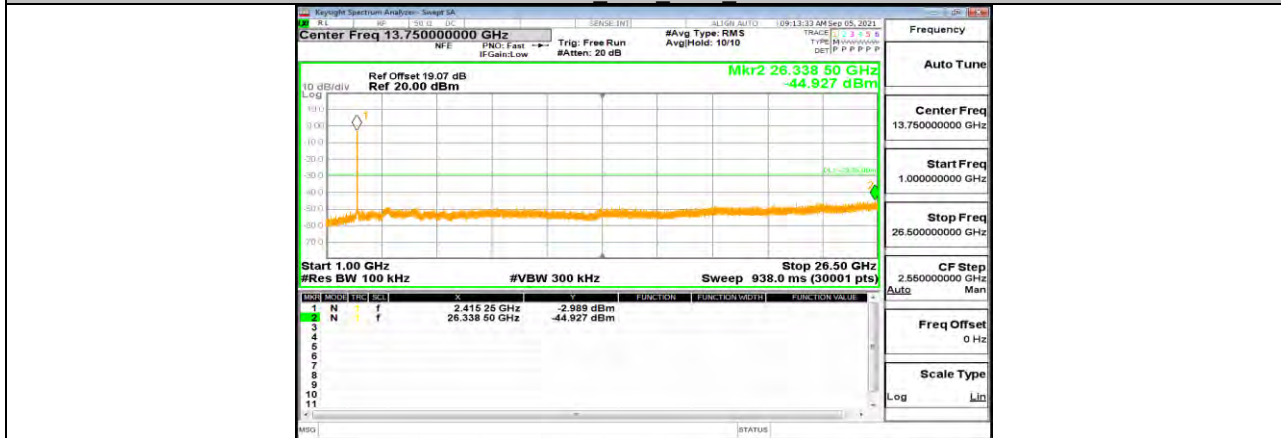


11N40MIMO Ant2 2422 1000-26500



11N40MIMO Ant1 2437 0-Reference

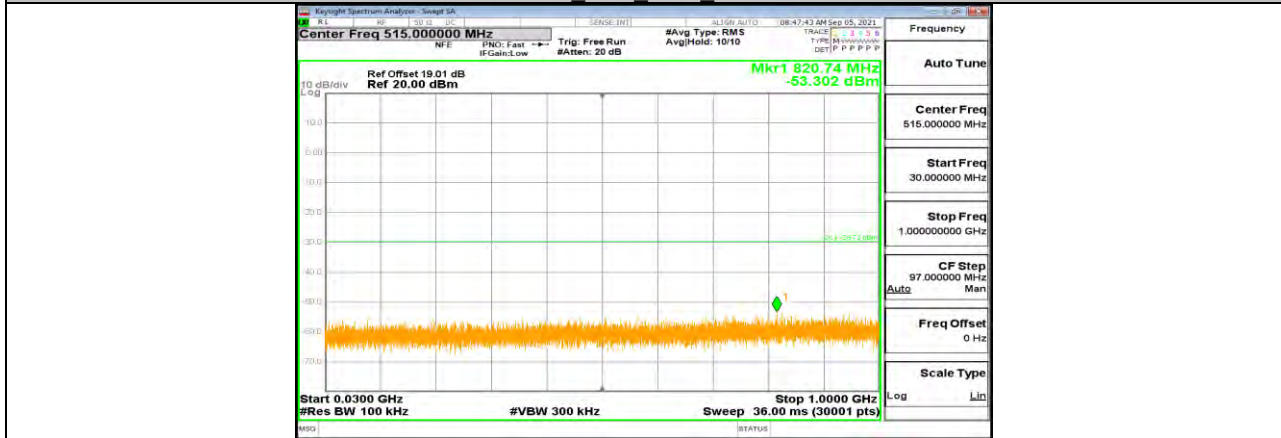


11N40MIMO Ant1 2437 30-1000

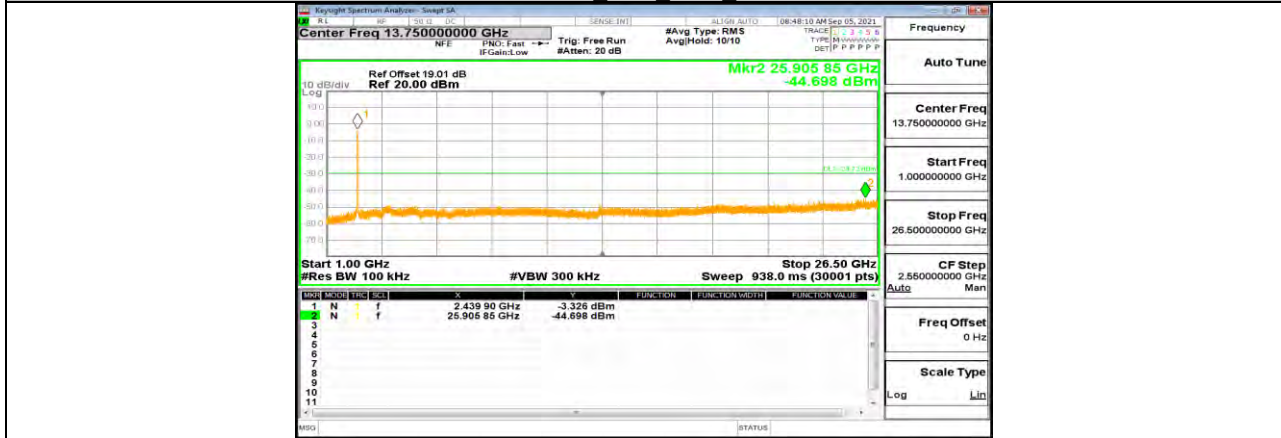


11N40MIMO Ant1 2437 1000-26500



11N40MIMO Ant2 2437 0~Reference

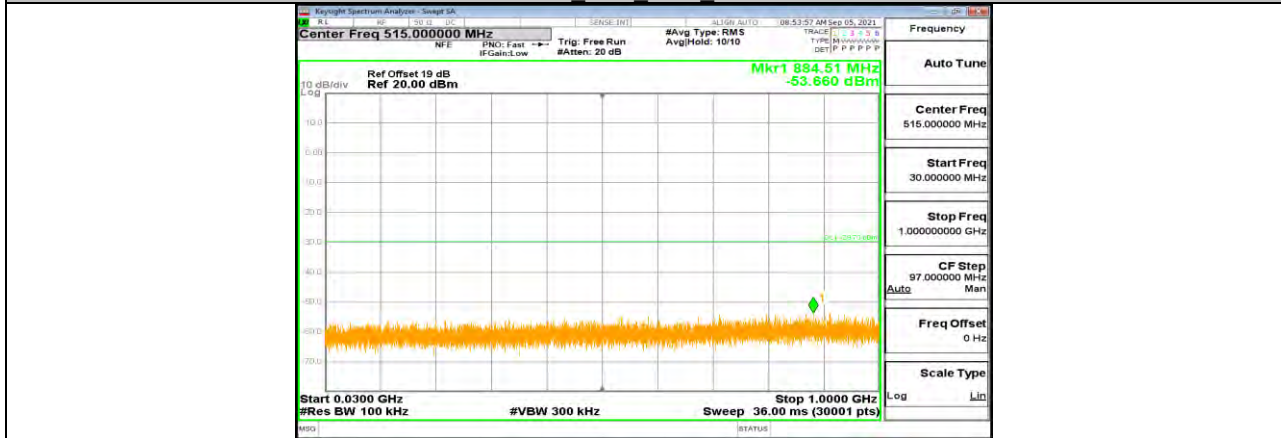


11N40MIMO Ant2 2437 30~1000

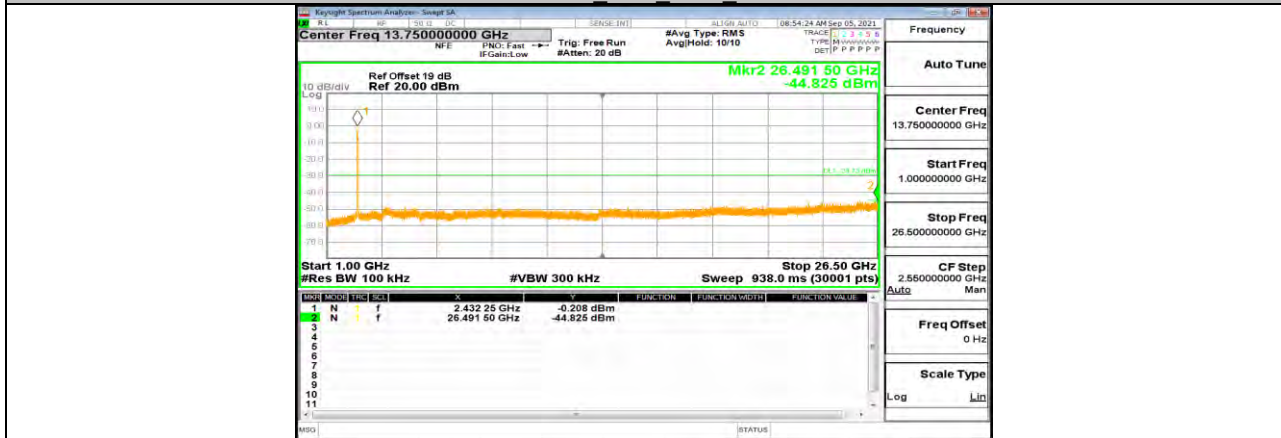


11N40MIMO Ant2 2437 1000~26500



11N40MIMO Ant1 2452 0-Reference

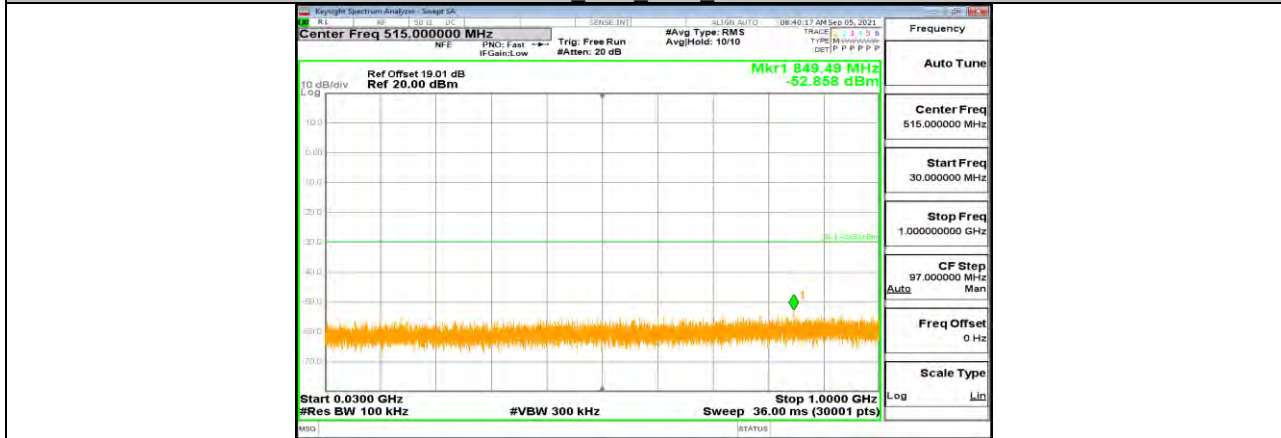


11N40MIMO Ant1 2452 30-1000

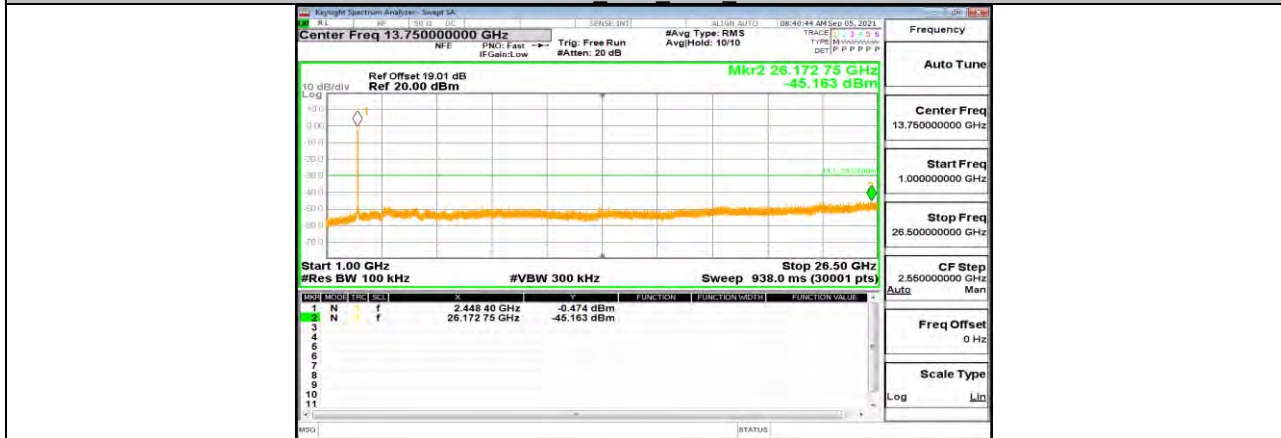


11N40MIMO Ant1 2452 1000-26500



11N40MIMO Ant2 2452 0-Reference

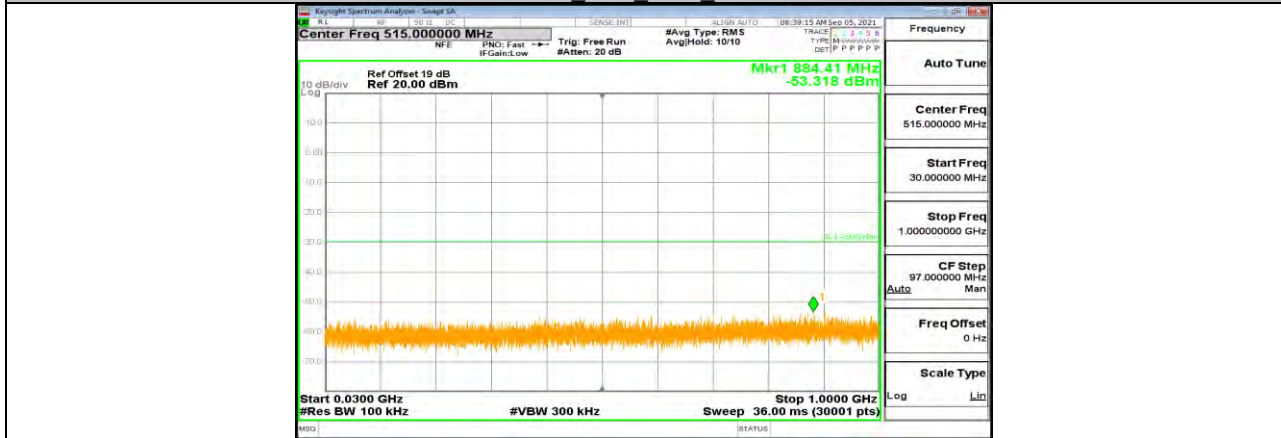

11N40MIMO Ant2 2452 30-1000

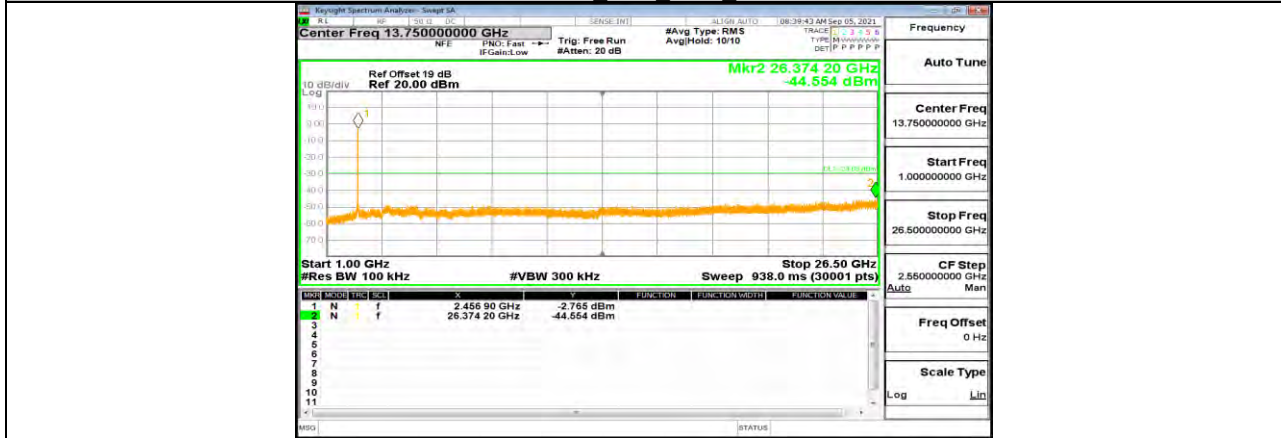

11N40MIMO Ant2 2452 1000-26500



**11.7. Appendix G: Duty Cycle**  
**11.7.1. Test Result**

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11b	8.38	8.42	0.9952	99.52	0.02	0.12	0.01
11g	1.39	1.44	0.9653	96.53	0.15	0.72	1
11n HT20	1.30	1.34	0.9701	97.01	0.13	0.77	1
11n HT40	0.64	0.69	0.9275	92.75	0.33	1.56	2

Note:

Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)


Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.



11.7.2. Test Graphs



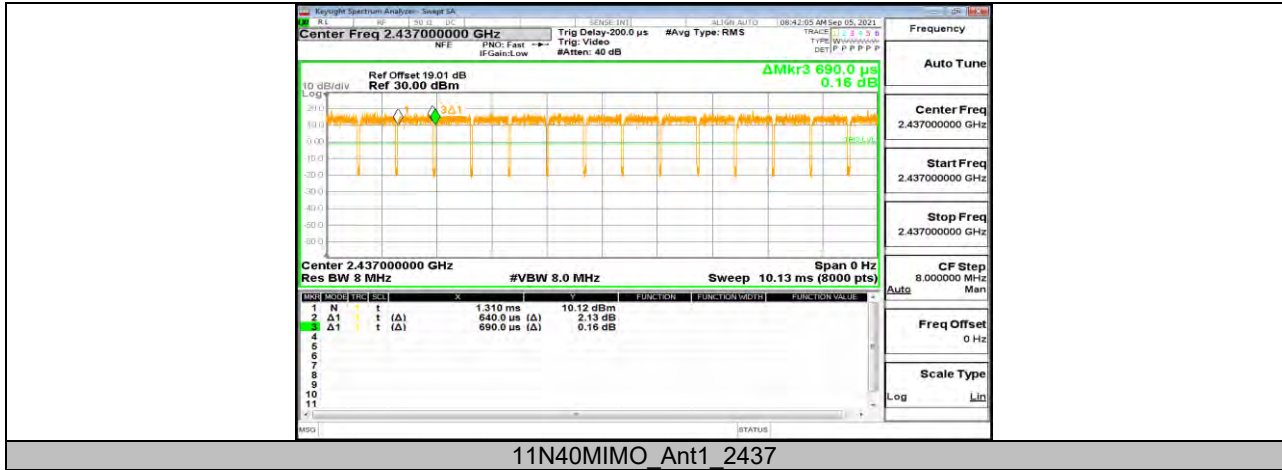

END OF REPORT