

# MEASUREMENT REPORT

## FCC PART 15.407 WLAN 802.11a/n

---

**FCC ID:** 2AC6AC71

**APPLICANT:** Shenzhen Chainway Information Technology Co., Ltd.

**Application Type:** Certification

**Product:** Mobile Data Terminal

**Model No.:** C71

**Brand Name:** CHAINWAY

**FCC Classification:** Unlicensed National Information Infrastructure (NII)

**FCC Rule Part(s):** Part15 Subpart E (Section 15.407)

**Test Procedure(s):** ANSI C63.10-2013, 74KDB 789033 D02v02

**Test Date:** October 31 ~ Decemeber 15, 2017

Reviewed By : Kevin Guo  
( Kevin Guo )

Approved By : Marlin Chen  
( Marlin Chen )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in 74KDB 789033 D02v02. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

## Revision History

Report No.	Version	Description	Issue Date	Note
1710RSU02703	Rev. 01	Initial report	12-11-2017	Valid

---

## CONTENTS

Description	Page
<b>§2.1033 General Information .....</b>	<b>6</b>
<b>1. INTRODUCTION .....</b>	<b>7</b>
1.1. Scope .....	7
1.2. MRT Test Location .....	7
<b>2. PRODUCT INFORMATION .....</b>	<b>8</b>
2.1. Equipment Description.....	8
2.2. Product Specification Subjective to this Report.....	8
2.3. Operation Frequency / Channel list.....	9
2.4. Description of Available Antennas.....	10
2.5. Test Mode .....	10
2.6. Description of Test Software.....	11
2.7. Device Capabilities .....	12
2.8. Test Configuration .....	13
2.9. EMI Suppression Device(s)/Modifications.....	13
2.10. Labeling Requirements.....	13
<b>3. DESCRIPTION OF TEST .....</b>	<b>14</b>
3.1. Evaluation Procedure .....	14
3.2. AC Line Conducted Emissions .....	14
3.3. Radiated Emissions.....	15
<b>4. ANTENNA REQUIREMENTS.....</b>	<b>16</b>
<b>5. TEST EQUIPMENT CALIBRATION DATE .....</b>	<b>17</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>18</b>
<b>7. TEST RESULT .....</b>	<b>19</b>
7.1. Summary .....	19
7.2. 26dB Bandwidth Measurement.....	20
7.2.1. Test Limit .....	20
7.2.2. Test Procedure used.....	20
7.2.3. Test Setting.....	20
7.2.4. Test Setup .....	20
7.2.5. Test Result.....	21
7.3. 6dB Bandwidth Measurement.....	27
7.3.1. Test Limit .....	27
7.3.2. Test Procedure used.....	27

---

7.3.3. Test Setting.....	27
7.3.4. Test Setup .....	27
7.3.5. Test Result.....	28
7.4. Output Power Measurement.....	31
7.4.1. Test Limit .....	31
7.4.2. Test Procedure Used .....	31
7.4.3. Test Setting.....	31
7.4.4. Test Setup .....	31
7.4.5. Test Result.....	32
7.5. Transmit Power Control .....	34
7.5.1. Test Limit .....	34
7.5.2. Test Procedure Used .....	34
7.5.3. Test Setting.....	34
7.5.4. Test Setup .....	34
7.5.5. Test Result.....	34
7.6. Power Spectral Density Measurement.....	35
7.6.1. Test Limit .....	35
7.6.2. Test Procedure Used .....	35
7.6.3. Test Setting.....	35
7.6.4. Test Setup .....	36
7.6.5. Test Result.....	37
7.7. Frequency Stability Measurement.....	44
7.7.1. Test Limit .....	44
7.7.2. Test Procedure Used .....	44
7.7.3. Test Setup .....	44
7.7.4. Test Result.....	45
7.8. Radiated Spurious Emission Measurement.....	46
7.8.1. Test Limit .....	46
7.8.2. Test Procedure Used .....	46
7.8.3. Test Setting.....	46
7.8.4. Test Setup .....	48
7.8.5. Test Result.....	50
7.9. Radiated Restricted Band Edge Measurement .....	76
7.9.1. Test Limit .....	76
7.9.2. Test Procedure Used .....	77
7.9.3. Test Setting.....	77
7.9.4. Test Setup .....	78
7.9.5. Test Result.....	79

7.10. AC Conducted Emissions Measurement.....	115
7.10.1. Test Limit .....	115
7.10.2. Test Procedure .....	115
7.10.3. Test Setup .....	116
7.10.4. Test Result.....	117
<b>8. CONCLUSION.....</b>	<b>119</b>

## §2.1033 General Information

<b>Applicant:</b>	Shenzhen Chainway Information Technology Co., Ltd.
<b>Applicant Address:</b>	9/F, Building 2, Daqian Industrial Park, Longchang Rd., District 67, Bao'an, Shenzhen, China
<b>Manufacturer:</b>	Shenzhen Chainway Information Technology Co., Ltd.
<b>Manufacturer Address:</b>	9/F, Building 2, Daqian Industrial Park, Longchang Rd., District 67, Bao'an, Shenzhen, China
<b>Test Site:</b>	MRT Technology (Suzhou) Co., Ltd
<b>Test Site Address:</b>	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
<b>MRT FCC Registration No.:</b>	893164
<b>MRT designation No.:</b>	CN1166
<b>FCC Rule Part(s):</b>	Part15 Subpart E (Section 15.407)
<b>Test Device Serial No.:</b>	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 893164) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name	Mobile Data Terminal
Model No.	C71
Brand Name:	CHAINWAY
Hardware Version:	C70SEA_mb_v12
Software Version:	C71A_MT6735_V1.1_AM_GITDOOFOC3
Wi-Fi Specification	802.11a/b/g/n
Bluetooth Version	V4.0 single mode
GSM Operation Band (s):	GSM 850 / 900 / 1800 / 1900
WCDMA Operation Band (s):	Band II / IV / V
LTE Operation Band (s):	FDD Band 2 / 4 / 7 / 12 / 17
NFC:	13.56MHz
GPS:	1575.42MHz
<b>Components</b>	
Adapter	Model No.: GME10D-050200FUu Input Power: 100 - 240V ~ 50 - 60Hz, 0.28A Output Power: 5VDC 2A

### 2.2. Product Specification Subjective to this Report

Frequency Range	802.11a/n-HT20: 5180~5320MHz, 5745~5825MHz For 802.11n-HT40: 5190~5310MHz, 5755~5795MHz
Type of Modulation	802.11a/n: OFDM
Data Rate:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 150Mbps
Maximum Average Output Power	802.11a: 16.37dBm 802.11n-HT20: 16.36dBm 802.11n-HT40: 16.51dBm

Note: For other features of this EUT, test report will be issued separately.



### 2.3. Operation Frequency / Channel list

#### 802.11a/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

#### 802.11n-HT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	151	5755 MHz	159	5795 MHz

## 2.4. Description of Available Antennas

Antenna Type	Frequency Band	Max Peak Gain (dBi)
<b>GPS Internal Antenna</b>		
PIFA	1575.42MHz	0.92
<b>2G Internal Antenna</b>		
PIFA	GSM850	-0.72
	GSM1900	-0.29
<b>3G Internal Antenna</b>		
PIFA	WCDMA Band II	0.40
	WCDMA Band IV	0.30
	WCDMA Band V	0.21
<b>4G Internal Antenna</b>		
PIFA	FDD-LTE Band 2	-0.76
	FDD-LTE Band 4	-0.52
	FDD-LTE Band 7	-0.43
	FDD-LTE Band 12	-0.28
	FDD-LTE Band 17	-0.72
<b>Wi-Fi Internal Antenna</b>		
PIFA	2400 ~ 2483.5MHz	0.44
	5150 ~ 5250MHz	0.49
	5250 ~ 5350MHz	0.52
	5725 ~ 5850MHz	0.50
<b>Bluetooth Internal Antenna</b>		
PIFA	2400 ~ 2483.5MHz	0.50
<b>NFC Internal Antenna</b>		
PIFA	13.56MHz	1.10

## 2.5. Test Mode

Test Mode	Mode 1: Transmit by 802.11a
	Mode 2: Transmit by 802.11n-HT20
	Mode 3: Transmit by 802.11n-HT40

## 2.6. Description of Test Software

The test utility software used during testing was supplied by manufacturer.

### Power Parameter Value:

Test Mode	Test Channel No.	Test Frequency (MHz)	Power Parameter Value
802.11a	36	5180	17.0
	44	5220	17.0
	48	5240	17.0
	52	5260	17.0
	60	5300	17.0
	64	5320	17.0
	149	5745	17.0
	157	5785	17.0
802.11n-HT20	36	5180	17.0
	44	5220	17.0
	48	5240	17.0
	52	5260	17.0
	60	5300	17.0
	64	5320	17.0
	149	5745	17.0
	157	5785	17.0
	165	5825	17.0
802.11n-HT40	38	5190	17.0
	46	5230	17.0
	54	5270	17.0
	62	5310	17.0
	151	5755	17.0
	159	5795	17.0
	38	5190	17.0
	46	5230	17.0

## 2.7. Device Capabilities


This device contains the following capabilities:

GSM 850/900/1800/1900, WCDMA Band II/IV/V, LTE FDD Band 2/4/7/12/17, 2.4GHz WLAN (DTS), 5GHz WLAN (UNII), Bluetooth (v4.0 single mode), NFC


**Note:** 5GHz (NII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = average per the guidance of Section B)2)b) of 74KDB 789033 D02v02. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11a	97.19%
802.11n-HT20	97.00%
802.11n-HT40	94.30%


802.11a (T = 1.385ms)

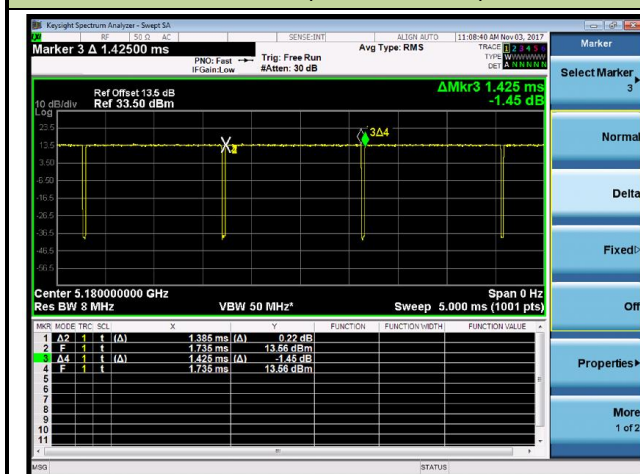

802.11n-HT20 (T = 1.295ms)

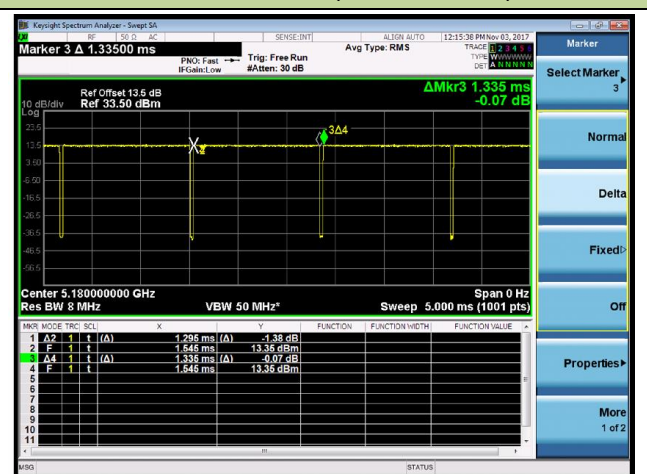

802.11n-HT40 (T = 645.0us)

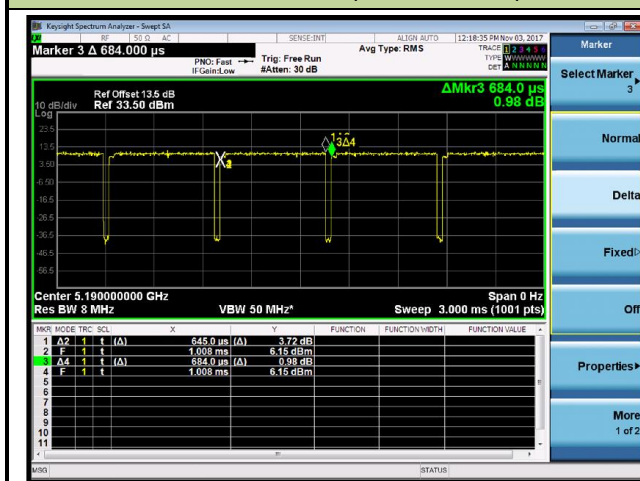

## **2.8. Test Configuration**

The **Mobile Data Terminal** was tested per the guidance of 74KDB 789033 D02v02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## **2.9. EMI Suppression Device(s)/Modifications**

No EMI suppression device(s) were added and/or no modifications were made during testing.

## **2.10. Labeling Requirements**

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

### 3. DESCRIPTION OF TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v02 were used in the measurement of the **Mobile Data Terminal**.

**Deviation from measurement procedure.....None**

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.10.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### **Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **Mobile Data Terminal** is **permanently attached**.
- There are no provisions for connection to an external antenna.

### **Conclusion:**

The **Mobile Data Terminal** unit complies with the requirement of §15.203.



## 5. TEST EQUIPMENT CALIBRATION DATE

### Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2018/06/20
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2018/06/20
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2018/06/20
Temperature/Humidity Meter	Yuhuaze	HTC-2	MRTSUE06181	1 year	2018/12/20
Shielding Anechoic Chamber	Mikebang	Chamber-SR2	MRTSUE06214	1 year	2018/05/10

### Radiated Emission – AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
MXE EMI Receiver	Agilent	N9038A	MRTSUE06125	1 year	2018/08/18
Loop Antenna	Schwarzbeck	FMZB1519	MRTSUE06025	1 year	2018/12/21
Bilog Period Antenna	Schwarzbeck	VULB9162	MRTSUE06022	1 year	2018/10/21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2017/12/10
Broadband Coaxial Pre-amplifier	Schwarzbeck	BBV 9718	MRTSUE06106	1 year	2017/12/10
Broadband Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06024	1 year	2018/04/25
Digital Thermometer & Hygrometer	Minggao	ETH529	MRTSUE06170	1 year	2017/11/30
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2018/05/10

### Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2018/04/25
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2017/12/06
Temperature/Humidity Meter	Yuhuaze	HTC-2	MRTSUE06180	1 year	2017/12/22

Software	Version	Function
e3	V8.3.5	EMI Test Software

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>AC Conducted Emission Measurement - SR2</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 150kHz~30MHz: 3.46dB
<b>Radiated Emission Measurement – AC2</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB
<b>Frequency Stability - TR3</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.78dB
<b>Output Power, Transmit Power Control - TR3</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.13dB
<b>Power Spectrum Density - TR3</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.15dB
<b>Occupied Bandwidth - TR3</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.28%

## 7. TEST RESULT

### 7.1. Summary

**Company Name:** Shenzhen Chainway Information Technology Co., Ltd.  
**FCC ID:** 2AC6AC71  
**FCC Classification:** Unlicensed National Information Infrastructure (NII)  
**Data Rate(s) Tested:** 6Mbps ~ 54Mbps (a); 6.5/7.2Mbps ~ 65.0/72.2Mbps (n-HT20);  
13.5/15.0Mbps ~ 135.0/150.0Mbps (n-HT40).

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	$\geq 500\text{kHz}$		Pass	Section 7.3
15.407(a)(1)(iv), (2), (3)	Maximum Conducted Output Power	Refer to Section 7.5		Pass	Section 7.5
15.407(h)(1)	Transmit Power Control	$\leq 24\text{ dBm}$		Pass	Section 7.6
15.407(a)(1)(iv), (2), (3), (5)	Peak Power Spectral Density	Refer to Section 7.7		Pass	Section 7.7
15.407(g)	Frequency Stability	N/A		Pass	Section 7.8
15.407(b)(1), (2), (3), (4)(i)	Undesirable Emissions	$\leq -27\text{dBm/MHz EIRP}$ Detail see section 7.9	Radiated	Pass	Section 7.9 & 7.10
15.205, 15.209 15.407(b)(5), (6), (7)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.11

#### Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

## 7.2. 26dB Bandwidth Measurement

### 7.2.1. Test Limit

N/A


### 7.2.2. Test Procedure used

74KDB 789033 D02v02 – Section C.1

### 7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 26$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold.

### 7.2.4. Test Setup

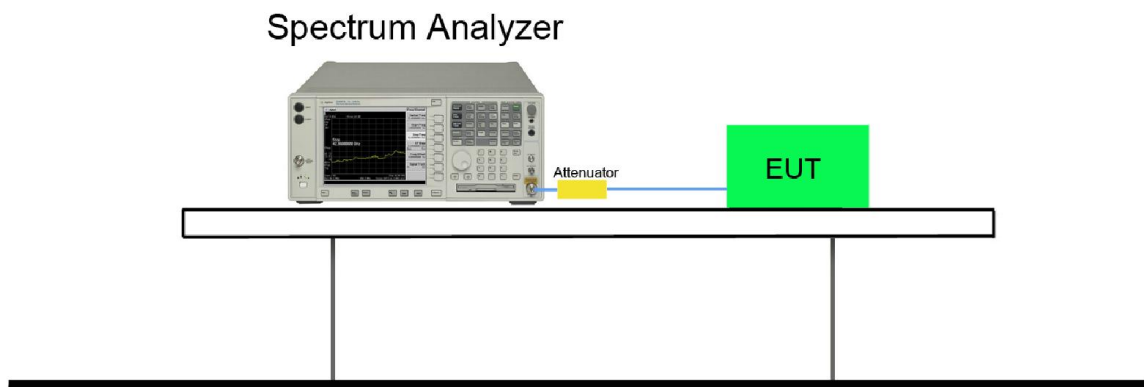

**7.2.5. Test Result**


Product	Mobile Data Terminal	Temperature	24°C
Test Engineer	Hunk Li	Relative Humidity	53%
Test Site	TR3	Test Date	2017/11/03
Test Item	26dB Bandwidth		


Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
802.11a	6	36	5180	21.69	16.64	Pass
802.11a	6	44	5220	20.02	16.55	Pass
802.11a	6	48	5240	20.56	16.63	Pass
802.11a	6	52	5260	20.13	16.60	Pass
802.11a	6	60	5300	21.86	16.60	Pass
802.11a	6	64	5320	21.29	16.62	Pass
802.11a	6	149	5745	20.04	16.59	Pass
802.11a	6	157	5785	20.37	16.67	Pass
802.11a	6	165	5825	21.76	16.68	Pass
802.11n-HT20	6.5	36	5180	21.46	17.70	Pass
802.11n-HT20	6.5	44	5220	21.25	17.66	Pass
802.11n-HT20	6.5	48	5240	21.46	17.68	Pass
802.11n-HT20	6.5	52	5260	20.00	17.64	Pass
802.11n-HT20	6.5	60	5300	20.04	17.66	Pass
802.11n-HT20	6.5	64	5320	22.66	17.67	Pass
802.11n-HT20	6.5	149	5745	23.91	17.69	Pass
802.11n-HT20	6.5	157	5785	23.73	17.72	Pass
802.11n-HT20	6.5	165	5825	23.50	17.72	Pass
802.11n-HT40	13.5	38	5190	60.92	36.50	Pass
802.11n-HT40	13.5	46	5230	61.55	36.30	Pass
802.11n-HT40	13.5	54	5270	61.29	36.22	Pass
802.11n-HT40	13.5	62	5310	61.95	36.50	Pass
802.11n-HT40	13.5	151	5755	57.04	36.39	Pass
802.11n-HT40	13.5	159	5795	62.25	36.38	Pass

**802.11a 26dB Bandwidth & 99% Bandwidth**
**Channel 36 (5180MHz)**

**Channel 44 (5220MHz)**

**Channel 48 (5240MHz)**

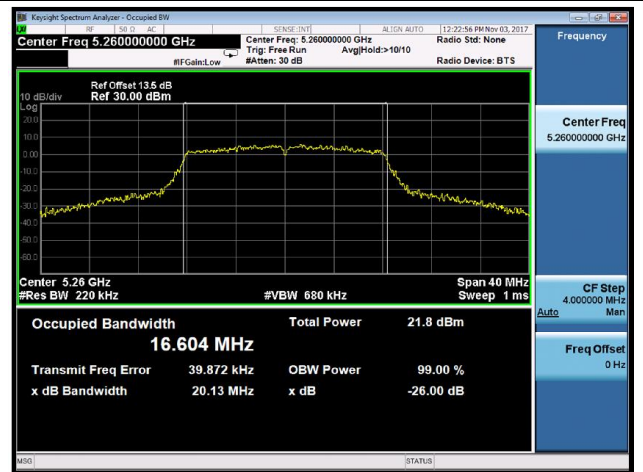**Channel 52 (5260MHz)**

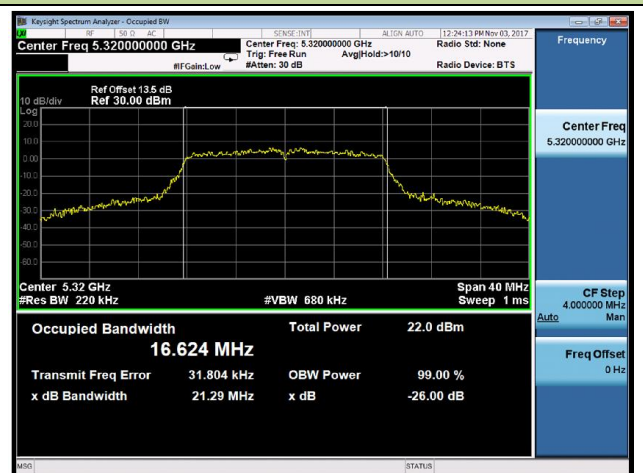**Channel 60 (5300MHz)**

**Channel 64 (5320MHz)**


### 802.11a 26dB Bandwidth & 99% Bandwidth

#### Channel 149 (5745MHz)



#### Channel 157 (5785MHz)



#### Channel 165 (5825MHz)




**802.11n-HT20 26dB Bandwidth & 99% Bandwidth**


**Channel 36 (5180MHz)**




**Channel 44 (5220MHz)**

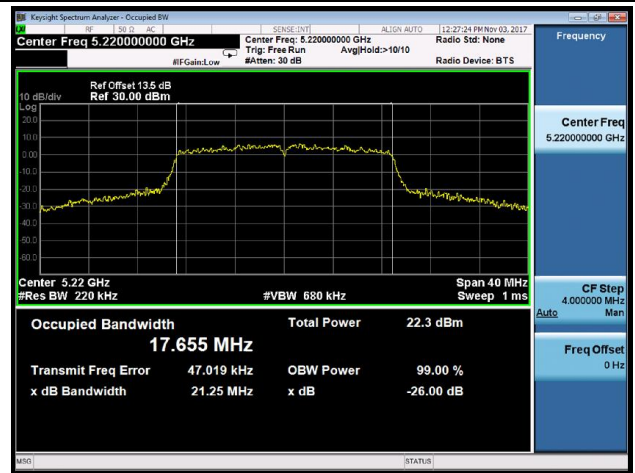


**Channel 48 (5240MHz)**

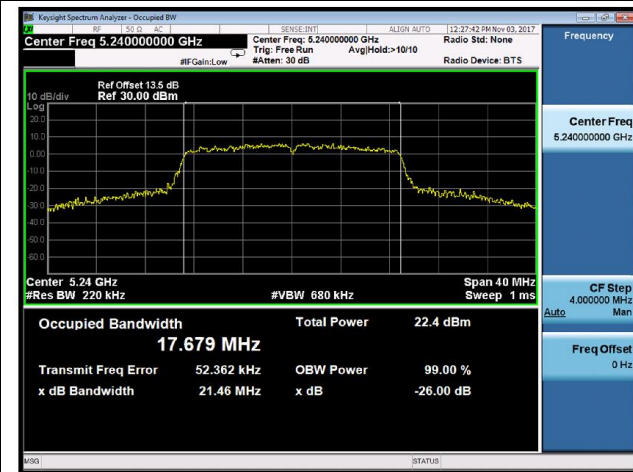


**Channel 52 (5260MHz)**

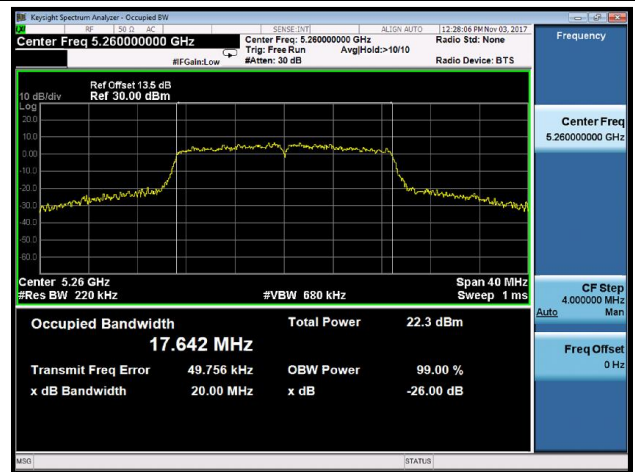

**Channel 60 (5300MHz)**


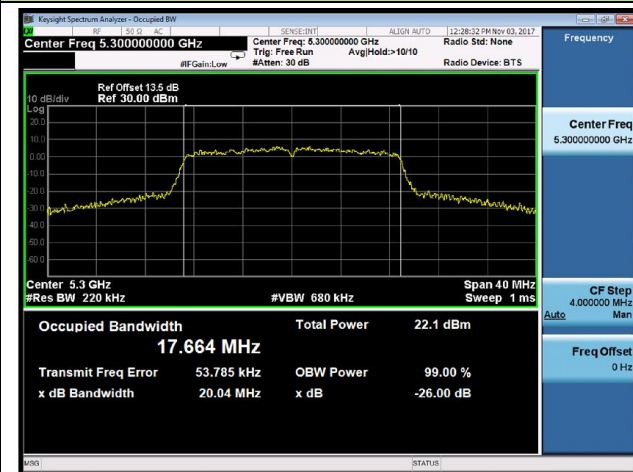








**Channel 64 (5320MHz)**

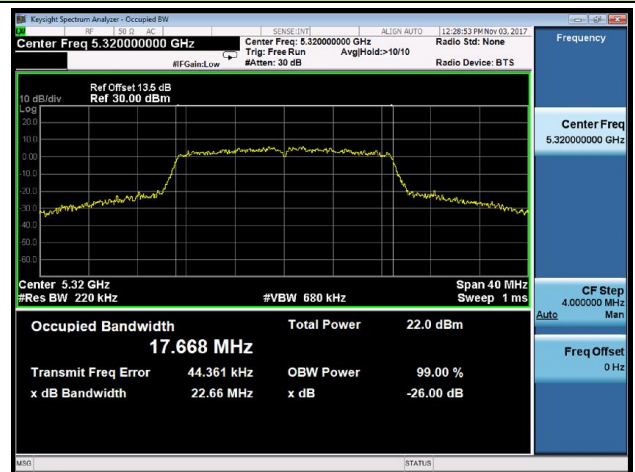



**802.11n-HT20 26dB Bandwidth & 99% Bandwidth**
**Channel 149 (5745MHz)**

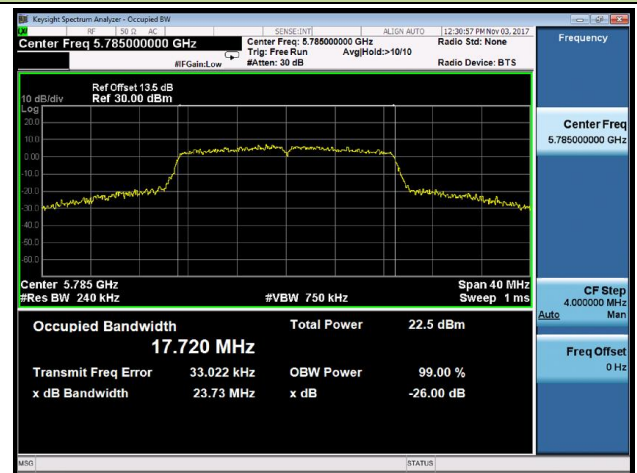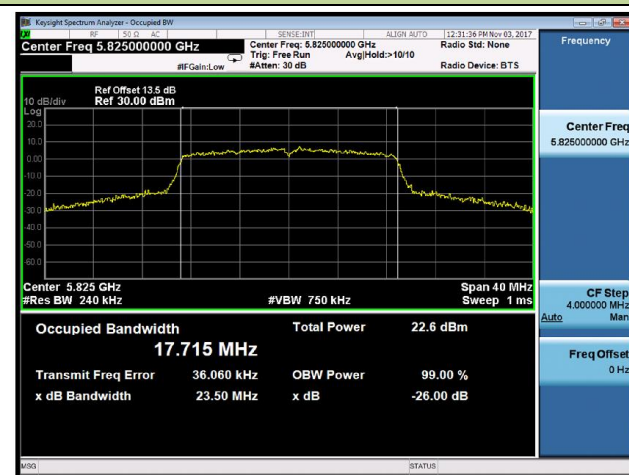**Channel 157 (5785MHz)**

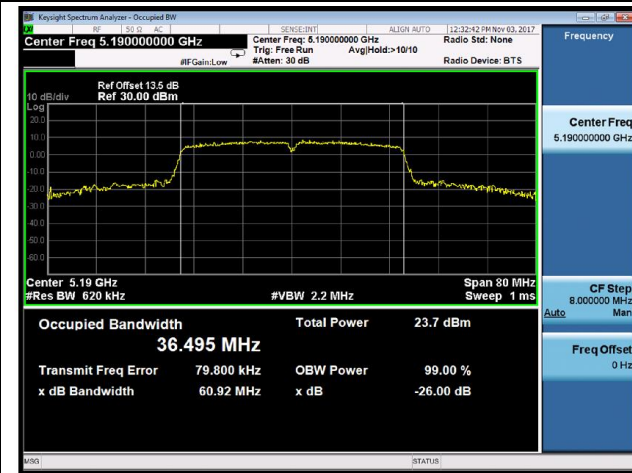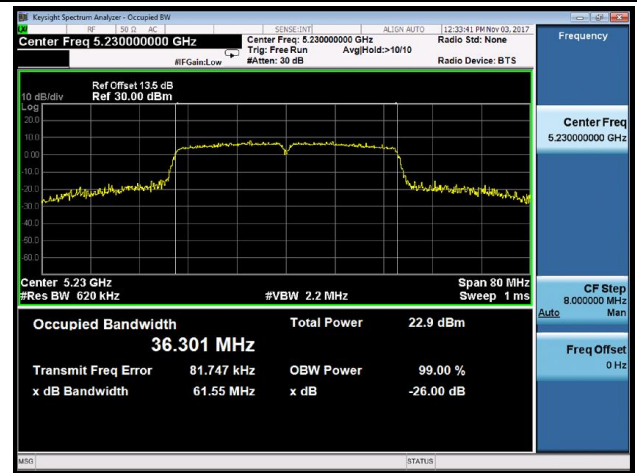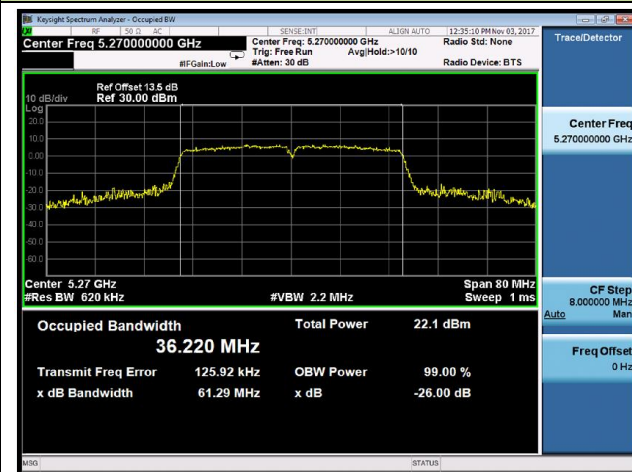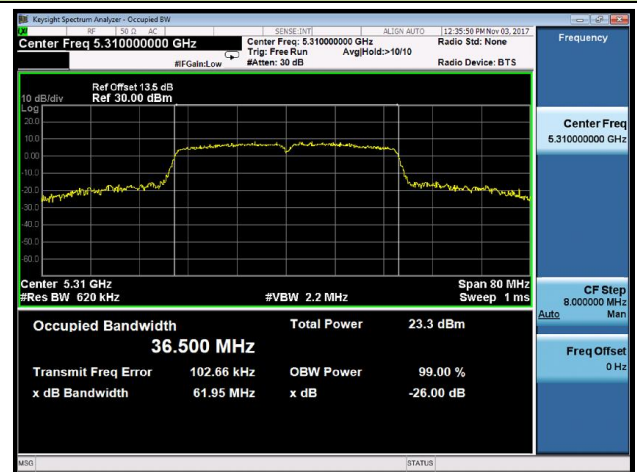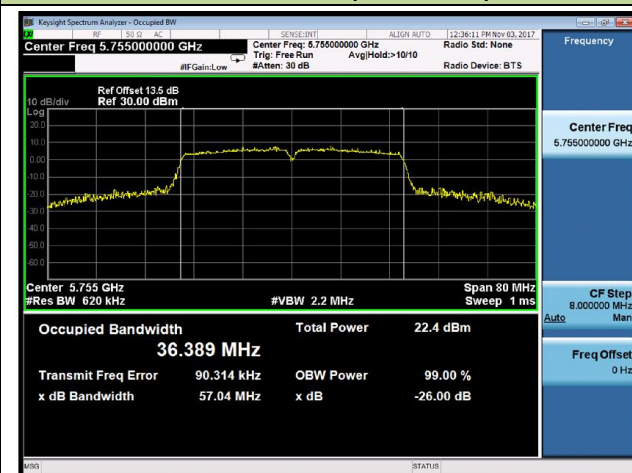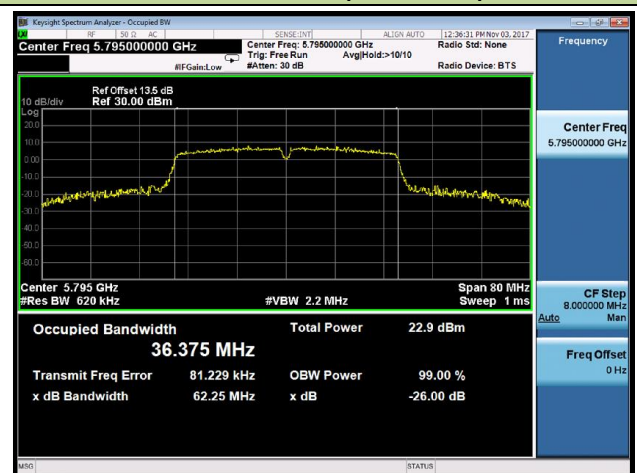**Channel 165 (5825MHz)**


**802.11n-HT40 26dB Bandwidth & 99% Bandwidth**
**Channel 38 (5190MHz)**

**Channel 46 (5230MHz)**

**Channel 54 (5270MHz)**

**Channel 62 (5310MHz)**

**Channel 151 (5755MHz)**

**Channel 159 (5795MHz)**


### 7.3. 6dB Bandwidth Measurement

#### 7.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


#### 7.3.2. Test Procedure used

74KDB 789033 D02v02 – Section C.2

#### 7.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 7.3.4. Test Setup

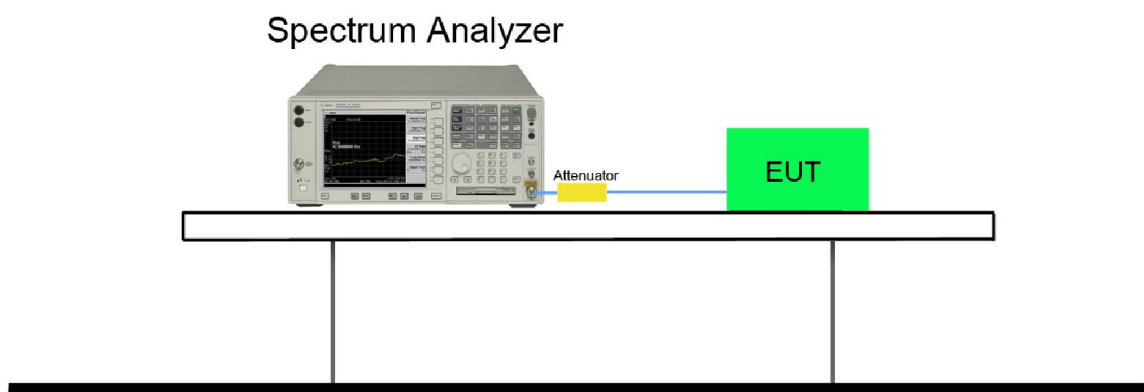


### 7.3.5. Test Result

Product	Mobile Data Terminal	Temperature	24°C
Test Engineer	Hunk Li	Relative Humidity	53%
Test Site	TR3	Test Date	2017/11/03
Test Item	6dB Bandwidth		


Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11a	6	149	5745	16.47	≥ 0.5	Pass
802.11a	6	157	5785	16.49	≥ 0.5	Pass
802.11a	6	165	5825	16.47	≥ 0.5	Pass
802.11n-HT20	6.5	149	5745	17.62	≥ 0.5	Pass
802.11n-HT20	6.5	157	5785	17.61	≥ 0.5	Pass
802.11n-HT20	6.5	165	5825	17.62	≥ 0.5	Pass
802.11n-HT40	13.5	151	5755	36.06	≥ 0.5	Pass
802.11n-HT40	13.5	159	5795	36.01	≥ 0.5	Pass

### 802.11a 6dB Bandwidth


#### Channel 149 (5745MHz)

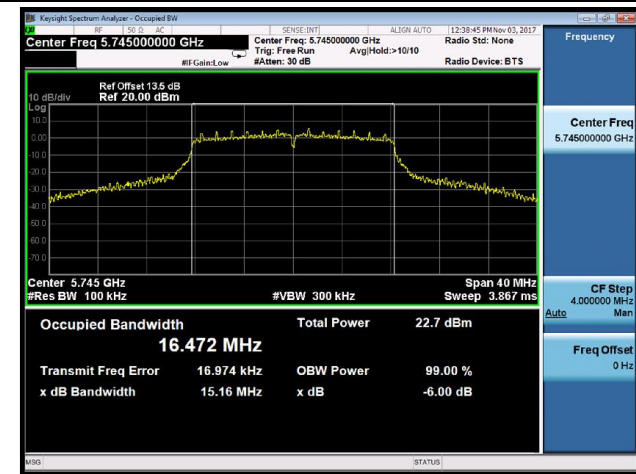

#### Channel 157 (5785MHz)

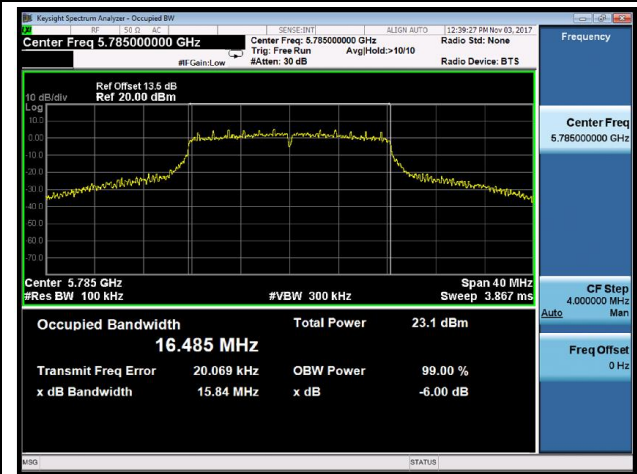


#### Channel 165 (5825MHz)

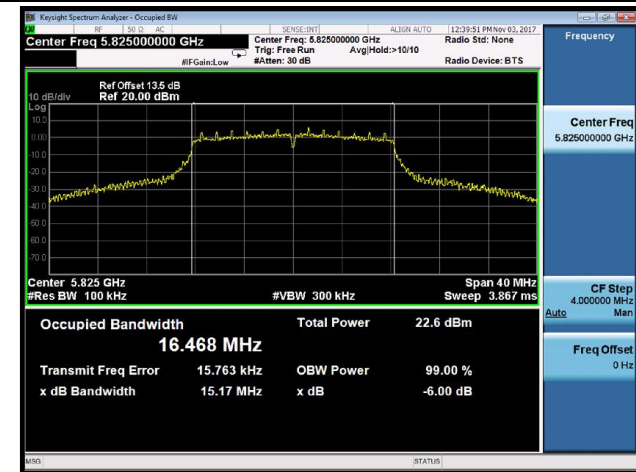


**802.11n-HT20 6dB Bandwidth**


**Channel 149 (5745MHz)**

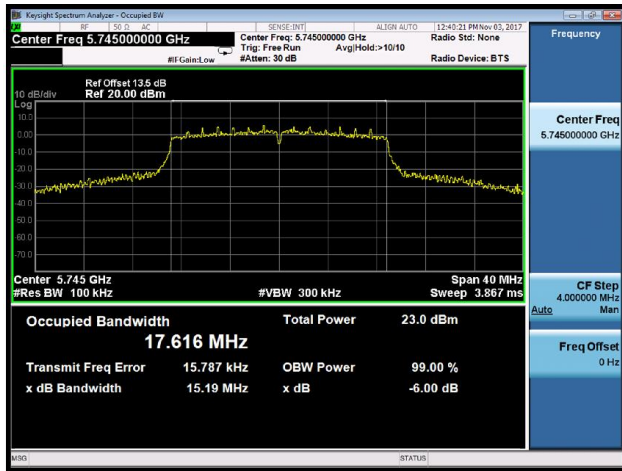

**Channel 157 (5785MHz)**

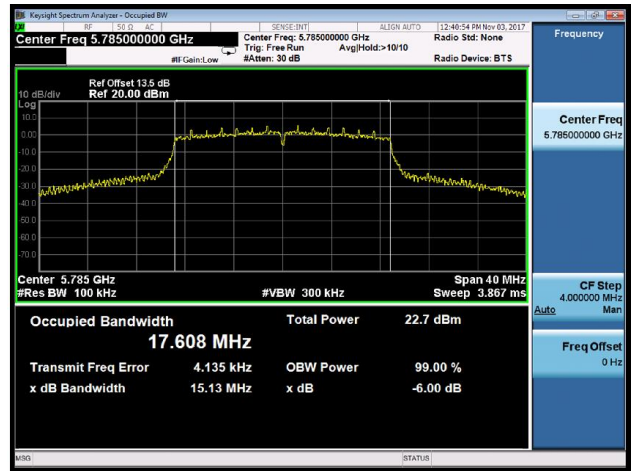


**Channel 165 (5825MHz)**

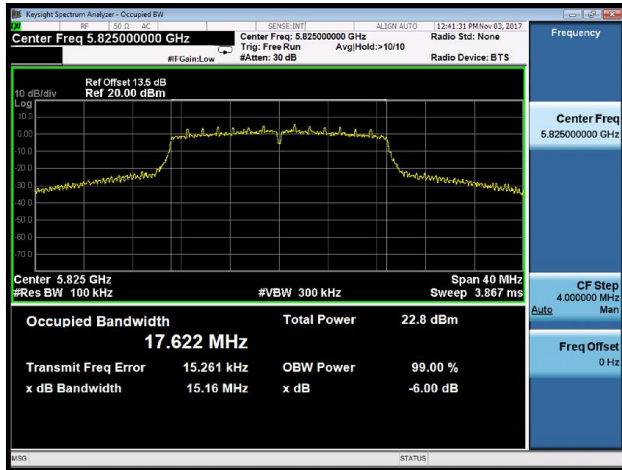


**802.11n-HT40 6dB Bandwidth**

**Channel 151 (5755MHz)**

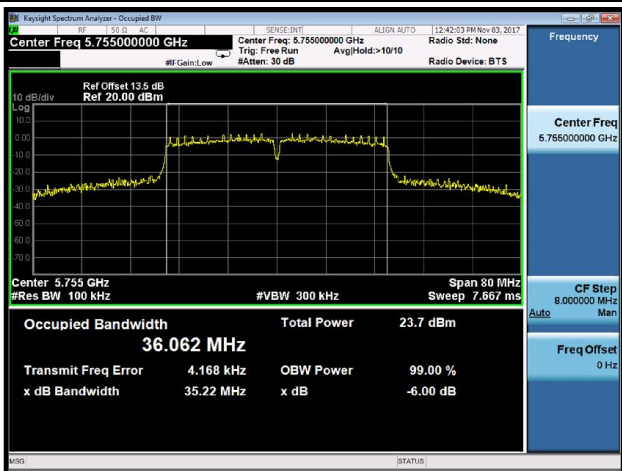

**Channel 159 (5795MHz)**

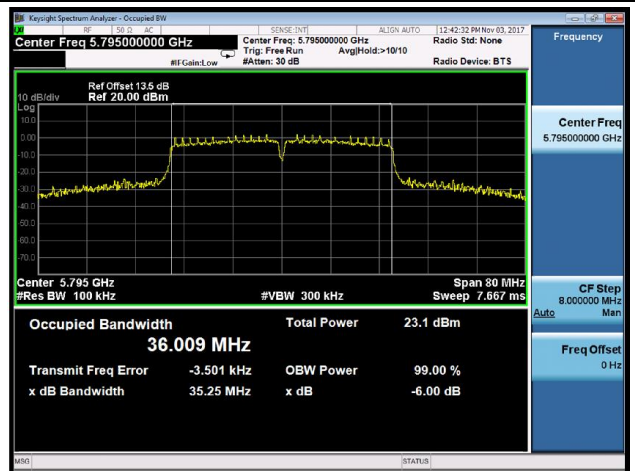

## 7.4. Output Power Measurement

### 7.4.1. Test Limit

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


### 7.4.2. Test Procedure Used

74KDB 789033 D02v02 - Section E) 3) b) Method PM-G

### 7.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### 7.4.4. Test Setup

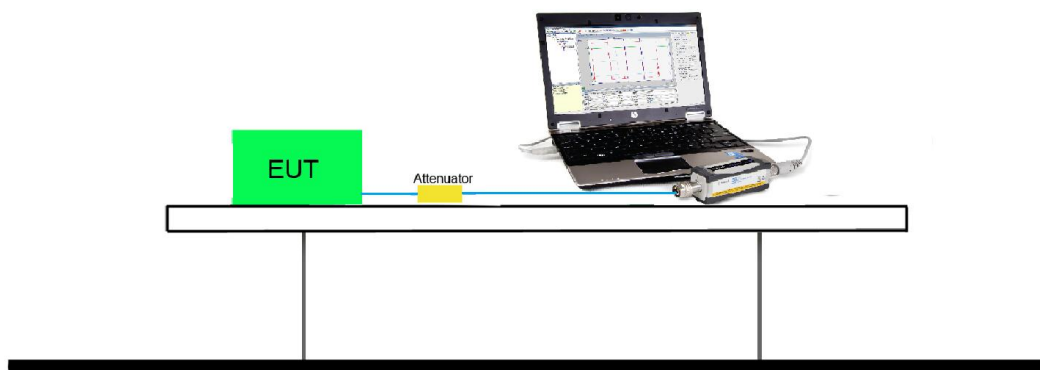

### 7.4.5. Test Result

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (Gray Marker) for final test of each channel.

Test Mode	Bandwidth	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)
802.11a	20	44	5220	6	16.37
				24	16.21
				54	16.02
802.11n	20	44	5220	6.5	16.07
				7.2	15.99
				39.0	15.76
				43.3	15.71
				65.0	15.43
				72.0	15.34
802.11n	40	46	5230	13.5	16.10
				15.0	16.02
				81.0	15.87
				90.0	15.78
				135.0	15.45
				150.0	15.39



Product	Mobile Data Terminal	Temperature	23°C
Test Engineer	Hunk Li	Relative Humidity	54%
Test Site	TR3	Test Date	2017/11/03
Test Item	Output Power		

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	Average Power (dBm)	Power Limit (dBm)	Result
11a	6	36	5180	16.17	≤ 23.98	Pass
11a	6	44	5220	16.37	≤ 23.98	Pass
11a	6	48	5240	15.92	≤ 23.98	Pass
11a	6	52	5260	15.71	≤ 23.98	Pass
11a	6	60	5300	16.28	≤ 23.98	Pass
11a	6	64	5320	15.68	≤ 23.98	Pass
11a	6	149	5745	15.12	≤ 30.00	Pass
11a	6	157	5785	15.84	≤ 30.00	Pass
11a	6	165	5825	15.35	≤ 30.00	Pass
11n-HT20	6.5	36	5180	16.36	≤ 23.98	Pass
11n-HT20	6.5	44	5220	16.07	≤ 23.98	Pass
11n-HT20	6.5	48	5240	16.08	≤ 23.98	Pass
11n-HT20	6.5	52	5260	15.67	≤ 23.98	Pass
11n-HT20	6.5	60	5300	15.82	≤ 23.98	Pass
11n-HT20	6.5	64	5320	15.83	≤ 23.98	Pass
11n-HT20	6.5	149	5745	15.76	≤ 30.00	Pass
11n-HT20	6.5	157	5785	15.23	≤ 30.00	Pass
11n-HT20	6.5	165	5825	15.85	≤ 30.00	Pass
11n-HT40	13.5	38	5190	16.51	≤ 23.98	Pass
11n-HT40	13.5	46	5230	16.10	≤ 23.98	Pass
11n-HT40	13.5	54	5270	15.98	≤ 23.98	Pass
11n-HT40	13.5	62	5310	15.87	≤ 23.98	Pass
11n-HT40	13.5	151	5755	15.93	≤ 30.00	Pass
11n-HT40	13.5	159	5795	15.42	≤ 30.00	Pass

## 7.5. Transmit Power Control

### 7.5.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30dBm.


### 7.5.2. Test Procedure Used

KDB 789033 D02v01- Section E)3)b) Method PM-G

### 7.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### 7.5.4. Test Setup

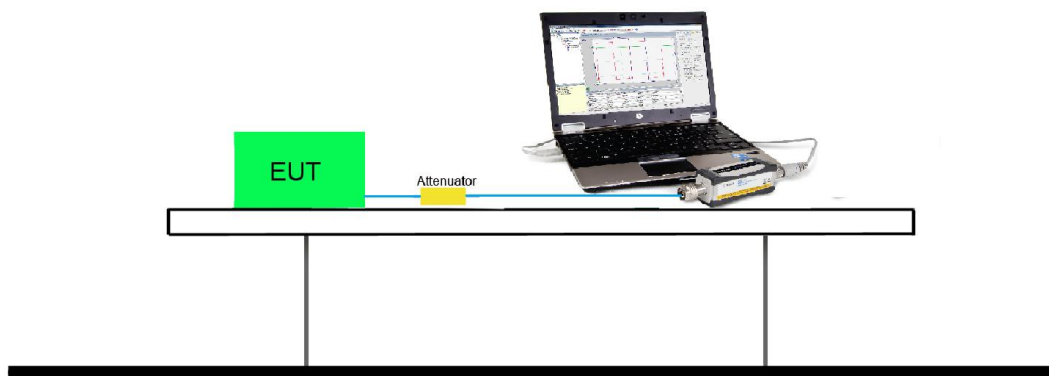

### 7.5.5. Test Result

A TPC mechanism is not required for systems with an e.i.r.p. of less than 500mW.

## **7.6. Power Spectral Density Measurement**

### **7.6.1. Test Limit**

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25-5.35 GHz bands, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### **7.6.2. Test Procedure Used**

74KDB 789033 D02v02 - Section F

### **7.6.3. Test Setting**

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB OBW of the signal.
3. RBW = 1MHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz,
4. RBW = 100 kHz
5. VBW = 3MHz
6. Number of sweep points  $\geq 2 \times (\text{span} / \text{RBW})$
7. Detector = power averaging (RMS)
8. Sweep time = auto
9. Trigger = free run
10. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
11. Add  $10 \cdot \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add  $10 \cdot \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
12. When the measurement bandwidth of Maximum PSD is specified in 500 kHz, add a constant factor  $10 \cdot \log(500\text{kHz}/100\text{kHz}) = 6.99$  dB to the measured result

### 7.6.4. Test Setup

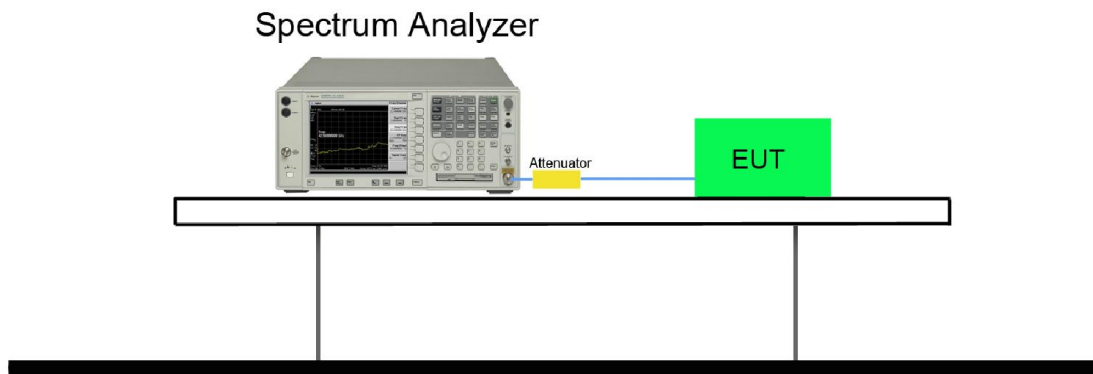

### 7.6.5. Test Result

Product	Mobile Data Terminal	Temperature	23°C
Test Engineer	Hunk Li	Relative Humidity	54%
Test Site	TR3	Test Date	2017/11/03
Test Item	Power Spectral Density (UNII-Band 1 & UNII-2A)		

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	PSD (dBm/MHz)	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
11a	6	36	5180	6.06	97.19	6.18	≤ 11.00	Pass
11a	6	44	5220	6.02	97.19	6.14	≤ 11.00	Pass
11a	6	48	5240	6.19	97.19	6.31	≤ 11.00	Pass
11a	6	52	5260	5.37	97.19	5.49	≤ 11.00	Pass
11a	6	60	5300	5.64	97.19	5.76	≤ 11.00	Pass
11a	6	64	5320	5.36	97.19	5.48	≤ 11.00	Pass
11n-HT20	6.5	36	5180	6.04	97.00	6.17	≤ 11.00	Pass
11n-HT20	6.5	44	5220	5.62	97.00	5.75	≤ 11.00	Pass
11n-HT20	6.5	48	5240	5.85	97.00	5.98	≤ 11.00	Pass
11n-HT20	6.5	52	5260	5.18	97.00	5.31	≤ 11.00	Pass
11n-HT20	6.5	60	5300	5.18	97.00	5.31	≤ 11.00	Pass
11n-HT20	6.5	64	5320	5.39	97.00	5.52	≤ 11.00	Pass
11n-HT40	13.5	38	5190	2.88	94.30	3.13	≤ 11.00	Pass
11n-HT40	13.5	46	5230	2.26	94.30	2.51	≤ 11.00	Pass
11n-HT40	13.5	54	5270	2.41	94.30	2.66	≤ 11.00	Pass
11n-HT40	13.5	62	5310	1.70	94.30	1.95	≤ 11.00	Pass

Note 1: When EUT duty cycle ≥ 98%, the Total PSD (dBm/MHz) = PSD (dBm/MHz).

Note 2: When EUT duty cycle < 98%, the Total PSD (dBm/MHz) = PSD (dBm/MHz) + 10\*log (1/Duty Cycle).

Product	Mobile Data Terminal	Temperature	23°C
Test Engineer	Hunk Li	Relative Humidity	54%
Test Site	TR3	Test Date	2017/11/03
Test Item	Power Spectral Density (UNII-Band 3)		


Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	PSD (dBm/100kHz)	Duty Cycle (%)	Constant Factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
11a	6	149	5745	-3.29	97.19	6.99	3.82	≤ 30.00	Pass
11a	6	157	5785	-2.82	97.19	6.99	4.29	≤ 30.00	Pass
11a	6	165	5825	-3.58	97.19	6.99	3.53	≤ 30.00	Pass
11n-HT20	6.5	149	5745	-3.50	97.00	6.99	3.62	≤ 30.00	Pass
11n-HT20	6.5	157	5785	-3.67	97.00	6.99	3.45	≤ 30.00	Pass
11n-HT20	6.5	165	5825	-3.58	97.00	6.99	3.54	≤ 30.00	Pass
11n-HT40	13.5	151	5755	-6.57	94.30	6.99	0.67	≤ 30.00	Pass
11n-HT40	13.5	159	5795	-6.01	94.30	6.99	1.23	≤ 30.00	Pass

Note 1: When EUT duty cycle ≥ 98%, Total PSD (dBm/500kHz) = PSD (dBm/100kHz) + Constant Factor.

Note 2: When EUT duty cycle < 98%, Total PSD (dBm/500kHz) = PSD (dBm/100kHz) + 10\*log (1/Duty Cycle) + Constant Factor.

### 802.11a Power Spectral Density


**Channel 36 (5180MHz)**

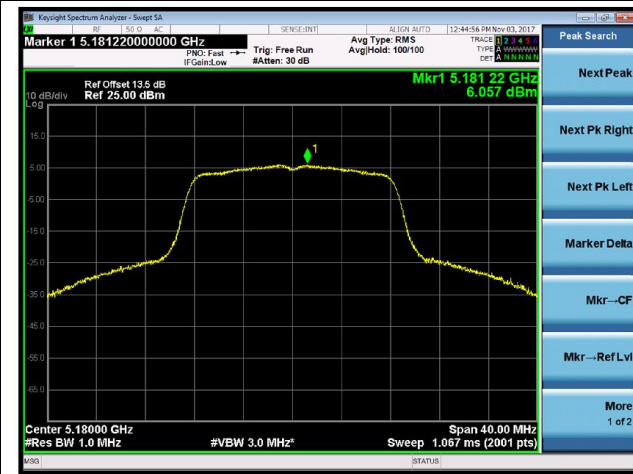

**Channel 44 (5220MHz)**




**Channel 48 (5240MHz)**

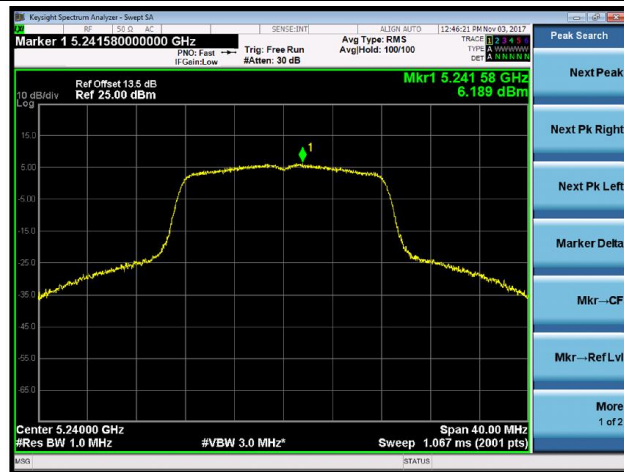


**Channel 52 (5260MHz)**



**Channel 60 (5300MHz)**

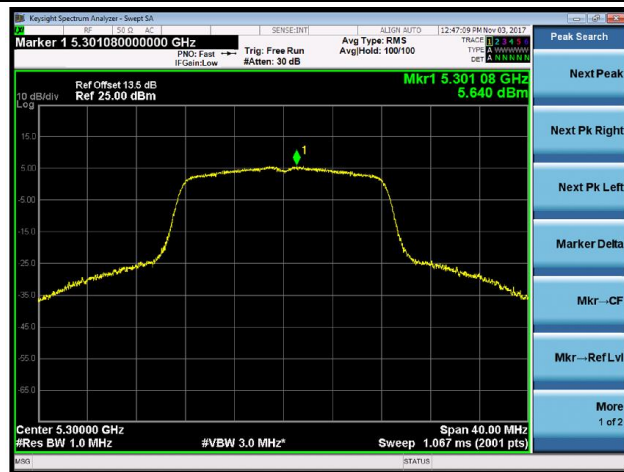


**Channel 64 (5320MHz)**

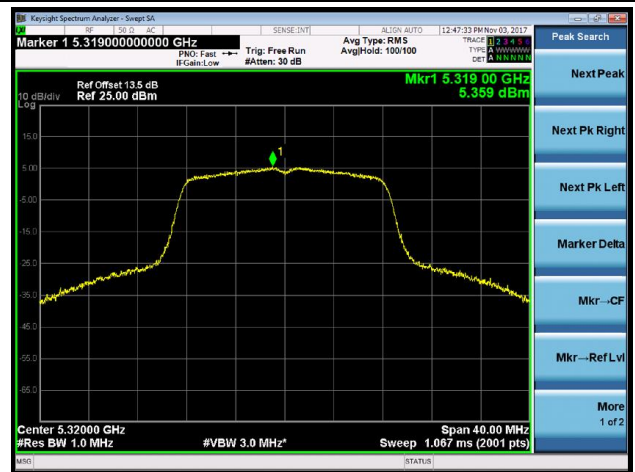

### 802.11a Power Spectral Density


#### Channel 149 (5745MHz)

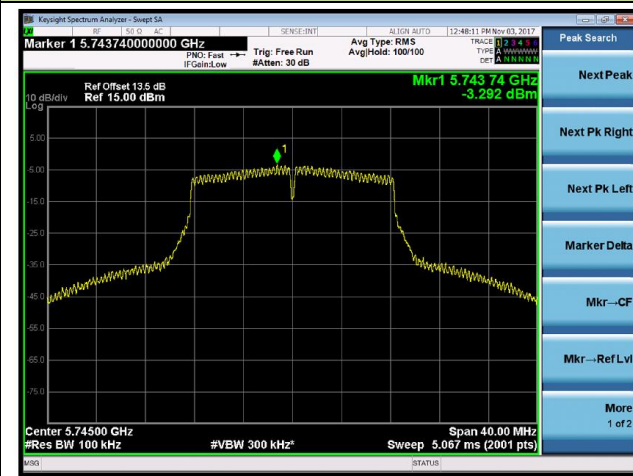

#### Channel 157 (5785MHz)



#### Channel 165 (5825MHz)

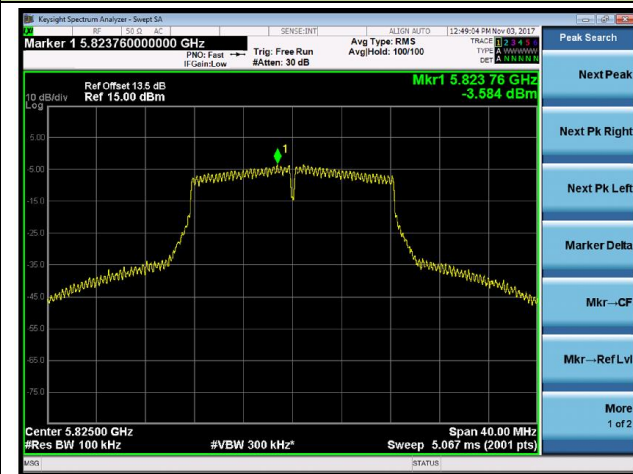



### 802.11n-HT20 Power Spectral Density


#### Channel 36 (5180MHz)




#### Channel 44 (5220MHz)



#### Channel 48 (5240MHz)

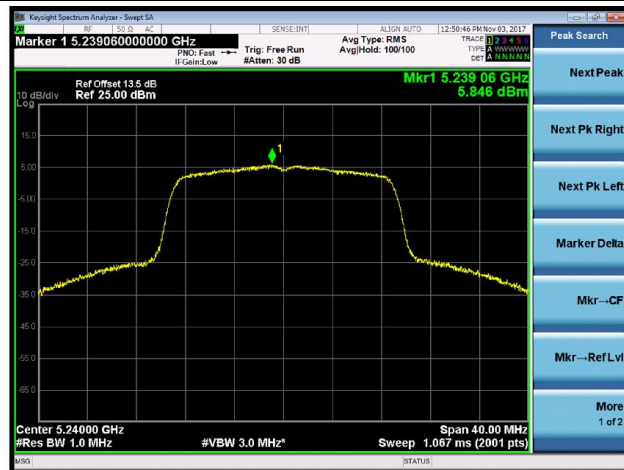

#### Channel 52 (5260MHz)

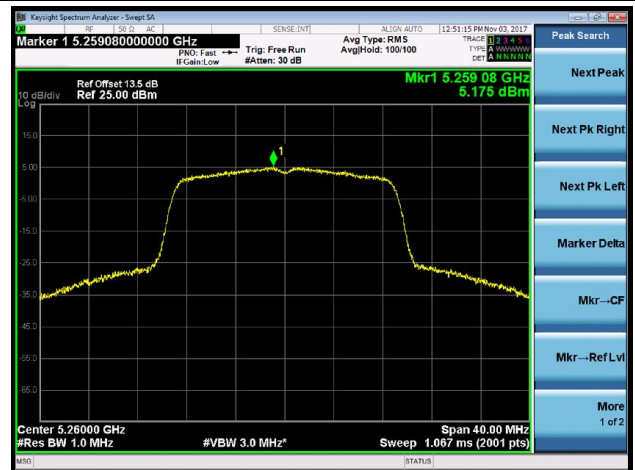

#### Channel 60 (5300MHz)



#### Channel 64 (5320MHz)

