



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

For

ESPRESSIF SYSTEMS (SHANGHAI) PTE LTD

456 Bibo Road Room A201, Shanghai, China 201203

FCC ID: 2AC7Z-ESP32SOLO1C

Report Type: Original Report	Product Type: WIFI & Bluetooth Module
Test Engineer: Max Min	<i>Max Min</i>
Report Number: RSHA180930011-00B	
Report Date: 2018-11-29	
Reviewed By: Oscar Ye RF Leader	<i>Oscar Ye</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	7
SUPPORT EQUIPMENT LIST AND DETAILS	10
EXTERNAL I/O CABLE.....	10
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS	12
TEST EQUIPMENT LIST	13
FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	14
APPLICABLE STANDARD	14
CALCULATED FORMULARY:.....	14
CALCULATED DATA:.....	14
FCC §15.203 - ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP.....	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	17
CORRECTED FACTOR & MARGIN CALCULATION	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	22
APPLICABLE STANDARD	22
EUT SETUP	22
EMI TEST RECEIVER SETUP.....	23
TEST PROCEDURE	23
CORRECTED AMPLITUDE & MARGIN CALCULATION	23
TEST RESULTS SUMMARY	23
TEST DATA	24
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	56
APPLICABLE STANDARD	56
TEST PROCEDURE	56
TEST DATA	56
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	66

APPLICABLE STANDARD	66
TEST PROCEDURE	66
TEST DATA	67
FCC §15.247(d) – BAND EDGE.....	70
APPLICABLE STANDARD	70
TEST PROCEDURE	70
TEST DATA	70
FCC §15.247(e) - POWER SPECTRAL DENSITY	77
APPLICABLE STANDARD	77
TEST PROCEDURE	77
TEST DATA	77

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	ESPRESSIF SYSTEMS (SHANGHAI) PTE LTD
Tested Model	ESP32-SOLO-1C
Product Type	WIFI & Bluetooth Module
Dimension	18.0mm (L)* 25.5mm (W)*3.1mm(H)
Power Supply	DC 3.3V

**All measurement and test data in this report was gathered from production sample serial number: 20180930011.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2018-09-30)*

Objective

This report is prepared on behalf of ESPRESSIF SYSTEMS (SHANGHAI) PTE LTD in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS submissions with FCC ID: 2AC7Z-ESP32SOLO1C.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 15.247 Meas Guidance v05.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Test channel list is as below:

For 802.11b, 802.11g and 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11;

For 802.11n-HT40 mode, EUT was tested with Channel 3, 4, 6, 8 and 9.
 (For channel 4 and 8, only band edge and output power were tested.)

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For BLE mode, EUT was tested with channel 0, 19 and 39.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404
...
...
18	2438	38	2478
19	2440	39	2480

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

RF test software: esprFTTool


Pre-scan with all the data rates, and the worst case was performed as below:

Mode	Data Rate	Channel	Power Level
802.11b	1 Mbps	/	0
802.11g	6 Mbps	/	0
802.11n-HT20	MCS0	/	0
802.11n-HT40	MCS0	3	12
		4	8
		6	8
		8	8
		9	12
BLE	1Mbps	1Mbps	4


Note: For Wi-Fi mode, the value of power level increases 4, the power attenuates 1dB.

Duty Cycle:


802.11b Mode Channel 6

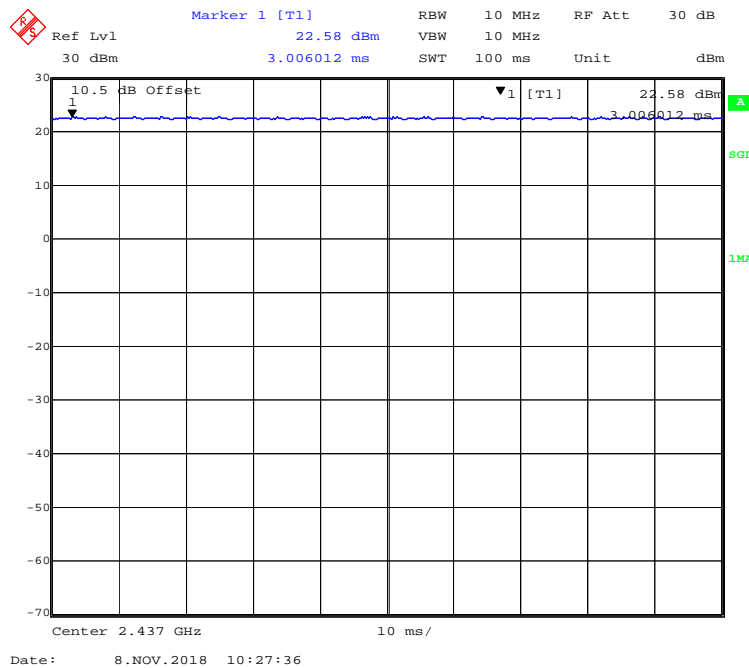


802.11g Mode Channel 6

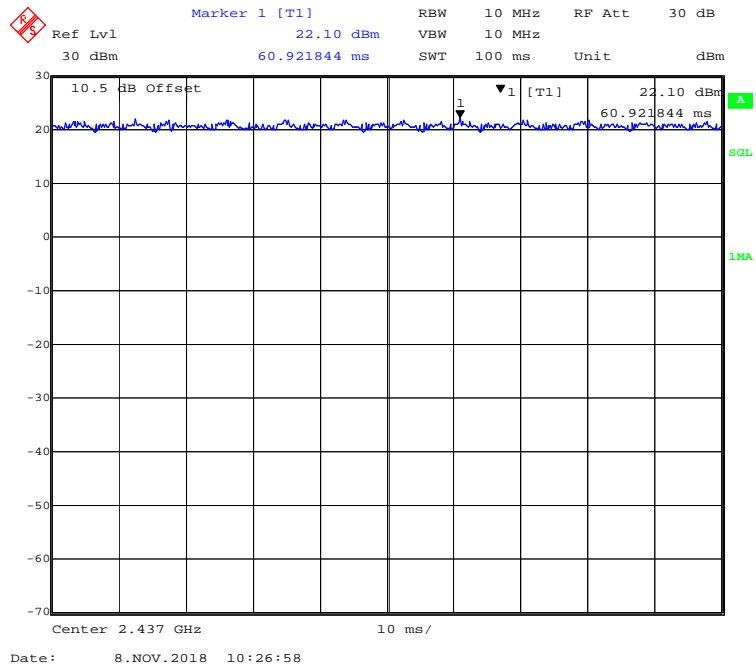


802.11n-HT20 Mode Channel 6

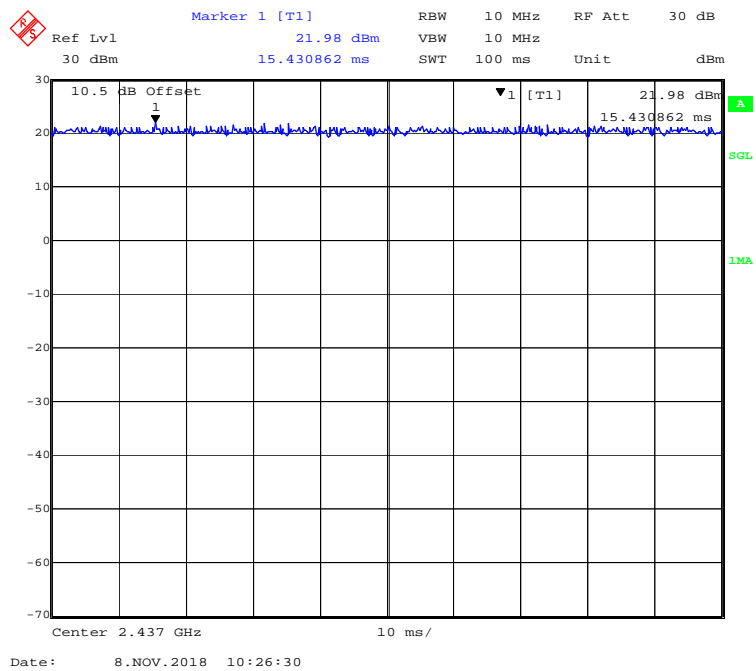

802.11n-HT40 Mode Channel 6

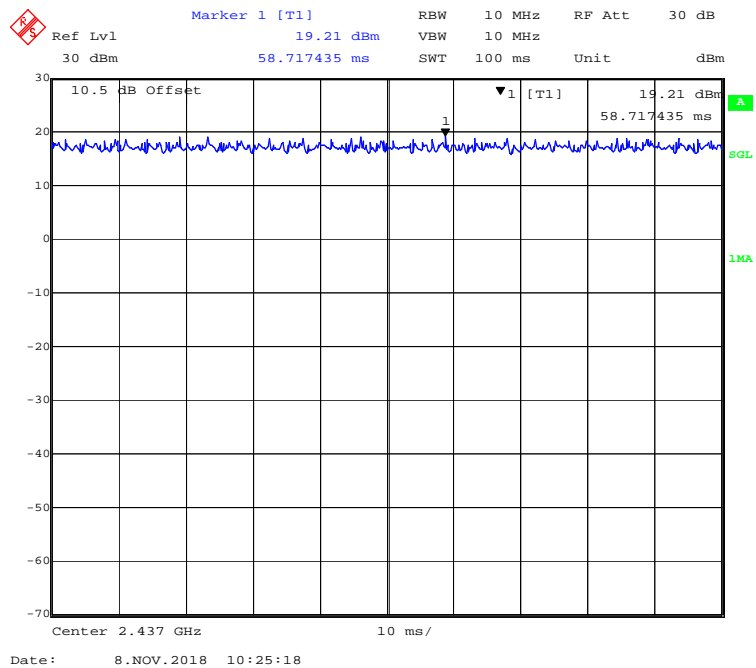

BLE Mode Channel 19

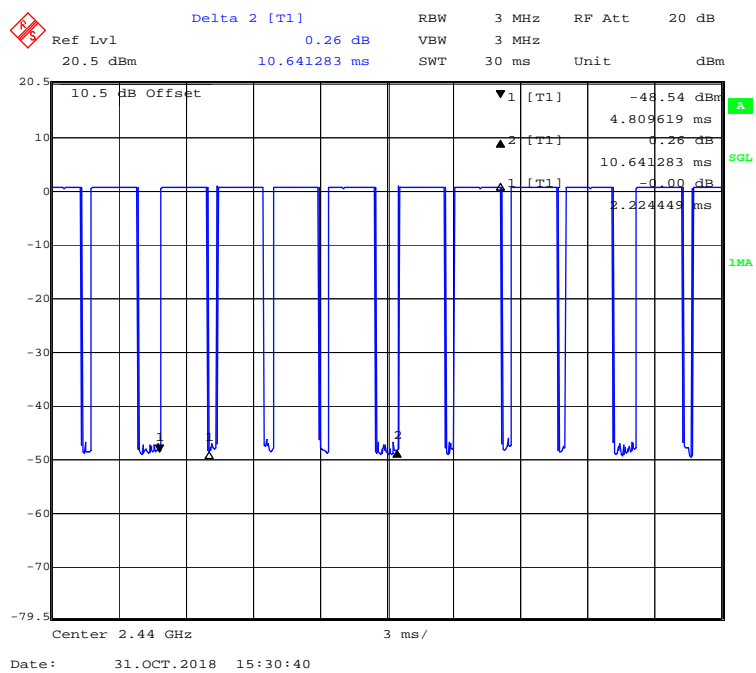

Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	10log(1/x)
802.11b	100.00	/	/	0.00
802.11g	100.00	/	/	0.00
802.11n-HT20	100.00	/	/	0.00
802.11n-HT40	100.00	/	/	0.00
BLE	83.60	2.224	0.45	0.78

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter	LA65NS0-00	DF263
ESPRESSIF	Control Board	ESP32_Module_Test board 2L_V1	20170620
ESPRESSIF	Debug Board	ESP-WROOM-03	/

External I/O Cable

Cable Description	Length (m)	From Port	To
Data Cable	0.3	Control Board	Debug Board
USB Cable-1	0.8	Control Board	Notebook
USB Cable-2	1.0	Debug Board	Notebook


Block Diagram of Test Setup

For Conducted Emissions:

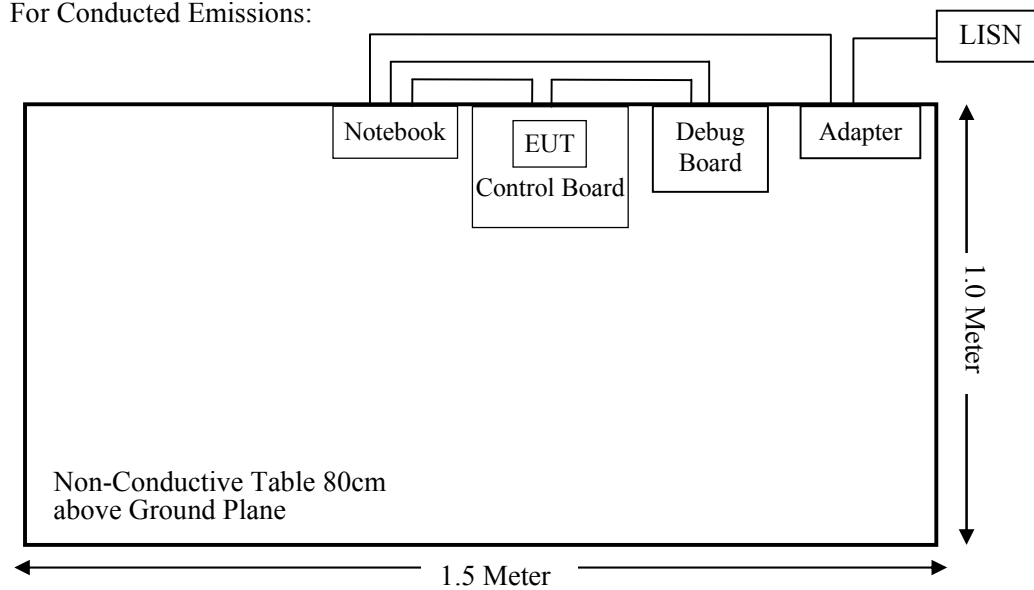


For Radiated Emissions (Below 1GHz):

Turntable
2m Diameter

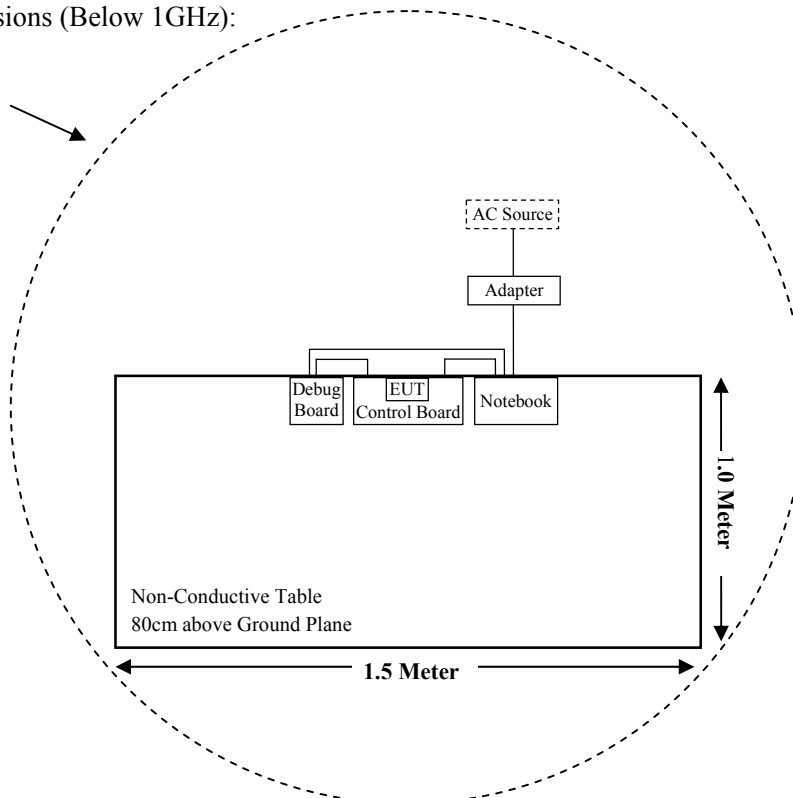

For Radiated Emissions (Above 1GHz):

Turntable
2m Diameter

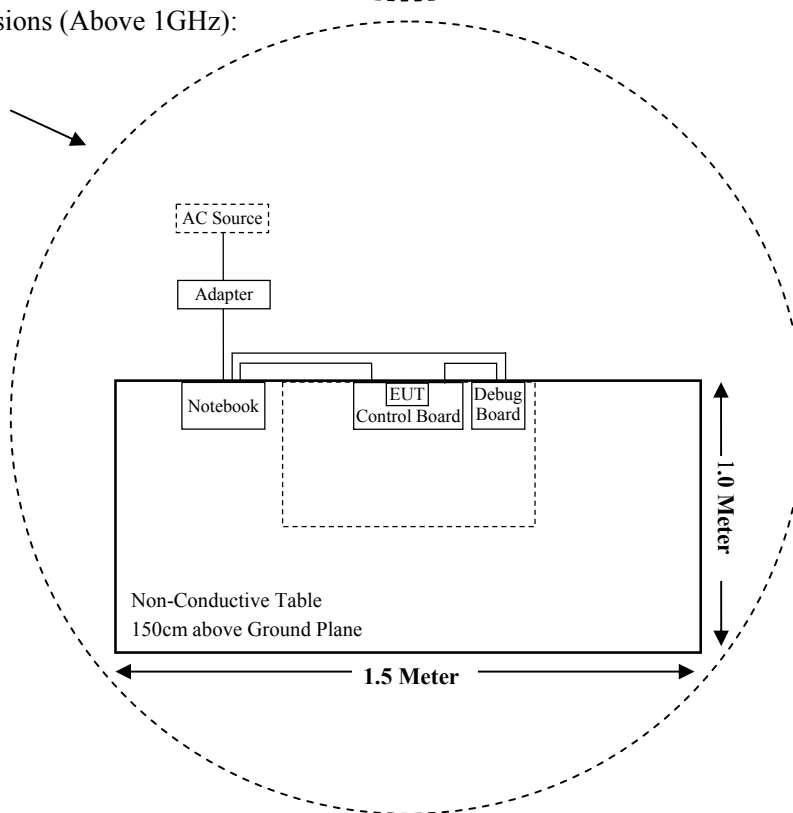

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (I), §1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-12	2019-11-11
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
A.H.Systems, inc	Amplifier	2641-1	466	2018-09-11	2019-09-10
EM Electronics Corporation	Amplifier	EM18G40G	060726	2018-03-22	2019-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2018-08-05	2019-08-04
Narda	Attenuator	10dB	010	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2017-11-12	2018-11-11
Agilent	Power Meter	N1912A	MY5000492	2017-12-18	2018-12-17
Agilent	Power Sensor	N1921A	MY54210024	2017-12-18	2018-12-17
Narda	Attenuator	10dB	010	2018-08-15	2019-08-14
ESPRESSIF	RF Cable	ESPRESSIFC01	C01	Each Time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2017-11-12	2018-11-11
Rohde & Schwarz	LISN	ENV216	3560655016	2017-11-12	2018-11-11
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2018-08-15	2019-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 1.1310, 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density

Calculated Formulary:

Predication of MPE limit at a given distance

S = PG/4πR² = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		Turn-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Wi-Fi	2412-2462	3.77	2.38	25.50	354.81	20	0.1680	1.00
	2422-2452	3.77	2.38	24.00	251.19	20	0.1189	1.00
BLE	2402-2480	3.77	2.38	0.50	1.12	20	0.0005	1.00
Bluetooth	2402-2480	3.77	2.38	3.50	2.24	20	0.0011	1.00

Note: Bluetooth, BLE and Wi-Fi cannot transmit at the same time.

Conclusion: The EUT meets exemption requirement- RF exposure evaluation greater than 20cm distance specified in § 2.1091. If the device built into a host as a portable usage, the additional RF exposure evaluation may be required as specified by § 2.1093.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a PCB antenna for Wi-Fi & BLE, and the antenna gain is 3.77 dBi, which is permanently attached to the unit, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

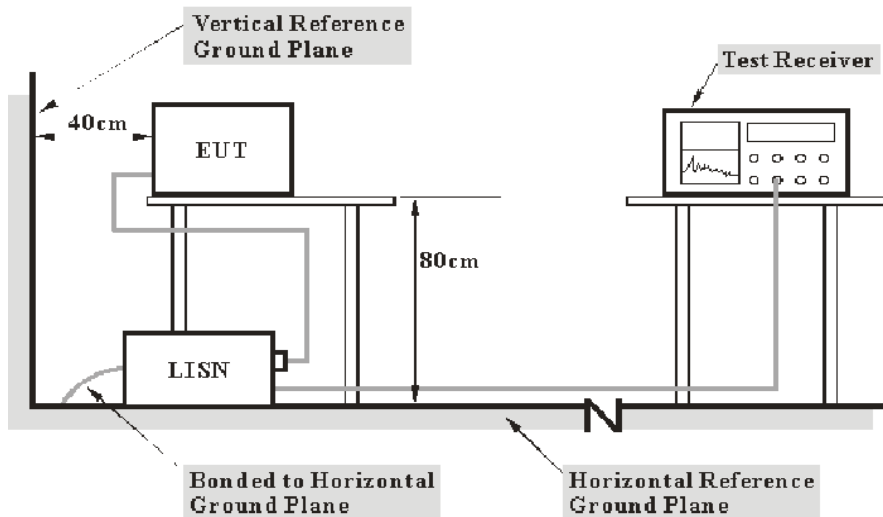

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Corrected Amplitude (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions

Temperature:	20.2 °C
Relative Humidity:	51 %
ATM Pressure:	101.3 kPa


The testing was performed by Max Min on 2018-11-04.

Test Result: Compliant.

For Wi-Fi Mode:


EUT operation mode: Transmitting in 802.11b mode channel 6(worst case)

AC 120V/60 Hz, Line

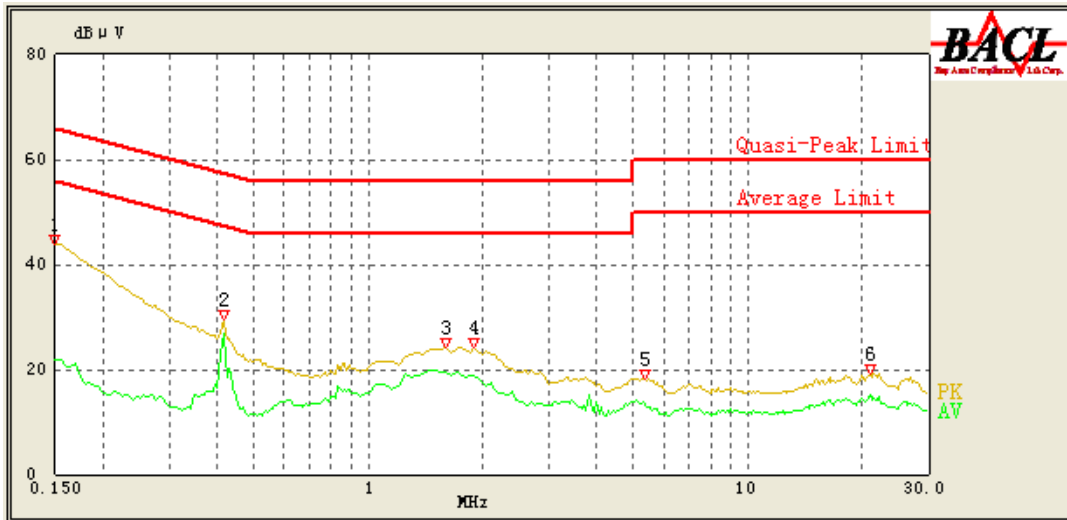

Frequency (MHz)	Corrected Amplitude (dBµV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBµV)	Margin (dB)	Comment
0.150	43.90	QP	9.000	L1	16.06	66.00	22.10	Compliance
0.150	21.73	AV	9.000	L1	16.06	56.00	34.27	Compliance
0.415	29.44	QP	9.000	L1	16.06	57.55	28.11	Compliance
0.415	26.94	AV	9.000	L1	16.06	47.55	20.61	Compliance
1.600	24.03	QP	9.000	L1	15.86	56.00	31.97	Compliance
1.600	19.46	AV	9.000	L1	15.86	46.00	26.54	Compliance
1.900	24.33	QP	9.000	L1	15.85	56.00	31.67	Compliance
1.900	18.72	AV	9.000	L1	15.85	46.00	27.28	Compliance
5.350	18.32	QP	9.000	L1	15.87	60.00	41.68	Compliance
5.300	13.79	AV	9.000	L1	15.87	50.00	36.21	Compliance
20.950	19.25	QP	9.000	L1	16.44	60.00	40.75	Compliance
20.950	15.03	AV	9.000	L1	16.44	50.00	34.97	Compliance

AC 120V/60 Hz, Neutral

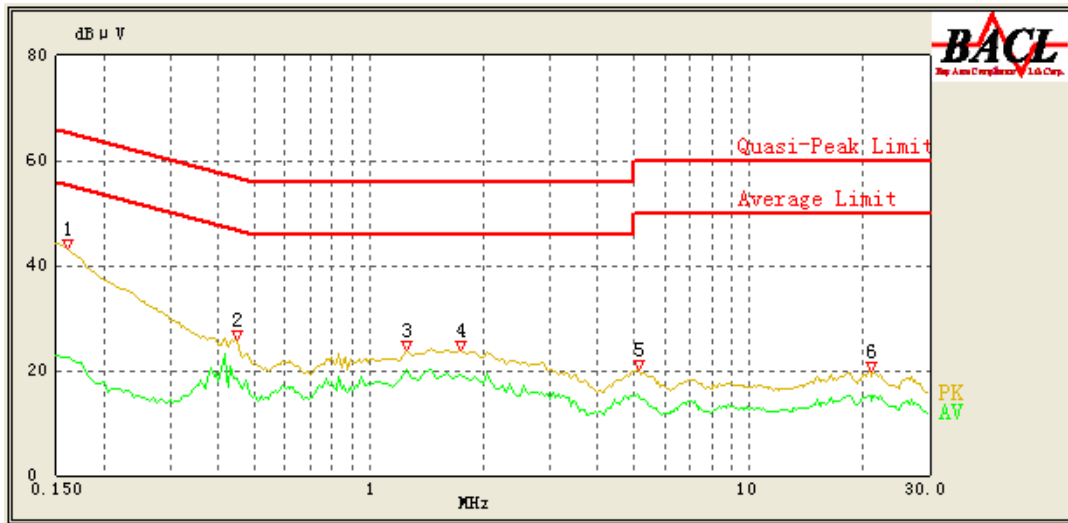

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.160	43.11	QP	9.000	N	16.06	65.71	22.60	Compliance
0.160	22.44	AV	9.000	N	16.06	55.71	33.27	Compliance
0.450	25.88	QP	9.000	N	16.10	56.88	31.00	Compliance
0.450	18.51	AV	9.000	N	16.10	46.88	28.37	Compliance
1.250	23.94	QP	9.000	N	15.93	56.00	32.06	Compliance
1.250	20.04	AV	9.000	N	15.93	46.00	25.96	Compliance
1.750	23.83	QP	9.000	N	15.92	56.00	32.17	Compliance
1.750	19.03	AV	9.000	N	15.92	46.00	26.97	Compliance
5.150	20.09	QP	9.000	N	15.87	60.00	39.91	Compliance
5.100	15.35	AV	9.000	N	15.87	50.00	34.65	Compliance
20.950	19.67	QP	9.000	N	16.18	60.00	40.33	Compliance
20.950	15.06	AV	9.000	N	16.18	50.00	34.94	Compliance


Note:

- 1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Margin (dB) = Limit (dBμV) – Corrected Amplitude (dBμV)

For BLE Mode:


EUT operation mode: Transmitting in channel 39(worst case)

AC 120V/60 Hz, Line

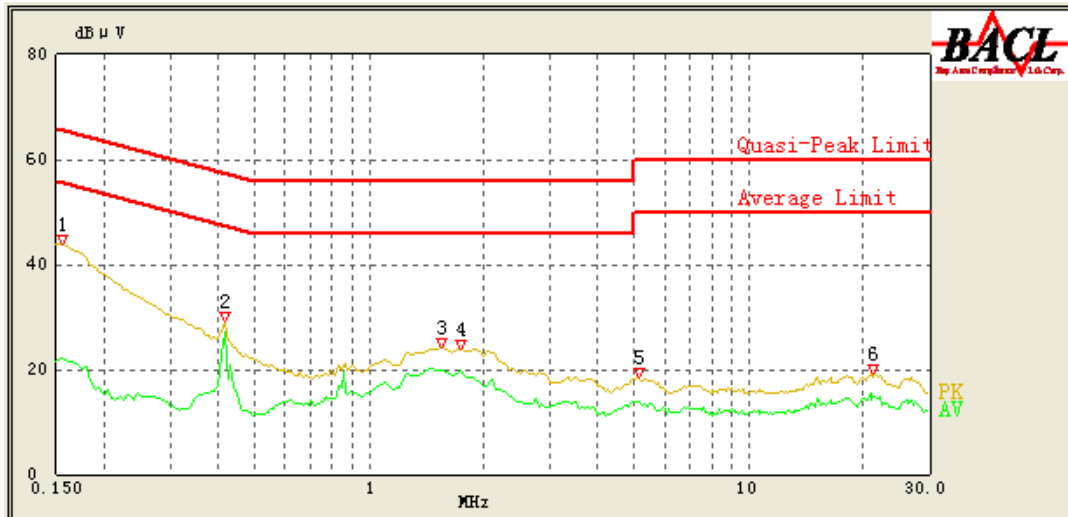

Frequency (MHz)	Corrected Amplitude (dBµV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBµV)	Margin (dB)	Comment
0.155	44.00	QP	9.000	L1	16.06	65.86	21.86	Compliance
0.155	22.16	AV	9.000	L1	16.06	55.86	33.70	Compliance
0.415	29.08	QP	9.000	L1	16.06	57.55	28.47	Compliance
0.415	27.24	AV	9.000	L1	16.06	47.55	20.31	Compliance
1.550	24.02	QP	9.000	L1	15.86	56.00	31.98	Compliance
1.550	19.87	AV	9.000	L1	15.86	46.00	26.13	Compliance
1.750	23.89	QP	9.000	L1	15.86	56.00	32.11	Compliance
1.750	19.91	AV	9.000	L1	15.86	46.00	26.09	Compliance
5.150	18.49	QP	9.000	L1	15.86	60.00	41.51	Compliance
5.100	13.95	AV	9.000	L1	15.86	50.00	36.05	Compliance
21.300	19.29	QP	9.000	L1	16.45	60.00	40.71	Compliance
21.300	14.98	AV	9.000	L1	16.45	50.00	35.02	Compliance

AC 120V/60 Hz, Neutral

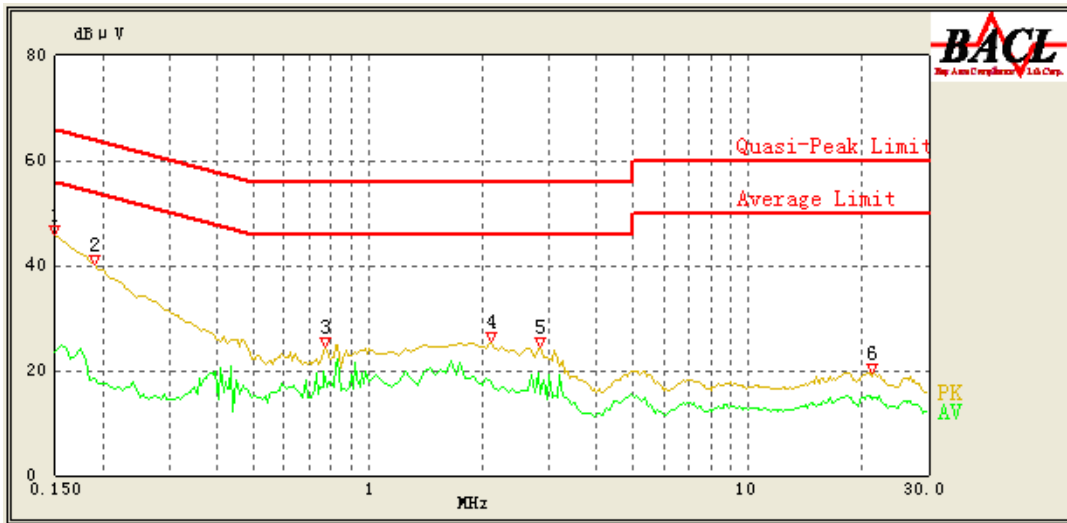

Frequency (MHz)	Corrected Amplitude (dBµV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBµV)	Margin (dB)	Comment
0.150	45.67	QP	9.000	N	16.06	66.00	20.33	Compliance
0.150	23.40	AV	9.000	N	16.06	56.00	32.60	Compliance
0.190	40.03	QP	9.000	N	16.05	64.04	24.01	Compliance
0.190	18.46	AV	9.000	N	16.05	54.04	35.58	Compliance
0.770	24.45	QP	9.000	N	15.98	56.00	31.55	Compliance
0.765	19.86	AV	9.000	N	15.98	46.00	26.14	Compliance
2.100	25.50	QP	9.000	N	15.91	56.00	30.50	Compliance
2.100	17.90	AV	9.000	N	15.91	46.00	28.10	Compliance
2.850	24.38	QP	9.000	N	15.90	56.00	31.62	Compliance
2.850	15.64	AV	9.000	N	15.90	46.00	30.36	Compliance
21.300	19.66	QP	9.000	N	16.18	60.00	40.34	Compliance
21.300	14.97	AV	9.000	N	16.18	50.00	35.03	Compliance

Note:

- 1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Margin (dB) = Limit (dBµV) – Corrected Amplitude (dBµV)


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

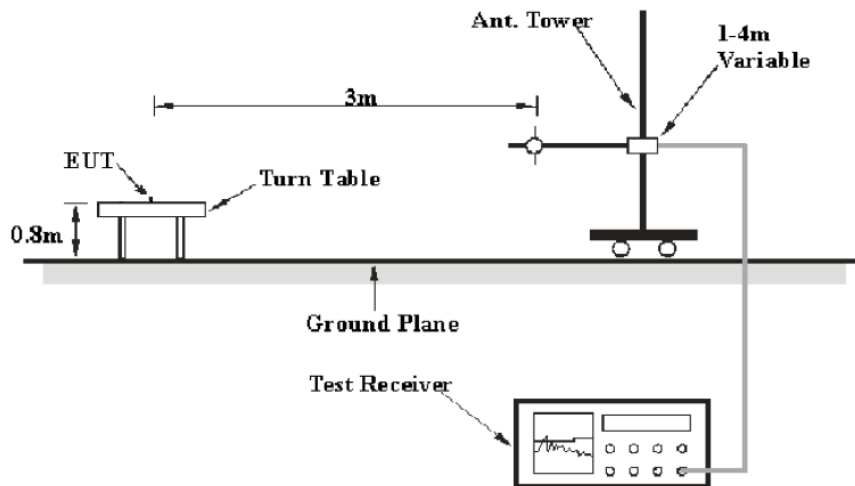

Above 1GHz:

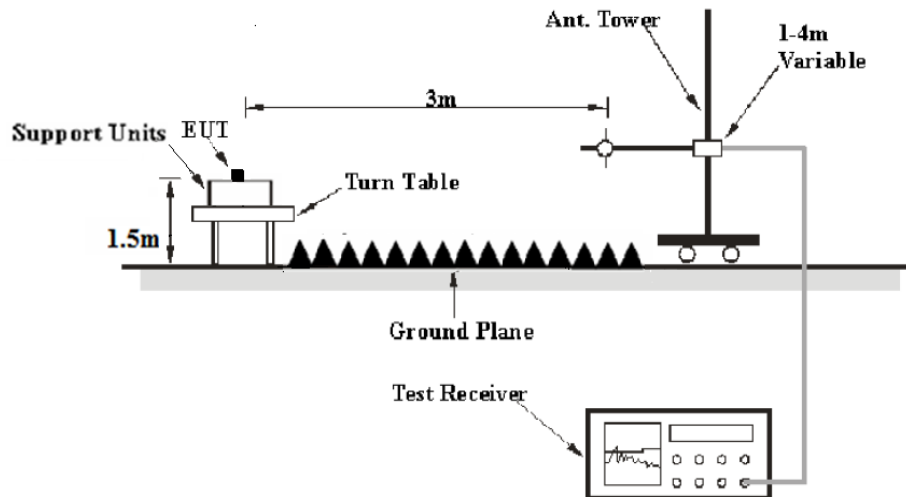

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	VBW	Detector	Duty Cycle	Measurement method
30 MHz - 1000 MHz	120 kHz	/	QP	/	QP
Above 1GHz	1MHz	3 MHz	PK	/	PK
	1MHz	3 MHz	RMS	≥98%	Ave
	1MHz	1/T	PK	<98%	Ave

Test Procedure

According to ANSI C63.10-2013 clause 6.5, 6.6 and 6.7.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection mode for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V /m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V /m)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data

Environmental Conditions

Temperature:	24.1 °C-24.3°C
Relative Humidity:	50 %-52%
ATM Pressure:	101.2kPa-101.3kPa

The testing was performed by Max Min from 2018-10-31 to 2018-11-08.

Test Result: Compliant.


EUT operation mode: Transmitting

For Wi-Fi Mode:

Spurious Emission Test:

30MHz-1GHz:

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **channel 6 of 802.11b mode in X-axis of orientation** was recorded

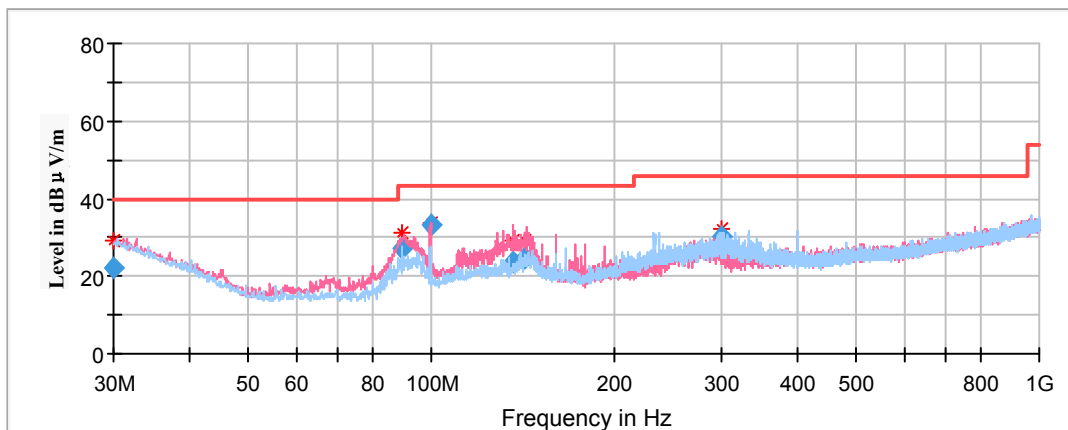

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	QuasiPeak (dBµV/m)	Height (cm)	Polar (H/V)				
30.090200	22.02	101.0	V	2.0	-4.0	40.00	17.98
89.734000	27.26	101.0	V	104.0	-17.5	43.50	16.24
99.896400	33.03	101.0	V	84.0	-14.9	43.50	10.47
136.484100	23.78	101.0	V	157.0	-11.8	43.50	19.72
142.883100	24.42	101.0	V	136.0	-12.1	43.50	19.08
299.720050	30.32	101.0	H	324.0	-10.5	46.00	15.68

1GHz-18GHz:

802.11b Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV /m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV /m)

Channel 1: 2412MHz


Full Spectrum

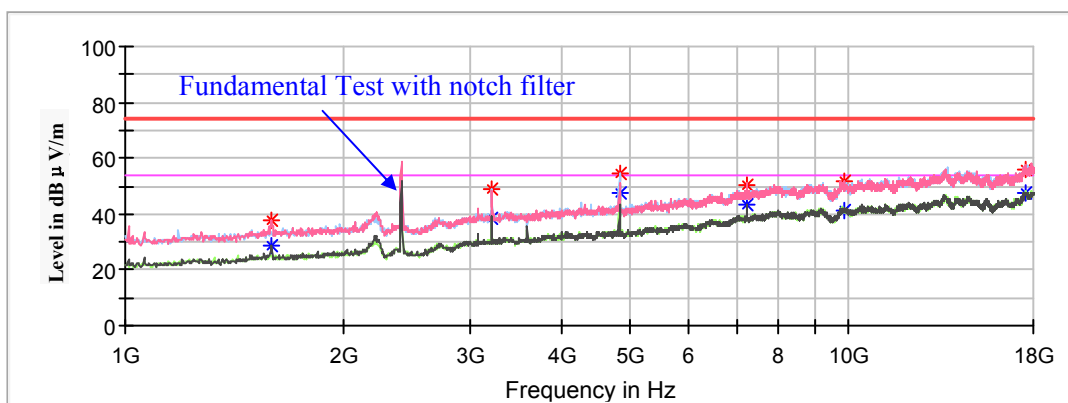

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1591.600000	37.84	---	100.0	V	161.0	-7.2	74.00	36.16
1591.600000	---	28.51	100.0	V	161.0	-7.2	54.00	25.49
3213.400000	---	38.72	100.0	H	73.0	-1.3	54.00	15.28
3213.400000	49.21	---	100.0	H	73.0	-1.3	74.00	24.79
4824.000000	---	47.32	200.0	V	318.0	1.9	54.00	6.68
4824.000000	54.75	---	200.0	V	318.0	1.9	74.00	19.25
7236.000000	---	43.18	150.0	V	220.0	9.0	54.00	10.82
7236.000000	50.63	---	150.0	V	220.0	9.0	74.00	23.37
9863.800000	51.54	---	200.0	V	337.0	12.3	74.00	22.46
9863.800000	---	41.13	200.0	V	337.0	12.3	54.00	12.87
17530.800000	56.13	---	100.0	V	129.0	17.2	74.00	17.87
17530.800000	---	47.89	100.0	V	129.0	17.2	54.00	6.11

Channel 6: 2437MHz


Full Spectrum

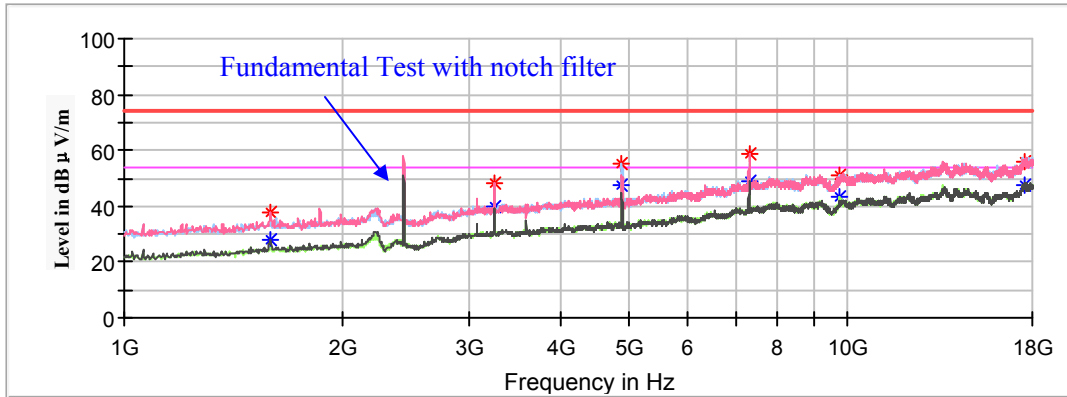

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1591.600000	37.68	---	250.0	V	38.0	-7.2	74.00	36.32
1591.600000	---	27.81	250.0	V	38.0	-7.2	54.00	26.19
3247.400000	---	39.53	100.0	H	205.0	-1.2	54.00	14.47
3247.400000	48.22	---	100.0	H	205.0	-1.2	74.00	25.78
4874.000000	55.21	---	100.0	V	142.0	1.9	74.00	18.79
4874.000000	---	47.74	100.0	V	142.0	1.9	54.00	6.26
7311.000000	58.50	---	200.0	V	136.0	9.2	74.00	15.50
7311.000000	---	48.92	200.0	V	136.0	9.2	54.00	5.08
9748.200000	50.80	---	100.0	H	68.0	12.0	74.00	23.20
9748.200000	---	43.53	100.0	H	68.0	12.0	54.00	10.47
17558.000000	55.76	---	200.0	H	272.0	17.3	74.00	18.24
17558.000000	---	47.87	200.0	H	272.0	17.3	54.00	6.13

Channel 11: 2462MHz

Full Spectrum

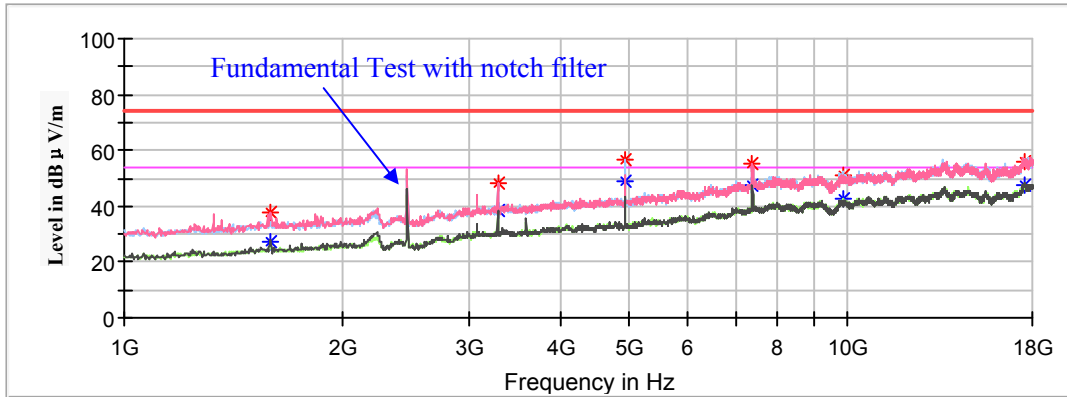

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1595.000000	---	27.48	200.0	V	242.0	-7.2	54.00	26.52
1595.000000	37.66	---	200.0	V	242.0	-7.2	74.00	36.34
3281.400000	---	38.75	100.0	H	145.0	-1.2	54.00	15.25
3281.400000	48.53	---	100.0	H	145.0	-1.2	74.00	25.47
4924.000000	56.35	---	250.0	V	99.0	2.0	74.00	17.65
4924.000000	---	49.11	250.0	V	99.0	2.0	54.00	4.89
7386.000000	55.47	---	250.0	V	67.0	9.4	74.00	18.53
7386.000000	---	47.76	250.0	V	67.0	9.4	54.00	6.24
9840.000000	51.37	---	100.0	H	66.0	12.2	74.00	22.63
9840.000000	---	42.42	100.0	H	66.0	12.2	54.00	11.58
17547.800000	55.96	---	250.0	H	264.0	17.2	74.00	18.04
17547.800000	---	47.86	250.0	H	264.0	17.2	54.00	6.14

802.11g Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV /m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV /m)

Channel 1: 2412MHz


Full Spectrum

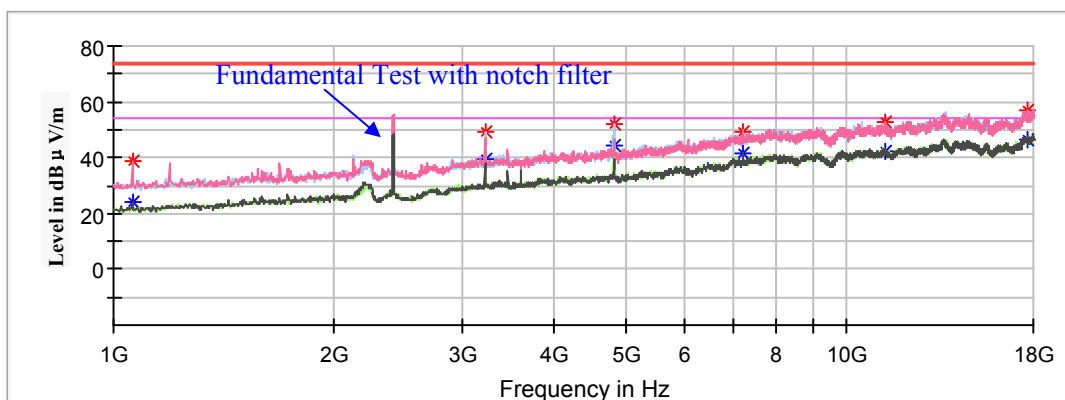

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1061.200000	---	24.35	100.0	V	29.0	-10.1	54.00	29.65
1061.200000	39.08	---	100.0	V	29.0	-10.1	74.00	34.92
3213.400000	---	39.47	100.0	H	26.0	-1.3	54.00	14.53
3213.400000	49.18	---	100.0	H	26.0	-1.3	74.00	24.82
4824.000000	---	44.56	200.0	V	243.0	1.9	54.00	9.44
4824.000000	52.30	---	200.0	V	243.0	1.9	74.00	21.70
7236.000000	---	41.50	150.0	V	195.0	9.0	54.00	12.50
7236.000000	49.13	---	150.0	V	195.0	9.0	74.00	24.87
11302.000000	---	41.94	200.0	V	71.0	13.1	54.00	12.06
11302.000000	53.07	---	200.0	V	71.0	13.1	74.00	20.93
17677.000000	---	46.21	150.0	V	201.0	17.4	54.00	7.79
17677.000000	56.94	---	150.0	V	201.0	17.4	74.00	17.06

Channel 6: 2437MHz


Full Spectrum

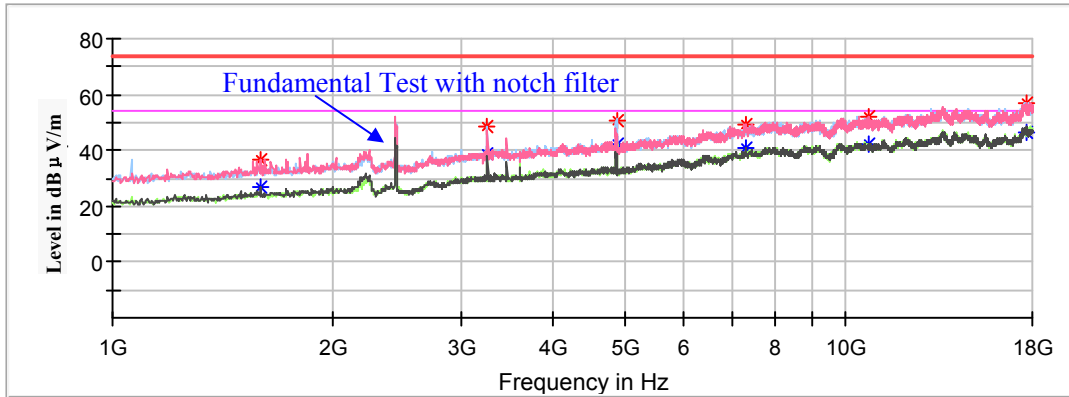

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1591.600000	---	27.10	250.0	V	289.0	-7.2	54.00	26.90
1591.600000	36.29	---	250.0	V	289.0	-7.2	74.00	37.71
3247.400000	---	39.08	100.0	H	316.0	-1.2	54.00	14.92
3247.400000	48.58	---	100.0	H	316.0	-1.2	74.00	25.42
4874.000000	---	41.91	100.0	V	125.0	1.9	54.00	12.09
4874.000000	50.97	---	100.0	V	125.0	1.9	74.00	23.03
7311.000000	---	41.11	200.0	V	350.0	9.2	54.00	12.89
7311.000000	49.05	---	200.0	V	350.0	9.2	74.00	24.95
10758.000000	---	42.08	100.0	H	349.0	13.1	54.00	11.92
10758.000000	52.05	---	100.0	H	349.0	13.1	74.00	21.95
17629.400000	---	46.76	250.0	V	67.0	17.3	54.00	7.24
17629.400000	56.95	---	250.0	V	67.0	17.3	74.00	17.05

Channel 11: 2462MHz

Full Spectrum

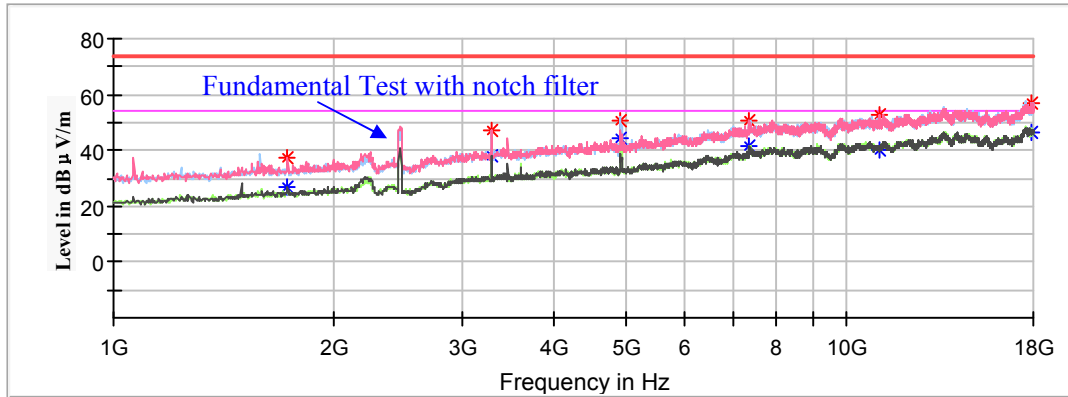

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1727.600000	---	27.04	200.0	V	50.0	-6.8	54.00	26.96
1727.600000	37.48	---	200.0	V	50.0	-6.8	74.00	36.52
3281.400000	---	37.80	150.0	V	90.0	-1.2	54.00	16.20
3281.400000	47.45	---	150.0	V	90.0	-1.2	74.00	26.55
4924.000000	50.44	---	200.0	V	315.0	2.0	74.00	23.56
4924.000000	---	44.22	200.0	V	315.0	2.0	54.00	9.78
7386.000000	---	41.78	250.0	V	103.0	9.4	54.00	12.22
7386.000000	50.28	---	250.0	V	103.0	9.4	74.00	23.72
11115.000000	---	40.36	100.0	V	172.0	13.3	54.00	13.64
11115.000000	52.68	---	100.0	V	172.0	13.3	74.00	21.32
17901.400000	---	46.72	250.0	H	7.0	17.6	54.00	7.28
17901.400000	56.64	---	250.0	H	7.0	17.6	74.00	17.36

802.11n-HT20 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV /m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV /m)

Channel 1: 2412MHz


Full Spectrum

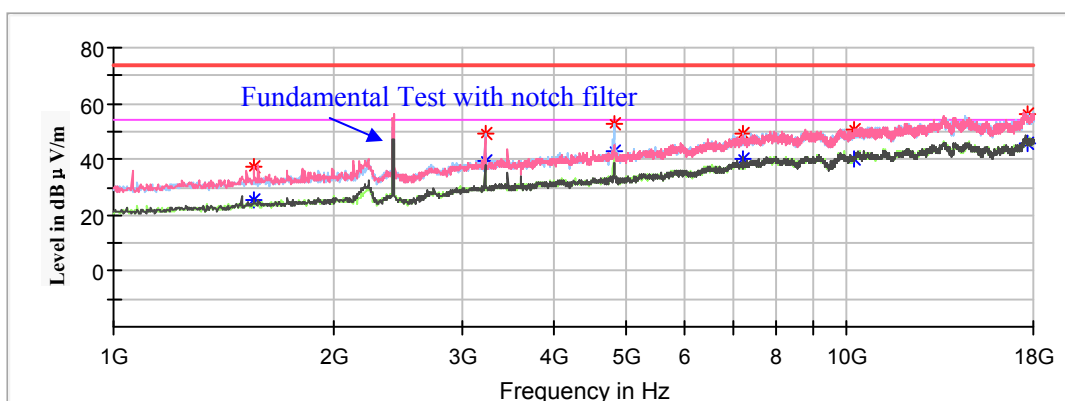

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1554.200000	---	25.39	150.0	V	19.0	-7.4	54.00	28.61
1554.200000	37.33	---	150.0	V	19.0	-7.4	74.00	36.67
3213.400000	---	39.20	100.0	H	76.0	-1.3	54.00	14.80
3213.400000	49.44	---	100.0	H	76.0	-1.3	74.00	24.56
4824.000000	---	42.99	250.0	V	331.0	1.9	54.00	11.01
4824.000000	52.92	---	250.0	V	331.0	1.9	74.00	21.08
7236.000000	---	40.20	100.0	V	117.0	9.0	54.00	13.80
7236.000000	49.38	---	100.0	V	117.0	9.0	74.00	24.62
10231.000000	---	39.93	200.0	V	226.0	12.7	54.00	14.07
10231.000000	50.37	---	200.0	V	226.0	12.7	74.00	23.63
17653.200000	---	46.04	100.0	H	337.0	17.4	54.00	7.96
17653.200000	55.91	---	100.0	H	337.0	17.4	74.00	18.09

Channel 6: 2437MHz


Full Spectrum

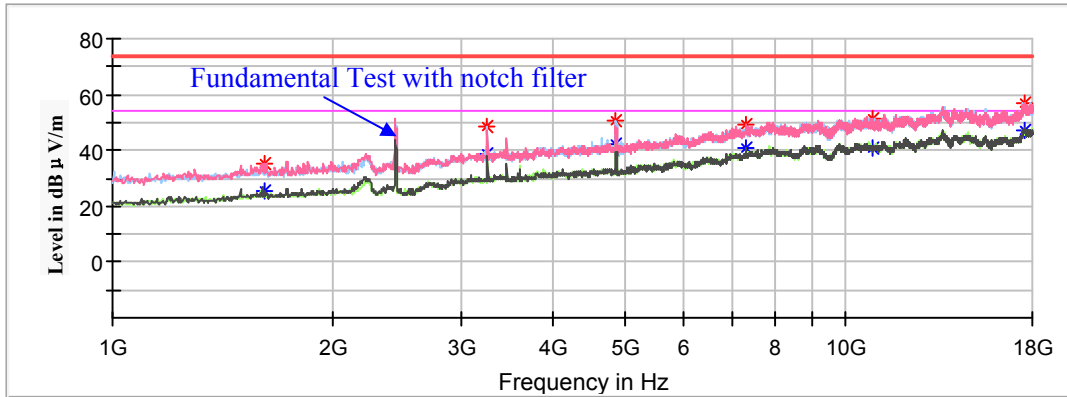

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1612.000000	---	25.57	200.0	V	132.0	-7.2	54.00	28.43
1612.000000	35.19	---	200.0	V	132.0	-7.2	74.00	38.81
3247.400000	---	39.07	100.0	H	335.0	-1.2	54.00	14.93
3247.400000	48.45	---	100.0	H	335.0	-1.2	74.00	25.55
4874.000000	---	41.96	100.0	V	208.0	1.9	54.00	12.04
4874.000000	50.67	---	100.0	V	208.0	1.9	74.00	23.33
7311.000000	---	40.99	200.0	V	216.0	9.2	54.00	13.01
7311.000000	48.99	---	200.0	V	216.0	9.2	74.00	25.01
10921.200000	---	40.74	100.0	V	204.0	13.4	54.00	13.26
10921.200000	51.53	---	100.0	V	204.0	13.4	74.00	22.47
17554.600000	---	47.06	200.0	H	15.0	17.2	54.00	6.94
17554.600000	57.01	---	200.0	H	15.0	17.2	74.00	16.99

Channel 11: 2462MHz

Full Spectrum

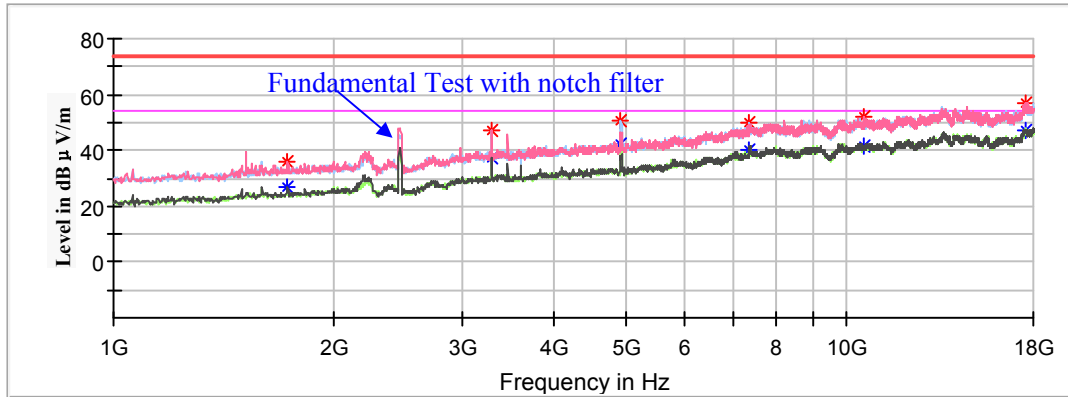

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1727.600000	---	26.90	200.0	V	152.0	-6.8	54.00	27.10
1727.600000	35.96	---	200.0	V	152.0	-6.8	74.00	38.04
3281.400000	---	37.54	100.0	V	218.0	-1.2	54.00	16.46
3281.400000	47.46	---	100.0	H	218.0	-1.2	74.00	26.54
4924.000000	---	42.03	200.0	V	147.0	2.0	54.00	11.97
4924.000000	50.45	---	200.0	V	147.0	2.0	74.00	23.55
7386.000000	---	40.02	250.0	V	91.0	9.4	54.00	13.98
7386.000000	50.04	---	250.0	V	91.0	9.4	74.00	23.96
10577.800000	---	41.57	150.0	V	166.0	12.8	54.00	12.43
10577.800000	51.88	---	150.0	V	166.0	12.8	74.00	22.12
17547.800000	---	47.16	200.0	V	312.0	17.2	54.00	6.84
17547.800000	56.78	---	200.0	V	312.0	17.2	74.00	17.22

802.11n-HT40 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV /m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV /m)

Channel 3: 2422MHz


Full Spectrum

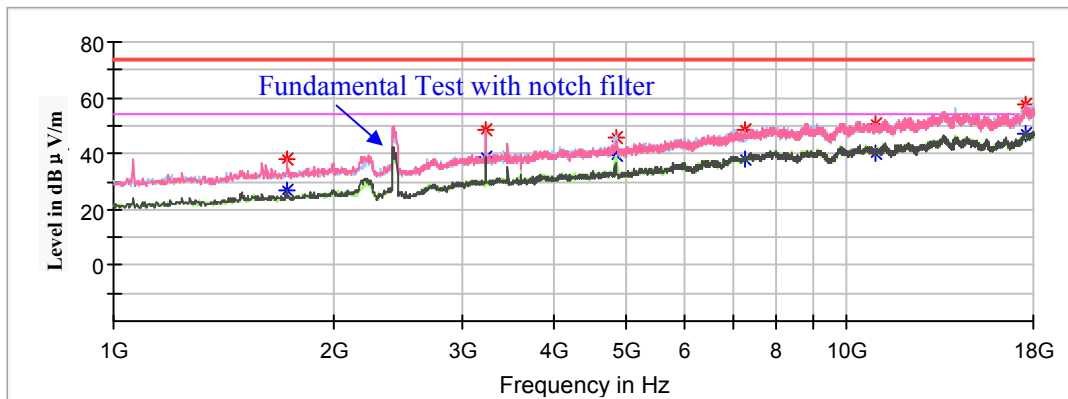

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1724.200000	---	26.90	100.0	V	346.0	-6.8	54.00	27.10
1724.200000	38.09	---	100.0	V	346.0	-6.8	74.00	35.91
3227.000000	---	38.64	100.0	V	46.0	-1.2	54.00	15.36
3227.000000	48.23	---	100.0	V	46.0	-1.2	74.00	25.77
4844.000000	---	39.27	250.0	V	147.0	1.9	54.00	14.73
4844.000000	46.06	---	250.0	V	147.0	1.9	74.00	27.94
7266.000000	---	38.20	100.0	V	275.0	9.1	54.00	15.80
7266.000000	48.60	---	100.0	V	275.0	9.1	74.00	25.40
10934.800000	---	40.41	250.0	V	111.0	13.4	54.00	13.59
10934.800000	50.88	---	250.0	V	111.0	13.4	74.00	23.12
17537.600000	---	47.40	100.0	H	19.0	17.2	54.00	6.60
17537.600000	57.48	---	100.0	H	19.0	17.2	74.00	16.52

Channel 6: 2437MHz


Full Spectrum

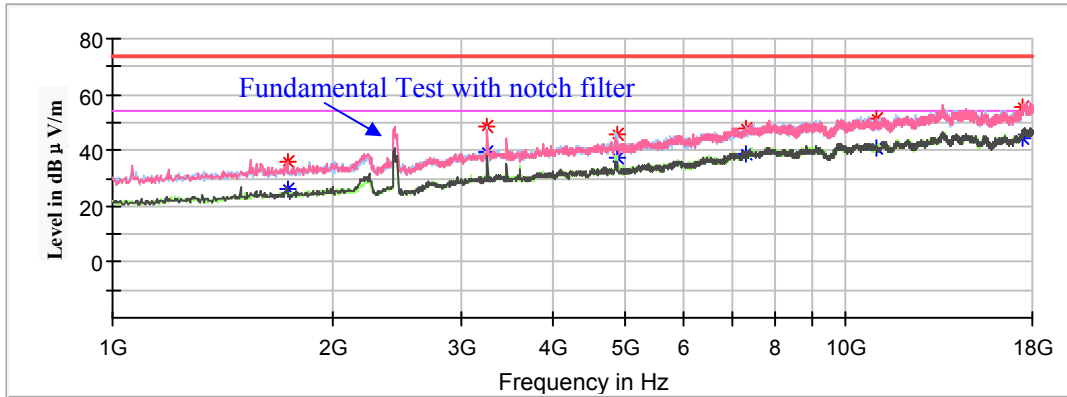

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1731.000000	---	26.07	250.0	V	40.0	-6.7	54.00	27.93
1731.000000	36.04	---	250.0	V	40.0	-6.7	74.00	37.96
3247.400000	---	39.22	100.0	H	124.0	-1.2	54.00	14.78
3247.400000	48.62	---	100.0	H	124.0	-1.2	74.00	25.38
4874.000000	---	37.67	100.0	V	353.0	1.9	54.00	16.33
4874.000000	45.69	---	100.0	V	353.0	1.9	74.00	28.31
7311.000000	---	38.83	250.0	V	329.0	9.2	54.00	15.17
7311.000000	48.01	---	250.0	V	329.0	9.2	74.00	25.99
11033.400000	---	40.86	100.0	H	291.0	13.4	54.00	13.14
11033.400000	51.38	---	100.0	H	291.0	13.4	74.00	22.62
17405.000000	---	44.35	250.0	H	299.0	16.7	54.00	9.65
17405.000000	55.74	---	250.0	H	299.0	16.7	74.00	18.26

Channel 9: 2452MHz

Full Spectrum

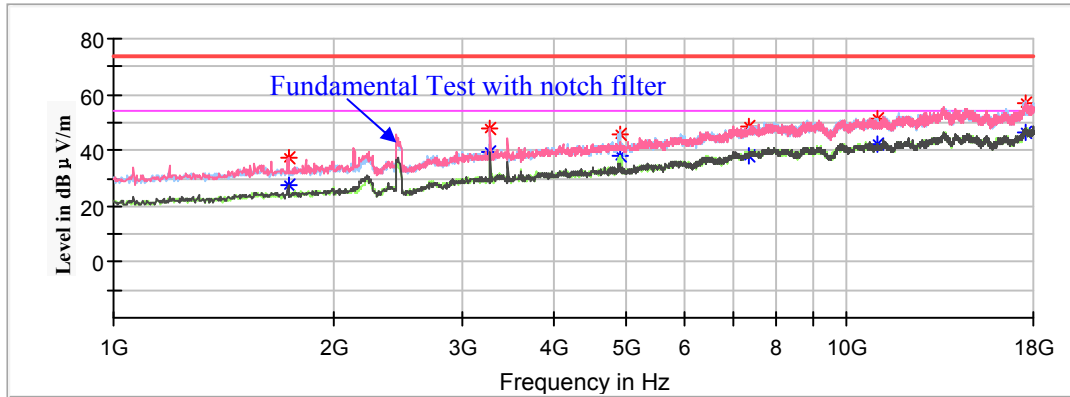


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1731.000000	---	27.29	200.0	V	237.0	-6.7	54.00	26.71
1731.000000	37.64	---	200.0	V	237.0	-6.7	74.00	36.36
3267.800000	48.07	---	150.0	V	331.0	-1.2	74.00	25.93
3267.800000	---	39.14	150.0	V	331.0	-1.2	54.00	14.86
4904.000000	45.64	---	250.0	V	70.0	2.0	74.00	28.36
4904.000000	---	37.92	250.0	V	70.0	2.0	54.00	16.08
7356.000000	---	38.32	200.0	V	66.0	9.3	54.00	15.68
7356.000000	48.19	---	200.0	V	66.0	9.3	74.00	25.81
11040.200000	---	42.17	100.0	H	222.0	13.4	54.00	11.83
11040.200000	51.42	---	100.0	H	222.0	13.4	74.00	22.58
17551.200000	---	46.71	200.0	V	69.0	17.2	54.00	7.29
17551.200000	56.82	---	200.0	V	69.0	17.2	74.00	17.18

18GHz-25GHz:


Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **channel 6 of 802.11b mode in X-axis of orientation** was recorded

Horizontal

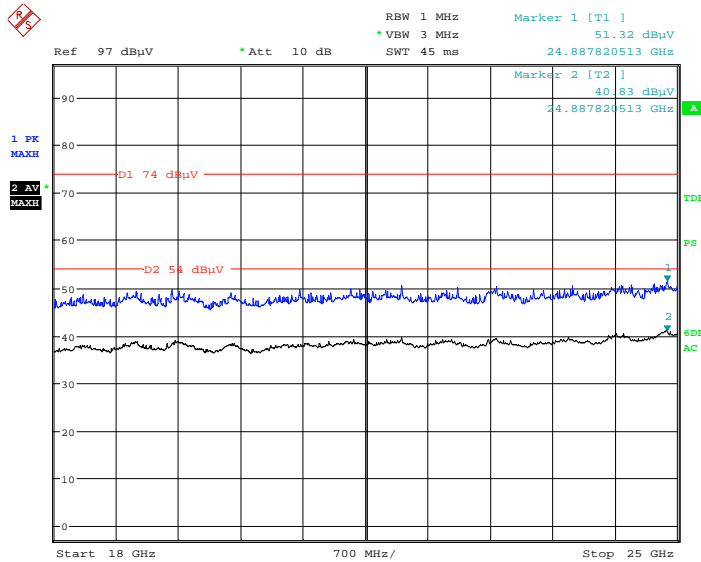

Date: 4.NOV.2018 14:25:27

Vertical

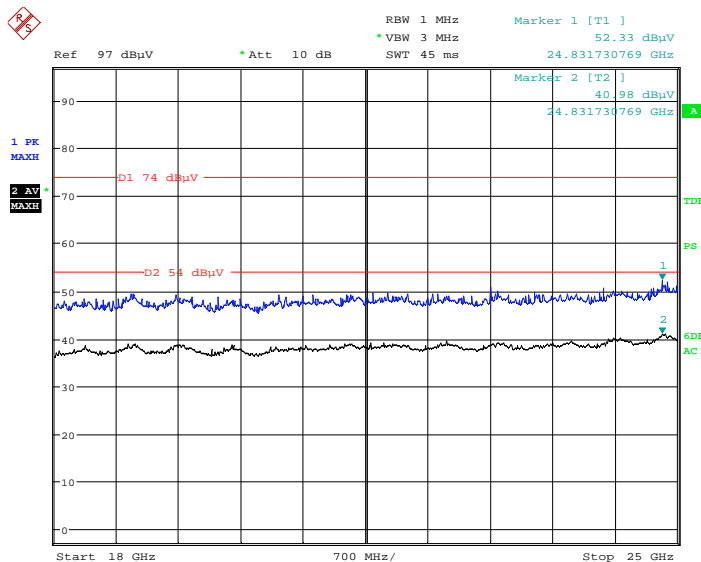

Date: 4.NOV.2018 14:48:51

Fundamental Test & Restricted Bands Emissions Test:

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dBµV /m) = Corrected Factor (dB/m) + Reading (dBµV)

Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV /m)

802.11b Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
Channel 1: 2412MHz								
2412.000000	115.03	---	200.0	V	162.0	6.1	/	/
2412.000000	---	108.94	200.0	V	162.0	6.1	/	/
2412.000000	112.67	---	150.0	H	294.0	6.1	/	/
2412.000000	---	106.75	150.0	H	294.0	6.1	/	/
2390.000000	---	47.62	200.0	V	176.0	6.0	54.00	6.38
2390.000000	57.89	---	200.0	V	176.0	6.0	74.00	16.11
Channel 6: 2437MHz								
2437.000000	116.54	---	150.0	V	308.0	6.2	/	/
2437.000000	---	110.42	150.0	V	308.0	6.2	/	/
2437.000000	114.33	---	150.0	H	352.0	6.2	/	/
2437.000000	---	108.08	150.0	H	352.0	6.2	/	/
Channel 11: 2462MHz								
2462.000000	115.52	---	200.0	V	136.0	6.2	/	/
2462.000000	---	109.53	200.0	V	136.0	6.2	/	/
2462.000000	113.23	---	100.0	H	237.0	6.2	/	/
2462.000000	---	107.28	100.0	H	237.0	6.2	/	/
2483.500000	58.21	---	150.0	V	313.0	6.3	74.00	15.79
2483.500000	---	48.81	150.0	V	313.0	6.3	54.00	5.19

802.11g Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
Channel 1: 2412MHz								
2412.000000	109.42	---	200.0	V	28.0	6.1	/	/
2412.000000	---	103.29	200.0	V	28.0	6.1	/	/
2412.000000	107.38	---	200.0	H	339.0	6.1	/	/
2412.000000	---	101.22	200.0	H	339.0	6.1	/	/
2390.000000	---	49.94	150.0	V	75.0	6.0	54.00	4.06
2390.000000	60.41	---	150.0	V	75.0	6.0	74.00	13.59
Channel 6: 2437MHz								
2437.000000	108.50	---	200.0	V	76.0	6.2	/	/
2437.000000	---	102.01	200.0	V	76.0	6.2	/	/
2437.000000	106.39	---	150.0	H	161.0	6.2	/	/
2437.000000	---	99.80	150.0	H	161.0	6.2	/	/
Channel 11: 2462MHz								
2462.000000	108.65	---	250.0	V	288.0	6.2	/	/
2462.000000	---	101.72	250.0	V	288.0	6.2	/	/
2462.000000	106.45	---	150.0	H	168.0	6.2	/	/
2462.000000	---	99.23	150.0	H	168.0	6.2	/	/
2483.500000	60.06	---	150.0	V	34.0	6.3	74.00	13.94
2483.500000	---	49.76	150.0	V	34.0	6.3	54.00	4.24

802.11n-HT20 Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
Channel 1: 2412MHz								
2412.000000	108.87	---	100.0	V	31.0	6.1	/	/
2412.000000	---	101.96	100.0	V	31.0	6.1	/	/
2412.000000	106.39	---	200.0	H	37.0	6.1	/	/
2412.000000	---	99.63	200.0	H	37.0	6.1	/	/
2390.000000	---	47.62	150.0	V	29.0	6.0	54.00	6.38
2390.000000	56.82	---	150.0	V	29.0	6.0	74.00	17.18
Channel 6: 2437MHz								
2437.000000	109.11	---	200.0	V	280.0	6.2	/	/
2437.000000	---	102.14	200.0	V	280.0	6.2	/	/
2437.000000	106.62	---	150.0	H	284.0	6.2	/	/
2437.000000	---	99.71	150.0	H	284.0	6.2	/	/
Channel 11: 2462MHz								
2462.000000	108.31	---	100.0	V	53.0	6.2	/	/
2462.000000	---	101.35	100.0	V	53.0	6.2	/	/
2462.000000	105.87	---	250.0	H	72.0	6.2	/	/
2462.000000	---	99.13	250.0	H	72.0	6.2	/	/
2483.500000	58.12	---	100.0	V	101.0	6.3	74.00	15.88
2483.500000	---	48.68	100.0	V	101.0	6.3	54.00	5.32

802.11n-HT40 Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
Channel 3: 2422MHz								
2422.000000	103.44	---	200.0	V	195.0	6.1	/	/
2422.000000	---	95.26	200.0	V	195.0	6.1	/	/
2422.000000	101.19	---	150.0	H	186.0	6.1	/	/
2422.000000	---	93.24	150.0	H	186.0	6.1	/	/
2390.000000	---	48.96	150.0	V	284.0	6.0	54.00	5.04
2390.000000	57.33	---	150.0	V	284.0	6.0	74.00	16.67
Channel 4: 2427MHz								
2427.000000	104.26	---	150.0	V	188.0	6.1	/	/
2427.000000	---	96.07	150.0	V	188.0	6.1	/	/
2427.000000	101.94	---	100.0	H	70.0	6.1	/	/
2427.000000	---	94.05	100.0	H	70.0	6.1	/	/
2390.000000	---	50.21	200.0	V	267.0	6.0	54.00	3.79
2390.000000	60.42	---	200.0	V	267.0	6.0	74.00	13.58
Channel 6: 2437MHz								
2437.000000	103.99	---	200.0	V	145.0	6.2	/	/
2437.000000	---	95.96	200.0	V	145.0	6.2	/	/
2437.000000	101.88	---	200.0	H	293.0	6.2	/	/
2437.000000	---	93.73	200.0	H	293.0	6.2	/	/
Channel 8: 2447MHz								
2447.000000	103.69	---	200.0	V	100.0	6.2	/	/
2447.000000	---	95.55	200.0	V	100.0	6.2	/	/
2447.000000	101.27	---	150.0	H	305.0	6.2	/	/
2447.000000	---	93.36	150.0	H	305.0	6.2	/	/
2483.500000	59.96	---	100.0	V	347.0	6.3	74.00	14.04
2483.500000	---	50.68	100.0	V	347.0	6.3	54.00	3.32
Channel 9: 2452MHz								
2452.000000	103.49	---	100.0	V	162.0	6.2	/	/
2452.000000	---	95.53	100.0	V	162.0	6.2	/	/
2452.000000	101.30	---	200.0	H	246.0	6.2	/	/
2452.000000	---	93.49	200.0	H	246.0	6.2	/	/
2483.500000	58.85	---	150.0	V	75.0	6.3	74.00	15.15
2483.500000	---	50.25	150.0	V	75.0	6.3	54.00	3.75

For BLE Mode:

Spurious Emission Test:

30MHz-1GHz

*(Pre-scan with channel 0, 19 and 39 of operation in the X,Y and Z axes of orientation, the worst case **channel 39** of operation in the **X axis** of orientation was recorded)*

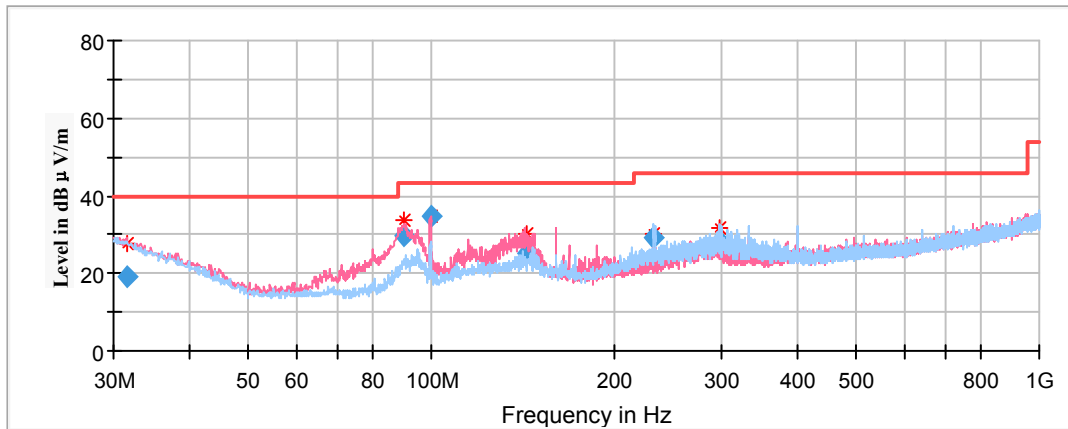

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
31.661750	18.91	199.0	V	252.0	-5.1	40.00	21.09
90.044100	29.70	101.0	V	99.0	-17.5	43.50	13.80
99.604700	34.57	101.0	V	79.0	-15.0	43.50	8.93
143.576250	24.94	101.0	V	126.0	-12.1	43.50	18.56
232.406450	29.08	101.0	H	246.0	-12.2	46.00	16.92
297.064800	28.08	101.0	H	173.0	-10.6	46.00	17.92

1GHz-18GHz


(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV /m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV /m)

Channel 0: 2402MHz


Full Spectrum

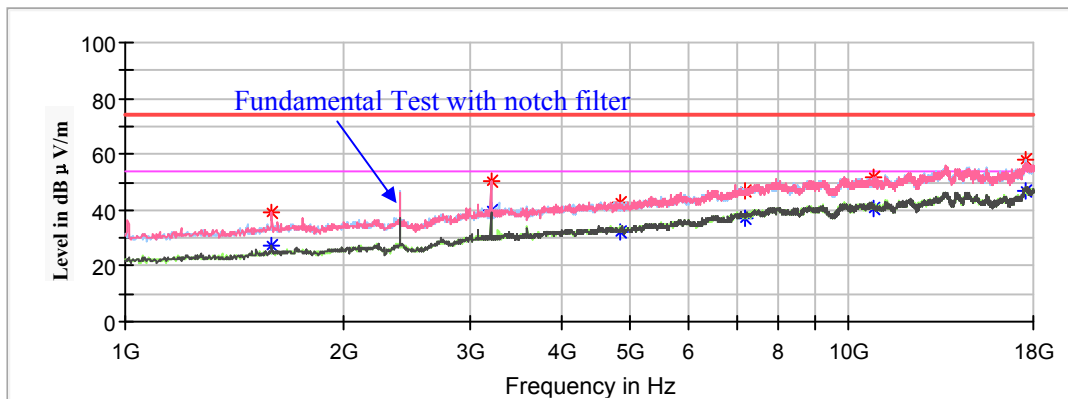

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1591.600000	---	27.46	150.0	V	223.0	-7.2	54.00	26.54
1591.600000	39.11	---	150.0	V	223.0	-7.2	74.00	34.89
3199.800000	---	39.87	100.0	H	321.0	-1.3	54.00	14.13
3199.800000	50.13	---	100.0	H	321.0	-1.3	74.00	23.87
4804.000000	---	32.21	200.0	H	15.0	1.9	54.00	21.79
4804.000000	42.49	---	200.0	H	15.0	1.9	74.00	31.51
7206.000000	---	37.33	150.0	H	284.0	8.9	54.00	16.67
7206.000000	46.62	---	150.0	H	284.0	8.9	74.00	27.38
10792.000000	---	40.86	250.0	V	300.0	13.2	54.00	13.14
10792.000000	51.47	---	250.0	V	300.0	13.2	74.00	22.53
17568.200000	---	46.95	100.0	H	246.0	17.3	54.00	7.05
17568.200000	58.18	---	100.0	H	246.0	17.3	74.00	15.82

Channel 19: 2440MHz


Full Spectrum

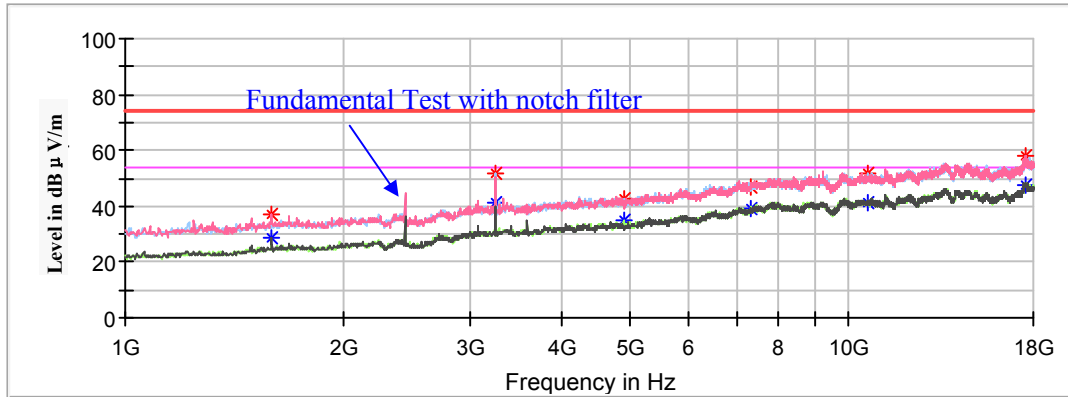

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1591.600000	---	28.50	200.0	V	320.0	-7.2	54.00	25.50
1591.600000	37.25	---	200.0	V	320.0	-7.2	74.00	36.75
3250.800000	---	41.10	100.0	H	290.0	-1.2	54.00	12.90
3250.800000	51.54	---	100.0	H	290.0	-1.2	74.00	22.46
4880.000000	---	35.20	100.0	H	158.0	1.9	54.00	18.80
4880.000000	42.89	---	100.0	H	158.0	1.9	74.00	31.11
7320.000000	46.60	---	200.0	H	199.0	9.2	74.00	27.40
7320.000000	---	38.90	200.0	H	199.0	9.2	54.00	15.10
10652.600000	---	41.40	150.0	H	338.0	13.0	54.00	12.60
10652.600000	51.87	---	150.0	H	338.0	13.0	74.00	22.13
17537.600000	---	47.65	200.0	H	207.0	17.2	54.00	6.35
17537.600000	58.09	---	200.0	H	207.0	17.2	74.00	15.91

Channel 39: 2480MHz

Full Spectrum

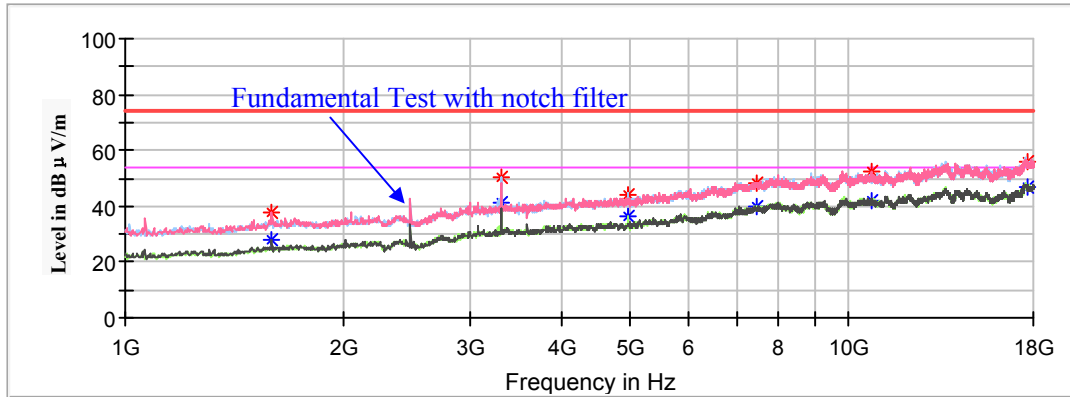


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1591.600000	38.08	---	200.0	V	158.0	-7.2	74.00	35.92
1591.600000	---	28.24	200.0	V	158.0	-7.2	54.00	25.76
3305.200000	50.53	---	100.0	H	216.0	-1.1	74.00	23.47
3305.200000	---	41.42	100.0	H	216.0	-1.1	54.00	12.58
4960.000000	44.19	---	200.0	H	86.0	2.0	74.00	29.81
4960.000000	---	36.34	200.0	H	86.0	2.0	54.00	17.66
7440.000000	---	39.59	250.0	H	37.0	9.6	54.00	14.41
7440.000000	47.92	---	250.0	H	37.0	9.6	74.00	26.08
10724.000000	---	42.10	100.0	V	253.0	13.1	54.00	11.90
10724.000000	52.55	---	100.0	V	253.0	13.1	74.00	21.45
17690.600000	---	47.03	200.0	V	197.0	17.4	54.00	6.97
17690.600000	55.80	---	200.0	V	197.0	17.4	74.00	18.20

18GHz-25GHz


(Pre-scan with channel 0, 19 and 39 of operation in the X,Y and Z axes of orientation, the worst case **channel 39 of operation in the X axis of orientation** was recorded)

Horizontal

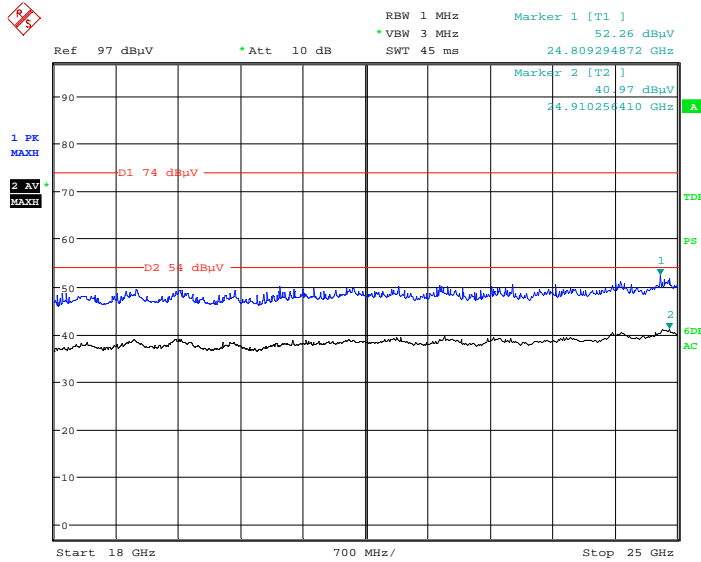

Date: 4.NOV.2018 13:07:11

Vertical

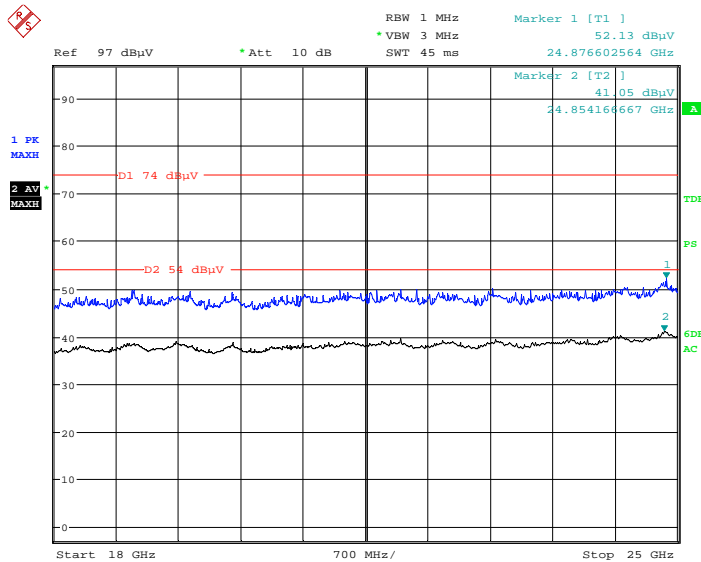

Date: 4.NOV.2018 13:26:00

Fundamental Test & Restricted Bands Emissions Test:

(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)


Corrected Amplitude (dBµV /m) = Corrected Factor (dB/m) + Reading (dBµV)

Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV /m)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
Channel 0: 2402MHz								
2402.000000	97.59	---	150.0	H	183.0	6.1	/	/
2402.000000	---	97.45	150.0	H	183.0	6.1	/	/
2402.000000	95.13	---	200.0	V	194.0	6.1	/	/
2402.000000	---	95.08	200.0	V	194.0	6.1	/	/
2390.000000	---	39.86	100.0	H	279.0	6.0	54.00	14.14
2390.000000	47.59	---	100.0	H	279.0	6.0	74.00	26.41
Channel 19: 2440MHz								
2440.000000	98.20	---	100.0	H	339.0	6.2	/	/
2440.000000	---	97.78	100.0	H	339.0	6.2	/	/
2440.000000	96.18	---	150.0	V	186.0	6.2	/	/
2440.000000	---	95.67	150.0	V	186.0	6.2	/	/
Channel 39: 2480MHz								
2480.000000	97.92	---	200.0	H	191.0	6.3	/	/
2480.000000	---	97.69	200.0	H	191.0	6.3	/	/
2480.000000	95.61	---	250.0	V	126.0	6.3	/	/
2480.000000	---	95.27	250.0	V	126.0	6.3	/	/
2483.500000	54.16	---	100.0	H	65.0	6.3	74.00	19.84
2483.500000	---	43.51	100.0	H	65.0	6.3	54.00	10.49

Conducted Spurious Emissions at Antenna Port


802.11b Mode Channel 1

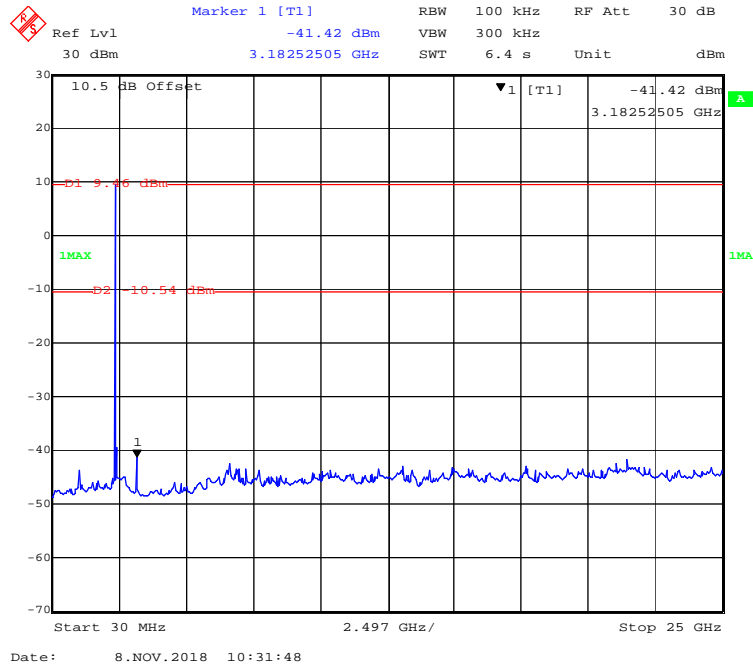


802.11b Mode Channel 6

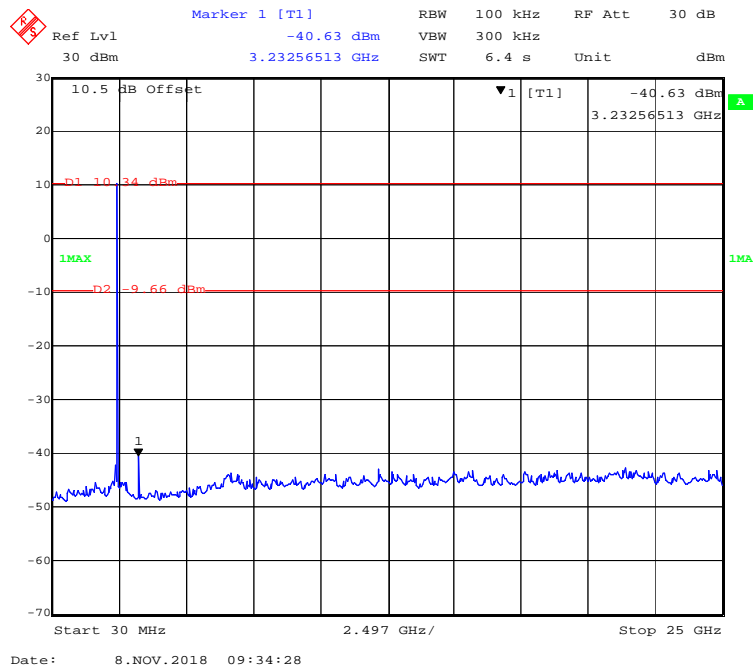


802.11b Mode Channel 11

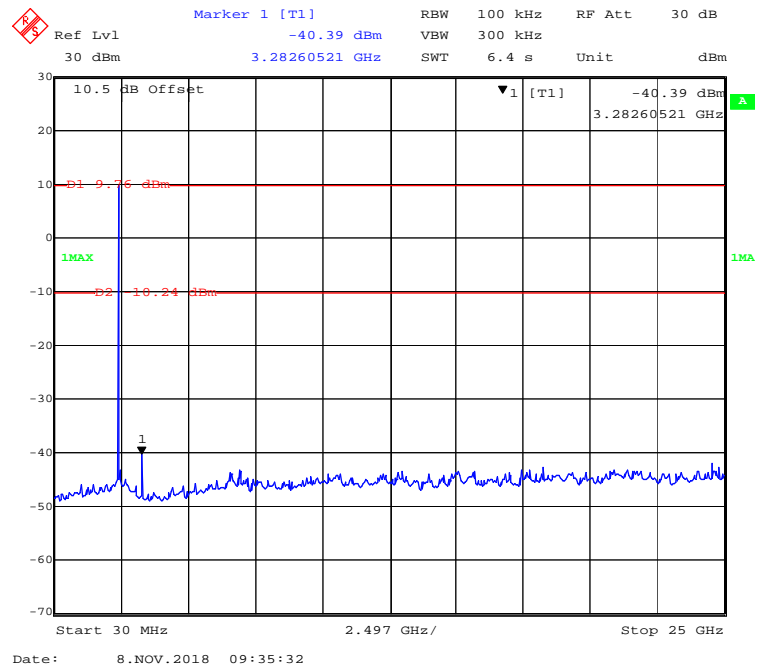


802.11g Mode Channel 1

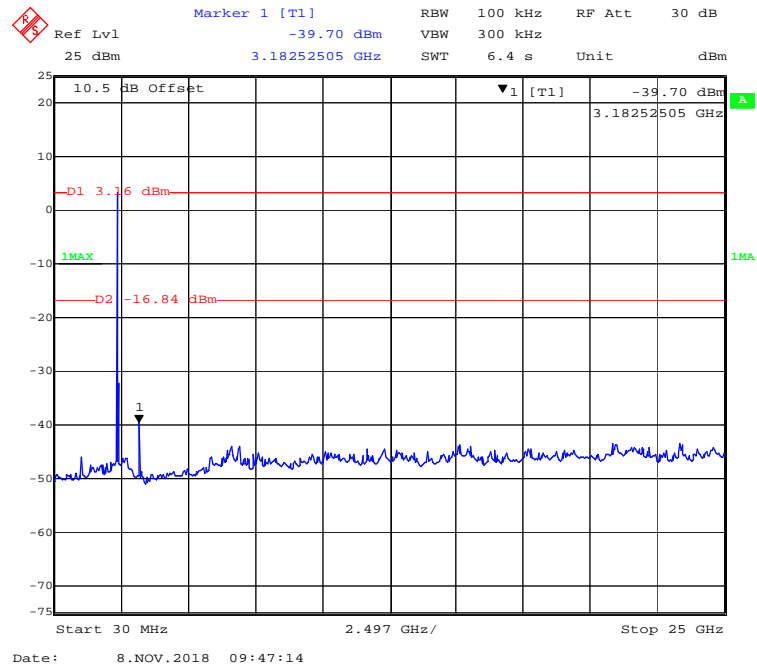


802.11g Mode Channel 6

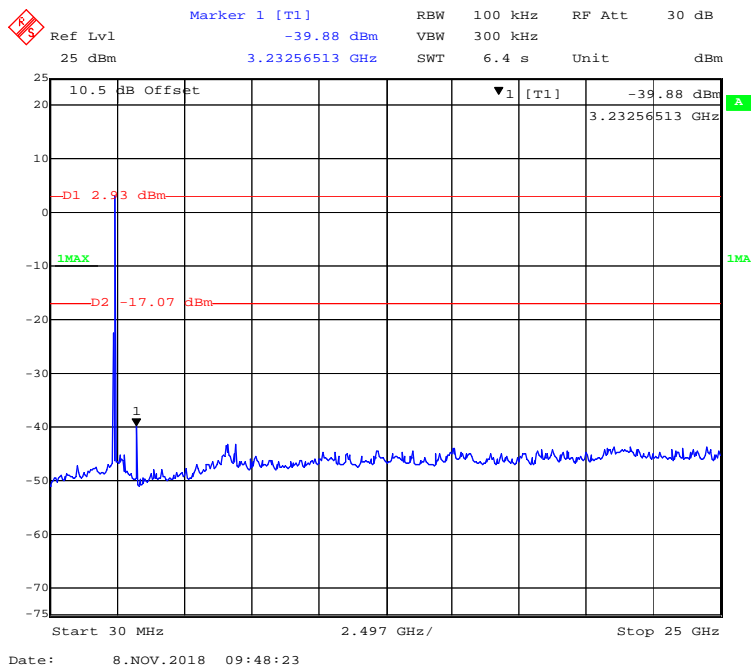


802.11g Mode Channel 11

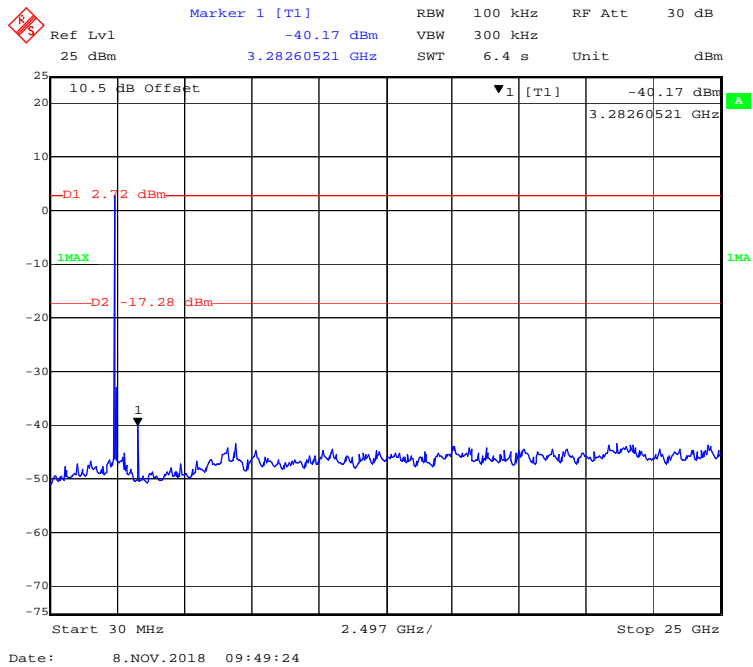


802.11n-HT20 Mode Channel 1

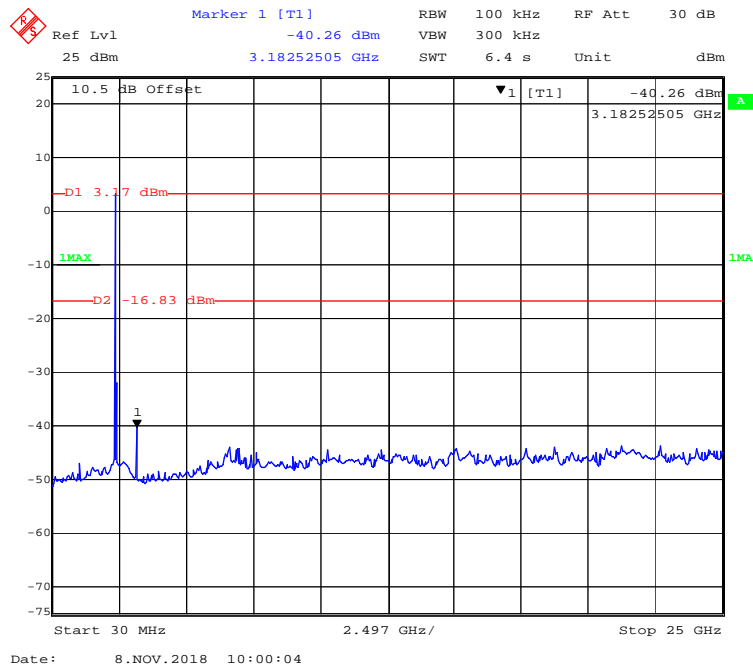


802.11n-HT20 Mode Channel 6

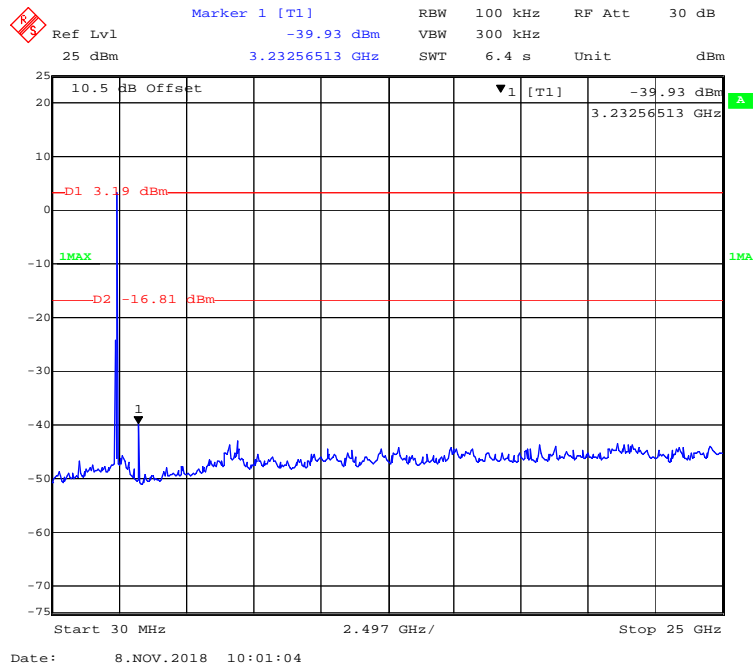


802.11n-HT20 Mode Channel 11

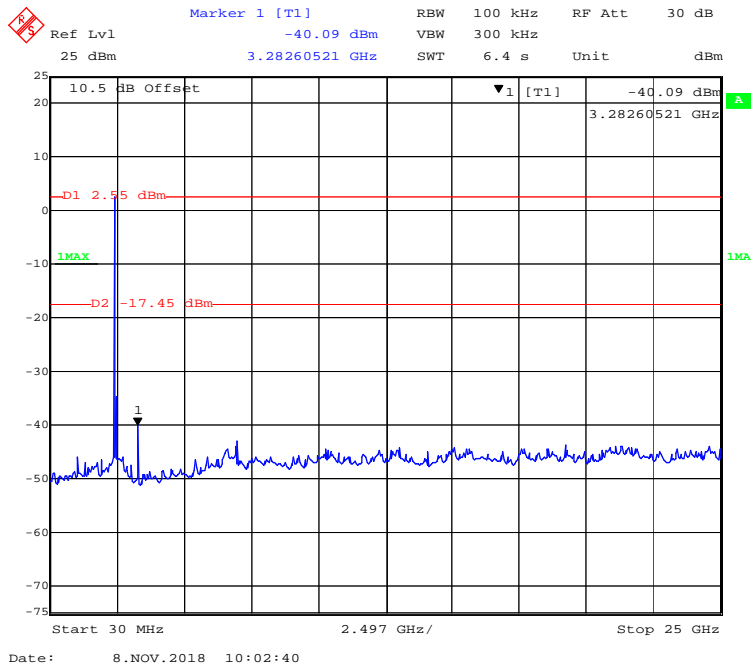


802.11n-HT40 Mode Channel 3

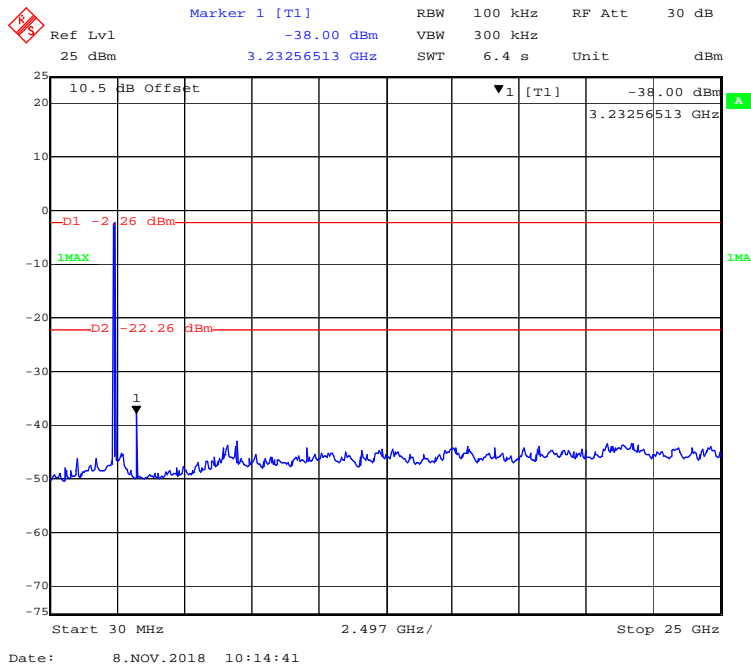


802.11n-HT40 Mode Channel 6

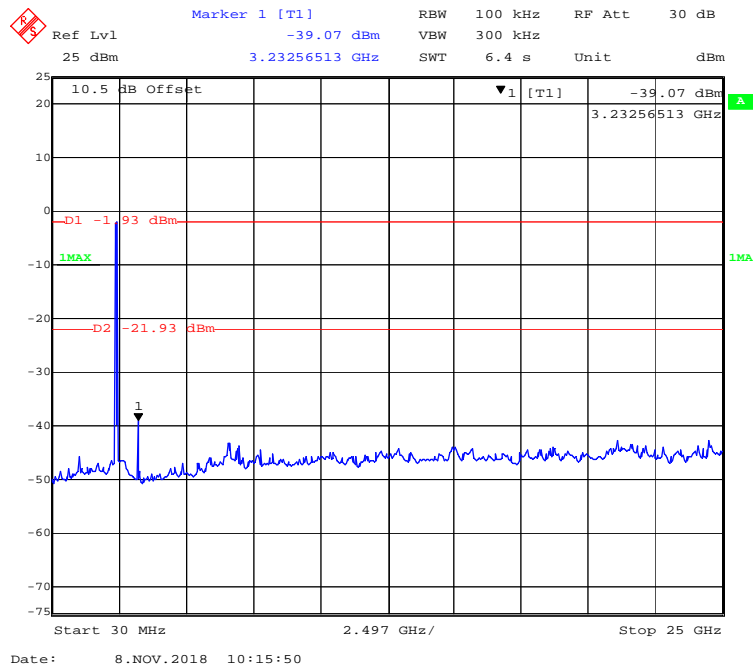


802.11n-HT40 Mode Channel 9

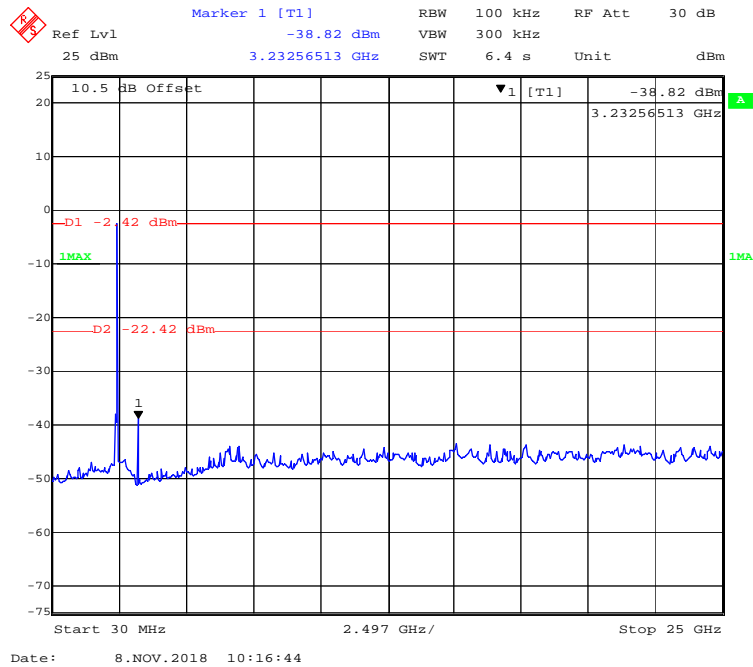


BLE Mode Channel 0

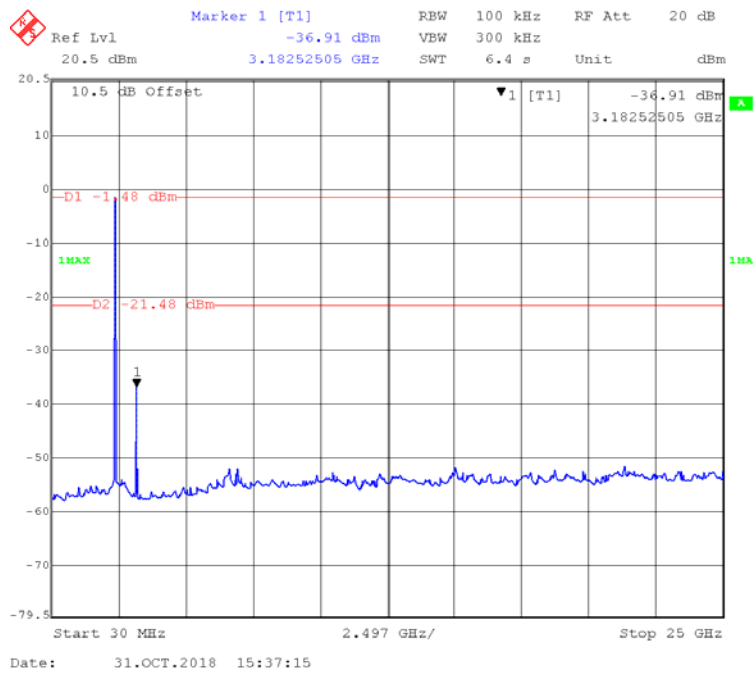

BLE Mode Channel 19

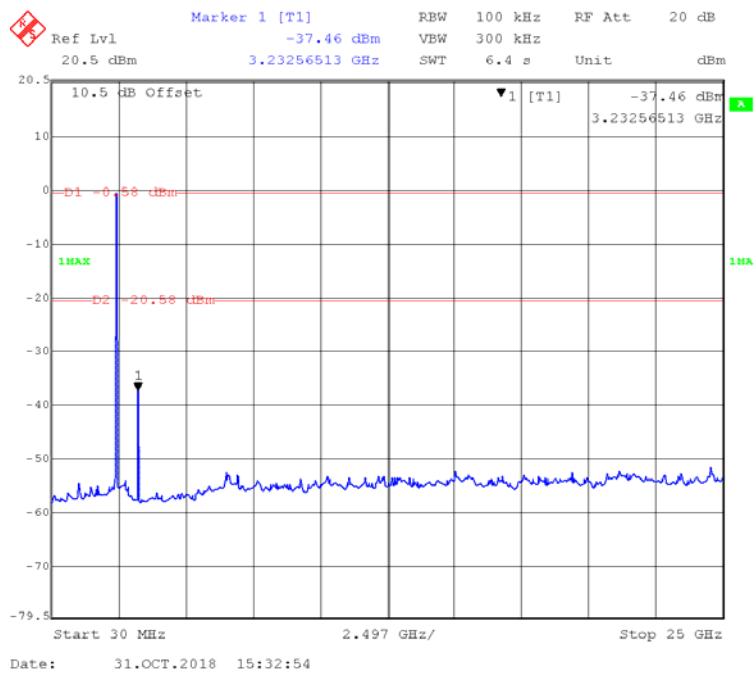

BLE Mode Channel 39

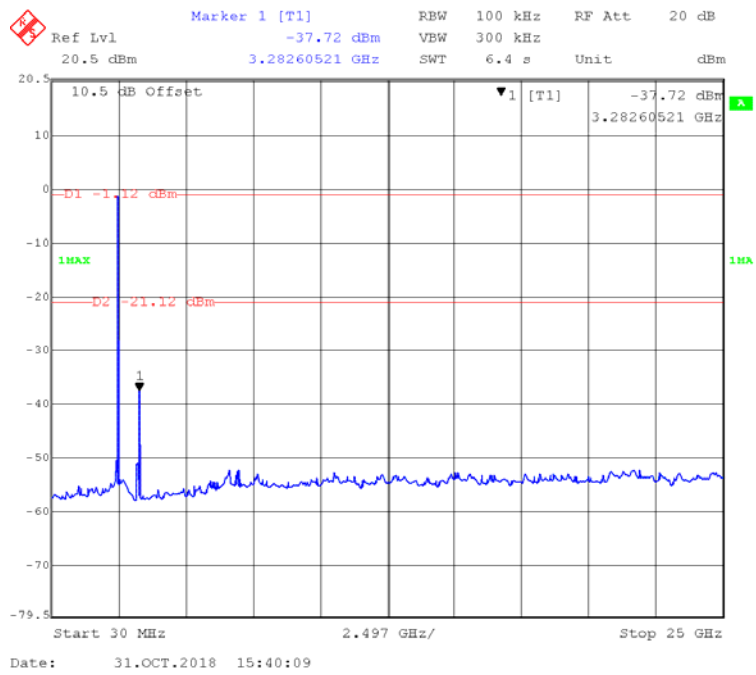

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	24.1 °C-24.3 °C
Relative Humidity:	50 %-52%
ATM Pressure:	101.2kPa-101.3kPa


The testing was performed by Max Min on 2018-10-31 & 2018-11-08.

Test Result: Compliant.


EUT operation mode: Transmitting

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
802.11b Mode			
1	2412	9.32	≥0.5
6	2437	8.84	≥0.5
11	2462	8.84	≥0.5
802.11g Mode			
1	2412	16.59	≥0.5
6	2437	16.53	≥0.5
11	2462	16.59	≥0.5
802.11n-HT20 Mode			
1	2412	17.68	≥0.5
6	2437	17.74	≥0.5
11	2462	17.68	≥0.5
802.11n-HT40 Mode			
3	2422	36.67	≥0.5
6	2437	36.67	≥0.5
9	2452	36.61	≥0.5
BLE Mode			
0	2402	0.70	≥0.5
19	2440	0.70	≥0.5
39	2480	0.70	≥0.5


802.11b Mode Channel 1

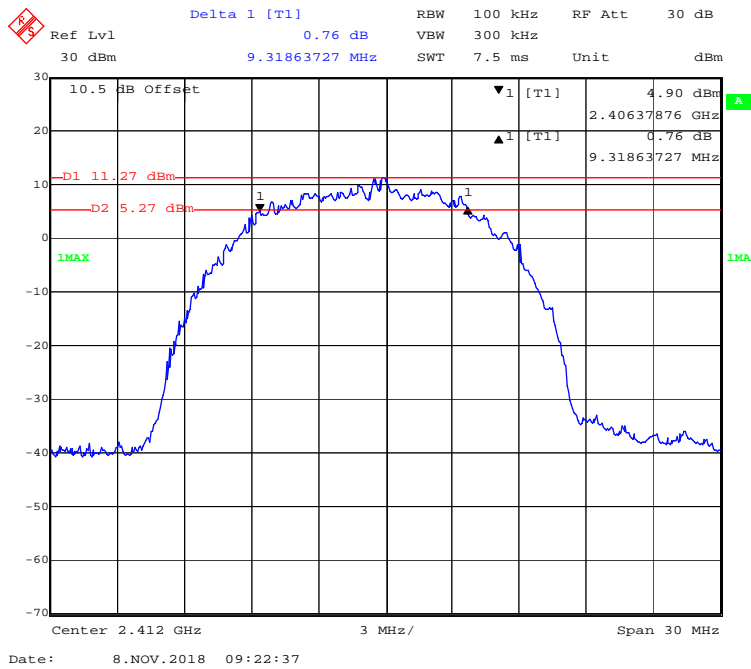


802.11b Mode Channel 6

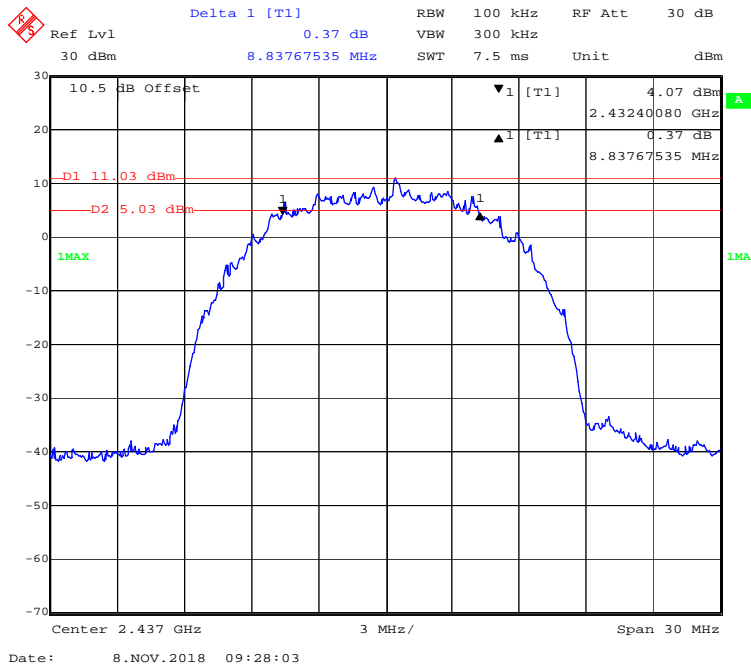


802.11b Mode Channel 11

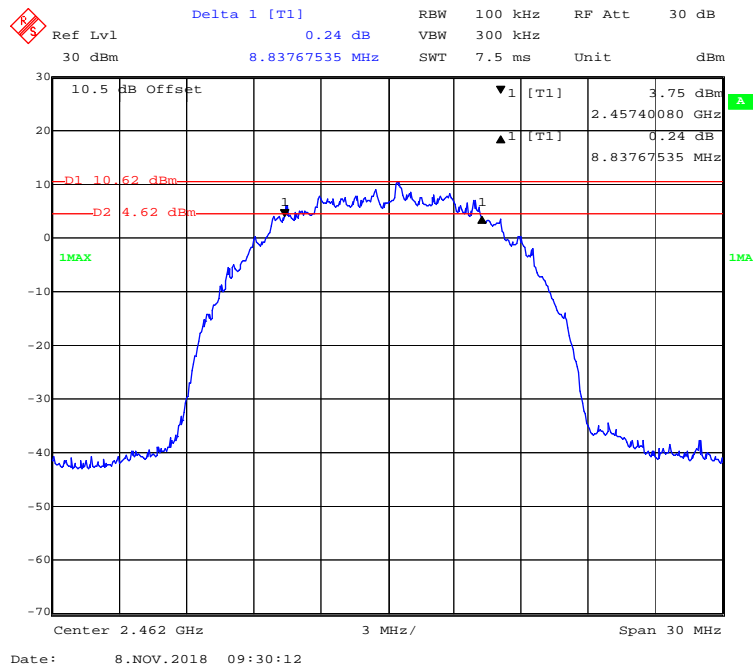


802.11g Mode Channel 1

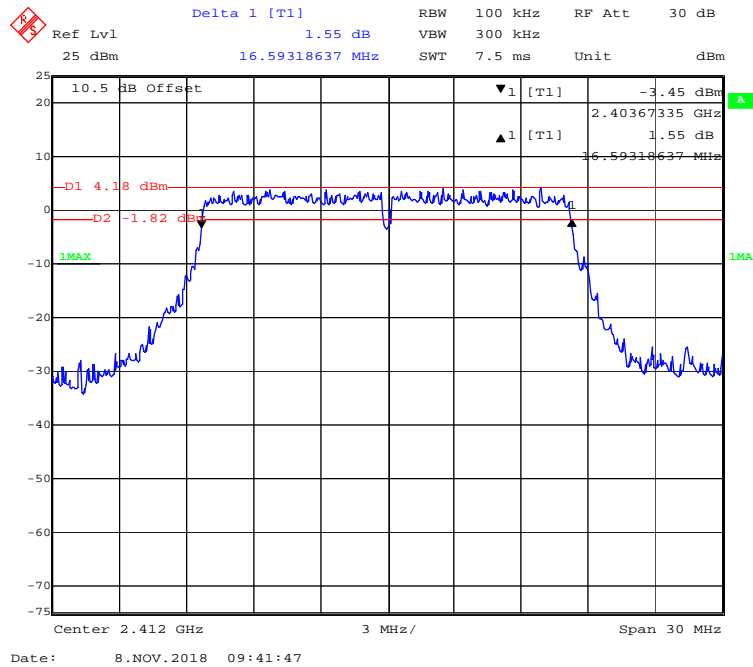


802.11g Mode Channel 6

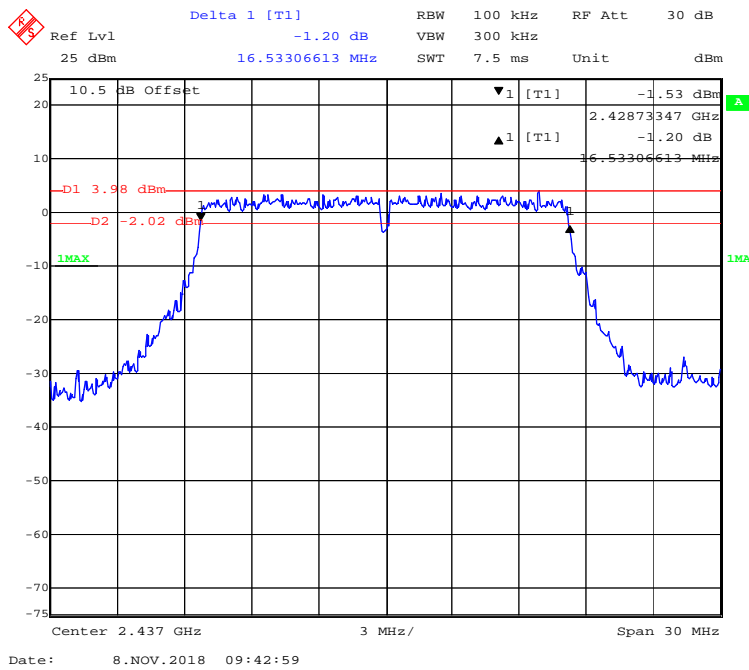


802.11g Mode Channel 11

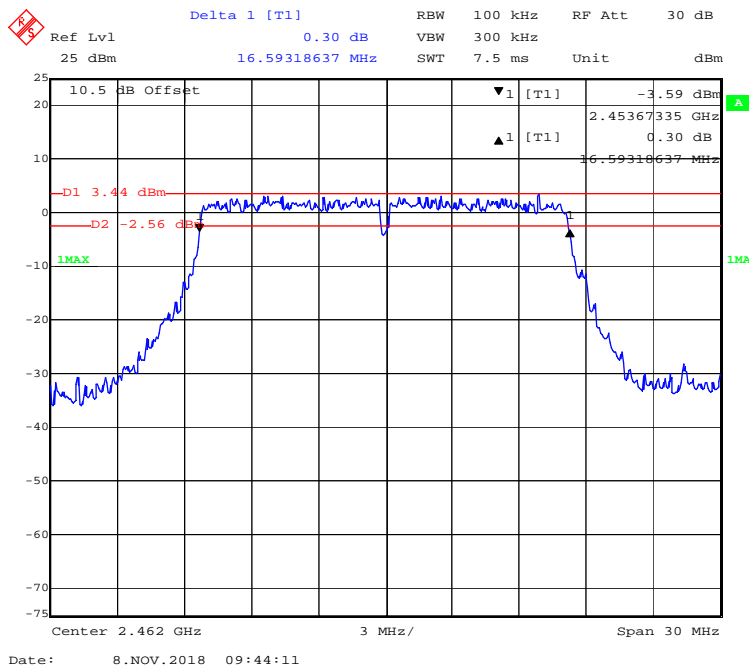


802.11n-HT20 Mode Channel 1

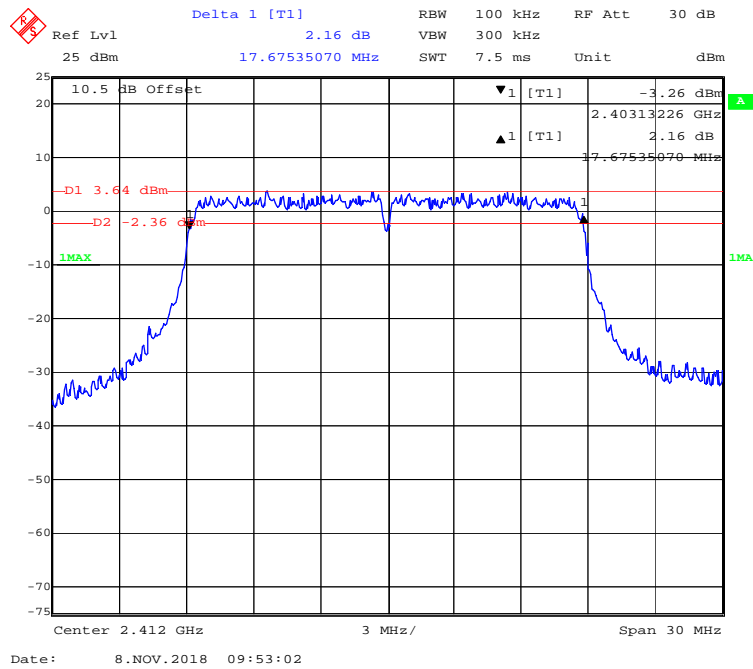


802.11n-HT20 Mode Channel 6

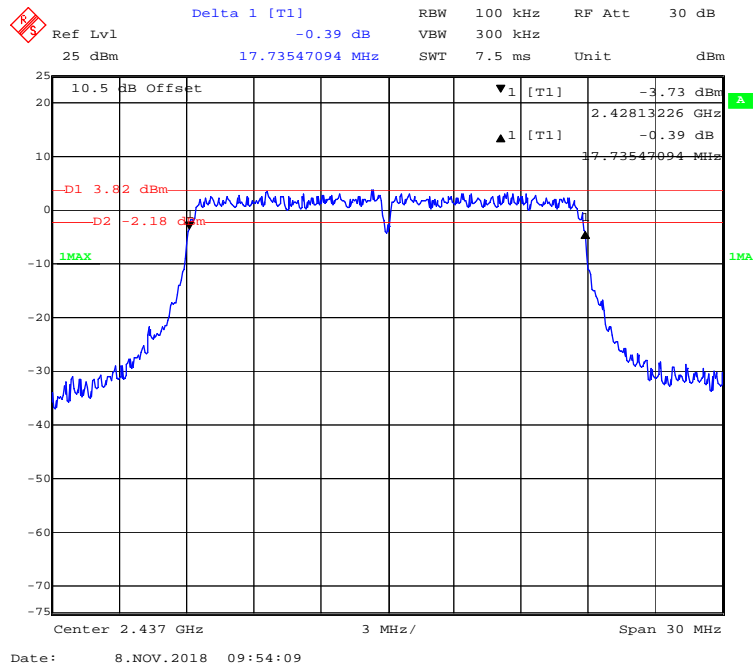


802.11n-HT20 Mode Channel 11

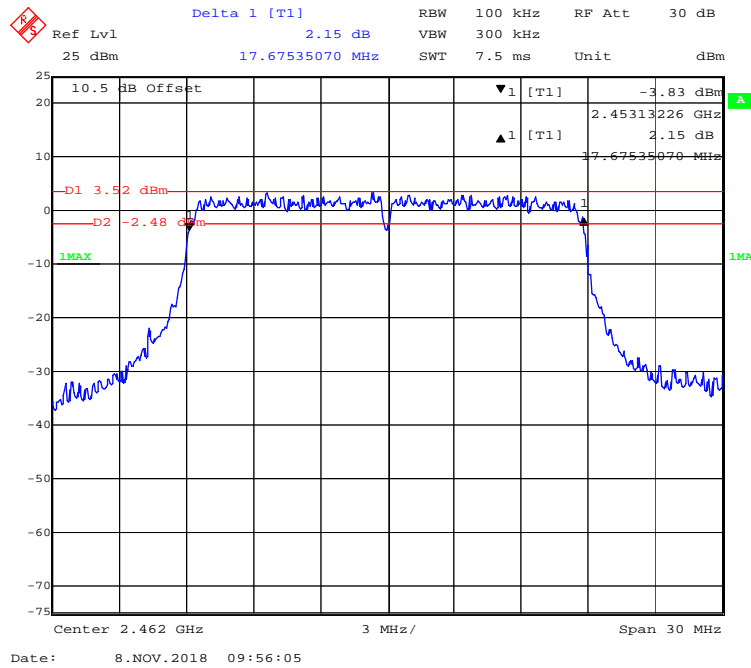


802.11n-HT40 Mode Channel 3

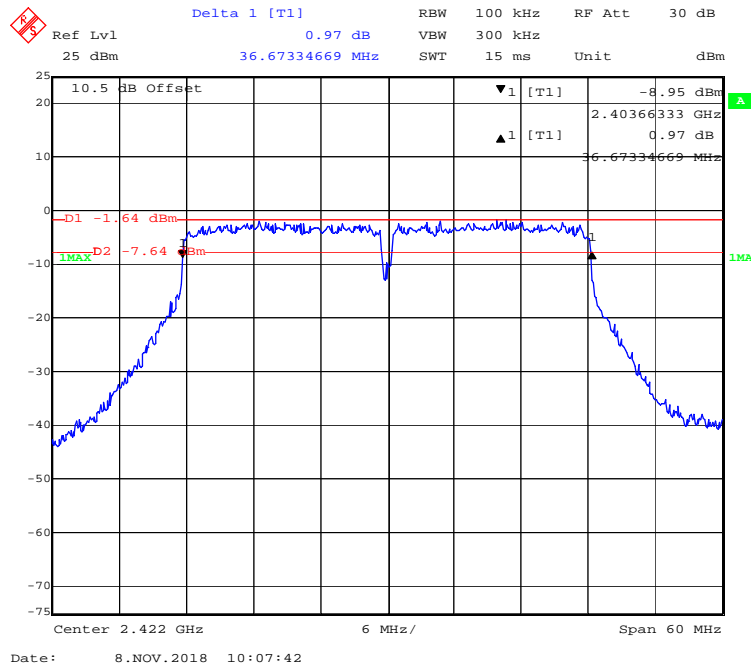


802.11n-HT40 Mode Channel 6

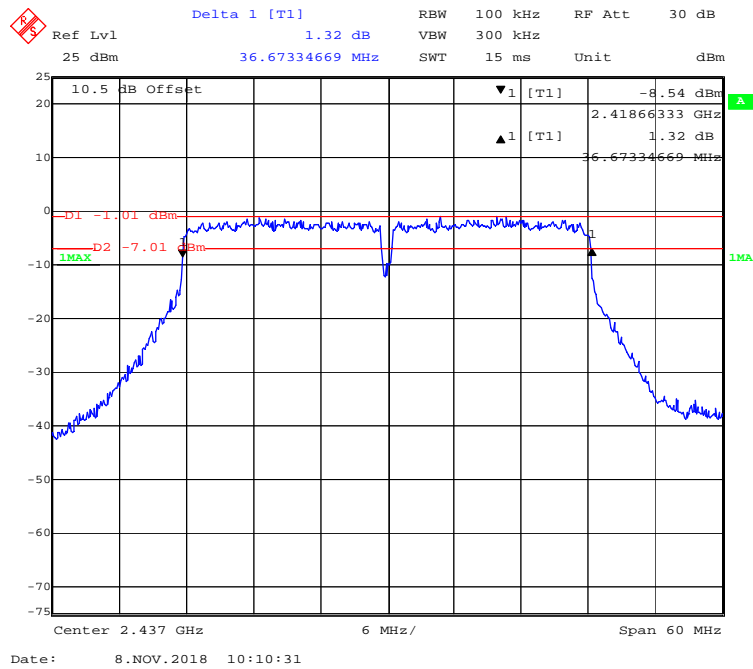


802.11n-HT40 Mode Channel 9

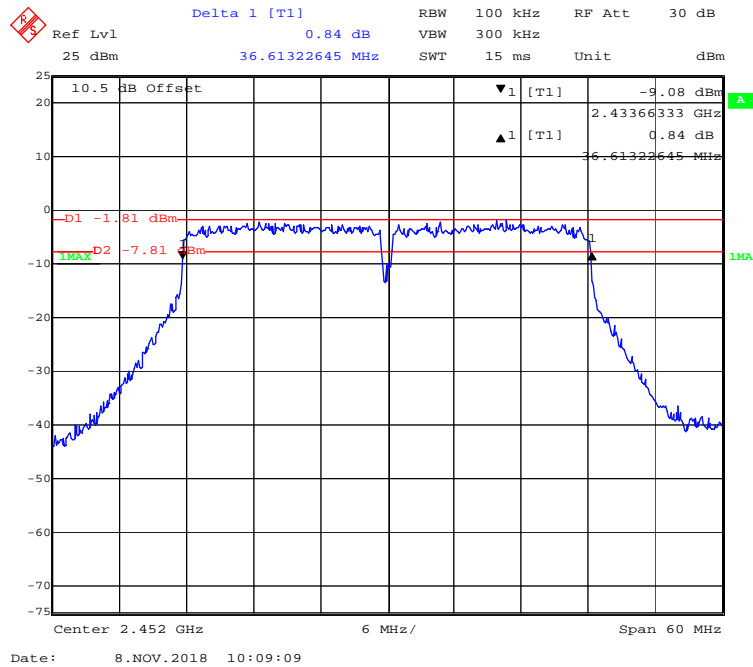


BLE Mode Channel 0

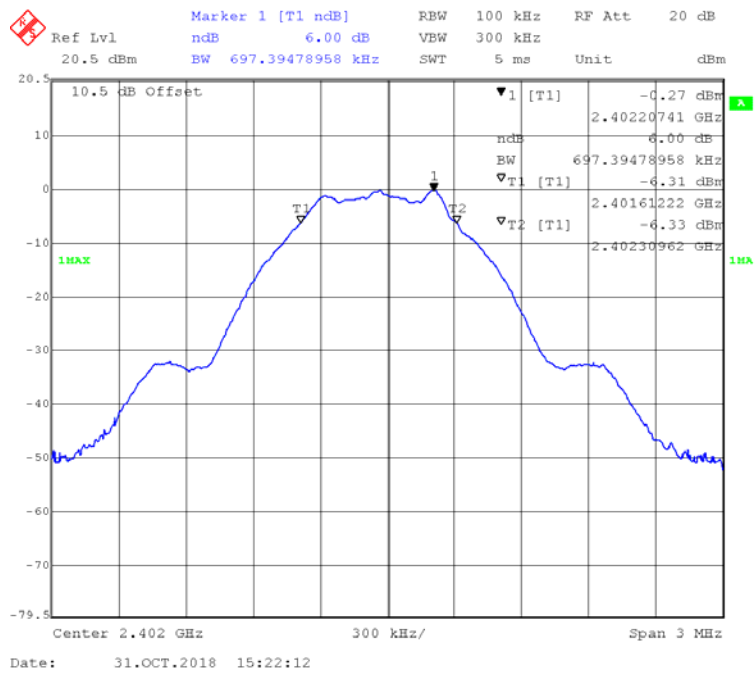

BLE Mode Channel 19

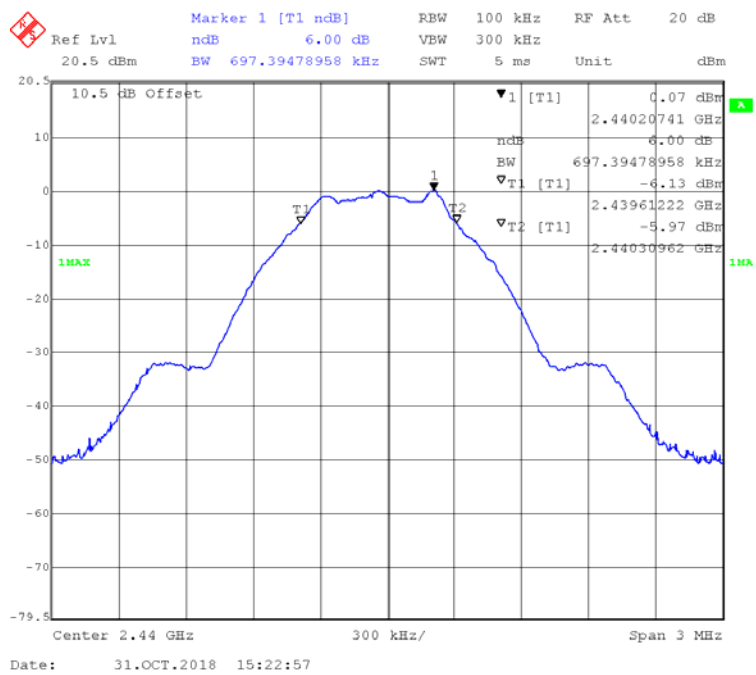

BLE Mode Channel 39

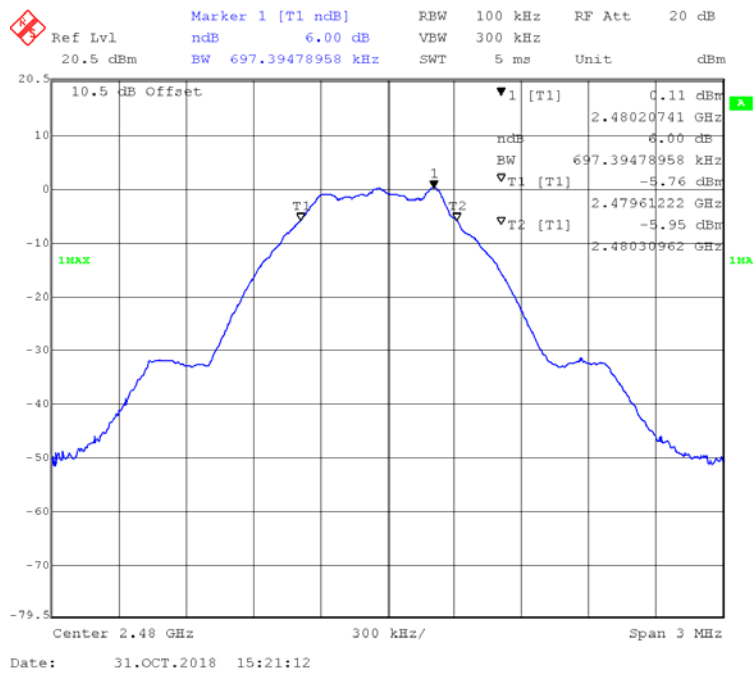

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

For Wi-Fi:

According to ANSI C63.10-2013 sub-clause 11.9.1.3


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.



For BLE:

According to ANSI C63.10-2013 sub-clause 11.9.1.1

1. Set the RBW \geq DTS bandwidth.
2. Set VBW \geq 3 x RBW.
3. Set span \geq 3 x RBW
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.



Test Data

Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	52%
ATM Pressure:	101.2kPa


The testing was performed by Max Min on 2018-10-31.

Test Result: Compliant.


EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
802.11b Mode				
1	2412	25.32	30	Pass
6	2437	25.14	30	Pass
11	2462	24.92	30	Pass
802.11g Mode				
1	2412	24.64	30	Pass
6	2437	24.71	30	Pass
11	2462	24.50	30	Pass
802.11n-HT20 Mode				
1	2412	24.71	30	Pass
6	2437	24.80	30	Pass
11	2462	24.49	30	Pass
802.11n-HT40 Mode				
3	2422	22.90	30	Pass
4	2427	23.74	30	Pass
6	2437	23.60	30	Pass
8	2447	23.63	30	Pass
9	2452	22.95	30	Pass
BLE Mode				
0	2402	-0.32	30	Pass
19	2440	0.34	30	Pass
39	2480	0.46	30	Pass


BLE Mode Channel 0

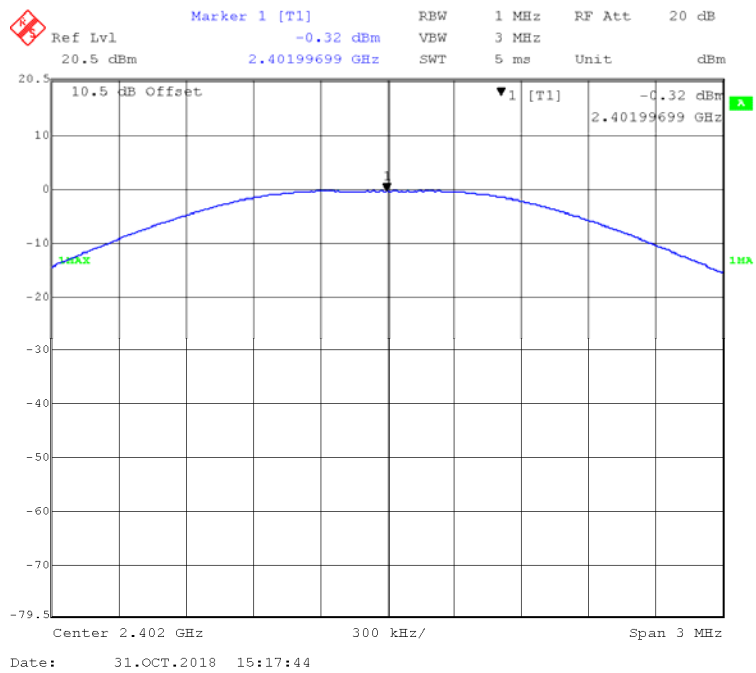

BLE Mode Channel 19

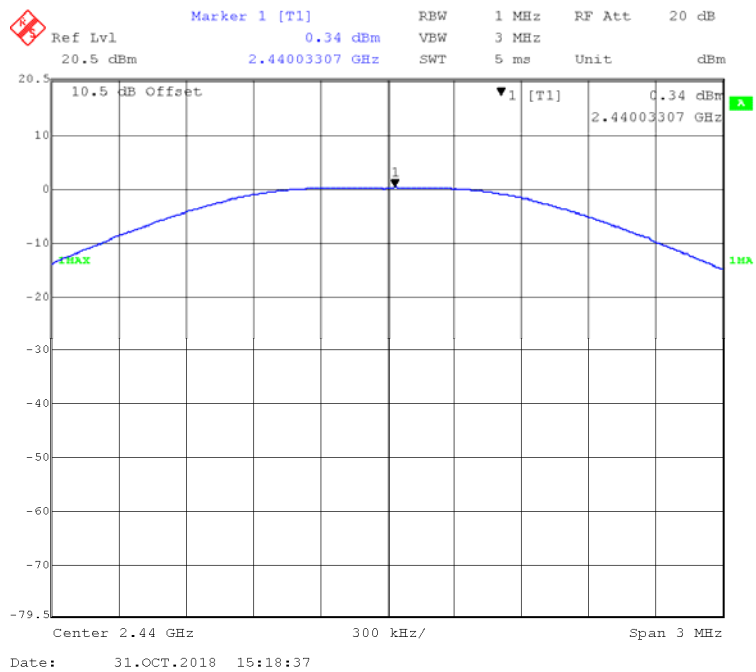

BLE Mode Channel 39

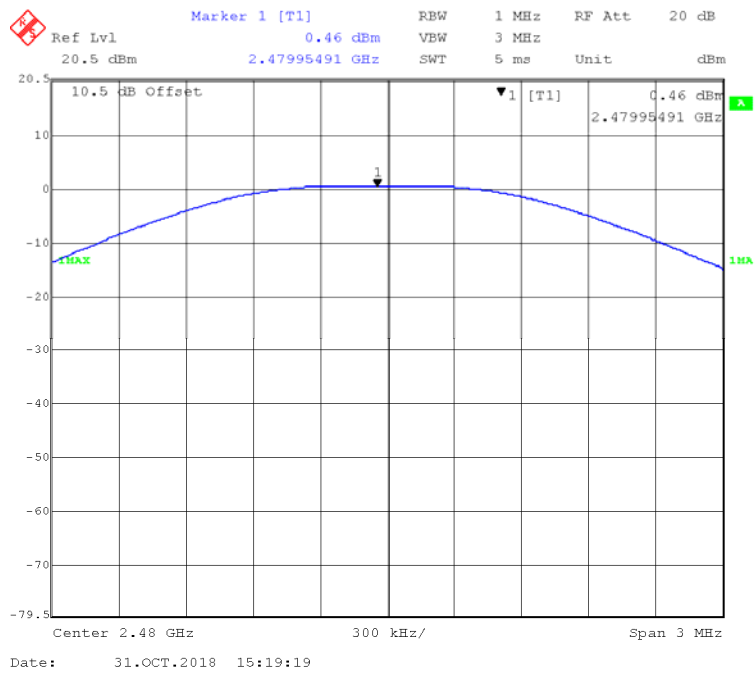

FCC §15.247(d) – BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	24.1 °C-24.3°C
Relative Humidity:	50 %-52%
ATM Pressure:	101.2kPa-101.3kPa

The testing was performed by Max Min on 2018-10-31 & 2018-11-08.


Test Result: Compliant.

EUT operation mode: Transmitting


802.11b Mode Left Side

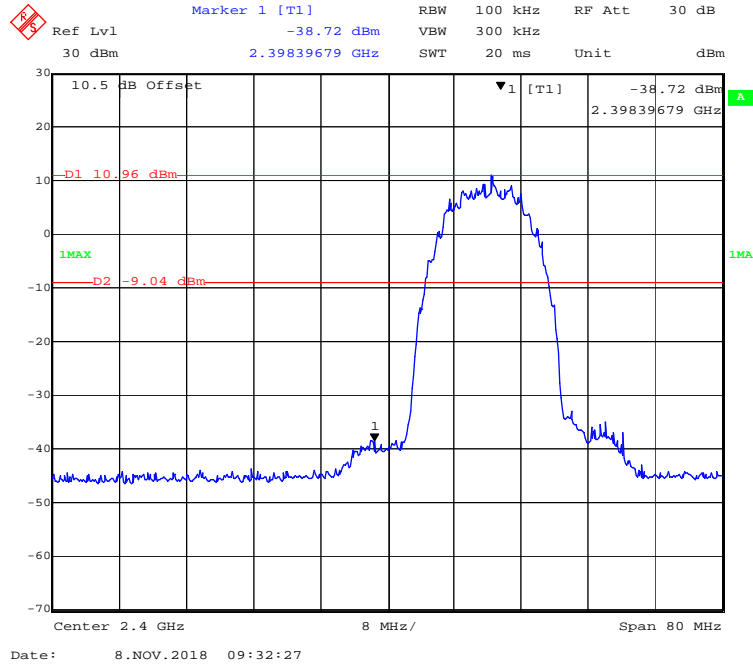


802.11b Mode Right Side

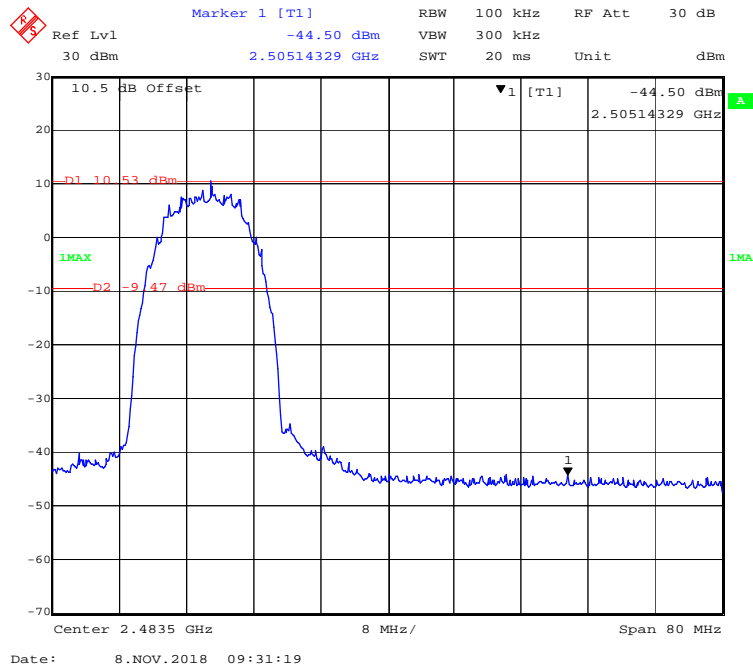


802.11g Mode Left Side

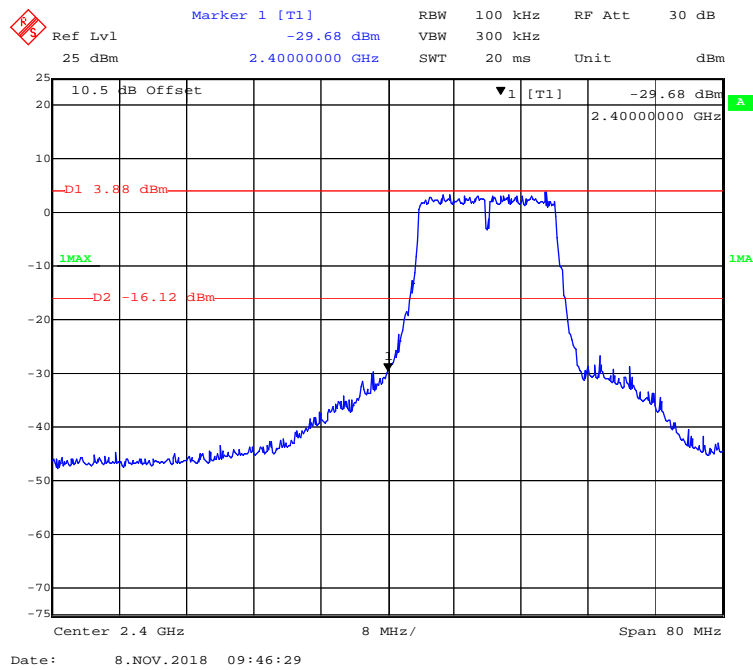


802.11g Mode Right Side

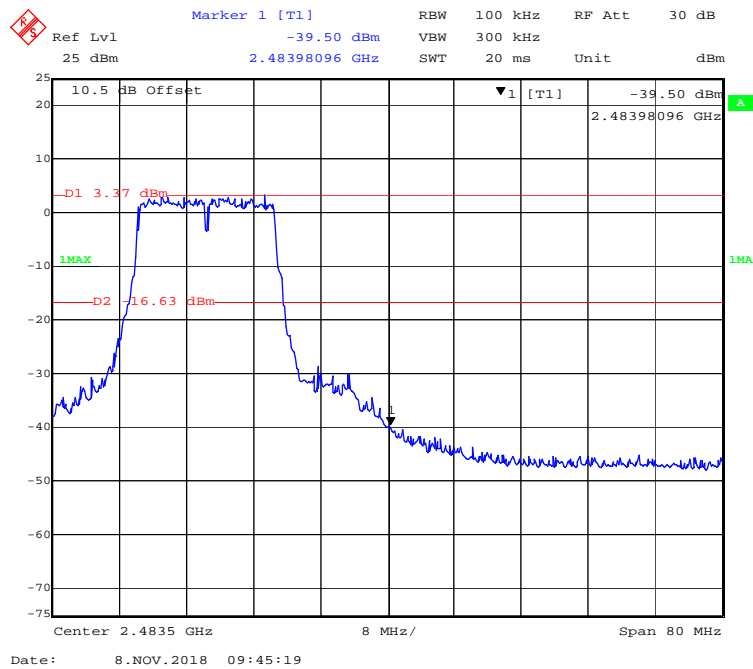


802.11n-HT20 Mode Left Side

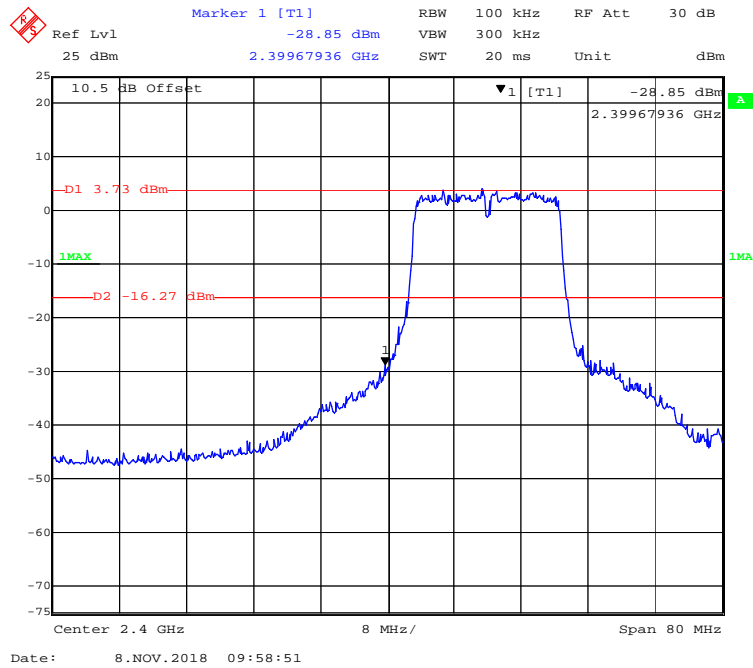


802.11n-HT20 Mode Right Side

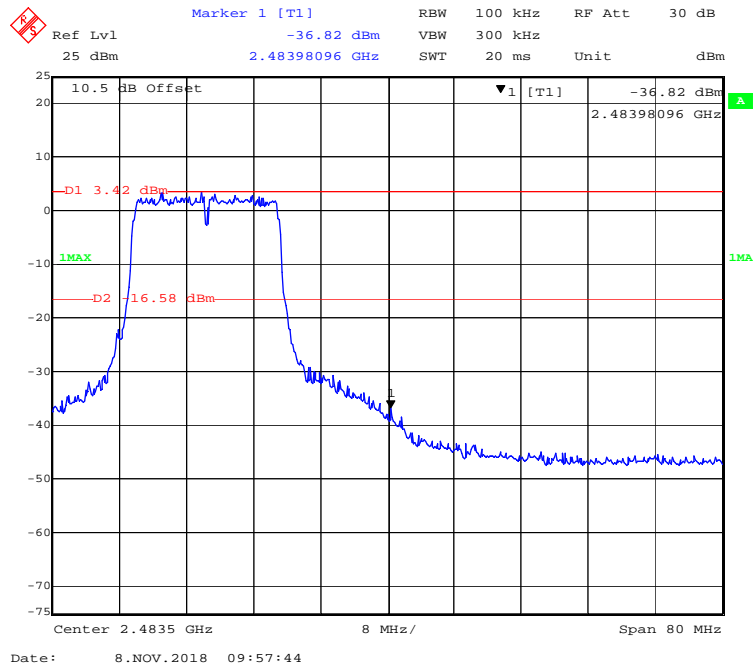


802.11n-HT40 Mode Left Side(2422MHz)

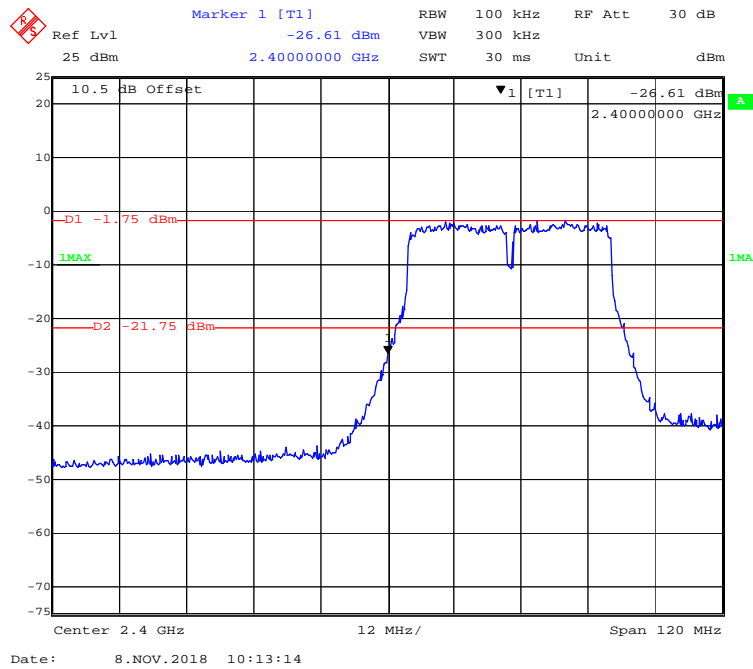


802.11n-HT40 Mode Right Side(2452MHz)

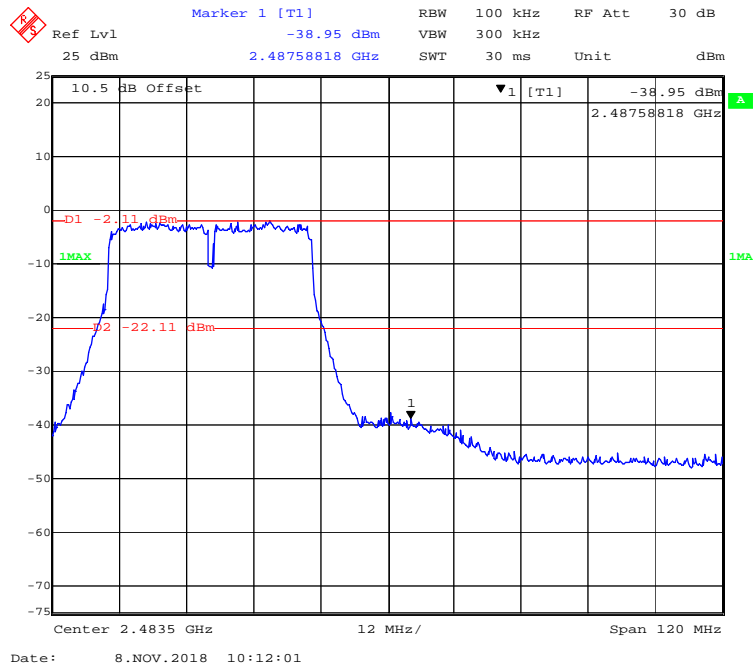


802.11n-HT40 Mode Left Side(2427MHz)

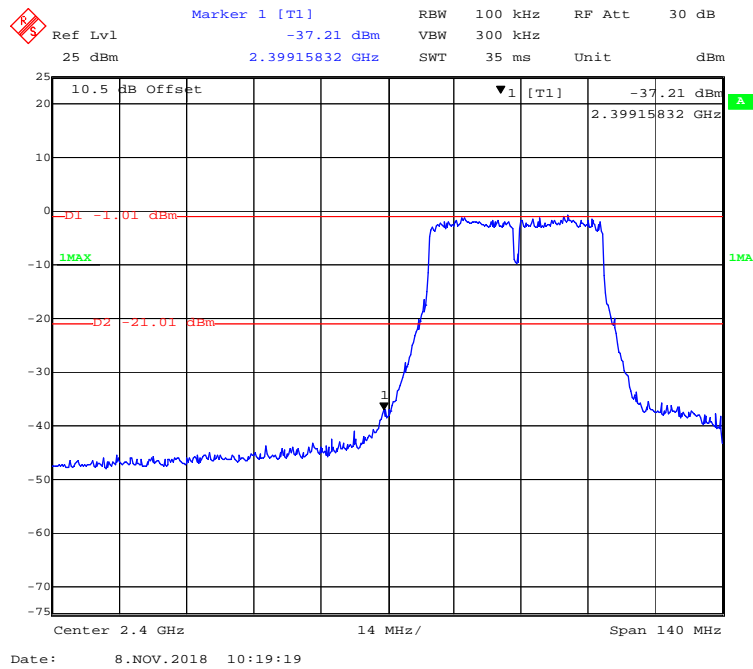


802.11n-HT40 Mode Right Side(2447MHz)

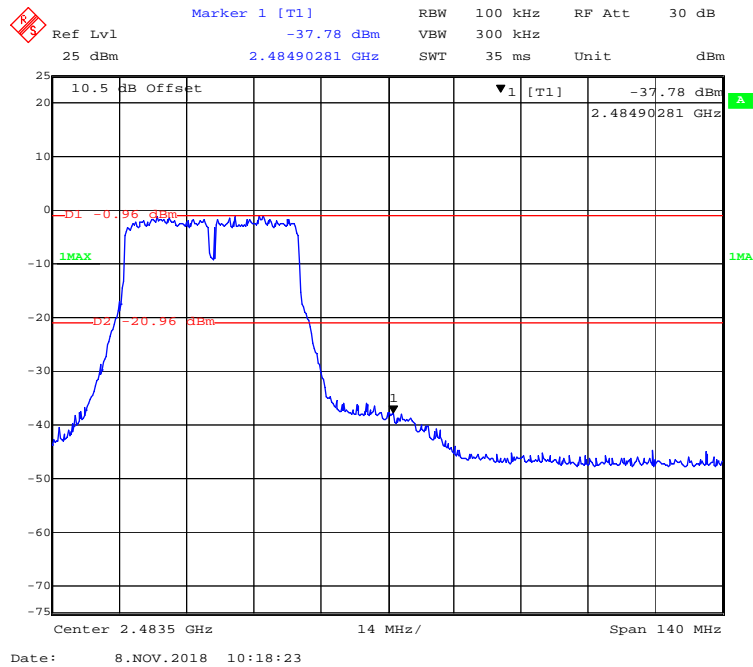

BLE Mode Left Side

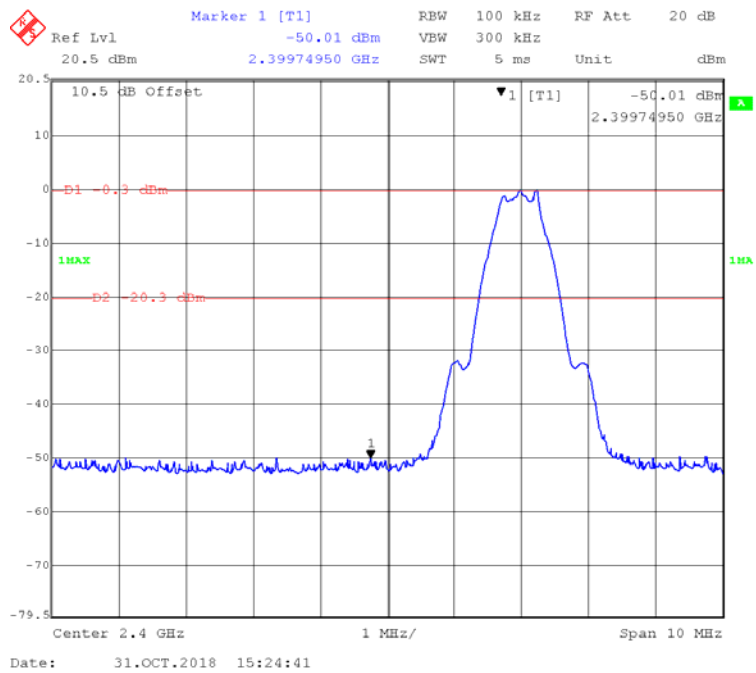

BLE Mode Right Side

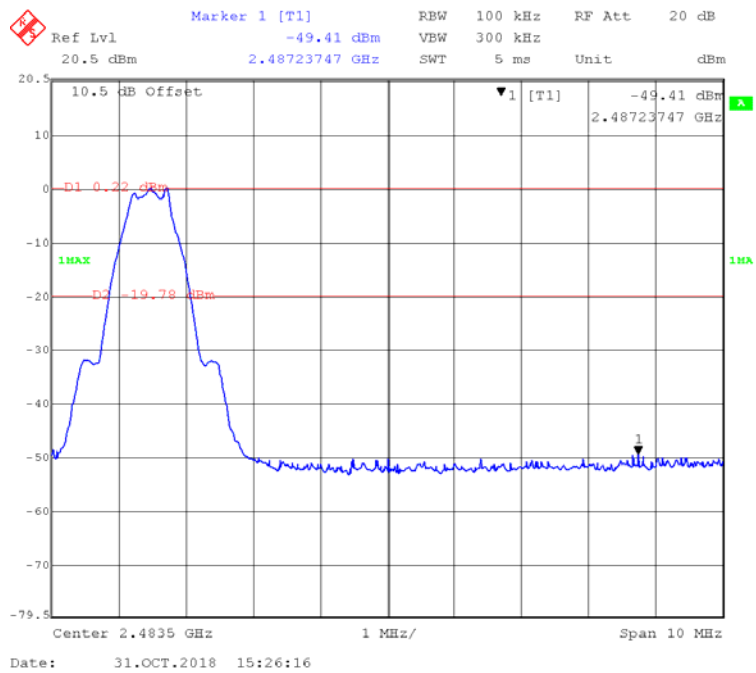

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	24.1 °C-24.3 °C
Relative Humidity:	50 %-52%
ATM Pressure:	101.2kPa-101.3kPa


The testing was performed by Max Min on 2018-10-31 & 2018-11-08.

Test Result: Compliant.


EUT operation mode: Transmitting

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b Mode			
1	2412	-5.45	≤8
6	2437	-6.36	≤8
11	2462	-6.17	≤8
802.11g Mode			
1	2412	-11.79	≤8
6	2437	-11.86	≤8
11	2462	-12.26	≤8
802.11n-HT20 mode			
1	2412	-11.16	≤8
6	2437	-11.11	≤8
11	2462	-11.85	≤8
802.11n-HT40 Mode			
3	2422	-16.17	≤8
6	2437	-15.01	≤8
9	2452	-15.78	≤8
BLE Mode			
0	2402	-15.98	≤8
19	2440	-15.70	≤8
39	2480	-15.67	≤8


802.11b Mode Channel 1

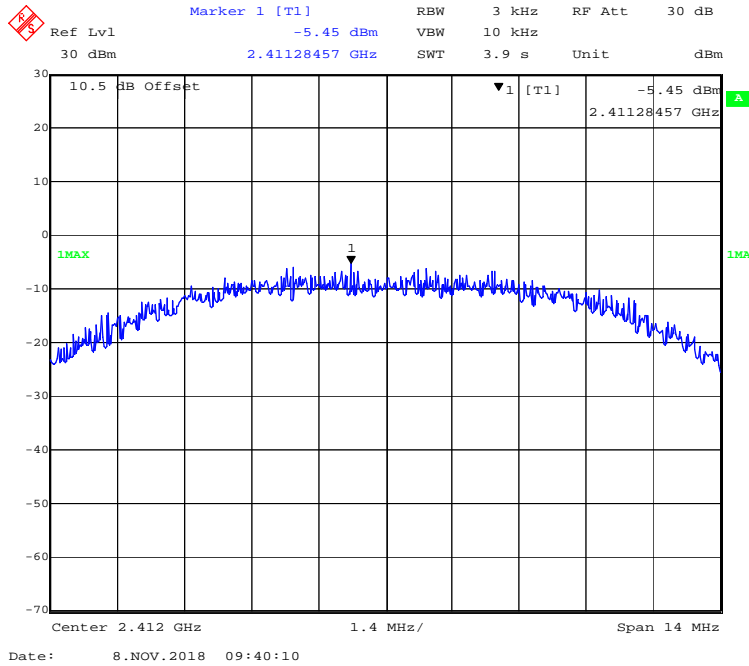


802.11b Mode Channel 6

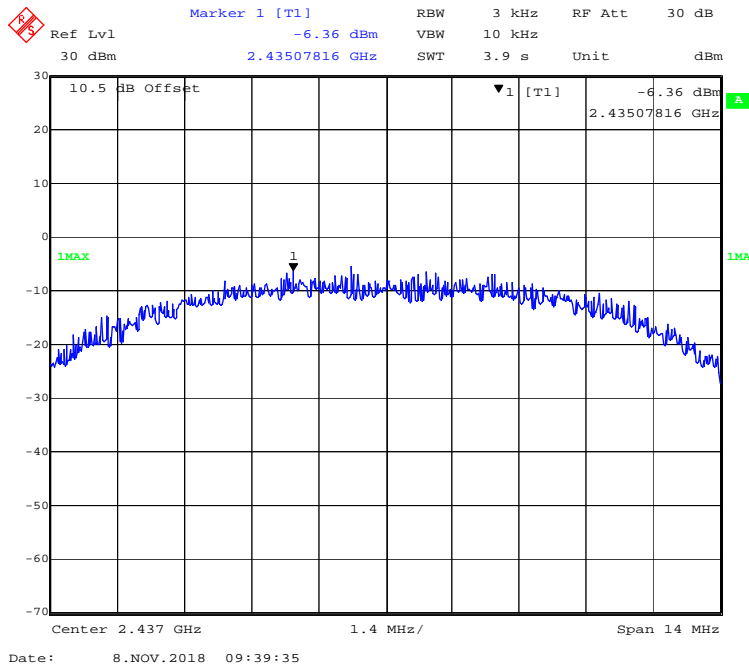


802.11b Mode Channel 11

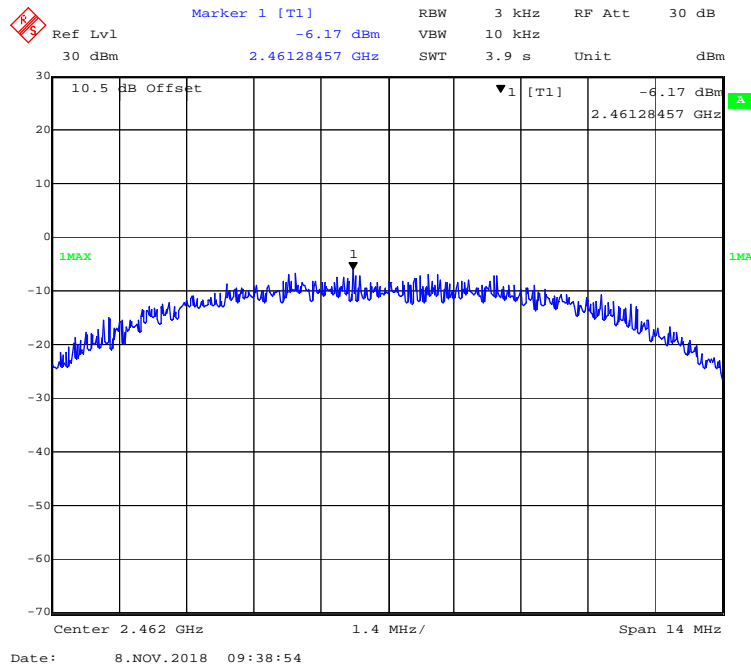


802.11g Mode Channel 1

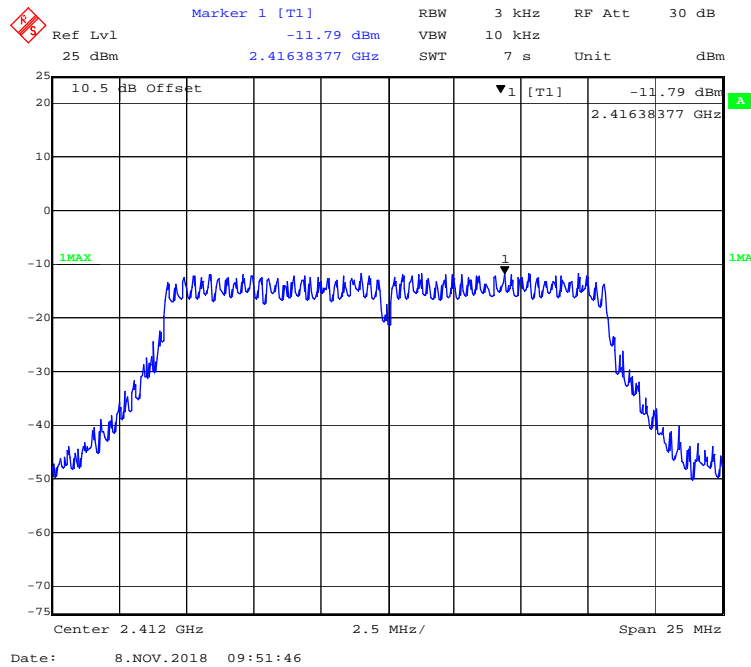


802.11g Mode Channel 6

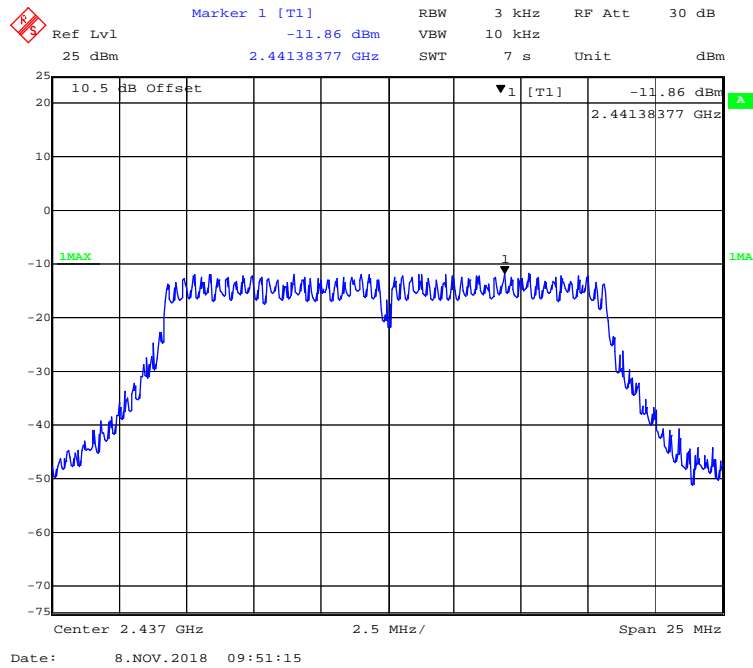


802.11g Mode Channel 11

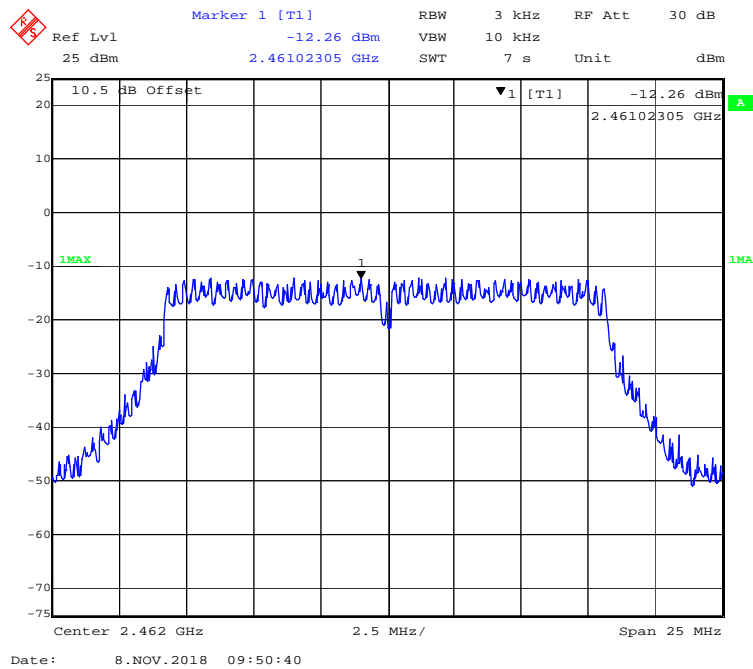


802.11n-HT20 Mode Channel 1

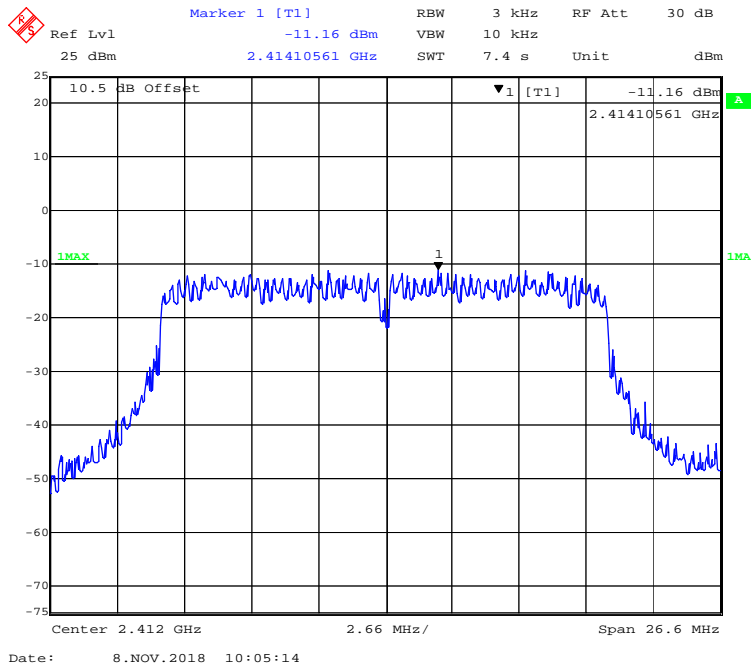


802.11n-HT20 Mode Channel 6

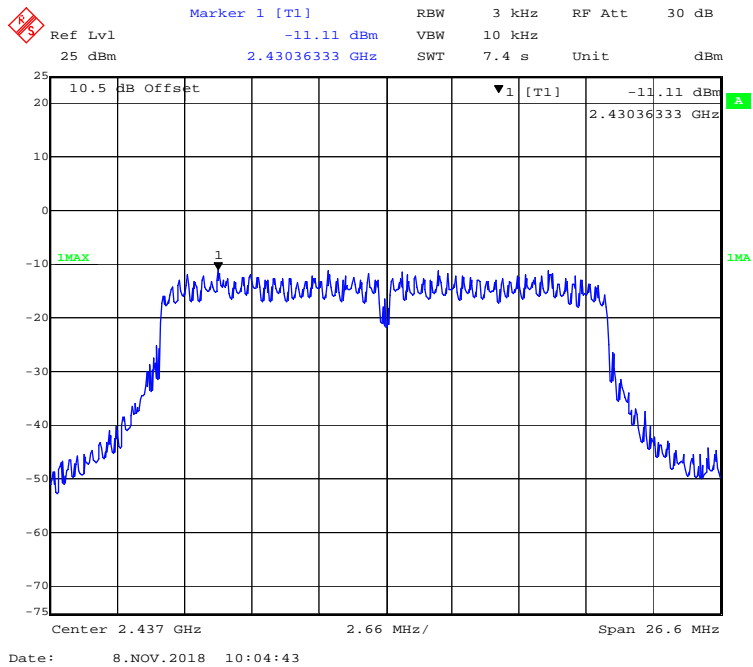


802.11n-HT20 Mode Channel 11

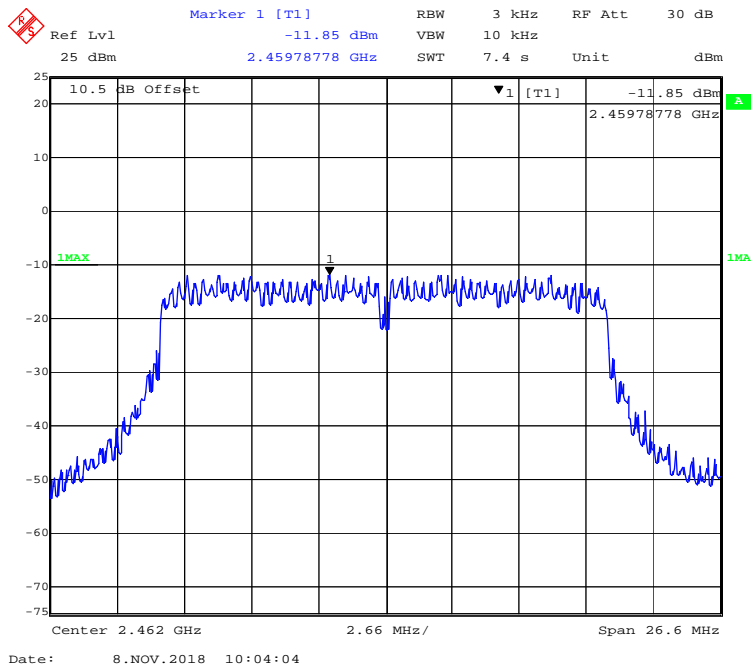


802.11n-HT40 Mode Channel 3

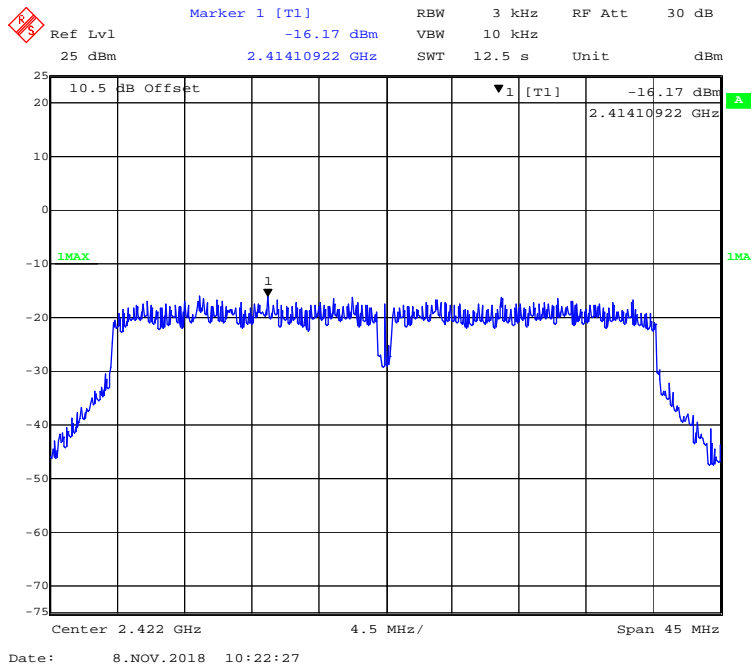


802.11n-HT40 Mode Channel 6

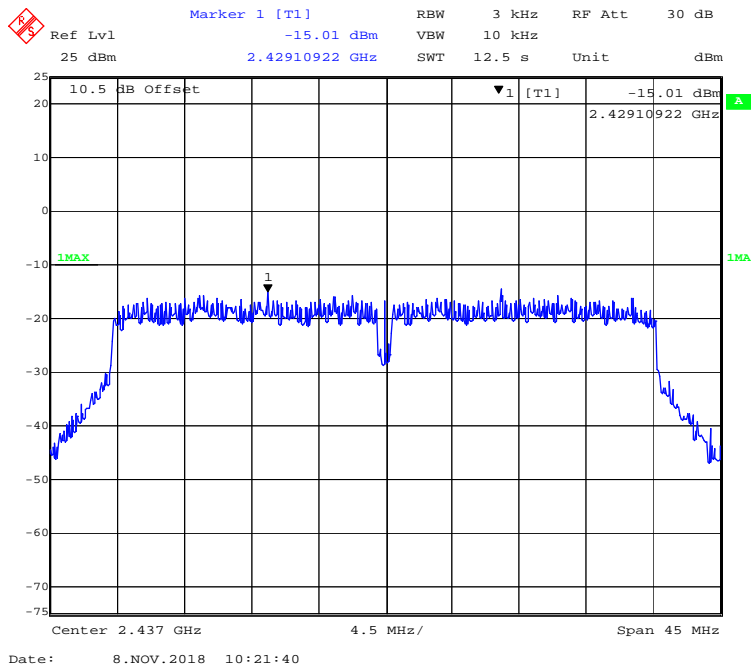


802.11n-HT40 Mode Channel 9

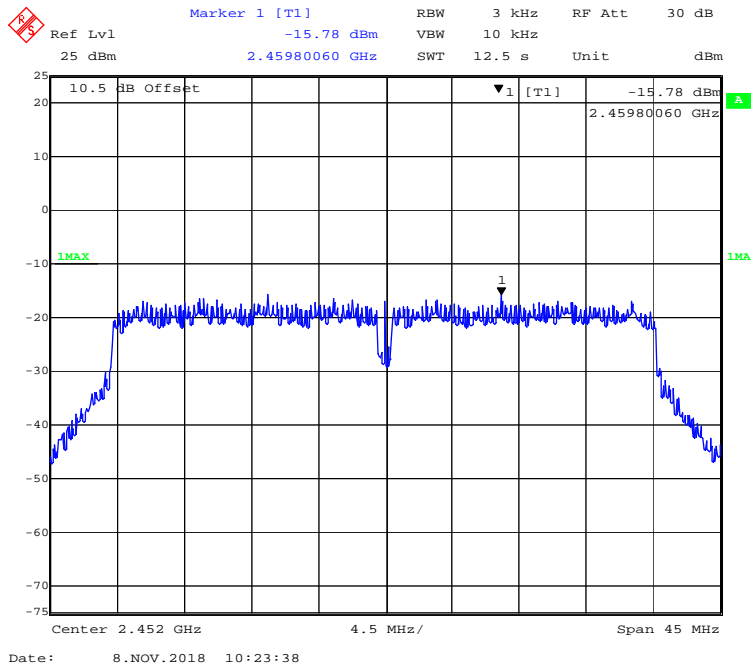


BLE Mode Channel 0

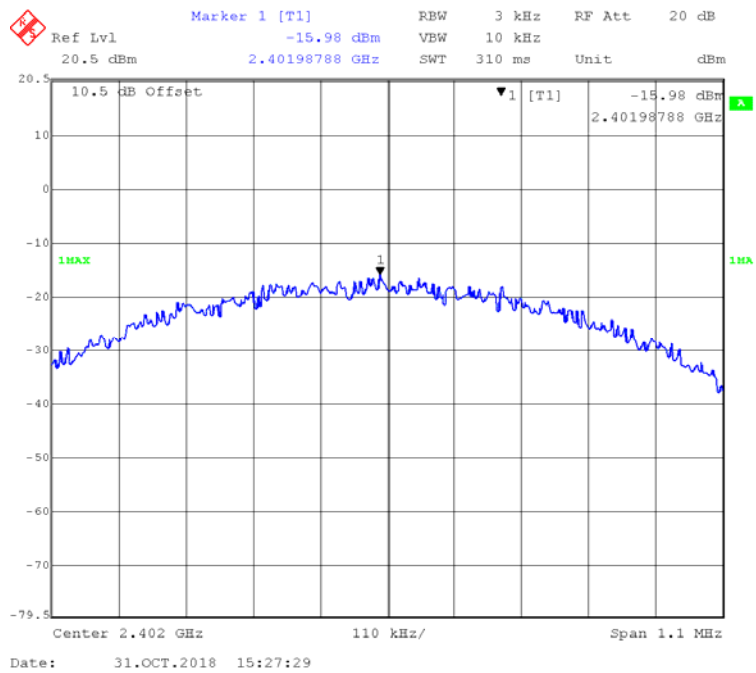

BLE Mode Channel 19

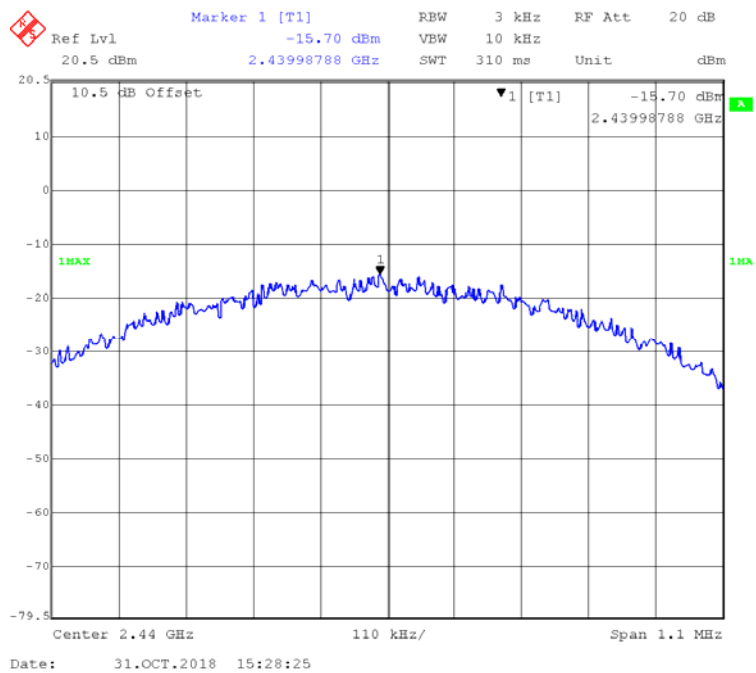

BLE Mode Channel 39

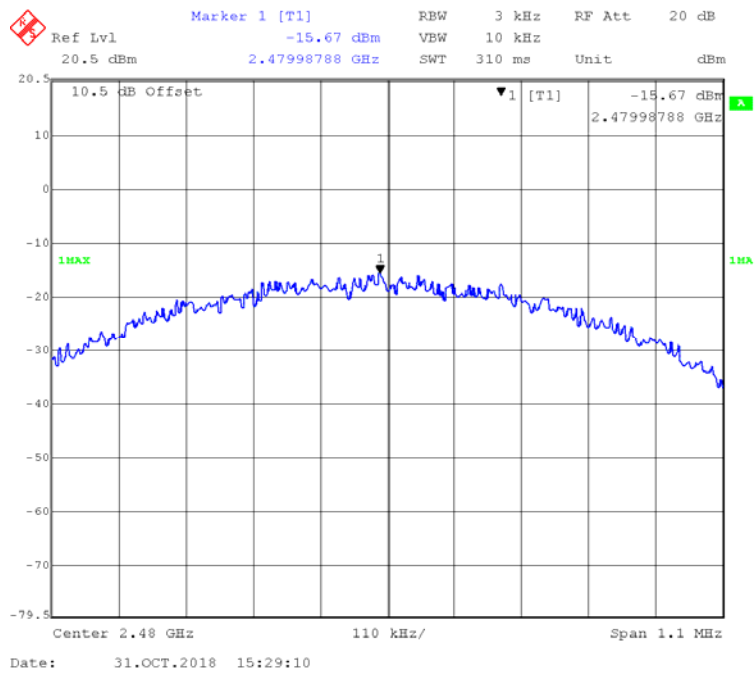

***** END OF REPORT *****