

TEST REPORT

Reference No...... : WTS17S0888240-1E
FCC ID : 2AC88-G1701
Applicant..... : HONGKONG UCLOUDLINK NETWORK TECHNOLOGY LIMITED
Address..... : Suite 603, 6/F, Laws Commercial Plaza, 788 Cheung Sha Wan Road,
Kowloon, HongKong
Manufacturer : Shenzhen uCloudlink Network Technology, Co., Ltd
Address..... : 3rd Floor, A Part of Building 1, Shenzhen Software Industry Base,
nanshan district xuefu Road Post Code 518057, Shenzhen City,
Guangdong Province, P.R.China
Product..... : Smart Phone
Model(s) : G1701
Brand Name..... : GlocalMe
Standards..... : FCC CFR47 Part 15.247:2016
Date of Receipt sample : 2017-08-23
Date of Test : 2017-08-24 to 2017-11-30
Date of Issue..... : 2017-12-12
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Ford Wang

Ford Wang / Project Engineer

Approved by:



Philo Zhong

Philo Zhong / Manager

2 Laboratories Introduction

Waltek Services Test Group Ltd. is one of the largest and the most comprehensive third party testing organizations in China, our headquarter located in Shenzhen (CNAS Registration No. L3110, A2LA Certificate Number: 4243.01) and have branches in Foshan (CNAS Registration No. L6478), Dongguan (CNAS Registration No. L9950), Zhongshan, Suzhou (CNAS Registration No. L7754), Ningbo and Hong Kong, Our test capability covered four large fields: safety test. Electronic Magnetic Compatibility(EMC), reliability and energy performance, Chemical test. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CPSC(Consumer Product Safety Commission), CEC(California energy efficiency), IC(Industry Canada) and ELI(Efficient Lighting Initiative). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as UL, Intertek(ETL-SEMKO), CSA, TÜV Rheinland, TÜV SÜD, etc. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

Waltek Services (Shenzhen) Co., Ltd.

A. Accreditations for Conformity Assessment (International)

Country/Region	Accreditation Body	Scope	Note
USA	CNAS (Registration No.: L3110) A2LA (Certificate No.: 4243.01)	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India	International Services	WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note:			
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.			
2. IC Canada Registration No.: 7760A			

B. TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
--------------------------------------	--------------------

TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

3 Contents

	Page
1 COVER PAGE.....	1
2 LABORATORIES INTRODUCTION.....	2
3 CONTENTS.....	4
4 REVISION HISTORY.....	6
5 GENERAL INFORMATION.....	7
5.1 GENERAL DESCRIPTION OF E.U.T.	7
5.2 DETAILS OF E.U.T.	7
5.3 CHANNEL LIST.....	10
5.4 TEST MODE.....	10
6 TEST SUMMARY.....	11
7 EQUIPMENT USED DURING TEST.....	12
7.1 EQUIPMENTS LIST.....	12
7.2 DESCRIPTION OF SUPPORT UNITS.....	13
7.3 MEASUREMENT UNCERTAINTY.....	13
7.4 TEST EQUIPMENT CALIBRATION.....	13
8 CONDUCTED EMISSION.....	14
8.1 E.U.T. OPERATION.....	14
8.2 EUT SETUP.....	14
8.3 MEASUREMENT DESCRIPTION.....	14
8.4 CONDUCTED EMISSION TEST RESULT.....	15
9 RADIATED SPURIOUS EMISSIONS.....	19
9.1 EUT OPERATION.....	19
9.2 TEST SETUP.....	20
9.3 SPECTRUM ANALYZER SETUP.....	21
9.4 TEST PROCEDURE.....	22
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	22
9.6 SUMMARY OF TEST RESULTS.....	23
10 CONDUCTED SPURIOUS EMISSIONS.....	26
10.1 TEST PROCEDURE.....	26
10.2 TEST RESULT.....	27
11 BAND EDGE MEASUREMENT.....	37
11.1 TEST PROCEDURE.....	37
11.2 TEST RESULT.....	38
12 20 DB BANDWIDTH MEASUREMENT.....	44
12.1 TEST PROCEDURE.....	44
12.2 TEST RESULT.....	44
13 MAXIMUM PEAK OUTPUT POWER.....	50
13.1 TEST PROCEDURE.....	50
13.2 TEST RESULT.....	50
14 HOPPING CHANNEL SEPARATION.....	56
14.1 TEST PROCEDURE.....	56
14.2 TEST RESULT.....	56
15 NUMBER OF HOPPING FREQUENCY.....	62

15.1	TEST PROCEDURE.....	62
15.2	TEST RESULT	62
16	DWELL TIME	64
16.1	TEST PROCEDURE.....	64
16.2	TEST RESULT	64
17	ANTENNA REQUIREMENT	70
18	RF EXPOSURE.....	71
19	PHOTOGRAPHS OF TEST SETUP AND EUT.....	72

4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS17S08882 40-1E	2017-08-23	2017-08-24 to 2017-11- 30	2017-12-12	original	-	Valid

5 General Information

5.1 General Description of E.U.T.

Product:	Smart Phone
Model(s):	G1701
Model Description:	N/A
GSM Band(s):	GSM 850/900/1800/1900MHz
GPRS/EGPRS Class:	12
WCDMA Band(s):	FDD Band I/II/IV/V
LTE Band(s):	FDD Band 2/4/5/7/12/13/25/26 TDD Band 41
Wi-Fi Specification:	2.4G-802.11b/g/n HT20 5G-802.11a/n HT20
Bluetooth Version:	Bluetooth v4.0 with BLE
GPS:	Support
NFC:	Support
Hardware Version:	G1701_VER_B
Software Version:	S1_C00_TSV1.0.001.008.171030 user dev-keys
Highest frequency (Exclude Radio):	1.25GHz
Storage Location:	Internal Storage
Note:	N/A

5.2 Details of E.U.T.

Operation Frequency:	GSM/GPRS/EDGE 850: 824~849MHz PCS/GPRS/EDGE 1900: 1850~1910MHz WCDMA Band II: 1850~1910MHz WCDMA Band V: 824~849MHz WCDMA Band IV:1710~1755MHz LTE Band 2: 1850~1910MHz LTE Band 4: 1710~1755MHz LTE Band 5: 824~849MHz LTE Band 7: 2500~2570MHz LTE Band 12: 699~716MHz LTE Band 13: 777~787MHz LTE Band 17: 704~716MHz LTE Band 25 1850~1915MHz LTE Band 26: 814~849MHz LTE Band 41: 2496~2690MHz WiFi:
----------------------	--

	802.11b/g/n HT20: 2412~2462MHz
	802.11a/ n(HT20): 5150MHz~5250MHz 5725MHz~5850MHz
	Bluetooth: 2402~2480MHz
	NFC:13.56MHz
Max. RF output power:	GSM 850: 32.82dBm PCS1900: 29.98dBm WCDMA Band II: 22.81dBm WCDMA Band V: 22.70dBm WCDMA Band IV: 22.81dBm LTE Band 2: 23.90dBm LTE Band 4: 22.89dBm LTE Band 5: 22.95dBm LTE Band 7: 21.97dBm LTE Band 12: 23.88dBm LTE Band 13: 23.73dBm LTE Band 17: 22.93dBm LTE Band 25: 22.95dBm LTE Band 26: 22.98dBm LTE Band 41: 22.95dBm WiFi(2.4G): 9.49dBm WiFi(5G) Band I: 9.52dBm WiFi(5G)Band IV: 7.44dBm Bluetooth: 2.13dBm
Type of Modulation:	GSM,GPRS: GMSK EDGE: GMSK, 8PSK WCDMA: BPSK, 16QAM LTE: QPSK, 16QAM WiFi: CCK, OFDM Bluetooth: GFSK, Pi/4 DQPSK, 8DPSK NFC: ASK, 2ASK
Antenna installation:	GSM/WCDMA/LTE: internal permanent antenna WiFi/Bluetooth: internal permanent antenna NFC: Loop antenna
Antenna Gain:	GSM 850: -1.56dBi PCS1900: 1.79dBi WCDMA Band II: 1.79dBi WCDMA Band V: -1.56dBi WCDMA Band IV: -0.12dBi LTE Band 2: 1.79dBi LTE Band 4: -0.12dBi

	LTE Band 5: -1.56dBi
	LTE Band 7: 3.01dBi
	LTE Band 12: -2.76dBi
	LTE Band 13: -1.28dBi
	LTE Band 17: -2.76dBi
	LTE Band 25: 1.79dBi
	LTE Band 26 -1.56dBi
	LTE Band 41 3.62dBi
	WiFi(2.4G): 2.47dBi
	WiFi(5G): 2.47dBi
	Bluetooth: 2.47dBi
Ratings:	Battery DC 3.85V, 2900mAh
	DC 5V, 2.0A; 9V, 2.0A; 12V, 1.5A charging from adapter 1 (Adapter Input: 100-240V~50/60Hz 0.6A)
	DC 5V, 2.0A charging from adapter 2 (Adapter Input: 100-240V~50/60Hz MAX 0.3A)
Adapter1:	Manufacture: ShenZhen HuaJin Electronics CO.,LTD Model No.: HJ-FC010K7-US
Adapter2:	Manufacture: SHENZHEN HONOR ELECTRONIC CO.,LTD Model No.: ADS-12DA-05 05010E

5.3 Channel List

Normal

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

5.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests; the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz

6 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious emissions	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conducted Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	Complies
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

7 Equipment Used during Test

7.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2017-09-12	2018-09-11
2.	LISN	R&S	ENV216	101215	2017-09-12	2018-09-11
3.	Cable	Top	TYPE16(3.5M)	-	2017-09-12	2018-09-11
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2017-09-12	2018-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2017-09-12	2018-09-11
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2017-09-12	2018-09-11
4.	Cable	LARGE	RF300	-	2017-09-12	2018-09-11
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2017-04-29	2018-04-28
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2017-04-09	2018-04-08
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2017-04-09	2018-04-08
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2017-09-12	2018-09-11
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2017-04-09	2018-04-08
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2017-04-09	2018-04-08
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2017-04-13	2018-04-12
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2017-04-13	2018-04-12
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2017-04-13	2018-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2017-04-09	2018-04-08
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2017-04-13	2018-04-12
4	Cable	HUBER+SUHNER	CBL2	525178	2017-04-13	2018-04-12

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2017-09-12	2018-09-11
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2017-09-12	2018-09-11
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2017-09-12	2018-09-11

7.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

7.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64 dB(AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz)
	± 4.99 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 ⁻⁷ Hz
RF Power	± 0.42 dB
Dwell time	1.0%
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

7.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

8 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Class/Severity: Class B

Limit:

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

8.1 E.U.T. Operation

Operating Environment :

Temperature: 22.8 °C

Humidity: 52.6 % RH


Atmospheric Pressure: 101.2kPa

EUT Operation :

The test was performed in TX Transmitting mode, the test data were shown in the report.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013.

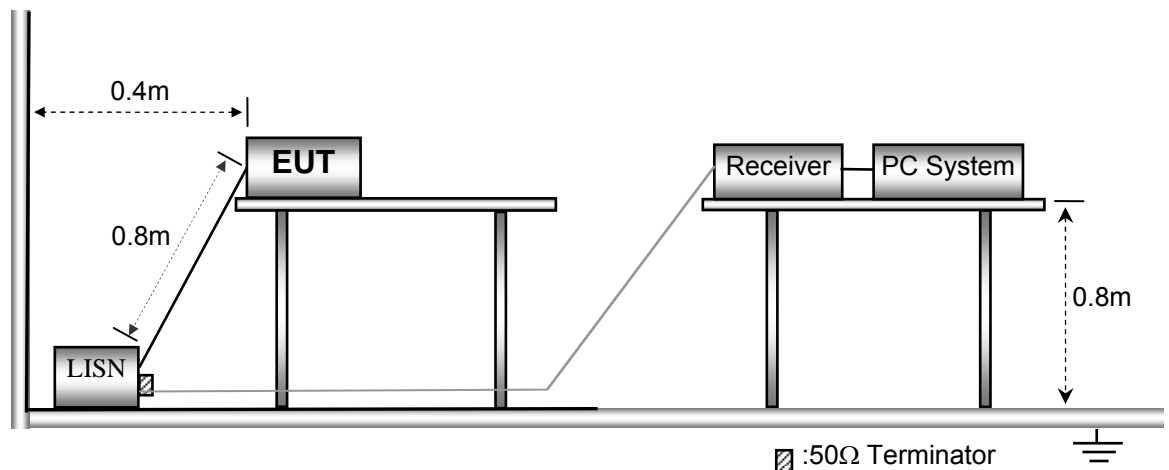

8.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

8.4 Conducted Emission Test Result

Remark: only the worst data (GFSK modulation Low channel mode) were reported


Adapter 1:

Live line:

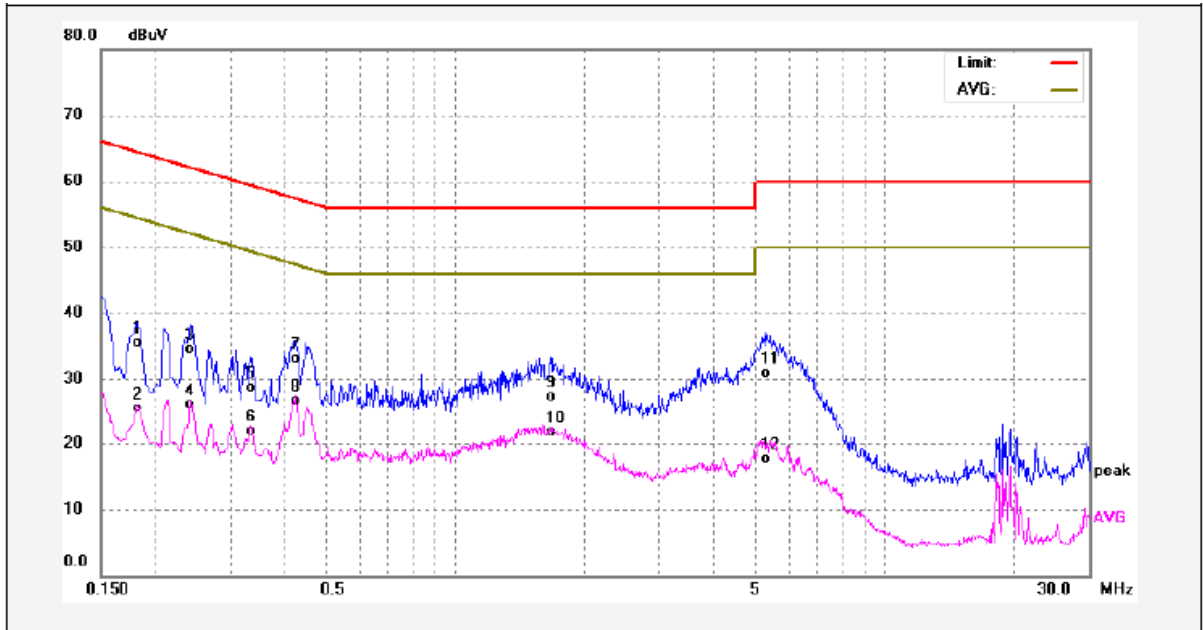

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1819	25.58	9.88	35.46	64.39	-28.93	QP	
2	0.1819	15.60	9.88	25.48	54.39	-28.91	AVG	
3	0.2420	24.59	9.99	34.58	62.02	-27.44	QP	
4	0.2420	16.20	9.99	26.19	52.02	-25.83	AVG	
5	0.3339	18.73	10.03	28.76	59.35	-30.59	QP	
6	0.3339	11.85	10.03	21.88	49.35	-27.47	AVG	
7	0.4220	23.16	10.04	33.20	57.41	-24.21	QP	
8	0.4220	16.67	10.04	26.71	47.41	-20.70	AVG	
9	1.6780	17.13	10.17	27.30	56.00	-28.70	QP	
10	1.6780	11.58	10.17	21.75	46.00	-24.25	AVG	
11	5.3180	20.74	10.25	30.99	60.00	-29.01	QP	
12	5.3180	7.52	10.25	17.77	50.00	-32.23	AVG	


Neutral line:

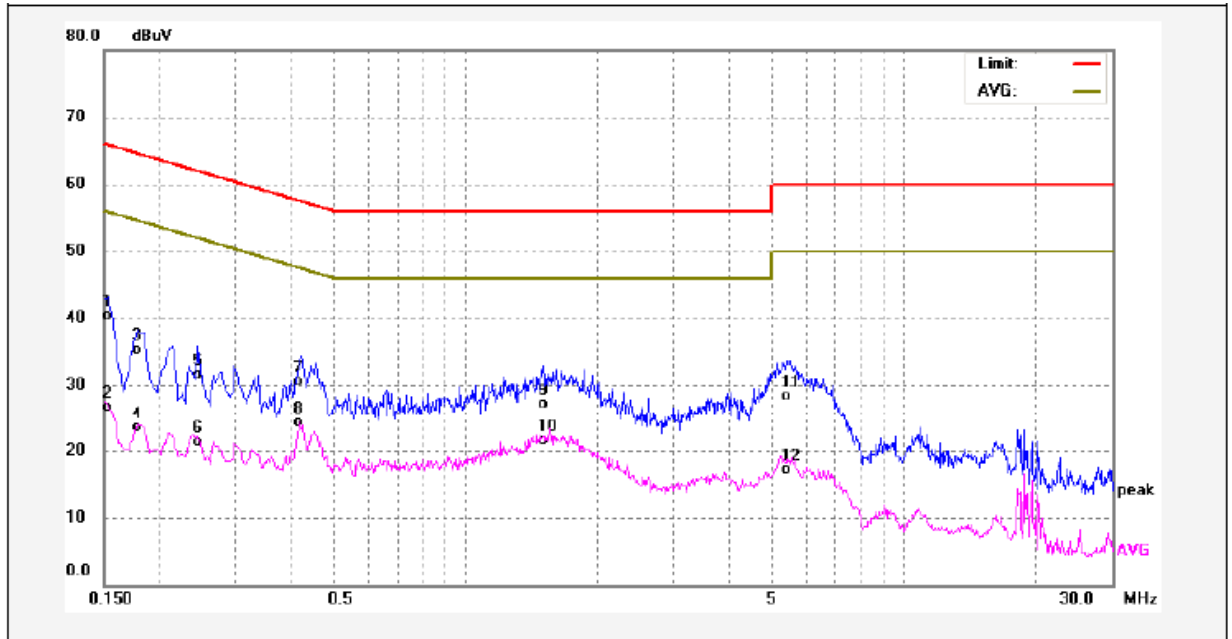

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	30.37	10.02	40.39	65.78	-25.39	QP	
2	0.1539	16.61	10.02	26.63	55.78	-29.15	AVG	
3	0.1780	25.49	9.87	35.36	64.57	-29.21	QP	
4	0.1780	13.62	9.87	23.49	54.57	-31.08	AVG	
5	0.2460	21.52	10.00	31.52	61.89	-30.37	QP	
6	0.2460	11.28	10.00	21.28	51.89	-30.61	AVG	
7	0.4220	20.52	10.04	30.56	57.41	-26.85	QP	
8	0.4220	14.28	10.04	24.32	47.41	-23.09	AVG	
9	1.5100	16.96	10.15	27.11	56.00	-28.89	QP	
10	1.5100	11.28	10.15	21.43	46.00	-24.57	AVG	
11	5.4740	17.98	10.26	28.24	60.00	-31.76	QP	
12	5.4740	6.75	10.26	17.01	50.00	-32.99	AVG	


Adapter 2:

Live line:

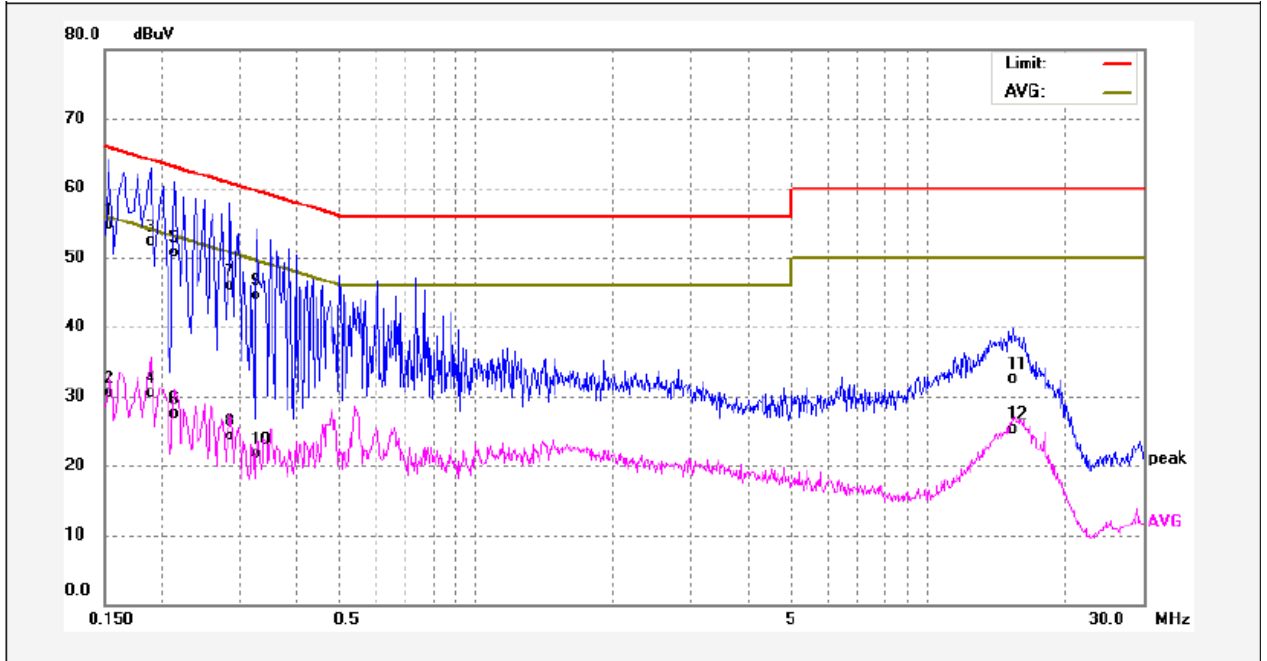

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	44.73	10.02	54.75	65.78	-11.03	QP	
2	0.1539	20.44	10.02	30.46	55.78	-25.32	AVG	
3	0.1900	42.31	9.90	52.21	64.03	-11.82	QP	
4	0.1900	20.66	9.90	30.56	54.03	-23.47	AVG	
5	0.2140	40.84	9.94	50.78	63.04	-12.26	QP	
6	0.2140	17.56	9.94	27.50	53.04	-25.54	AVG	
7	0.2860	35.94	9.99	45.93	60.64	-14.71	QP	
8	0.2860	14.25	9.99	24.24	50.64	-26.40	AVG	
9	0.3260	34.48	10.02	44.50	59.55	-15.05	QP	
10	0.3260	11.74	10.02	21.76	49.55	-27.79	AVG	
11	15.4260	22.16	10.39	32.55	60.00	-27.45	QP	
12	15.4260	14.96	10.39	25.35	50.00	-24.65	AVG	

Neutral line:

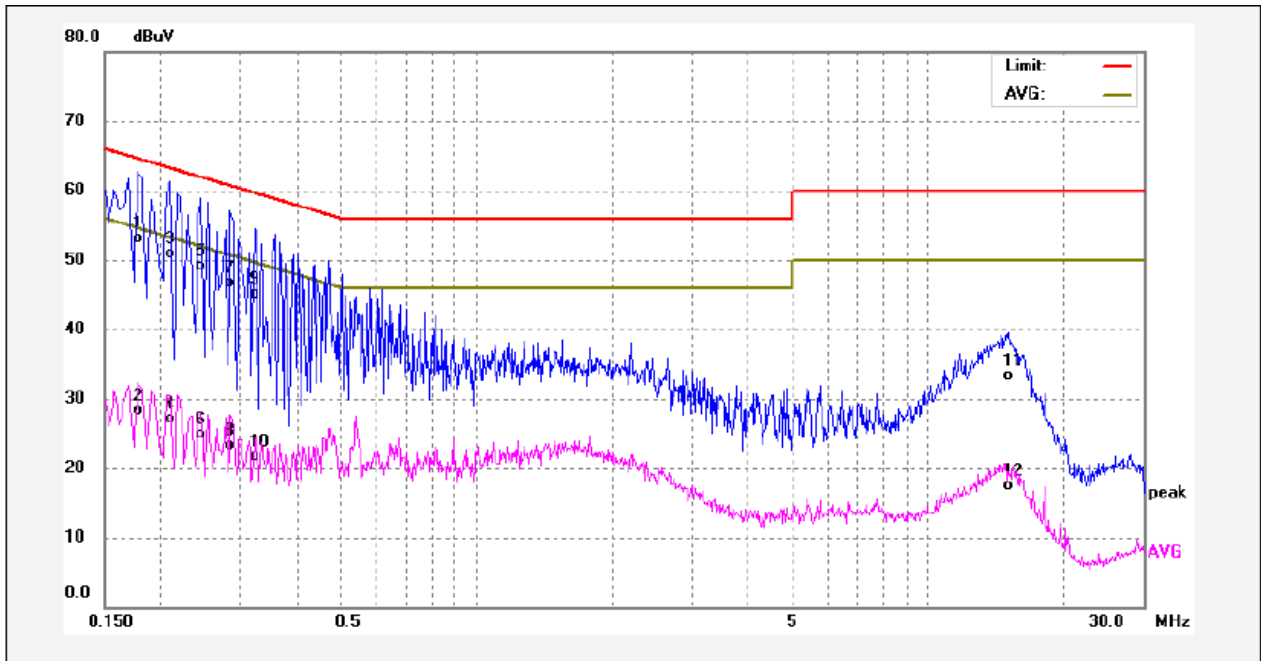

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1780	43.19	9.87	53.06	64.57	-11.51	QP	
2	0.1780	18.46	9.87	28.33	54.57	-26.24	AVG	
3	0.2100	41.06	9.93	50.99	63.20	-12.21	QP	
4	0.2100	17.11	9.93	27.04	53.20	-26.16	AVG	
5	0.2460	39.16	10.00	49.16	61.89	-12.73	QP	
6	0.2460	15.00	10.00	25.00	51.89	-26.89	AVG	
7	0.2860	36.74	9.99	46.73	60.64	-13.91	QP	
8	0.2860	13.22	9.99	23.21	50.64	-27.43	AVG	
9	0.3220	35.01	10.02	45.03	59.65	-14.62	QP	
10	0.3220	11.72	10.02	21.74	49.65	-27.91	AVG	
11	15.1100	22.97	10.38	33.35	60.00	-26.65	QP	
12	15.1100	7.19	10.38	17.57	50.00	-32.43	AVG	

9 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.205 &15.209 & 15.247

Test Method: ANSI C63.10: 2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

9.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in TX Transmitting mode, the test data were shown in the report.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

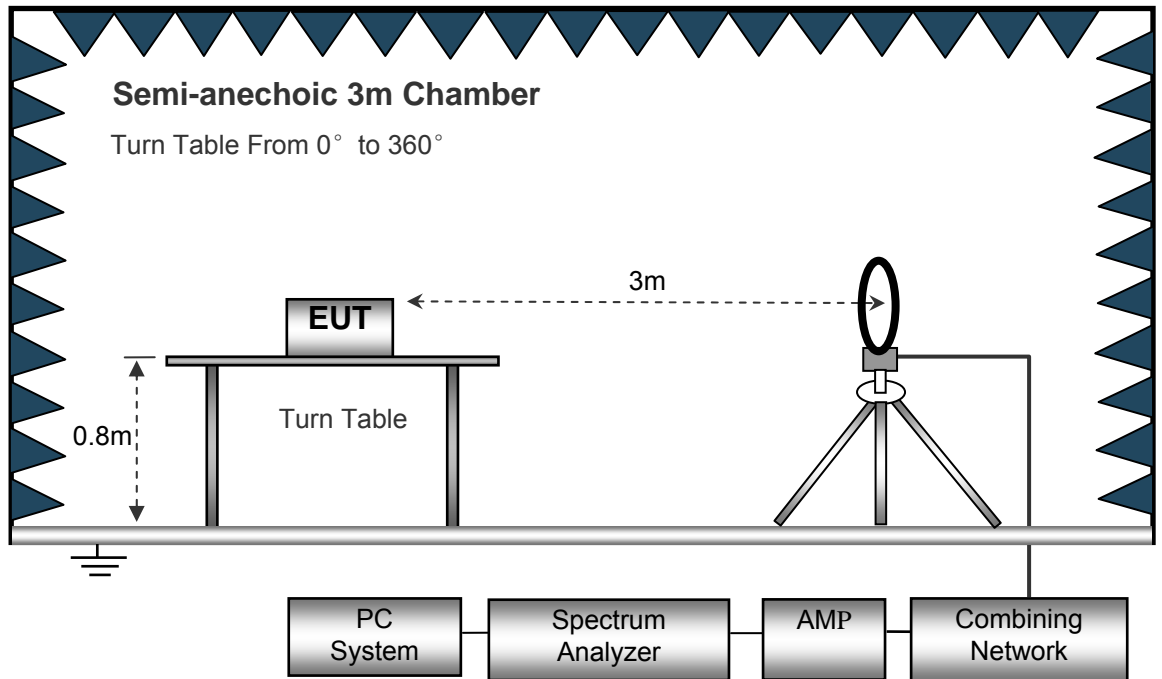

The test setup for emission measurement from 30 MHz to 1 GHz.

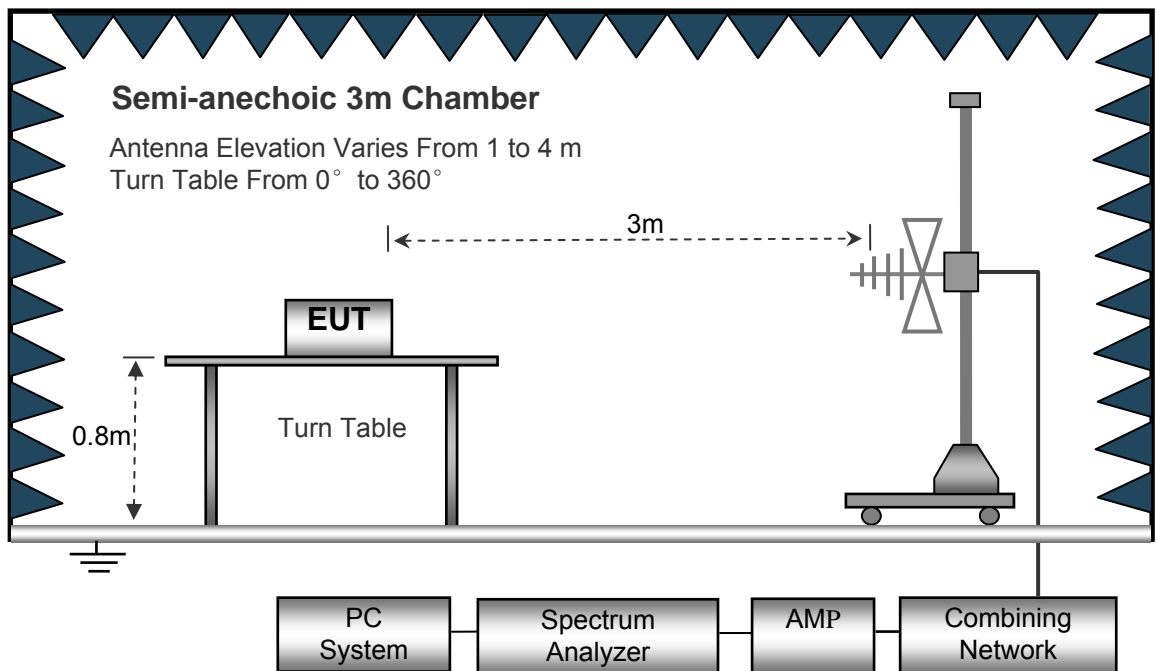

The test setup for emission measurement above 1 GHz.

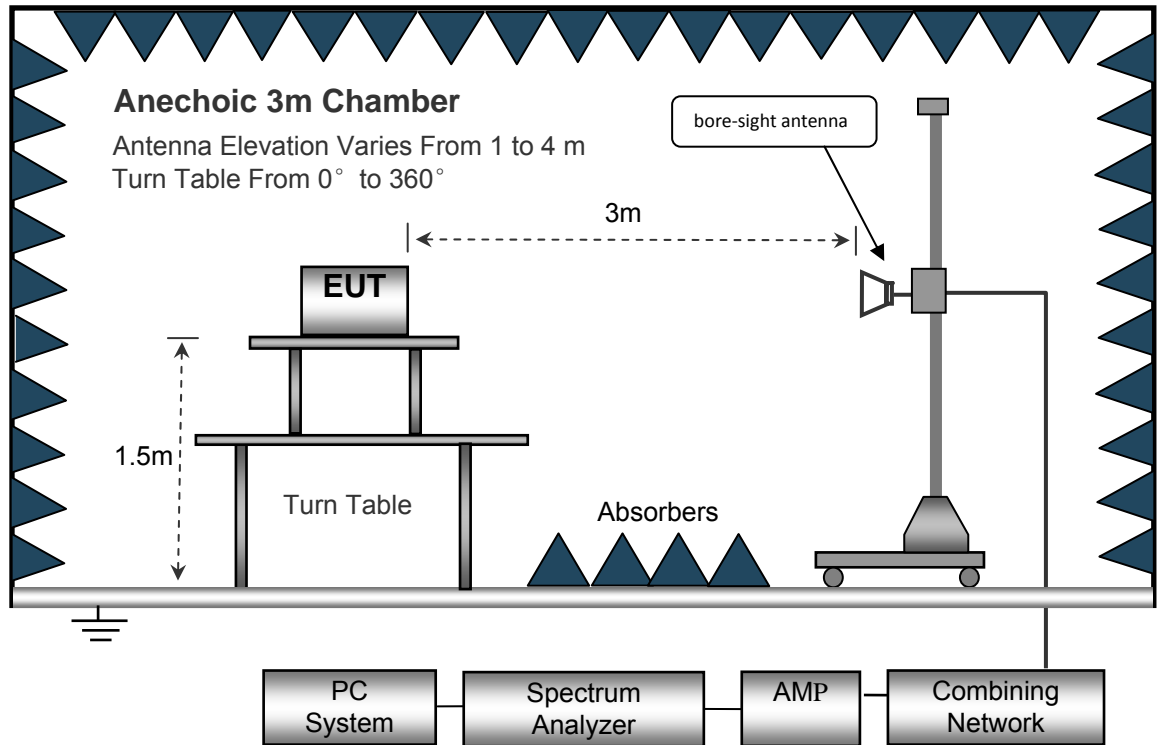

9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

9.6 Summary of Test Results

Test Frequency: 9KHz~30MHz

Remark: only the worst data (GFSK modulation Low channel mode) were reported

Frequency	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
6.021	25.63	QP	21.84	40.00	7.47	29.54	-22.07
15.730	24.96	QP	21.35	40.00	6.31	29.54	-23.23
25.680	25.60	QP	20.67	40.00	6.27	29.54	-23.27

Test Frequency: 30MHz ~ 18GHz

Remark: only the worst data (GFSK modulation mode) were reported.

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel									
268.32	36.19	QP	157	1.1	H	-13.35	22.84	46.00	-23.16
268.32	40.72	QP	105	1.4	V	-13.35	27.37	46.00	-18.63
4804.00	46.70	PK	275	1.5	V	-1.06	45.64	74.00	-28.36
4804.00	42.71	Ave	275	1.5	V	-1.06	41.65	54.00	-12.35
7206.00	41.07	PK	203	1.6	H	1.33	42.40	74.00	-31.60
7206.00	36.13	Ave	203	1.6	H	1.33	37.46	54.00	-16.54
2339.93	46.66	PK	84	1.6	V	-13.19	33.47	74.00	-40.53
2339.93	37.01	Ave	84	1.6	V	-13.19	23.82	54.00	-30.18
2363.44	42.26	PK	34	1.6	H	-13.14	29.12	74.00	-44.88
2363.44	38.17	Ave	34	1.6	H	-13.14	25.03	54.00	-28.97
2488.32	44.11	PK	156	1.8	V	-13.08	31.03	74.00	-42.97
2488.32	38.59	Ave	156	1.8	V	-13.08	25.51	54.00	-28.49

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Middle Channel									
268.32	35.02	QP	312	1.0	H	-13.35	21.67	46.00	-24.33
268.32	39.23	QP	217	1.8	V	-13.35	25.88	46.00	-20.12
4882.00	47.97	PK	352	1.4	V	-0.62	47.35	74.00	-26.65
4882.00	42.88	Ave	352	1.4	V	-0.62	42.26	54.00	-11.74
7323.00	41.54	PK	163	1.5	H	2.21	43.75	74.00	-30.25
7323.00	37.23	Ave	163	1.5	H	2.21	39.44	54.00	-14.56
2328.98	46.19	PK	177	1.2	V	-13.19	33.00	74.00	-41.00
2328.98	37.11	Ave	177	1.2	V	-13.19	23.92	54.00	-30.08
2387.82	44.20	PK	273	1.6	H	-13.14	31.06	74.00	-42.94
2387.82	36.21	Ave	273	1.6	H	-13.14	23.07	54.00	-30.93
2494.76	43.64	PK	315	2.0	V	-13.08	30.56	74.00	-43.44
2494.76	38.42	Ave	315	2.0	V	-13.08	25.34	54.00	-28.66

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK High Channel									
268.32	34.05	QP	189	1.5	H	-13.35	20.70	46.00	-25.30
268.32	39.30	QP	204	1.2	V	-13.35	25.95	46.00	-20.05
4960.00	46.69	PK	148	2.0	V	-0.24	46.45	74.00	-27.55
4960.00	42.80	Ave	148	2.0	V	-0.24	42.56	54.00	-11.44
7440.00	41.58	PK	75	1.6	H	2.84	44.42	74.00	-29.58
7440.00	38.47	Ave	75	1.6	H	2.84	41.31	54.00	-12.69
2348.75	45.91	PK	128	1.5	V	-13.19	32.72	74.00	-41.28
2348.75	39.37	Ave	128	1.5	V	-13.19	26.18	54.00	-27.82
2378.65	43.85	PK	147	1.5	H	-13.14	30.71	74.00	-43.29
2378.65	36.31	Ave	147	1.5	H	-13.14	23.17	54.00	-30.83
2486.74	42.07	PK	96	2.0	V	-13.08	28.99	74.00	-45.01
2486.74	38.29	Ave	96	2.0	V	-13.08	25.21	54.00	-28.79

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not recorded

10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10: 2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto


Detector function = peak, Trace = max hold

10.2 Test Result


9KHz - 30MHz

GFSK


Low Channel

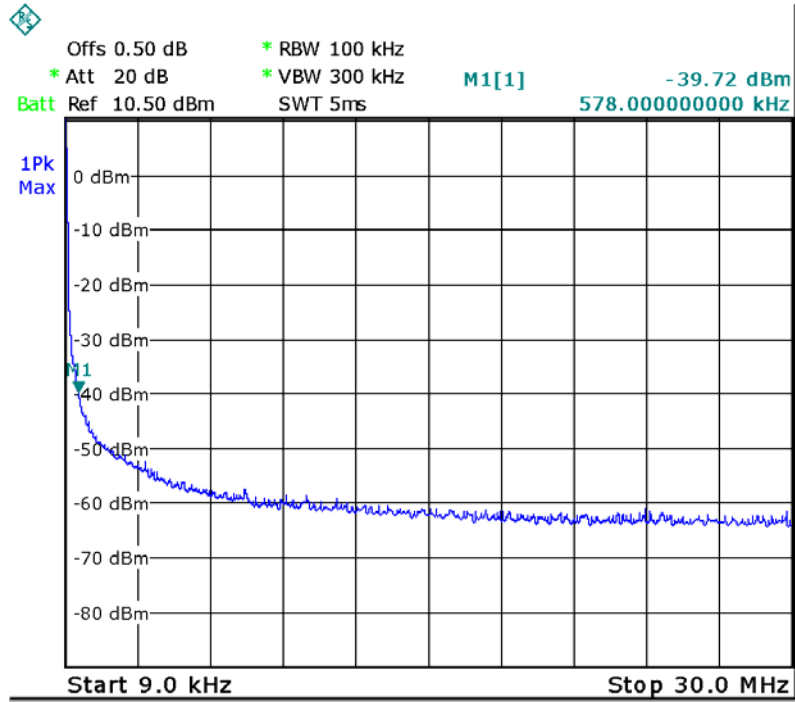

Middle Channel

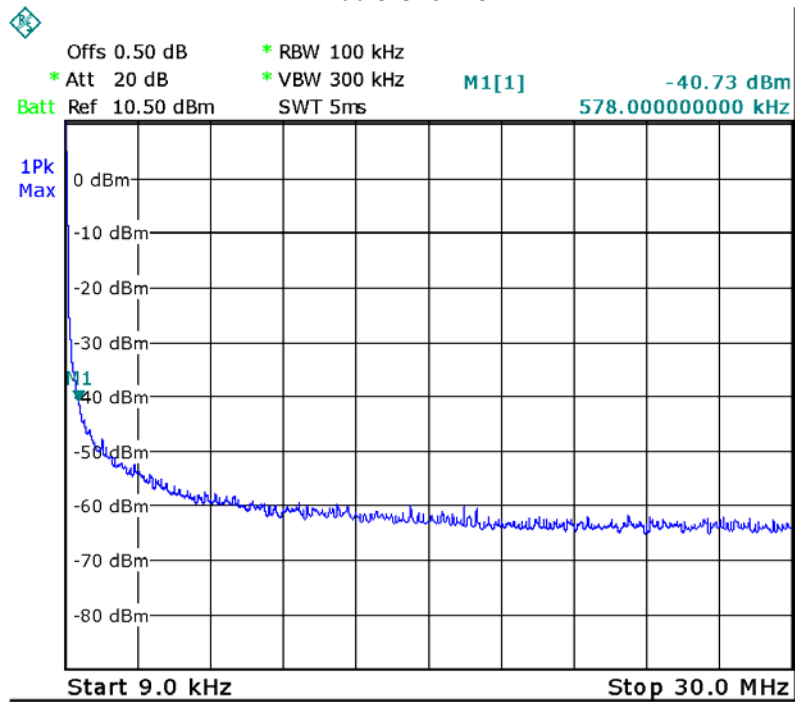




High Channel

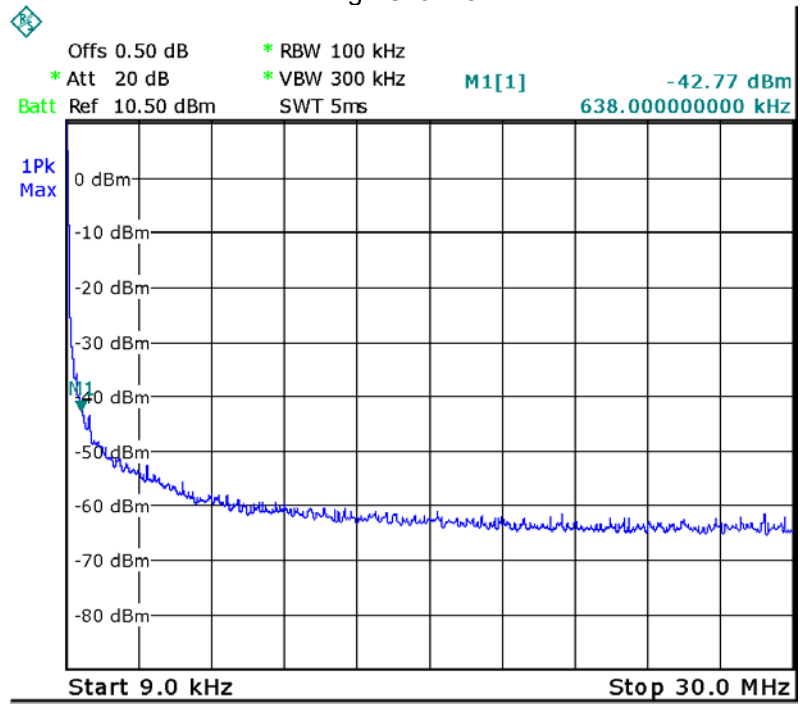

Pi/4DQPSK


Low Channel

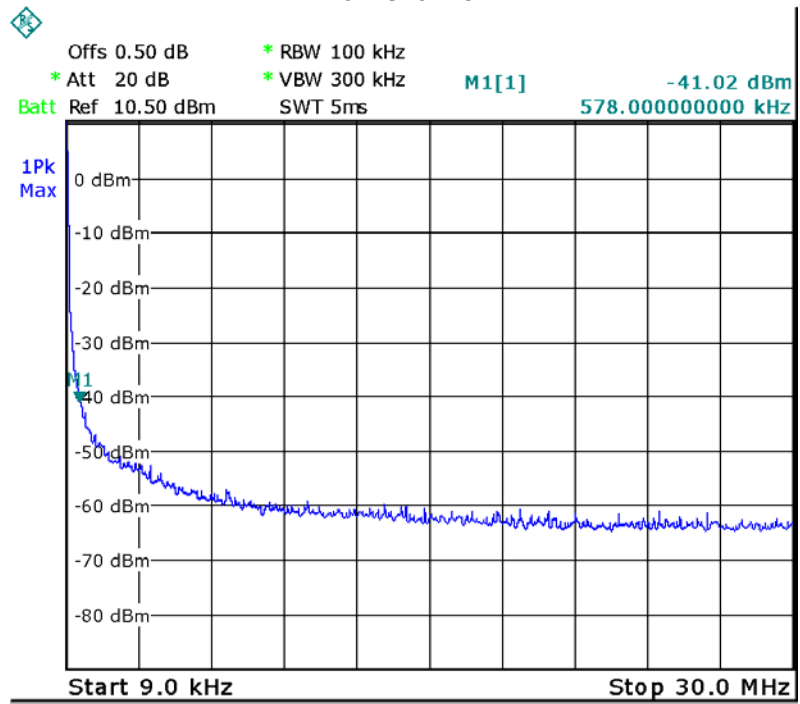

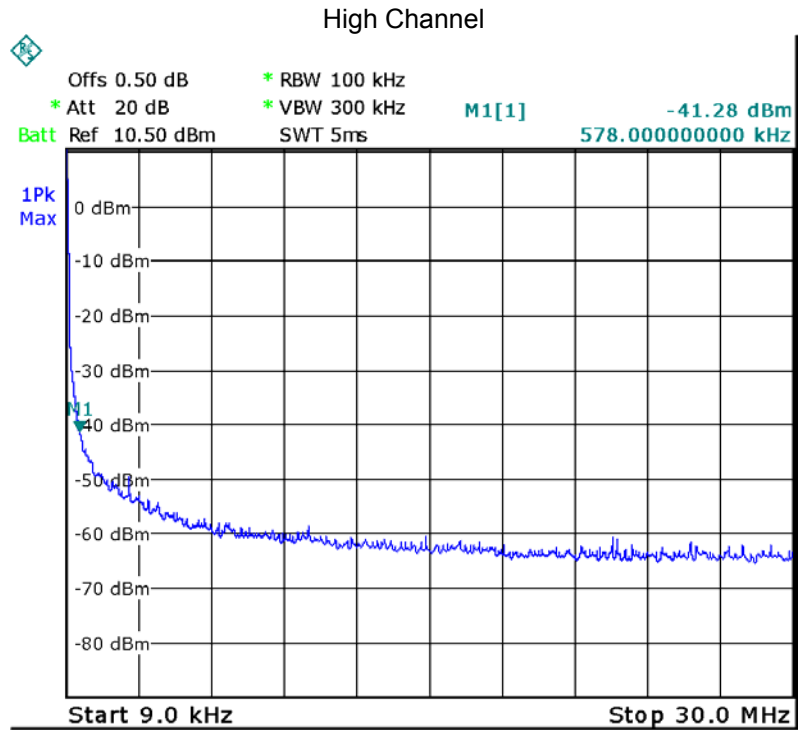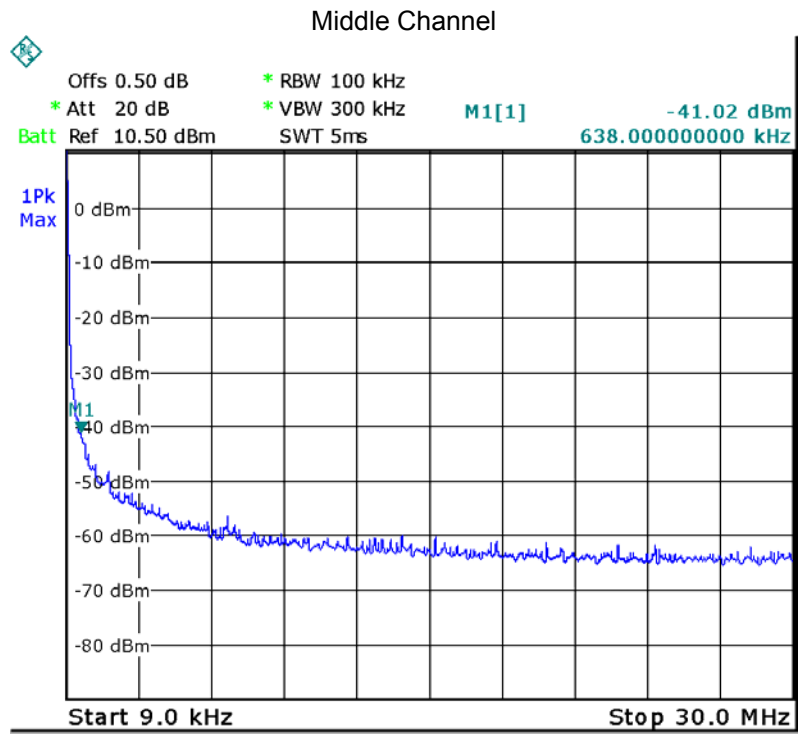



8DPSK

Low Channel

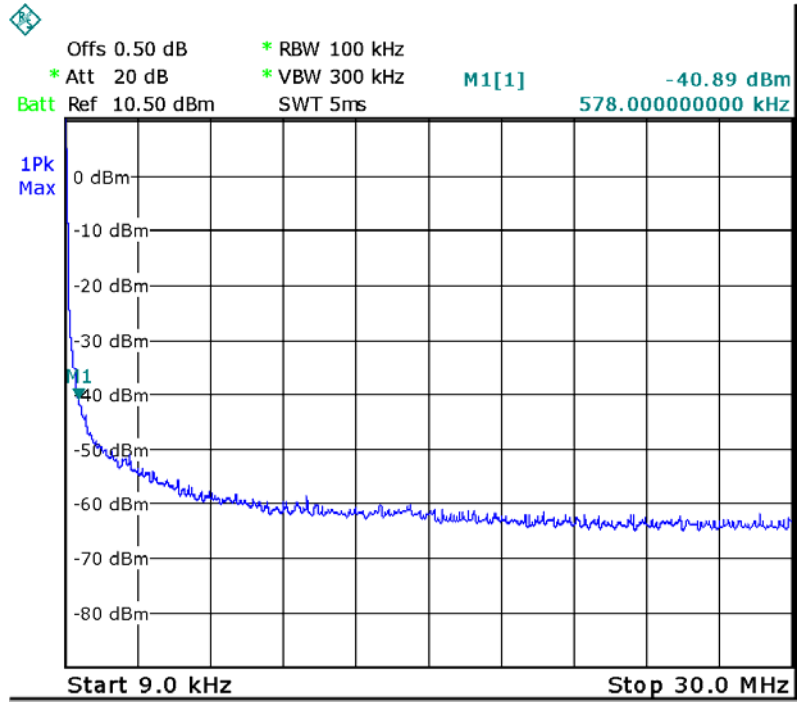

Middle Channel

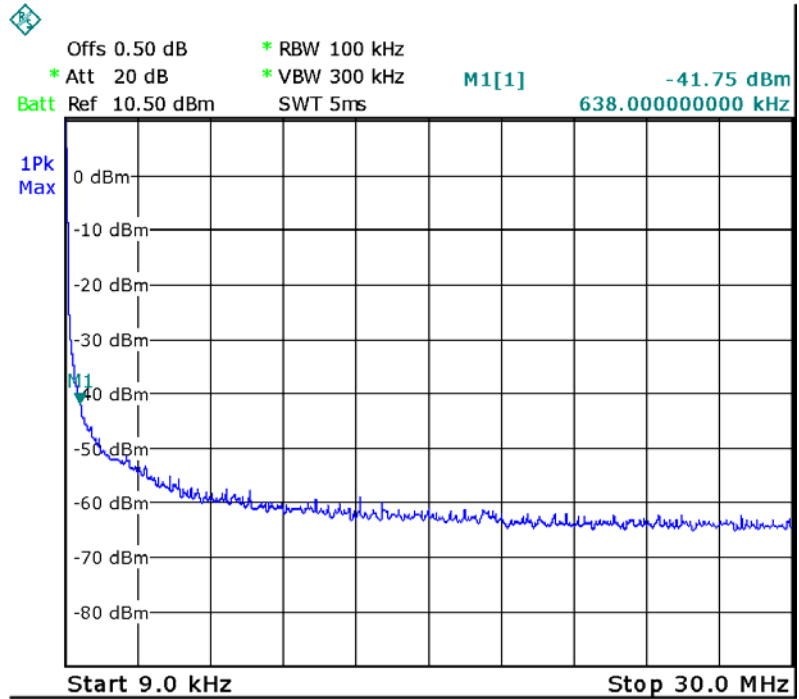

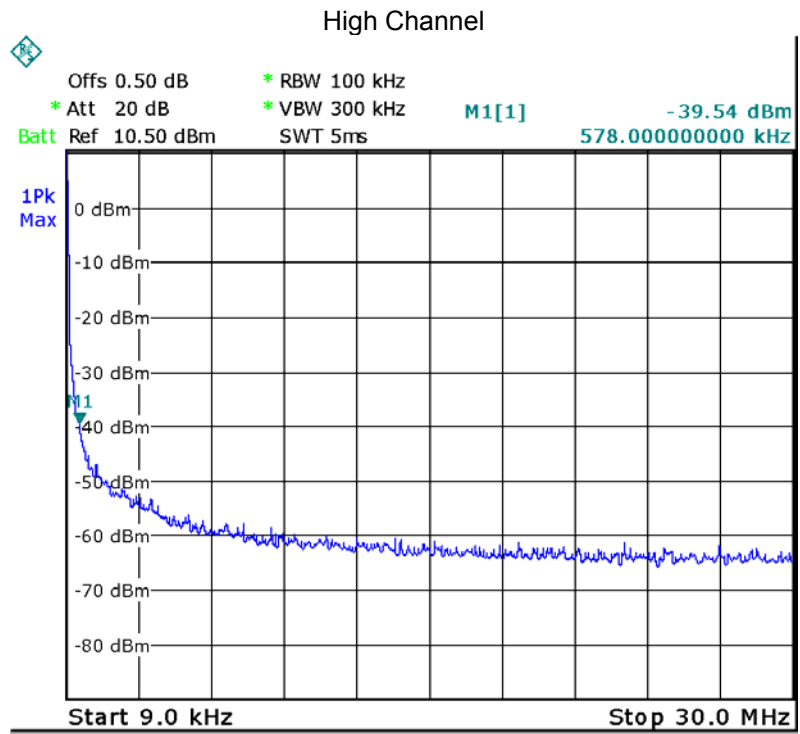

30MHz – 25GHz
GFSK Low Channel

Fundamental



GFSK Middle Channel

Fundamental




GFSK High Channel

Fundamental




Pi/4 DQPSK Low Channel

Fundamental

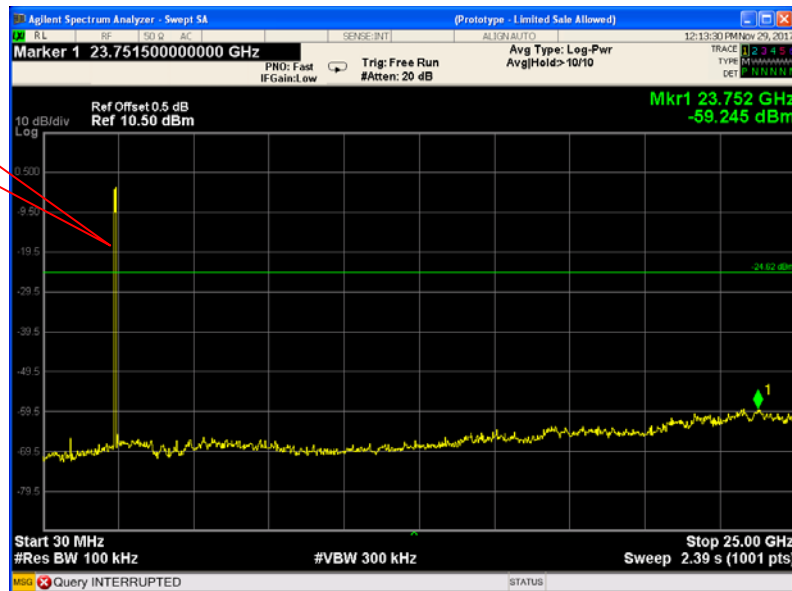

Pi/4 DQPSK Middle Channel

Fundamental

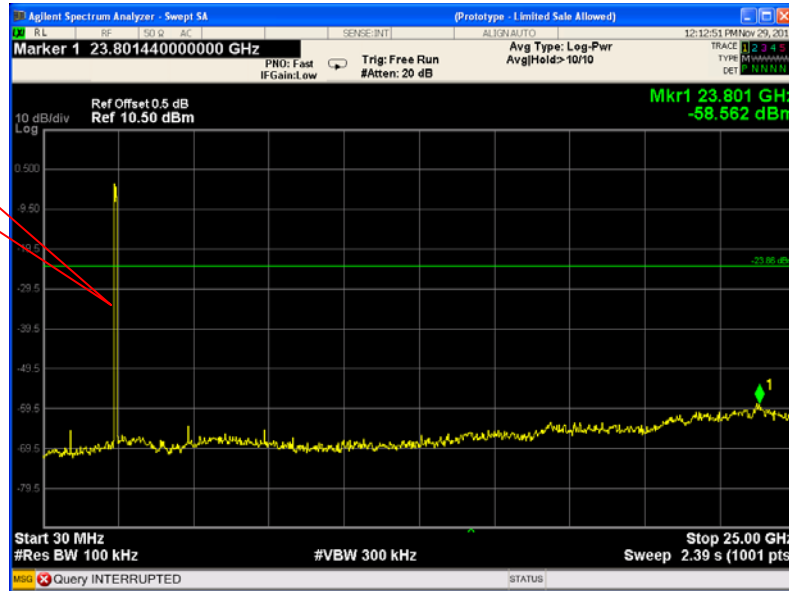

Pi/4 DQPSK High Channel

Fundamental



8DPSK Low Channel

Fundamental




8DPSK Middle Channel

Fundamental



8DPSK High Channel

Fundamental

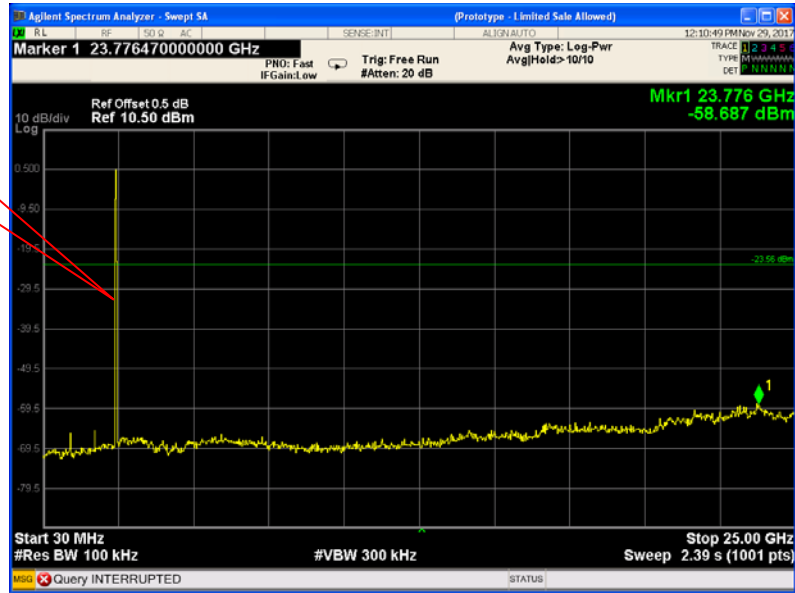



11 Band Edge Measurement

Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting


11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold


11.2 Test Result

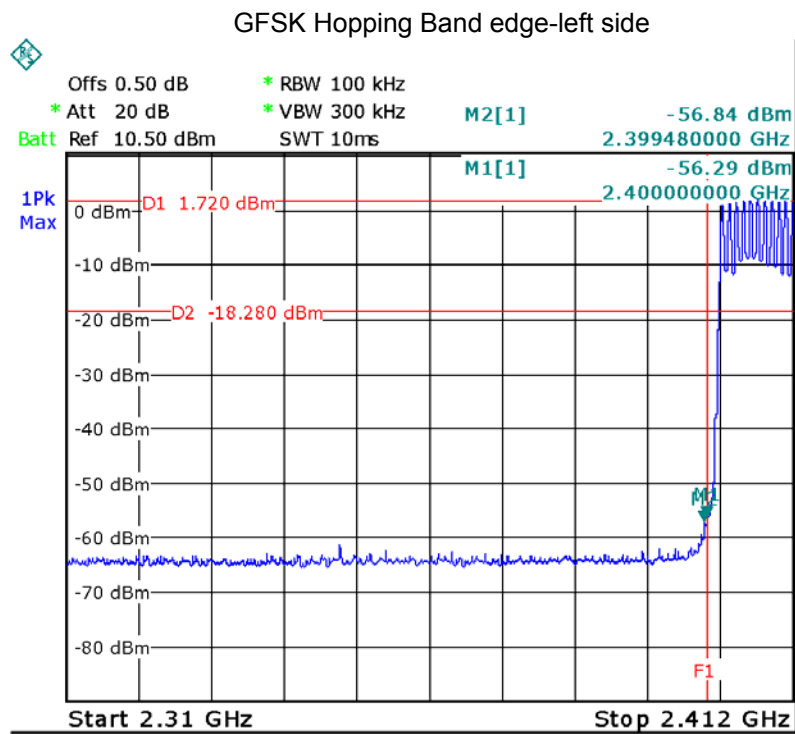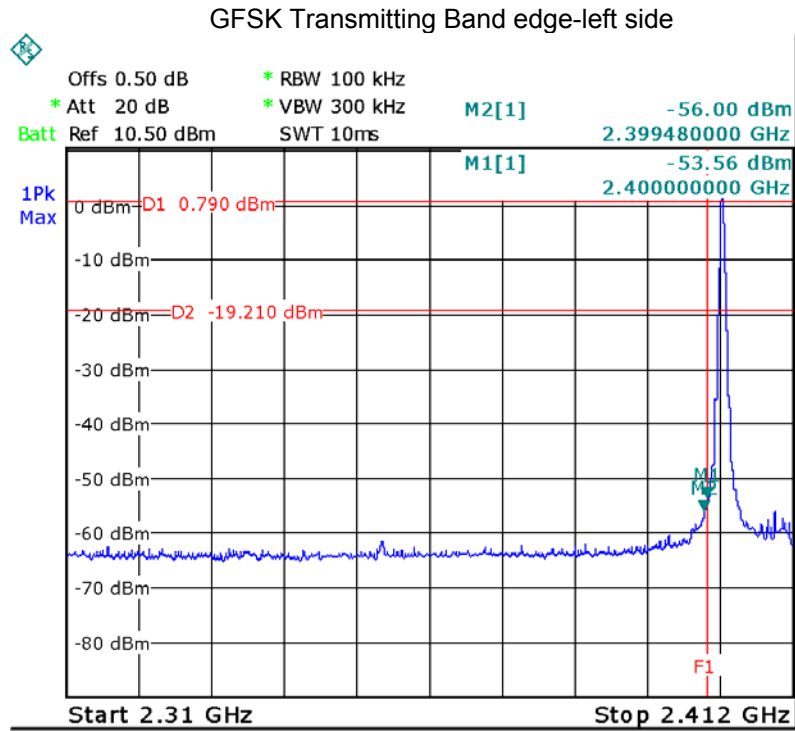


GFSK Transmitting Band edge-right side

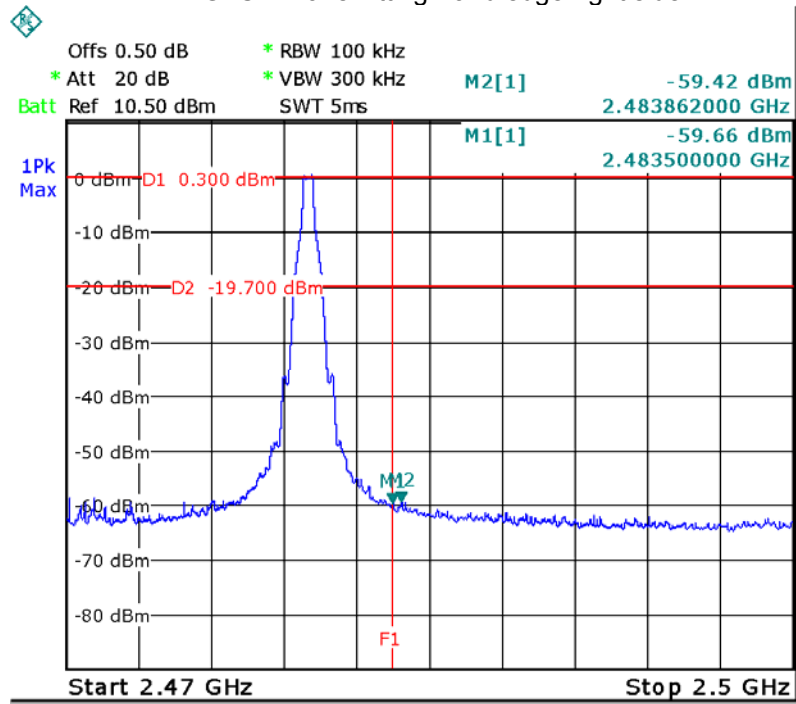


GFSK Hopping Band edge-right side

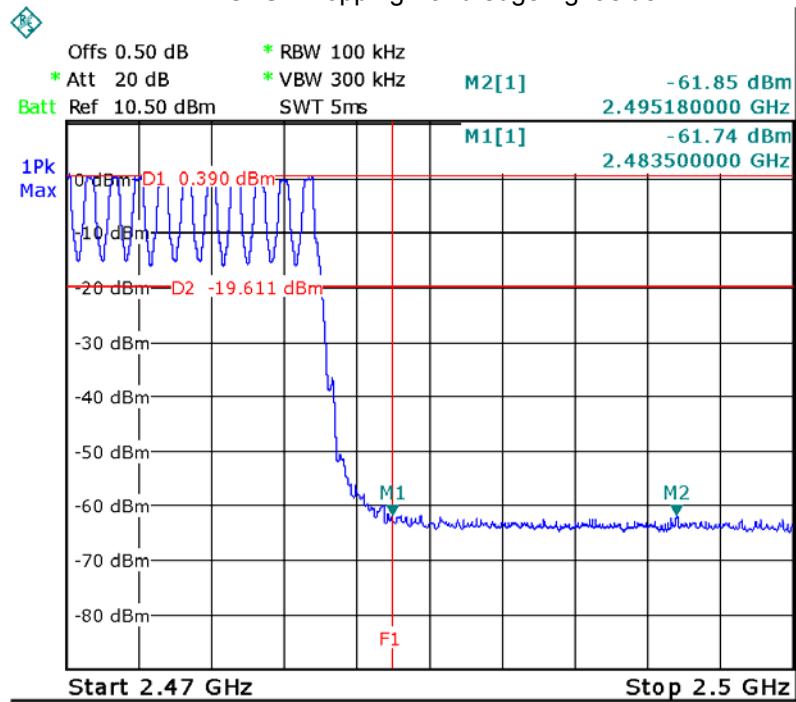


Pi/4 DQPSK Transmitting Band edge-left side

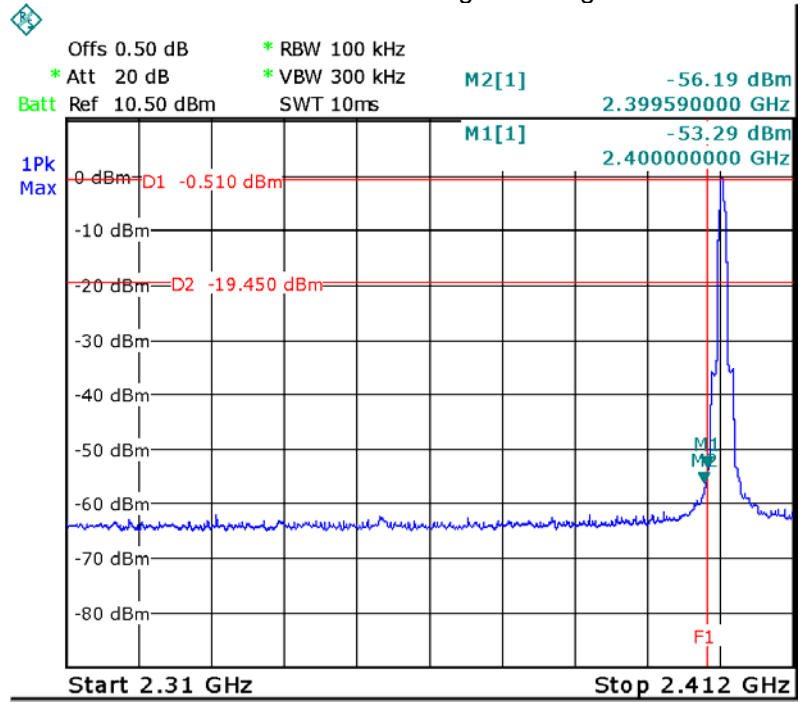


Pi/4 DQPSK Hopping Band edge-left side

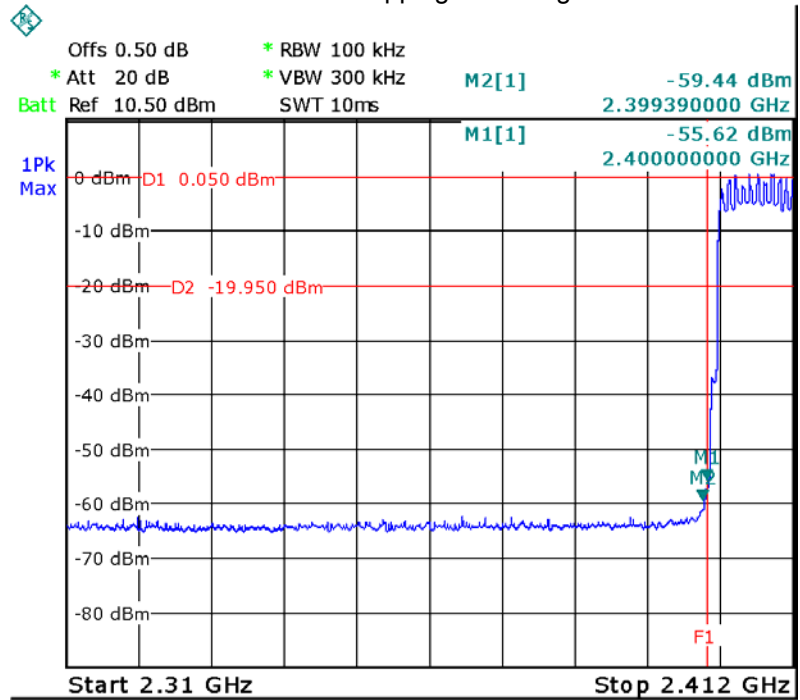


Pi/4 DQPSK Transmitting Band edge-right side

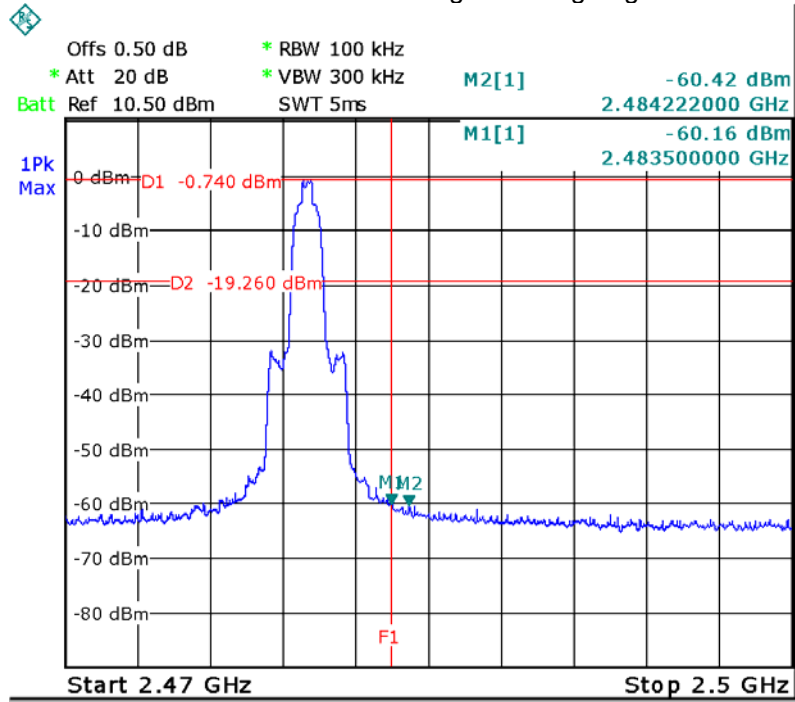


Pi/4 DQPSK Hopping Band edge-right side

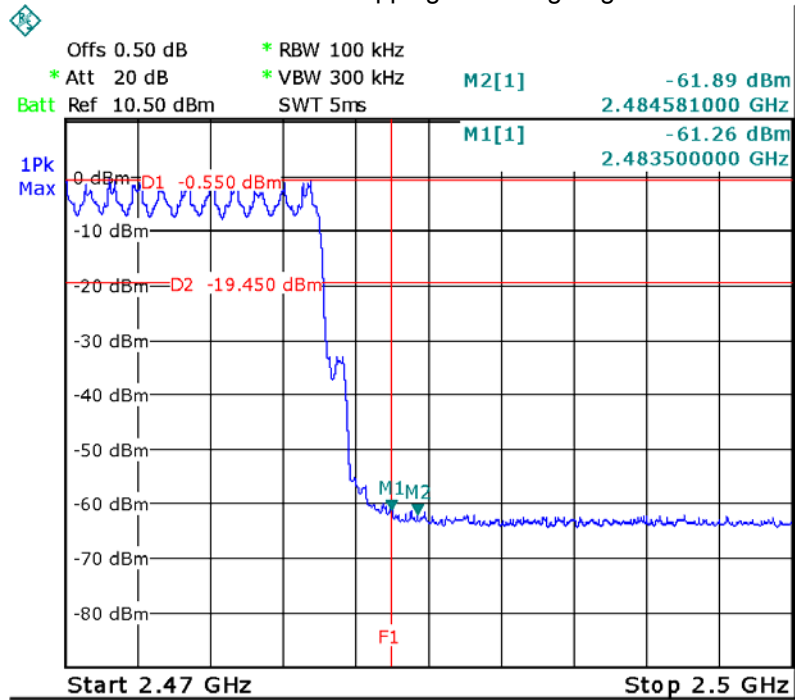


8DPSK Transmitting Band edge-left side

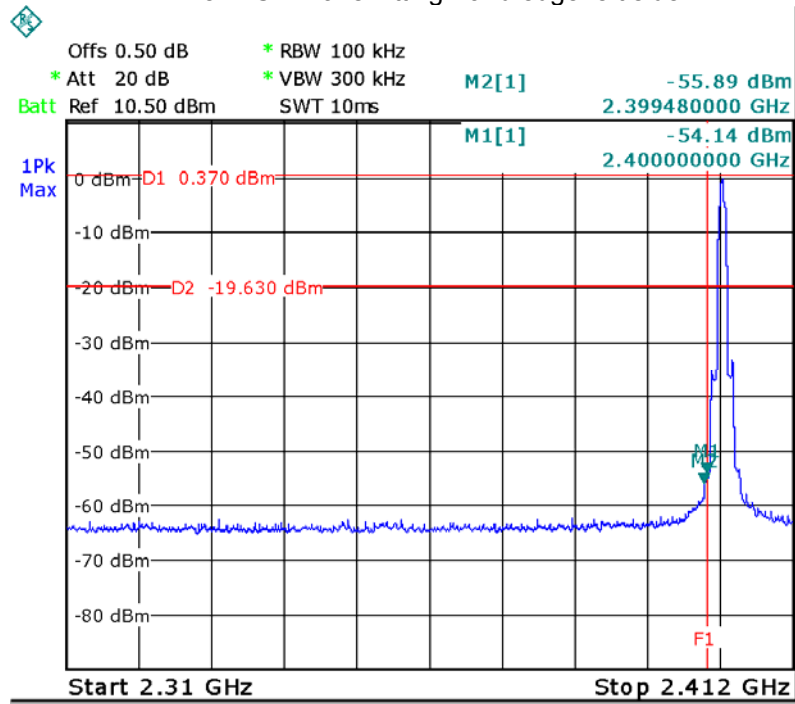


8DPSK Hopping Band edge-left side

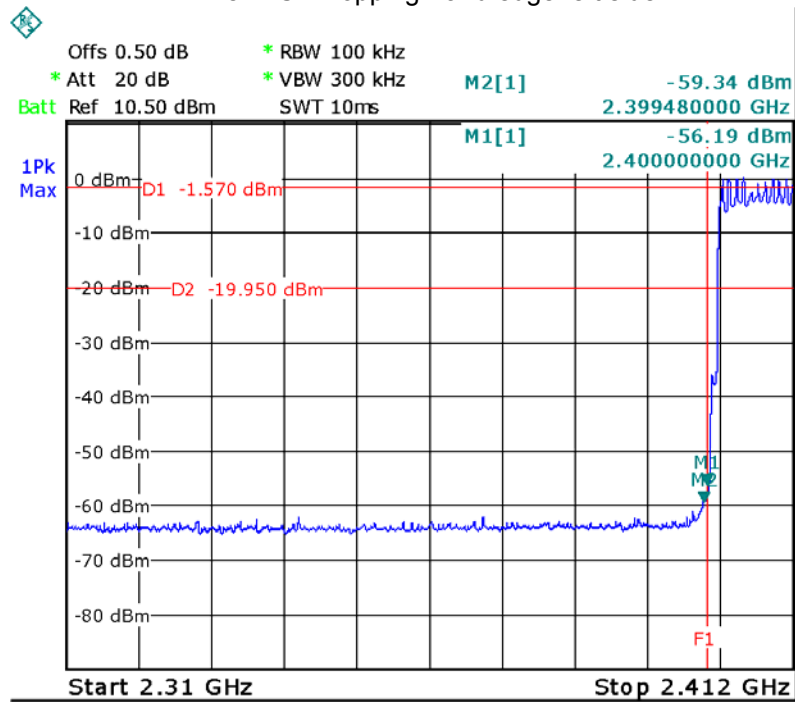

8DPSK Transmitting Band edge-right side

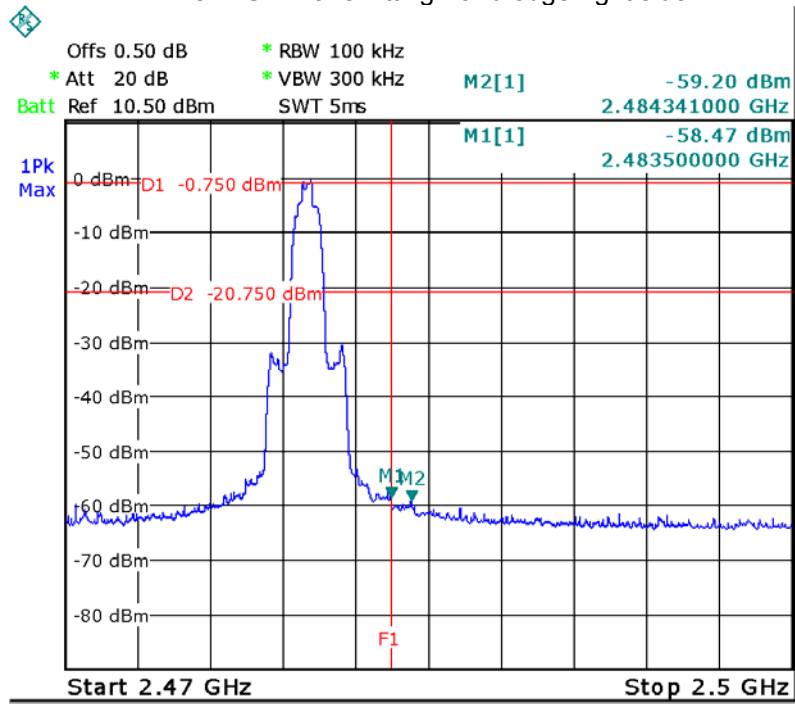

8DPSK Hopping Band edge-right side

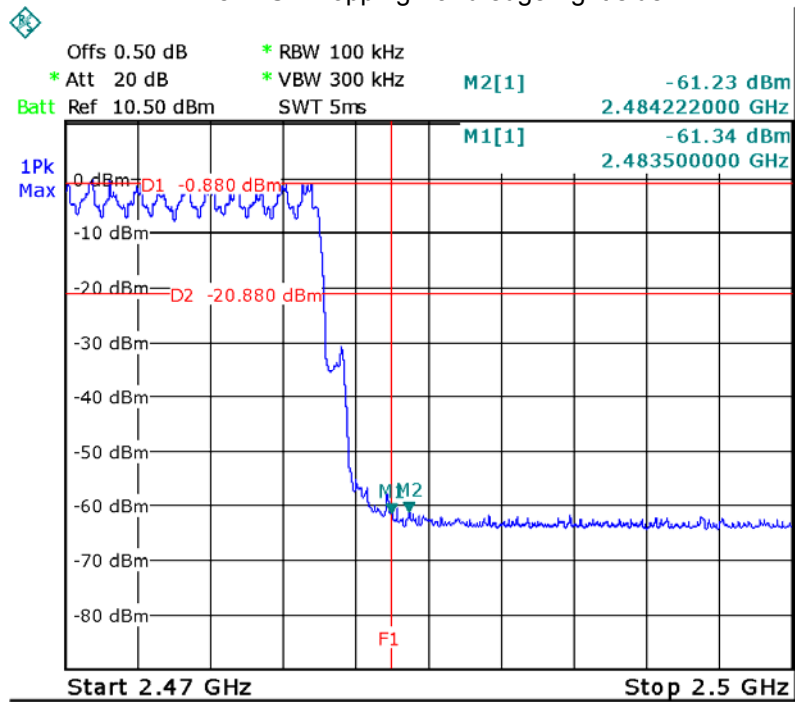

12 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10: 2013

Test Mode: Test in fixing operating frequency at low, Middle, high channel.

12.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

12.2 Test Result


Modulation	Test Channel	Bandwidth(MHz)
GFSK	Low	0.958
GFSK	Middle	1.240
GFSK	High	1.030
Pi/4 DQPSK	Low	1.305
Pi/4 DQPSK	Middle	1.311
Pi/4 DQPSK	High	1.311
8DPSK	Low	1.305
8DPSK	Middle	1.293
8DPSK	High	1.287

Test plots


GFSK Low Channel

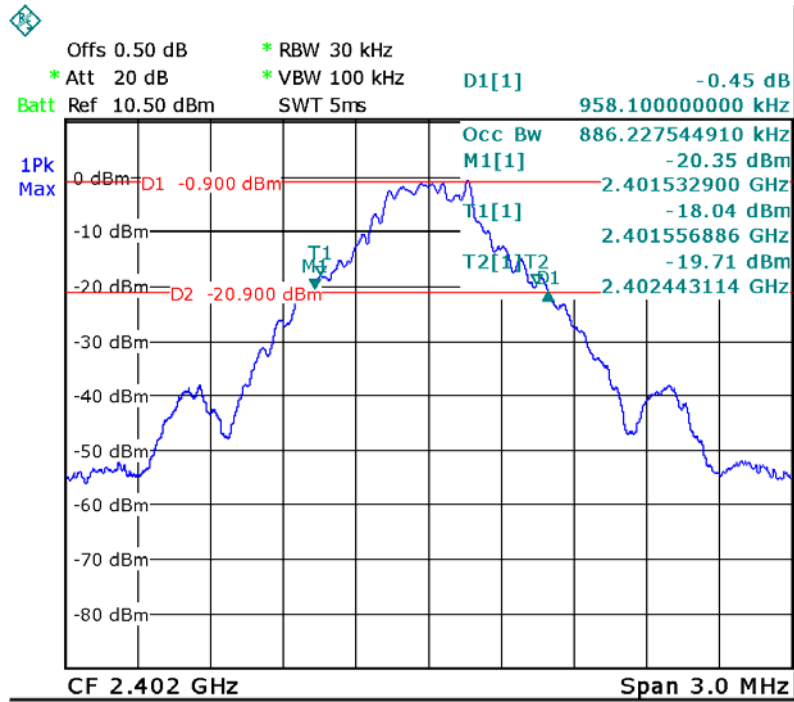


GFSK Middle Channel


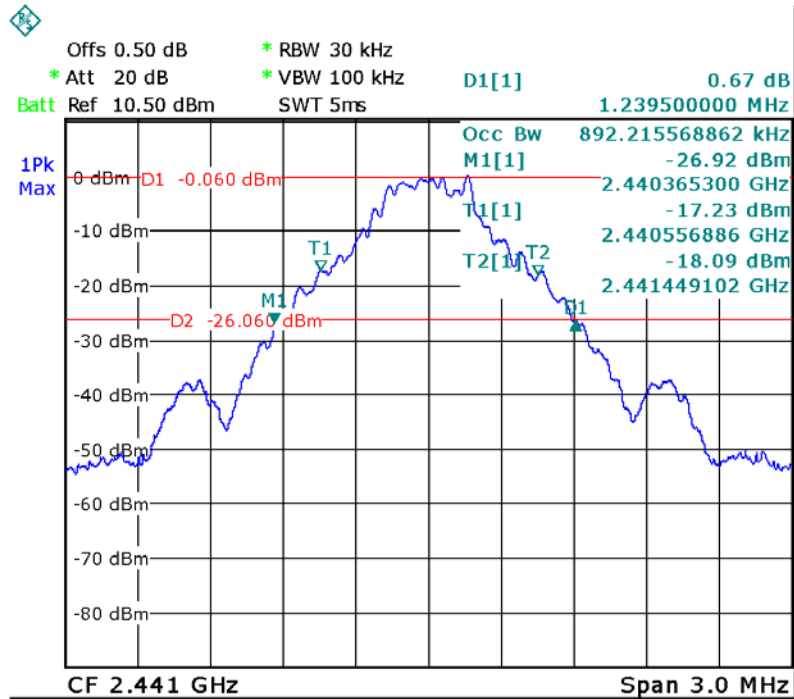


GFSK High Channel

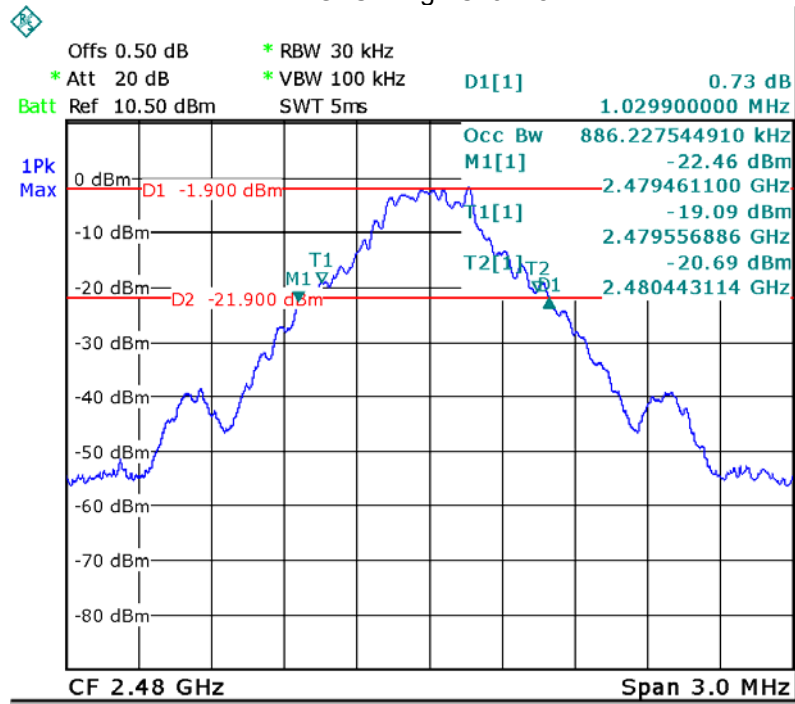


Pi/4 DQPSK Low Channel

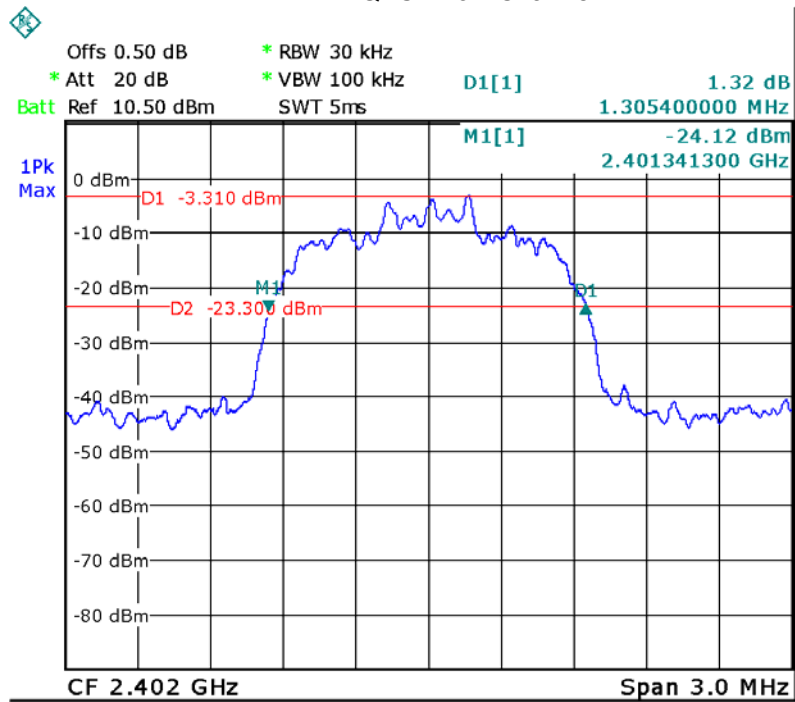


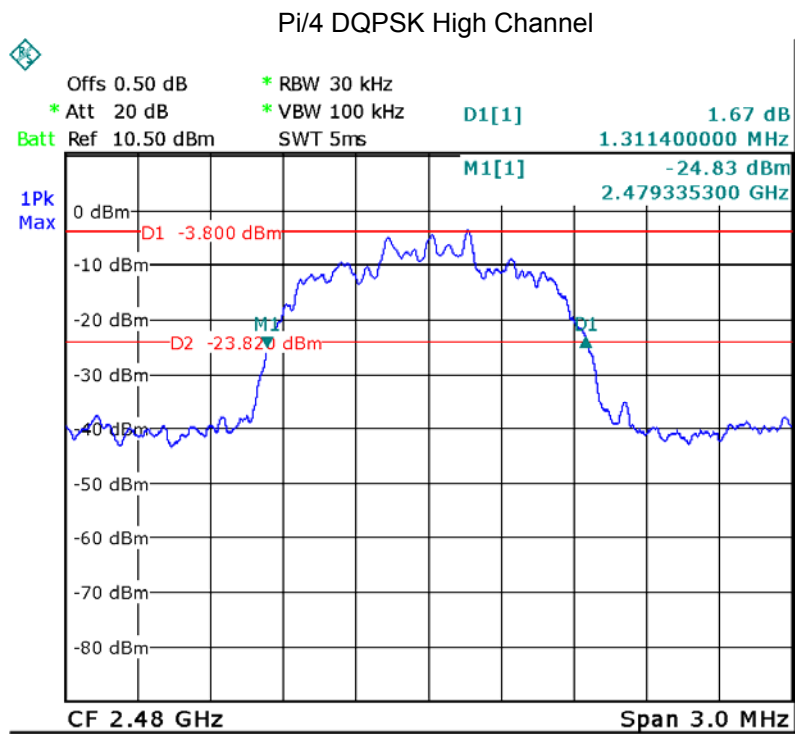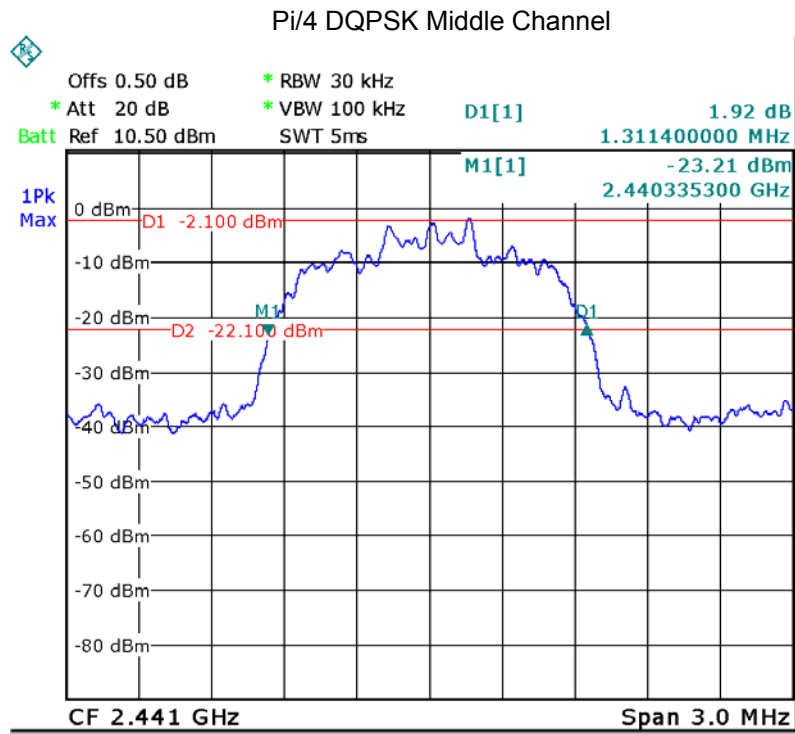


8DPSK Low Channel

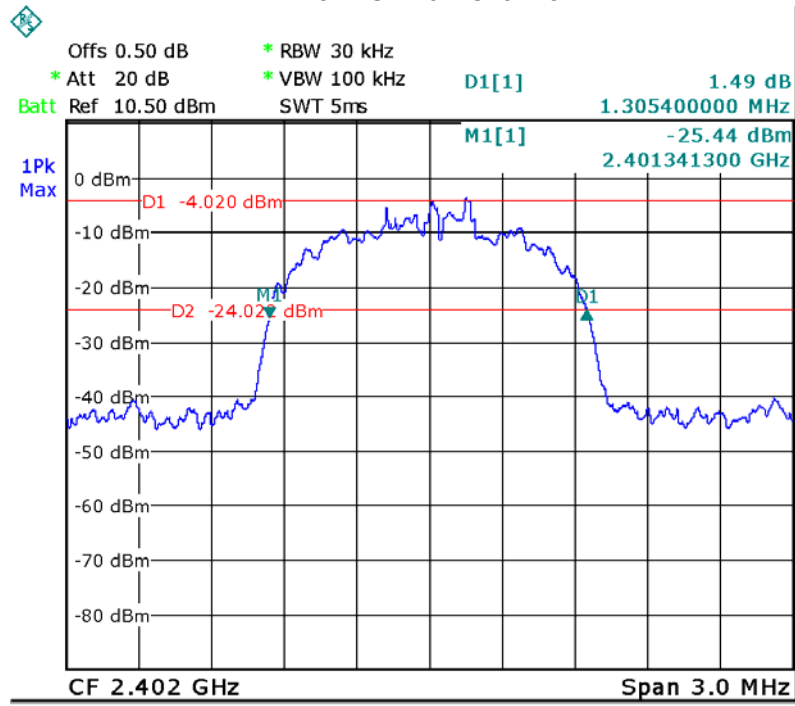

8DPSK Middle Channel

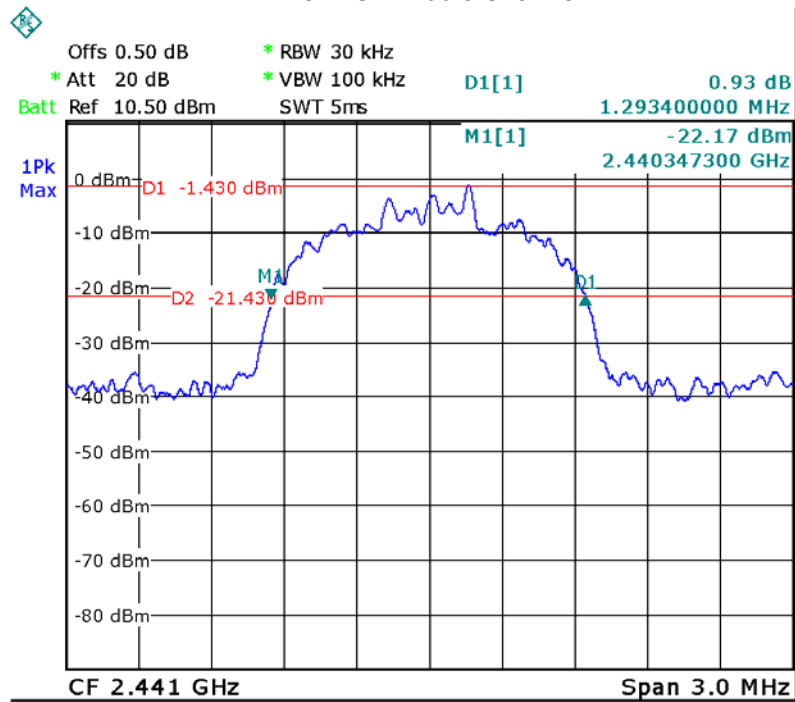

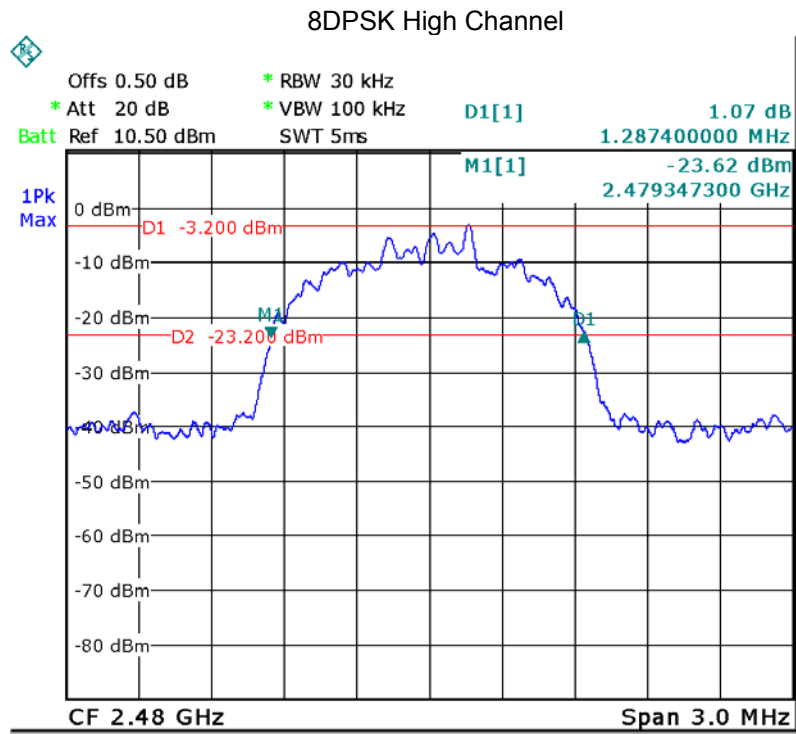

13 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247 (a)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater: 0.125 watts..
Test mode:	Test in fixing frequency transmitting mode.

13.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.///

13.2 Test Result


Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	1.06	30
GFSK	Middle	2.13	21
GFSK	High	0.36	21
Pi/4 DQPSK	Low	0.29	21
Pi/4 DQPSK	Middle	1.52	21
Pi/4 DQPSK	High	-0.23	21
8DPSK	Low	0.40	21
8DPSK	Middle	1.64	21
8DPSK	High	-0.07	21

Test plots


GFSK Low Channel

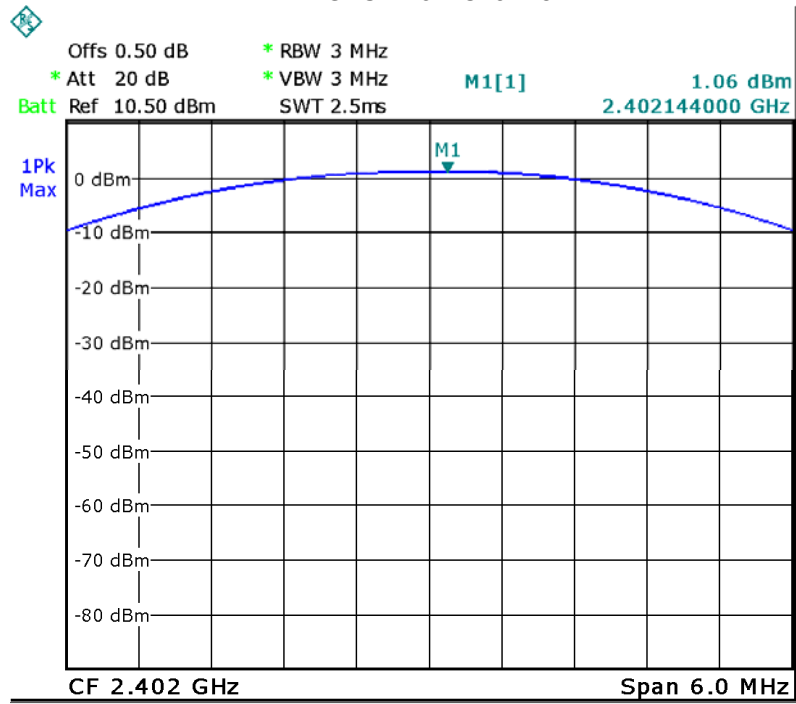


GFSK Middle Channel


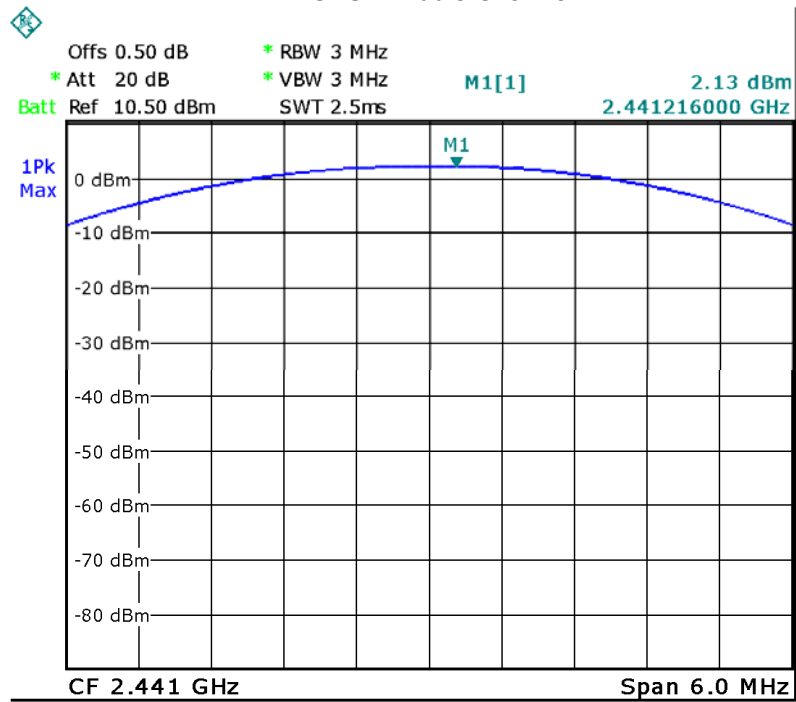


GFSK High Channel

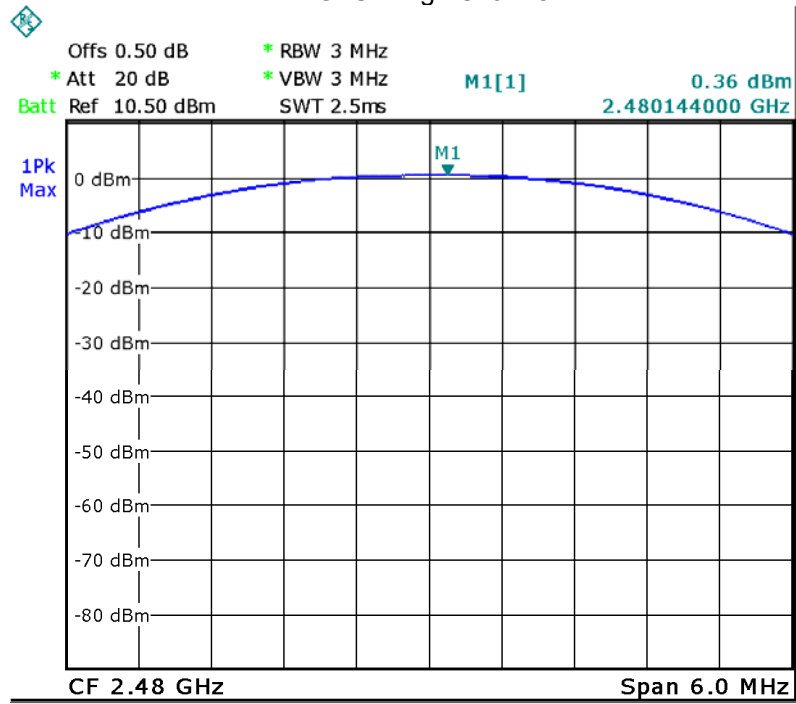


Pi/4 DQPSK Low Channel

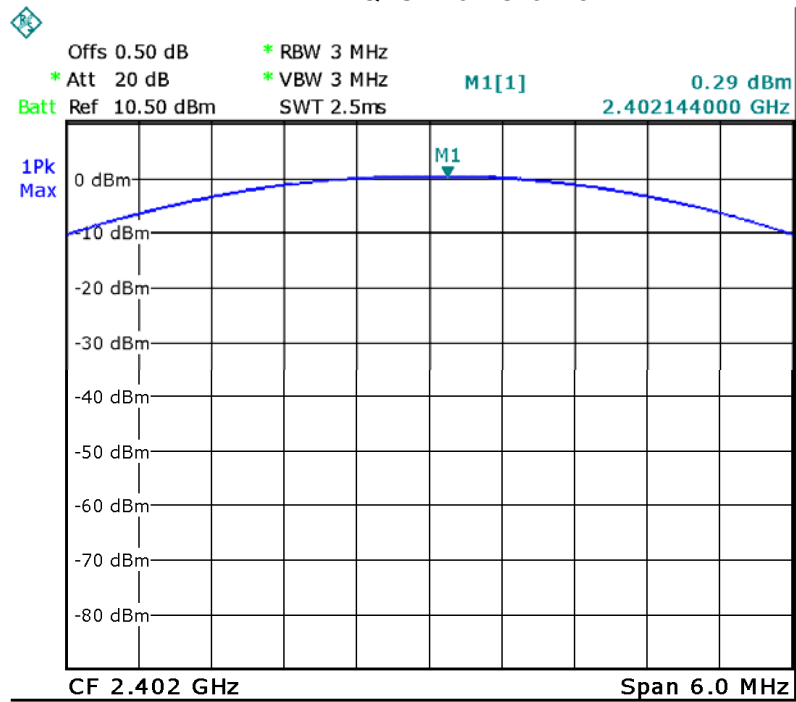


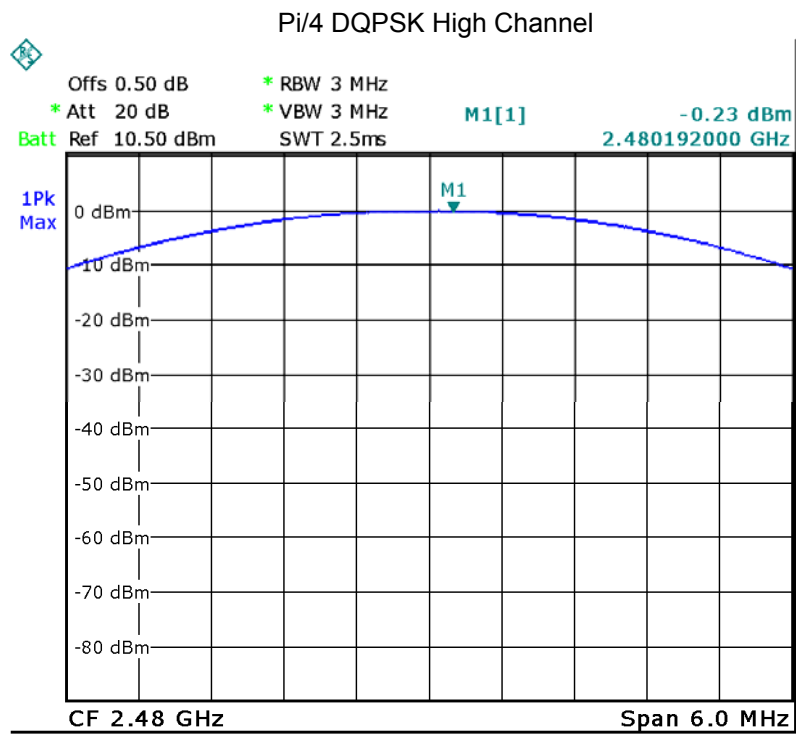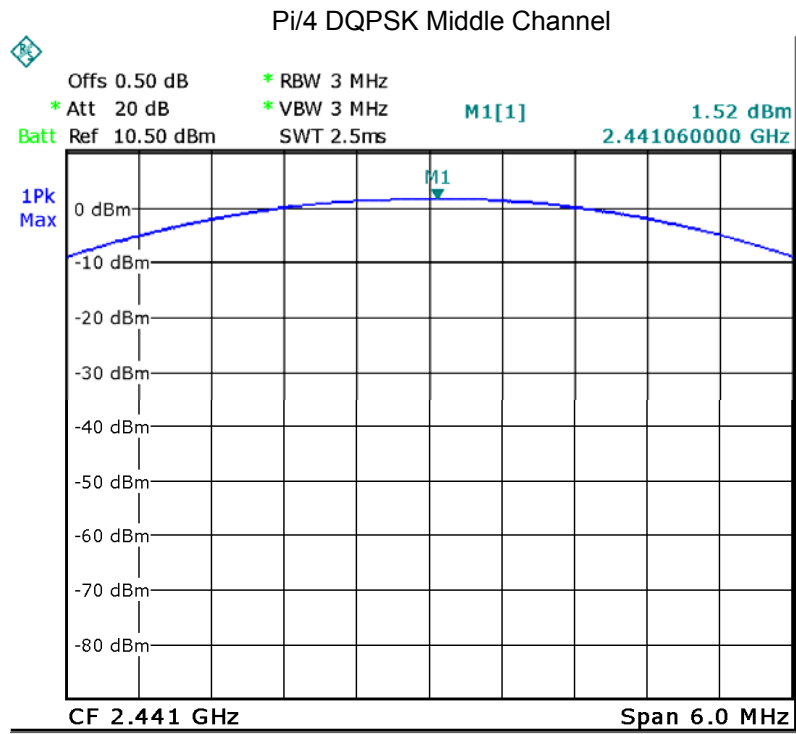


8DPSK Low Channel

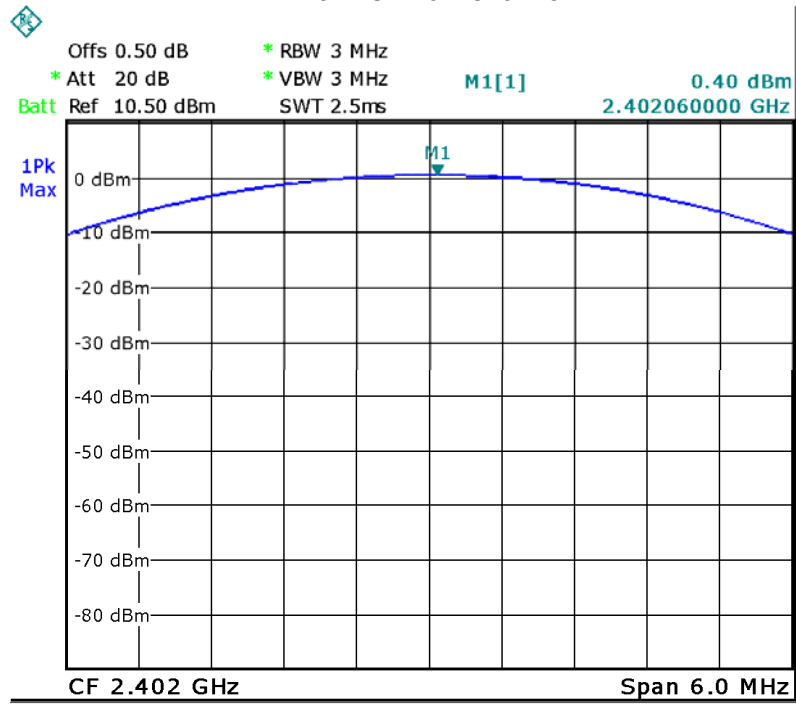

8DPSK Middle Channel

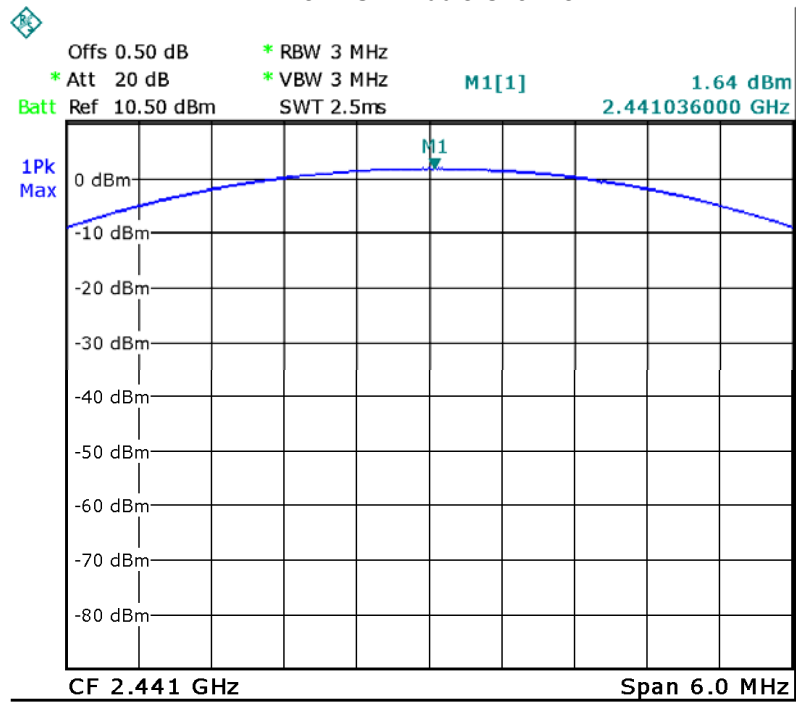

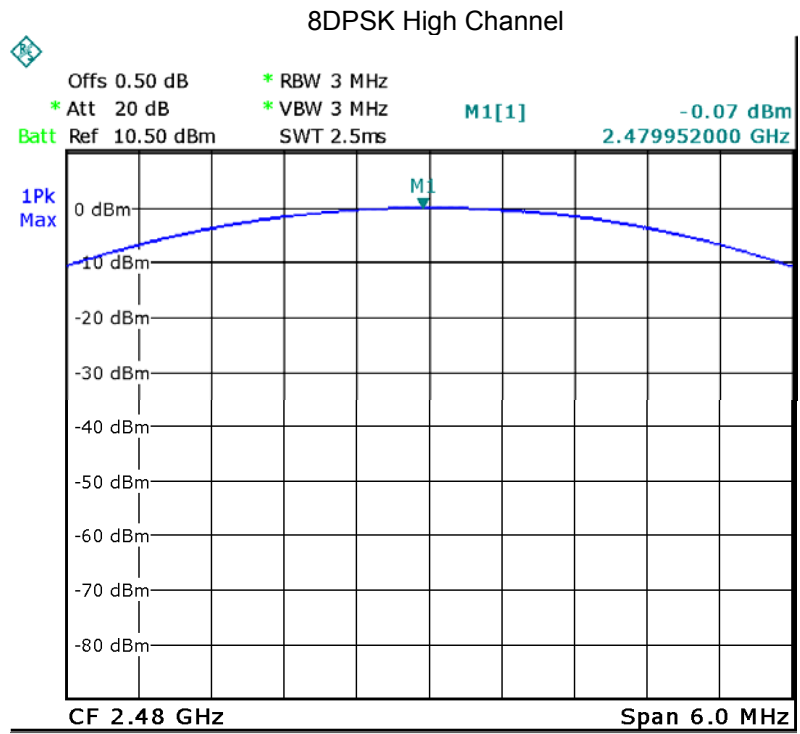

14 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.
Test Mode:	Test in hopping transmitting operating mode.

14.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

14.2 Test Result


Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.000	0.958	PASS
GFSK	Middle	1.000	0.683	PASS
GFSK	High	0.988	0.687	PASS
Pi/4 DQPSK	Low	1.000	0.870	PASS
Pi/4 DQPSK	Middle	1.000	0.874	PASS
Pi/4 DQPSK	High	1.000	0.874	PASS
8DPSK	Low	1.000	0.870	PASS
8DPSK	Middle	1.000	0.862	PASS
8DPSK	High	1.000	0.858	PASS

Test plots


GFSK Low Channel

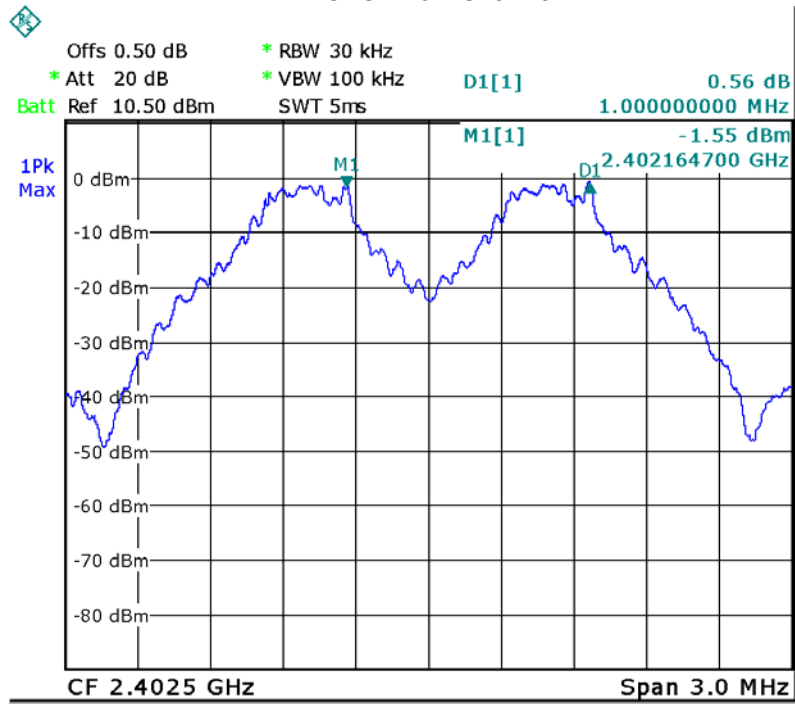


GFSK Middle Channel


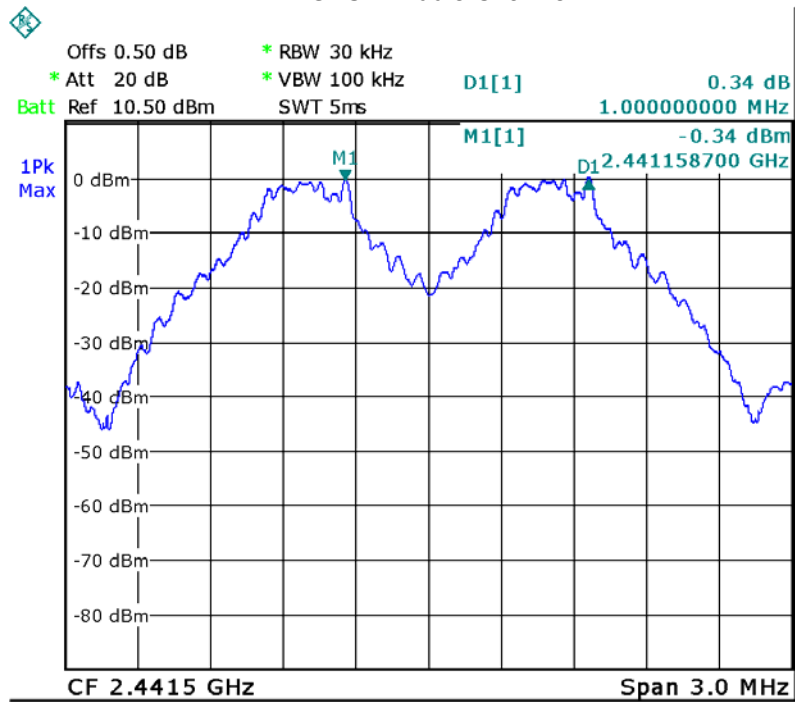


GFSK High Channel

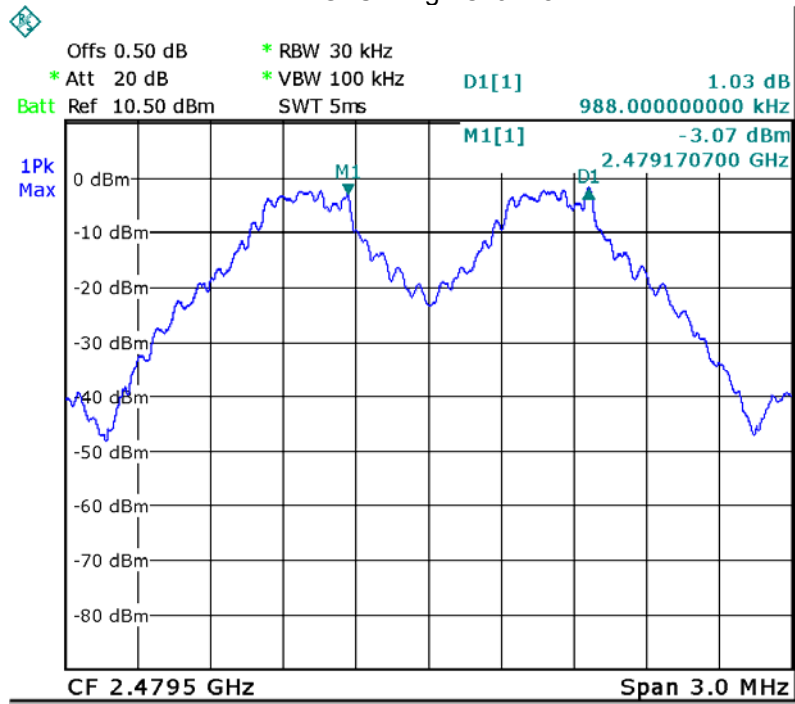


Pi/4 DQPSK Low Channel

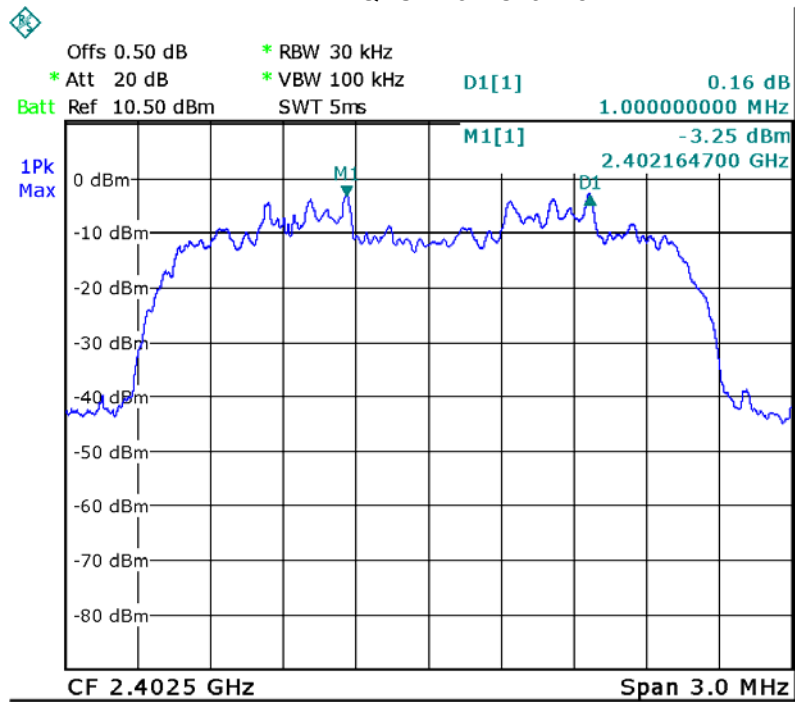


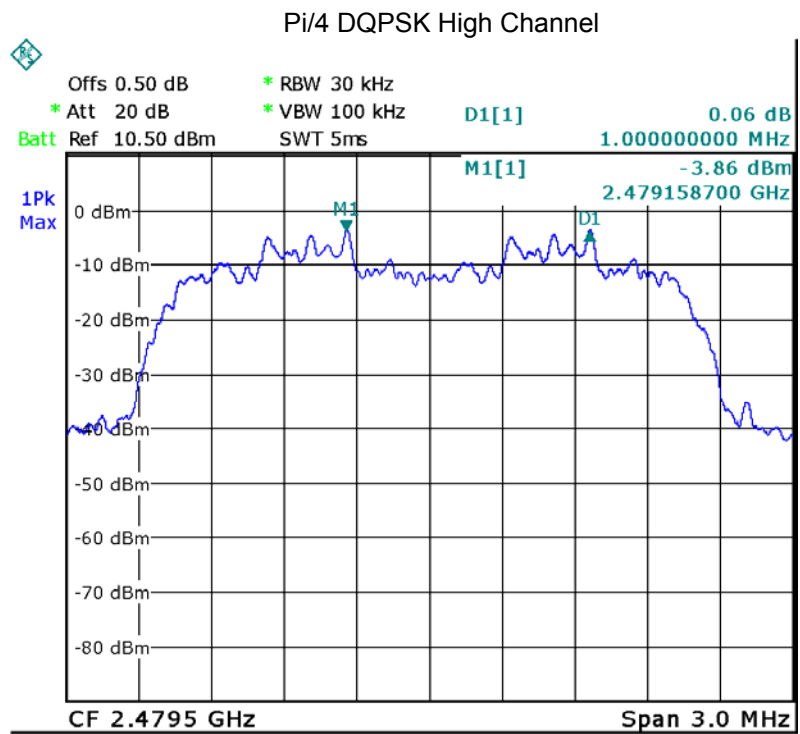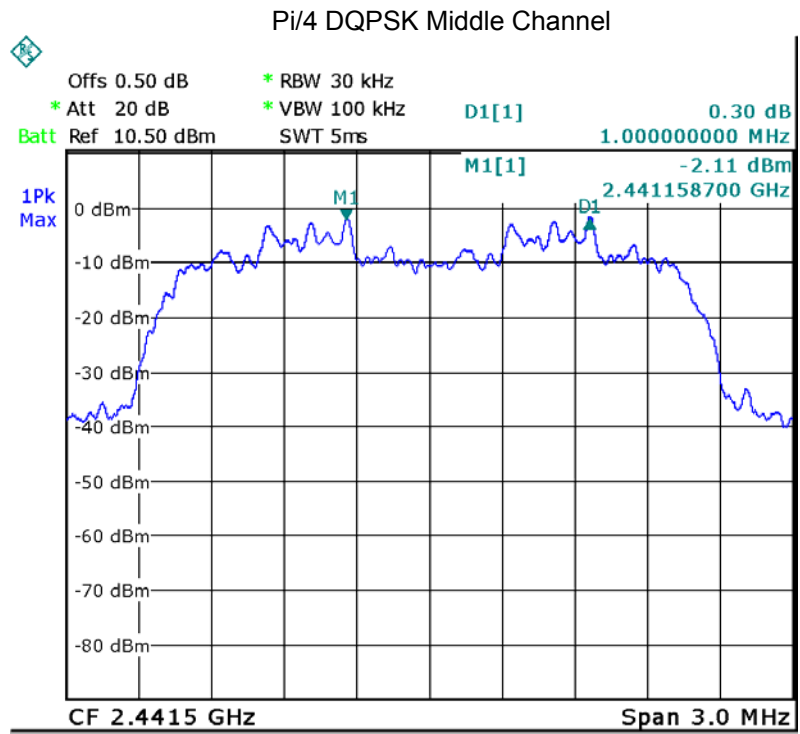


8DPSK Low Channel

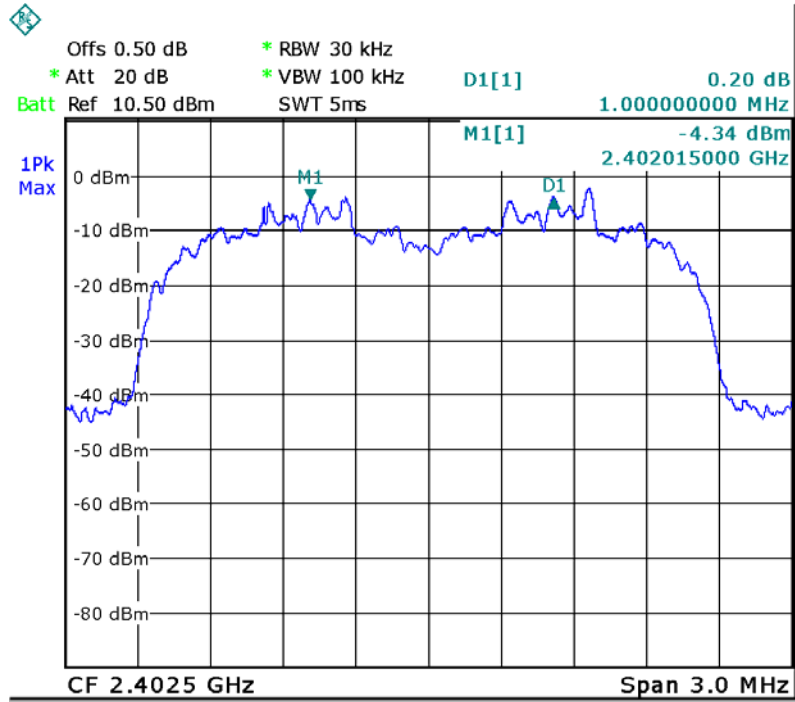

8DPSK Middle Channel

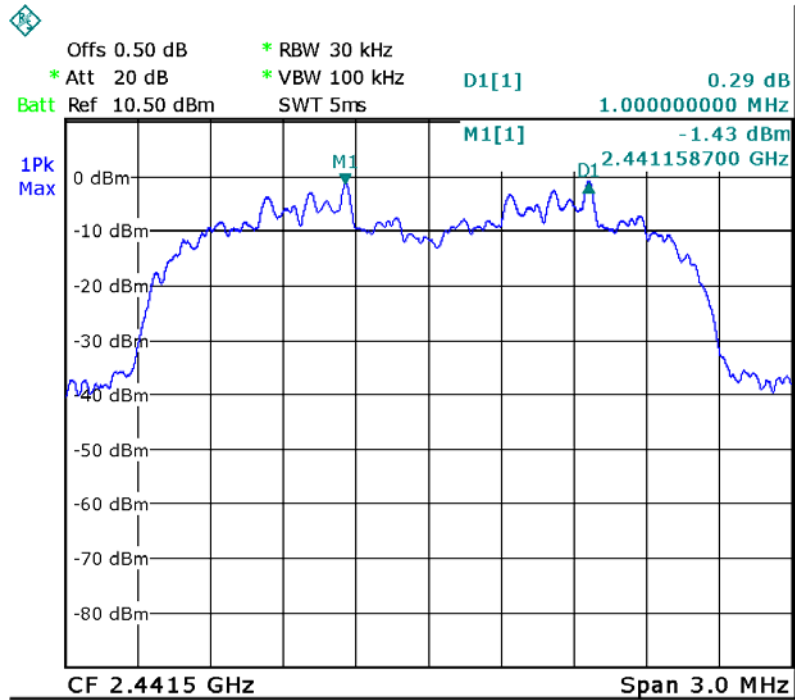

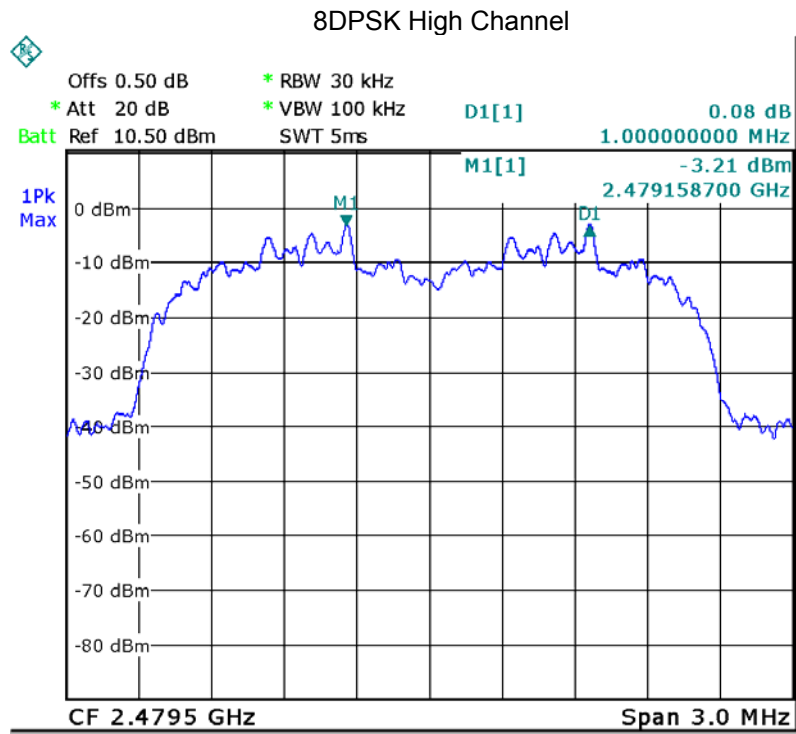


15 Number of Hopping Frequency

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.


15.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


15.2 Test Result

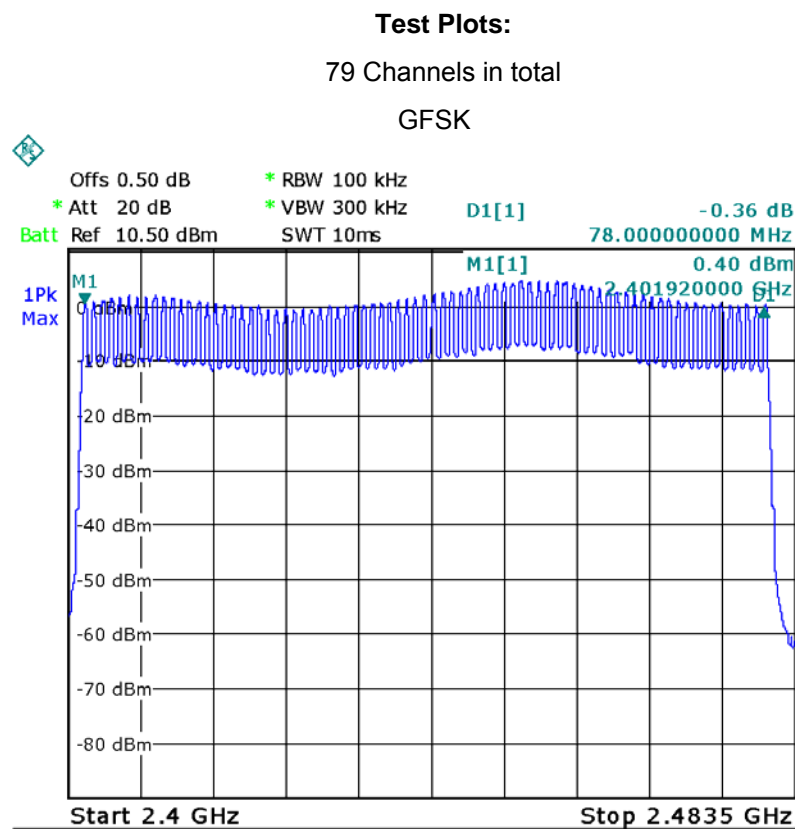

Pi/4 DQPSK

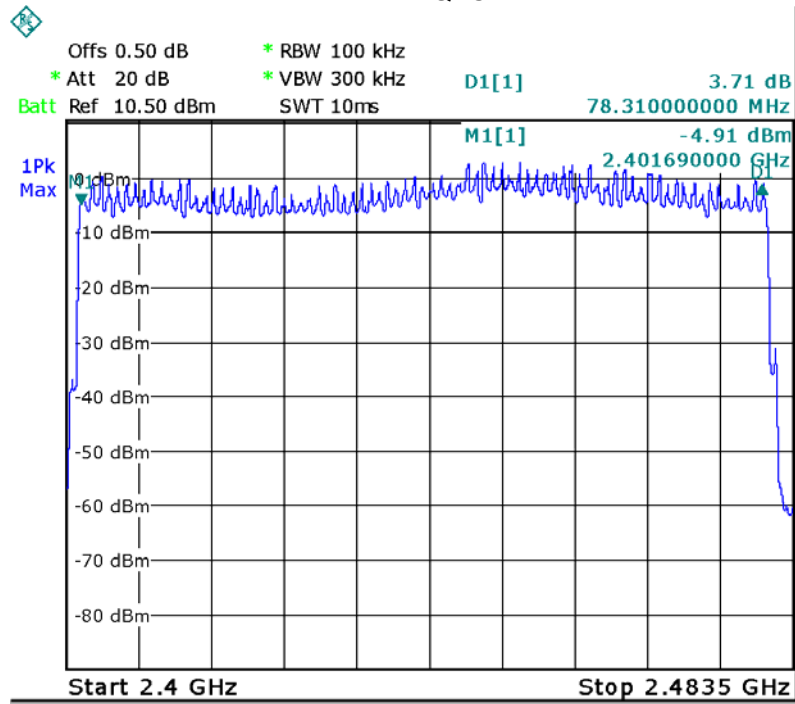

8DPSK

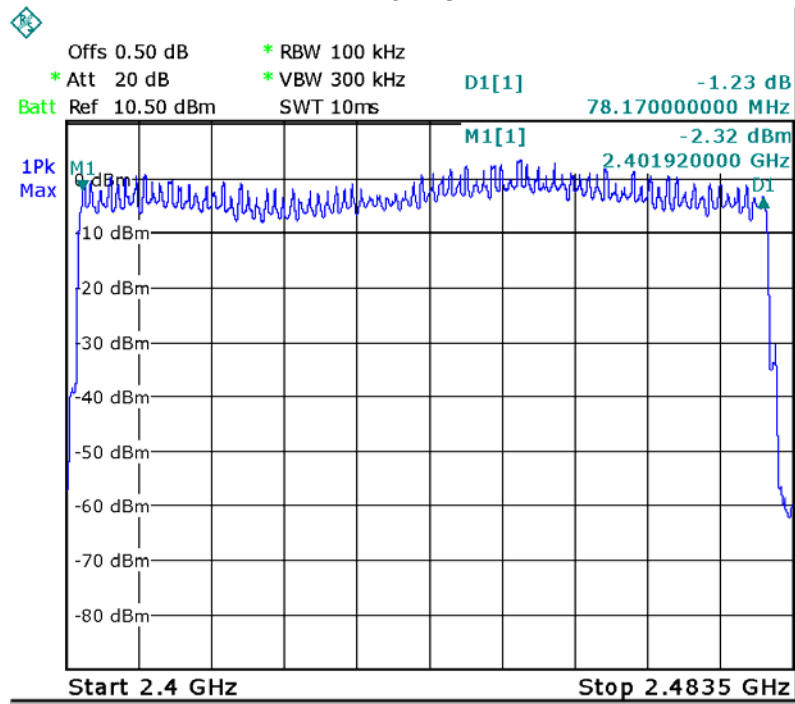

16 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

16.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

16.2 Test Result

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).


DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


Data Packet	Dwell Time(s)
DH5	$1600/79/6*0.4*79*(MkrDelta)/1000$
DH3	$1600/79/4*0.4*79*(MkrDelta)/1000$
DH1	$1600/79/2*0.4*79*(MkrDelta)/1000$
Remark: Mkr Delta is once pulse time.	

Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.850	0.304	0.4
		middle	2.850	0.304	0.4
		High	2.880	0.307	0.4
Pi/4DQPSK	DH5	Low	2.824	0.301	0.4
		middle	2.824	0.301	0.4
		High	2.824	0.301	0.4
8DPSK	DH5	Low	2.824	0.301	0.4
		middle	2.824	0.301	0.4
		High	2.824	0.301	0.4


Remark: Only the worst-case mode DH5 is recorded.

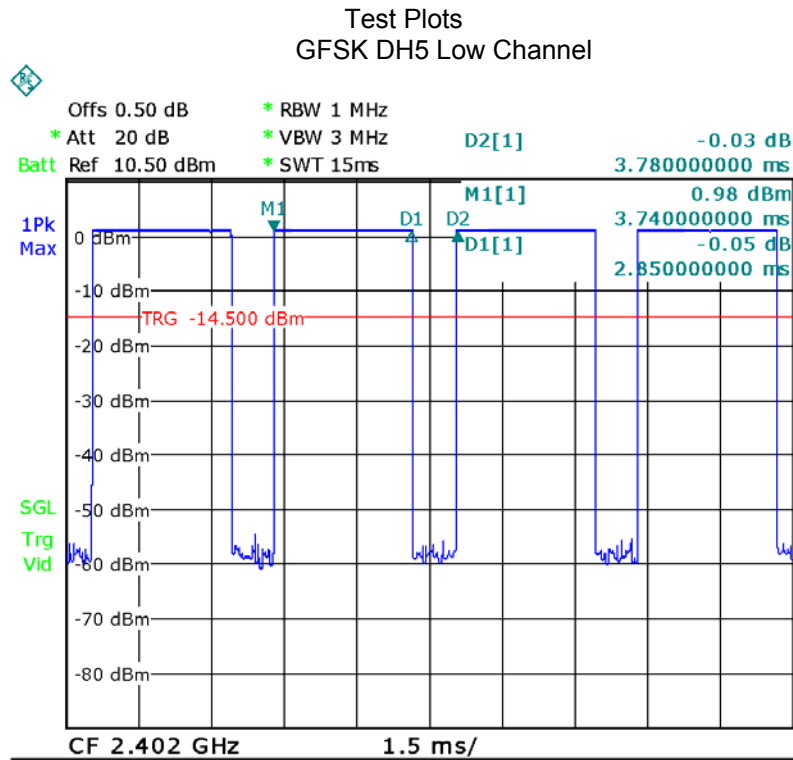


GFSK DH5 Middle Channel

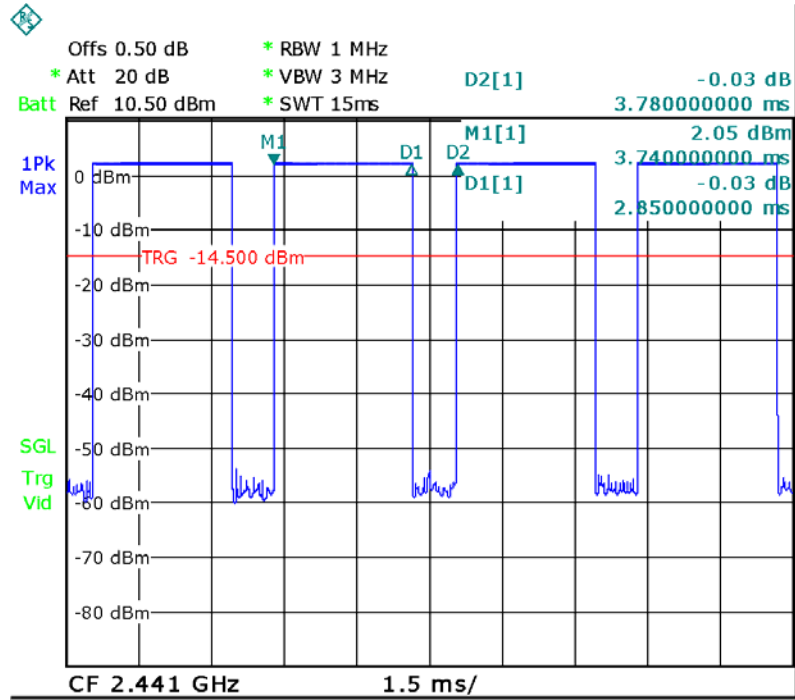


GFSK DH5 High Channel

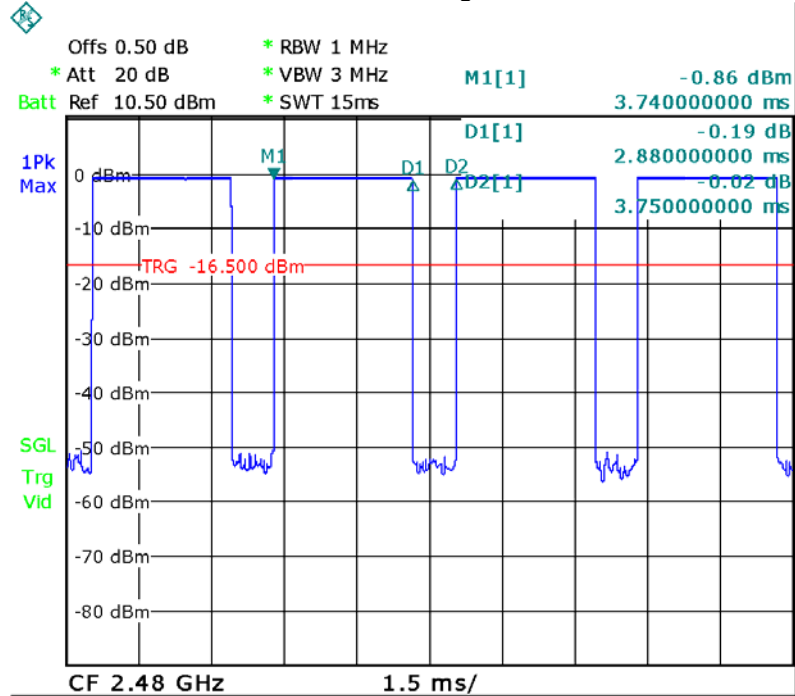


Pi/4DQPSK DH5 Low Channel

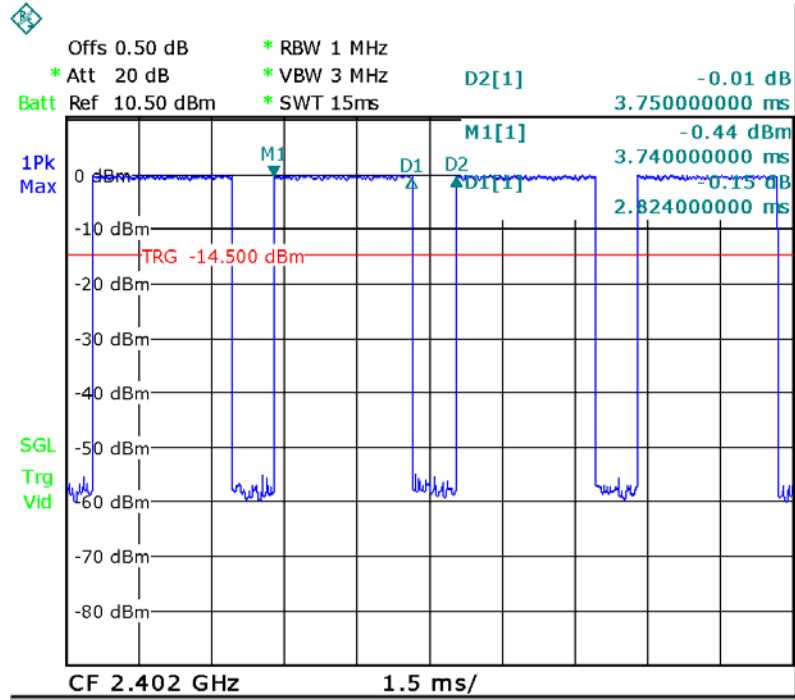


Pi/4DQPSK DH5 Middle Channel

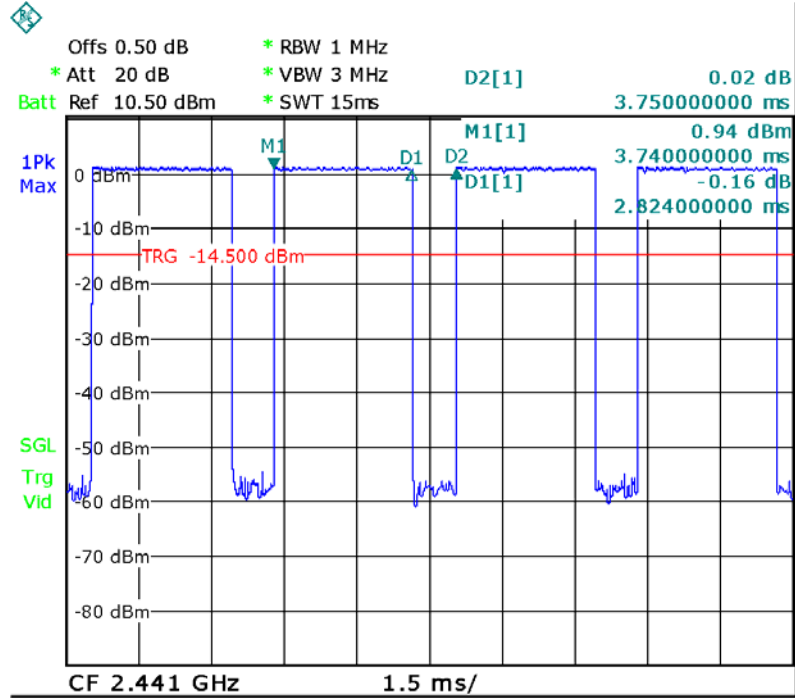


Pi/4DQPSK DH5 High Channel

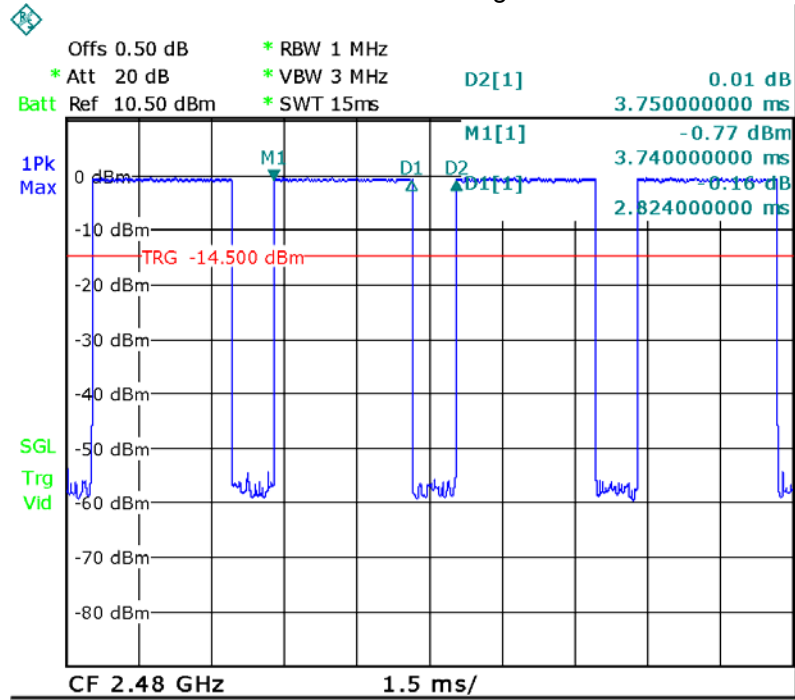


8DPSK DH5 Low Channel

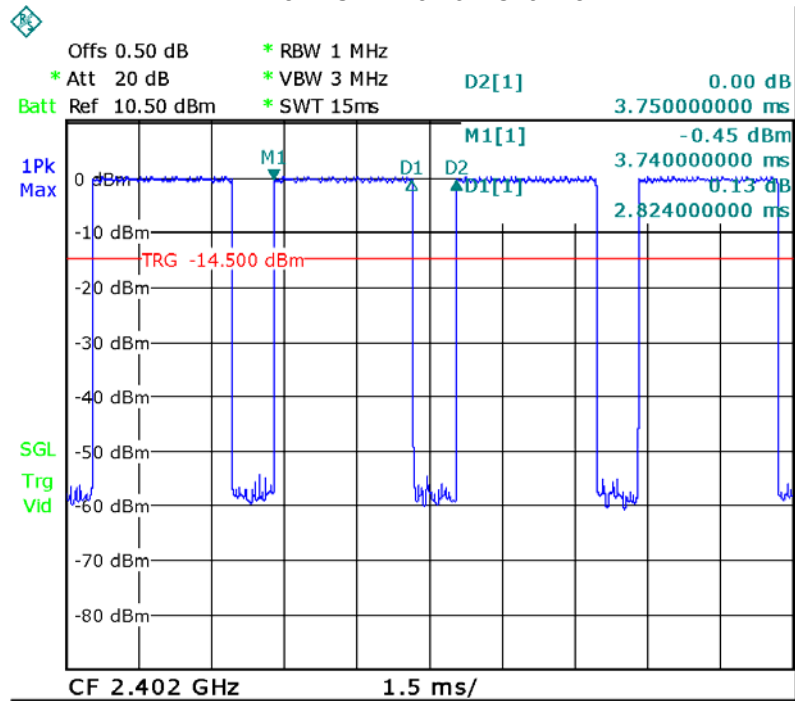

8DPSK DH5 Middle Channel

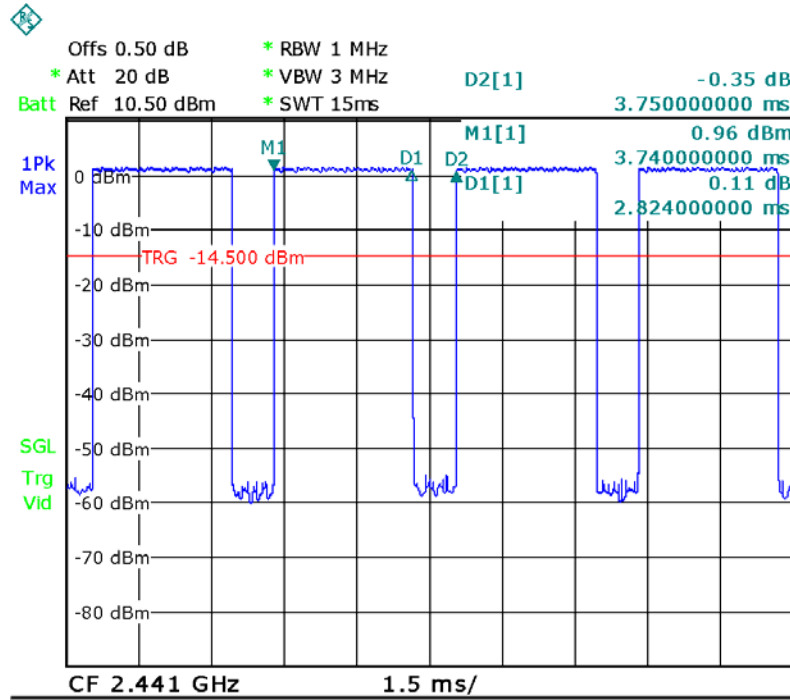

8DPSK DH5 High Channel

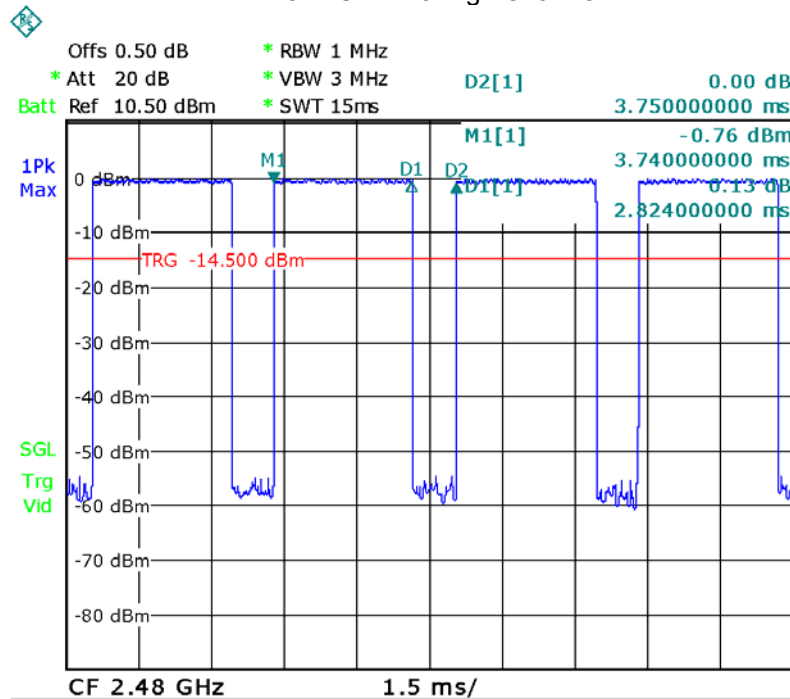

17 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna, fulfil the requirement of this section.

18 RF Exposure

Remark: refer to SAR test report: WTS17S0888245E.

19 Photographs of test setup and EUT.

Note: Please refer to appendix: WTS17S0888240E_Photo.

=====**End of Report**=====