

# FCC SAR EVALUATION REPORT

**In accordance with the requirements of  
FCC 47 CFR Part 2(2.1093), ANSI/IEEE C95.1-1992 and  
IEEE Std 1528-2013**

**Product Name :** 4G Wireless Data Terminal

**Brand Name :** GlocalMe

**Model Name :** GLMG21A01

**Family Model :** N/A

**Report No. :** S22051900501001

**FCC ID :** 2AC88-GLMG21A01

**Prepared for**

HONGKONG UCLOUDLINK NETWORK TECHNOLOGY LIMITED

Suite 603, 6/F, Laws Commercial Plaza, 788 Cheung Sha Wan Road, Kowloon,  
Hong Kong

**Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,  
Bao'an District, Shenzhen 518126 P.R.China.

Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: <http://www.ntek.org.cn>

## TEST RESULT CERTIFICATION

**Applicant's name**.....: HONGKONG UCLOUDLINK NETWORK TECHNOLOGY LIMITED

Address .....: Suite 603, 6/F, Laws Commercial Plaza, 788 Cheung Sha Wan Road, Kowloon, Hong Kong

**Manufacturer's Name**.....: HONGKONG UCLOUDLINK NETWORK TECHNOLOGY LIMITED

Address .....: Suite 603, 6/F, Laws Commercial Plaza, 788 Cheung Sha Wan Road, Kowloon, Hong Kong

### Product description

Product name.....: 4G Wireless Data Terminal

Brand Name .....: GlocalMe

Model and/or type reference : GLMG21A01

Family Model.....: N/A

FCC 47 CFR Part 2(2.1093)

ANSI/IEEE C95.1-1992

**Standards**.....: IEEE Std 1528-2013

Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

**Test Sample Number** ..... S220519005002

### Date of Test

Date (s) of performance of tests .....: May 19, 2022 ~ May 30, 2022

Date of Issue .....: Jun. 12, 2022

Test Result .....: **Pass**

Prepared By  
(Test Engineer)

: Jacob . chen  
(Jacob Chen)

Approved By  
(Lab Manager)

: Alex  
(Alex Li)

## ※ ※ Revision History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Jun. 12, 2022	Jacob Chen

## TABLE OF CONTENTS

1.	General Information .....	6
1.1.	RF exposure limits .....	6
1.2.	Statement of Compliance .....	7
1.3.	EUT Description .....	7
1.4.	Test specification(s) .....	9
1.5.	Ambient Condition .....	9
2.	SAR Measurement System .....	10
2.1.	SATIMO SAR Measurement Set-up Diagram .....	10
2.2.	Robot .....	11
2.3.	E-Field Probe .....	12
2.3.1.	E-Field Probe Calibration .....	12
2.4.	SAM phantoms .....	13
2.4.1.	Technical Data .....	14
2.5.	Device Holder .....	15
2.6.	Test Equipment List .....	16
3.	SAR Measurement Procedures .....	18
3.1.	Power Reference .....	18
3.2.	Area scan & Zoom scan .....	18
3.3.	Description of interpolation/extrapolation scheme .....	20
3.4.	Volumetric Scan .....	20
3.5.	Power Drift .....	20
4.	System Verification Procedure .....	21
4.1.	Tissue Verification .....	21
4.1.1.	Tissue Dielectric Parameter Check Results .....	22
4.2.	System Verification Procedure .....	23
4.2.1.	System Verification Results .....	24
5.	SAR Measurement variability and uncertainty .....	25
5.1.	SAR measurement variability .....	25
5.2.	SAR measurement uncertainty .....	25
6.	RF Exposure Positions .....	26
6.1.	Body Worn Accessory .....	26
6.2.	Wireless Router Devices .....	26
7.	RF Output Power .....	28
7.1.	GSM Conducted Power .....	28
7.2.	WCDMA Conducted Power .....	28
7.3.	LTE Conducted Power .....	29
7.4.	WLAN Output Power .....	54
8.	Antenna Location .....	56
9.	SAR Results .....	57

9.1. SAR measurement Result.....	57
9.1.1. SAR measurement Result of GSM850.....	57
9.1.2. SAR measurement Result of GSM1900.....	57
9.1.3. SAR measurement Result of WCDMA Band 2 .....	58
9.1.4. SAR measurement Result of WCDMA Band 4 .....	59
9.1.5. SAR measurement Result of WCDMA Band 5 .....	59
9.1.6. SAR measurement Result of LTE Band 2 .....	60
9.1.7. SAR measurement Result of LTE Band 4 .....	61
9.1.8. SAR measurement Result of LTE Band 5 .....	63
9.1.9. SAR measurement Result of LTE Band 7 .....	64
9.1.10. SAR measurement Result of LTE Band 12 .....	66
9.1.11. SAR measurement Result of LTE Band 13 .....	67
9.1.12. SAR measurement Result of LTE Band 17 .....	68
9.1.13. SAR measurement Result of LTE Band 25 .....	69
9.1.14. SAR measurement Result of LTE Band 26A .....	71
9.1.15. SAR measurement Result of LTE Band 26B .....	72
9.1.16. SAR measurement Result of LTE Band 41 .....	73
9.1.17. SAR measurement Result of LTE Band 66 .....	74
9.1.18. SAR measurement Result of WLAN 2.4G .....	76
9.1.19. SAR measurement Result of WLAN 5.2G .....	76
9.1.20. SAR measurement Result of WLAN 5.8G .....	77
9.2. Simultaneous Transmission Analysis.....	78
10. Appendix A. Photo documentation .....	78
11. Appendix B. System Check Plots.....	79
12. Appendix C. Plots of High SAR Measurement.....	96
13. Appendix D. Calibration Certificate .....	137

## 1. General Information

### 1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

#### Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

#### General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

#### NOTE

#### TRUNK LIMIT

1.6 W/kg

APPLIED TO THIS EUT

## 1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for GLMG21A01 are as follows.

RF Exposure Conditions		Equipment Class -Highest Reported SAR (W/kg)			
		PCE	DTS	NII	DSS
1-g Body-Worn (Separation distance of 10mm)		1.232	0.119	0.154	N/A
1-g Hotspot (Separation distance of 10mm)		1.232	0.119	0.154	N/A
Max Simultaneous Tx	Body-Worn	1.386	1.351	1.386	N/A
	Hotspot	1.386	1.351	1.386	N/A

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

## 1.3. EUT Description

Device Information			
Product Name	4G Wireless Data Terminal		
Brand Name	GlocalMe		
Model Name	GLMG21A01		
Family Model	N/A		
FCC ID	2AC88-GLMG21A01		
Device Phase	Identical Prototype		
Exposure Category	General population / Uncontrolled environment		
Antenna Type	PIFA Antenna		
Battery Information	DC3.85V,3900mAh,15.02Wh		
Hardware Version	G40_MB_VB		
Software Version	N/A		
Device Operating Configurations			
Supporting Mode(s)	GSM 850/1900 , WCDMA Band 2/4/5, LTE Band 2/4/5/7/12/13/17/25/26/41/66, WLAN 2.4G/5G		
Test Modulation	GSM(GMSK/8PSK), WCDMA(QPSK), LTE(QPSK/16QAM), WLAN(DSSS/OFDM)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)

	GSM 850	824-849	869-894
	GSM 1900	1850-1910	1930-1990
	WCDMA Band 2	1850-1910	1930-1990
	WCDMA Band 4	1710-1755	2110-2155
	WCDMA Band 5	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894
	LTE Band 7	2500-2570	2620-2690
	LTE Band 12	699-716	729-746
	LTE Band 13	777-787	746-756
	LTE Band 17	704-716	734-746
	LTE Band 25	1850-1915	1930-1995
	LTE Band 26	814-849	859-894
	LTE Band 41	2496-2690	
	LTE Band 66	1710-1780	2110-2200
	WLAN 2.4G	2412-2462	
	WLAN 5.2G	5180-5240	
	WLAN 5.8G	5745-5825	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
EDGE Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
Power Class	4, tested with power level 5(GSM 850)		
	1, tested with power level 0(GSM 1900)		
	3, tested with power control "all 1"(WCDMA Band 2)		
	3, tested with power control "all 1"(WCDMA Band 4)		
	3, tested with power control "all 1"(WCDMA Band 5)		
	3, tested with power control all Max.(LTE Band 2)		
	3, tested with power control all Max.(LTE Band 4)		
	3, tested with power control all Max.(LTE Band 5)		
	3, tested with power control all Max.(LTE Band 7)		
	3, tested with power control all Max.(LTE Band 12)		
	3, tested with power control all Max.(LTE Band 13)		
	3, tested with power control all Max.(LTE Band 17)		
	3, tested with power control all Max.(LTE Band 25)		
	3, tested with power control all Max.(LTE Band 26)		
	3, tested with power control all Max.(LTE Band 41)		

	3, tested with power control all Max.(LTE Band 66)
--	--

#### 1.4. Test specification(s)


FCC 47 CFR Part 2(2.1093)
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 248227 D01 802.11 Wi-Fi SAR
KDB 941225 D01 3G SAR Procedures
KDB 941225 D05 SAR for LTE Devices
KDB 941225 D06 Hotspot SAR
KDB 648474 D04 Handset SAR

#### 1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

## 2. SAR Measurement System

### 2.1. SATIMO SAR Measurement Set-up Diagram

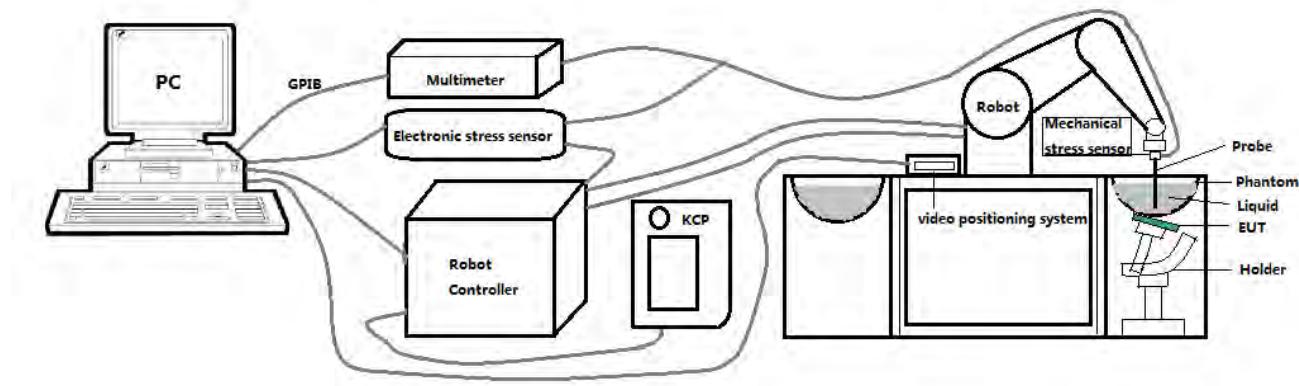

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than  $\pm 0.03$  mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface".

## 2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability  $\pm 0.03$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

### 2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe SN 08/16 EPGO287 with following specifications is used



- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 2.5 mm
- Distance between probe tip and sensor center: 1 mm
- Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than  $\pm 1$  mm).
- Probe linearity:  $\pm 0.08$  dB
- Axial isotropy:  $\pm 0.01$  dB
- Hemispherical Isotropy:  $\pm 0.01$  dB
- Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
- Lower detection limit: 8mW/kg

Angle between probe axis (evaluation axis) and surface normal line: less than 30°.

#### 2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy shall be evaluated and within  $\pm 0.25$ dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

## 2.4. SAM phantoms


Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by mobile phones.

### 2.4.1. Technical Data

Serial Number	Shell thickness	Filling volume	Dimensions	Positioner Material	Permittivity	Loss Tangent
SN 16/15 SAM119	2 mm ±0.2 mm	27 liters	Length:1000 mm Width:500 mm Height:200 mm	Gelcoat with fiberglass	3.4	0.02

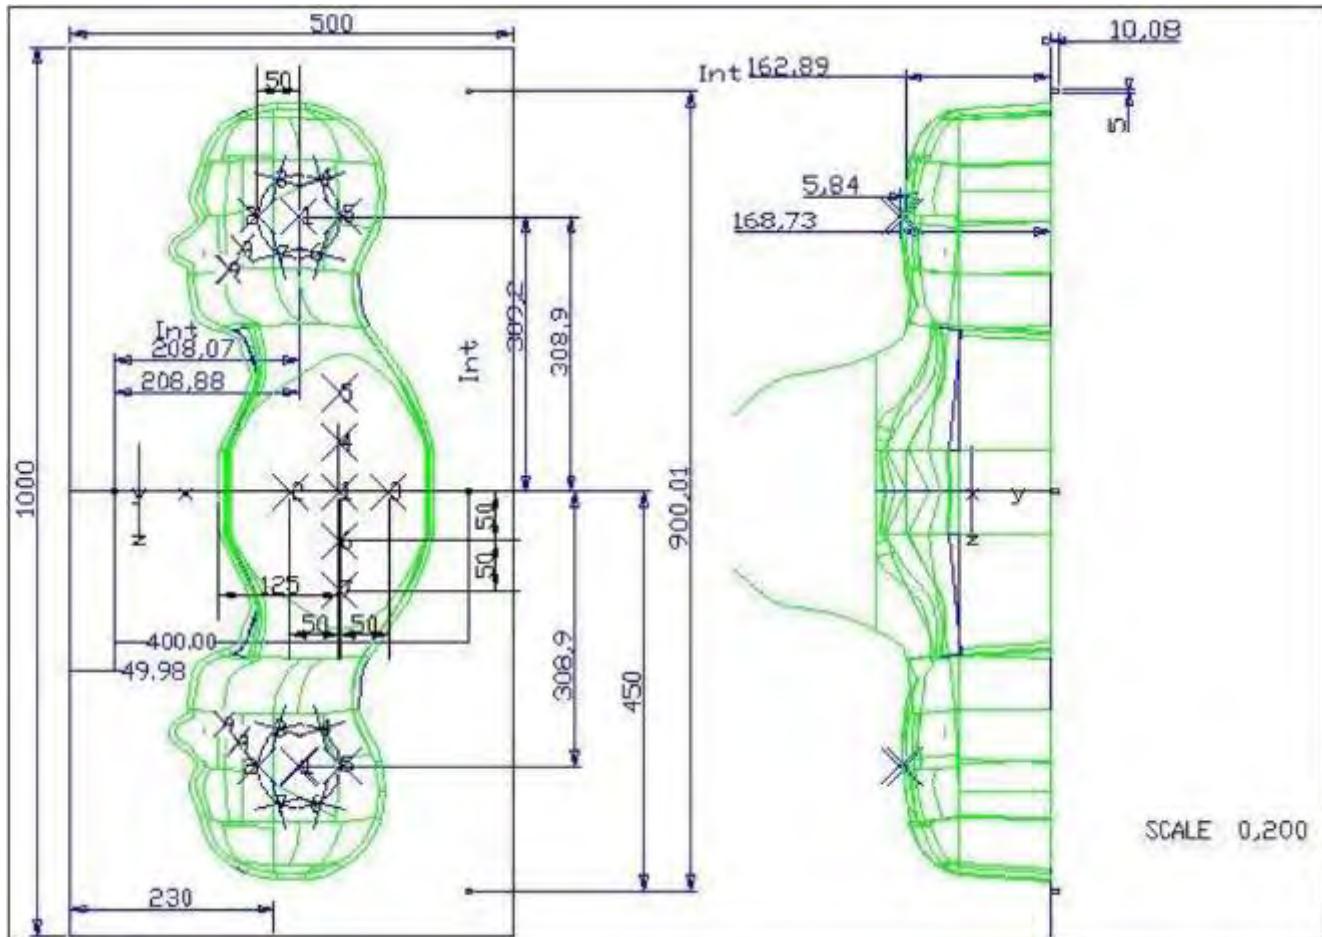


Serial Number	Left Head(mm)		Right Head(mm)		Flat Part(mm)	
SN 16/15 SAM119	2	2.02	2	2.08	1	2.09
	3	2.05	3	2.06	2	2.06
	4	2.07	4	2.07	3	2.08
	5	2.08	5	2.08	4	2.10
	6	2.05	6	2.07	5	2.10
	7	2.05	7	2.05	6	2.07
	8	2.07	8	2.06	7	2.07
	9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 µm.

## 2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

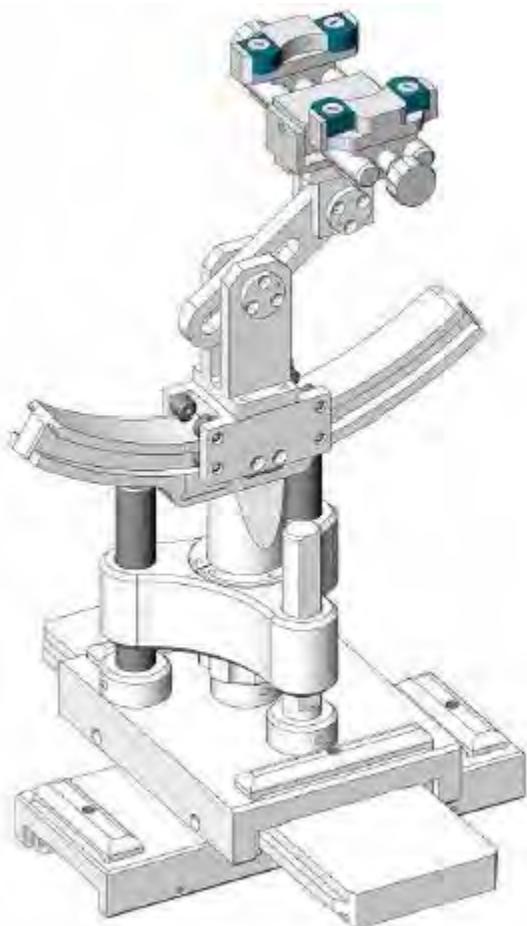

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

## 2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
<input checked="" type="checkbox"/>	MVG	E FIELD PROBE	SSE2	SN 08/16 EPGO287	Feb. 01, 2022	Jan. 31, 2023
<input checked="" type="checkbox"/>	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Mar. 01, 2021	Feb. 28, 2024
<input type="checkbox"/>	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Mar. 01, 2021	Feb. 28, 2024
<input type="checkbox"/>	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
<input checked="" type="checkbox"/>	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
<input checked="" type="checkbox"/>	KEITHLEY	Millivoltmeter	2000	4072790	NCR	NCR
<input checked="" type="checkbox"/>	R&S	Universal radio communication tester	CMU200	117858	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	R&S	Wideband radio communication tester	CMW500	103917	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	HP	Network Analyzer	8753D	3410J01136	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	Agilent	PSG Analog Signal Generator	E8257D	MY51110112	Jul. 01, 2021	Jun. 30, 2022

<input checked="" type="checkbox"/>	Agilent	Power meter	E4419B	MY45102538	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	Agilent	Power sensor	E9301A	MY41495644	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	Agilent	Power sensor	E9301A	US39212148	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Jul. 17, 2020	Jul. 16, 2023

### 3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For Wi-Fi/BT power measurement, use engineering software to configure EUT Wi-Fi/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure Wi-Fi/BT output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT Wi-Fi/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

#### 3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

#### 3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan

above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8 \* 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

		$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
		$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}$ , $\Delta y_{\text{Area}}$		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}$ , $\Delta y_{\text{Zoom}}$		$\leq 2$ GHz: $\leq 8$ mm $2 - 3$ GHz: $\leq 5$ mm*	$3 - 4$ GHz: $\leq 5$ mm* $4 - 6$ GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$3 - 4$ GHz: $\leq 4$ mm $4 - 5$ GHz: $\leq 3$ mm $5 - 6$ GHz: $\leq 2$ mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface $\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points	$\leq 4$ mm $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	$3 - 4$ GHz: $\geq 28$ mm $4 - 5$ GHz: $\geq 25$ mm $5 - 6$ GHz: $\geq 22$ mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.			
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

### 3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is used to determine these highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

### 3.4. Volumetric Scan

The volumetric scan consists to a full 3D scan over a specific area. This 3D scan is useful for multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scans to calculate the SAR value of the combined measurement as it is defined in the standard IEEE1528 and IEC62209.

### 3.5. Power Drift

All SAR testing is under the EUT installed full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than  $\pm 5\%$ , the SAR will be retested.


## 4. System Verification Procedure

### 4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

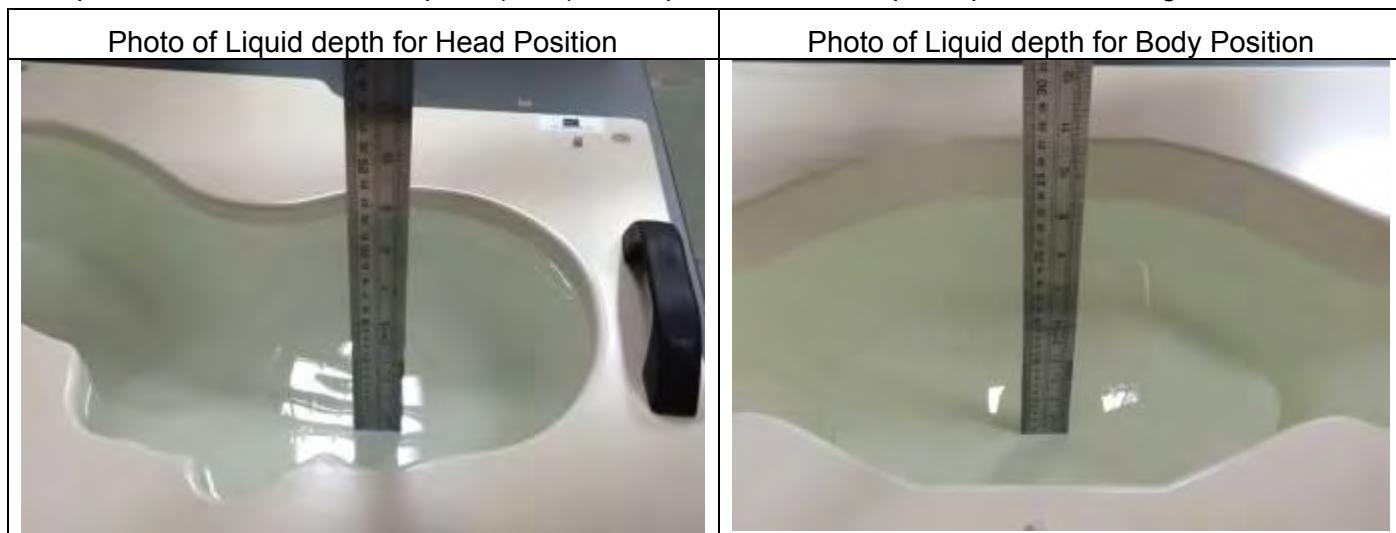

#### 4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameter are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		$\epsilon_r$ ( $\pm 5\%$ )	$\sigma$ (S/m) ( $\pm 5\%$ )	$\epsilon_r$	$\sigma$ (S/m)		
Head 750	750	41.96 (39.86~44.06)	0.89 (0.85~0.93)	40.71	0.90	21.6 °C	May 19, 2022
Head 850	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	41.90	0.91	21.5 °C	May 25, 2022
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.63	1.38	21.7 °C	May 20, 2022
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.18	1.47	21.3 °C	May 24, 2022
Head 2450	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	38.12	1.76	21.8 °C	May 26, 2022
Head 2600	2600	39.01 (37.06~40.96)	1.96 (1.86~2.06)	37.91	1.95	21.8 °C	May 30, 2022
Head 5200	5200	36.00 (34.20~37.80)	4.66 (4.43~4.89)	36.04	4.64	21.4 °C	May 28, 2022
Head 5800	5800	35.30 (33.54~37.07)	5.27 (5.01~5.53)	34.91	5.25	21.6 °C	May 27, 2022

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

#### 4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

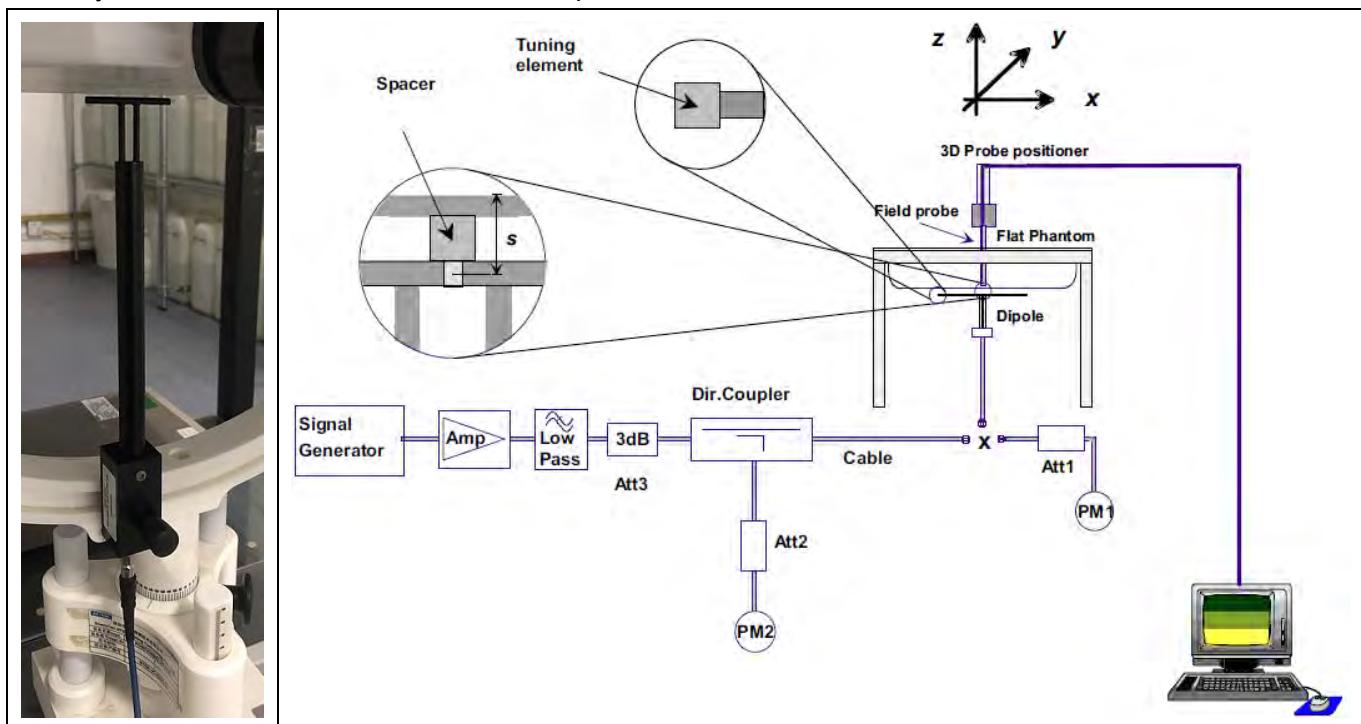

#### 4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of  $\pm 10\%$ . Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W) ( $\pm 10\%$ )		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)		
750MHz	8.53 (7.68~9.38)	5.56 (5.01~6.11)	8.25	5.52	21.6 °C	May 19, 2022
835MHz	9.84 (8.86~10.82)	6.22 (5.60~6.84)	9.12	6.63	21.5 °C	May 25, 2022
1800MHz	37.96 (34.17~41.75)	19.81 (17.83~21.79)	38.47	18.94	21.7 °C	May 20, 2022
1900MHz	40.37 (36.34~44.40)	20.48 (18.44~22.52)	36.96	21.49	21.3 °C	May 24, 2022
2450MHz	53.69 (48.33~59.05)	23.94 (21.55~26.33)	52.26	24.27	21.8 °C	May 26, 2022
2600MHz	55.83 (50.25~61.41)	24.19 (21.78~26.60)	54.12	23.00	21.8 °C	May 30, 2022
5200MHz	162.34 (146.11~178.57)	55.42 (49.88~60.96)	155.12	58.38	21.4 °C	May 28, 2022
5800MHz	178.89 (161.01~196.77)	59.32 (53.39~65.25)	193.40	61.36	21.6 °C	May 27, 2022

## 5. SAR Measurement variability and uncertainty

### 5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

### 5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

## 6. RF Exposure Positions

### 6.1. Body Worn Accessory

1. Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4.1). Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is < 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.
2. Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

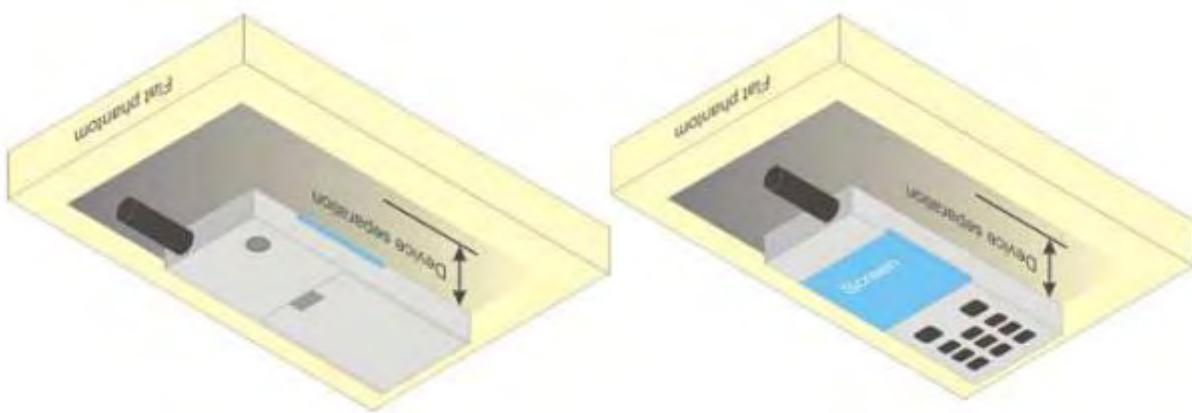


Figure 6.4.1 – Test positions for body-worn devices

### 6.2. Wireless Router Devices

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WLAN simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from

general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WLAN transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WLAN transmitter according to FCC KDB Publication 447498 D01 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

## 7. RF Output Power

### 7.1. GSM Conducted Power

Band GSM850	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	128	190	251	Tune-up	128	190	251
Frequency (MHz)	(dBm)	824.2	836.6	848.8	(dBm)	824.2	836.6	848.8
GPRS(GMSK, 1 TS)	34.00	33.75	33.57	33.18	24.97	24.72	24.54	24.15
GPRS(GMSK, 2 TS)	32.50	32.42	32.38	32.03	26.48	26.40	26.36	26.01
GPRS(GMSK, 3 TS)	30.50	30.24	30.24	30.17	26.24	25.98	25.98	25.91
GPRS(GMSK, 4 TS)	28.50	28.27	28.15	28.08	25.49	25.26	25.14	25.07
EDGE(GMSK, 1 TS)	28.50	28.06	27.82	27.76	19.47	19.03	18.79	18.73
EDGE(GMSK, 2 TS)	28.00	27.85	27.70	27.66	21.98	21.83	21.68	21.64
EDGE(GMSK, 3 TS)	26.50	26.02	25.92	25.83	22.24	21.76	21.66	21.57
EDGE(GMSK, 4 TS)	24.00	23.88	23.79	23.73	20.99	20.87	20.78	20.72
Band GSM1900	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	512	661	810	Tune-up	512	661	810
Frequency (MHz)	(dBm)	1850.2	1880.0	1909.8	(dBm)	1850.2	1880.0	1909.8
GPRS(GMSK, 1 TS)	31.00	30.02	30.19	30.60	21.97	20.99	21.16	21.57
GPRS(GMSK, 2 TS)	29.50	28.77	28.88	29.21	23.48	22.75	22.86	23.19
GPRS(GMSK, 3 TS)	28.00	27.32	27.40	27.74	23.74	23.06	23.14	23.48
GPRS(GMSK, 4 TS)	26.50	25.66	25.75	26.12	23.49	22.65	22.74	23.11
EDGE(GMSK, 1 TS)	26.50	26.03	25.73	26.01	17.47	17.00	16.70	16.98
EDGE(GMSK, 2 TS)	24.00	23.80	23.63	23.96	17.98	17.78	17.61	17.94
EDGE(GMSK, 3 TS)	22.00	21.48	21.37	21.65	17.74	17.22	17.11	17.39
EDGE(GMSK, 4 TS)	19.50	19.10	19.06	19.37	16.49	16.09	16.05	16.36

Note: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

$$\text{Frame-averaged power} = \text{Maximum burst averaged power (1 TS)} - 9.03 \text{ dB}$$

$$\text{Frame-averaged power} = \text{Maximum burst averaged power (2 TS)} - 6.02 \text{ dB}$$

$$\text{Frame-averaged power} = \text{Maximum burst averaged power (3 TS)} - 4.26 \text{ dB}$$

$$\text{Frame-averaged power} = \text{Maximum burst averaged power (4 TS)} - 3.01 \text{ dB}$$

### 7.2. WCDMA Conducted Power

Band	WCDMA Band 2			
Tx Channel	Tune-up	9262	9400	9538
Frequency (MHz)		1852.4	1880	1907.6
RMC 12.2Kbps	23.00	22.52	22.59	22.46
HSDPA Subtest-1	23.00	22.63	22.63	22.55

HSDPA Subtest-2	23.00	22.54	22.64	22.54
HSDPA Subtest-3	23.00	22.54	22.59	22.50
HSDPA Subtest-4	23.00	22.54	22.69	22.50
HSUPA Subtest-1	21.50	21.11	21.39	21.19
HSUPA Subtest-2	20.50	20.17	20.11	19.69
HSUPA Subtest-3	21.00	20.29	20.58	20.64
HSUPA Subtest-4	21.50	21.06	21.12	20.76
HSUPA Subtest-5	22.00	21.56	21.62	21.56
Band	WCDMA Band 4			
Tx Channel	Tune-up	1312	1413	1513
Frequency (MHz)		1712.4	1732.6	1752.6
RMC 12.2Kbps	22.00	21.43	21.37	21.33
HSDPA Subtest-1	22.00	21.91	21.90	21.76
HSDPA Subtest-2	21.00	20.47	19.85	20.80
HSDPA Subtest-3	18.50	17.82	18.09	17.99
HSDPA Subtest-4	19.50	17.80	19.01	19.08
HSUPA Subtest-1	22.00	21.38	21.62	21.57
HSUPA Subtest-2	21.00	20.64	20.22	20.12
HSUPA Subtest-3	21.00	20.93	20.46	20.12
HSUPA Subtest-4	21.50	20.92	21.12	20.65
HSUPA Subtest-5	22.00	21.98	21.88	21.98
Band	WCDMA Band 5			
Tx Channel	Tune-up	4132	4182	4233
Frequency (MHz)		826.4	836.4	846.6
RMC 12.2Kbps	24.00	23.22	22.89	23.22
HSDPA Subtest-1	24.00	23.35	23.51	23.75
HSDPA Subtest-2	24.00	23.38	23.49	23.74
HSDPA Subtest-3	23.50	22.92	23.02	23.19
HSDPA Subtest-4	23.50	22.93	23.01	23.18
HSUPA Subtest-1	23.50	22.72	23.30	23.32
HSUPA Subtest-2	22.50	22.11	22.29	22.01
HSUPA Subtest-3	22.50	21.79	21.36	22.15
HSUPA Subtest-4	22.50	21.83	22.11	22.41
HSUPA Subtest-5	23.50	22.76	22.91	23.26

### 7.3. LTE Conducted Power

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB	RB		18607/1850.7	18900/1880	19193/1909.3

			Size	Offset				
LTE Band 2	1.4MHz	QPSK	1	0	24.00	22.95	23.19	23.17
			1	2	24.00	23.17	23.24	23.13
			1	5	24.00	23.38	23.35	23.04
			3	0	24.00	23.14	23.39	23.06
			3	1	24.00	23.00	23.38	23.04
			3	2	24.00	23.11	23.32	22.93
			6	0	22.50	22.13	22.35	22.01
		16QAM	1	0	23.00	21.92	22.17	22.25
			1	2	23.00	22.22	22.80	22.21
			1	5	23.00	22.22	22.81	22.14
			3	0	23.50	23.01	23.38	23.04
			3	1	23.50	22.99	23.37	23.03
			3	2	23.50	23.10	23.32	22.92
			6	0	21.50	21.00	21.36	21.36
			RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
Band	Band Width	Modulation	RB Size	RB Offset		18615/1851.5	18900/1880	19185/1908.5
LTE Band 2	3MHz	QPSK	1	0	24.00	22.97	23.23	23.25
			1	7	24.00	23.09	23.25	23.07
			1	14	24.00	23.20	23.24	22.99
			8	0	23.00	22.15	22.33	22.80
			8	4	23.00	22.02	22.38	22.27
			8	7	23.00	22.06	22.26	22.66
			15	0	22.50	22.17	22.41	22.14
		16QAM	1	0	23.00	21.88	22.14	22.00
			1	7	23.00	22.42	22.27	21.96
			1	14	23.00	22.12	22.05	22.66
			8	0	23.00	22.14	22.33	22.58
			8	4	23.00	21.85	22.28	22.26
			8	7	23.00	21.96	22.26	22.69
			15	0	21.50	21.18	21.33	20.92
			RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
Band	Band Width	Modulation	RB Size	RB Offset		18625/1852.5	18900/1880	19175/1907.5
LTE Band 2	5MHz	QPSK	1	0	24.00	22.93	23.23	22.96
			1	12	24.00	23.29	23.27	23.00
			1	24	24.00	23.15	23.21	23.05

			12	0	22.50	22.18	22.28	22.15
			12	6	22.50	22.17	22.37	22.16
			12	11	22.50	22.17	22.39	22.05
			25	0	22.50	22.17	22.36	22.23
			1	0	22.50	22.18	22.39	22.02
			1	12	22.50	22.28	22.31	22.23
			1	24	22.50	22.13	22.42	21.92
			12	0	22.50	22.17	22.38	22.16
			12	6	22.50	22.16	22.37	22.16
			12	11	22.50	22.17	22.39	22.03
			25	0	21.50	21.15	21.41	21.08
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18650/1855	18900/1880	19150/1905
LTE Band 2	10MHz	QPSK	1	0	24.00	22.08	23.75	22.84
			1	24	24.00	22.54	23.87	22.87
			1	49	24.00	22.61	23.48	22.19
			25	0	23.00	21.51	22.92	21.90
			25	12	23.00	21.52	22.92	21.84
			25	24	23.00	21.57	22.89	21.55
			50	0	23.00	21.47	22.81	21.95
		16QAM	1	0	23.50	21.33	23.31	21.94
			1	24	23.50	21.77	23.04	21.87
			1	49	23.50	21.75	23.23	21.50
			25	0	23.00	21.52	22.92	21.93
			25	12	23.00	21.51	22.84	21.84
			25	24	23.00	21.57	22.82	21.64
			50	0	22.00	20.49	21.95	20.95
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18675/1857.5	18900/1880	19125/1902.5
LTE Band 2	15MHz	QPSK	1	0	24.00	22.10	23.65	23.16
			1	37	24.00	22.77	23.75	22.94
			1	74	24.00	22.88	23.41	22.31
			36	0	24.00	21.37	23.22	22.28
			36	18	24.00	21.87	23.64	21.96
			36	37	24.00	21.89	23.15	21.50
			75	0	23.00	21.68	22.71	21.93

			1	0	23.50	21.19	23.35	22.22
			1	37	23.50	21.64	23.38	21.94
			1	74	23.50	22.09	23.14	21.42
			36	0	24.00	21.40	23.22	22.23
			36	18	24.00	21.88	23.65	21.95
			36	37	24.00	21.89	23.12	21.54
			75	0	22.00	20.75	21.78	20.82
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18700/1860	18900/1880	19100/1900
LTE Band 2	20MHz	QPSK	1	0	24.00	22.28	23.49	23.31
			1	49	24.00	23.06	23.92	23.09
			1	99	24.00	23.24	23.52	22.41
			50	0	23.00	21.67	22.68	22.21
			50	24	23.00	21.62	22.70	22.20
			50	49	23.00	22.14	22.84	22.00
			100	0	23.00	21.91	22.76	21.86
		16QAM	1	0	23.00	21.41	22.24	22.66
			1	49	23.00	22.26	22.68	22.47
			1	99	23.00	22.55	22.41	21.74
			50	0	23.00	21.70	22.69	22.20
			50	24	23.00	21.62	22.70	22.19
			50	49	23.00	22.13	22.85	21.98
			100	0	22.00	20.75	21.84	20.88

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		19957/1710.7	20175/1732.5	20393/1754.3
LTE Band 4	1.4MHz	QPSK	1	0	23.50	22.83	22.83	22.95
			1	2	23.50	22.76	23.03	22.95
			1	5	23.50	22.73	22.90	23.00
			3	0	23.50	22.77	22.85	22.85
			3	1	23.50	22.76	23.03	22.84
			3	2	23.50	22.85	22.96	22.80
			6	0	22.00	21.89	21.96	21.92
		16QAM	1	0	23.00	21.64	21.76	21.98
			1	2	23.00	21.71	22.58	22.11
			1	5	23.00	21.66	21.76	21.95

			3	0	23.50	22.76	23.03	22.84
			3	1	23.50	22.76	23.02	22.84
			3	2	23.50	22.84	23.06	22.79
			6	0	21.00	20.70	21.00	20.96
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		19965/1711.5	20175/1732.5	20385/1753.5
			1	0	23.50	22.96	22.94	22.61
LTE Band 4	3MHz	QPSK	1	7	23.50	23.10	22.89	22.91
			1	14	23.50	22.97	22.95	22.82
			8	0	23.00	21.86	22.49	21.91
			8	4	23.00	21.90	22.52	22.04
			8	7	23.00	21.59	22.28	22.07
			15	0	22.50	21.80	21.85	22.06
			1	0	22.50	21.91	21.74	21.94
		16QAM	1	7	22.50	21.91	22.34	22.12
			1	14	22.50	21.77	22.45	21.94
			8	0	23.00	21.86	22.48	21.93
			8	4	23.00	21.90	22.54	22.03
			8	7	23.00	21.59	22.53	22.06
			15	0	21.50	20.70	20.70	21.09
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		19975/1712.5	20175/1732.5	20375/1752.5
			1	0	23.50	22.88	22.86	22.94
LTE Band 4	5MHz	QPSK	1	12	23.50	22.88	23.04	23.17
			1	24	23.50	22.49	22.95	23.11
			12	0	22.50	21.81	22.02	22.01
			12	6	22.50	21.91	22.01	22.02
			12	11	22.50	21.80	22.01	22.09
			25	0	22.50	21.85	22.01	21.93
			1	0	22.50	21.99	21.98	22.04
		16QAM	1	12	22.50	22.13	22.06	21.90
			1	24	22.50	21.76	21.97	21.95
			12	0	22.50	21.81	22.01	22.02
			12	6	22.50	21.91	22.01	21.89
			12	11	22.50	21.80	22.01	22.07
			25	0	21.00	20.82	20.88	20.95

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20000/1715	20175/1732.5	20350/1750
LTE Band 4	10MHz	QPSK	1	0	23.50	22.67	22.92	22.72
			1	24	23.50	22.81	23.12	23.01
			1	49	23.50	22.50	22.90	22.75
			25	0	22.00	21.74	21.86	22.00
			25	12	22.00	21.75	21.84	21.93
			25	24	22.00	21.68	21.88	21.82
			50	0	22.00	21.70	21.92	21.81
		16QAM	1	0	23.00	21.57	21.80	21.52
			1	24	23.00	21.63	22.50	22.22
			1	49	23.00	21.32	21.80	21.86
			25	0	22.00	21.75	21.84	21.92
			25	12	22.00	21.75	21.84	21.93
			25	24	22.00	21.66	22.00	21.80
			50	0	21.00	20.72	20.86	20.93
LTE Band 4	15MHz	QPSK	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20025/1717.5	20175/1732.5	20325/1747.5
			1	0	23.50	22.52	22.76	22.86
			1	37	23.50	22.50	22.98	23.07
			1	74	23.50	22.36	22.82	22.78
			36	0	22.50	21.84	21.64	21.99
			36	18	22.50	21.61	22.22	22.30
		16QAM	36	37	22.50	20.95	21.77	21.87
			75	0	22.50	21.58	21.87	22.01
			1	0	22.50	21.63	21.60	21.92
			1	37	22.50	21.40	21.76	22.01
			1	74	22.50	21.51	21.80	21.88
			36	0	22.50	21.86	21.60	22.03
			36	18	22.50	21.60	22.23	22.29
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20050/1720	20175/1732.5	20300/1745

LTE Band 4	20MHz	QPSK	1	0	23.50	22.57	22.49	23.04
			1	49	23.50	22.82	22.98	23.34
			1	99	23.50	22.86	22.86	22.82
			50	0	22.50	21.65	21.86	22.01
			50	24	22.50	21.67	21.82	22.04
			50	49	22.50	21.81	21.99	21.96
			100	0	22.00	21.80	21.96	21.92
		16QAM	1	0	23.00	22.52	21.69	22.10
			1	49	23.00	22.15	21.67	22.27
			1	99	23.00	22.41	21.73	21.97
			50	0	22.50	21.67	21.82	22.04
			50	24	22.50	21.67	21.82	22.04
			50	49	22.50	21.87	22.02	21.95
			100	0	21.50	20.73	20.98	21.01

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20407/824.7	20525/836.5	20643/848.3
LTE Band 5	1.4MHz	QPSK	1	0	25.00	24.40	24.34	24.61
			1	2	25.00	24.33	24.47	24.45
			1	5	25.00	24.44	24.59	24.47
			3	0	25.00	24.42	24.52	24.63
			3	1	25.00	24.40	24.50	24.60
			3	2	25.00	24.36	24.59	24.44
			6	0	24.00	23.45	23.50	23.62
		16QAM	1	0	24.50	23.26	24.20	23.54
			1	2	24.50	23.42	23.59	23.94
			1	5	24.50	23.43	24.05	23.46
			3	0	25.00	24.41	24.50	24.61
			3	1	25.00	24.39	24.50	24.60
			3	2	25.00	24.44	24.49	24.74
			6	0	23.00	22.11	22.47	22.71
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20415/825.5	20525/836.5	20635/847.5
LTE Band 5	3MHz	QPSK	1	0	25.00	24.36	24.55	24.57
			1	7	25.00	24.59	24.63	24.49
			1	14	25.00	24.62	24.59	24.30

			8	0	24.50	23.41	24.18	23.55
			8	4	24.50	23.56	23.76	23.60
			8	7	24.50	23.31	23.72	23.35
			15	0	24.00	23.46	23.60	23.76
			1	0	24.50	23.43	23.84	23.83
			1	7	24.50	23.53	24.03	23.59
			1	14	24.50	23.46	24.17	23.49
			8	0	24.00	23.33	23.83	23.63
			8	4	24.00	23.20	23.77	23.59
			8	7	24.00	23.39	23.72	23.43
			15	0	23.00	22.43	22.57	22.84
			RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20425/826.5	20525/836.5	20625/846.5
LTE Band 5	5MHz	QPSK	1	0	25.00	24.34	24.53	24.43
			1	12	25.00	24.68	24.68	24.69
			1	24	25.00	24.54	24.47	24.47
			12	0	24.00	23.49	23.60	23.69
			12	6	24.00	23.47	23.59	23.60
			12	11	24.00	23.52	23.55	23.65
			25	0	24.00	23.51	23.57	23.75
		16QAM	1	0	24.00	23.39	23.59	23.68
			1	12	24.00	23.37	23.64	23.81
			1	24	24.00	23.53	23.58	23.74
			12	0	24.00	23.48	23.59	23.60
			12	6	24.00	23.47	23.58	23.60
			12	11	24.00	23.60	23.56	23.72
			25	0	23.00	22.54	22.40	22.85
			RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20450/829	20525/836.5	20600/844
LTE Band 5	10MHz	QPSK	1	0	25.00	24.24	24.40	24.39
			1	24	25.00	24.68	24.87	24.71
			1	49	25.00	24.42	24.51	24.34
			25	0	24.00	23.49	23.60	23.72
			25	12	24.00	23.46	23.59	23.74
			25	24	24.00	23.57	23.63	23.67
			50	0	24.00	23.54	23.57	23.71

			1	0	24.50	23.15	23.68	23.45
			1	24	24.50	23.66	23.94	23.82
			1	49	24.50	23.33	24.37	23.51
			25	0	24.00	23.47	23.60	23.74
			25	12	24.00	23.46	23.59	23.74
			25	24	24.00	23.57	23.64	23.66
			50	0	23.00	22.55	22.62	22.76

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20775/2502.5	21100/2535	21425/2567.5
LTE Band 7	5MHz	QPSK	1	0	23.50	22.84	22.54	22.66
			1	12	23.50	23.01	22.66	22.86
			1	24	23.50	22.82	22.44	22.73
			12	0	22.50	22.07	21.72	21.92
			12	6	22.50	22.07	21.73	21.92
			12	11	22.50	21.91	21.68	21.71
			25	0	22.00	21.99	21.68	21.92
		16QAM	1	0	22.50	21.92	21.67	21.67
			1	12	22.50	22.01	21.76	21.71
			1	24	22.50	21.99	21.57	21.70
			12	0	22.50	22.07	21.73	21.92
			12	6	22.50	21.98	21.73	21.92
			12	11	22.50	21.90	21.67	21.83
			25	0	21.50	21.03	20.87	20.86
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20800/2505	21100/2535	21400/2565
LTE Band 7	10MHz	QPSK	1	0	23.50	23.03	22.81	22.93
			1	24	23.50	23.04	22.85	23.00
			1	49	23.50	22.70	22.65	22.69
			25	0	22.50	22.00	21.84	22.02
			25	12	22.50	22.04	21.76	22.01
			25	24	22.50	21.92	21.65	21.89
			50	0	22.50	22.06	21.73	22.06
		16QAM	1	0	22.50	22.13	21.67	21.84
			1	24	22.50	22.07	22.19	22.01
			1	49	22.50	22.23	22.37	21.77

			25	0	22.50	22.04	21.74	22.00
			25	12	22.50	22.05	21.76	22.01
			25	24	22.50	21.90	21.69	21.88
			50	0	21.50	21.03	20.77	21.07
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20825/2507.5	21100/2535	21375/2562.5
			1	0	23.50	22.77	22.72	22.61
LTE Band 7	15MHz	QPSK	1	37	23.50	22.73	22.75	22.98
			1	74	23.50	22.55	22.57	22.58
			36	0	22.50	21.91	22.07	22.13
			36	18	22.50	21.83	22.33	22.18
			36	37	22.50	21.76	21.52	21.77
			75	0	22.50	21.89	21.78	22.04
			1	0	22.50	22.07	21.69	21.88
		16QAM	1	37	22.50	21.97	21.59	21.93
			1	74	22.50	21.74	21.61	21.84
			36	0	22.50	21.95	22.06	22.10
			36	18	22.50	21.79	22.32	21.88
			36	37	22.50	21.76	21.63	21.80
			75	0	21.50	20.96	20.82	21.02
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20850/2510	21100/2535	21350/2560
LTE Band 7	20MHz	QPSK	1	0	23.50	22.84	22.48	22.60
			1	49	23.50	22.95	23.20	23.05
			1	99	23.50	22.69	22.77	22.63
			50	0	22.00	21.87	21.83	21.89
			50	24	22.00	21.97	21.79	21.86
			50	49	22.00	21.81	21.75	21.98
			100	0	22.00	21.82	21.78	21.92
		16QAM	1	0	22.50	22.26	21.45	22.09
			1	49	22.50	22.34	21.85	22.05
			1	99	22.50	21.86	21.57	22.04
			50	0	22.00	21.97	21.87	21.87
			50	24	22.00	21.96	21.79	21.85
			50	49	22.00	21.79	21.72	22.00
			100	0	21.00	20.87	20.85	20.93

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23017/699.7	23095/707.5	23173/715.3
LTE Band 12	1.4MHz	QPSK	1	0	25.00	24.16	24.12	24.05
			1	2	25.00	24.12	24.41	24.26
			1	5	25.00	24.03	24.39	24.20
			3	0	25.00	24.24	24.16	24.17
			3	1	25.00	24.29	24.19	24.30
			3	2	25.00	24.30	24.29	24.25
			6	0	23.50	23.26	23.33	23.29
		16QAM	1	0	24.00	22.99	23.57	23.14
			1	2	24.00	23.12	23.91	23.32
			1	5	24.00	23.07	23.24	23.21
			3	0	24.50	24.22	24.13	24.12
			3	1	24.50	24.29	24.27	24.28
			3	2	24.50	24.29	24.31	24.26
			6	0	22.50	22.19	22.44	22.48
LTE Band 12	3MHz	QPSK	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23025/700.5	23095/707.5	23165/714.5
			1	0	25.00	24.50	24.23	24.14
			1	7	25.00	24.15	24.31	24.21
			1	14	25.00	24.18	24.38	24.17
			8	0	24.00	23.41	23.66	22.95
			8	4	24.00	23.26	23.86	23.38
		16QAM	8	7	24.00	23.15	23.61	23.18
			15	0	23.50	23.23	23.43	23.31
			1	0	24.00	23.26	23.48	23.46
			1	7	24.00	23.23	23.88	23.17
			1	14	24.00	23.44	23.70	23.18
			8	0	24.00	23.34	23.89	23.25
			8	4	24.00	23.26	23.88	23.19
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB	RB		23035/701.5	23095/707.5	23155/713.5

			Size	Offset				
LTE Band 12	5MHz	QPSK	1	0	25.00	24.19	24.16	24.18
			1	12	25.00	24.20	24.34	24.45
			1	24	25.00	24.20	24.09	24.15
			12	0	23.50	23.18	23.19	23.20
			12	6	23.50	23.17	23.25	23.25
			12	11	23.50	23.18	23.43	23.33
			25	0	23.50	23.10	23.23	23.28
		16QAM	1	0	23.50	23.28	23.39	22.93
			1	12	23.50	23.25	23.32	23.00
			1	24	23.50	23.34	22.91	23.21
			12	0	23.50	23.17	23.25	23.26
			12	6	23.50	23.17	23.25	23.25
			12	11	23.50	23.17	23.42	23.34
			25	0	22.50	22.31	22.44	22.25
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23060/704	23095/707.5	23130/711
LTE Band 12	10MHz	QPSK	1	0	25.00	23.44	23.56	23.58
			1	24	25.00	23.79	24.07	23.89
			1	49	25.00	23.65	23.61	23.48
			25	0	23.00	22.47	22.73	22.91
			25	12	23.00	22.65	22.69	22.77
			25	24	23.00	22.79	22.70	22.71
			50	0	23.00	22.60	22.74	22.88
		16QAM	1	0	23.50	22.63	23.04	22.65
			1	24	23.50	23.05	23.10	23.02
			1	49	23.50	22.38	23.35	22.63
			25	0	22.00	21.69	21.95	21.80
			25	12	22.00	21.80	21.85	21.78
			25	24	22.00	21.95	21.86	21.77
			50	0	22.00	21.69	21.88	21.83

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23205/779.5	23230/782	23255/784.5
LTE Band	5MHz	QPSK	1	0	24.50	23.69	23.83	23.91
			1	12	24.50	23.95	23.78	23.93

13		16QAM	1	24	24.50	23.87	23.94	24.00
			12	0	23.00	22.82	22.94	22.87
			12	6	23.00	22.75	22.89	22.84
			12	11	23.00	22.78	22.73	22.92
			25	0	23.50	22.83	22.98	23.03
			1	0	23.50	22.77	22.99	22.79
			1	12	23.50	22.83	22.93	22.85
			1	24	23.50	23.10	22.95	22.99
			12	0	23.00	22.75	22.96	22.83
			12	6	23.00	22.74	22.89	22.85
			12	11	23.00	22.81	22.81	22.99
			25	0	22.50	21.93	21.89	22.13
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		/	23230/782	/
LTE Band 13	10MHz	QPSK	1	0	24.50	/	23.60	/
			1	24	24.50	/	23.78	/
			1	49	24.50	/	24.10	/
			25	0	23.00	/	22.87	/
			25	12	23.00	/	22.84	/
			25	24	23.00	/	22.96	/
			50	0	23.00	/	22.83	/
		16QAM	1	0	23.50	/	22.34	/
			1	24	23.50	/	22.86	/
			1	49	23.50	/	23.23	/
			25	0	23.00	/	22.83	/
			25	12	23.00	/	22.84	/
			25	24	23.00	/	22.93	/
			50	0	22.00	/	21.92	/

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23755/706.5	23790/710	23825/713.5
LTE Band 17	5MHz	QPSK	1	0	24.50	23.82	23.73	23.91
			1	12	24.50	23.88	23.75	23.94
			1	24	24.50	23.66	23.72	23.63
			12	0	23.00	22.55	22.80	22.72
			12	6	23.00	22.57	22.65	22.72

		16QAM	12	11	23.00	22.65	22.70	22.63
			25	0	23.00	22.67	22.65	22.62
			1	0	23.00	22.82	22.89	22.63
			1	12	23.00	22.97	22.88	22.55
			1	24	23.00	22.57	22.82	22.51
			12	0	22.00	21.75	21.58	21.66
			12	6	22.00	21.76	21.60	21.66
			12	11	22.00	21.94	21.81	21.49
			25	0	22.00	21.65	21.56	21.83
			RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
LTE Band 17	10MHz	QPSK	RB Size	RB Offset		23780/709	23790/710	23800/711
			1	0	24.50	23.68	23.58	23.69
			1	24	24.50	24.02	24.26	23.94
			1	49	24.50	23.66	23.54	23.35
			25	0	23.00	22.78	22.87	22.86
			25	12	23.00	22.68	22.67	22.72
			25	24	23.00	22.80	22.77	22.71
		16QAM	50	0	23.00	22.67	22.72	22.69
			1	0	23.50	22.95	23.20	22.70
			1	24	23.50	22.95	23.40	22.83
LTE Band 25	1.4MHz	QPSK	1	49	23.50	22.69	23.37	22.61
			25	0	22.00	21.81	21.88	21.87
			25	12	22.00	21.89	21.83	21.80
			25	24	22.00	21.95	21.91	21.69
			50	0	22.00	21.78	21.75	21.70
			RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26047/1850.7	26365/1882.5	26683/1914.3
		16QAM	1	0	23.50	22.43	22.58	22.27
			1	2	23.50	22.85	22.52	22.21
			1	5	23.50	22.36	22.45	22.25
			3	0	23.00	22.39	22.57	22.41
			3	1	23.00	22.56	22.57	22.24
			3	2	23.00	22.76	22.66	22.54
			6	0	22.00	21.50	21.71	21.42

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26047/1850.7	26365/1882.5	26683/1914.3
LTE Band 25	1.4MHz	QPSK	1	0	23.50	22.43	22.58	22.27
			1	2	23.50	22.85	22.52	22.21
			1	5	23.50	22.36	22.45	22.25
			3	0	23.00	22.39	22.57	22.41
			3	1	23.00	22.56	22.57	22.24
			3	2	23.00	22.76	22.66	22.54
			6	0	22.00	21.50	21.71	21.42
		16QAM	1	0	22.00	21.03	21.30	21.05

			1	2	22.00	21.42	21.53	21.22
			1	5	22.00	21.22	21.49	21.44
			3	0	22.00	21.33	21.15	21.22
			3	1	22.00	21.56	21.57	21.21
			3	2	22.00	21.30	21.54	21.81
			6	0	20.50	20.27	20.48	20.25
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26055/1851.5	26365/1882.5	26675/1913.5
LTE Band 25	3MHz	QPSK	1	0	23..5	22.36	22.63	22.46
			1	7	23..5	22.48	22.82	22.46
			1	14	23..5	22.49	22.85	22.68
			8	0	22.00	21.46	21.86	21.60
			8	4	22.00	21.46	21.61	21.63
			8	7	22.00	21.52	21.62	21.74
			15	0	22.00	21.50	21.58	21.76
		16QAM	1	0	22.50	21.00	21.95	21.63
			1	7	22.50	21.42	22.26	21.56
			1	14	22.50	21.54	22.29	21.76
			8	0	21.00	20.34	20.80	20.80
			8	4	21.00	20.33	20.60	20.69
			8	7	21.00	20.63	20.52	20.48
			15	0	21.00	20.29	20.52	20.58
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26065/1852.5	26365/1882.5	26665/1912.5
LTE Band 25	5MHz	QPSK	1	0	23.50	22.62	22.57	22.81
			1	12	23.50	22.66	22.85	22.58
			1	24	23.50	22.46	22.46	22.70
			12	0	22.00	21.49	21.69	21.70
			12	6	22.00	21.49	21.70	21.55
			12	11	22.00	21.39	21.54	21.69
			25	0	22.00	21.44	21.63	21.58
		16QAM	1	0	22.00	21.38	21.59	21.48
			1	12	22.00	21.35	21.90	21.58
			1	24	22.00	21.45	21.67	21.75
			12	0	21.00	20.45	20.73	20.58
			12	6	21.00	20.44	20.63	20.59

			12	11	21.00	20.56	20.58	20.52
			25	0	21.00	20.42	20.68	20.60
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26090/1855	26365/1882.5	26640/1910
			1	0	23.50	22.40	22.82	22.46
LTE Band 25	10MHz	QPSK	1	24	23.50	22.64	23.08	22.63
			1	49	23.50	22.31	22.65	22.49
			25	0	22.00	21.60	21.82	21.60
			25	12	22.00	21.50	21.66	21.54
			25	24	22.00	21.37	21.64	21.64
			50	0	22.00	21.42	21.67	21.64
			1	0	22.50	21.36	22.19	21.42
		16QAM	1	24	22.50	21.51	21.97	21.70
			1	49	22.50	21.25	22.39	21.74
			25	0	21.00	20.65	20.76	20.66
			25	12	21.00	20.38	20.68	20.68
			25	24	21.00	20.49	20.77	20.54
			50	0	21.00	20.54	20.70	20.78
			1	0	23.50	22.16	22.47	22.48
LTE Band 25	15MHz	QPSK	1	37	23.50	22.09	22.76	22.61
			1	74	23.50	22.25	22.45	22.36
			36	0	22.50	21.53	21.84	21.65
			36	18	22.50	21.31	22.28	21.51
			36	37	22.50	20.68	22.24	21.53
			75	0	22.00	21.49	21.71	21.58
			1	0	22.50	21.49	21.51	21.67
		16QAM	1	37	22.50	21.25	21.54	21.54
			1	74	22.50	21.42	22.25	21.55
			36	0	22.50	21.55	21.87	21.67
			36	18	22.50	21.30	22.30	21.52
			36	37	22.50	20.66	22.19	21.52
			75	0	21.00	20.52	20.78	20.46
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		

			RB Size	RB Offset		26140/1860	26365/1882.5	26590/1905
LTE Band 25	20MHz	QPSK	1	0	23.50	22.60	22.46	22.50
			1	49	23.50	22.77	22.76	23.02
			1	99	23.50	22.51	22.68	22.42
			50	0	22.00	21.57	21.71	21.57
			50	24	22.00	21.60	21.65	21.51
			50	49	22.00	21.46	21.64	21.72
			100	0	22.00	21.49	21.69	21.60
		16QAM	1	0	22.50	21.61	21.35	21.80
			1	49	22.50	22.01	21.66	21.89
			1	99	22.50	21.90	21.60	21.52
			50	0	21.00	20.64	20.70	20.64
			50	24	21.00	20.63	20.84	20.66
			50	49	21.00	20.50	20.69	20.76
			100	0	21.00	20.51	20.74	20.61

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26697/814.7	26740/819	26783/823.3
LTE Band 26a	1.4MHz	QPSK	1	0	24.00	23.42	23.52	23.42
			1	2	24.00	23.63	23.42	23.59
			1	5	24.00	23.45	23.37	23.58
			3	0	24.00	23.49	23.65	23.58
			3	1	24.00	23.56	23.55	23.49
			3	2	24.00	23.49	23.45	23.58
			6	0	23.00	22.44	22.55	22.72
		16QAM	1	0	23.00	22.36	22.29	22.27
			1	2	23.00	22.64	22.34	22.52
			1	5	23.00	22.68	22.37	22.28
			3	0	23.00	22.71	22.39	22.48
			3	1	23.00	22.71	22.66	22.38
			3	2	23.00	22.65	22.45	22.78
			6	0	21.50	21.35	21.49	21.49
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26705/818.5	26740/819	26775/822.5
LTE	3MHz	QPSK	1	0	24.00	23.35	23.59	23.54

Band 26a			1	7	24.00	23.49	23.63	23.50
			1	14	24.00	23.52	23.63	23.56
			8	0	23.00	22.51	22.65	22.63
			8	4	23.00	22.52	22.60	22.52
			8	7	23.00	22.50	22.63	22.62
			15	0	23.00	22.60	22.60	22.56
			1	0	23.00	22.09	22.20	22.31
			1	7	23.00	22.23	22.57	22.39
			1	14	23.00	22.82	22.99	22.80
			8	0	22.00	21.59	21.63	21.78
			8	4	22.00	21.59	21.53	21.69
			8	7	22.00	21.70	21.52	21.77
			15	0	22.00	21.57	21.57	21.64
			RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26715/816.5	26740/819	26765/821.5
LTE Band 26a	5MHz	QPSK	1	0	24.00	23.48	23.54	23.75
			1	12	24.00	23.67	23.67	23.56
			1	24	24.00	23.45	23.56	23.75
			12	0	23.00	22.50	22.54	22.58
			12	6	23.00	22.67	22.56	22.53
			12	11	23.00	22.58	22.53	22.50
			25	0	23.00	22.53	22.51	22.57
		16QAM	1	0	23.00	22.55	22.55	22.44
			1	12	23.00	22.74	22.65	22.55
			1	24	23.00	22.31	22.53	22.54
			12	0	22.00	21.56	21.44	21.57
			12	6	22.00	21.81	21.54	21.58
			12	11	22.00	21.65	21.63	21.35
			25	0	22.00	21.57	21.71	21.64
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		/	26740/819	/
			1	0	24.00	/	23.42	/
			1	24	24.00	/	23.59	/
			1	49	24.00	/	23.48	/
			25	0	23.00	/	22.66	/
			25	12	23.00	/	22.58	/
LTE Band 26a	10MHz	QPSK	1	0	24.00	/	23.42	/
			1	24	24.00	/	23.59	/
			1	49	24.00	/	23.48	/
			25	0	23.00	/	22.66	/
			25	12	23.00	/	22.58	/

			25	24	23.00	/	22.54	/
			50	0	23.00	/	22.60	/
16QAM			1	0	22.50	/	22.41	/
			1	24	22.50	/	22.40	/
			1	49	22.50	/	22.48	/
			25	0	22.00	/	21.75	/
			25	12	22.00	/	21.76	/
			25	24	22.00	/	21.75	/
			50	0	22.00	/	21.70	/

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26797/824.7	26915/836.5	27033/848.3
LTE Band 26b	1.4MHz	QPSK	1	0	24.00	23.62	23.50	23.60
			1	2	24.00	23.44	23.39	23.77
			1	5	24.00	23.60	23.49	23.79
			3	0	24.00	23.41	23.56	23.66
			3	1	24.00	23.42	23.53	23.64
			3	2	24.00	23.33	23.52	23.62
			6	0	23.00	22.47	22.58	22.57
		16QAM	1	0	23.00	22.78	22.26	22.56
			1	2	23.00	22.86	22.28	22.57
			1	5	23.00	22.73	22.29	22.53
			3	0	23.00	22.20	22.58	22.50
			3	1	23.00	22.19	22.32	22.59
			3	2	23.00	22.12	22.65	22.73
			6	0	22.00	21.56	21.33	21.41
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26805/825.5	26915/836.5	27025/847.5
LTE Band 26b	3MHz	QPSK	1	0	24.00	23.28	23.53	23.53
			1	7	24.00	23.35	23.51	23.59
			1	14	24.00	23.41	23.61	23.53
			8	0	23.00	22.44	22.62	22.81
			8	4	23.00	22.48	22.50	22.74
			8	7	23.00	22.41	22.55	22.63
			15	0	23.00	22.44	22.48	22.72
		16QAM	1	0	23.00	22.31	22.74	22.55

			1	7	23.00	22.25	22.67	22.74
			1	14	23.00	22.29	22.44	22.52
			8	0	22.00	21.63	21.50	21.86
			8	4	22.00	21.54	21.60	21.81
			8	7	22.00	21.47	21.50	21.92
			15	0	22.00	21.48	21.43	21.80
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26815/826.5	26915/836.5	27015/846.5
LTE Band 26b	5MHz	QPSK	1	0	24.00	23.48	23.49	23.70
			1	12	24.00	23.61	23.44	23.85
			1	24	24.00	23.38	23.42	23.53
			12	0	23.00	22.45	22.54	22.77
			12	6	23.00	22.46	22.47	22.58
			12	11	23.00	22.40	22.53	22.64
			25	0	23.00	22.42	22.55	22.65
		16QAM	1	0	23.00	22.53	22.70	22.39
			1	12	23.00	22.40	22.61	22.60
			1	24	23.00	22.43	22.48	22.63
			12	0	22.00	21.62	21.33	21.61
			12	6	22.00	21.61	21.73	21.75
			12	11	22.00	21.44	21.52	21.68
			25	0	22.00	21.49	21.75	21.83
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26840/829	26915/836.5	26990/844
LTE Band 26b	10MHz	QPSK	1	0	24.00	23.39	23.67	23.45
			1	24	24.00	23.88	23.82	23.77
			1	49	24.00	23.40	23.56	23.55
			25	0	23.00	22.42	22.57	22.74
			25	12	23.00	22.41	22.59	22.60
			25	24	23.00	22.55	22.54	22.63
			50	0	23.00	22.43	22.59	22.77
		16QAM	1	0	23.50	22.33	23.22	22.53
			1	24	23.50	22.79	22.87	22.79
			1	49	23.50	22.61	22.57	22.64
			25	0	22.00	21.61	21.86	21.71
			25	12	22.00	21.70	21.67	21.73

			25	24	22.00	21.67	21.72	21.65
			50	0	22.00	21.54	21.65	21.77
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26865/831.5	26915/836.5	26965/841.5
			1	0	24.00	23.22	23.57	23.42
LTE Band 26b	15MHz	QPSK	1	37	24.00	23.40	23.64	23.66
			1	74	24.00	23.28	23.38	23.45
			36	0	23.50	22.39	23.17	22.87
			36	18	23.50	22.38	23.48	22.92
			36	37	23.50	21.78	23.32	22.50
			75	0	23.00	22.45	22.61	22.69
			1	0	23.50	22.57	23.16	22.53
		16QAM	1	37	23.50	22.32	23.20	22.57
			1	74	23.50	22.50	23.20	22.62
			36	0	24.00	22.34	23.10	22.89
			36	18	24.00	22.38	23.51	22.94
			36	37	24.00	22.30	23.36	22.55
			75	0	22.00	21.62	21.57	21.67

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		39675/2498.5	40620/2593	41565/2687.5
LTE Band 41	5MHz	QPSK	1	0	23.50	22.56	22.08	22.86
			1	12	23.50	22.66	22.14	22.97
			1	24	23.50	22.66	22.10	22.84
			12	0	22.00	21.67	21.31	21.98
			12	6	22.00	21.69	21.23	22.00
			12	11	22.00	21.80	21.17	21.93
			25	0	22.00	21.64	21.22	21.92
		16QAM	1	0	22.00	21.79	21.52	21.88
			1	12	22.00	21.78	21.46	21.97
			1	24	22.00	21.95	21.41	21.60
			12	0	21.50	20.69	20.25	21.04
			12	6	21.50	20.74	20.25	21.05
			12	11	21.50	20.60	20.01	20.98
			25	0	21.00	20.65	20.35	20.99
Band	Band	Modulation	RB		Tune-up	Channel/Frequency(MHz)		

	Width		Configuration		(dBm)						
			RB Size	RB Offset		39700/2501	40620/2593	41540/2685			
LTE Band 41	10MHz	QPSK	1	0	23.50	22.50	22.31	22.70			
			1	24	23.50	22.86	22.37	22.89			
			1	49	23.50	22.56	22.03	22.77			
			25	0	22.50	21.66	21.23	22.01			
			25	12	22.50	21.82	21.26	21.93			
			25	24	22.50	21.91	21.23	21.88			
			50	0	22.00	21.73	21.21	21.91			
		16QAM	1	0	22.50	21.41	21.29	21.99			
			1	24	22.50	21.76	21.73	22.03			
			1	49	22.50	21.51	21.33	21.56			
			25	0	21.50	20.87	20.36	21.06			
			25	12	21.50	20.77	20.37	20.89			
			25	24	21.50	20.95	20.26	20.92			
			50	0	21.50	20.86	20.21	21.07			
LTE Band 41	15MHz	QPSK	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)			
					RB Size	RB Offset		39725/2503.5	40620/2593		
					1	0	23.50	22.27	22.36		
					1	37	23.50	22.54	22.24		
					1	74	23.50	22.40	22.15		
					36	0	22.50	21.56	21.72		
					36	18	22.50	21.81	21.60		
		16QAM			36	37	22.50	21.78	21.22		
					75	0	22.00	21.76	21.27		
					1	0	22.50	21.45	21.79		
					1	37	22.50	21.70	21.53		
					1	74	22.50	21.60	21.55		
					36	0	22.00	21.52	21.81		
					36	18	22.00	21.82	21.56		
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)					
			RB Size	RB Offset		39750/2506	40620/2593	41490/2680			
			1	0		23.50	22.48	22.22			
LTE	20MHz	QPSK	1	0	23.50	22.48	22.22	22.71			

Band 41			1	49	23.50	23.04	22.16	23.09
			1	99	23.50	22.68	21.92	22.77
			50	0	22.50	21.63	21.45	22.02
			50	24	22.50	21.65	21.37	21.95
			50	49	22.50	21.84	21.19	21.93
			100	0	22.00	21.72	21.23	22.00
		16QAM	1	0	22.50	22.11	21.10	22.16
			1	49	22.50	22.35	21.02	22.30
			1	99	22.50	22.42	20.88	22.21
			50	0	21.50	20.53	20.36	21.10
			50	24	21.50	20.53	20.42	21.00
			50	49	21.50	20.68	20.23	21.01
			100	0	21.50	20.72	20.16	21.05

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131979/1710.7	132322/1745	132665/1779.3
LTE Band 66	1.4MHz	QPSK	1	0	23.00	22.19	22.20	22.00
			1	2	23.00	22.21	22.21	22.16
			1	5	23.00	22.08	22.10	21.92
			3	0	23.00	22.31	22.15	21.94
			3	1	23.00	22.22	22.17	21.94
			3	2	23.00	22.20	22.19	21.88
			6	0	21.50	21.21	21.21	20.89
		16QAM	1	0	22.00	20.99	20.99	20.96
			1	2	22.00	21.07	21.59	20.95
			1	5	22.00	21.01	21.72	20.79
			3	0	21.50	20.98	20.83	20.94
			3	1	21.50	20.98	20.93	20.83
			3	2	21.50	21.07	20.73	20.82
			6	0	20.50	19.97	20.20	19.98
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset	131987/1711.5	132322/1745	132657/1778.5	
LTE Band 66	3MHz	QPSK	1	0	23.00	22.04	22.37	22.49
			1	7	23.00	22.08	22.10	22.28
			1	14	23.00	22.03	22.19	22.11
			8	0	21.50	21.28	21.18	21.28

			8	4	21.50	21.27	21.21	21.21
			8	7	21.50	21.21	21.26	21.08
			15	0	21.50	21.12	21.23	21.16
			1	0	21.50	21.21	21.23	21.12
			1	7	21.50	21.07	21.00	21.21
			1	14	21.50	21.02	20.98	20.92
			8	0	20.50	20.18	20.16	20.09
			8	4	20.50	20.16	20.17	20.30
			8	7	20.50	20.10	20.32	20.18
			15	0	20.50	20.20	20.12	20.18
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131997/1712.5	132322/1745	132647/1777.5
LTE Band 66	5MHz	QPSK	1	0	23.00	22.28	22.15	22.39
			1	12	23.00	22.30	22.10	22.40
			1	24	23.00	22.13	22.00	22.27
			12	0	21.50	21.23	21.27	21.36
			12	6	21.50	21.24	21.19	21.39
			12	11	21.50	21.13	21.12	21.21
			25	0	21.50	21.19	21.16	21.26
		16QAM	1	0	21.50	21.31	21.17	21.39
			1	12	21.50	21.27	21.17	21.39
			1	24	21.50	20.76	21.18	21.14
			12	0	20.50	20.29	20.19	20.23
			12	6	20.50	20.30	20.20	20.23
			12	11	20.50	20.08	20.21	20.19
			25	0	20.50	20.15	20.27	20.24
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		132022/1715	132322/1745	132622/1775
LTE Band 66	10MHz	QPSK	1	0	23.00	22.11	22.20	22.03
			1	24	23.00	22.23	22.44	22.66
			1	49	23.00	21.87	22.06	22.01
			25	0	21.50	21.17	21.21	21.35
			25	12	21.50	21.20	21.13	21.37
			25	24	21.50	21.00	21.07	21.33
			50	0	21.50	21.03	21.11	21.26
		16QAM	1	0	22.00	21.03	21.24	20.83

			1	24	22.00	20.95	21.72	21.61
			1	49	22.00	20.59	21.16	20.96
			25	0	20.50	19.99	20.25	20.38
			25	12	20.50	20.20	20.11	20.39
			25	24	20.50	20.11	20.08	20.27
			50	0	20.50	20.04	19.91	20.18
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		132047/1717.5	132322/1745	132597/1772.5
LTE Band 66	15MHz	QPSK	1	0	22.50	22.11	22.12	22.22
			1	37	22.50	21.88	22.20	22.17
			1	74	22.50	21.83	21.84	21.87
			36	0	22.50	21.18	22.03	21.05
			36	18	22.50	21.03	21.99	21.26
			36	37	22.50	20.71	21.65	20.41
			75	0	21.50	20.92	21.13	21.31
		16QAM	1	0	21.50	21.25	21.15	21.37
			1	37	21.50	20.91	20.93	21.10
			1	74	21.50	20.99	20.75	20.99
			36	0	22.00	21.21	21.87	21.22
			36	18	22.00	21.01	22.00	21.20
			36	37	22.00	20.79	21.63	20.97
			75	0	20.50	19.95	20.07	20.23
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		132072/1720	132322/1745	132572/1770
LTE Band 66	20MHz	QPSK	1	0	23.00	22.20	22.33	22.40
			1	49	23.00	22.44	22.69	22.27
			1	99	23.00	22.11	22.17	22.01
			50	0	21.50	21.05	21.25	21.34
			50	24	21.50	21.01	21.21	21.33
			50	49	21.50	21.16	21.09	21.35
			100	0	21.50	21.00	21.11	21.31
		16QAM	1	0	22.50	22.04	21.31	22.26
			1	49	22.50	21.63	21.26	21.95
			1	99	22.50	22.08	21.11	22.01
			50	0	20.50	20.11	20.25	20.38
			50	24	20.50	20.13	20.26	20.38

			50	49	20.50	20.28	20.10	20.30
			100	0	20.50	20.01	20.23	20.31

#### 7.4. WLAN Output Power

Mode	Channel	Frequency (MHz)	Tune-up(dBm)	Output Power (dBm)
802.11b	1	2412	18.50	18.46
	6	2437	18.50	18.19
	11	2462	18.50	18.30
802.11g	1	2412	17.00	16.83
	6	2437	17.00	16.86
	11	2462	17.00	16.10
802.11n HT20	1	2412	17.00	16.32
	6	2437	17.00	16.81
	11	2462	17.00	16.01
802.11n HT40	3	2422	17.00	16.45
	6	2437	17.00	16.71
	9	2452	17.00	16.64

NOTE: Power measurement results of WLAN 2.4G.

Mode	Channel	Frequency (MHz)	Tune-up (dBm)	Output Power (dBm)
802.11a	36	5180	17.50	17.06
	40	5200	17.50	17.02
	48	5240	17.50	17.21
802.11n HT20	36	5180	18.00	17.01
	40	5200	18.00	17.29
	48	5240	18.00	17.53
802.11n HT40	38	5190	18.00	17.46
	46	5230	18.00	17.77
802.11ac VHT20	36	5180	17.50	16.88
	40	5200	17.50	16.88
	48	5240	17.50	17.18
802.11ac VHT40	38	5190	17.50	17.09
	46	5230	17.50	17.48
802.11ac VHT80	42	5210	16.50	16.49


NOTE: Power measurement results of WLAN 5.2G.

Mode	Channel	Frequency (MHz)	Tune-up (dBm)	Output Power (dBm)
------	---------	-----------------	---------------	--------------------

802.11a	149	5745	17.00	16.91
	157	5785	17.00	16.62
	165	5825	17.00	16.16
802.11n HT20	149	5745	17.00	16.85
	157	5785	17.00	16.53
	165	5825	17.00	16.38
802.11n HT40	151	5755	17.00	16.96
	159	5795	17.00	16.94
802.11ac VHT20	149	5745	17.50	16.71
	157	5785	17.50	16.47
	165	5825	17.50	17.19
802.11ac VHT40	151	5755	17.50	17.17
	159	5795	17.50	16.76
802.11ac VHT80	155	5775	16.50	16.14

NOTE: Power measurement results of WLAN 5.8G.

## 8. Antenna Location

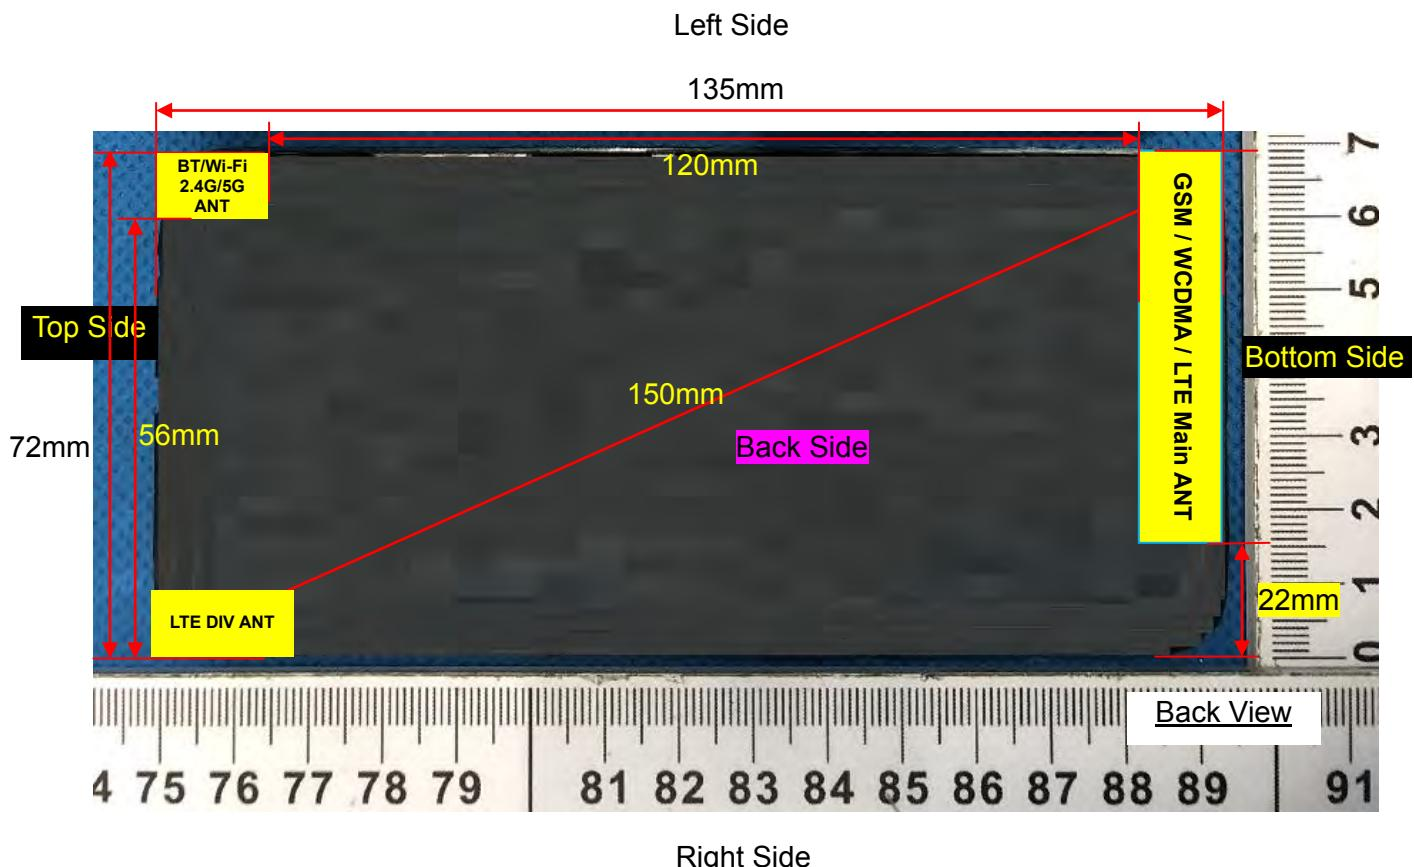

Note: Since the confidentiality request of EUT, the antenna location example diagram see as above.

Distance of the Antenna to the EUT surface/edge						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main ANT	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm
WLAN & Bluetooth	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	> 25mm
Positions for SAR tests						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main ANT	Yes	Yes	Yes	Yes	NO	Yes
WLAN & Bluetooth	Yes	Yes	Yes	NO	Yes	NO

## 9. SAR Results

### 9.1. SAR measurement Result

#### 9.1.1. SAR measurement Result of GSM850

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	190/836.6	GPRS(GMSK 2TS)	0.228	0.164	-2.57	32.38	32.50	0.234	2022/5/25
Back Side	190/836.6	GPRS(GMSK 2TS)	0.339	0.246	-4.44	32.38	32.50	0.348	2022/5/25

NOTE: Body-Worn SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	190/836.6	GPRS(GMSK 2TS)	0.228	0.164	-2.57	32.38	32.50	0.234	2022/5/25
Back Side	190/836.6	GPRS(GMSK 2TS)	0.339	0.246	-4.44	32.38	32.50	0.348	2022/5/25
Left Side	190/836.6	GPRS(GMSK 2TS)	0.119	0.085	-2.88	32.38	32.50	0.122	2022/5/25
Right Side	190/836.6	GPRS(GMSK 2TS)	0.048	0.033	-2.55	32.38	32.50	0.049	2022/5/25
Bottom Side	190/836.6	GPRS(GMSK 2TS)	0.175	0.127	2.84	32.38	32.50	0.180	2022/5/25

NOTE: Hotspot SAR test results of GSM850

#### 9.1.2. SAR measurement Result of GSM1900

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	661/1880	GPRS(GMSK	0.210	0.119	-2.25	27.40	28.00	0.241	2022/5/24

		3TS)							
Back Side	661/1880	GPRS(GMSK 3TS)	0.301	0.178	0.74	27.40	28.00	0.346	2022/5/24

NOTE: Body-Worn SAR test results of GSM1900

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	661/1880	GPRS(GMSK 3TS)	0.210	0.119	-2.25	27.40	28.00	0.241	2022/5/24
Back Side	661/1880	GPRS(GMSK 3TS)	0.301	0.178	0.74	27.40	28.00	0.346	2022/5/24
Left Side	661/1880	GPRS(GMSK 3TS)	0.123	0.072	3.26	27.40	28.00	0.141	2022/5/24
Right Side	661/1880	GPRS(GMSK 3TS)	0.043	0.025	-2.58	27.40	28.00	0.049	2022/5/24
Bottom Side	661/1880	GPRS(GMSK 3TS)	0.175	0.099	-2.38	27.40	28.00	0.201	2022/5/24

NOTE: Hotspot SAR test results of GSM1900

### 9.1.3. SAR measurement Result of WCDMA Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	9400/1880	RMC12.2K	0.294	0.156	1.88	22.59	23.00	0.323	2022/5/24
Back Side	9400/1880	RMC12.2K	0.489	0.268	-0.77	22.59	23.00	0.537	2022/5/24

NOTE: Body-Worn SAR test results of WCDMA Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	9400/1880	RMC12.2K	0.294	0.156	1.88	22.59	23.00	0.323	2022/5/24
Back Side	9400/1880	RMC12.2K	0.489	0.268	-0.77	22.59	23.00	0.537	2022/5/24

Left Side	9400/1880	RMC12.2K	0.182	0.096	-3.93	22.59	23.00	0.200	2022/5/24
Right Side	9400/1880	RMC12.2K	0.066	0.035	1.09	22.59	23.00	0.073	2022/5/24
Bottom Side	9400/1880	RMC12.2K	0.245	0.132	-0.06	22.59	23.00	0.269	2022/5/24

NOTE: Hotspot SAR test results of WCDMA Band 2

#### 9.1.4. SAR measurement Result of WCDMA Band 4

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	1413/1732.6	RMC12.2K	0.480	0.258	-2.69	21.37	22.00	0.555	2022/5/20
Back Side	1413/1732.6	RMC12.2K	0.778	0.423	-0.45	21.37	22.00	0.899	2022/5/20
Back Side	1312/1712.4	RMC12.2K	0.656	0.342	-2.43	21.43	22.00	0.748	2022/5/20
Back Side	1513/1752.6	RMC12.2K	0.680	0.362	1.97	21.33	22.00	0.793	2022/5/20

NOTE: Body-Worn SAR test results of WCDMA Band 4

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	1413/1732.6	RMC12.2K	0.480	0.258	-2.69	21.37	22.00	0.555	2022/5/20
Back Side	1413/1732.6	RMC12.2K	0.778	0.423	-0.45	21.37	22.00	0.899	2022/5/20
Left Side	1413/1732.6	RMC12.2K	0.287	0.153	2.57	21.37	22.00	0.332	2022/5/20
Right Side	1413/1732.6	RMC12.2K	0.101	0.055	-3.28	21.37	22.00	0.117	2022/5/20
Bottom Side	1413/1732.6	RMC12.2K	0.410	0.218	2.29	21.37	22.00	0.474	2022/5/20
Back Side	1312/1712.4	RMC12.2K	0.656	0.342	-2.43	21.43	22.00	0.748	2022/5/20
Back Side	1513/1752.6	RMC12.2K	0.680	0.362	1.97	21.33	22.00	0.793	2022/5/20

NOTE: Hotspot SAR test results of WCDMA Band 4

### 9.1.5. SAR measurement Result of WCDMA Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					

Front Side	4182/836.4	RMC12.2K	0.288	0.217	-0.94	22.89	24.00	0.372	2022/5/25
Back Side	4182/836.4	RMC12.2K	0.474	0.364	1.20	22.89	24.00	0.612	2022/5/25

NOTE: Body-Worn SAR test results of WCDMA Band 5

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ( $\pm 5\%$ )	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	4182/836.4	RMC12.2K	0.288	0.217	-0.94	22.89	24.00	0.372	2022/5/25
Back Side	4182/836.4	RMC12.2K	0.474	0.364	1.20	22.89	24.00	0.612	2022/5/25
Left Side	4182/836.4	RMC12.2K	0.175	0.128	-2.02	22.89	24.00	0.226	2022/5/25
Right Side	4182/836.4	RMC12.2K	0.068	0.050	3.48	22.89	24.00	0.088	2022/5/25
Bottom Side	4182/836.4	RMC12.2K	0.260	0.200	0.60	22.89	24.00	0.336	2022/5/25

NOTE: Hotspot SAR test results of WCDMA Band 5

### 9.1.6. SAR measurement Result of LTE Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ( $\pm 5\%$ )	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	18900/1880	20M QPSK(1,49)	0.288	0.162	-1.20	23.92	24.00	0.293	2022/5/24
Back Side	18900/1880	20M QPSK(1,49)	0.478	0.269	-1.34	23.92	24.00	0.487	2022/5/24
50%RB									
Front Side	18900/1880	20M QPSK(50,49)	0.163	0.097	0.93	22.84	23.00	0.169	2022/5/24
Back Side	18900/1880	20M QPSK(50,49)	0.275	0.153	3.73	22.84	23.00	0.285	2022/5/24

NOTE: Body-Worn SAR test results of LTE Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ( $\pm 5\%$ )	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					

1RB									
Front Side	18900/1880	20M QPSK(1,49)	0.288	0.162	-1.20	23.92	24.00	0.293	2022/5/24
Back Side	18900/1880	20M QPSK(1,49)	0.478	0.269	-1.34	23.92	24.00	0.487	2022/5/24
Left Side	18900/1880	20M QPSK(1,49)	0.179	0.096	0.97	23.92	24.00	0.182	2022/5/24
Right Side	18900/1880	20M QPSK(1,49)	0.064	0.036	-2.37	23.92	24.00	0.065	2022/5/24
Bottom Side	18900/1880	20M QPSK(1,49)	0.255	0.144	-0.08	23.92	24.00	0.260	2022/5/24
50%RB									
Front Side	18900/1880	20M QPSK(50,49)	0.163	0.097	0.93	22.84	23.00	0.169	2022/5/24
Back Side	18900/1880	20M QPSK(50,49)	0.275	0.153	3.73	22.84	23.00	0.285	2022/5/24
Left Side	18900/1880	20M QPSK(50,49)	0.095	0.051	-4.95	22.84	23.00	0.099	2022/5/24
Right Side	18900/1880	20M QPSK(50,49)	0.037	0.021	4.52	22.84	23.00	0.038	2022/5/24
Bottom Side	18900/1880	20M QPSK(50,49)	0.144	0.080	-1.25	22.84	23.00	0.149	2022/5/24

NOTE: Hotspot SAR test results of LTE Band 2

### 9.1.7. SAR measurement Result of LTE Band 4

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	20175/1732.5	20M QPSK(1,49)	0.522	0.282	1.52	22.98	23.50	0.588	2022/5/20
Back Side	20175/1732.5	20M QPSK(1,49)	0.853	0.465	-1.11	22.98	23.50	0.961	2022/5/20
Back Side Repeated	20175/1732.5	20M QPSK(1,49)	0.848	0.460	1.25	22.98	23.50	0.956	2022/5/20
Back Side	20050/1720	20M QPSK(1,49)	0.852	0.463	0.71	22.82	23.50	0.996	2022/5/20

Back Side	20300/1745	20M QPSK(1,49)	0.828	0.448	-1.19	23.34	23.50	0.859	2022/5/20
50%RB									
Front Side	20175/1732.5	20M QPSK(50,24)	0.313	0.154	-0.55	21.82	22.50	0.366	2022/5/20
Back Side	20175/1732.5	20M QPSK(50,24)	0.461	0.246	3.71	21.82	22.50	0.539	2022/5/20
100%RB									
Back Side	20175/1732.5	20M QPSK(100,0)	0.457	0.240	1.24	21.96	22.00	0.461	2022/5/20

NOTE: Body-Worn SAR test results of LTE Band 4

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	20175/1732.5	20M QPSK(1,49)	0.522	0.282	1.52	22.98	23.50	0.588	2022/5/20
Back Side	20175/1732.5	20M QPSK(1,49)	0.853	0.465	-1.11	22.98	23.50	0.961	2022/5/20
Back Side Repeated	20175/1732.5	20M QPSK(1,49)	0.848	0.460	1.25	22.98	23.50	0.956	2022/5/20
Left Side	20175/1732.5	20M QPSK(1,49)	0.305	0.160	1.77	22.98	23.50	0.344	2022/5/20
Right Side	20175/1732.5	20M QPSK(1,49)	0.117	0.063	-0.81	22.98	23.50	0.132	2022/5/20
Bottom Side	20175/1732.5	20M QPSK(1,49)	0.445	0.235	-0.42	22.98	23.50	0.502	2022/5/20
Back Side	20050/1720	20M QPSK(1,49)	0.852	0.463	0.71	22.82	23.50	0.996	2022/5/20
Back Side	20300/1745	20M QPSK(1,49)	0.828	0.448	-1.19	23.34	23.50	0.859	2022/5/20
50%RB									
Front Side	20175/1732.5	20M QPSK(50,24)	0.313	0.154	-0.55	21.82	22.50	0.366	2022/5/20
Back Side	20175/1732.5	20M QPSK(50,24)	0.461	0.246	3.71	21.82	22.50	0.539	2022/5/20
Left Side	20175/1732.5	20M	0.155	0.088	-4.21	21.82	22.50	0.181	2022/5/20

		QPSK(50,24)							
Right Side	20175/1732.5	20M QPSK(50,24)	0.065	0.035	3.01	21.82	22.50	0.076	2022/5/20
Bottom Side	20175/1732.5	20M QPSK(50,24)	0.265	0.124	4.63	21.82	22.50	0.310	2022/5/20
100%RB									
Back Side	20175/1732.5	20M QPSK(100,0)	0.457	0.240	1.24	21.96	22.00	0.461	2022/5/20

NOTE: Hotspot SAR test results of LTE Band 4

### 9.1.8. SAR measurement Result of LTE Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ( $\pm 5\%$ )	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	20525/836.5	10M QPSK(1,24)	0.306	0.233	-2.17	24.87	25.00	0.315	2022/5/25
Back Side	20525/836.5	10M QPSK(1,24)	0.474	0.361	-0.60	24.87	25.00	0.488	2022/5/25
50%RB									
Front Side	20525/836.5	10M QPSK(25,12)	0.176	0.122	1.79	23.59	24.00	0.193	2022/5/25
Back Side	20525/836.5	10M QPSK(25,12)	0.267	0.207	-0.52	23.59	24.00	0.293	2022/5/25

NOTE: Body-Worn SAR test results of LTE Band 5

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ( $\pm 5\%$ )	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	20525/836.5	10M QPSK(1,24)	0.306	0.233	-2.17	24.87	25.00	0.315	2022/5/25
Back Side	20525/836.5	10M QPSK(1,24)	0.474	0.361	-0.60	24.87	25.00	0.488	2022/5/25

Left Side	20525/836.5	10M QPSK(1,24)	0.179	0.135	-3.64	24.87	25.00	0.184	2022/5/25
Right Side	20525/836.5	10M QPSK(1,24)	0.062	0.047	-0.37	24.87	25.00	0.064	2022/5/25
Bottom Side	20525/836.5	10M QPSK(1,24)	0.250	0.181	-1.55	24.87	25.00	0.258	2022/5/25
50%RB									
Front Side	20525/836.5	10M QPSK(25,12)	0.176	0.122	1.79	23.59	24.00	0.193	2022/5/25
Back Side	20525/836.5	10M QPSK(25,12)	0.267	0.207	-0.52	23.59	24.00	0.293	2022/5/25
Left Side	20525/836.5	10M QPSK(25,12)	0.095	0.078	-3.71	23.59	24.00	0.104	2022/5/25
Right Side	20525/836.5	10M QPSK(25,12)	0.034	0.028	-2.46	23.59	24.00	0.037	2022/5/25
Bottom Side	20525/836.5	10M QPSK(25,12)	0.148	0.098	-2.86	23.59	24.00	0.163	2022/5/25

NOTE: Hotspot SAR test results of LTE Band 5

### 9.1.9. SAR measurement Result of LTE Band 7

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	21100/2535	20M QPSK(1,49)	0.594	0.274	-2.45	23.20	23.50	0.636	2022/5/30
Back Side	21100/2535	20M QPSK(1,49)	0.942	0.453	-0.55	23.20	23.50	1.009	2022/5/30
Back Side	20850/2510	20M QPSK(1,49)	0.961	0.450	0.30	22.95	23.50	1.091	2022/5/30
Back Side	21350/2560	20M QPSK(1,49)	1.111	0.526	-2.93	23.05	23.50	1.232	2022/5/30
Back Side Repeated	21350/2560	20M QPSK(1,49)	1.105	0.521	-0.35	23.05	23.50	1.226	2022/5/30
50%RB									
Front Side	21100/2535	20M QPSK(50,49)	0.319	0.157	-2.96	21.75	22.00	0.338	2022/5/30

Back Side	21100/2535	20M QPSK(50,49)	0.497	0.240	4.36	21.75	22.00	0.526	2022/5/30
100%RB									
Back Side	21100/2535	20M QPSK100,0)	0.480	0.233	0.77	21.78	22.00	0.505	2022/5/30

NOTE: Body-Worn SAR test results of LTE Band 7

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	21100/2535	20M QPSK(1,49)	0.594	0.274	-2.45	23.20	23.50	0.636	2022/5/30
Back Side	21100/2535	20M QPSK(1,49)	0.942	0.453	-0.55	23.20	23.50	1.009	2022/5/30
Left Side	21100/2535	20M QPSK(1,49)	0.343	0.157	1.94	23.20	23.50	0.368	2022/5/30
Right Side	21100/2535	20M QPSK(1,49)	0.126	0.061	1.36	23.20	23.50	0.135	2022/5/30
Bottom Side	21100/2535	20M QPSK(1,49)	0.480	0.224	-3.01	23.20	23.50	0.514	2022/5/30
Back Side	20850/2510	20M QPSK(1,49)	0.961	0.450	0.30	22.95	23.50	1.091	2022/5/30
Back Side	21350/2560	20M QPSK(1,49)	1.111	0.526	-2.93	23.05	23.50	1.232	2022/5/30
Back Side Repeated	21350/2560	20M QPSK(1,49)	1.105	0.521	-0.35	23.05	23.50	1.226	2022/5/30
50%RB									
Front Side	21100/2535	20M QPSK(50,49)	0.319	0.157	-2.96	21.75	22.00	0.338	2022/5/30
Back Side	21100/2535	20M QPSK(50,49)	0.497	0.240	4.36	21.75	22.00	0.526	2022/5/30
Left Side	21100/2535	20M QPSK(50,49)	0.204	0.085	1.37	21.75	22.00	0.216	2022/5/30
Right Side	21100/2535	20M QPSK(50,49)	0.067	0.033	-4.81	21.75	22.00	0.071	2022/5/30
Bottom	21100/2535	20M	0.283	0.125	1.45	21.75	22.00	0.300	2022/5/30

Side		QPSK(50,49)							
100%RB									
Back Side	21100/2535	20M QPSK100,0)	0.480	0.233	0.77	21.78	22.00	0.505	2022/5/30

NOTE: Hotspot SAR test results of LTE Band 7

#### 9.1.10. SAR measurement Result of LTE Band 12

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ( $\pm 5\%$ )	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	23095/707.5	10M QPSK(1,24)	0.258	0.197	-1.28	24.07	25.00	0.320	2022/5/19
Back Side	23095/707.5	10M QPSK(1,24)	0.414	0.320	2.83	24.07	25.00	0.513	2022/5/19
50%RB									
Front Side	23095/707.5	10M QPSK(25,0)	0.153	0.111	-3.79	22.73	23.00	0.163	2022/5/19
Back Side	23095/707.5	10M QPSK(25,0)	0.244	0.166	2.34	22.73	23.00	0.260	2022/5/19

NOTE: Body-Worn SAR test results of LTE Band 12

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ( $\pm 5\%$ )	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	23095/707.5	10M QPSK(1,24)	0.258	0.197	-1.28	24.07	25.00	0.320	2022/5/19
Back Side	23095/707.5	10M QPSK(1,24)	0.414	0.320	2.83	24.07	25.00	0.513	2022/5/19
Left Side	23095/707.5	10M QPSK(1,24)	0.147	0.108	-2.17	24.07	25.00	0.182	2022/5/19
Right Side	23095/707.5	10M QPSK(1,24)	0.055	0.040	-2.50	24.07	25.00	0.068	2022/5/19

Bottom Side	23095/707.5	10M QPSK(1,24)	0.220	0.163	-0.47	24.07	25.00	0.273	2022/5/19
50%RB									
Front Side	23095/707.5	10M QPSK(25,0)	0.153	0.111	-3.79	22.73	23.00	0.163	2022/5/19
Back Side	23095/707.5	10M QPSK(25,0)	0.244	0.166	2.34	22.73	23.00	0.260	2022/5/19
Left Side	23095/707.5	10M QPSK(25,0)	0.081	0.059	-4.32	22.73	23.00	0.086	2022/5/19
Right Side	23095/707.5	10M QPSK(25,0)	0.031	0.023	2.27	22.73	23.00	0.033	2022/5/19
Bottom Side	23095/707.5	10M QPSK(25,0)	0.115	0.084	-2.02	22.73	23.00	0.122	2022/5/19

NOTE: Hotspot SAR test results of LTE Band 12

### 9.1.11. SAR measurement Result of LTE Band 13

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ( $\pm 5\%$ )	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	23230/782	10M QPSK(1,49)	0.015	0.012	1.69	24.10	24.50	0.016	2022/5/19
Back Side	23230/782	10M QPSK(1,49)	0.016	0.013	0.15	24.10	24.50	0.018	2022/5/19
50%RB									
Front Side	23230/782	10M QPSK(25,24)	0.010	0.009	-2.37	22.96	23.00	0.010	2022/5/19
Back Side	23230/782	10M QPSK(25,24)	0.012	0.010	-2.35	22.96	23.00	0.012	2022/5/19

NOTE: Body-Worn SAR test results of LTE Band 13

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ( $\pm 5\%$ )	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					

1RB									
Front Side	23230/782	10M QPSK(1,49)	0.015	0.012	1.69	24.10	24.50	0.016	2022/5/19
Back Side	23230/782	10M QPSK(1,49)	0.016	0.013	0.15	24.10	24.50	0.018	2022/5/19
Left Side	23230/782	10M QPSK(1,49)	0.014	0.012	3.22	24.10	24.50	0.015	2022/5/19
Right Side	23230/782	10M QPSK(1,49)	0.009	0.007	3.22	24.10	24.50	0.010	2022/5/19
Bottom Side	23230/782	10M QPSK(1,49)	0.010	0.008	2.73	24.10	24.50	0.011	2022/5/19
50%RB									
Front Side	23230/782	10M QPSK(25,24)	0.010	0.009	-2.37	22.96	23.00	0.010	2022/5/19
Back Side	23230/782	10M QPSK(25,24)	0.012	0.010	-2.35	22.96	23.00	0.012	2022/5/19
Left Side	23230/782	10M QPSK(25,24)	0.009	0.008	2.06	22.96	23.00	0.009	2022/5/19
Right Side	23230/782	10M QPSK(25,24)	0.008	0.006	-1.39	22.96	23.00	0.008	2022/5/19
Bottom Side	23230/782	10M QPSK(25,24)	0.005	0.004	-2.54	22.96	23.00	0.005	2022/5/19

NOTE: Hotspot SAR test results of LTE Band 13

#### 9.1.12. SAR measurement Result of LTE Band 17

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	23790/710	10M QPSK(1,24)	0.252	0.186	3.54	24.26	24.50	0.266	2022/5/19
Back Side	23790/710	10M QPSK(1,24)	0.416	0.323	-0.40	24.26	24.50	0.440	2022/5/19
50%RB									
Front Side	23790/710	10M QPSK(25,0)	0.133	0.110	-1.54	22.87	23.00	0.137	2022/5/19
Back Side	23790/710	10M	0.228	0.163	-1.29	22.87	23.00	0.235	2022/5/19

		QPSK(25,0)						
--	--	------------	--	--	--	--	--	--

NOTE: Body-Worn SAR test results of LTE Band 17

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ( $\pm 5\%$ )	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	23790/710	10M QPSK(1,24)	0.252	0.186	3.54	24.26	24.50	0.266	2022/5/19
Back Side	23790/710	10M QPSK(1,24)	0.416	0.323	-0.40	24.26	24.50	0.440	2022/5/19
Left Side	23790/710	10M QPSK(1,24)	0.154	0.116	-2.89	24.26	24.50	0.163	2022/5/19
Right Side	23790/710	10M QPSK(1,24)	0.055	0.043	-0.73	24.26	24.50	0.058	2022/5/19
Bottom Side	23790/710	10M QPSK(1,24)	0.220	0.169	-2.89	24.26	24.50	0.232	2022/5/19
50%RB									
Front Side	23790/710	10M QPSK(25,0)	0.133	0.110	-1.54	22.87	23.00	0.137	2022/5/19
Back Side	23790/710	10M QPSK(25,0)	0.228	0.163	-1.29	22.87	23.00	0.235	2022/5/19
Left Side	23790/710	10M QPSK(25,0)	0.087	0.061	-3.82	22.87	23.00	0.090	2022/5/19
Right Side	23790/710	10M QPSK(25,0)	0.030	0.024	1.96	22.87	23.00	0.031	2022/5/19
Bottom Side	23790/710	10M QPSK(25,0)	0.112	0.101	-4.29	22.87	23.00	0.115	2022/5/19

NOTE: Hotspot SAR test results of LTE Band 17

#### 9.1.13. SAR measurement Result of LTE Band 25

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ( $\pm 5\%$ )	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					

1RB									
Front Side	26365/1882.5	20M QPSK(1,49)	0.312	0.175	-1.56	22.76	23.50	0.370	2022/5/24
Back Side	26365/1882.5	20M QPSK(1,49)	0.495	0.286	-0.89	22.76	23.50	0.587	2022/5/24
50%RB									
Front Side	26365/1882.5	20M QPSK(50,0)	0.179	0.098	-0.51	21.71	22.00	0.191	2022/5/24
Back Side	26365/1882.5	20M QPSK(50,0)	0.296	0.161	-1.94	21.71	22.00	0.316	2022/5/24

NOTE: Body-Worn SAR test results of LTE Band 25

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	26365/1882.5	20M QPSK(1,49)	0.312	0.175	-1.56	22.76	23.50	0.370	2022/5/24
Back Side	26365/1882.5	20M QPSK(1,49)	0.495	0.286	-0.89	22.76	23.50	0.587	2022/5/24
Left Side	26365/1882.5	20M QPSK(1,49)	0.182	0.104	3.01	22.76	23.50	0.216	2022/5/24
Right Side	26365/1882.5	20M QPSK(1,49)	0.070	0.040	0.91	22.76	23.50	0.083	2022/5/24
Bottom Side	26365/1882.5	20M QPSK(1,49)	0.250	0.142	1.94	22.76	23.50	0.296	2022/5/24
50%RB									
Front Side	26365/1882.5	20M QPSK(50,0)	0.179	0.098	-0.51	21.71	22.00	0.191	2022/5/24
Back Side	26365/1882.5	20M QPSK(50,0)	0.296	0.161	-1.94	21.71	22.00	0.316	2022/5/24
Left Side	26365/1882.5	20M QPSK(50,0)	0.104	0.054	-2.11	21.71	22.00	0.111	2022/5/24
Right Side	26365/1882.5	20M QPSK(50,0)	0.039	0.024	-4.04	21.71	22.00	0.042	2022/5/24
Bottom Side	26365/1882.5	20M QPSK(50,0)	0.146	0.074	-0.03	21.71	22.00	0.156	2022/5/24

NOTE: Hotspot SAR test results of LTE Band 25

### 9.1.14. SAR measurement Result of LTE Band 26A

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	26740/819	10M QPSK(1,24)	0.240	0.182	-3.66	23.59	24.00	0.264	2022/5/25
Back Side	26740/819	10M QPSK(1,24)	0.366	0.277	-0.64	23.59	24.00	0.402	2022/5/25
50%RB									
Front Side	26740/819	10M QPSK(25,0)	0.120	0.104	3.18	22.66	23.00	0.130	2022/5/25
Back Side	26740/819	10M QPSK(25,0)	0.218	0.145	1.13	22.66	23.00	0.236	2022/5/25

NOTE: Body-Worn SAR test results of LTE Band 26A

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	26740/819	10M QPSK(1,24)	0.240	0.182	-3.66	23.59	24.00	0.264	2022/5/25
Back Side	26740/819	10M QPSK(1,24)	0.366	0.277	-0.64	23.59	24.00	0.402	2022/5/25
Left Side	26740/819	10M QPSK(1,24)	0.140	0.101	-2.37	23.59	24.00	0.154	2022/5/25
Right Side	26740/819	10M QPSK(1,24)	0.048	0.036	1.06	23.59	24.00	0.053	2022/5/25
Bottom Side	26740/819	10M QPSK(1,24)	0.195	0.146	-0.42	23.59	24.00	0.214	2022/5/25
50%RB									
Front Side	26740/819	10M QPSK(25,0)	0.120	0.104	3.18	22.66	23.00	0.130	2022/5/25

Back Side	26740/819	10M QPSK(25,0)	0.218	0.145	1.13	22.66	23.00	0.236	2022/5/25
Left Side	26740/819	10M QPSK(25,0)	0.074	0.056	2.78	22.66	23.00	0.080	2022/5/25
Right Side	26740/819	10M QPSK(25,0)	0.029	0.021	3.25	22.66	23.00	0.031	2022/5/25
Bottom Side	26740/819	10M QPSK(25,0)	0.109	0.076	4.04	22.66	23.00	0.118	2022/5/25

NOTE: Hotspot SAR test results of LTE Band 26A

#### 9.1.15. SAR measurement Result of LTE Band 26B

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ( $\pm 5\%$ )	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	26865/836.5	15M QPSK(1,37)	0.294	0.217	-3.87	23.64	24.00	0.319	2022/5/25
Back Side	26865/836.5	15M QPSK(1,37)	0.447	0.337	0.25	23.64	24.00	0.486	2022/5/25
50%RB									
Front Side	26865/836.5	15M QPSK(36,18)	0.170	0.111	-0.31	23.48	23.50	0.171	2022/5/25
Back Side	26865/836.5	15M QPSK(36,18)	0.266	0.189	2.02	23.48	23.50	0.267	2022/5/25

NOTE: Body-Worn SAR test results of LTE Band 26B

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ( $\pm 5\%$ )	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	26865/836.5	15M QPSK(1,37)	0.294	0.217	-3.87	23.64	24.00	0.319	2022/5/25
Back Side	26865/836.5	15M QPSK(1,37)	0.447	0.337	0.25	23.64	24.00	0.486	2022/5/25

Left Side	26865/836.5	15M QPSK(1,37)	0.168	0.122	1.93	23.64	24.00	0.183	2022/5/25
Right Side	26865/836.5	15M QPSK(1,37)	0.061	0.044	1.55	23.64	24.00	0.066	2022/5/25
Bottom Side	26865/836.5	15M QPSK(1,37)	0.225	0.170	3.94	23.64	24.00	0.244	2022/5/25
50%RB									
Front Side	26865/836.5	15M QPSK(36,18)	0.170	0.111	-0.31	23.48	23.50	0.171	2022/5/25
Back Side	26865/836.5	15M QPSK(36,18)	0.266	0.189	2.02	23.48	23.50	0.267	2022/5/25
Left Side	26865/836.5	15M QPSK(36,18)	0.100	0.065	-2.42	23.48	23.50	0.100	2022/5/25
Right Side	26865/836.5	15M QPSK(36,18)	0.036	0.026	-4.49	23.48	23.50	0.036	2022/5/25
Bottom Side	26865/836.5	15M QPSK(36,18)	0.126	0.089	-3.58	23.48	23.50	0.127	2022/5/25

NOTE: Hotspot SAR test results of LTE Band 26B

### 9.1.16. SAR measurement Result of LTE Band 41

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	40620/2593	20M QPSK(1,49)	0.306	0.141	0.55	22.16	23.50	0.417	2022/5/30
Back Side	40620/2593	20M QPSK(1,49)	0.473	0.229	-3.36	22.16	23.50	0.644	2022/5/30
50%RB									
Front Side	40620/2593	20M QPSK(50,0)	0.170	0.072	2.02	21.45	22.50	0.216	2022/5/30
Back Side	40620/2593	20M QPSK(50,0)	0.279	0.123	0.80	21.45	22.50	0.355	2022/5/30

NOTE: Body-Worn SAR test results of LTE Band 41

Test Position	Test channel	Test Mode	SAR Value (W/kg)	Power Drift	Conducted power	Tune-up power	Scaled SAR 1g	Date
---------------	--------------	-----------	------------------	-------------	-----------------	---------------	---------------	------

of Hotspot with 10mm	/Freq.		1g	10g	(±5%)	(dBm)	(dBm)	(W/Kg)	
1RB									
Front Side	40620/2593	20M QPSK(1,49)	0.306	0.141	0.55	22.16	23.50	0.417	2022/5/30
Back Side	40620/2593	20M QPSK(1,49)	0.473	0.229	-3.36	22.16	23.50	0.644	2022/5/30
Left Side	40620/2593	20M QPSK(1,49)	0.172	0.081	2.11	22.16	23.50	0.234	2022/5/30
Right Side	40620/2593	20M QPSK(1,49)	0.068	0.032	-1.73	22.16	23.50	0.093	2022/5/30
Bottom Side	40620/2593	20M QPSK(1,49)	0.250	0.121	-3.05	22.16	23.50	0.340	2022/5/30
50%RB									
Front Side	40620/2593	20M QPSK(50,0)	0.170	0.072	2.02	21.45	22.50	0.216	2022/5/30
Back Side	40620/2593	20M QPSK(50,0)	0.279	0.123	0.80	21.45	22.50	0.355	2022/5/30
Left Side	40620/2593	20M QPSK(50,0)	0.094	0.047	4.87	21.45	22.50	0.120	2022/5/30
Right Side	40620/2593	20M QPSK(50,0)	0.040	0.019	-4.61	21.45	22.50	0.051	2022/5/30
Bottom Side	40620/2593	20M QPSK(50,0)	0.137	0.066	-2.96	21.45	22.50	0.174	2022/5/30

NOTE: Hotspot SAR test results of LTE Band 41

#### 9.1.17. SAR measurement Result of LTE Band 66

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	132322/1745	20M QPSK(1,49)	0.462	0.249	2.41	22.69	23.00	0.496	2022/5/20
Back Side	132322/1745	20M QPSK(1,49)	0.751	0.409	-0.39	22.69	23.00	0.807	2022/5/20

Back Side	132072/1720	20M QPSK(1,49)	0.663	0.343	-3.96	22.44	23.00	0.754	2022/5/20
Back Side	132572/1770	20M QPSK(1,49)	0.624	0.330	0.78	22.27	23.00	0.738	2022/5/20
50%RB									
Front Side	132322/1745	20M QPSK(50,49)	0.238	0.138	-2.34	21.09	21.50	0.262	2022/5/20
Back Side	132322/1745	20M QPSK(50,49)	0.390	0.230	-0.51	21.09	21.50	0.429	2022/5/20
100%RB									
Back Side	132322/1745	20M QPSK(100,0)	0.366	0.215	1.24	21.11	21.50	0.400	2022/5/20

NOTE: Body-Worn SAR test results of LTE Band 66

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	132322/1745	20M QPSK(1,49)	0.462	0.249	2.41	22.69	23.00	0.496	2022/5/20
Back Side	132322/1745	20M QPSK(1,49)	0.751	0.409	-0.39	22.69	23.00	0.807	2022/5/20
Left Side	132322/1745	20M QPSK(1,49)	0.273	0.146	-0.28	22.69	23.00	0.293	2022/5/20
Right Side	132322/1745	20M QPSK(1,49)	0.099	0.053	1.55	22.69	23.00	0.106	2022/5/20
Bottom Side	132322/1745	20M QPSK(1,49)	0.390	0.212	3.25	22.69	23.00	0.419	2022/5/20
Back Side	132072/1720	20M QPSK(1,49)	0.663	0.343	-3.96	22.44	23.00	0.754	2022/5/20
Back Side	132572/1770	20M QPSK(1,49)	0.624	0.330	0.78	22.27	23.00	0.738	2022/5/20
50%RB									
Front Side	132322/1745	20M QPSK(50,49)	0.238	0.138	-2.34	21.09	21.50	0.262	2022/5/20
Back Side	132322/1745	20M QPSK(50,49)	0.390	0.230	-0.51	21.09	21.50	0.429	2022/5/20

Left Side	132322/1745	20M QPSK(50,49)	0.146	0.079	-2.85	21.09	21.50	0.160	2022/5/20
Right Side	132322/1745	20M QPSK(50,49)	0.055	0.027	1.24	21.09	21.50	0.060	2022/5/20
Bottom Side	132322/1745	20M QPSK(50,49)	0.219	0.127	4.62	21.09	21.50	0.241	2022/5/20
100%RB									
Back Side	132322/1745	20M QPSK(100,0)	0.366	0.215	1.24	21.11	21.50	0.400	2022/5/20

NOTE: Hotspot SAR test results of LTE Band 66

#### 9.1.18. SAR measurement Result of WLAN 2.4G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	6/2437	802.11b	0.090	0.048	-0.46	18.19	18.50	0.097	2022/5/26
Back Side	6/2437	802.11b	0.111	0.062	-0.97	18.19	18.50	0.119	2022/5/26

NOTE: Body-Worn SAR test results of WLAN 2.4G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	6/2437	802.11b	0.090	0.048	-0.46	18.19	18.50	0.097	2022/5/26
Back Side	6/2437	802.11b	0.111	0.062	-0.97	18.19	18.50	0.119	2022/5/26
Left Side	6/2437	802.11b	0.043	0.023	-1.66	18.19	18.50	0.046	2022/5/26
Top Side	6/2437	802.11b	0.068	0.036	-0.51	18.19	18.50	0.073	2022/5/26

NOTE: Hotspot SAR test results of WLAN 2.4G

#### 9.1.19. SAR measurement Result of WLAN 5.2G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	40/5200	802.11n	0.096	0.050	2.13	17.29	18.00	0.113	2022/5/28

		HT20							
Back Side	40/5200	802.11n HT20	0.131	0.068	-0.36	17.29	18.00	0.154	2022/5/28

NOTE: Body-Worn SAR test results of WLAN 5.2G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	40/5200	802.11n HT20	0.096	0.050	2.13	17.29	18.00	0.113	2022/5/28
Back Side	40/5200	802.11n HT20	0.131	0.068	-0.36	17.29	18.00	0.154	2022/5/28
Left Side	40/5200	802.11n HT20	0.046	0.024	-0.80	17.29	18.00	0.054	2022/5/28
Top Side	40/5200	802.11n HT20	0.077	0.039	-2.38	17.29	18.00	0.091	2022/5/28

NOTE: Hotspot SAR test results of WLAN 5.2G

### 9.1.20. SAR measurement Result of WLAN 5.8G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	157/5785	802.11ac VHT20	0.090	0.051	3.85	16.47	17.50	0.114	2022/5/27
Back Side	157/5785	802.11ac VHT20	0.108	0.064	-0.98	16.47	17.50	0.137	2022/5/27

NOTE: Body-Worn SAR test results of WLAN 5.8G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	157/5785	802.11ac VHT20	0.090	0.051	3.85	16.47	17.50	0.114	2022/5/27
Back Side	157/5785	802.11ac VHT20	0.108	0.064	-0.98	16.47	17.50	0.137	2022/5/27

Left Side	157/5785	802.11ac VHT20	0.046	0.027	-1.39	16.47	17.50	0.058	2022/5/27
Top Side	157/5785	802.11ac VHT20	0.068	0.040	-1.37	16.47	17.50	0.086	2022/5/27

NOTE: Hotspot SAR test results of WLAN 5.8G

## 9.2. Simultaneous Transmission Analysis

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- 1) Scalar SAR summation < 1.6W/kg.
- 2) SPLSR =  $(\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$ , where  $(x_1, y_1, z_1)$  and  $(x_2, y_2, z_2)$  are the coordinates of the extrapolated peak SAR locations in the zoom scan. If  $\text{SPLSR} \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.

Test Position		Scaled SAR <sub>MAX</sub>		$\Sigma 1\text{-g SAR}$ (W/Kg)	SPLSR	Remark
		WWAN	DTS			
Body-Worn	Front Side	0.636	0.097	0.733	N/A	N/A
	Back Side	1.232	0.119	1.351	N/A	N/A
Hotspot	Front Side	0.636	0.097	0.733	N/A	N/A
	Back Side	1.232	0.119	1.351	N/A	N/A
	Left Side	0.368	0.046	0.414	N/A	N/A
	Right Side	0.135	N/A	0.135	N/A	N/A
	Top Side	N/A	0.073	0.073	N/A	N/A
	Bottom Side	0.514	N/A	0.514	N/A	N/A

Test Position		Scaled SAR <sub>MAX</sub>		$\Sigma 1\text{-g SAR}$ (W/Kg)	SPLSR	Remark
		WWAN	NII			
Body-Worn	Front Side	0.636	0.114	0.750	N/A	N/A
	Back Side	1.232	0.154	1.386	N/A	N/A
Hotspot	Front Side	0.636	0.114	0.750	N/A	N/A
	Back Side	1.232	0.154	1.386	N/A	N/A
	Left Side	0.368	0.058	0.426	N/A	N/A
	Right Side	0.135	N/A	0.135	N/A	N/A
	Top Side	N/A	0.091	0.091	N/A	N/A
	Bottom Side	0.514	N/A	0.514	N/A	N/A

## 10. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

## 11. Appendix B. System Check Plots

Table of contents
<b>MEASUREMENT 1 System Performance Check - 750MHz</b>
<b>MEASUREMENT 2 System Performance Check - 835MHz</b>
<b>MEASUREMENT 3 System Performance Check - 1800MHz</b>
<b>MEASUREMENT 4 System Performance Check - 1900MHz</b>
<b>MEASUREMENT 5 System Performance Check - 2450MHz</b>
<b>MEASUREMENT 6 System Performance Check - 2600MHz</b>
<b>MEASUREMENT 7 System Performance Check - 5200MHz</b>
<b>MEASUREMENT 8 System Performance Check - 5800MHz</b>

# MEASUREMENT 1


Date of measurement: 19/5/2022

## A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=15\text{mm}</math> <math>dy=15\text{mm}</math>, <math>h= 5.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>5\times 5\times 7, dx=8\text{mm}</math> <math>dy=8\text{mm}</math> <math>dz=5\text{mm}</math></u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW750</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	750.000000
<b>Relative permittivity (real part)</b>	40.707545
<b>Relative permittivity (imaginary part)</b>	21.487866
<b>Conductivity (S/m)</b>	0.895328
<b>Variation (%)</b>	2.730000

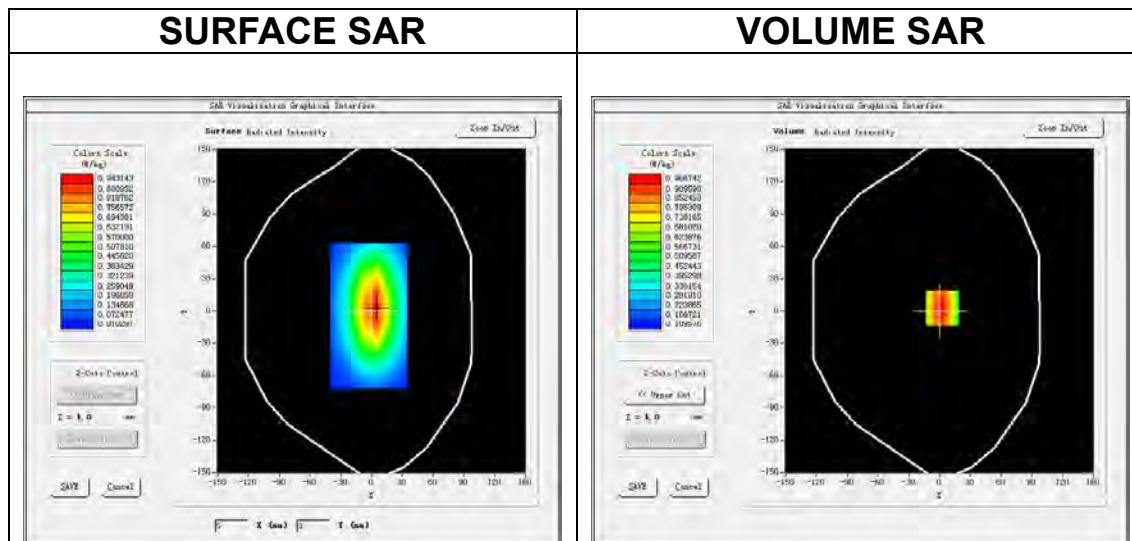

**Maximum location: X=3.00, Y=3.00**  
**SAR Peak: 1.30 W/kg**

<b>SAR 10g (W/Kg)</b>	0.552332
<b>SAR 1g (W/Kg)</b>	0.825321

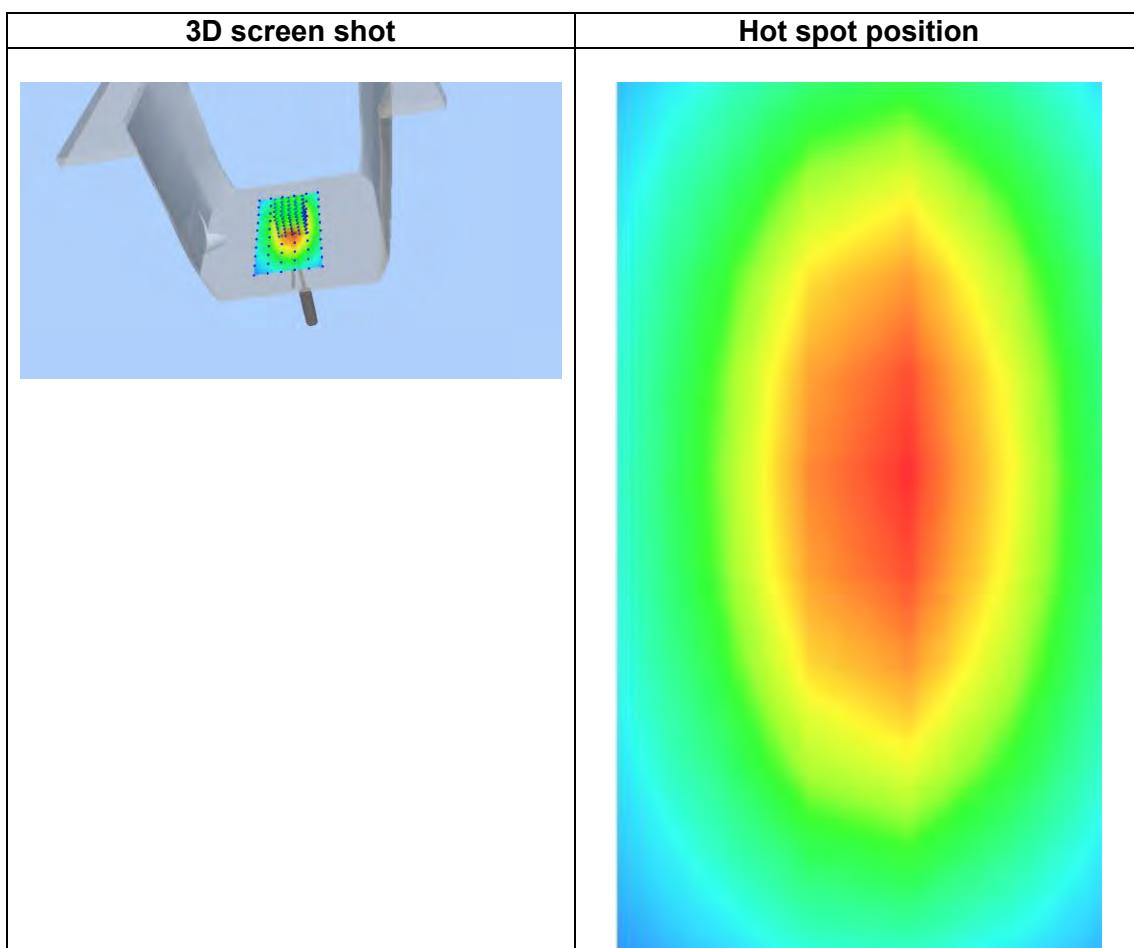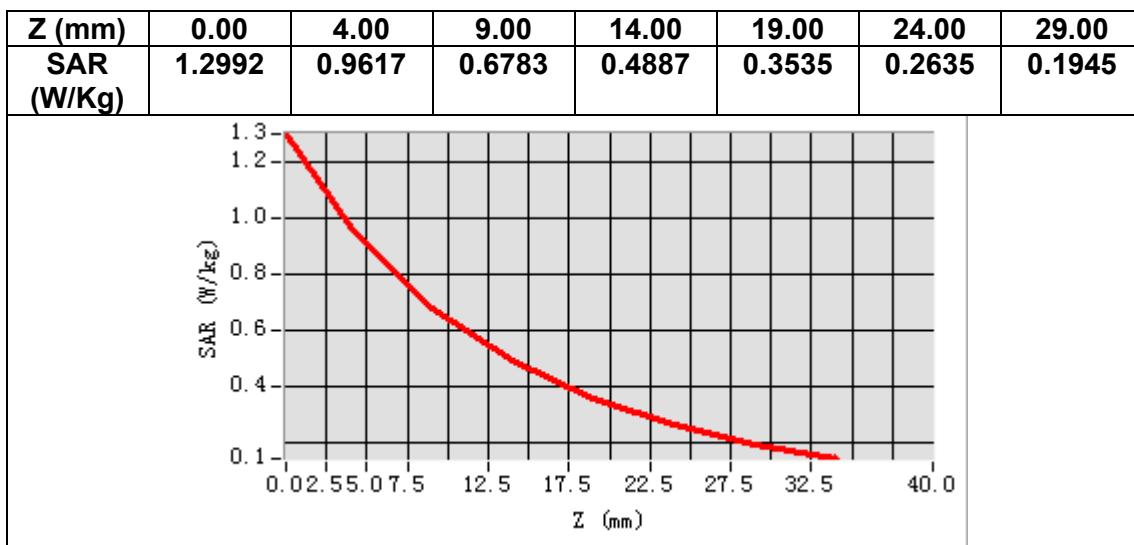

## MEASUREMENT 2


Date of measurement: 25/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=15\text{mm}</math> <math>dy=15\text{mm}</math>, <math>h= 5.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>5\times 5\times 7, dx=8\text{mm}</math> <math>dy=8\text{mm}</math> <math>dz=5\text{mm}</math></u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW835</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	835.000000
<b>Relative permittivity (real part)</b>	41.904657
<b>Relative permittivity (imaginary part)</b>	19.639930
<b>Conductivity (S/m)</b>	0.911075
<b>Variation (%)</b>	-2.720000

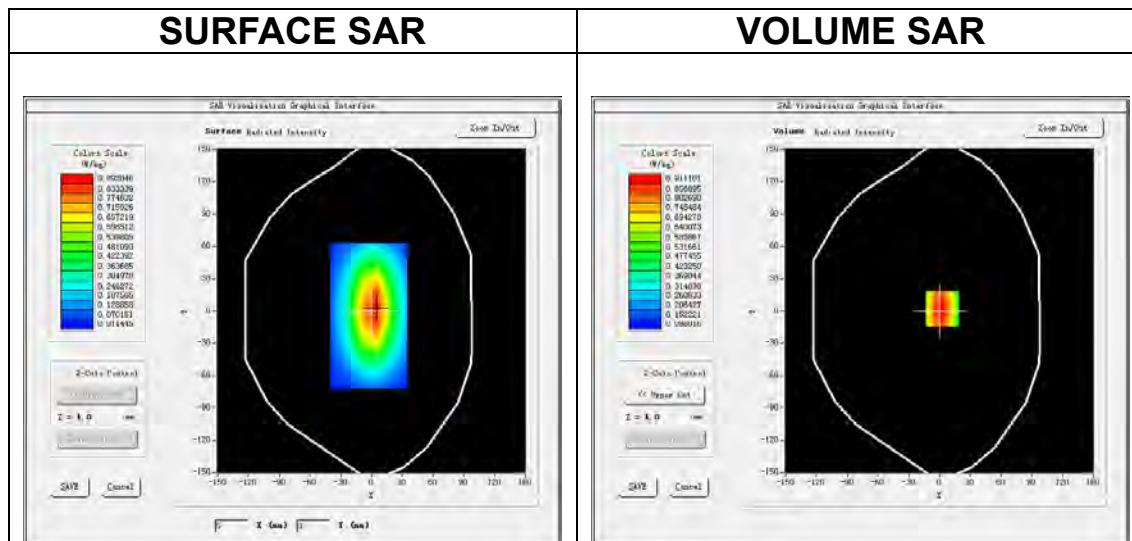

**Maximum location: X=3.00, Y=2.00**  
**SAR Peak: 1.23 W/kg**

<b>SAR 10g (W/Kg)</b>	0.663333
<b>SAR 1g (W/Kg)</b>	0.912172

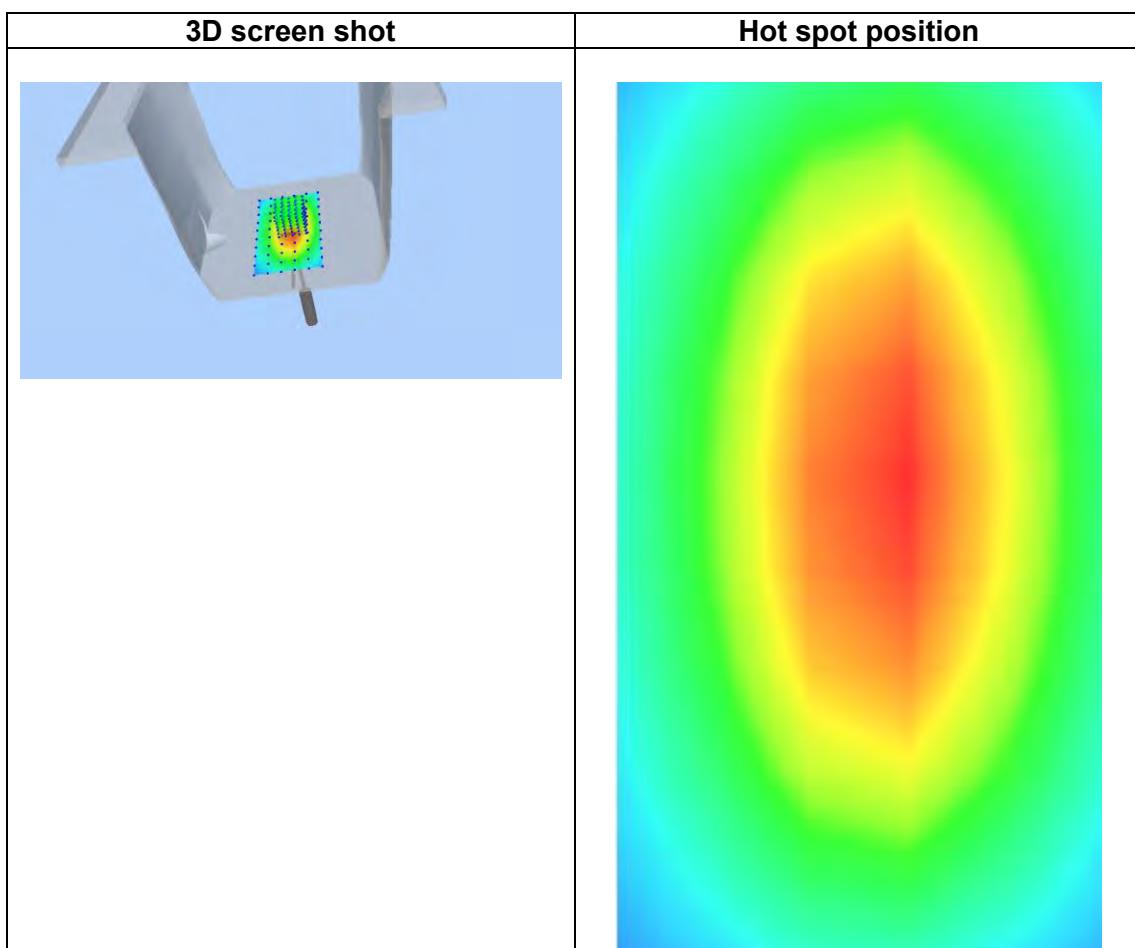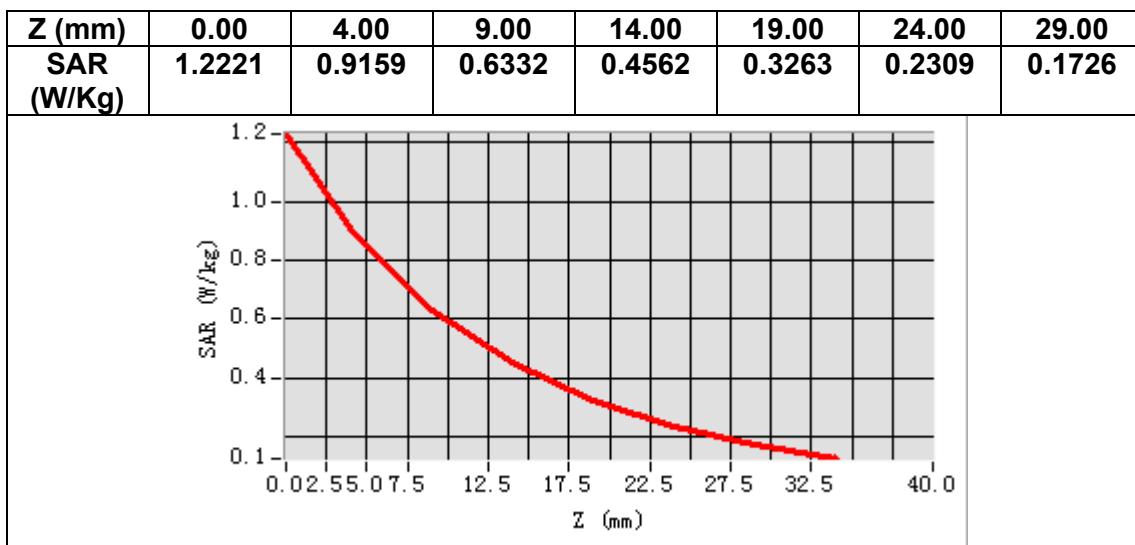

## MEASUREMENT 3


Date of measurement: 20/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	$dx=15\text{mm}$ $dy=15\text{mm}$ , $h= 5.00 \text{ mm}$
<u>ZoomScan</u>	$5\times 5\times 7$ , $dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1800.000000
<b>Relative permittivity (real part)</b>	38.628363
<b>Relative permittivity (imaginary part)</b>	13.750537
<b>Conductivity (S/m)</b>	1.375054
<b>Variation (%)</b>	2.980000

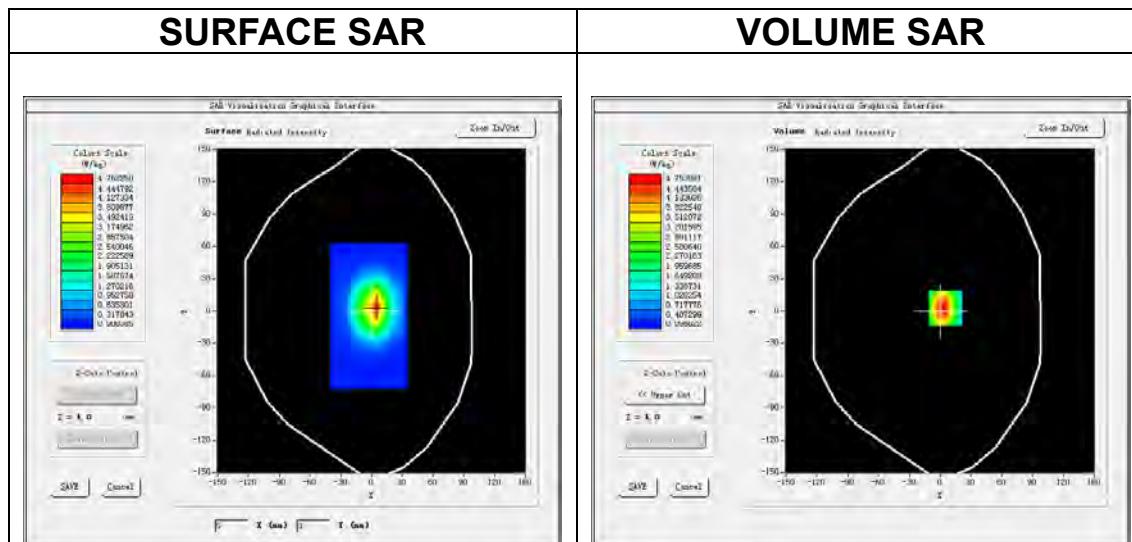

**Maximum location: X=5.00, Y=3.00**  
**SAR Peak: 7.59 W/kg**

<b>SAR 10g (W/Kg)</b>	1.894307
<b>SAR 1g (W/Kg)</b>	3.847066

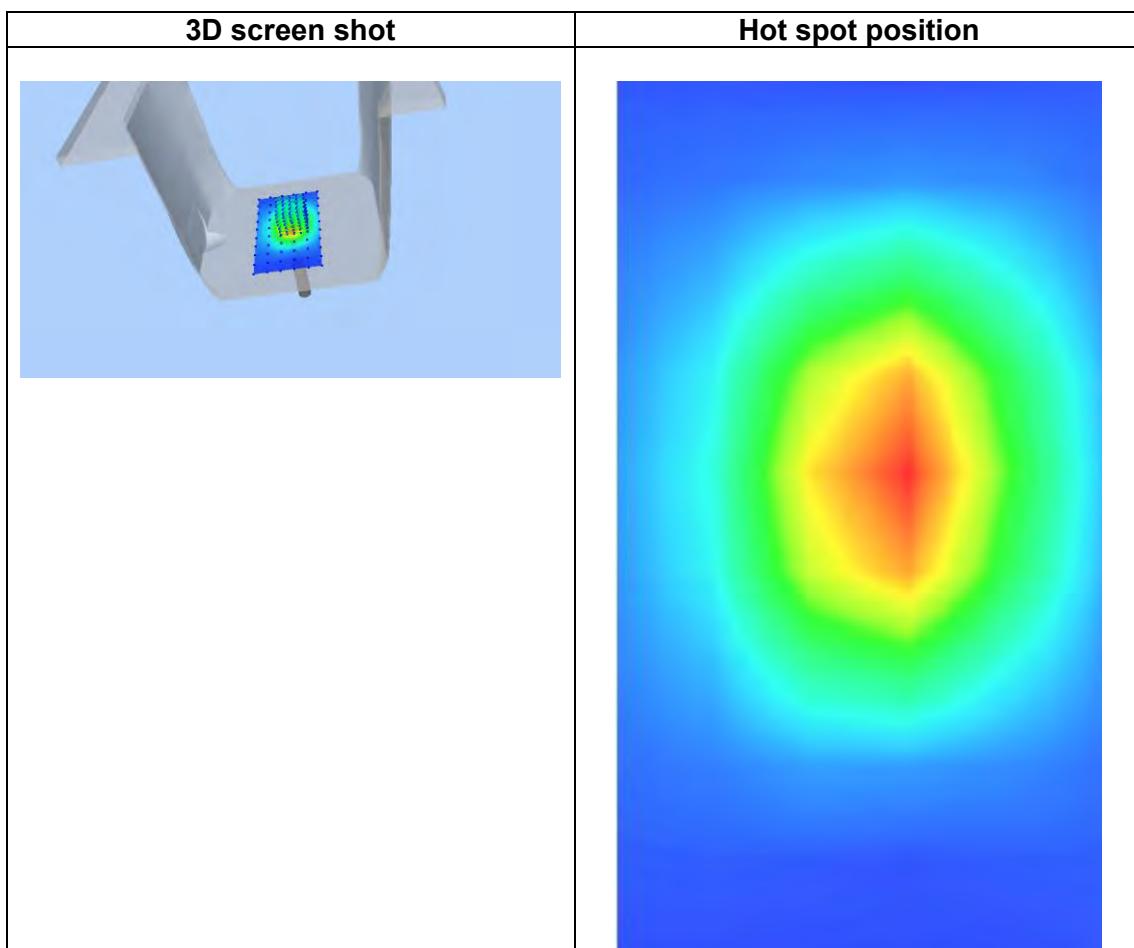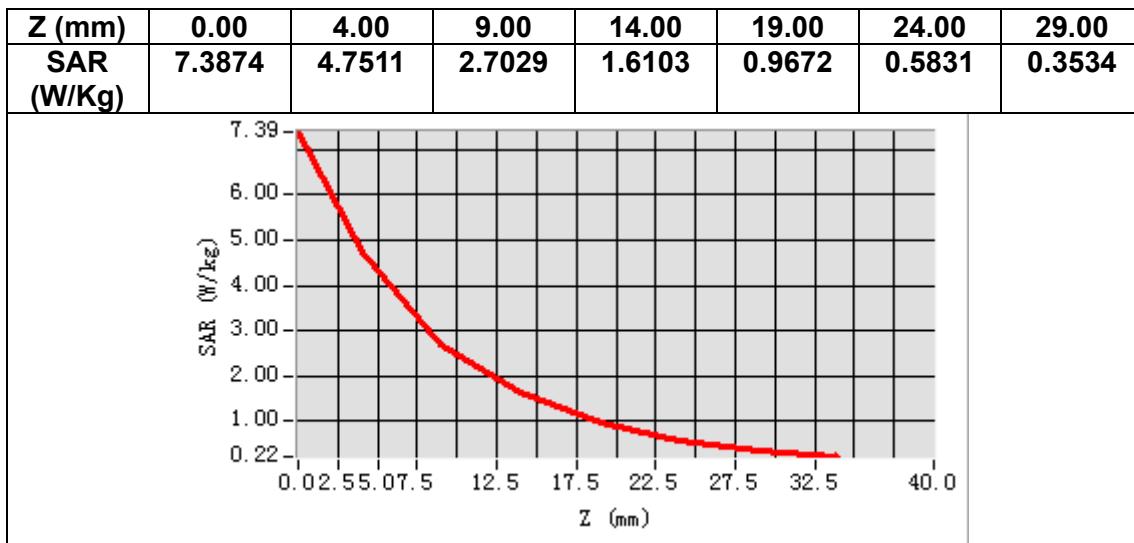

## MEASUREMENT 4


Date of measurement: 24/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	$dx=15\text{mm}$ $dy=15\text{mm}$ , $h= 5.00 \text{ mm}$
<u>ZoomScan</u>	$5\times 5\times 7$ , $dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1900.000000
<b>Relative permittivity (real part)</b>	38.180775
<b>Relative permittivity (imaginary part)</b>	13.879897
<b>Conductivity (S/m)</b>	1.465100
<b>Variation (%)</b>	2.220000

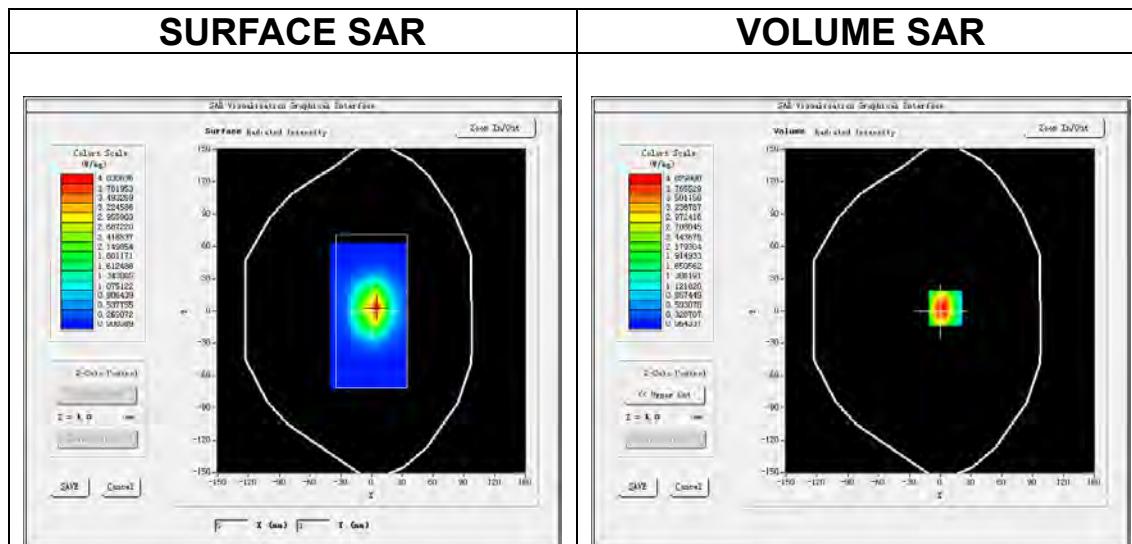

**Maximum location: X=5.00, Y=3.00**  
**SAR Peak: 6.57 W/kg**

<b>SAR 10g (W/Kg)</b>	2.149347
<b>SAR 1g (W/Kg)</b>	3.696221

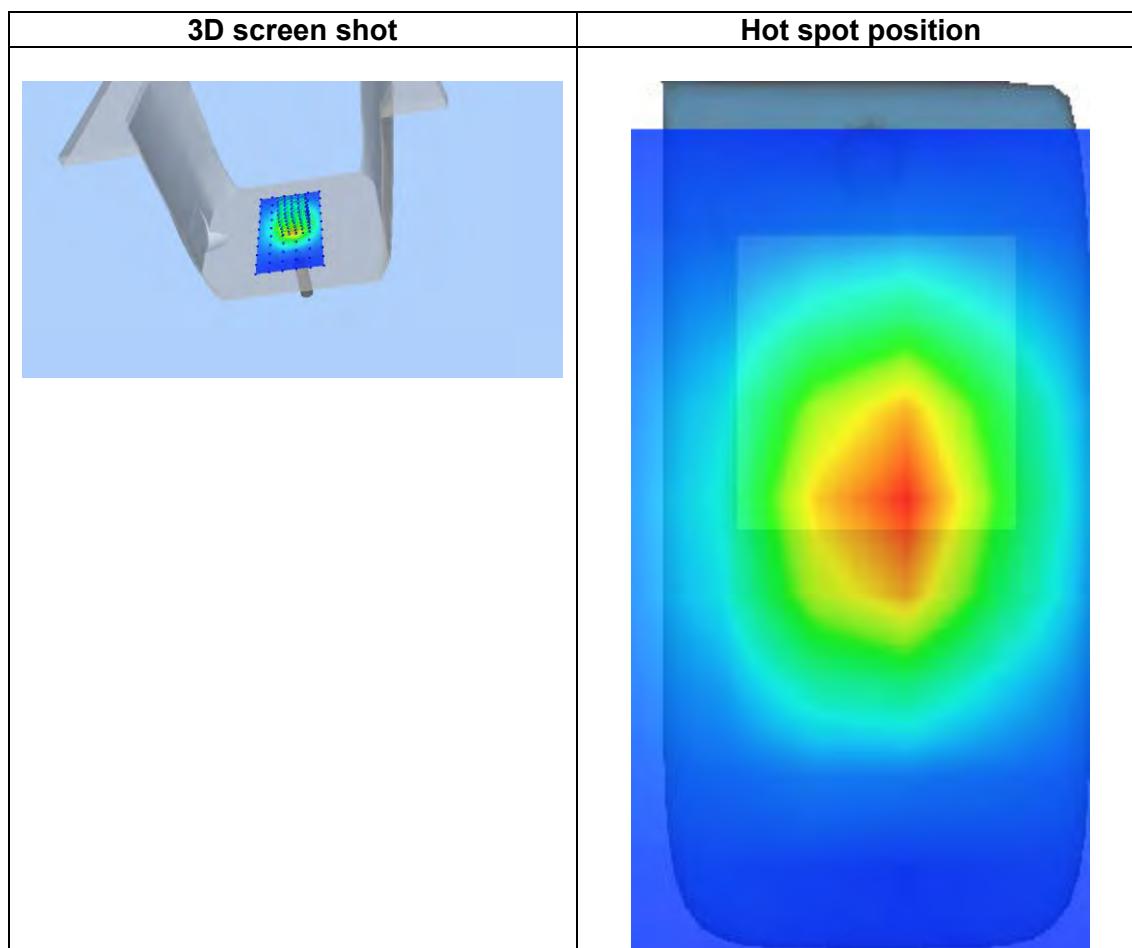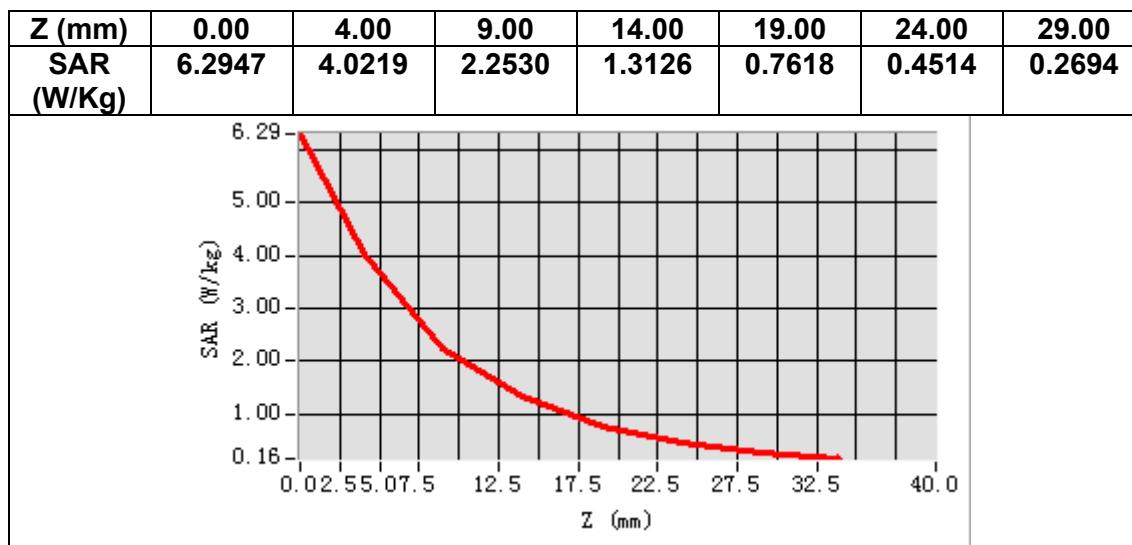

## MEASUREMENT 5


Date of measurement: 26/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=12\text{mm}</math> <math>dy=12\text{mm}</math>, <math>h= 5.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>7\times 7\times 7, dx=5\text{mm}</math> <math>dy=5\text{mm}</math> <math>dz=5\text{mm}</math></u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	2450.000000
<b>Relative permittivity (real part)</b>	38.120243
<b>Relative permittivity (imaginary part)</b>	12.946655
<b>Conductivity (S/m)</b>	1.762184
<b>Variation (%)</b>	1.290000

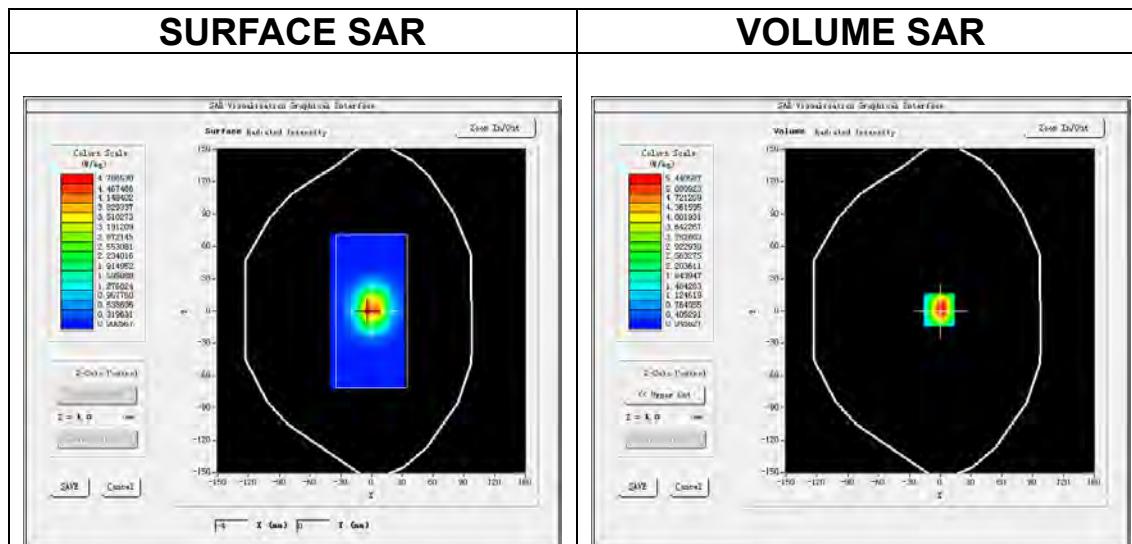

**Maximum location: X=-1.00, Y=1.00**  
**SAR Peak: 8.94 W/kg**

<b>SAR 10g (W/Kg)</b>	2.427106
<b>SAR 1g (W/Kg)</b>	5.226340

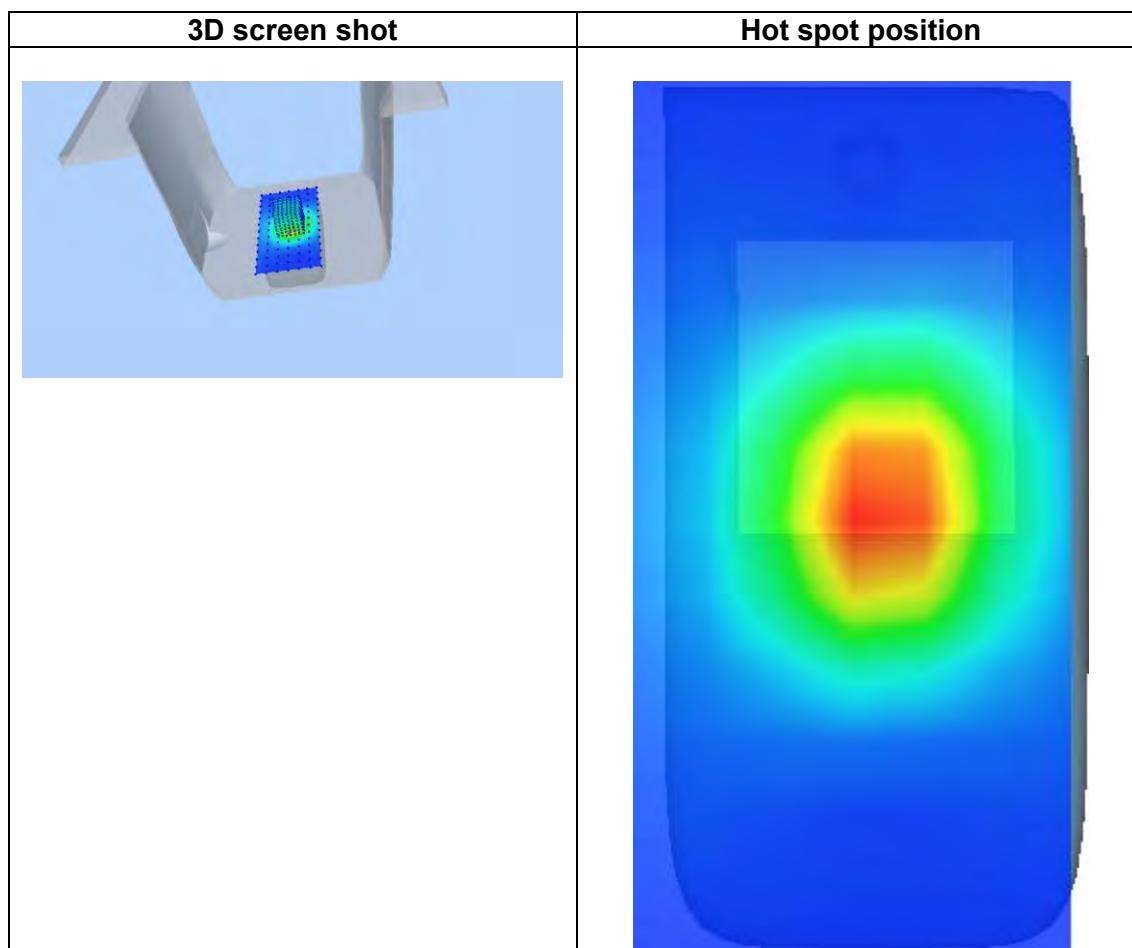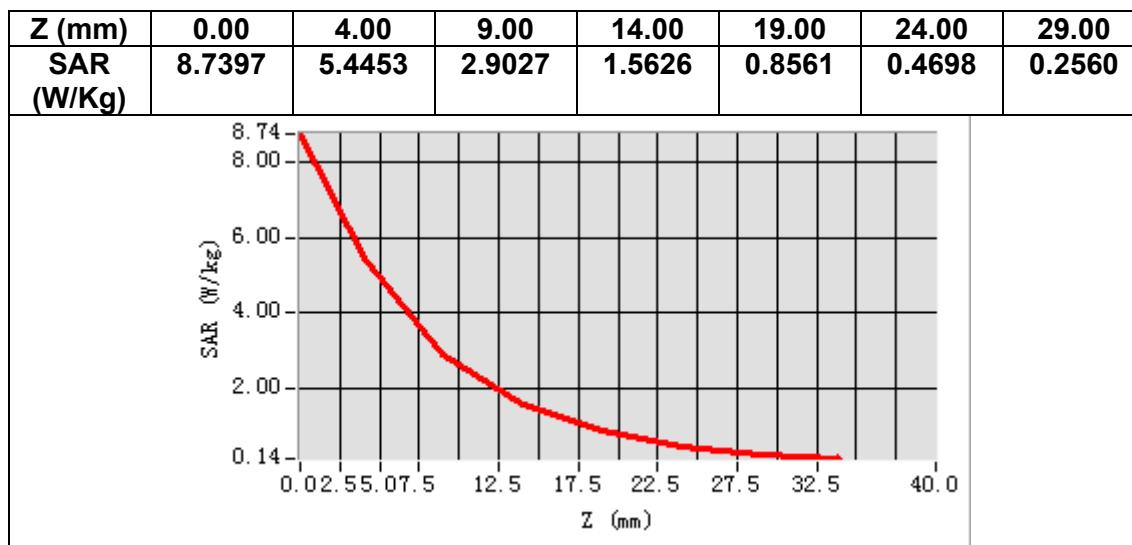

## MEASUREMENT 6


Date of measurement: 30/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=12\text{mm}</math> <math>dy=12\text{mm}</math>, <math>h= 5.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>7\times 7\times 7, dx=5\text{mm}</math> <math>dy=5\text{mm}</math> <math>dz=5\text{mm}</math></u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	2600.000000
<b>Relative permittivity (real part)</b>	37.914686
<b>Relative permittivity (imaginary part)</b>	13.467382
<b>Conductivity (S/m)</b>	1.945289
<b>Variation (%)</b>	0.250000

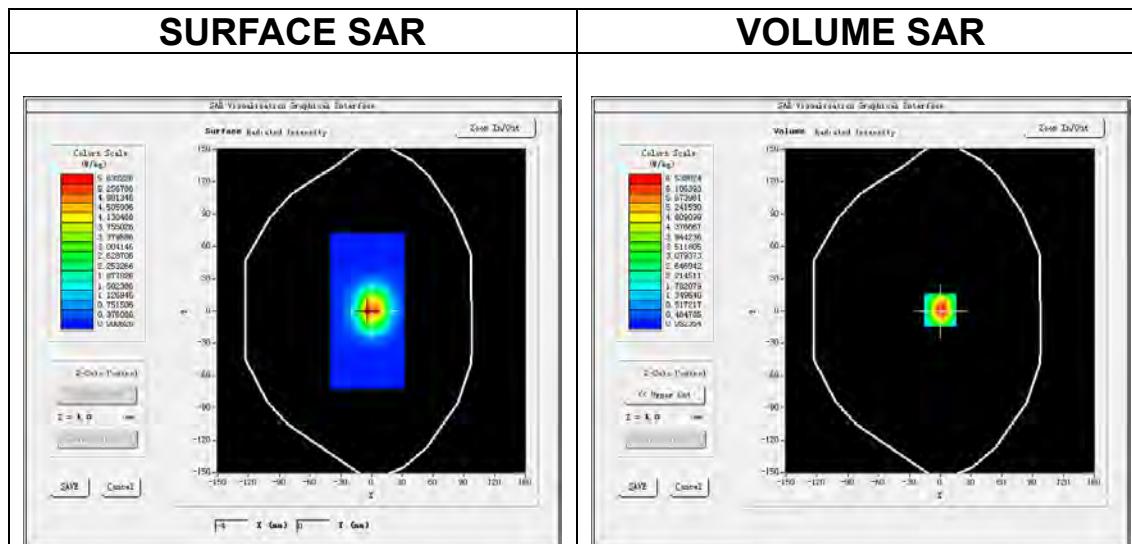

**Maximum location: X=0.00, Y=1.00**  
**SAR Peak: 10.67 W/kg**

<b>SAR 10g (W/Kg)</b>	2.300037
<b>SAR 1g (W/Kg)</b>	5.412199

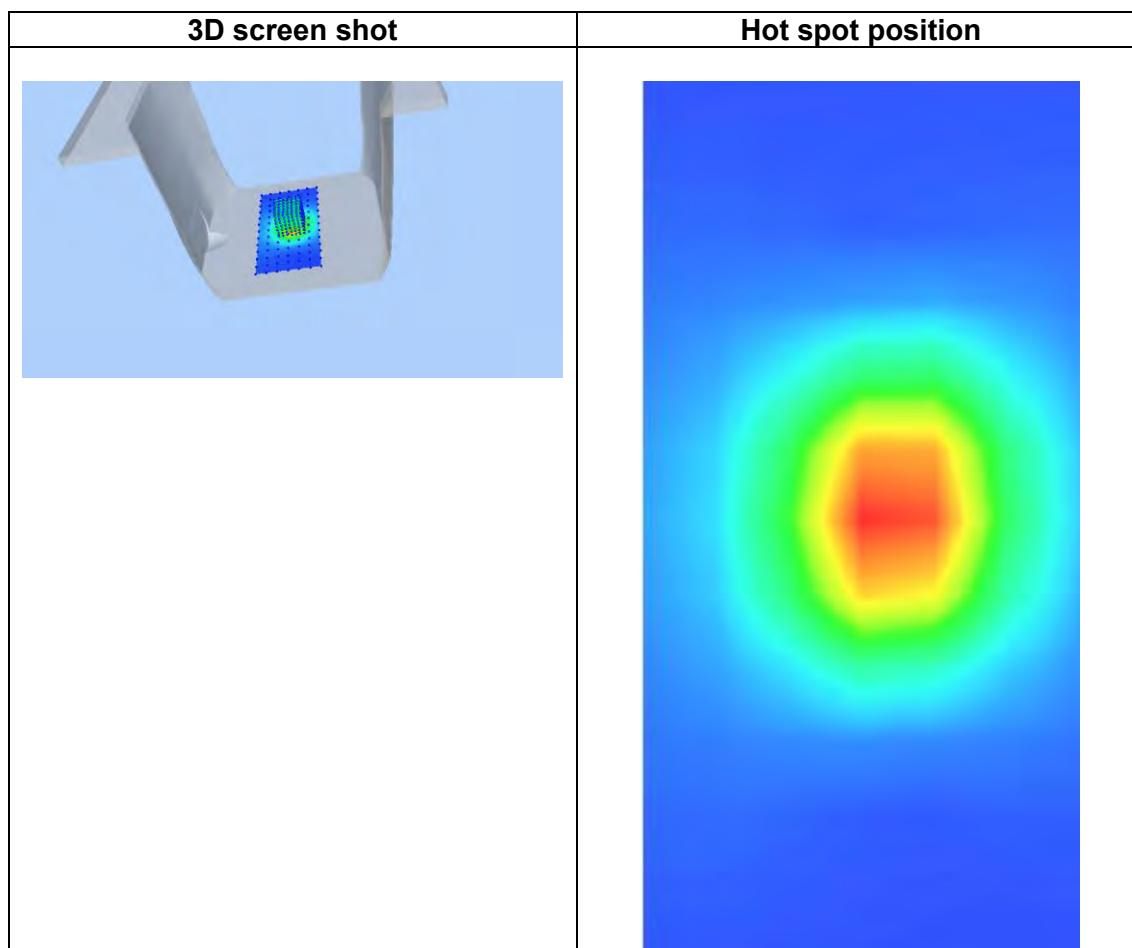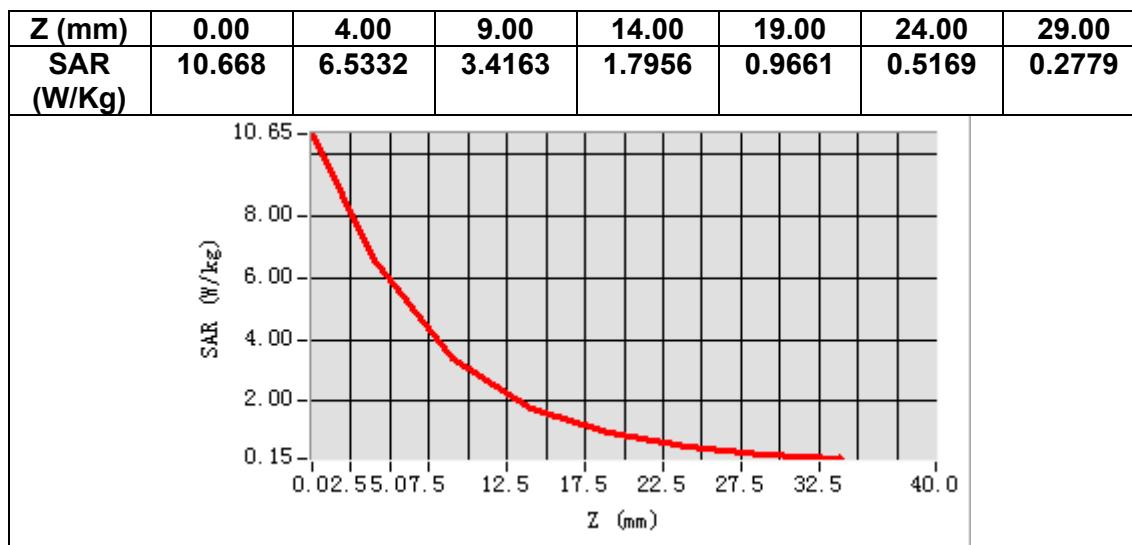

## MEASUREMENT 7


Date of measurement: 28/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5200</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	5200.000000
<b>Relative permittivity (real part)</b>	36.039140
<b>Relative permittivity (imaginary part)</b>	16.071884
<b>Conductivity (S/m)</b>	4.642989
<b>Variation (%)</b>	2.800000

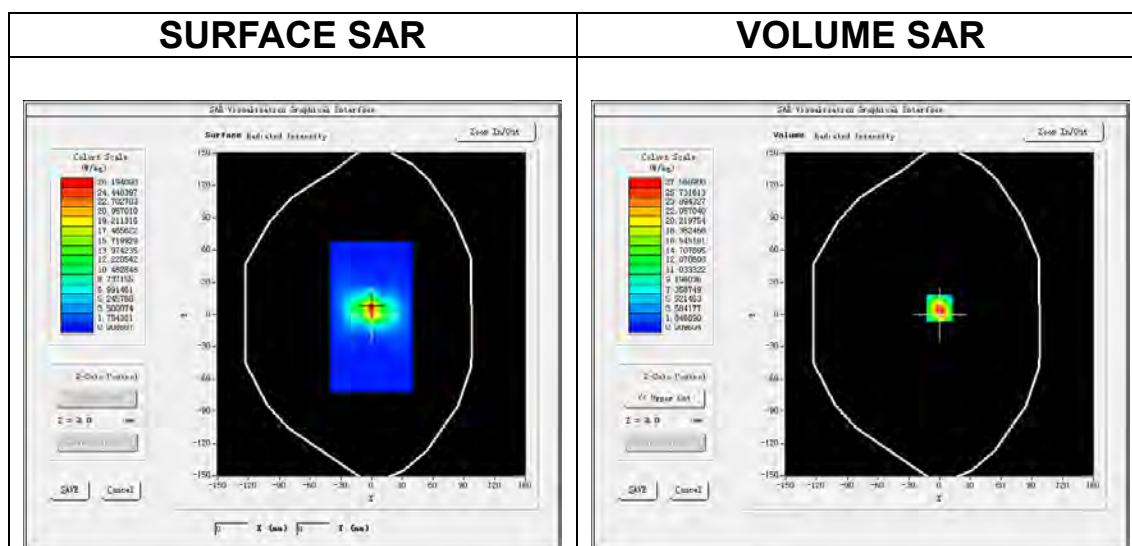

**Maximum location: X=0.00, Y=6.00**  
**SAR Peak: 49.61 W/kg**

<b>SAR 10g (W/Kg)</b>	5.838162
<b>SAR 1g (W/Kg)</b>	15.512032

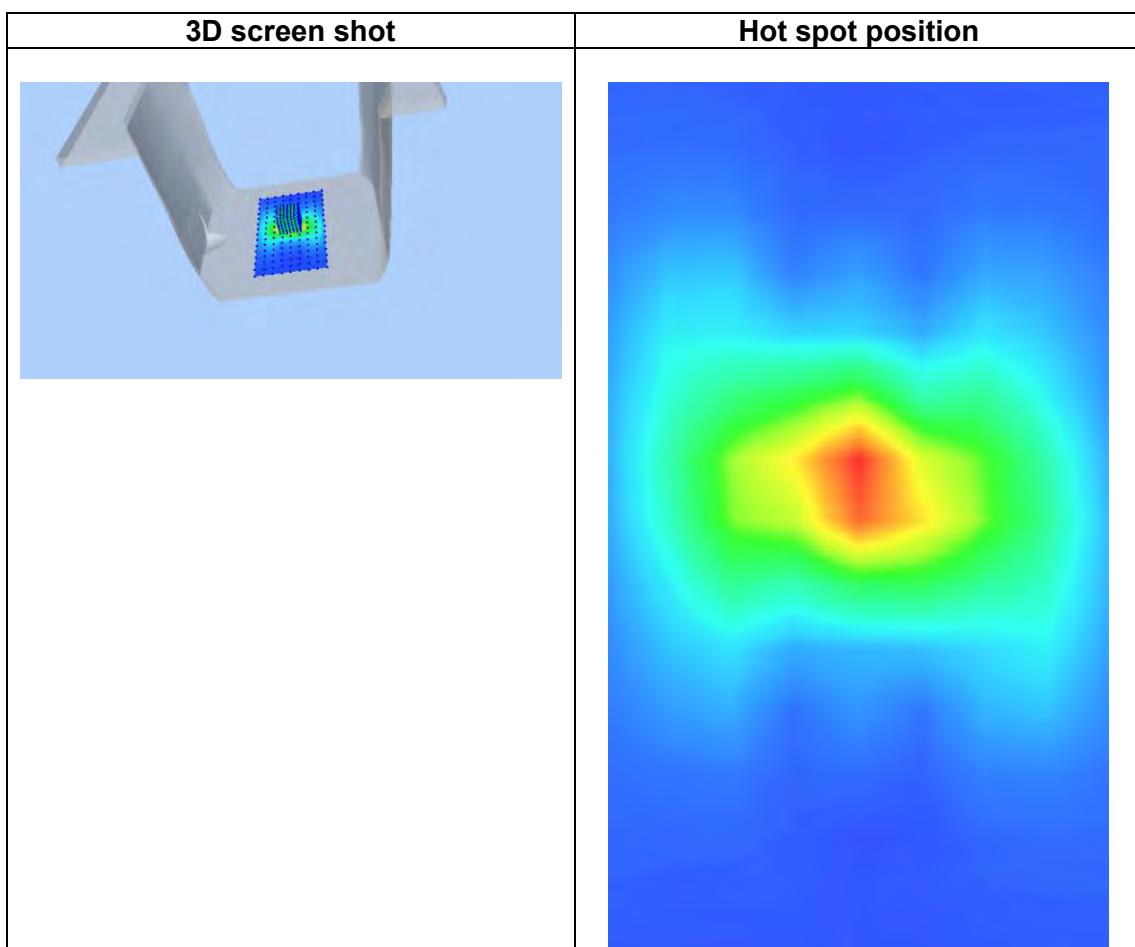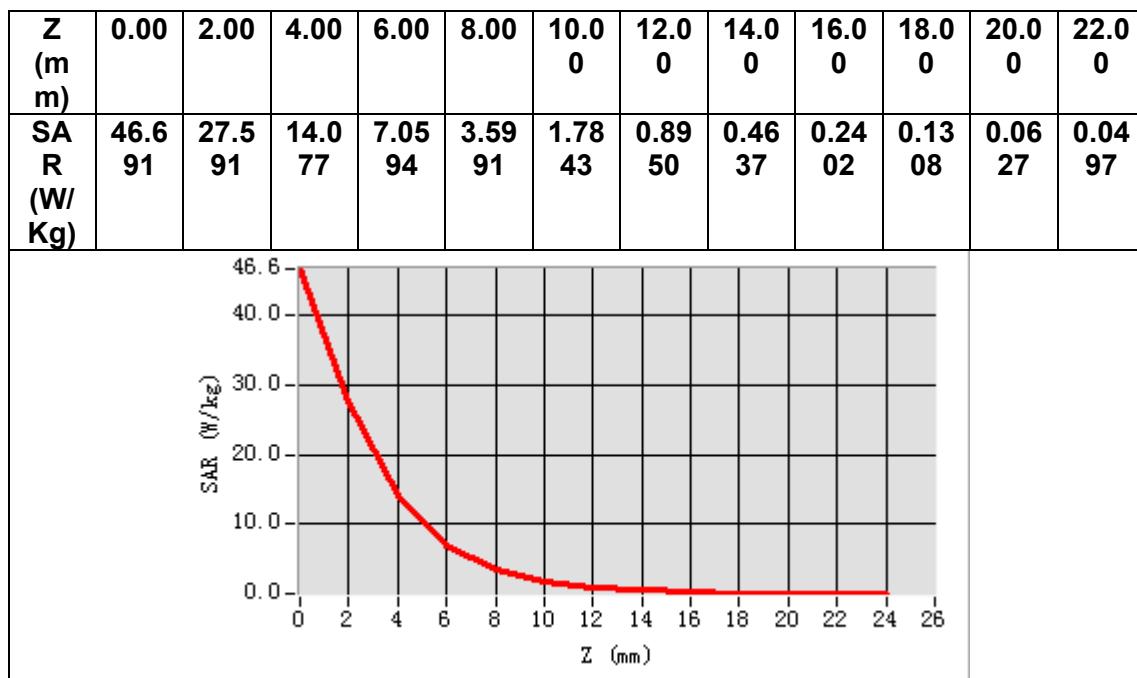

## MEASUREMENT 8


Date of measurement: 27/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	5800.000000
<b>Relative permittivity (real part)</b>	34.905858
<b>Relative permittivity (imaginary part)</b>	16.299808
<b>Conductivity (S/m)</b>	5.252160
<b>Variation (%)</b>	-0.500000

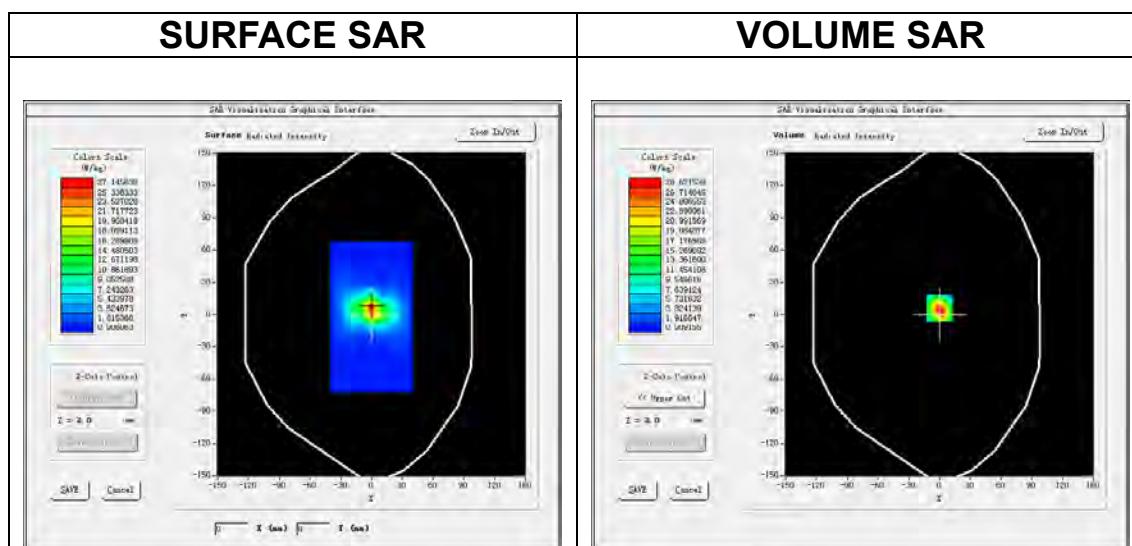

**Maximum location: X=0.00, Y=6.00**  
**SAR Peak: 51.30 W/kg**

<b>SAR 10g (W/Kg)</b>	6.136228
<b>SAR 1g (W/Kg)</b>	19.340190

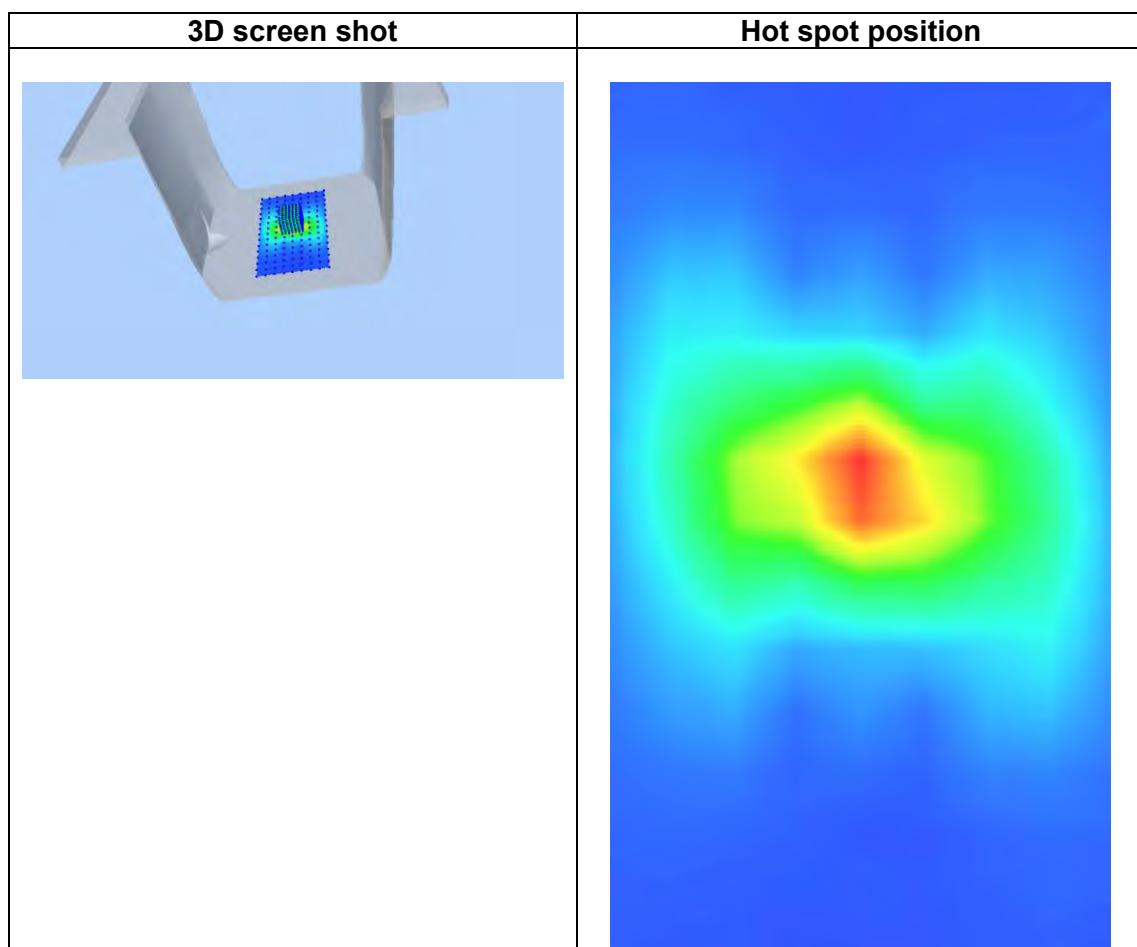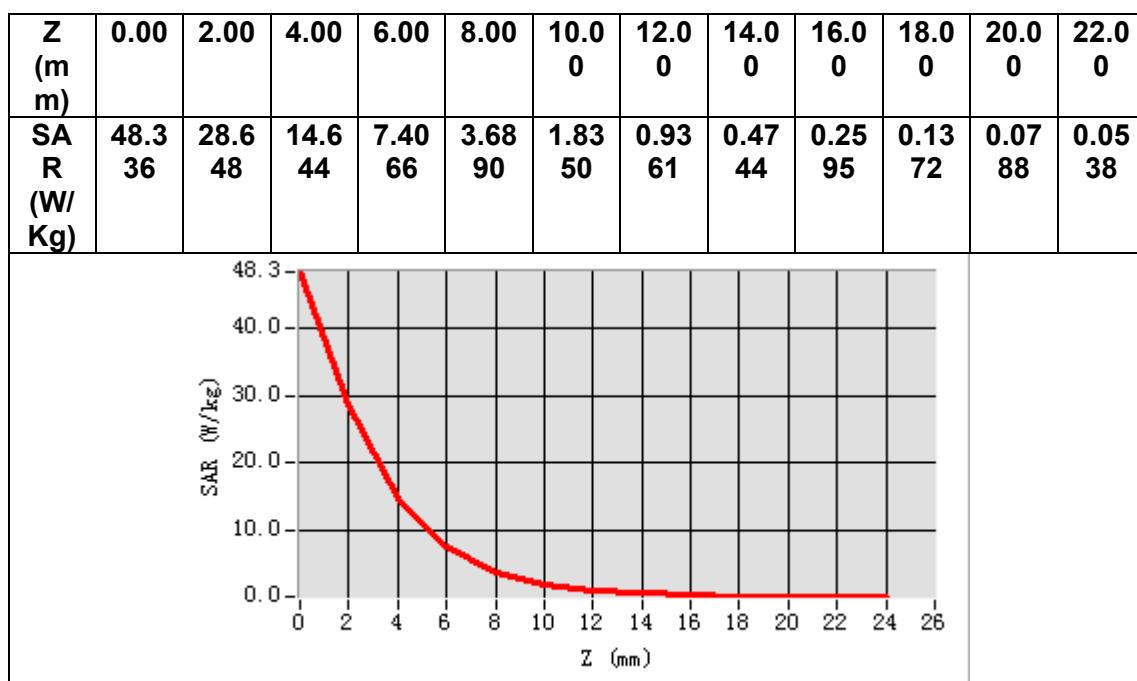

## 12. Appendix C. Plots of High SAR Measurement

### Table of contents

- MEASUREMENT 1 GSM 850 Body**
- MEASUREMENT 2 GSM 1900 Body**
- MEASUREMENT 3 WCDMA Band 2 Body**
- MEASUREMENT 4 WCDMA Band 4 Body**
- MEASUREMENT 5 WCDMA Band 5 Body**
- MEASUREMENT 6 WLAN 5.2G Body**
- MEASUREMENT 7 WLAN 5.8G Body**
- MEASUREMENT 8 WLAN 2.4G Body**
- MEASUREMENT 9 LTE Band 2 Body**
- MEASUREMENT 10 LTE Band 4 Body**
- MEASUREMENT 11 LTE Band 5 Body**
- MEASUREMENT 12 LTE Band 7 Body**
- MEASUREMENT 13 LTE Band 12 Body**
- MEASUREMENT 14 LTE Band 13 Body**
- MEASUREMENT 15 LTE Band 17 Body**
- MEASUREMENT 16 LTE Band 25 Body**
- MEASUREMENT 17 LTE Band 26A Body**
- MEASUREMENT 18 LTE Band 26B Body**
- MEASUREMENT 19 LTE Band 41 Body**
- MEASUREMENT 20 LTE Band 66 Body**

# MEASUREMENT 1


Date of measurement: 25/5/2022

## A. Experimental conditions.

<u>Area Scan</u>	$dx=15\text{mm}$ $dy=15\text{mm}$ , $h= 5.00 \text{ mm}$
<u>ZoomScan</u>	$5\times 5\times 7$ , $dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	836.600000
<b>Relative permittivity (real part)</b>	41.820316
<b>Relative permittivity (imaginary part)</b>	19.665770
<b>Conductivity (S/m)</b>	0.913803
<b>Variation (%)</b>	-4.440000

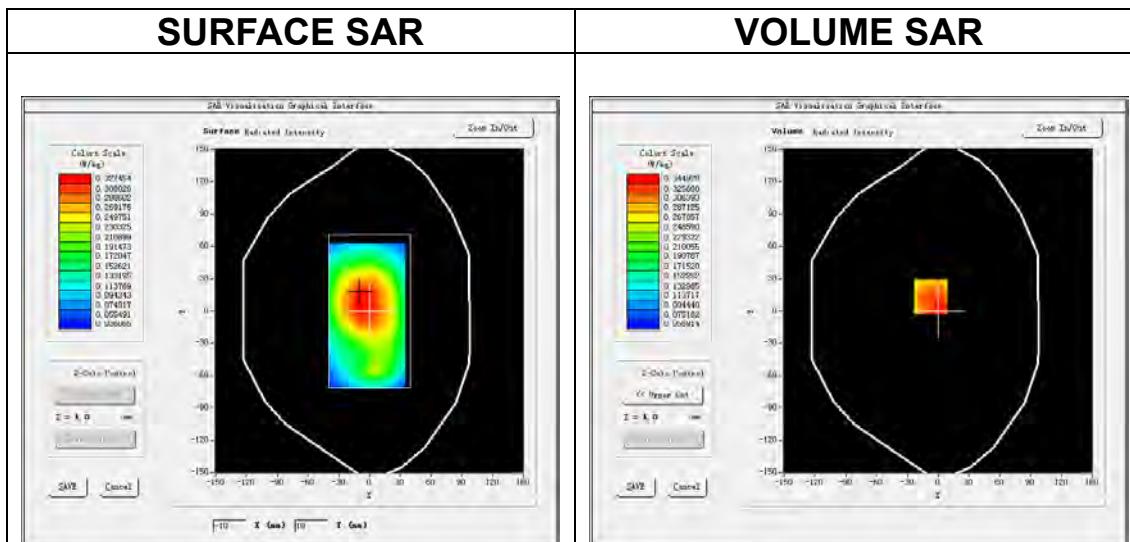

**Maximum location: X=-7.00, Y=13.00**

**SAR Peak: 0.47 W/kg**

<b>SAR 10g (W/Kg)</b>	0.246222
<b>SAR 1g (W/Kg)</b>	0.339383

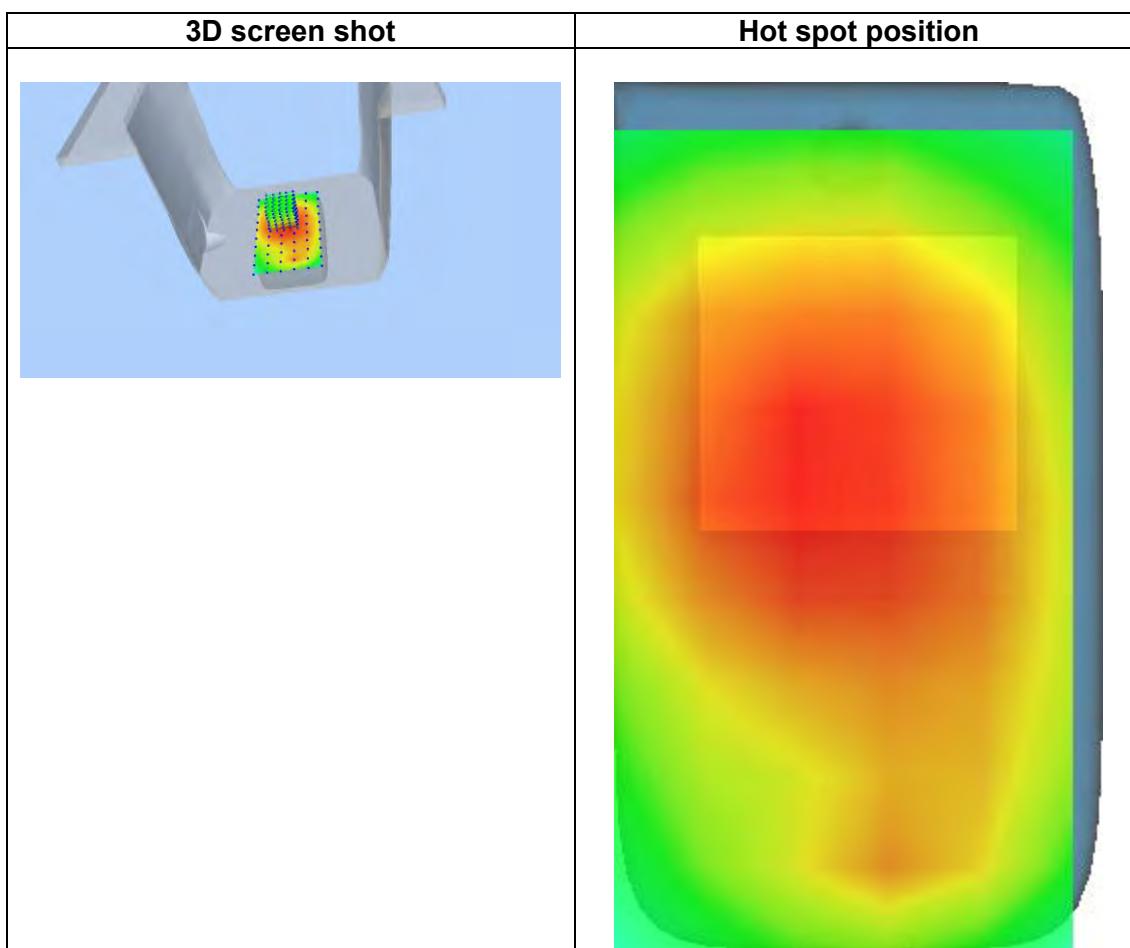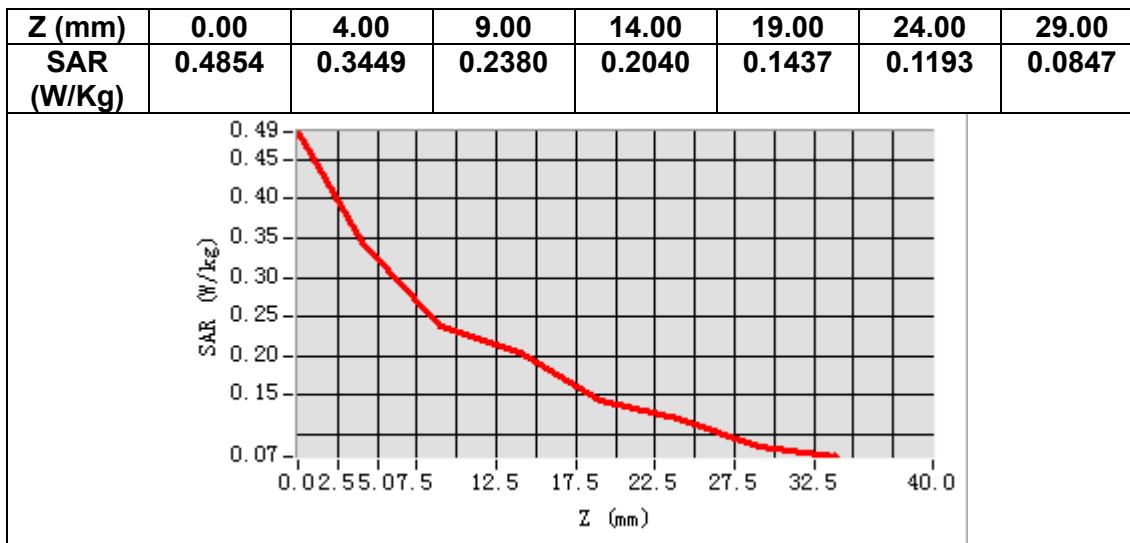

## MEASUREMENT 2


Date of measurement: 24/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	$dx=15\text{mm}$ $dy=15\text{mm}$ , $h= 5.00 \text{ mm}$
<u>ZoomScan</u>	$5\times 5\times 7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.7)</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1880.000000
<b>Relative permittivity (real part)</b>	38.267174
<b>Relative permittivity (imaginary part)</b>	13.897697
<b>Conductivity (S/m)</b>	1.451537
<b>Variation (%)</b>	0.740000

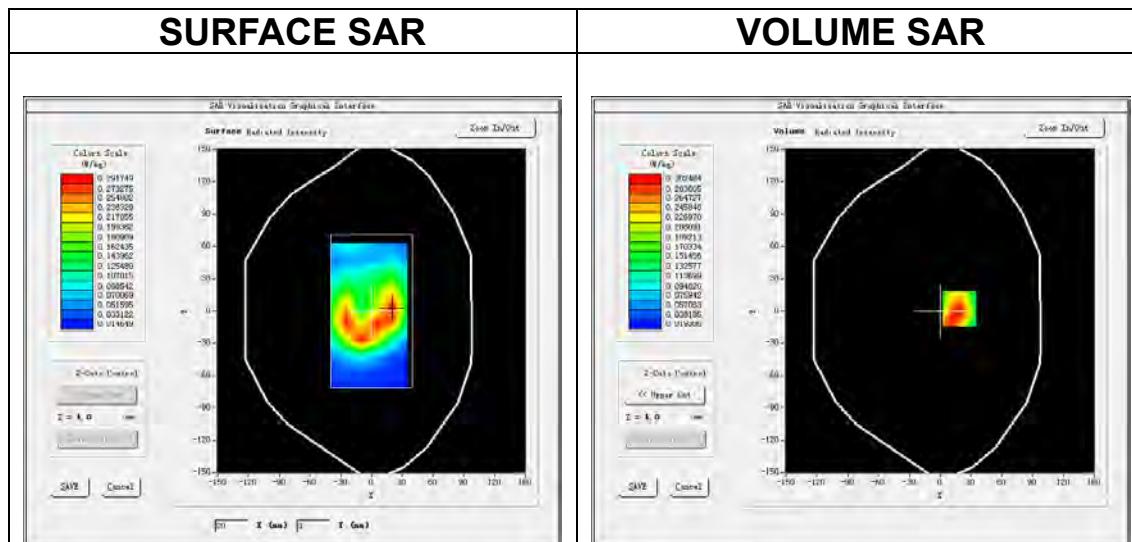

**Maximum location: X=19.00, Y=2.00**  
**SAR Peak: 0.46 W/kg**

<b>SAR 10g (W/Kg)</b>	0.178239
<b>SAR 1g (W/Kg)</b>	0.300779

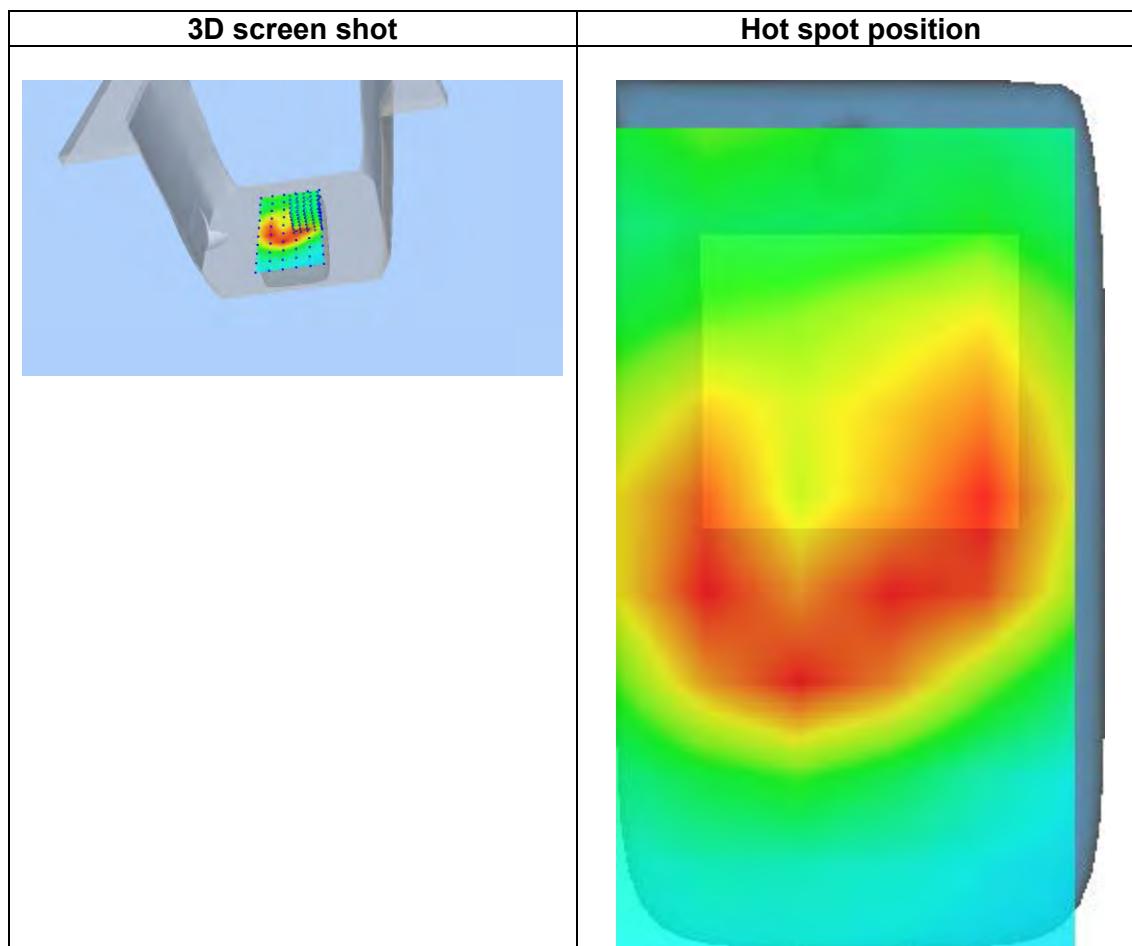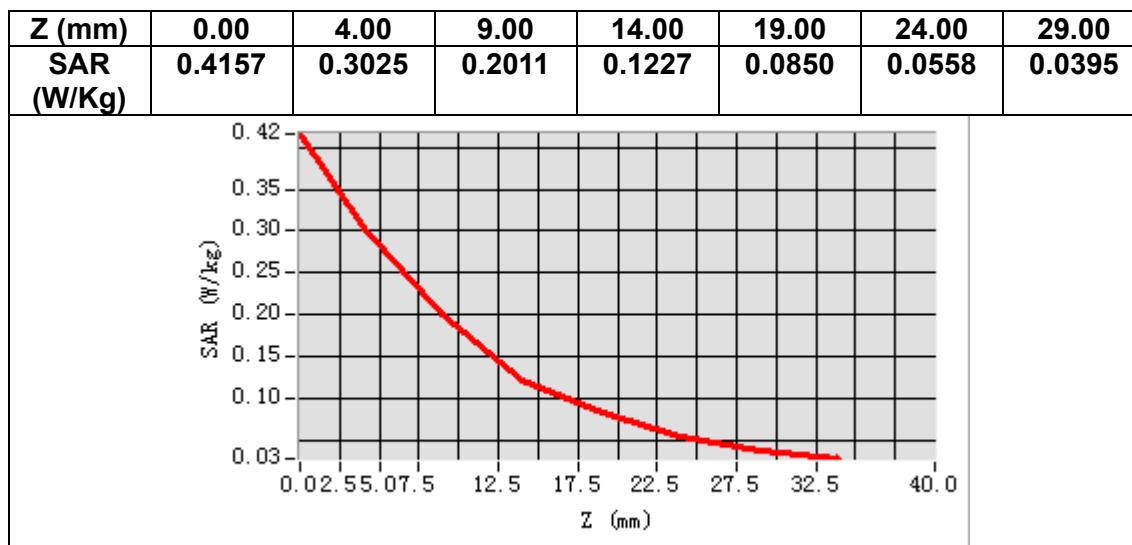

## MEASUREMENT 3


Date of measurement: 24/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1880.000000
<b>Relative permittivity (real part)</b>	38.267174
<b>Relative permittivity (imaginary part)</b>	13.897697
<b>Conductivity (S/m)</b>	1.451537
<b>Variation (%)</b>	-0.770000

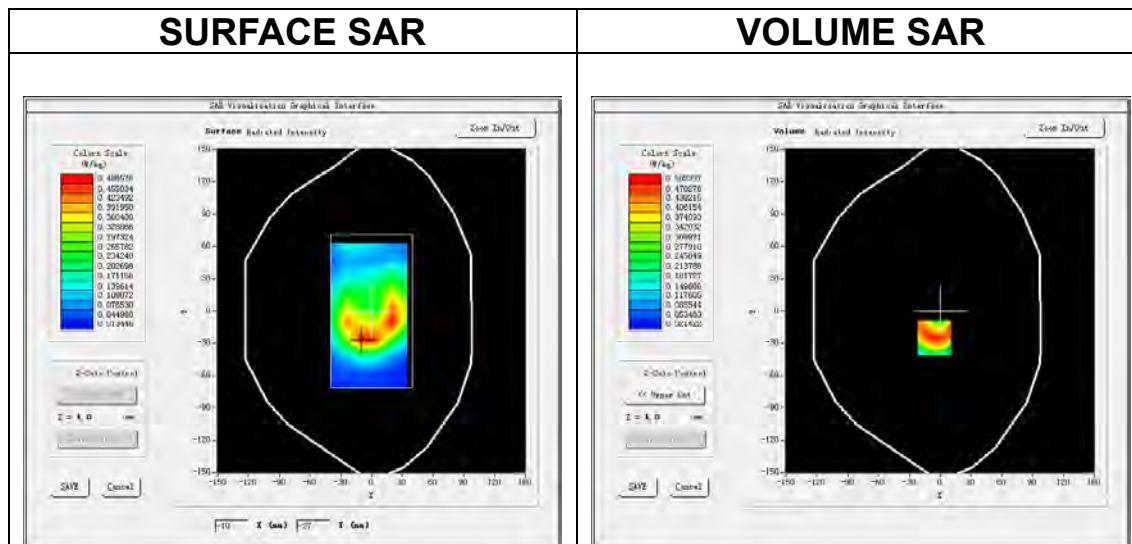

**Maximum location: X=-6.00, Y=-25.00**  
**SAR Peak: 0.77 W/kg**

<b>SAR 10g (W/Kg)</b>	0.268292
<b>SAR 1g (W/Kg)</b>	0.489001

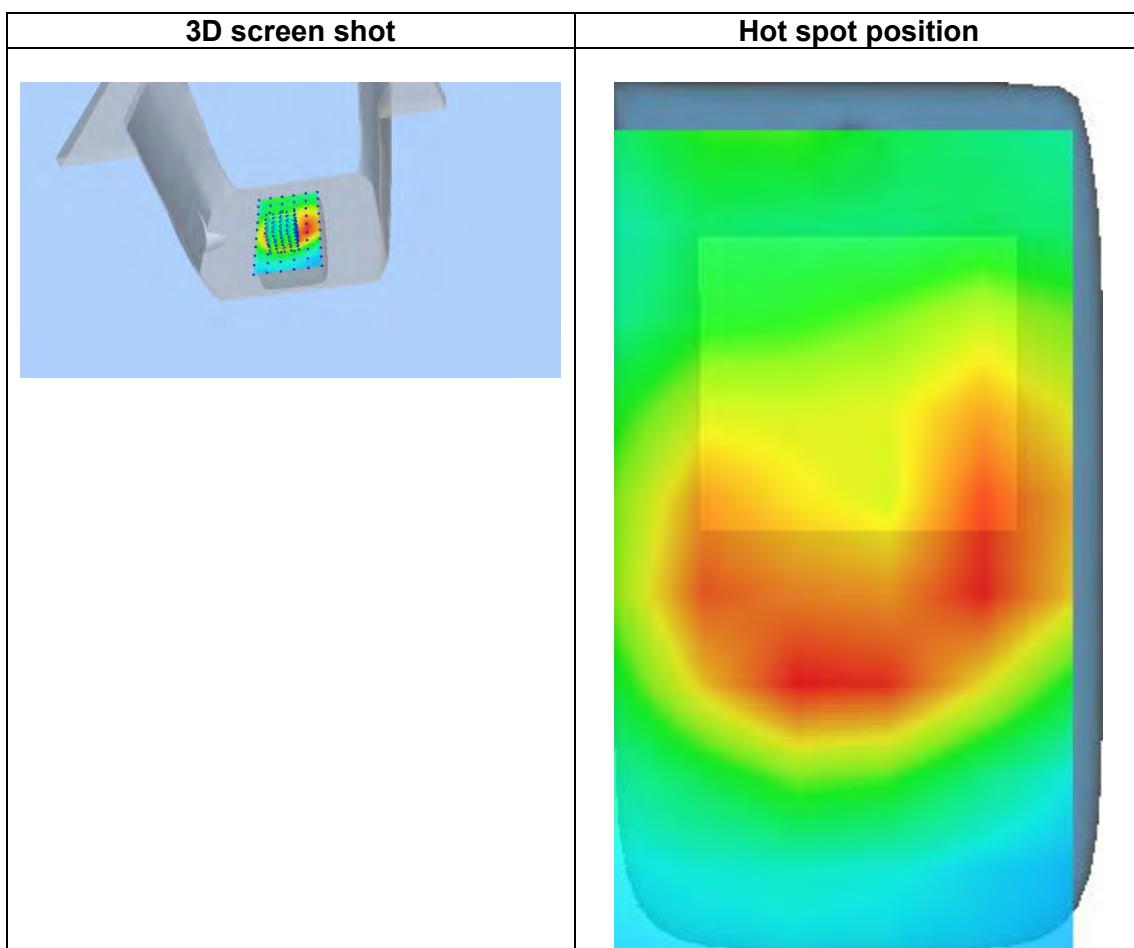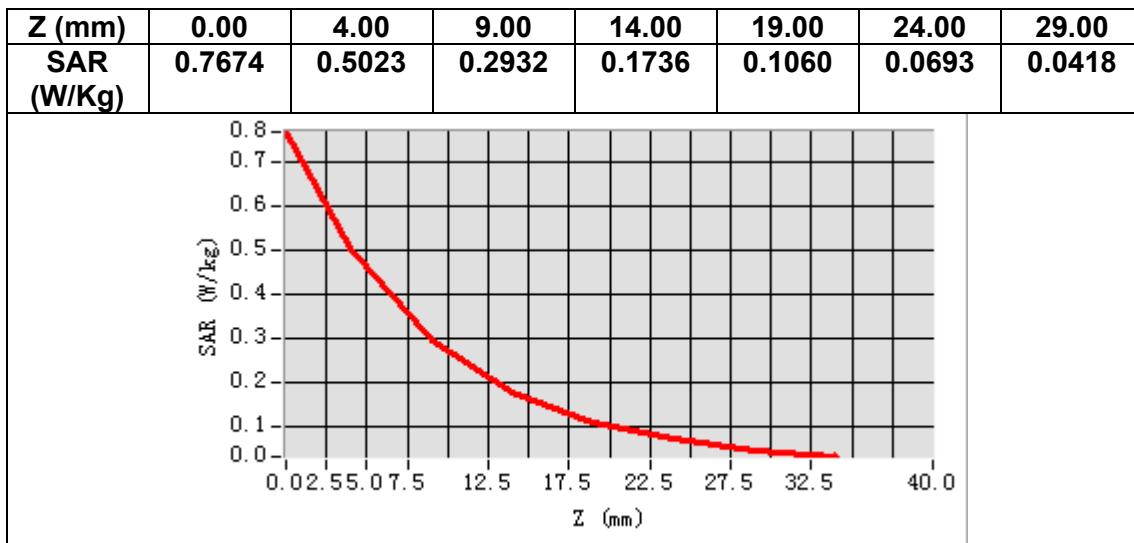

## MEASUREMENT 4


Date of measurement: 20/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	$dx=15\text{mm}$ $dy=15\text{mm}$ , $h= 5.00 \text{ mm}$
<u>ZoomScan</u>	$5\times 5\times 7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band4 WCDMA1700</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>

### B. SAR Measurement Results



<b>Frequency (MHz)</b>	1732.600000
<b>Relative permittivity (real part)</b>	39.088062
<b>Relative permittivity (imaginary part)</b>	13.702837
<b>Conductivity (S/m)</b>	1.318517
<b>Variation (%)</b>	-0.450000

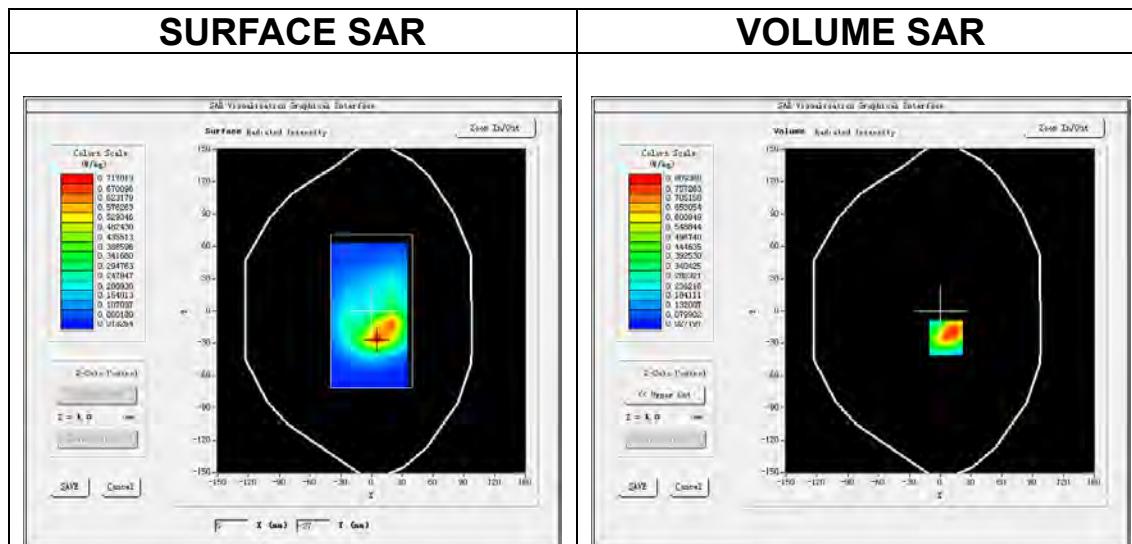

**Maximum location: X=6.00, Y=-25.00**

**SAR Peak: 1.27 W/kg**

<b>SAR 10g (W/Kg)</b>	0.423357
<b>SAR 1g (W/Kg)</b>	0.778174

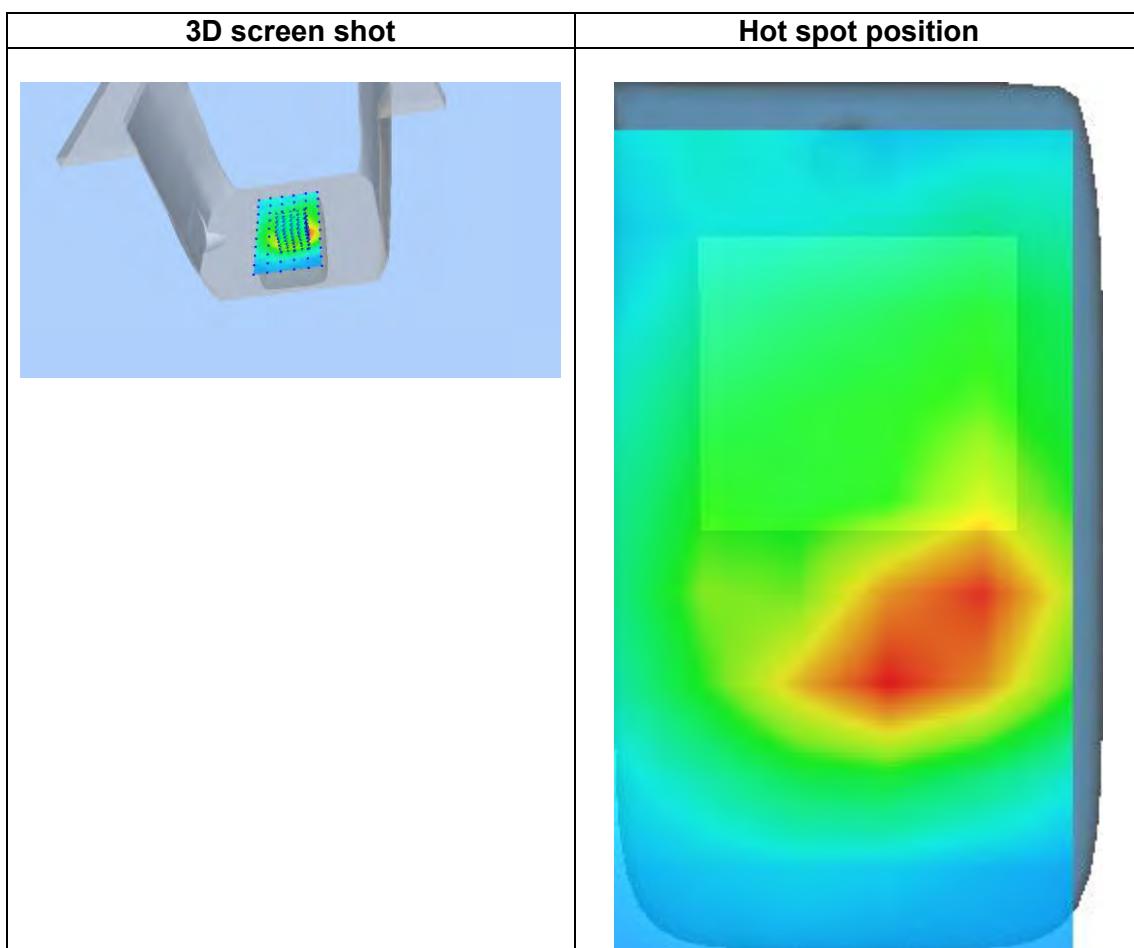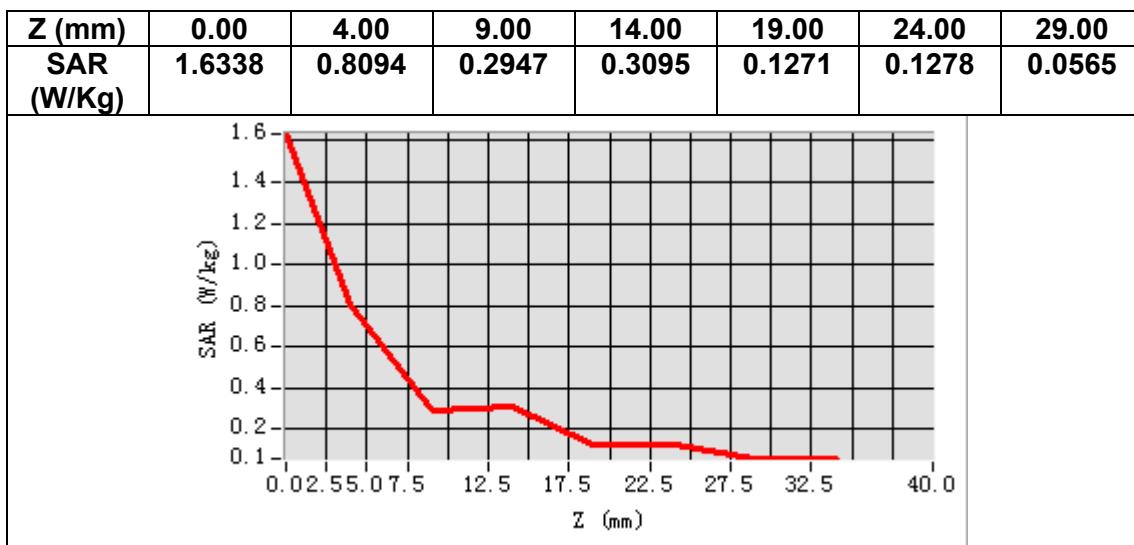

## MEASUREMENT 5


Date of measurement: 25/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=15\text{mm}</math> <math>dy=15\text{mm}</math>, <math>h= 5.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>5\times 5\times 7</math>, <math>dx=8\text{mm}</math> <math>dy=8\text{mm}</math> <math>dz=5\text{mm}</math></u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	836.400000
<b>Relative permittivity (real part)</b>	41.820316
<b>Relative permittivity (imaginary part)</b>	19.665770
<b>Conductivity (S/m)</b>	0.913803
<b>Variation (%)</b>	1.200000

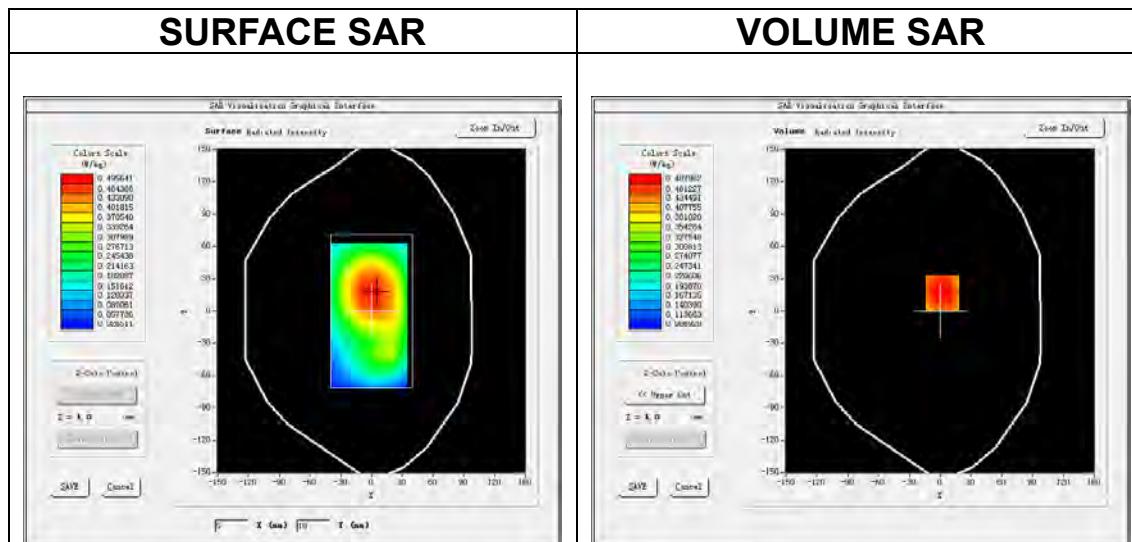

**Maximum location: X=2.00, Y=17.00**  
**SAR Peak: 0.57 W/kg**

<b>SAR 10g (W/Kg)</b>	0.363846
<b>SAR 1g (W/Kg)</b>	0.474477

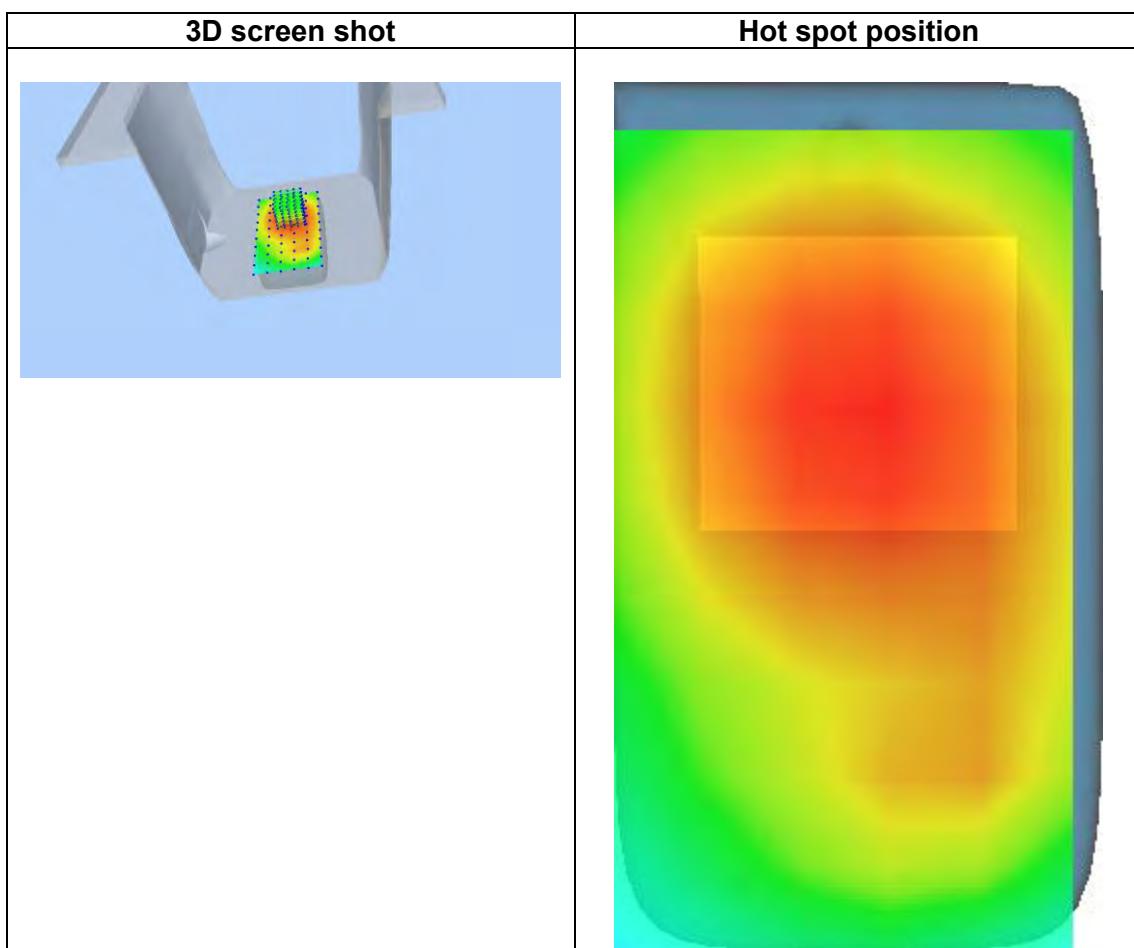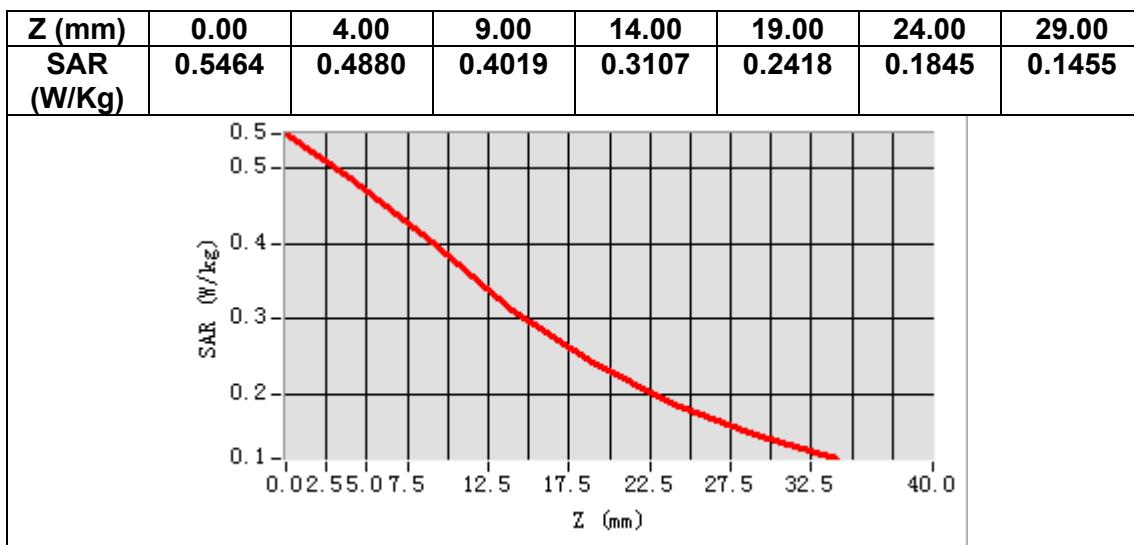

## MEASUREMENT 6


Date of measurement: 28/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	$dx=10\text{mm}$ $dy=10\text{mm}$ , $h= 2.00 \text{ mm}$
<u>ZoomScan</u>	$7x7x12, dx=4\text{mm}$ $dy=4\text{mm}$ $dz=2\text{mm}$
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11n U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11n (Crest factor: 1.0)</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	5200.000000
<b>Relative permittivity (real part)</b>	36.039139
<b>Relative permittivity (imaginary part)</b>	16.071884
<b>Conductivity (S/m)</b>	4.642989
<b>Variation (%)</b>	-0.360000

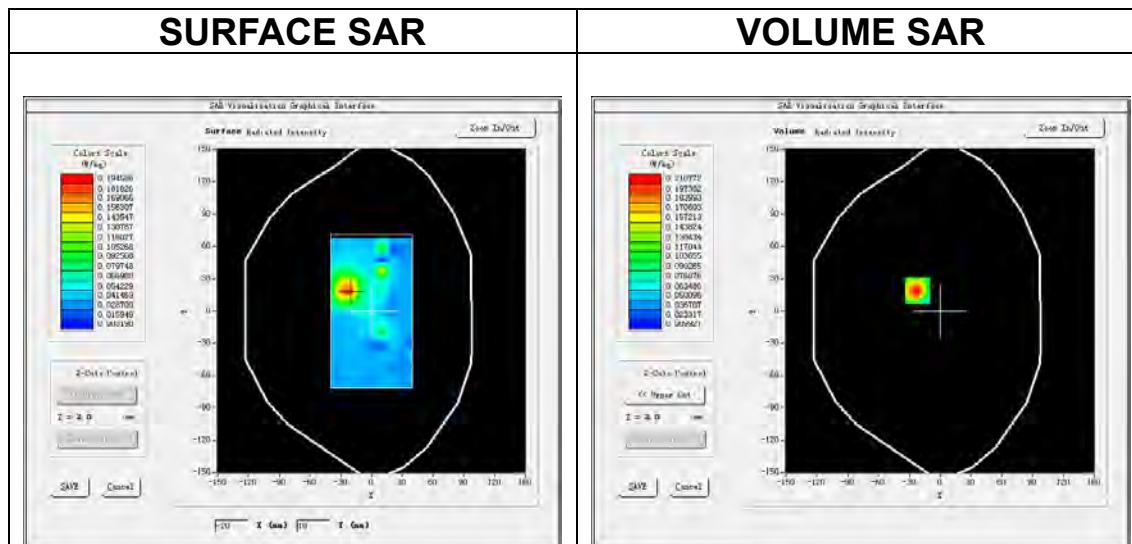

**Maximum location: X=-22.00, Y=19.00**  
**SAR Peak: 0.34 W/kg**

<b>SAR 10g (W/Kg)</b>	0.067833
<b>SAR 1g (W/Kg)</b>	0.131149

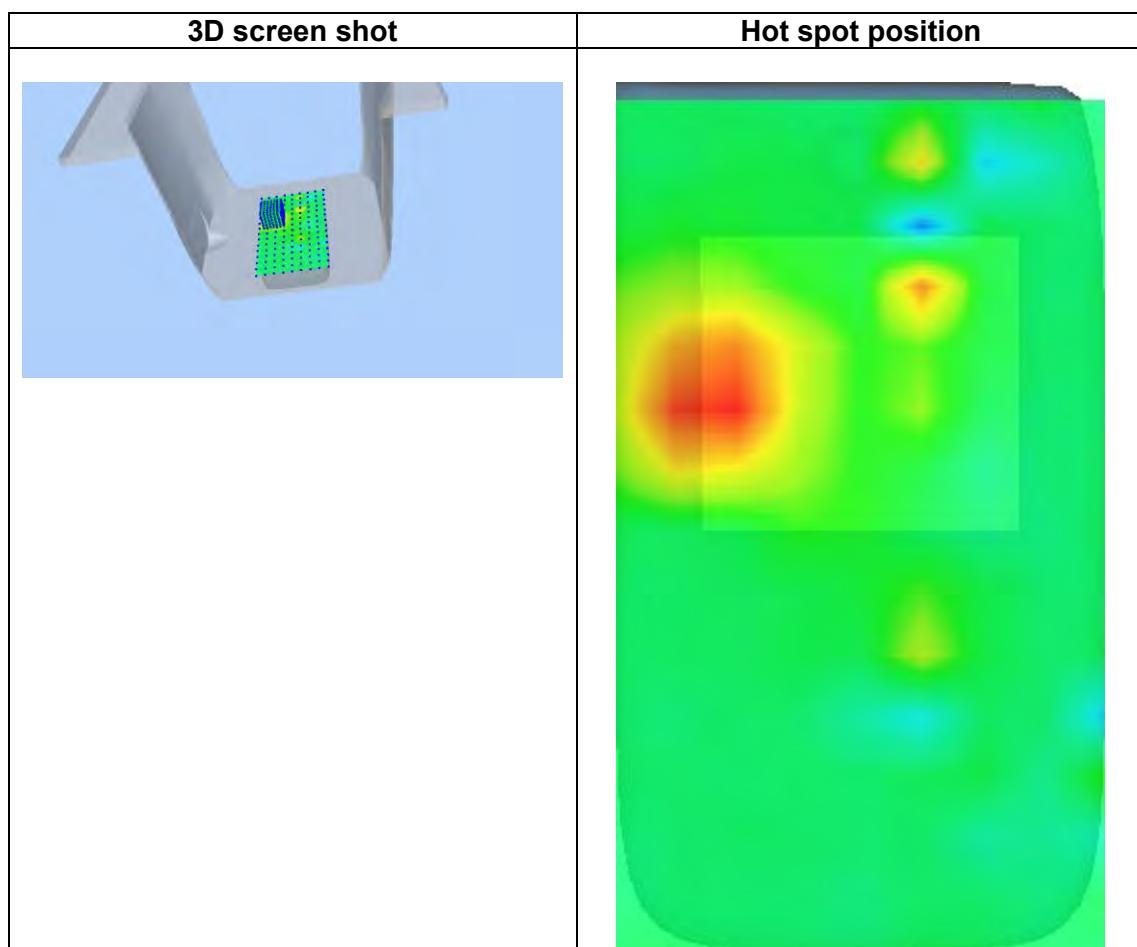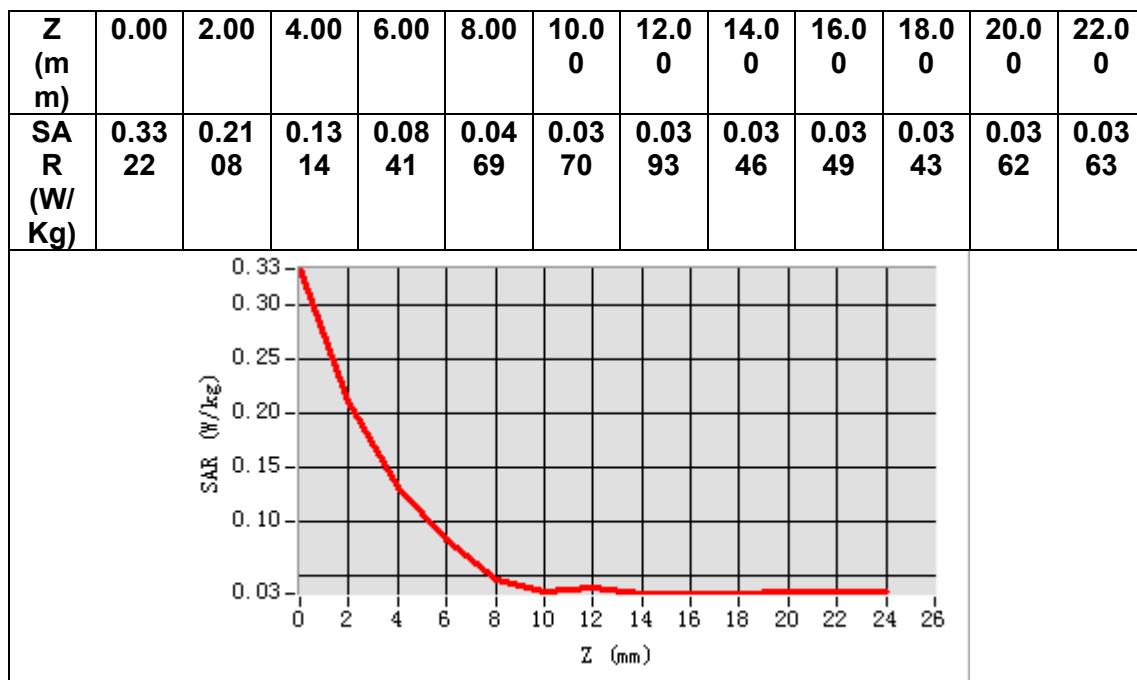

## MEASUREMENT 7


Date of measurement: 27/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	$dx=10\text{mm}$ $dy=10\text{mm}$ , $h= 2.00 \text{ mm}$
<u>ZoomScan</u>	$7x7x12, dx=4\text{mm}$ $dy=4\text{mm}$ $dz=2\text{mm}$
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11ac U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11ac (Crest factor: 1.0)</u>

### B. SAR Measurement Results



<b>Frequency (MHz)</b>	5785.000000
<b>Relative permittivity (real part)</b>	34.981808
<b>Relative permittivity (imaginary part)</b>	16.175365
<b>Conductivity (S/m)</b>	5.198583
<b>Variation (%)</b>	-0.980000

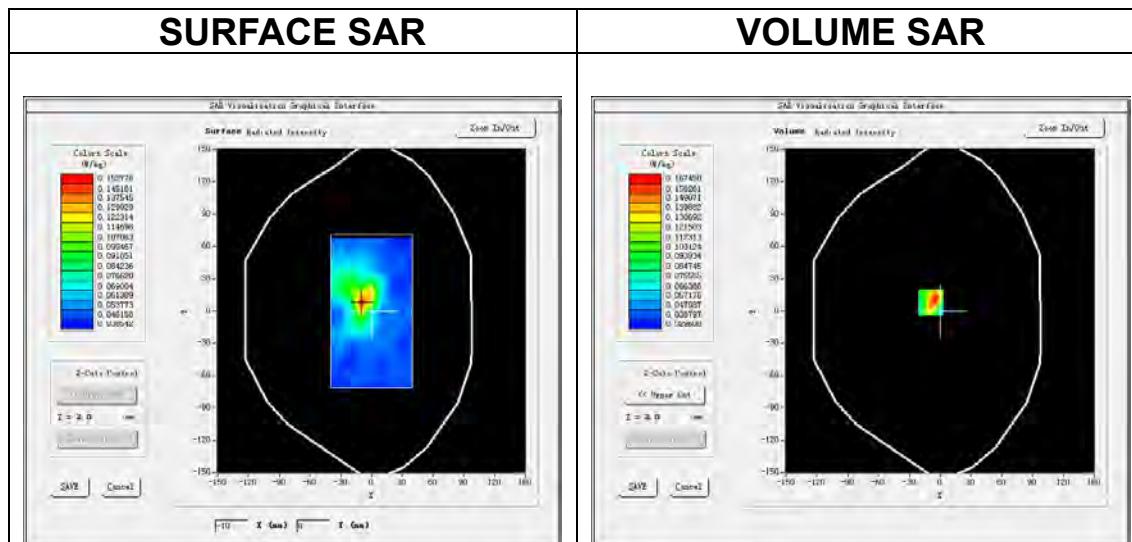

**Maximum location: X=-9.00, Y=8.00**  
**SAR Peak: 0.28 W/kg**

<b>SAR 10g (W/Kg)</b>	0.063897
<b>SAR 1g (W/Kg)</b>	0.108317

Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
SA R (W/ Kg)	0.27 30	0.16 74	0.07 95	0.06 40	0.04 83	0.04 12	0.04 07	0.03 91	0.03 95	0.04 12	0.04 10	0.04 01

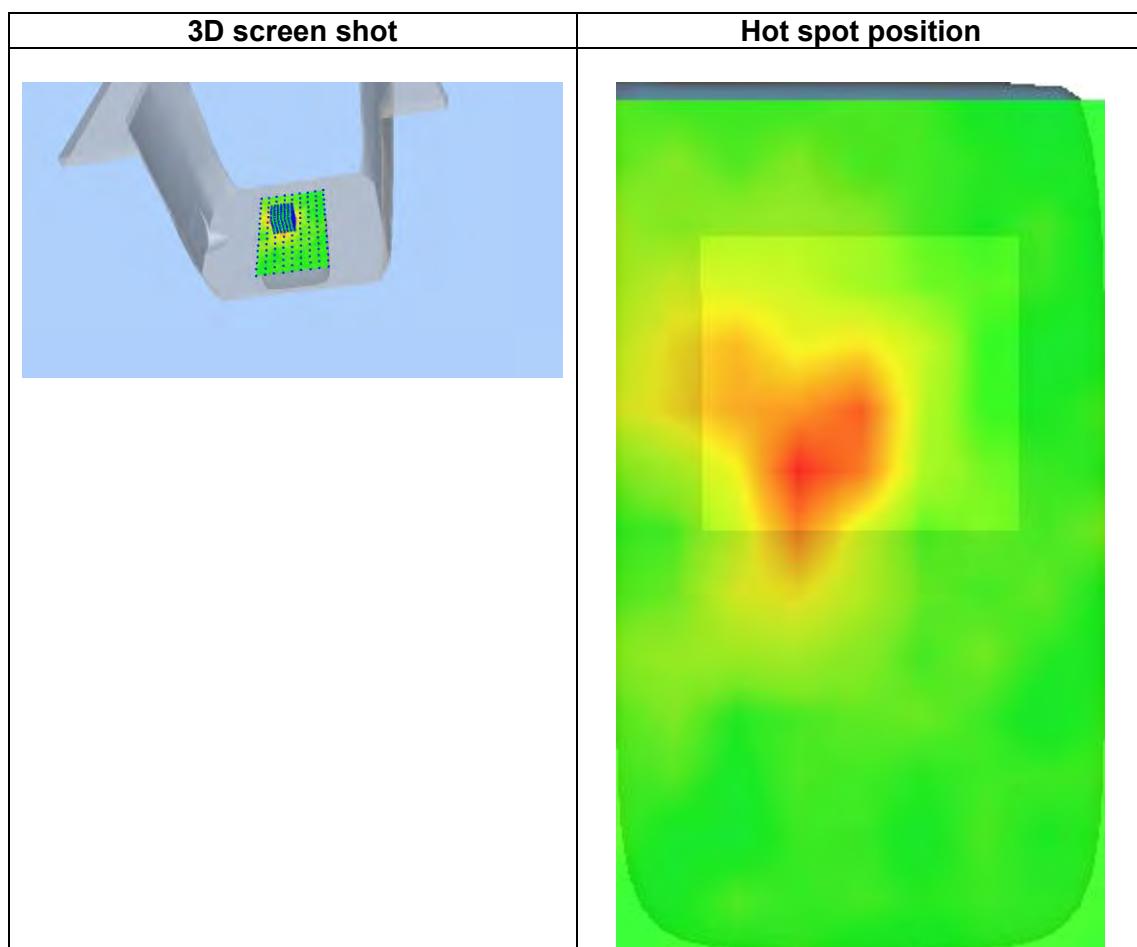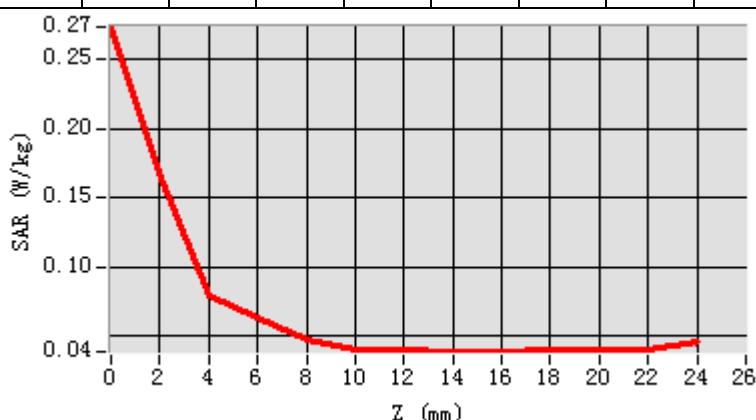

## MEASUREMENT 8


Date of measurement: 26/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	$dx=12\text{mm}$ $dy=12\text{mm}$ , $h= 5.00 \text{ mm}$
<u>ZoomScan</u>	$7x7x7, dx=5\text{mm}$ $dy=5\text{mm}$ $dz=5\text{mm}$
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	2437.000000
<b>Relative permittivity (real part)</b>	38.172344
<b>Relative permittivity (imaginary part)</b>	12.865155
<b>Conductivity (S/m)</b>	1.741799
<b>Variation (%)</b>	-0.970000

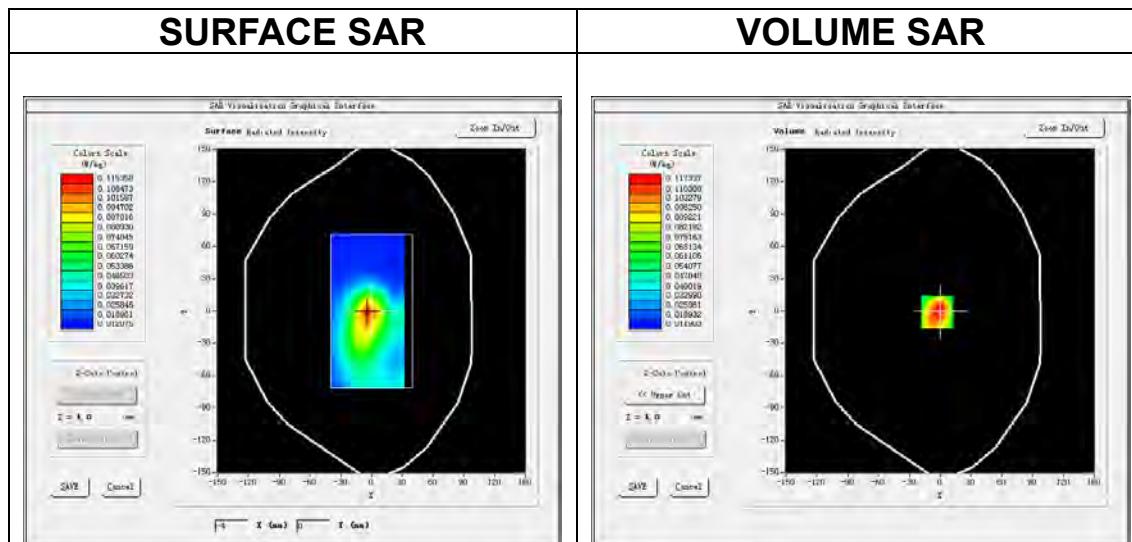

**Maximum location: X=-3.00, Y=-1.00**  
**SAR Peak: 0.19 W/kg**

<b>SAR 10g (W/Kg)</b>	0.061970
<b>SAR 1g (W/Kg)</b>	0.111221

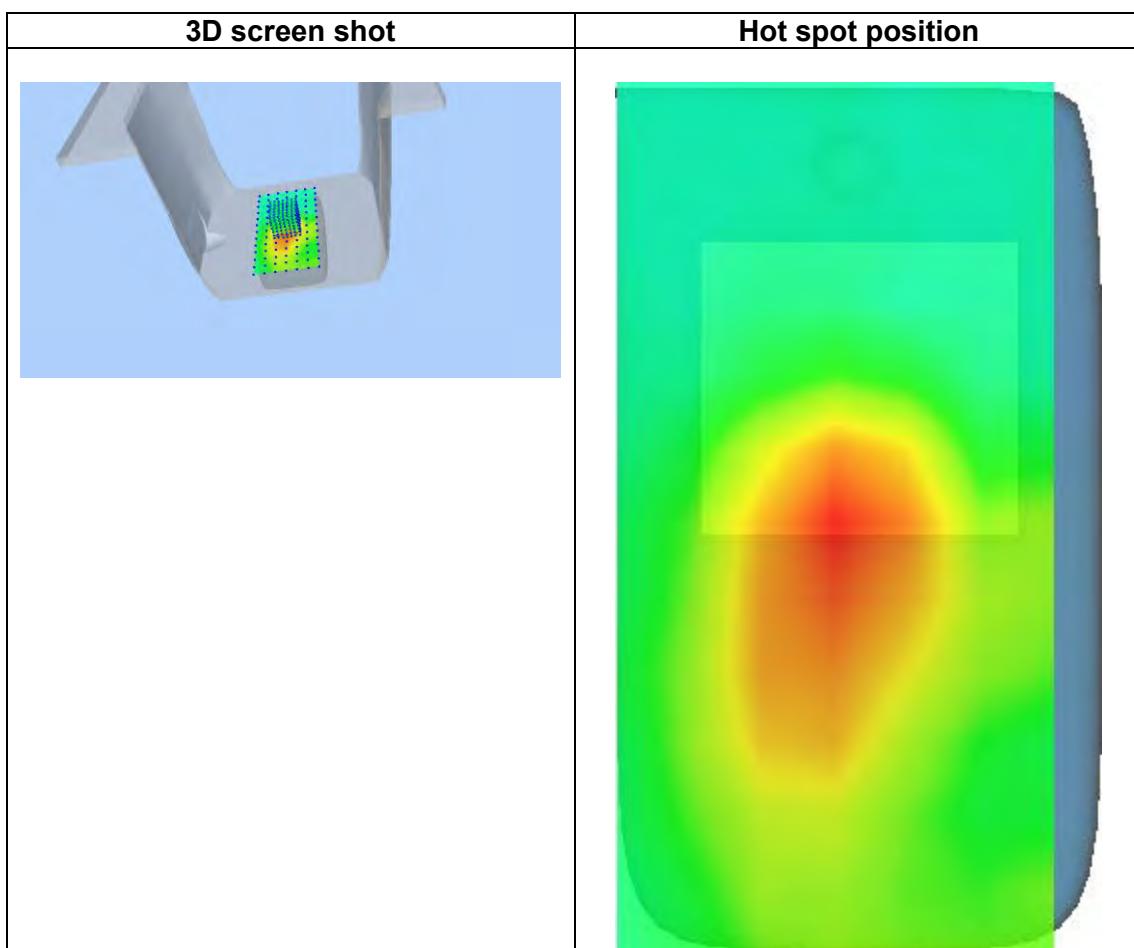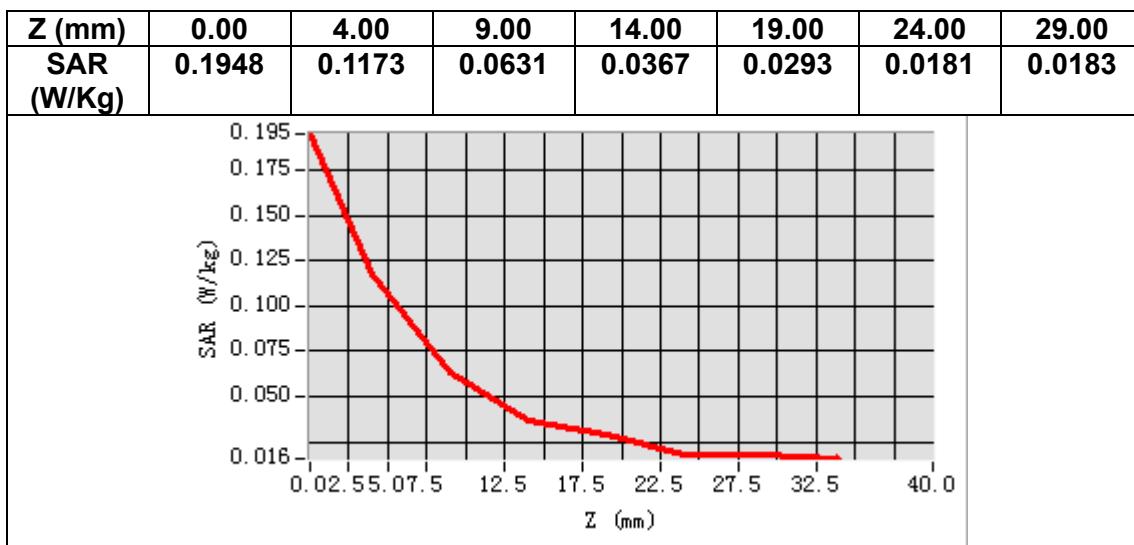

## MEASUREMENT 9


Date of measurement: 24/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	$dx=15\text{mm}$ $dy=15\text{mm}$ , $h= 5.00 \text{ mm}$
<u>ZoomScan</u>	$5x5x7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	LTE band 2
<u>Channels</u>	Middle
<u>Signal</u>	LTE (Crest factor: 1.0)



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1880.000000
<b>Relative permittivity (real part)</b>	38.267174
<b>Relative permittivity (imaginary part)</b>	13.897697
<b>Conductivity (S/m)</b>	1.451537
<b>Variation (%)</b>	-1.340000

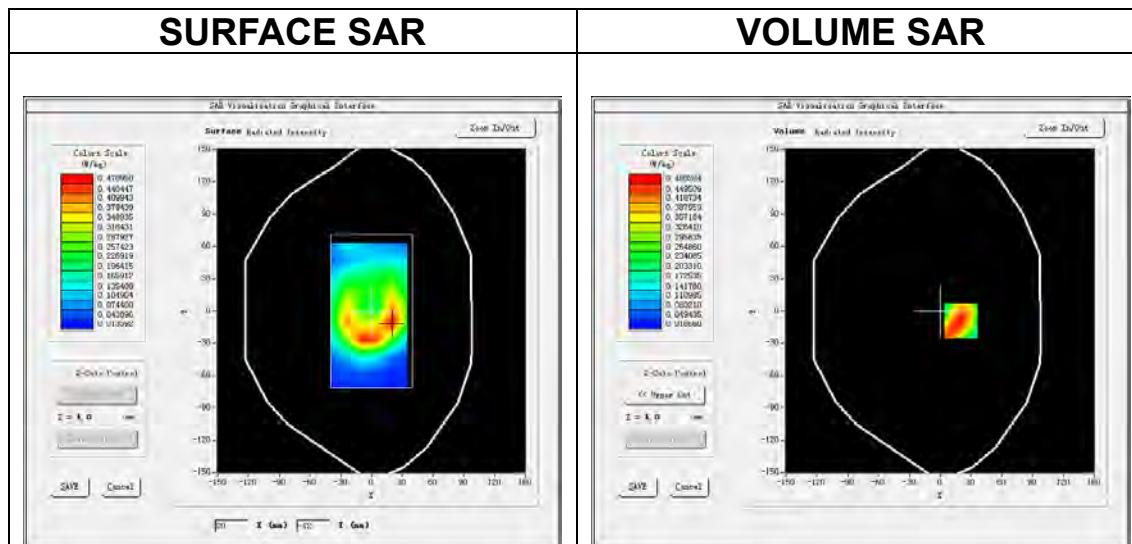

**Maximum location: X=20.00, Y=-9.00**  
**SAR Peak: 0.77 W/kg**

<b>SAR 10g (W/Kg)</b>	0.269489
<b>SAR 1g (W/Kg)</b>	0.477959

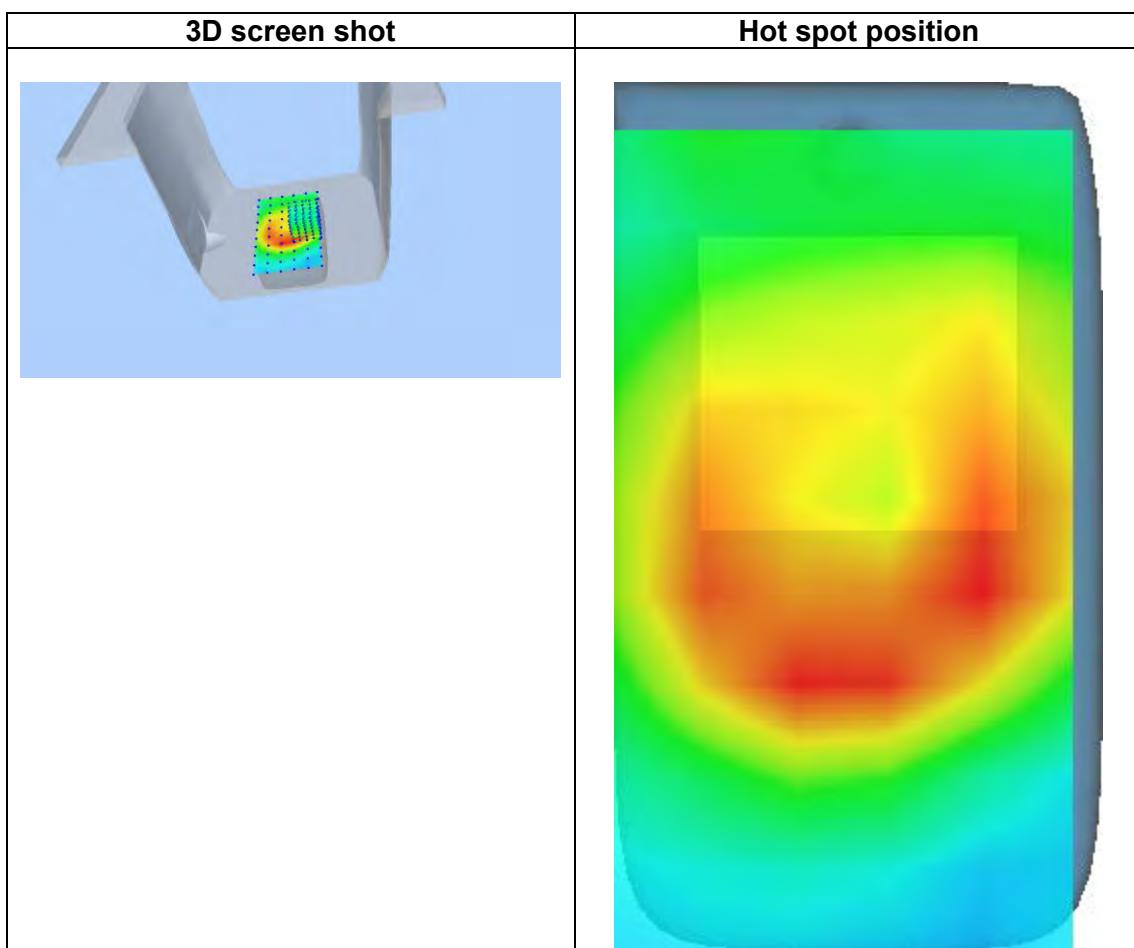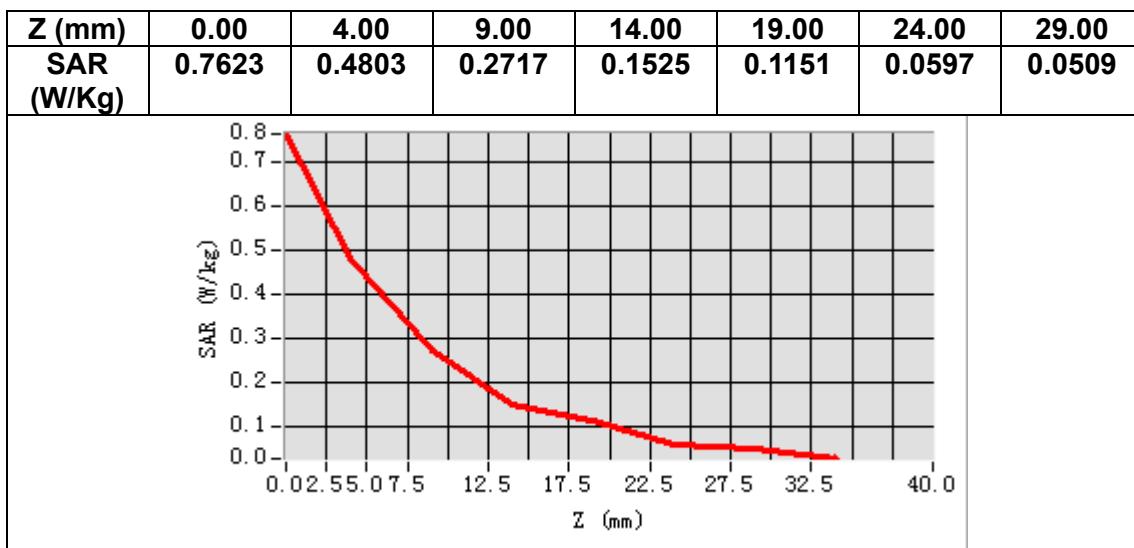

# MEASUREMENT 10


Date of measurement: 20/5/2022

## A. Experimental conditions.

<u>Area Scan</u>	$dx=15\text{mm}$ $dy=15\text{mm}$ , $h= 5.00 \text{ mm}$
<u>ZoomScan</u>	$5\times 5\times 7$ , $dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	LTE band 4
<u>Channels</u>	Middle
<u>Signal</u>	LTE (Crest factor: 1.0)

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	1732.500000
<b>Relative permittivity (real part)</b>	39.095963
<b>Relative permittivity (imaginary part)</b>	13.687687
<b>Conductivity (S/m)</b>	1.317440
<b>Variation (%)</b>	-1.110000

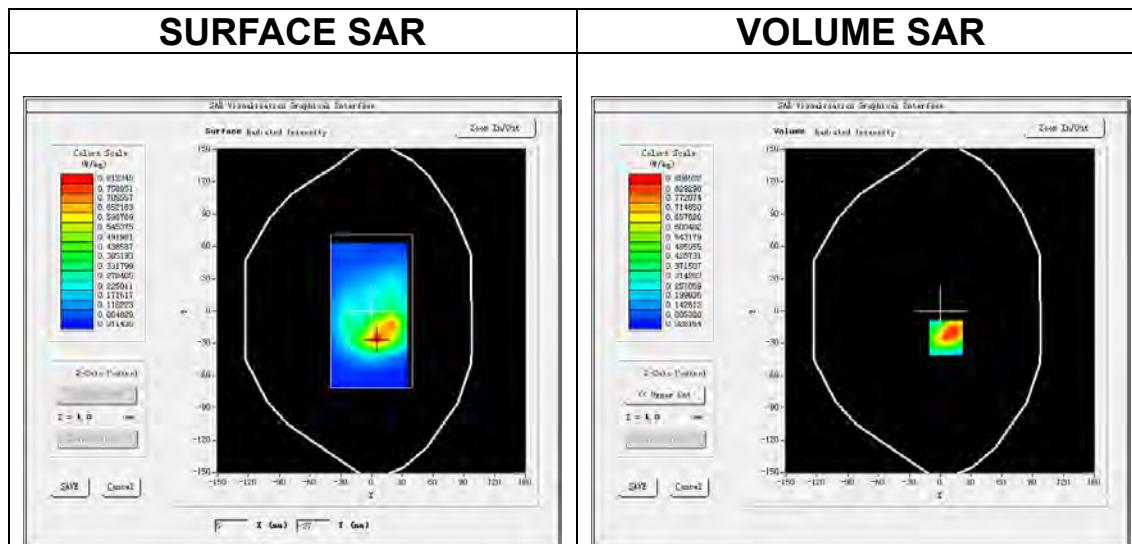

**Maximum location: X=6.00, Y=-25.00**

**SAR Peak: 1.39 W/kg**

<b>SAR 10g (W/Kg)</b>	0.465128
<b>SAR 1g (W/Kg)</b>	0.852846

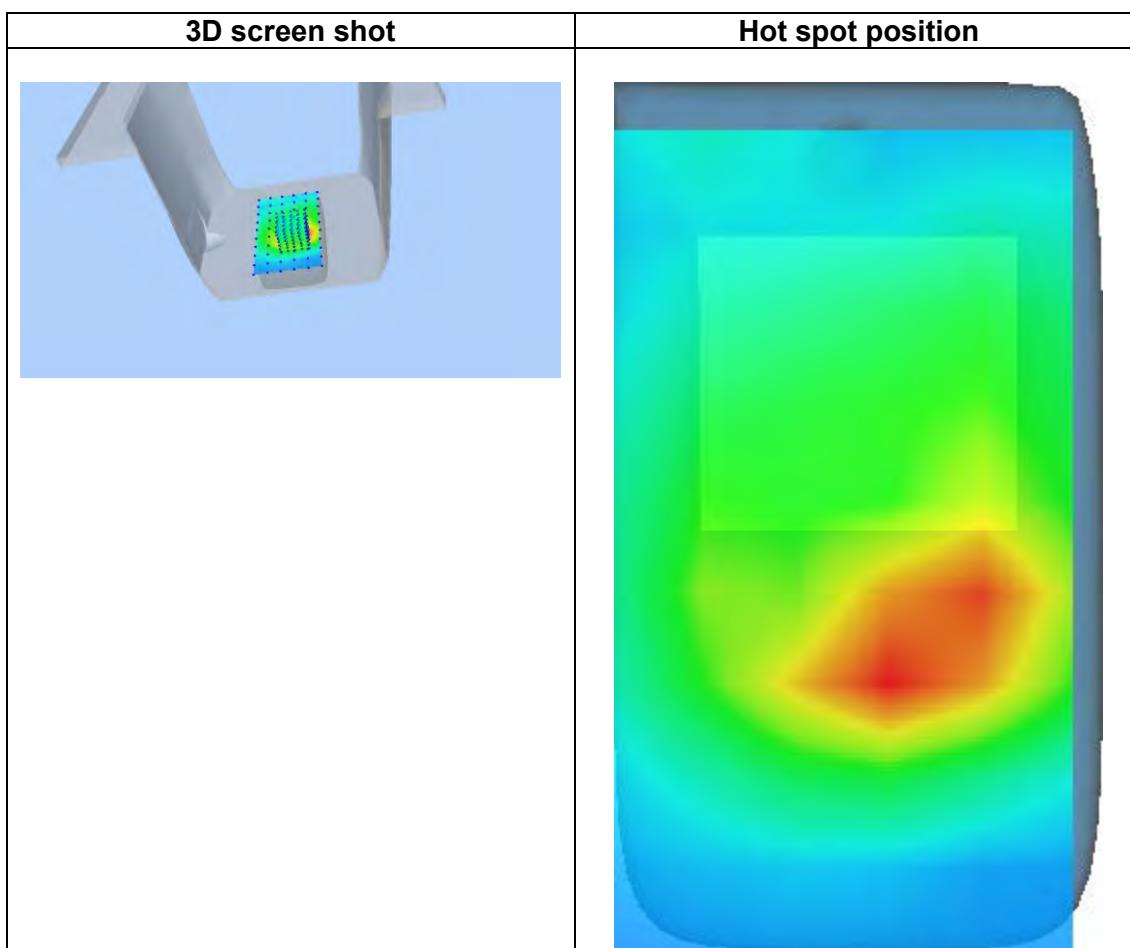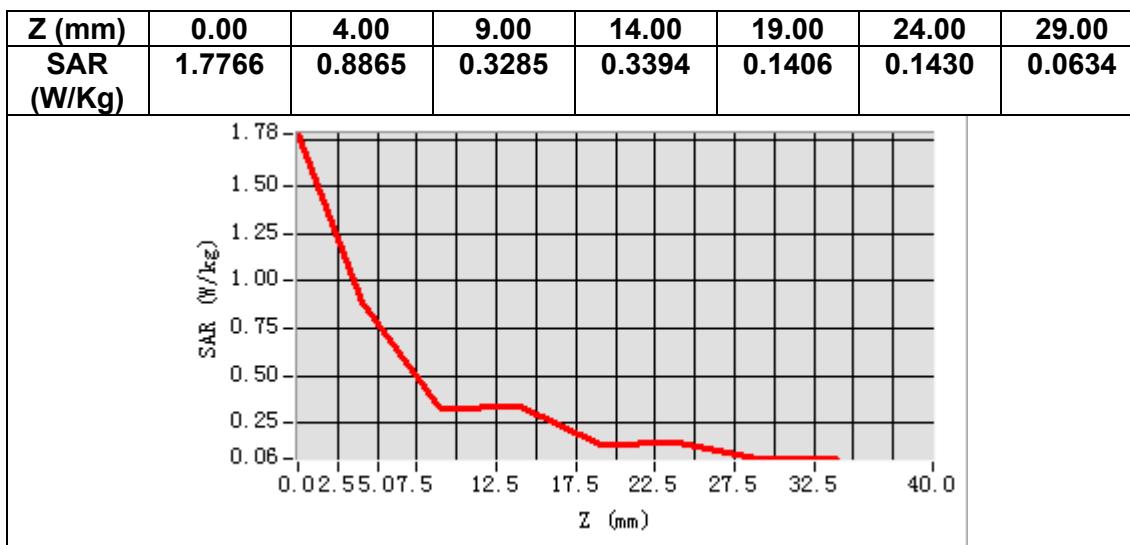

# MEASUREMENT 11


Date of measurement: 25/5/2022

## A. Experimental conditions.

<u>Area Scan</u>	$dx=15\text{mm}$ $dy=15\text{mm}$ , $h= 5.00 \text{ mm}$
<u>ZoomScan</u>	$5x5x7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	LTE band 5
<u>Channels</u>	Middle
<u>Signal</u>	LTE (Crest factor: 1.0)



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	836.500000
<b>Relative permittivity (real part)</b>	41.822906
<b>Relative permittivity (imaginary part)</b>	19.664431
<b>Conductivity (S/m)</b>	0.913850
<b>Variation (%)</b>	-0.600000

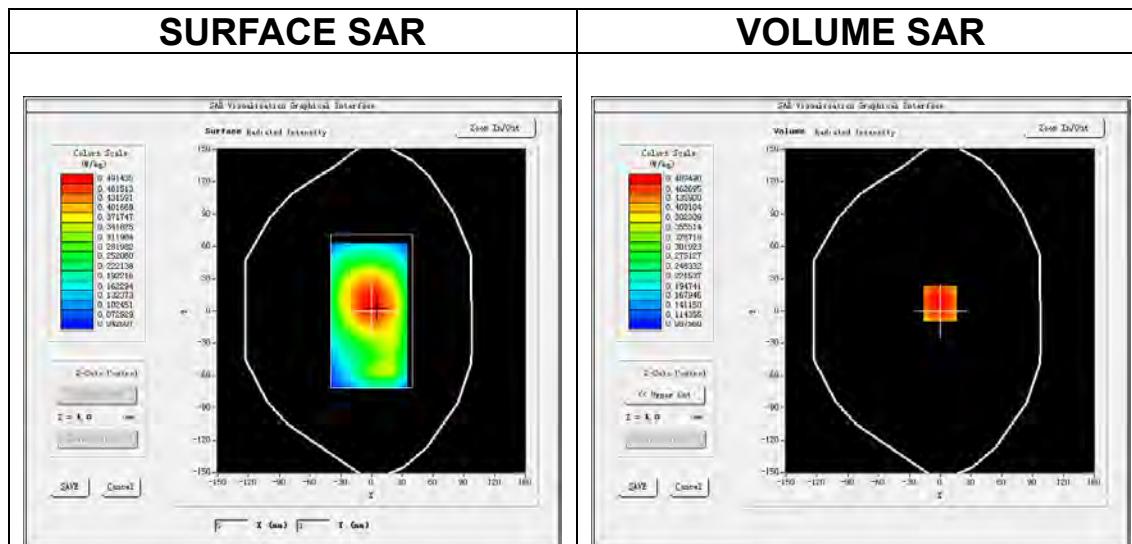

**Maximum location: X=0.00, Y=7.00**  
**SAR Peak: 0.58 W/kg**

<b>SAR 10g (W/Kg)</b>	0.361339
<b>SAR 1g (W/Kg)</b>	0.474373

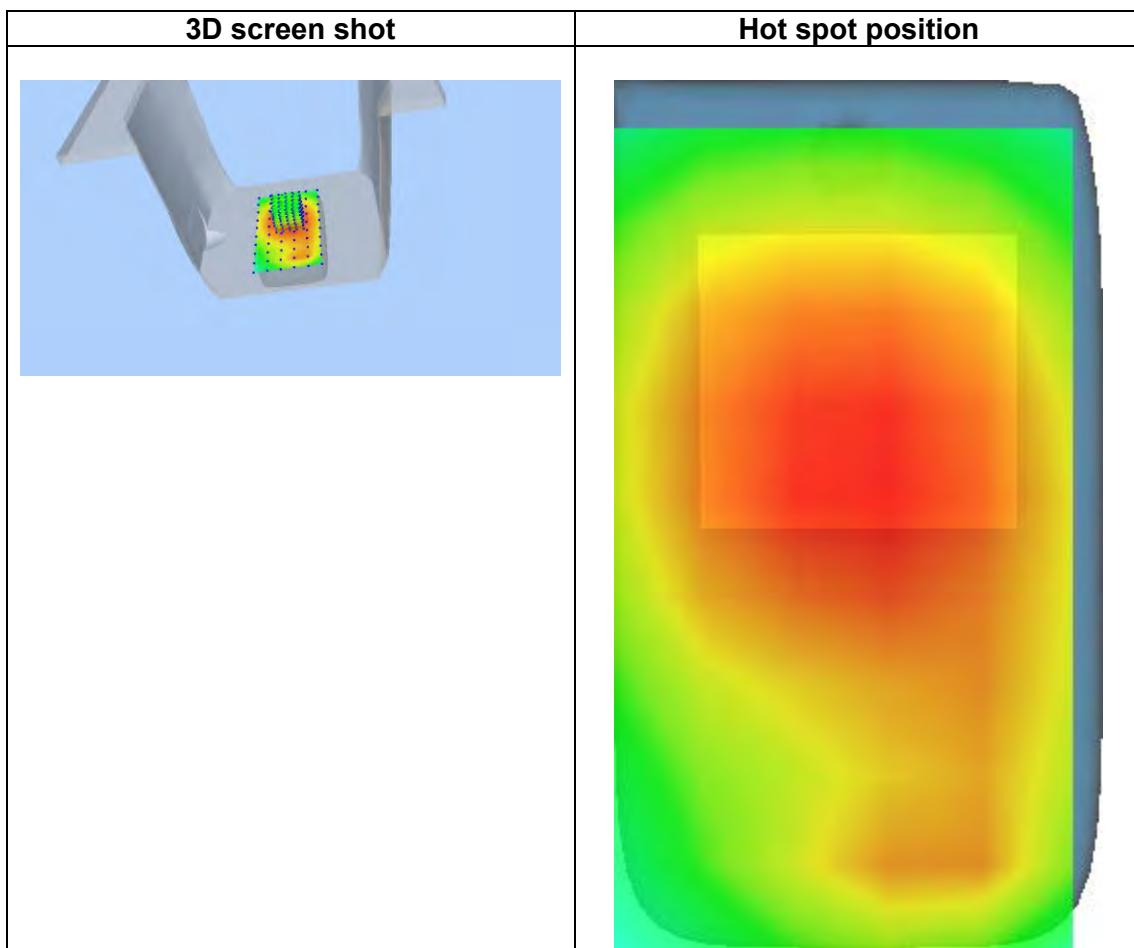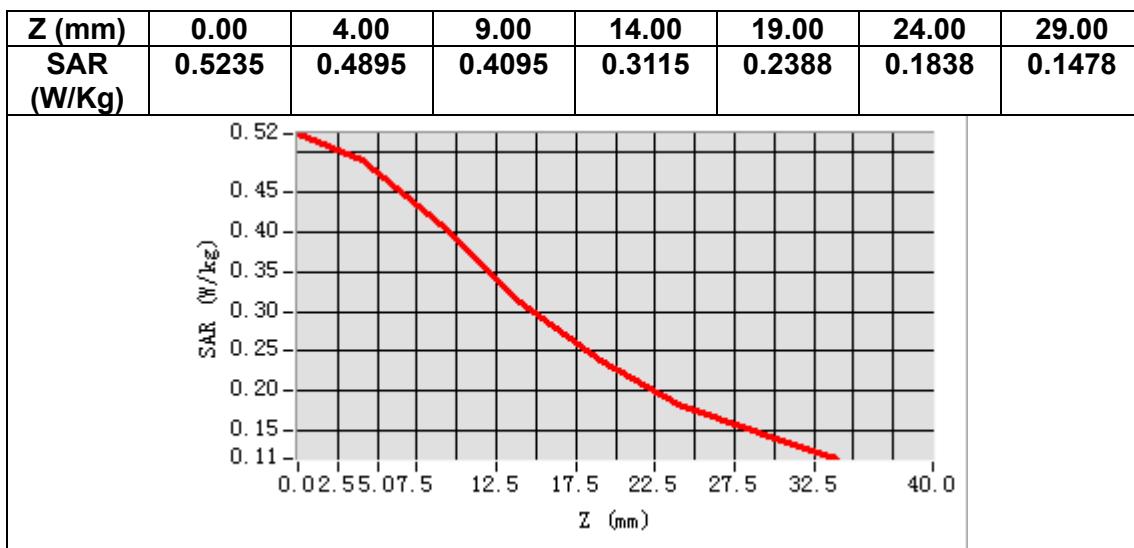

## MEASUREMENT 12


Date of measurement: 30/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	$dx=12\text{mm}$ $dy=12\text{mm}$ , $h= 5.00 \text{ mm}$
<u>ZoomScan</u>	$7\times 7\times 7$ , $dx=5\text{mm}$ $dy=5\text{mm}$ $dz=5\text{mm}$
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>High</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	2560.000000
<b>Relative permittivity (real part)</b>	38.097485
<b>Relative permittivity (imaginary part)</b>	13.402982
<b>Conductivity (S/m)</b>	1.906202
<b>Variation (%)</b>	-2.930000

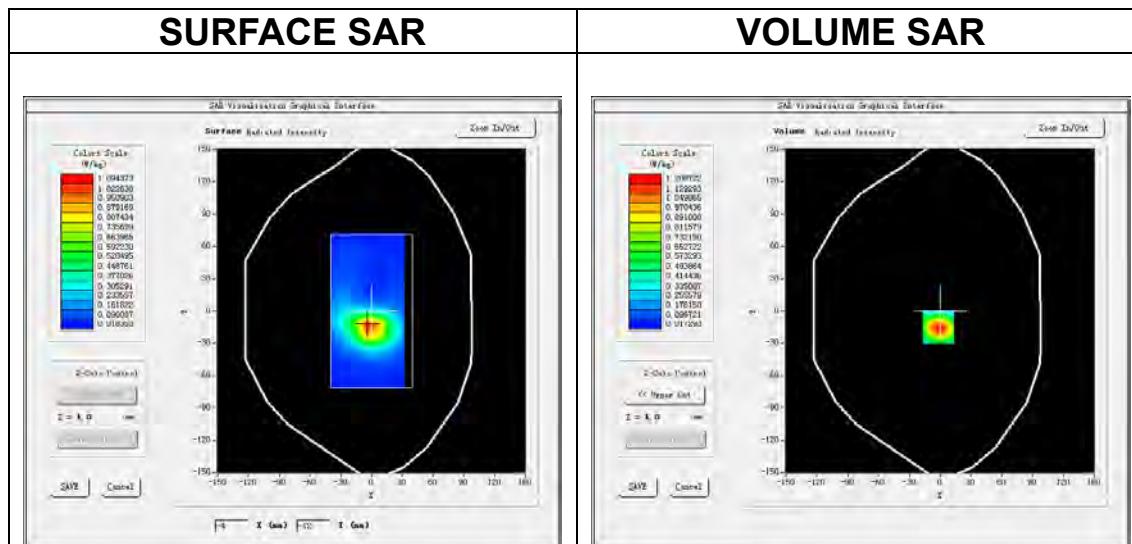

**Maximum location: X=-2.00, Y=-15.00**  
**SAR Peak: 2.01 W/kg**

<b>SAR 10g (W/Kg)</b>	0.525840
<b>SAR 1g (W/Kg)</b>	1.110769

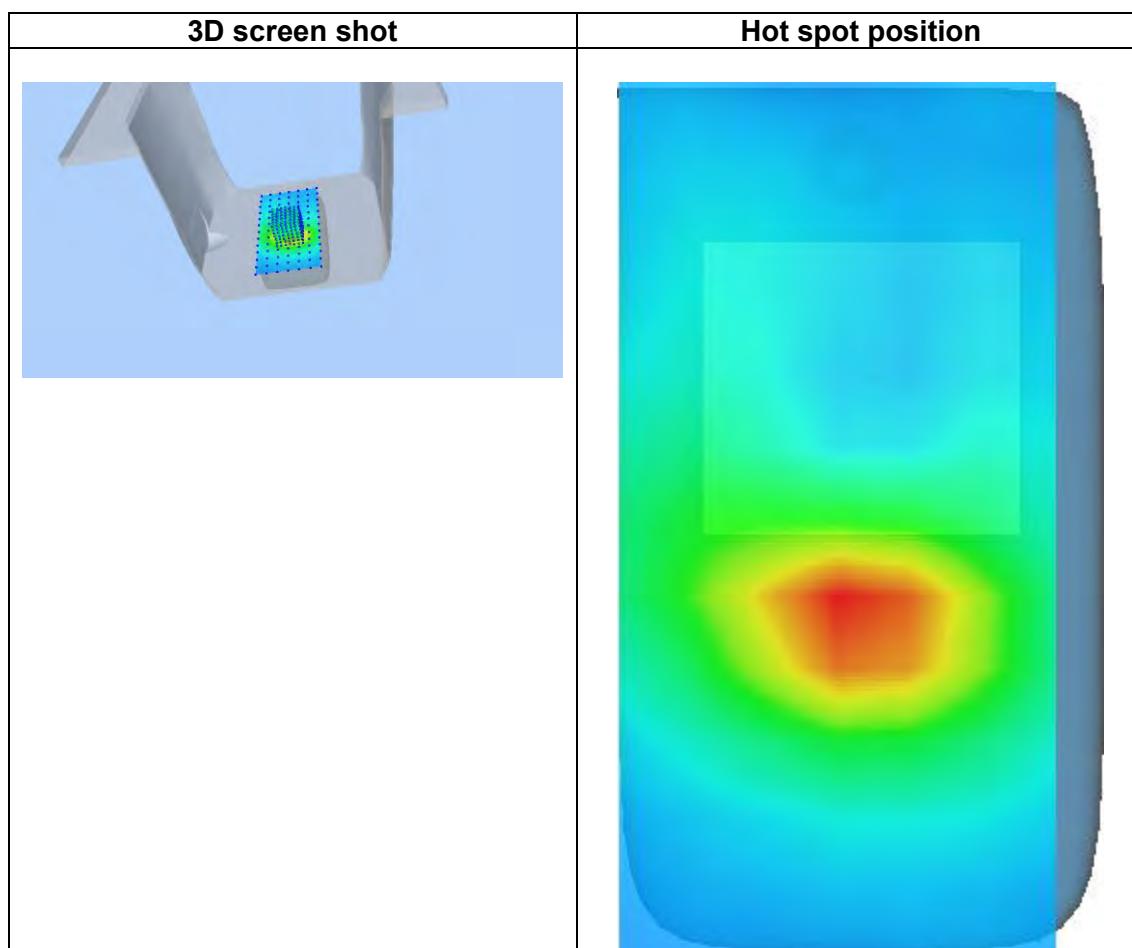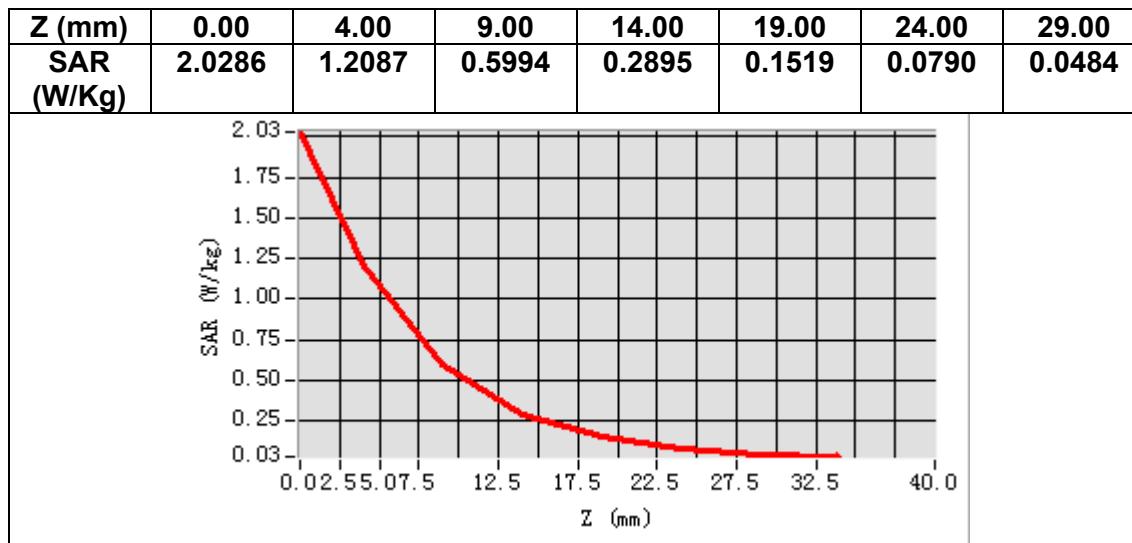

## MEASUREMENT 13


Date of measurement: 19/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	$dx=15\text{mm}$ $dy=15\text{mm}$ , $h= 5.00 \text{ mm}$
<u>ZoomScan</u>	$5x5x7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

### B. SAR Measurement Results



<b>Frequency (MHz)</b>	707.500000
<b>Relative permittivity (real part)</b>	41.250195
<b>Relative permittivity (imaginary part)</b>	21.799616
<b>Conductivity (S/m)</b>	0.856846
<b>Variation (%)</b>	2.830000

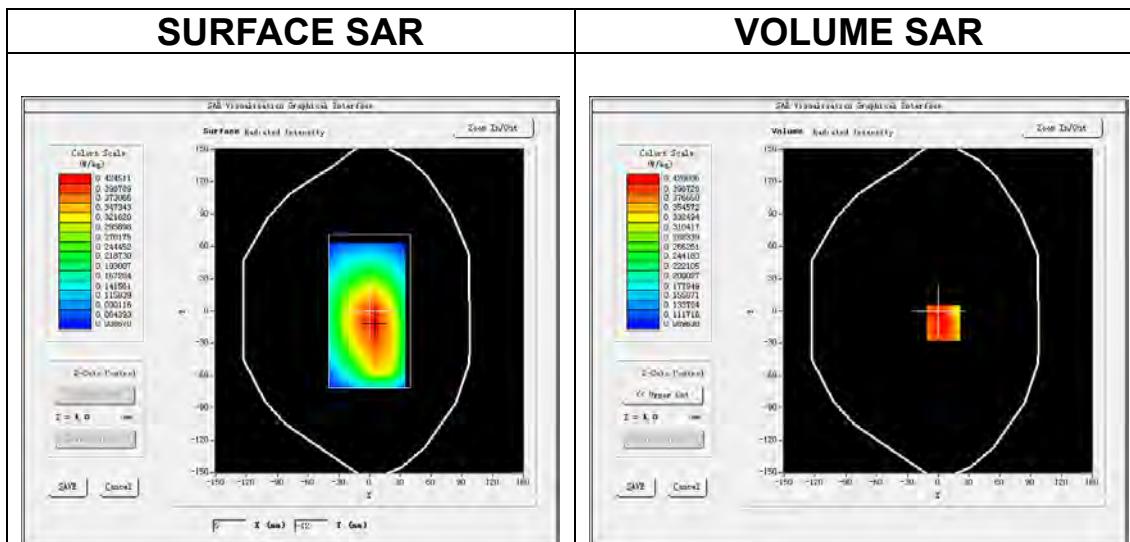

**Maximum location: X=5.00, Y=-11.00**

**SAR Peak: 0.52 W/kg**

<b>SAR 10g (W/Kg)</b>	0.319573
<b>SAR 1g (W/Kg)</b>	0.413652

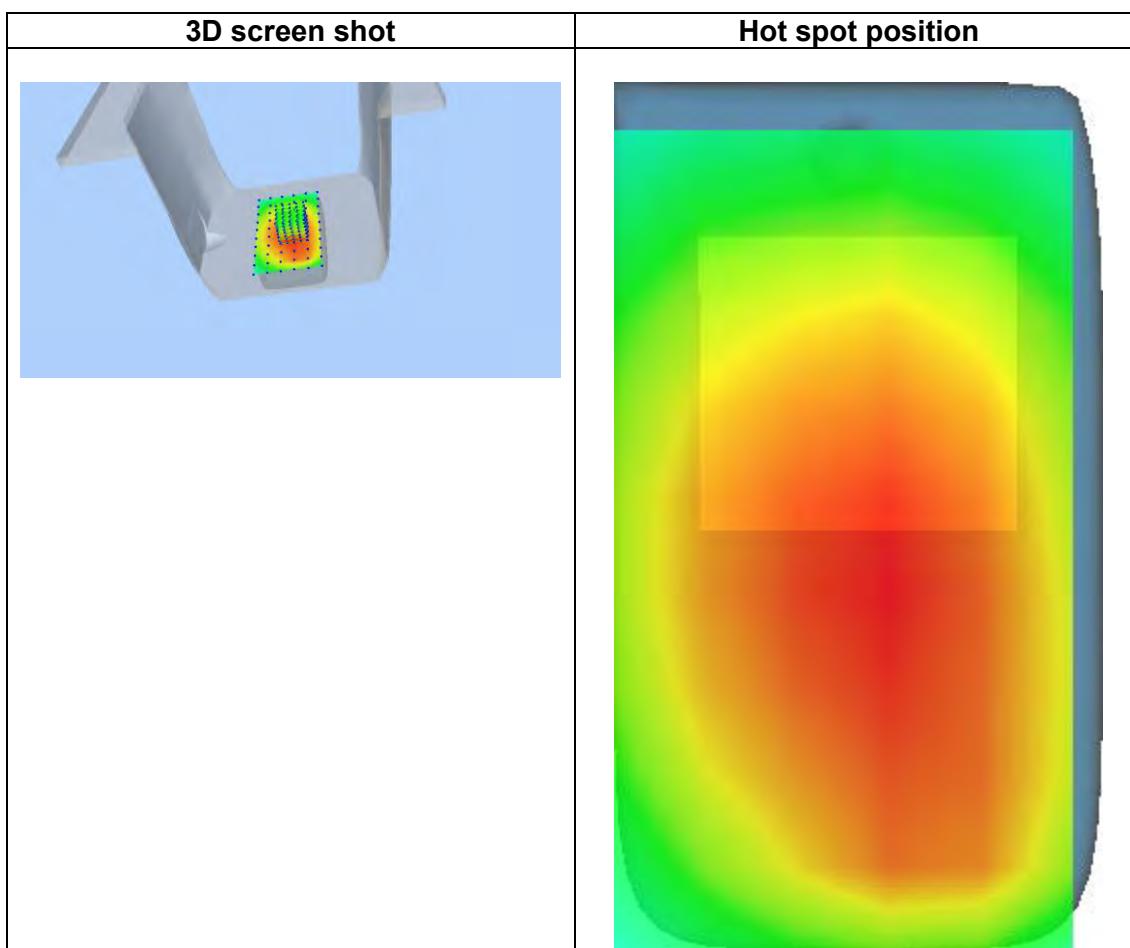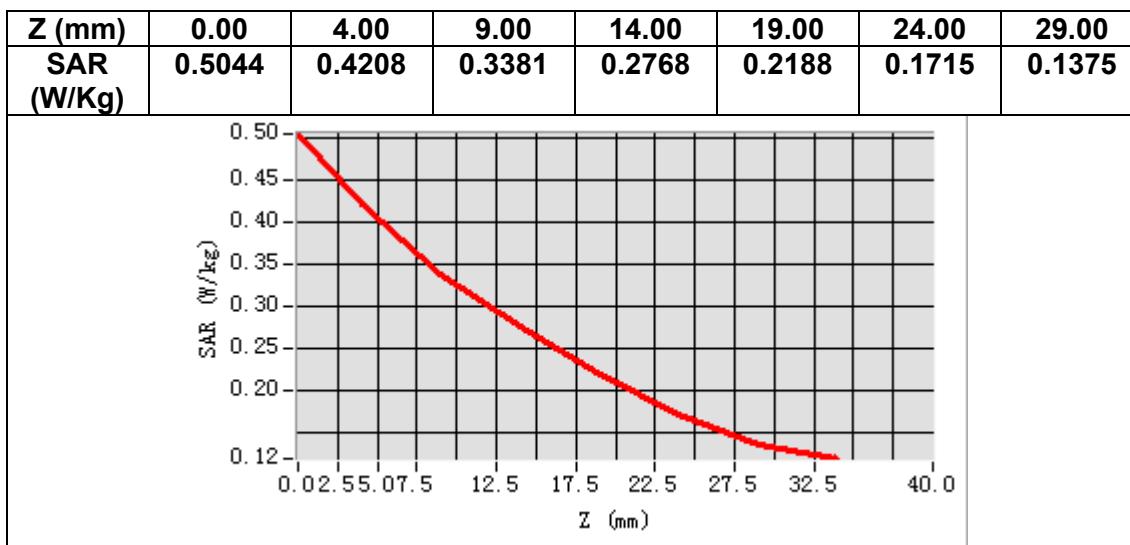

# MEASUREMENT 14


Date of measurement: 19/5/2022

## A. Experimental conditions.

<u>Area Scan</u>	$dx=15\text{mm}$ $dy=15\text{mm}$ , $h= 5.00 \text{ mm}$
<u>ZoomScan</u>	$5\times 5\times 7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 13</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	782.000000
<b>Relative permittivity (real part)</b>	40.362545
<b>Relative permittivity (imaginary part)</b>	21.057166
<b>Conductivity (S/m)</b>	0.914817
<b>Variation (%)</b>	0.150000

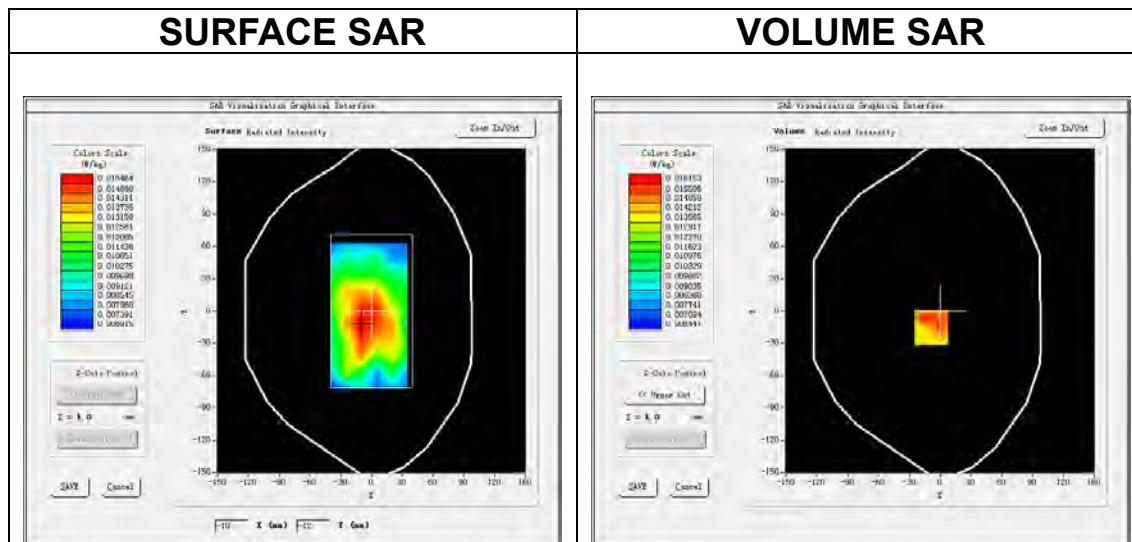

**Maximum location: X=-9.00, Y=-15.00**  
**SAR Peak: 0.02 W/kg**

<b>SAR 10g (W/Kg)</b>	0.012996
<b>SAR 1g (W/Kg)</b>	0.015912

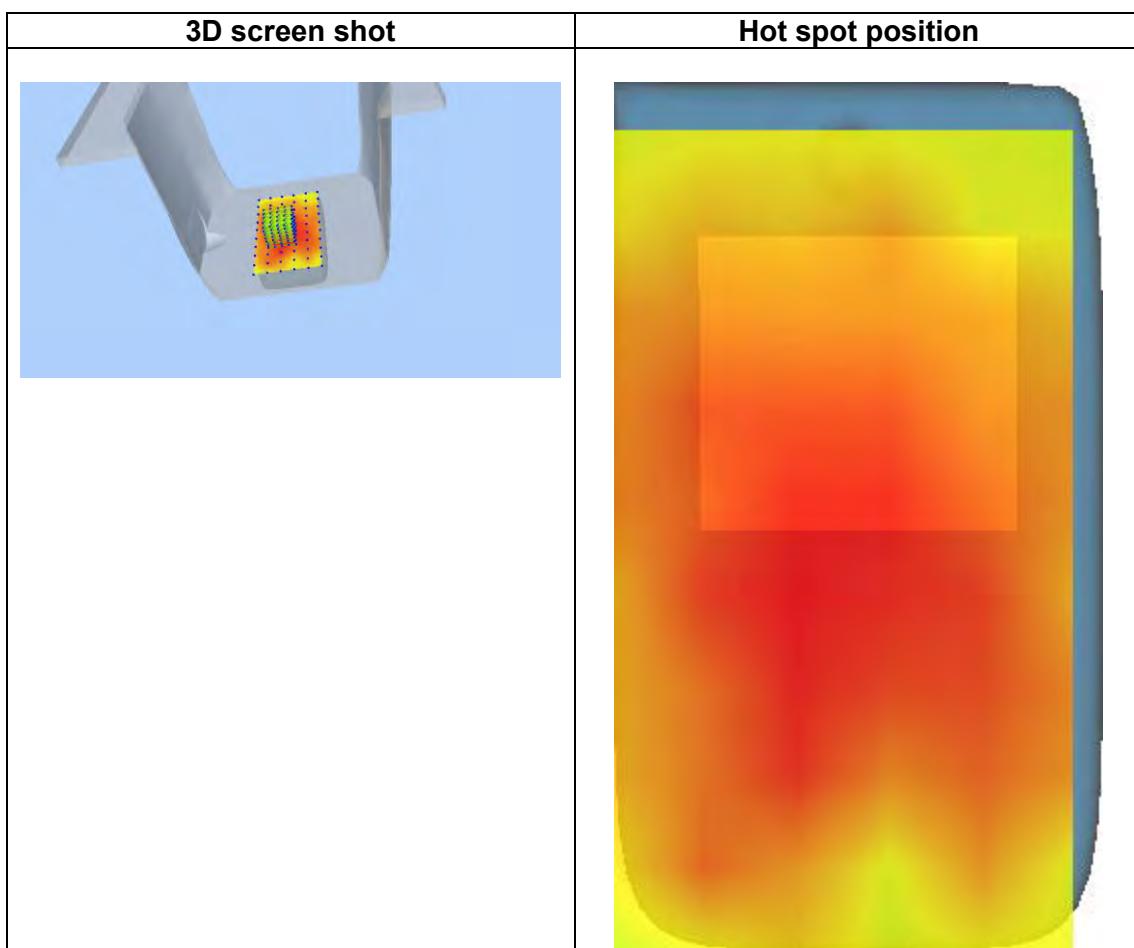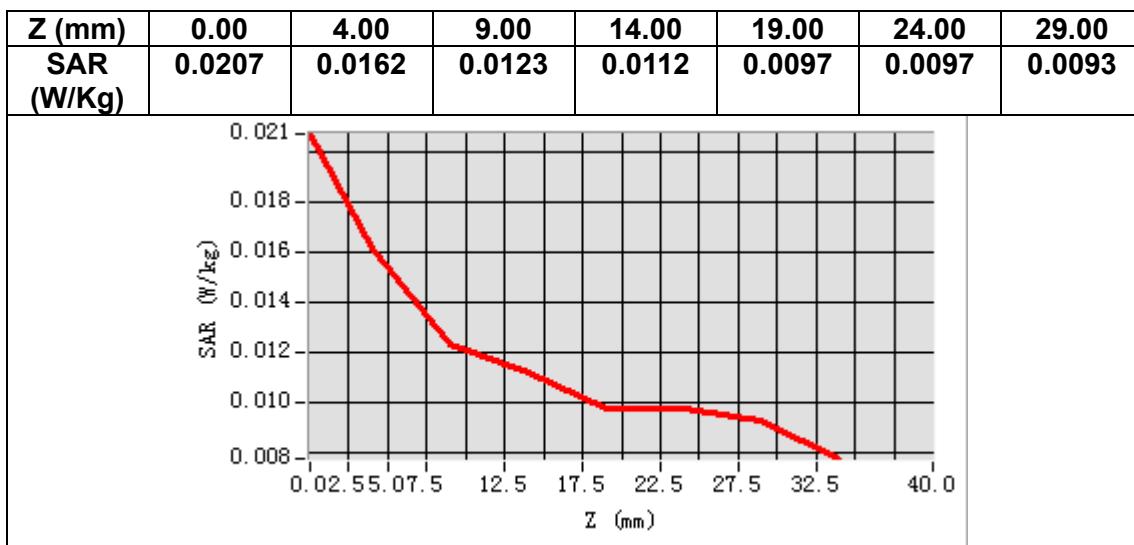

# MEASUREMENT 15


Date of measurement: 19/5/2022

## A. Experimental conditions.

<u>Area Scan</u>	$dx=15\text{mm}$ $dy=15\text{mm}$ , $h= 5.00 \text{ mm}$
<u>ZoomScan</u>	$5\times 5\times 7$ , $dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 17</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	710.000000
<b>Relative permittivity (real part)</b>	41.234844
<b>Relative permittivity (imaginary part)</b>	21.740067
<b>Conductivity (S/m)</b>	0.857525
<b>Variation (%)</b>	-0.400000

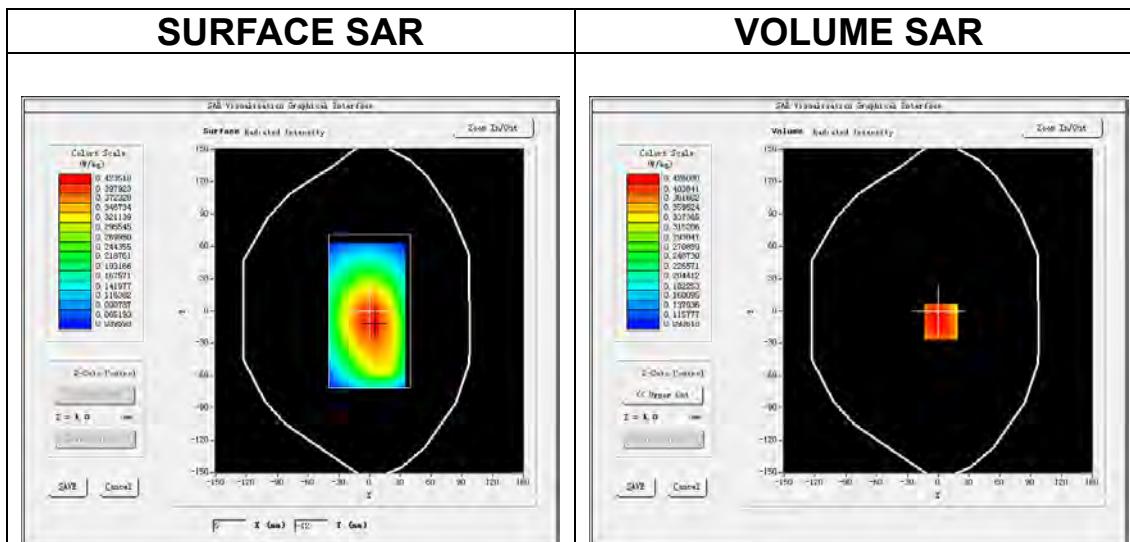

**Maximum location: X=3.00, Y=-10.00**

**SAR Peak: 0.51 W/kg**

<b>SAR 10g (W/Kg)</b>	0.322851
<b>SAR 1g (W/Kg)</b>	0.416240

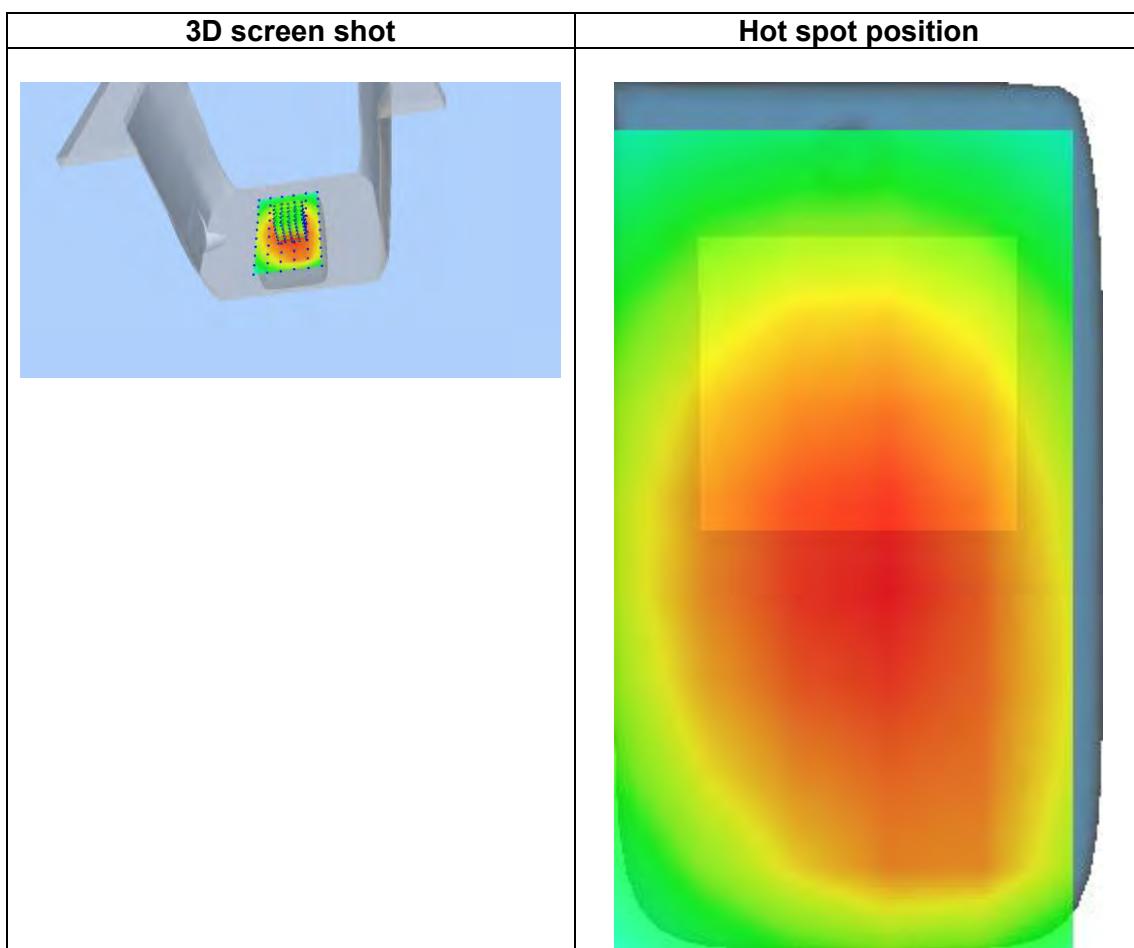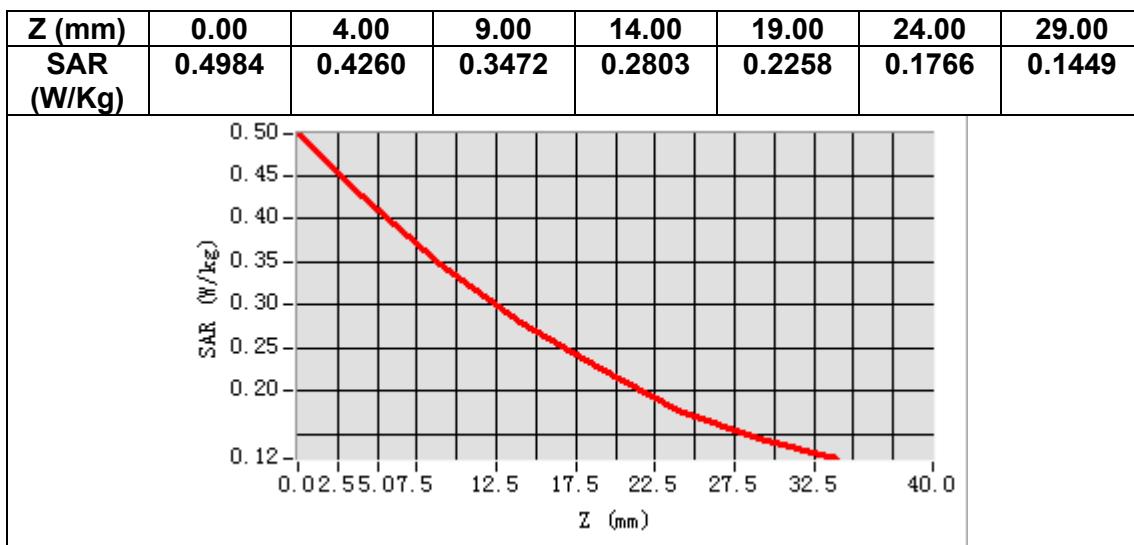

# MEASUREMENT 16


Date of measurement: 24/5/2022

## A. Experimental conditions.

<u>Area Scan</u>	$dx=15\text{mm}$ $dy=15\text{mm}$ , $h= 5.00 \text{ mm}$
<u>ZoomScan</u>	$5\times 5\times 7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 25</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1882.500000
<b>Relative permittivity (real part)</b>	38.267277
<b>Relative permittivity (imaginary part)</b>	13.926497
<b>Conductivity (S/m)</b>	1.456093
<b>Variation (%)</b>	-0.890000

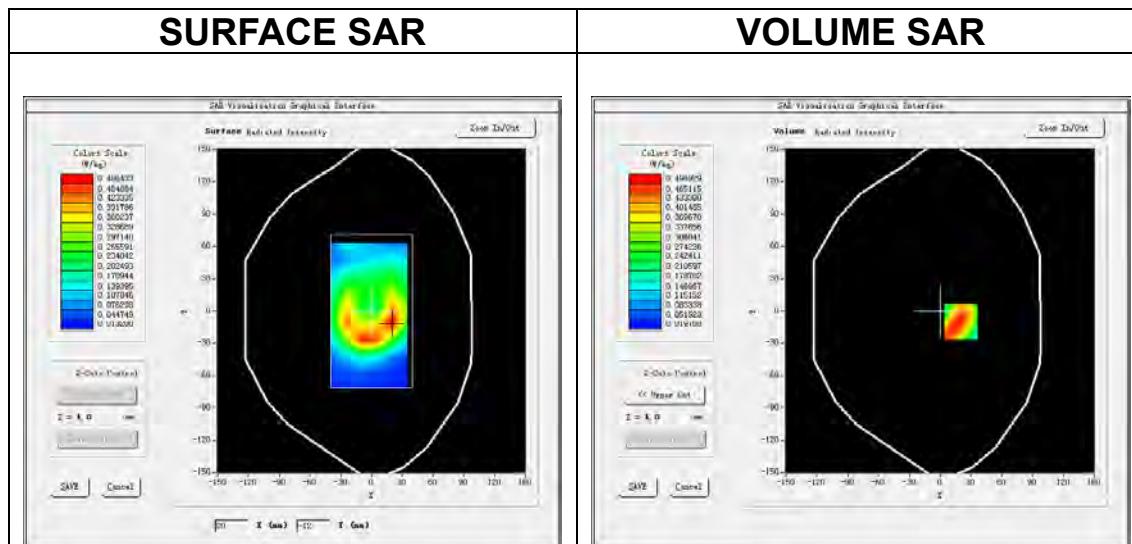

**Maximum location: X=20.00, Y=-10.00**  
**SAR Peak: 0.79 W/kg**

<b>SAR 10g (W/Kg)</b>	0.285718
<b>SAR 1g (W/Kg)</b>	0.495280

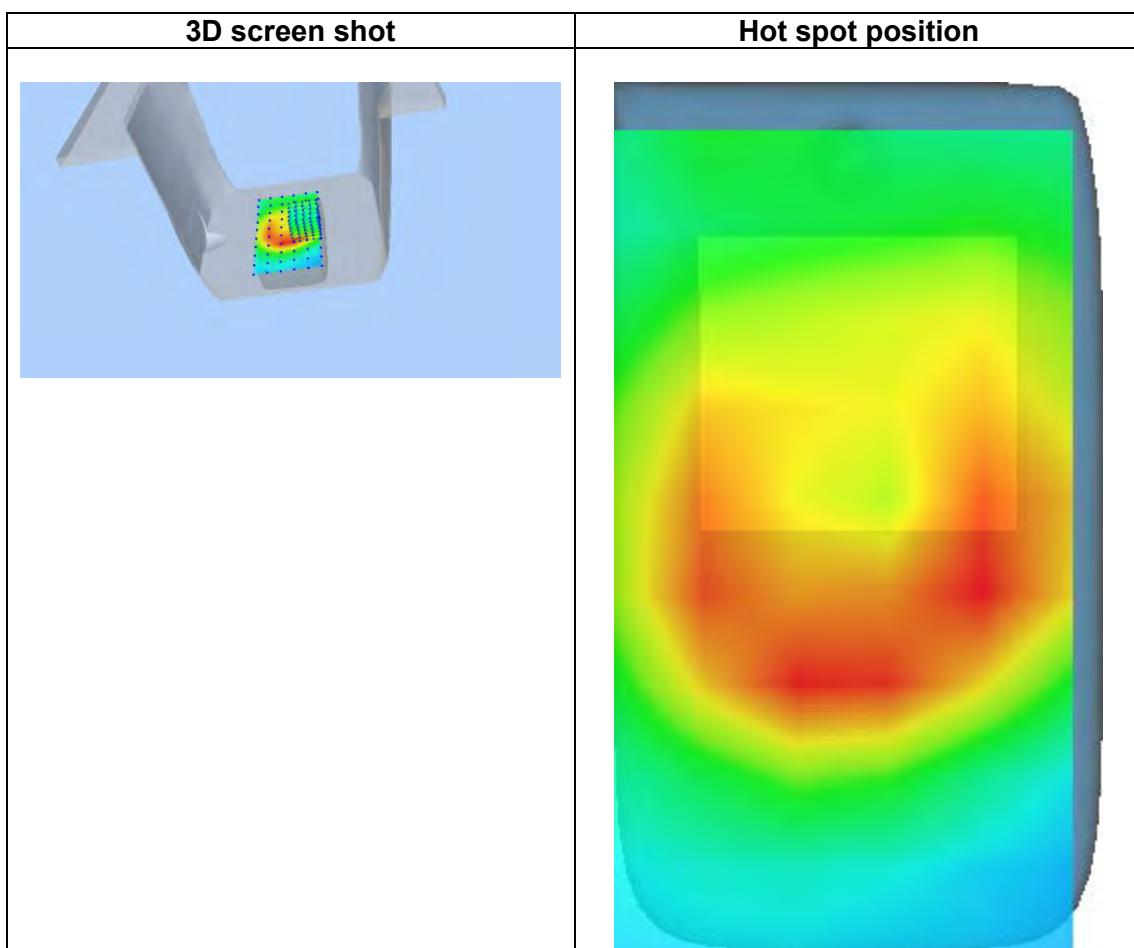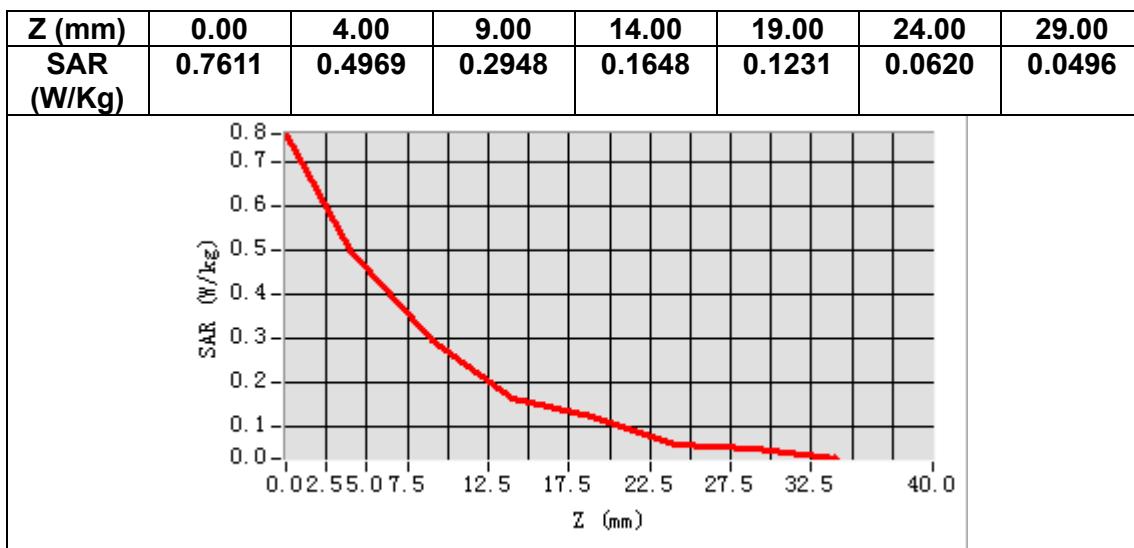

## MEASUREMENT 17


Date of measurement: 25/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=15\text{mm}</math> <math>dy=15\text{mm}</math>, <math>h= 5.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>5\times 5\times 7, dx=8\text{mm}</math> <math>dy=8\text{mm}</math> <math>dz=5\text{mm}</math></u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 26A</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	819.000000
<b>Relative permittivity (real part)</b>	42.089557
<b>Relative permittivity (imaginary part)</b>	19.648230
<b>Conductivity (S/m)</b>	0.893994
<b>Variation (%)</b>	-0.640000

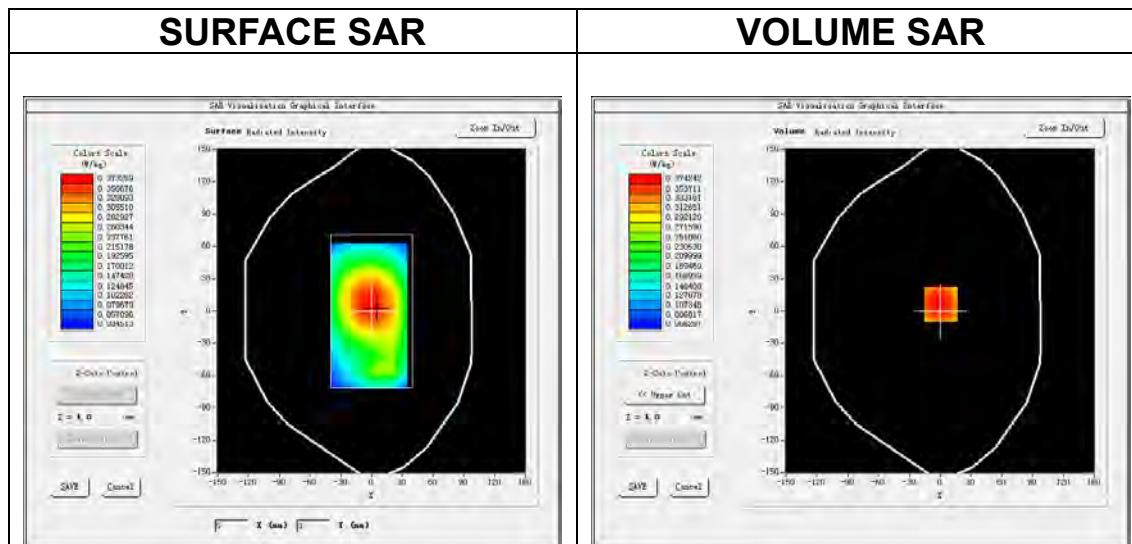

**Maximum location: X=1.00, Y=6.00**  
**SAR Peak: 0.45 W/kg**

<b>SAR 10g (W/Kg)</b>	0.277434
<b>SAR 1g (W/Kg)</b>	0.365545

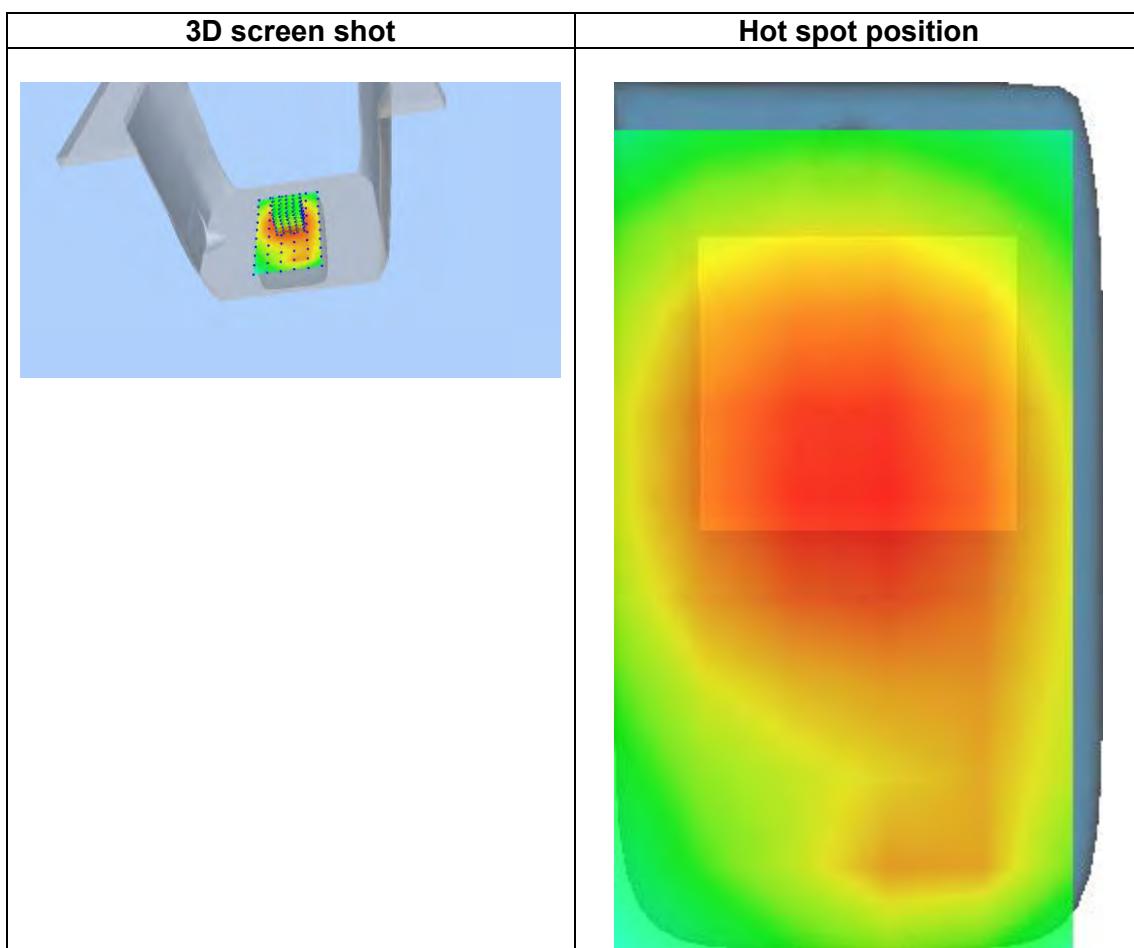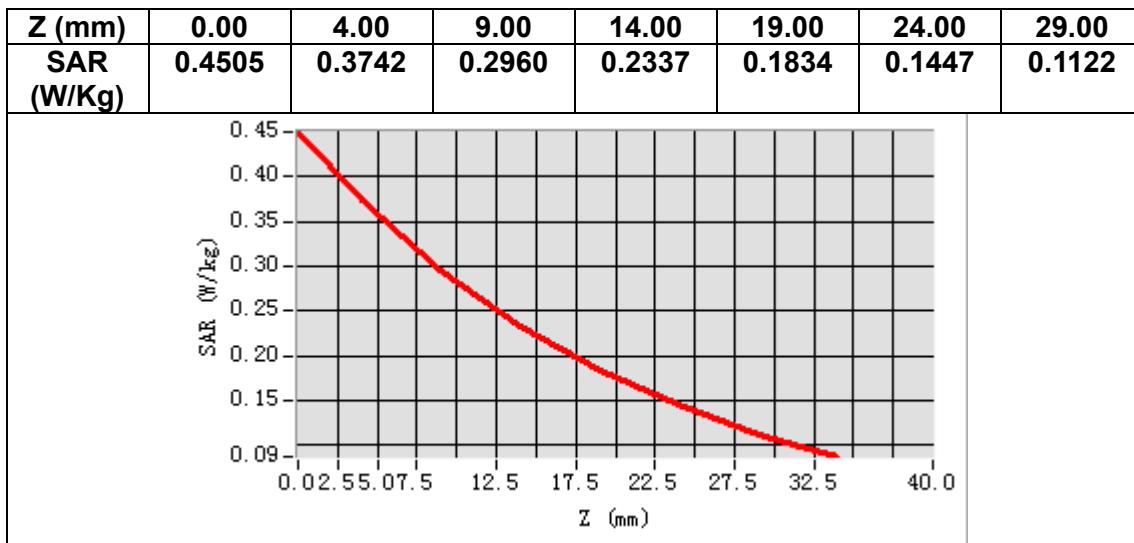

## MEASUREMENT 18


Date of measurement: 25/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	$dx=15\text{mm}$ $dy=15\text{mm}$ , $h= 5.00 \text{ mm}$
<u>ZoomScan</u>	$5x5x7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 26B</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	836.500000
<b>Relative permittivity (real part)</b>	41.809957
<b>Relative permittivity (imaginary part)</b>	19.671130
<b>Conductivity (S/m)</b>	0.914161
<b>Variation (%)</b>	0.250000

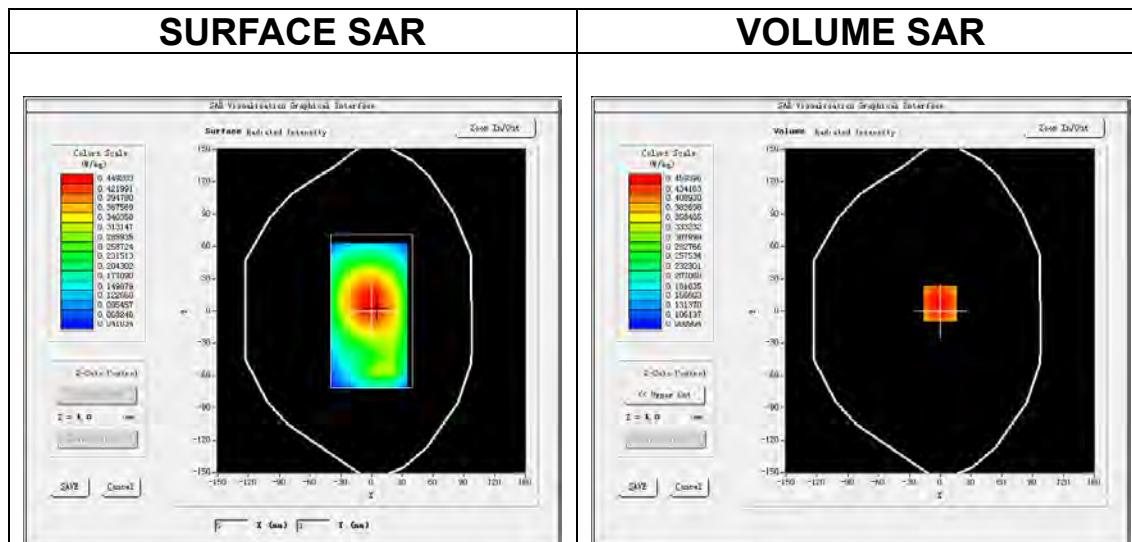

**Maximum location: X=0.00, Y=7.00**  
**SAR Peak: 0.56 W/kg**

<b>SAR 10g (W/Kg)</b>	0.337471
<b>SAR 1g (W/Kg)</b>	0.447355

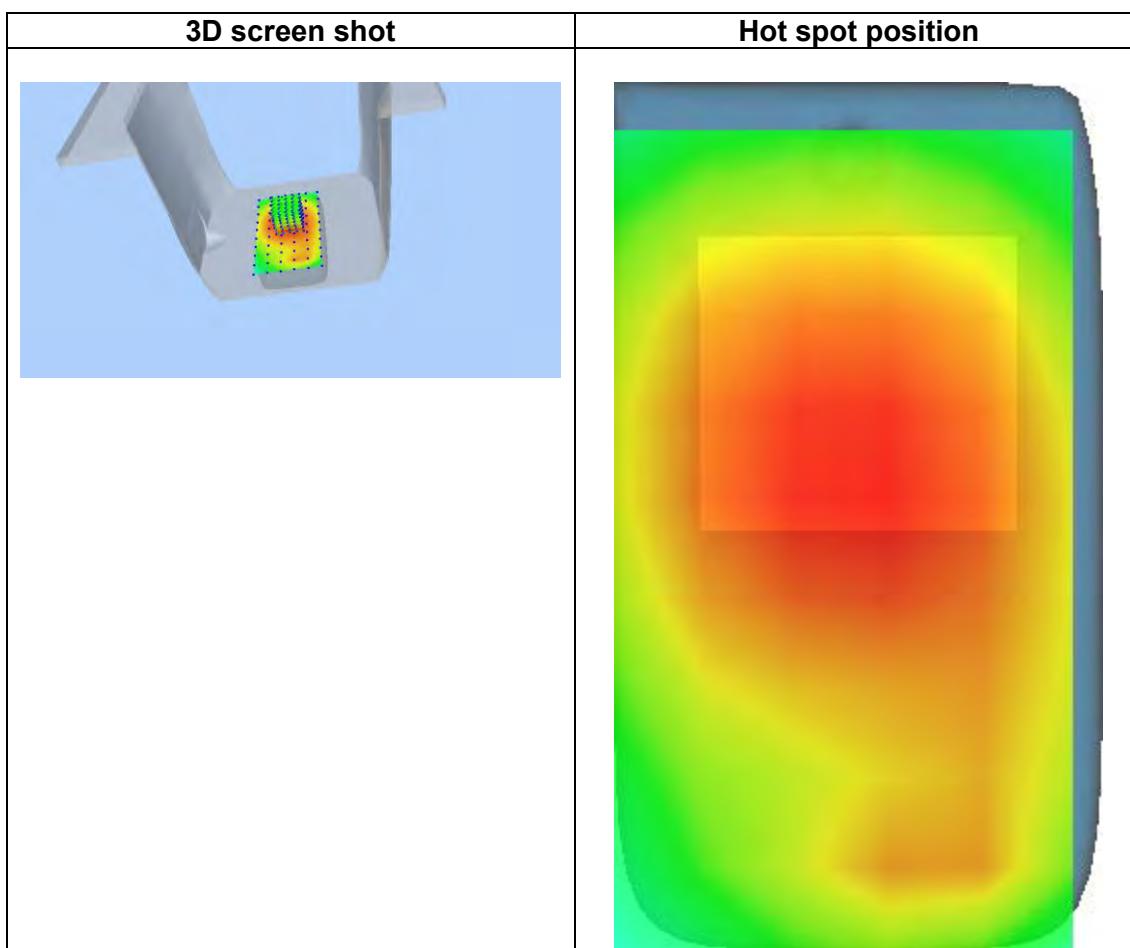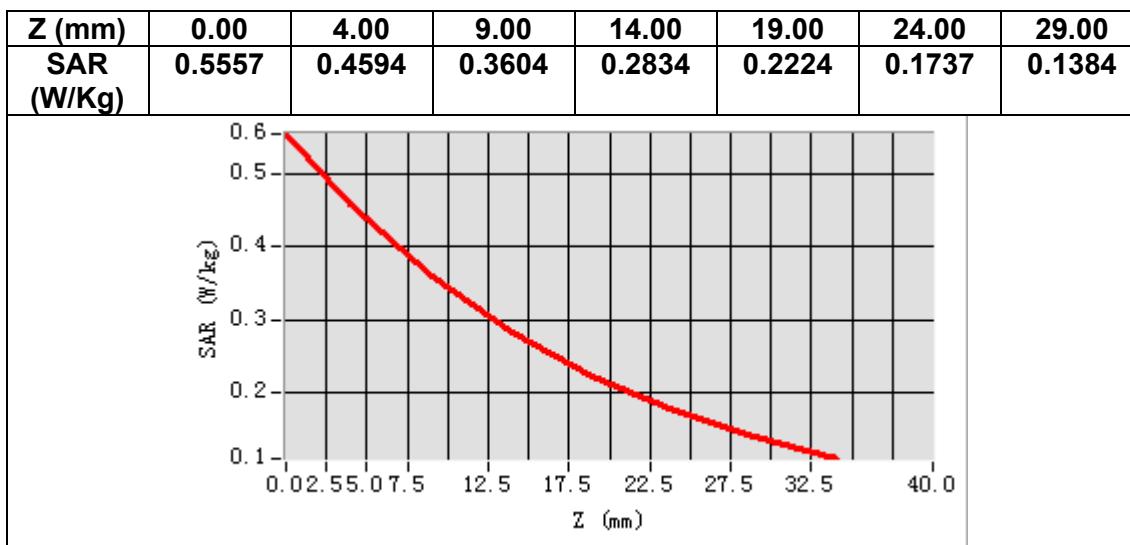

## MEASUREMENT 19


Date of measurement: 30/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=12\text{mm}</math> <math>dy=12\text{mm}</math>, <math>h= 5.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>7\times 7\times 7</math>, <math>dx=5\text{mm}</math> <math>dy=5\text{mm}</math> <math>dz=5\text{mm}</math></u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 41</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.6)</u>



### B. SAR Measurement Results

<b>Frequency (MHz)</b>	2593.000000
<b>Relative permittivity (real part)</b>	37.968487
<b>Relative permittivity (imaginary part)</b>	13.498882
<b>Conductivity (S/m)</b>	1.944589
<b>Variation (%)</b>	-3.360000

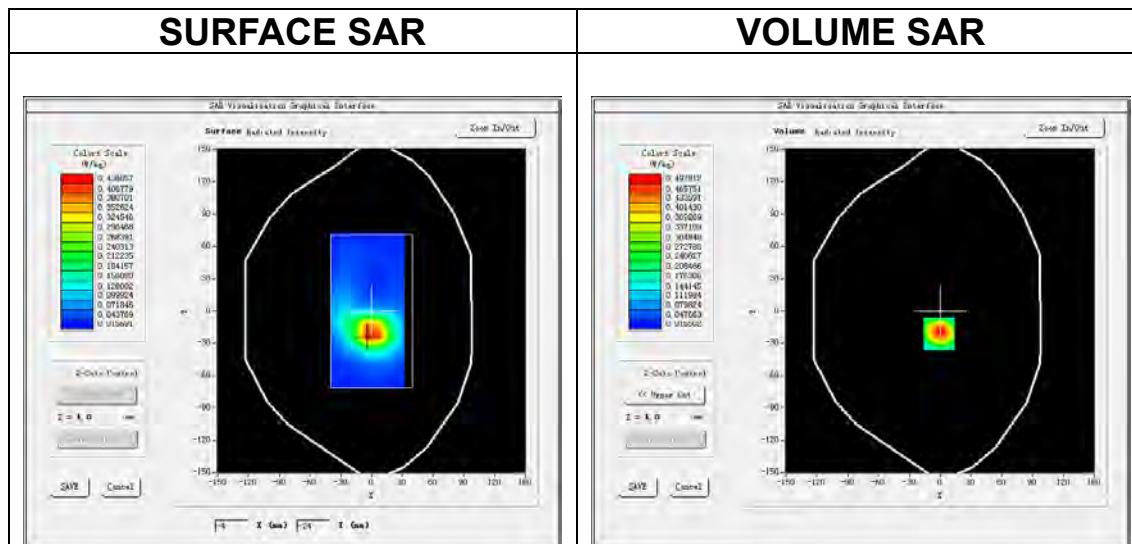

**Maximum location: X=-1.00, Y=-21.00**  
**SAR Peak: 0.85 W/kg**

<b>SAR 10g (W/Kg)</b>	0.229189
<b>SAR 1g (W/Kg)</b>	0.473219

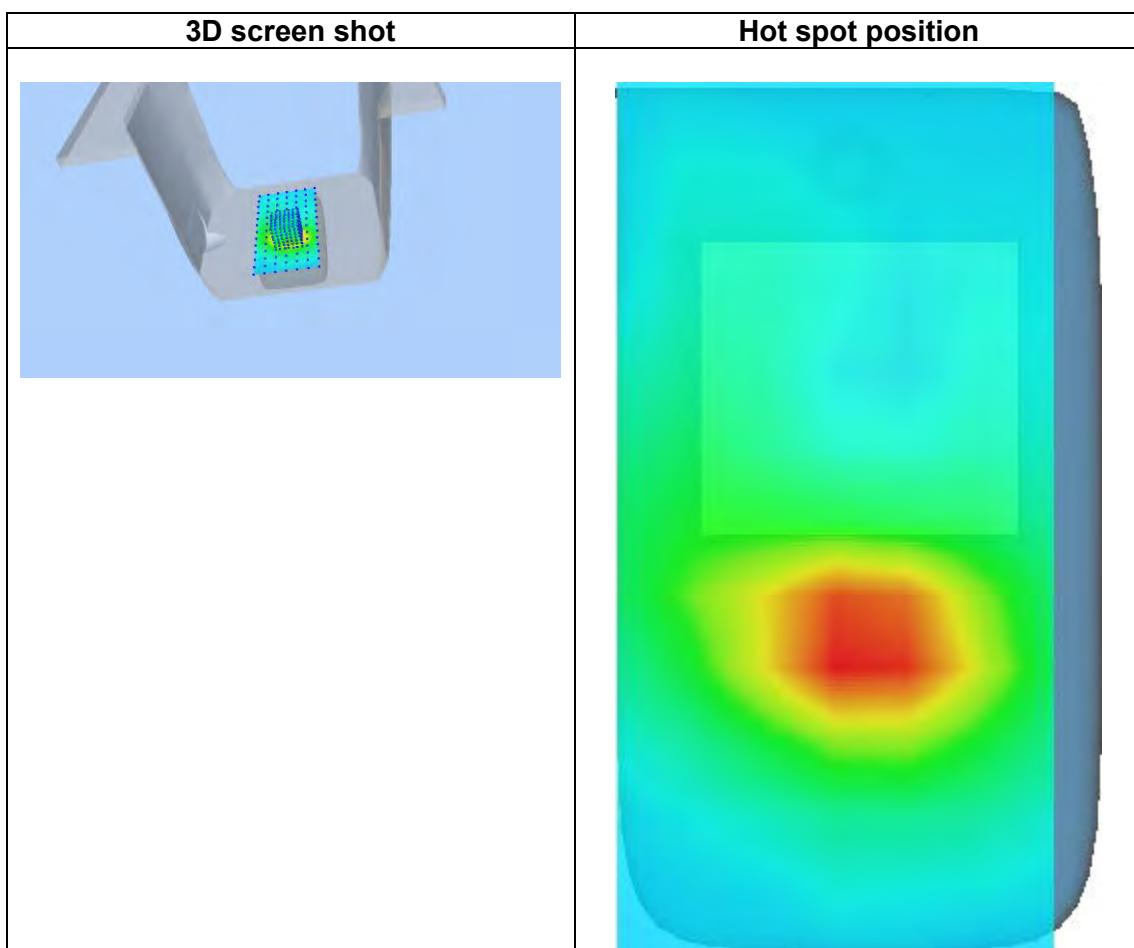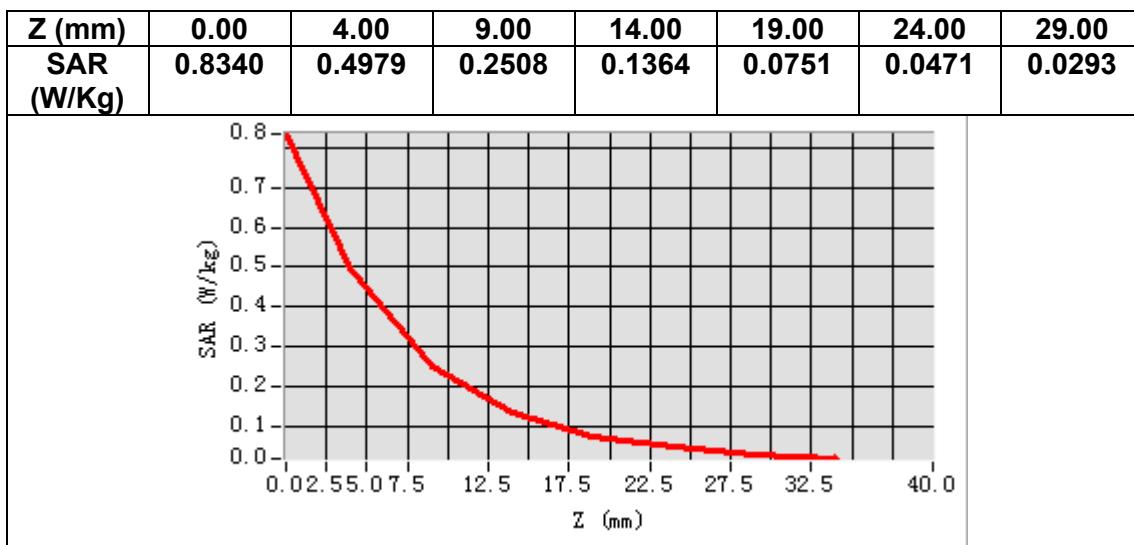

## MEASUREMENT 20


Date of measurement: 20/5/2022

### A. Experimental conditions.

<u>Area Scan</u>	<u><math>dx=15\text{mm}</math> <math>dy=15\text{mm}</math>, <math>h= 5.00 \text{ mm}</math></u>
<u>ZoomScan</u>	<u><math>5\times 5\times 7, dx=8\text{mm}</math> <math>dy=8\text{mm}</math> <math>dz=5\text{mm}</math></u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 66</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

### B. SAR Measurement Results



<b>Frequency (MHz)</b>	1745.000000
<b>Relative permittivity (real part)</b>	39.024162
<b>Relative permittivity (imaginary part)</b>	13.685237
<b>Conductivity (S/m)</b>	1.326708
<b>Variation (%)</b>	-0.390000

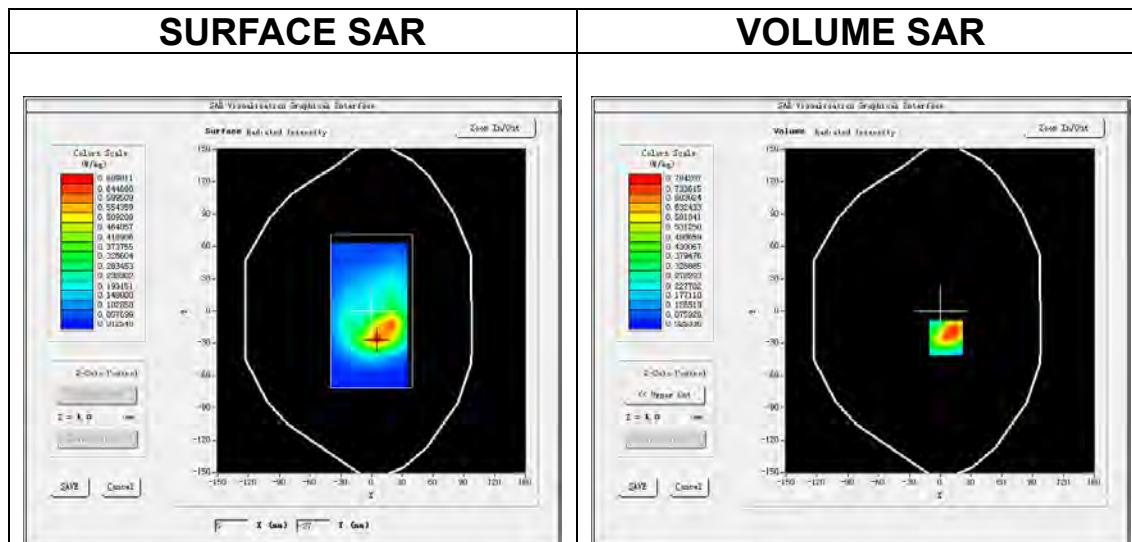

**Maximum location:  $X=6.00, Y=-25.00$**

**SAR Peak: 1.22 W/kg**

<b>SAR 10g (W/Kg)</b>	0.409398
<b>SAR 1g (W/Kg)</b>	0.750693

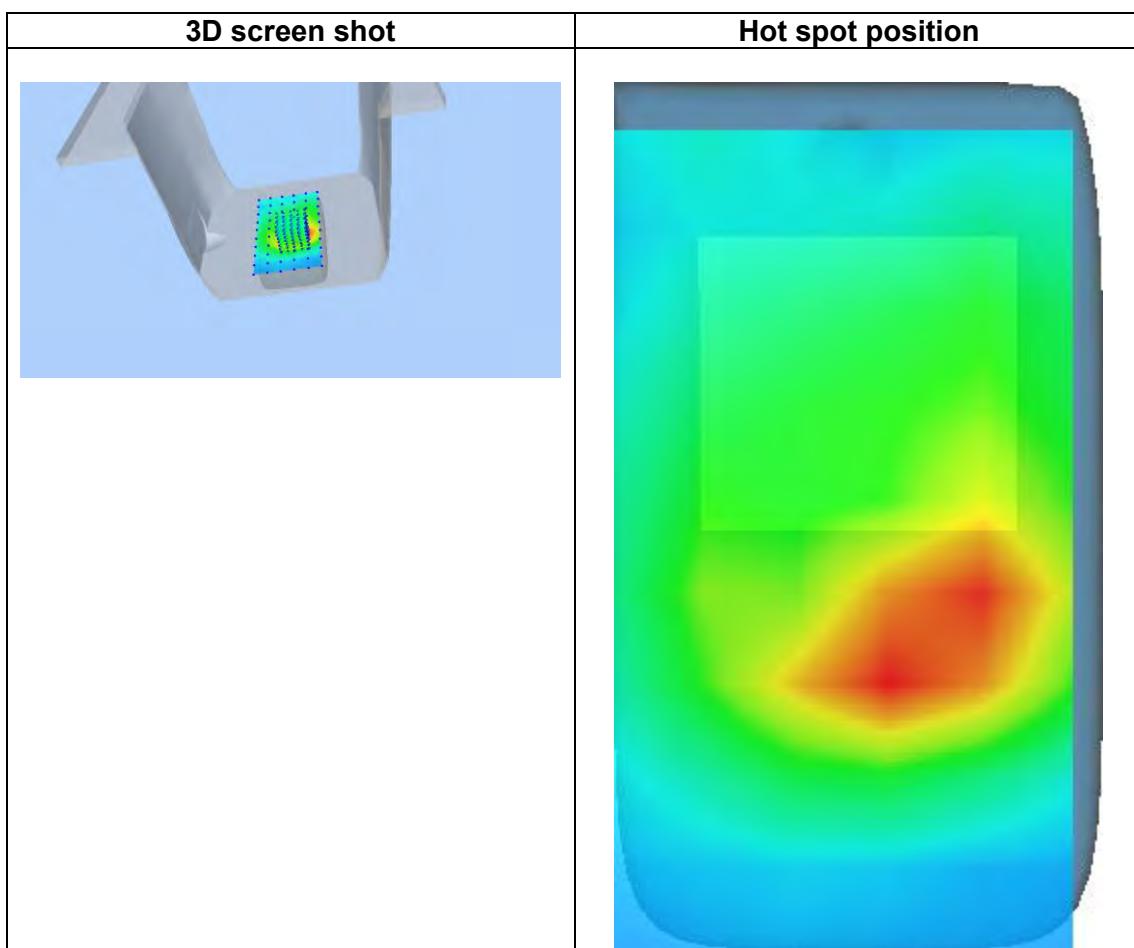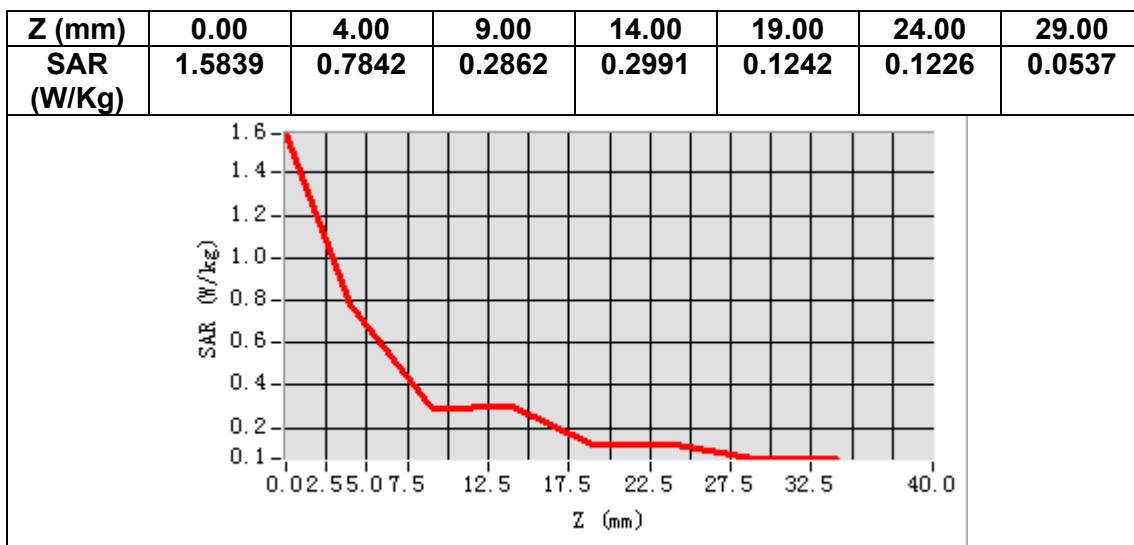

## 13. Appendix D. Calibration Certificate

### Table of contents

- E Field Probe - SN 08/16 EPGO287
- 750 MHz Dipole - SN 03/15 DIP 0G750-355
- 835 MHz Dipole - SN 03/15 DIP 0G835-347
- 1800 MHz Dipole - SN 03/15 DIP 1G800-349
- 1900 MHz Dipole - SN 03/15 DIP 1G900-350
- 2450 MHz Dipole - SN 03/15 DIP 2G450-352
- 2600 MHz Dipole - SN 03/15 DIP 2G600-356
- 5000-6000 MHz Dipole - SN 13/14 WGA 33
- Extended Calibration Certificate



## COMOSAR E-Field Probe Calibration Report

Ref : ACR.60.1.21.MVGB.A

**SHENZHEN NTEK TESTING TECHNOLOGY  
CO., LTD.**

**BUILDING E, FENDA SCIENCE PARK, SANWEI  
COMMUNITY, XIXIANG STREET,  
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA  
MVG COMOSAR DOSIMETRIC E-FIELD PROBE  
SERIAL NO.: SN 08/16 EPGO287**

**Calibrated at MVG**  
Z.I. de la pointe du diable  
Technopôle Brest Iroise – 295 avenue Alexis de Rochon  
29280 PLOUZANE - FRANCE

**Calibration date: 02/01/2022**



Accreditations #2-6789 and #2-6814  
Scope available on [www.cofrac.fr](http://www.cofrac.fr)


### Summary:

This document presents the method and results from an accredited COMOSAR E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref. ACR.60.1.21.MVGB.A

	Name	Function	Date	Signature
Prepared by :	Jérôme Luc	Technical Manager	2/1/2022	
Checked by :	Jérôme Luc	Technical Manager	2/1/2022	
Approved by :	Yann Toutain	Laboratory Director	2/1/2022	

Mode d'emploi  
2022.02.0  
1 10:07:13  
+01'00'  
PHILIPS

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Name	Date	Modifications
A	Jérôme Luc	2/1/2022	Initial release



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

## TABLE OF CONTENTS

1	Device Under Test .....	4
2	Product Description .....	4
2.1	General Information .....	4
3	Measurement Method .....	4
3.1	Linearity .....	4
3.2	Sensitivity .....	5
3.3	Lower Detection Limit .....	5
3.4	Isotropy .....	5
3.1	Boundary Effect .....	5
4	Measurement Uncertainty .....	6
5	Calibration Measurement Results .....	6
5.1	Sensitivity in air .....	6
5.2	Linearity .....	7
5.3	Sensitivity in liquid .....	8
5.4	Isotropy .....	9
6	List of Equipment .....	10



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref. ACR.60.1.21.MVGB.A

**1 DEVICE UNDER TEST**

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 08/16 EPGO287
Product Condition (new / used)	Used
Frequency Range of Probe	0.15 GHz-6GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.211 MΩ Dipole 2: R2=0.199 MΩ Dipole 3: R3=0.199 MΩ

**2 PRODUCT DESCRIPTION****2.1 GENERAL INFORMATION**

MVG's COMOSAR E field Probes are built in accordance to the IEEE 1528, FCC KDB865664 D01, CENELEC EN62209 and CEI/IEC 62209 standards.



**Figure 1 – MVG COMOSAR Dosimetric E field Dipole**

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

**3 MEASUREMENT METHOD**

The IEEE 1528, FCC KDB865664 D01, CENELEC EN62209 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

**3.1 LINEARITY**

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

**3.2 SENSITIVITY**

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

**3.3 LOWER DETECTION LIMIT**

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

**3.4 ISOTROPY**

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 to 360 degrees in 15-degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

**3.1 BOUNDARY EFFECT**

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

The boundary effect uncertainty can be estimated according to the following uncertainty approximation formula based on linear and exponential extrapolations between the surface and  $d_{be} + d_{step}$  along lines that are approximately normal to the surface:

$$\text{SAR}_{\text{uncertainty}} [\%] = \delta \text{SAR}_{\text{be}} \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{\left( e^{-\frac{d_{be}}{\delta}} \right)}{\delta/2} \quad \text{for } (d_{be} + d_{step}) < 10 \text{ mm}$$

where

$\Delta \text{SAR}_{\text{be}}$	is the uncertainty in percent of the probe boundary effect
$d_{be}$	is the distance between the surface and the closest <i>zoom-scan</i> measurement point, in millimetre
$\Delta_{\text{step}}$	is the separation distance between the first and second measurement points that are closest to the phantom surface, in millimetre, assuming the boundary effect at the second location is negligible
$\delta$	is the minimum penetration depth in millimetres of the head tissue-equivalent liquids defined in this standard, i.e., $\delta \approx 14$ mm at 3 GHz;
	in percent of SAR is the deviation between the measured SAR value, at the distance $d_{be}$ from the boundary, and the analytical SAR value.



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref. ACR.60.1.21.MVGB.A

The measured worst case boundary effect SARuncertainty[%] for scanning distances larger than 4mm is 1.0% Limit ,2%).

#### 4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Expanded uncertainty 95 % confidence level k = 2					14 %

#### 5 CALIBRATION MEASUREMENT RESULTS

Calibration Parameters	
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

##### 5.1 SENSITIVITY IN AIR

Normx dipole 1 ( $\mu\text{V}/(\text{V}/\text{m})^2$ )	Normy dipole 2 ( $\mu\text{V}/(\text{V}/\text{m})^2$ )	Normz dipole 3 ( $\mu\text{V}/(\text{V}/\text{m})^2$ )
0.72	0.66	0.77

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
107	110	110

Calibration curves  $ei=f(V)$  (i=1,2,3) allow to obtain E-field value using the formula:


$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$




## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref. ACR.60.1.21.MVGB.A

## Calibration curves

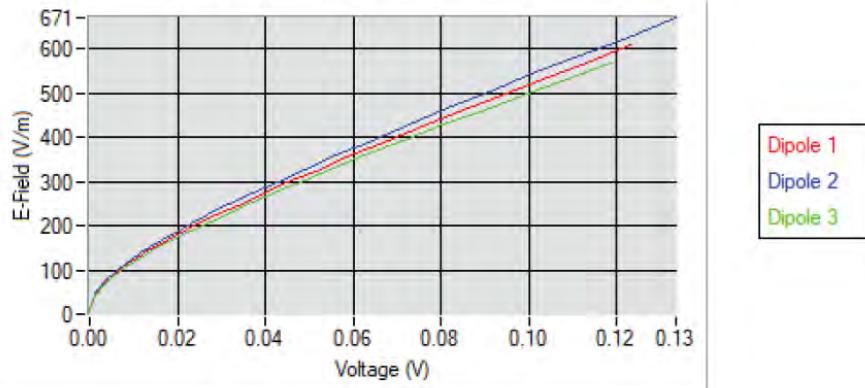5.2 LINEARITY

## Linearity

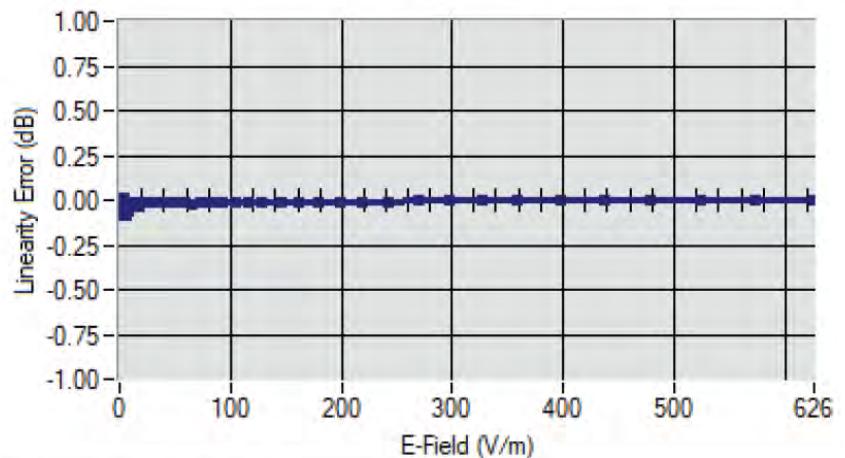Linearity: +/- 1.90% (+/-0.08dB)



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

5.3 SENSITIVITY IN LIQUID

<u>Liquid</u>	<u>Frequency</u> (MHz +/- 100MHz)	<u>ConvF</u>
HL750	750	1.49
HL850	835	1.50
HL900	900	1.61
HL1800	1800	1.73
HL1900	1900	1.91
HL2000	2000	1.97
HL2300	2300	1.92
HL2450	2450	1.98
HL2600	2600	1.87
HL3300	3300	1.79
HL3500	3500	1.85
HL3700	3700	1.79
HL3900	3900	2.07
HL4200	4200	2.21
HL4600	4600	2.25
HL4900	4900	2.05
HL5200	5200	1.80
HL5400	5400	2.05
HL5600	5600	2.16
HL5800	5800	2.07

LOWER DETECTION LIMIT: 8mW/kg

Page: 8/10


*Template ACR.DDD.N.YY.MVGB.ISSUE COMOSAR Probe vH*

*This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref. ACR.60.1.21.MVGB.A

5.4 ISOTROPYHL1800 MHz



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

## 6 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
Flat Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rohde & Schwarz ZVM	100203	05/2019	05/2022
Network Analyzer – Calibration kit	Rohde & Schwarz ZV-Z235	101223	05/2019	05/2022
Multimeter	Keithley 2000	1160271	02/2020	02/2023
Signal Generator	Rohde & Schwarz SMB	106589	04/2019	04/2022
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	NI-USB 5680	170100013	05/2019	05/2022
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Waveguide	Mega Industries	069Y7-158-13-712	Validated. No cal required.	Validated. No cal required.
Waveguide Transition	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.
Waveguide Termination	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.
Temperature / Humidity Sensor	Testo 184 H1	44220687	05/2020	05/2023



## SAR Reference Dipole Calibration Report

Ref : ACR.60.2.21.MVGB.A

### SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI  
COMMUNITY, XIXIANG STREET,  
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA

#### MVG COMOSAR REFERENCE DIPOLE

FREQUENCY: 750 MHZ

SERIAL NO.: SN 03/15 DIP0G750-355

#### Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon  
29280 PLOUZANE - FRANCE

Calibration date: 03/01/2021



Accreditations #2-6789 and #2-6814  
Scope available on [www.cofrac.fr](http://www.cofrac.fr)


#### Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed at MVG, using the COMOSAR test bench. The test results covered by accreditation are traceable to the International System of Units (SI).



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.60.2.21 MVGB.A

	Name	Function	Date	Signature
Prepared by :	Jérôme Luc	Technical Manager	3/1/2021	
Checked by :	Jérôme Luc	Technical Manager	3/1/2021	
Approved by :	Yann Toutain	Laboratory Director	3/1/2021	

2021.03.0

113:08:18

+01'00'

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Name	Date	Modifications
A	Jérôme Luc	3/1/2021	Initial release



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.60.2.21.MVGB.A

## TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test .....	4
3	Product Description .....	4
3.1	General Information .....	4
4	Measurement Method .....	5
4.1	Return Loss Requirements .....	5
4.2	Mechanical Requirements .....	5
5	Measurement Uncertainty.....	5
5.1	Return Loss .....	5
5.2	Dimension Measurement .....	5
5.3	Validation Measurement .....	5
6	Calibration Measurement Results.....	6
6.1	Return Loss and Impedance .....	6
6.2	Mechanical Dimensions .....	6
7	Validation measurement .....	7
7.1	Measurement Condition .....	7
7.2	Head Liquid Measurement .....	7
7.3	Measurement Result .....	8
8	List of Equipment .....	10