



# **RADIO TEST REPORT**

## **FCC ID: 2AC8IFT15J1900**

**Product:** Capacitive Touch Screen PC  
**Trade Mark:** faytech  
**Model No.:** FT15J1900  
**Serial Model:** FT07J1900, FT08J1900, FT10J1900,  
FT101J1900, FT104J1900, FT121J1900,  
FT17J1900, FT19J1900, FT215J1900  
**Report No.:** NTEK-2015NT12283627F1  
**Issue Date:** 17 Feb. 2017

### **Prepared for**

faytech Tech. Co., Ltd

Fl. 4, Hongmen Tech. Zone, Jihua Road, Longgang District Shenzhen, China

### **Prepared by**

**NTEK TESTING TECHNOLOGY CO., LTD.**

1/F, Building E, Fenda Science Park, Sanwei Community,  
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

Tel.: +86-755-6115 6588

Fax.: +86-755-6115 6599

Website:<http://www.ntek.org.cn>

### TABLE OF CONTENTS

- 1 TEST RESULT CERTIFICATION .....3**
- 2 SUMMARY OF TEST RESULTS.....4**
- 3 FACILITIES AND ACCREDITATIONS .....5**
  - 3.1 FACILITIES.....5
  - 3.2 LABORATORY ACCREDITATIONS AND LISTINGS .....5
  - 3.3 MEASUREMENT UNCERTAINTY .....5
- 4 GENERAL DESCRIPTION OF EUT .....6**
- 5 DESCRIPTION OF TEST MODES .....8**
- 6 SETUP OF EQUIPMENT UNDER TEST .....10**
  - 6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....10
  - 6.2 SUPPORT EQUIPMENT.....11
  - 6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS.....12
- 7 TEST REQUIREMENTS .....13**
  - 7.1 CONDUCTED EMISSIONS TEST .....13
  - 7.2 RADIATED SPURIOUS EMISSION .....18
  - 7.3 6DB BANDWIDTH.....27
  - 7.4 20DB BANDWIDTH.....31
  - 7.5 DUTY CYCLE.....35
  - 7.6 MAXIMUM OUTPUT POWER.....37
  - 7.7 POWER SPECTRAL DENSITY .....39
  - 7.8 CONDUCTED BAND EDGE MEASUREMENT.....43
  - 7.9 SPURIOUS RF CONDUCTED EMISSIONS.....48
  - 7.10 ANTENNA APPLICATION .....61



### 1 TEST RESULT CERTIFICATION

Applicant's name .....	faytech Tech. Co., Ltd
Address .....	Fl. 4, Hongmen Tech. Zone, Jihua Road, Longgang District Shenzhen, China
Manufacturer's Name .....	faytech Tech. Co., Ltd
Address .....	Fl. 4, Hongmen Tech. Zone, Jihua Road, Longgang District Shenzhen, China
Product description	
Product name .....	Capacitive Touch Screen PC
Model and/or type reference .....	FT15J1900
Serial Model .....	FT07J1900, FT08J1900, FT10J1900, FT101J1900, FT104J1900, FT121J1900, FT17J1900, FT19J1900, FT215J1900

Measurement Procedure Used:


APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
FCC 47 CFR Part 2, Subpart J:2015 FCC 47 CFR Part 15, Subpart C:2015 KDB 174176 D01 Line Conducted FAQ v01r01 ANSI C63.10-2013 FCC KDB 558074 D01 DTS Meas Guidance v03r05	Complied


This device described above has been tested by NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of NTEK Testing Technology Co., Ltd., this document may be altered or revised by NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : 28 Dec. 2016 ~ 17 Feb. 2017

Testing Engineer :   
(Allen Liu)

Technical Manager :   
(Jason Chen)

Authorized Signatory :   
(Sam Chen)

**2 SUMMARY OF TEST RESULTS**

FCC Part15 (15.247), Subpart C			
Standard Section	Test Item	Verdict	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Maximum Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

### 3 FACILITIES AND ACCREDITATIONS

#### 3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

#### 3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab. : Accredited by CNAS, 2014.09.04  
 The certificate is valid until 2017.09.03  
 The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)  
 The Certificate Registration Number is L5516.

Accredited by Industry Canada, August 29, 2012  
 The Certificate Registration Number is 9270A-1.

Accredited by FCC, September 06, 2013  
 The Certificate Registration Number is 238937.

Name of Firm : NTEK Testing Technology Co., Ltd  
 Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

#### 3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

#### 4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	Capacitive Touch Screen PC
Trade Mark	faytech
FCC ID	2AC8IFT15J1900
Model No.	FT15J1900
Serial Model	FT07J1900, FT08J1900, FT10J1900, FT101J1900, FT104J1900, FT121J1900, FT17J1900, FT19J1900, FT215J1900
Model Difference	All the model are the same circuit and RF module, except the model No. and colour.
Operating Frequency	2412-2462MHz for 802.11b/g/11n(HT20); 2422-2452MHz for 802.11n(HT40);
Modulation	DSSS with BPSK/QPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Number of Channels	11 channels for 802.11b/g/11n(HT20); 7 channels for 802.11n(HT40);
Antenna Designation	External Antenna
Antenna Gain(Peak)	Main antenna 3 dBi For 2.4G(antenna A) AUX antenna 3 dBi For 2.4G (antenna B)
Power supply	<input type="checkbox"/> DC supply:
	<input checked="" type="checkbox"/> Adapter supply: Mode: FJ-SW1205000 Input: 100-240V~, 50/60Hz, 1.5A MAX Output: 12.0V 5000mA
HW Version	A21
SW Version	V5

Note 1: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.



## 5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT40): MCS0) were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report.

Frequency and Channel list for 802.11b/g/n (HT20/HT40):

Channel	Frequency(MHz)
1	2412
2	2417
...	...
5	2432
6	2437
...	...
10	2457
11	2462

Note:  $fc=2412MHz+k \times 5MHz$  k=0 to 10

EUT built-in battery-powered, fully-charged battery use of the test battery




Test Mode:

Test Items	Mode	Data Rate	Channel	Ant
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1


## 6 SETUP OF EQUIPMENT UNDER TEST

### 6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM


For AC Conducted Emission Mode

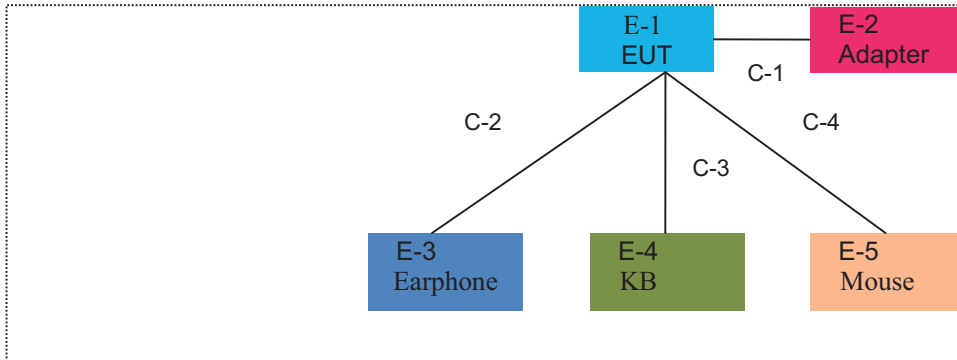

For Radiated Test Cases

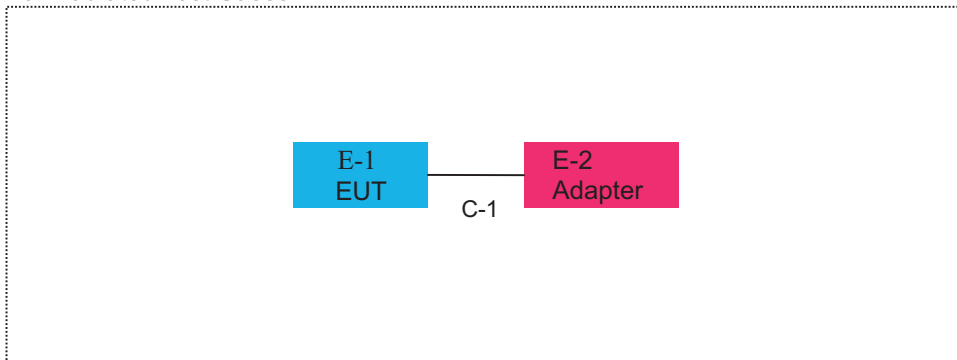

For Conducted Test Cases

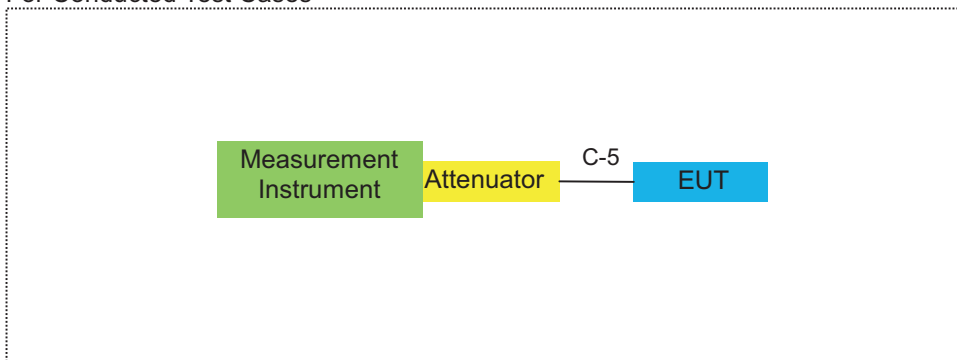

**6.2 SUPPORT EQUIPMENT**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
E-1	Capacitive Touch Screen PC	faytech	FT15J1900	2AC8IFT15J1900	EUT
E-2	Adapter	N/A	FJ-SW1205000	N/A	Peripherals
E-3	Earphone	N/A	L662	N/A	Peripherals
E-4	KB	DELL	SK-8185	OY526KUS	
E-5	Mouse	DELL	MS111-P	cn-011d3v-71581-1 1e-1th7	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	Power Cable	NO	NO	1.0m
C-2	Earphone Cable	NO	NO	0.8m
C-3	Mouse Cable	NO	NO	1.5m
C-4	KB Cable	NO	NO	1.2m
C-5	RF Cable	NO	NO	0.5m

**Notes:**

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

**6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS**

**Radiation Test equipment**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2016.07.06	2017.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2016.06.07	2017.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2016.07.06	2017.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.06.07	2017.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2016.06.07	2017.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2016.07.06	2017.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2016.12.22	2017.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2016.06.08	2017.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2016.07.06	2017.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2016.07.06	2017.07.05	1 year
12	Test Cable	N/A	R-01	N/A	2016.07.06	2017.07.05	1 year
13	Test Cable	N/A	R-02	N/A	2016.07.06	2017.07.05	1 year

**Conduction Test equipment**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2016.06.06	2017.06.05	1 year
2	LISN	R&S	ENV216	101313	2016.08.24	2017.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2016.08.24	2017.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.06.07	2017.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2016.06.07	2017.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2016.06.08	2017.06.07	1 year
7	Test Cable	N/A	C01	N/A	2016.06.08	2017.06.07	1 year
8	Test Cable	N/A	C02	N/A	2016.06.08	2017.06.07	1 year
9	Test Cable	N/A	C03	N/A	2016.06.08	2017.06.07	1 year
1	Attenuation	MCE	24-10-34	BN9258	2016.06.08	2017.06.07	1 year

Note: Each piece of equipment is scheduled for calibration once a year.

## 7 TEST REQUIREMENTS

### 7.1 CONDUCTED EMISSIONS TEST

#### 7.1.1 Applicable Standard

According to FCC Part 15.207(a) and KDB 174176 D01 Line Conducted FAQ v01r01

#### 7.1.2 Conformance Limit


Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. \*Decreases with the logarithm of the frequency  
 2. The lower limit shall apply at the transition frequencies  
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

#### 7.1.4 Test Configuration

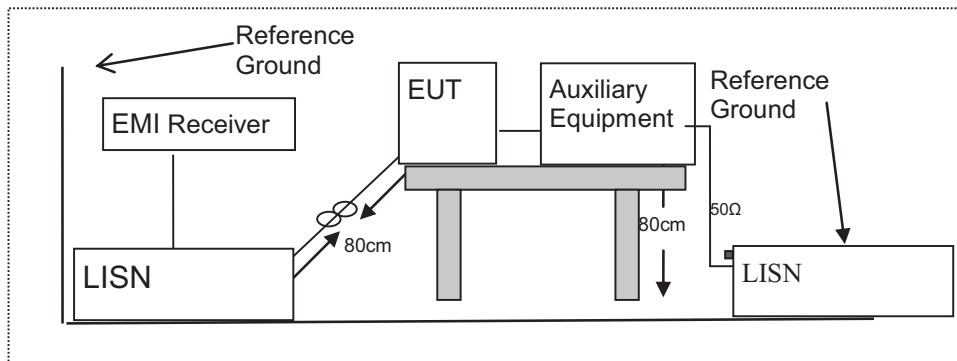

#### 7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.


7.1.6 Test Results

EUT:	Capacitive Touch Screen PC	Model Name :	FT15J1900
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 12V from Adapter AC 120V/60Hz	Test Mode:	Normal Link

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1779	48.77	10.13	58.9	64.58	-5.68	QP
0.1779	23.9	10.13	34.03	54.58	-20.55	AVG
0.2379	47.27	10.13	57.4	62.17	-4.77	QP
0.2379	18.21	10.13	28.34	52.17	-23.83	AVG
0.2938	42.16	10.14	52.3	60.41	-8.11	QP
0.2938	14.64	10.14	24.78	50.41	-25.63	AVG
0.4818	42.76	9.84	52.6	56.31	-3.71	QP
0.4818	24.94	9.84	34.78	46.31	-11.53	AVG
12.7097	37.03	9.82	46.85	60	-13.15	QP
12.7097	26.51	9.82	36.33	50	-13.67	AVG
20.486	39.31	9.94	49.25	60	-10.75	QP
20.486	29.84	9.94	39.78	50	-10.22	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

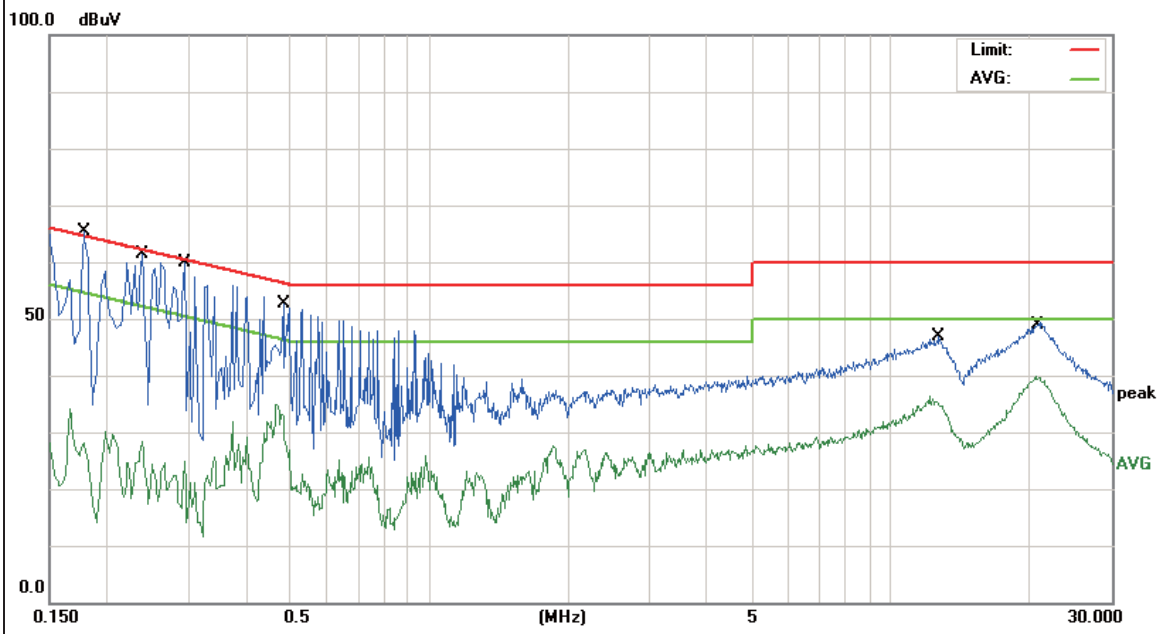


EUT:	Capacitive Touch Screen PC	Model Name :	FT15J1900
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 12V from Adapter AC 120V/60Hz	Test Mode:	Normal Link

Frequency (MHz)	Reading Level (dBµV)	Correct Factor (dB)	Measure-ment (dBµV)	Limits (dBµV)	Margin (dB)	Remark
0.1779	48.27	10.13	58.4	64.58	-6.18	QP
0.1779	22.24	10.13	32.37	54.58	-22.21	AVG
0.2099	46.67	10.13	56.8	63.21	-6.41	QP
0.2099	18.33	10.13	28.46	53.21	-24.75	AVG
0.5299	42.29	9.8	52.09	56	-3.91	QP
0.5299	23.94	9.8	33.74	46	-12.26	AVG
1.622	31.33	9.78	41.11	56	-14.89	QP
1.622	18.72	9.78	28.5	46	-17.5	AVG
12.9219	40.2	9.83	50.03	60	-9.97	QP
12.9219	25.84	9.83	35.67	50	-14.33	AVG
19.9258	36.91	9.94	46.85	60	-13.15	QP
19.9258	25.63	9.94	35.57	50	-14.43	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

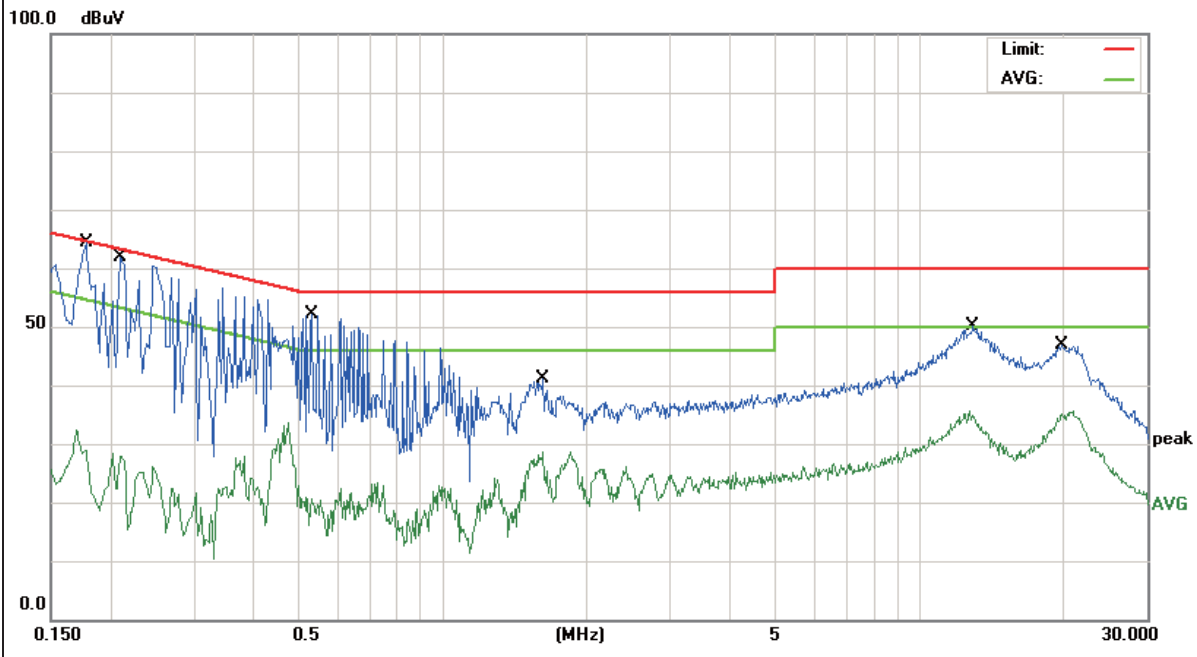


EUT:	Capacitive Touch Screen PC	Model Name :	FT15J1900
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 12V from Adapter AC 240V/60Hz	Test Mode:	Normal Link

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1819	38.95	10.13	49.08	64.39	-15.31	QP
0.1819	21.86	10.13	31.99	54.39	-22.4	AVG
0.2099	37.13	10.13	47.26	63.21	-15.95	QP
0.2099	21.81	10.13	31.94	53.21	-21.27	AVG
0.318	31.69	10.12	41.81	59.76	-17.95	QP
0.318	18.71	10.12	28.83	49.76	-20.93	AVG
0.4699	30.59	9.87	40.46	56.52	-16.06	QP
0.4699	16.71	9.87	26.58	46.52	-19.94	AVG
1.9299	27.42	9.74	37.16	56	-18.84	QP
1.9299	20.2	9.74	29.94	46	-16.06	AVG
20.7939	39.51	9.95	49.46	60	-10.54	QP
20.7939	30.95	9.95	40.9	50	-9.1	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

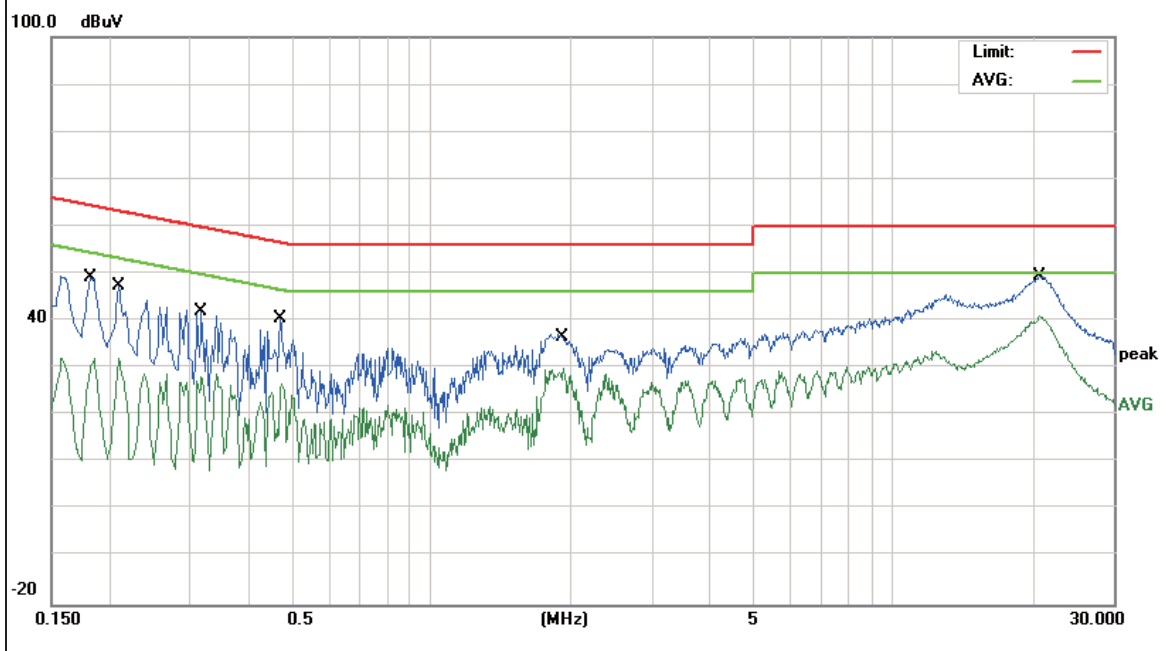




EUT:	Capacitive Touch Screen PC	Model Name :	FT15J1900
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 12V from Adapter AC 240V/60Hz	Test Mode:	Normal Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.158	38.67	10.12	48.79	65.56	-16.77	QP
0.158	22.71	10.12	32.83	55.56	-22.73	AVG
0.2099	34.59	10.13	44.72	63.21	-18.49	QP
0.2099	21.6	10.13	31.73	53.21	-21.48	AVG
0.314	27.65	10.13	37.78	59.86	-22.08	QP
0.314	19.93	10.13	30.06	49.86	-19.8	AVG
0.446	27.06	9.93	36.99	56.95	-19.96	QP
0.446	21.05	9.93	30.98	46.95	-15.97	AVG
1.8779	27.23	9.74	36.97	56	-19.03	QP
1.8779	21.1	9.74	30.84	46	-15.16	AVG
20.51	40.19	9.94	50.13	60	-9.87	QP
20.51	27.52	9.94	37.46	50	-12.54	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

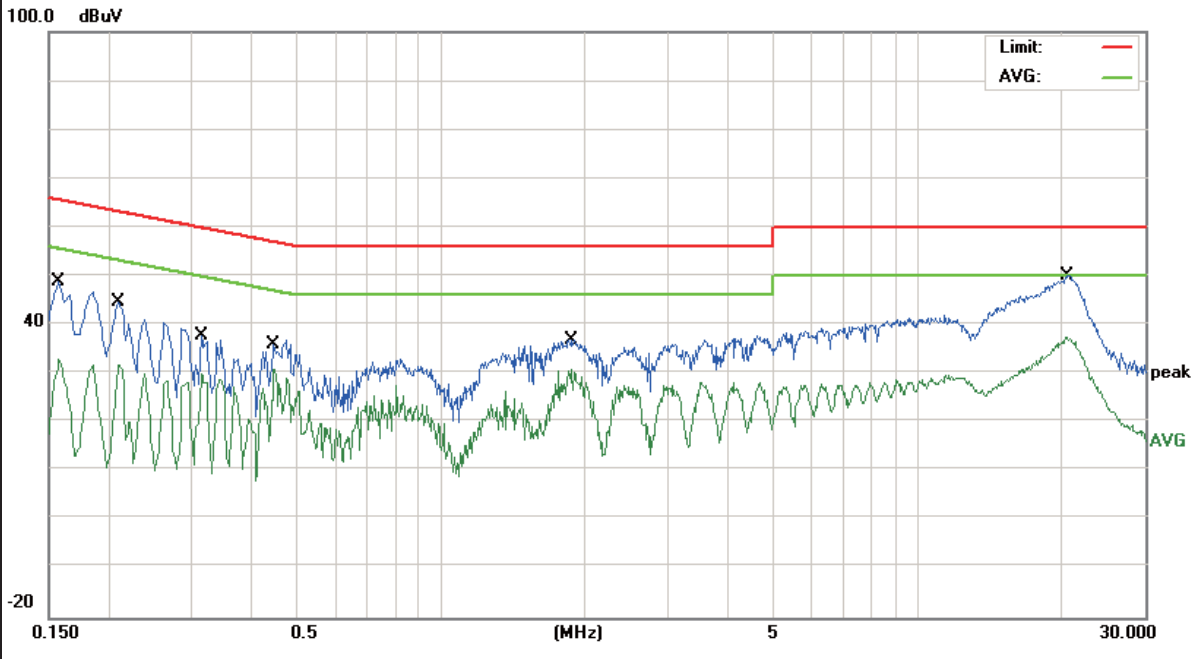

**7.2 RADIATED SPURIOUS EMISSION**

**7.2.1 Applicable Standard**

According to FCC Part 15.247(d) and 15.209 and DA 00-705

**7.2.2 Conformance Limit**

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54


- Remark :1. Emission level in dBuV/m=20 log (uV/m)  
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.  
 3. Distance extrapolation factor =40log(Specific distance/ test distance)( dB);  
 Limit line=Specific limits(dBuV) + distance extrapolation factor.

### 7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

### 7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

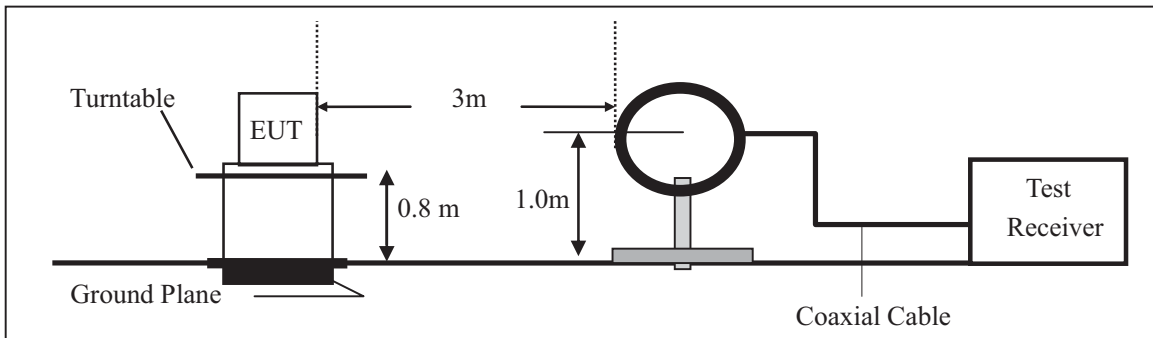

(b) For radiated emissions from 30MHz to 1000MHz

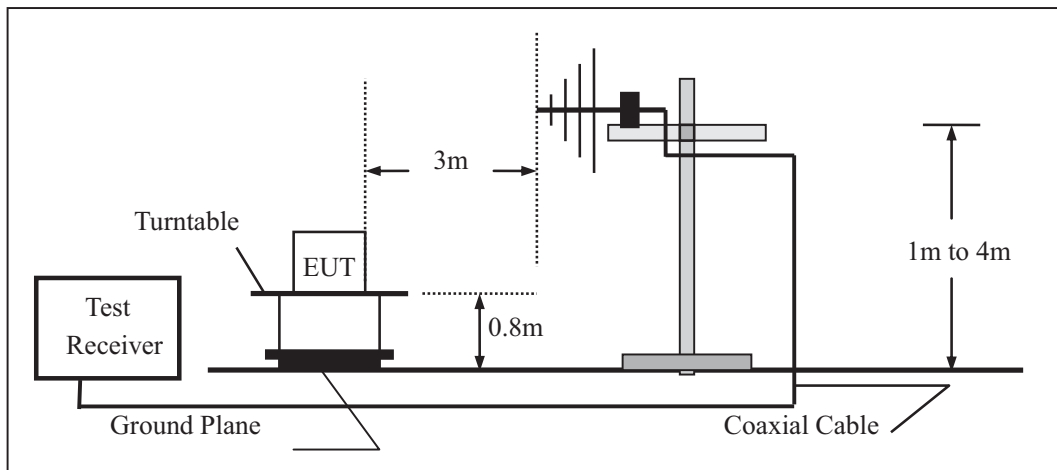

(c) For radiated emissions above 1000MHz

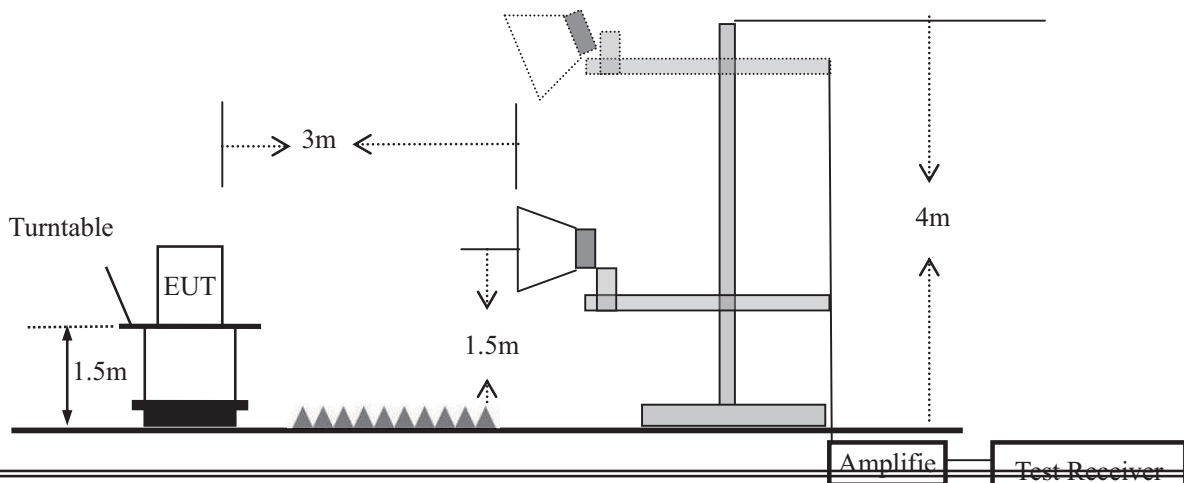

**7.2.5 Test Procedure**

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

**7.2.6 Test Results**

■ Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	Capacitive Touch Screen PC	Model No.:	FT15J1900
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40	Test By:	Allen Liu

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =  $20\log(\text{Specific distance/ test distance})$ ( dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor


- Spurious Emission below 1GHz (30MHz to 1GHz)  
All the modulation modes have been tested, and the worst result was report as below:

EUT:	Capacitive Touch Screen PC	Model No.:	FT15J1900
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010hPa	Test Mode:	Normal Link
Test Voltage :	DC 12V from Adapter AC 240V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	31.9546	17.33	18.87	36.2	40	-3.8	QP
V	47.6586	25.99	10.01	36	40	-4	QP
V	67.2022	27.51	7.39	34.9	40	-5.1	QP
V	143.3261	22.8	11.19	33.99	43.5	-9.51	QP
V	198.5878	20.44	11.45	31.89	43.5	-11.61	QP
V	501.1788	12.66	17.42	30.08	46	-15.92	QP

**Remark:**


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

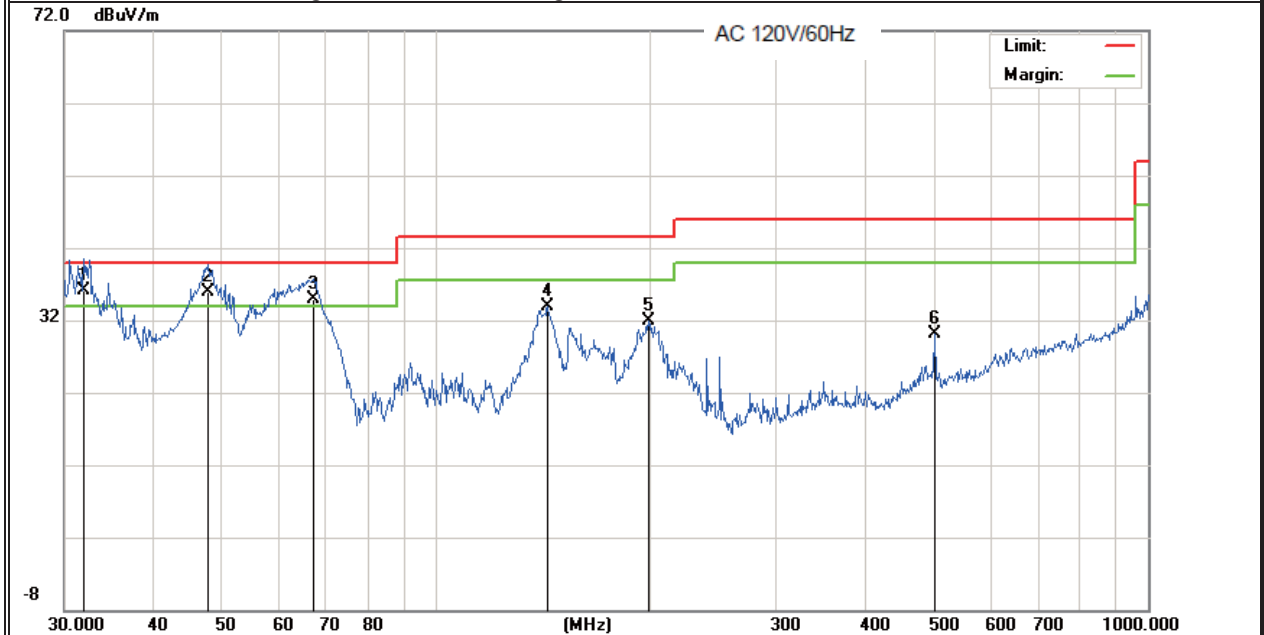

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	32.5197	10.1	18.51	28.61	40	-11.39	QP
H	68.631	24.21	8.33	32.54	40	-7.46	QP
H	92.1388	18.9	9.93	28.83	43.5	-14.67	QP
H	200.6879	20.34	11.48	31.82	43.5	-11.68	QP
H	250.3011	22.3	10.88	33.18	46	-12.82	QP
H	287.9904	18.48	12.08	30.56	46	-15.44	QP

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

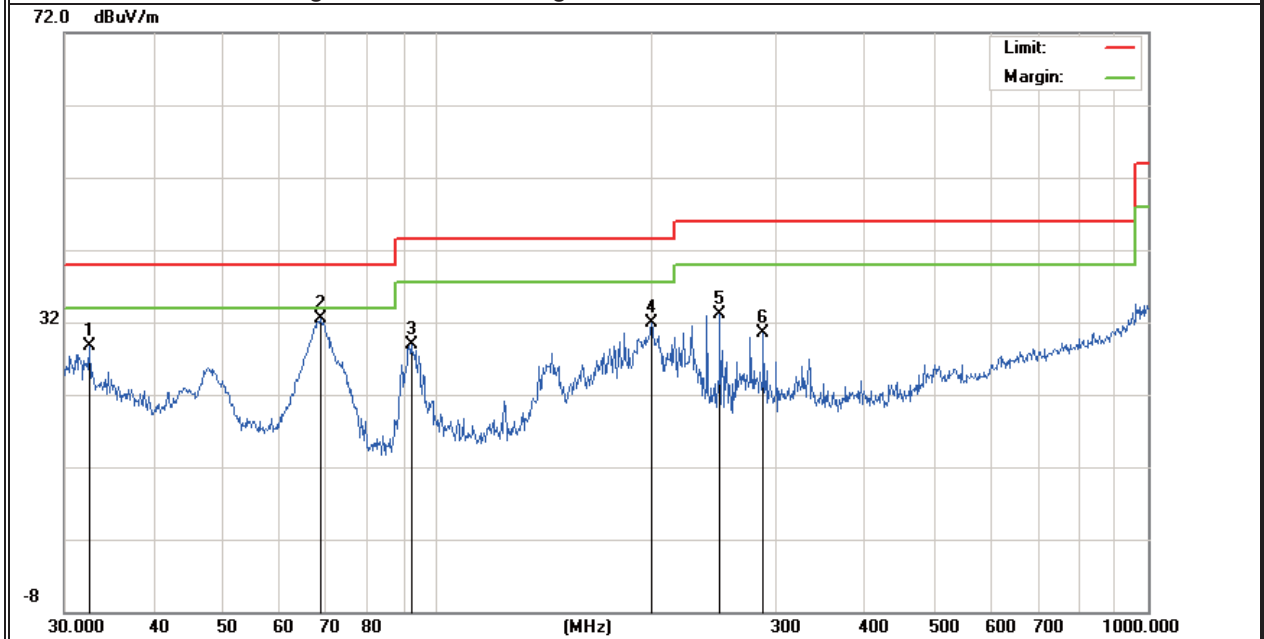

■ Spurious Emission Above 1GHz (1GHz to 27GHz)

EUT:	Capacitive Touch Screen PC	Model No.:	FT15J1900
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40	Test By:	Allen Liu

All the modulation modes have been tested, and the worst result was report as below:

Frequency (MHz)	Read Level (dBμV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark	Comment
Low Channel (2412 MHz)(802.11b)--Above 1G									
4824.335	61.22	5.21	35.59	44.30	57.72	74.00	-16.28	Pk	Vertical
4824.335	43.02	5.21	35.59	44.30	39.52	54.00	-14.48	AV	Vertical
7236.166	59.52	6.48	36.27	44.60	57.67	74.00	-16.33	Pk	Vertical
7236.166	42.15	6.48	36.27	44.60	40.30	54.00	-13.7	AV	Vertical
4824.155	63.36	5.21	35.55	44.30	59.82	74.00	-14.18	Pk	Horizontal
4824.155	42.25	5.21	35.55	44.30	38.71	54.00	-15.29	AV	Horizontal
7236.412	62.58	6.48	36.27	44.52	60.81	74.00	-13.19	Pk	Horizontal
7236.412	44.11	6.48	36.27	44.52	42.34	54.00	-11.66	AV	Horizontal
Low Channel (2437 MHz)(802.11b)--Above 1G									
4874.551	61.02	5.21	35.66	44.20	57.69	74.00	-16.31	Pk	Vertical
4874.551	42.33	5.21	35.66	44.20	39.00	54.00	-15.00	AV	Vertical
7311.022	60.15	7.10	36.50	44.43	59.32	74.00	-14.68	Pk	Vertical
7311.022	42.36	7.10	36.50	44.43	41.53	54.00	-12.47	AV	Vertical
4874.166	61.22	5.21	35.66	44.20	57.89	74.00	-16.11	Pk	Horizontal
4874.166	41.52	5.21	35.66	44.20	38.19	54.00	-15.81	AV	Horizontal
7311.205	57.33	7.10	36.50	44.43	56.50	74.00	-17.50	Pk	Horizontal
7311.205	42.33	7.10	36.50	44.43	41.50	54.00	-12.50	AV	Horizontal
Low Channel (2462 MHz)(802.11b)--Above 1G									
4924.556	60.22	5.21	35.52	44.21	56.74	74.00	-17.26	Pk	Vertical
4924.556	41.33	5.21	35.52	44.21	37.85	54.00	-16.15	AV	Vertical
7386.111	60.25	7.10	36.53	44.60	59.28	74.00	-14.72	Pk	Vertical
7386.111	41.32	7.10	36.53	44.60	40.35	54.00	-13.65	AV	Vertical
4924.528	64.25	5.21	35.52	44.21	60.77	74.00	-13.23	Pk	Horizontal
4924.528	41.33	5.21	35.52	44.21	37.85	54.00	-16.15	AV	Horizontal
7386.477	59.58	7.10	36.53	44.60	58.61	74.00	-15.39	Pk	Horizontal
7386.477	41.66	7.10	36.53	44.60	40.69	54.00	-13.31	AV	Horizontal

- Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
 (2) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor  
 (3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.  
 (4)"802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.



■ Spurious Emission in Restricted Band 2310MHz -18000MHz

All the modulation modes have been tested, and the worst result was report as below:

Frequency (MHz)	Meter Reading (dBµV)	Cable Loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type	Comment
802.11b									
2310.00	61.22	2.97	27.80	43.80	48.19	74	-25.81	Pk	Horizontal
2310.00	42.36	2.97	27.80	43.80	29.33	54	-24.67	AV	Horizontal
2310.00	59.36	2.97	27.80	43.80	46.33	74	-27.67	Pk	Vertical
2310.00	42.25	2.97	27.80	43.80	29.22	54	-24.78	AV	Vertical
2390.00	61.02	3.14	27.21	43.80	47.57	74	-26.43	Pk	Vertical
2390.00	44.22	3.14	27.21	43.80	30.77	54	-23.23	AV	Vertical
2390.00	61.32	3.14	27.21	43.80	47.87	74	-26.13	Pk	Horizontal
2390.00	41.52	3.14	27.21	43.80	28.07	54	-25.93	AV	Horizontal
2483.50	62.55	3.58	27.70	44.00	49.83	74	-24.17	Pk	Vertical
2483.50	43.32	3.58	27.70	44.00	30.60	54	-23.4	AV	Vertical
2483.50	64.02	3.58	27.70	44.00	51.30	74	-22.7	Pk	Horizontal
2483.50	43.22	3.58	27.70	44.00	30.50	54	-23.5	AV	Horizontal
802.11g									
2310.00	59.58	2.97	27.80	43.80	46.55	74	-27.45	Pk	Horizontal
2310.00	41.25	2.97	27.80	43.80	28.22	54	-25.78	AV	Horizontal
2310.00	60.44	2.97	27.80	43.80	47.41	74	-26.59	Pk	Vertical
2310.00	42.25	2.97	27.80	43.80	29.22	54	-24.78	AV	Vertical
2390.00	58.25	3.14	27.21	43.80	44.80	74	-29.2	Pk	Vertical
2390.00	43.36	3.14	27.21	43.80	29.91	54	-24.09	AV	Vertical
2390.00	60.22	3.14	27.21	43.80	46.77	74	-27.23	Pk	Horizontal
2390.00	41.23	3.14	27.21	43.80	27.78	54	-26.22	AV	Horizontal
2483.50	62.08	3.58	27.70	44.00	49.36	74	-24.64	Pk	Vertical
2483.50	41.55	3.58	27.70	44.00	28.83	54	-25.17	AV	Vertical
2483.50	62.15	3.58	27.70	44.00	49.43	74	-24.57	Pk	Horizontal
2483.50	41.33	3.58	27.70	44.00	28.61	54	-25.39	AV	Horizontal
802.11n20									
2310.00	63.33	2.97	27.80	43.80	50.30	74	-23.7	Pk	Horizontal
2310.00	41.25	2.97	27.80	43.80	28.22	54	-25.78	AV	Horizontal
2310.00	62.02	2.97	27.80	43.80	48.99	74	-25.01	Pk	Vertical
2310.00	43.36	2.97	27.80	43.80	30.33	54	-23.67	AV	Vertical
2390.00	63.34	3.14	27.21	43.80	49.89	74	-24.11	Pk	Vertical
2390.00	41.58	3.14	27.21	43.80	28.13	54	-25.87	AV	Vertical
2390.00	60.55	3.14	27.21	43.80	47.10	74	-26.9	Pk	Horizontal
2390.00	42.55	3.14	27.21	43.80	29.10	54	-24.9	AV	Horizontal
2483.50	61.45	3.58	27.70	44.00	48.73	74	-25.27	Pk	Vertical
2483.50	43.39	3.58	27.70	44.00	30.67	54	-23.33	AV	Vertical
2483.50	61.45	3.58	27.70	44.00	48.73	74	-25.27	Pk	Horizontal
2483.50	42.22	3.58	27.70	44.00	29.50	54	-24.5	AV	Horizontal
802.11n40									
2310.00	63.11	2.97	27.80	43.80	50.08	74	-23.92	Pk	Horizontal
2310.00	42.52	2.97	27.80	43.80	29.49	54	-24.51	AV	Horizontal
2310.00	59.55	2.97	27.80	43.80	46.52	74	-27.48	Pk	Vertical
2310.00	41.41	2.97	27.80	43.80	28.38	54	-25.62	AV	Vertical
2390.00	59.36	3.14	27.21	43.80	45.91	74	-28.09	Pk	Vertical
2390.00	43.32	3.14	27.21	43.80	29.87	54	-24.13	AV	Vertical
2390.00	58.25	3.14	27.21	43.80	44.80	74	-29.2	Pk	Horizontal
2390.00	42.11	3.14	27.21	43.80	28.66	54	-25.34	AV	Horizontal
2483.50	61.55	3.58	27.70	44.00	48.83	74	-25.17	Pk	Vertical
2483.50	43.33	3.58	27.70	44.00	30.61	54	-23.39	AV	Vertical
2483.50	61.69	3.58	27.70	44.00	48.97	74	-25.03	Pk	Horizontal
2483.50	42.22	3.58	27.70	44.00	29.50	54	-24.5	AV	Horizontal

Spurious Emission in Restricted Bands 3260MMHz- 18000MHz

All the modulation modes have been tested, the worst result was report as below:

Frequency (MHz)	Reading Level (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
3260	62.15	4.04	29.57	44.70	51.06	74	-22.94	Pk	Vertical
3260	46.33	4.04	29.57	44.70	35.24	54	-18.76	AV	Vertical
3260	63.36	4.04	29.57	44.70	52.27	74	-21.73	Pk	Horizontal
3260	50.22	4.04	29.57	44.70	39.13	54	-14.87	AV	Horizontal
3332	62.28	4.26	29.87	44.40	52.01	74	-21.99	Pk	Vertical
3332	46.33	4.26	29.87	44.40	36.06	54	-17.94	AV	Vertical
3332	62.35	4.26	29.87	44.40	52.08	74	-21.92	Pk	Horizontal
3332	48.55	4.26	29.87	44.40	38.28	54	-15.72	AV	Horizontal
17797	42.33	10.99	43.95	43.50	53.77	74	-20.23	Pk	Vertical
17797	32.65	10.99	43.95	43.50	44.09	54	-9.91	AV	Vertical
17788	42.25	11.81	43.69	44.60	53.15	74	-20.85	Pk	Horizontal
17788	28.11	11.81	43.69	44.60	39.01	54	-14.99	AV	Horizontal

"802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

### **7.3 6DB BANDWIDTH**

#### **7.3.1 Applicable Standard**

According to FCC Part 15.247(a)(2) and KDB 558074 DTS 01 Meas. Guidance v03r04

#### **7.3.2 Conformance Limit**

The minimum permissible 6dB bandwidth is 500 kHz.

#### **7.3.3 Measuring Instruments**

The Measuring equipment is listed in the section 6.3 of this test report.

#### **7.3.4 Test Setup**

Please refer to Section 6.1 of this test report.

#### **7.3.5 Test Procedure**

The testing follows KDB 558074 DTS 01 Meas. Guidance v03r04

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100KHz

VBW  $\geq$  3\*RBW

Sweep = auto

Detector function = peak

Trace = max hold

**7.3.6 Test Results**


EUT:	Capacitive Touch Screen PC	Model No.:	FT15J1900
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40	Test By:	Allen Liu

Note: Model A(B) represent two different modules,  
A(B) Represent the value of antenna A and B, The worst data is A Antenna a ,only shown  
Antenna A Plot.


Channel	Frequency (MHz)	6dB bandwidth (MHz)		Limit (kHz)	Result
		ANT A	ANT B		
802.11b					
1	2412	10.05	9.106	500	Pass
6	2437	10.05	9.593	500	Pass
11	2462	10.05	9.592	500	Pass
802.11g					
1	2412	15.48	15.17	500	Pass
6	2437	15.17	15.17	500	Pass
11	2462	15.49	15.49	500	Pass
802.11n HT20					
1	2412	15.35	15.48	500	Pass
6	2437	16.09	16.09	500	Pass
11	2462	15.50	15.72	500	Pass
802.11n HT40					
3	2422	35.24	35.24	500	Pass
6	2437	35.23	35.23	500	Pass
9	2452	35.22	35.22	500	Pass

Antenna A


(802.11b) 6dB Bandwidth plot on channel 1

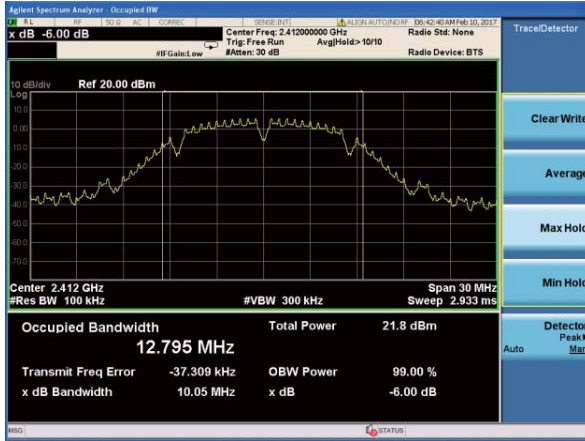


(802.11g) 6dB Bandwidth plot on channel 1

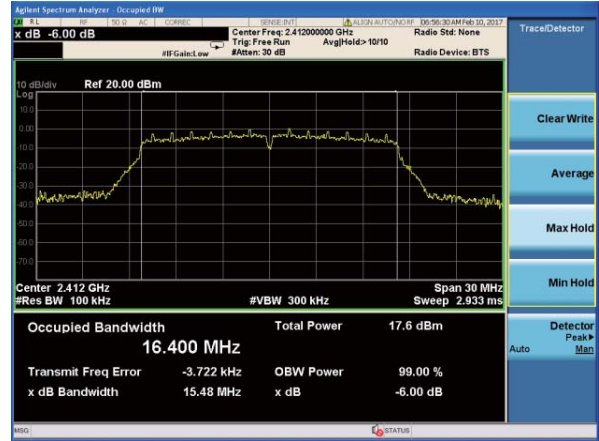


(802.11b) 6dB Bandwidth plot on channel 6

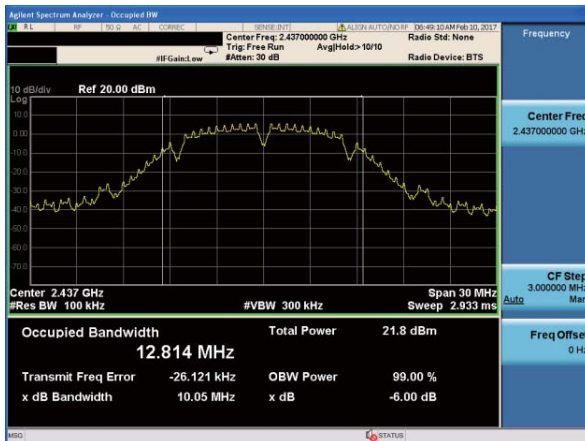


(802.11g) 6dB Bandwidth plot on channel 6

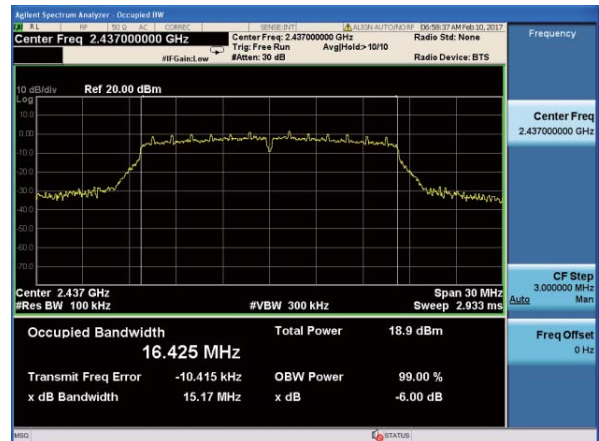

(802.11b) 6dB Bandwidth plot on channel 11

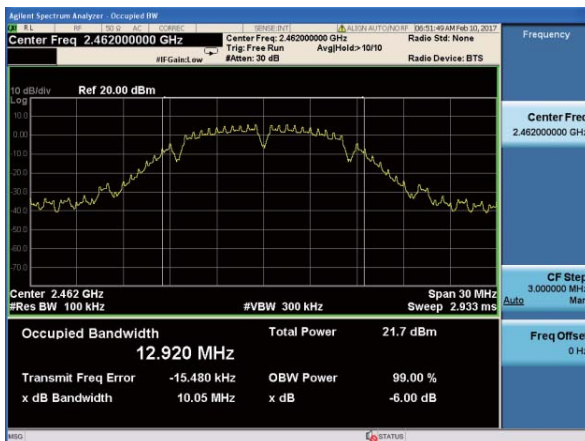


(802.11g) 6dB Bandwidth plot on channel 11

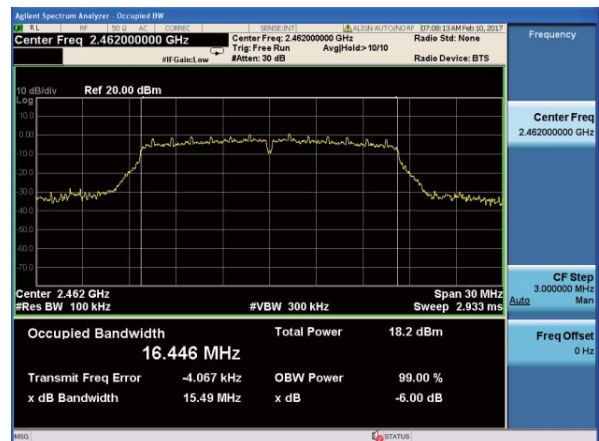


### Antenna A


(802.11n20) 6dB Bandwidth plot on channel 1

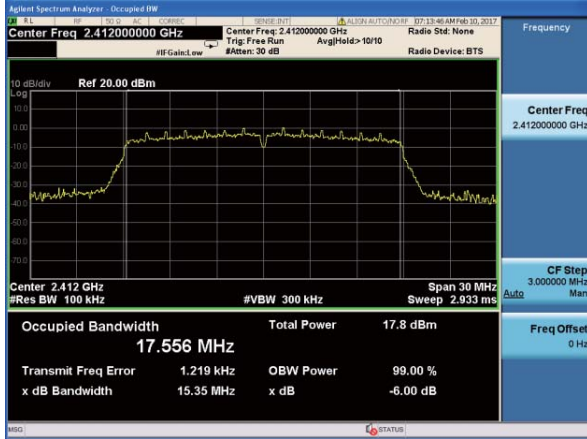


(802.11n40) 6dB Bandwidth plot on channel 3

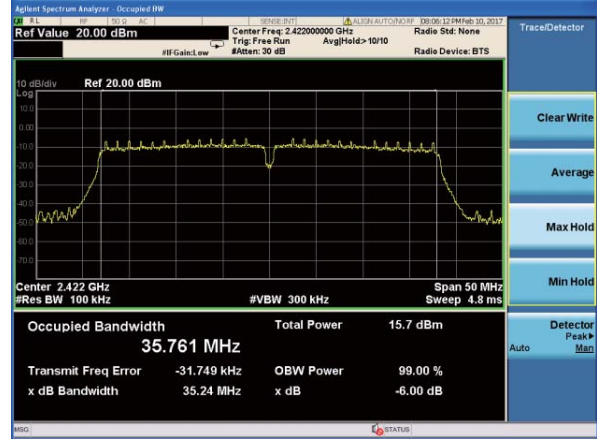


(802.11n20) 6dB Bandwidth plot on channel 6

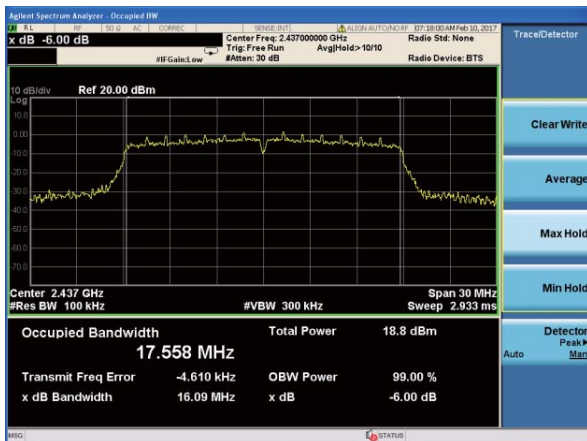


(802.11n40) 6dB Bandwidth plot on channel 6

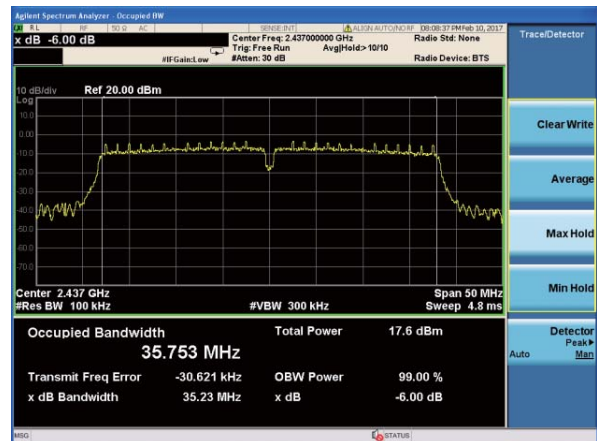

(802.11n20) 6dB Bandwidth plot on channel 11

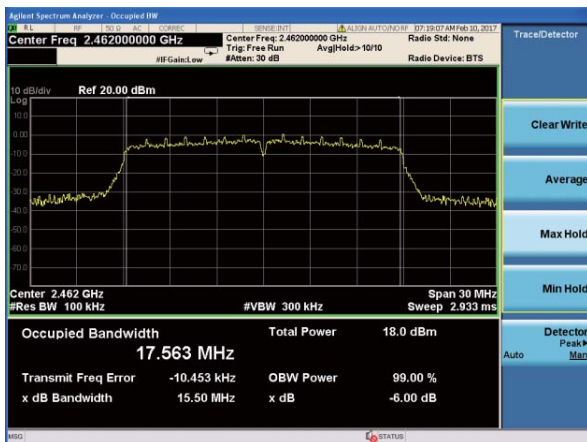

(802.11n40) 6dB Bandwidth plot on channel 9

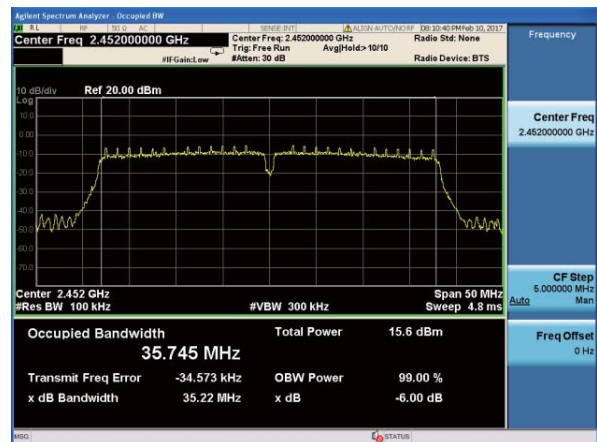

## **7.4 20DB BANDWIDTH**

### **7.4.1 Applicable Standard**

According to FCC Part 15.247(a)(2) and KDB 558074 DTS 01 Meas. Guidance v03r04

### **7.4.2 Conformance Limit**

The minimum permissible 6dB bandwidth is 500 kHz.

### **7.4.3 Measuring Instruments**

The Measuring equipment is listed in the section 6.3 of this test report.

### **7.4.4 Test Setup**

Please refer to Section 6.1 of this test report.

### **7.4.5 Test Procedure**

The testing follows KDB 558074 DTS 01 Meas. Guidance v03r04

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100KHz

VBW  $\geq$  3\*RBW

Sweep = auto

Detector function = peak

Trace = max hold

**7.4.6 Test Results**

EUT:	Capacitive Touch Screen PC	Model No.:	FT15J1900
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40	Test By:	Allen Liu

Note: Model A(B) represent two different modules,  
A(B) Represent the value of antenna A and B, The worst data is A Antenna a ,only shown Antenna A Plot.

**Antenna A**

Mode	Channel	Frequency (MHz)	-20dB bandwidth	Limit (kHz)	Result
			(MHz)		
802.11b	Low	2412	14.20	500	Pass
	Middle	2437	14.21	500	Pass
	High	2462	15.07	500	Pass
802.11g	Low	2412	17.71	500	Pass
	Middle	2437	18.04	500	Pass
	High	2462	18.05	500	Pass
802.11n20	Low	2412	18.52	500	Pass
	Middle	2437	18.43	500	Pass
	High	2462	18.64	500	Pass
802.11n40	Low	2422	37.16	500	Pass
	Middle	2437	37.18	500	Pass
	High	2452	37.11	500	Pass


**Antenna B**

Mode	Channel	Frequency (MHz)	-20dB bandwidth	Limit (kHz)	Result
			(MHz)		
802.11b	Low	2412	14.20	500	Pass
	Middle	2437	14.61	500	Pass
	High	2462	14.67	500	Pass
802.11g	Low	2412	17.62	500	Pass
	Middle	2437	17.93	500	Pass
	High	2462	17.84	500	Pass
802.11n20	Low	2412	18.40	500	Pass
	Middle	2437	18.48	500	Pass
	High	2462	18.41	500	Pass
802.11n40	Low	2422	37.16	500	Pass
	Middle	2437	37.17	500	Pass
	High	2452	37.13	500	Pass




### Antenna A


(802.11b) -20dB Bandwidth plot on channel 1

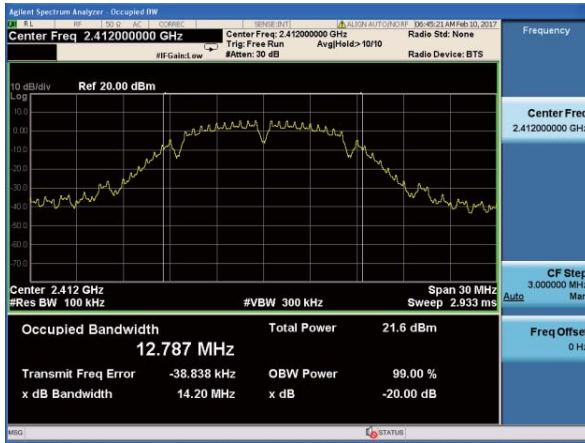


(802.11g) -20dB Bandwidth plot on channel 1

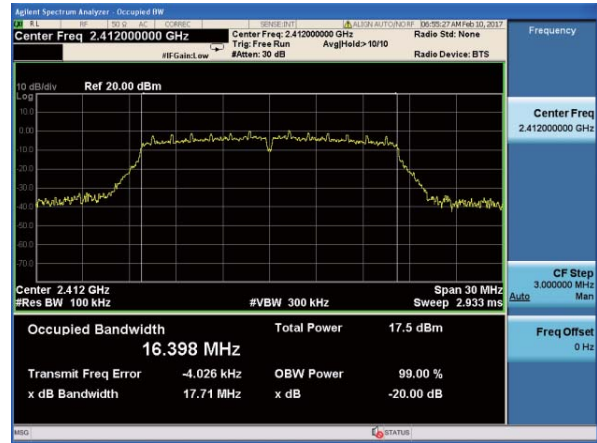


(802.11b) -20dB Bandwidth plot on channel 6

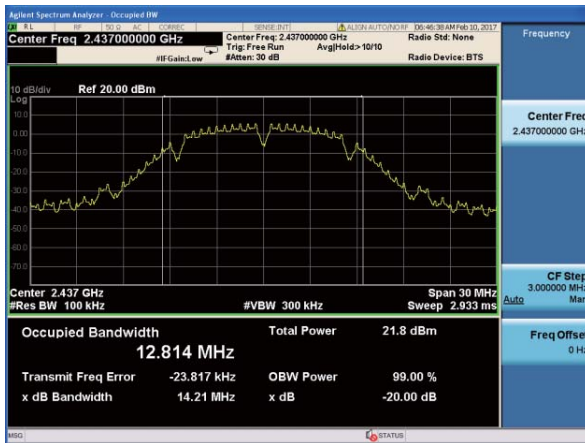


(802.11g) -20dB Bandwidth plot on channel 6

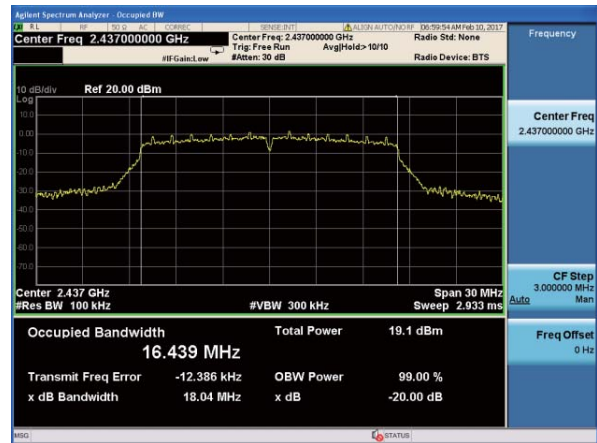

(802.11b) -20dB Bandwidth plot on channel 11

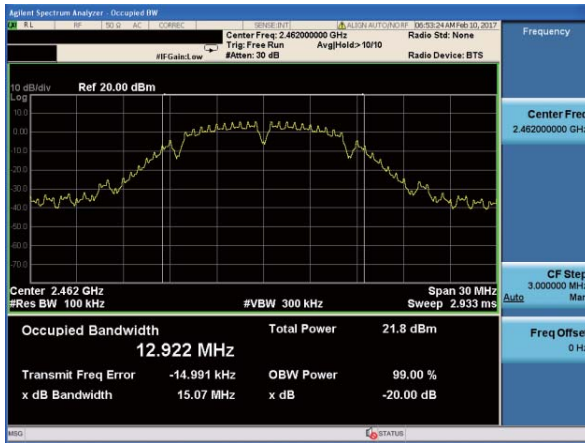


(802.11g) -20dB Bandwidth plot on channel 11

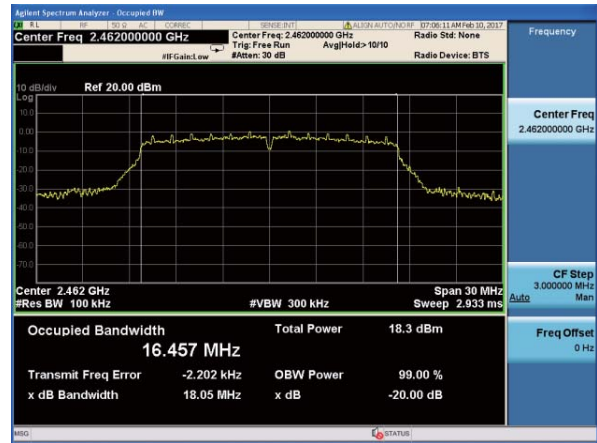


### Antenna A


(802.11n20) -20dB Bandwidth plot on channel 1

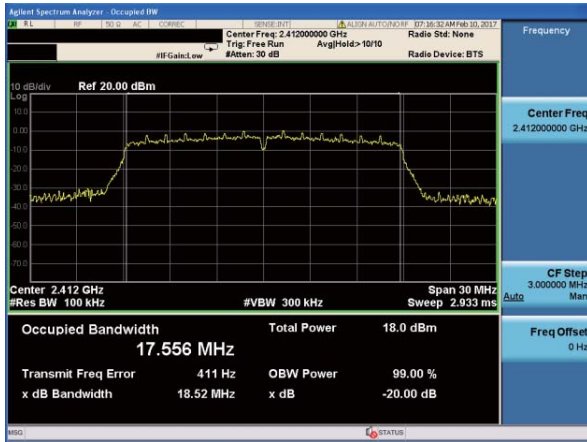


(802.11n40) -20dB Bandwidth plot on channel 3

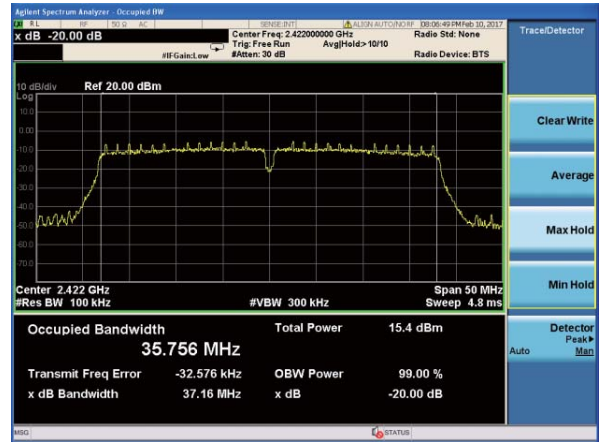


(802.11n20) -20dB Bandwidth plot on channel 6

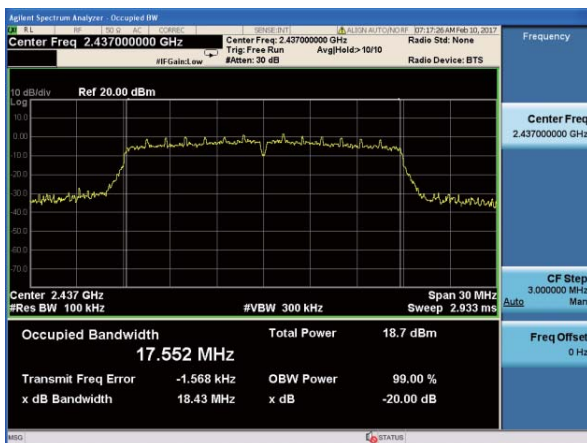


(802.11n40) -20dB Bandwidth plot on channel 6

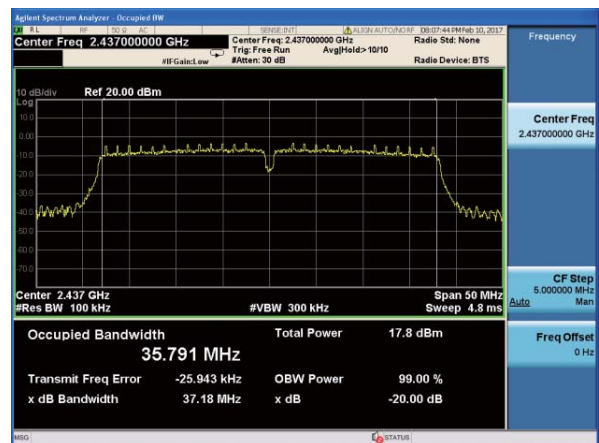

(802.11n20) -20dB Bandwidth plot on channel 11

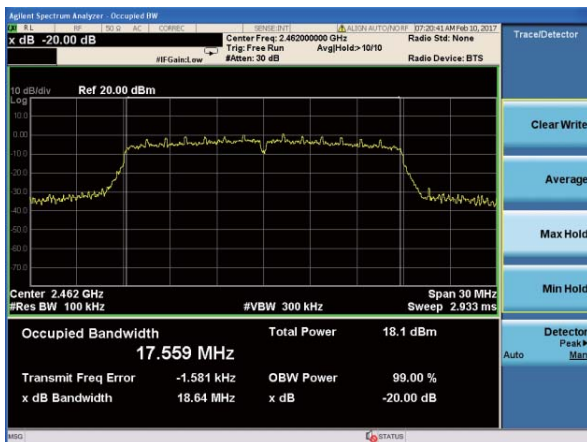

(802.11n40) -20dB Bandwidth plot on channel 9

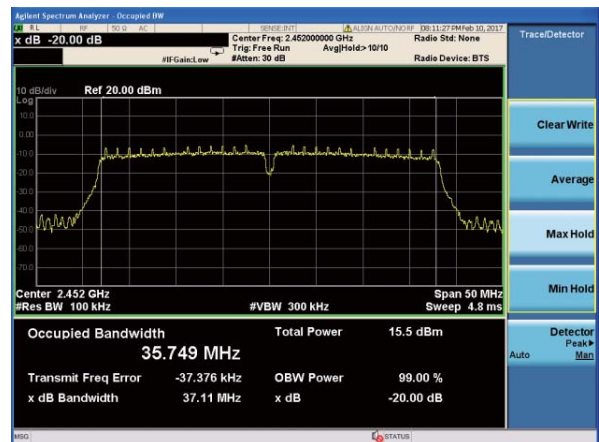

## 7.5 DUTY CYCLE

### 7.5.1 Applicable Standard

According to KDB 558074)6)b), issued 06/09/2015

### 7.5.2 Conformance Limit

No limit requirement.

### 7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

### 7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

### 7.5.5 Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value. Set  $VBW \geq RBW$ . Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074(issued 06/09/2015)

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Zero Span

RBW = 8MHz(the largest available value)

VBW = 8MHz ( $\geq$  RBW)

Number of points in Sweep  $> 100$

Detector function = peak

Trace = Clear write

Measure  $T_{total}$  and  $T_{on}$

Calculate Duty Cycle =  $T_{on} / T_{total}$  and Duty Cycle Factor =  $10 \cdot \log(1/\text{Duty Cycle})$

**7.5.6 Test Results**

EUT:	Capacitive Touch Screen PC	Model No.:	FT15J1900
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40	Test By:	Allen Liu

Note: Model A(B) represent two different modules,  
A(B) Represent the value of antenna A and B, The worst data is A Antenna a ,only shown Antenna A Plot.

**Antenna A**

Mode	Data rate	Channel	T <sub>on</sub>	T <sub>total</sub>	Duty Cycle	Duty Cycle Factor (dB)	VBW Setting
802.11b	1Mbps	6	-	-	100%	0	10Hz
802.11g	6Mbps	6	-	-	100%	0	1KHz
802.11n HT20	MCS0	6	-	-	100%	0	1KHz
802.11n HT40	MCS0	6	-	-	100%	0	3KHz

**Antenna B**

Mode	Data rate	Channel	T <sub>on</sub>	T <sub>total</sub>	Duty Cycle	Duty Cycle Factor (dB)	VBW Setting
802.11b	1Mbps	6	-	-	100%	0	10Hz
802.11g	6Mbps	6	-	-	100%	0	1KHz
802.11n HT20	MCS0	6	-	-	100%	0	1KHz
802.11n HT40	MCS0	6	-	-	100%	0	3KHz

Note: All the modulation modes were tested, the data of the worst mode are described in the following table.

## 7.6 MAXIMUM OUTPUT POWER

### 7.6.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 DTS 01 Meas. Guidance v03r04

### 7.6.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm). If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

### 7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

### 7.6.5 Test Procedure

The testing follows KDB 558074 DTS 01 Meas. Guidance v03r04 section 9.2.2

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

a) Set instrument center frequency to DTS channel center frequency.

b) Set span to at least 1.5 times the OBW.

c) Set RBW = 1-5% of the OBW, not to exceed 1MHz.

d) Set VBW  $\geq 3 \times$  RBW.

e) Number of points in sweep  $\geq 2 \times$  span / RBW.

(This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)

f) Sweep time = auto.

g) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

h) If transmit duty cycle  $< 98 \%$ , use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98 \%$ , and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

j) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

**7.6.6 Test Results**

EUT:	Capacitive Touch Screen PC	Model No.:	FT15J1900
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40	Test By:	Allen Liu

Note: Model A(B) represent two different modules,  
A(B) Represent the value of antenna A and B, The worst data is A Antenna a ,only shown Antenna A Plot.

EUT has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
11b, 11g, 11n(HT20, HT40)	1Tx, 1Rx
11n(HT20, HT40)	2Tx, 2Rx

Test Channel	Frequency (MHz)	Power Setting	Average Output Power(dBm)		Total Power (dBm)		LIMIT (dBm)	Verdict
			ANT A	ANT B	ANT A	ANT B		
<b>802.11b</b>								
1	2412	Default	14.3	14.2	-	-	30	PASS
6	2437	Default	14.1	14.1	-	-	30	PASS
11	2462	Default	14.6	13.9	-	-	30	PASS
<b>802.11g</b>								
1	2412	Default	9.8	9.5	-	-	30	PASS
6	2437	Default	10.6	10.7	-	-	30	PASS
11	2462	Default	11.1	9.6	-	-	30	PASS
<b>802.11n HT20</b>								
1	2412	Default	9.5	9.5	12.51	29.99	PASS	
6	2437	Default	9.8	9.4	12.61	29.99	PASS	
11	2462	Default	9.6	9.6	12.61	29.99	PASS	
<b>802.11n HT40</b>								
3	2422	Default	8.6	8.9	11.76	29.99	PASS	
6	2437	Default	9.3	9.3	12.31	29.99	PASS	
9	2452	Default	9.4	9.6	12.51	29.99	PASS	

Note: For 802.11n HT20/40 Directional gain=GANT +10log(N)dbi =6.01dbi

6.01dbi>6.0 dbi so power limit= 30-(6.01-6.0)=29.99

## 7.7 POWER SPECTRAL DENSITY

### 7.7.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 DTS 01 Meas. Guidance v03r04

### 7.7.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

### 7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

### 7.7.5 Test Procedure

The testing follows Measurement Procedure 10.3 Method AVGPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r04

This procedure may be used when the maximum (average) conducted output power was used to demonstrate compliance to the output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has an RMS power averaging detector, it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously (duty cycle  $\geq 98\%$ ); otherwise sweep triggering/signal gating must be implemented to ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter off time is to be considered).

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

a) Set instrument center frequency to DTS channel center frequency.

b) Set span to at least 1.5 times the OBW.

c) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .

d) Set VBW  $\geq 3 \times \text{RBW}$ .

e) Detector = power averaging (RMS) or sample detector (when RMS not available).

f) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .

g) Sweep time = auto couple.

h) Employ trace averaging (RMS) mode over a minimum of 100 traces.

i) Use the peak marker function to determine the maximum amplitude level.

j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reduc

**7.7.6 Test Results**

EUT:	Capacitive Touch Screen PC	Model No.:	FT15J1900
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40	Test By:	Allen Liu

Note: Model A(B) represent two different modules,

A(B) Represent the value of antenna A and B, The worst data is A Antenna a ,only shown Antenna A Plot.

EUT has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
11b, 11g, 11n(HT20, HT40)	1Tx, 1Rx
11n(HT20, HT40)	2Tx, 2Rx

Test Channel	Frequency (MHz)	Power Density (dBm/3KHz)		Limit (dBm/3KHz)	Verdict
		ANT A	ANT B		
<b>802.11b</b>					
1	2412	-9.405	-8.722	8	PASS
6	2437	-9.638	-8.849	8	PASS
11	2462	-9.328	-7.825	8	PASS
<b>802.11g</b>					
1	2412	-14.601	-13.855	8	PASS
6	2437	-14.622	-14.080	8	PASS
11	2462	-14.249	-14.504	8	PASS

Test Channel	Frequency (MHz)	Power Density (dBm/3KHz)		Total Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Verdict
		ANT A	ANT B			
<b>802.11n HT20</b>						
1	2412	-14.122	-15.113	-11.58	7.99	PASS
6	2437	-14.445	-13.974	-11.19	7.99	PASS
11	2462	-15.253	-14.769	-11.99	7.99	PASS
<b>802.11n HT40</b>						
3	2422	-21.538	-21.196	-18.35	7.99	PASS
6	2437	-21.240	-18.517	-16.66	7.99	PASS
9	2452	-21.165	-22.071	-18.58	7.99	PASS


Note: For 802.11n HT20/40 Directional gain=GANT +10log(N)dbi =6.01dbi

6.01dbi>6.0 dbi so power Density limit= 8-(6.01-6.0)=7.99/3KHz




Antenna A


(802.11b) PSD plot on channel 1

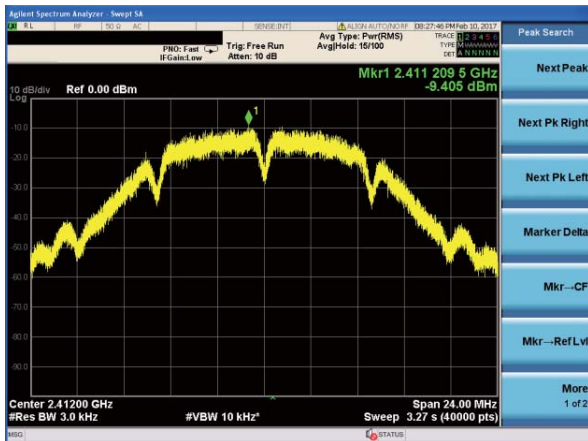


(802.11g) PSD plot on channel 1

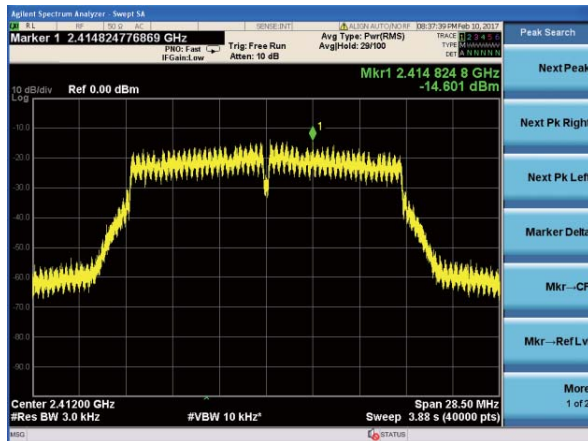


(802.11b) PSD plot on channel 6

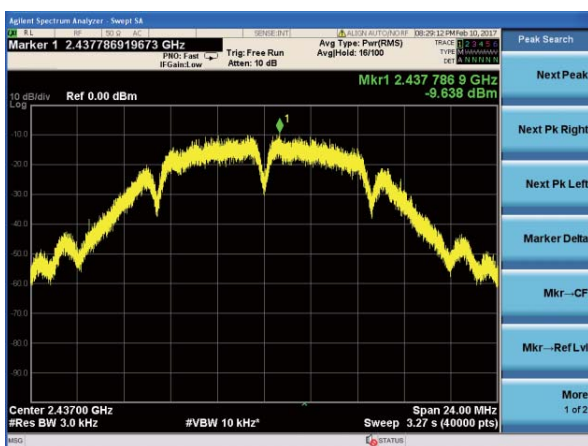


(802.11g) PSD plot on channel 6

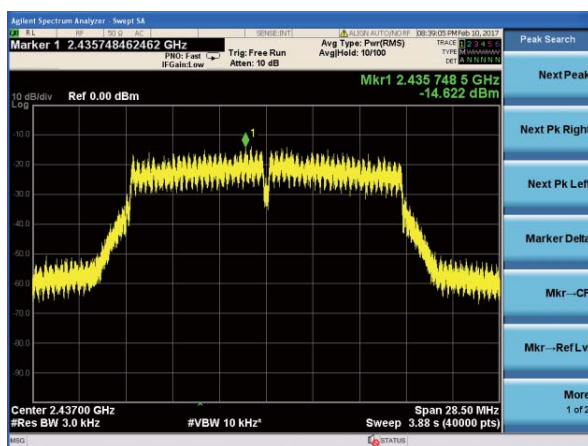

(802.11b) PSD plot on channel 11

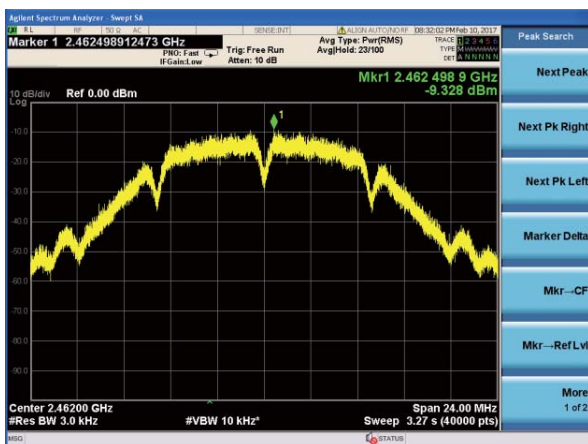


(802.11g) PSD plot on channel 11

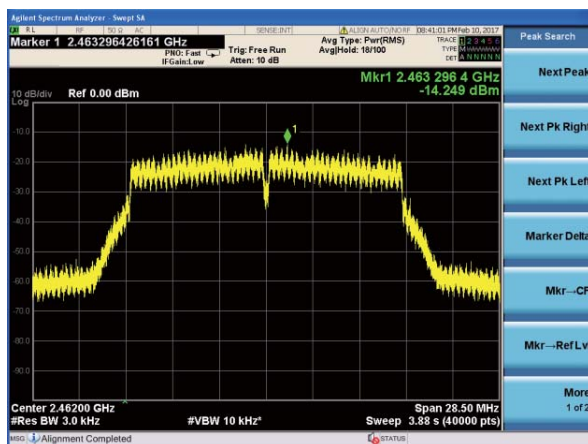


Antenna A


(802.11n20) PSD plot on channel 1

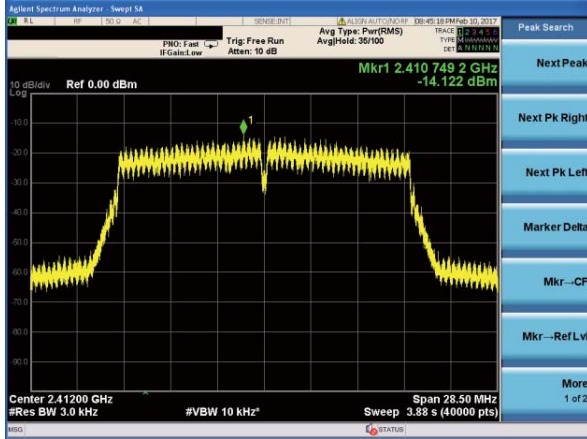


(802.11n40) PSD plot on channel 3

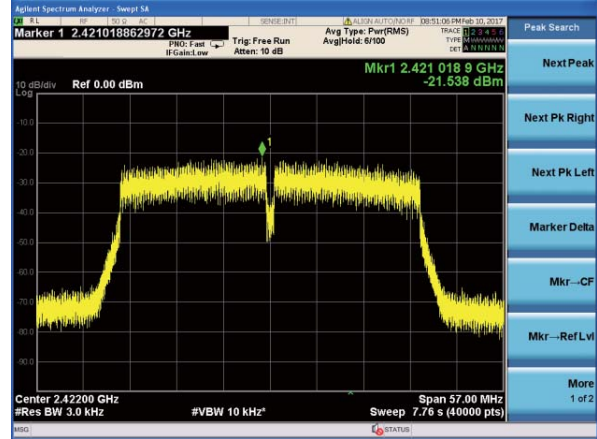


(802.11n20) PSD plot on channel 6

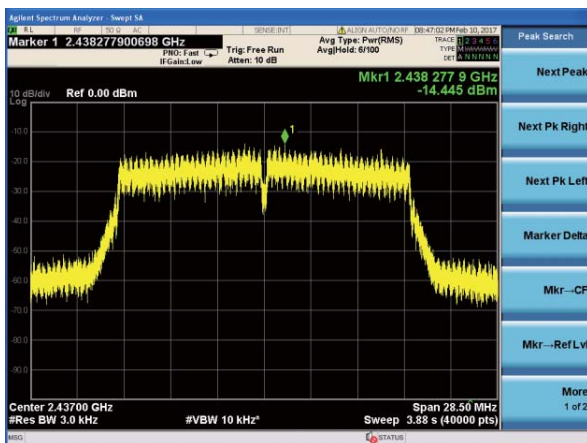


(802.11n40) PSD plot on channel 6

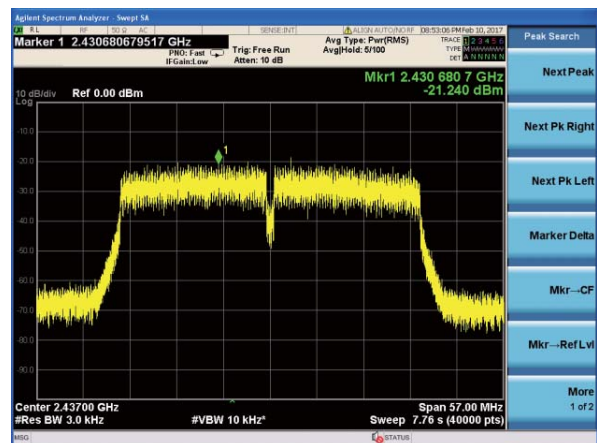

(802.11n20) PSD plot on channel 11

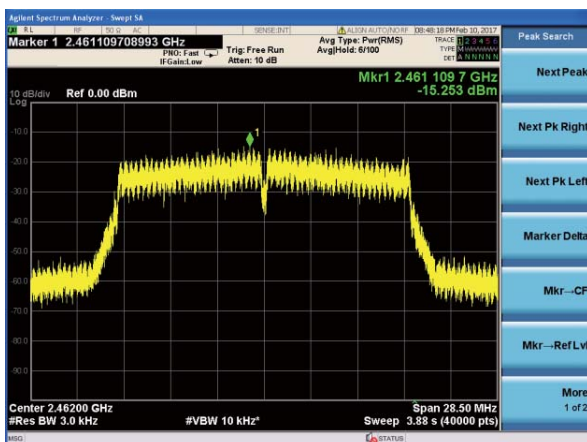

(802.11n40) PSD plot on channel 9

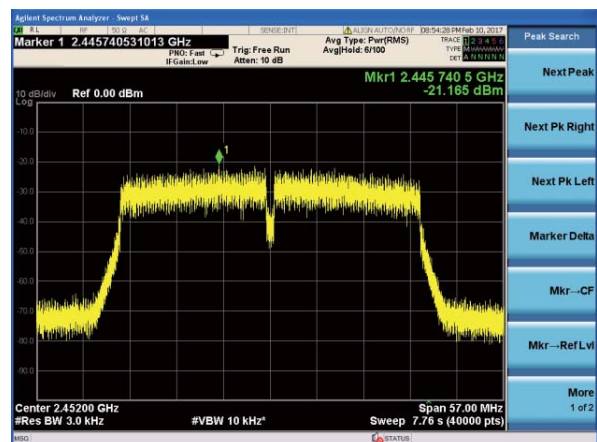

## **7.8 CONDUCTED BAND EDGE MEASUREMENT**

### **7.8.1 Applicable Standard**

According to FCC Part 15.247(d) and KDB 558074 DTS 01 Meas. Guidance v03r04

When performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below. The integration method described below can be used when performing conducted or radiated average measurements.

### **7.8.2 Conformance Limit**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### **7.8.3 Measuring Instruments**

The Measuring equipment is listed in the section 6.3 of this test report.

### **7.8.4 Test Setup**

Please refer to Section 6.1 of this test report.

### **7.8.5 Marker-delta method**

The marker-delta method, as described in ANSI C63.10, can be used to perform measurements of the radiated unwanted emissions level at the band-edges provided that the 99% OBW of the fundamental emission is within 2 MHz of the authorized band edge.

### **7.8.6 Integration method**

The following procedures may be used to determine the average power or power density of any unwanted emission. Use the procedure described in 13.3.1 when the EUT can be configured to transmit continuously (i.e., duty cycle  $\geq 98\%$ ). Use the procedure described in 13.3.2 when the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent). Use the procedure described in 13.3.3 when the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

### 7.8.7 Test Procedure

The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r04.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

If the EUT can be configured or modified to transmit continuously (i.e., duty cycle  $\geq$  98 percent then the average emission levels within 2 MHz of the authorized band edge may be measured using the following method (with EUT transmitting continuously).

- a) Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).
- b) Set span to 2 MHz
- c) RBW = 100 kHz.
- d) VBW  $\geq$  3 x RBW.
- e) Detector = RMS, if span/(# of points in sweep)  $\leq$  (RBW/2).
- f) Averaging type = power (i.e., RMS).
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission)  $\pm$  0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission  $\pm$  0.5 MHz.

**7.8.8 Test Results**

EUT:	Capacitive Touch Screen PC	Model No.:	FT15J1900
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40	Test By:	Allen Liu


Note: Model A(B) represent two different modules,  
A(B) Represent the value of antenna A and B, The worst data is A Antenna a ,only shown Antenna A Plot.

EUT has two antennas, and different modes support different transmit mode what describe as Following form:


Mode	Tx/Rx
11b, 11g, 11n(HT20, HT40)	1Tx, 1Rx
11n(HT20, HT40)	2Tx, 2Rx

Antenna A

802.11b: Band Edge-Low Channel

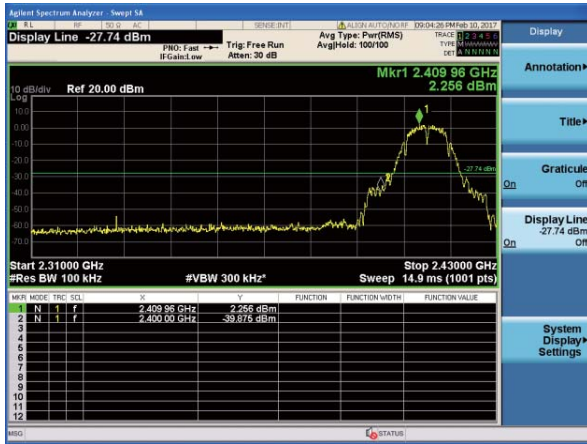

802.11g: Band Edge-Low Channel

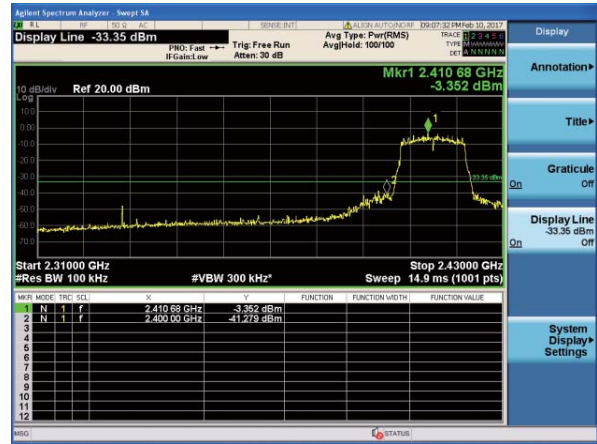

802.11b: Band Edge-High Channel




802.11g: Band Edge-High Channel




### Antenna A

802.11n20: Band Edge-Low Channel

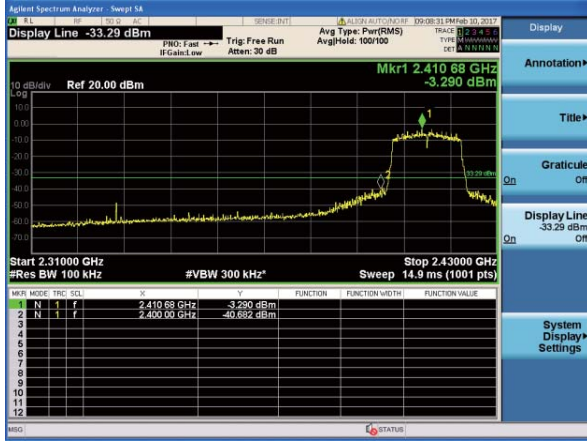


802.11n40: Band Edge-Low Channel

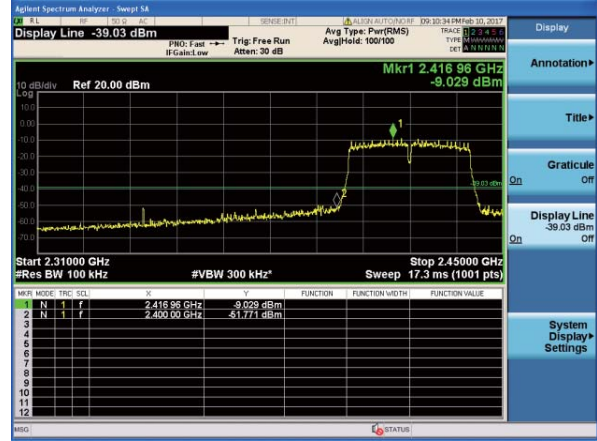

802.11n20: Band Edge-High Channel



802.11n40: Band Edge-High Channel

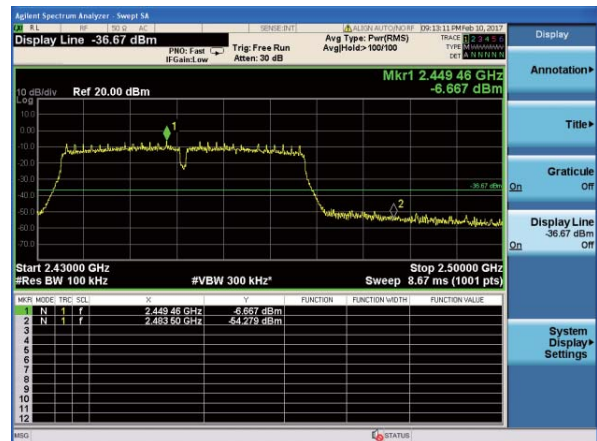

**7.9 SPURIOUS RF CONDUCTED EMISSIONS**

**7.9.1 Conformance Limit**

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

**7.9.2 Measuring Instruments**

The Measuring equipment is listed in the section 6.3 of this test report.

**7.9.3 Test Setup**

Please refer to Section 6.1 of this test report.

**7.9.4 Test Procedure**

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and mwasure frequency range from 9KHz to 26.5GHz.

**7.9.5 Test Results**

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

Note: Model A(B) represent two different modules.

A(B) Represent the value of antenna A and B, The worst data is A Antenna a ,only shown Antenna A Plot.


EUT has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
11b, 11g, 11n(HT20, HT40)	1Tx, 1Rx
11n(HT20, HT40)	2Tx, 2Rx




### Antenna A


802.11b on channel 01

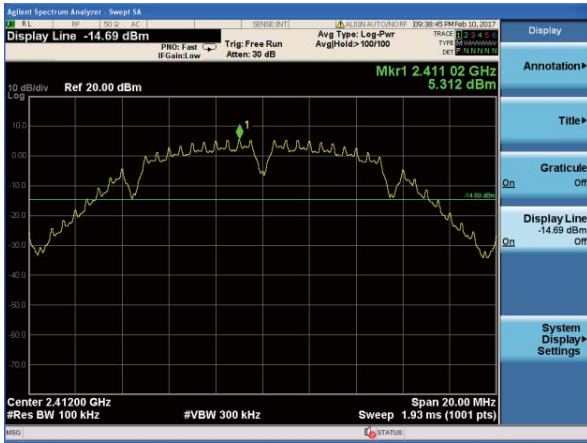

802.11b on channel 01

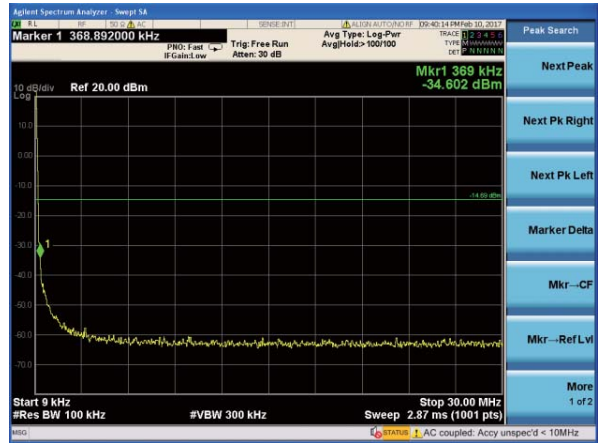

802.11b on channel 01

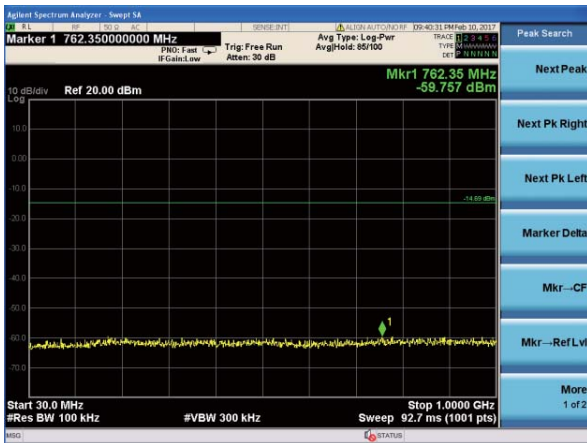

802.11b on channel 01




Antenna A


802.11b on channel 06



802.11b on channel 06

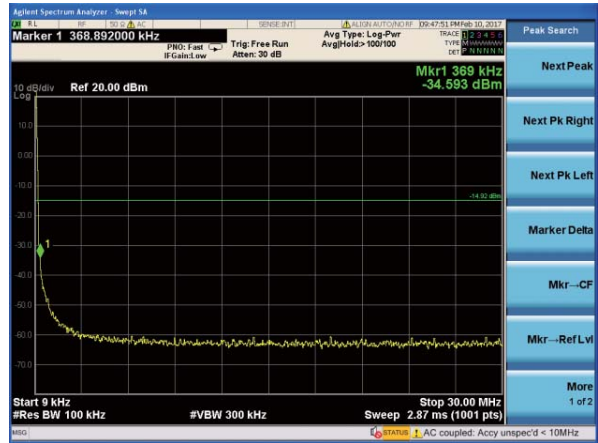

802.11b on channel 06

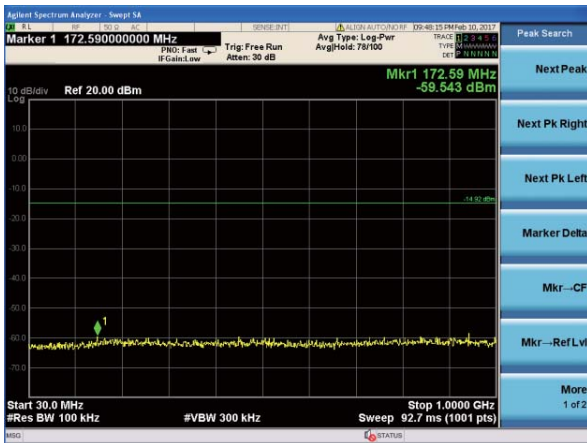

802.11b on channel 06




Antenna A


802.11b on channel 11



802.11b on channel 11

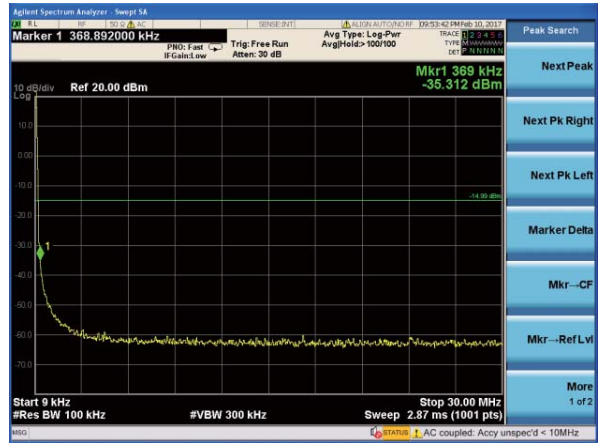

802.11b on channel 11

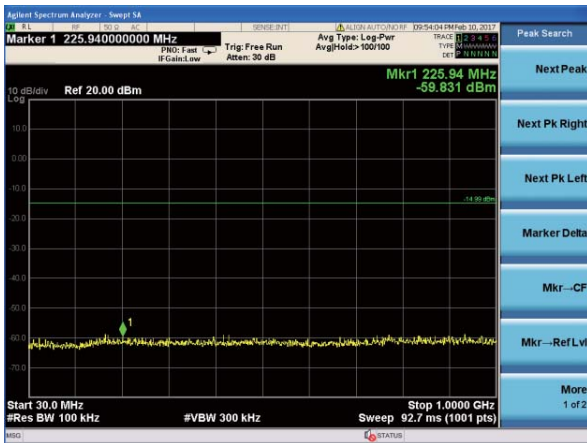


802.11b on channel 11




Antenna A


802.11g on channel 01

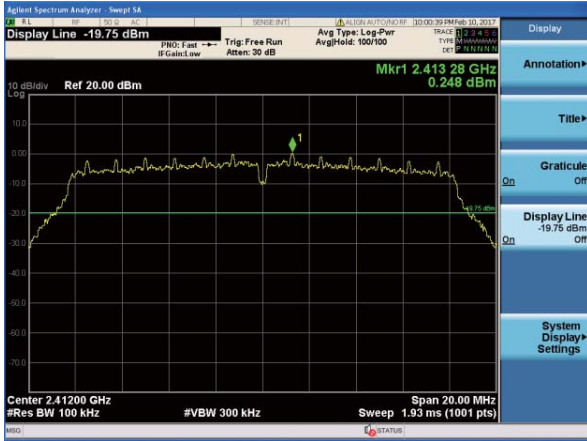

802.11g on channel 01

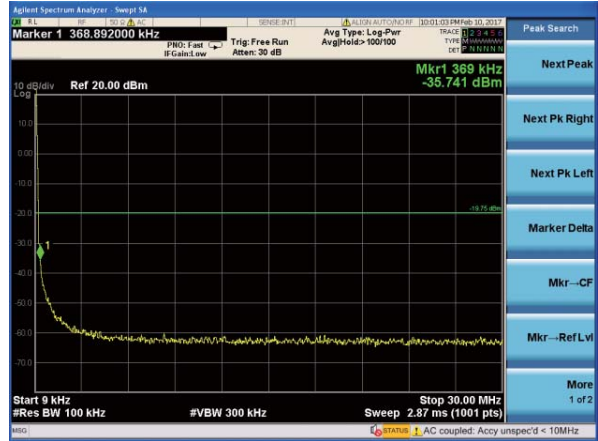

802.11g on channel 01

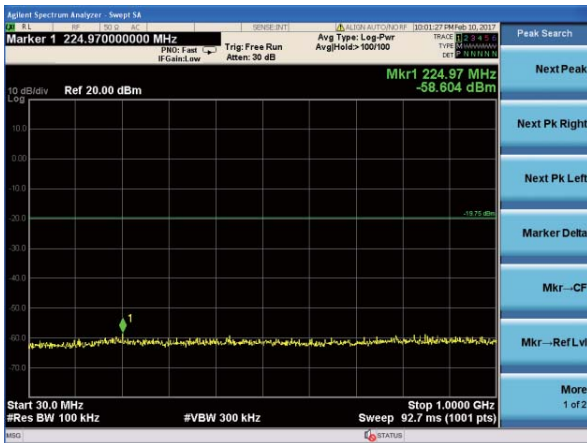


802.11g on channel 01




Antenna A


802.11g on channel 06

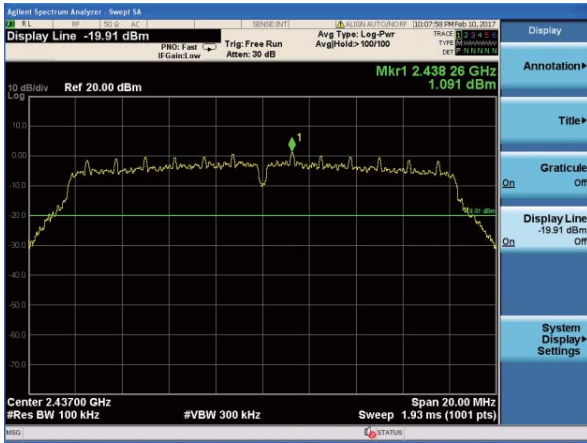

802.11g on channel 06

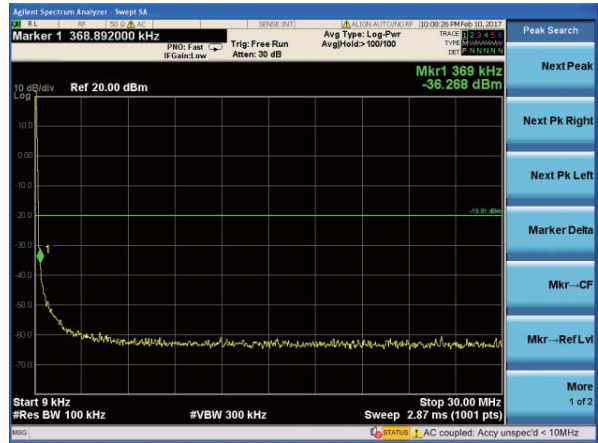

802.11g on channel 06

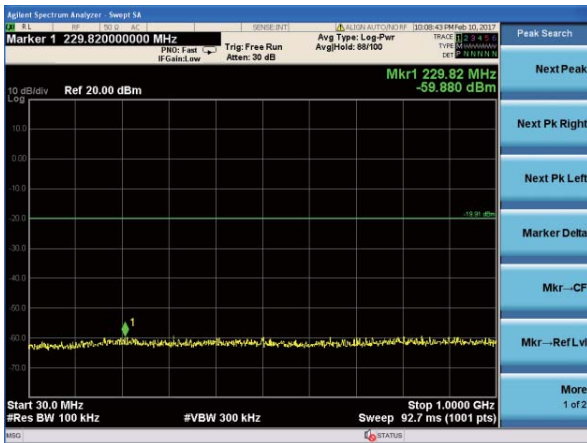


802.11g on channel 06




Antenna A


802.11g on channel 11

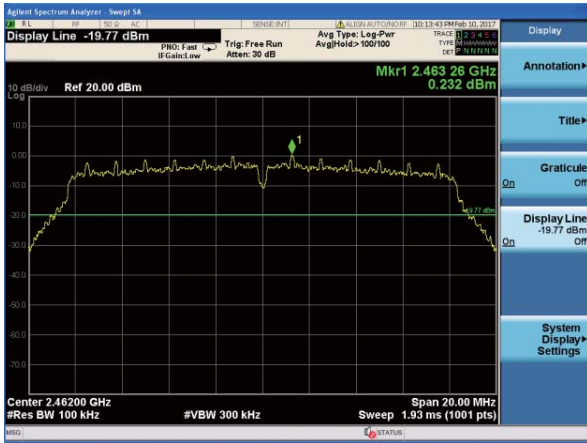

802.11g on channel 11

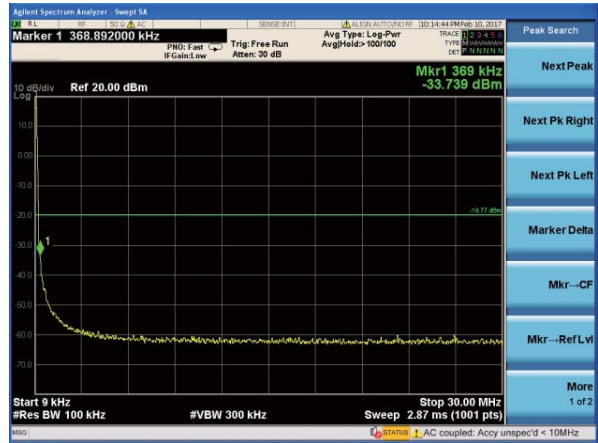

802.11g on channel 11

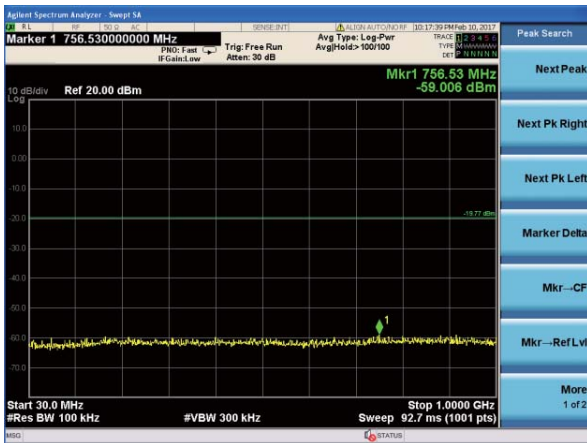


802.11g on channel 11




### Antenna A


802.11n20 on channel 01

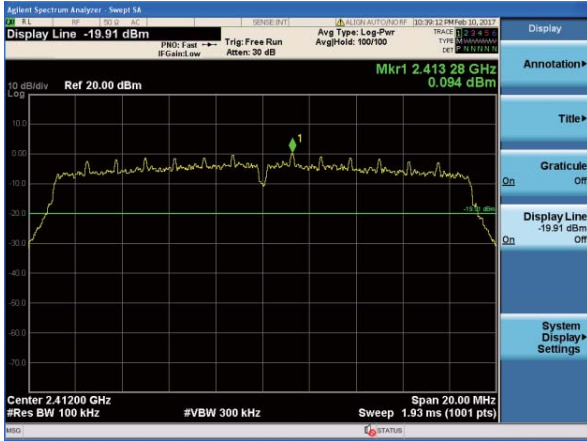

802.11n20 on channel 01

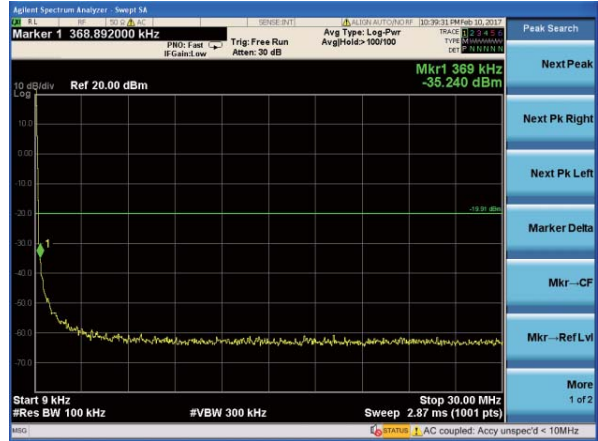

802.11 n20 on channel 01

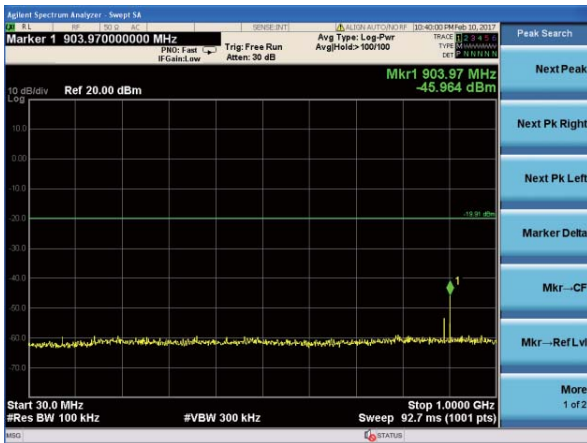

802.11 n20 on channel 01




Antenna A


802.11 n20 on channel 06



802.11 n20 on channel 06

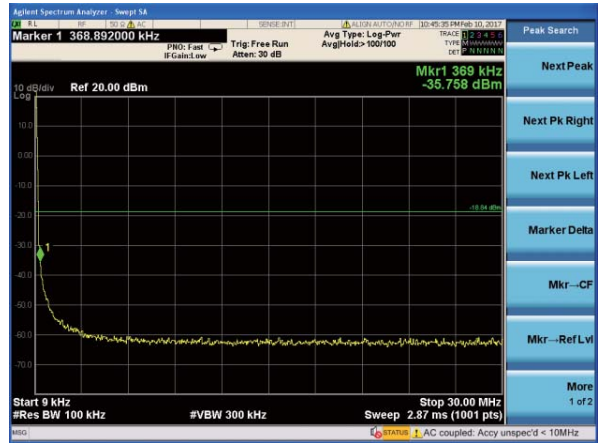

802.11 n20 on channel 06

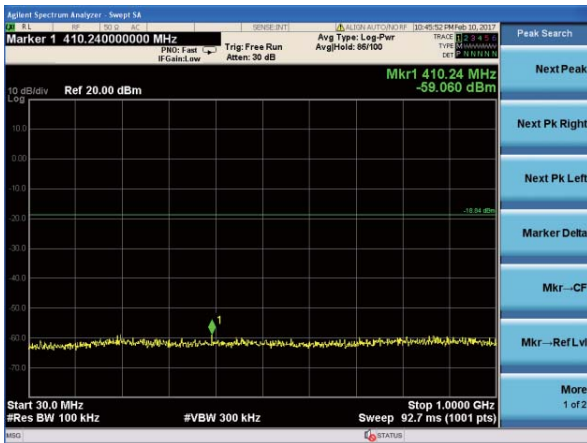


802.11 n20 on channel 06






Antenna A


802.11 n20 on channel 11

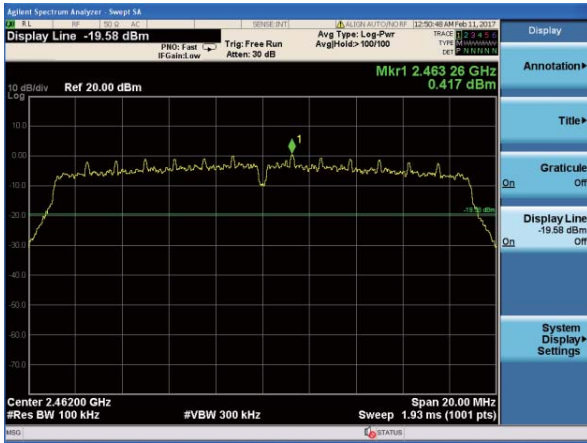

802.11 n20 on channel 11

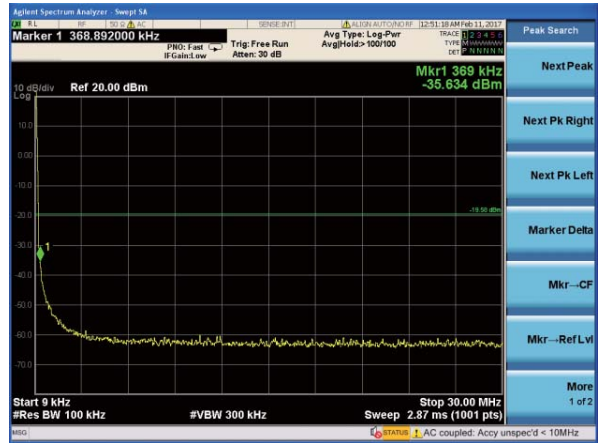

802.11 n20 on channel 11

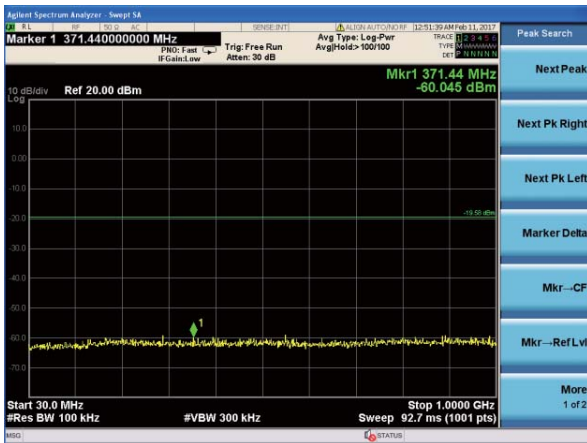


802.11 n20 on channel 11




Antenna A


802.11n40 on channel 03

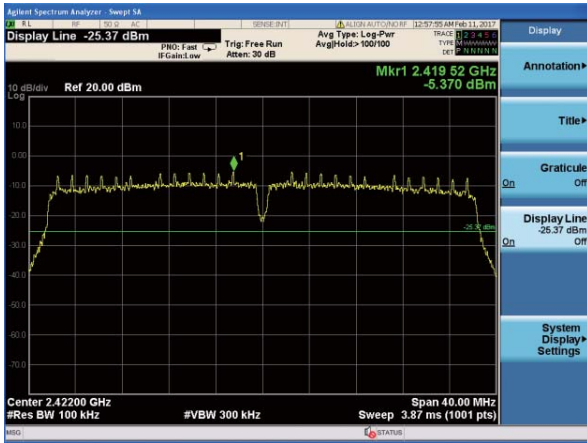

802.11n40 on channel 03

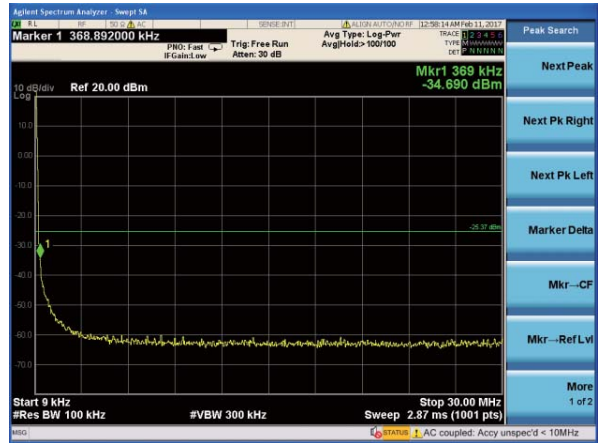

802.11n40 on channel 03

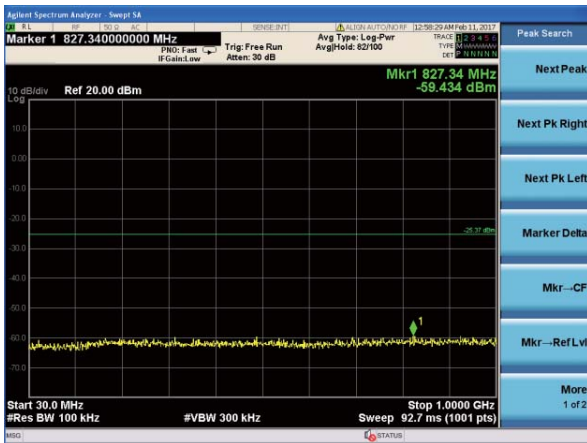


802.11n40 on channel 03




### Antenna A


802.11n40 on channel 06

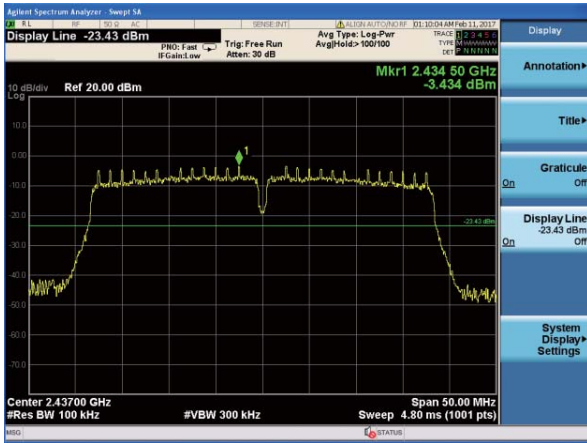

802.11 n40 on channel 06

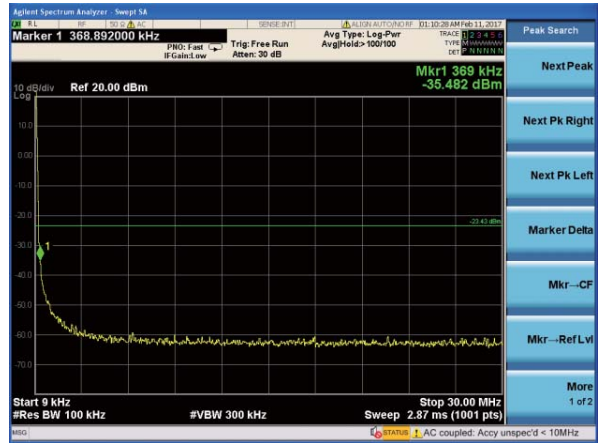

802.11 n40 on channel 06

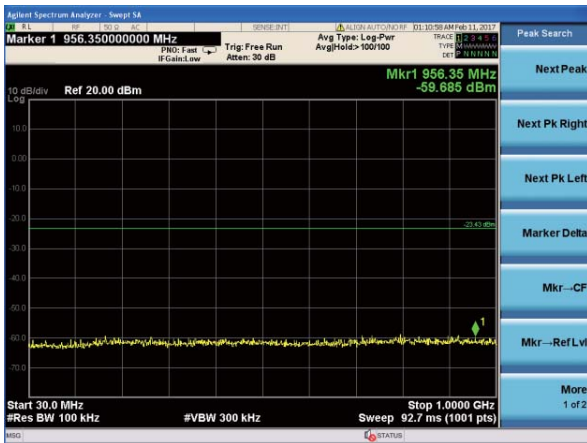


802.11 n40 on channel 06




Antenna A


802.11 n40 on channel 9

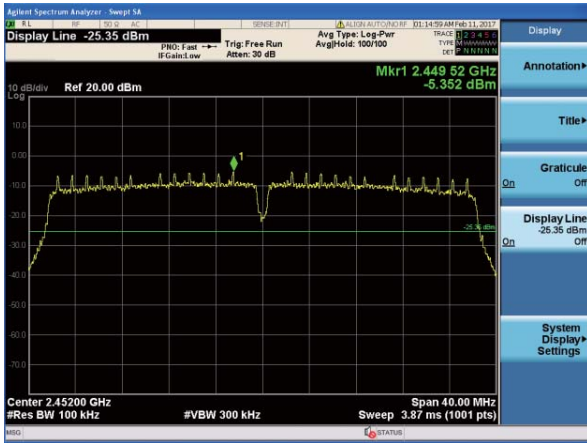

802.11 n40 on channel 9

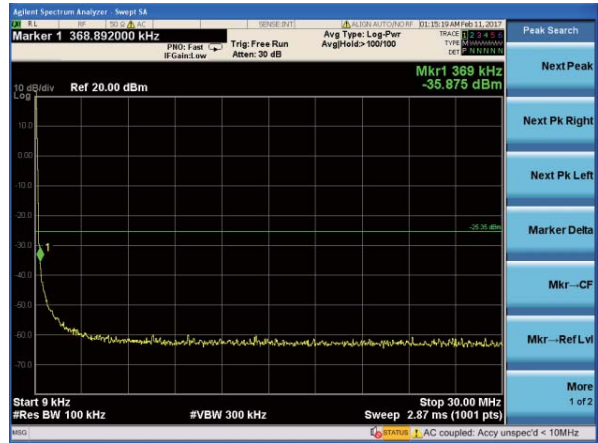

802.11 n40 on channel 9

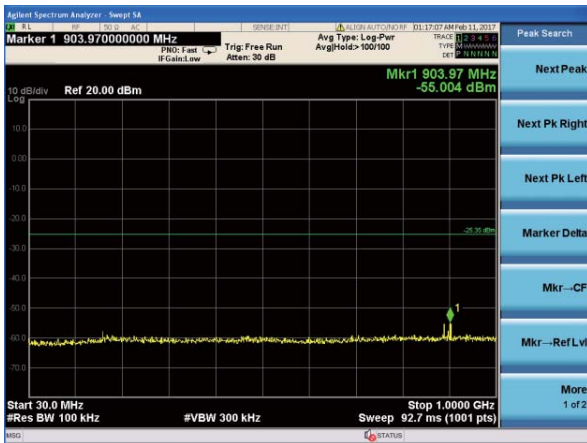

802.11 n40 on channel 9



## **7.10 ANTENNA APPLICATION**

### **7.10.1 Antenna Requirement**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **7.10.2 Result**

The EUT antenna is external antenna. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This antenna is a special type, belonging to the opposite polarity SMA antenna connector male, the "outer spiral hole +", "+ pin spiral" design mode the user can not be replaced, and then free to buy on the market, It comply with the standard requirement

END OF REPORT