



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 1 of 190

# TEST REPORT

**Application No.:** KSCR2306001097AT  
**FCC ID:** 2AC8UA2317  
**Applicant:** Anhui Huami Information Technology Co., Ltd.  
**Address of Applicant:** 7/F, Building B2, Huami Global Innovation Center, No. 900, Wangjiang West Road, High-tech Zone, Hefei City, China (Anhui) Pilot Free Trade Zone(230088)  
**Manufacturer:** Anhui Huami Information Technology Co., Ltd.  
**Address of Manufacturer:** 7/F, Building B2, Huami Global Innovation Center, No. 900, Wangjiang West Road, High-tech Zone, Hefei City, China (Anhui) Pilot Free Trade Zone(230088)  
**Equipment Under Test (EUT):**  
**EUT Name:** Zepp Clarity Omni  
**Model No.:** A2317  
**Standard(s) :** 47 CFR Part 15, Subpart C 15.247  
**Date of Receipt:** 2023-10-27  
**Date of Test:** 2023-11-03 to 2023-11-08  
**Date of Issue:** 2023-11-16

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 2 of 190

<i>Revision Record</i>			
<i>Version</i>	<i>Description</i>	<i>Date</i>	<i>Remark</i>
00	Original	2023-11-16	/

<b>Authorized for issue by:</b>			
<b>Tested By</b>		<i>Damon Zhou</i>	
		<u>Damon_Zhou/Project Engineer</u>	
<b>Approved By</b>		<i>Terry Hou</i>	
		<u>Terry Hou /Reviewer</u>	



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 3 of 190

## 2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence		N/A	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass
20dB Bandwidth		ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Carrier Frequencies Separation		ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
Hopping Channel Number		ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Dwell Time		ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2013) Section 7.8.6	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2013) Section 7.8.8	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2013) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

### 3 Contents

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 Test Summary.....</b>	<b>3</b>
<b>3 Contents.....</b>	<b>4</b>
<b>4 General Information.....</b>	<b>5</b>
4.1 Details of E.U.T.....	5
4.2 Description of Support Units.....	5
4.3 Measurement Uncertainty.....	5
4.4 Test Location.....	6
4.5 Test Facility.....	6
4.6 Deviation from Standards.....	6
4.7 Abnormalities from Standard Conditions.....	6
<b>5 Equipment List.....</b>	<b>7</b>
<b>6 Radio Spectrum Technical Requirement.....</b>	<b>8</b>
6.1 Antenna Requirement.....	8
6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence.....	9
<b>7 Radio Spectrum Matter Test Results.....</b>	<b>10</b>
7.1 Conducted Peak Output Power.....	10
7.2 20dB Bandwidth.....	12
7.3 Carrier Frequencies Separation.....	13
7.4 Hopping Channel Number.....	14
7.5 Dwell Time.....	15
7.6 Conducted Band Edges Measurement.....	16
7.7 Conducted Spurious Emissions.....	17
7.8 Radiated Emissions which fall in the restricted bands.....	18
7.9 Radiated Spurious Emissions Below 1GHz.....	44
7.10 Radiated Spurious Emissions Above 1GHz.....	48
<b>8 Test Setup Photo.....</b>	<b>86</b>
<b>9 EUT Constructional Details (EUT Photos).....</b>	<b>86</b>
<b>10 Appendix.....</b>	<b>87</b>

## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	DC 3.85V by Rechargeable Li-ion Button cell for earphone. Button cell model:1154W2 63mAh,0.242Wh
Operation Frequency:	2402MHz to 2480MHz
Bluetooth Version:	V5.3 Dual mode
Modulation Type:	GFSK, pi/4DQPSK, 8DPSK
Number of Channels:	79
Channel Spacing:	1MHz
Spectrum Spread Technology:	Frequency Hopping Spread Spectrum(FHSS)
Antenna Type:	Chip Antenna
Antenna Gain:	-3.53dBi (Provided by the manufacturer)

### 4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	Lenovo	/	/

### 4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4 x 10 <sup>-8</sup>
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### **4.4 Test Location**

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

#### **4.5 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

• **FCC**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

• **ISED**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

• **VCCI**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

#### **4.6 Deviation from Standards**

None

#### **4.7 Abnormalities from Standard Conditions**

None



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 7 of 190

### 5 Equipment List

RF Conducted Test						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	08/24/2023	08/23/2024
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	08/24/2023	08/23/2024
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	02/03/2023	02/02/2024
4	Signal Generator	R&S	SMBV100B	KSEM032	03/16/2023	03/15/2024
5	Signal Generator	R&S	SMW200A	KSEM020-1	08/24/2023	08/23/2024
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	08/24/2023	08/23/2024
7	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	08/24/2023	08/23/2024
8	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	03/16/2023	03/15/2024
9	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	08/24/2023	08/23/2024
10	Switcher	CCSRF	FY562	KUS2001M001-3	08/24/2023	08/23/2024
11	AC Power Source	EXTECH	6605	KS301178	N.C.R	N.C.R
12	DC Power Supply	Agilent	E3632A	KS301180	N.C.R	N.C.R
13	Conducted Test Cable	Thermax	RF01-RF04	CZ301111-CZ301120	02/03/2023	02/02/2024
14	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	08/24/2023	08/23/2024
15	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	03/22/2023	03/21/2024
16	Software	BST	TST-PASS	/	N/A	N/A
RF Radiated Test						
1	Spectrum Analyzer	R&S	FSV40	KUS1806E003	08/24/2023	08/23/2024
2	Universal Radio Communication Tester	R&S	CMW500	KSEM009-1	03/16/2023	03/15/2024
3	Signal Generator	Agilent	E8257C	KS301066	08/24/2023	08/23/2024
4	Loop Antenna	COM-POWER	AL-130R	KUS1806E001	03/18/2023	03/17/2025
5	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E005	06/29/2023	06/28/2025
6	Bilog Antenna	SCHWARZBECK	VULB9160	CZ301016	04/13/2021	04/12/2024
7	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	KS301079	08/24/2023	08/23/2024
8	Horn-antenna(1-18GHz)	ETS-LINDGREN	3117	KS301186	02/21/2023	02/20/2024
9	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	CZ301058	02/26/2023	02/25/2024
10	Amplifier(30MHz~18GHz)	PANSHAN TECHNOLOGY	LNA:1~18G	KSEM010-1	01/17/2023	01/16/2024
11	Amplifier(18~40GHz)	COM-POWER	PAM-840A	KUS1710E001	01/21/2023	01/20/2024
12	RE Test Cable	REBES MICROWAVE	/	CZ301097	08/24/2023	08/23/2024
13	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-4	03/22/2023	03/21/2024
14	Software	Faratronic	EZ EMC-v 3A1	/	N/A	N/A

## **6 Radio Spectrum Technical Requirement**

### **6.1 Antenna Requirement**

#### **6.1.1 Test Requirement:**

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

#### **6.1.2 Conclusion**

Standard Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. EUT Antenna: The antenna is Chip Antenna and no consideration of replacement. The best case gain of the Antenna is -3.53dBi; Antenna location: Refer to internal photo.



## **6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence**

### **6.2.1 Test Requirement:**

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

### **6.2.2 Conclusion**

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

> Number of shift register stages: 9

> Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits

> Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(1)

Test Method: ANSI C63.10 (2013) Section 7.8.5

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 52.6 % RH

Atmospheric Pressure: 1010 mbar

#### 7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

#### 7.1.3 Test Setup Diagram

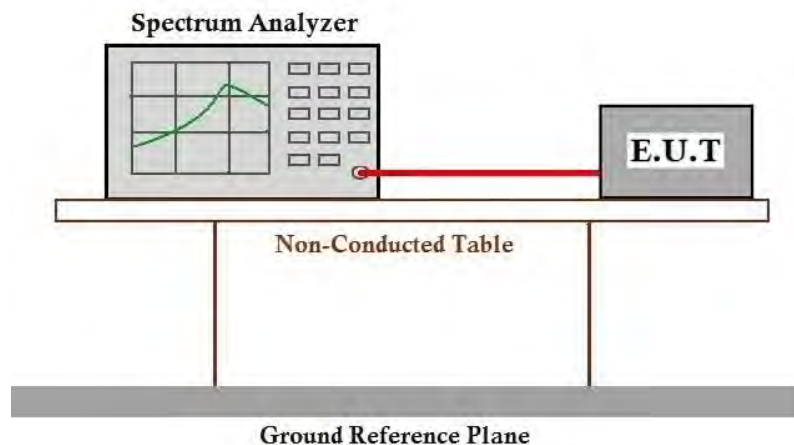



## **Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 11 of 190

### **7.1.4 Measurement Procedure and Data**

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 12 of 190

## 7.2 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)

Test Method: ANSI C63.10 (2013) Section 7.8.7

### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 52.6 % RH

Atmospheric Pressure: 1010 mbar

### 7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

### 7.2.3 Test Setup Diagram

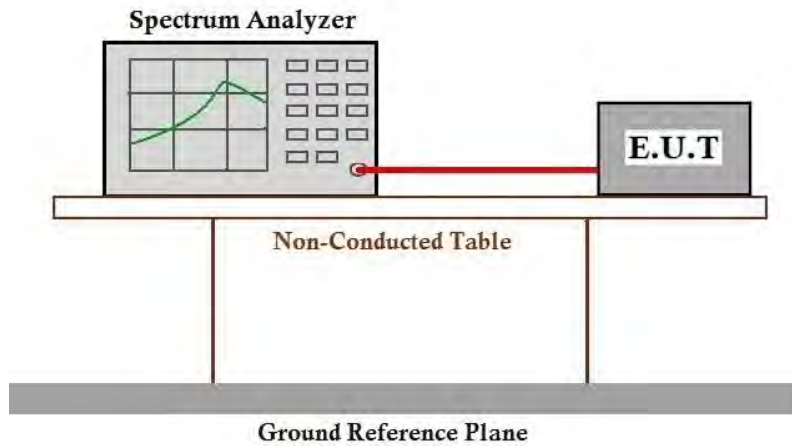

### 7.2.4 Measurement Procedure and Data

Please Refer to Appendix for Details

**7.3 Carrier Frequencies Separation**

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)

Test Method: ANSI C63.10 (2013) Section 7.8.2

Limit:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**7.3.1 E.U.T. Operation**

Operating Environment:

Temperature: 25.4 °C


Humidity: 52.6 % RH

Atmospheric Pressure: 1010 mbar

**7.3.2 Test Mode Description**

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

**7.3.3 Test Setup Diagram**

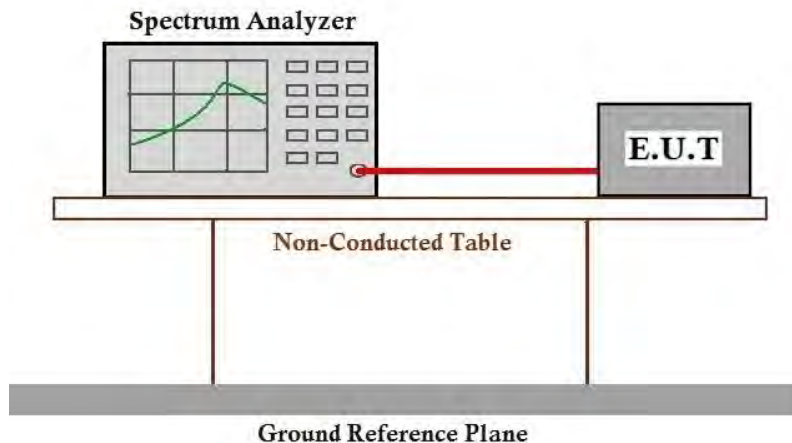

**7.3.4 Measurement Procedure and Data**

Please Refer to Appendix for Details

**7.4 Hopping Channel Number**

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.3

Limit:

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

**7.4.1 E.U.T. Operation**

Operating Environment:

Temperature: 25.4 °C


Humidity: 52.6 % RH

Atmospheric Pressure: 1010 mbar

**7.4.2 Test Mode Description**

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

**7.4.3 Test Setup Diagram**

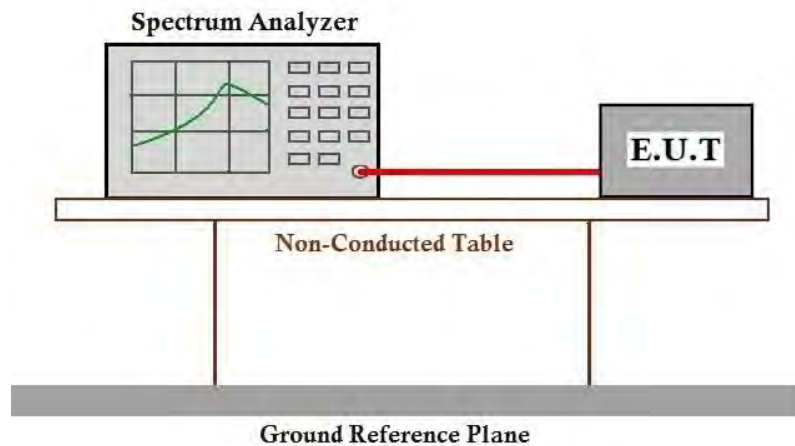

**7.4.4 Measurement Procedure and Data**

Please Refer to Appendix for Details

# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 15 of 190

## 7.5 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.4

Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

### 7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 52.6 % RH

Atmospheric Pressure: 1010 mbar

### 7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

### 7.5.3 Test Setup Diagram

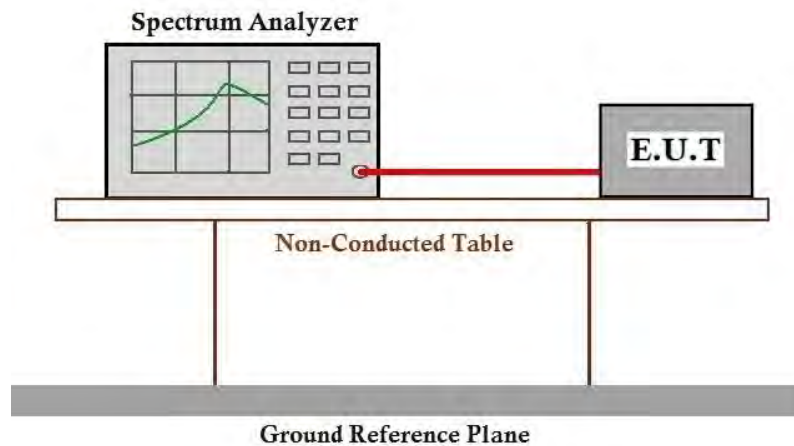

### 7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

**7.6 Conducted Band Edges Measurement**

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 7.8.6

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**7.6.1 E.U.T. Operation**

Operating Environment:

Temperature: 25.4 °C


Humidity: 52.6 % RH

Atmospheric Pressure: 1010 mbar

**7.6.2 Test Mode Description**

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

**7.6.3 Test Setup Diagram**

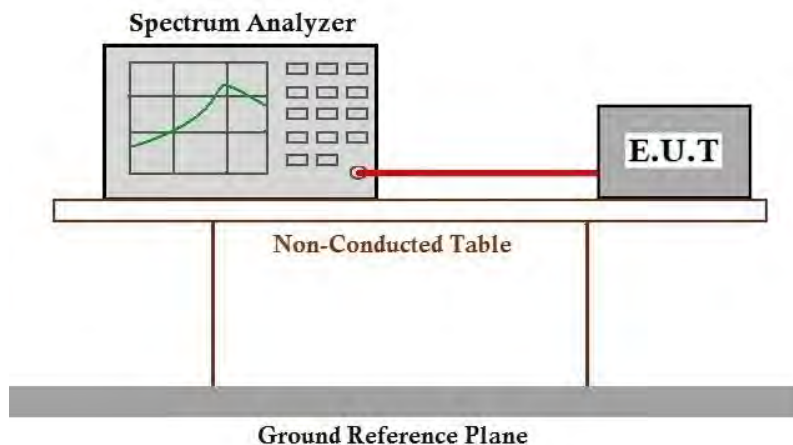

**7.6.4 Measurement Procedure and Data**

Please Refer to Appendix for Details



**7.7 Conducted Spurious Emissions**

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 7.8.8

**Limit:**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**7.7.1 E.U.T. Operation**

Operating Environment:

Temperature: 25.4 °C


Humidity: 52.6 % RH

Atmospheric Pressure: 1010 mbar

**7.7.2 Test Mode Description**

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

**7.7.3 Test Setup Diagram**

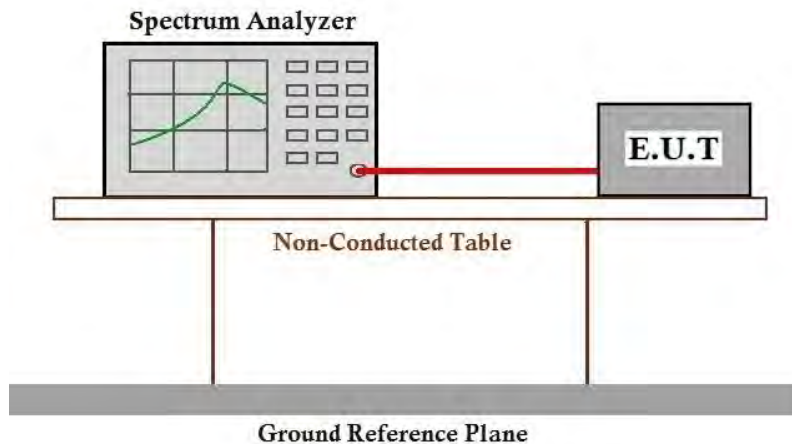

**7.7.4 Measurement Procedure and Data**

Please Refer to Appendix for Details

## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 18 of 190

### 7.8 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

#### 7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 23.4 °C


Humidity: 50.1 % RH

Atmospheric Pressure: 1010 mbar

#### 7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

**7.8.3 Test Setup Diagram**

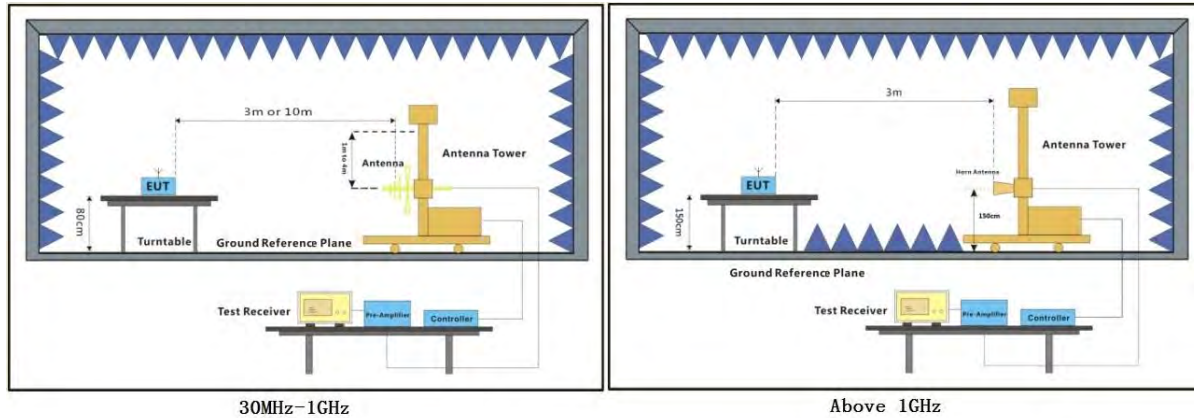

**7.8.4 Measurement Procedure and Data**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

# Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 20 of 190

Left

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

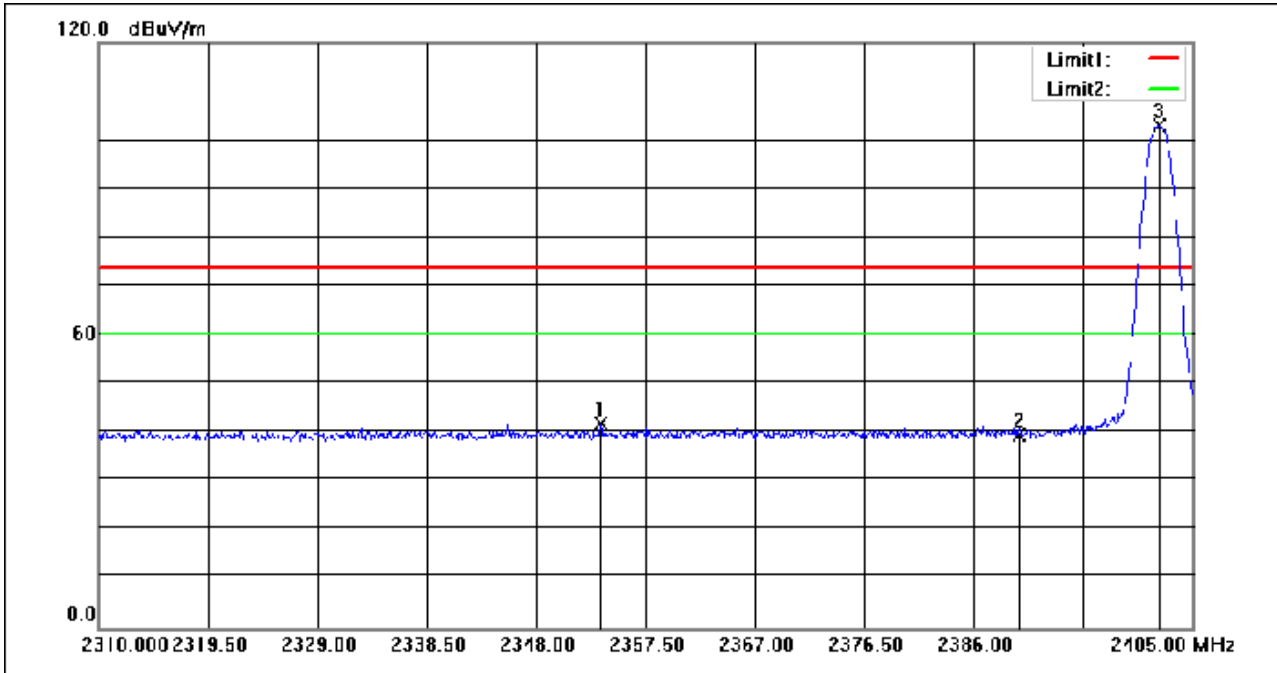

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2353.605	61.77	-20.00	41.77	74.00	-32.23	peak
2	2390.000	59.37	-19.92	39.45	74.00	-34.55	peak
3	2402.150	122.81	-19.89	102.92	74.00	28.92	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 21 of 190

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

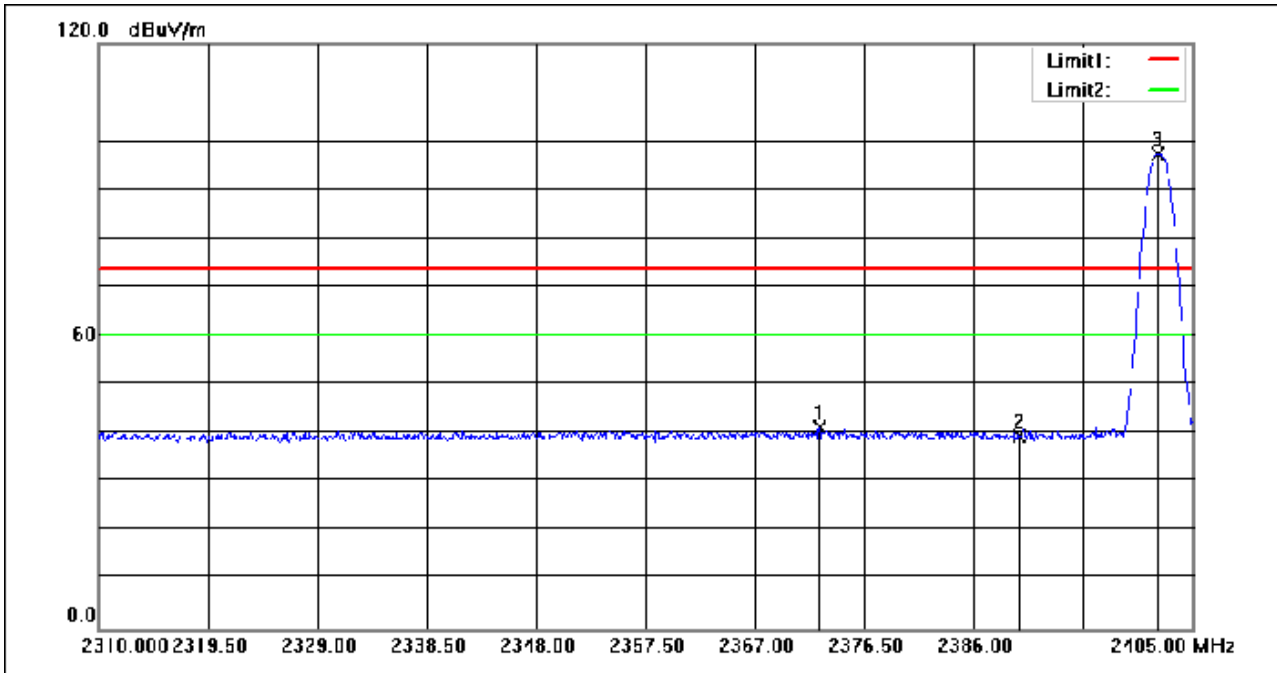

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2372.605	61.22	-19.96	41.26	74.00	-32.74	peak
2	2390.000	59.44	-19.92	39.52	74.00	-34.48	peak
3	2401.960	117.27	-19.89	97.38	74.00	23.38	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 22 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

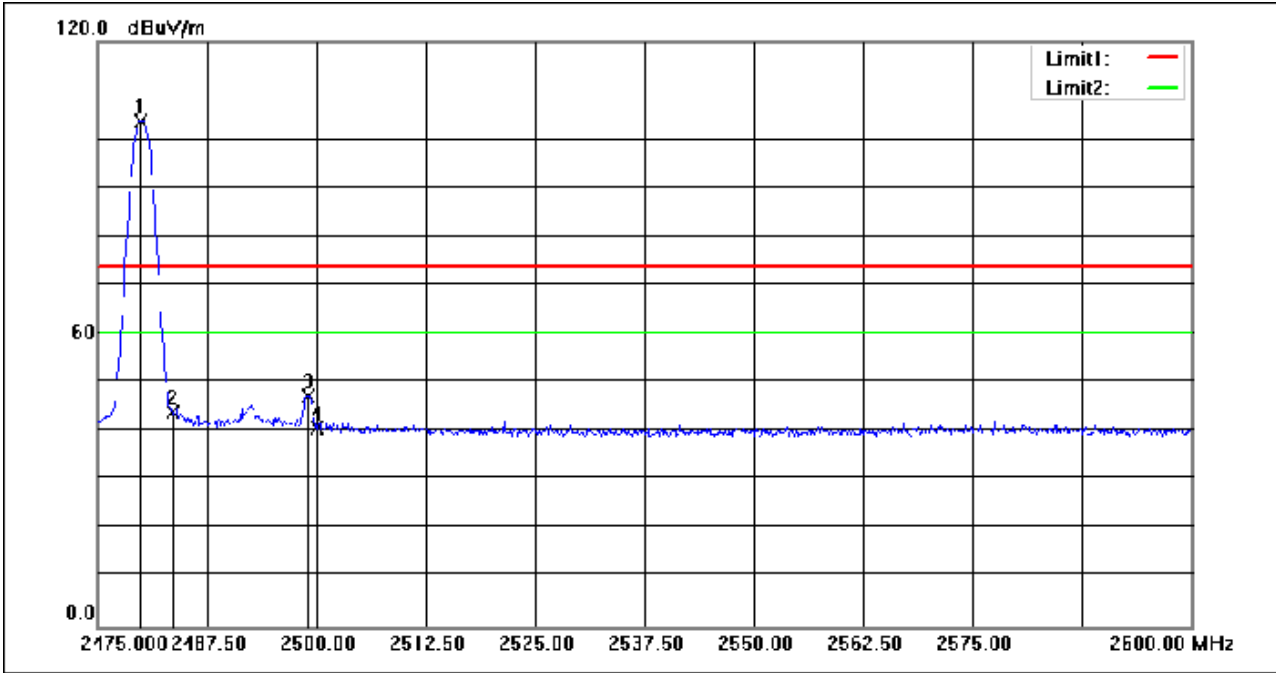

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.875	123.32	-19.59	103.73	74.00	29.73	peak
2	2483.500	63.47	-19.59	43.88	74.00	-30.12	peak
3	2499.125	66.97	-19.61	47.36	74.00	-26.64	peak
4	2500.000	60.31	-19.61	40.70	74.00	-33.30	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 23 of 190

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

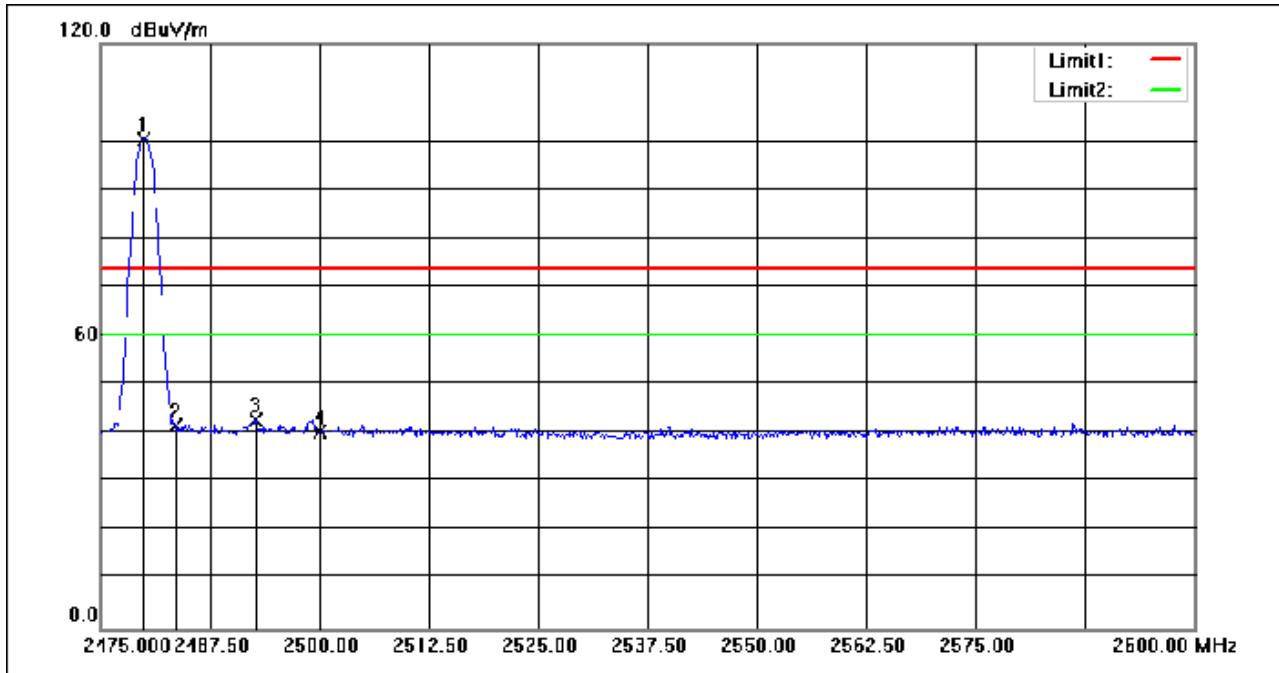

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.875	120.00	-19.59	100.41	74.00	26.41	peak
2	2483.500	61.26	-19.59	41.67	74.00	-32.33	peak
3	2492.750	62.31	-19.60	42.71	74.00	-31.29	peak
4	2500.000	60.00	-19.61	40.39	74.00	-33.61	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 24 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: Low

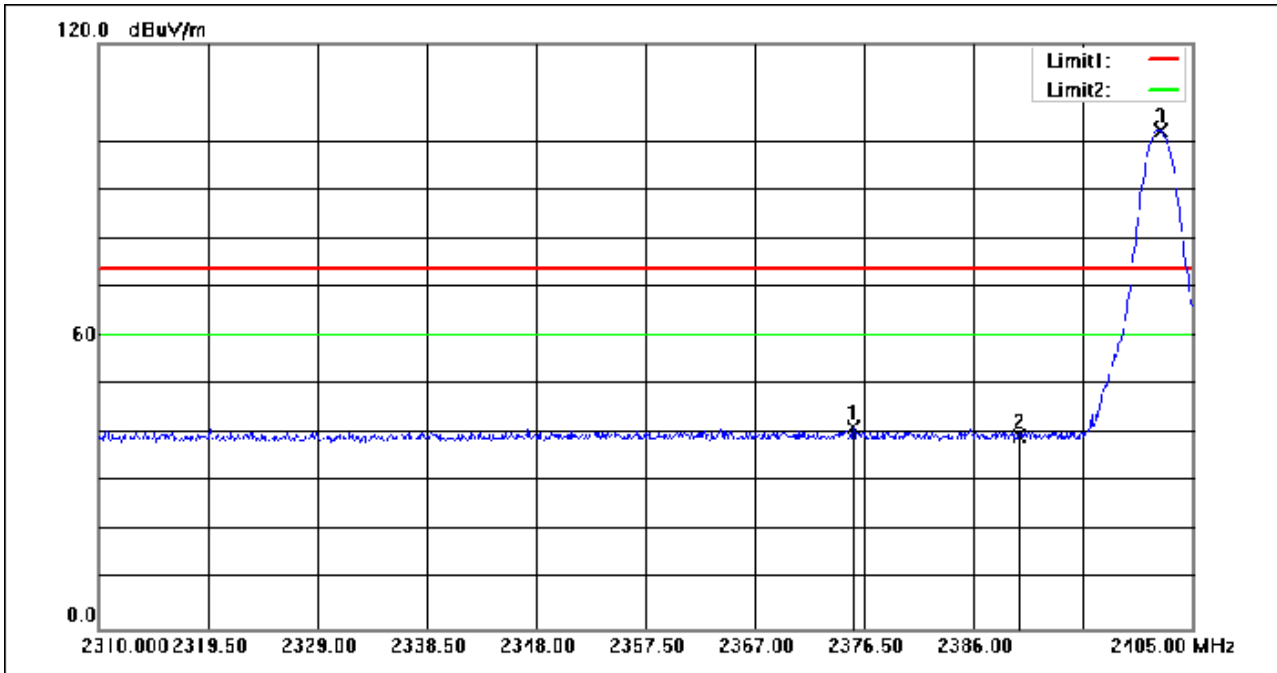

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2375.550	61.15	-19.96	41.19	74.00	-32.81	peak
2	2390.000	59.33	-19.92	39.41	74.00	-34.59	peak
3	2402.245	122.13	-19.89	102.24	74.00	28.24	peak




# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 25 of 190

Test Mode: 00; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: Low

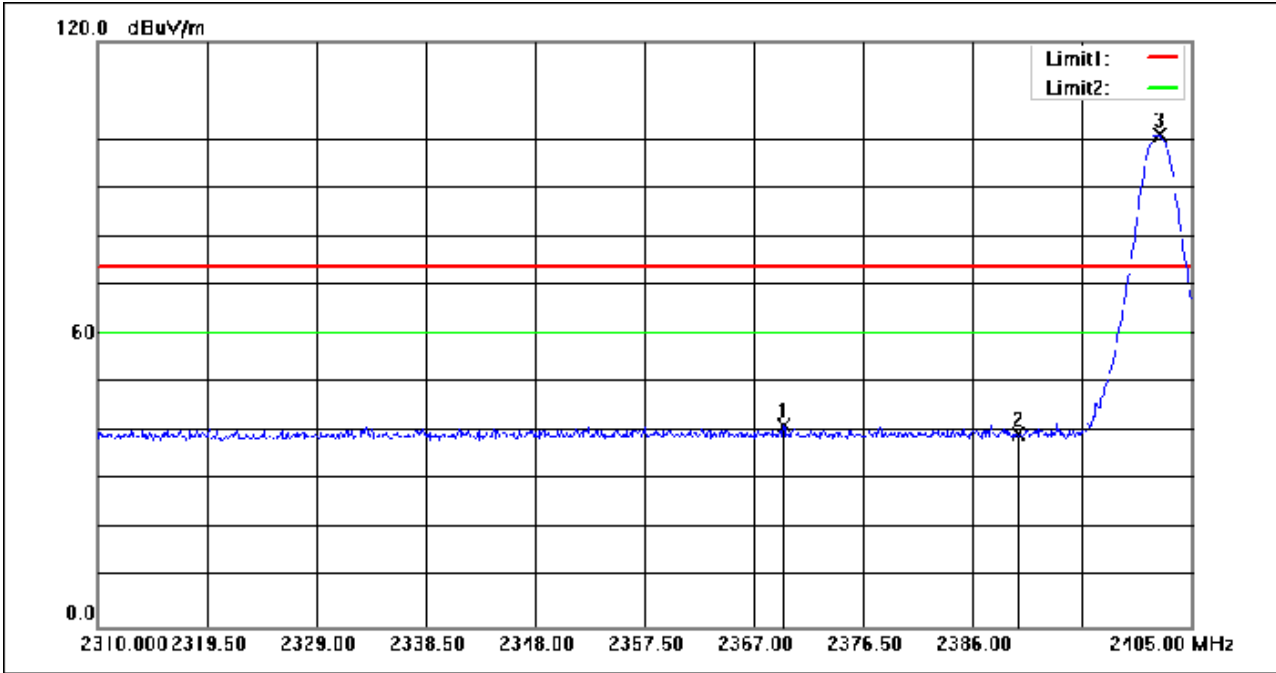

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2369.565	61.12	-19.98	41.14	74.00	-32.86	peak
2	2390.000	59.23	-19.92	39.31	74.00	-34.69	peak
3	2402.245	120.82	-19.89	100.93	74.00	26.93	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 26 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: High

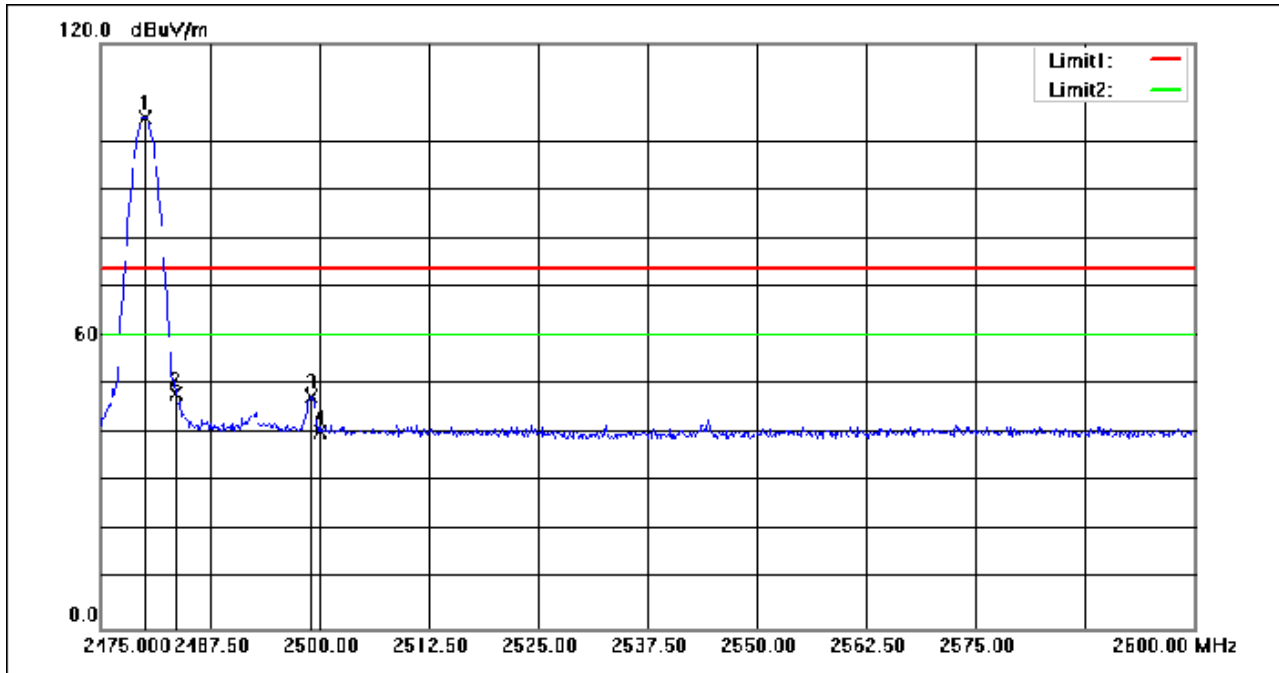

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.125	124.44	-19.59	104.85	74.00	30.85	peak
2	2483.500	67.76	-19.59	48.17	74.00	-25.83	peak
3	2499.125	67.28	-19.61	47.67	74.00	-26.33	peak
4	2500.000	59.84	-19.61	40.23	74.00	-33.77	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 27 of 190

Test Mode: 00; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: High

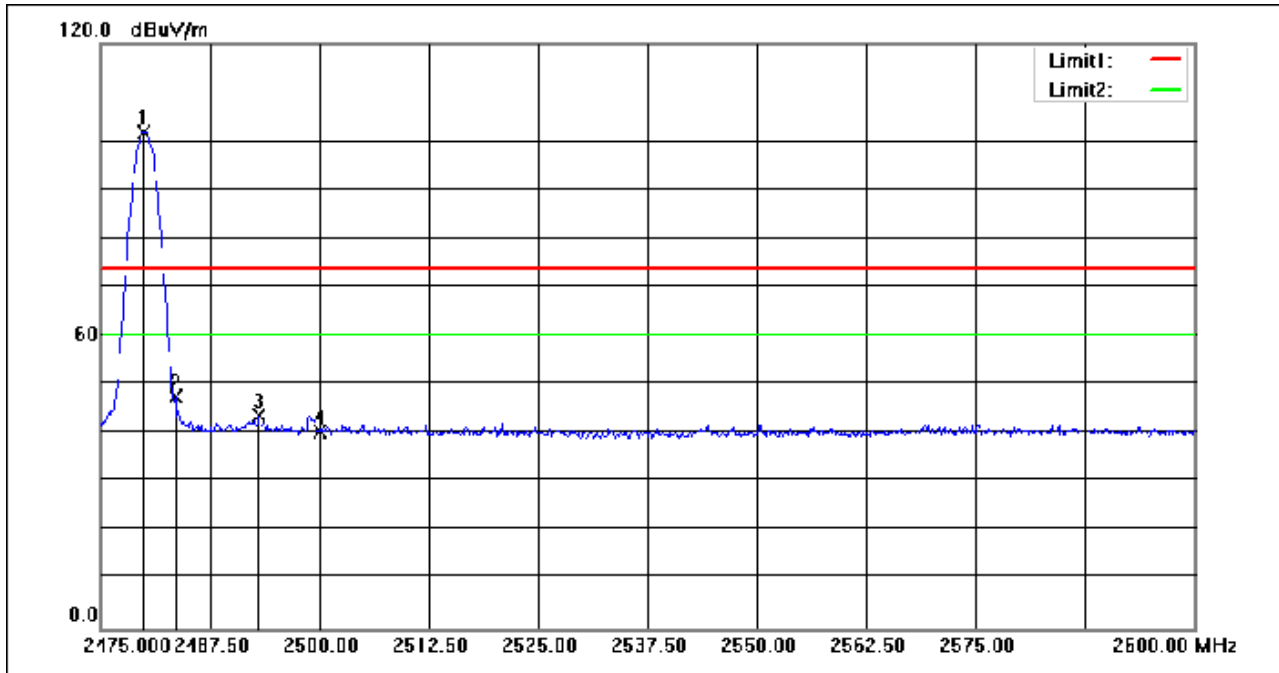

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.875	121.45	-19.59	101.86	74.00	27.86	peak
2	2483.500	67.14	-19.59	47.55	74.00	-26.45	peak
3	2493.000	63.29	-19.60	43.69	74.00	-30.31	peak
4	2500.000	59.82	-19.61	40.21	74.00	-33.79	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 28 of 190

Test Mode: 00; Polarity: Horizontal; Modulation: 8DPSK; Channel: Low

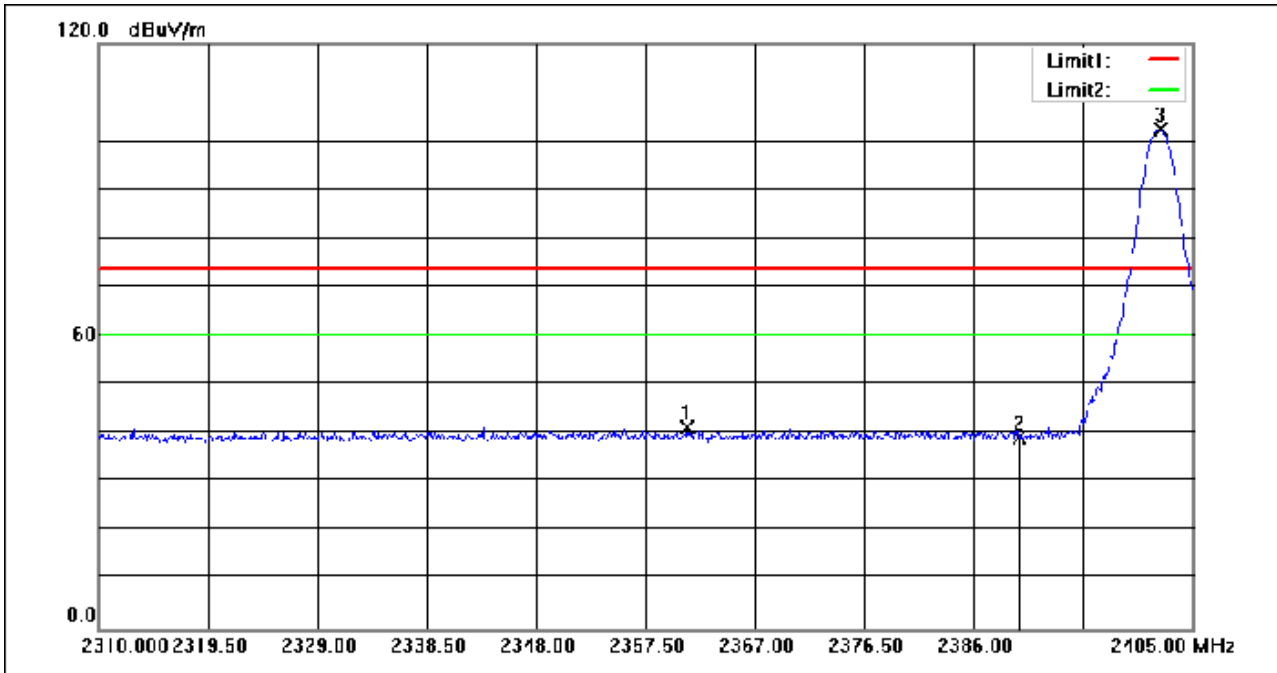

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2361.110	61.22	-19.99	41.23	74.00	-32.77	peak
2	2390.000	59.10	-19.92	39.18	74.00	-34.82	peak
3	2402.245	122.28	-19.89	102.39	74.00	28.39	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 29 of 190

Test Mode: 00; Polarity: Vertical; Modulation: 8DPSK; Channel: Low

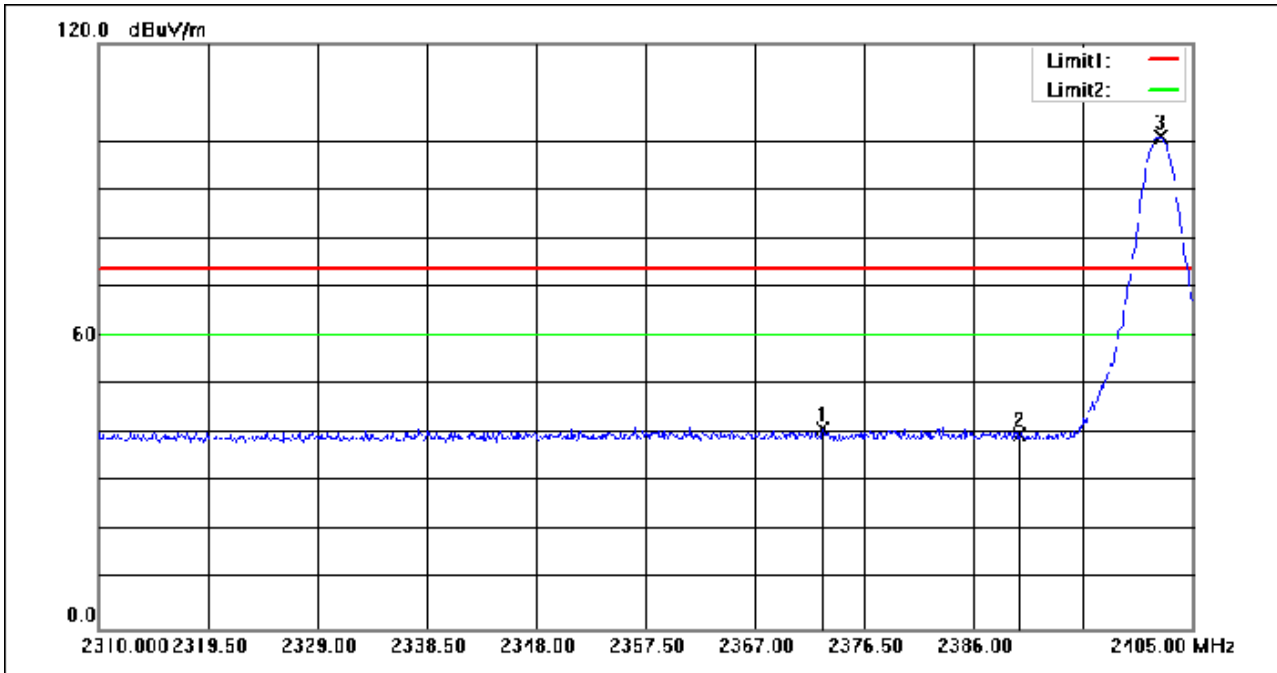

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2372.890	60.77	-19.96	40.81	74.00	-33.19	peak
2	2390.000	59.72	-19.92	39.80	74.00	-34.20	peak
3	2402.245	120.72	-19.89	100.83	74.00	26.83	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 30 of 190

Test Mode: 00; Polarity: Horizontal; Modulation: 8DPSK; Channel: High

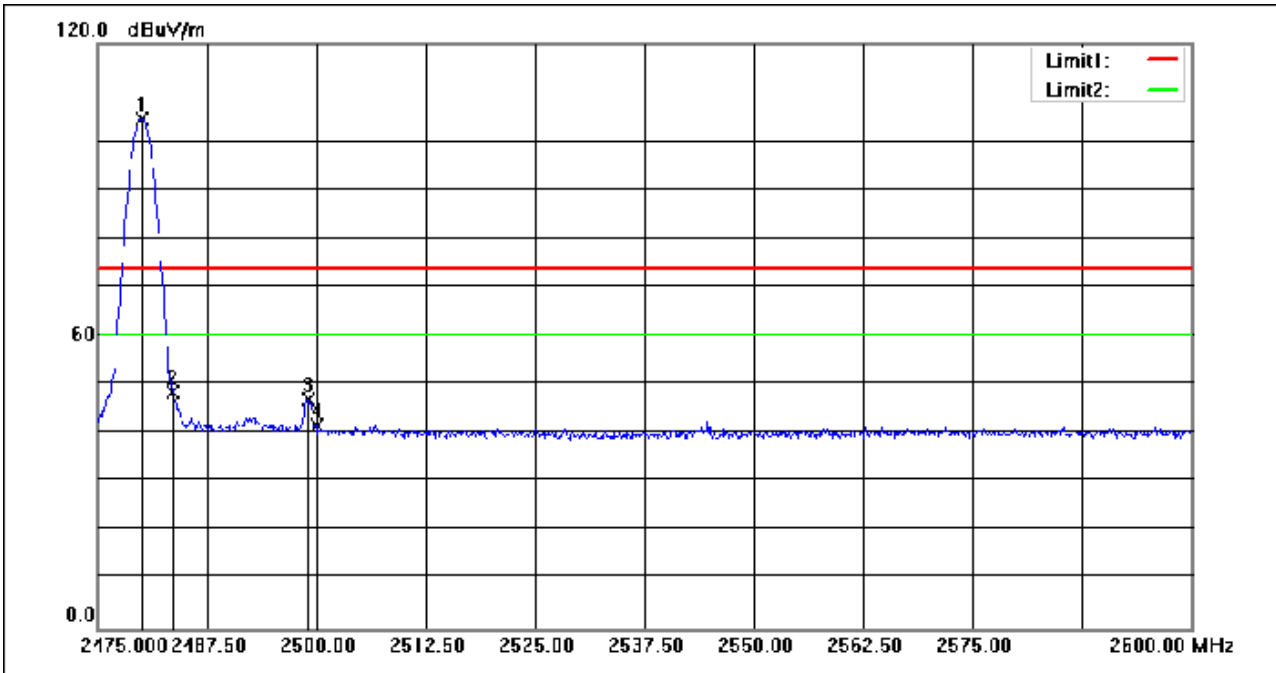

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	124.13	-19.59	104.54	74.00	30.54	peak
2	2483.500	68.10	-19.59	48.51	74.00	-25.49	peak
3	2499.000	66.62	-19.61	47.01	74.00	-26.99	peak
4	2500.000	61.23	-19.61	41.62	74.00	-32.38	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 31 of 190

Test Mode: 00; Polarity: Vertical; Modulation: 8DPSK; Channel: High

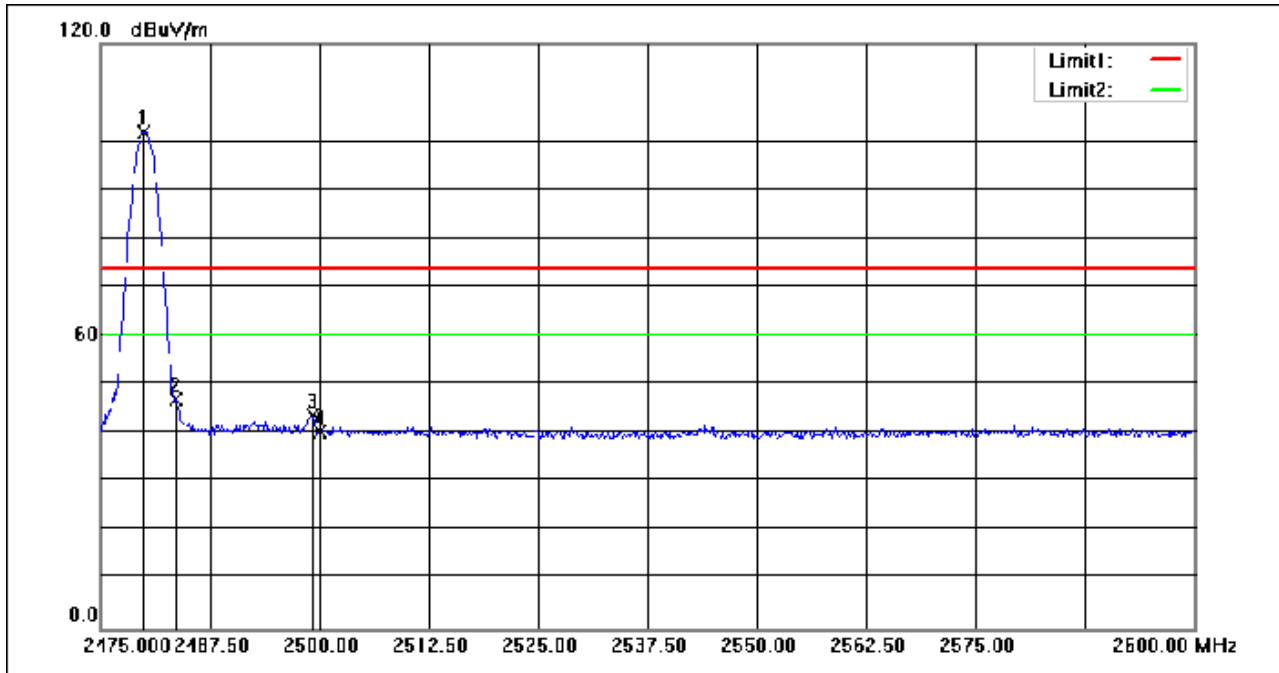

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.875	121.46	-19.59	101.87	74.00	27.87	peak
2	2483.500	66.56	-19.59	46.97	74.00	-27.03	peak
3	2499.250	63.36	-19.61	43.75	74.00	-30.25	peak
4	2500.000	59.95	-19.61	40.34	74.00	-33.66	peak

# Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 32 of 190

Right

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

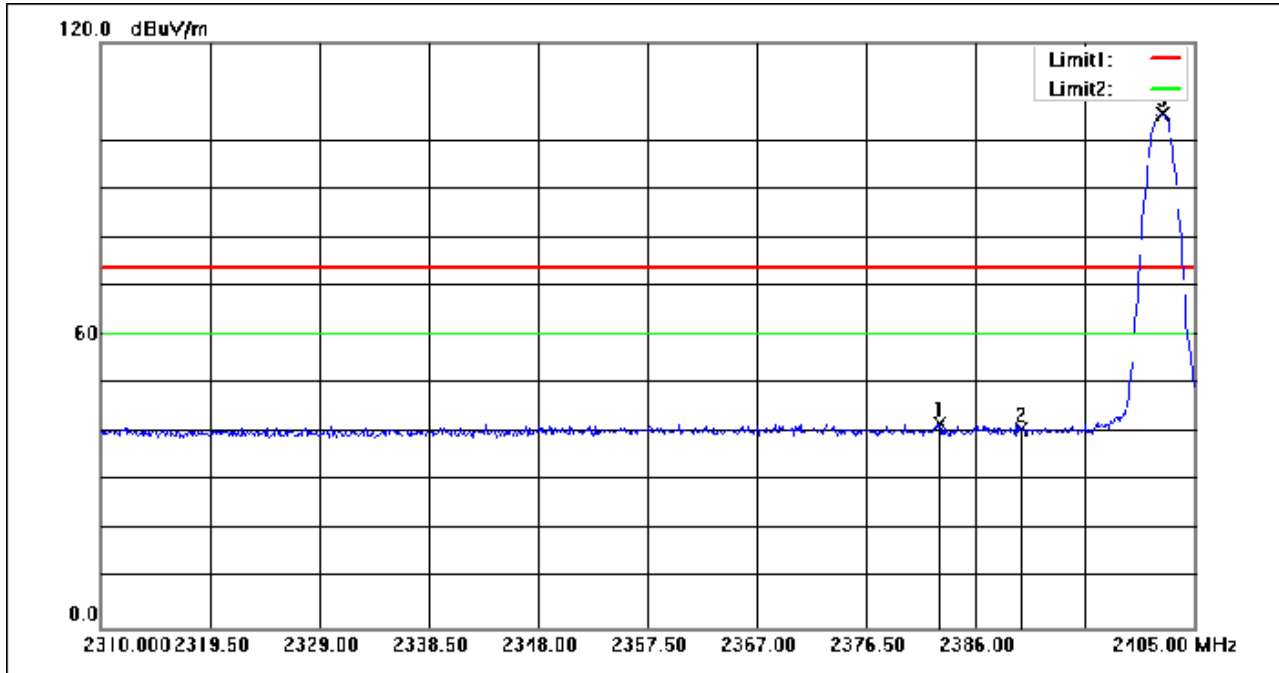

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.865	61.85	-19.94	41.91	74.00	-32.09	peak
2	2390.000	60.57	-19.92	40.65	74.00	-33.35	peak
3	2402.245	125.26	-19.89	105.37	74.00	31.37	peak




# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 33 of 190

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

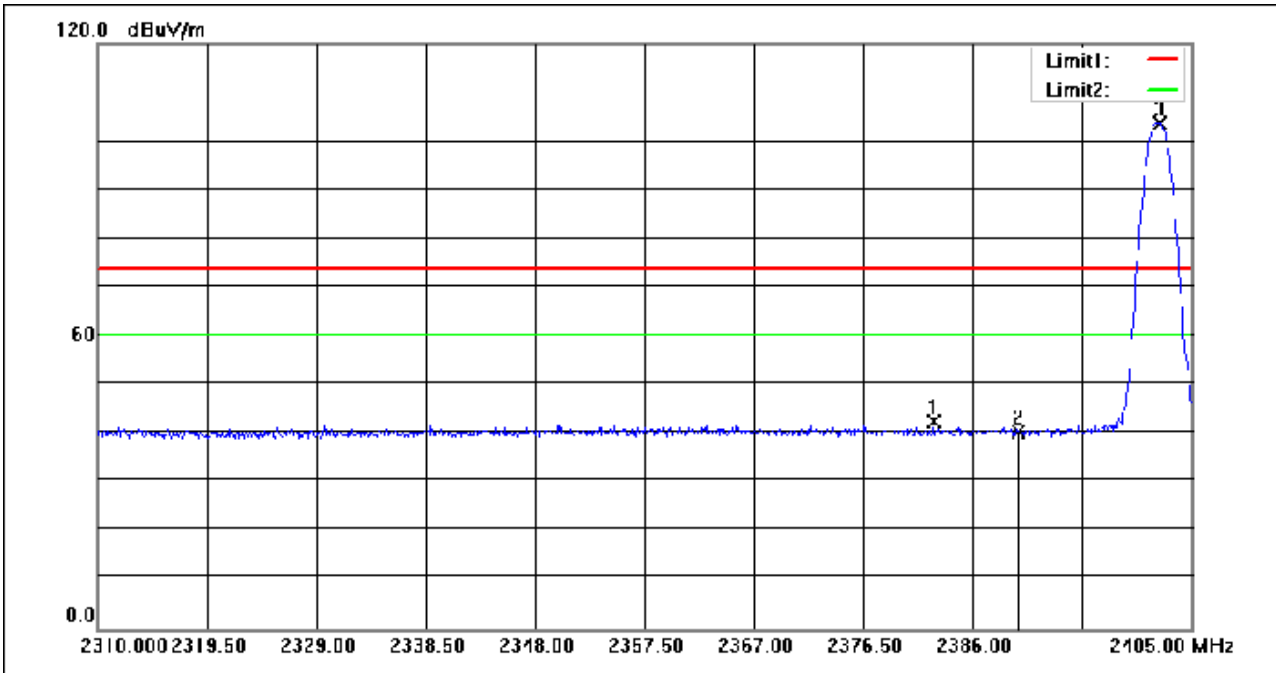

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.580	62.30	-19.94	42.36	74.00	-31.64	peak
2	2390.000	60.28	-19.92	40.36	74.00	-33.64	peak
3	2402.245	123.49	-19.89	103.60	74.00	29.60	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 34 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

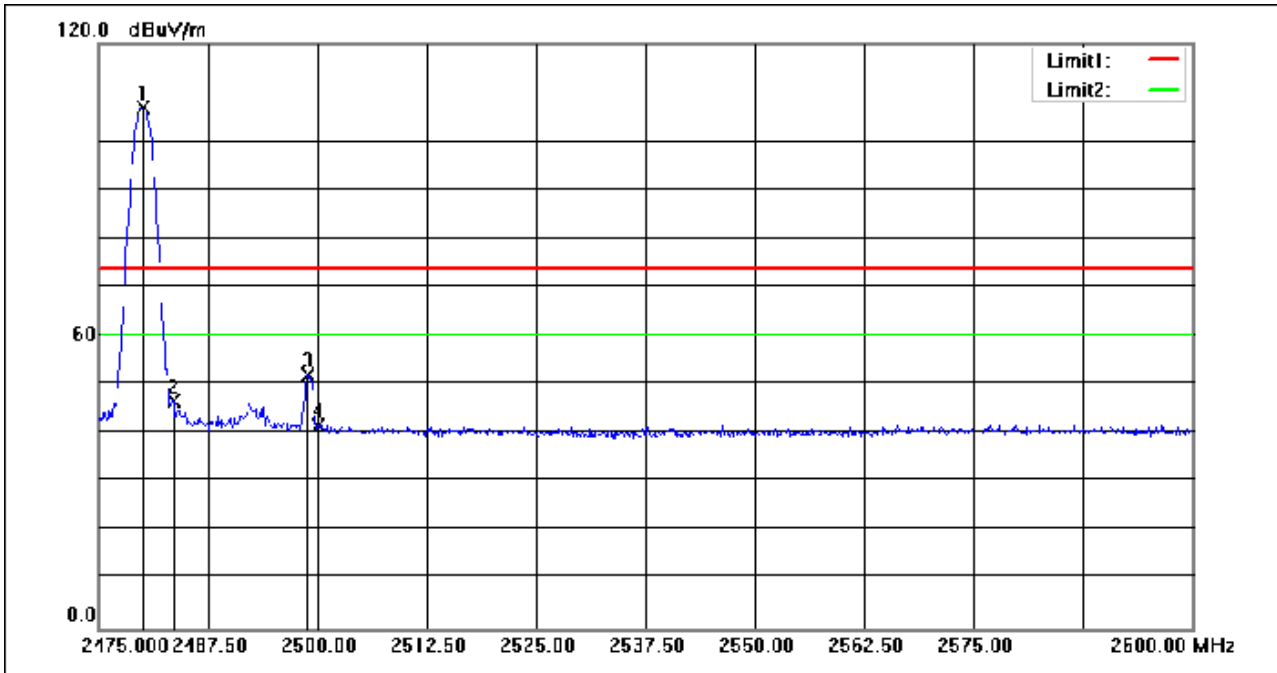

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.125	126.42	-19.59	106.83	74.00	32.83	peak
2	2483.500	66.39	-19.59	46.80	74.00	-27.20	peak
3	2498.875	71.64	-19.61	52.03	74.00	-21.97	peak
4	2500.000	61.15	-19.61	41.54	74.00	-32.46	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 35 of 190

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

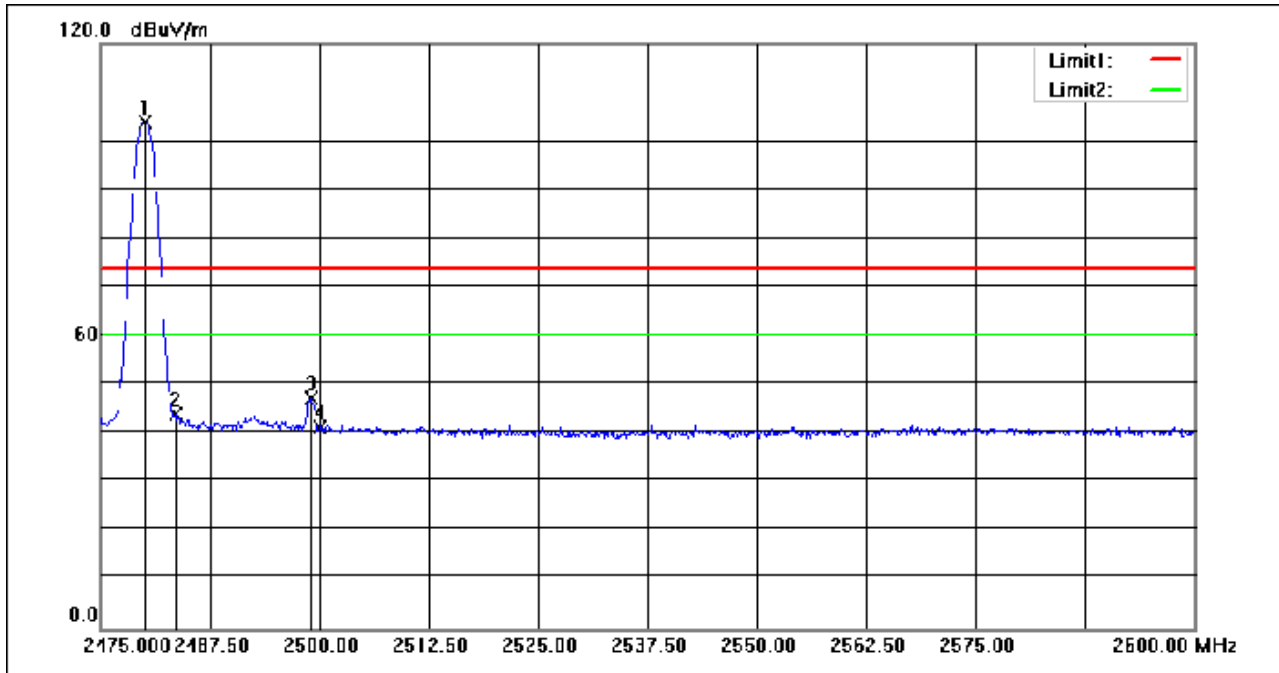

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.125	123.45	-19.59	103.86	74.00	29.86	peak
2	2483.500	63.57	-19.59	43.98	74.00	-30.02	peak
3	2499.000	66.84	-19.61	47.23	74.00	-26.77	peak
4	2500.000	60.94	-19.61	41.33	74.00	-32.67	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 36 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: Low

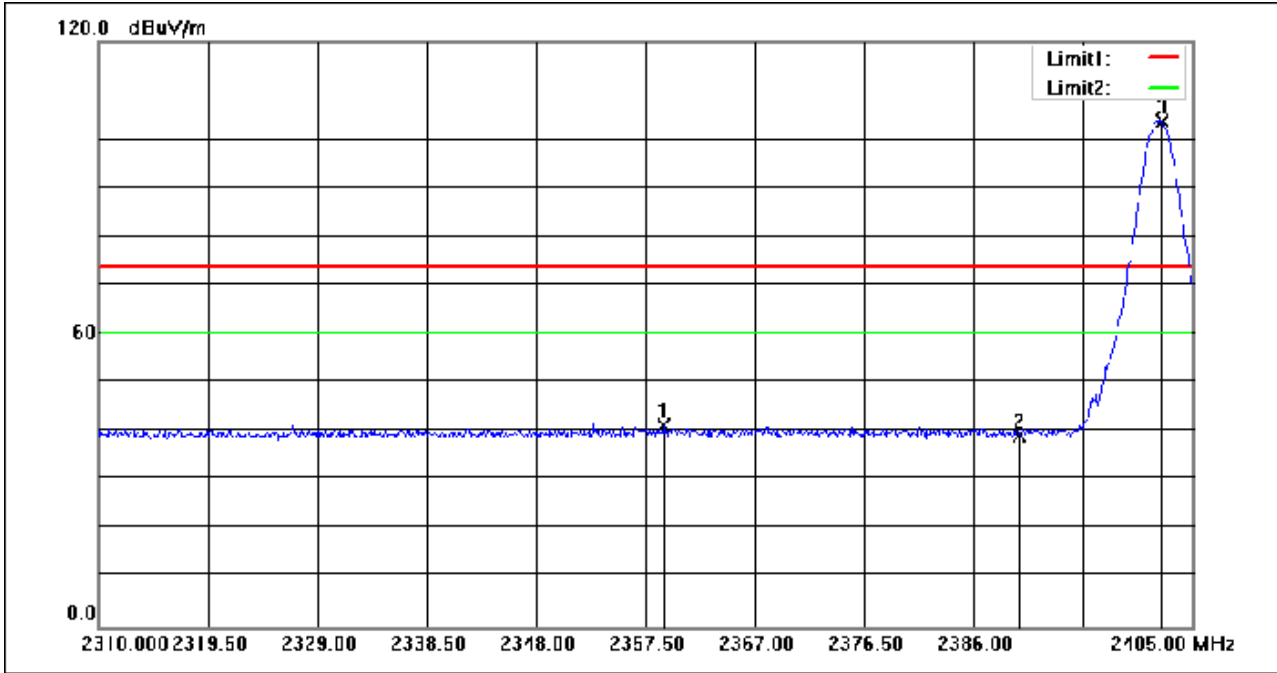

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2359.020	61.33	-20.00	41.33	74.00	-32.67	peak
2	2390.000	58.93	-19.92	39.01	74.00	-34.99	peak
3	2402.340	123.45	-19.89	103.56	74.00	29.56	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 37 of 190

Test Mode: 00; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: Low

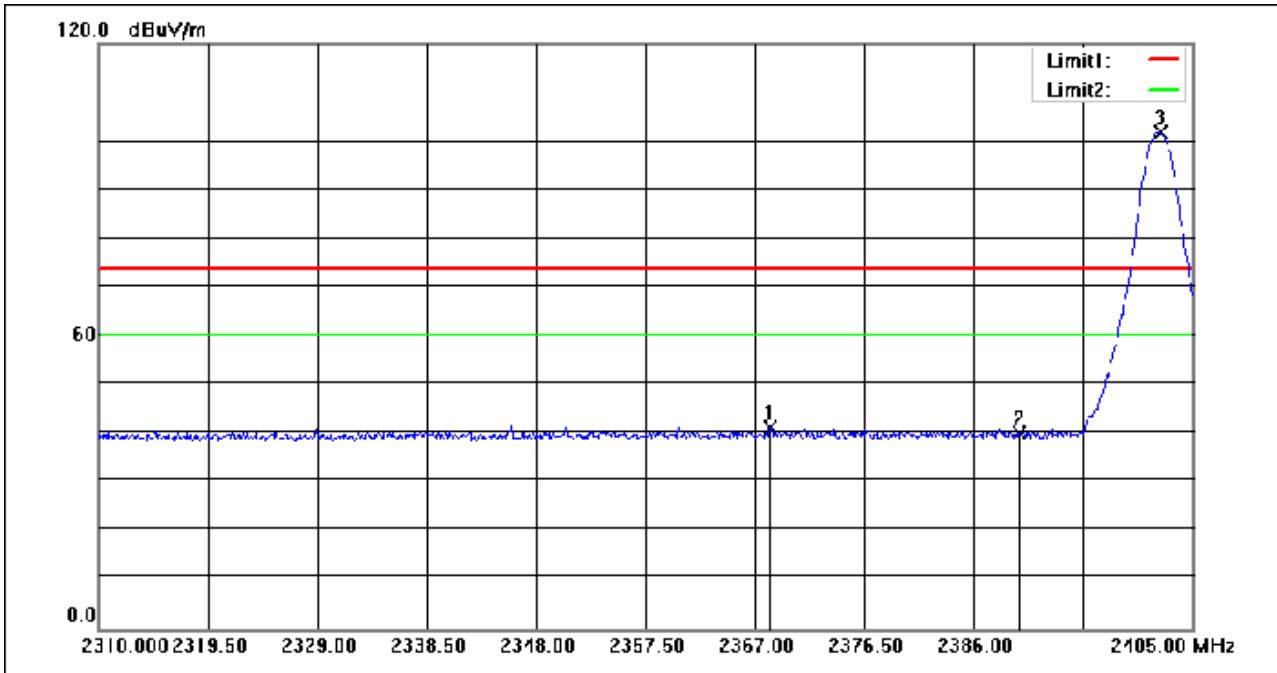

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2368.330	61.28	-19.98	41.30	74.00	-32.70	peak
2	2390.000	59.99	-19.92	40.07	74.00	-33.93	peak
3	2402.245	121.80	-19.89	101.91	74.00	27.91	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 38 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: High

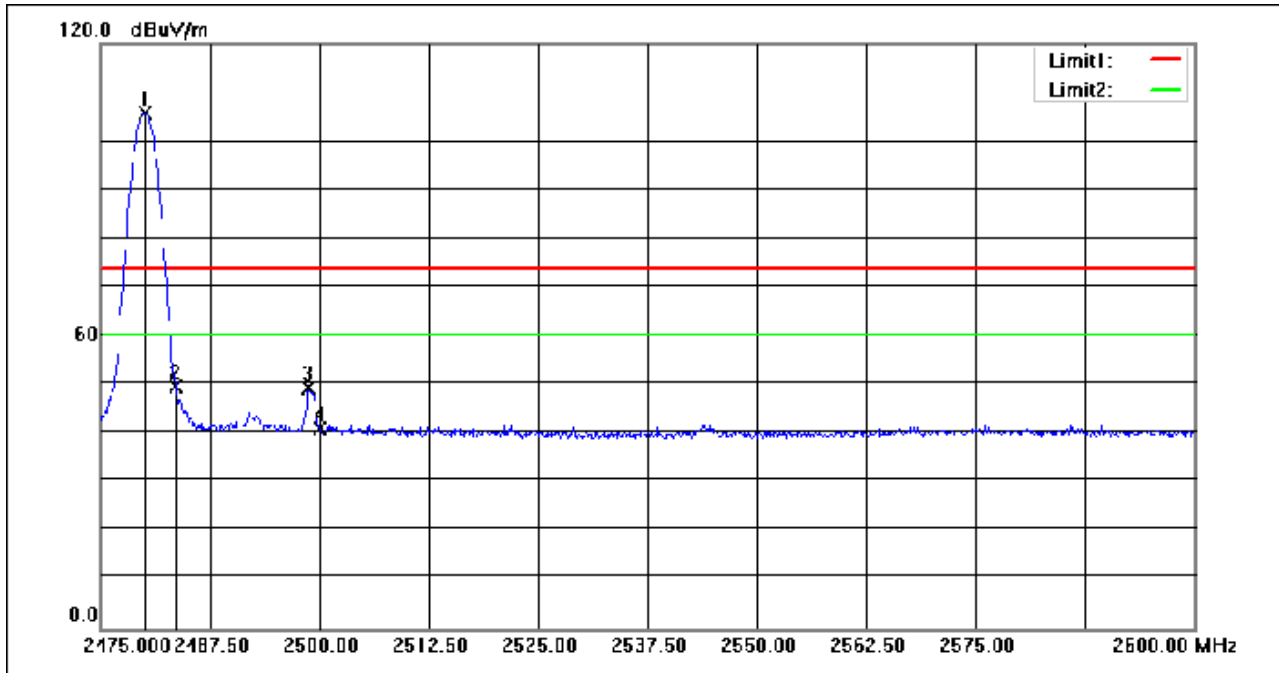

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.125	125.36	-19.59	105.77	74.00	31.77	peak
2	2483.500	69.33	-19.59	49.74	74.00	-24.26	peak
3	2498.750	68.90	-19.61	49.29	74.00	-24.71	peak
4	2500.000	60.57	-19.61	40.96	74.00	-33.04	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 39 of 190

Test Mode: 00; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: High

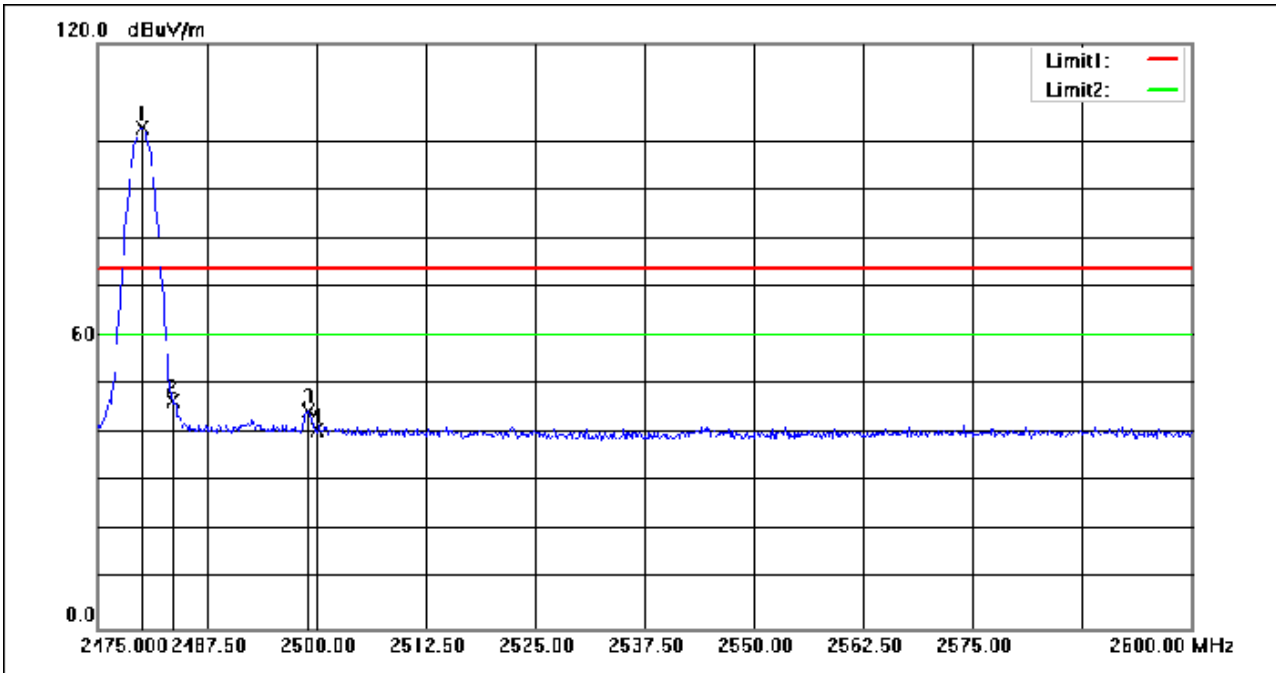

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.125	122.26	-19.59	102.67	74.00	28.67	peak
2	2483.500	66.28	-19.59	46.69	74.00	-27.31	peak
3	2499.000	64.30	-19.61	44.69	74.00	-29.31	peak
4	2500.000	60.40	-19.61	40.79	74.00	-33.21	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 40 of 190

Test Mode: 00; Polarity: Horizontal; Modulation: 8DPSK; Channel: Low

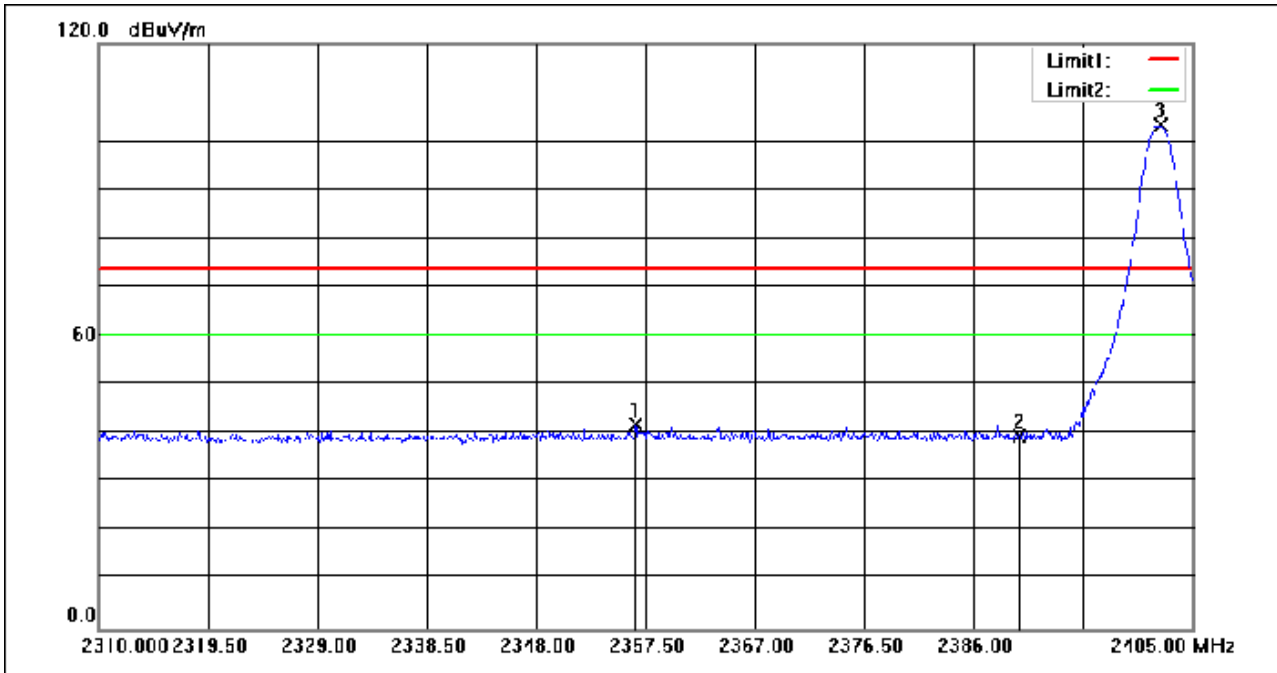

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2356.645	61.70	-20.00	41.70	74.00	-32.30	peak
2	2390.000	59.28	-19.92	39.36	74.00	-34.64	peak
3	2402.245	123.11	-19.89	103.22	74.00	29.22	peak




# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 41 of 190

Test Mode: 00; Polarity: Vertical; Modulation: 8DPSK; Channel: Low

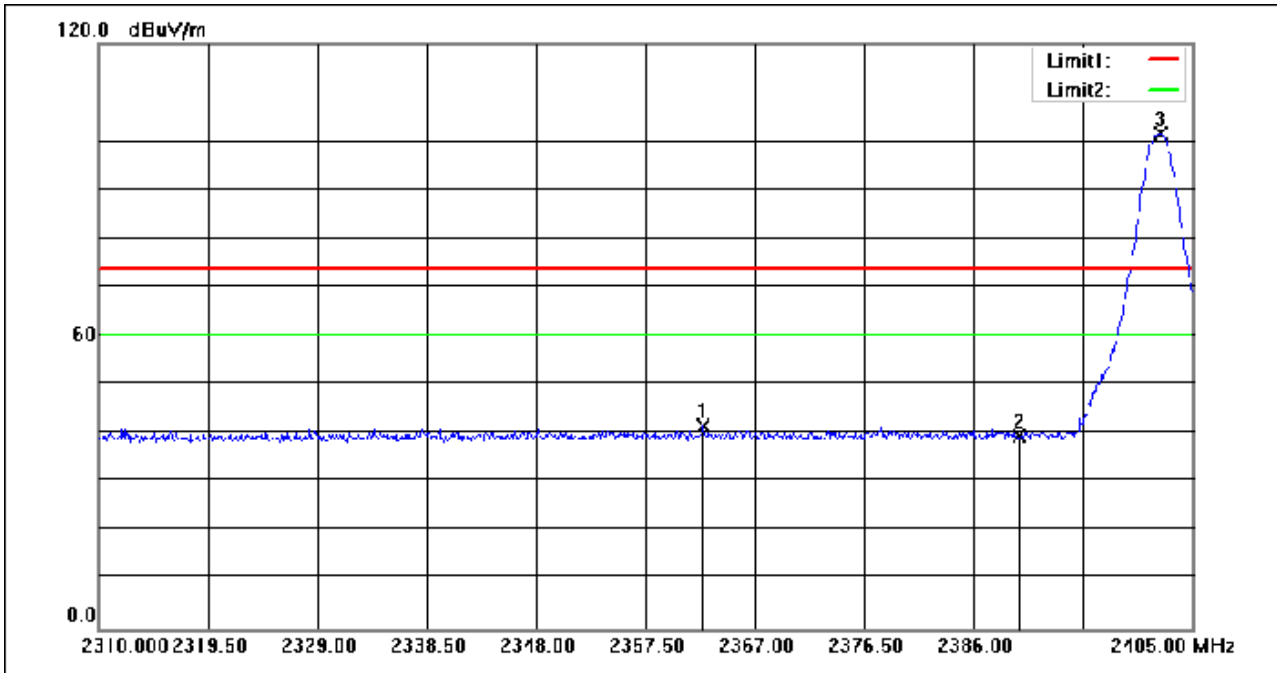

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2362.440	61.43	-19.98	41.45	74.00	-32.55	peak
2	2390.000	59.48	-19.92	39.56	74.00	-34.44	peak
3	2402.245	121.57	-19.89	101.68	74.00	27.68	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 42 of 190

Test Mode: 00; Polarity: Horizontal; Modulation: 8DPSK; Channel: High

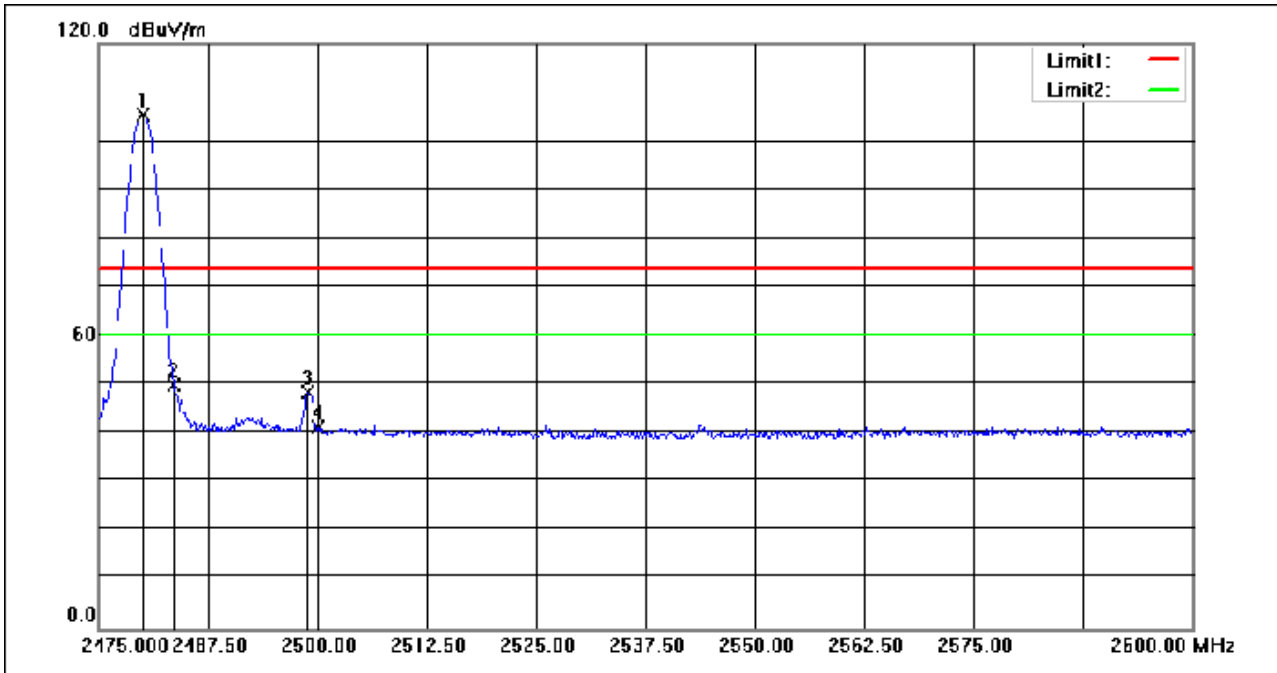

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.125	125.14	-19.59	105.55	74.00	31.55	peak
2	2483.500	69.60	-19.59	50.01	74.00	-23.99	peak
3	2498.875	68.20	-19.61	48.59	74.00	-25.41	peak
4	2500.000	60.80	-19.61	41.19	74.00	-32.81	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 43 of 190

Test Mode: 00; Polarity: Vertical; Modulation: 8DPSK; Channel: High

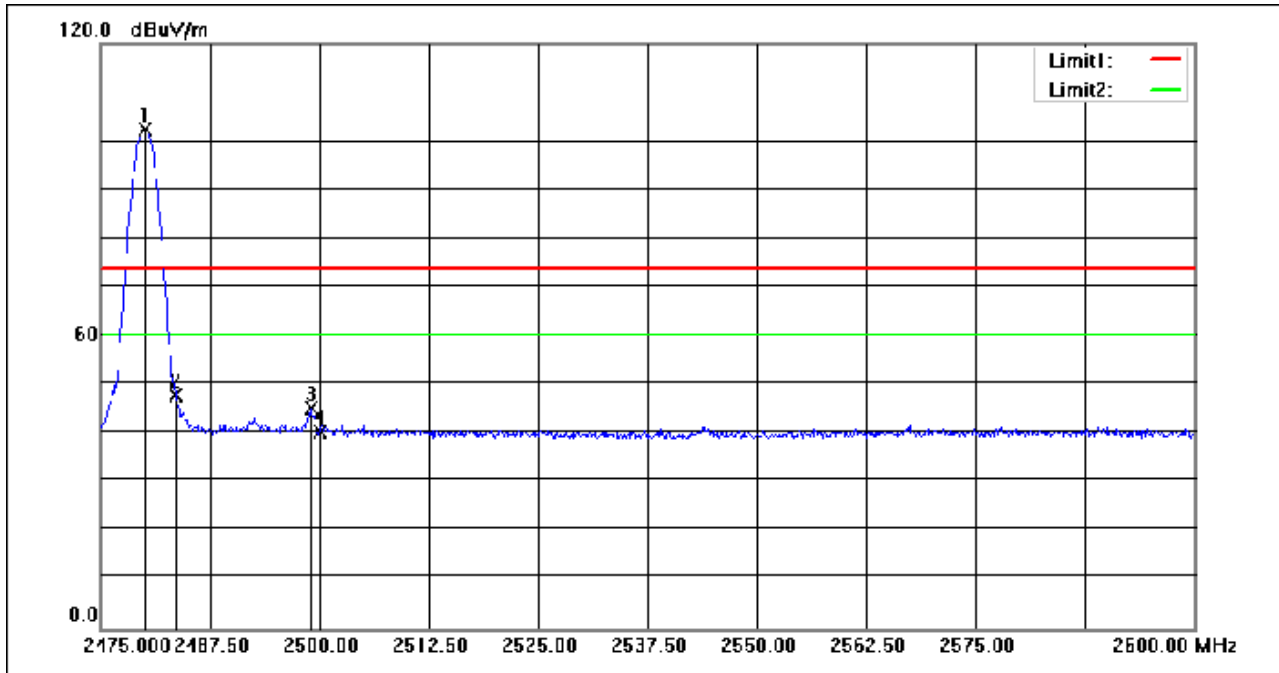

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	122.13	-19.59	102.54	74.00	28.54	peak
2	2483.500	67.38	-19.59	47.79	74.00	-26.21	peak
3	2499.000	64.68	-19.61	45.07	74.00	-28.93	peak
4	2500.000	59.90	-19.61	40.29	74.00	-33.71	peak

**7.9 Radiated Spurious Emissions Below 1GHz**

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

**7.9.1 E.U.T. Operation**

Operating Environment:

Temperature: 23.4 °C


Humidity: 50.1 % RH

Atmospheric Pressure: 1010 mbar

**7.9.2 Test Mode Description**

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

**7.9.3 Test Setup Diagram**

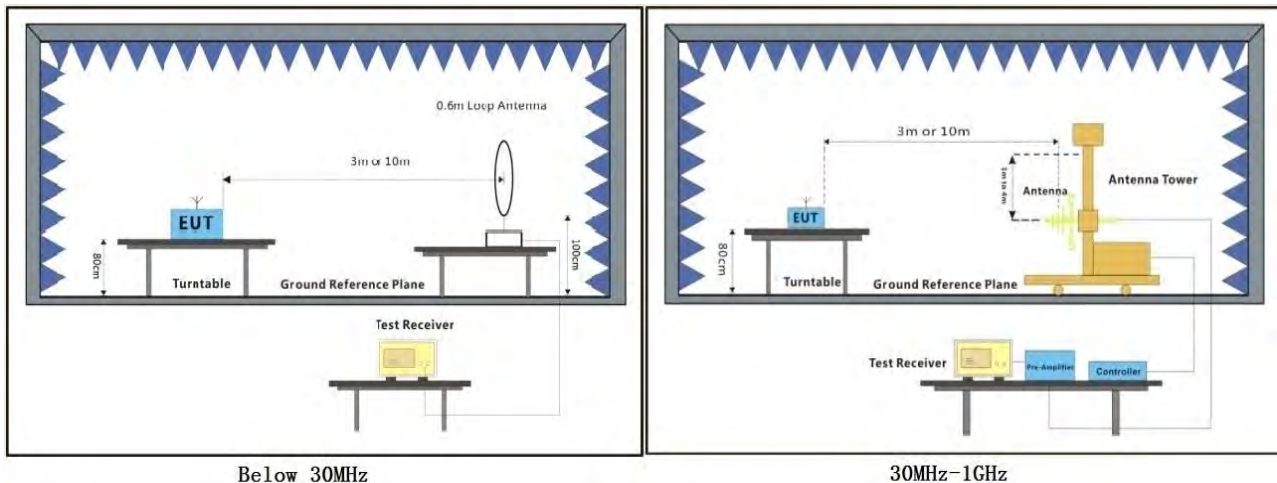

**7.9.4 Measurement Procedure and Data**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1.  $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$
- 2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

# Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 46 of 190

Test Mode: 00; Polarity: Horizontal

70.0 dBuV/m

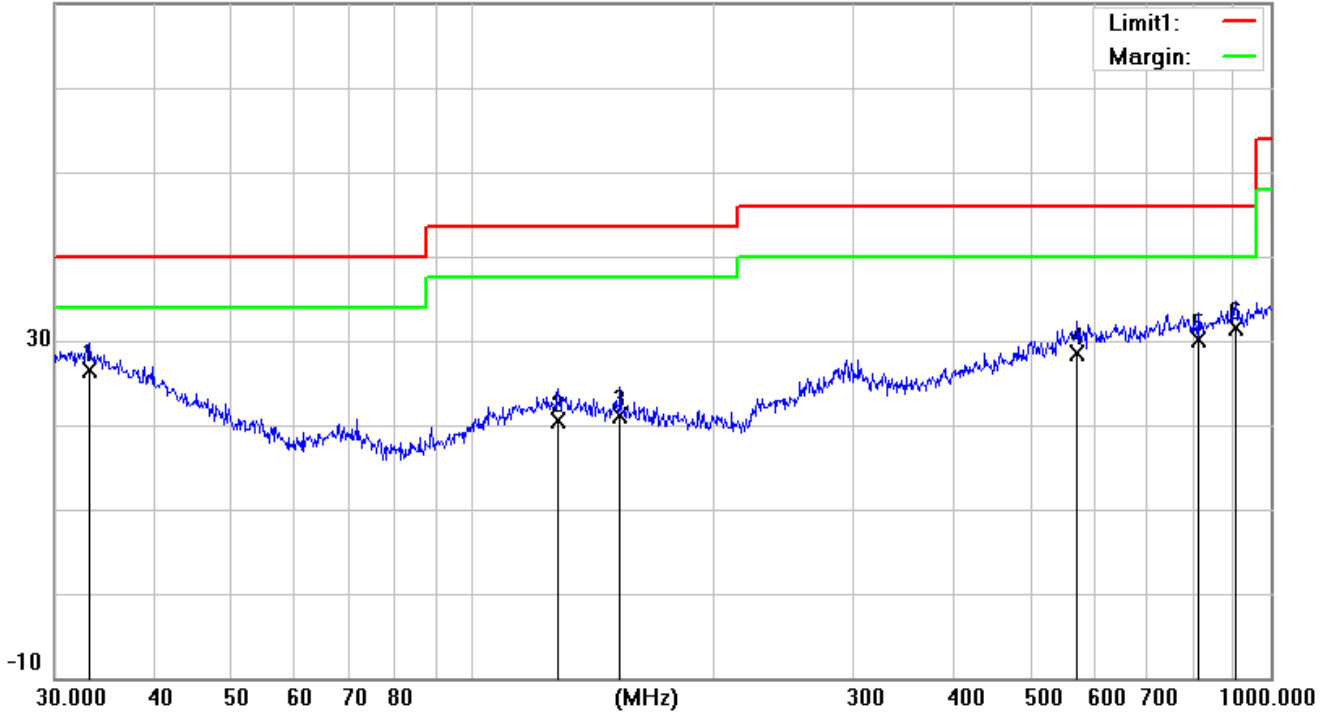

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	33.2112	1.38	25.05	26.43	40.00	-13.57	100	42	QP
2	128.1130	1.08	19.48	20.56	43.50	-22.94	200	126	QP
3	153.2004	3.30	17.75	21.05	43.50	-22.45	100	343	QP
4	572.6144	1.45	27.14	28.59	46.00	-17.41	300	286	QP
5	813.1116	2.12	28.03	30.15	46.00	-15.85	400	19	QP
6	903.3094	1.97	29.51	31.48	46.00	-14.52	100	360	QP


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 47 of 190

Test Mode: 00; Polarity: Vertical

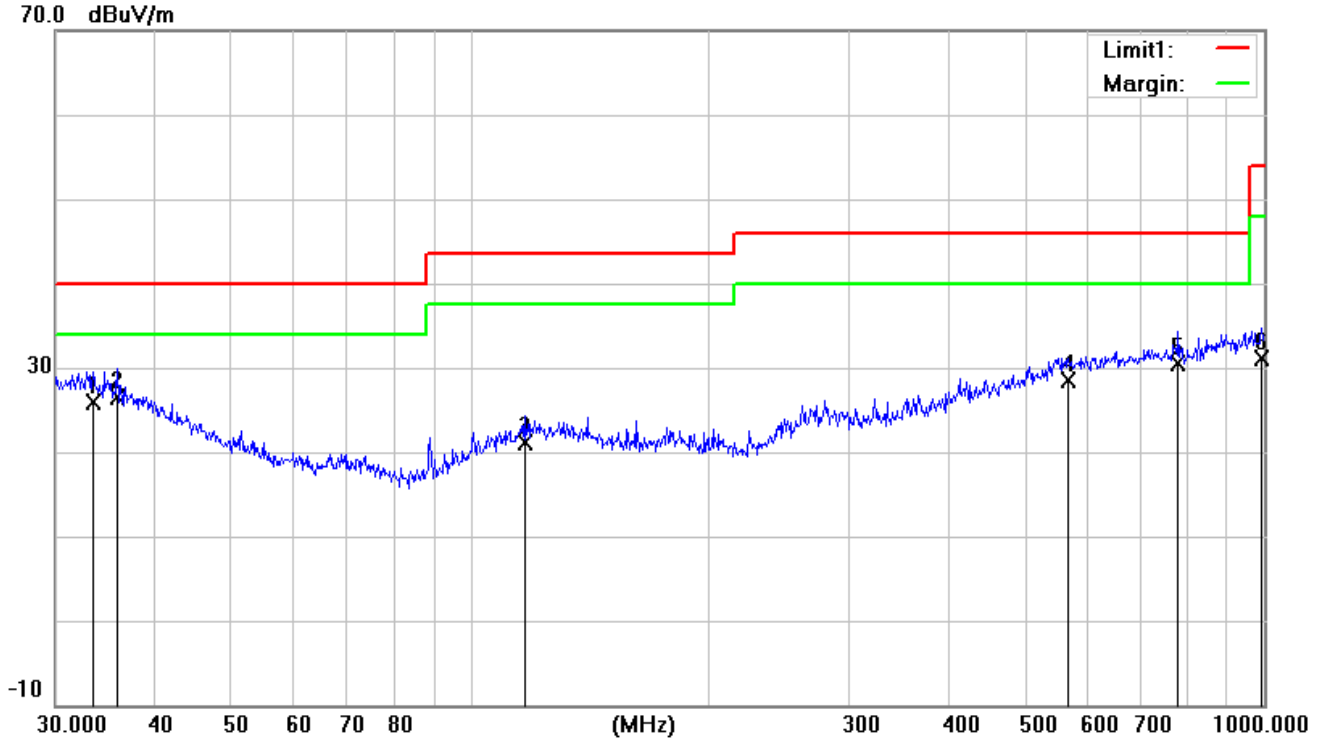

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	33.4449	0.84	25.02	25.86	40.00	-14.14	200	185	QP
2	35.8747	2.34	24.18	26.52	40.00	-13.48	100	5	QP
3	116.9495	1.81	19.24	21.05	43.50	-22.45	100	312	QP
4	566.6223	1.13	27.43	28.56	46.00	-17.44	300	181	QP
5	779.6068	2.31	28.15	30.46	46.00	-15.54	100	0	QP
6	993.0114	0.77	30.25	31.02	54.00	-22.98	400	116	QP

**7.10 Radiated Spurious Emissions Above 1GHz**

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

**7.10.1 E.U.T. Operation**

Operating Environment:

Temperature: 23.4 °C


Humidity: 50.1 % RH

Atmospheric Pressure: 1010 mbar

**7.10.2 Test Mode Description**

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4QPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

**7.10.3 Test Setup Diagram**

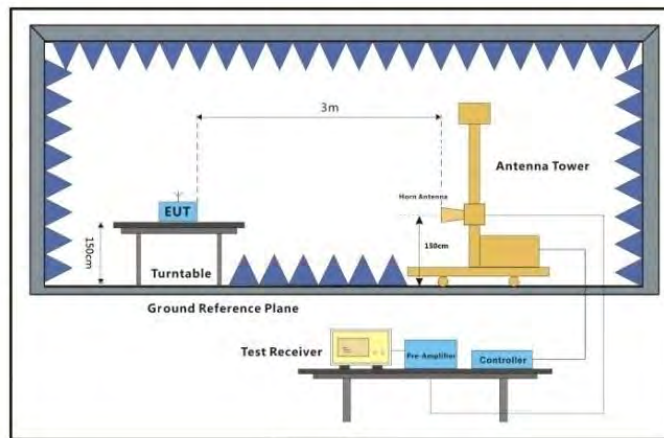

Above 1GHz



**7.10.4 Measurement Procedure and Data**

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1.  $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$
- 2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



**Compliance Certification Services (Kunshan) Inc.**


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 50 of 190

Left:

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

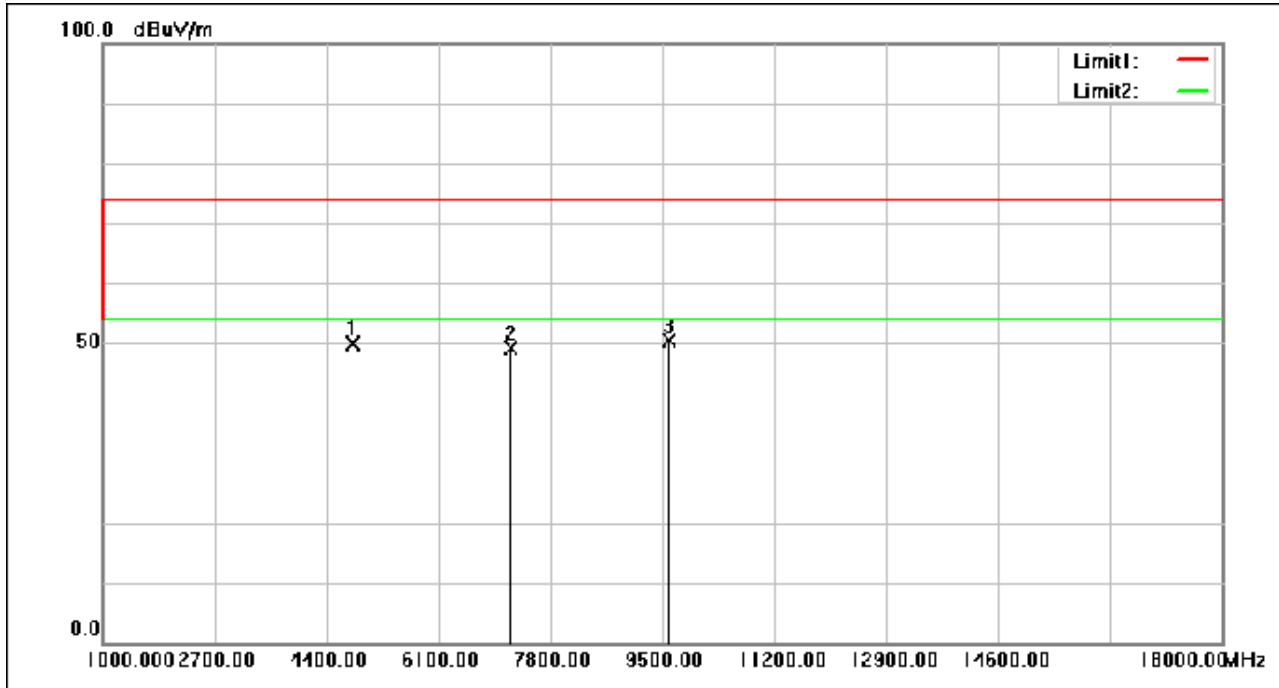

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	58.84	-8.86	49.98	74.00	-24.02	peak
2	7206.000	55.05	-5.89	49.16	74.00	-24.84	peak
3	9608.000	51.66	-1.26	50.40	74.00	-23.60	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 51 of 190

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

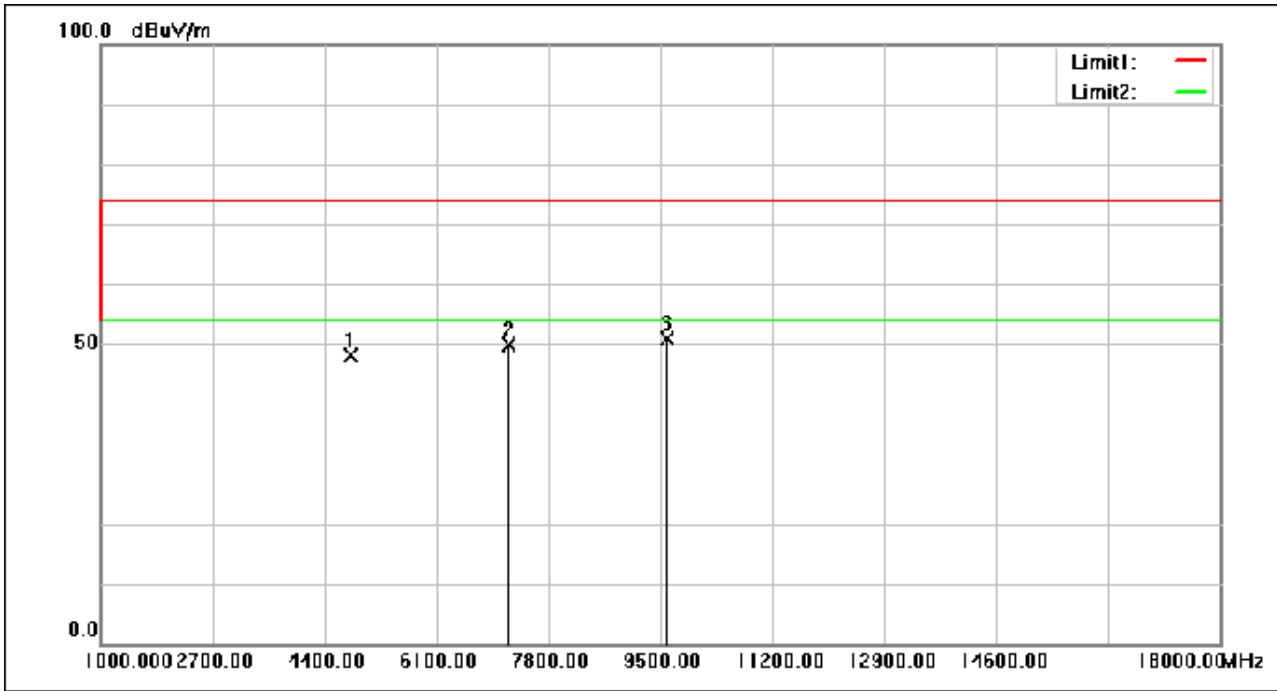

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	57.10	-8.86	48.24	74.00	-25.76	peak
2	7206.000	55.66	-5.89	49.77	74.00	-24.23	peak
3	9608.000	52.07	-1.26	50.81	74.00	-23.19	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 52 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:middle

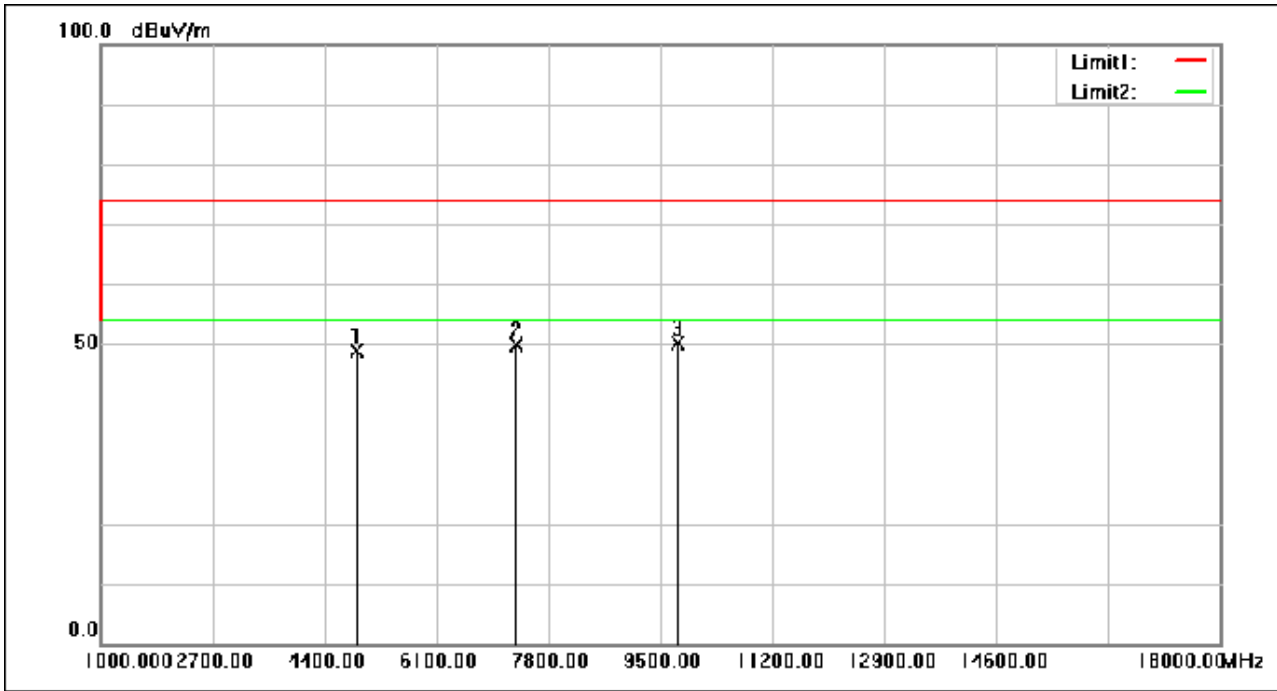

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	57.34	-8.58	48.76	74.00	-25.24	peak
2	7323.000	55.58	-5.77	49.81	74.00	-24.19	peak
3	9764.000	51.71	-1.46	50.25	74.00	-23.75	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 53 of 190

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:middle

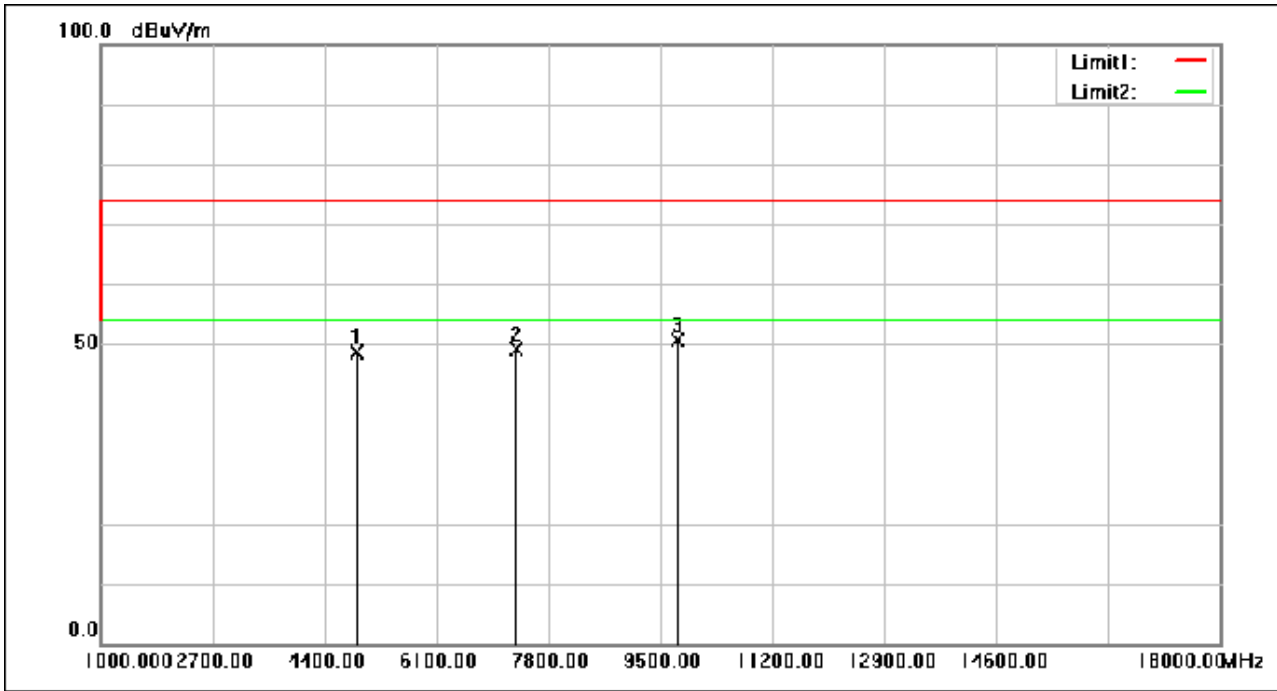

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	57.23	-8.58	48.65	74.00	-25.35	peak
2	7323.000	54.81	-5.77	49.04	74.00	-24.96	peak
3	9764.000	52.00	-1.46	50.54	74.00	-23.46	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 54 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

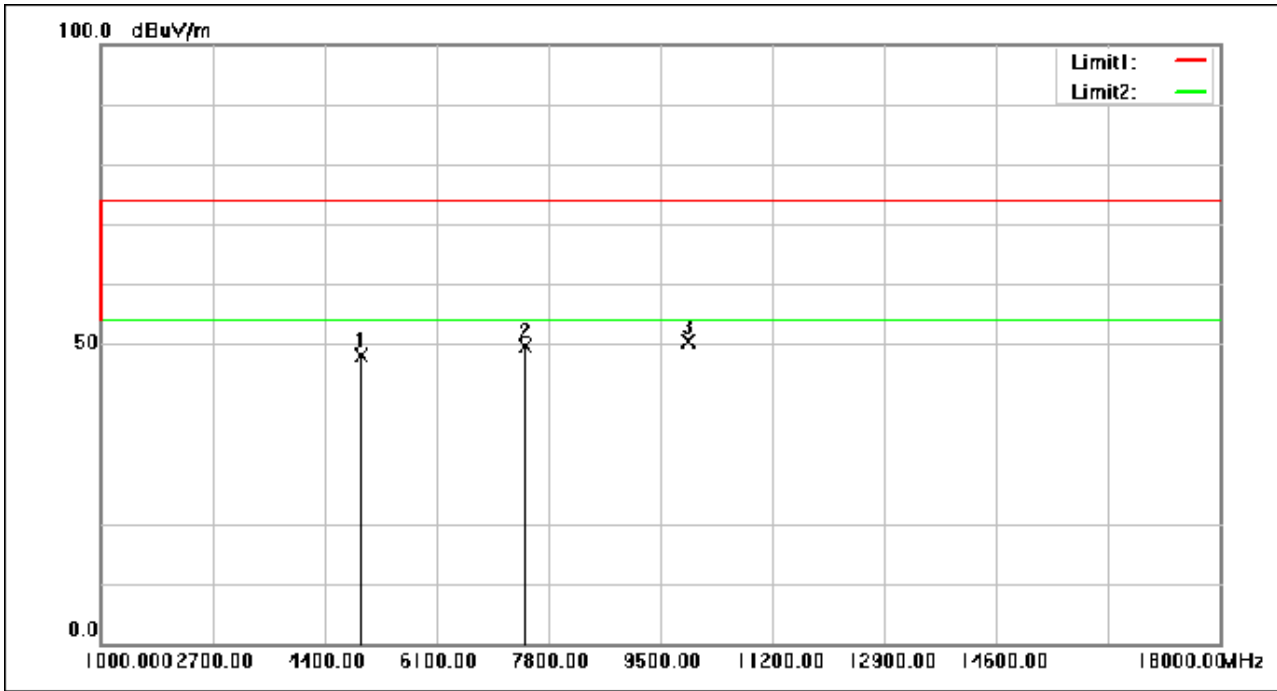

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	56.35	-8.32	48.03	74.00	-25.97	peak
2	7440.000	55.15	-5.63	49.52	74.00	-24.48	peak
3	9920.000	51.33	-0.94	50.39	74.00	-23.61	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 55 of 190

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

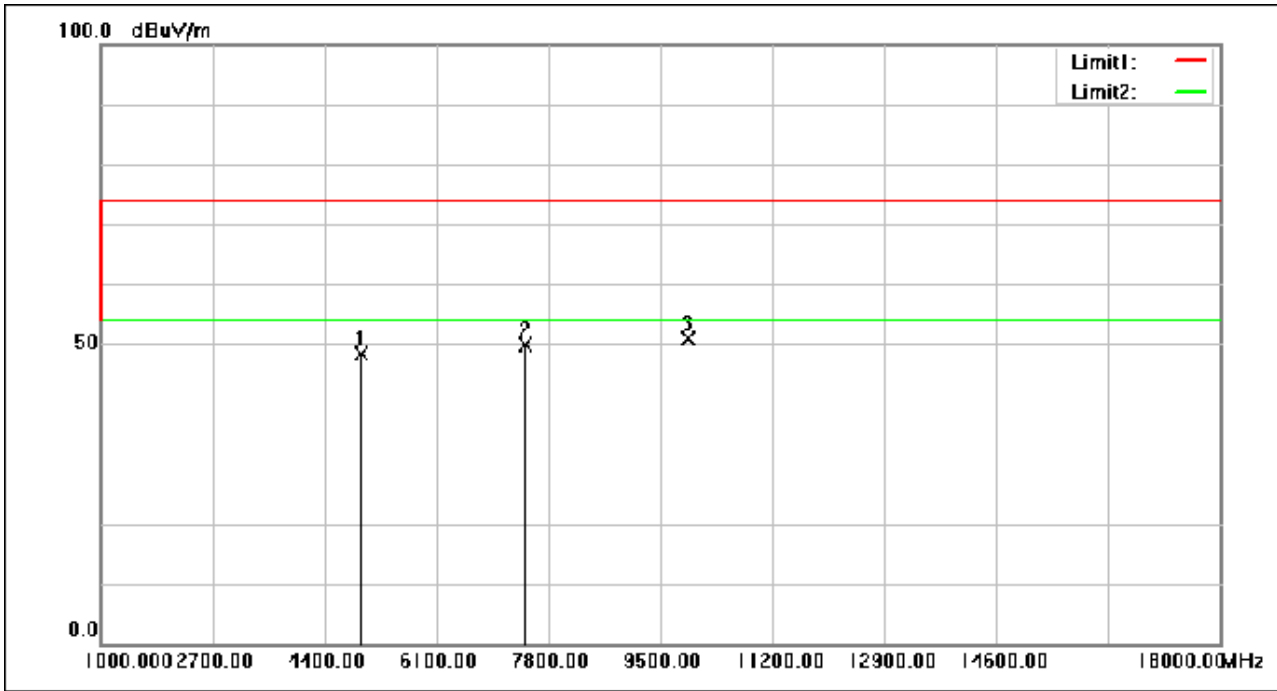

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	56.72	-8.32	48.40	74.00	-25.60	peak
2	7440.000	55.50	-5.63	49.87	74.00	-24.13	peak
3	9920.000	51.87	-0.94	50.93	74.00	-23.07	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 56 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: Low

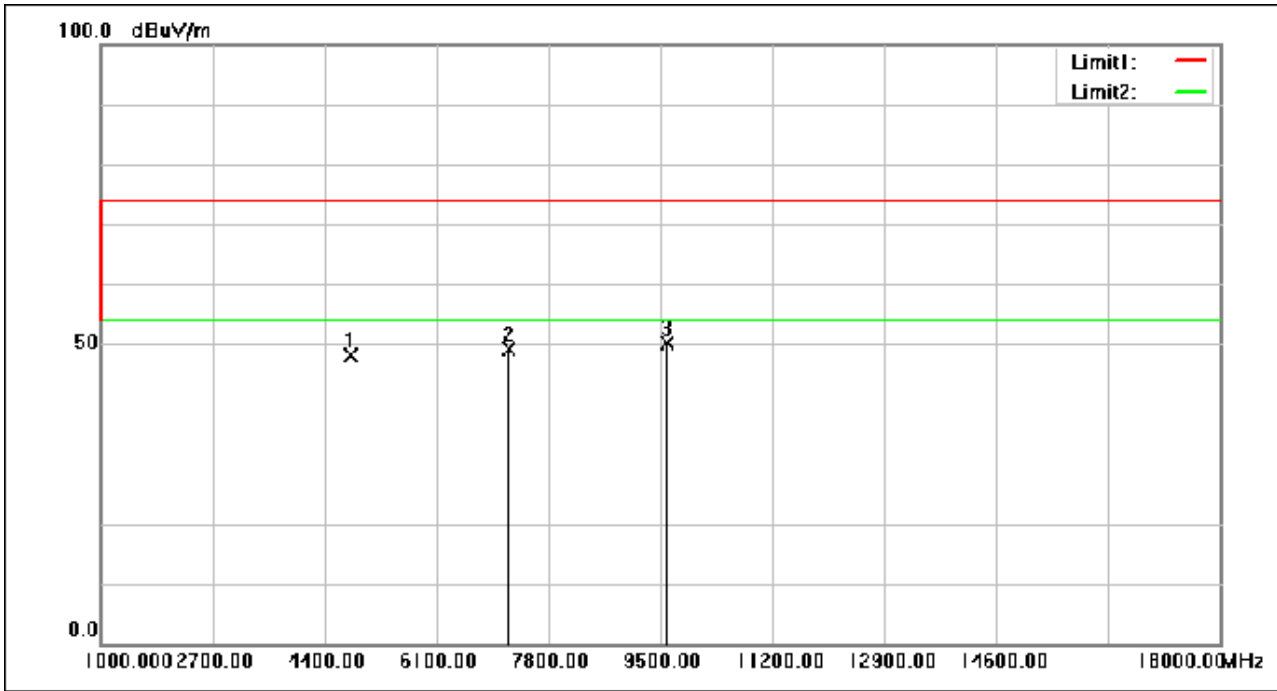

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	57.03	-8.86	48.17	74.00	-25.83	peak
2	7206.000	54.93	-5.89	49.04	74.00	-24.96	peak
3	9608.000	51.45	-1.26	50.19	74.00	-23.81	peak




# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 57 of 190

Test Mode: 00; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: Low

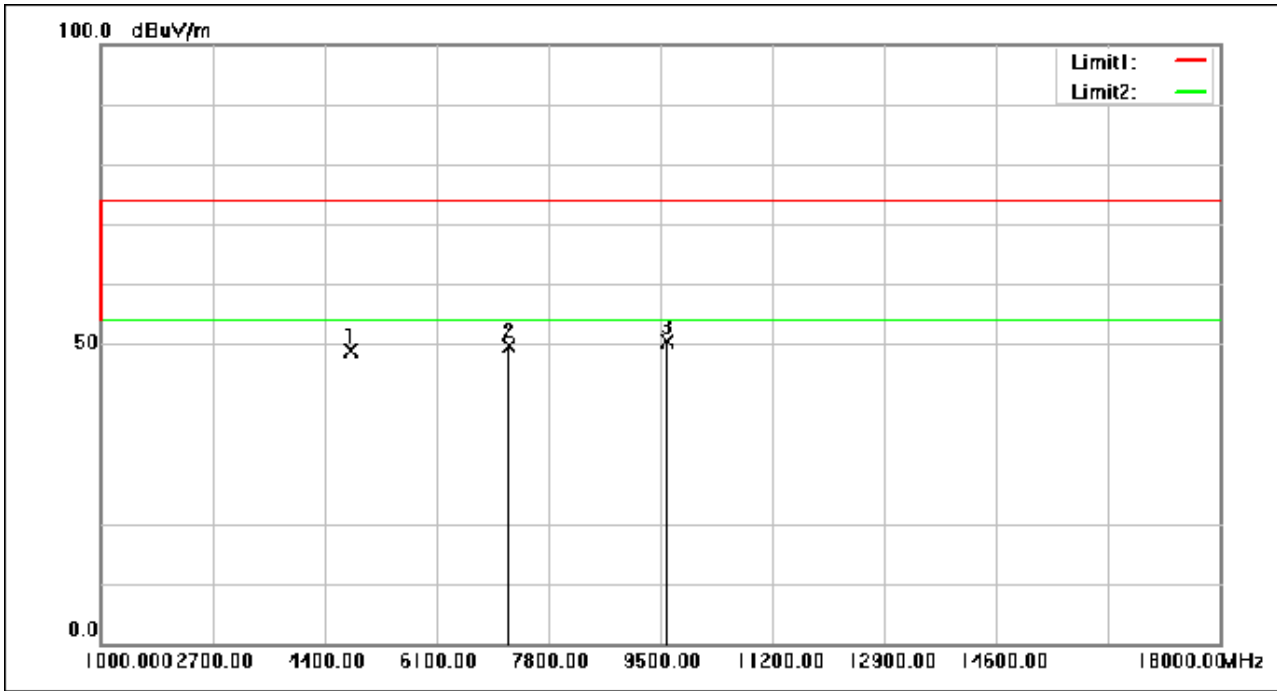

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	57.68	-8.86	48.82	74.00	-25.18	peak
2	7206.000	55.45	-5.89	49.56	74.00	-24.44	peak
3	9608.000	51.59	-1.26	50.33	74.00	-23.67	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 58 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: middle

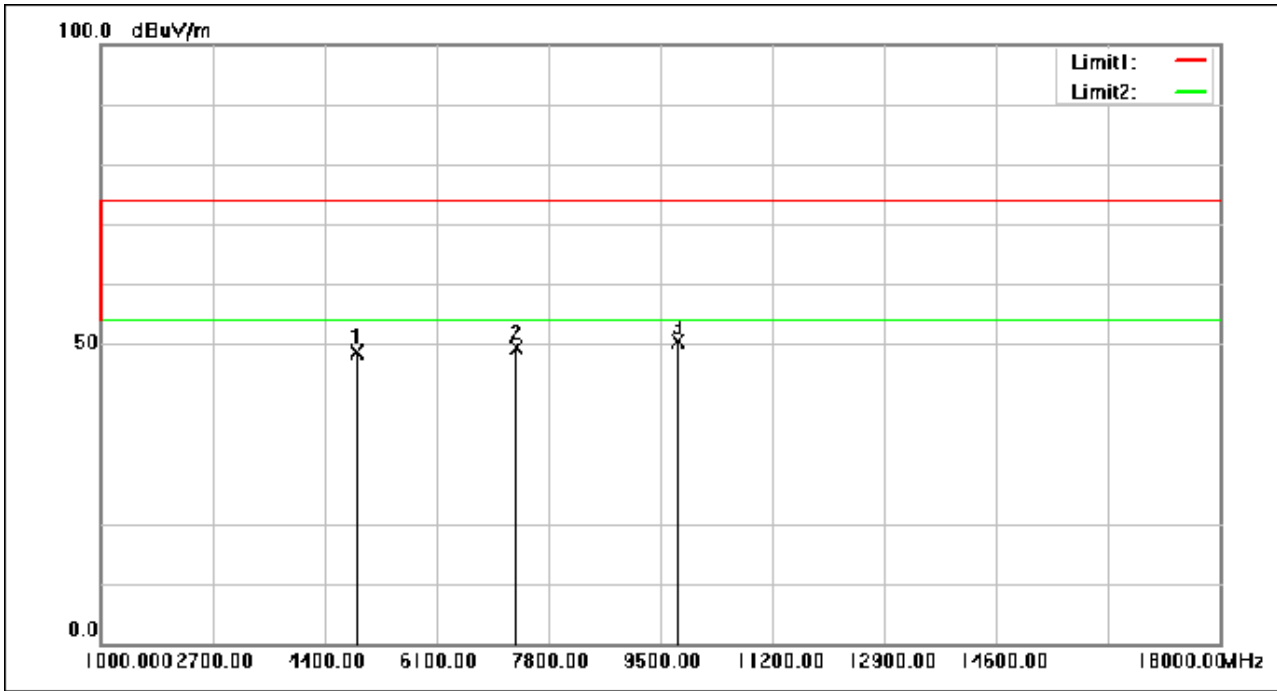

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	57.32	-8.58	48.74	74.00	-25.26	peak
2	7323.000	55.07	-5.77	49.30	74.00	-24.70	peak
3	9764.000	51.89	-1.46	50.43	74.00	-23.57	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 59 of 190

Test Mode: 00; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: middle

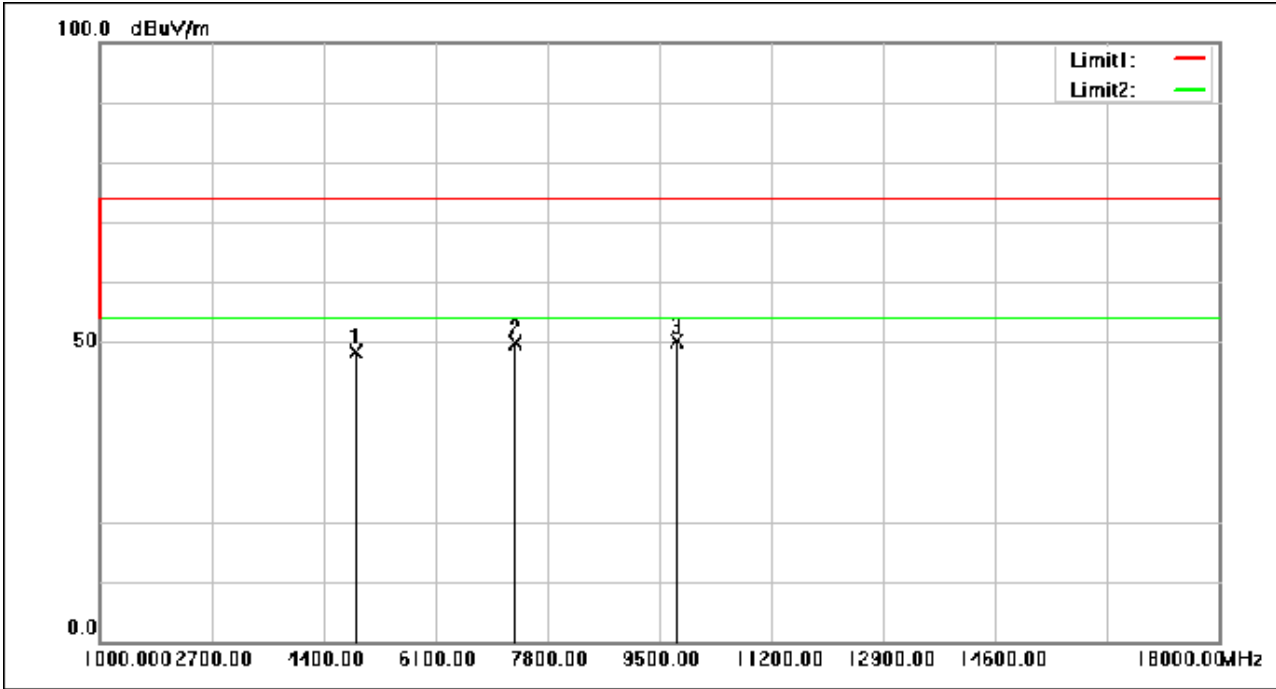

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	56.99	-8.58	48.41	74.00	-25.59	peak
2	7323.000	55.59	-5.77	49.82	74.00	-24.18	peak
3	9764.000	51.69	-1.46	50.23	74.00	-23.77	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 60 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: High

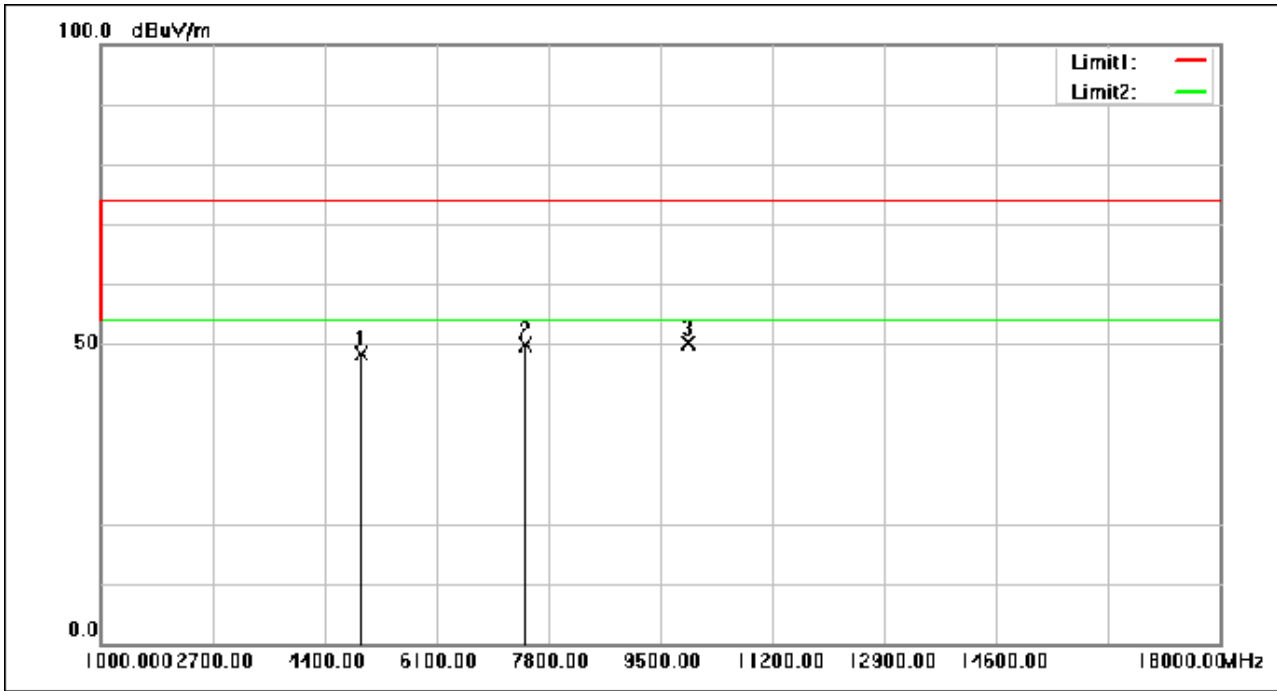

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	56.69	-8.32	48.37	74.00	-25.63	peak
2	7440.000	55.58	-5.63	49.95	74.00	-24.05	peak
3	9920.000	51.02	-0.94	50.08	74.00	-23.92	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 61 of 190

Test Mode: 00; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: High

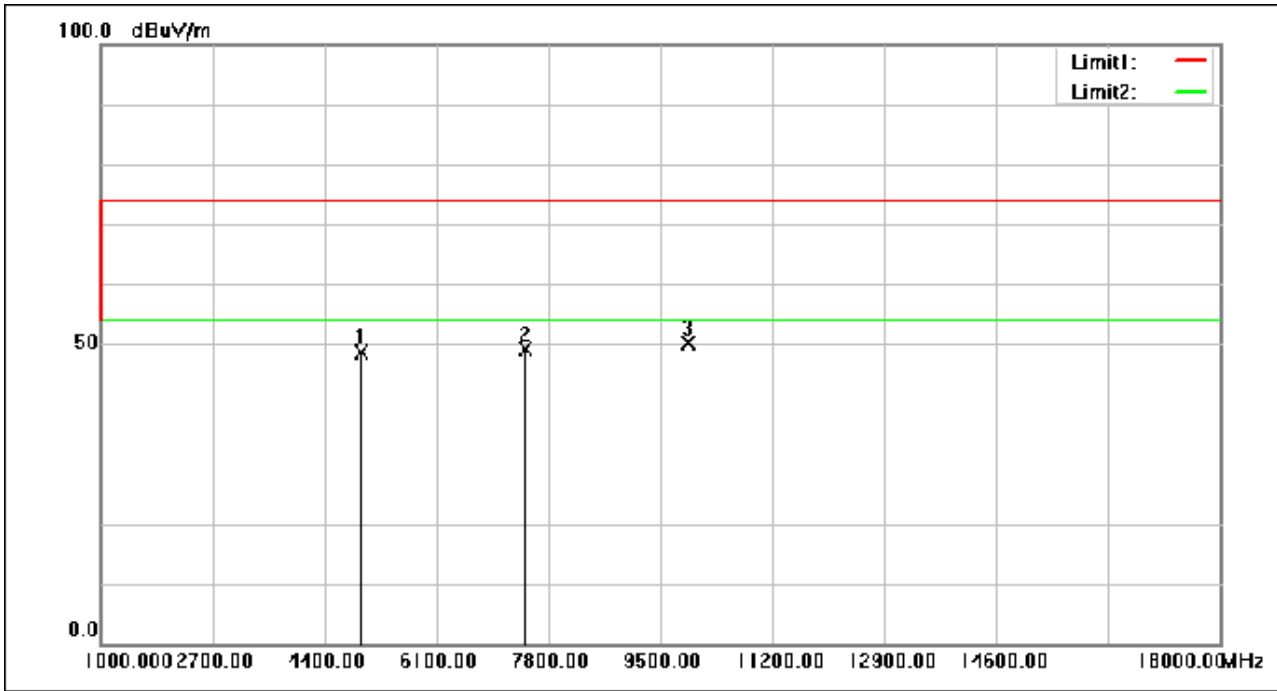

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	57.01	-8.32	48.69	74.00	-25.31	peak
2	7440.000	54.75	-5.63	49.12	74.00	-24.88	peak
3	9920.000	51.08	-0.94	50.14	74.00	-23.86	peak




**Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 62 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:8DPSK; Channel:Low

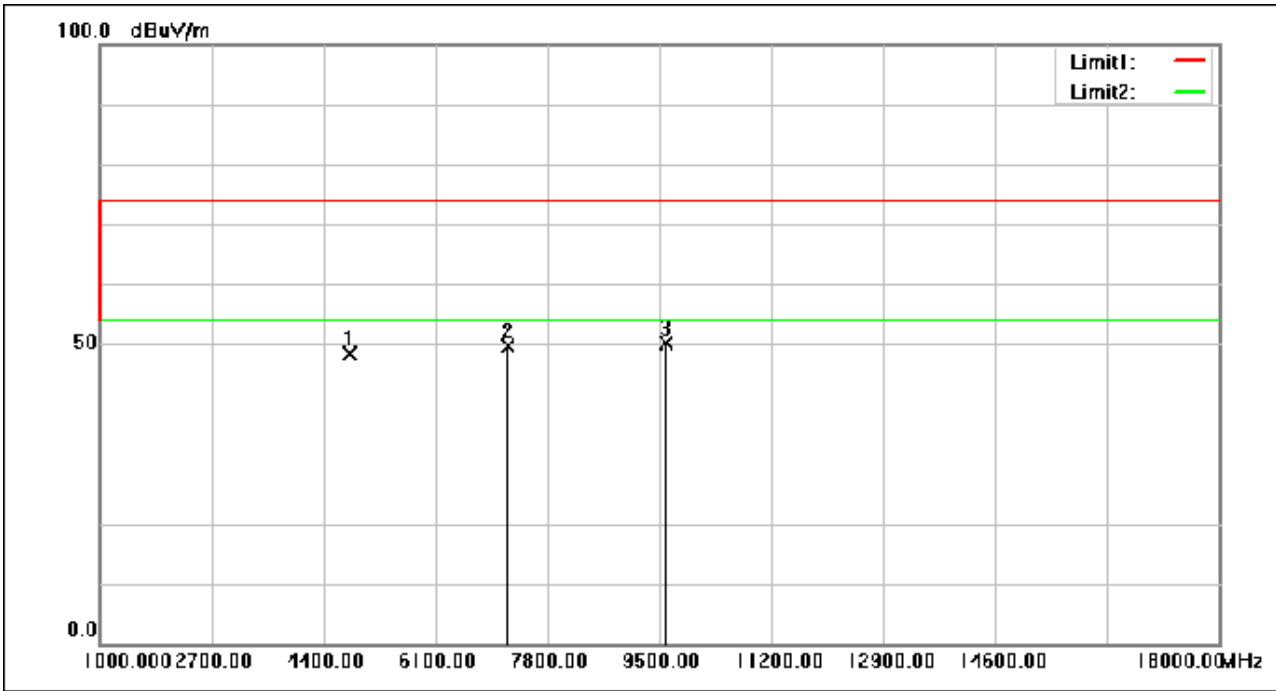

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	57.20	-8.86	48.34	74.00	-25.66	peak
2	7206.000	55.59	-5.89	49.70	74.00	-24.30	peak
3	9608.000	51.42	-1.26	50.16	74.00	-23.84	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 63 of 190

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:Low

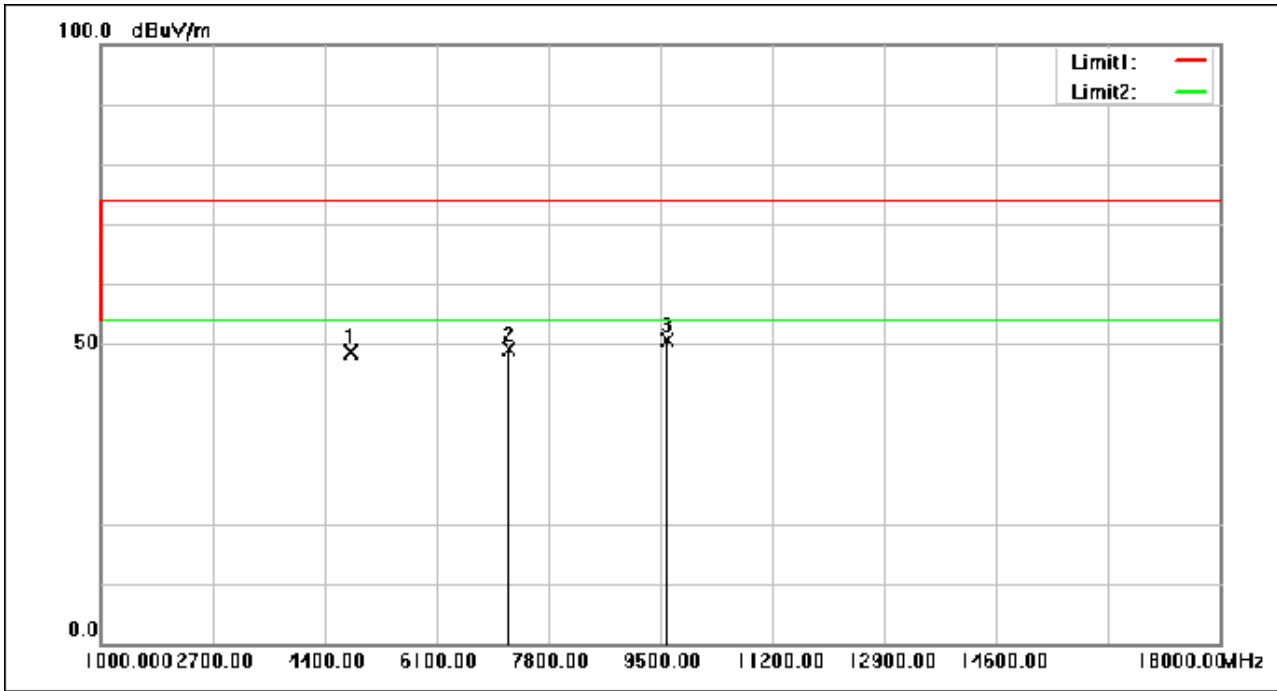

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	57.47	-8.86	48.61	74.00	-25.39	peak
2	7206.000	54.96	-5.89	49.07	74.00	-24.93	peak
3	9608.000	51.83	-1.26	50.57	74.00	-23.43	peak




**Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 64 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:8DPSK; Channel:middle

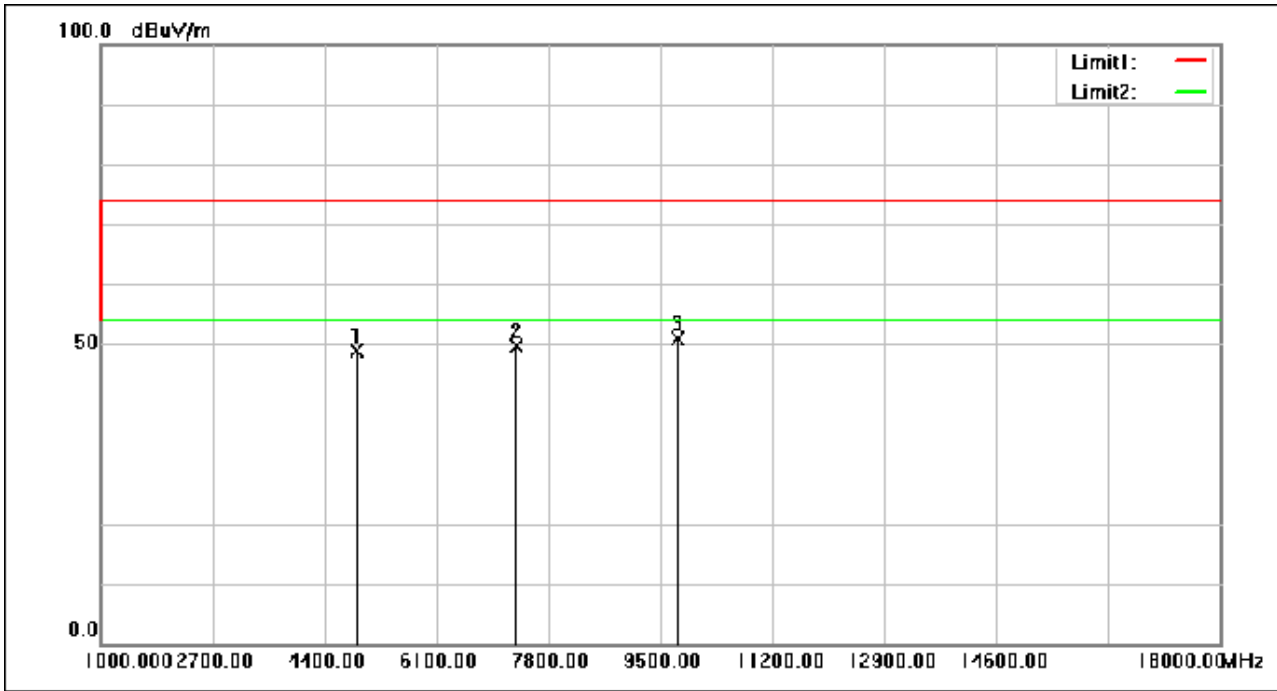

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	57.42	-8.58	48.84	74.00	-25.16	peak
2	7323.000	55.49	-5.77	49.72	74.00	-24.28	peak
3	9764.000	52.25	-1.46	50.79	74.00	-23.21	peak




# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 65 of 190

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:middle

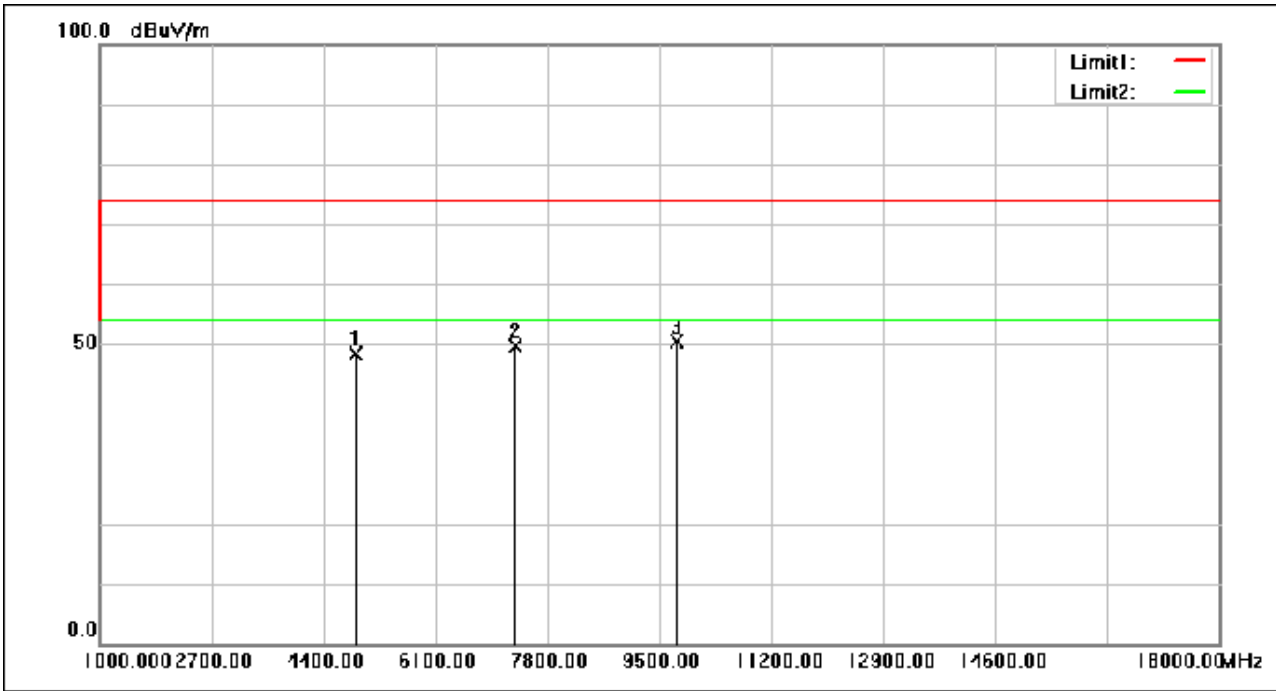

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	56.92	-8.58	48.34	74.00	-25.66	peak
2	7323.000	55.45	-5.77	49.68	74.00	-24.32	peak
3	9764.000	51.73	-1.46	50.27	74.00	-23.73	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 66 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:8DPSK; Channel:High

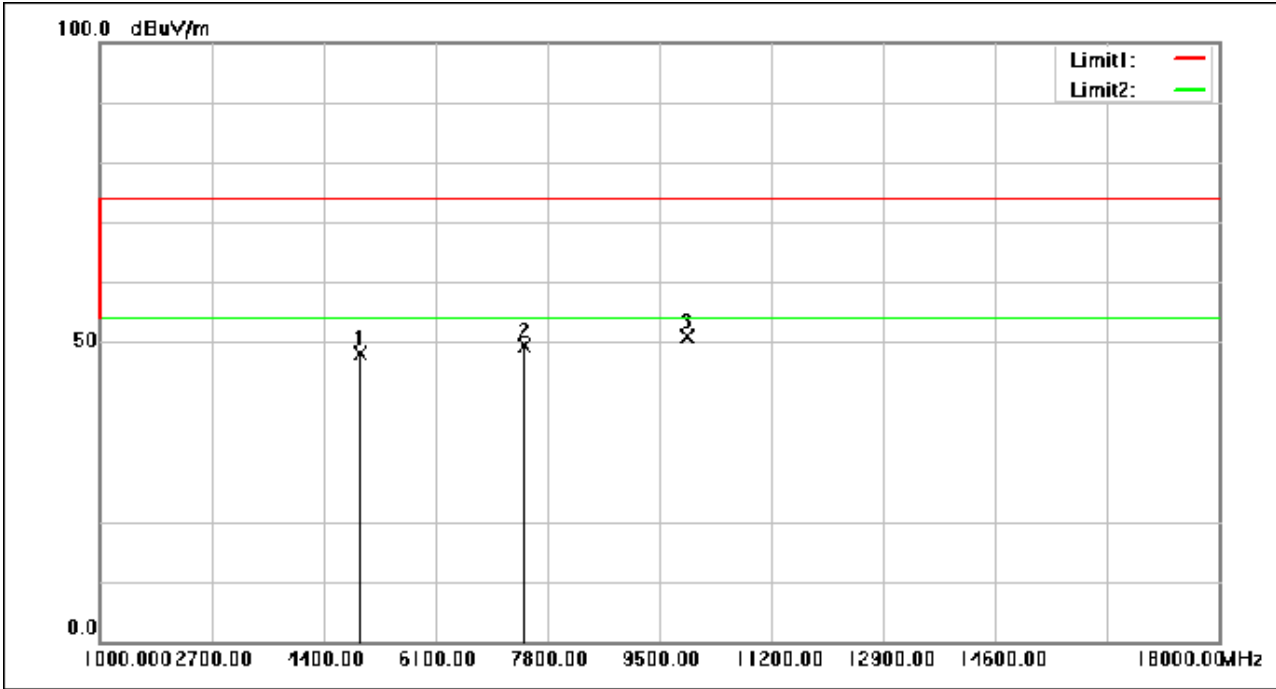

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	56.52	-8.32	48.20	74.00	-25.80	peak
2	7440.000	55.09	-5.63	49.46	74.00	-24.54	peak
3	9920.000	51.91	-0.94	50.97	74.00	-23.03	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 67 of 190

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:High

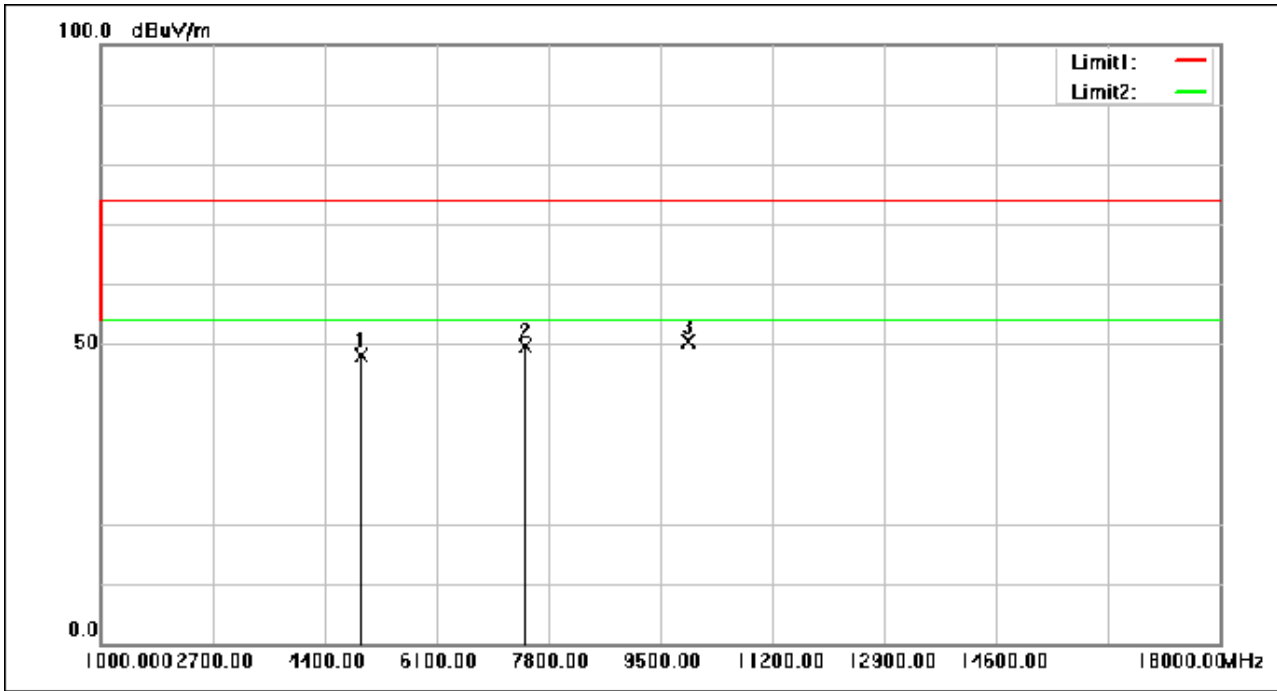

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	56.38	-8.32	48.06	74.00	-25.94	peak
2	7440.000	55.35	-5.63	49.72	74.00	-24.28	peak
3	9920.000	51.25	-0.94	50.31	74.00	-23.69	peak



**Compliance Certification Services (Kunshan) Inc.**


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 68 of 190

Right

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

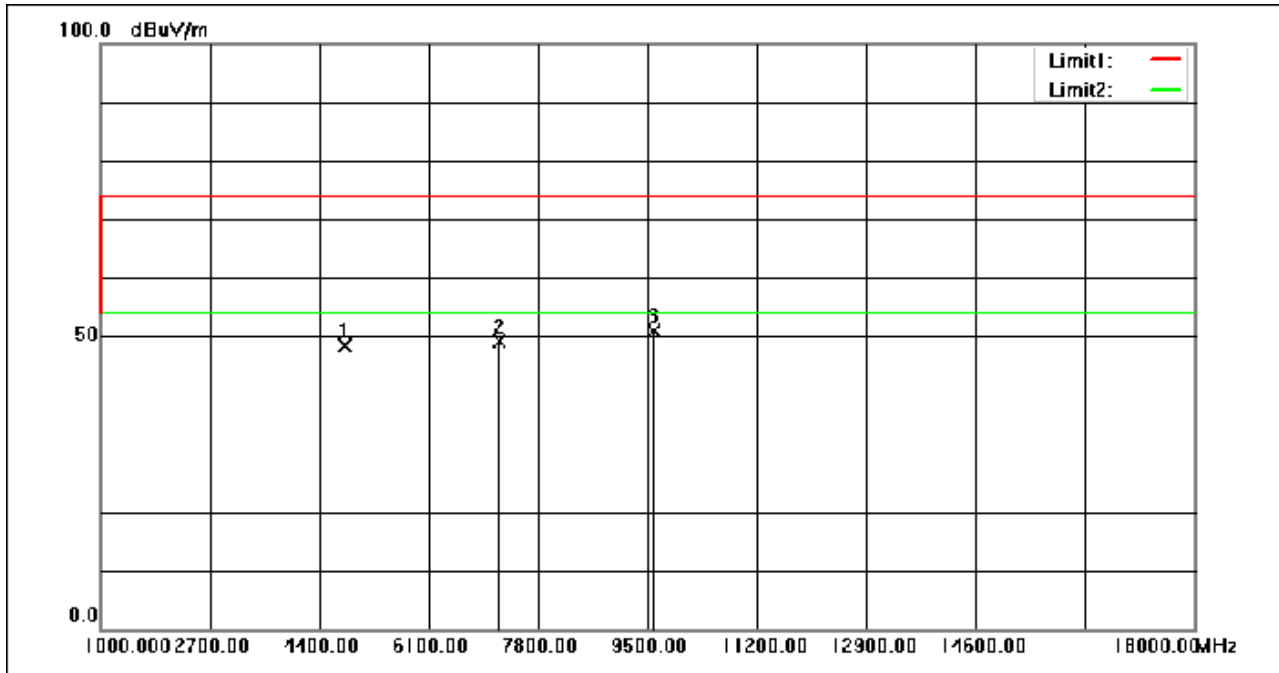

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	57.13	-8.86	48.27	74.00	-25.73	peak
2	7206.000	54.99	-5.89	49.10	74.00	-24.90	peak
3	9608.000	52.20	-1.26	50.94	74.00	-23.06	peak




**Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 69 of 190

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

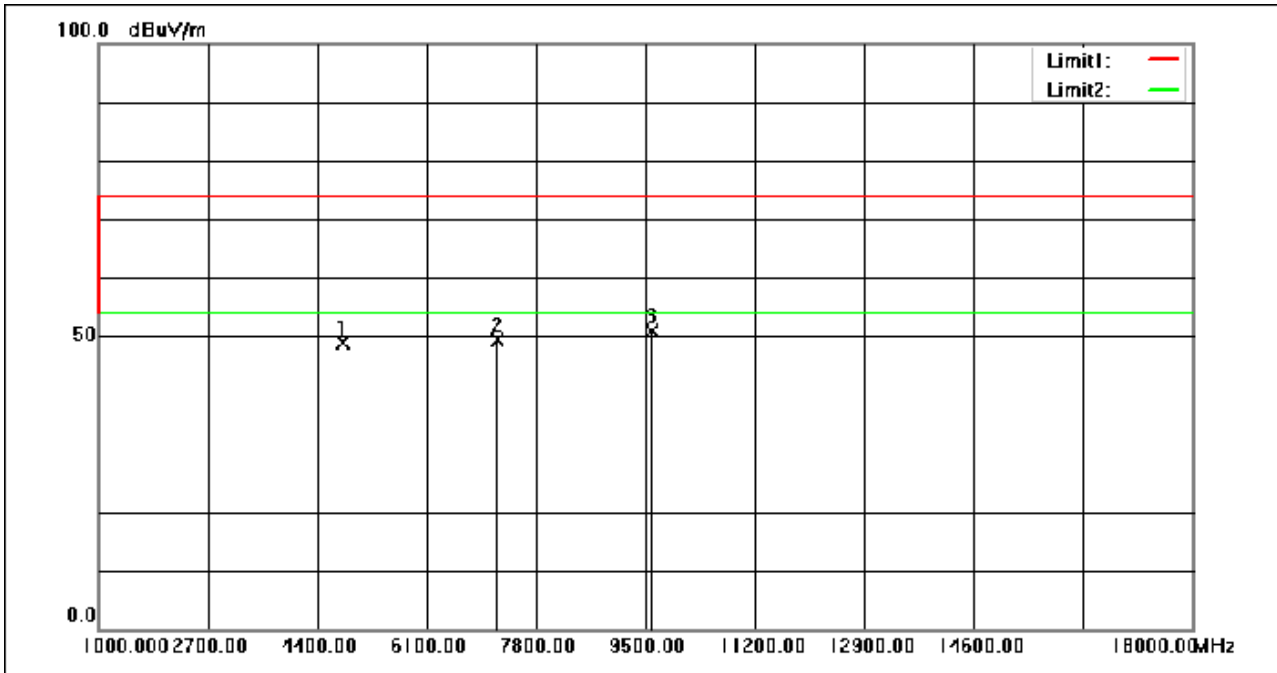

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	57.75	-8.86	48.89	74.00	-25.11	peak
2	7206.000	55.30	-5.89	49.41	74.00	-24.59	peak
3	9608.000	52.14	-1.26	50.88	74.00	-23.12	peak




# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 70 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:middle

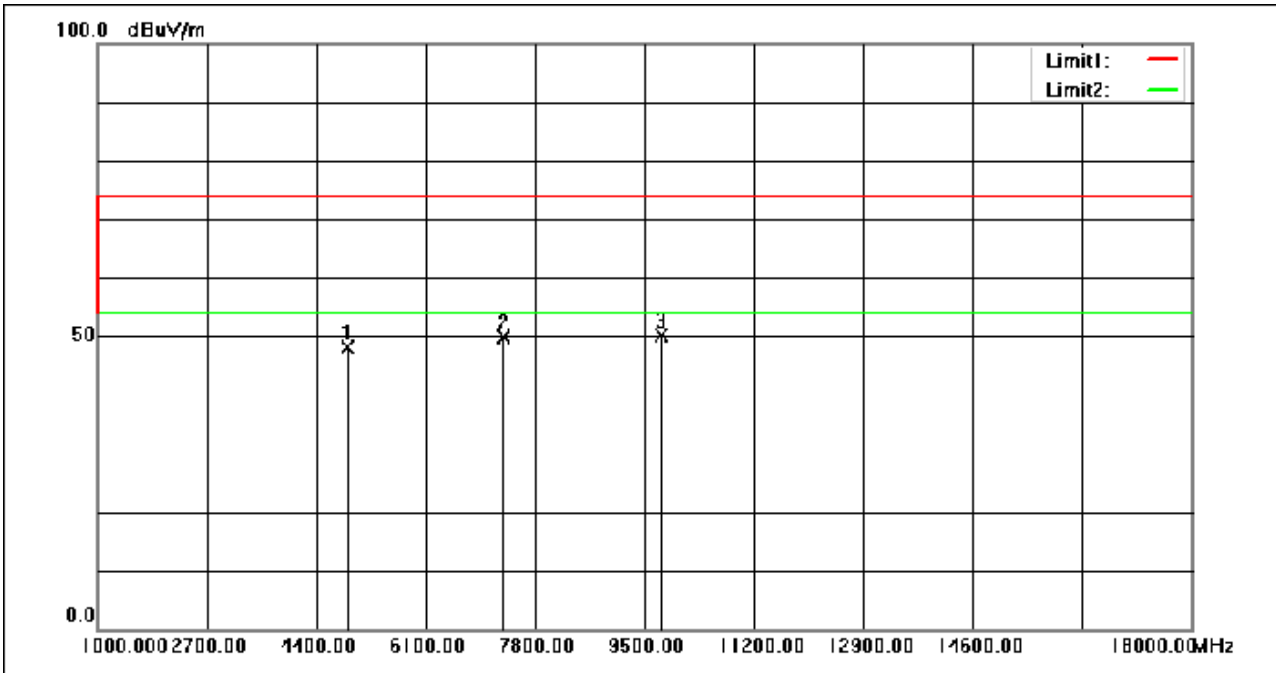

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	56.75	-8.58	48.17	74.00	-25.83	peak
2	7323.000	55.58	-5.77	49.81	74.00	-24.19	peak
3	9764.000	51.61	-1.46	50.15	74.00	-23.85	peak




# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 71 of 190

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:middle

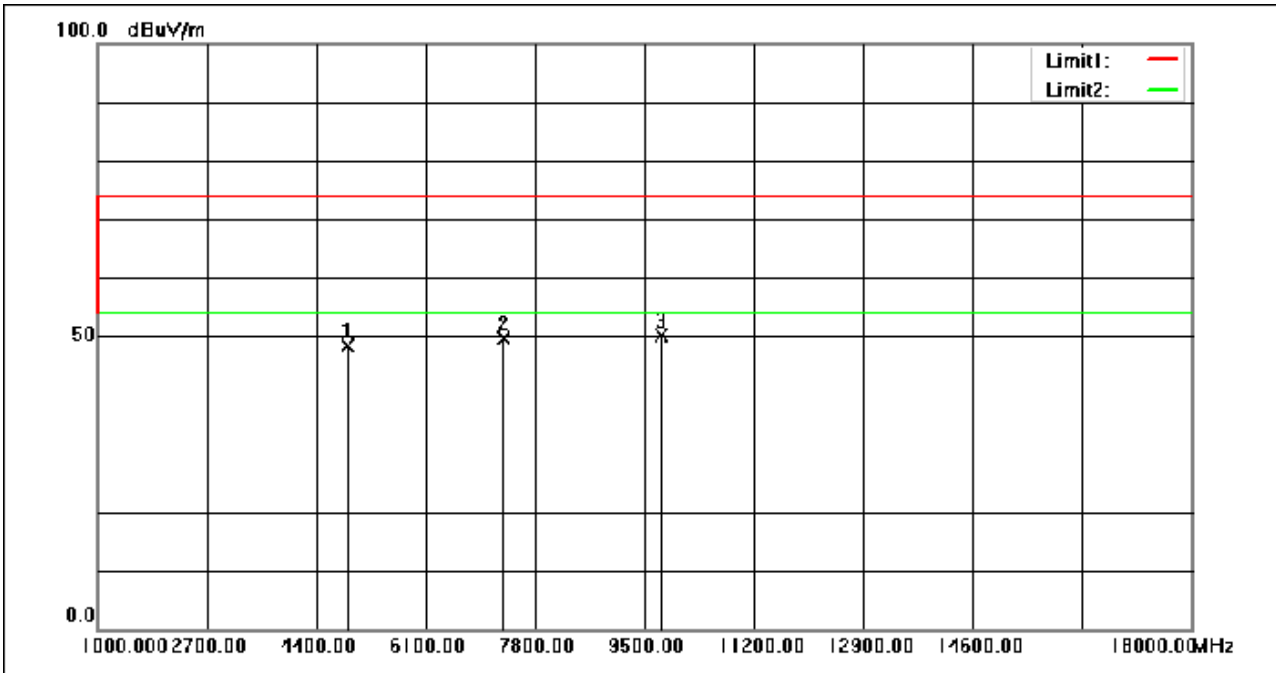

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	56.97	-8.58	48.39	74.00	-25.61	peak
2	7323.000	55.28	-5.77	49.51	74.00	-24.49	peak
3	9764.000	51.58	-1.46	50.12	74.00	-23.88	peak




# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 72 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

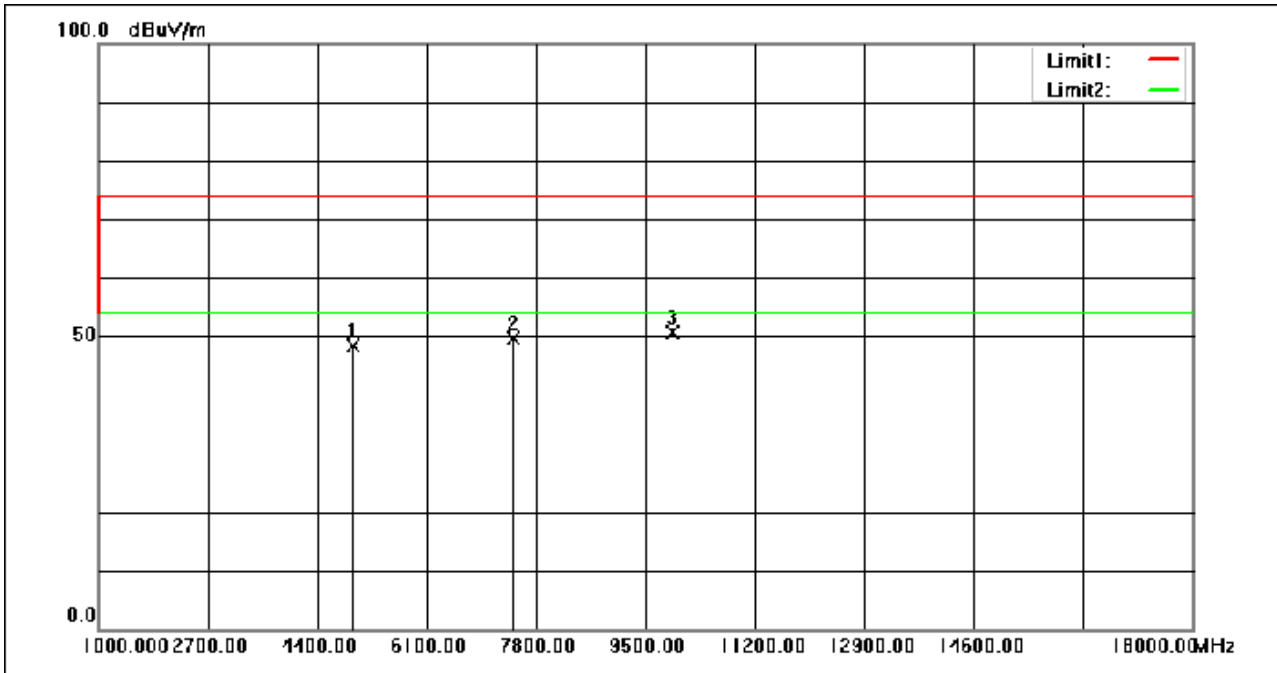

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	56.71	-8.32	48.39	74.00	-25.61	peak
2	7440.000	55.21	-5.63	49.58	74.00	-24.42	peak
3	9920.000	51.60	-0.94	50.66	74.00	-23.34	peak






# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 73 of 190

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

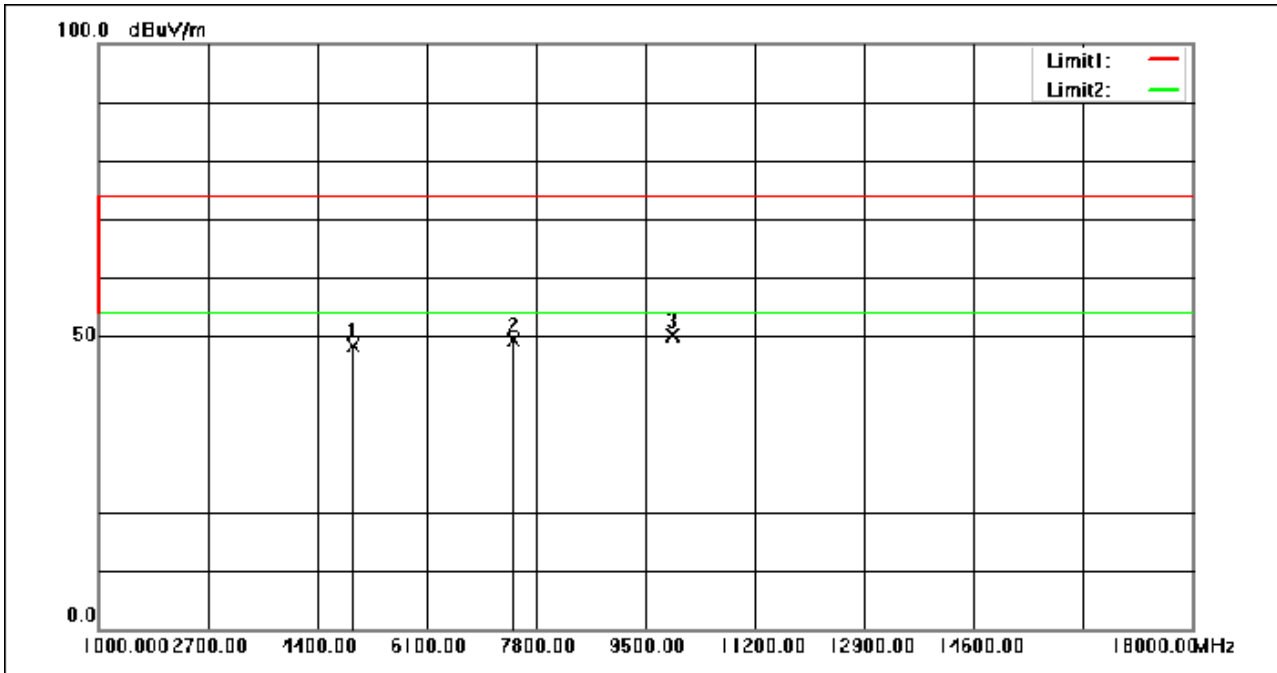

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	56.74	-8.32	48.42	74.00	-25.58	peak
2	7440.000	54.98	-5.63	49.35	74.00	-24.65	peak
3	9920.000	51.05	-0.94	50.11	74.00	-23.89	peak




**Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 74 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: Low

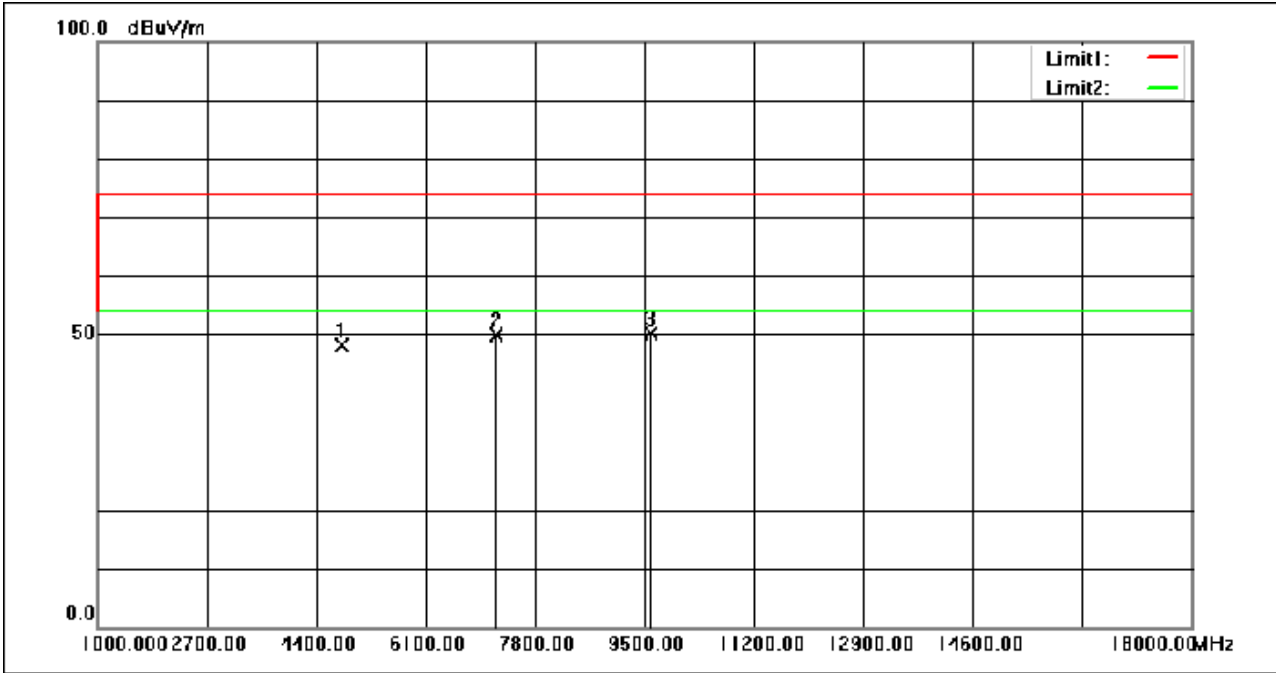

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	57.03	-8.86	48.17	74.00	-25.83	peak
2	7206.000	55.70	-5.89	49.81	74.00	-24.19	peak
3	9608.000	51.48	-1.26	50.22	74.00	-23.78	peak




**Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 75 of 190

Test Mode: 00; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: Low

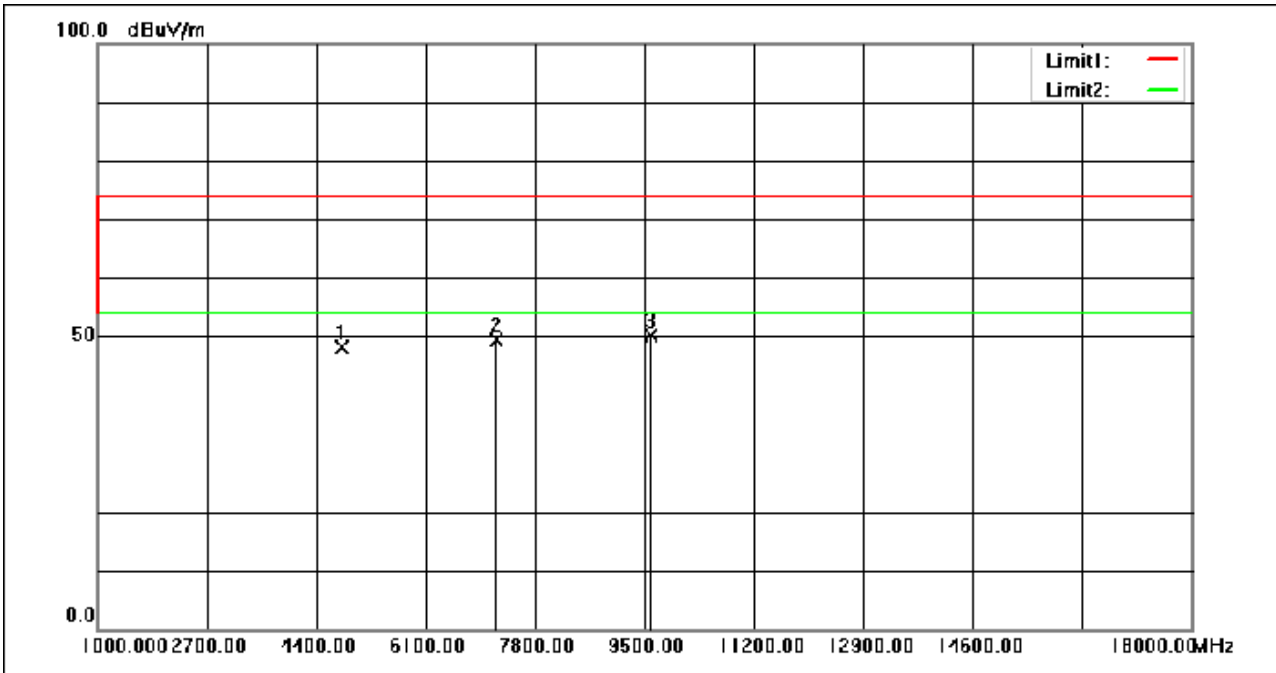

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	56.89	-8.86	48.03	74.00	-25.97	peak
2	7206.000	55.27	-5.89	49.38	74.00	-24.62	peak
3	9608.000	51.50	-1.26	50.24	74.00	-23.76	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 76 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: middle

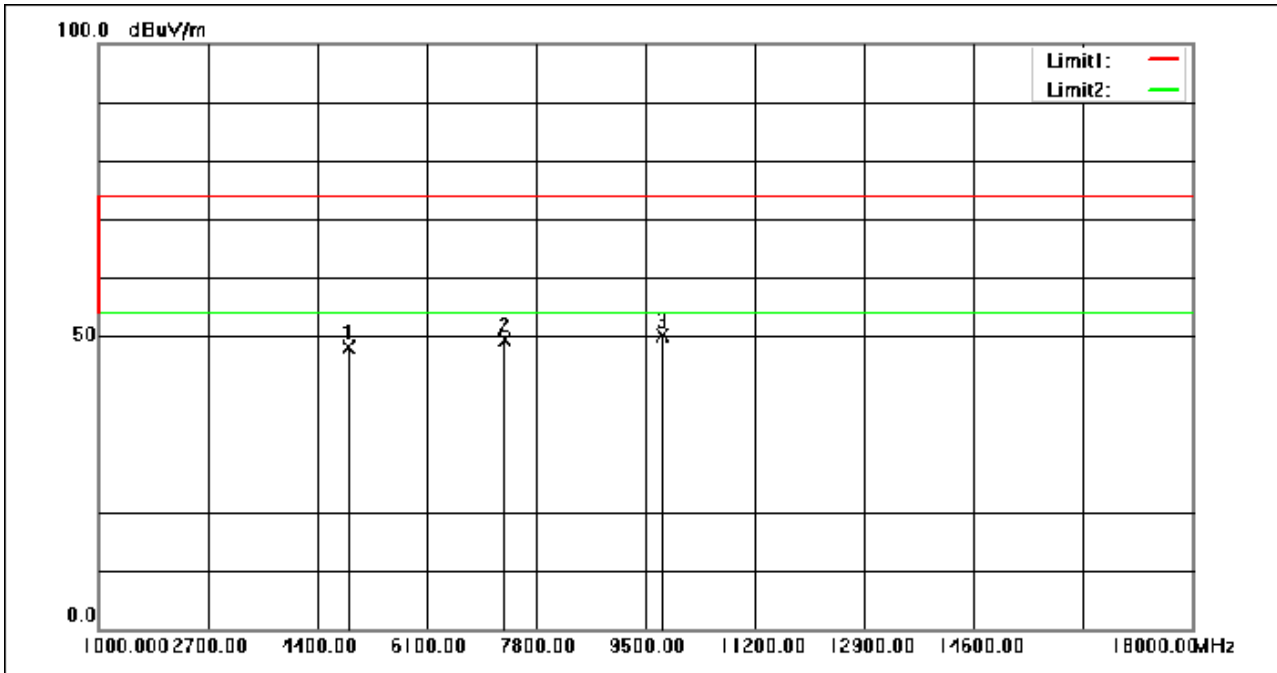

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	56.63	-8.58	48.05	74.00	-25.95	peak
2	7323.000	55.20	-5.77	49.43	74.00	-24.57	peak
3	9764.000	51.49	-1.46	50.03	74.00	-23.97	peak




# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 77 of 190

Test Mode: 00; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: middle

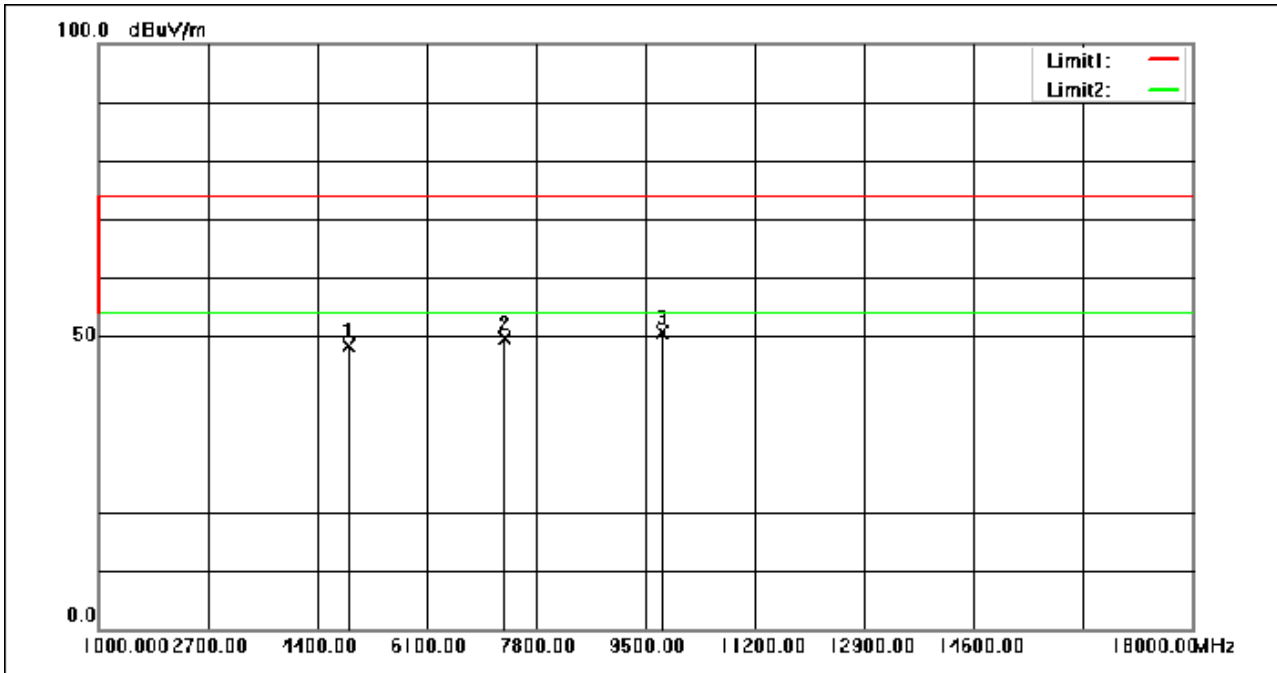

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	56.94	-8.58	48.36	74.00	-25.64	peak
2	7323.000	55.45	-5.77	49.68	74.00	-24.32	peak
3	9764.000	52.13	-1.46	50.67	74.00	-23.33	peak




**Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 78 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: High

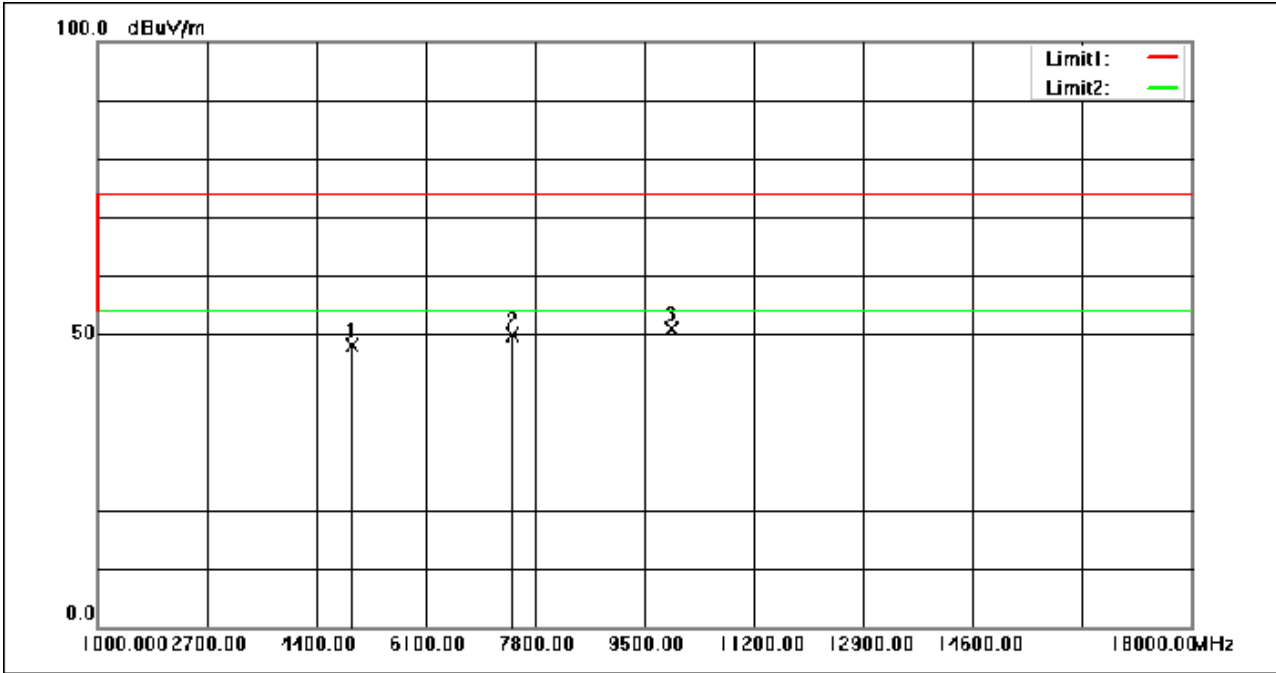

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	56.46	-8.32	48.14	74.00	-25.86	peak
2	7440.000	55.58	-5.63	49.95	74.00	-24.05	peak
3	9920.000	51.88	-0.94	50.94	74.00	-23.06	peak




# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 79 of 190

Test Mode: 00; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: High

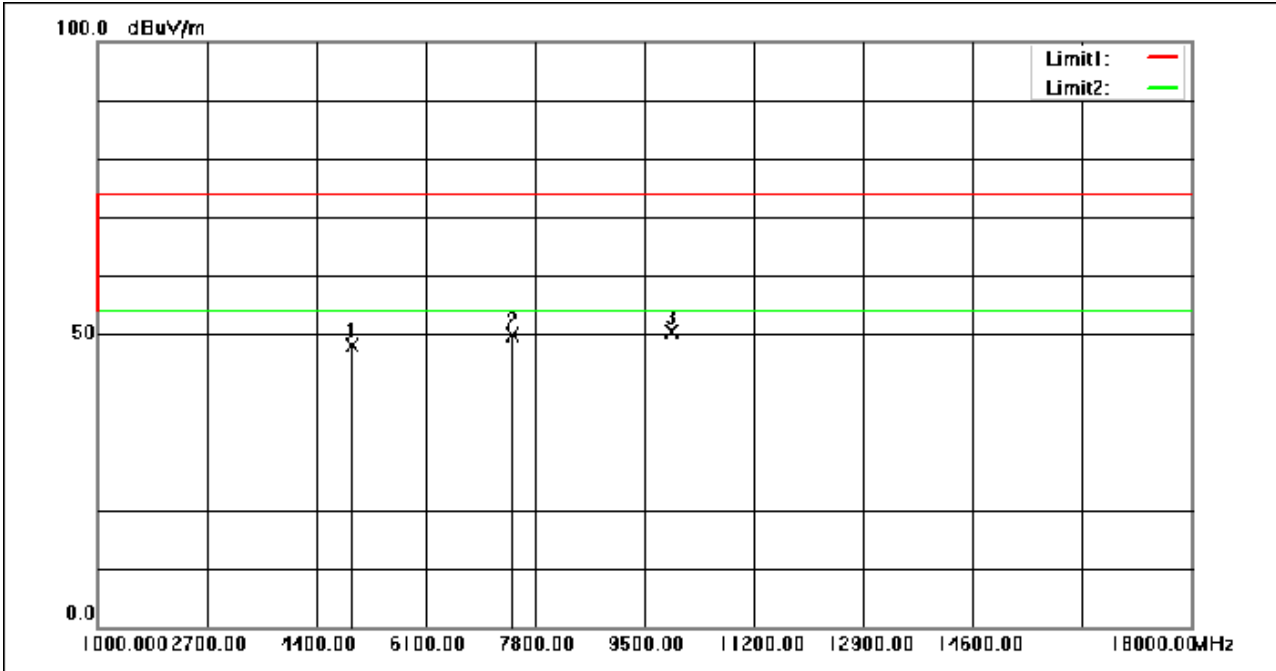

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	56.35	-8.32	48.03	74.00	-25.97	peak
2	7440.000	55.60	-5.63	49.97	74.00	-24.03	peak
3	9920.000	51.30	-0.94	50.36	74.00	-23.64	peak




**Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 80 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:8DPSK; Channel:Low

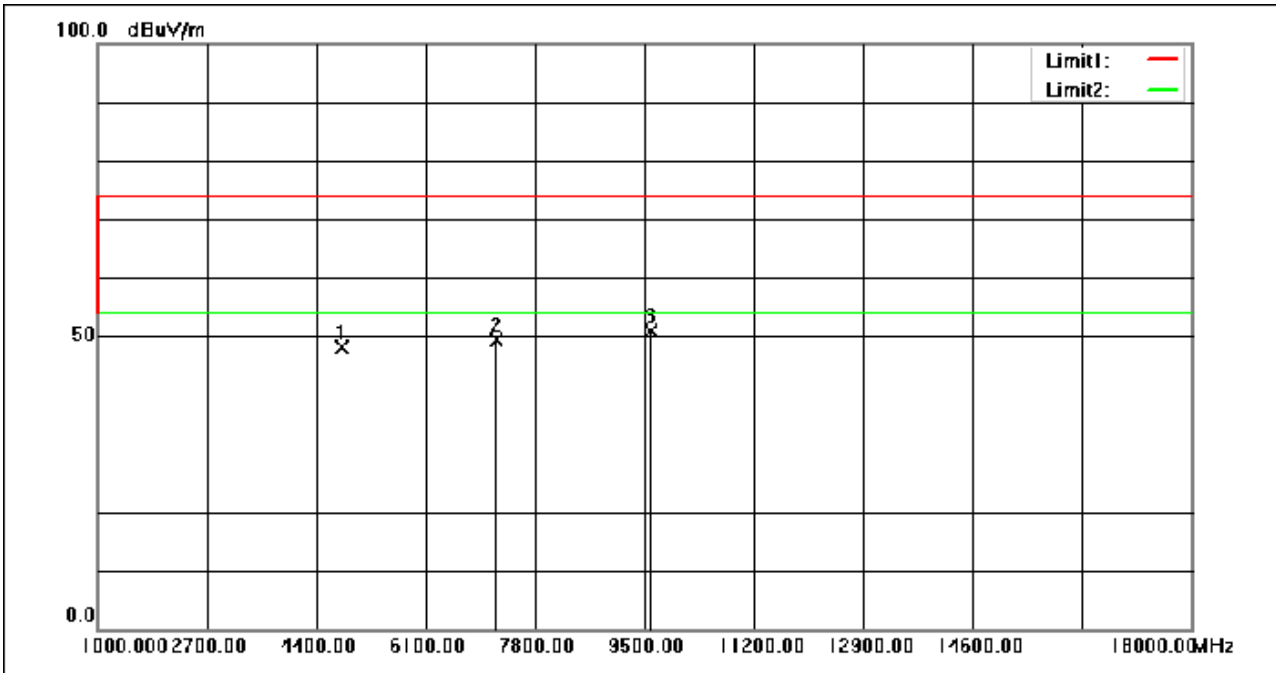

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	56.88	-8.86	48.02	74.00	-25.98	peak
2	7206.000	55.34	-5.89	49.45	74.00	-24.55	peak
3	9608.000	52.20	-1.26	50.94	74.00	-23.06	peak






**Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 81 of 190

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:Low

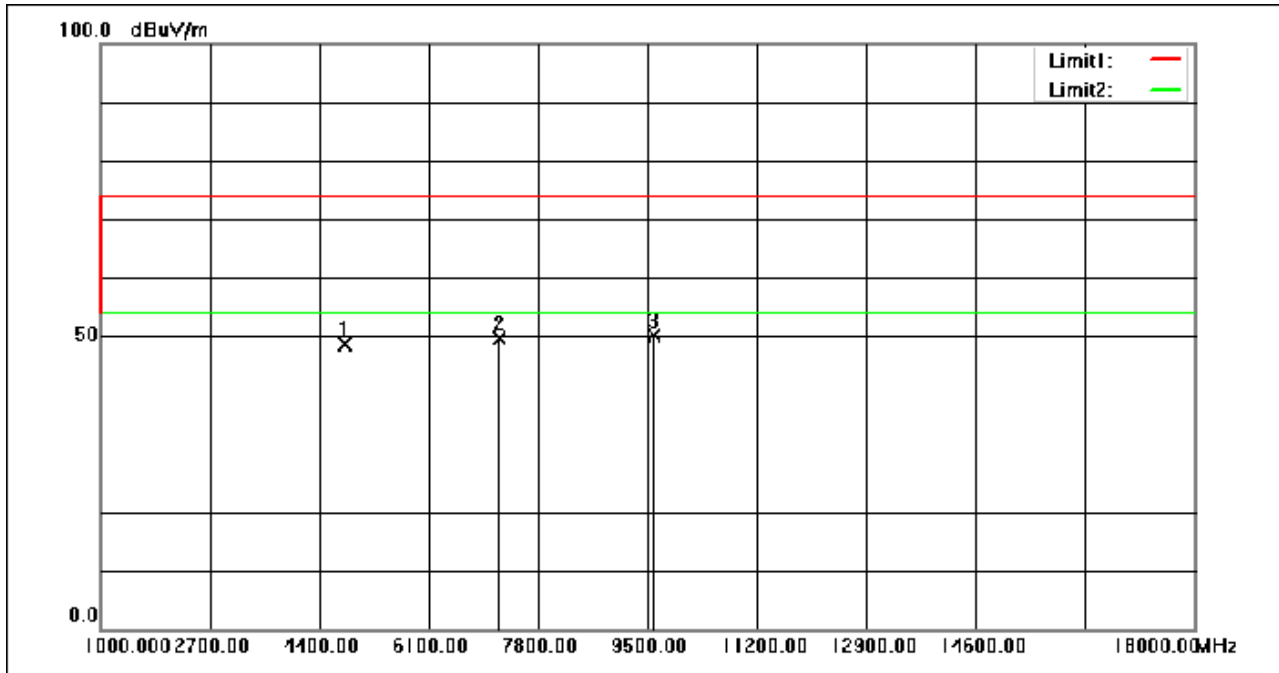

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	57.44	-8.86	48.58	74.00	-25.42	peak
2	7206.000	55.48	-5.89	49.59	74.00	-24.41	peak
3	9608.000	51.33	-1.26	50.07	74.00	-23.93	peak




**Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 82 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:8DPSK; Channel:middle

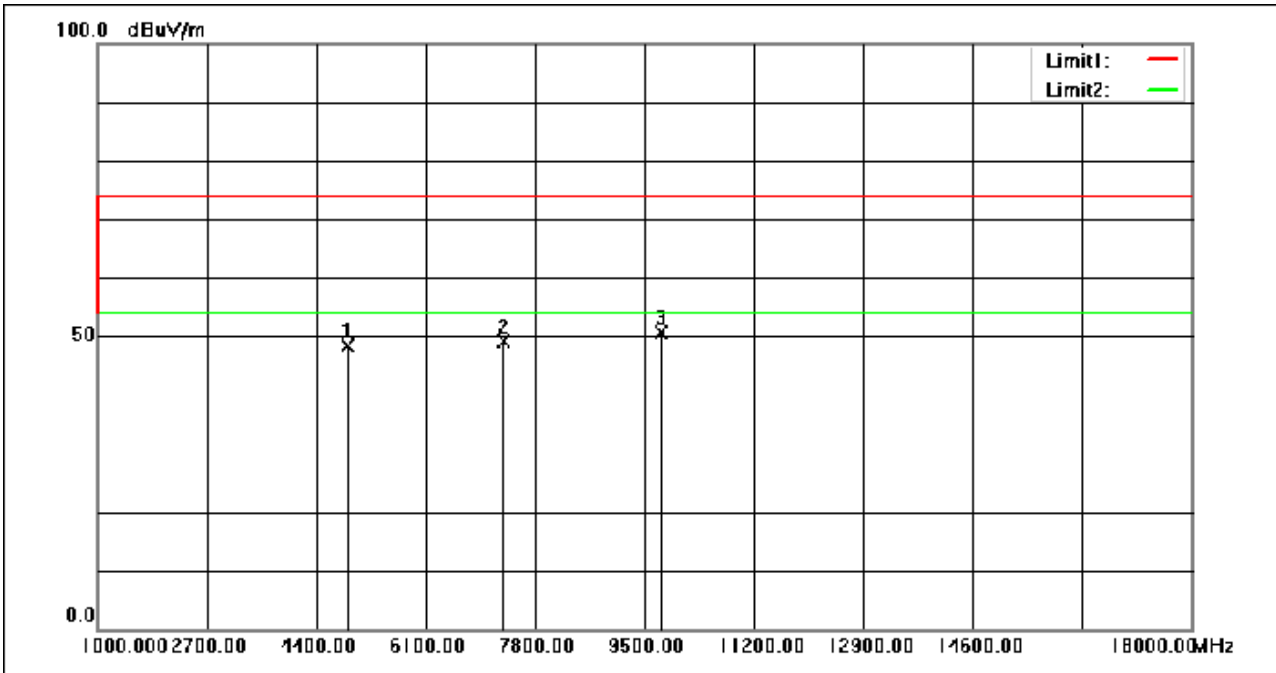

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	56.92	-8.58	48.34	74.00	-25.66	peak
2	7323.000	54.89	-5.77	49.12	74.00	-24.88	peak
3	9764.000	52.14	-1.46	50.68	74.00	-23.32	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 83 of 190

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:middle

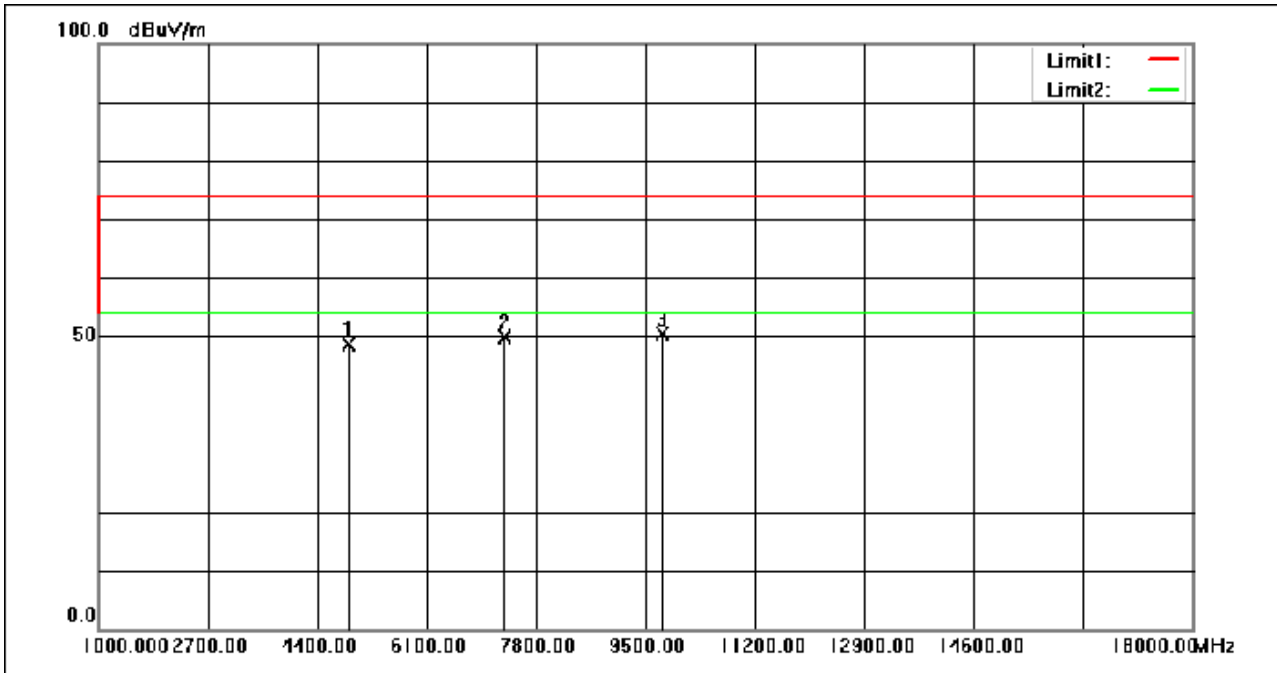

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	57.11	-8.58	48.53	74.00	-25.47	peak
2	7323.000	55.61	-5.77	49.84	74.00	-24.16	peak
3	9764.000	51.87	-1.46	50.41	74.00	-23.59	peak




**Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 84 of 190

Test Mode: 00; Polarity: Horizontal; Modulation:8DPSK; Channel:High

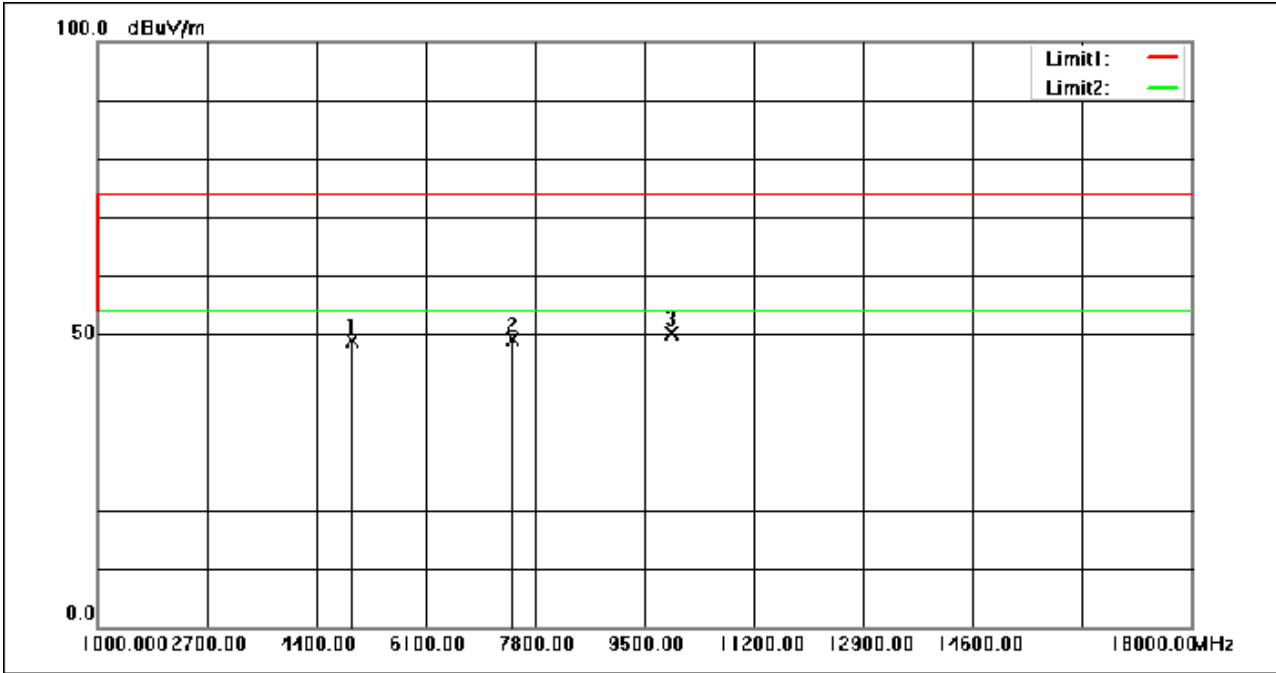

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	57.16	-8.32	48.84	74.00	-25.16	peak
2	7440.000	54.72	-5.63	49.09	74.00	-24.91	peak
3	9920.000	51.00	-0.94	50.06	74.00	-23.94	peak


# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 85 of 190

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:High

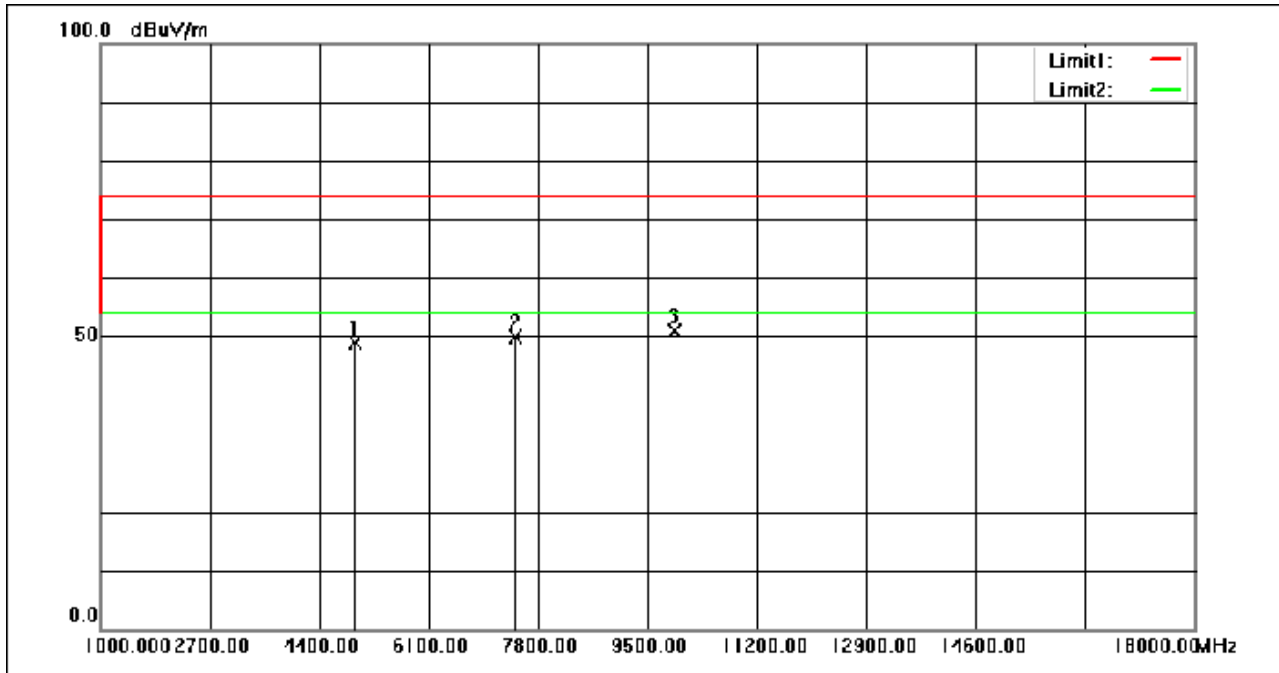

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	57.23	-8.32	48.91	74.00	-25.09	peak
2	7440.000	55.40	-5.63	49.77	74.00	-24.23	peak
3	9920.000	51.85	-0.94	50.91	74.00	-23.09	peak



## **Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 86 of 190

### **8 Test Setup Photo**

Refer to Appendix - Test Setup Photo for KSCR2306001097AT

### **9 EUT Constructional Details (EUT Photos)**

Refer to Appendix - Photographs of EUT Constructional Details for KSCR2306001097AT

## 10 Appendix

### Left

Channel	DH	2DH	3DH
	Ant 1	Ant 1	Ant 1
0	63	63	63
39	63	63	63
78	63	63	63


### 1. Bandwidth

#### 1.1 OBW

##### 1.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.888	/	Pass
		2441	DH5	1	0.890	/	Pass
		2480	DH5	1	0.890	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.157	/	Pass
		2441	2DH5	1	1.155	/	Pass
		2480	2DH5	1	1.160	/	Pass
8DPSK	SISO	2402	3DH5	1	1.164	/	Pass
		2441	3DH5	1	1.164	/	Pass
		2480	3DH5	1	1.165	/	Pass

1.1.2 Test Graph

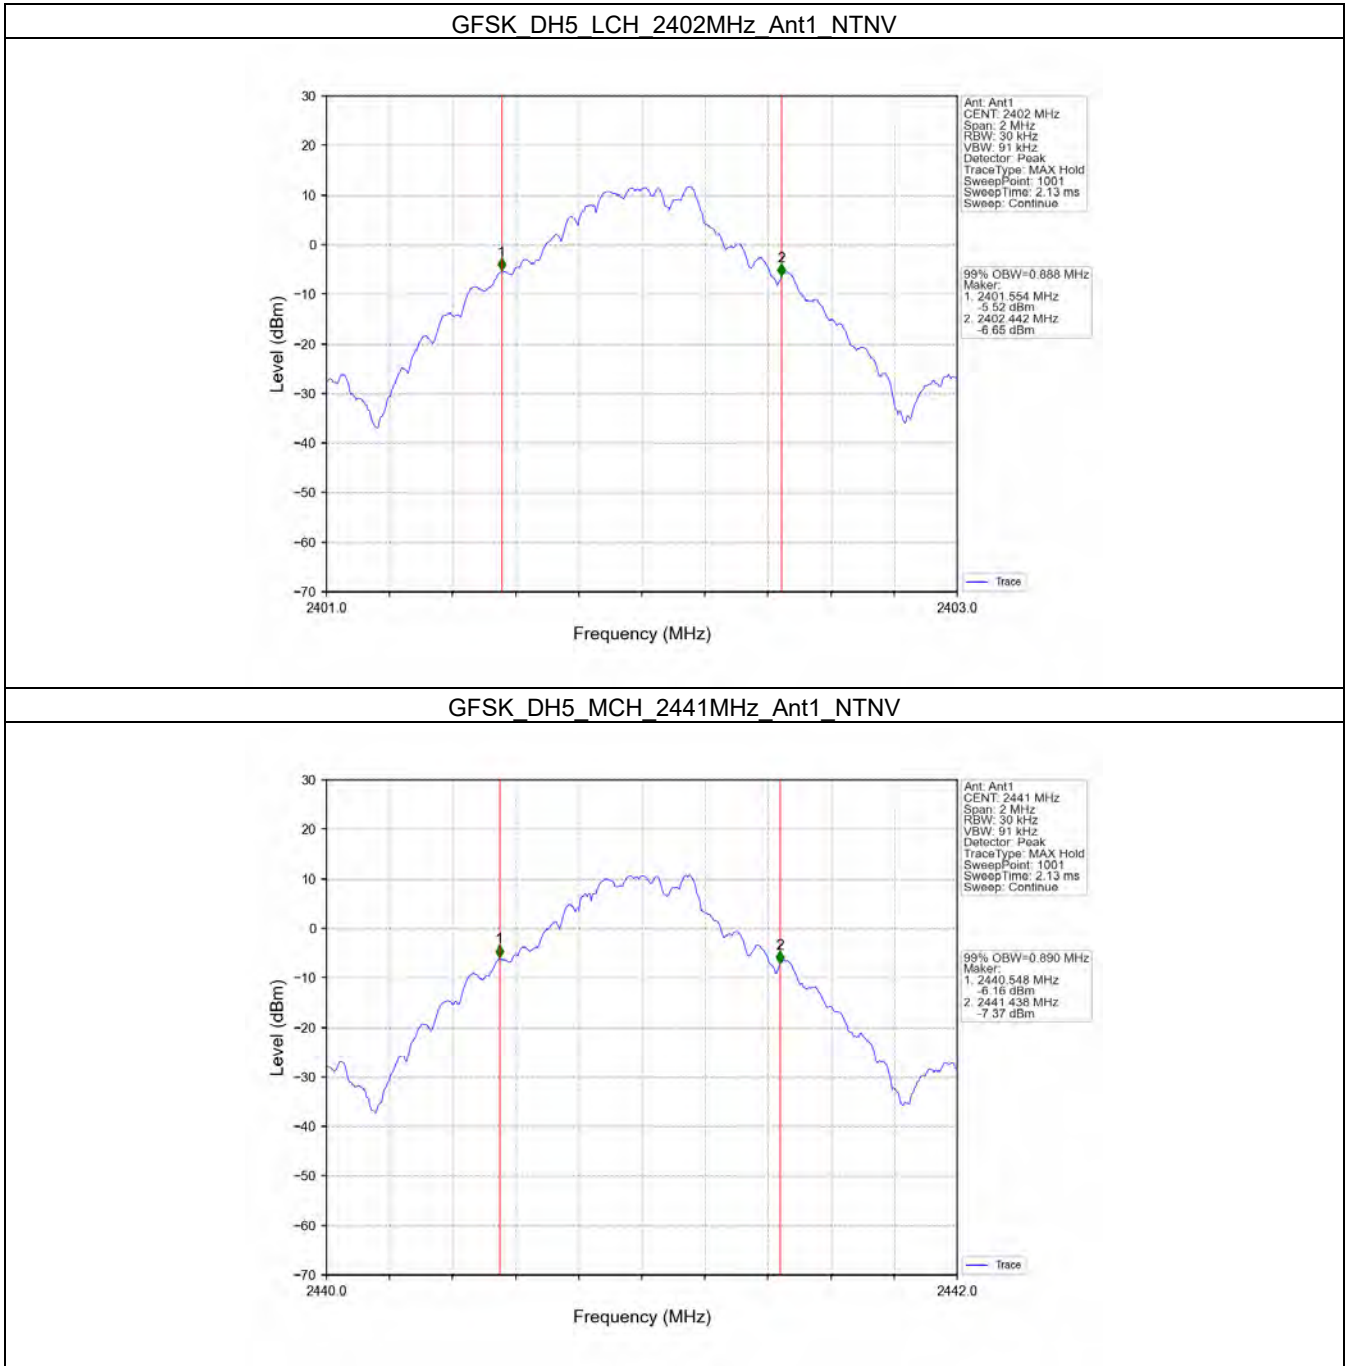





GFSK DH5 HCH 2480MHz Ant1 NTV

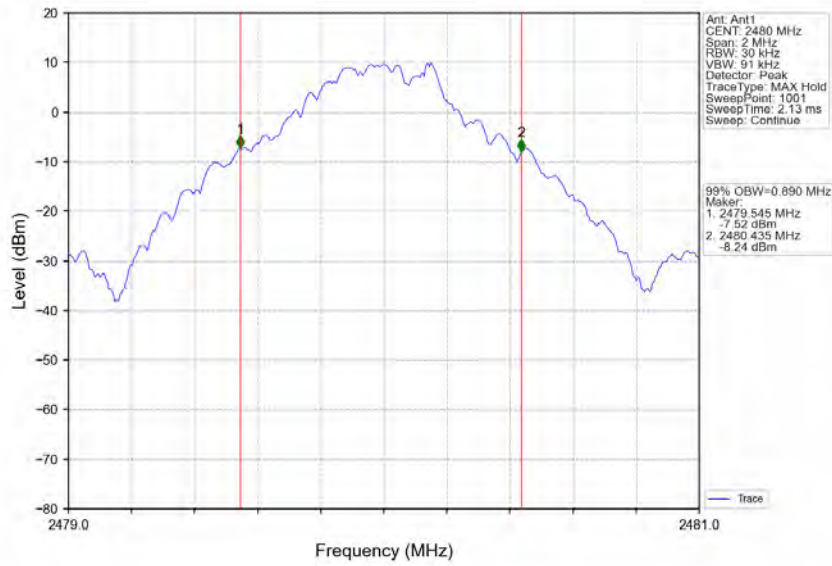


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTV

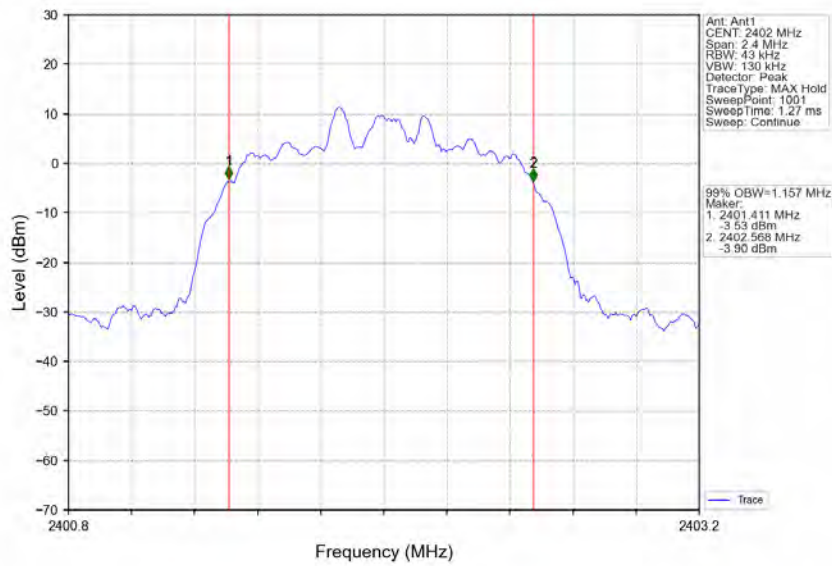


Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTN

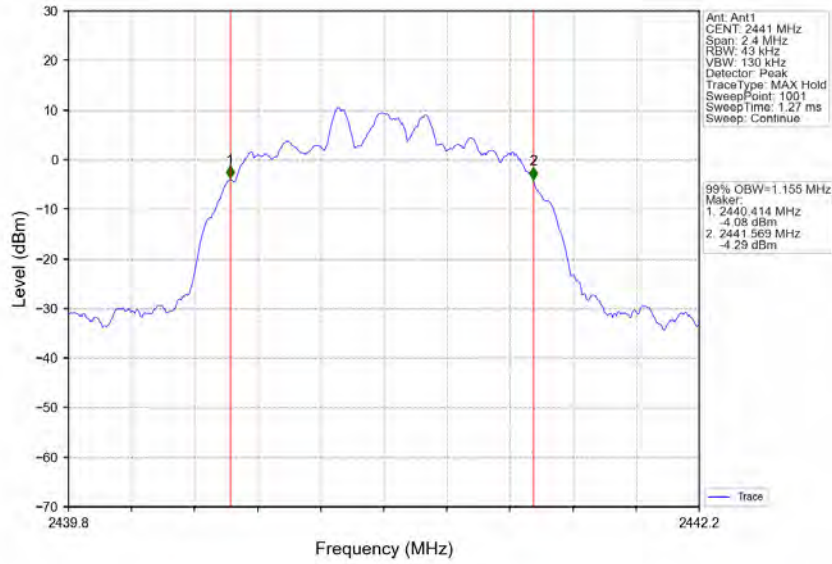


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTN

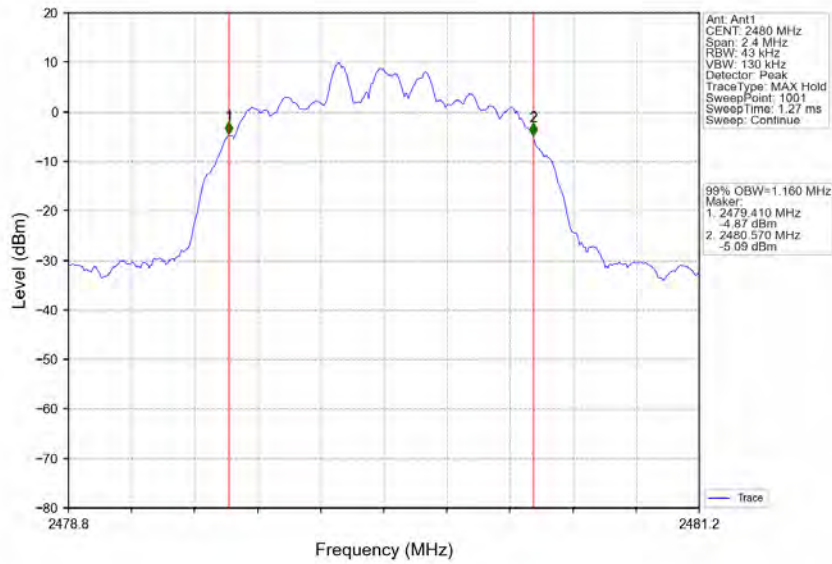


8DPSK 3DH5 LCH 2402MHz Ant1 NTV

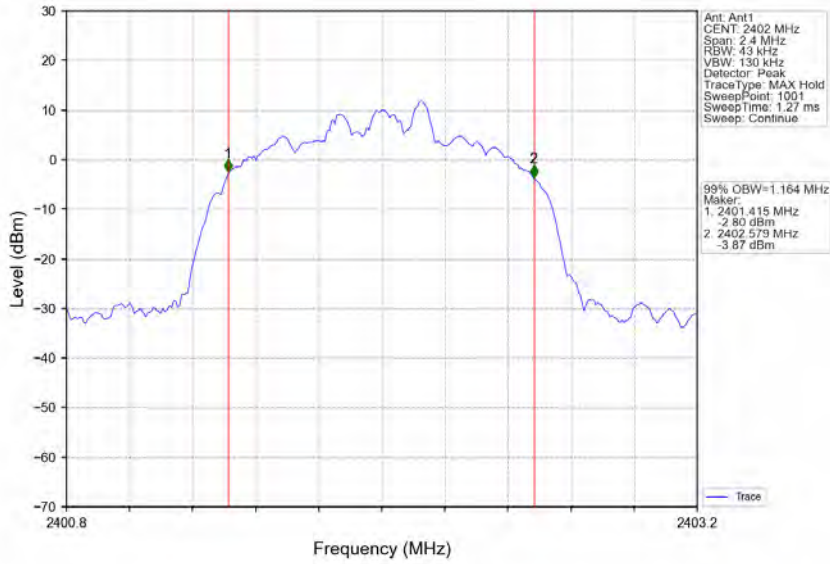

8DPSK 3DH5 MCH 2441MHz Ant1 NTV

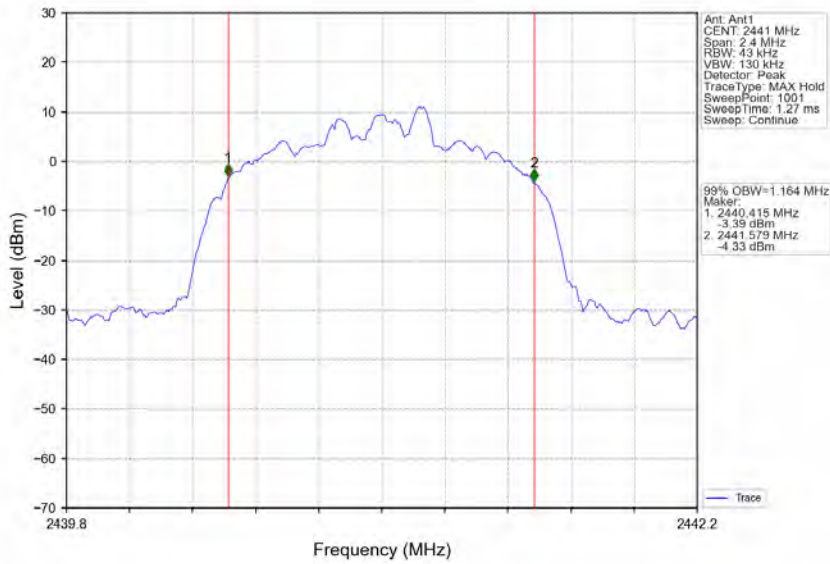

8DPSK 3DH5 HCH 2480MHz Ant1 NTV

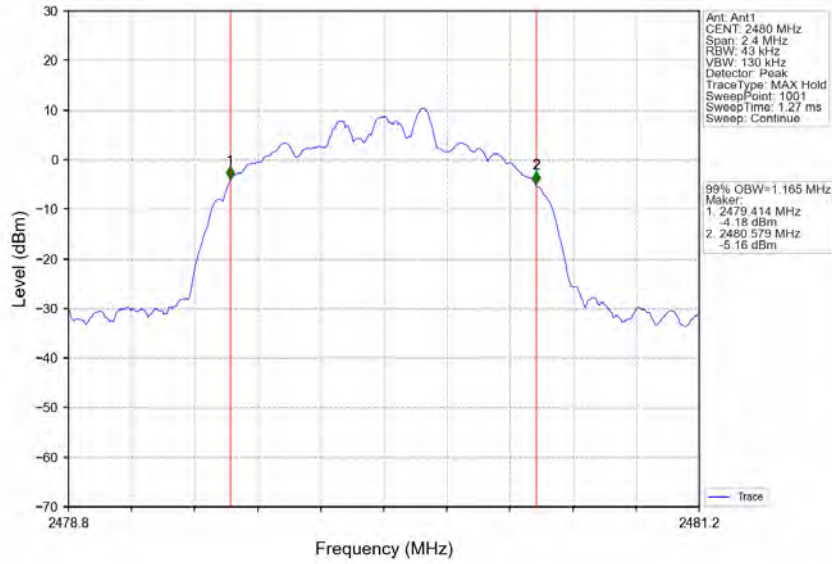



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701


Page: 93 of 190

### 1.2 20dB BW


#### 1.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.965	/	Pass
		2441	DH5	1	0.969	/	Pass
		2480	DH5	1	0.966	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.276	/	Pass
		2441	2DH5	1	1.276	/	Pass
		2480	2DH5	1	1.279	/	Pass
8DPSK	SISO	2402	3DH5	1	1.292	/	Pass
		2441	3DH5	1	1.293	/	Pass
		2480	3DH5	1	1.292	/	Pass


### 1.2.2 Test Graph

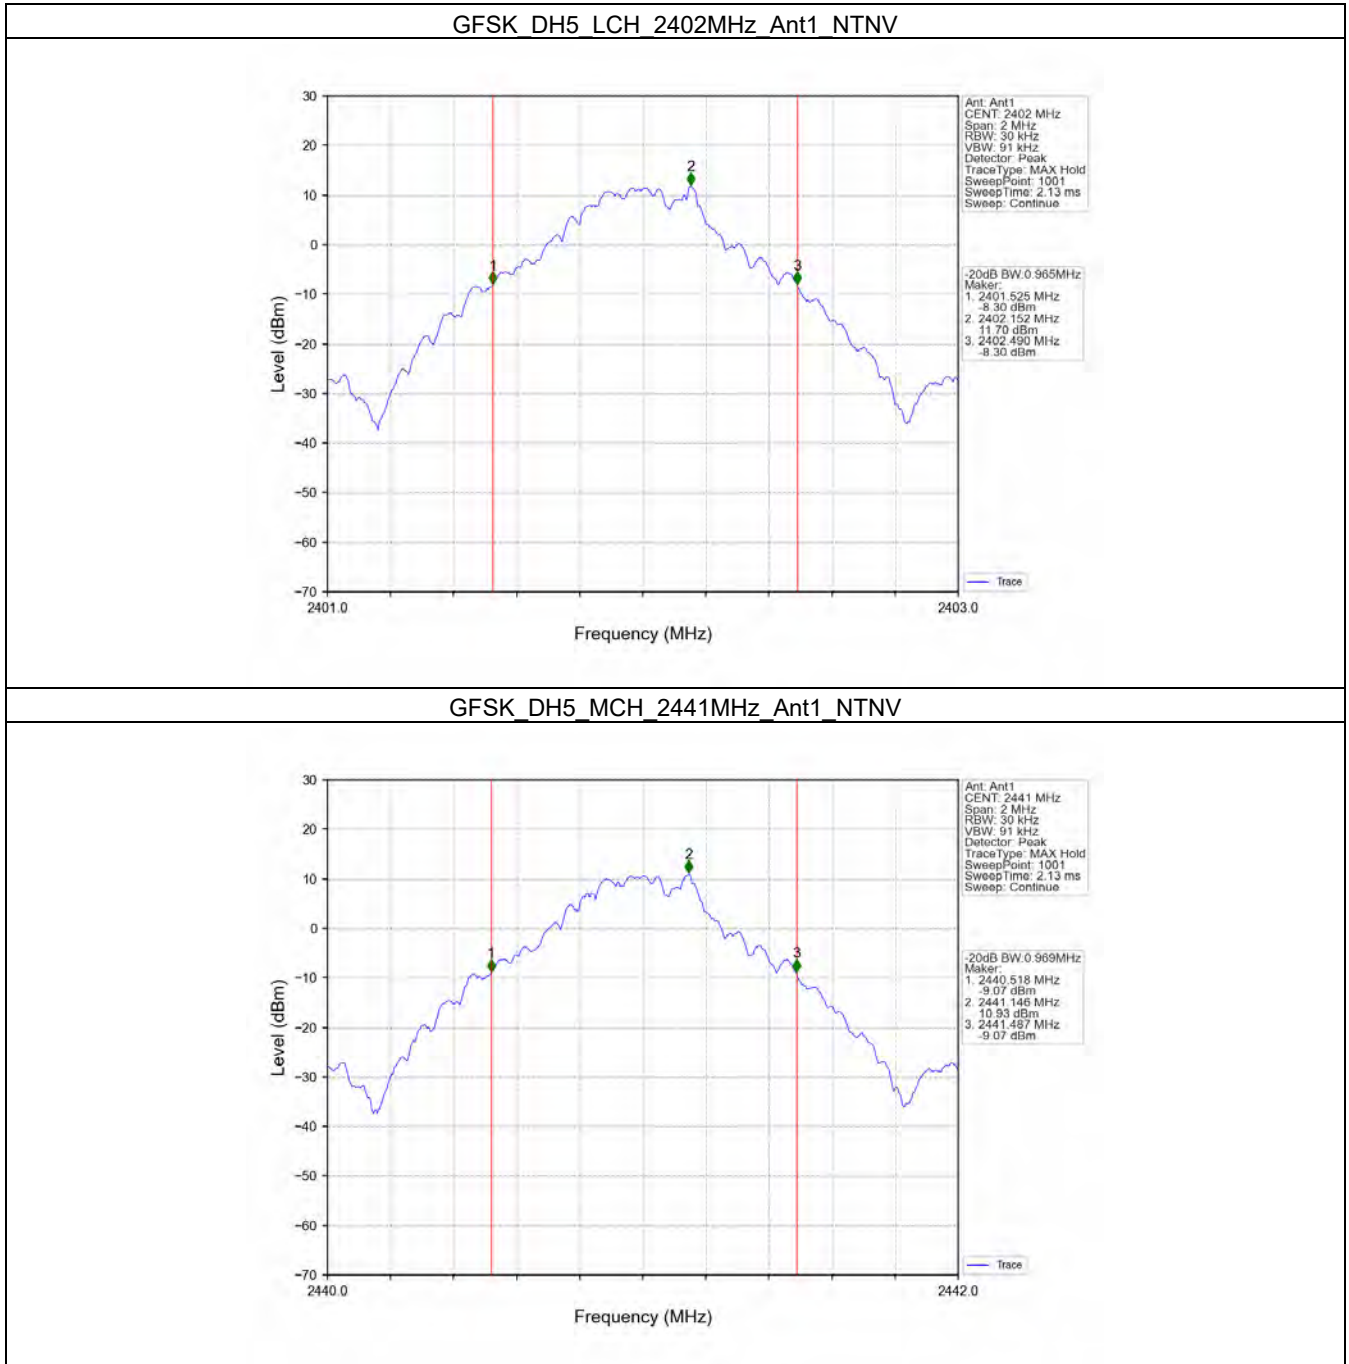


GFSK DH5 HCH 2480MHz Ant1 NTN

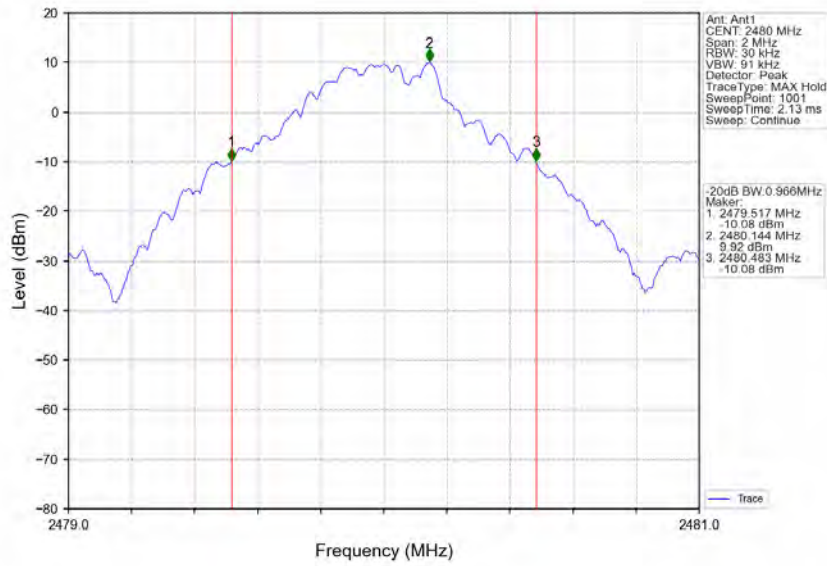


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTN

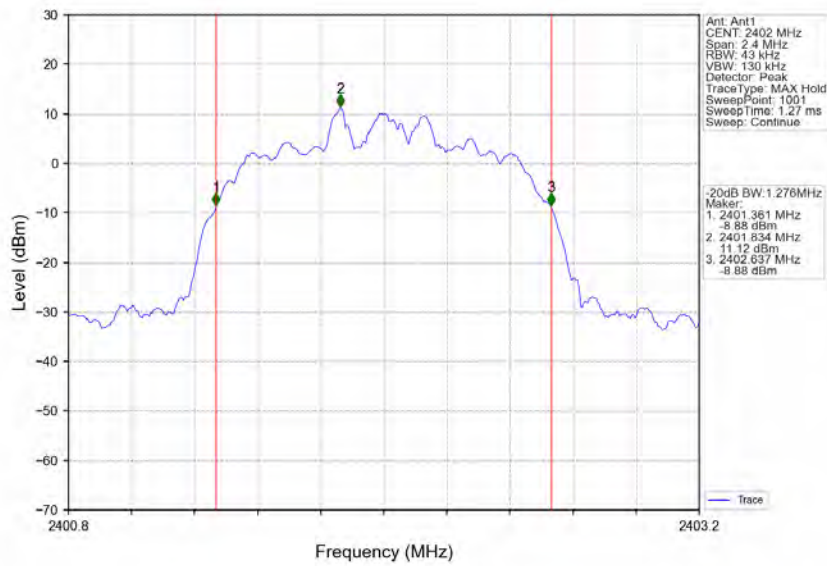

Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTN

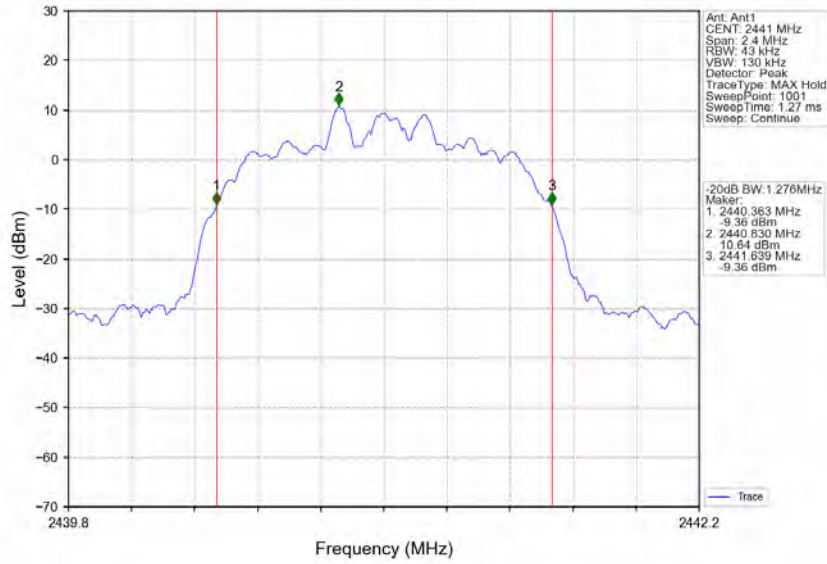


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTN

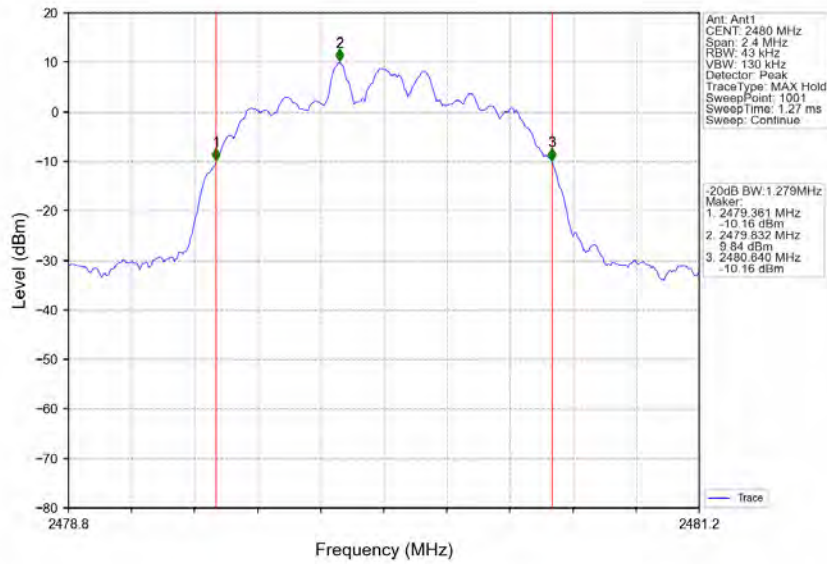





8DPSK 3DH5 LCH 2402MHz Ant1 NTV

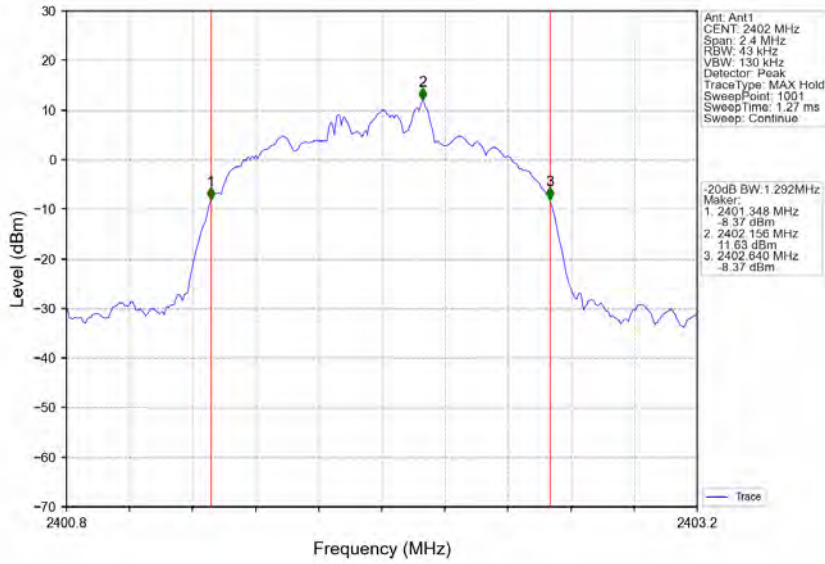

8DPSK 3DH5 MCH 2441MHz Ant1 NTV

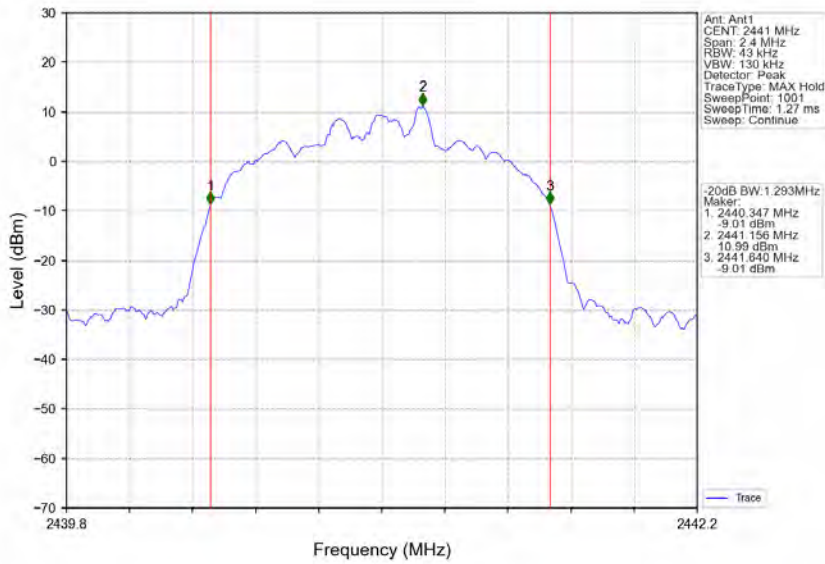

### 8DPSK 3DH5 HCH 2480MHz Ant1 NTV

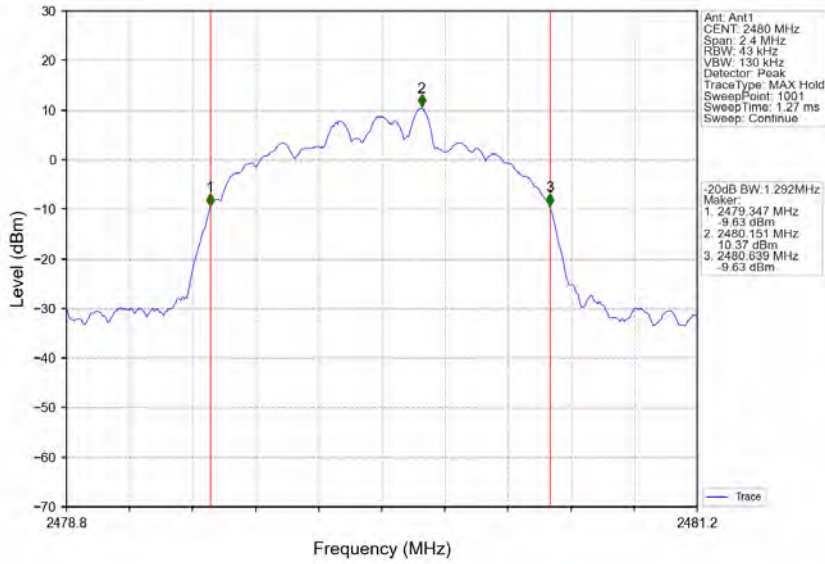



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 99 of 190

### 2. Maximum Conducted Output Power


#### 2.1 Power

##### 2.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	14.02	<=30	Pass
		2441	DH5	13.22	<=30	Pass
		2480	DH5	12.25	<=30	Pass
Pi/4DQPSK	SISO	2402	2DH5	12.44	<=20.97	Pass
		2441	2DH5	11.87	<=20.97	Pass
		2480	2DH5	11.06	<=20.97	Pass
8DPSK	SISO	2402	3DH5	12.51	<=20.97	Pass
		2441	3DH5	11.89	<=20.97	Pass
		2480	3DH5	11.09	<=20.97	Pass

Note1: Antenna Gain: Ant1: -3.53dBi;


2.1.2 Test Graph

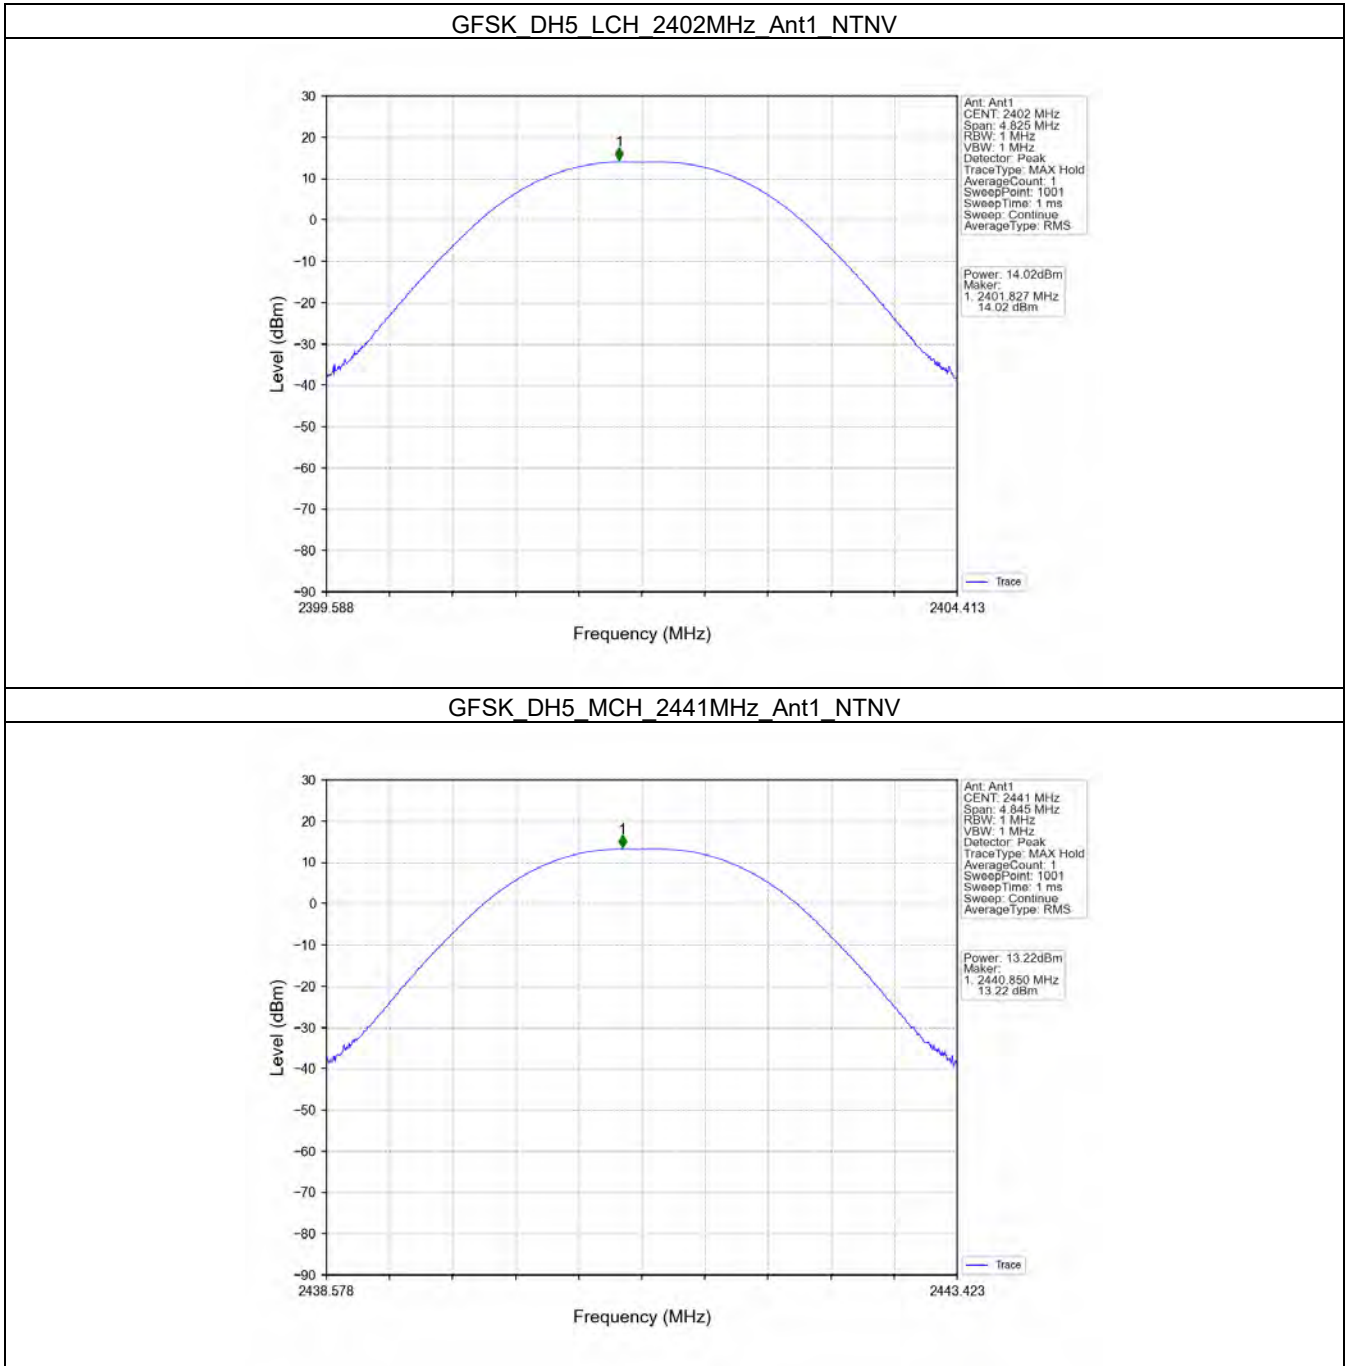


GFSK DH5 HCH 2480MHz Ant1 NTN

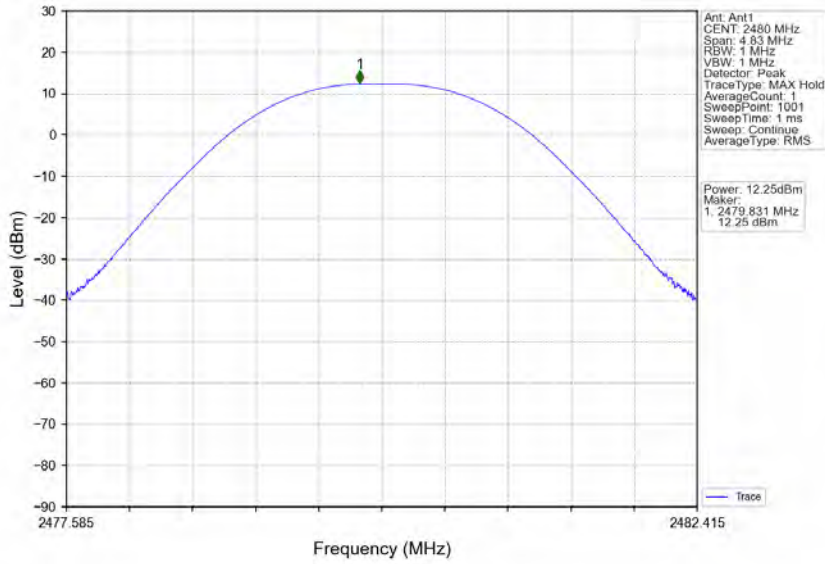


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTN

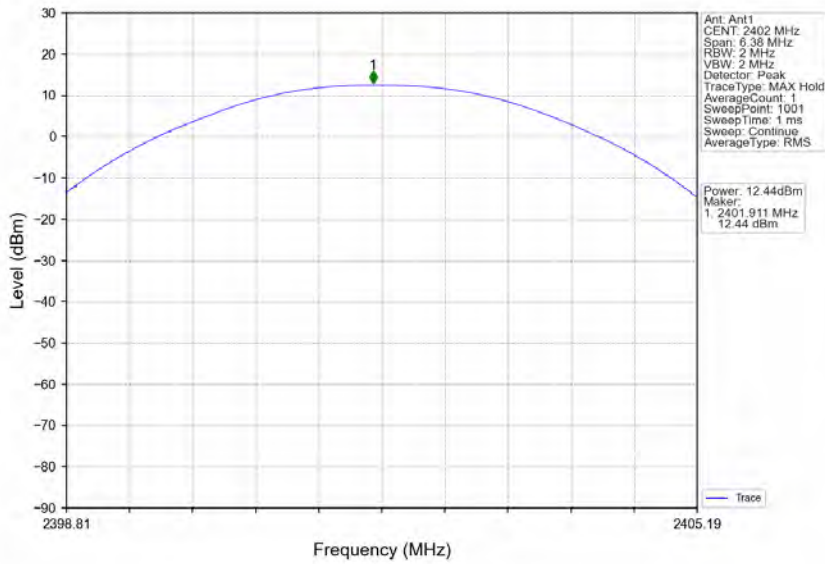


Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTN

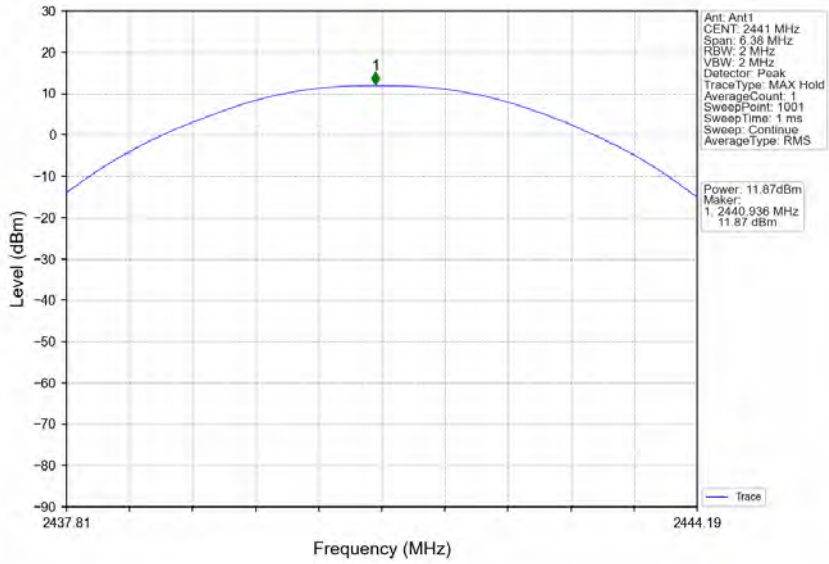


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTN

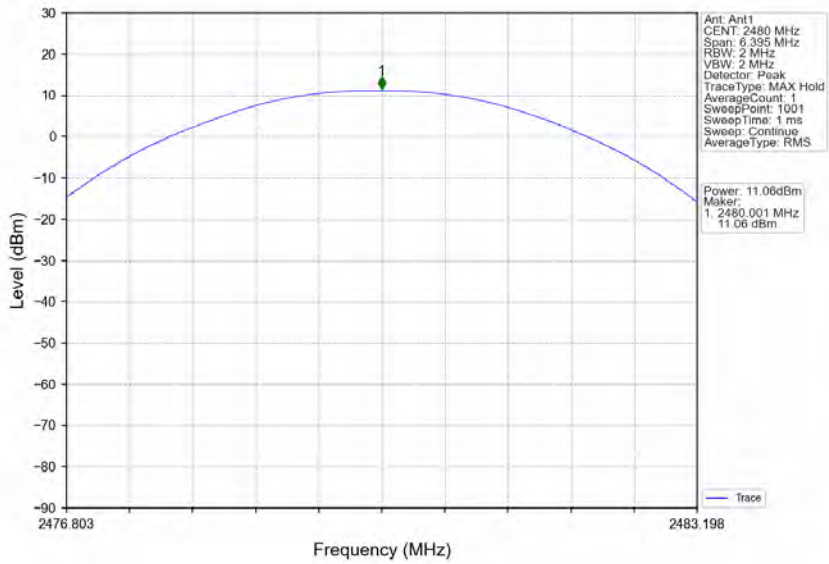


8DPSK 3DH5 LCH 2402MHz Ant1 NTV

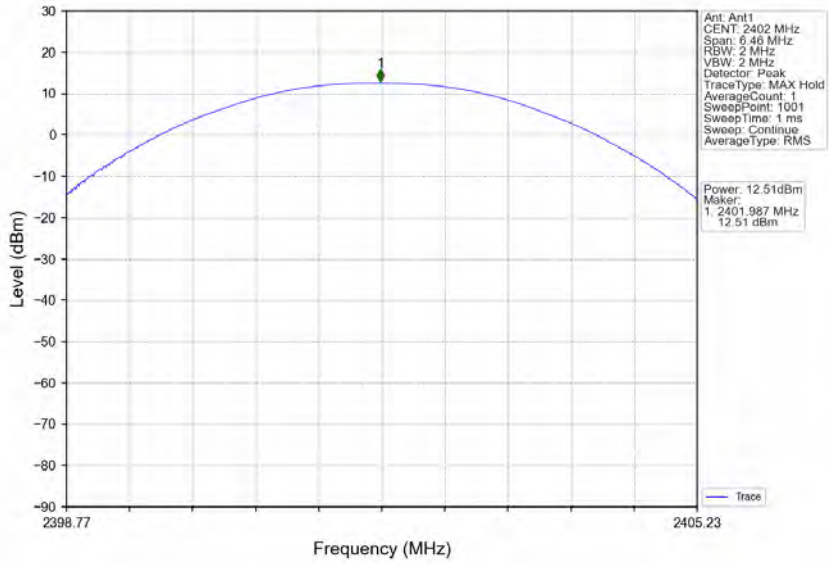

8DPSK 3DH5 MCH 2441MHz Ant1 NTV

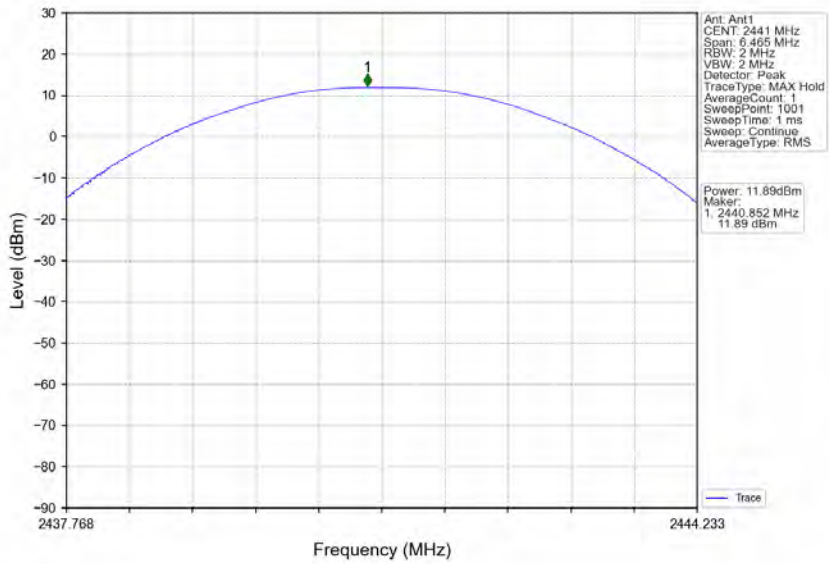

### 8DPSK 3DH5 HCH 2480MHz Ant1 NTV

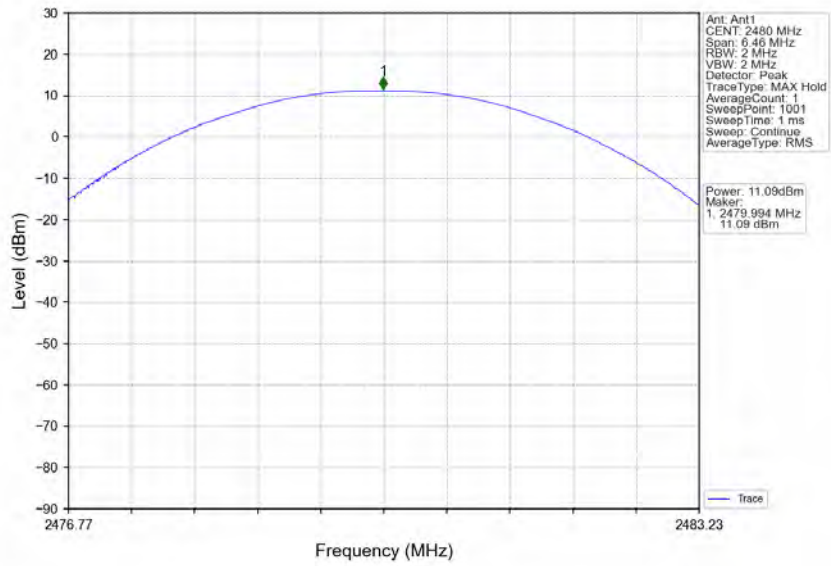





## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 105 of 190


### 3. Carrier Frequency Separation

#### 3.1 Ant1


##### 3.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.000	0.969	$\geq 0.969$	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.001	1.279	$\geq 0.853$	Pass
8DPSK	SISO	HOPP	3DH5	1.001	1.293	$\geq 0.862$	Pass

3.1.2 Test Graph

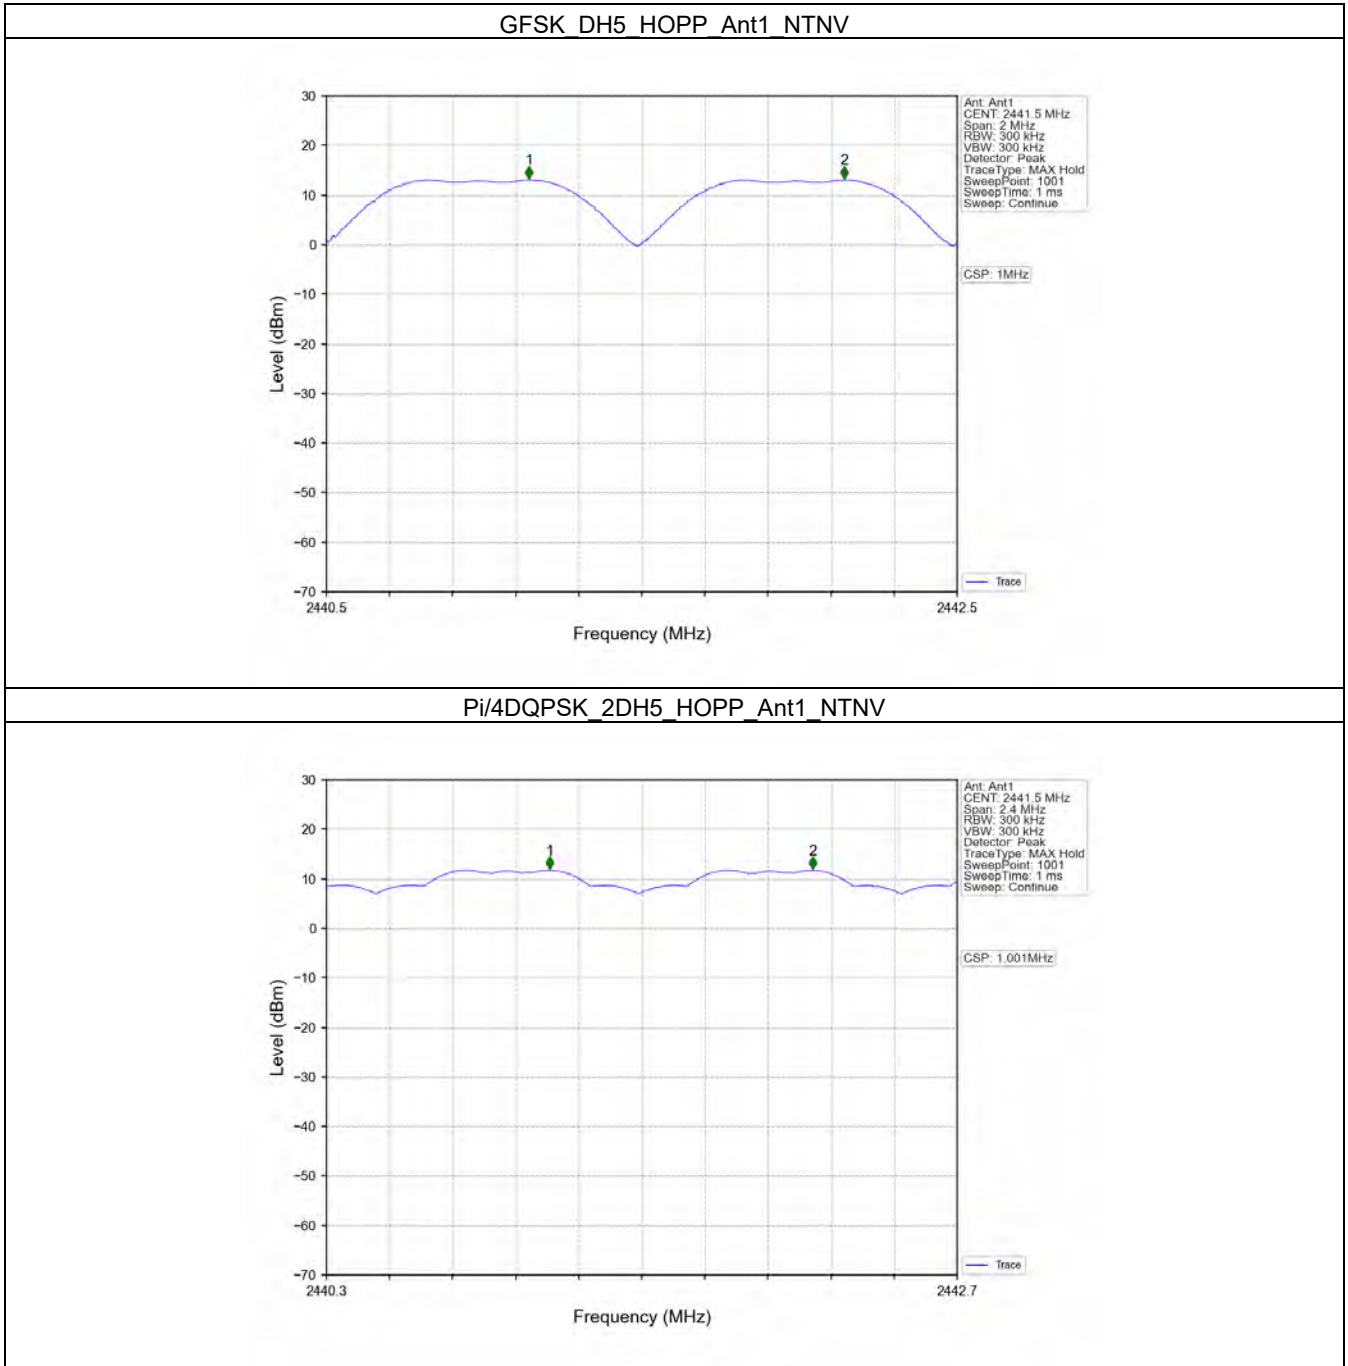

### 8DPSK 3DH5 HOPP Ant1 NTN

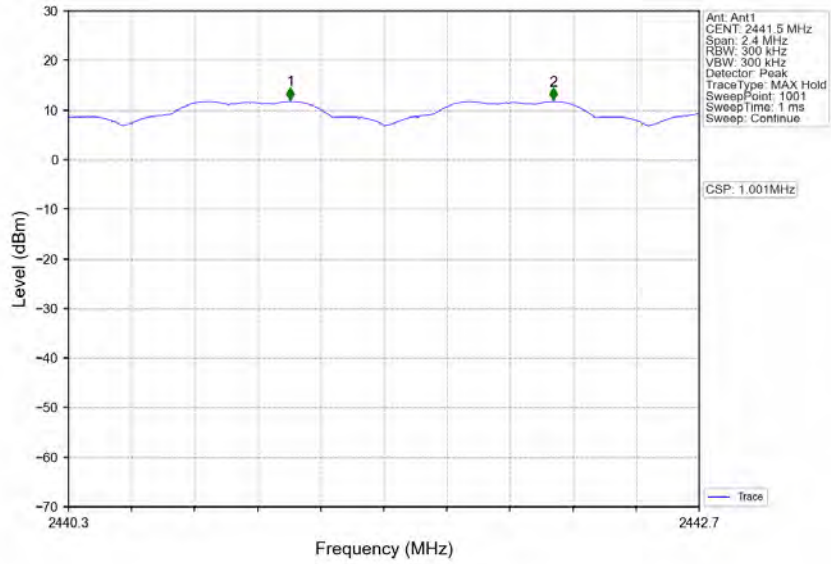



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 108 of 190


### 4. Number of Hopping Frequencies

#### 4.1 HoppNum

##### 4.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	>=15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	>=15	Pass
8DPSK	SISO	HOPP	3DH5	79	>=15	Pass

4.1.2 Test Graph

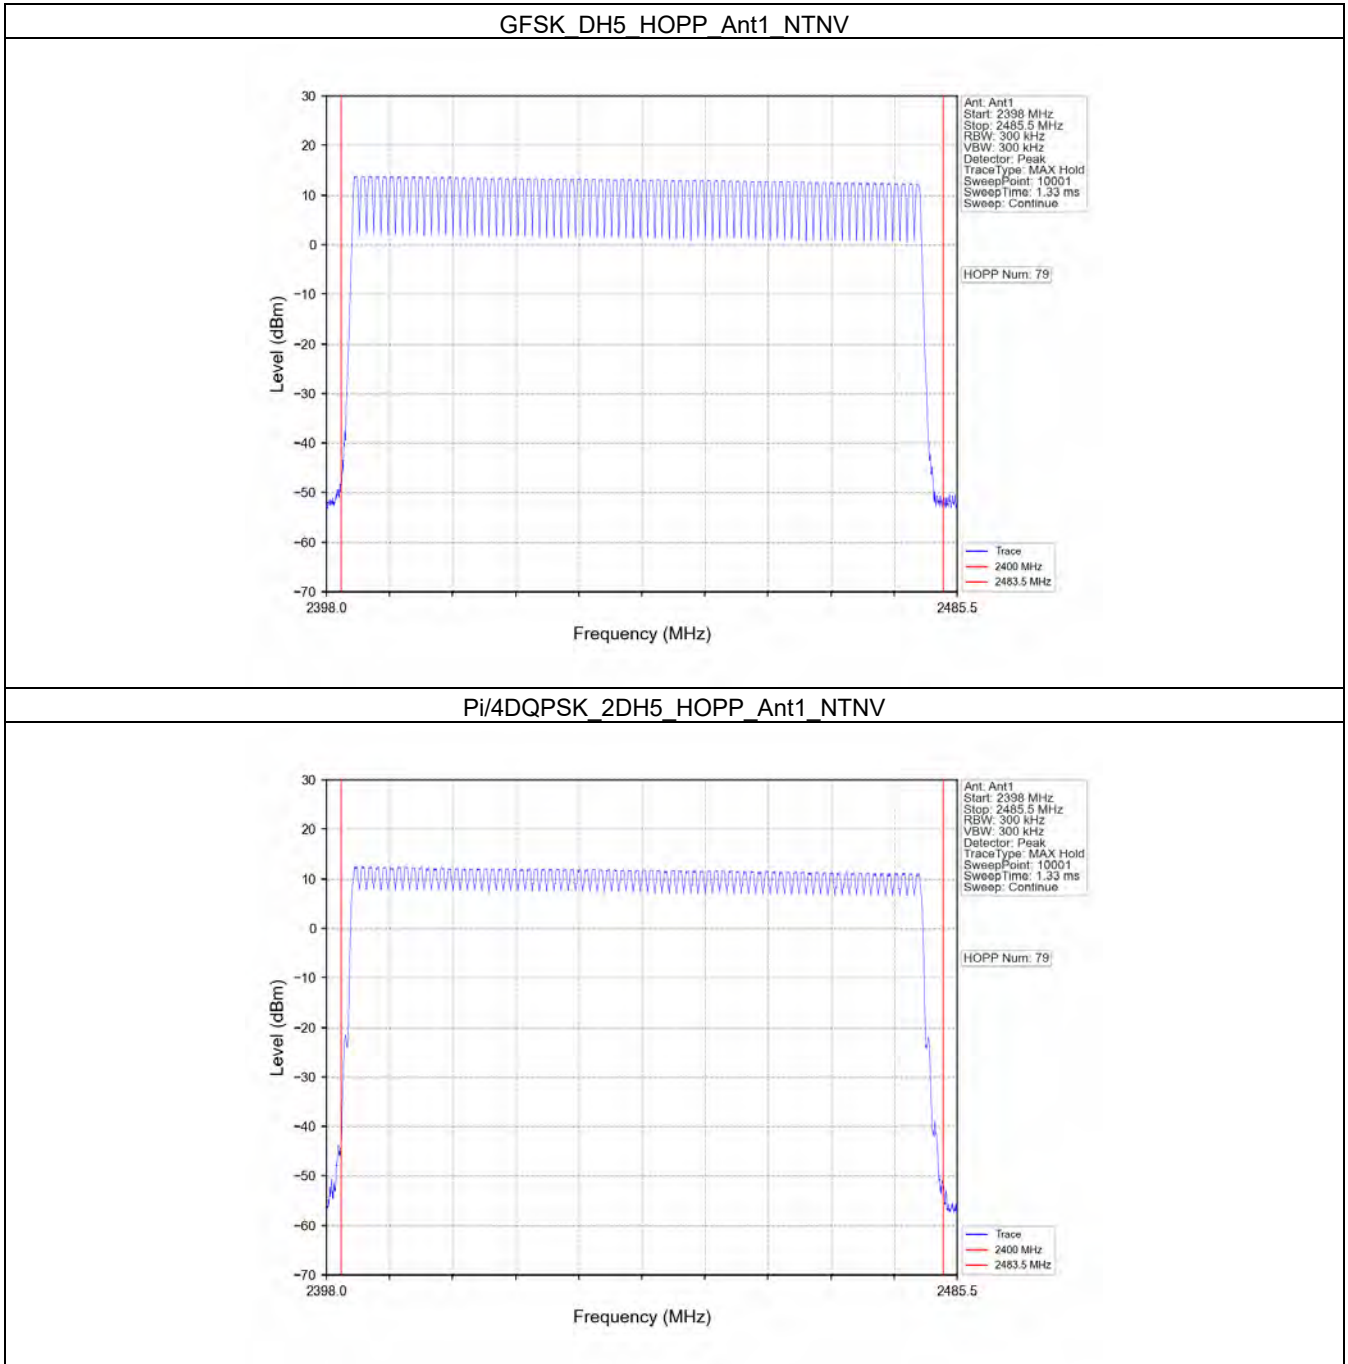




# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 110 of 190

8DPSK 3DH5 HOPP Ant1 NTN

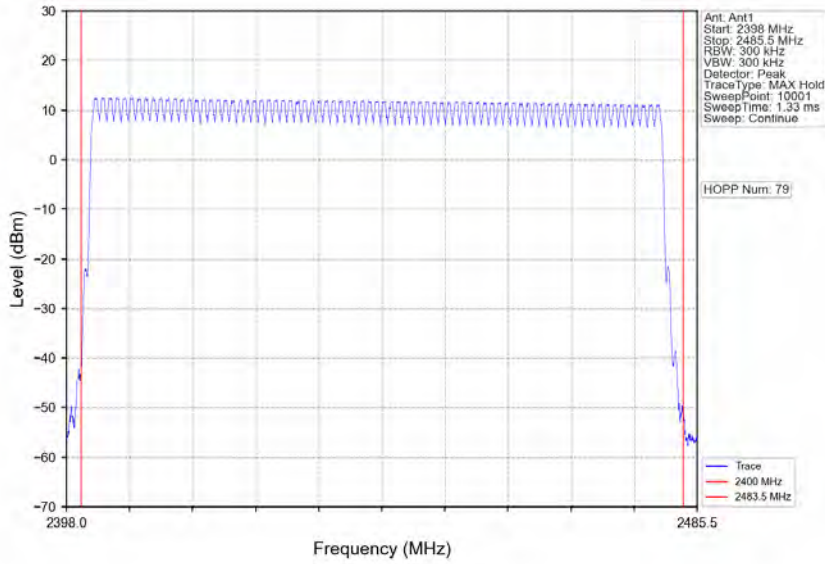



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 111 of 190


### 5. Time of Occupancy (Dwell Time)

#### 5.1 Ant1

##### 5.1.1 Test Result


Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.378	31.600	320	120.960	<=400	Pass
			DH3	1.634	31.600	160	261.440	<=400	Pass
			DH5	2.882	31.600	107	308.374	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.382	31.600	320	122.240	<=400	Pass
			2DH3	1.634	31.600	160	261.440	<=400	Pass
			2DH5	2.882	31.600	106	305.492	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.382	31.600	320	122.240	<=400	Pass
			3DH3	1.632	31.600	160	261.120	<=400	Pass
			3DH5	2.884	31.600	107	308.588	<=400	Pass

### 5.1.2 Test Graph

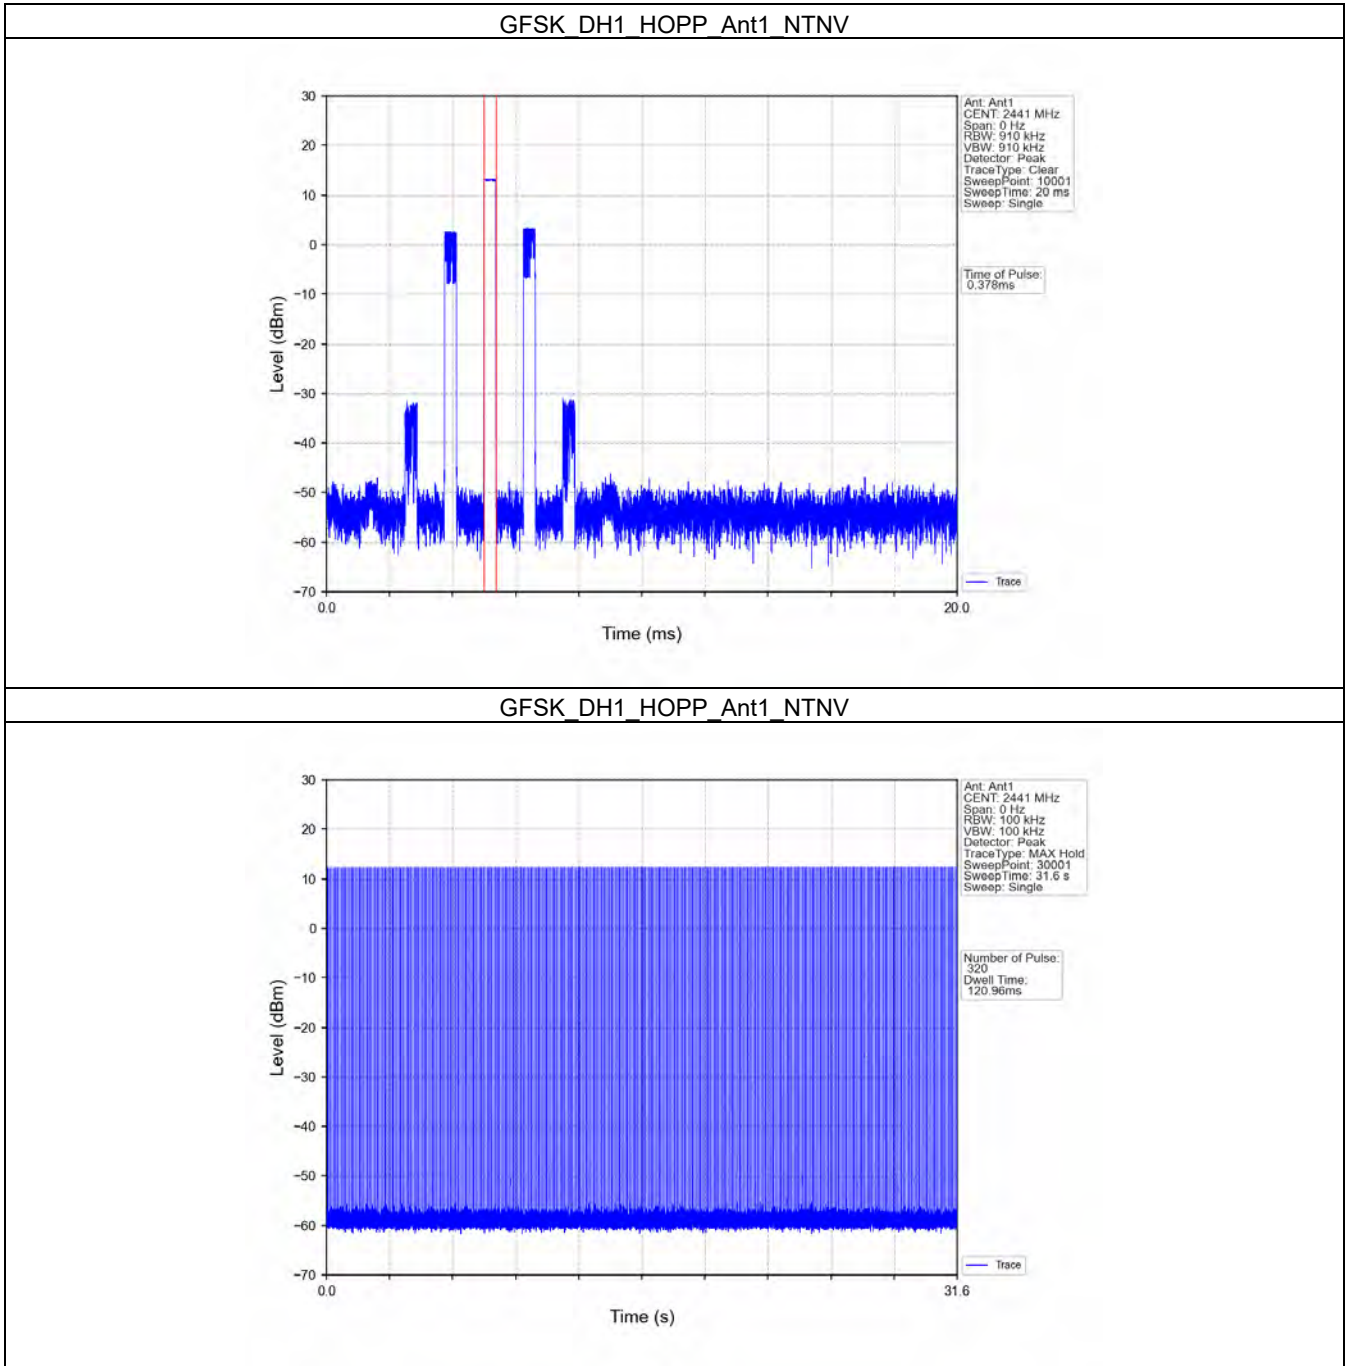





GFSK\_DH3\_HOPP\_Ant1\_NTNV

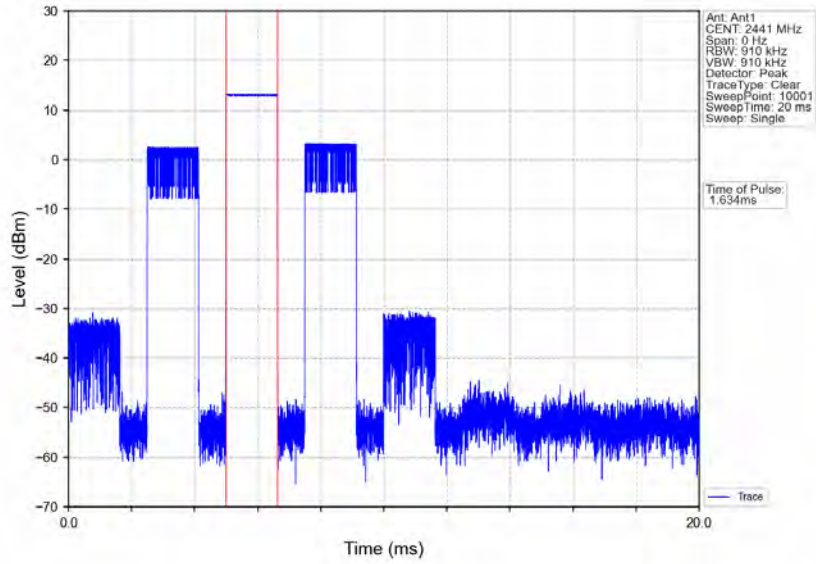


GFSK\_DH3\_HOPP\_Ant1\_NTNV

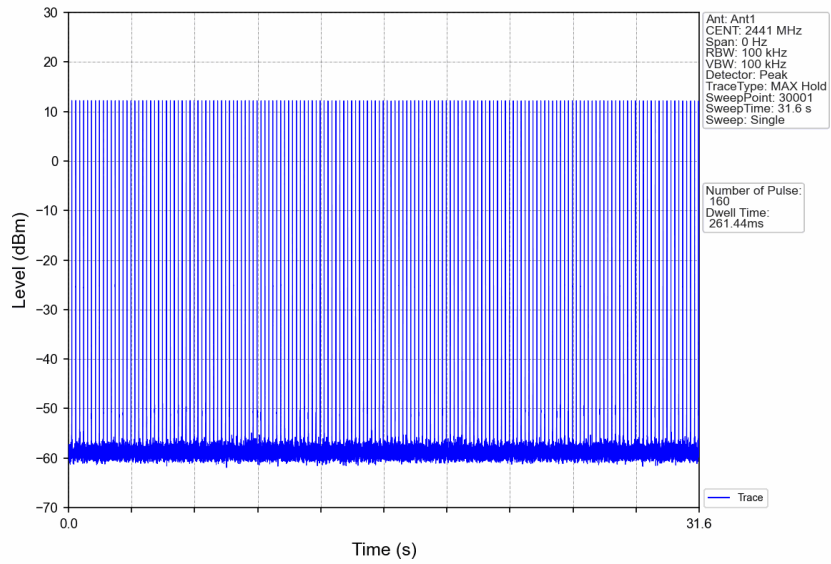


GFSK DH5 HOPP Ant1 NTV

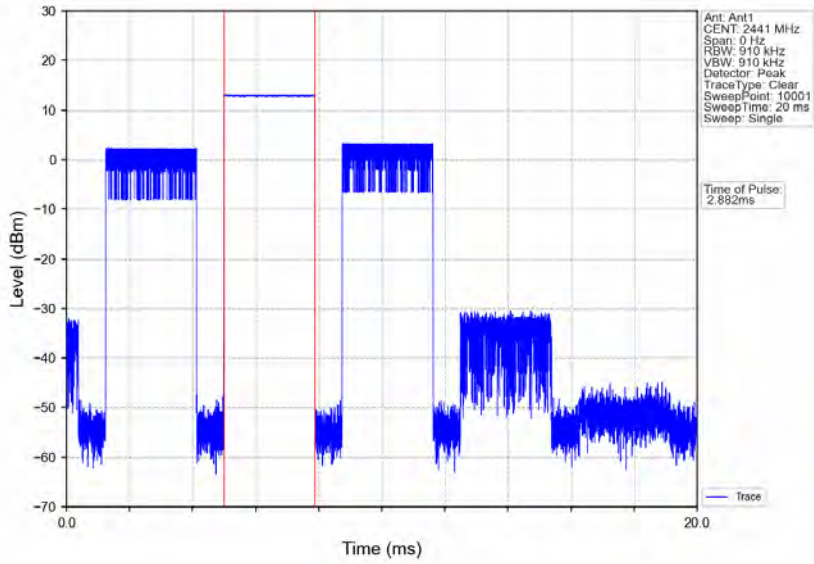


GFSK DH5 HOPP Ant1 NTV

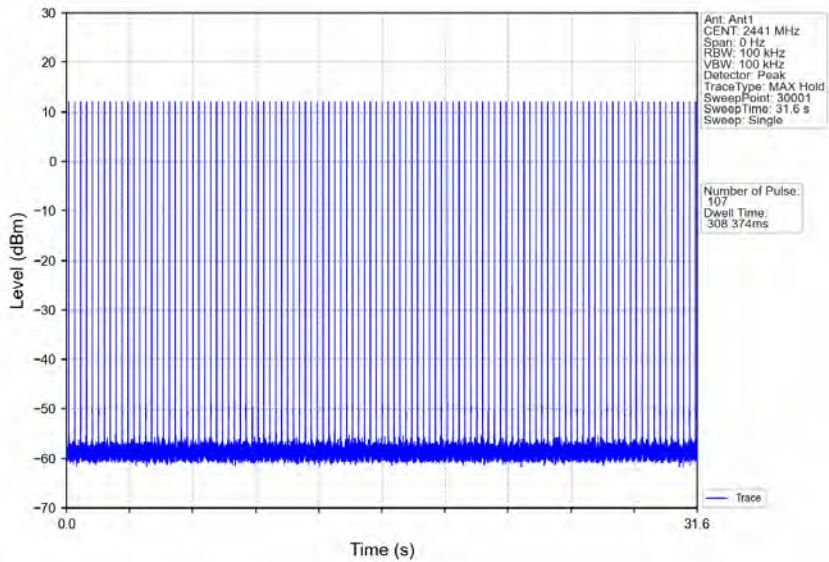


Pi/4DQPSK 2DH1 HOPP Ant1 NTN

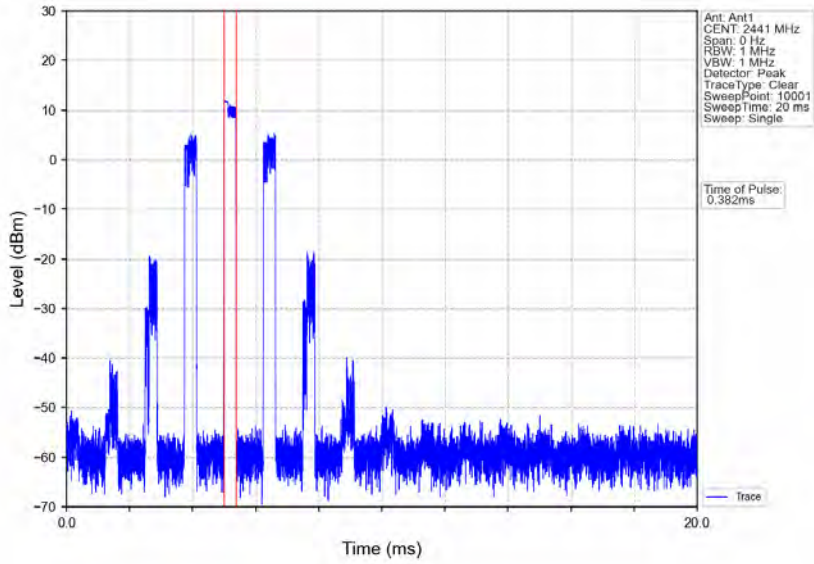


Pi/4DQPSK 2DH1 HOPP Ant1 NTN

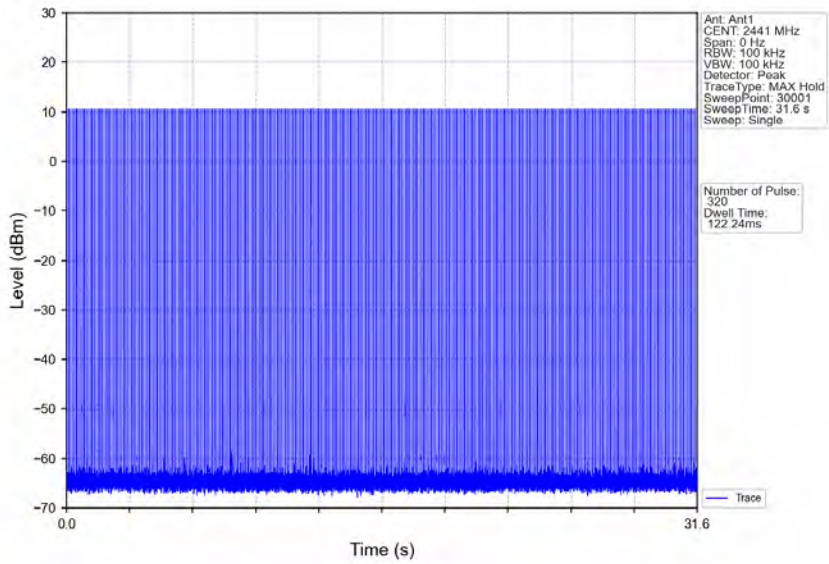


Pi/4DQPSK 2DH3 HOPP Ant1 NTV

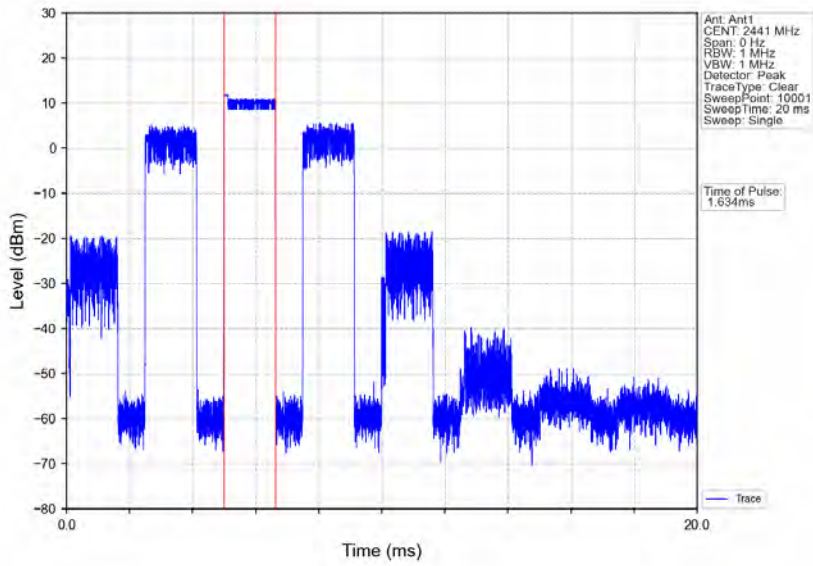


Pi/4DQPSK 2DH3 HOPP Ant1 NTV

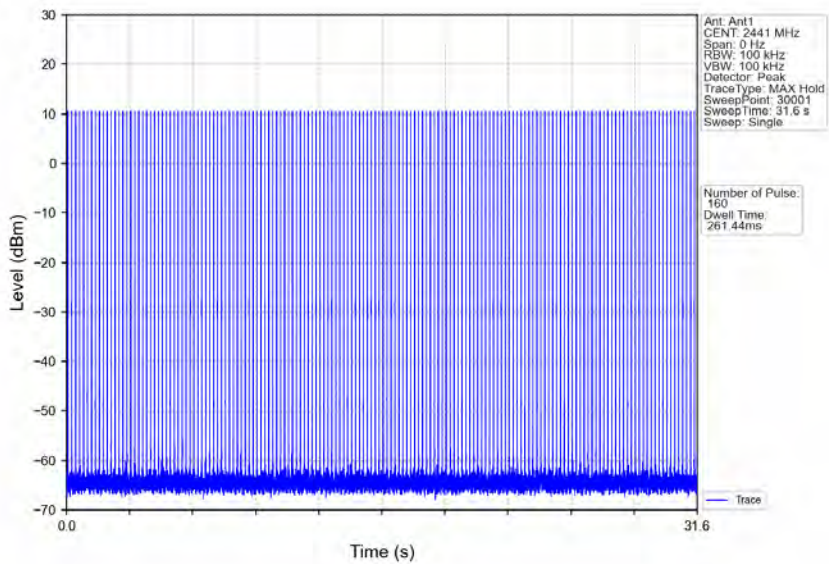


Pi/4DQPSK 2DH5 HOPP Ant1 NTN

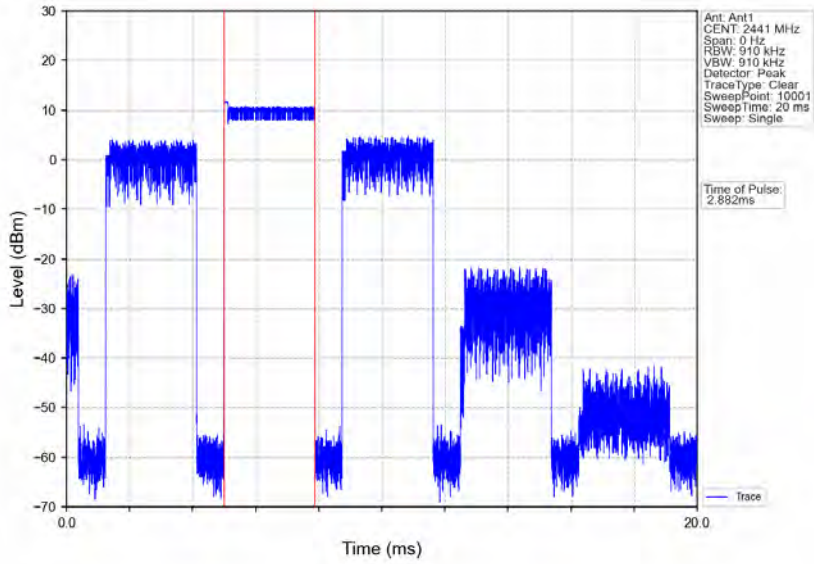


Pi/4DQPSK 2DH5 HOPP Ant1 NTN

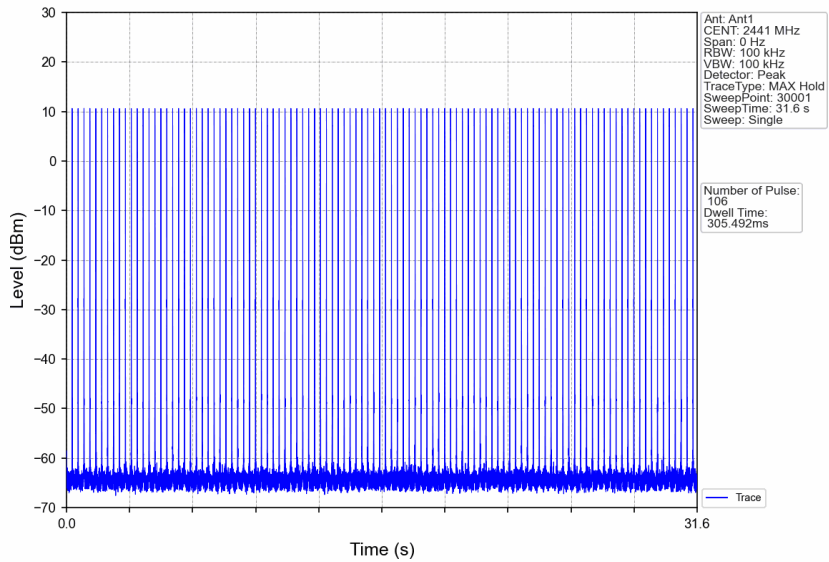


8DPSK 3DH1 HOPP Ant1 NTN

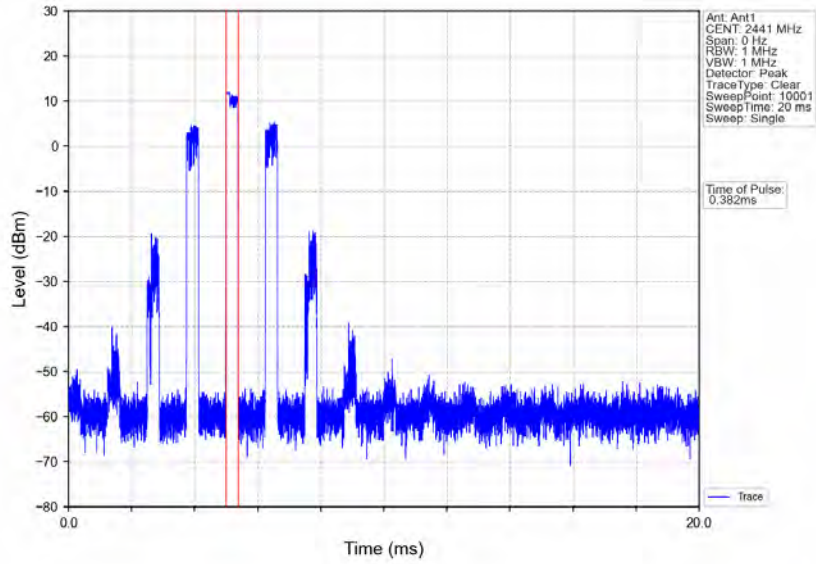


8DPSK 3DH1 HOPP Ant1 NTN

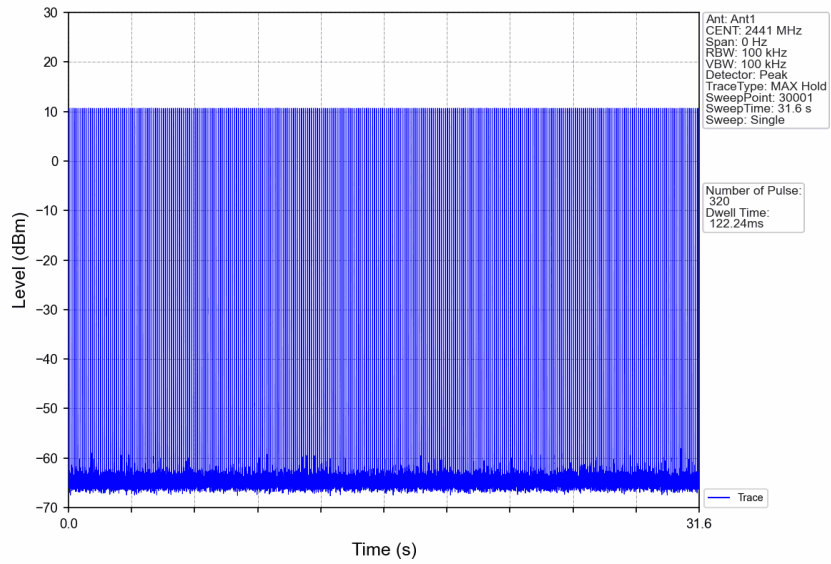


8DPSK 3DH3 HOPP\_Ant1\_NTNV

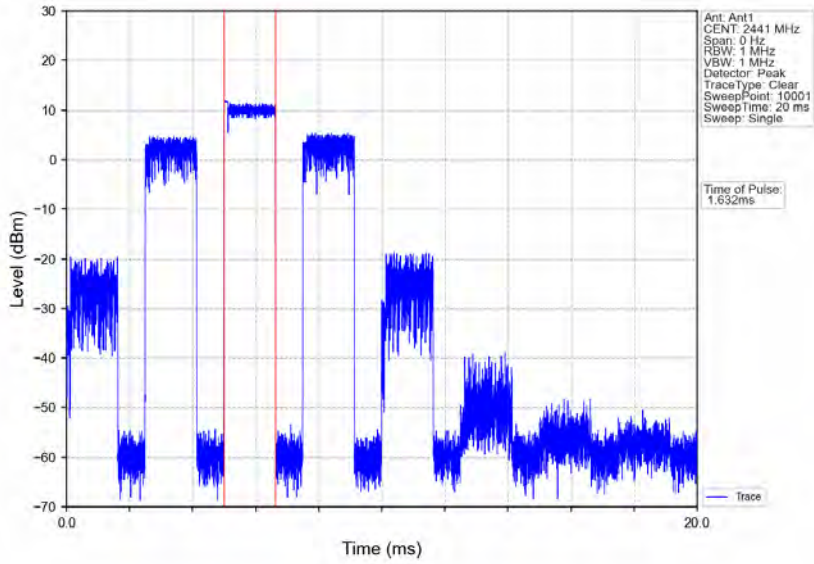


8DPSK 3DH3 HOPP\_Ant1\_NTNV

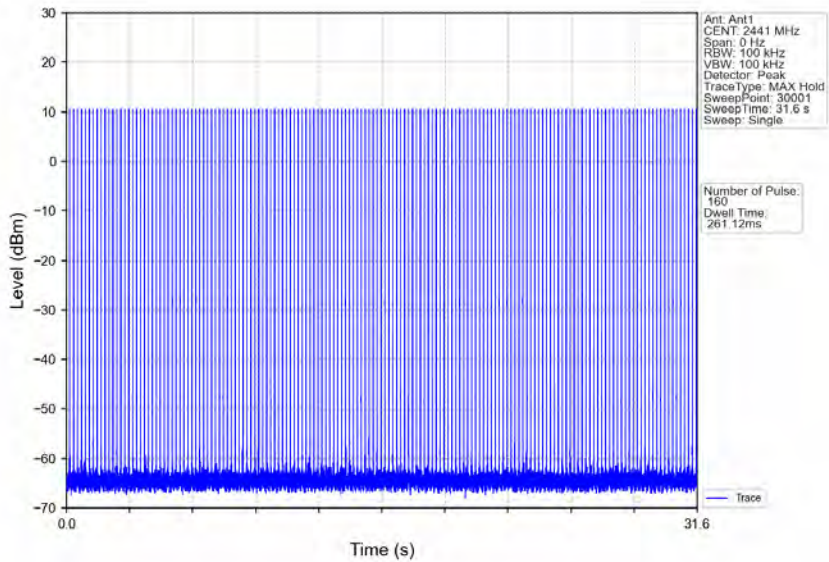

8DPSK 3DH5 HOPP Ant1 NTN

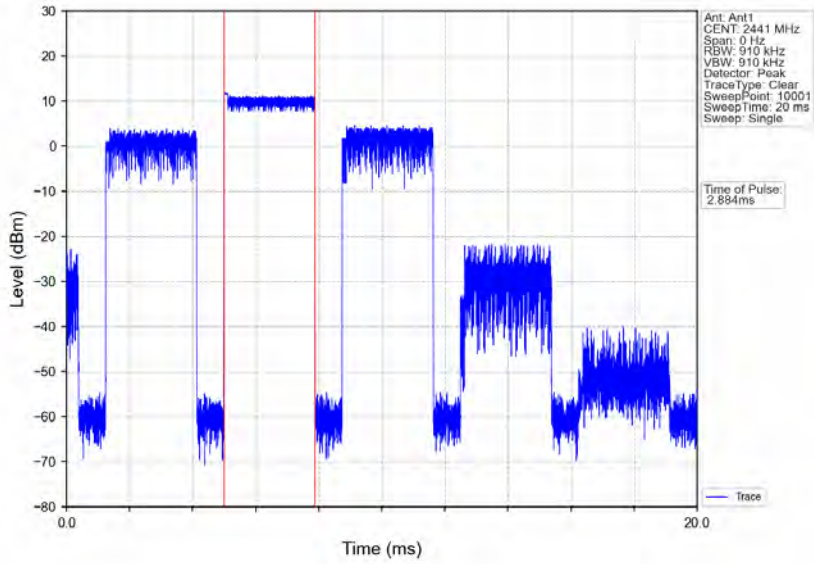

8DPSK 3DH5 HOPP Ant1 NTN

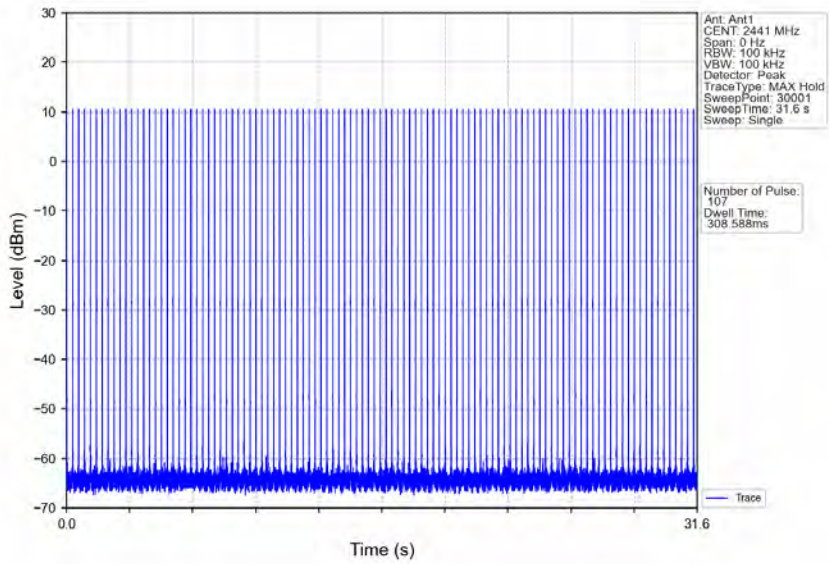





## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 121 of 190

### 6. Unwanted Emissions In Non-restricted Frequency Bands


#### 6.1 Ref

##### 6.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	13.82
		2441	DH5	1	13.08
		2480	DH5	1	12.12
Pi/4DQPSK	SISO	2402	2DH5	1	12.32
		2441	2DH5	1	11.69
		2480	2DH5	1	10.91
8DPSK	SISO	2402	3DH5	1	12.33
		2441	3DH5	1	11.74
		2480	3DH5	1	10.90

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


### 6.1.2 Test Graph

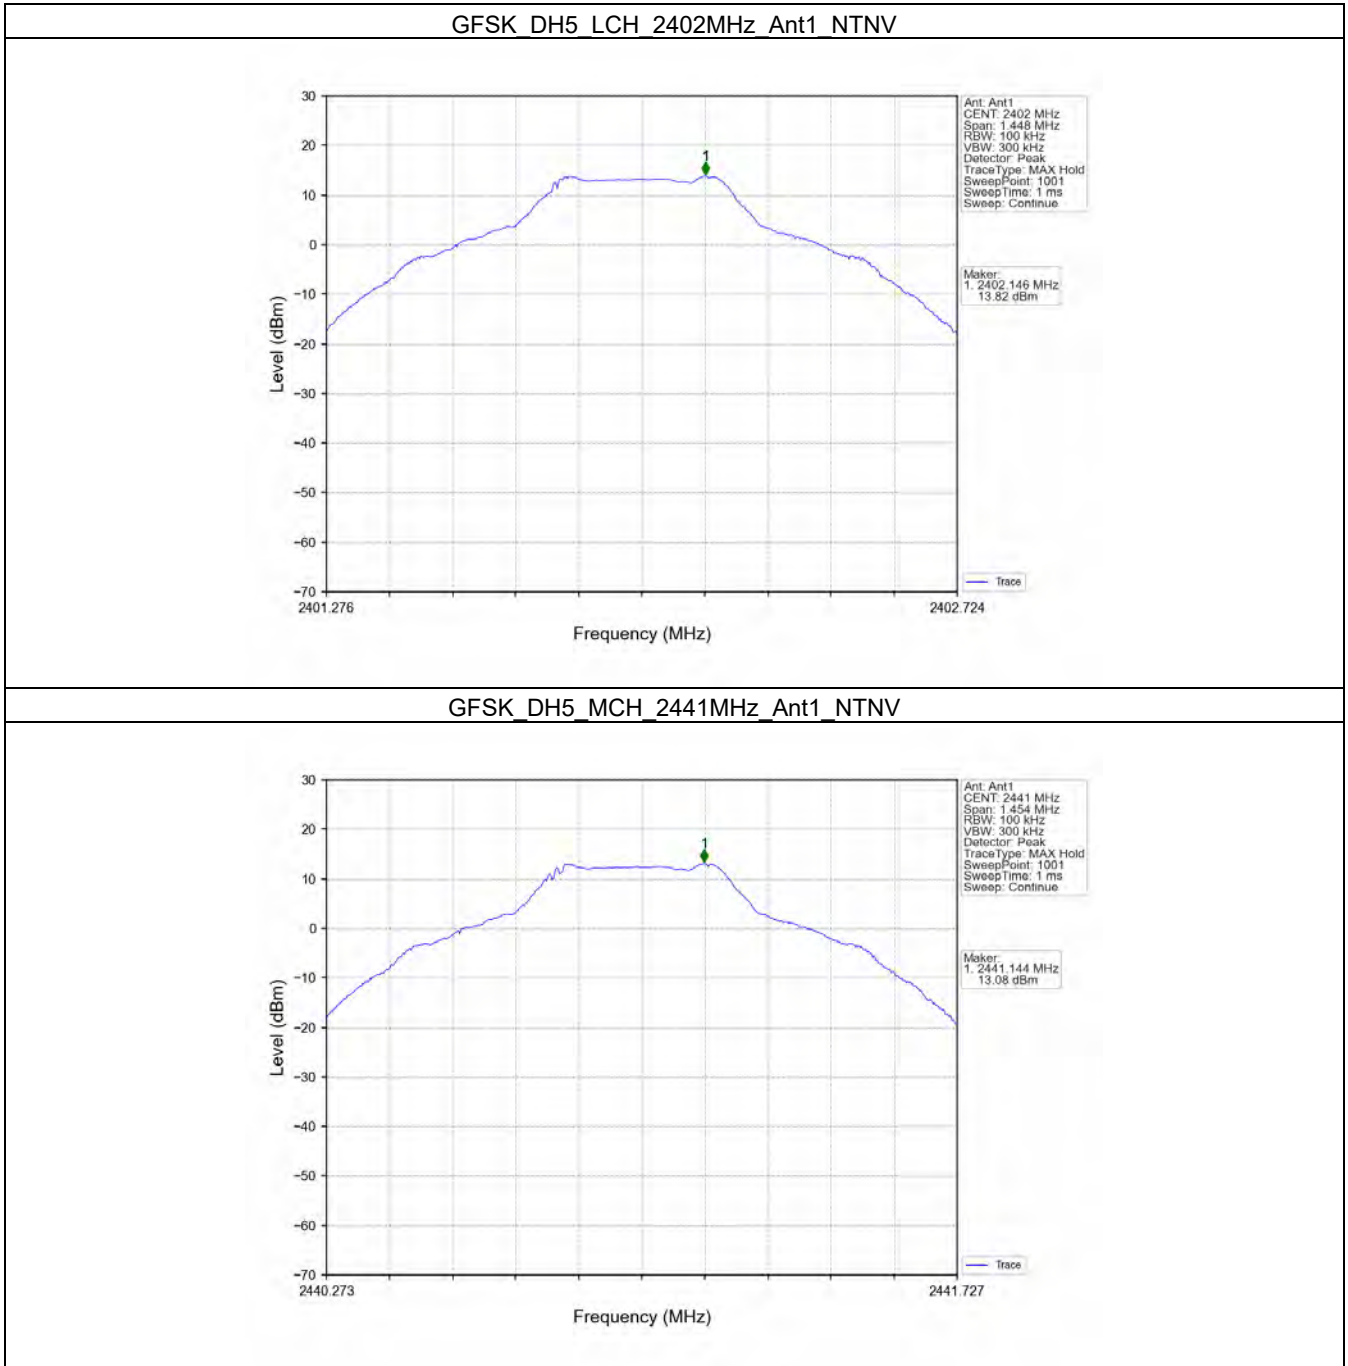


GFSK DH5 HCH 2480MHz Ant1 NTN

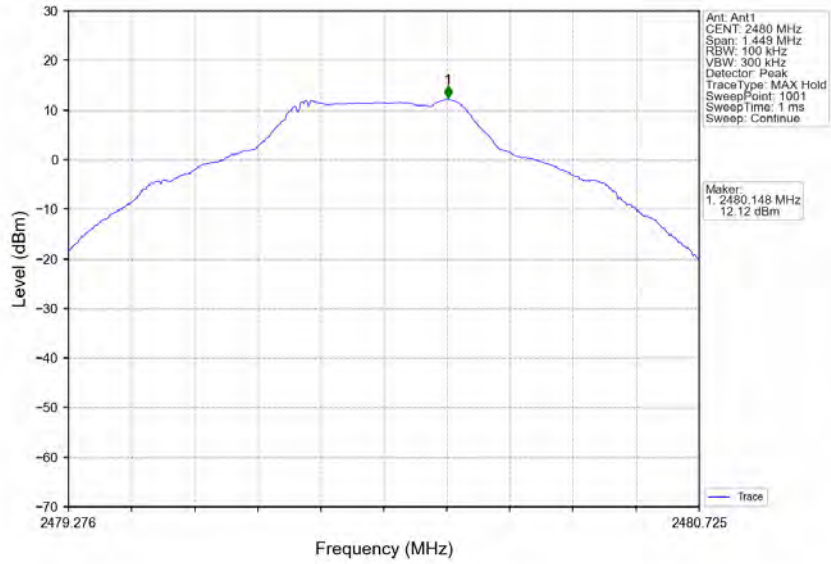


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTN

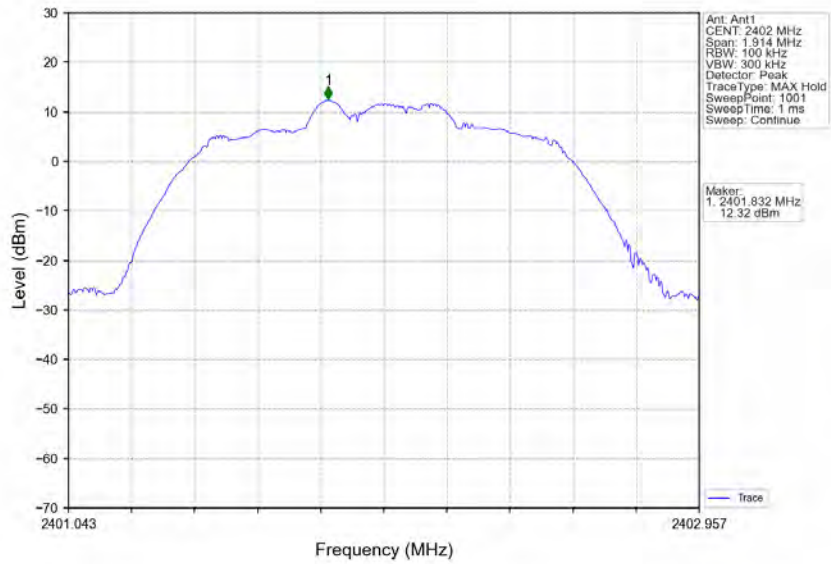


Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTN

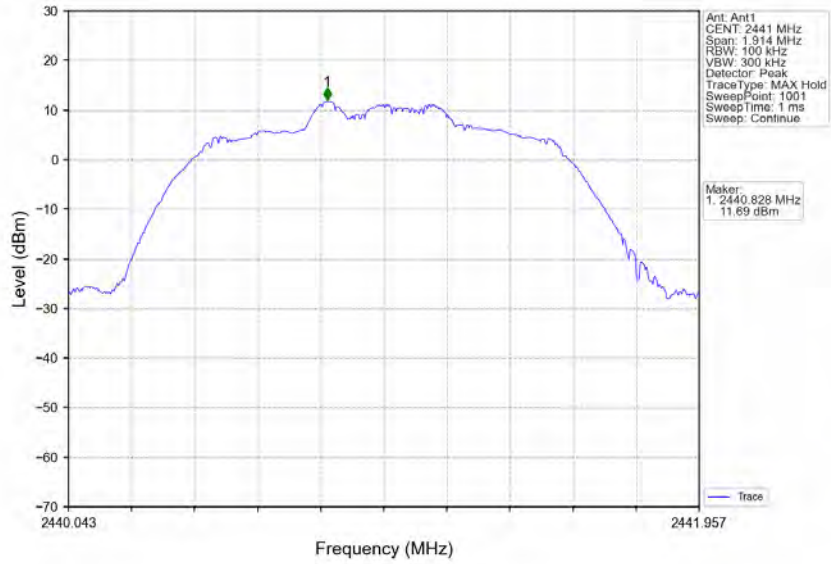


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTN

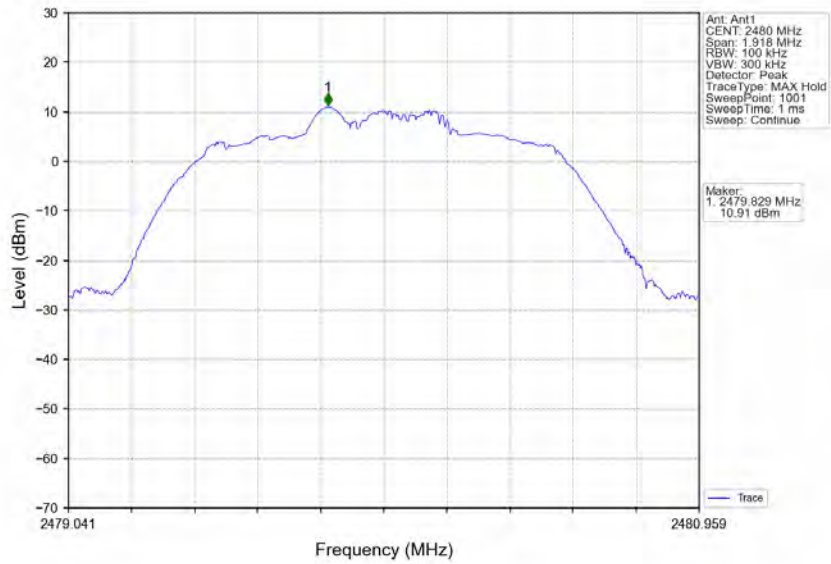

8DPSK 3DH5 LCH 2402MHz Ant1 NTV

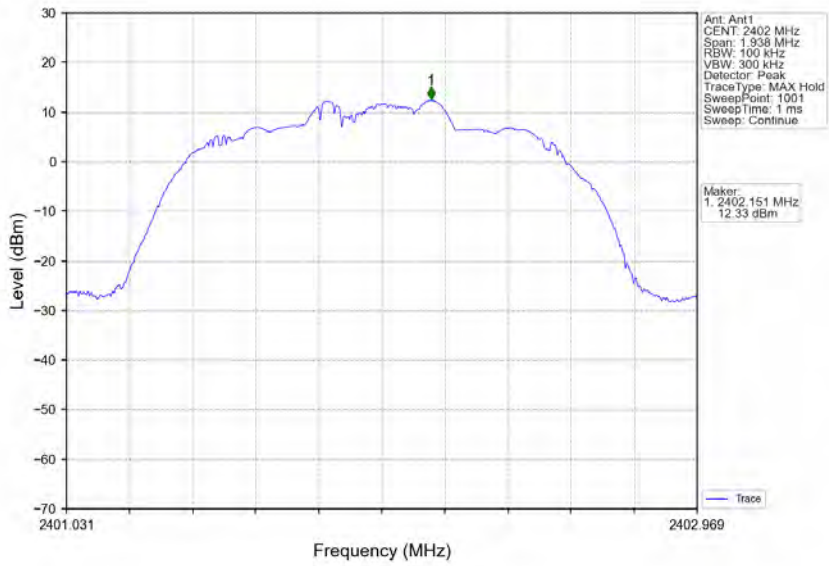

8DPSK 3DH5 MCH 2441MHz Ant1 NTV

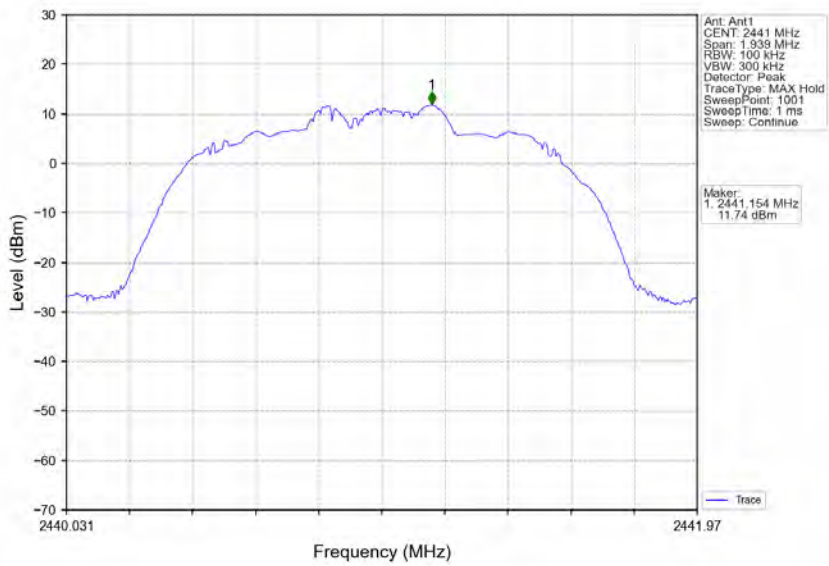


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 126 of 190

8DPSK 3DH5 HCH 2480MHz Ant1 NTV

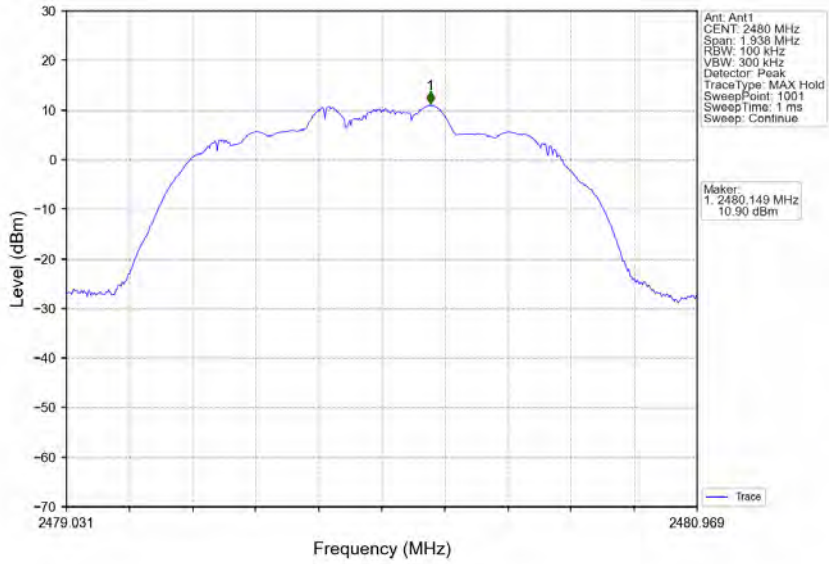



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 127 of 190


### 6.2 CSE

#### 6.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	13.82	-6.18	Pass
		2441	DH5	1	13.82	-6.18	Pass
		2480	DH5	1	13.82	-6.18	Pass
		HOPP	DH5	1	13.82	-6.18	Pass
					13.82	-6.18	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	12.32	-7.68	Pass
		2441	2DH5	1	12.32	-7.68	Pass
		2480	2DH5	1	12.32	-7.68	Pass
		HOPP	2DH5	1	12.32	-7.68	Pass
					12.32	-7.68	Pass
8DPSK	SISO	2402	3DH5	1	12.33	-7.67	Pass
		2441	3DH5	1	12.33	-7.67	Pass
		2480	3DH5	1	12.33	-7.67	Pass
		HOPP	3DH5	1	12.33	-7.67	Pass
					12.33	-7.67	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

6.2.2 Test Graph

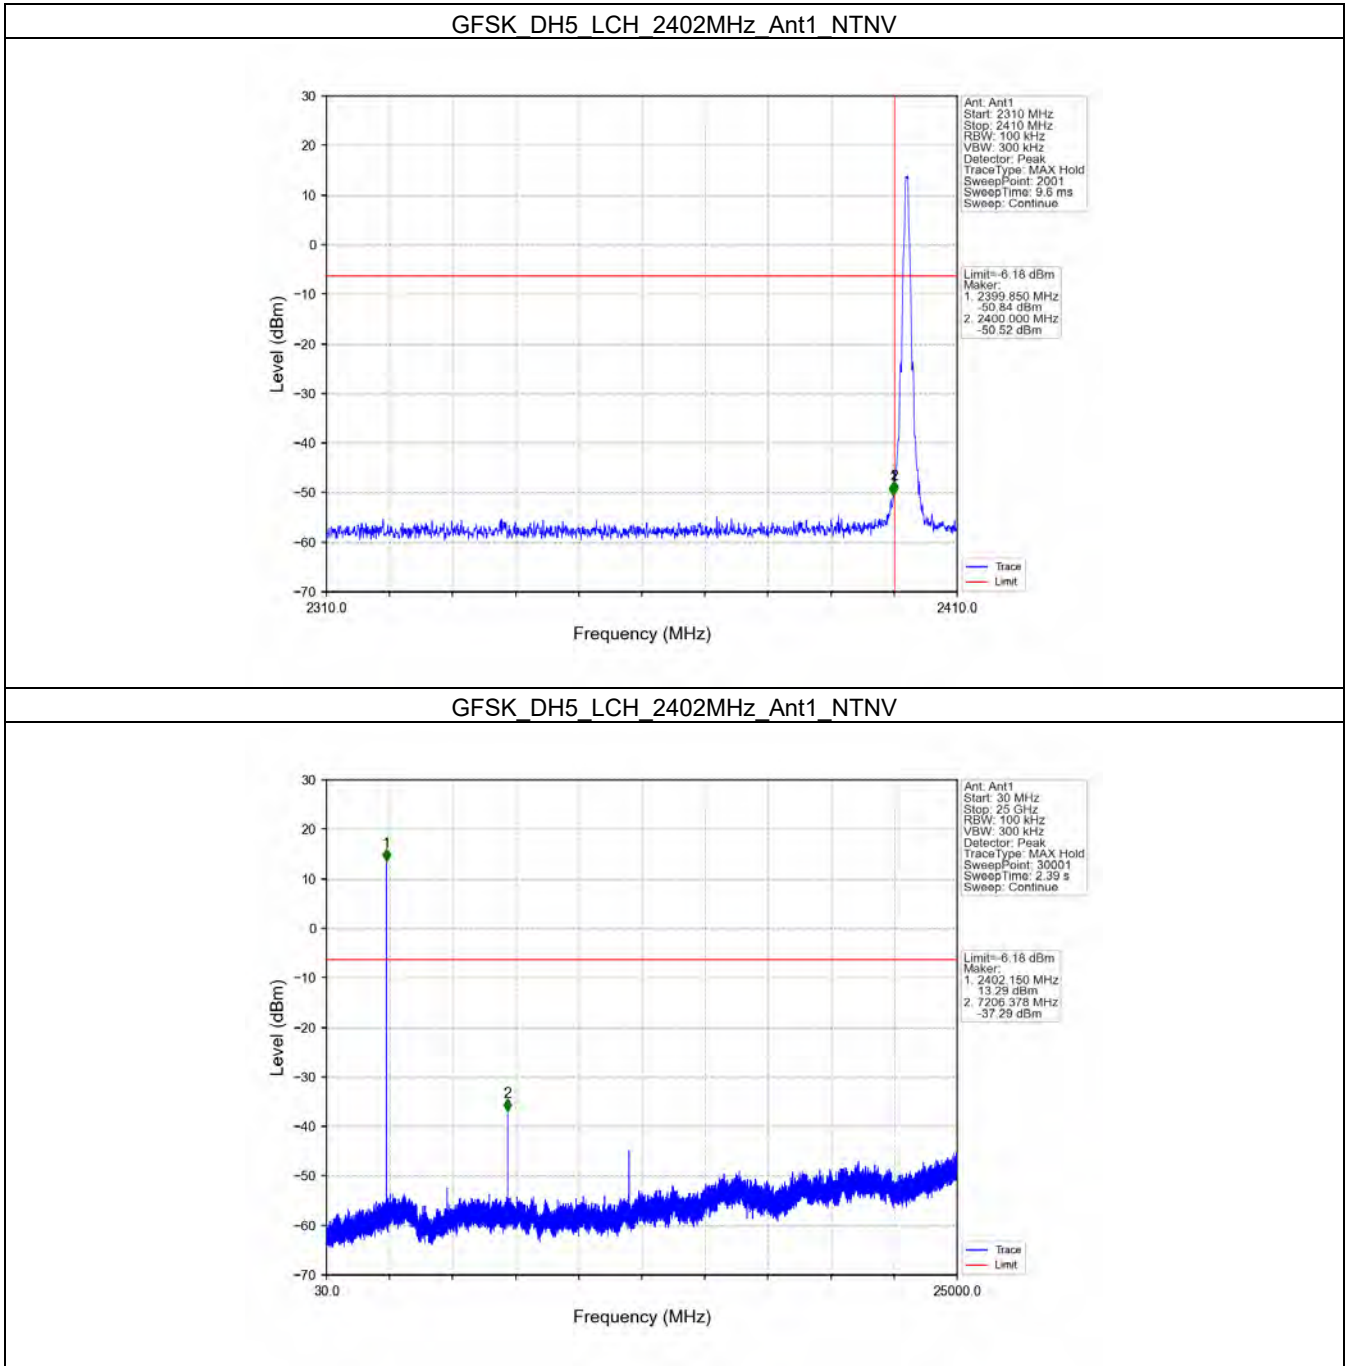





GFSK DH5 MCH 2441MHz Ant1 NTN

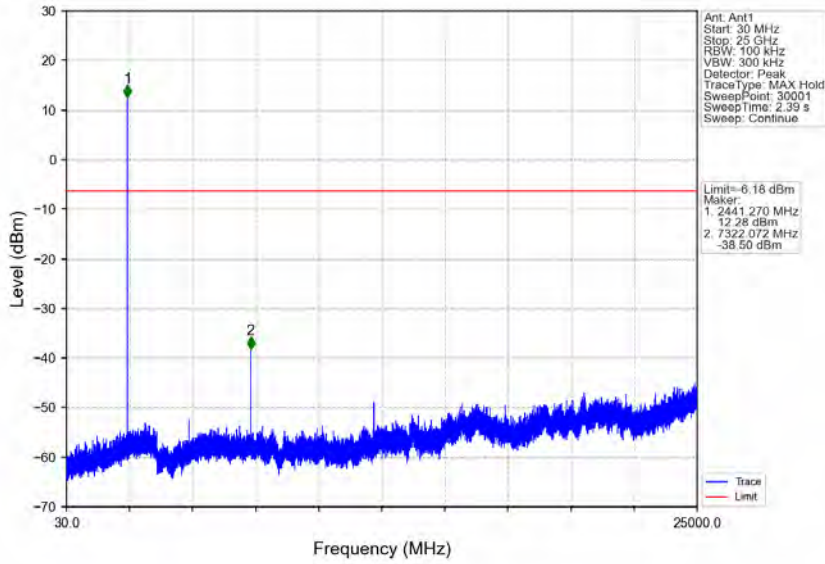


GFSK DH5 HCH 2480MHz Ant1 NTN

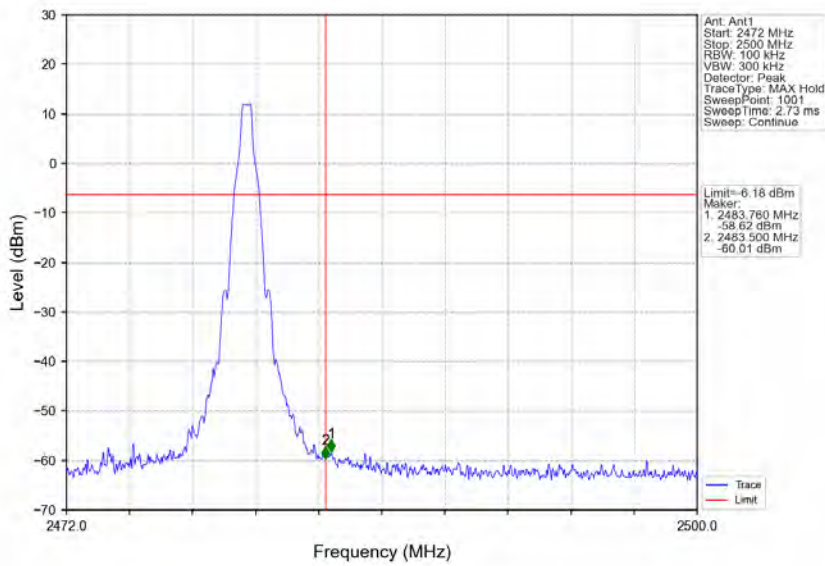


GFSK DH5 HCH 2480MHz Ant1 NTN

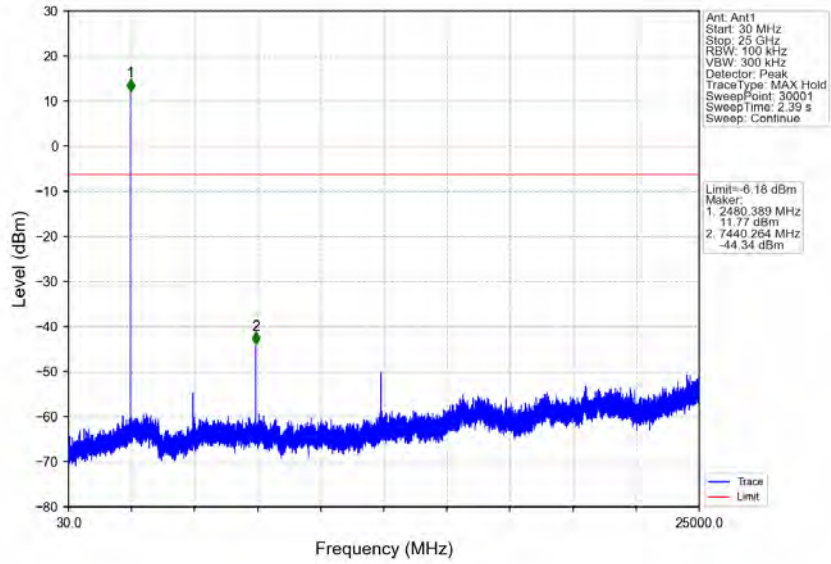


GFSK DH5\_HOPP\_Ant1 NTN

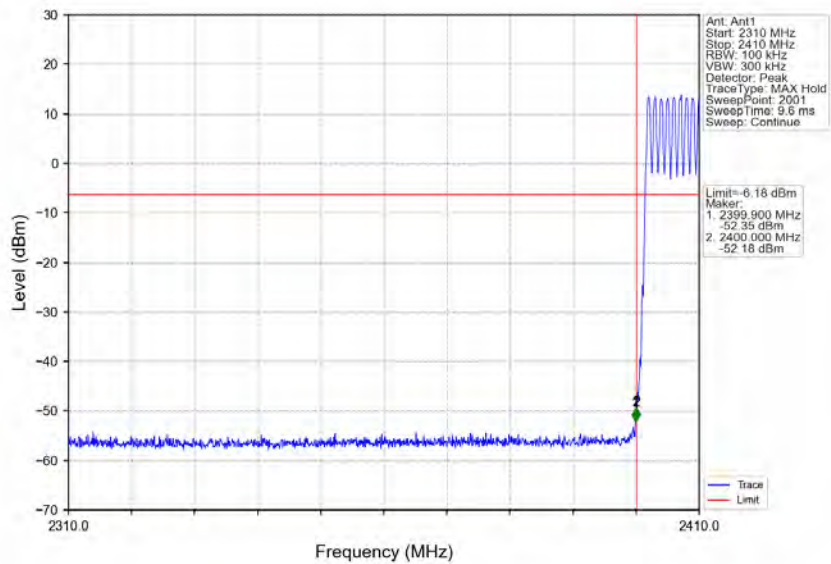


### GFSK DH5 HOPP Ant1 NTN

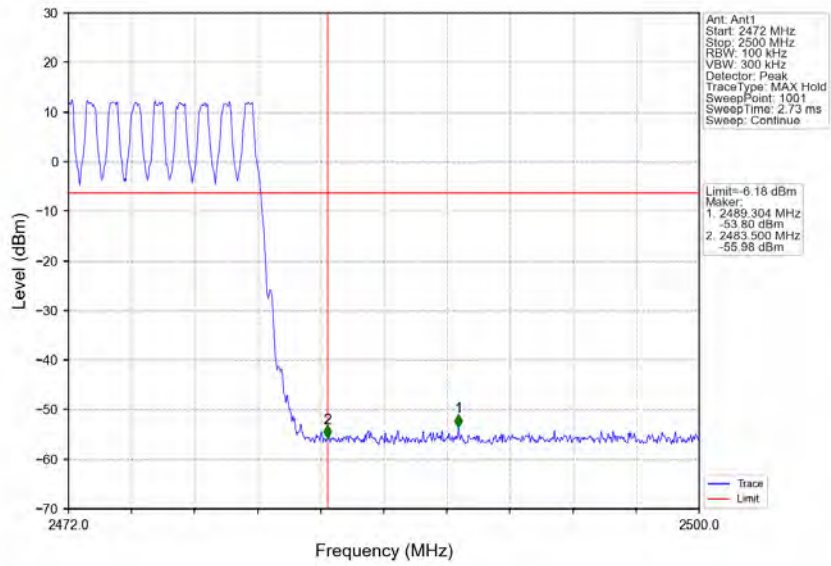


### Pi/4DQPSK 2DH5\_LCH\_2402MHz\_Ant1\_NTN

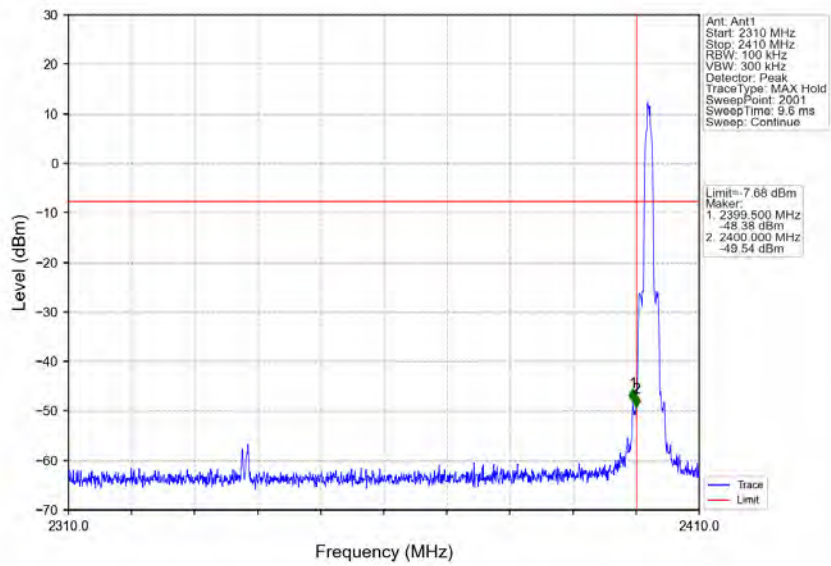


Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant1\_NTNV

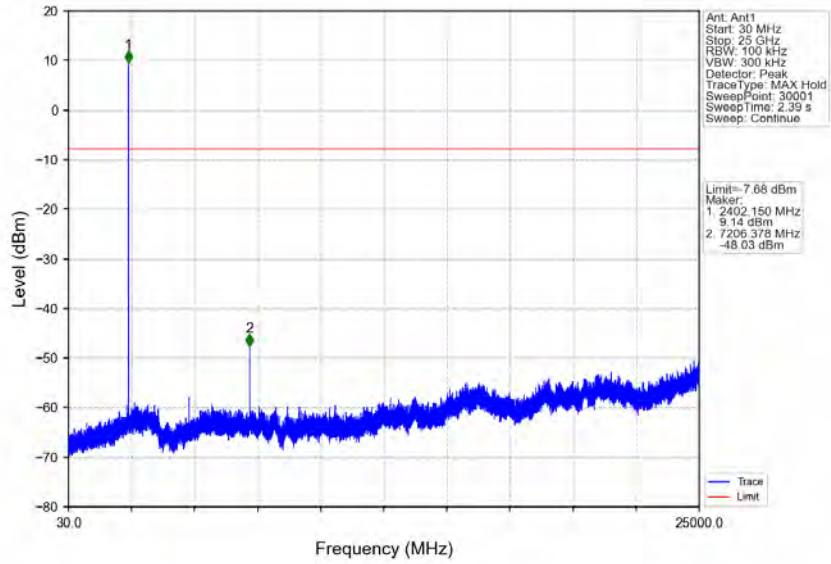


Pi/4DQPSK\_2DH5\_MCH\_2441MHz\_Ant1\_NTNV

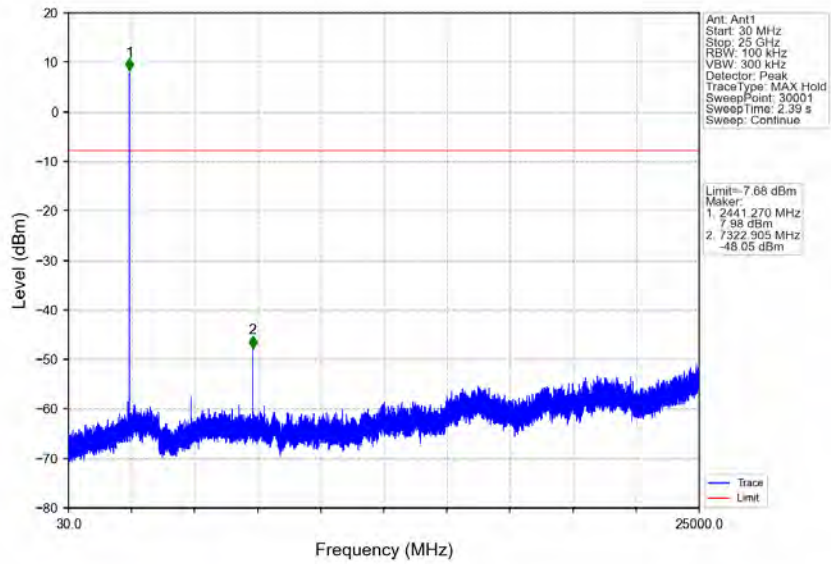


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTN

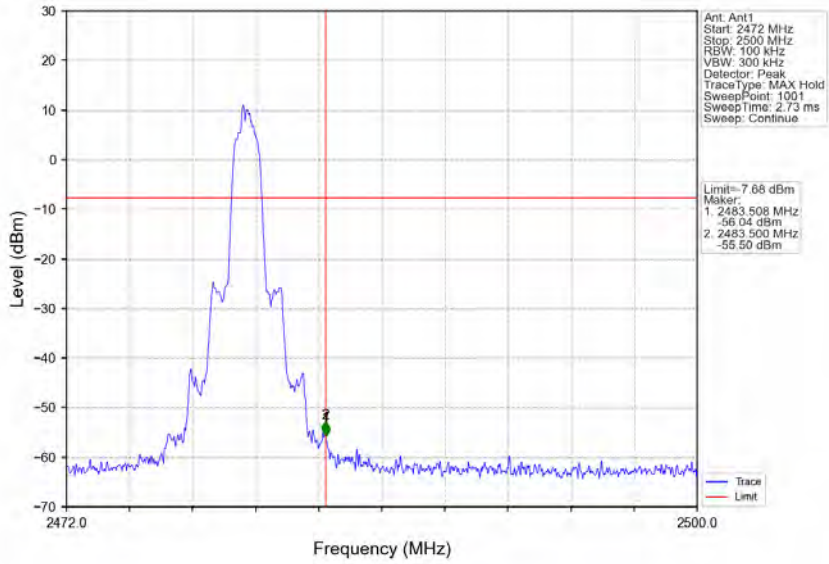


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTN

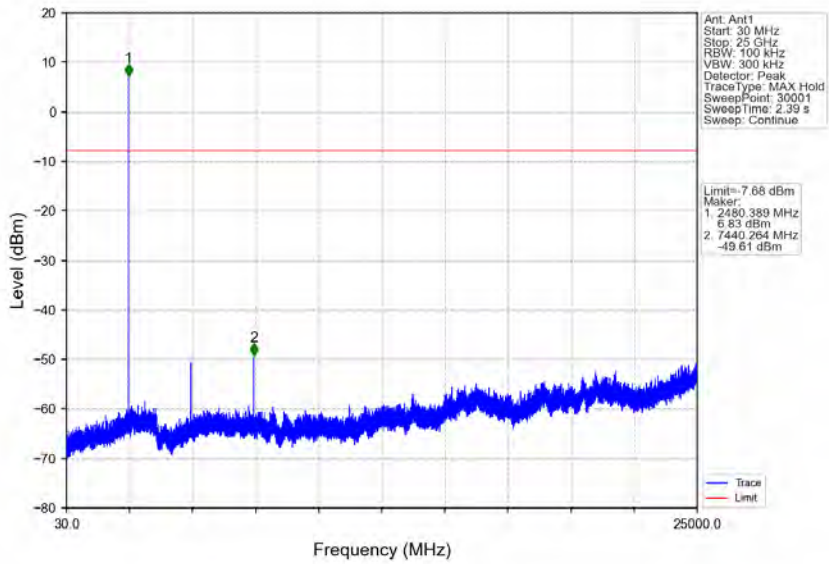


Pi/4DQPSK 2DH5 HOPP Ant1 NTN

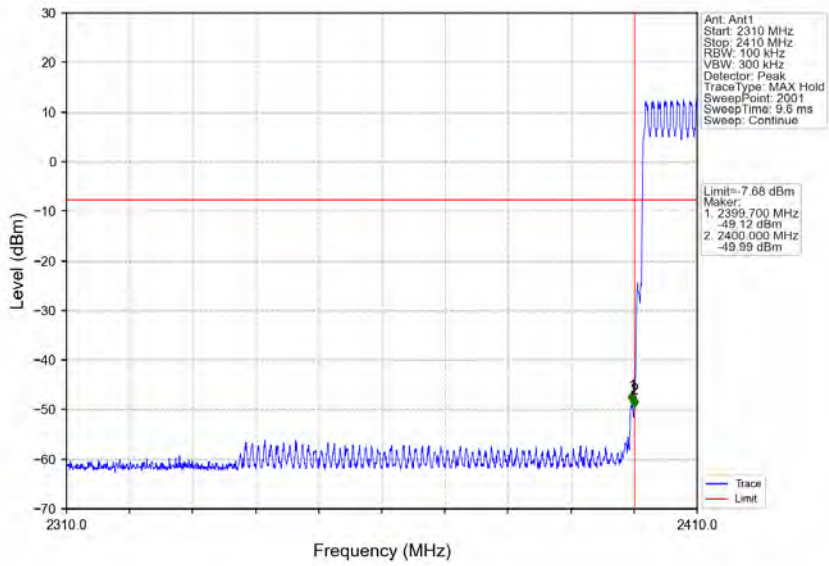


Pi/4DQPSK 2DH5 HOPP Ant1 NTN

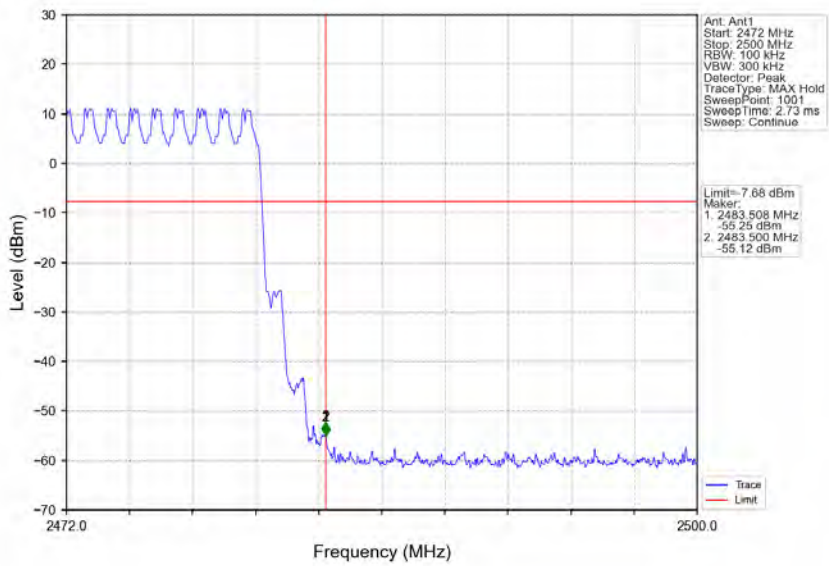


8DPSK 3DH5 LCH 2402MHz Ant1 NTN

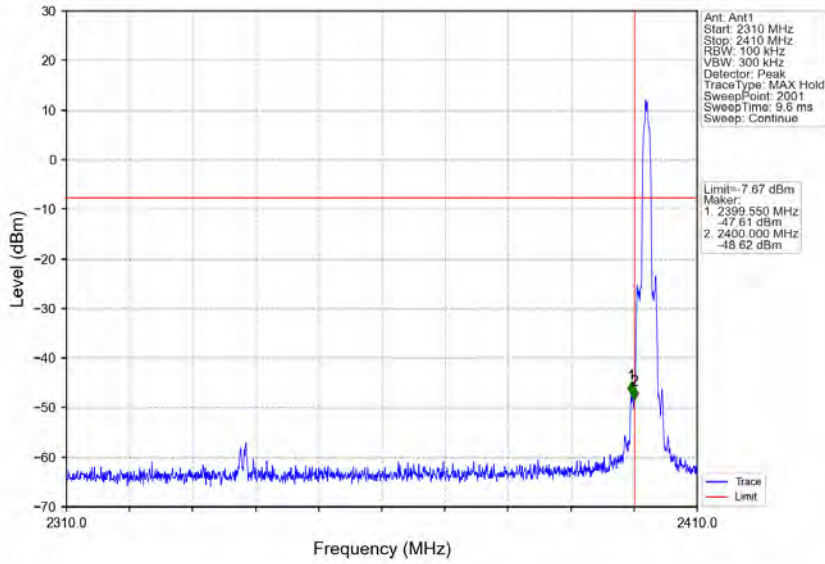


8DPSK 3DH5 LCH 2402MHz Ant1 NTN

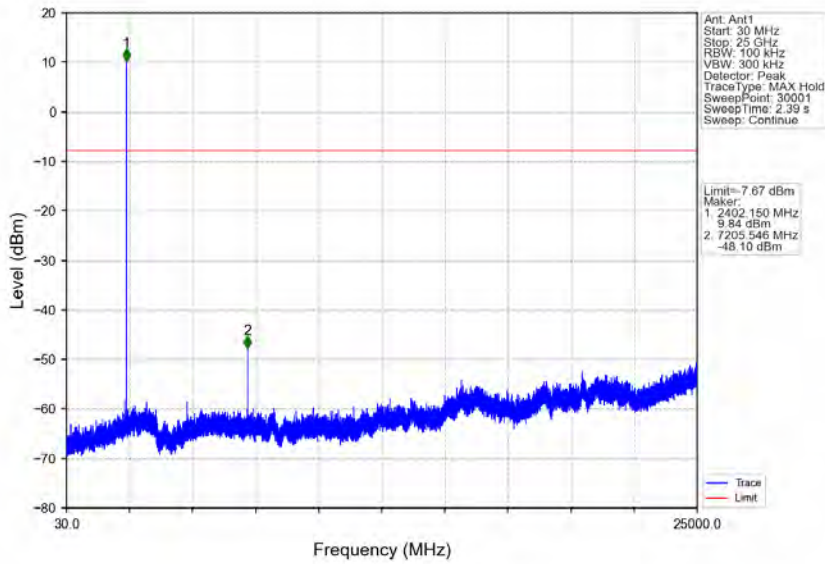

8DPSK 3DH5 MCH 2441MHz Ant1 NTV

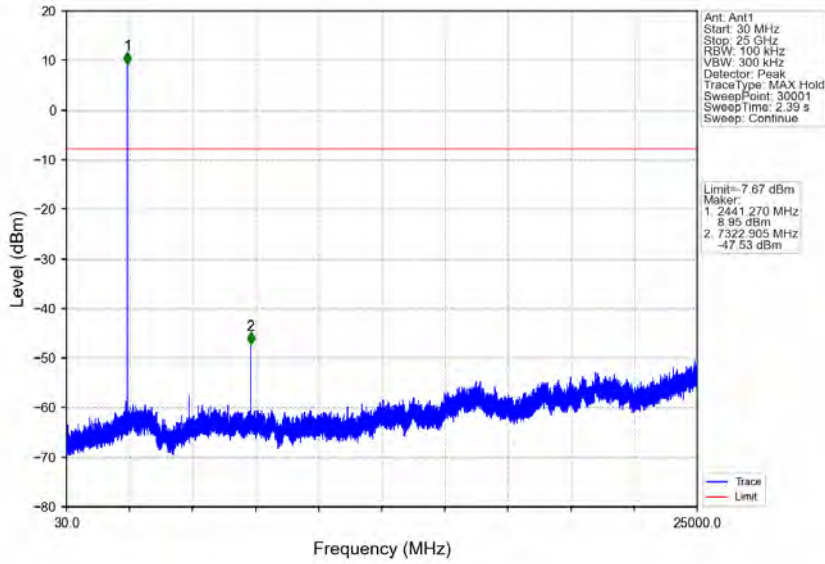


8DPSK 3DH5 HCH 2480MHz Ant1 NTV

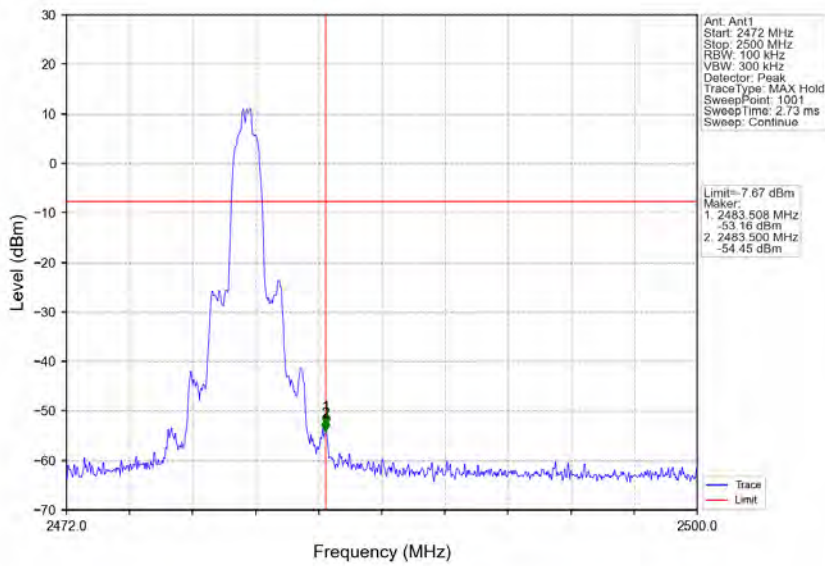





8DPSK 3DH5 HCH 2480MHz Ant1 NTN

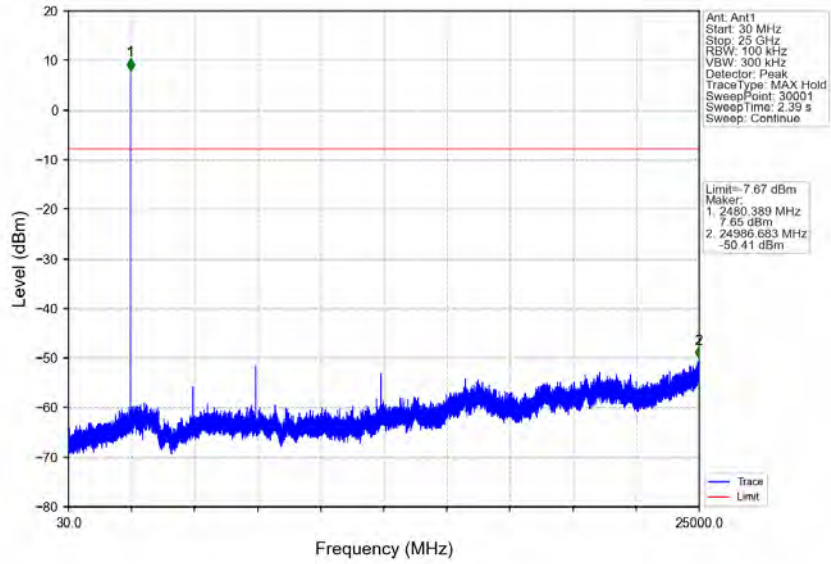

8DPSK 3DH5 HOPP\_Ant1 NTN

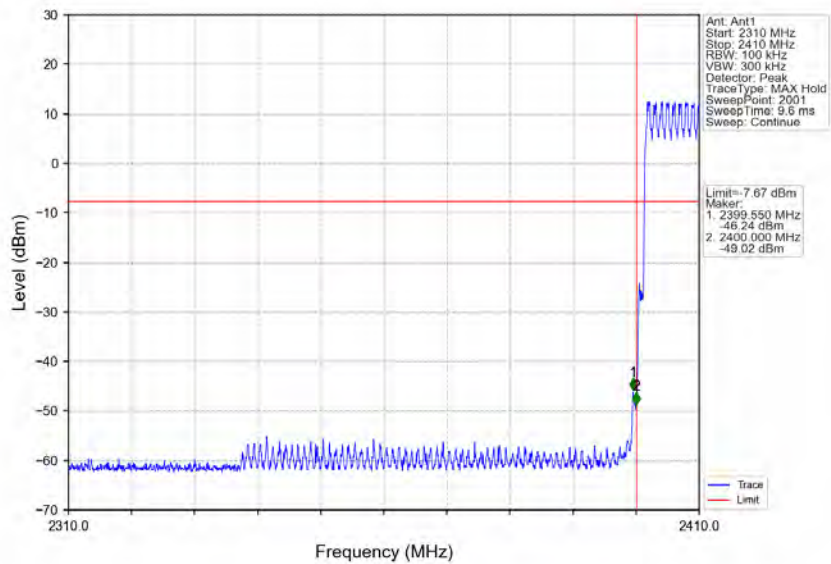

### 8DPSK 3DH5 HOPP Ant1 NTN

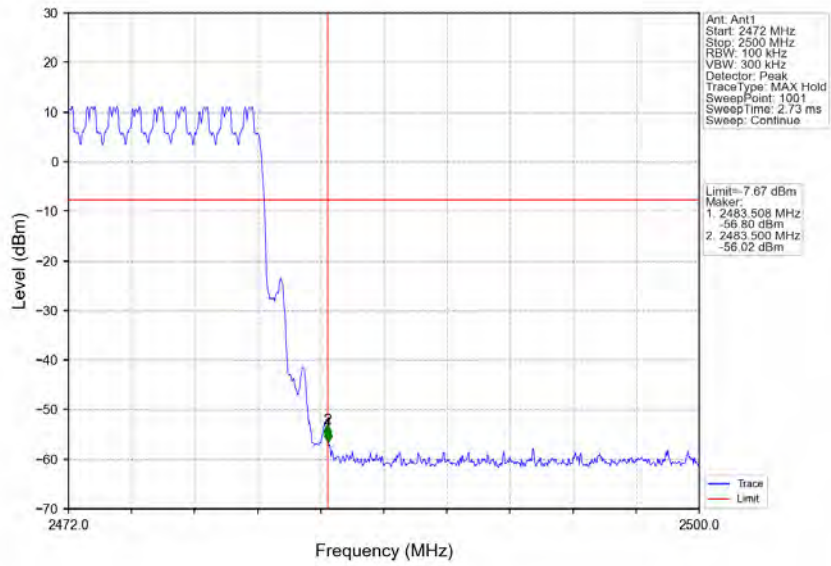



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 139 of 190

### Right

Channel	DH	2DH	3DH
	Ant 1	Ant 1	Ant 1
0	63	63	63
39	63	63	63
78	63	63	63


## 1. Bandwidth

### 1.1 OBW


#### 1.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.890	/	Pass
		2441	DH5	1	0.891	/	Pass
		2480	DH5	1	0.891	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.156	/	Pass
		2441	2DH5	1	1.157	/	Pass
		2480	2DH5	1	1.163	/	Pass
8DPSK	SISO	2402	3DH5	1	1.163	/	Pass
		2441	3DH5	1	1.166	/	Pass
		2480	3DH5	1	1.168	/	Pass


### 1.1.2 Test Graph

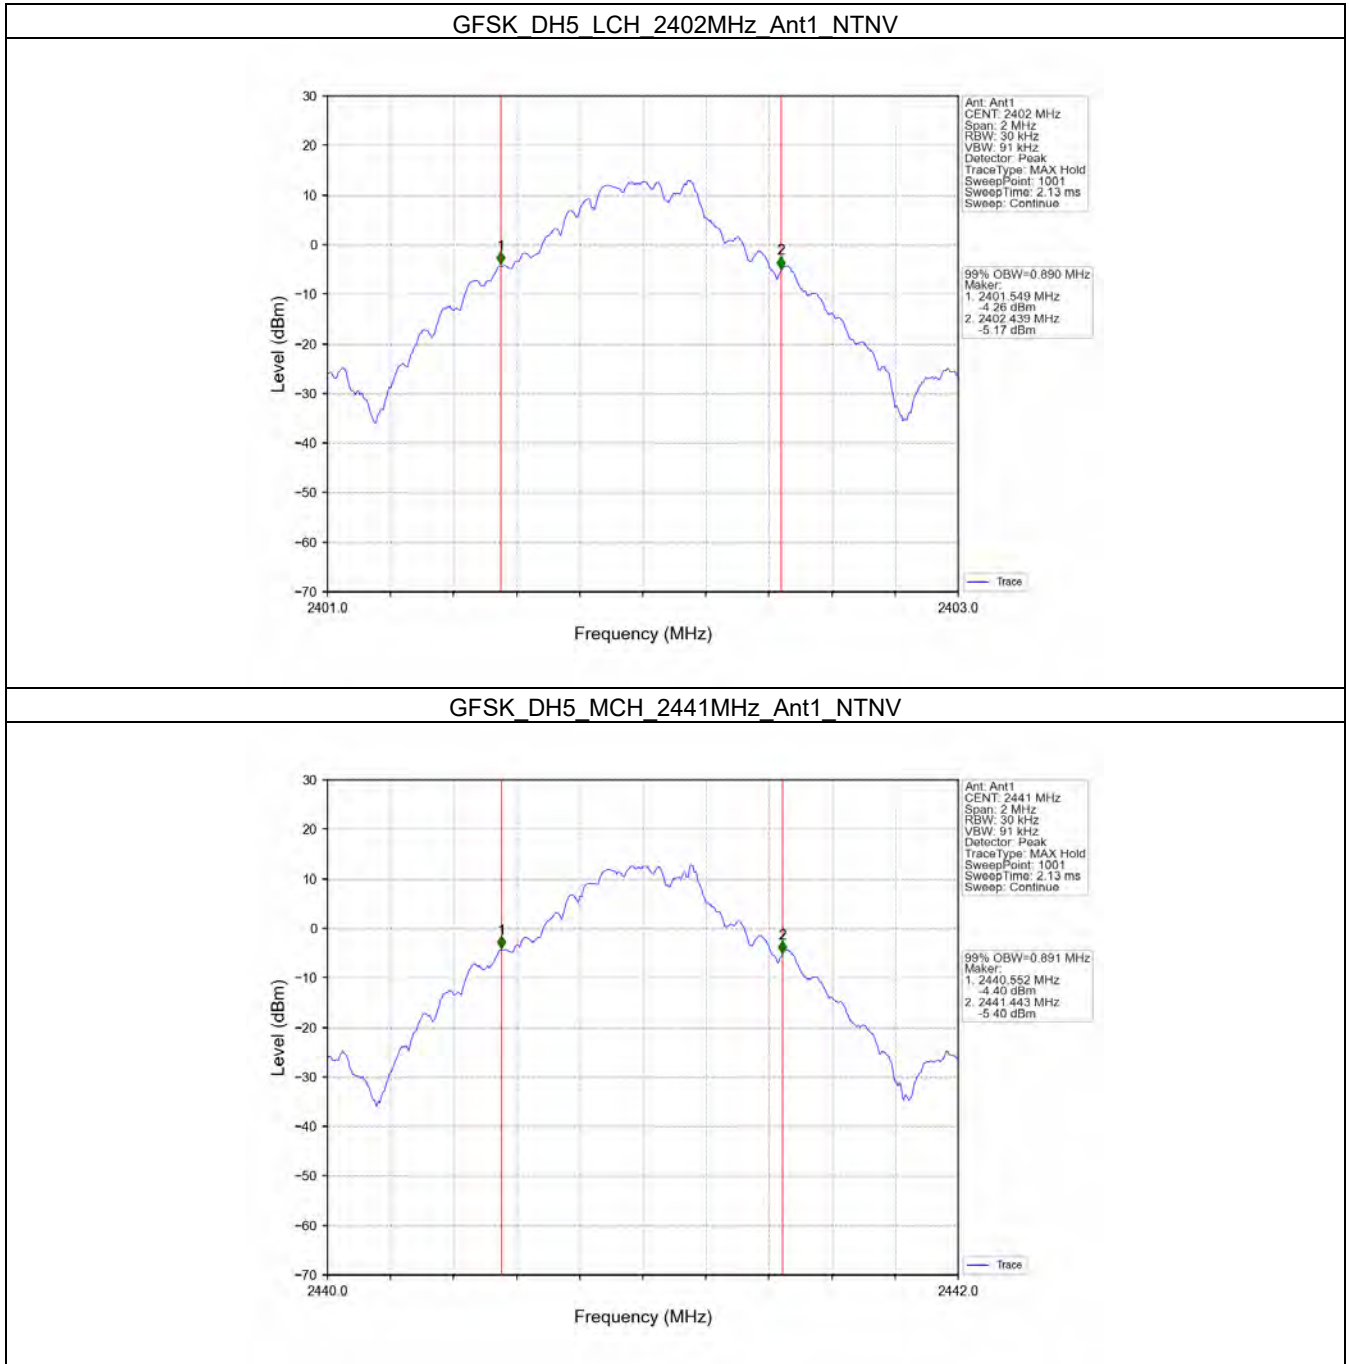


GFSK DH5 HCH 2480MHz Ant1 NTN

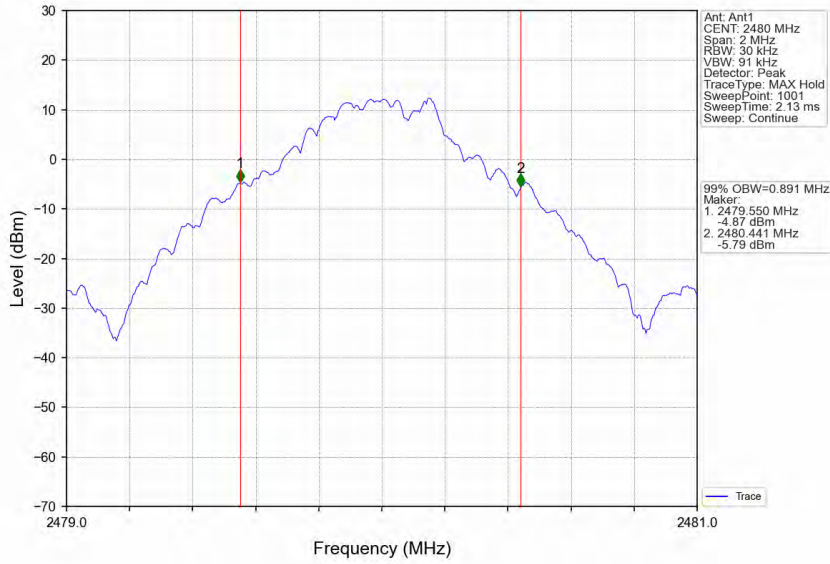


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTN

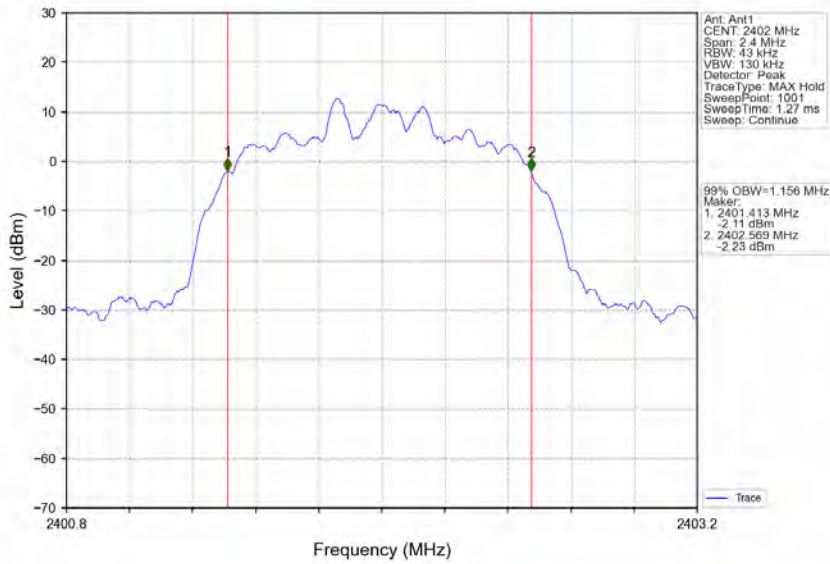


Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTN

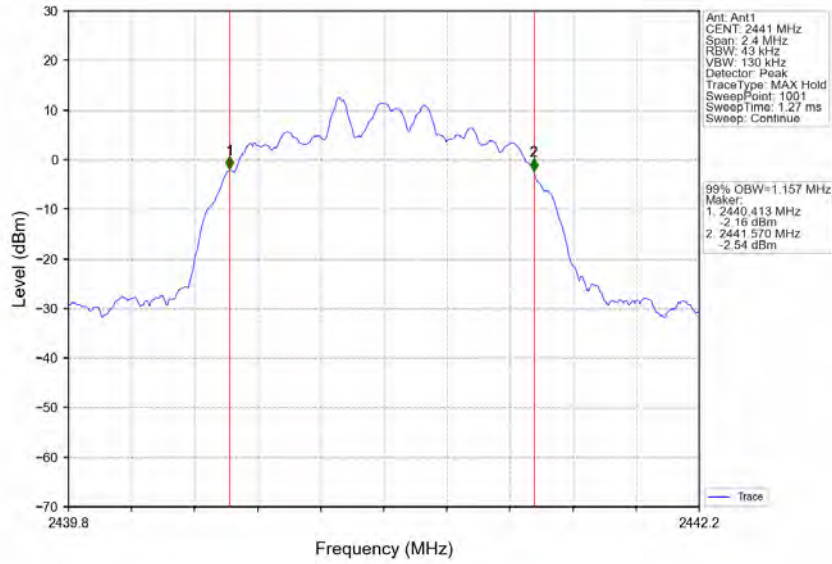


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTN

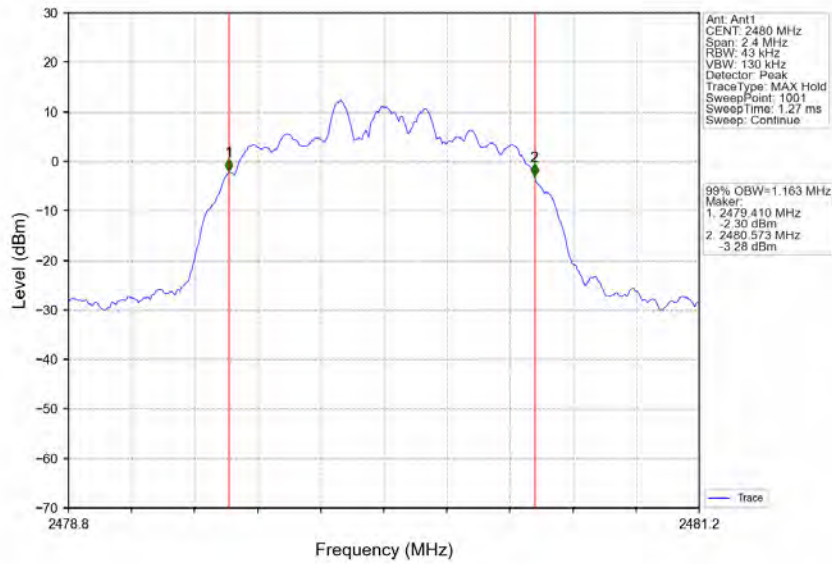


8DPSK 3DH5 LCH 2402MHz Ant1 NTV

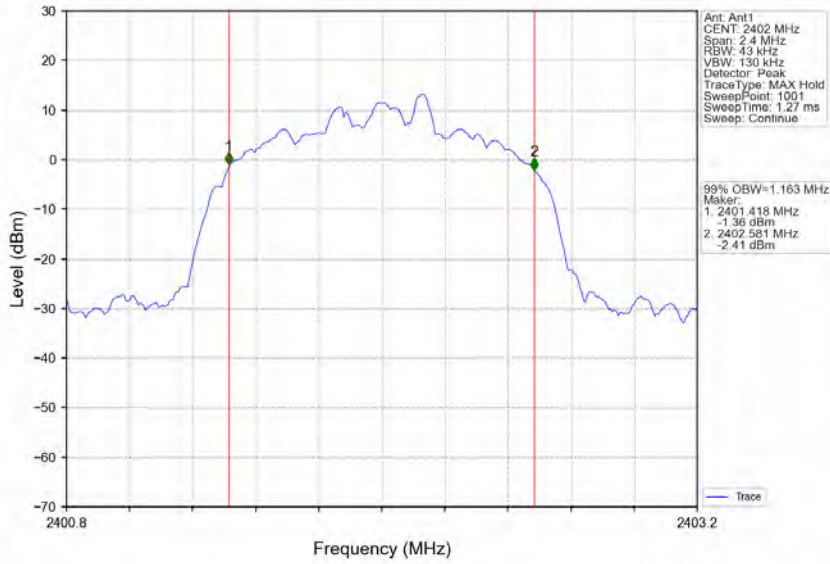

8DPSK 3DH5 MCH 2441MHz Ant1 NTV

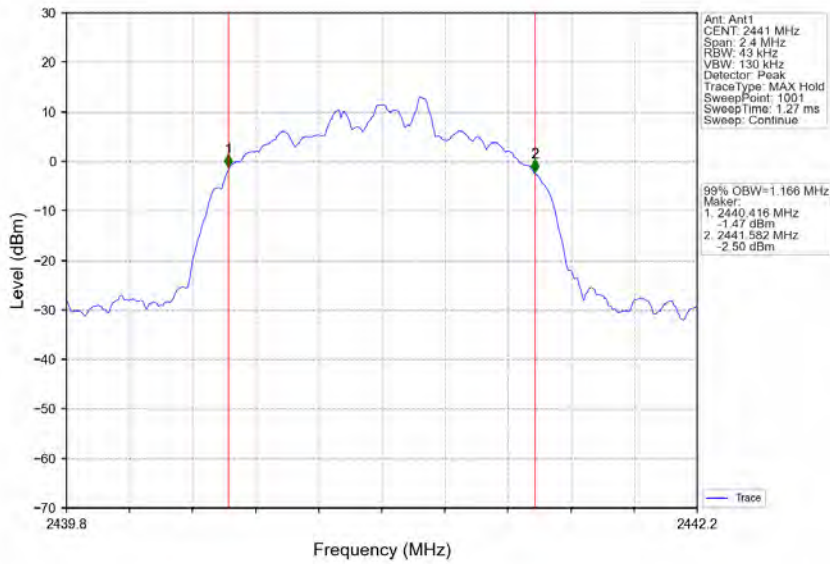

8DPSK 3DH5 HCH 2480MHz Ant1 NTV

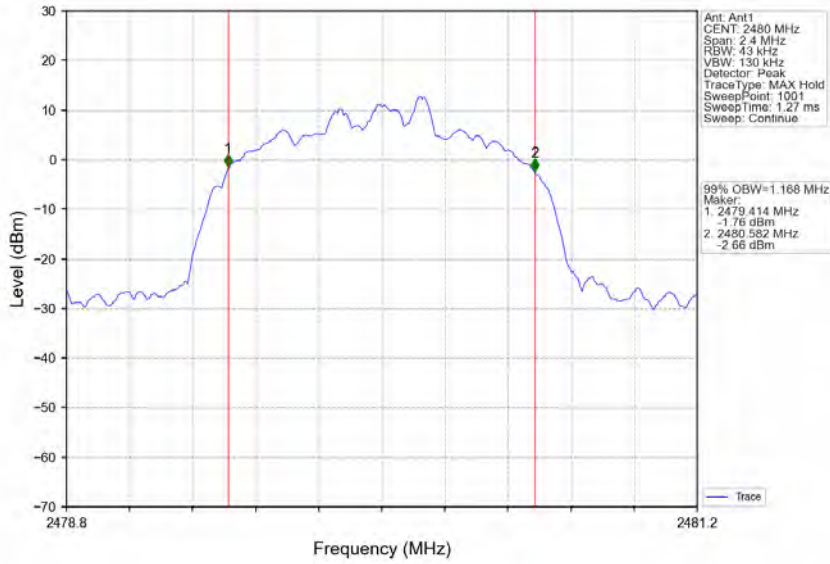





## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701


Page: 145 of 190

### 1.2 20dB BW


#### 1.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.968	/	Pass
		2441	DH5	1	0.969	/	Pass
		2480	DH5	1	0.967	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.281	/	Pass
		2441	2DH5	1	1.281	/	Pass
		2480	2DH5	1	1.283	/	Pass
8DPSK	SISO	2402	3DH5	1	1.291	/	Pass
		2441	3DH5	1	1.291	/	Pass
		2480	3DH5	1	1.293	/	Pass


### 1.2.2 Test Graph

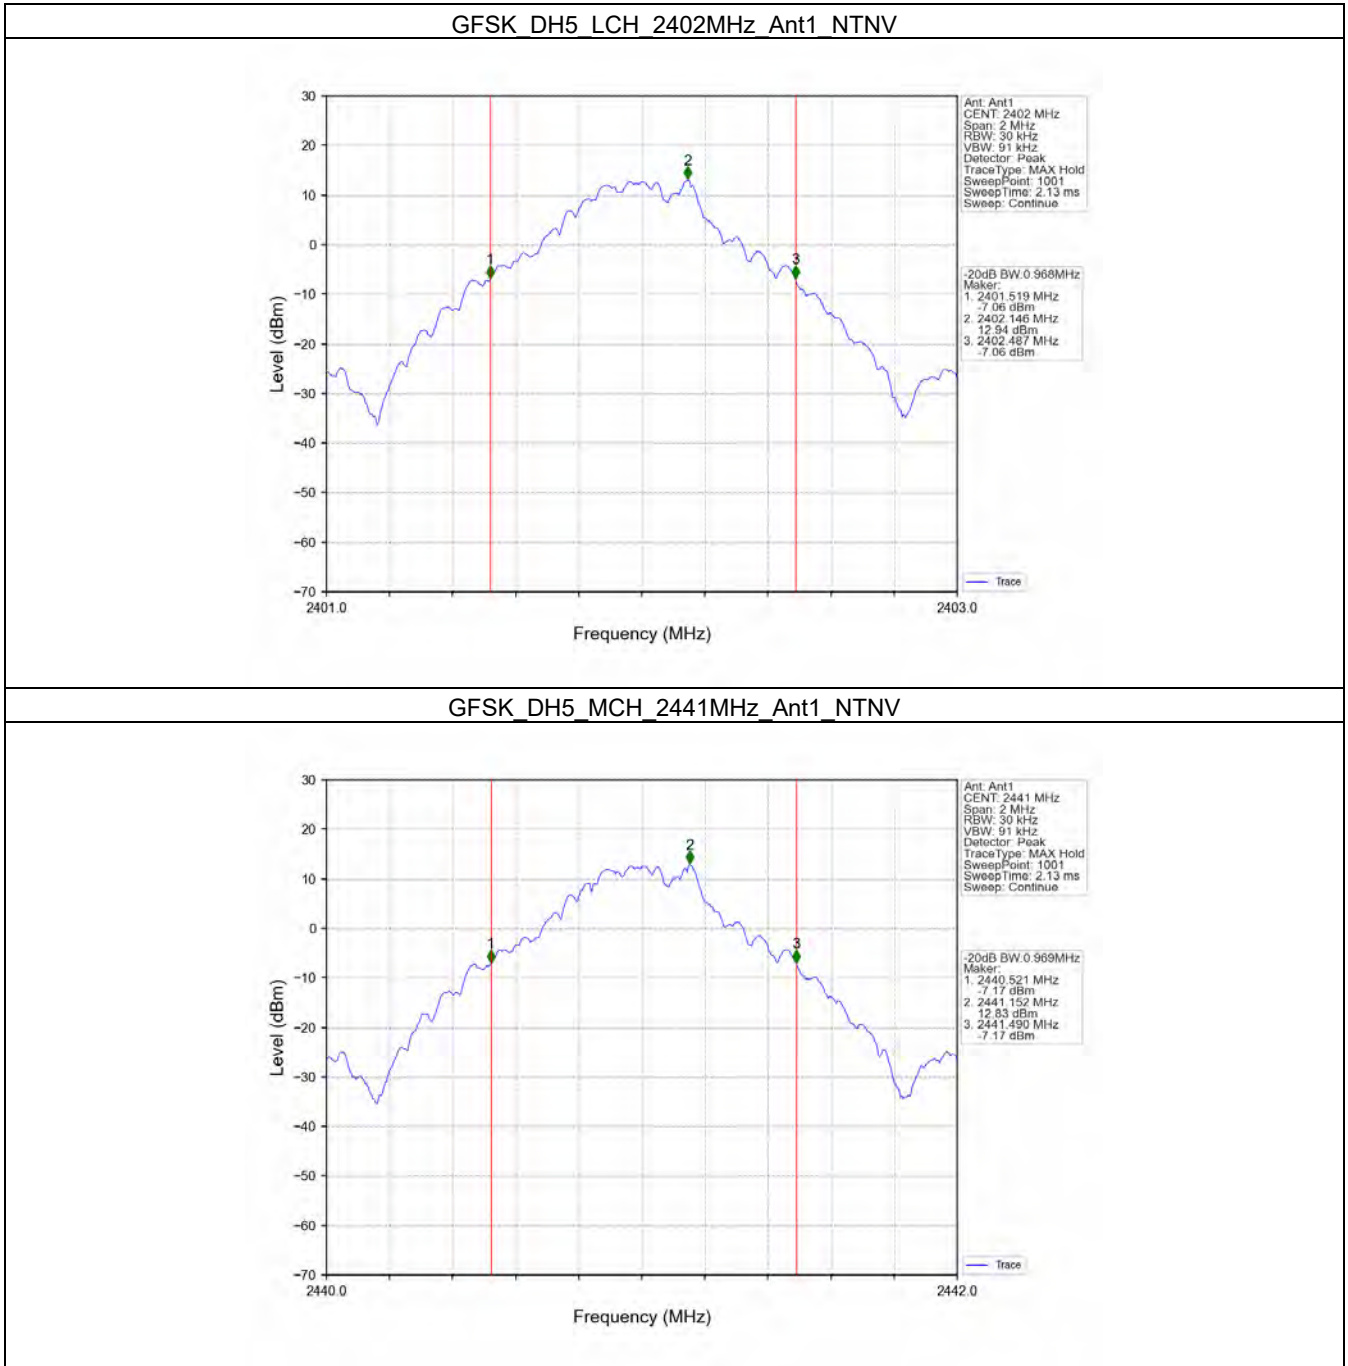


GFSK DH5 HCH 2480MHz Ant1 NTN

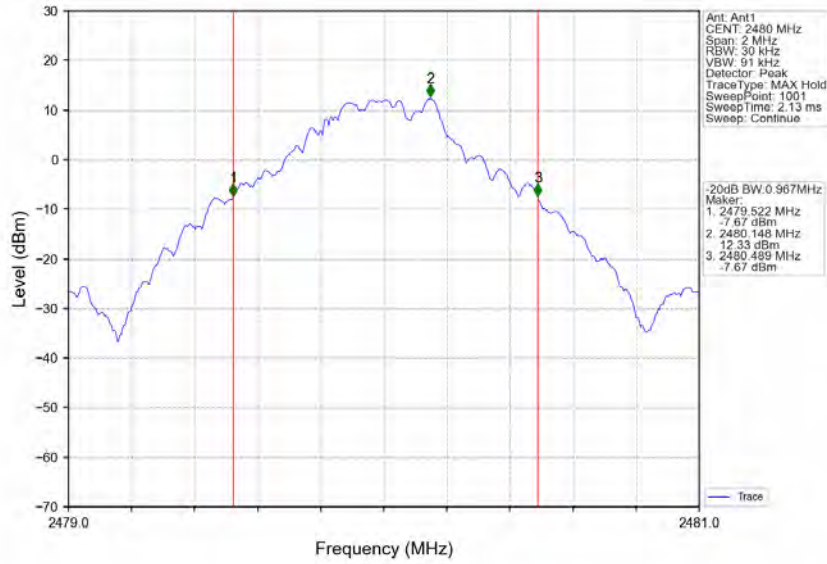


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTN

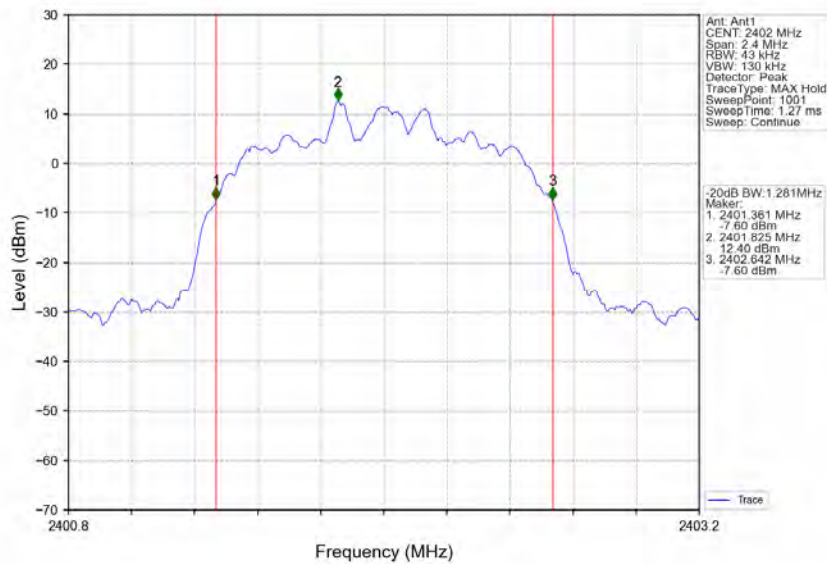


Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTN

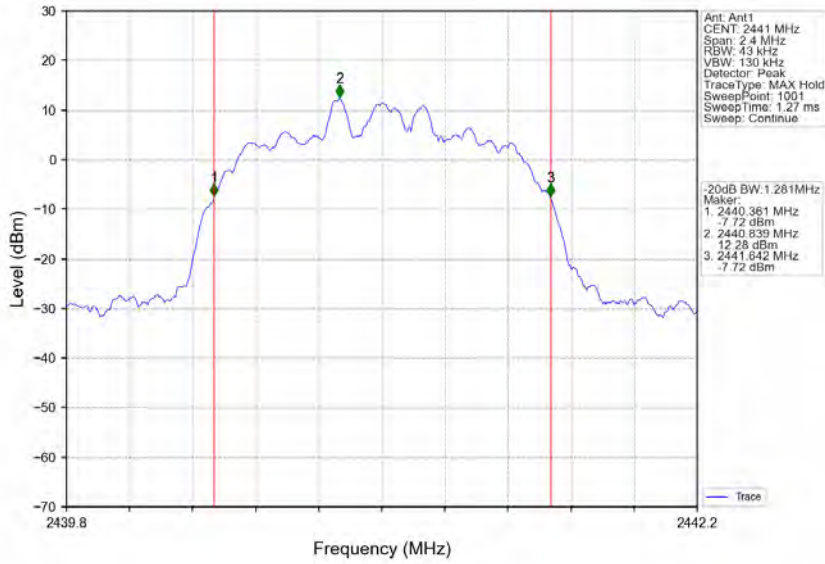


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTN

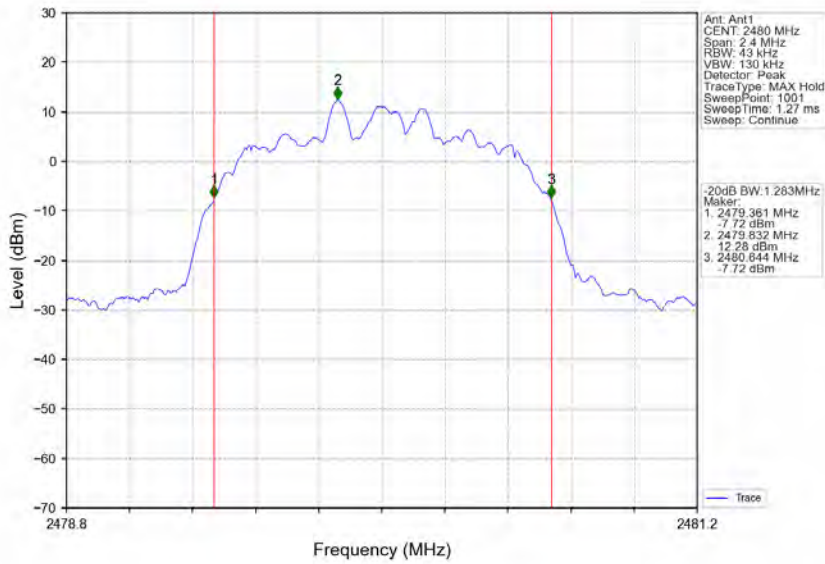


8DPSK 3DH5 LCH 2402MHz Ant1 NTV

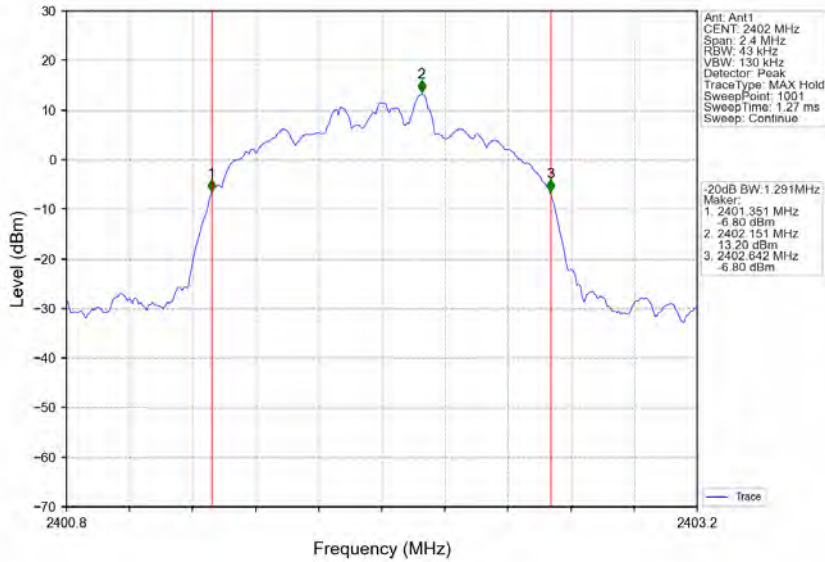

8DPSK 3DH5 MCH 2441MHz Ant1 NTV

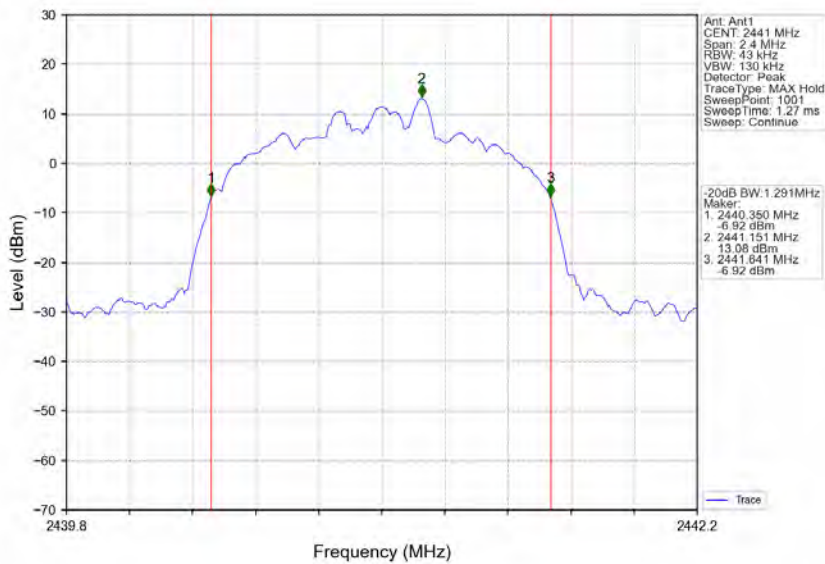

### 8DPSK 3DH5 HCH 2480MHz Ant1 NTV

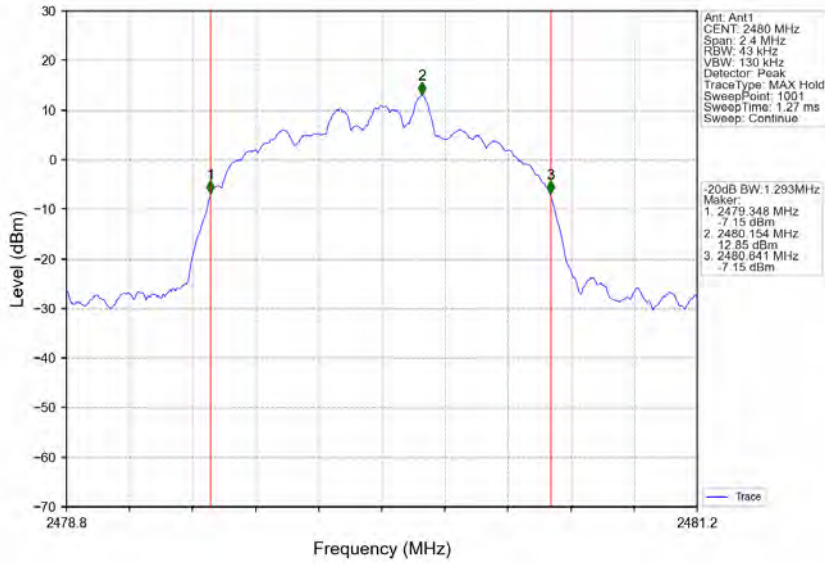



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 151 of 190

### 2. Maximum Conducted Output Power


#### 2.1 Power

##### 2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	15.20	<=30	Pass
		2441	DH5	15.05	<=30	Pass
		2480	DH5	14.58	<=30	Pass
Pi/4DQPSK	SISO	2402	2DH5	13.78	<=20.97	Pass
		2441	2DH5	13.64	<=20.97	Pass
		2480	2DH5	13.43	<=20.97	Pass
8DPSK	SISO	2402	3DH5	13.83	<=20.97	Pass
		2441	3DH5	13.69	<=20.97	Pass
		2480	3DH5	13.46	<=20.97	Pass


Note1: Antenna Gain: Ant1: -3.53dBi;

### 2.1.2 Test Graph

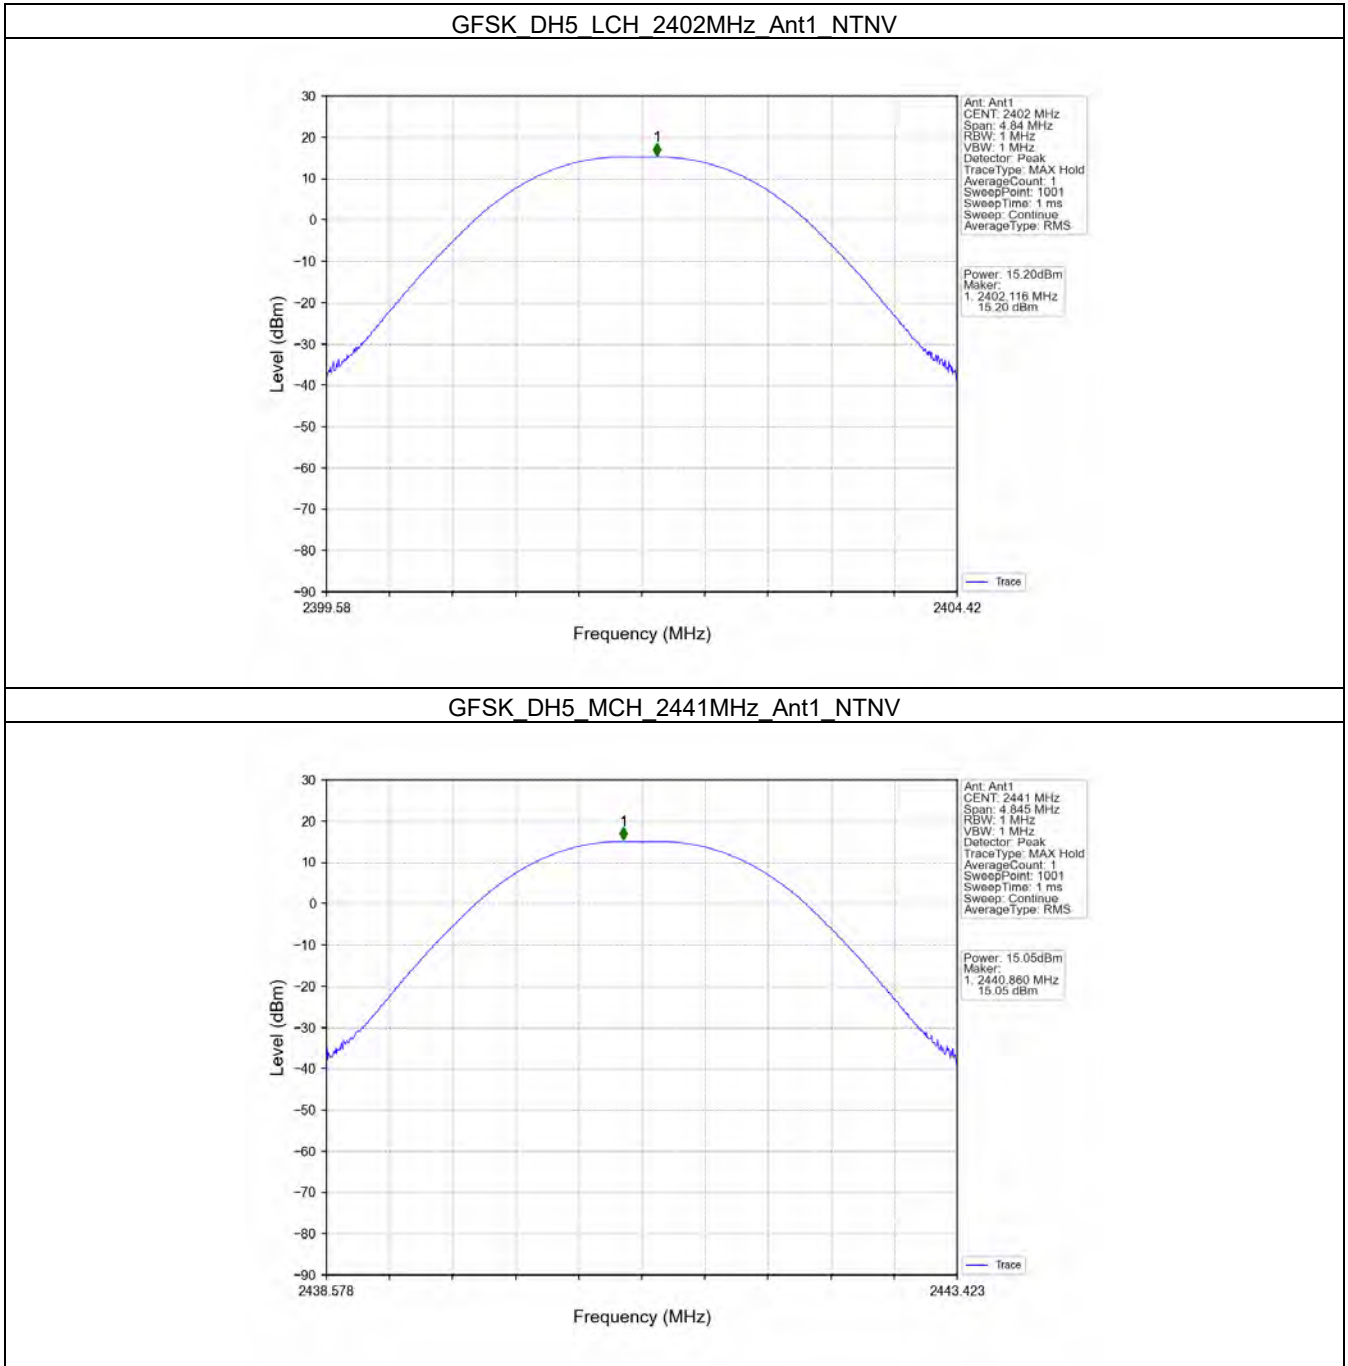





GFSK DH5 HCH 2480MHz Ant1 NTN

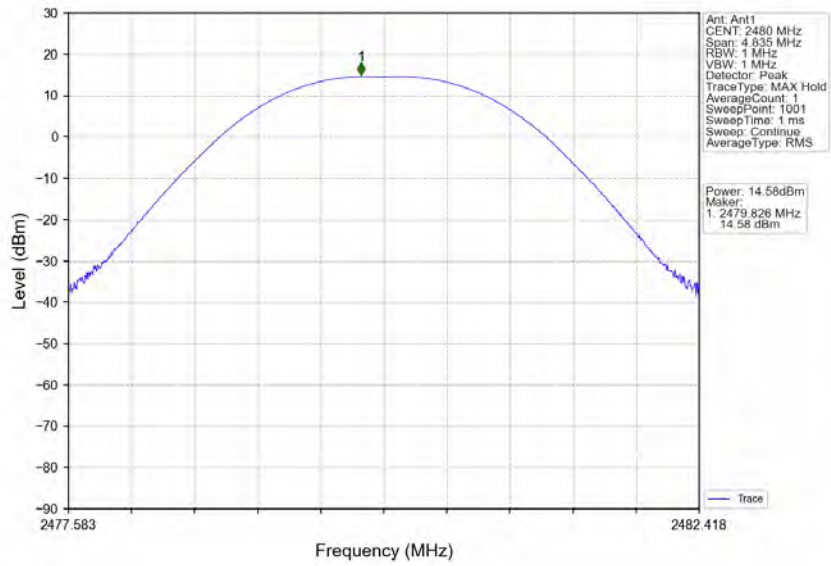


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTN

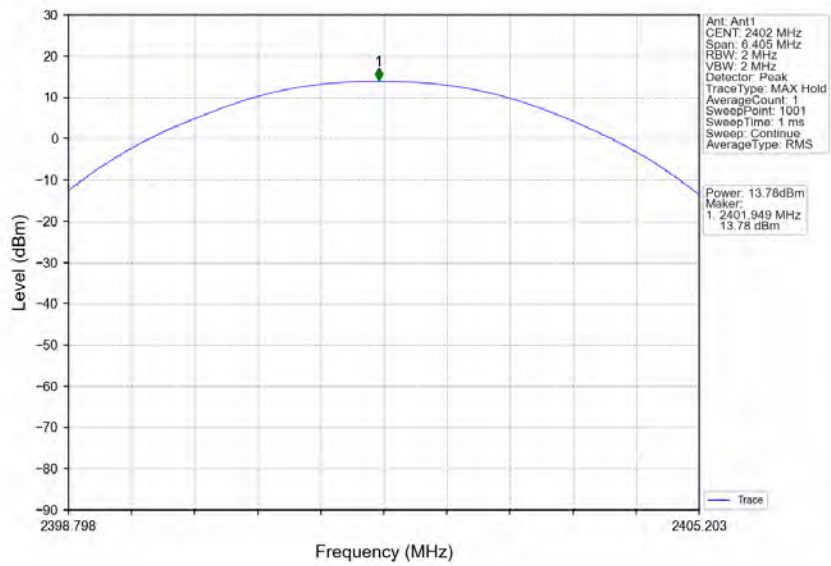


Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTN

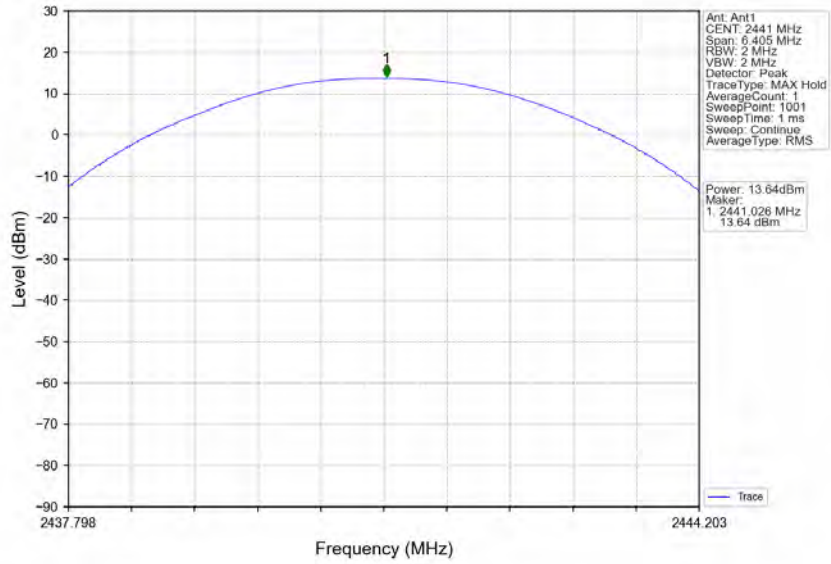


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTN

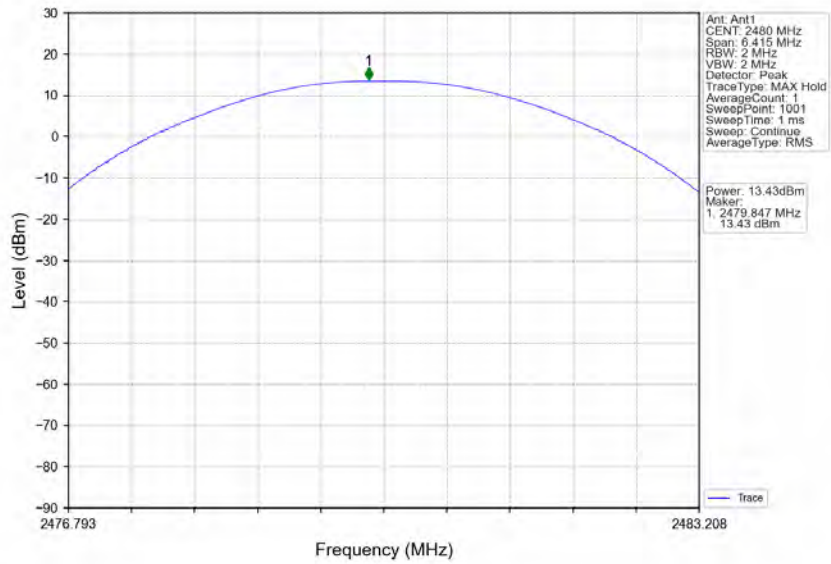


8DPSK 3DH5 LCH 2402MHz Ant1 NTV

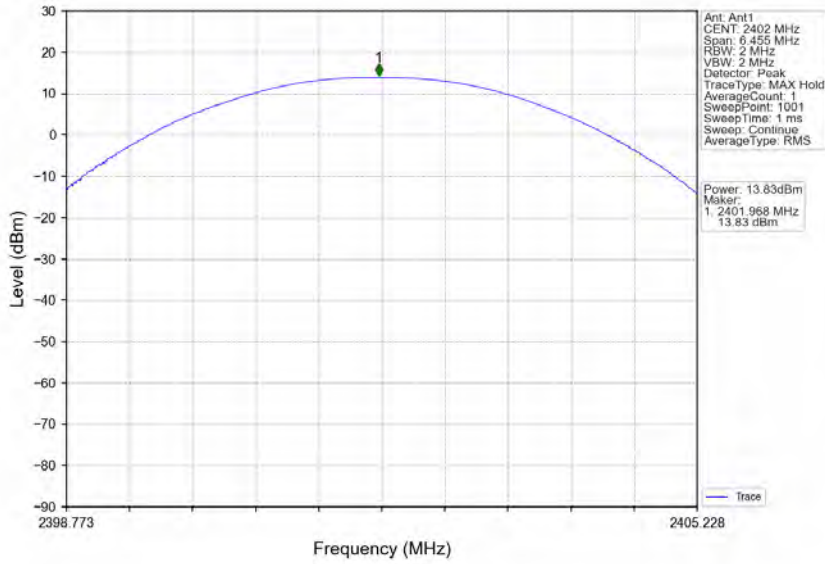

8DPSK 3DH5 MCH 2441MHz Ant1 NTV

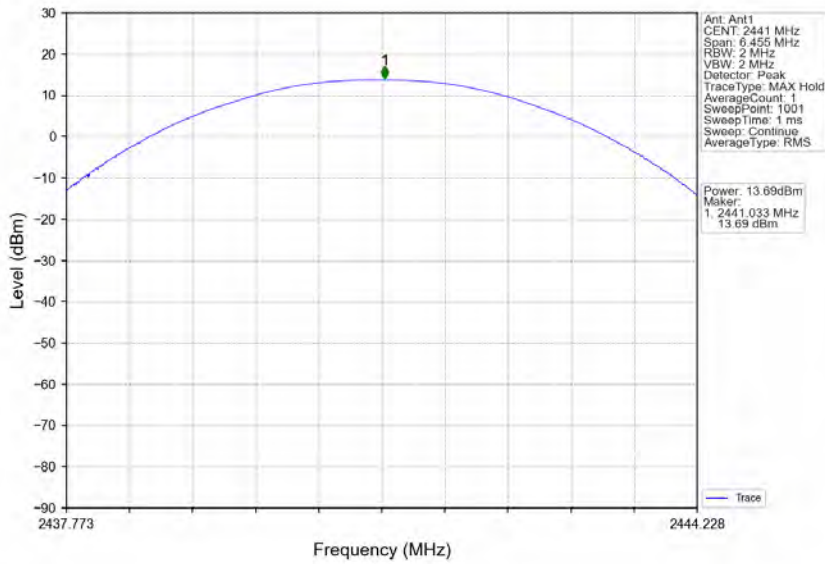

8DPSK 3DH5 HCH 2480MHz Ant1 NTV

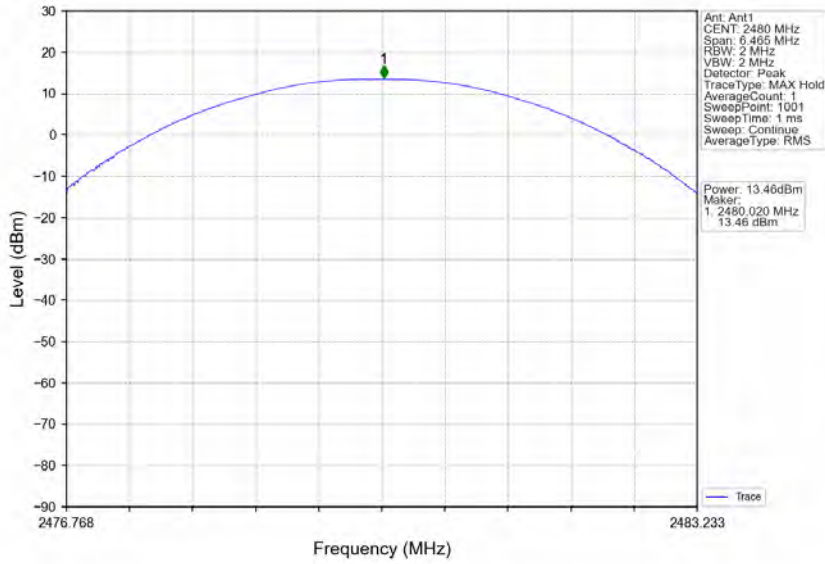



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 157 of 190


### 3. Carrier Frequency Separation

#### 3.1 Ant1

##### 3.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.002	0.969	$\geq 0.969$	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.001	1.283	$\geq 0.855$	Pass
8DPSK	SISO	HOPP	3DH5	1.003	1.293	$\geq 0.862$	Pass

3.1.2 Test Graph

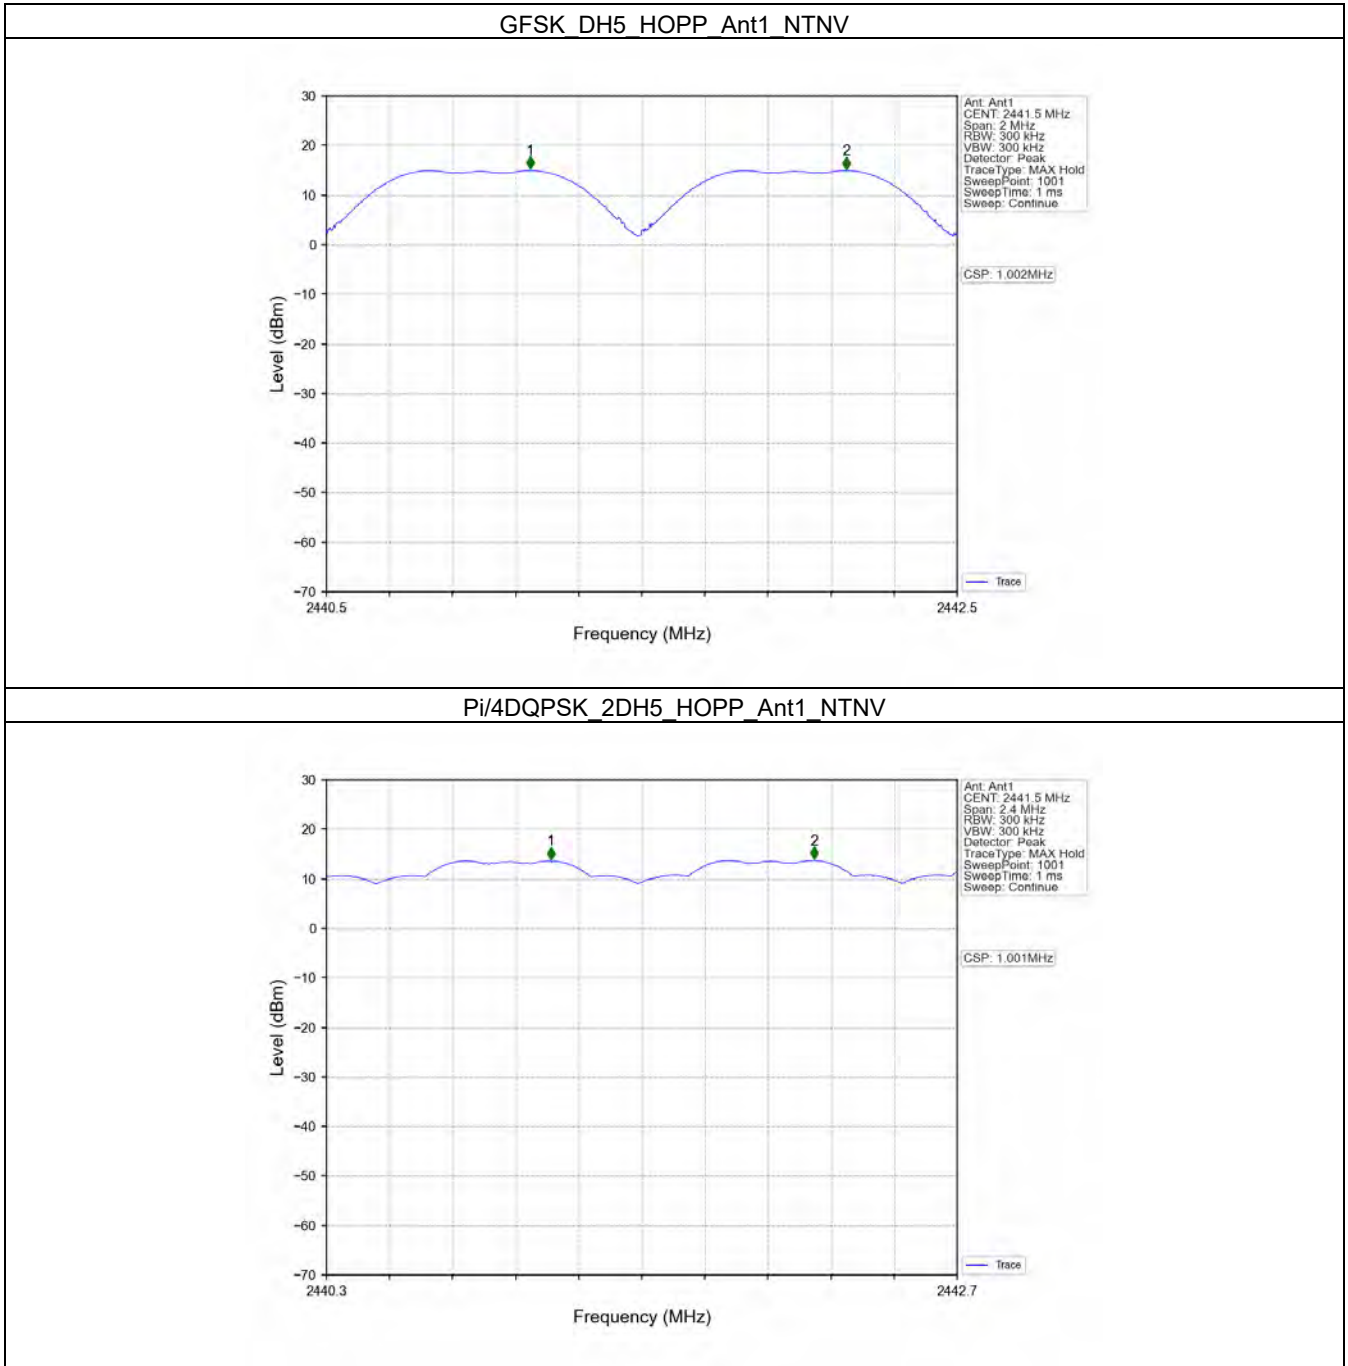




# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 159 of 190

8DPSK 3DH5 HOPP Ant1 NTN

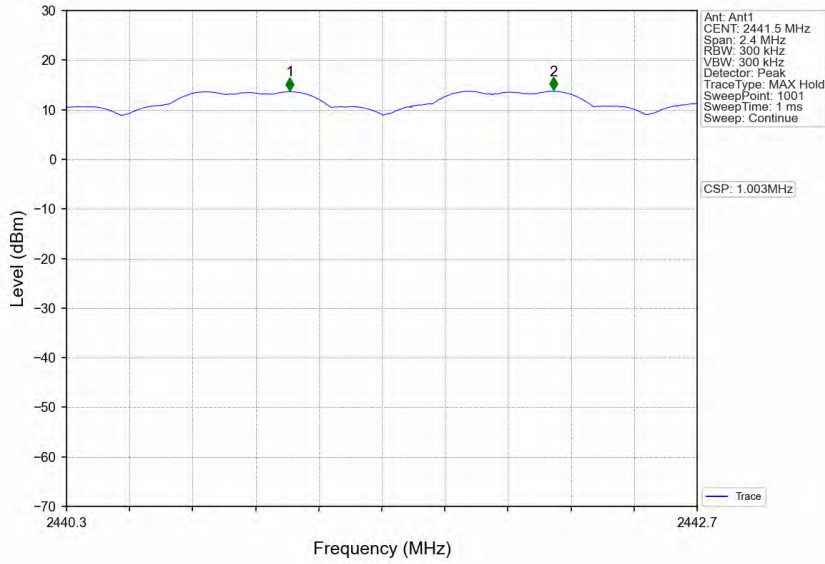



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 160 of 190

### 4. Number of Hopping Frequencies


#### 4.1 HoppNum

##### 4.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	>=15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	>=15	Pass
8DPSK	SISO	HOPP	3DH5	79	>=15	Pass



### 4.1.2 Test Graph

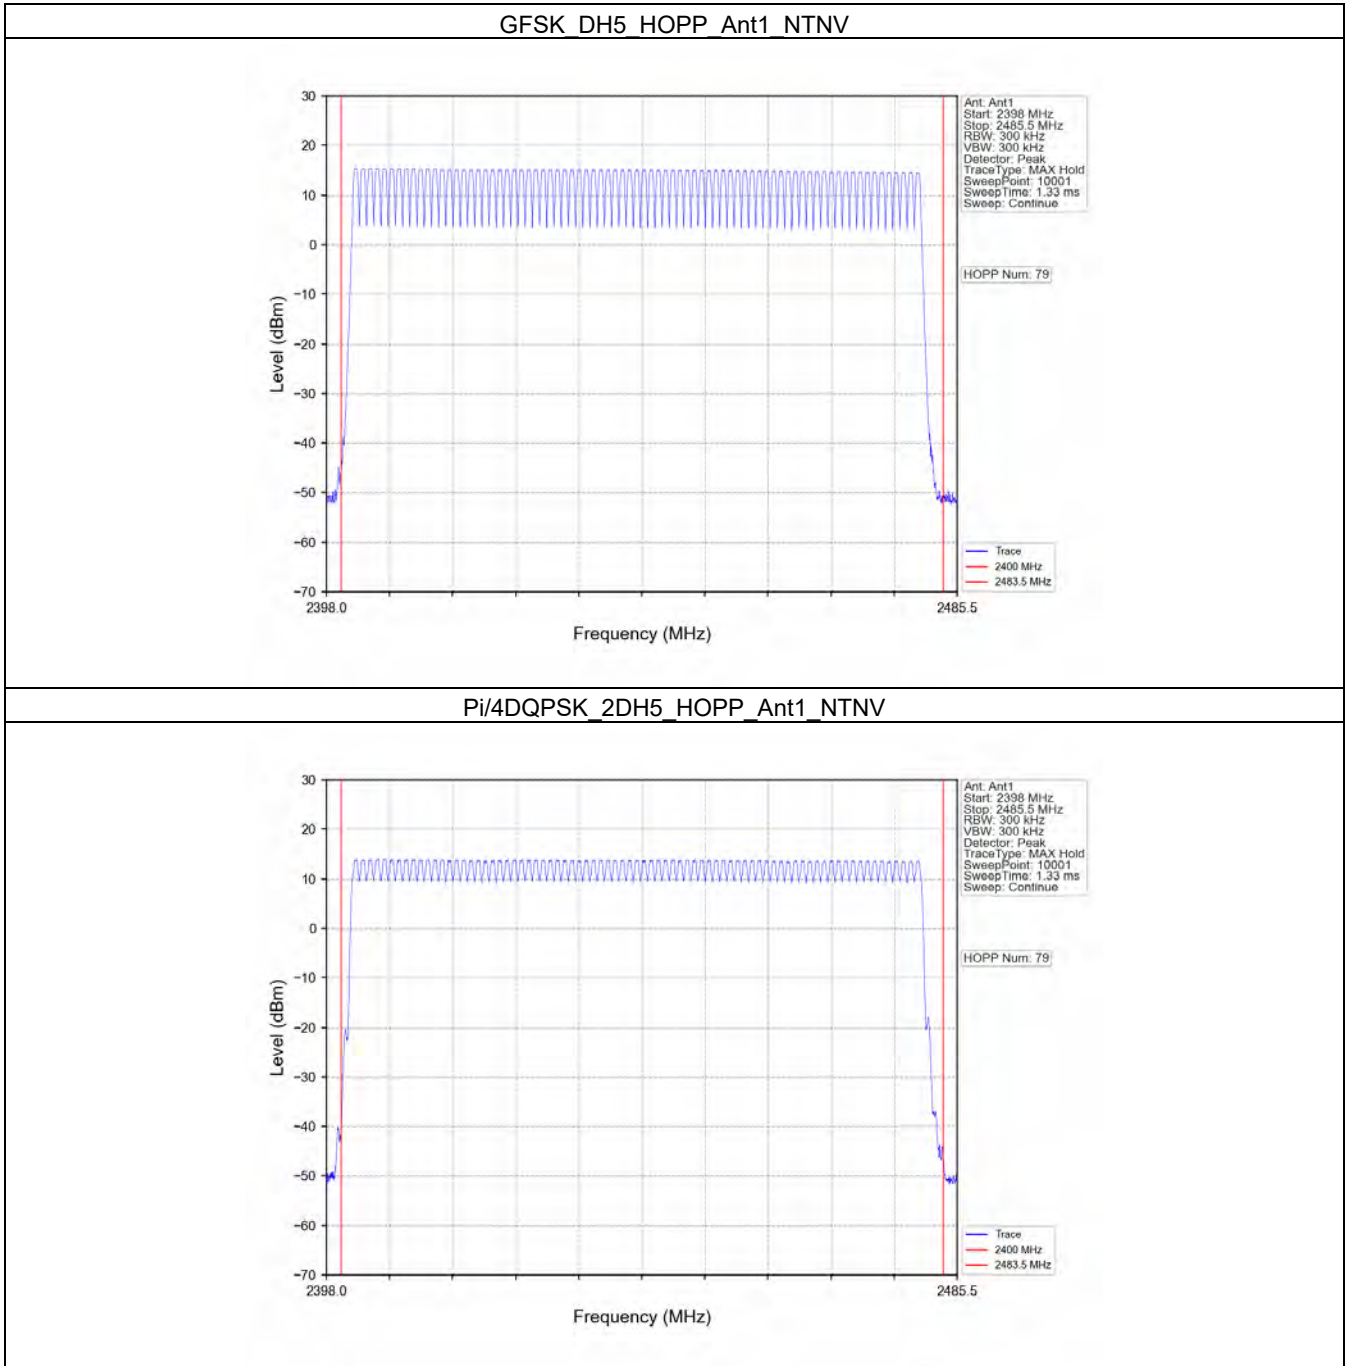

### 8DPSK 3DH5 HOPP Ant1 NTN

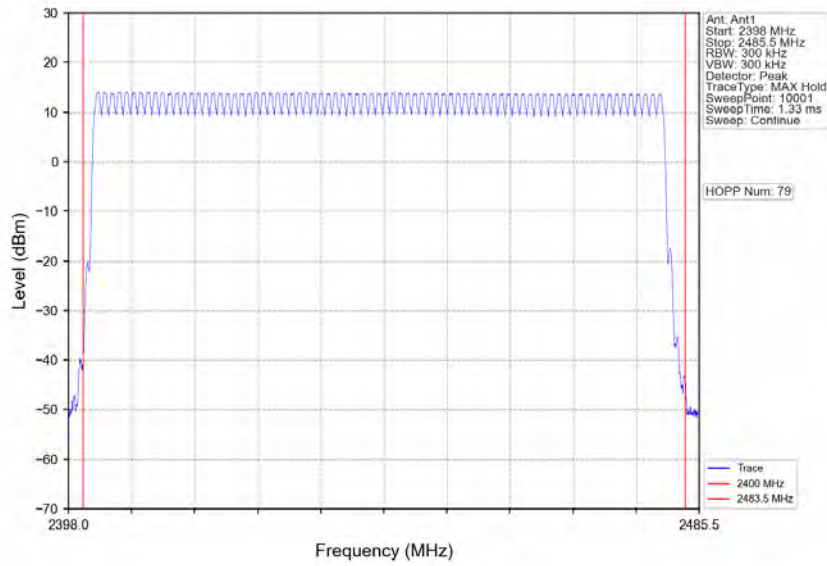



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 163 of 190


### 5. Time of Occupancy (Dwell Time)

#### 5.1 Ant1


##### 5.1.1 Test Result

Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.378	31.600	320	120.960	<=400	Pass
			DH3	1.634	31.600	160	261.440	<=400	Pass
			DH5	2.882	31.600	107	308.374	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.382	31.600	320	122.240	<=400	Pass
			2DH3	1.634	31.600	160	261.440	<=400	Pass
			2DH5	2.882	31.600	107	308.374	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.382	31.600	320	122.240	<=400	Pass
			3DH3	1.632	31.600	160	261.120	<=400	Pass
			3DH5	2.884	31.600	107	308.588	<=400	Pass


### 5.1.2 Test Graph

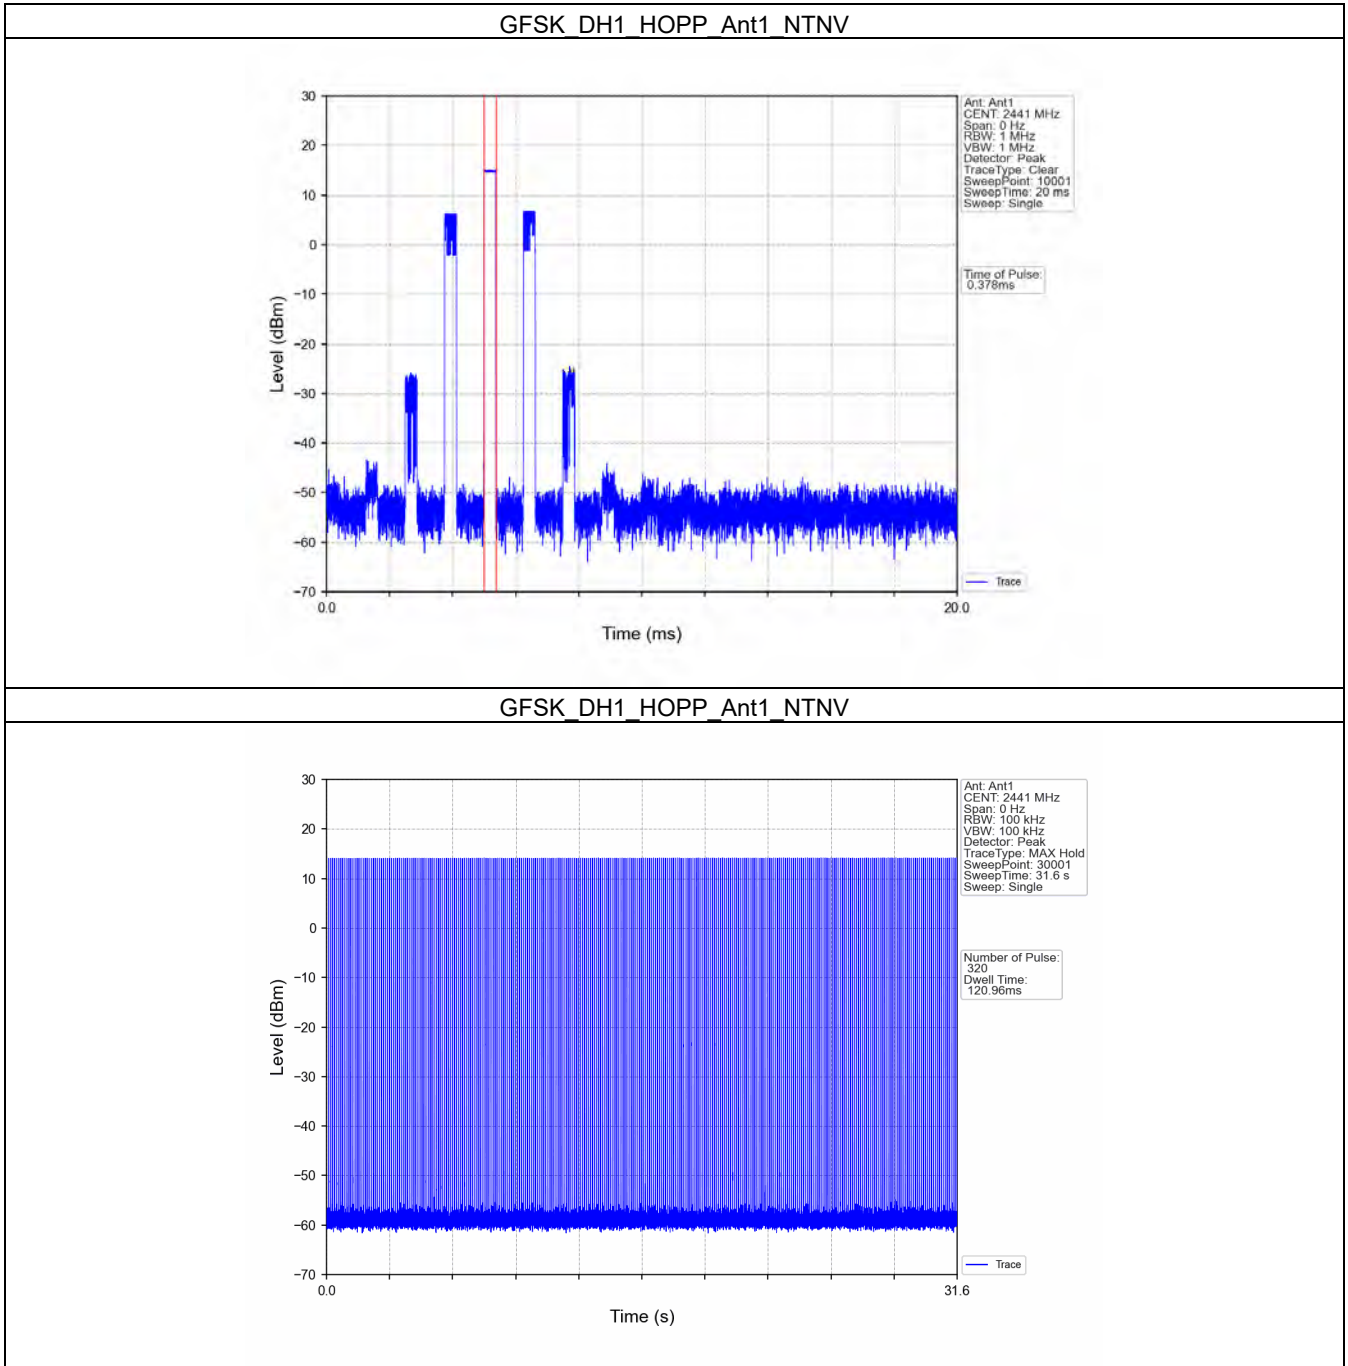


GFSK\_DH3\_HOPP\_Ant1\_NTNV

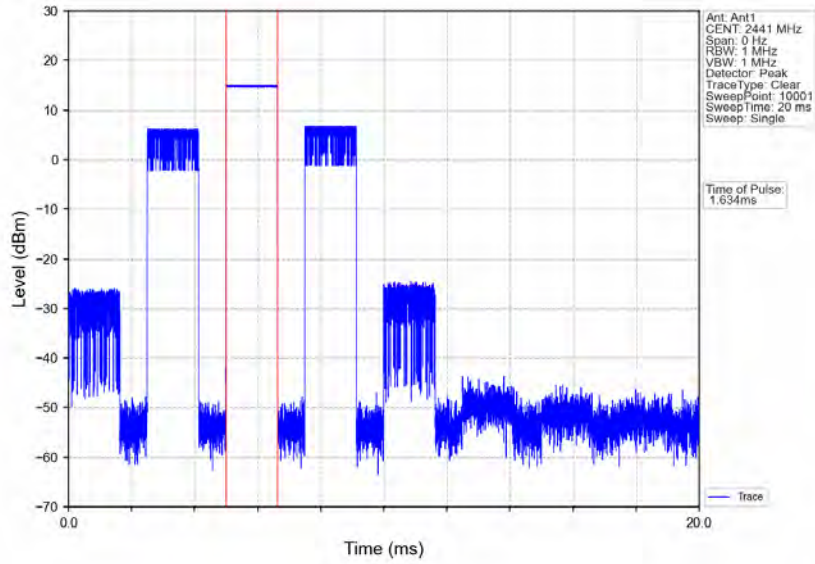


GFSK\_DH3\_HOPP\_Ant1\_NTNV

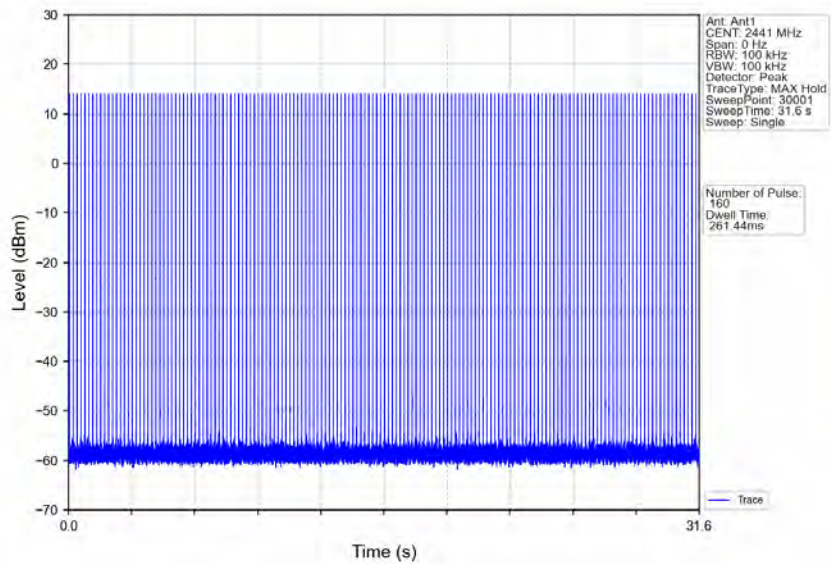


GFSK DH5 HOPP Ant1 NTV

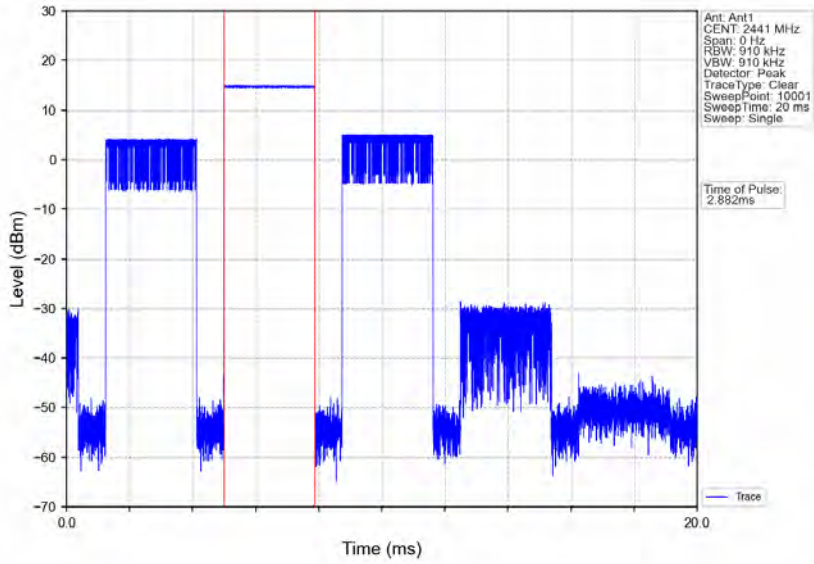


GFSK DH5 HOPP Ant1 NTV

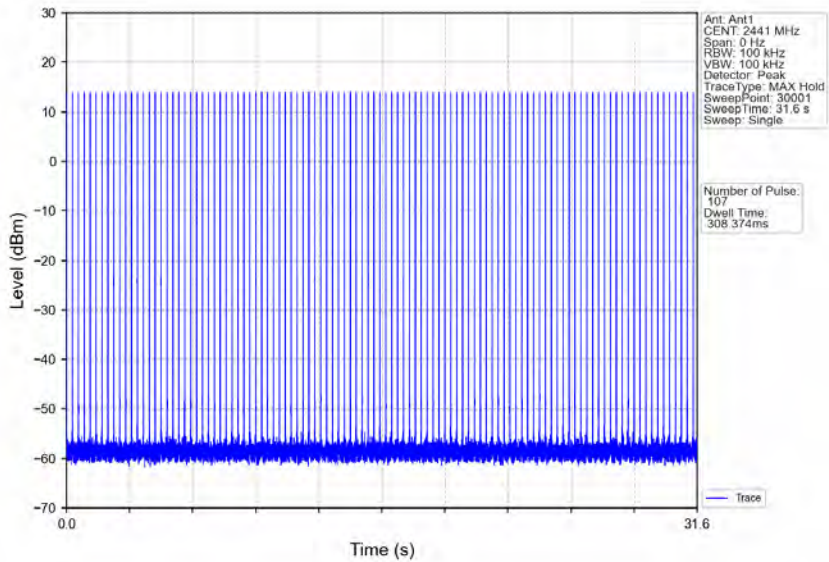


Pi/4DQPSK 2DH1 HOPP Ant1 NTN

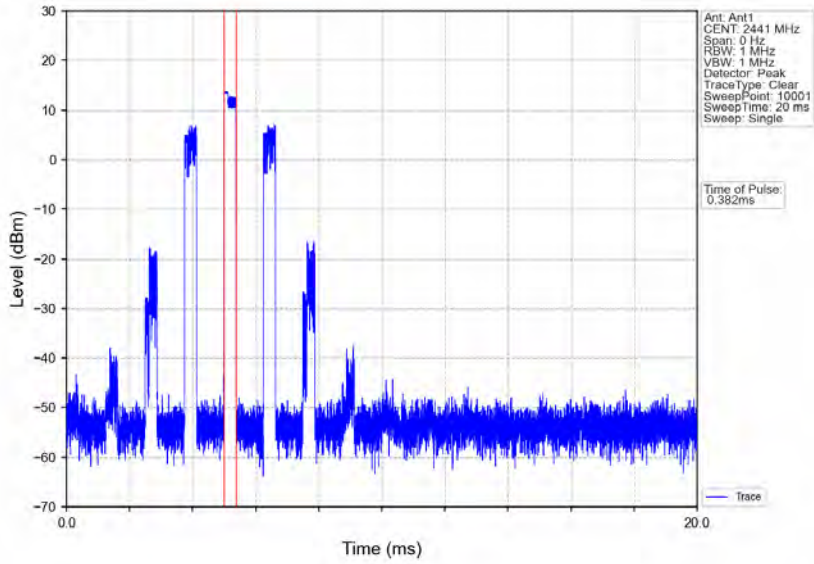


Pi/4DQPSK 2DH1 HOPP Ant1 NTN

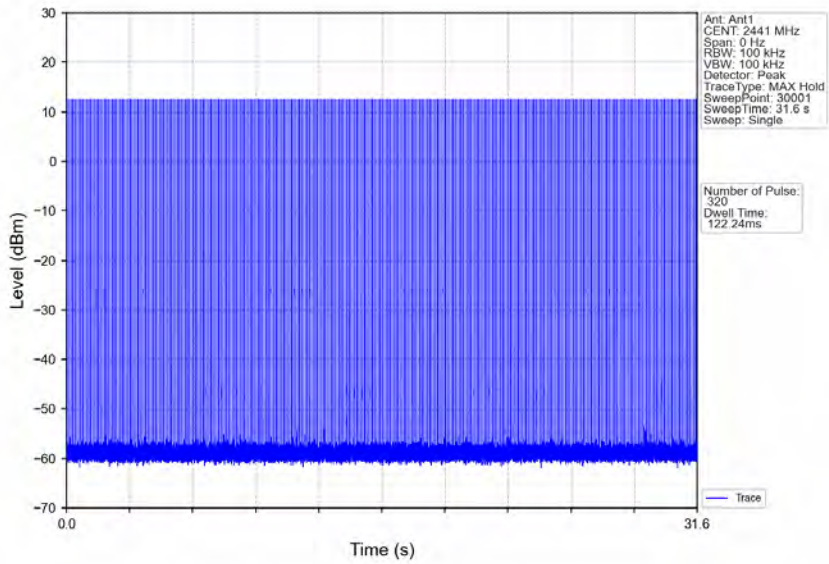

Pi/4DQPSK 2DH3 HOPP Ant1 NTV

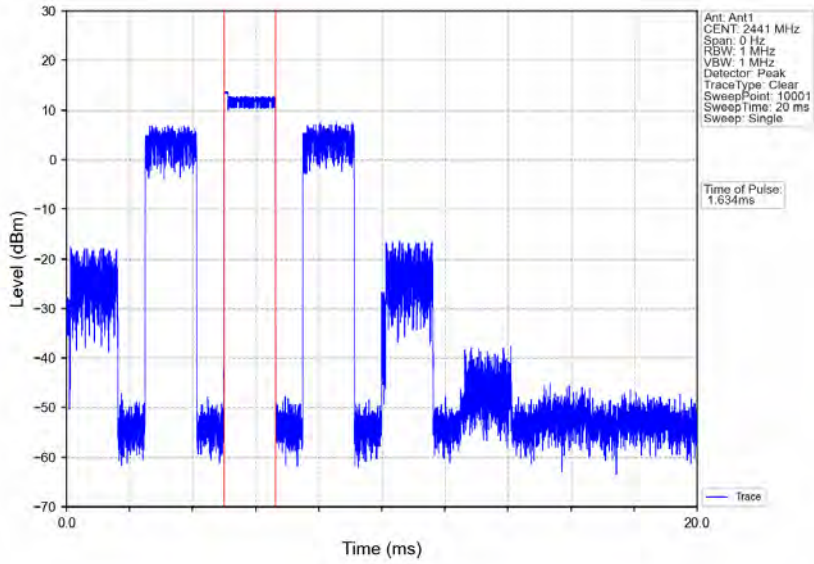


Pi/4DQPSK 2DH3 HOPP Ant1 NTV

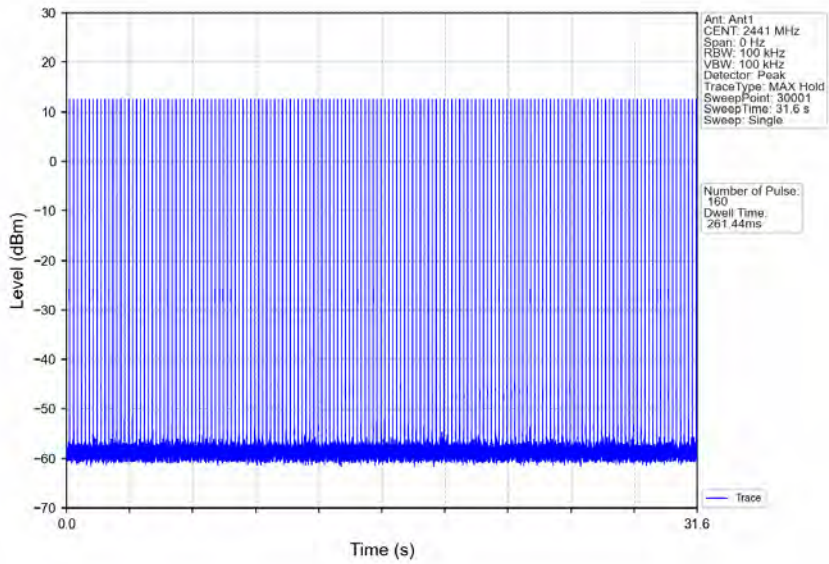





Pi/4DQPSK 2DH5 HOPP Ant1 NTN

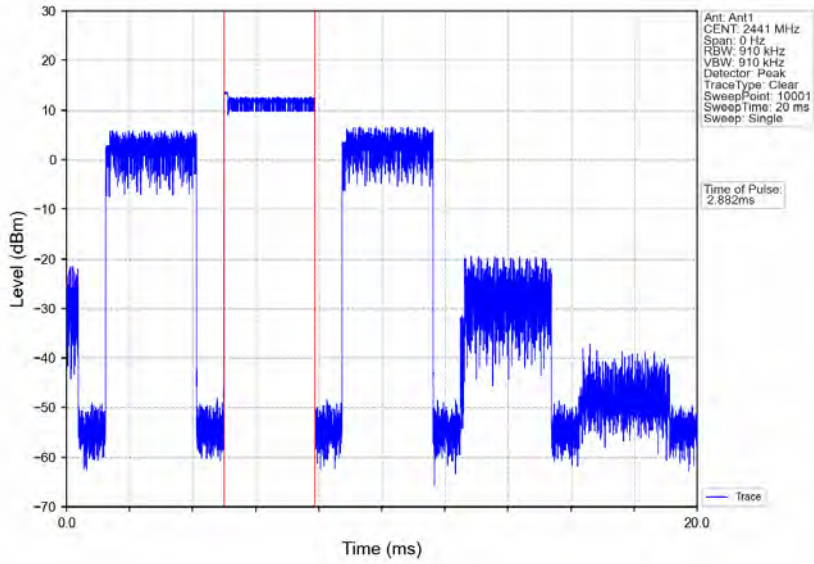


Pi/4DQPSK 2DH5 HOPP Ant1 NTN

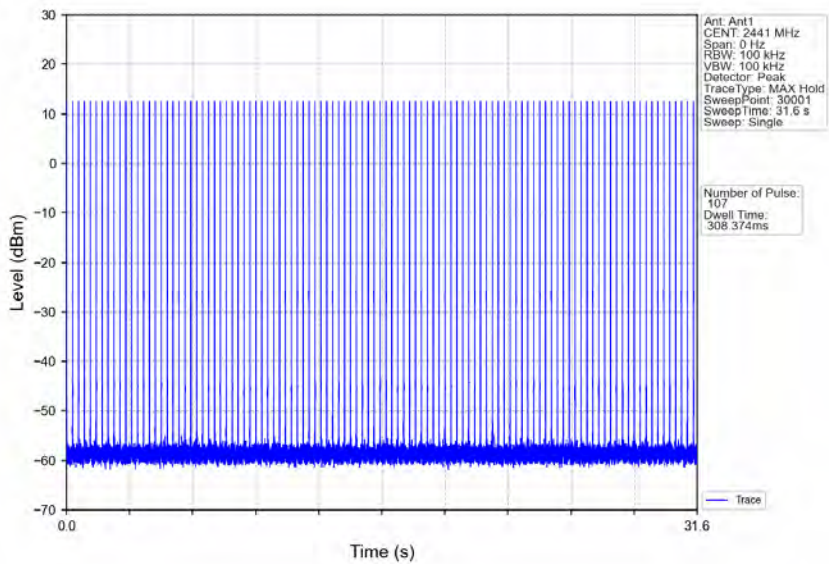


8DPSK 3DH1 HOPP Ant1 NTN

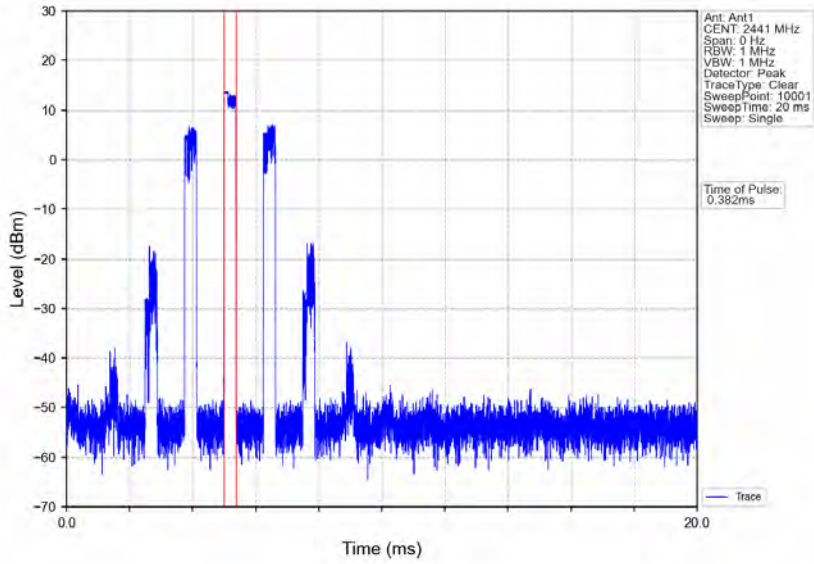


8DPSK 3DH1\_HOPP\_Ant1 NTN

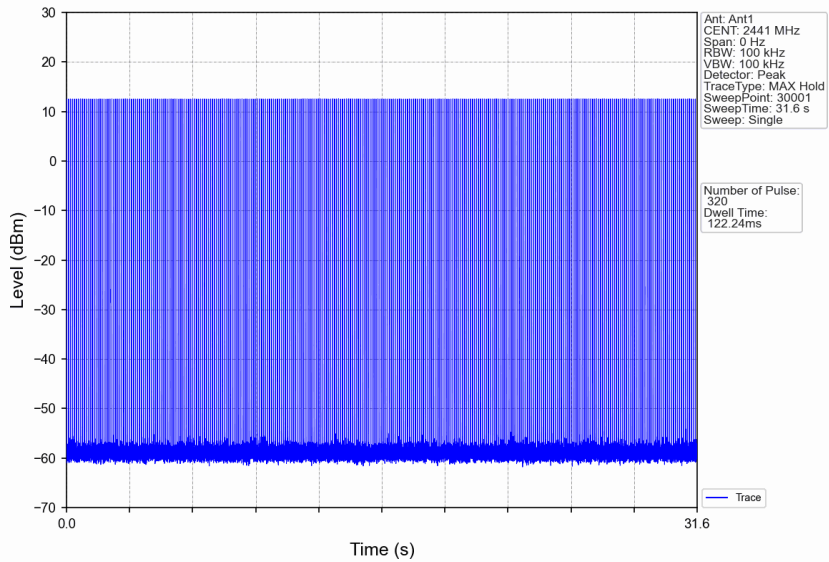


8DPSK 3DH3 HOPP\_Ant1\_NTNV

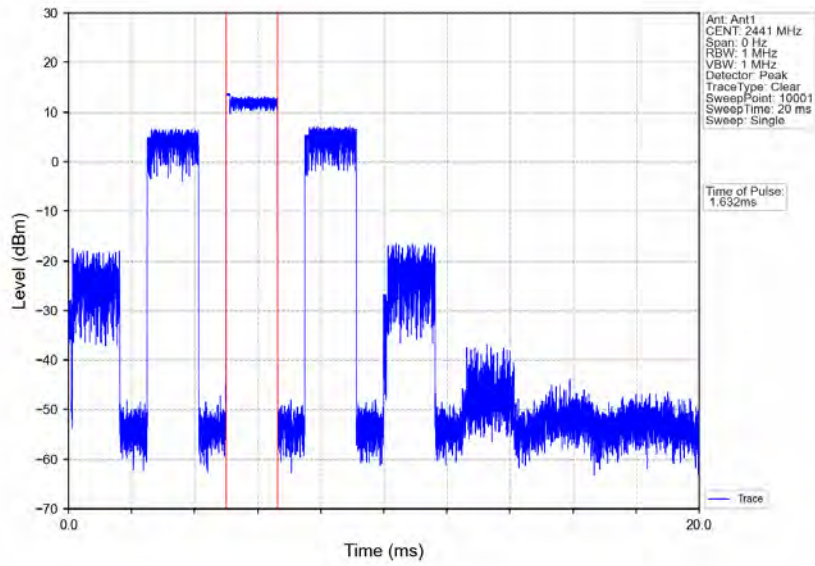


8DPSK 3DH3 HOPP\_Ant1\_NTNV

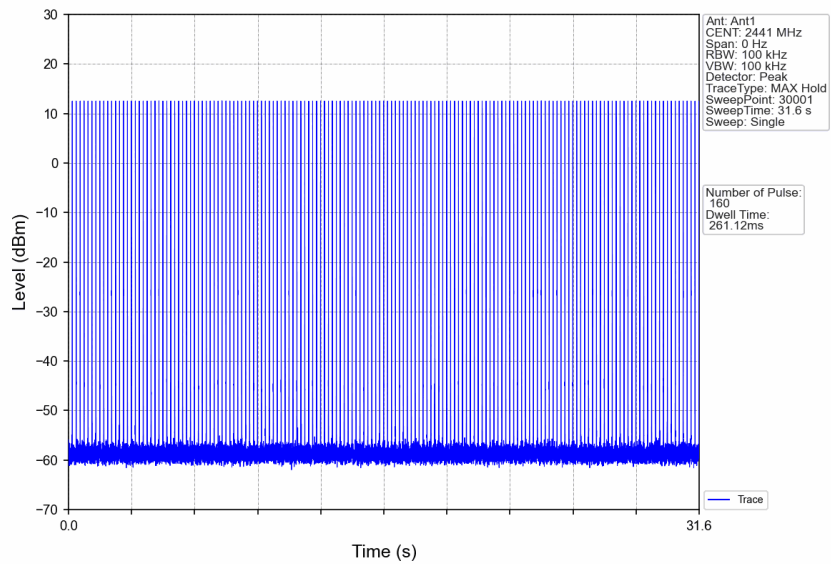

8DPSK 3DH5 HOPP\_Ant1\_NTNV

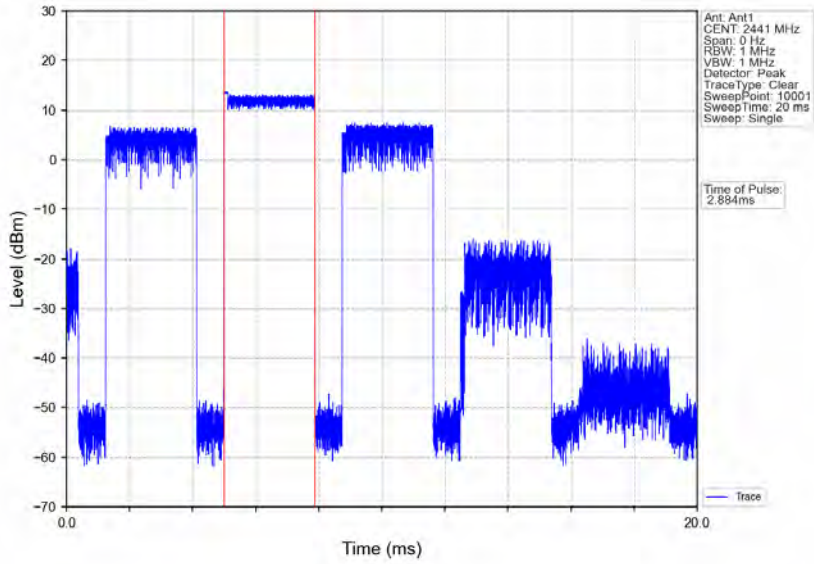

8DPSK 3DH5 HOPP\_Ant1\_NTNV

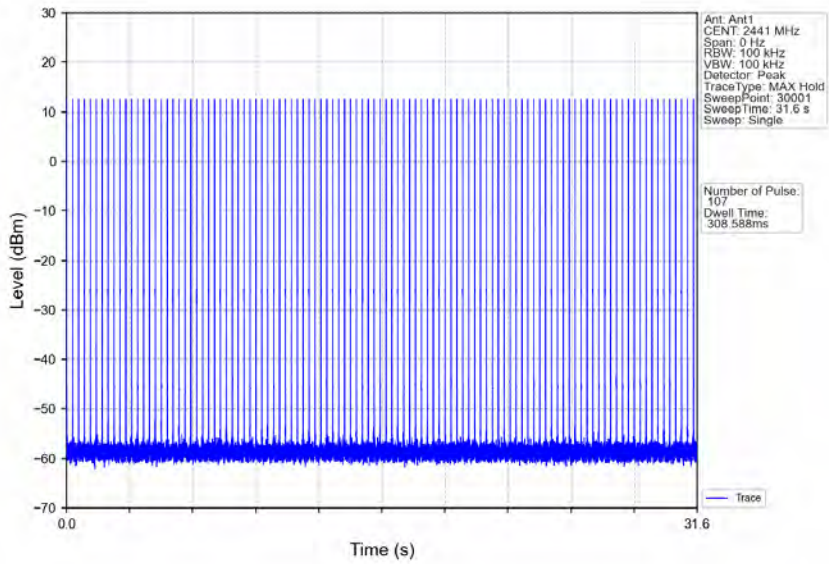



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 173 of 190

### 6. Unwanted Emissions In Non-restricted Frequency Bands


#### 6.1 Ref

##### 6.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	15.18
		2441	DH5	1	14.90
		2480	DH5	1	14.43
Pi/4DQPSK	SISO	2402	2DH5	1	13.60
		2441	2DH5	1	13.56
		2480	2DH5	1	13.27
8DPSK	SISO	2402	3DH5	1	13.77
		2441	3DH5	1	13.52
		2480	3DH5	1	13.41

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


6.1.2 Test Graph

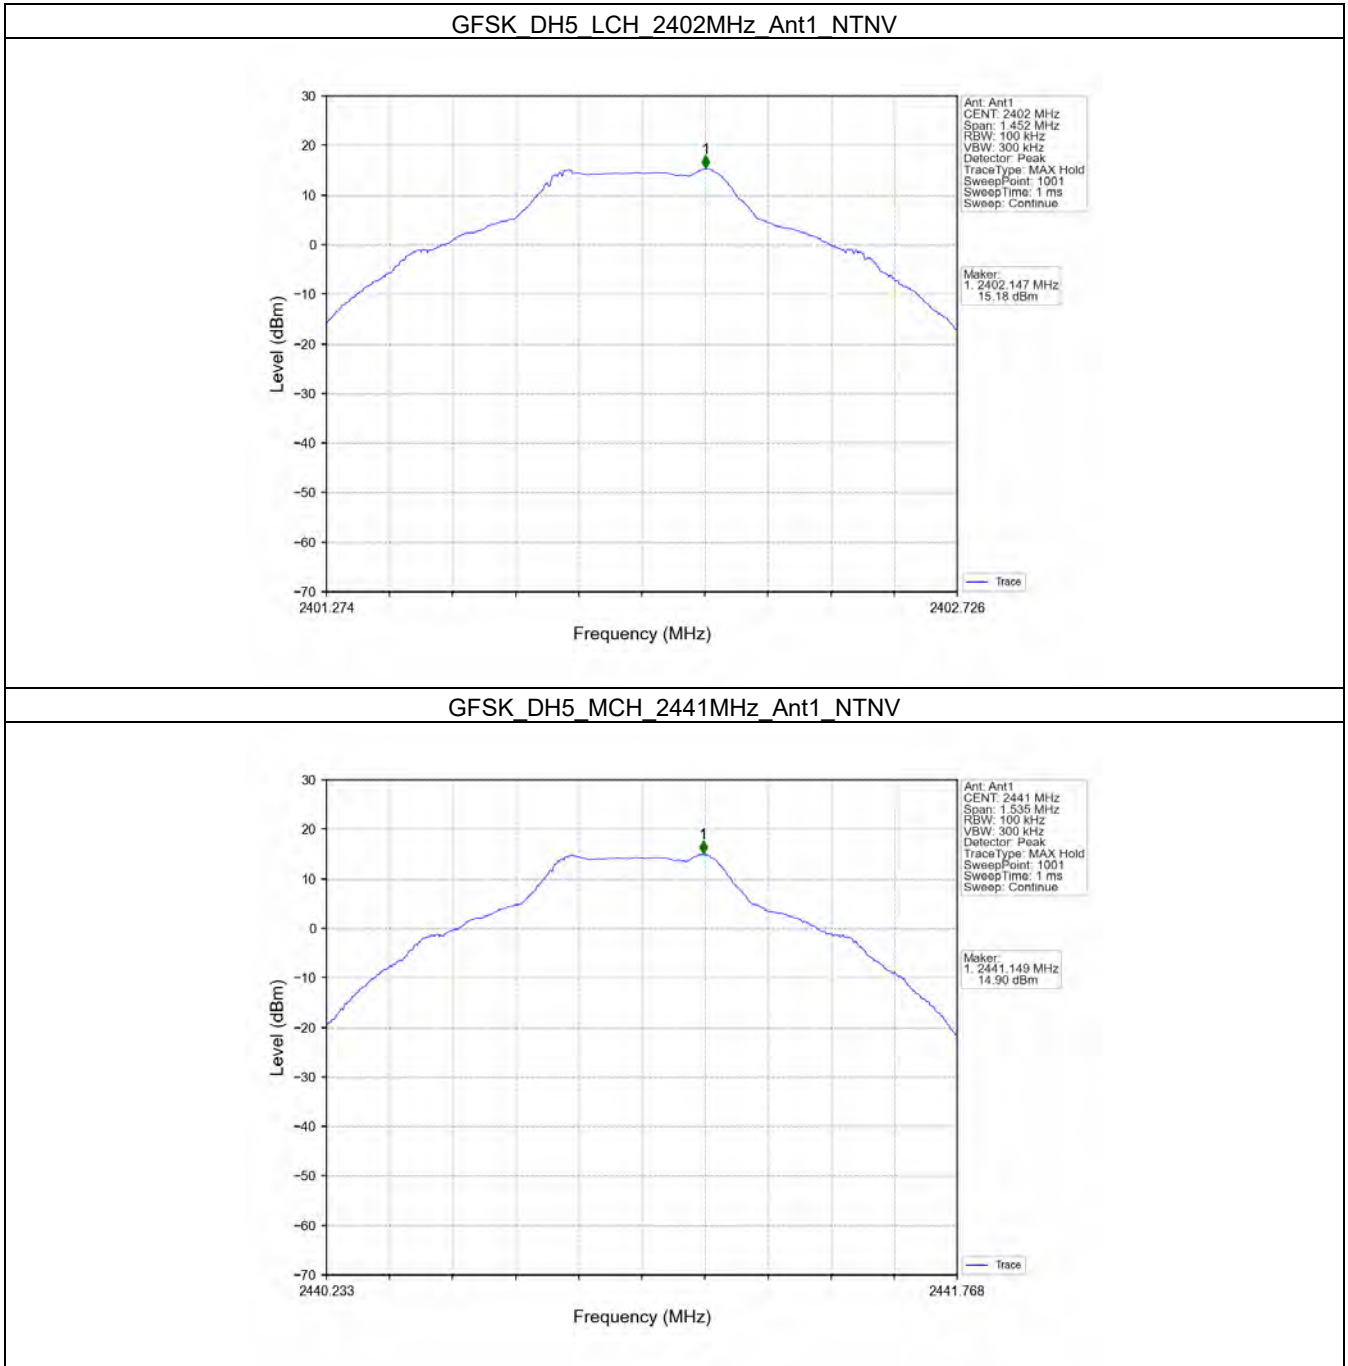


GFSK DH5 HCH 2480MHz Ant1 NTN

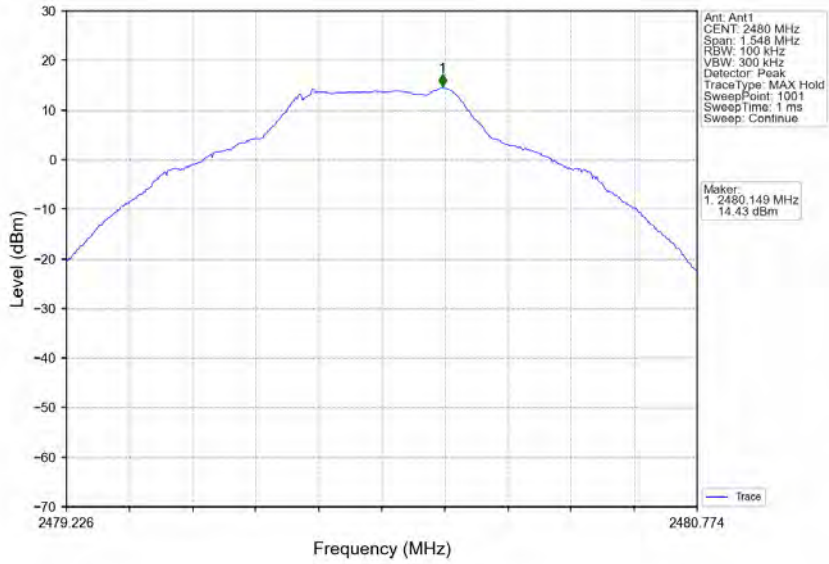


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTN

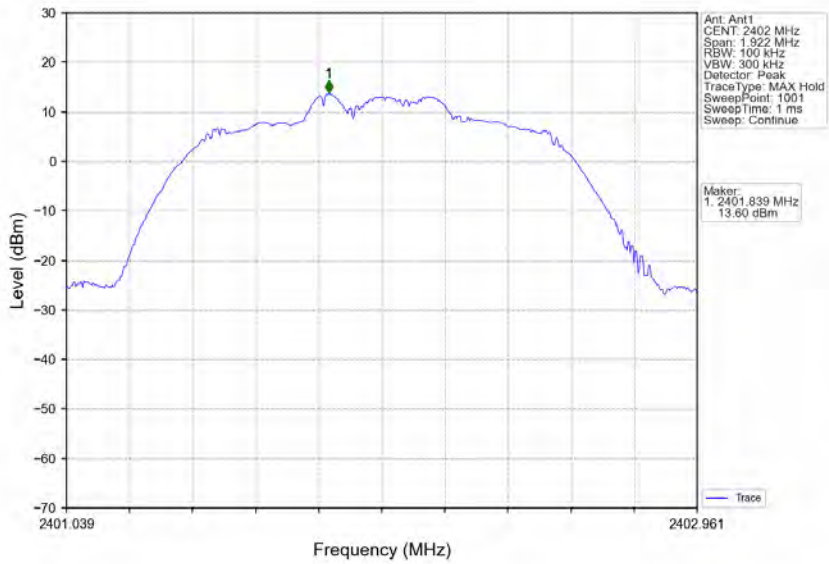

Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTN

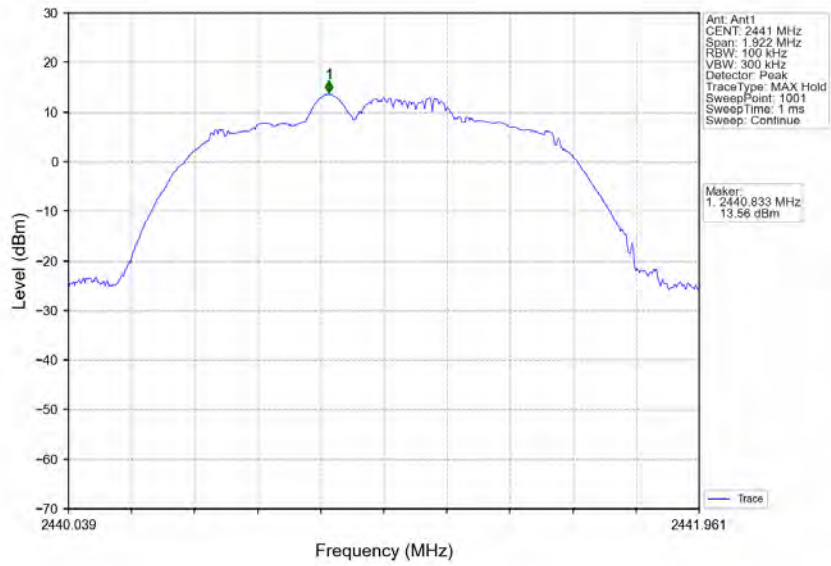


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTN

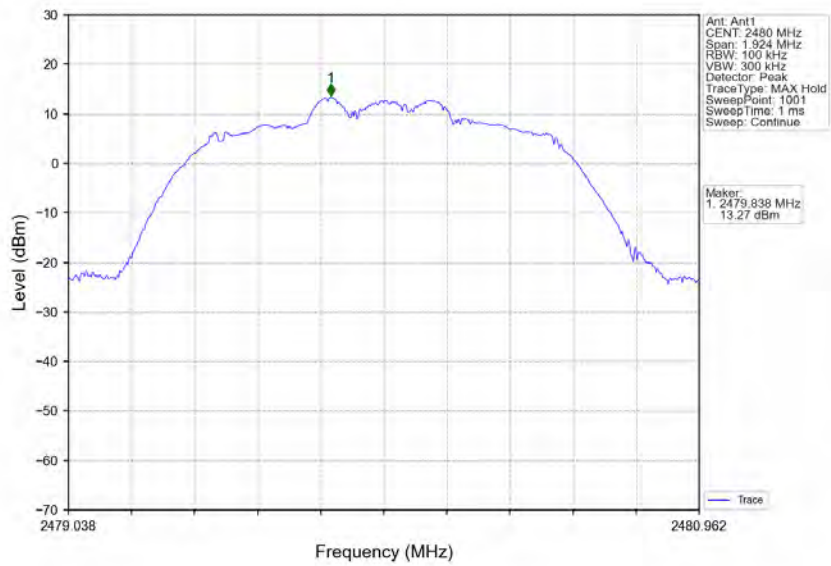





8DPSK 3DH5 LCH 2402MHz Ant1 NTV

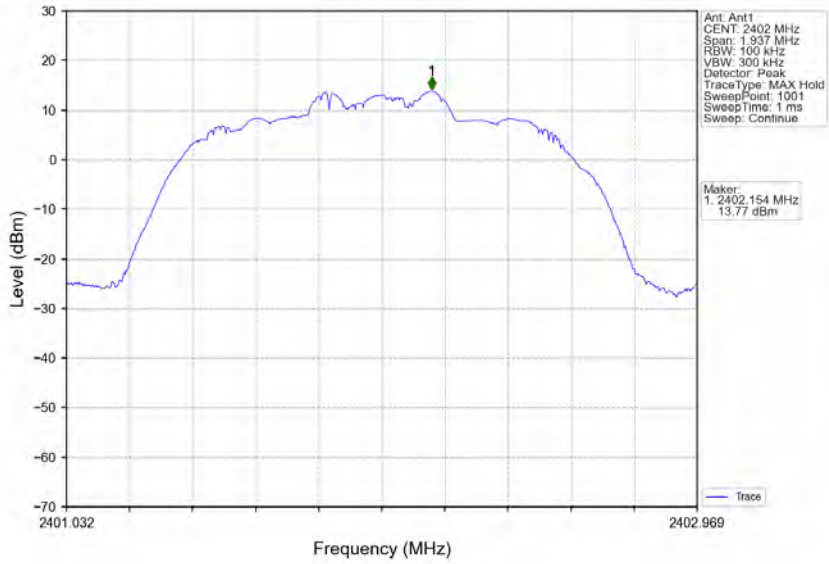

8DPSK 3DH5 MCH 2441MHz Ant1 NTV

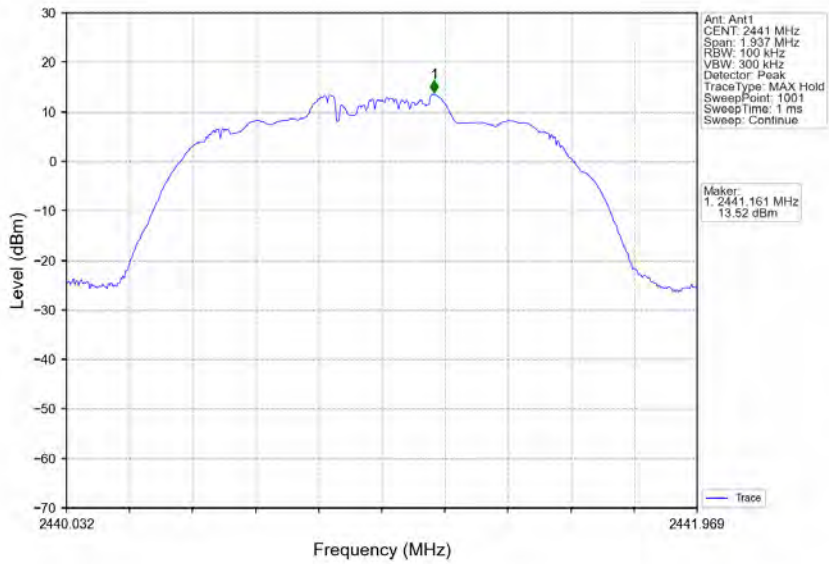

8DPSK 3DH5 HCH 2480MHz Ant1 NTV

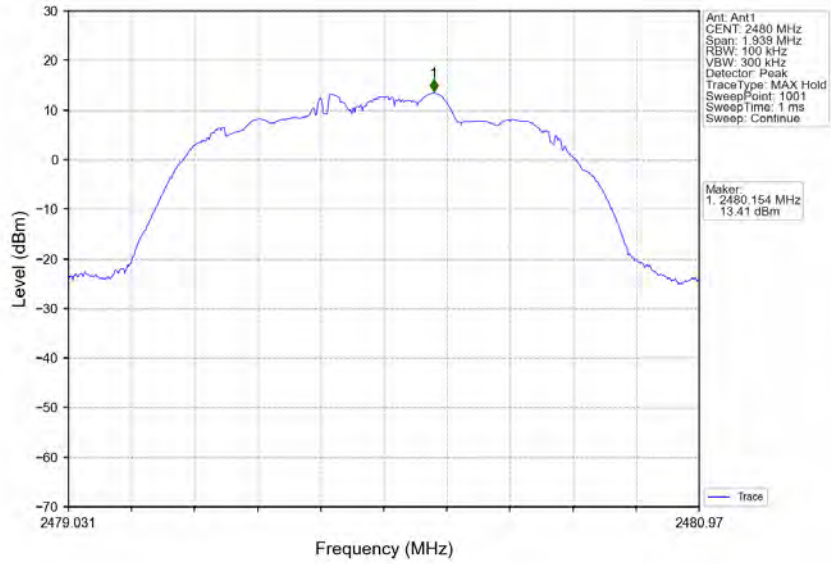



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230600109701

Page: 179 of 190


### 6.2 CSE

#### 6.2.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	15.18	-4.82	Pass
		2441	DH5	1	15.18	-4.82	Pass
		2480	DH5	1	15.18	-4.82	Pass
		HOPP	DH5	1	15.18	-4.82	Pass
					15.18	-4.82	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	13.60	-6.40	Pass
		2441	2DH5	1	13.60	-6.40	Pass
		2480	2DH5	1	13.60	-6.40	Pass
		HOPP	2DH5	1	13.60	-6.40	Pass
					13.60	-6.40	Pass
8DPSK	SISO	2402	3DH5	1	13.77	-6.23	Pass
		2441	3DH5	1	13.77	-6.23	Pass
		2480	3DH5	1	13.77	-6.23	Pass
		HOPP	3DH5	1	13.77	-6.23	Pass
					13.77	-6.23	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


### 6.2.2 Test Graph

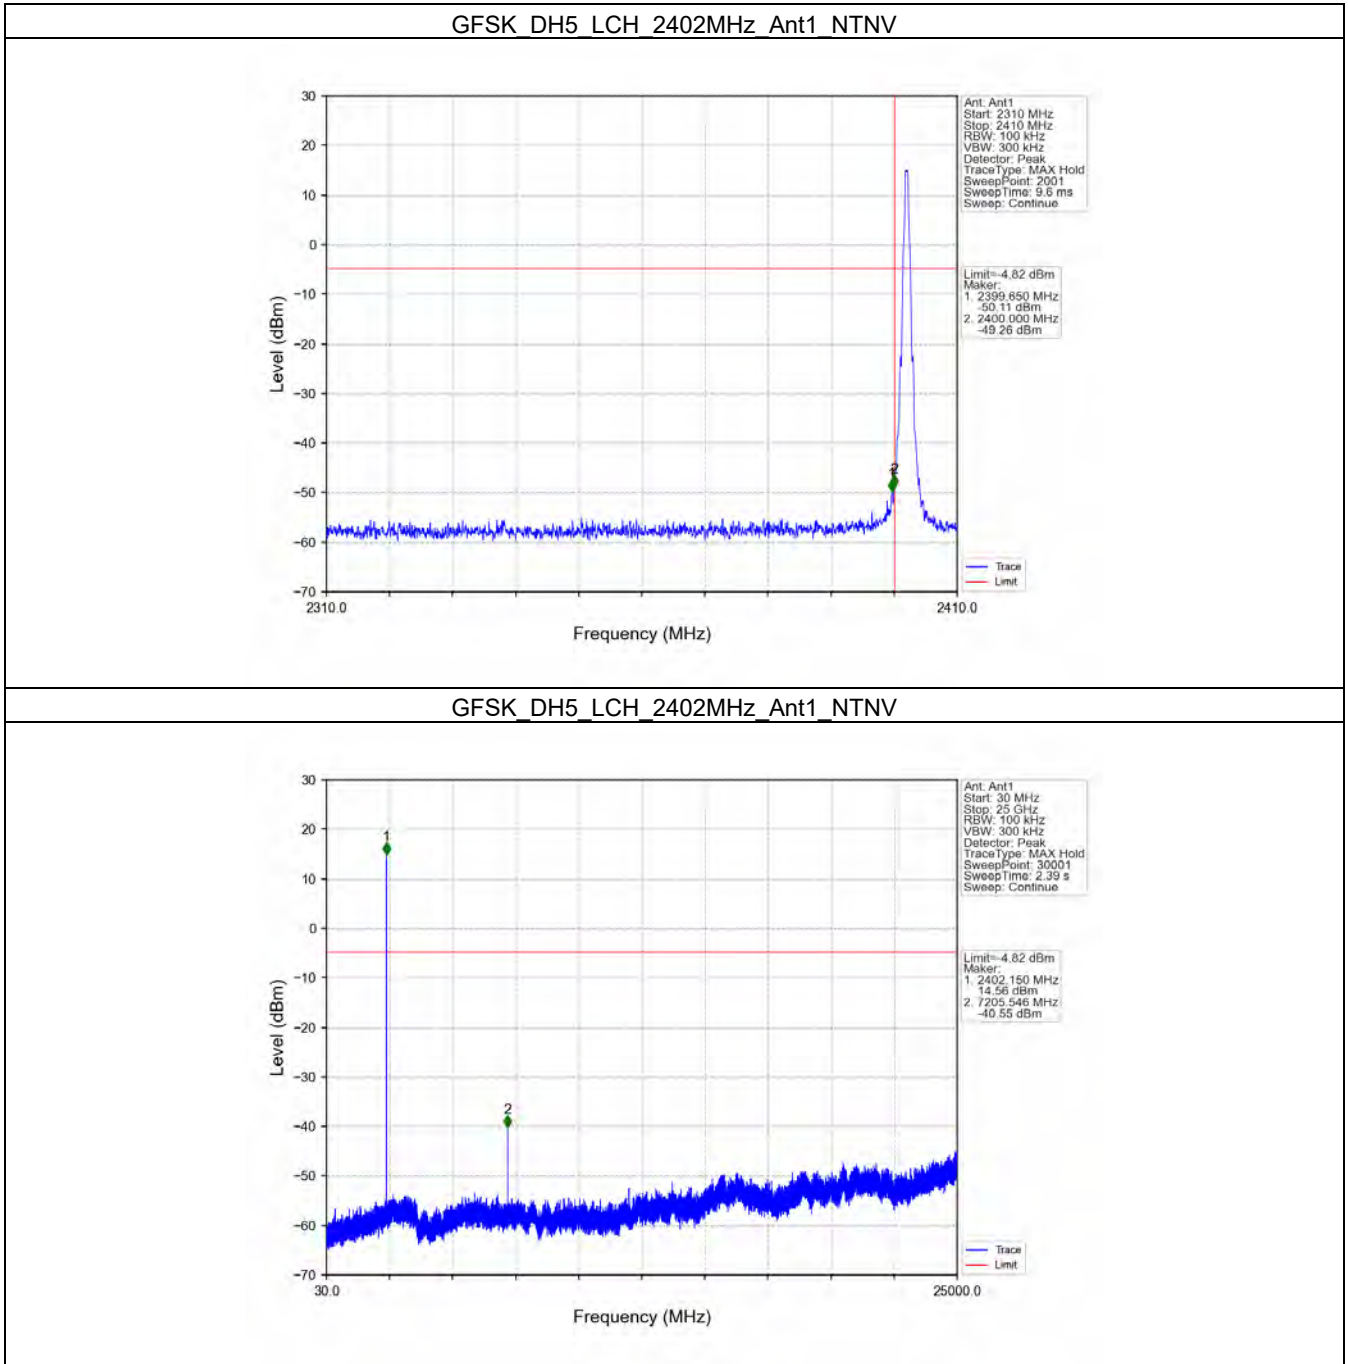


GFSK DH5 MCH 2441MHz Ant1 NTN

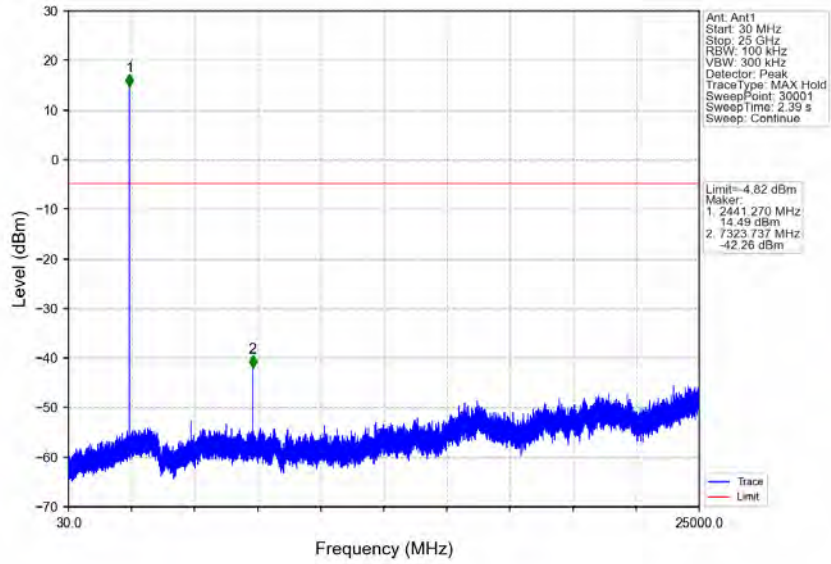


GFSK DH5 HCH 2480MHz Ant1 NTN

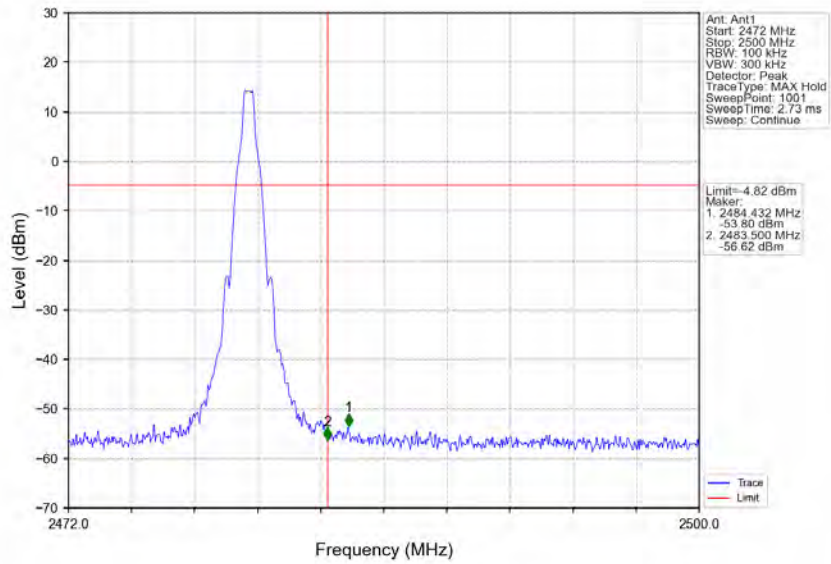


GFSK\_DH5\_HCH\_2480MHz\_Ant1\_NTNV

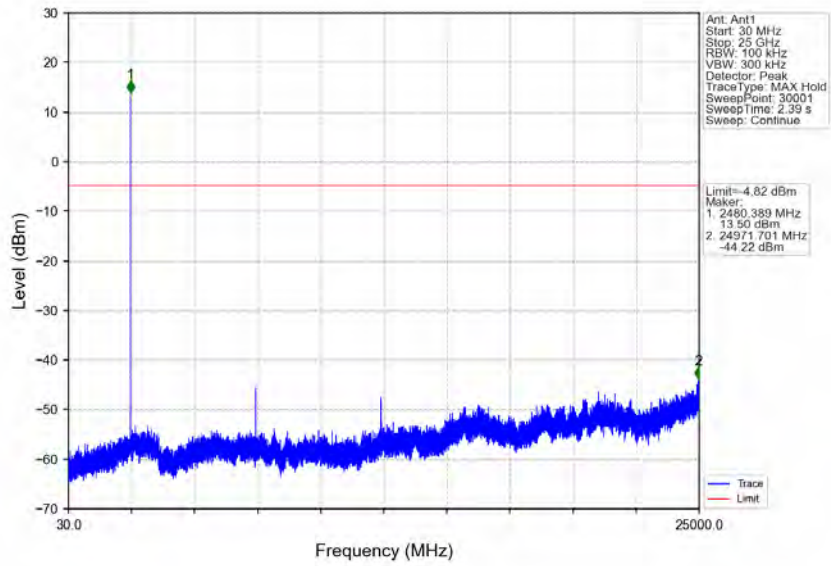


GFSK\_DH5\_HOPP\_Ant1\_NTNV

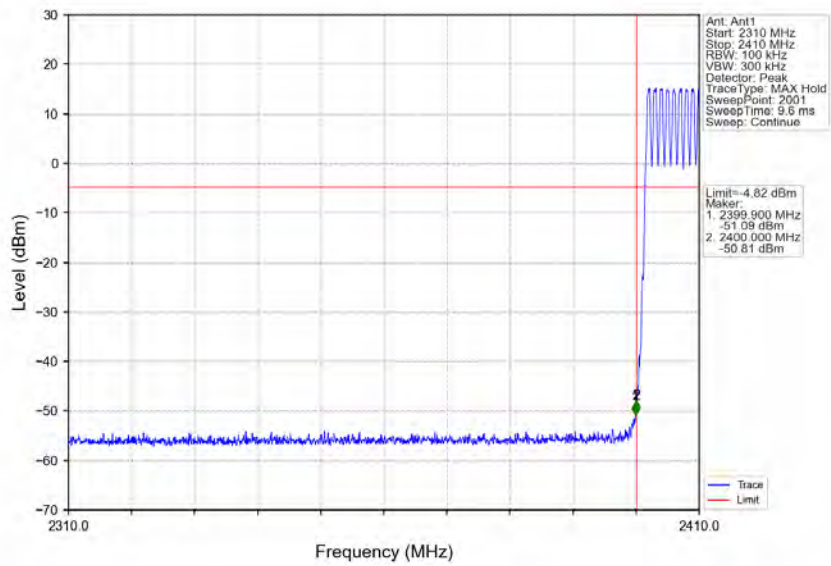


### GFSK DH5 HOPP Ant1 NTN

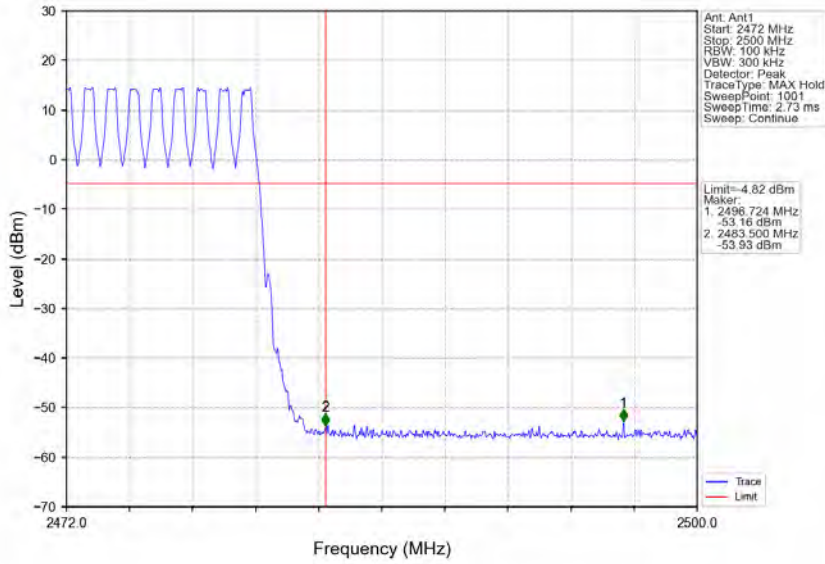


### Pi/4DQPSK 2DH5\_LCH\_2402MHz\_Ant1\_NTNV

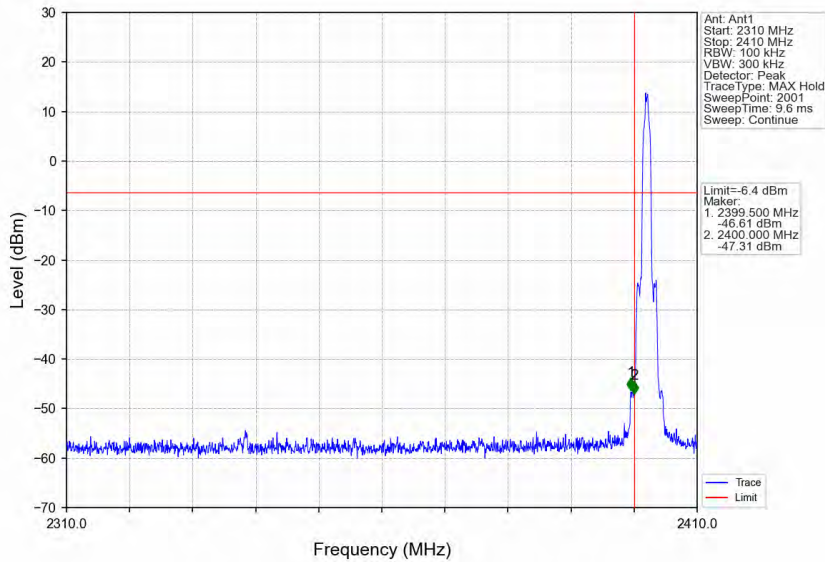

Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTN

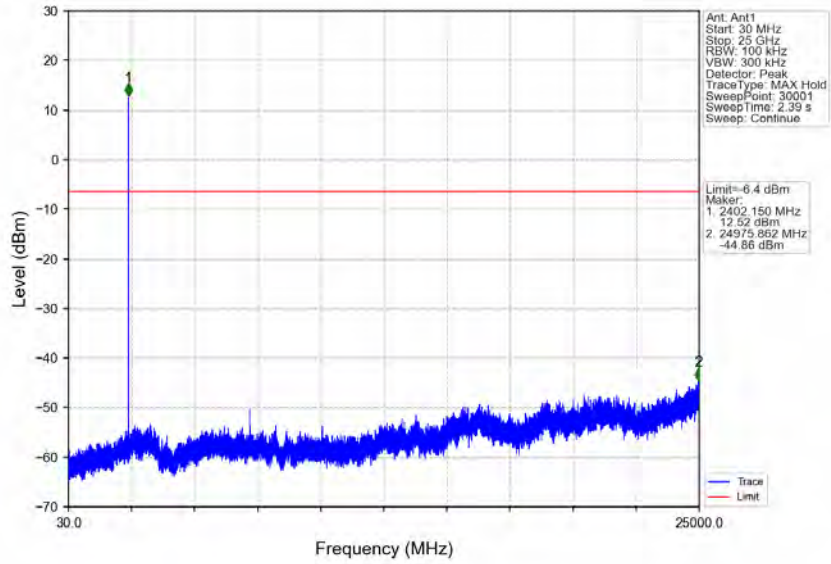


Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTN

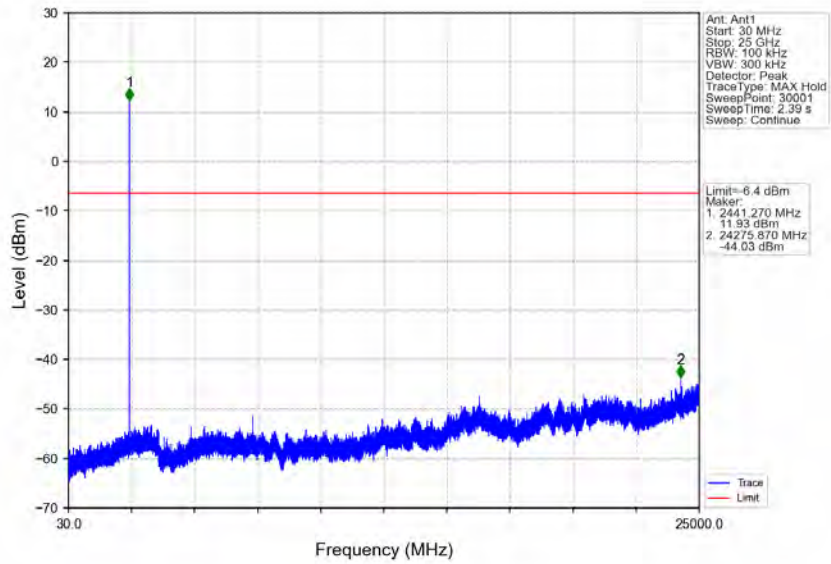





Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTN

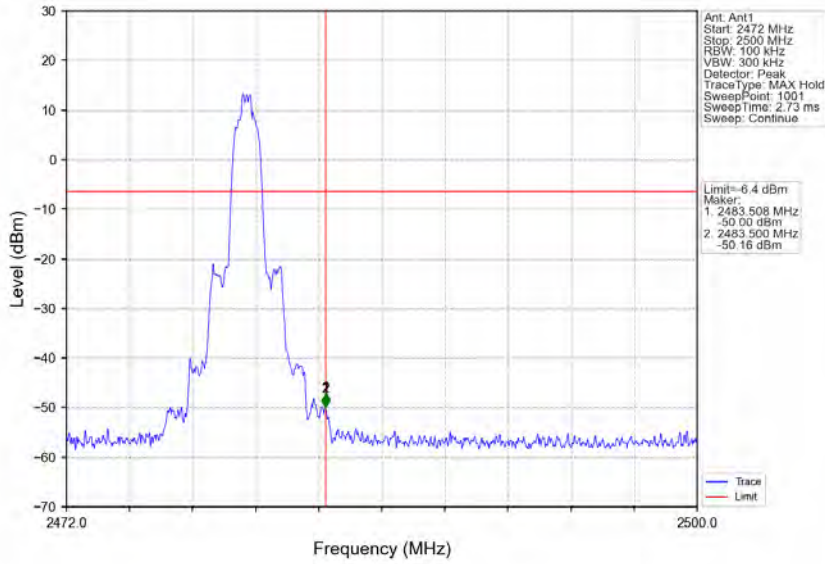


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTN

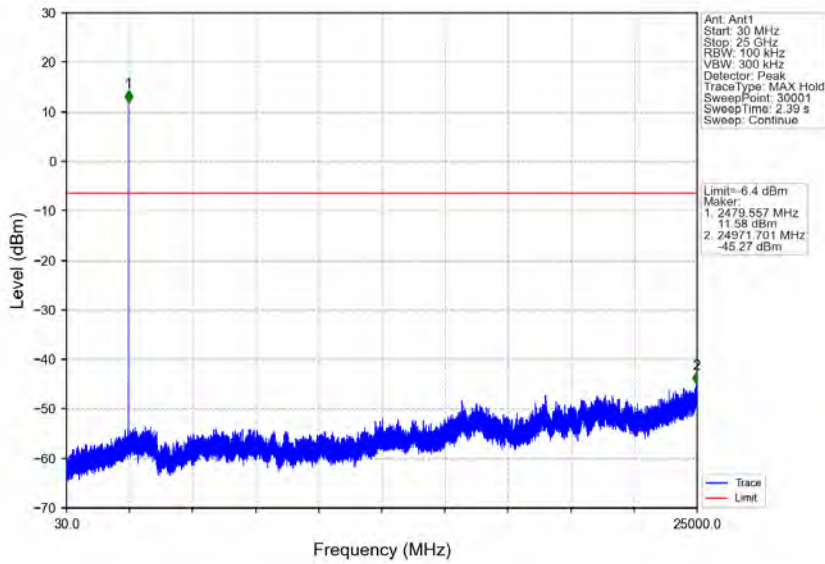


Pi/4DQPSK 2DH5 HOPP Ant1 NTN

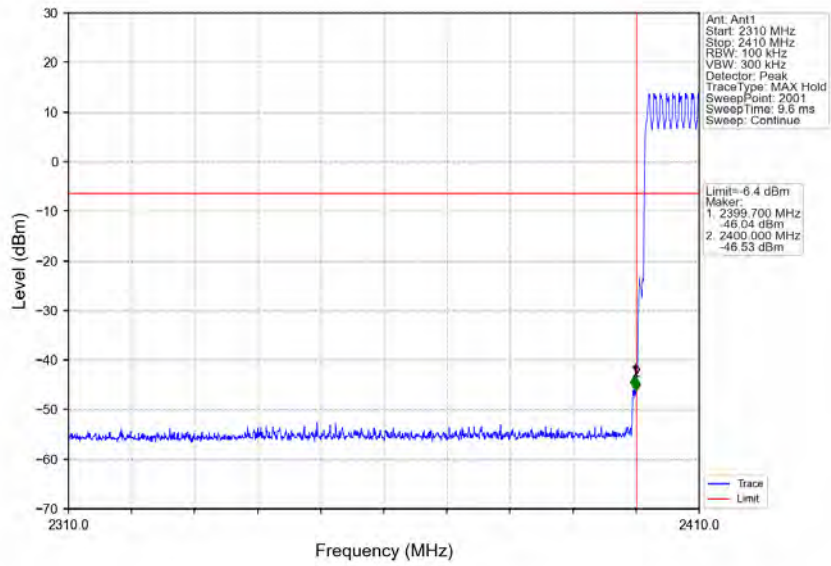


Pi/4DQPSK 2DH5 HOPP Ant1 NTN

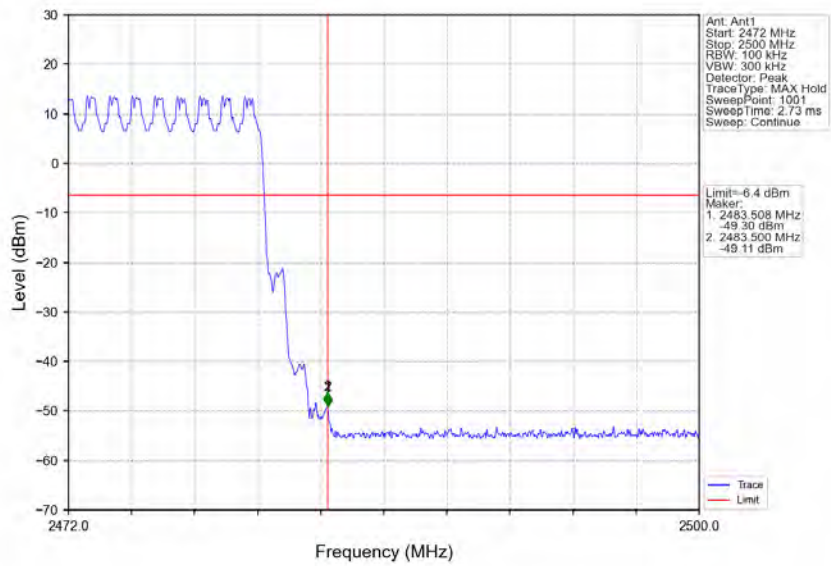


8DPSK 3DH5 LCH 2402MHz Ant1 NTN

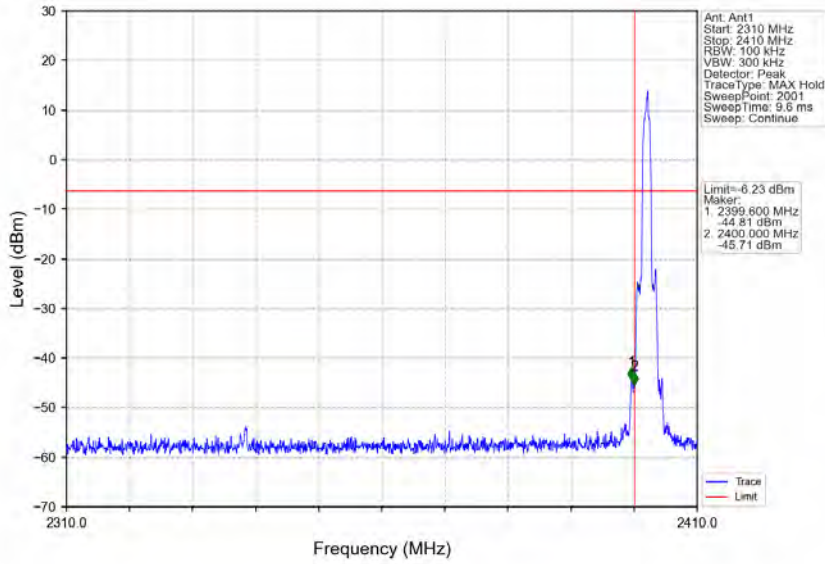


8DPSK 3DH5 LCH 2402MHz Ant1 NTN

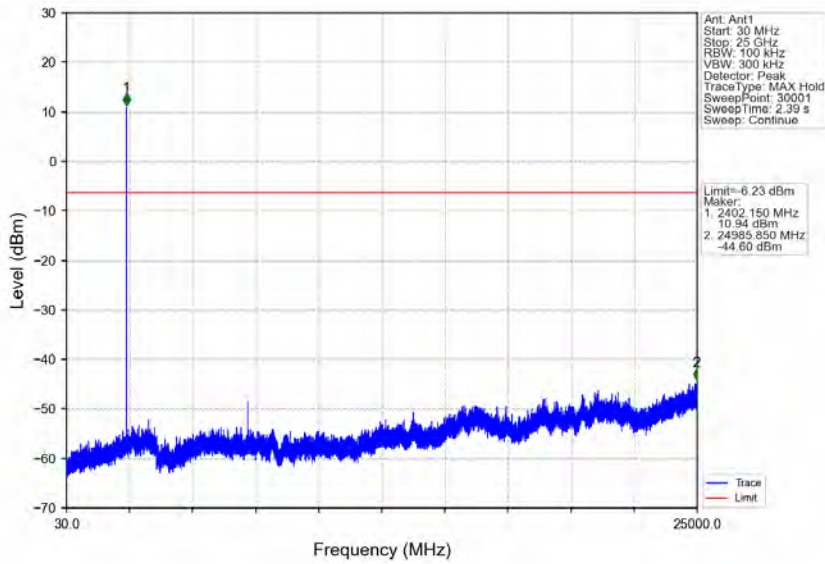


8DPSK 3DH5 MCH 2441MHz Ant1 NTV

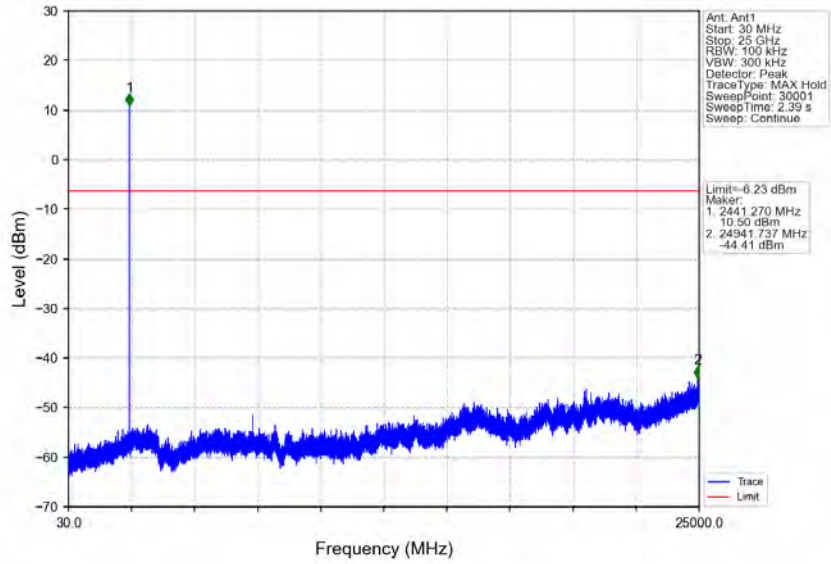


8DPSK 3DH5 HCH 2480MHz Ant1 NTV

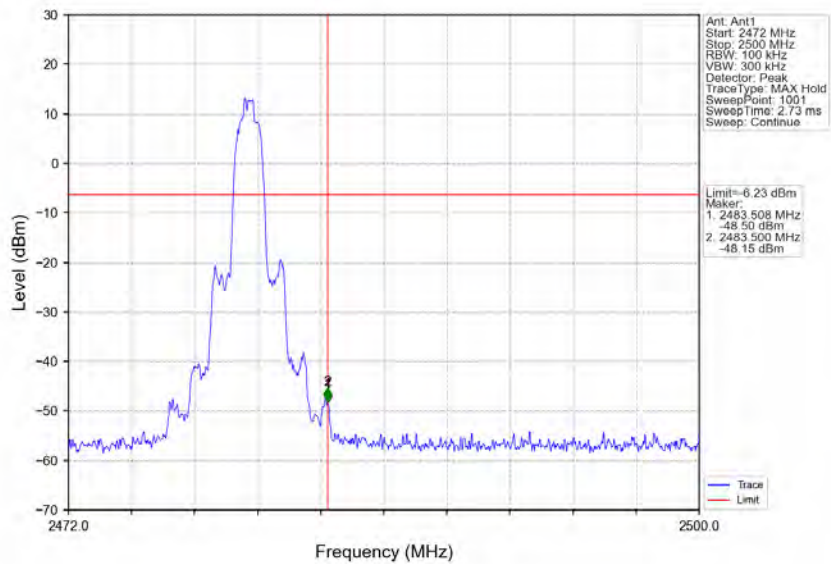


8DPSK 3DH5 HCH 2480MHz Ant1 NTN

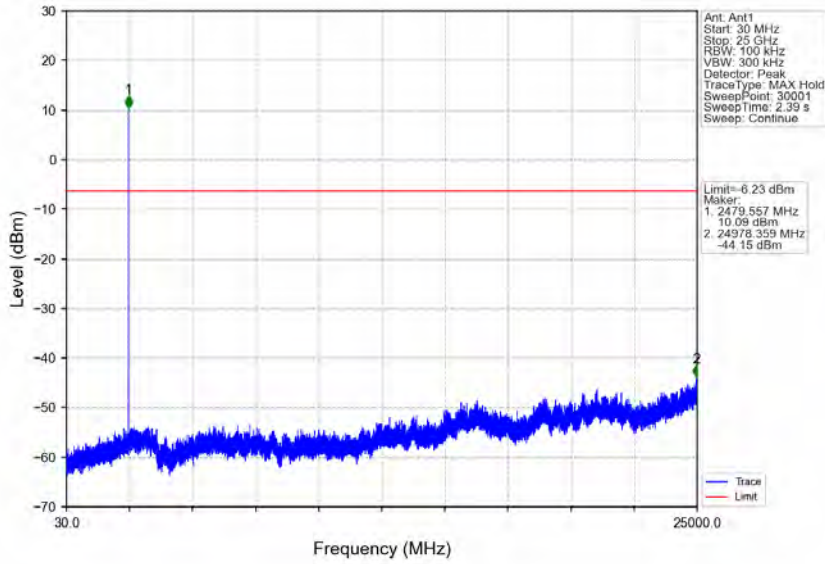

8DPSK 3DH5 HOPP\_Ant1 NTN

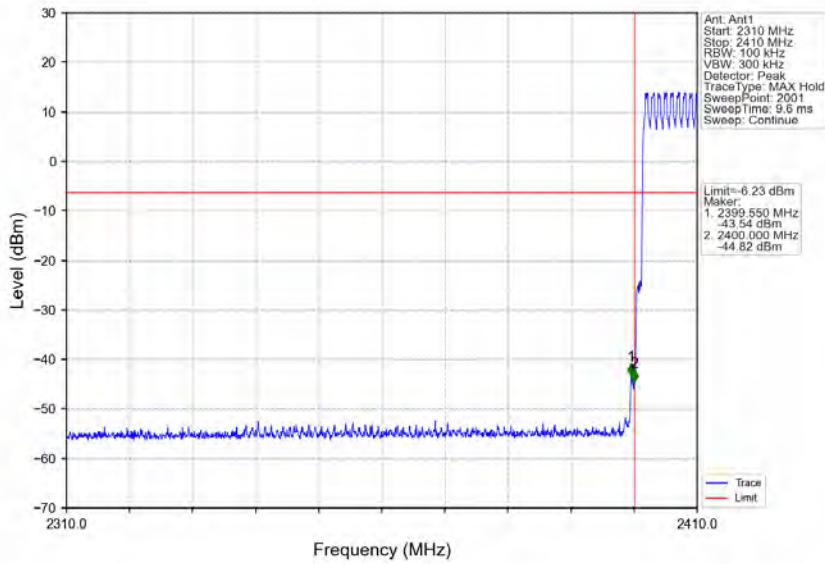

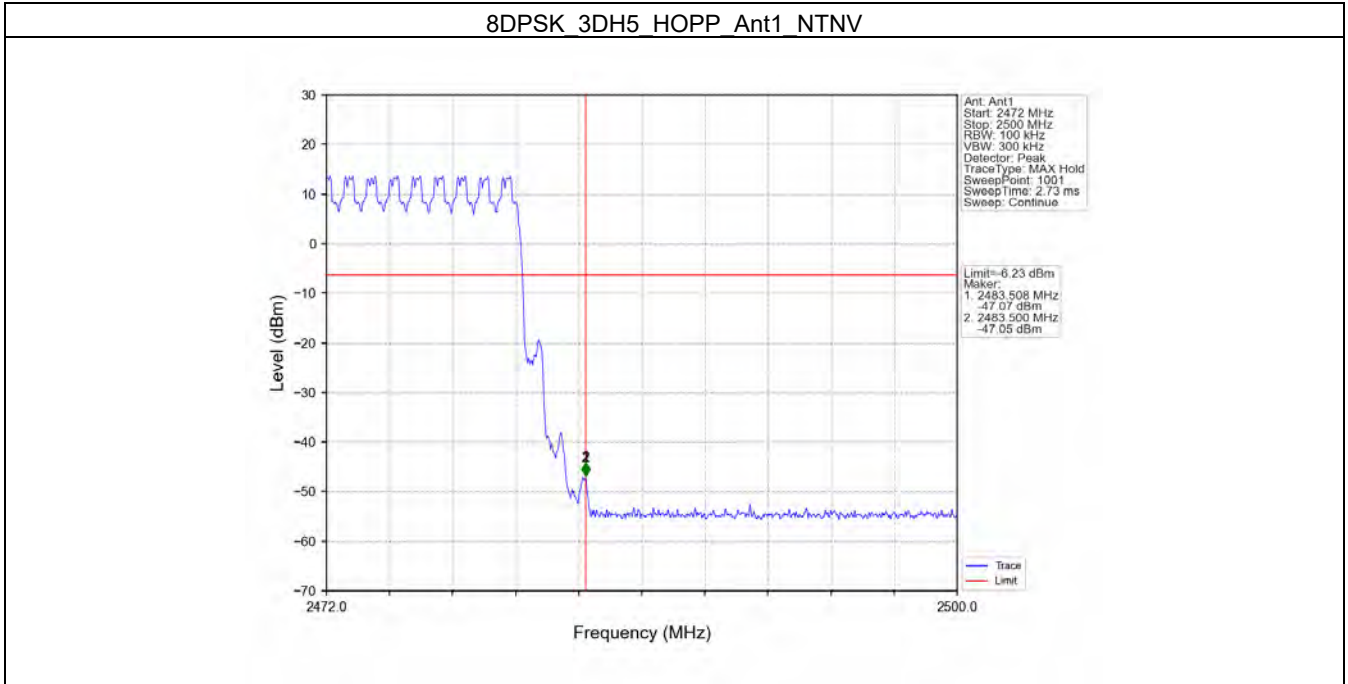

- End of the Report -