

---

# FCC Test Report

---

Report No.: AGC01680160302FE03

**FCC ID** : 2AC9LHW155A  
**APPLICATION PURPOSE** : Original Equipment  
**PRODUCT DESIGNATION** : HW155-2.4G receiver  
**BRAND NAME** : N/A  
**MODEL NAME** : HW155  
**CLIENT** : Shenzhen Hastech Industries Co., Ltd.  
**DATE OF ISSUE** : Mar.26, 2016  
**STANDARD(S)** : FCC Part 15 Rules  
**TEST PROCEDURE(S)**  
**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



### Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Mar.26, 2016	Valid	Original Report

## TABLE OF CONTENTS

<b>1. VERIFICATION OF CONFORMITY</b>	<b>4</b>
<b>2. GENERAL INFORMATION</b>	<b>5</b>
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCY	6
<b>3. MEASUREMENT UNCERTAINTY</b>	<b>7</b>
<b>4. DESCRIPTION OF TEST MODES</b>	<b>7</b>
<b>5. SYSTEM TEST CONFIGURATION</b>	<b>8</b>
5.1. CONFIGURATION OF EUT SYSTEM	8
5.2. EQUIPMENT USED IN EUT SYSTEM	8
5.3. SUMMARY OF TEST RESULTS	8
<b>6. TEST FACILITY</b>	<b>9</b>
<b>7. RADIATED EMISSION</b>	<b>10</b>
7.1 TEST LIMIT	10
7.2. MEASUREMENT PROCEDURE	11
7.3. TEST SETUP	13
7.4. TEST RESULT	14
<b>8. BAND EDGE EMISSION</b>	<b>19</b>
8.1. MEASUREMENT PROCEDURE	19
8.2 TEST SETUP	19
8.3 RADIATED TEST RESULT	19
<b>9. 20DB BANDWIDTH</b>	<b>24</b>
9.1. MEASUREMENT PROCEDURE	24
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	24
9.3. MEASUREMENT RESULTS	24
<b>10. FCC LINE CONDUCTED EMISSION TEST</b>	<b>27</b>
10.1. LIMITS OF LINE CONDUCTED EMISSION TEST	27
10.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	27
10.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	28
10.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	28
10.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	29
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP</b>	<b>31</b>
<b>APPENDIX B: PHOTOGRAPHS OF EUT</b>	<b>33</b>


## 1. VERIFICATION OF CONFORMITY

<b>Applicant</b>	Shenzhen Hastech Industries Co., Ltd.
<b>Address</b>	3rd, 4th floor G-A1 Bldg & 1st, 2nd floor G-A2 Bldg Democracy West Industry Park, Shajing Town, Bao'an District, Shenzhen, China
<b>Manufacturer</b>	Shenzhen Hastech Industries Co., Ltd.
<b>Address</b>	3rd, 4th floor G-A1 Bldg & 1st, 2nd floor G-A2 Bldg Democracy West Industry Park, Shajing Town, Bao'an District, Shenzhen, China
<b>Product Designation</b>	HW155-2.4G receiver
<b>Brand Name</b>	N/A
<b>Test Model</b>	HW155
<b>Date of test</b>	Mar.16, 2016 to Mar.17, 2016
<b>Deviation</b>	None
<b>Condition of Test Sample</b>	Normal
<b>Test Result</b>	Pass
<b>Report Template</b>	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.


Tested by



Max Zhang(Zhang Yi)

Mar.26, 2016


Reviewed by

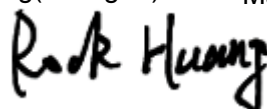

Rock Huang(Huang Dinglue)

Mar.26, 2016

Approved by

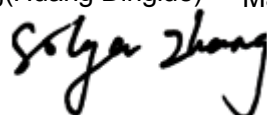

Solger Zhang(Zhang Hongyi)  
Authorized Officer

Mar.26, 2016

## 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

<b>Operation Frequency</b>	2.408 GHz to 2.474GHz
<b>Maximum field strength</b>	86.63dBuv/m@3m(AV)
<b>Modulation</b>	GFSK
<b>Number of channels</b>	34
<b>Antenna Gain</b>	0dBi
<b>Antenna Designation</b>	PCB Antenna (Met 15.203 Antenna requirement)
<b>Hardware Version</b>	V1.1
<b>Software Version</b>	N/A
<b>Power Supply</b>	DC 5V by USB port

## 2.2. TABLE OF CARRIER FREQUENCY

Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2408	18	2442
02	2410	19	2444
03	2412	20	2446
04	2414	21	2448
05	2416	22	2450
06	2418	23	2452
07	2420	24	2454
08	2422	25	2456
09	2424	26	2458
10	2426	27	2460
11	2428	28	2462
12	2430	29	2464
13	2432	30	2466
14	2434	31	2468
15	2436	32	2470
16	2438	33	2472
17	2440	34	2474

### 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$


### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX in GFSK modulation
2	Middle channel TX in GFSK modulation
3	High channel TX in GFSK modulation
4	TX OFF
Note: 1. Only the result of the worst case was recorded in the report, if no other cases. 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.	

## 5. SYSTEM TEST CONFIGURATION

### 5.1. CONFIGURATION OF EUT SYSTEM

Configure :

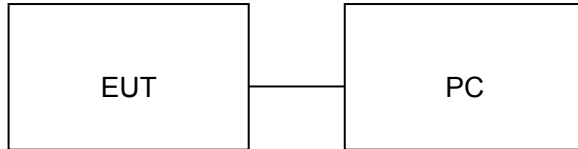

### 5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	HW155-2.4G receiver	HW155	2AC9LHW155A	EUT
2	PC	SONY	E1412AYCW	Support
3	PC adapter	SONY	A13-040A3A	Support

### 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission	Compliant



## 6. TEST FACILITY

<b>Site</b>	Dongguan Precise Testing Service Co., Ltd.
<b>Location</b>	Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China.
<b>FCC Registration No.</b>	371540
<b>Description</b>	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

## ALL TEST EQUIPMENT LIST

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	June 6, 2015	June 5, 2016
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016
Shielded Room	CHENGYU	843	PTS-002	June 6, 2015	June 5, 2016

## 7. RADIATED EMISSION

### 7.1 TEST LIMIT

#### Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

#### Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		$\mu$ V/m	dB( $\mu$ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other: 74.0 dB( $\mu$ V)/m (Peak) 54.0 dB( $\mu$ V)/m (Average)	

Remark:

- (1) Emission level dB  $\mu$  V = 20 log Emission level  $\mu$  V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

## 7.2. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

7.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

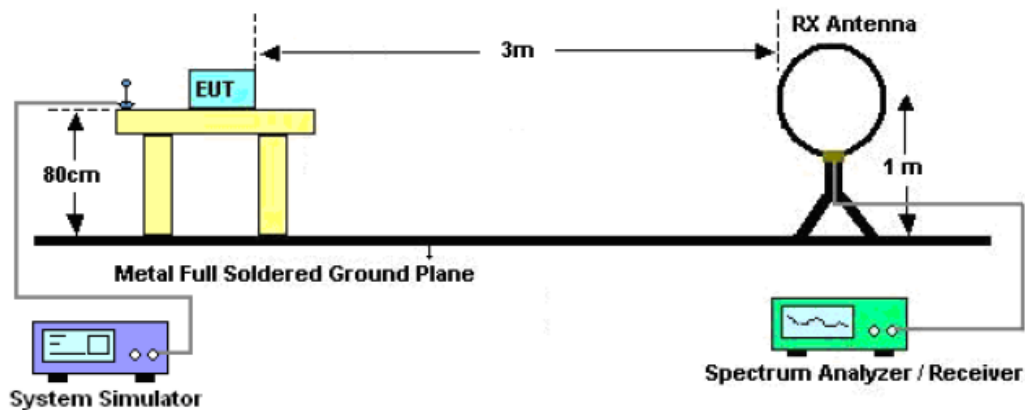

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

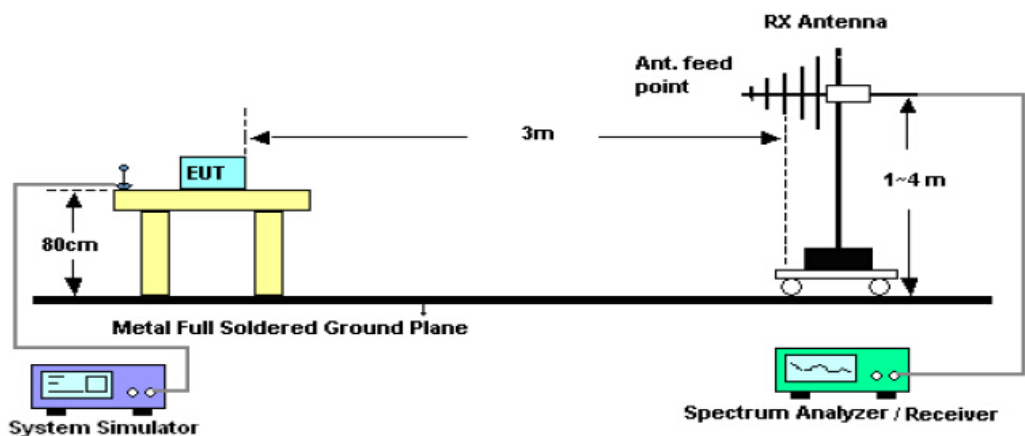

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

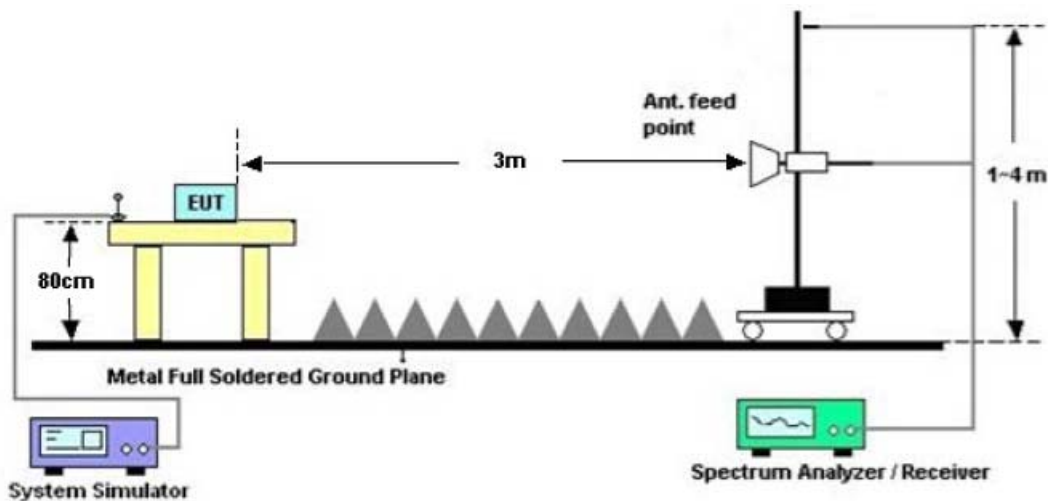


## 7.4. TEST RESULT

### RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

### RADIATED EMISSION 30MHz- 1GHZ


EUT :	HW155-2.4G receiver	Model Name. :	HW155
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 1	Polarization :	Horizontal

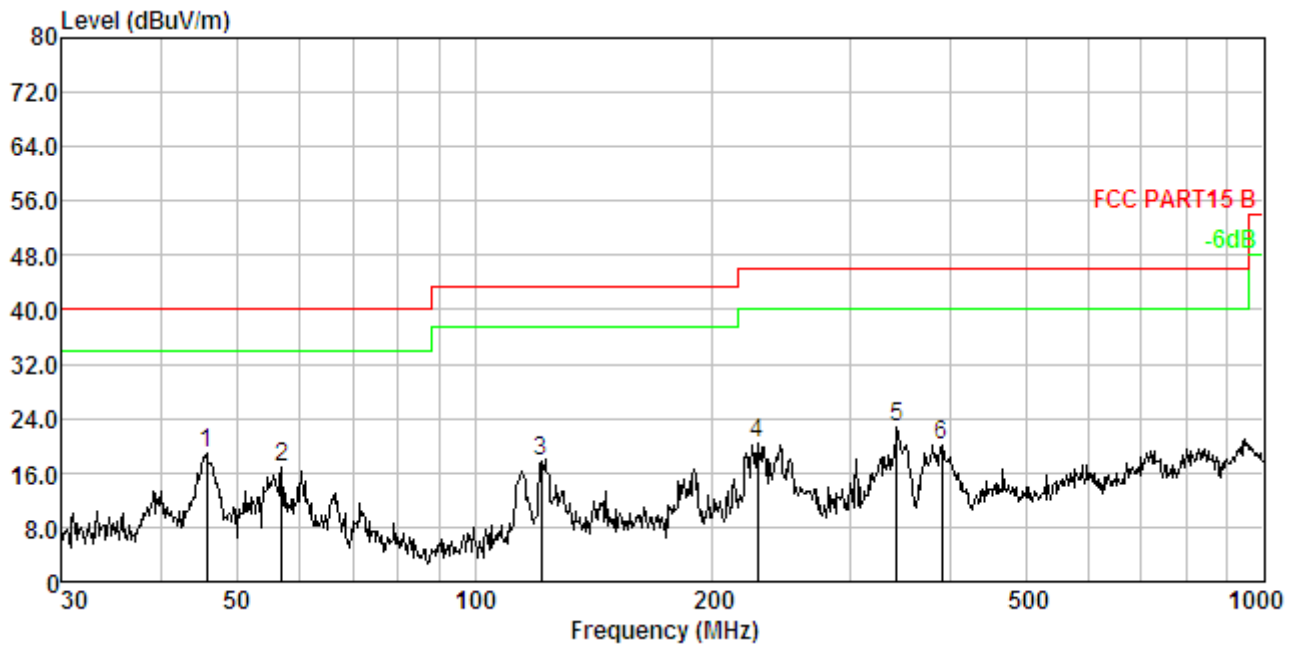

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	45.695	1.44	13.11	34.39	30.12	18.82	40.00	-21.18	Peak
2.	56.991	1.64	12.01	33.27	30.19	16.73	40.00	-23.27	Peak
3.	121.549	2.32	12.13	33.79	30.46	17.78	43.50	-25.72	Peak
4.	228.490	2.89	11.17	37.14	30.68	20.52	46.00	-25.48	Peak
5.	343.180	3.26	14.14	36.04	30.82	22.62	46.00	-23.38	Peak
6.	390.723	3.38	15.12	32.52	30.86	20.16	46.00	-25.84	Peak

**RESULT: PASS**

EUT :	HW155-2.4G receiver	Model Name. :	HW155
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 1	Polarization :	Vertical

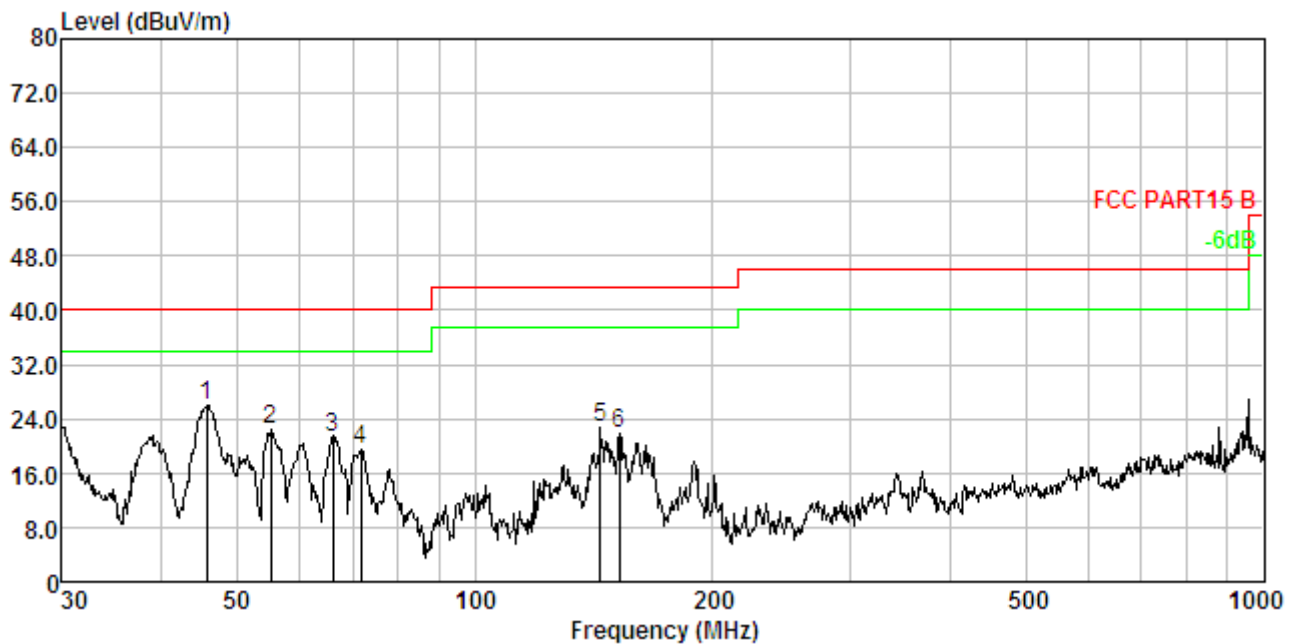

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	45.695	1.44	13.11	41.68	30.12	26.11	40.00	-13.89	Peak
2.	55.221	1.61	11.91	39.07	30.18	22.41	40.00	-17.59	Peak
3.	66.034	1.77	11.45	38.34	30.24	21.32	40.00	-18.68	Peak
4.	71.832	1.85	9.95	38.04	30.27	19.57	40.00	-20.43	Peak
5.	144.335	2.48	13.60	37.13	30.52	22.69	43.50	-20.81	Peak
6.	152.664	2.53	13.89	35.84	30.54	21.72	43.50	-21.78	Peak

## RESULT: PASS

### Note:

Factor=Antenna Factor + Cable loss, Margin=Result-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The mode 1 is the worst case, and only the data of the worst case recorded in this test report.

## RADIATED EMISSION ABOVE 1GHZ

EUT :	HW155-2.4G receiver	Model Name. :	HW155
Temperature :	20 ℃	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 1	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2408.013	99.56	-9.37	90.19	114	-23.81	peak
2408.013	94.18	-9.37	84.81	94	-9.19	AVG
4816.026	50.58	3.74	54.32	74	-19.68	peak
4816.026	44.67	3.74	48.41	54	-5.59	AVG
7224.039	42.51	8.14	50.65	74	-23.35	peak
7224.039	36.89	8.14	45.03	54	-8.97	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT :	HW155-2.4G receiver	Model Name. :	HW155
Temperature :	20 ℃	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 1	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2408.013	96.85	-9.37	87.48	114	-26.52	peak
2408.013	91.26	-9.37	81.89	94	-12.11	AVG
4816.026	49.68	3.74	53.42	74	-20.58	peak
4816.026	43.37	3.74	47.11	54	-6.89	AVG
7224.039	42.13	8.14	50.27	74	-23.73	peak
7224.039	36.54	8.14	44.68	54	-9.32	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



EUT :	HW155-2.4G receiver	Model Name. :	HW155
Temperature :	20 ℃	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 2	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2440.016	99.24	-9.63	89.61	114	-24.39	peak
2440.016	93.74	-9.63	84.11	94	-9.89	AVG
4880.032	50.21	3.76	53.97	74	-20.03	peak
4880.032	44.42	3.76	48.18	54	-5.82	AVG
7320.048	42.39	8.17	50.56	74	-23.44	peak
7320.048	37.12	8.17	45.29	54	-8.71	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT :	HW155-2.4G receiver	Model Name. :	HW155
Temperature :	20 ℃	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 2	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2440.016	96.14	-9.63	86.51	114	-27.49	peak
2440.016	90.25	-9.63	80.62	94	-13.38	AVG
4880.032	48.75	3.76	52.51	74	-21.49	peak
4880.032	43.16	3.76	46.92	54	-7.08	AVG
7320.048	42.07	8.17	50.24	74	-23.76	peak
7320.048	36.55	8.17	44.72	54	-9.28	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT :	HW155-2.4G receiver	Model Name. :	HW155
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 3	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
2474.021	102.13	-9.61	92.52	114	-21.48	peak
2474.021	96.24	-9.61	86.63	94	-7.37	AVG
4948.042	52.69	3.83	56.52	74	-17.48	peak
4948.042	46.74	3.83	50.57	54	-3.43	AVG
7422.063	43.36	8.21	51.57	74	-22.43	peak
7422.063	38.51	8.21	46.72	54	-7.28	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT :	HW155-2.4G receiver	Model Name. :	HW155
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 3	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
2474.021	99.24	-9.61	89.63	114	-24.37	peak
2474.021	94.57	-9.61	84.96	94	-9.04	AVG
4948.042	51.74	3.83	55.57	74	-18.43	peak
4948.042	45.66	3.83	49.49	54	-4.51	AVG
7422.063	43.04	8.21	51.25	74	-22.75	peak
7422.063	37.68	8.21	45.89	54	-8.11	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

**Note:** Other emissions from 8G to 25 GHz are considered as ambient noise. No recording in the test report.  
Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.  
The “Factor” value can be calculated automatically by software of measurement system.  
The spurious emission of mode 4 are considered as ambient noise. No recording in the test report.


## 8. BAND EDGE EMISSION

### 8.1. MEASUREMENT PROCEDURE

1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO  
(b) AVERAGE: RBW=1MHz ; VBW=1/on time(1KHz) / Sweep=AUTO
3. Other procedures refer to clause 7.2.

### 8.2 TEST SETUP

RADIATED EMISSION TEST SETUP

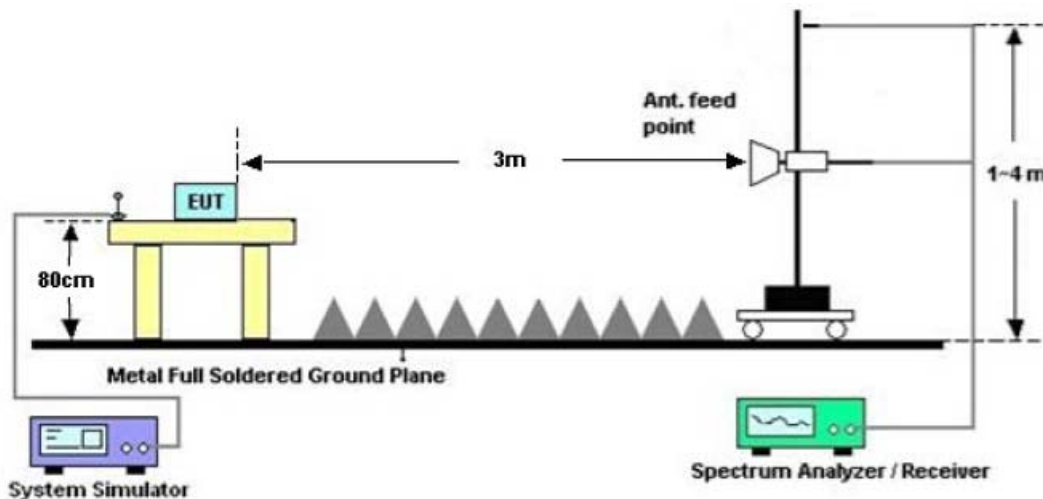


### 8.3 RADIATED TEST RESULT

#### Note:


1. Factor=Antenna Factor + Cable loss - Amplifier gain. Field Strength=Factor + Reading level
2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB( $\mu$ V) to represent the Amplitude. Use the F dB( $\mu$ V/m) to represent the Field Strength. So A=F.

EUT :	HW155-2.4G receiver	Model Name. :	HW155
Temperature :	20 ℃	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 1	Polarization :	Horizontal

PK Value

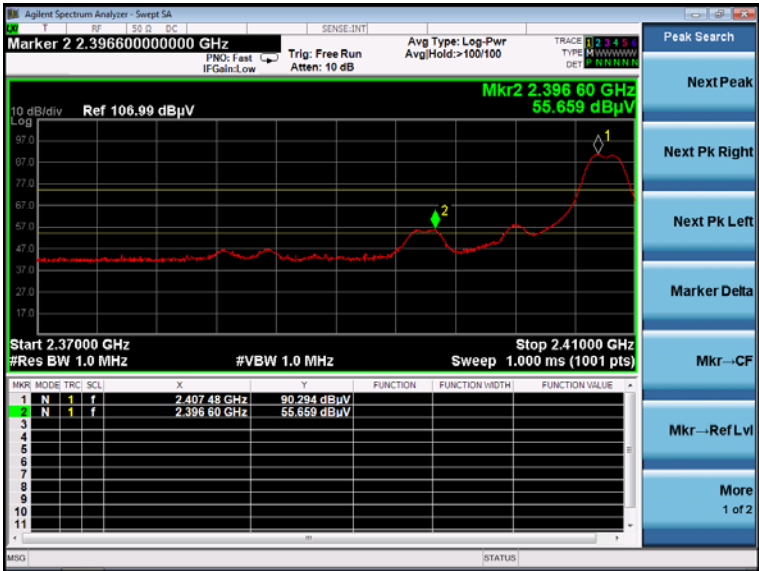


AV Value

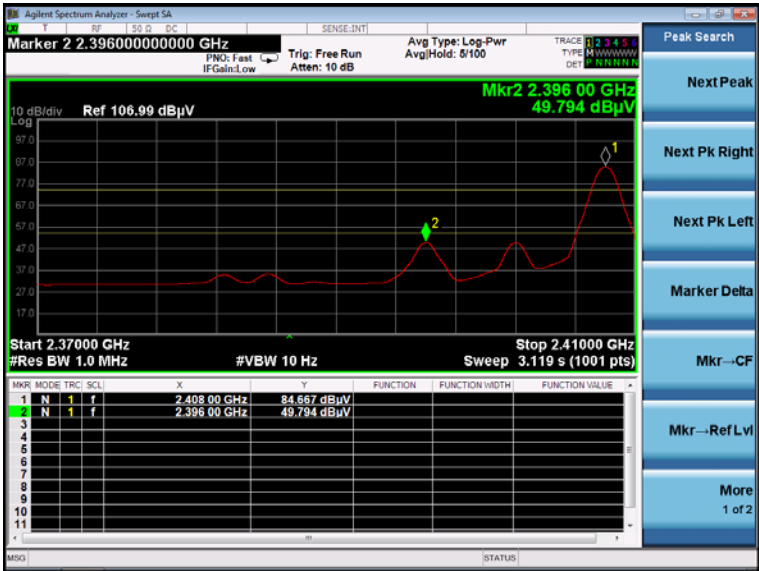


EUT :	HW155-2.4G receiver	Model Name. :	HW155
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 1	Polarization :	Vertical

PK Value

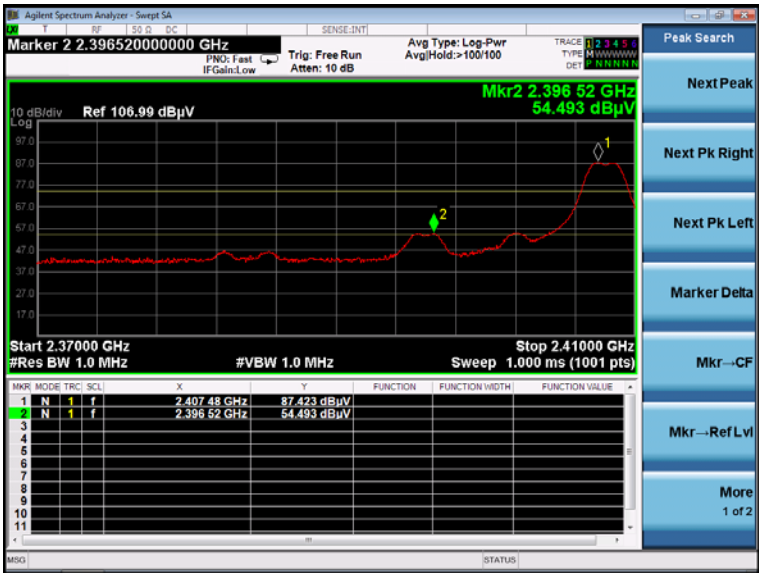

AV Value

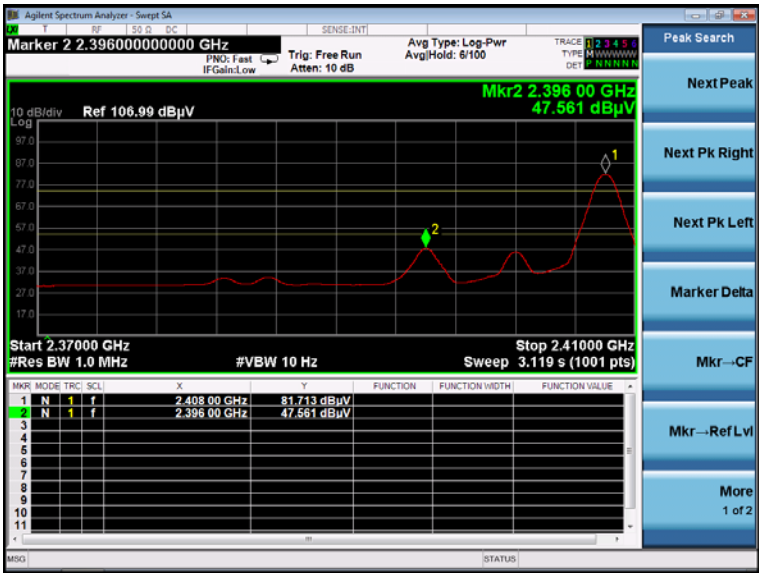


EUT :	HW155-2.4G receiver	Model Name. :	HW155
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 3	Polarization :	Horizontal

PK Value



AV Value

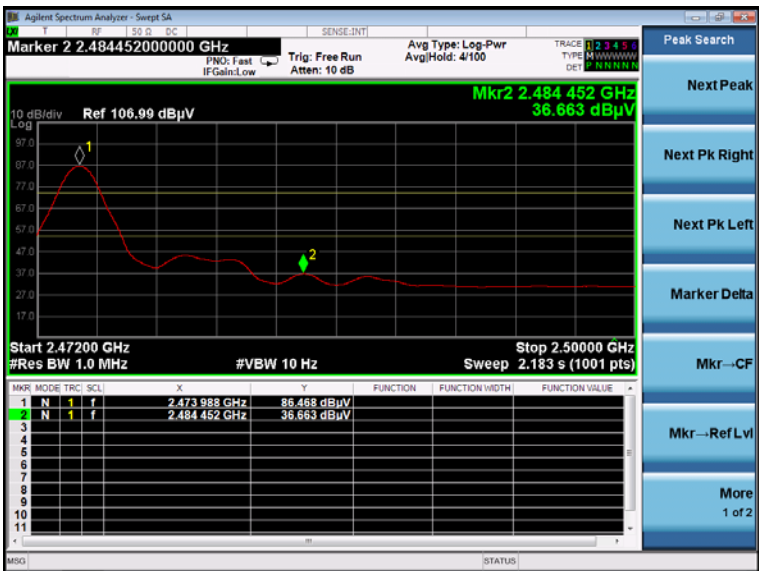


EUT :	HW155-2.4G receiver	Model Name. :	HW155
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC5V
Test Mode :	Mode 3	Polarization :	Vertical

PK Value



AV Value

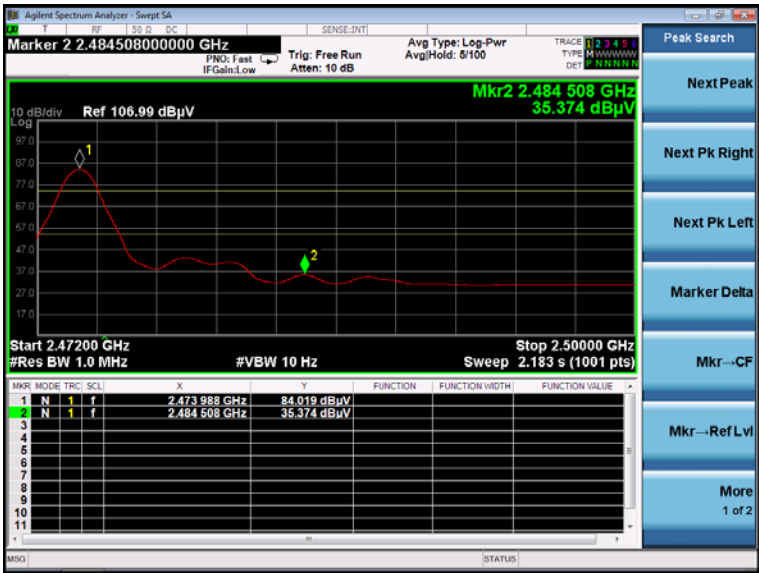

**Note:**

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.


The “Factor” value can be calculated automatically by software of measurement system.

9. 20DB BANDWIDTH

9.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 1% of SPAN,  $VBW \geq 3 \times RBW$ .
4. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

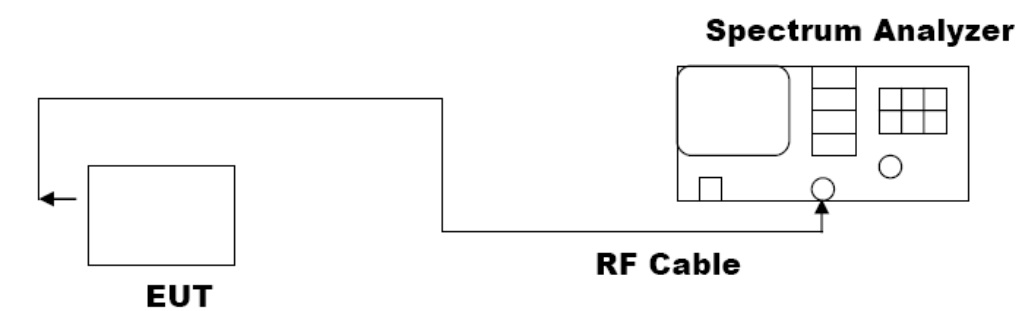


9.3. MEASUREMENT RESULTS

TEST ITEM	20DB BANDWIDTH
TEST MODE	Mode1;Mode2;Mode3


Test Data (MHz)		Criteria
Low Channel	1.597	PASS
Middle Channel	1.598	PASS
High Channel	1.595	PASS




TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

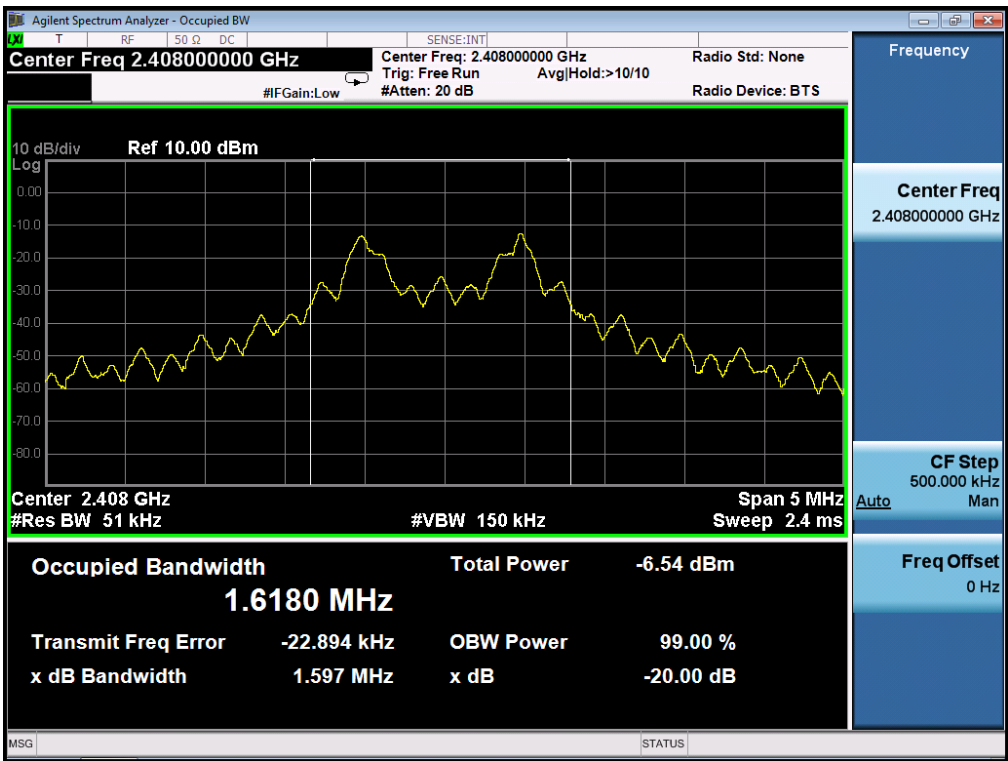

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

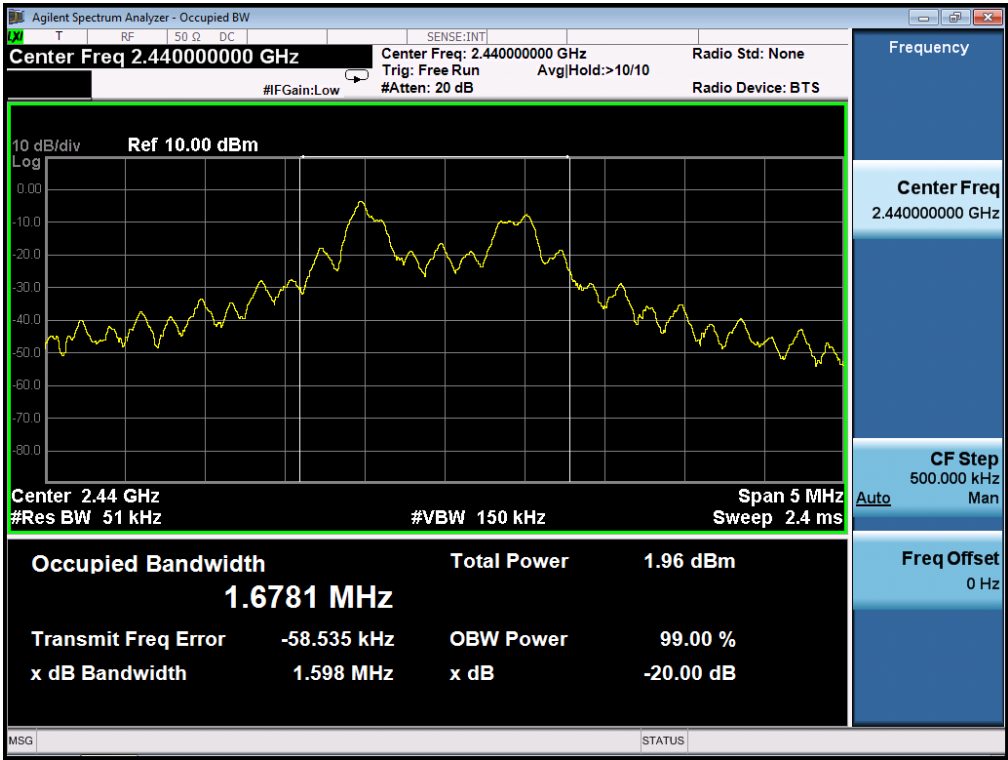

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

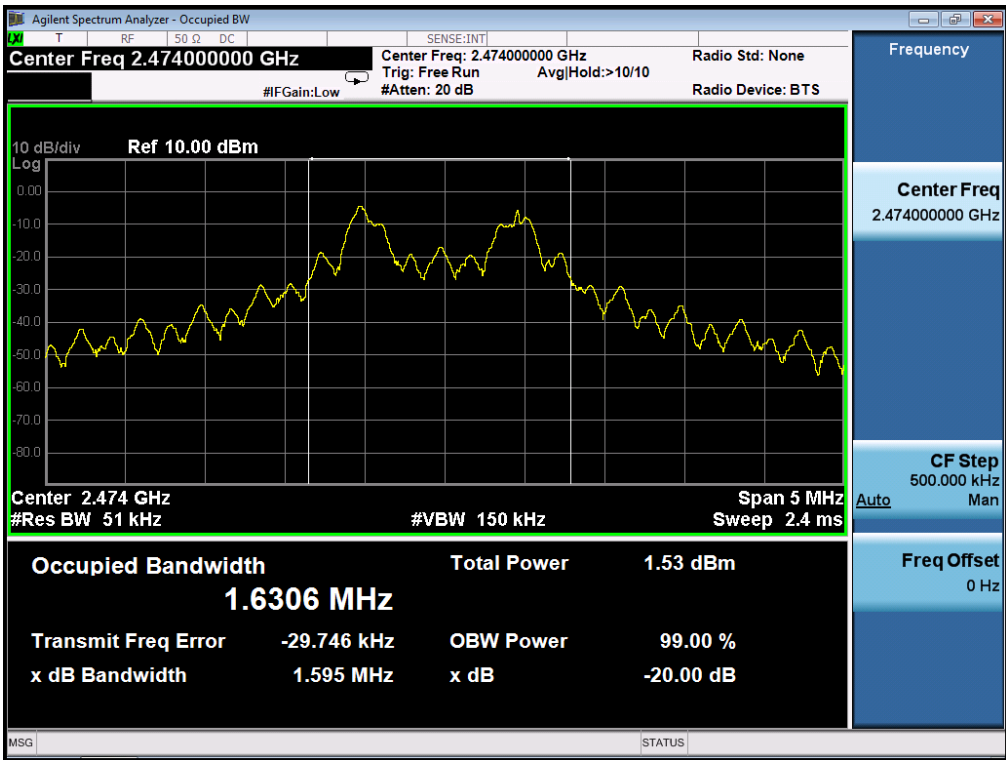

## 10. FCC LINE CONDUCTED EMISSION TEST


### 10.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 10.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

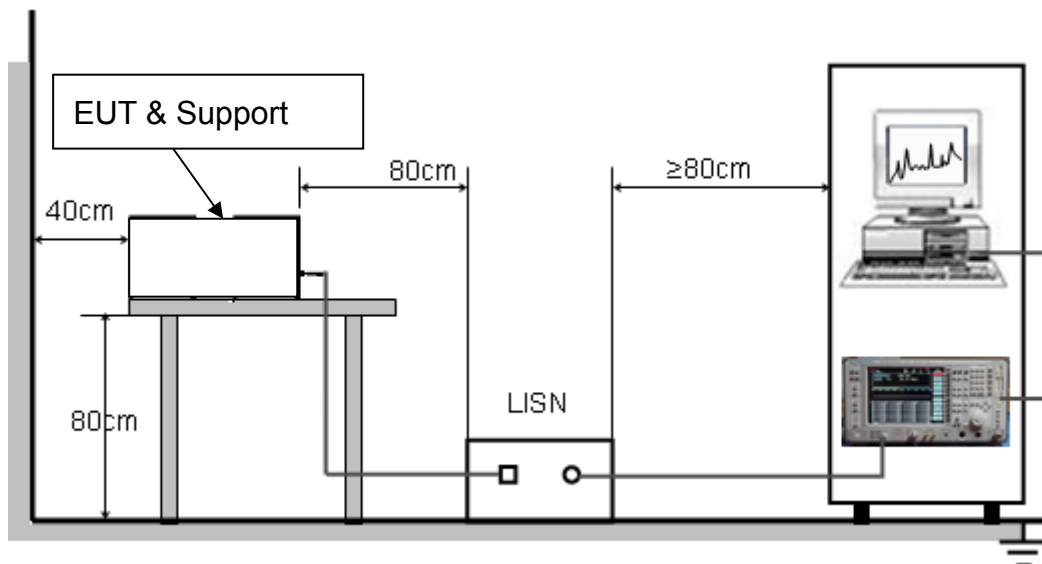

### **10.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST**

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received 120V/60Hz power by a LISN..
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### **10.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST**

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

**10.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST**


Line Conducted Emission Test Line 1-L

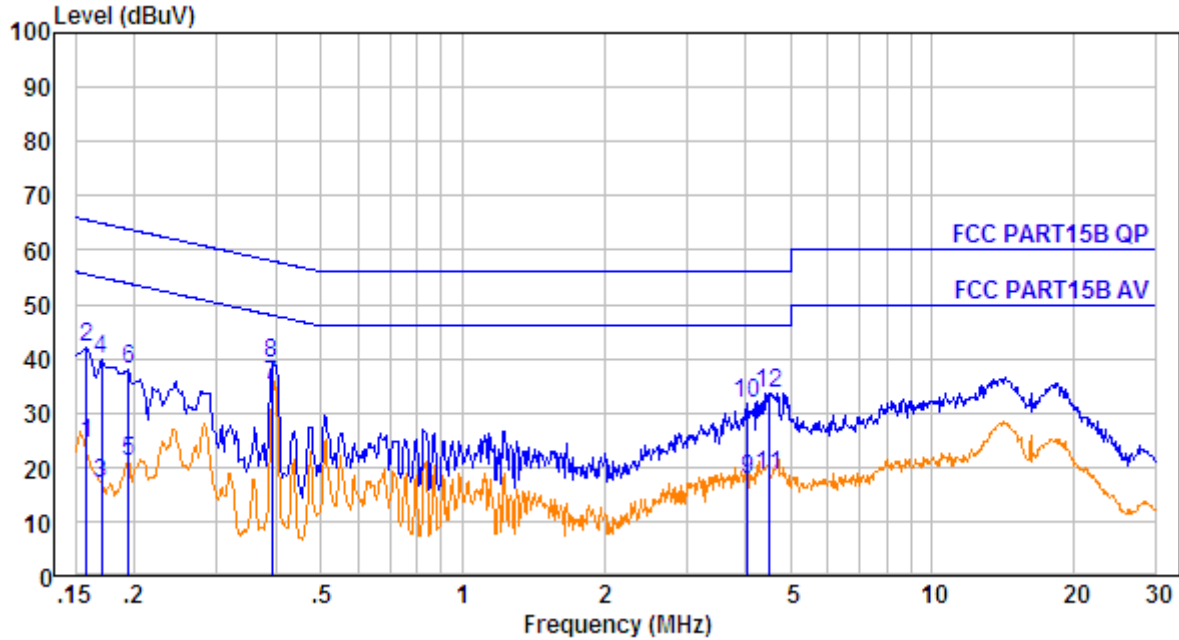

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBUV	Emission Level dBUV	Limit dBUV	Over Limit dB	Remark
1.	0.158	10.60	0.60	13.00	24.20	55.56	-31.36	Average
2.	0.158	10.60	0.60	31.00	42.20	65.56	-23.36	Peak
3.	0.170	10.60	0.60	5.69	16.89	54.94	-38.05	Average
4.	0.170	10.60	0.60	28.69	39.89	64.94	-25.05	Peak
5.	0.194	10.61	0.60	9.85	21.06	53.84	-32.78	Average
6.	0.194	10.61	0.60	26.85	38.06	63.84	-25.78	Peak
7.	0.393	10.64	0.60	23.80	35.04	47.99	-12.95	Average
8.	0.393	10.64	0.60	27.80	39.04	57.99	-18.95	Peak
9.	4.049	10.72	0.60	6.52	17.84	46.00	-28.16	Average
10.	4.049	10.72	0.60	20.52	31.84	56.00	-24.16	Peak
11.	4.478	10.73	0.60	7.30	18.63	46.00	-27.37	Average
12.	4.478	10.73	0.60	22.30	33.63	56.00	-22.37	Peak

**RESULT: PASS**

Line Conducted Emission Test Line 2-N

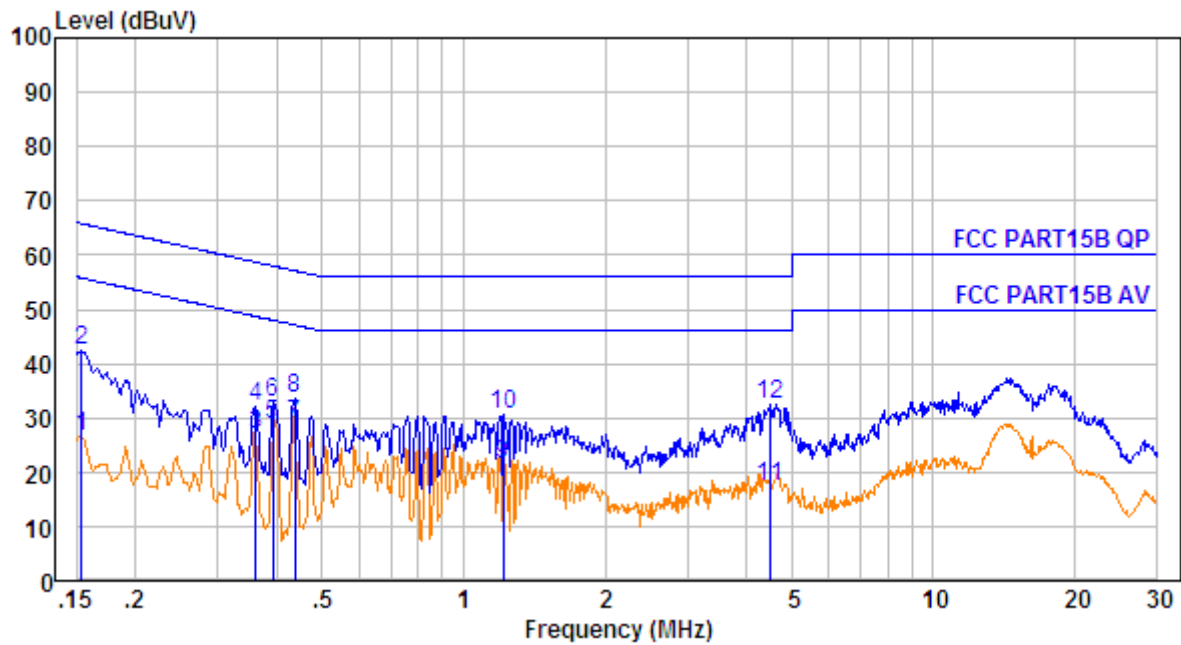


No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.154	10.60	0.60	15.31	26.51	55.78	-29.27	Average
2.	0.154	10.60	0.60	31.31	42.51	65.78	-23.27	Peak
3.	0.361	10.63	0.60	15.85	27.08	48.69	-21.61	Average
4.	0.361	10.63	0.60	20.85	32.08	58.69	-26.61	Peak
5.	0.393	10.64	0.60	17.63	28.87	47.99	-19.12	Average
6.	0.393	10.64	0.60	21.63	32.87	57.99	-25.12	Peak
7.	0.437	10.64	0.60	17.44	28.68	47.11	-18.43	Average
8.	0.437	10.64	0.60	22.44	33.68	57.11	-23.43	Peak
9.	1.216	10.68	0.60	10.23	21.51	46.00	-24.49	Average
10.	1.216	10.68	0.60	19.23	30.51	56.00	-25.49	Peak
11.	4.478	10.73	0.60	6.11	17.44	46.00	-28.56	Average
12.	4.478	10.73	0.60	21.11	32.44	56.00	-23.56	Peak


**RESULT: PASS**

## APPENDIX A: PHOTOGRAPHS OF TEST SETUP

### RADIATED EMISSION TEST SETUP BELOW 1GHz

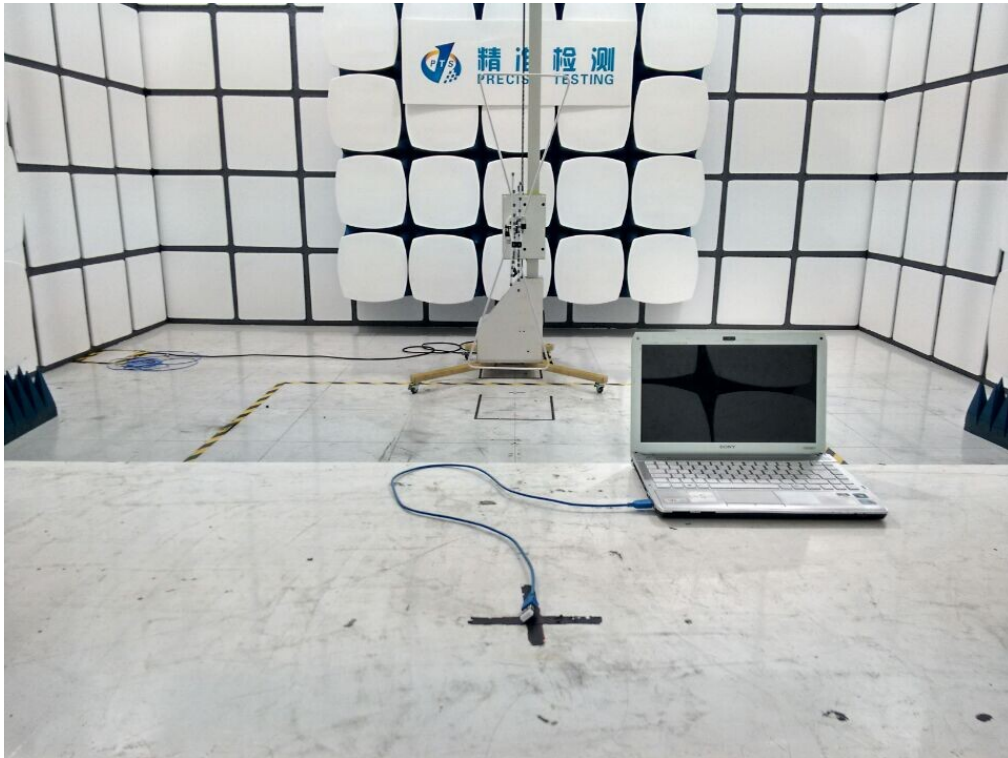

### RADIATED EMISSION TEST SETUP ABOVE 1GHz

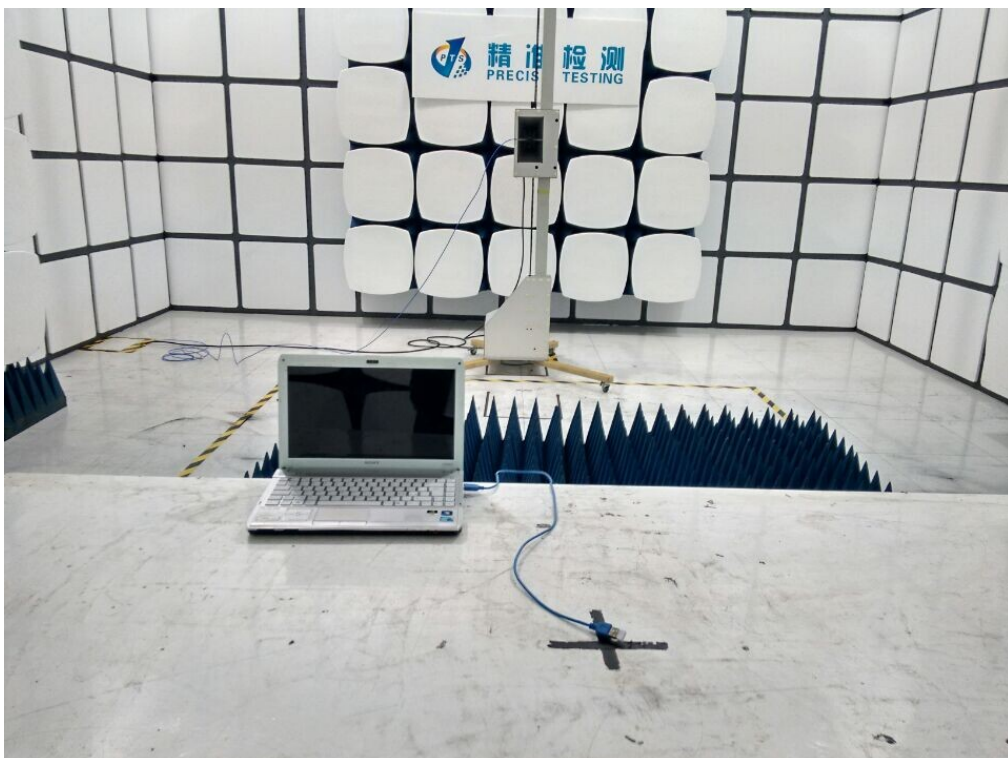


### CONDUCTED EMISSION TEST SETUP






## APPENDIX B: PHOTOGRAPHS OF EUT


TOP VIEW OF EUT

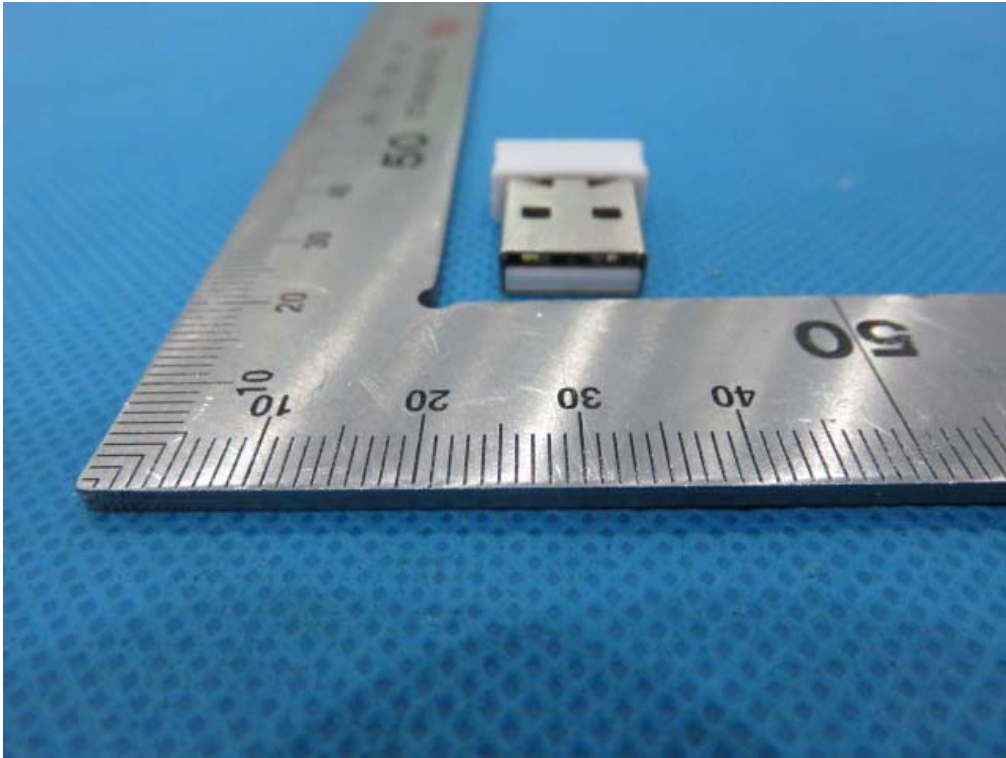


BOTTOM VIEW OF EUT

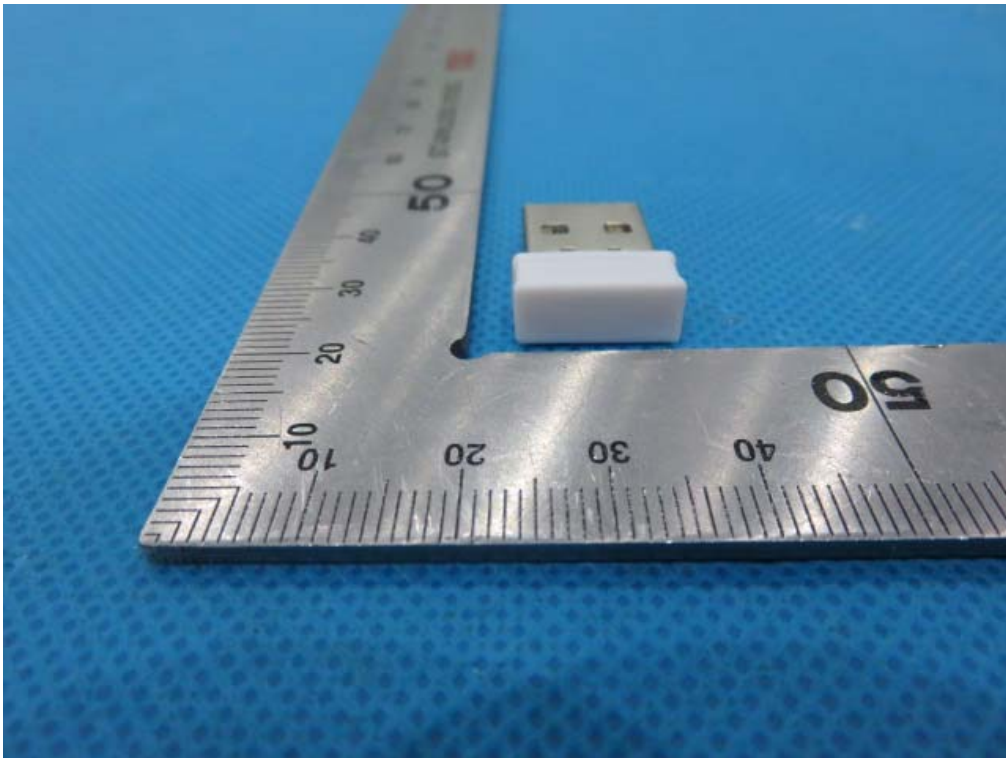


FRONT VIEW OF EUT

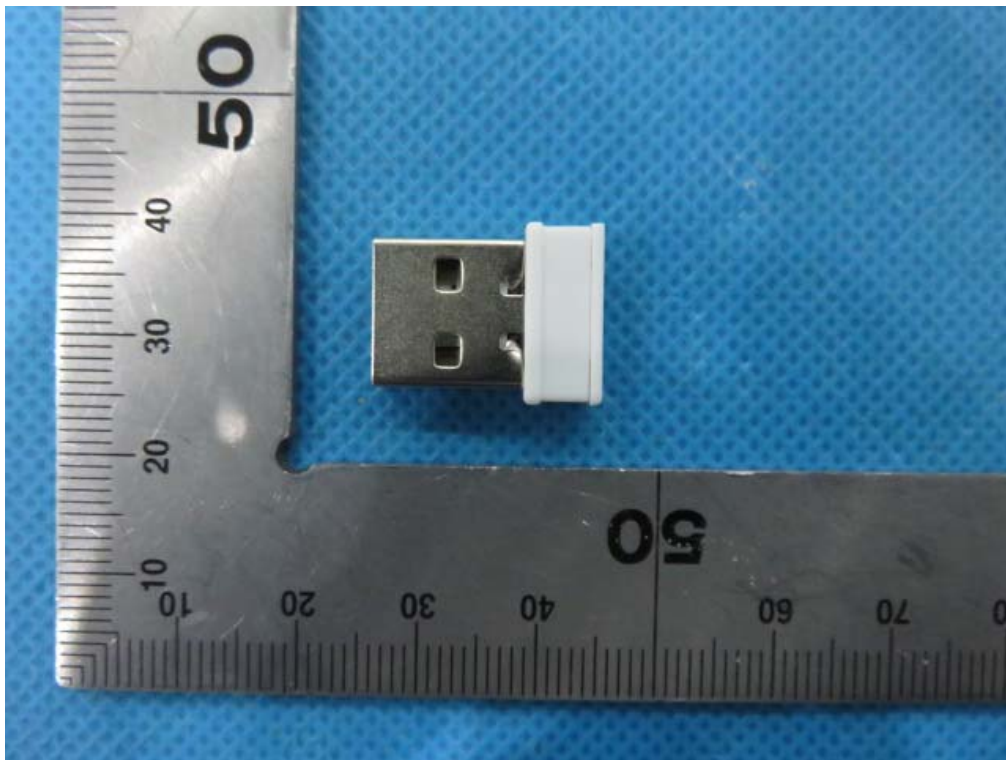


BACK VIEW OF EUT

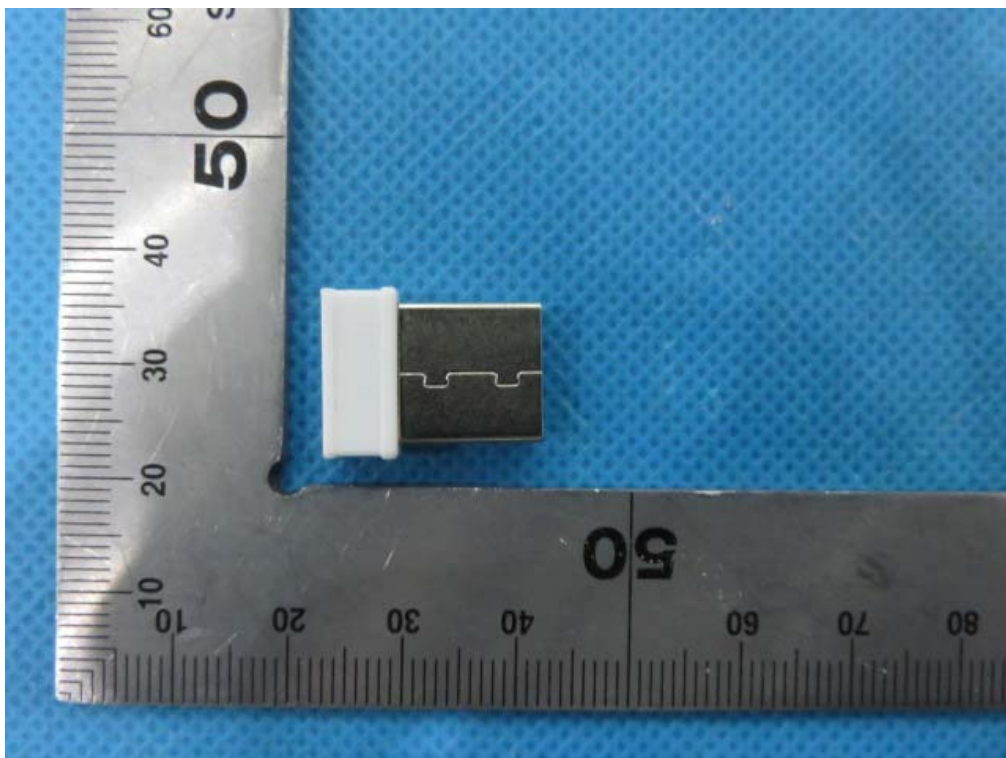

LEFT VIEW OF EUT

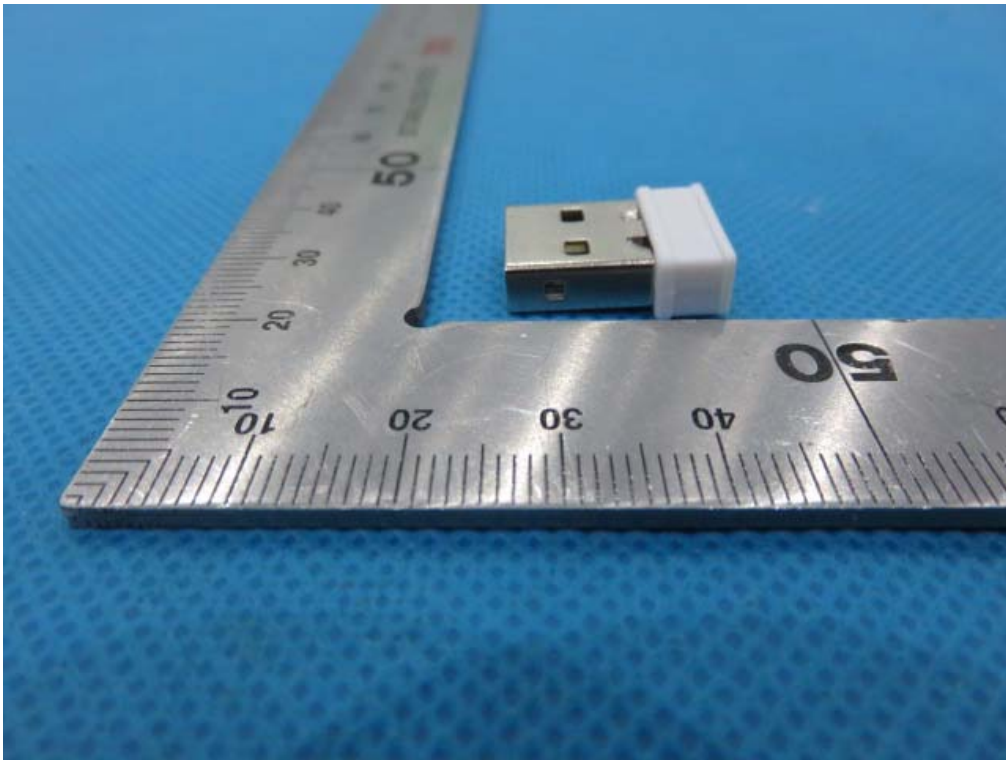


RIGHT VIEW OF EUT

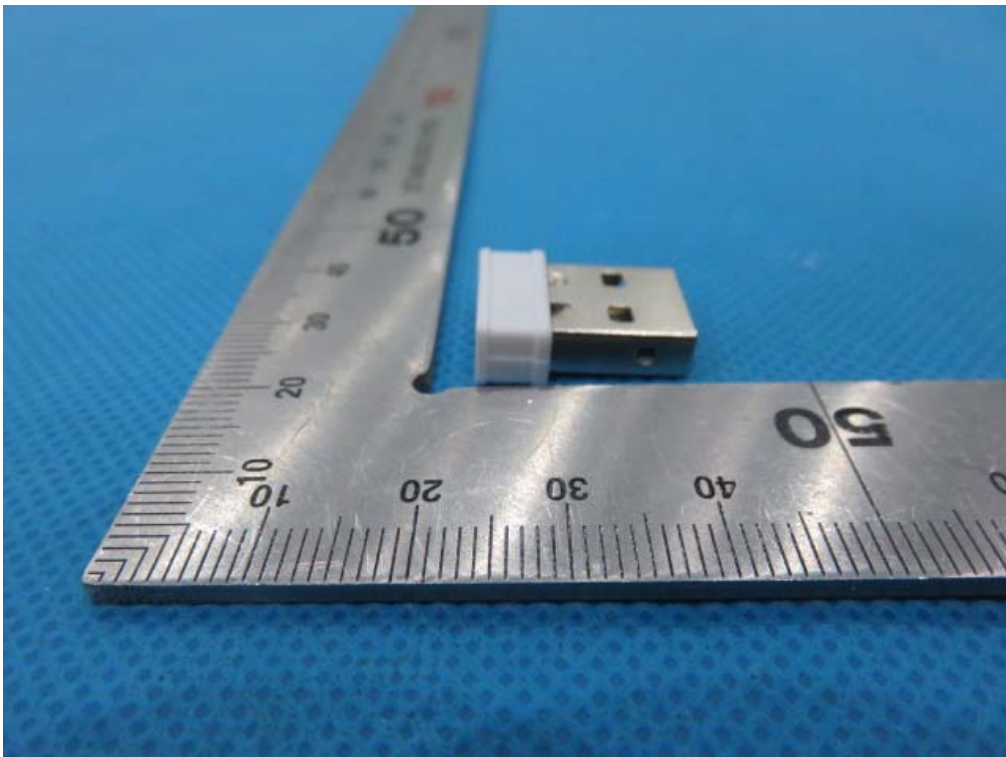





OPEN VIEW OF EUT

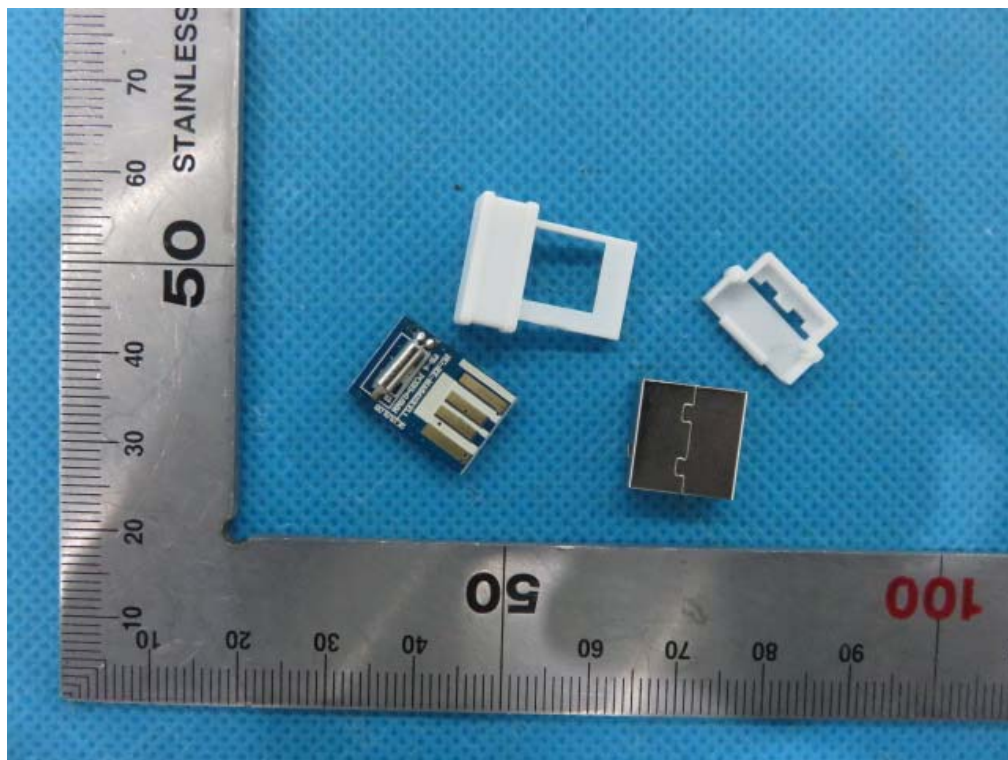

INTERNAL VIEW OF EUT-1

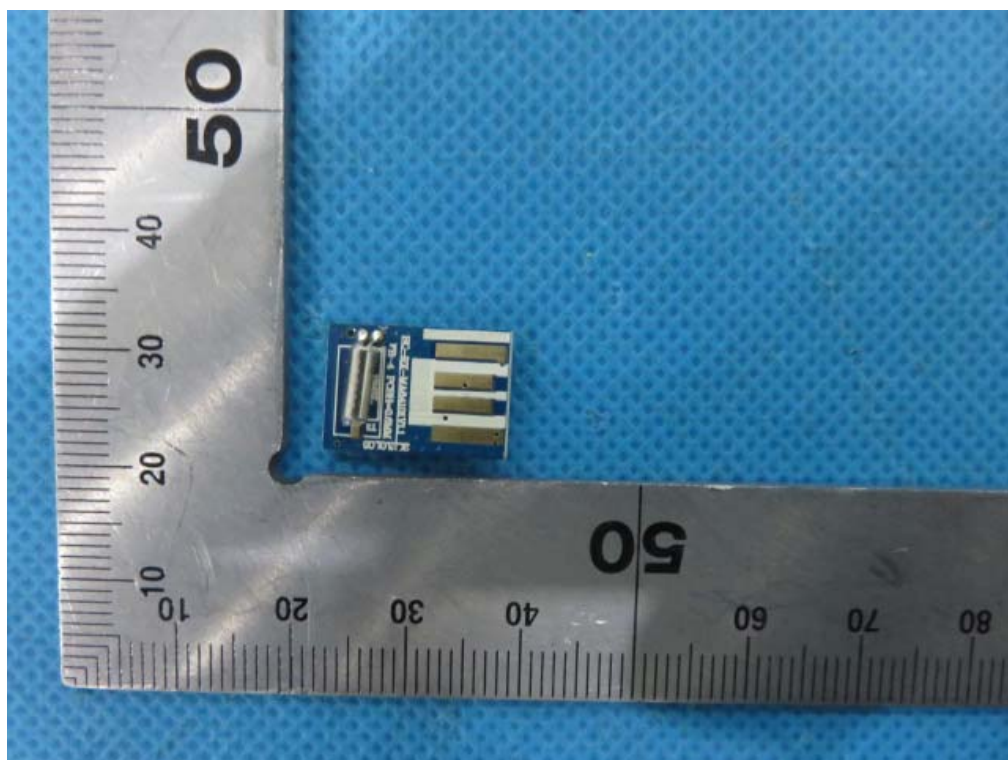

INTERNAL VIEW OF EUT-2

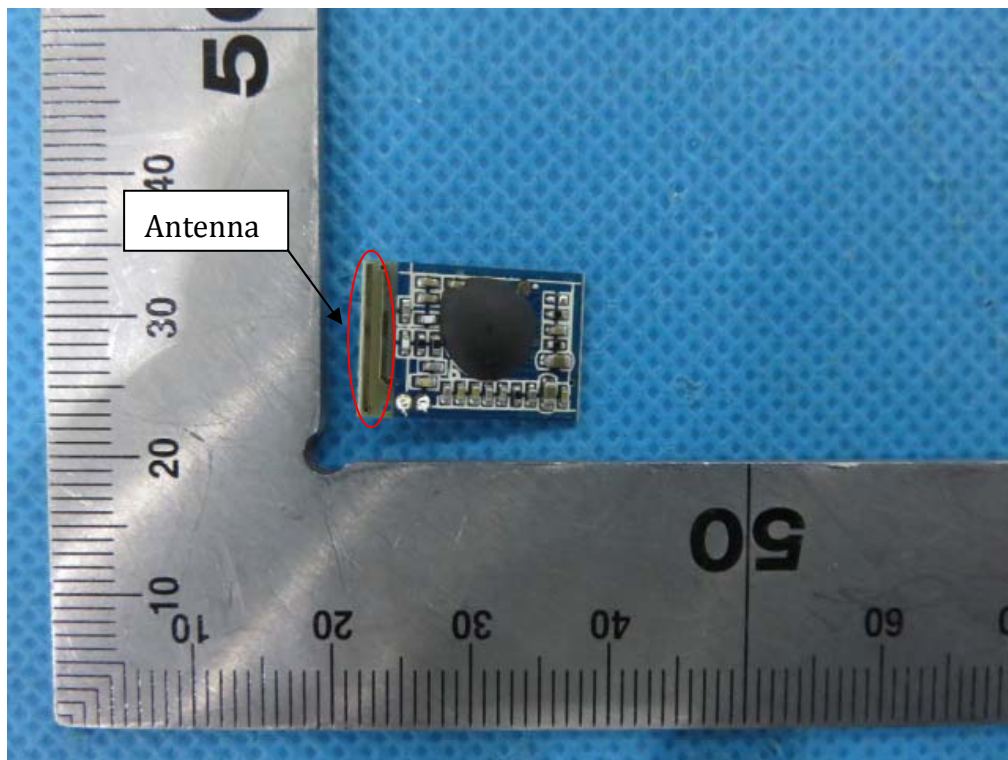

-----END OF REPORT-----