
TEST REPORT FOR WLAN TESTING

Report No.: SRTC2023-9004(F)-23112701(F)

Product Name: tracker

Product Model: MK40

Applicant: TCL Communication Ltd.

Manufacturer: TCL Communication Ltd.

Specification: FCC Part 15 Subpart C (2022)

FCC ID: 2ACCJB172

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District,

Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

CONTENTS

1. GENERAL INFORMATION	2
1.1 NOTES OF THE TEST REPORT	2
1.2 INFORMATION ABOUT THE TESTING LABORATORY	2
1.3 APPLICANT’S DETAILS	2
1.4 MANUFACTURER’S DETAILS	2
1.5 TEST ENVIRONMENT	3
2 DESCRIPTION OF THE DEVICE UNDER TEST	4
2.1 FINAL EQUIPMENT BUILD STATUS	4
2.2 DESCRIPTION OF TEST MODES	7
2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	7
2.3 DUTY CYCLE OF TEST SIGNAL	8
2.4 EUT OPERATING CONDITIONS	9
2.5 SUPPORT EQUIPMENT	9
3 REFERENCE SPECIFICATION	10
4 KEY TO NOTES AND RESULT CODES	10
5 RESULT SUMMARY	11
6 TEST RESULT	12
6.1 PEAK POWER OUTPUT	12
6.2 6dB BANDWIDTH	13
6.3 TRANSMITTER POWER SPECTRAL DENSITY	14
6.4 CONDUCTED OUT OF BAND EMISSION MEASUREMENT	15
6.5 BAND-EDGE MEASUREMENT	16
6.6 SPURIOUS RADIATED EMISSIONS	17
6.7 AC POWER LINE CONDUCTED EMISSION	22
7 MEASUREMENT UNCERTAINTIES	24
8 TEST EQUIPMENTS	25
APPENDIX A – TEST DATA OF CONDUCTED EMISSION	26
APPENDIX B – TEST DATA OF RADIATED EMISSION	41

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn

1.3 Applicant's details

Company:	TCL Communication Ltd.
Address:	5/F, Building 22E, 22 Science Park East Avenue Hong Kong Science Park, Shatin, NT
City:	Hong Kong
Country or Region:	China
Contacted person:	Peter Yang
Tel:	8675536645759
Fax:	NA
Email:	peter.yang@tcl.com

1.4 Manufacturer's details

Company:	TCL Communication Ltd.
Address:	5/F, Building 22E, 22 Science Park East Avenue Hong Kong Science Park, Shatin, NT
City:	Hong Kong
Country or Region:	China
Contacted person:	Peter Yang
Tel:	8675536645759
Fax:	NA
Email:	peter.yang@tcl.com

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2023-11-27
Testing Start Date:	2023-11-28
Testing End Date:	2023-12-04

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	30
Maximum Extreme	55	---
Minimum Extreme	-10	---

Normal Supply Voltage (V d.c.):	3.85
Maximum Extreme Supply Voltage (V d.c.):	4.30
Minimum Extreme Supply Voltage (V d.c.):	3.60

2 DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Frequency Band	2.412GHz~2.462GHz
Number of Channel For 20MHz	11
Modulation Type	DBPSK/DQPSK/CCK/BPSK/QPSK/16QAM/64QAM
Duplex Mode	TDD
Channel Spacing	5MHz
Data Rate	802.11b:1Mbps-11Mbps 802.11g:6Mbps-54Mbps 802.11n HT20:MCS0-MCS7 802.11n HT40:MCS0-MCS7
Power Supply	Battery/Charger
Hardware Version	P1
Software Version	3.18.505.P0.200514.cp314AT
IMEI	016201003250137
Antenna type	Refer to Note
Antenna connector	Refer to Note

Declaration of changes from Initial MK40 to Variant MK40

General: MK40 is a variant product of MK40:

● **SOFTWARE MODIFICATIONS:**

- OS update (e.g. from Android 12 to 13) / change (e.g. from Android to other OS) : **NO**
- Protocol Stack changes: **NO**
- MMS/STK/USAT/USIM changes: **NO**
- DM/SUPL/VT/FUMO/SWP/HCI: **NO**
- Other changes detail: **NO**

● **HARDWARE MODIFICATIONS:**

- Baseband changes: NO
Band changes: NO
- PCB layout/material changes: NO
- Main components changes:

LTE	Bas e Ba nd	Anten na	Transce iver	AS M	Power Amplifier	Tx SAW Filter	Rx SAW Filter (SAW Duplexer)
LTE B2	NO	NO	NO	/	Yes	NO	NO
LTE	NO	NO	NO	/	Yes	NO	NO

B4							
LTE B5	NO	NO	NO	/	Yes	NO	NO
LTE B12	NO	NO	NO	/	Yes	NO	NO
LTE B13	NO	NO	NO	/	Yes	NO	NO
LTE B25	NO	NO	NO	/	Yes	NO	NO
LTE B26	NO	NO	NO	/	Yes	NO	NO
LTE B41	NO	NO	NO	/	Yes	NO	NO
LTE B66	NO	NO	NO	/	Yes	NO	NO
LTE B71	NO	NO	NO	/	Yes	NO	NO
UTMS B2	NO	NO	NO	/	Yes	NO	NO
UTMS B4	NO	NO	NO	/	Yes	NO	NO
UTMS B5	NO	NO	NO	/	Yes	NO	NO

Other Radio	Antenna	AP	MODEM	Transceiver	Balun	Band pass filter	Triplexer
Wi-Fi	NO	NO	/	NO	/	NO	NO

- FM changes: NO
- GPS changes: TBD (e.g. Saw is different): NO
- Memory/TP/LCD/ Camera/SIM changes: NO
- Other changes detailed:
 1. P sensor from 5X931OIC STRT change to SX9311 IC STRT1
 2. RF switch from HS8775C-15 change to OM8775C-25
 3. RF switch from AW13412DN R change to AW13412HDNR
 4. Antenna switch from AW13418QNR change to AW13418RQNR

All the changes do not influence the RF performance

● **MECHANICAL MODIFICATIONS:**

- Use new metal front/back cover or keypad: NO
- Mechanical shell changes: No
- Whole size of EUT: No
- Distance of Ear reference point to bottom of handset: No
- Other trinkets to change the surface of handset: NO
- Other changes detailed: No (e.g. new mechanical design)

● **Accessory changes:**

➤ Use new charger/battery/headset/USB cable: NO

● **Update of standards: TBD**

For the 2.4G WIFI band , based on original report test date (report No.: SRTC2020-9004(R)-20050604(F)) . and measures 11b.

Note: Antenna requirement (FCC part 15.203)

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The antenna(s) of the EUT are permanently attached.
- There are no provisions for connection to an external antenna.

Note: The antenna provide to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency range(GHz)	Antenna type	Connecter Type
N/A	N/A	-1.35dBi	2.412GHz~2.462GHz	Fixed Internal Antenna	N/A

Manufacturers ensure that their designs will not be modified by the user or third parties arbitrary antenna parameters and performance. The EUT complies with the requirement of §15.203.

2.2 Description of Test Modes

11 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	---	---

2.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE ≥ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where

RE ≥ 1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK/ BPSK	1,6,6.5,13.5

Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK/ BPSK	1,6,6.5,13.5

Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK	1

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1,3, 6,9, 11	DBPSK/ BPSK	1,6,6.5,13.5

2.3 Duty Cycle of Test Signal

Modulation Type	Data Rate	Duty Cycle	Correction factor
11b	1Mbps	99.99%	0dB
11g	6Mbps	97.2%	0.11dB
11n(HT20)	6.5Mbps	97.0%	0.11dB
11n(HT40)	13.5 Mbps	95.6%	0.20dB

Duty cycle of test signal is > 98 %, duty factor shall not be considered.

Correction factor = $10 * \log (1/\text{duty cycle})$

2.4 EUT Operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

2.5 Support Equipment

The following support equipment was used to exercise the DUT during testing:

Equipment	Battery
Manufacturer	Lishen
Model Number	CPLD-432
Serial Number	---

Equipment	Charger
Manufacturer	Shenzhen RUIDE
Model Number	RD0501000-USBA-18MG
Serial Number	---

3 REFERENCE SPECIFICATION

Specification	Version	Title
FCC part15 Subpart C	2022	Intentional radiators
ANSI C63.10	2013	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074D01 V05R02r02	April 2, 2019	Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules




4 KEY TO NOTES AND RESULT CODES

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.

5 RESULT SUMMARY

No.	Test case	FCC reference	Verdict
1	RF Power Output	2.1046	Pass
2	Effective Radiated Power and Effective Isotropic Radiated Power	22.913(a)(5), 24.232(c), 27.50(b)(10), 27.50(c)(10), 27.50(h)(2), 27.50(d)(4), 27.50(a)(3)	Pass
3	Occupied Bandwidth	2.1049	Pass
4	Peak-Average Ratio	24.232(d), 27.50(d)(5)	Pass
5	Emission Bandwidth	2.1049	Pass
6	Spurious Emissions at antenna terminals	2.1051, 22.917(a), 24.238(a), 27.53(c), 27.53(g), 27.53(h), 27.53(m), 27.53(a)	Pass
7	Band Edges Compliance	2.1051, 22.917(a), 24.238(a), 27.53(c), 27.53(g), 27.53(h), 27.53(m), 27.53(a)	Pass
8	Frequency Stability	2.1055, 22.355, 24.235, 27.54	Pass
9	Radiated Spurious Emissions	2.1053, 22.917(a), 24.238(a), 27.53(c), 27.53(g), 27.53(h), 27.53(f), 27.53(a), 27.53(m)	Pass

Test Site 1: 15th Building, No.30 Shixing Street, Shijingshan District

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested and Issued by: Mr. LiangXisheng 	Issued date: 20231204

6 TEST RESULT

6.1 Peak Power Output

6.1.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

6.2.2 Test limit

Part15.247 (b) (3)

The maximum permissible conducted output power is 1 Watt.

6.2.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3

ANSI C63.10-2013 – Section 11.9.2.3.2

KDB 558074 D01 v05r02 – Section 8.3.1.3

6.2.4 Test Settings

Peak Power Measurement


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.2.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.2.6 Test result

The test results are shown in Appendix A.

6.2 6dB Bandwidth

6.2.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

6.1.2 Test limit

Part15.247 (a) (2)

The minimum permissible 6dB bandwidth is 500 kHz

6.1.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2

KDB 558074 D01 v05r02 – Section 8.2

6.1.4 Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.

2. RBW = 100 kHz

3. VBW ≥ 3 x RBW

4. Detector = Peak


5. Trace mode = max hold

6. Sweep = auto couple

7. The trace was allowed to stabilize

6.1.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.1.6 Test result

The test results are shown in Appendix A.

6.3 Transmitter Power Spectral Density

6.3.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

6.3.2 Test limit

Part15.247 (e)

The maximum permissible power spectral density is 8.0dBm in any 3 kHz band.

6.3.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD


KDB 558074 D01 v05r02 – Section 8.4

6.3.4 Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3 kHz
4. VBW = 10 kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.3.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.3.7 Test result

The test results are shown in Appendix A.

6.4 Conducted Out of band emission measurement

6.4.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

6.4.2 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.4.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3

KDB 558074 D01 v05r02 – Section 8.5

6.4.4 Reference level measurement Settings

Establish a reference level by using the following procedure:


- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 MHz
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

6.4.5 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.4.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.4.7 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

6.5 Band-edge measurement

6.5.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

6.5.2 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.5.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3

KDB 558074 D01 v05r02 – Section 8.7.2

6.5.4 Reference level measurement Settings

Establish a reference level by using the following procedure:


- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 MHz
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

6.5.5 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.5.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.5.7 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

6.6 Spurious Radiated Emissions

6.6.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

6.6.2 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

6.6.3 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209. The spectrum shall be investigated from the lowest radio frequency signal generated in the device

Frequency [MHz]	Field strength [$\mu\text{V/m}$]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Limits

Part15.35(b):

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: Limit (dB $\mu\text{V/m}$) = 20 log (Limit ($\mu\text{V/m}$)/1 $\mu\text{V/m}$)

Frequency [MHz]	Detector	Unit (dB $\mu\text{V/m}$)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

Conversion Radiated limits

6.6.4 Test Procedure Used

KDB 558074 D01 DTS Meas Guidance v05r02r02 – Section 12.2.7

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and recorded the reading with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer complied the following setting:

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground in chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and recorded the reading with Maximum Hold Mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detector and recorded the reading with Maximum Hold Mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak(QP) detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection(PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Voltage Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

6.6.5 Test Settings

Average Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)

Frequency	Detector
<1000MHz	Quasi-peak
>1000MHz	Peak and average

Peak Field Strength Measurements per Section 12.2.7of KDB 558074 (Part 15.35)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz


3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.6 Test Setup


For Radiated emission below 30MHz

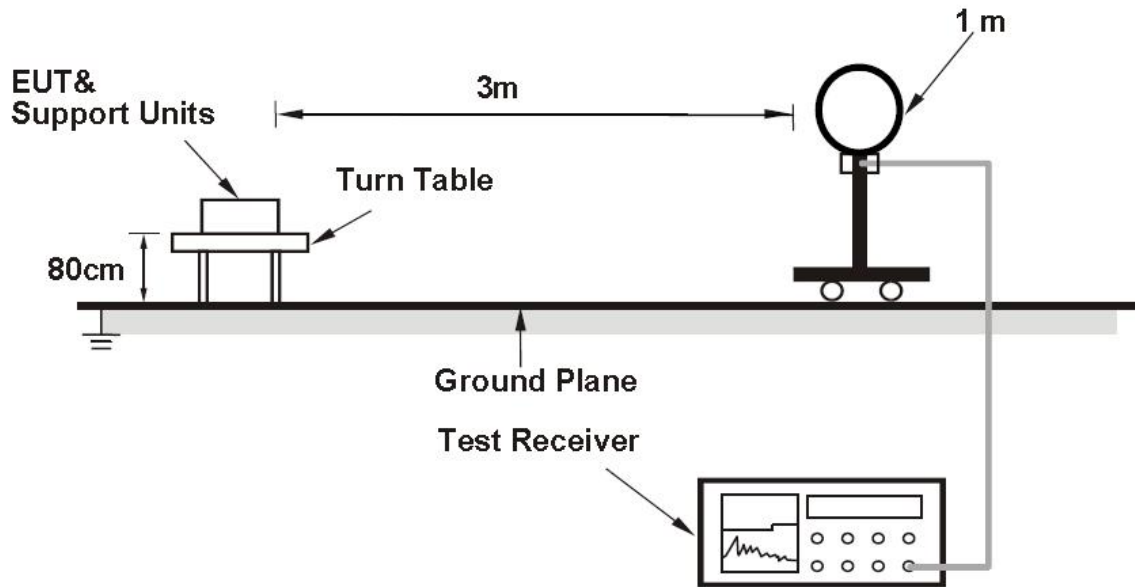

For Radiated emission 30MHz to 1GHz

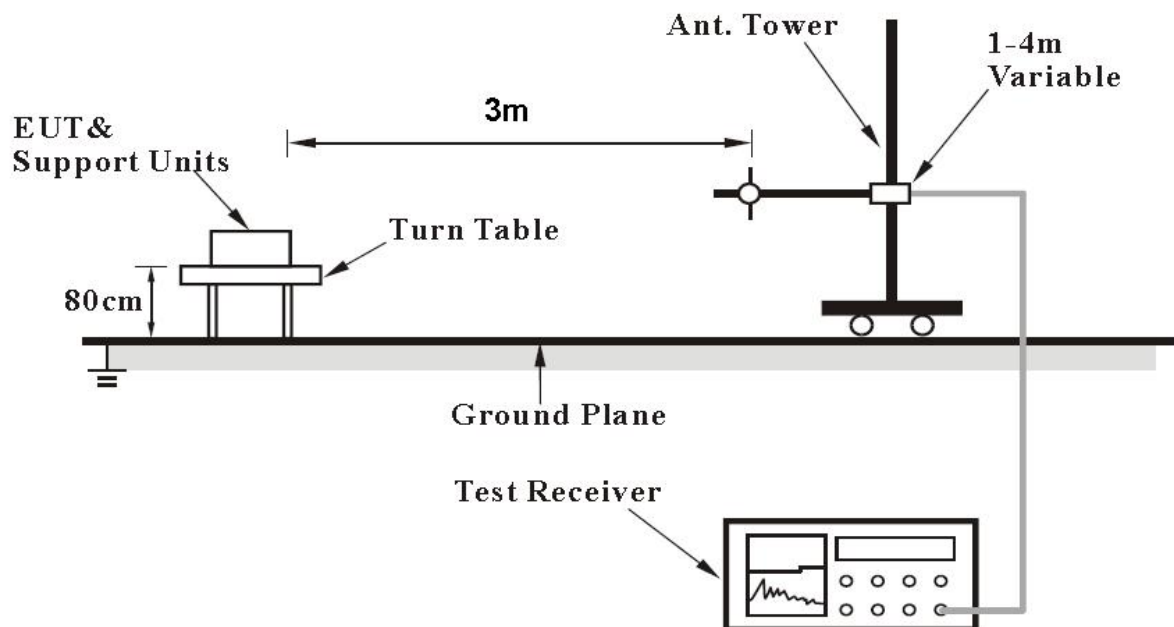

For Radiated emission above 1GHz

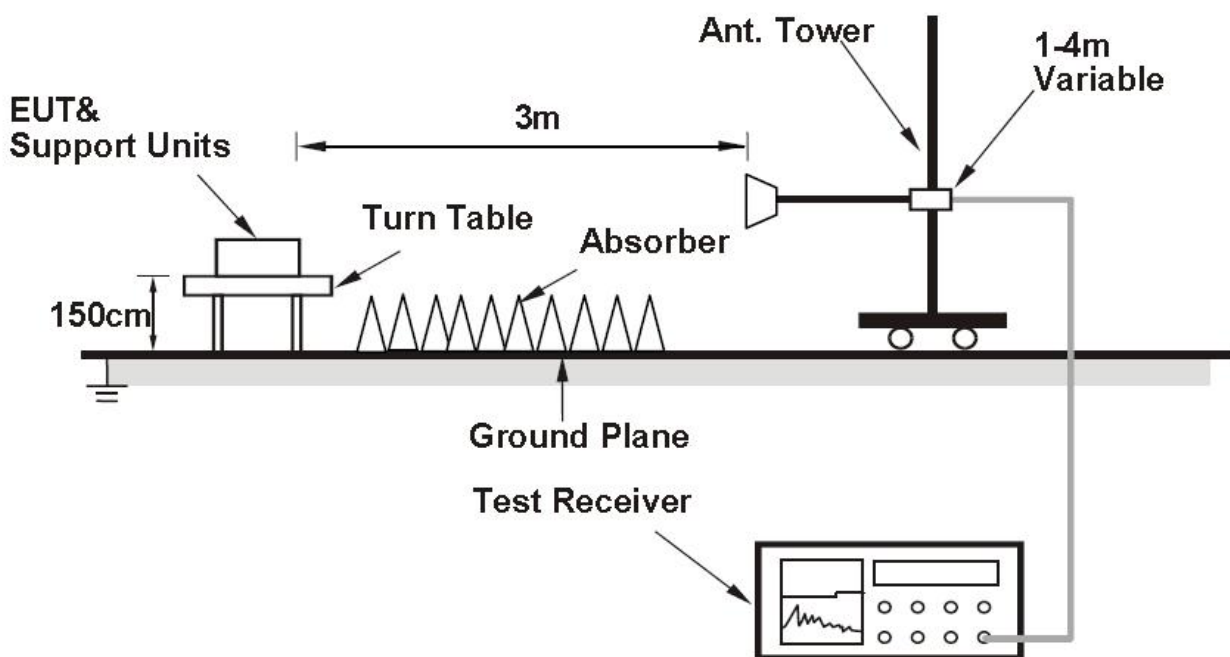

6.6.7 Test result

The test results are shown in Appendix B.

6.7 AC Power line Conducted Emission

6.7.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

6.7.2 Test limit

FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013

6.7.3 Test Procedures

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.


b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

The EUT shall test under the power AC120V/60Hz.

6.7.4 Test Setup

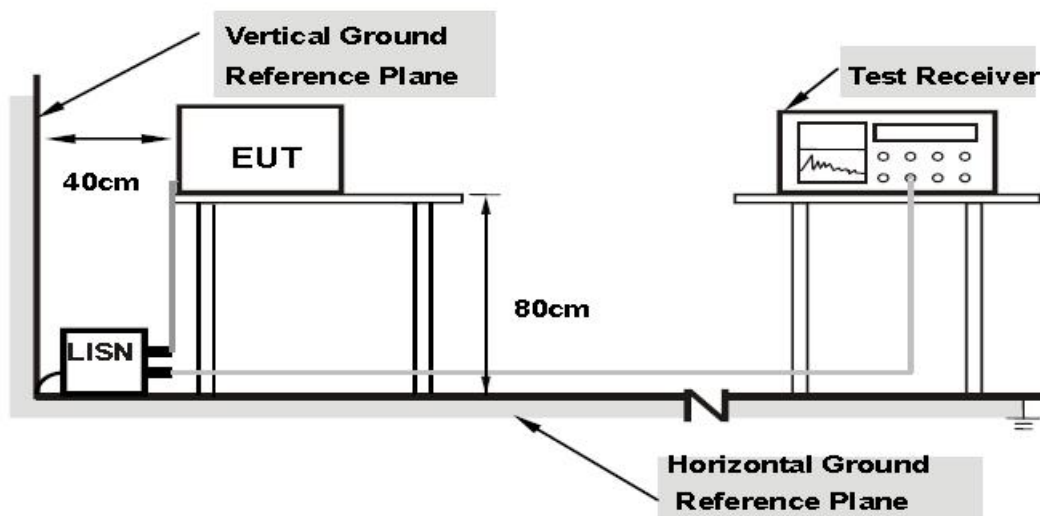

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.5 Test result

The test results are shown in Appendix B.

7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
Occupied Bandwidth	3kHz	
Peak power output	0.67dB	
Band edge compliance	1.20dB	
Spurious emissions	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB

8 TEST EQUIPMENTS

No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer / FSV	ROHDE & SCHWARZ	101065	2023.06.21	2024.06.20
2.	Signal Analyzer / N9020A	Agilent	MY48010771	2023.03.06	2024.03.05
3.	Bluetooth Test Set / MT8852B	Anritsu	1329003	2023.06.21	2024.06.20
4.	Power Divider / 11667A	HP	19632	2023.06.21	2024.06.20
5.	Signal Generator / SMBV100A	R&S	260910	2023.06.21	2024.06.20
6.	Temperature chamber / SH241	ESPEC	92013758	2023.06.21	2024.06.20
7.	Fully-Anechoic Chamber / 12.65m×8.03m×7.50m	FRANKONIA	----	----	----
8.	Semi-Anechoic/Chamber / 23.18m×16.88m×9.60m	FRANKONIA	---	----	----
9.	Turn table Diameter:1m	FRANKONIA	----	----	----
10.	Turn table Diameter:5m	FRANKONIA	----	----	----
11.	Antenna master FAC(MA4.0)	MATURO	----	----	----
12.	Antenna master SAC(MA4.0)	MATURO	----	----	----
13.	Shielding room / 9.080m×5.255m×3.525m	FRANKONIA	----	----	----
14.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100512	2023.06.21	2024.06.20
15.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100513	2023.06.21	2024.06.20
16.	Ultra log antenna / HL562	R&S	100016	2023.06.21	2024.06.20
17.	Receive antenna /3160-09	SCHWARZ-BECK	002058-002	2023.06.21	2024.06.20
18.	EMI test receiver / ESI 40	R&S	100015	2023.06.21	2024.06.20
19.	EMI test receiver / ESCS30	R&S	100029	2023.06.21	2024.06.20
20.	Receive antenna / HL562	R&S	100167	2023.06.21	2024.06.20
21.	AMN / ENV216	R&S	3560.6550.12	2023.06.21	2024.06.20
22.	WLAN AP WIA3300-20	SKSpruce	8152017060700339	---	---
23.	Notebook E470c	Lenovo	PF10UZW7	---	---
24.	Loop Antenna	R&S	100340	2023.08.21	2024.08.20
25.	FCC auto test system / RT9200BW-2	Radiosky	V2.05	/	/
26.	EMI test software / EMC32	R&S	V10.20.01	/	/

APPENDIX A – TEST DATA OF CONDUCTED EMISSION

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
802.11b	1Mbps
802.11g	6Mbps
802.11n HT20	MCS0(6.5 Mbps)
802.11n HT40	MCS0(13.5 Mbps)

We chose the Worst-modes are shown as following table:

Test Mode	Ant	Note
802.11b	SISO	---
802.11g	SISO	---
802.11n HT20	SISO	---
802.11n HT40	SISO	---

Conducted power

Modulation type	Peak power output (dBm)		
	2412MHz	2437MHz	2462MHz
802.11b	18.97	18.63	19.11
802.11g	22.83	21.94	22.81
11n HT20	21.81	20.47	21.69
Modulation type	Peak power output (dBm)		
	2422MHz	2437MHz	2452MHz
11n HT40	19.09	18.34	17.92

Modulation type	Average power output (dBm)		
	2412MHz	2437MHz	2462MHz
802.11b	15.77	15.57	15.98
802.11g	13.88	13.58	13.94
11n HT20	12.99	12.28	12.88
Modulation type	Average power output (dBm)		
	2422MHz	2437MHz	2452MHz
11n HT40	11.89	11.49	11.05


6dB Bandwidth

Offset 11.2dB = Attenuator 10dB+ Temporary antenna connector loss 0.2dB+ Cable loss 1.0dB

Test Mode: 802.11b


Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2412	1	9.65
2437	6	9.01
2462	11	8.98

Test Mode: 802.11b

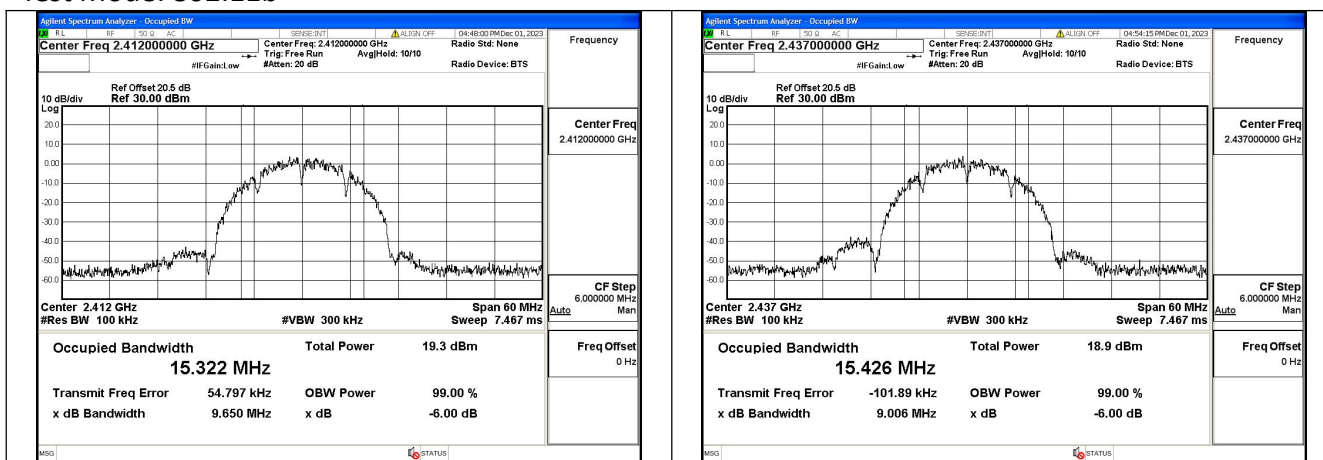

Mode:802.11b Frequency:2412MHz Ant:Chain0

Mode:802.11b Frequency:2437MHz Ant:Chain0

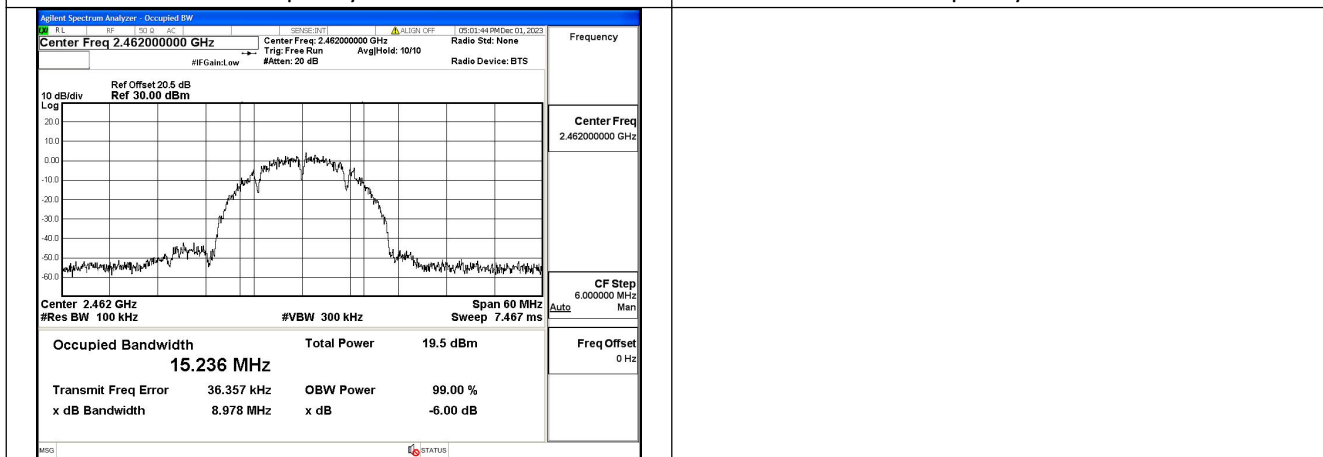


Mode:802.11b Frequency:2462MHz Ant:Chain0

Test Mode: 802.11g


Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2412	1	16.31
2437	6	16.33
2462	11	16.34

CH1

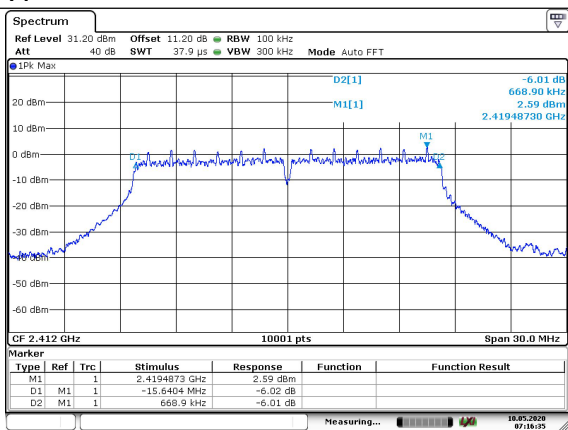


Date: 10_MAY.2020 07:16:34

CH6

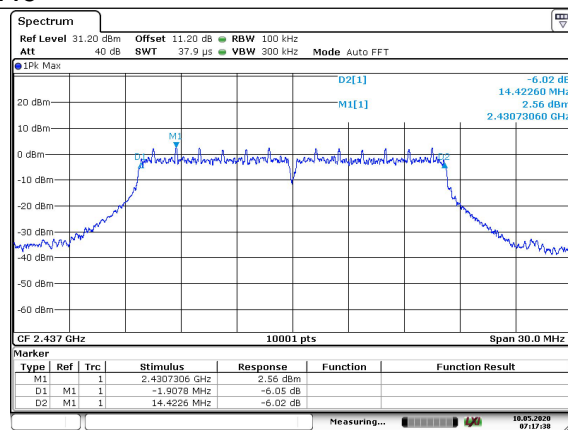

Date: 10_MAY.2020 07:17:38

CH11

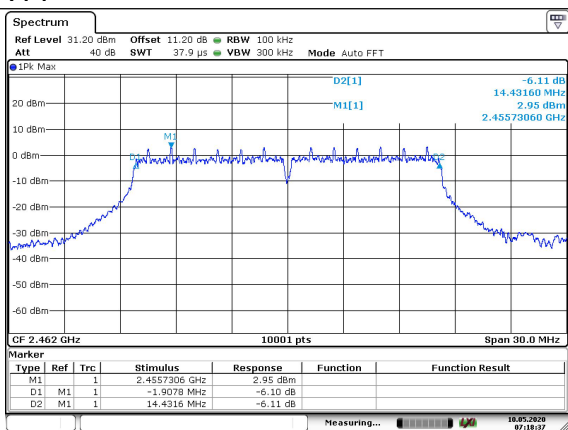


Date: 10_MAY.2020 07:18:37

Test Mode: 802.11n (HT20)


Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2412	1	16.95
2437	6	17.55
2462	11	17.46

CH1

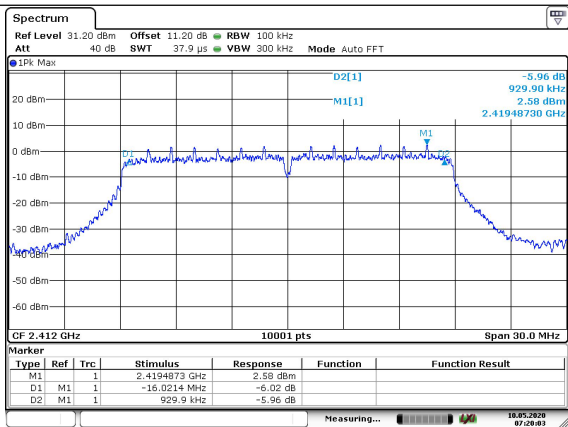


Date: 10.MAY.2020 07:20:02

CH6

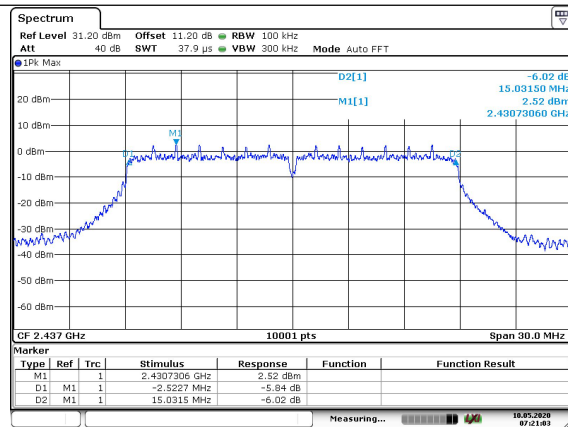

Date: 10.MAY.2020 07:21:02

CH11

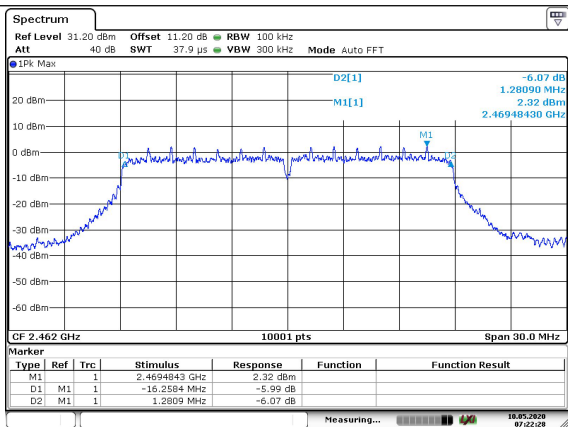


Date: 10.MAY.2020 07:22:28


Test Mode: 802.11n (HT40)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2422	3	35.30
2437	6	35.34
2452	9	35.34


CH3

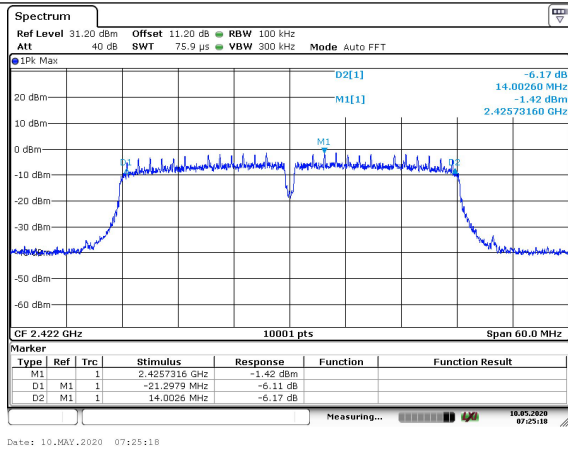

CH6

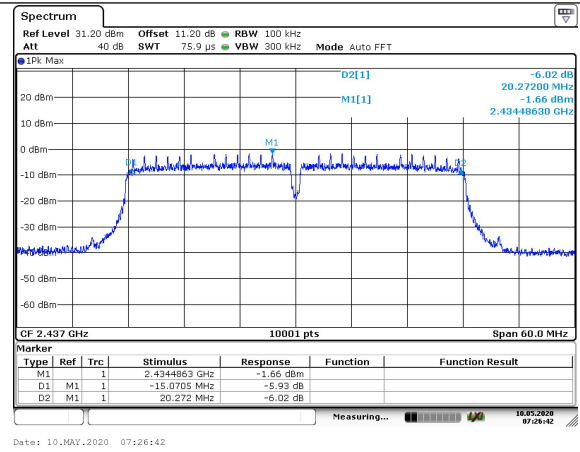

CH9

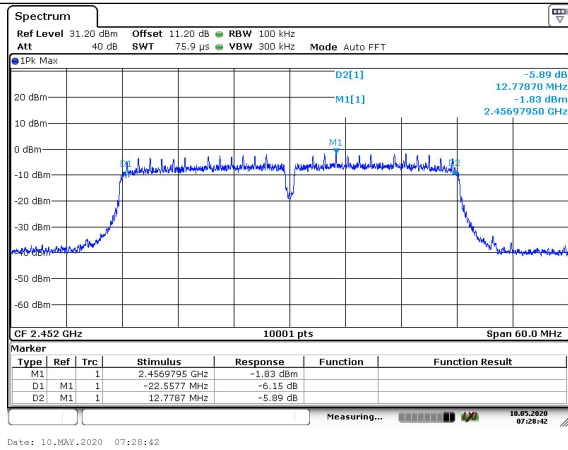


Transmitter Power Spectral Density

Offset 11.2dB = Attenuator 10dB+ Temporary antenna connector loss 0.2dB+ Cable loss 1.0dB

Test Mode: 802.11b


Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-8.213
2437	6	-8.488
2462	11	-8.024

Test Mode: 802.11b

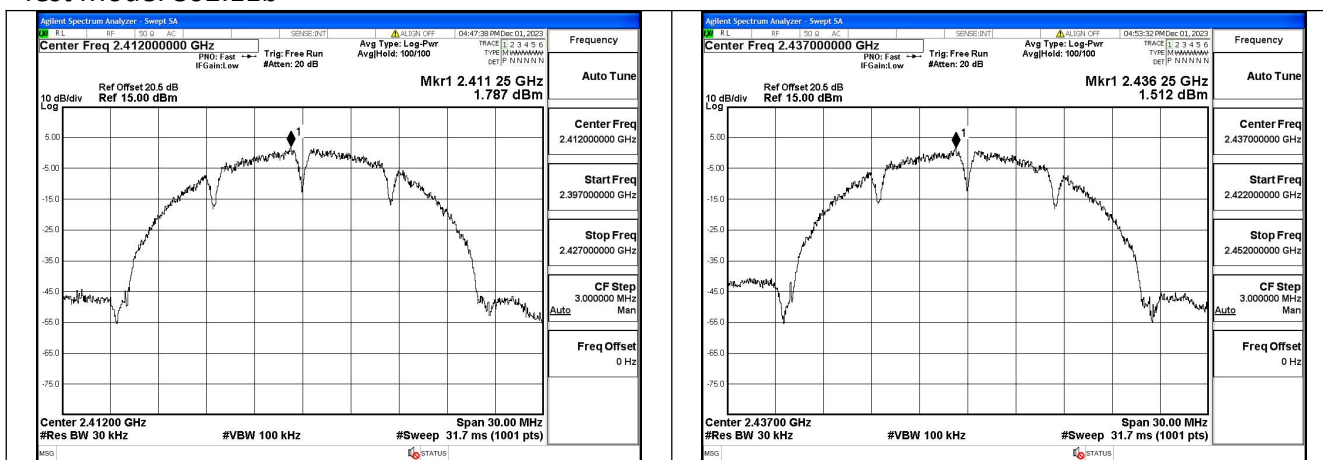

Mode:802.11b Frequency:2412MHz Ant:Chain0

Mode:802.11b Frequency:2437MHz Ant:Chain0

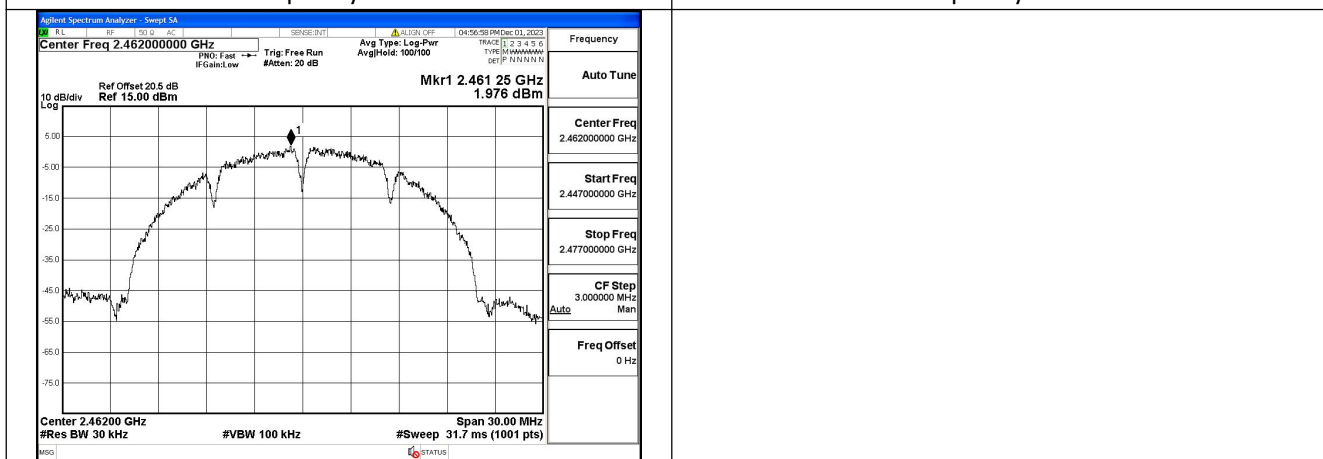


Mode:802.11b Frequency:2462MHz Ant:Chain0

Test Mode: 802.11g


Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-14.07
2442	6	-13.98
2472	11	-13.04

CH1

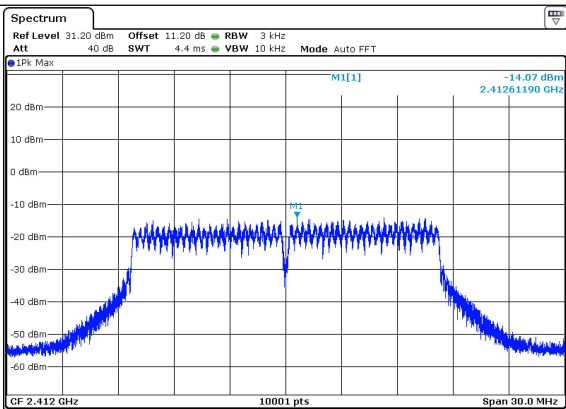


Date: 10_MAY.2020 07:34:05

CH6

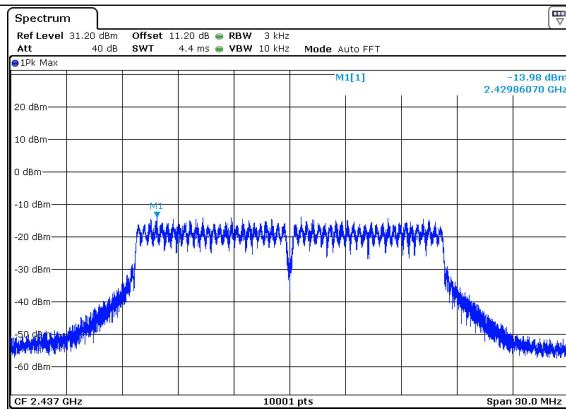

Date: 10_MAY.2020 07:34:38

CH11

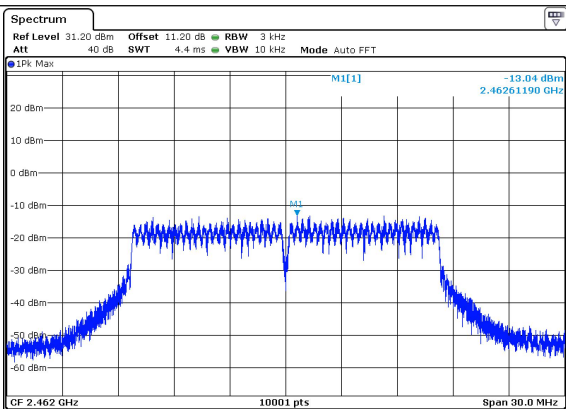


Date: 10_MAY.2020 07:35:06


Test Mode: 802.11n (HT20)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-13.62
2437	6	-13.40
2462	11	-13.26


CH1

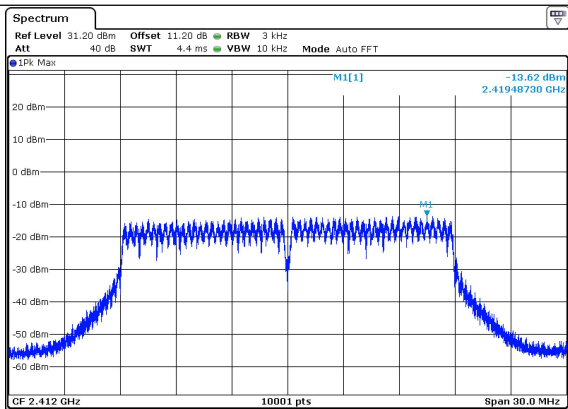

CH6

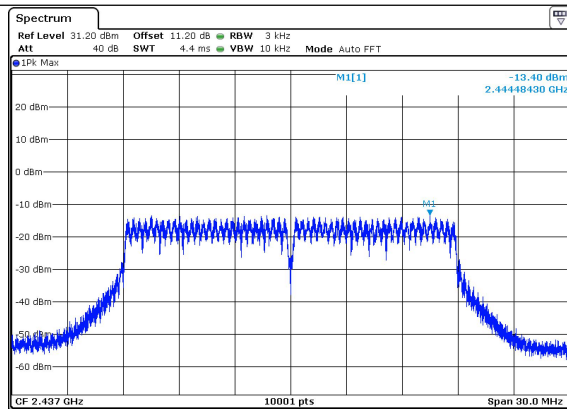


CH11

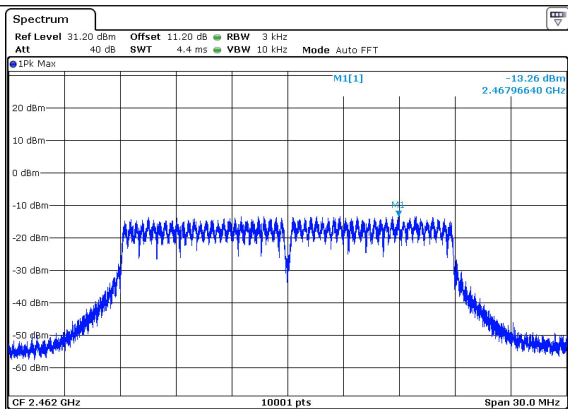

Test Mode: 802.11n (HT40)


Carrier frequency (MHz)	Channel No	Power Density (dBm)
2422	3	-16.09
2437	6	-16.16
2452	9	-17.09

CH3

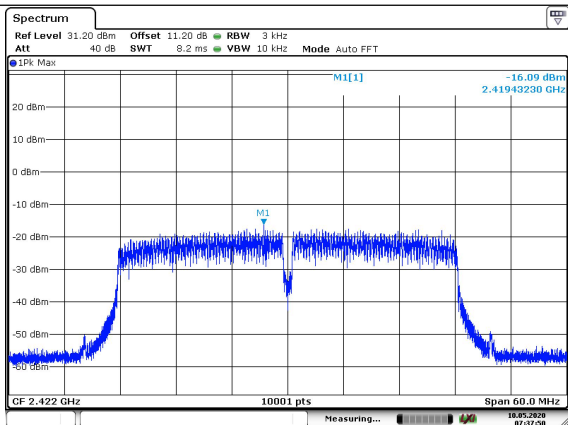


Date: 10_MAY.2020 07:137:50

CH6

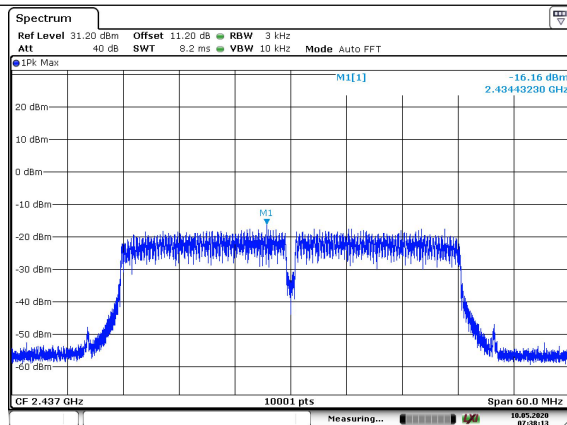

Date: 10_MAY.2020 07:138:13

CH9

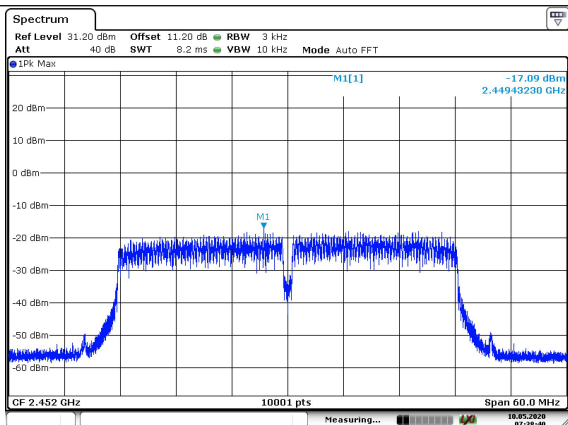

Date: 10_MAY.2020 07:138:40