



No. I19Z61825-SEM03

For

TCL Communication Ltd.

LTE/UMTS/GSM mobile phone

Model name: A507DL

With

Hardware Version: PIO

Software Version: vD41

FCC ID: 2ACCJH111

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

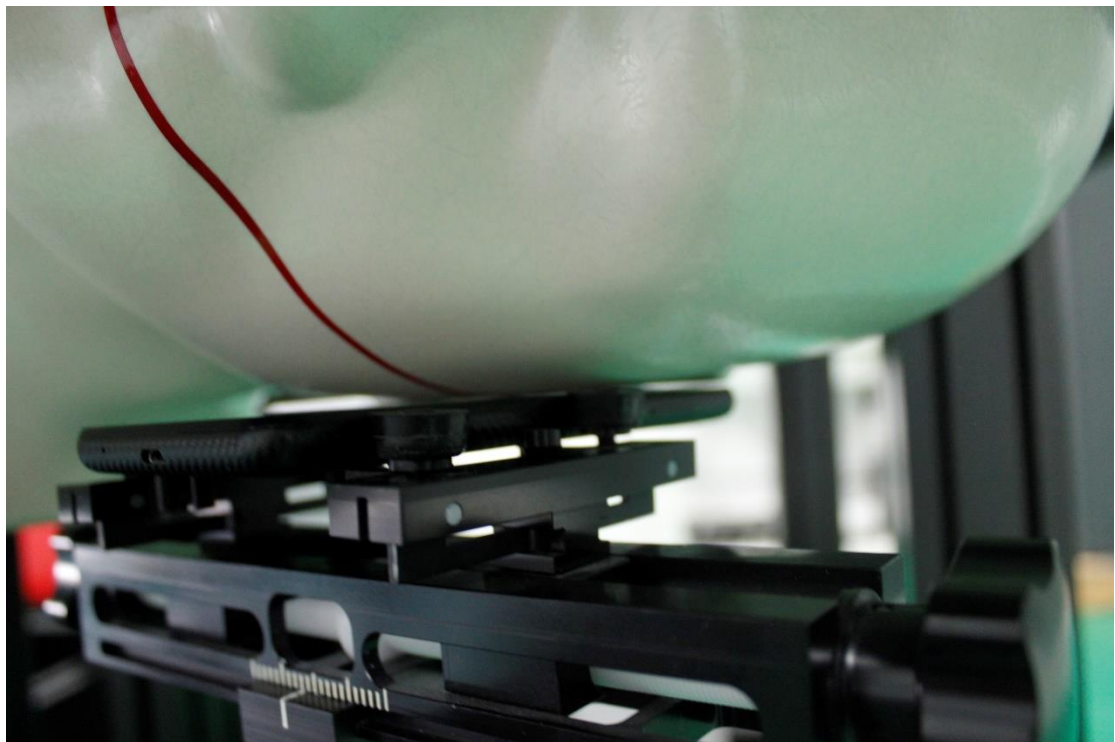

Picture 2: Left Hand Touch Cheek Position

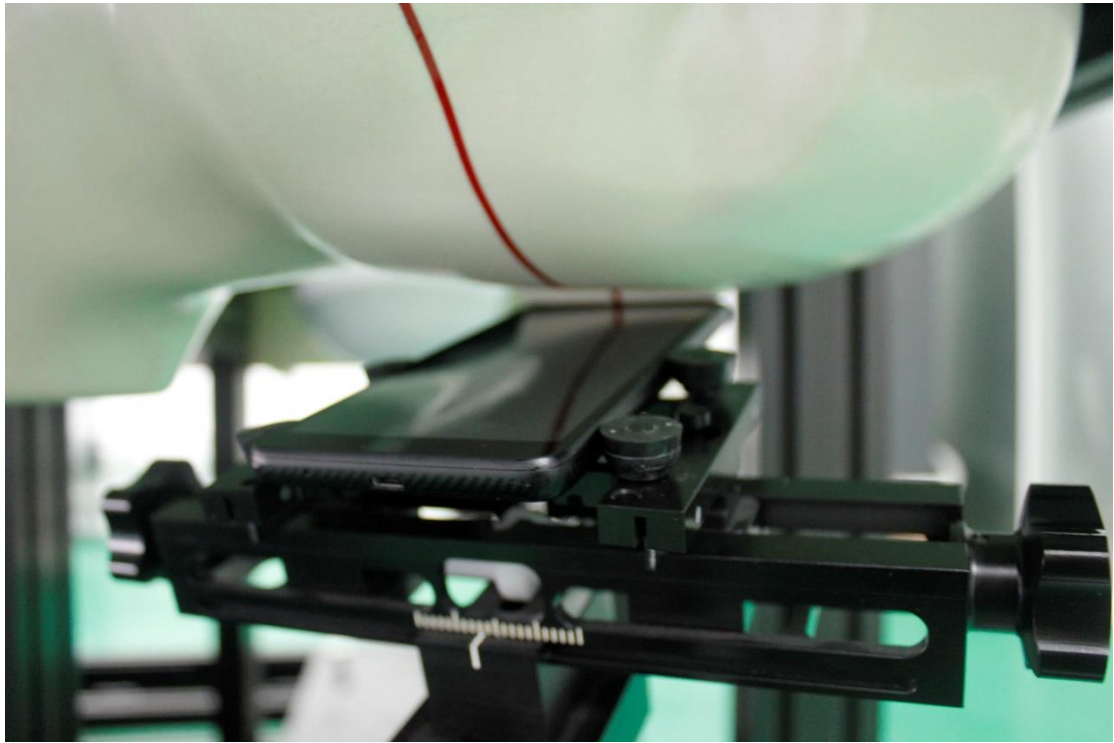

Picture 3: Left Hand Tilt 15° Position

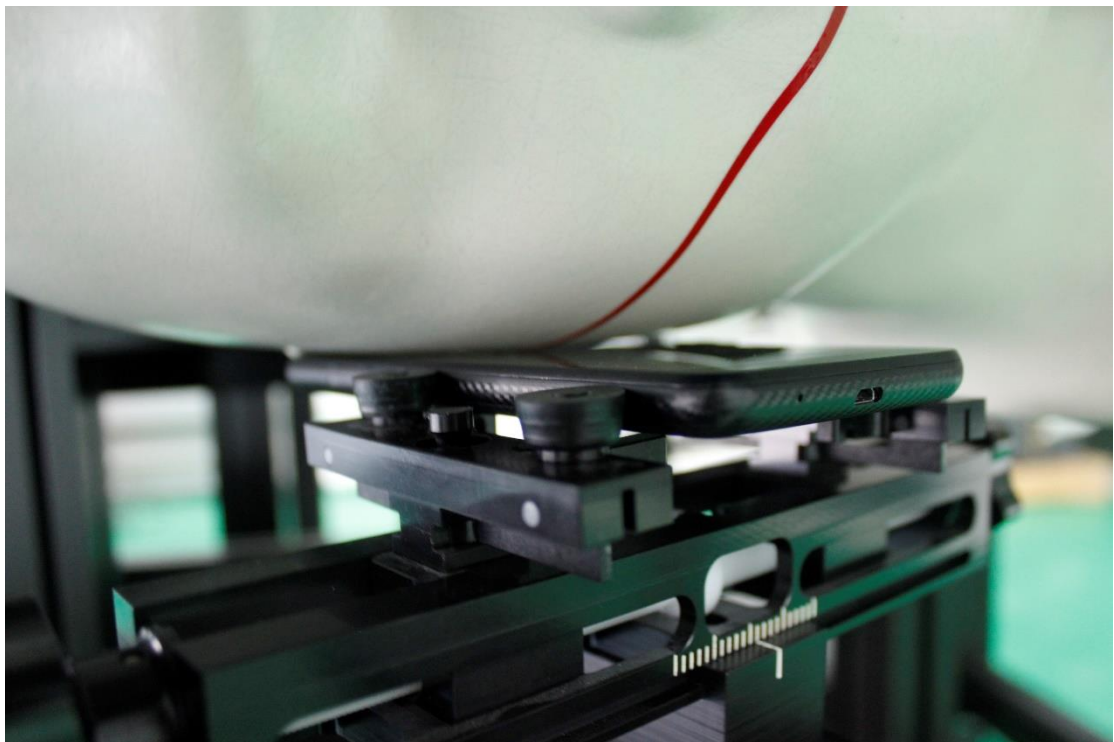


Picture 4: Right Hand Touch Cheek Position



Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 8 test positions all with the distance =10/15mm between the EUT and the phantom bottom:

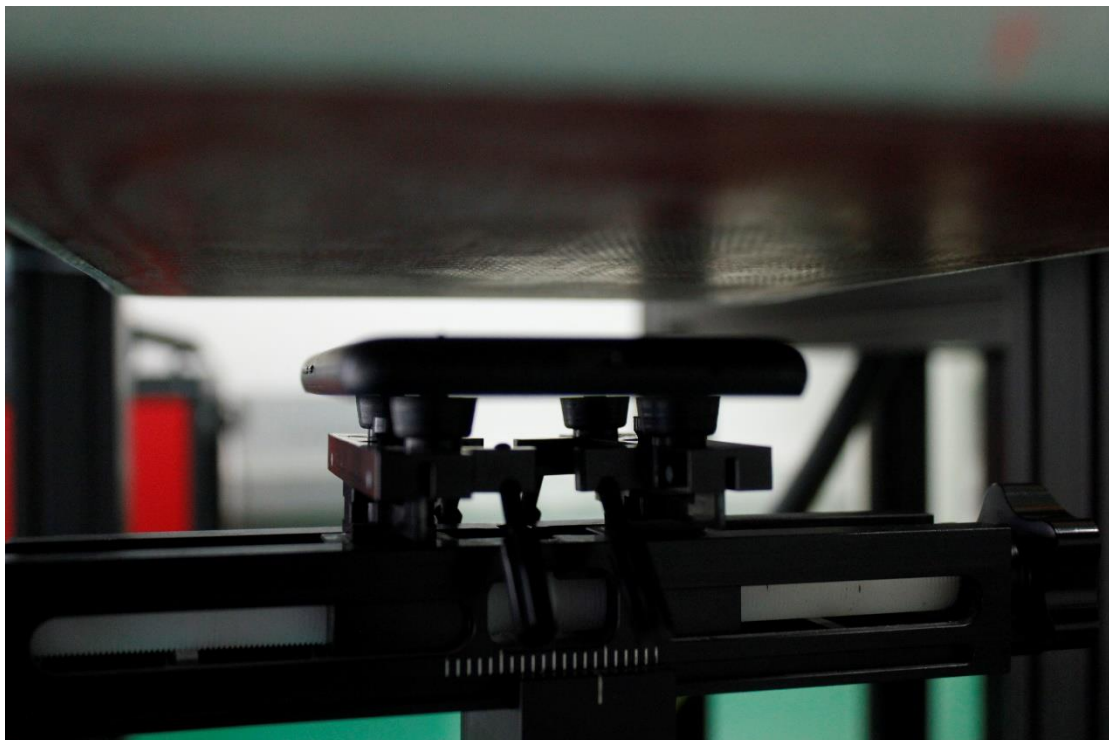


Picture 6: Front 10mm



Picture 7: Front 15mm

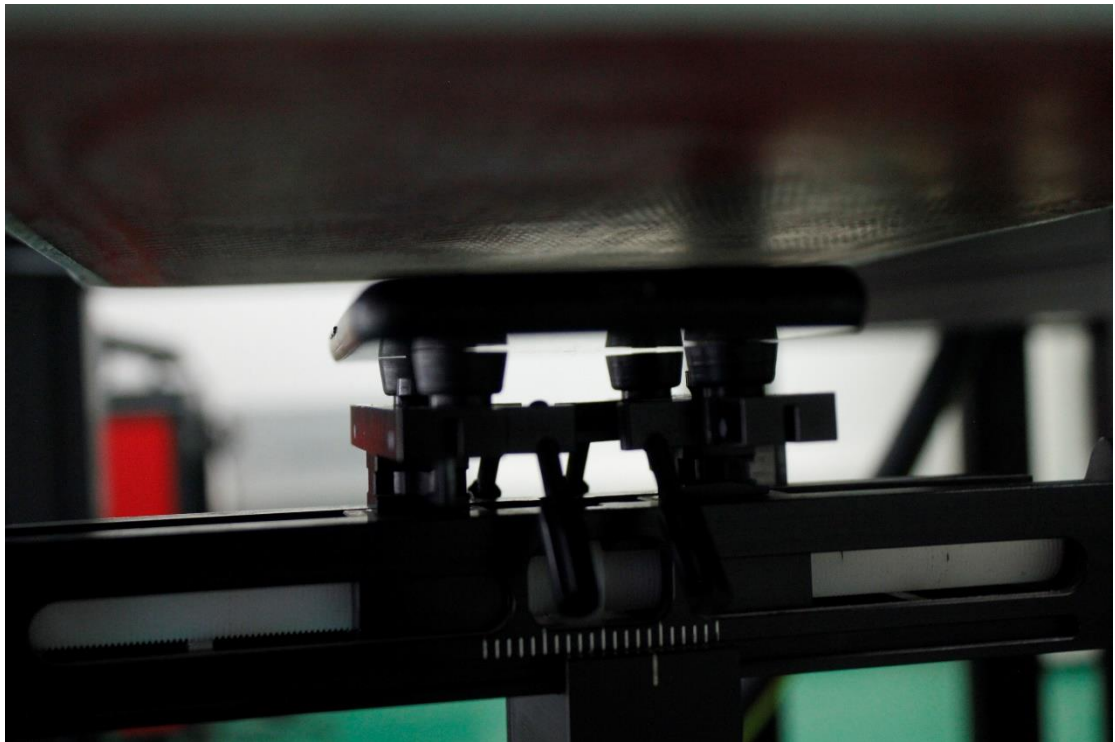


Picture 8: Rear 10mm

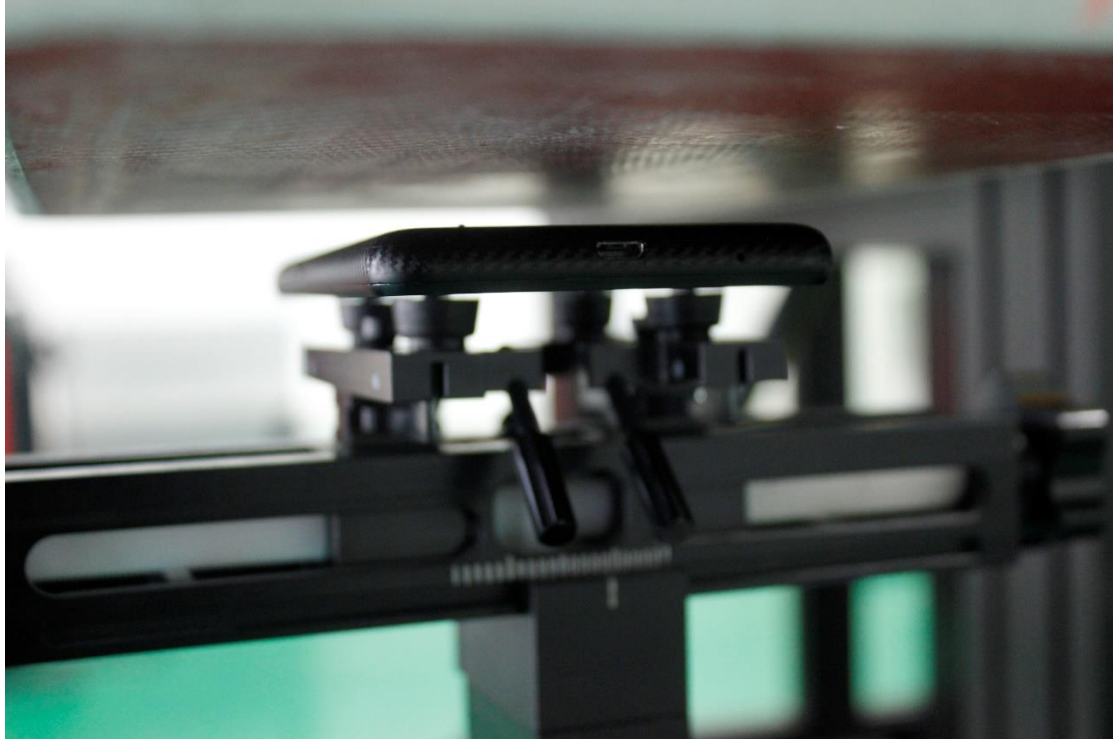

Picture 9: Rear 15mm



Picture 10: Left 10mm

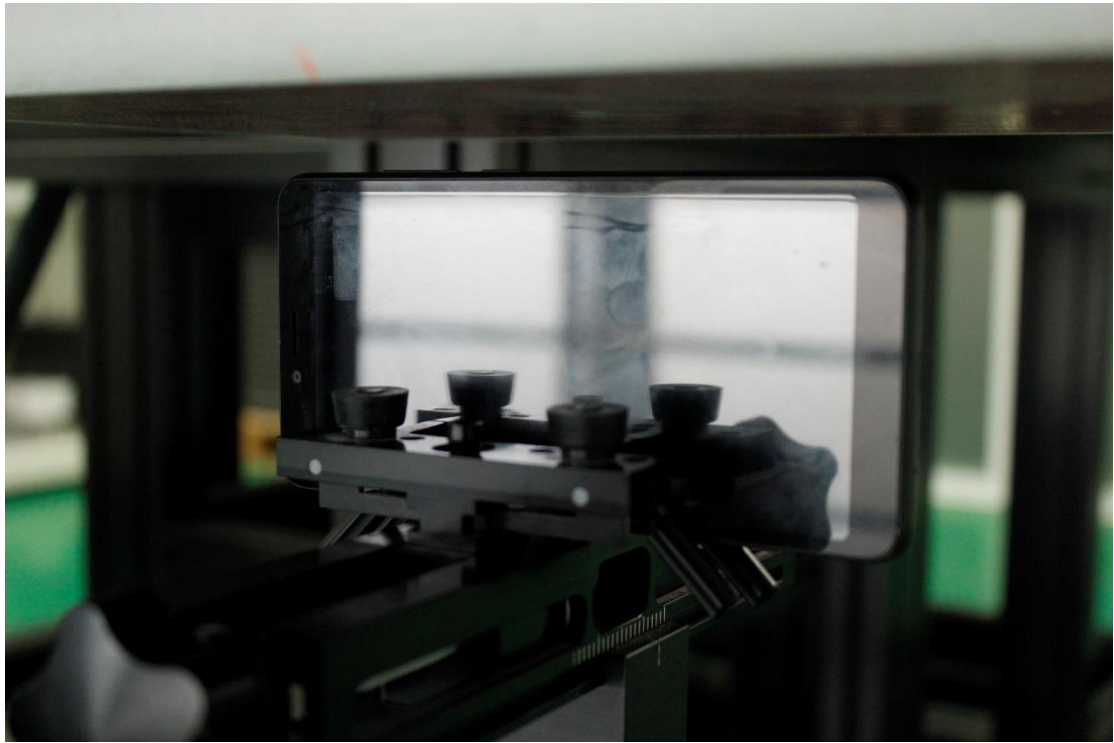

Picture 11: Right 10mm



Picture 12: Top 10mm



Picture 13: Bottom 10mm