



No. I20Z61079-SEM01

For

**TCL Communication Ltd.
GSM/UMTS/LTE Mobile phone**

Model name: 5002B

With

**Hardware Version: PIO
Software Version: v3C7K
FCC ID: 2ACCJH118**

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.


Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

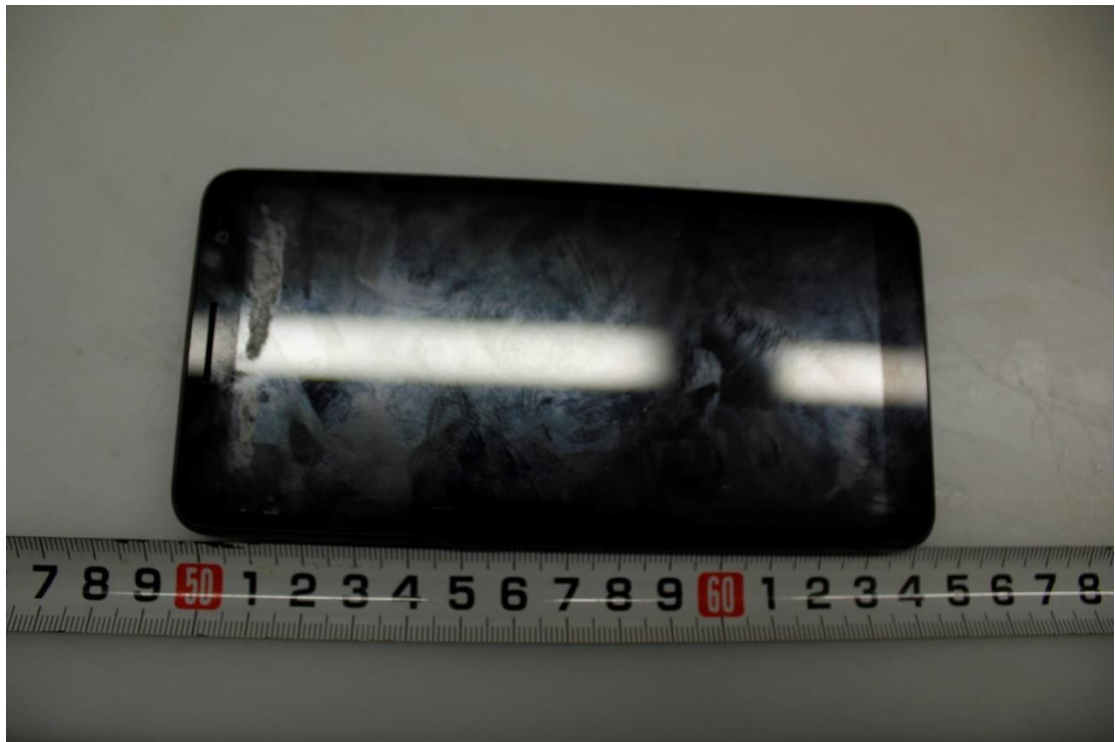


Picture 1: Constituents of the sample

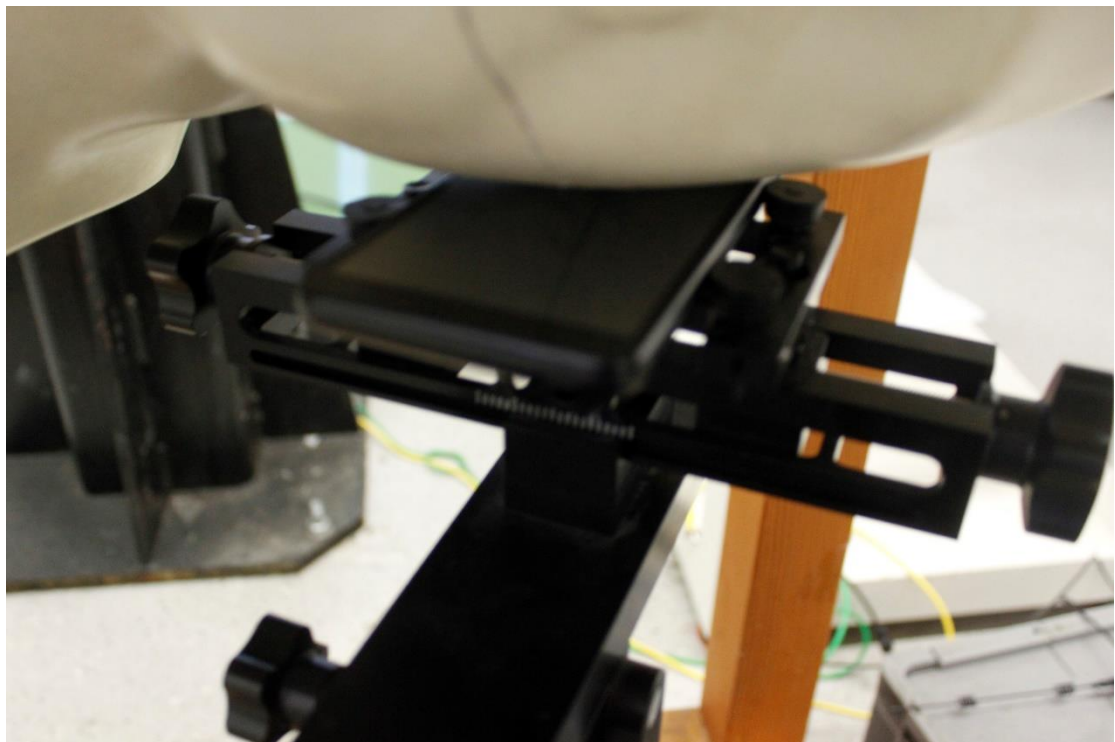

Picture 2: Left Hand Touch Cheek Position

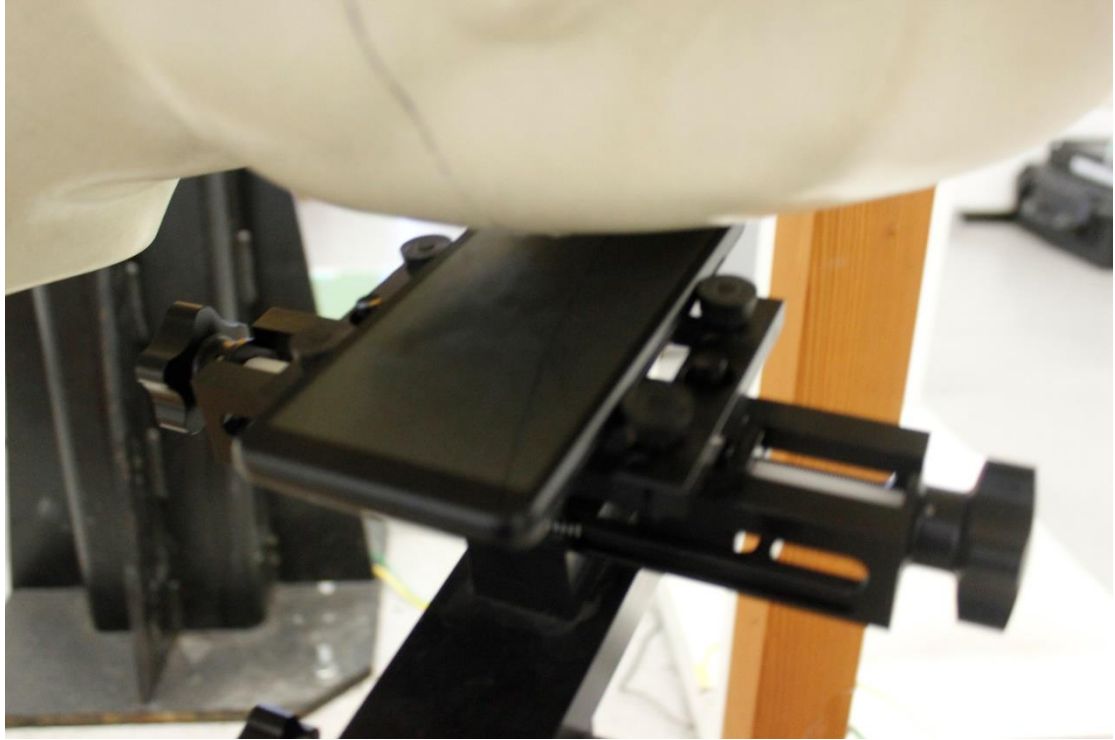

Picture 3: Left Hand Tilt 15° Position

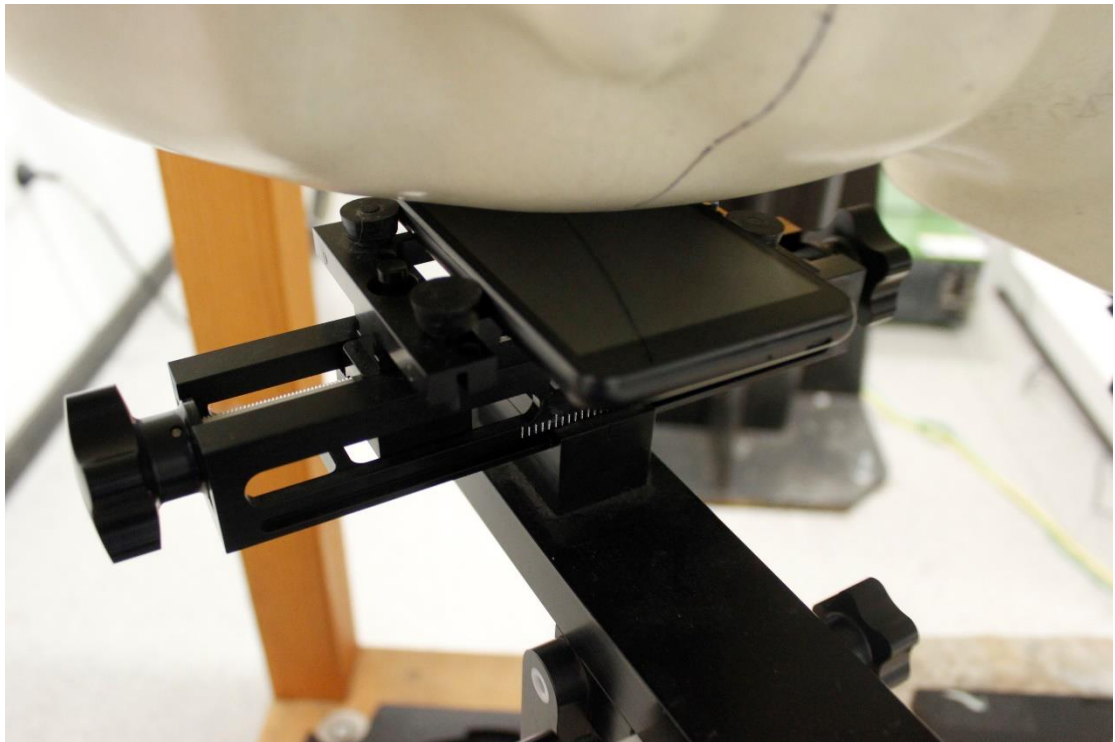


Picture 4: Right Hand Touch Cheek Position




Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 8 test positions all with the distance =10/15mm between the EUT and the phantom bottom:

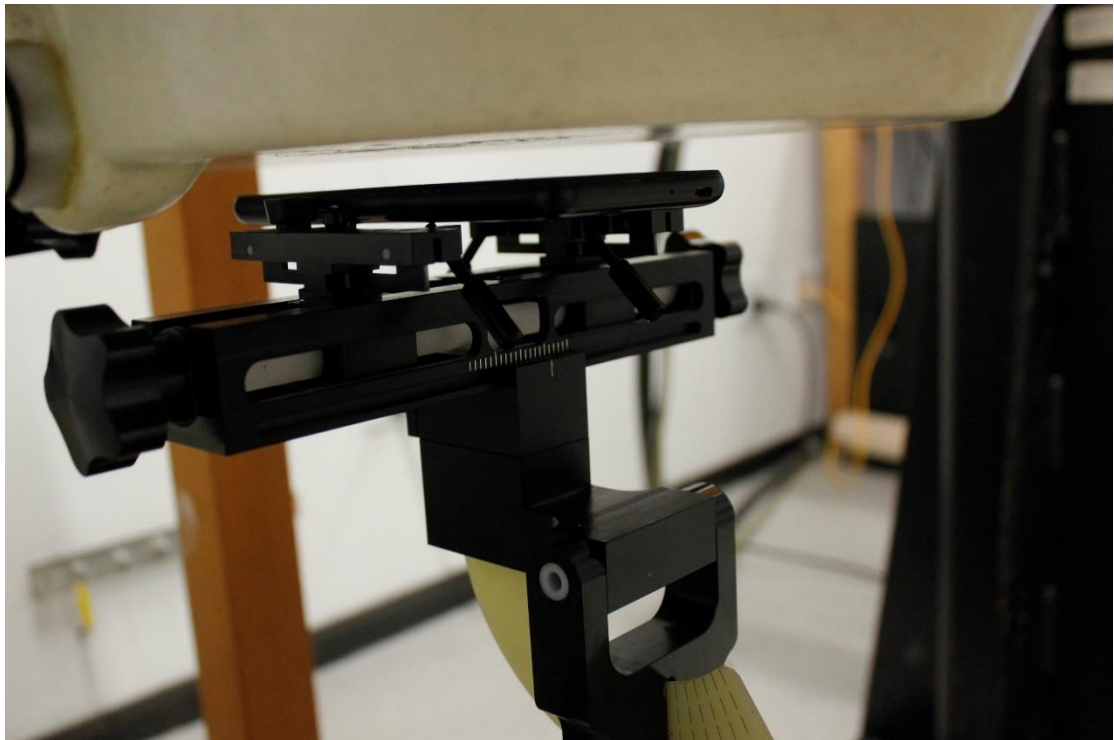


Picture 6: Front 10mm

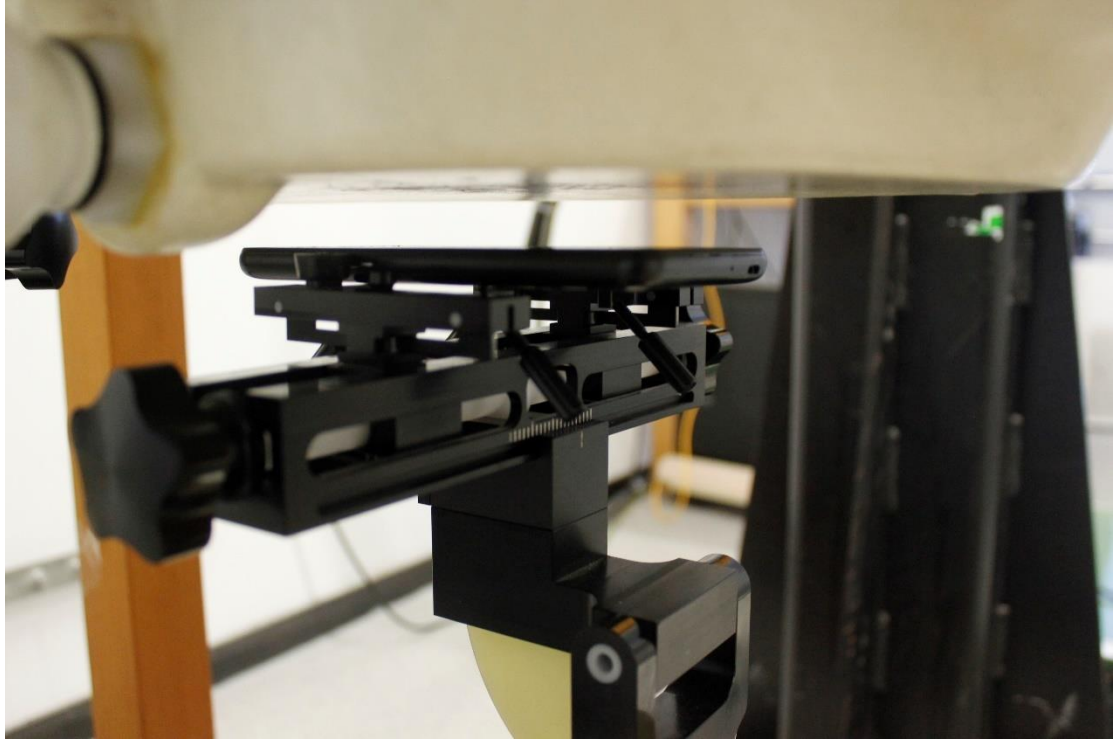


Picture 7: Front 15mm

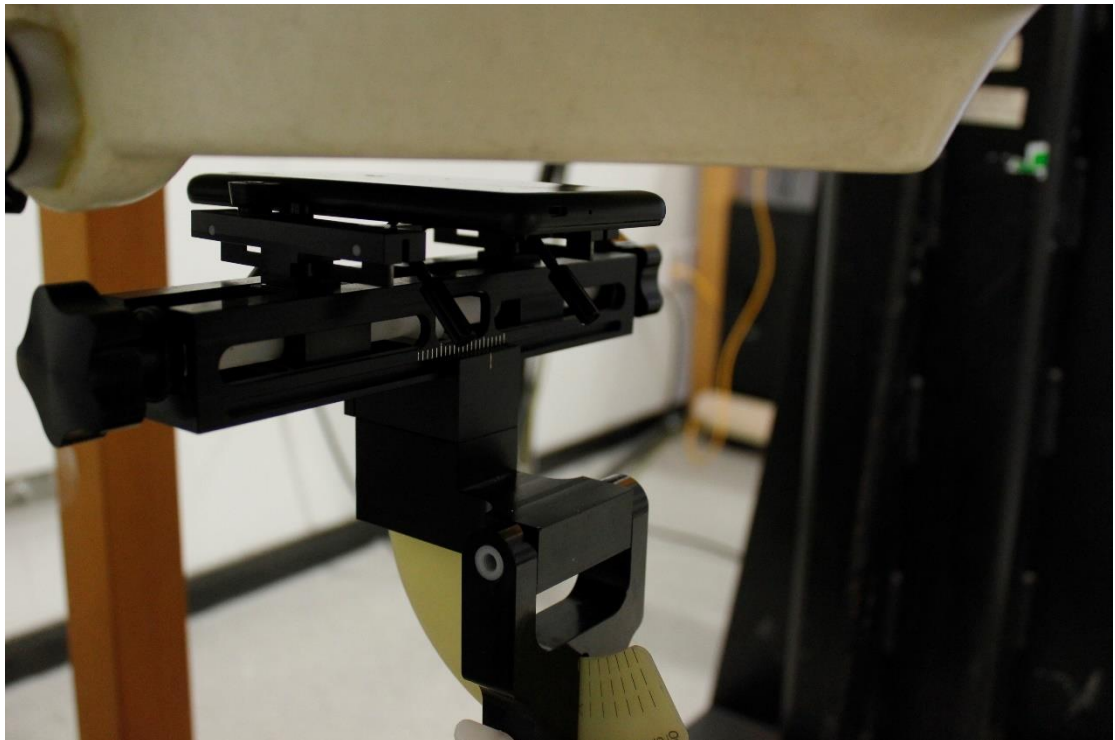


Picture 8: Rear 10mm

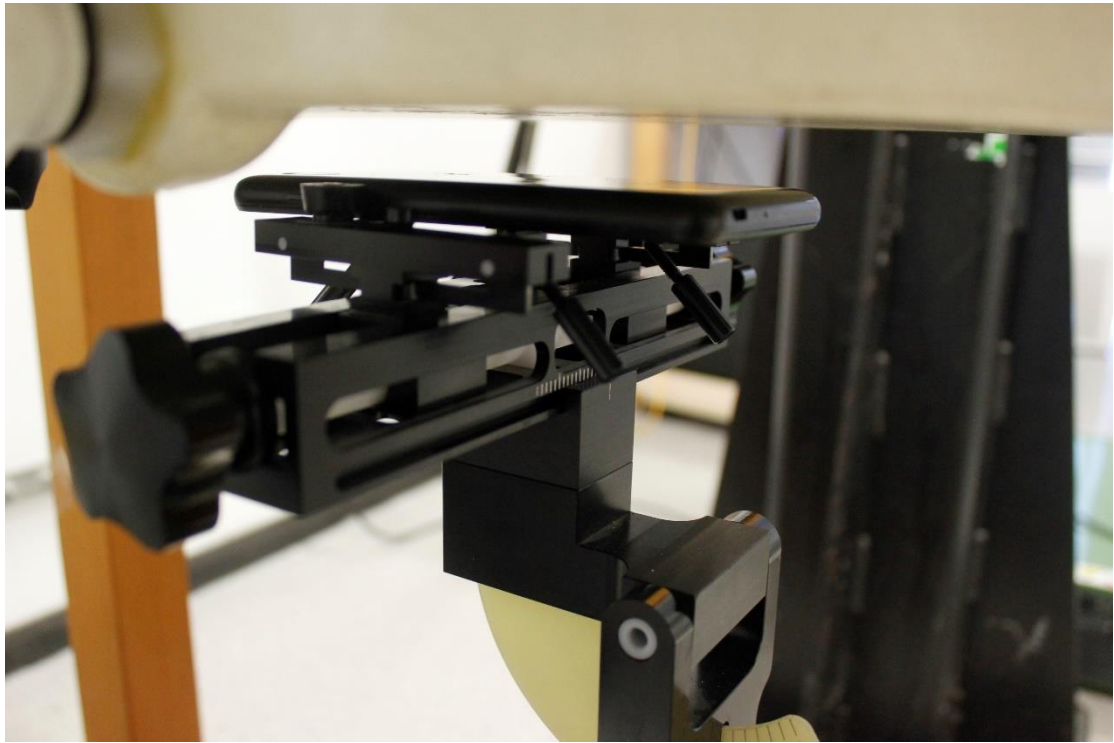


Picture 9: Rear 15mm

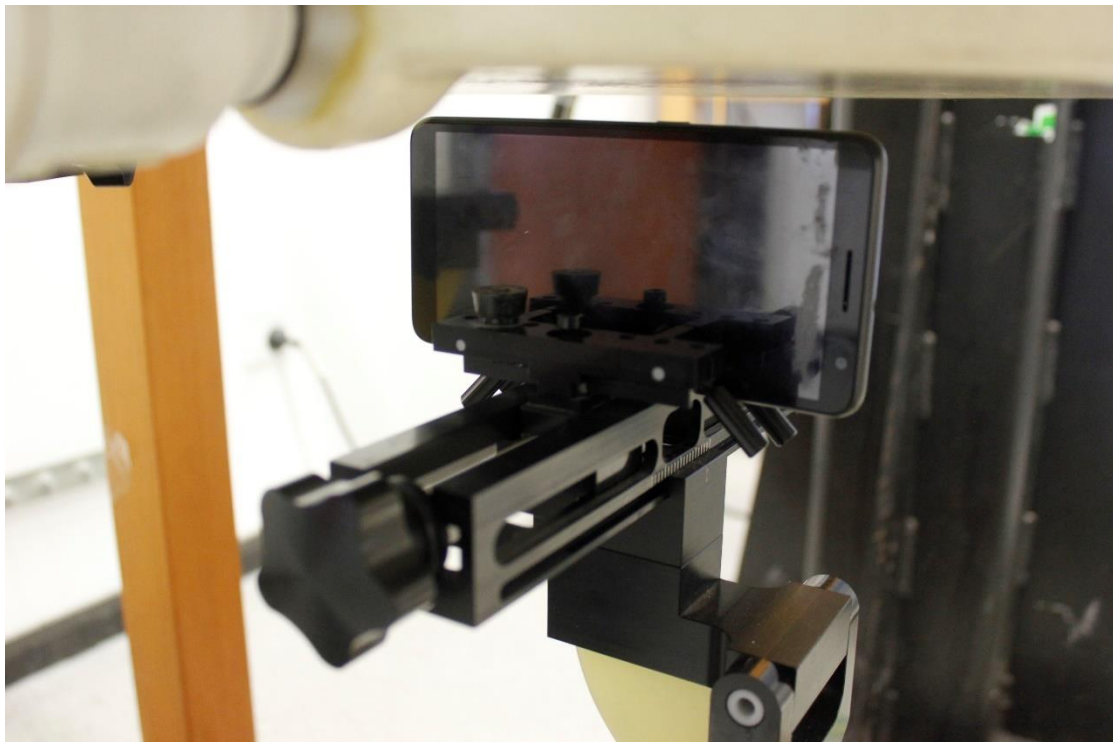


Picture 10: Left 10mm

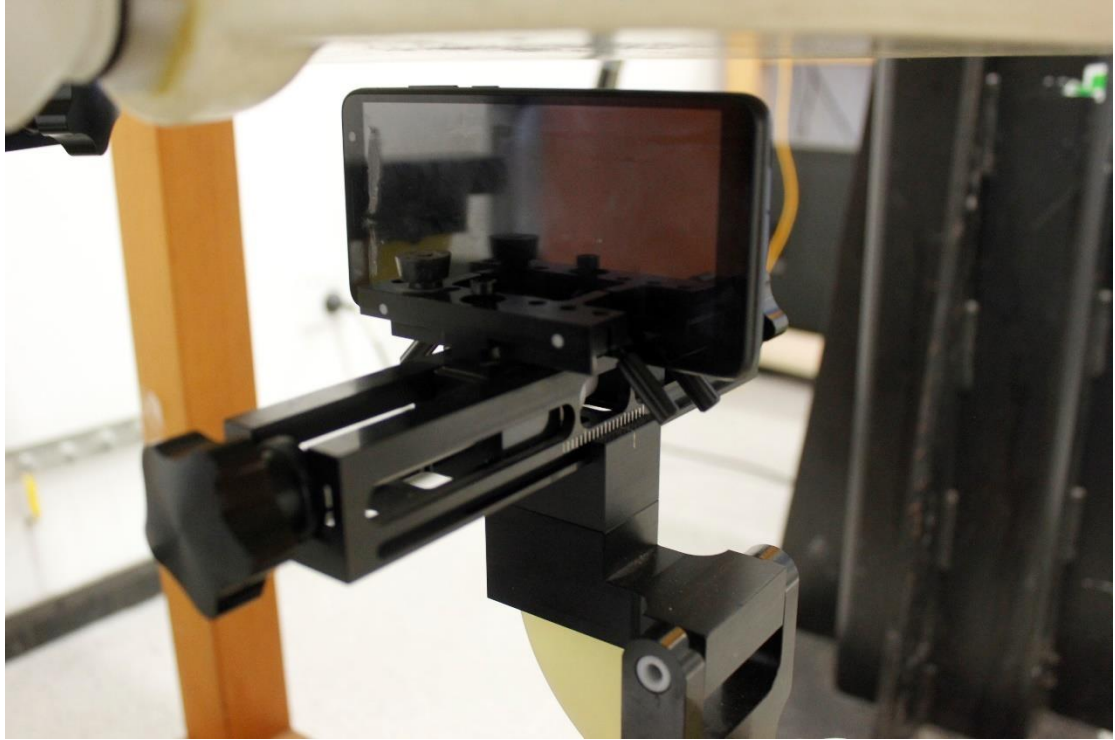


Picture 11: Right 10mm

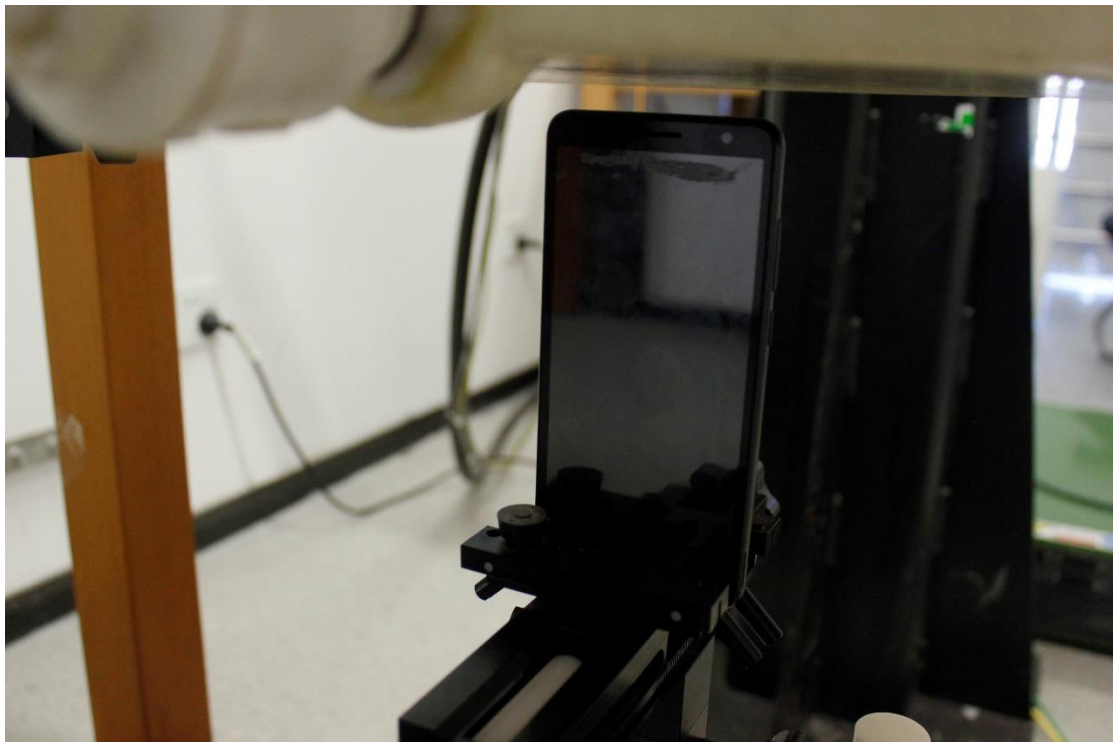

Picture 12: Top 10mm

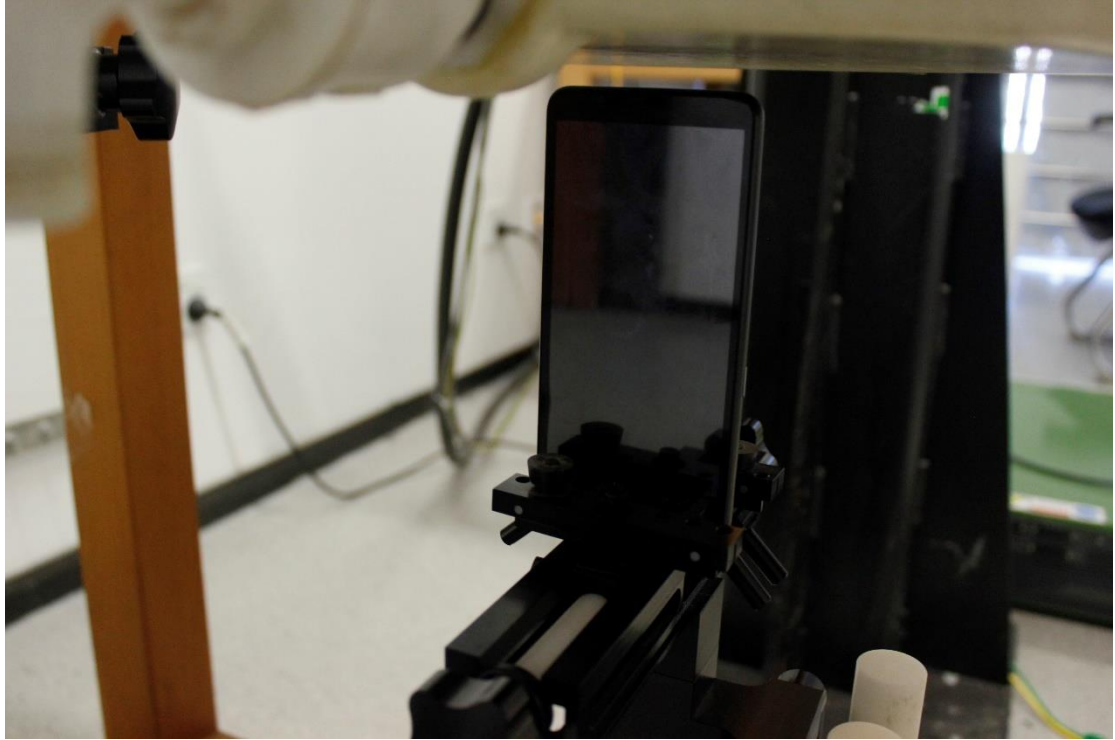

Picture 13: Bottom 10mm

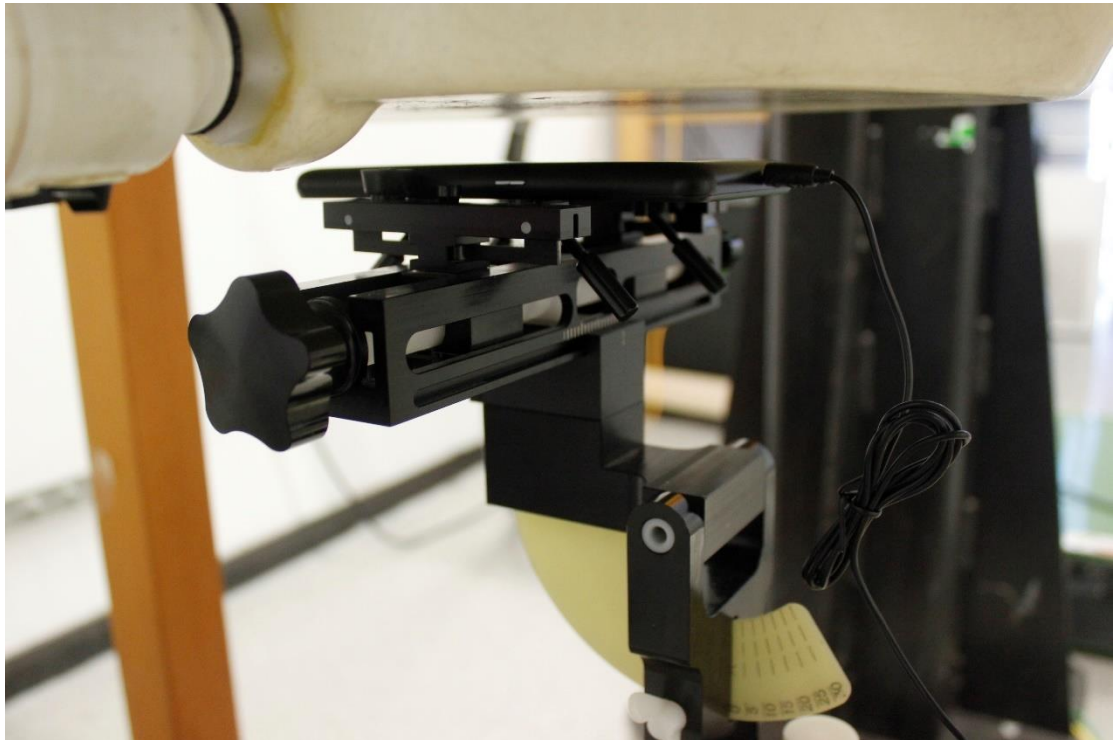

Picture 14: Rear 15mm with Headset