



# TEST REPORT

## No. I20N02478-RF-UMTS

for

**TCL Communication Ltd.**

**GSM/UMTS/LTE Mobile phone**

**Model Name: 5007S**

**FCC ID: 2ACCJH130**

with

**Hardware Version: 03**

**Software Version: v2D23UZ31**

**Issued Date: 2020-10-16**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

**Test Laboratory:**

**SAICT, Shenzhen Academy of Information and Communications Technology**

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518026.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@caict.ac.cn www.saict.ac.cn



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I20N02478-RF-UMTS	Rev.0	1 <sup>st</sup> edition	2020-10-16

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

<b>1. SUMMARY OF TEST REPORT</b> .....	<b>4</b>
<b>1.1. TEST ITEMS</b> .....	<b>4</b>
<b>1.2. TEST STANDARDS</b> .....	<b>4</b>
<b>1.3. TEST RESULT</b> .....	<b>4</b>
<b>1.4. TESTING LOCATION</b> .....	<b>4</b>
<b>1.5. PROJECT DATA</b> .....	<b>4</b>
<b>1.6. SIGNATURE</b> .....	<b>4</b>
<b>2. CLIENT INFORMATION</b> .....	<b>5</b>
<b>2.1. APPLICANT INFORMATION</b> .....	<b>5</b>
<b>2.2. MANUFACTURER INFORMATION</b> .....	<b>5</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)</b> .....	<b>6</b>
<b>3.1. ABOUT EUT</b> .....	<b>6</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST</b> .....	<b>6</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST</b> .....	<b>6</b>
<b>4. REFERENCE DOCUMENTS</b> .....	<b>7</b>
<b>5. LABORATORY ENVIRONMENT</b> .....	<b>8</b>
<b>6. SUMMARY OF TEST RESULT</b> .....	<b>9</b>
<b>7. STATEMENT</b> .....	<b>10</b>
<b>8. TEST EQUIPMENT UTILIZED</b> .....	<b>11</b>
<b>ANNEX A: MEASUREMENT RESULTS</b> .....	<b>12</b>
<b>A.1 OUTPUT POWER</b> .....	<b>12</b>
<b>A.2 EMISSION LIMIT</b> .....	<b>15</b>
<b>A.3 FREQUENCY STABILITY</b> .....	<b>21</b>
<b>A.4 OCCUPIED BANDWIDTH</b> .....	<b>24</b>
<b>A.5 EMISSION BANDWIDTH</b> .....	<b>31</b>
<b>A.6 BAND EDGE COMPLIANCE</b> .....	<b>38</b>
<b>A.7 CONDUCTED SPURIOUS EMISSION</b> .....	<b>42</b>
<b>A.8 PEAK-TO-AVERAGE POWER RATIO</b> .....	<b>49</b>

## 1. SUMMARY OF TEST REPORT

### 1.1. Test Items

Description	GSM/UMTS/LTE Mobile phone
Model Name	5007S
Applicant's name	TCL Communication Ltd.
Manufacturer's Name	TCL Communication Ltd.

### 1.2. Test Standards

FCC Part 2/22/24/27	10-1-19 Edition
ANSI C63.26	2015
KDB971168 D01	v03r01
ANSI/TIA-603-E	2016

### 1.3. Test Result

All test items are pass. Please refer to "6 Summary of Test Results" for detail.

### 1.4. Testing Location


Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518026

### 1.5. Project Data

Testing Start Date: 2020-09-07


Testing End Date: 2020-09-22

### 1.6. Signature




---

Lai Minghua  
(Prepared this test report)



---

Huang Qiuqin  
(Reviewed this test report)



---

Zhang Hao  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
Contact: Gong Zhizhou  
Email: zhizhou.gong@tcl.com  
Telephone: 0086-755-36611722  
Fax: 0086-755-36612000-81722

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
Contact: Gong Zhizhou  
Email: zhizhou.gong@tcl.com  
Telephone: 0086-755-36611722  
Fax: 0086-755-36612000-81722

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	GSM/UMTS/LTE Mobile phone
Model Name	5007S
FCC ID	2ACCJH130
Antenna	Embedded
Output power	22.36dBm maximum EIRP measured for WCDMA Band II
Extreme vol. Limits	3.5VDC to 4.4VDC (nominal: 3.85VDC)
Extreme temp. Tolerance	-20°C to +60°C
Condition of EUT as received	No abnormality in appearance

#### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>IMEI</b>	<b>HW Version</b>	<b>SW Version</b>	<b>Date of receipt</b>
UT02aa	015794000205337	03	v2D23UZ31	2020-09-07
UT01aa	015794000205394	03	v2D23UZ31	2020-09-07

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

<b>AE ID*</b>	<b>Description</b>
AE1	Battery
AE1	
Model	TLp034G1
Manufacturer	BYD
Capacitance	3500mAh

\*AE ID: is used to identify the test sample in the lab internally.

#### **4. Reference Documents**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-19 Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-19 Edition
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	10-1-19 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-19 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01

## 5. Laboratory Environment

**Shielded room** did not exceed following limits along the RF testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz>60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	>2 MΩ
Ground system resistance	< 4 Ω

**Fully-anechoic chamber** did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz



## 6. Summary Of Test Result

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.1 of this report

### WCDMA Band II

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	24.232	P
2	Emission Limit	2.1051/24.238	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	24.238	P
6	Band Edge Compliance	24.238	P
7	Conducted Spurious Emission	24.238	P
8	Peak-to-Average Power Ratio	24.232	P

### WCDMA Band V

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	22.913	P
2	Emission Limit	2.1051/22.917	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	22.917	P
6	Band Edge Compliance	22.917	P
7	Conducted Spurious Emission	22.917	P

### WCDMA Band IV

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	2.1051/27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P



## **7. STATEMENT**

Since the information of samples in this report is provided by the client, the laboratory is not responsible for the authenticity of sample information.

This report takes measured values as criterion of test conclusion. The test conclusion meets the limit requirements.

## 8. Test Equipment Utilized

NO.	Description	TYPE	Manufacture	series number	CAL DUE DATE
1	Test Receiver	ESR7	R&S	101676	2020-11-27
2	BiLog Antenna	3142E	ETS-lindgren	00224831	2021-05-17
3	Horn Antenna	3117	ETS-lindgren	00066577	2022-04-02
4	Horn Antenna	QSH-SL-18 -26-S-20	Q-par	17013	2023-01-06
5	Antenna	BBHA 9120D	Schwarzbeck	1593	2022-12-05
6	Antenna	VUBA 9117	Schwarzbeck	207	2023-07-15
7	Antenna	QWH-SL-18 -40-K-SG	Q-par	15979	2023-01-06
8	preamplifier	83017A	Agilent	MY39501110	/
9	Signal Generator	SMB100A	R&S	179725	2020-11-27
10	Fully Anechoic Chamber	FACT3-2.0	ETS-Lindgren	1285	2021-07-19
11	Spectrum Analyzer	FSV40	R&S	101192	2021-01-14
12	Universal Radio Communication Tester	CMU200	R&S	114545	2021-01-14
13	Universal Radio Communication Tester	CMU200	R&S	123210	2020-12-13
14	Spectrum Analyzer	FSU	R&S	101506	2020-12-13
15	Temperature Chamber	SH-241	ESPECs	92007516	2020-10-15
16	DC Power Supply	U3606A	Agilent Technologies	MY50450012	2020-11-13

### Test software

Item	Name	Vesion
Radiated	EMC32	Version 10.01.00

## **Annex A: Measurement Results**

### **A.1 Output Power**

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via communication tester to ensure max power transmission and proper modulation.

In all cases, output power is within the specified limits.

#### **A.1.2 Conducted**

##### **A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

##### **A.1.2.2 Measurement Result**

###### **WCDMA Band II**

###### **QPSK**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band II)	9262	1852.4	22.79
	9400	1880.0	22.80
	9538	1907.6	22.86

###### **WCDMA Band V**

###### **QPSK**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band V)	4132	826.4	23.20
	4183	836.6	23.22
	4233	846.6	23.18

###### **WCDMA Band IV**

###### **QPSK**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band IV)	1312	1712.4	22.58
	1412	1732.4	22.66
	1513	1752.6	22.78

### A.1.3 Radiated

#### A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts".

Part 24.232(c) specifies "Mobile and portable stations are limited to 2 watts EIRP".

Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band and mobile and portable stations operating in the 1695–1710 MHz and 1755–1780 MHz bands are limited to 1 watt EIRP".

#### A.1.3.2 Method of Measurement

NASI C63.26 chapter 5.2.5.5: when working in decibels (i.e., logarithmic scale), the ERP and EIRP represent the sum of the transmit antenna gain (in dBd or dBi, respectively) and the conducted RF output power (expressed in dB relative to watts or milliwatts).

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Mea}} + G_{\text{T}}$$

Where

ERP or EIRP                      effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as  $P_{\text{Mea}}$ , e.g., dBm or dBW)

$P_{\text{Mea}}$                               measured transmitter output power or PSD, in dBm or dBW

$G_{\text{T}}$                                       gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

### WCDMA Band II

#### QPSK

Frequency (MHz)	Conducted output power (dBm)	$G_{\text{T}}$ (dBi)	Radiated output power (dBm)
1852.4	22.79	-0.5	22.29
1880.0	22.80	-0.5	22.30
1907.6	22.86	-0.5	22.36

### WCDMA Band V

#### QPSK

Frequency (MHz)	Conducted output power (dBm)	$G_{\text{T}}$ (dBi)	Radiated output power (dBm)
826.4	23.20	-4.0	17.05
836.6	23.22	-4.0	17.07
846.6	23.18	-4.0	17.03

**WCDMA Band IV****QPSK**

Frequency (MHz)	Conducted output power (dBm)	$G_T$ (dBi)	Radiated output power (dBm)
1712.4	22.58	-1.5	21.08
1732.4	22.66	-1.5	21.16
1752.6	22.78	-1.5	21.28

## A.2 Emission Limit


### **A.2.1 Measurement Method**

The measurements procedures in TIA-603E-2016 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238, Part 22.917, Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II, WCDMA Band V and WCDMA Band IV.

#### **The procedure of radiated spurious emissions is as follows:**

1. EUT was placed on a 1.5-meter-high non-conductive stand at a 3-meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

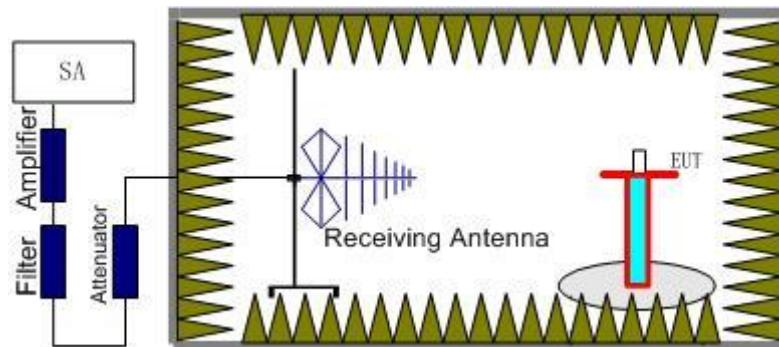

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as ( $P_r$ ).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

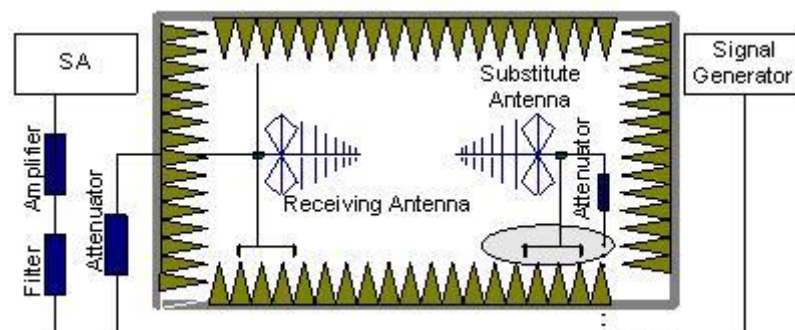

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the

substitution antenna and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{pl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

### A.2.2 Measurement Limit

Part 22.917 , Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

### A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of WCDMA Band II (1852.4 MHz, 1880.0MHz and 1907.6MHz),WCDMA Band V(826.4MHz, 836.6MHz and 846.6MHz) and WCDMA Band IV(1712.4MHz, 1732.4MHz and 1752.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II, WCDMA Band V and WCDMA Band IV into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.



#### A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
WCDMA Band V	Low	30MHz-10GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-10GHz	Pass
WCDMA Band II	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass
WCDMA Band IV	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass

#### A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
WCDMA Band V	0.03~1	100kHz	300kHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
WCDMA Band II	0.03~1	100kHz	300kHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
WCDMA Band IV	0.03~1	100kHz	300kHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

**WCDMA BAND II Mode Channel 9262/1852.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5561.02	-40.22	7.19	10.59	-36.82	-13.00	23.82	H
9262.01	-53.66	9.07	13.26	-49.47	-13.00	36.47	V
11092.01	-51.21	9.85	13.18	-47.88	-13.00	34.88	V
12955.01	-48.72	10.48	13.47	-45.73	-13.00	32.73	H
14819.00	-45.59	11.14	14.14	-42.59	-13.00	29.59	H
16679.00	-42.73	11.79	13.67	-40.85	-13.00	27.85	H

**WCDMA BAND II Mode Channel 9400/1880MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5641.02	-42.06	7.27	10.57	-38.76	-13.00	25.76	H
9413.01	-54.42	9.10	13.35	-50.17	-13.00	37.17	V
11262.01	-50.87	9.77	13.15	-47.49	-13.00	34.49	V
13144.01	-48.17	10.74	13.70	-45.21	-13.00	32.21	H
15020.00	-46.47	11.24	13.99	-43.72	-13.00	30.72	H
16898.00	-42.84	12.00	13.76	-41.08	-13.00	28.08	H

**WCDMA BAND II Mode Channel 9538/1907.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5726.02	-44.09	7.30	10.55	-40.84	-13.00	27.84	H
9567.01	-52.81	9.30	13.33	-48.78	-13.00	35.78	V
11465.01	-50.47	9.90	13.11	-47.26	-13.00	34.26	H
13382.01	-47.87	10.57	14.03	-44.41	-13.00	31.41	V
15292.00	-45.00	11.29	13.82	-42.47	-13.00	29.47	V
17189.00	-43.37	12.39	14.22	-41.54	-13.00	28.54	H

**WCDMA BAND V Mode Channel 4132/826.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1655.01	-56.88	3.57	5.22	2.15	-57.38	-13.00	44.38	H
2472.00	-52.90	4.59	6.02	2.15	-53.62	-13.00	40.62	H
3277.02	-54.21	5.28	7.66	2.15	-53.98	-13.00	40.98	V
4102.02	-54.70	6.04	9.00	2.15	-53.89	-13.00	40.89	V
4941.01	-54.04	6.71	9.84	2.15	-53.06	-13.00	40.06	H
5763.01	-53.56	7.24	10.55	2.15	-52.40	-13.00	39.40	V

**WCDMA BAND V Mode Channel 4183/836.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1671.01	-54.40	3.58	5.19	2.15	-54.94	-13.00	41.94	H
2511.00	-52.55	4.64	6.12	2.15	-53.22	-13.00	40.22	H
3353.02	-54.55	5.32	7.85	2.15	-54.17	-13.00	41.17	H
4200.02	-53.76	6.21	9.10	2.15	-53.02	-13.00	40.02	V
5031.01	-53.88	6.58	9.94	2.15	-52.67	-13.00	39.67	V
5848.01	-53.53	7.23	10.53	2.15	-52.38	-13.00	39.38	V

**WCDMA BAND V Mode Channel 4233/846.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1691.01	-53.90	3.59	5.16	2.15	-54.48	-13.00	41.48	H
2566.00	-52.66	4.68	6.22	2.15	-53.27	-13.00	40.27	V
3399.02	-54.98	5.36	7.96	2.15	-54.53	-13.00	41.53	V
4244.02	-54.39	6.25	9.14	2.15	-53.65	-13.00	40.65	V
5093.01	-53.96	6.75	10.03	2.15	-52.83	-13.00	39.83	H
5923.01	-52.35	7.47	10.52	2.15	-51.45	-13.00	38.45	H

**WCDMA BAND IV Mode Channel 1312/1712.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
8702.01	-54.24	8.37	13.04	-49.57	-13.00	36.57	H
10451.01	-51.14	9.72	13.08	-47.78	-13.00	34.78	V
12185.01	-48.70	10.10	13.07	-45.73	-13.00	32.73	V
13930.01	-48.17	10.82	14.46	-44.53	-13.00	31.53	V
15648.00	-44.25	11.54	13.70	-42.09	-13.00	29.09	H
17400.00	-43.78	12.50	14.68	-41.60	-13.00	28.60	H

**WCDMA BAND IV Mode Channel 1412/1732.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5200.02	-42.33	6.96	10.18	-39.11	-13.00	26.11	H
10445.01	-51.60	9.73	13.08	-48.25	-13.00	35.25	V
12192.01	-49.28	10.08	13.08	-46.28	-13.00	33.28	V
13935.01	-48.17	10.82	14.46	-44.53	-13.00	31.53	H
15645.00	-43.82	11.54	13.70	-41.66	-13.00	28.66	H
17417.00	-43.72	12.54	14.72	-41.54	-13.00	28.54	H

**WCDMA BAND IV Mode Channel 1513/1752.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
8692.01	-53.77	8.37	13.04	-49.10	-13.00	36.10	V
10456.01	-51.61	9.72	13.08	-48.25	-13.00	35.25	V
12179.01	-49.08	10.12	13.07	-46.13	-13.00	33.13	H
13930.01	-48.03	10.82	14.46	-44.39	-13.00	31.39	H
15677.00	-43.99	11.58	13.70	-41.87	-13.00	28.87	H
17413.00	-43.93	12.53	14.71	-41.75	-13.00	28.75	V

## **A.3 Frequency Stability**

### **A.3.1 Method of Measurement**

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage. Two reference points are established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwanted emissions specification of the applicable regulatory standard. These reference points measured using the lowest and highest channel of operation shall be identified as  $F_L$  and  $F_H$  respectively.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of CMU200.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of each band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of the lower, higher and nominal voltage. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

### A.3.2 Measurement results

#### WCDMA Band II QPSK

##### Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.85	1850.120	1909.904		
50				7.17	0.0038
40				3.02	0.0016
30				7.25	0.0039
10				4.29	0.0023
0				7.46	0.0040
-10				4.07	0.0022
-20				8.58	0.0046
-30				3.51	0.0019

##### Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
3.5	20	1850.120	1909.904	6.30	0.0034
4.4				5.91	0.0031

#### WCDMA Band V QPSK

##### Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.85	824.160	848.864		
50				3.23	0.0039
40				1.14	0.0014
30				2.43	0.0029
10				3.19	0.0038
0				4.96	0.0059
-10				2.94	0.0035
-20				2.67	0.0032
-30				8.62	0.0103

##### Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
3.5	20	824.160	848.864	5.02	0.0060
4.4				4.76	0.0057

**WCDMA Band IV QPSK**
**Frequency Error vs Temperature**

Temperature(°C)	Voltage(V)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.85	1710.120	1754.872		
50				3.85	0.0022
40				8.96	0.0052
30				4.81	0.0028
10				4.56	0.0026
0				4.04	0.0023
-10				8.42	0.0049
-20				3.77	0.0022
-30				5.07	0.0029

**Frequency Error vs Voltage**

Voltage(V)	Temperature(°C)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
3.5	20	1710.120	1754.872	0.50	0.0003
4.4				6.27	0.0036

#### **A.4 Occupied Bandwidth**

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequency. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from ANSI C63.26:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts.
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times$  RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) Set the detection mode to peak, and the trace mode to max-hold.




**WCDMA Band II (99% BW)-QPSK**

Frequency (MHz)	Occupied Bandwidth (99% BW) (kHz)
1852.4	4182.69
1880.0	4182.69
1907.6	4230.77


**WCDMA Band II**

**Channel 9262-Occupied Bandwidth (99% BW)**

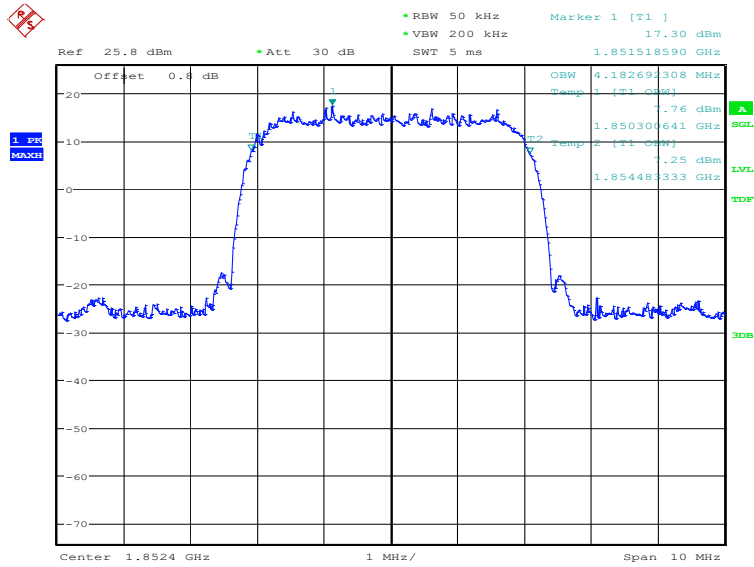


Date: 7.SEP.2020 17:54:02

### Channel 9400-Occupied Bandwidth (99% BW)

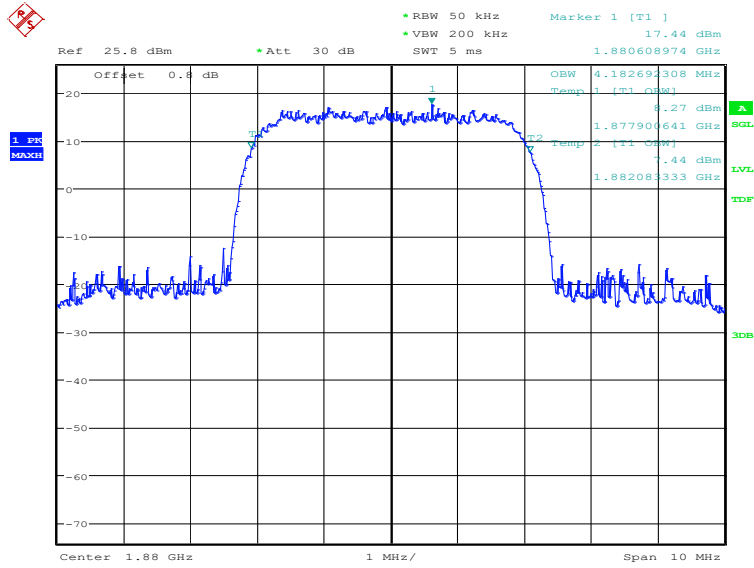

Date: 7.SEP.2020 17:54:28

### Channel 9538-Occupied Bandwidth (99% BW)

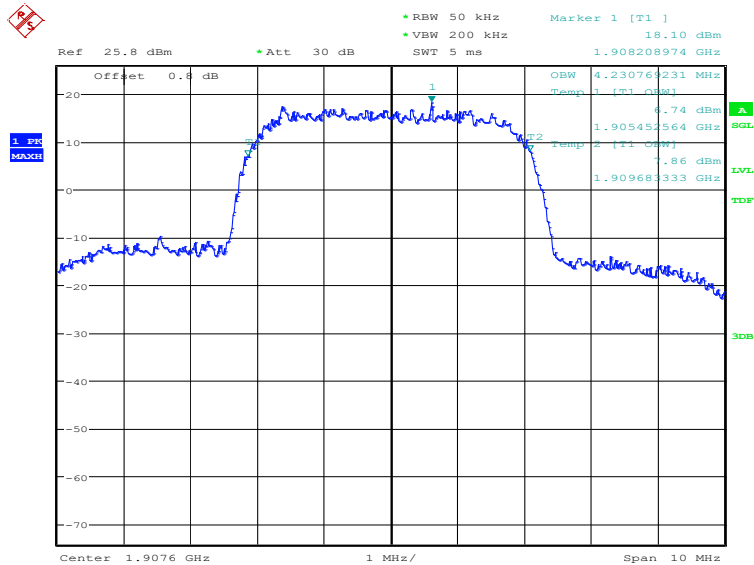


Date: 7.SEP.2020 17:54:54

**WCDMA Band V (99% BW)-QPSK**

Frequency (MHz)	Occupied Bandwidth (99% BW) (kHz)
826.4	4166.67
836.6	4198.72
846.6	4182.69


**WCDMA Band V**

**Channel 4132-Occupied Bandwidth (99% BW)**

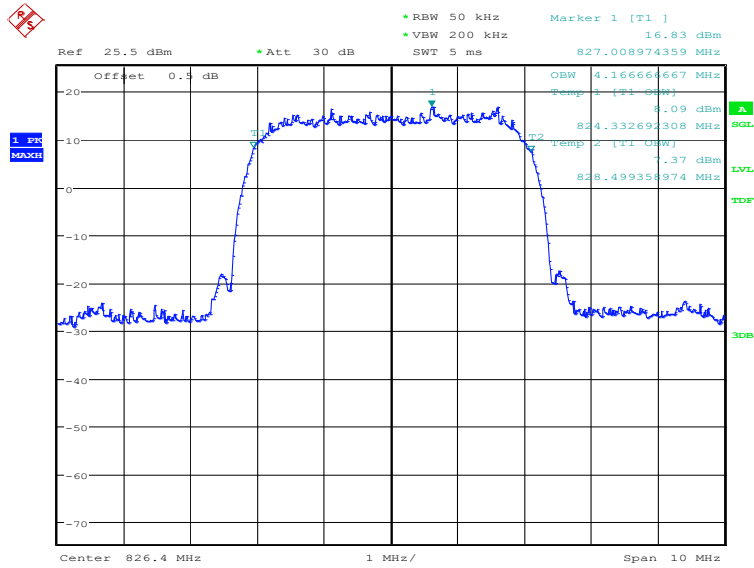


Date: 8.SEP.2020 08:00:09

### Channel 4183-Occupied Bandwidth (99% BW)

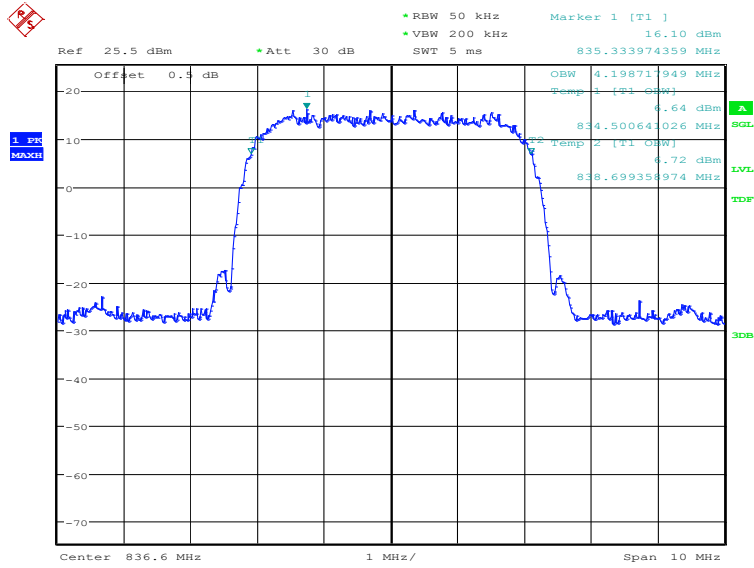

Date: 8.SEP.2020 08:00:34

### Channel 4233-Occupied Bandwidth (99% BW)

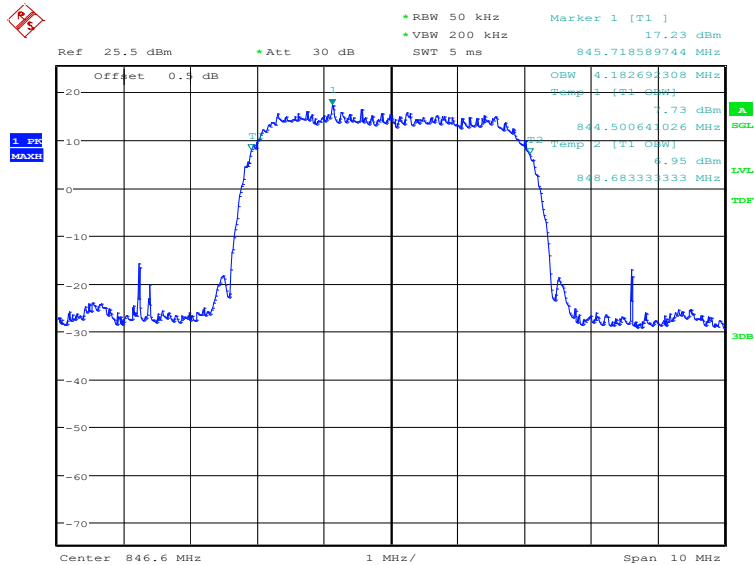


Date: 8.SEP.2020 08:01:00

**WCDMA Band IV (99% BW)-QPSK**

Frequency (MHz)	Occupied Bandwidth (99% BW) (kHz)
1712.4	4166.67
1732.4	4198.72
1752.6	4182.69


**WCDMA Band IV**

**Channel 1312-Occupied Bandwidth (99% BW)**

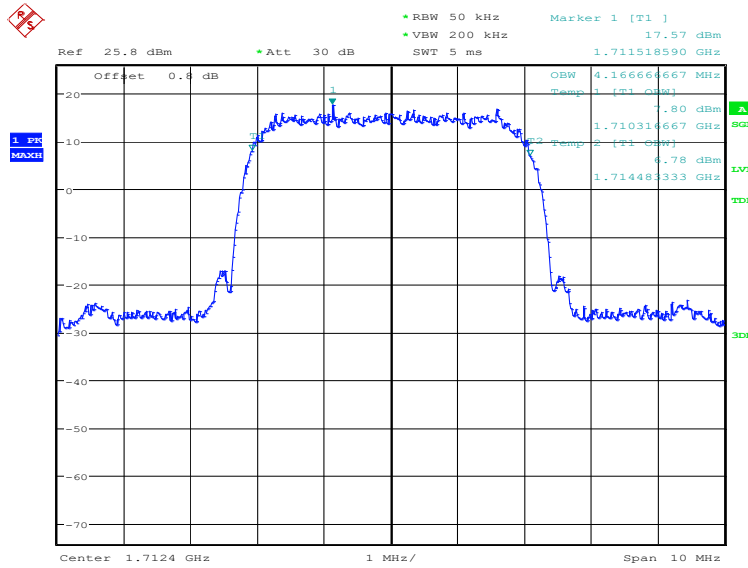


Date: 7.SEP.2020 17:56:05

### Channel 1412-Occupied Bandwidth (99% BW)

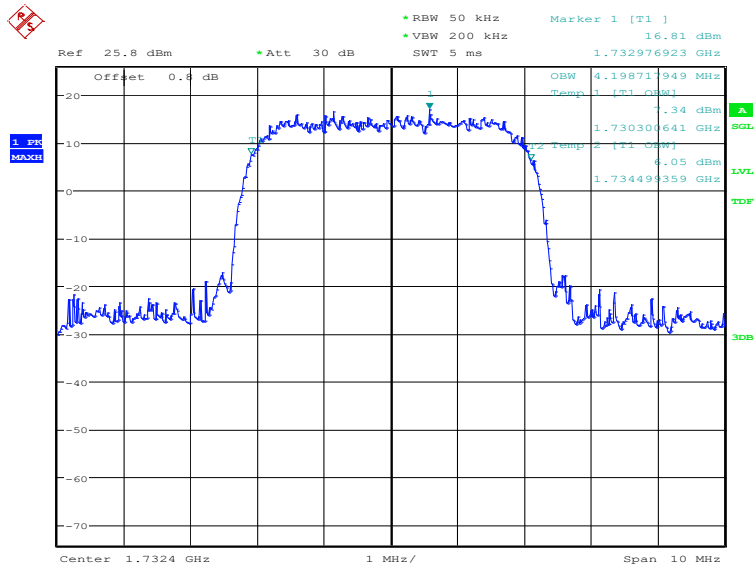

Date: 7.SEP.2020 17:56:31

### Channel 1513-Occupied Bandwidth (99% BW)

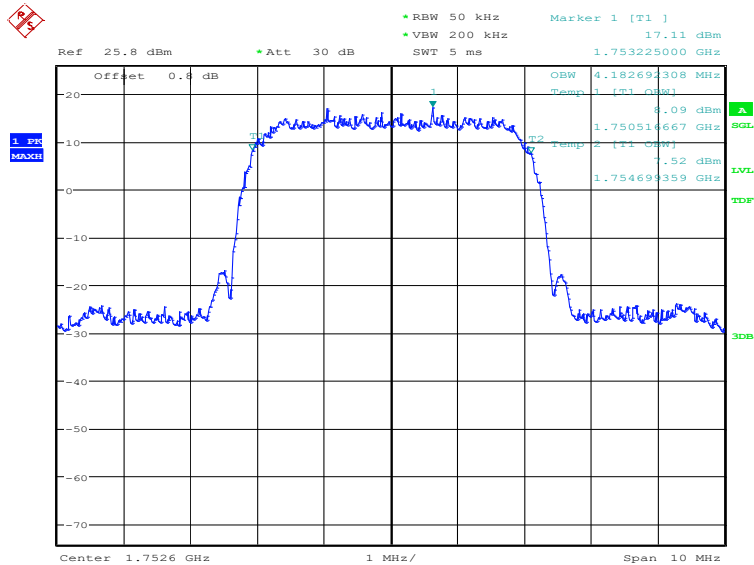

Date: 7.SEP.2020 17:56:57

## **A.5 Emission Bandwidth**

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The measurement method is from ANSI C63.26:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b) The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times$  RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e) Set spectrum analyzer detection mode to peak, and the trace mode to max hold.

### WCDMA Band II-QPSK

Frequency (MHz)	Emission Bandwidth (kHz)
1852.4	4695.51
1880.0	4711.54
1907.6	4775.64

### WCDMA Band II


#### Channel 9262-Emission Bandwidth

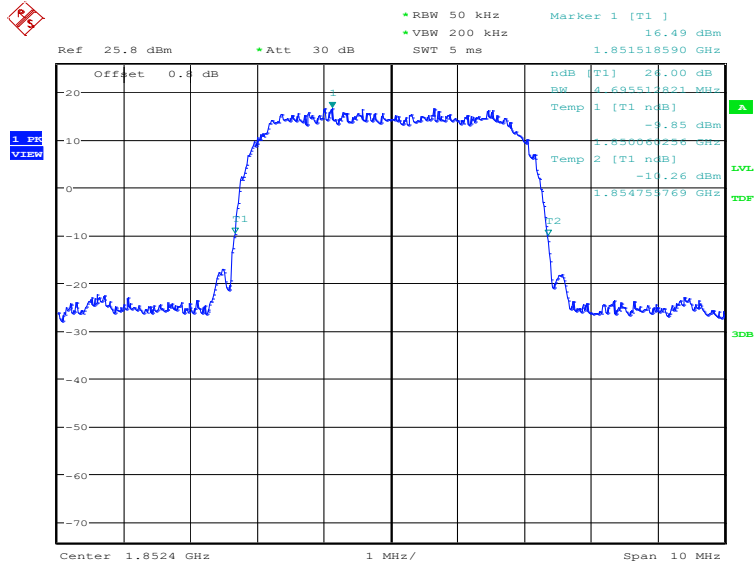

Date: 7.SBP.2020 17:58:11




### Channel 9400-Emission Bandwidth

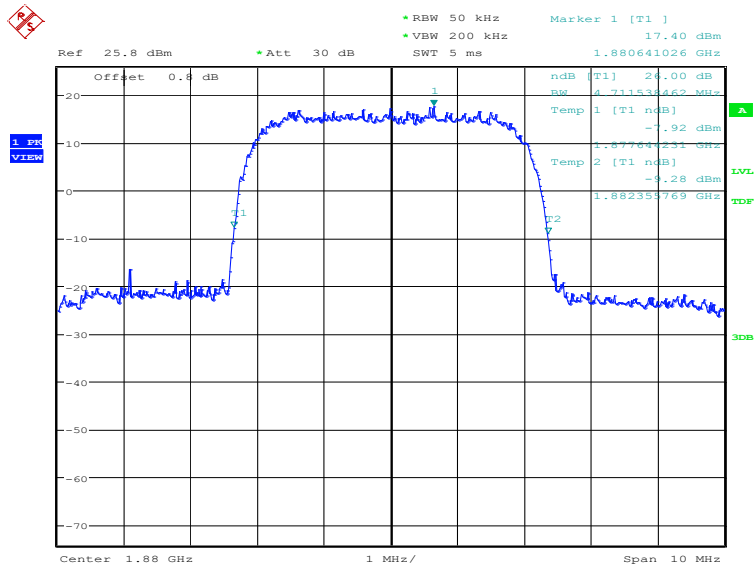

Date: 7.SEP.2020 17:58:37

### Channel 9538-Emission Bandwidth

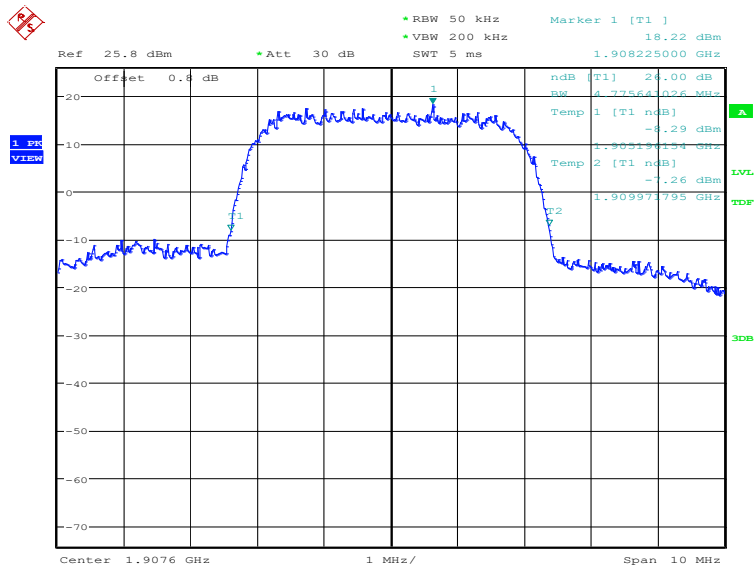


Date: 7.SEP.2020 17:59:04

### WCDMA Band V-QPSK

Frequency (MHz)	Emission Bandwidth (kHz)
826.40	4695.51
836.60	4695.51
846.60	4679.49


### WCDMA Band V

#### Channel 4132-Emission Bandwidth

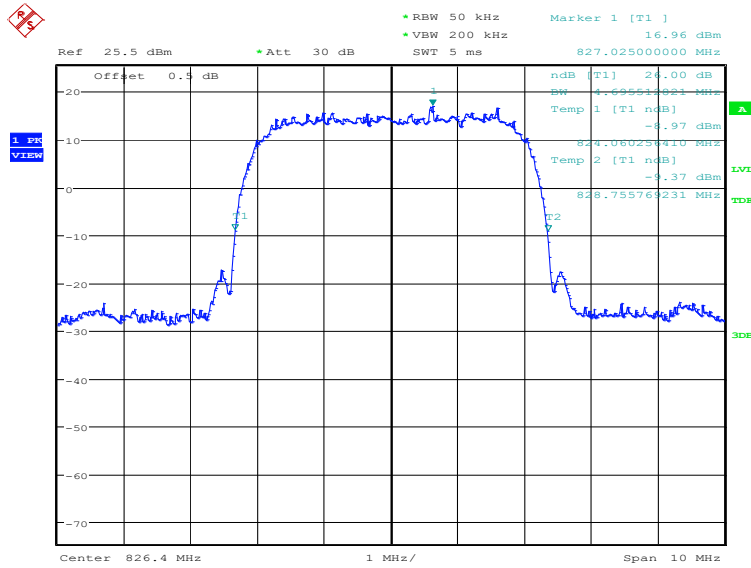


Date: 8.SEP.2020 08:02:14

### Channel 4183-Emission Bandwidth

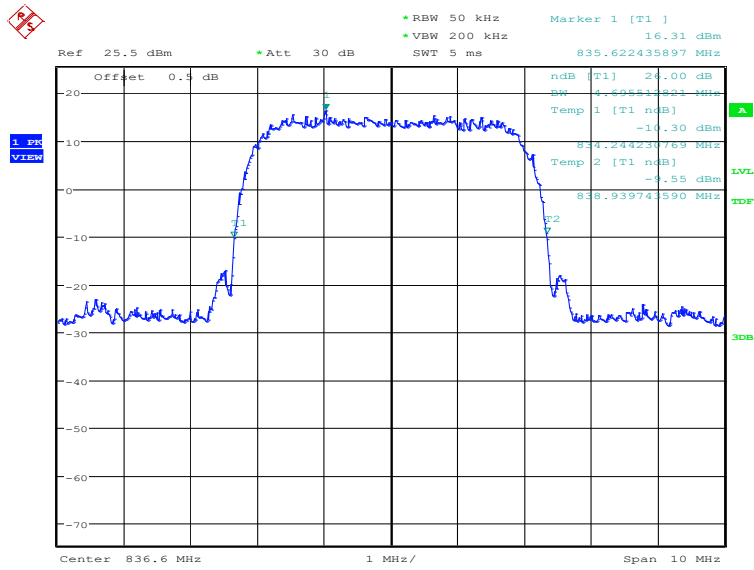

Date: 8.SEP.2020 08:02:41

### Channel 4233-Emission Bandwidth

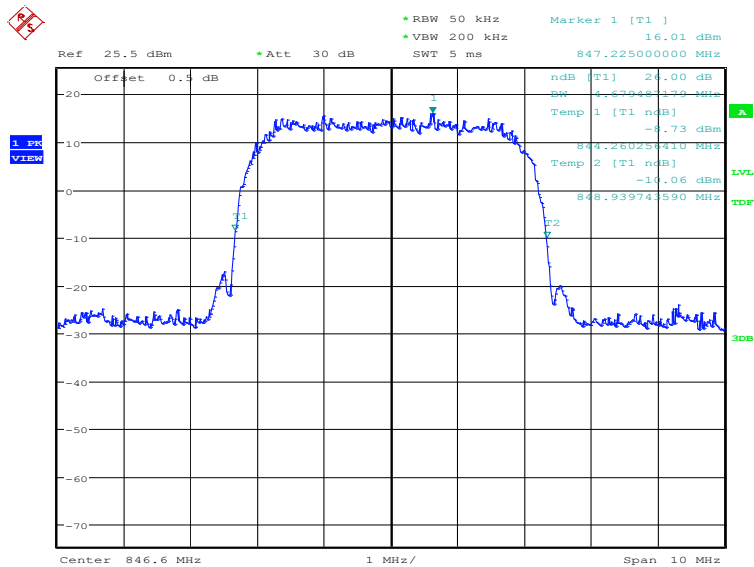


Date: 8.SEP.2020 08:03:07

### WCDMA Band IV-QPSK

Frequency (MHz)	Emission Bandwidth (kHz)
1712.4	4679.49
1732.4	4679.49
1752.6	4695.51


### WCDMA Band IV

#### Channel 1312-Emission Bandwidth

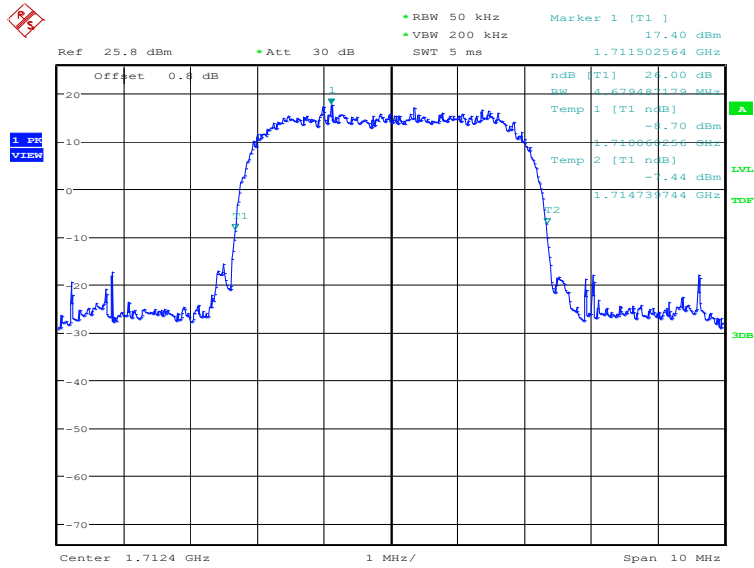


Date: 7.SEP.2020 18:00:06

### Channel 1412-Emission Bandwidth

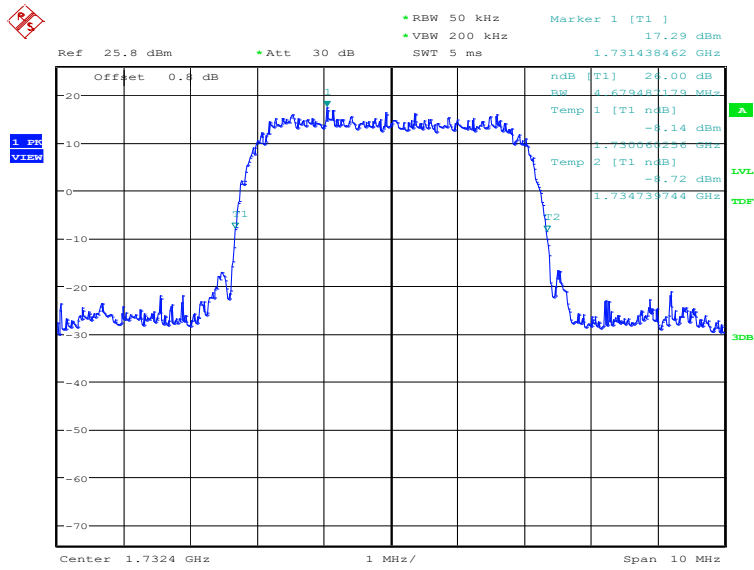

Date: 7.SEP.2020 18:00:32

### Channel 1513-Emission Bandwidth

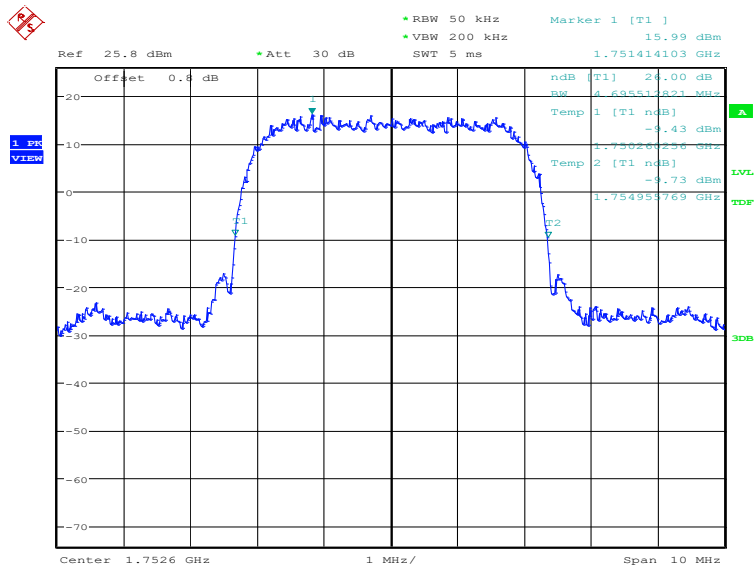

Date: 7.SEP.2020 18:00:59

## **A.6 Band Edge Compliance**

### **A.6.1 Measurement limit**


Part 22.917 , Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to KDB 971168, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

### A.6.2 Measurement result


#### WCDMA Band II-QPSK

#### Channel 9262

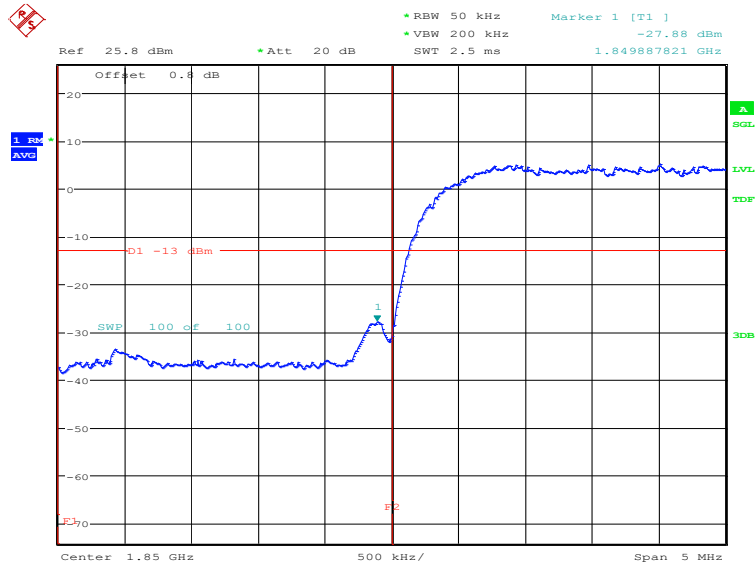


Date: 7.SEP.2020 18:02:04

#### Channel 9538

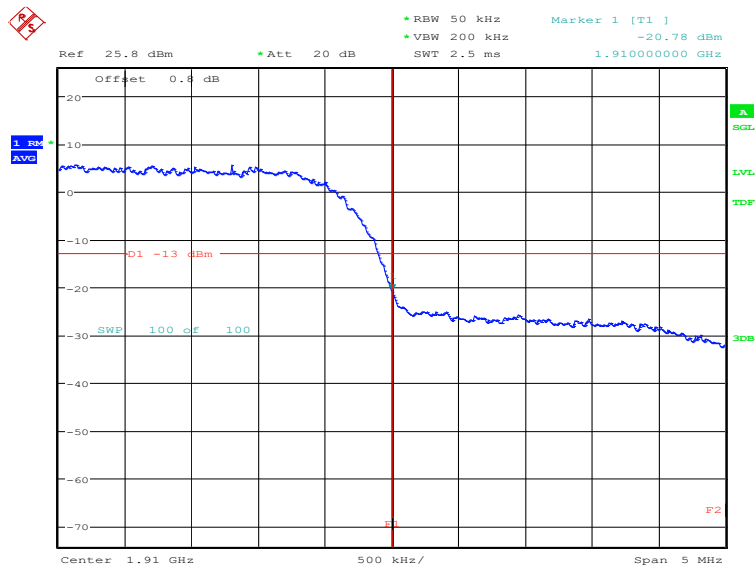


Date: 7.SEP.2020 18:03:13

**WCDMA Band V-QPSK**  
**Channel 4132**

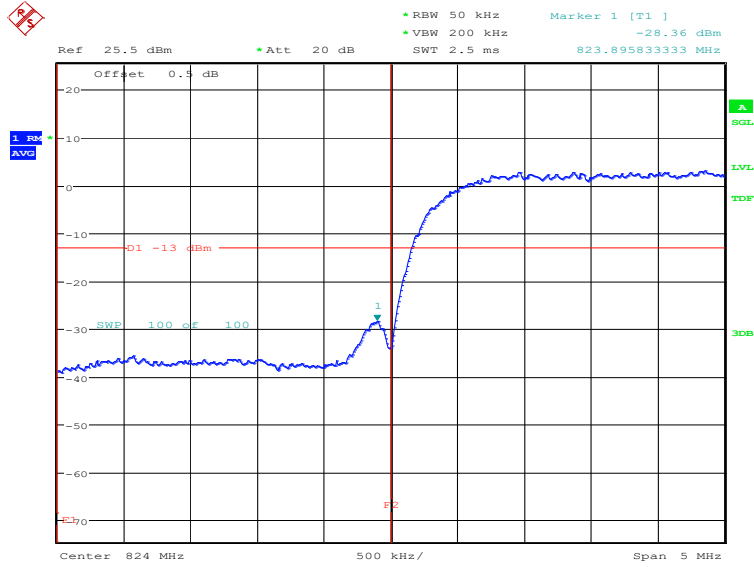

Date: 8.SEP.2020 08:04:17


**Channel 4233**

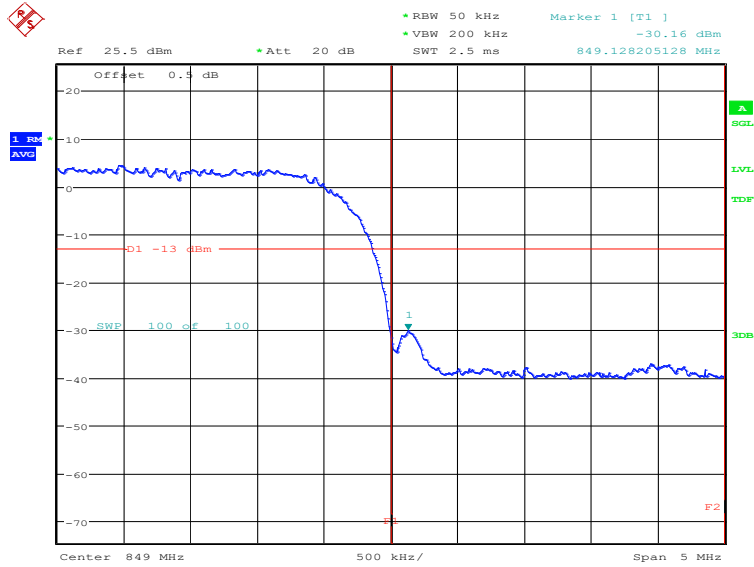

Date: 8.SEP.2020 08:05:26




### WCDMA Band IV-QPSK Channel 1312

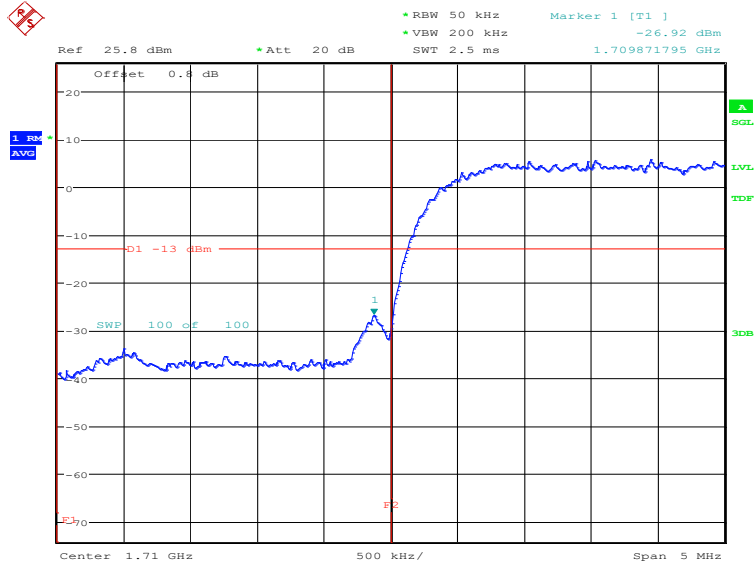

Date: 7.SEP.2020 18:04:58

### Channel 1513

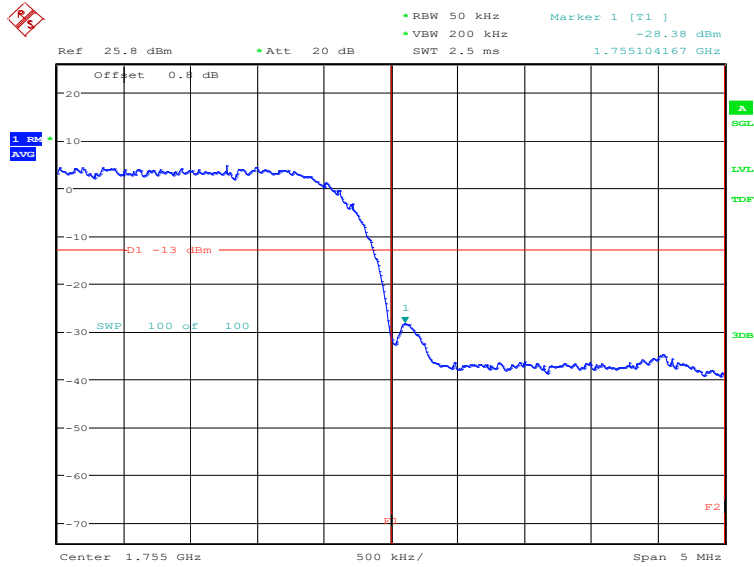

Date: 7.SEP.2020 18:06:08

## **A.7 Conducted Spurious Emission**

### **A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below:
  - (a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
  - (b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is set to 30001 which is greater than span/RBW.

### **A. 7.2 Measurement Limit**


Part 22.917 , Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### A.7.3 Measurement result

#### WCDMA Band II

#### Channel 9262: 30MHz – 19.10GHz


NOTE: peak above the limit line is the carrier frequency.

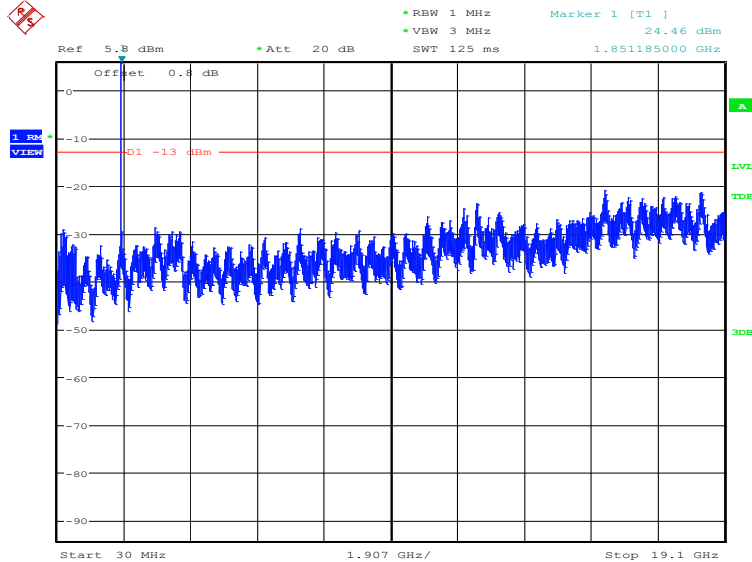

Date: 7.SEP.2020 18:08:17

#### Channel 9400: 30MHz – 19.10GHz


NOTE: peak above the limit line is the carrier frequency.

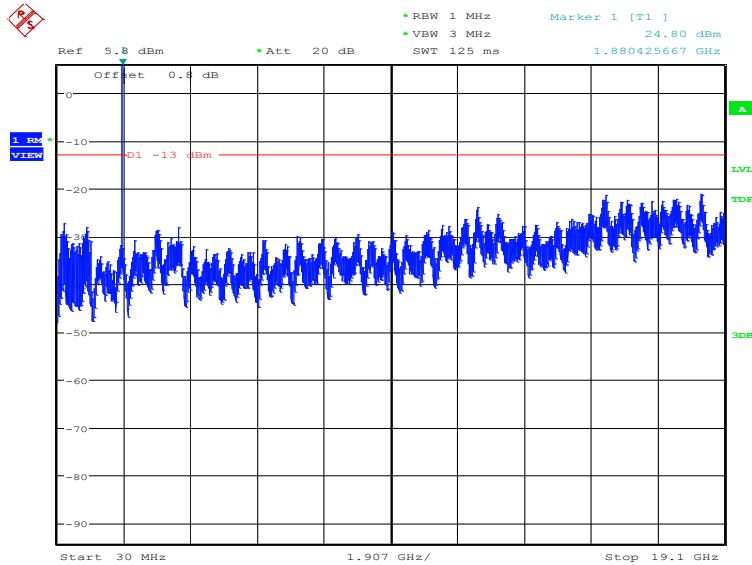

Date: 7.SEP.2020 18:08:46

### Channel 9538: 30MHz –19.10GHz

NOTE: peak above the limit line is the carrier frequency.

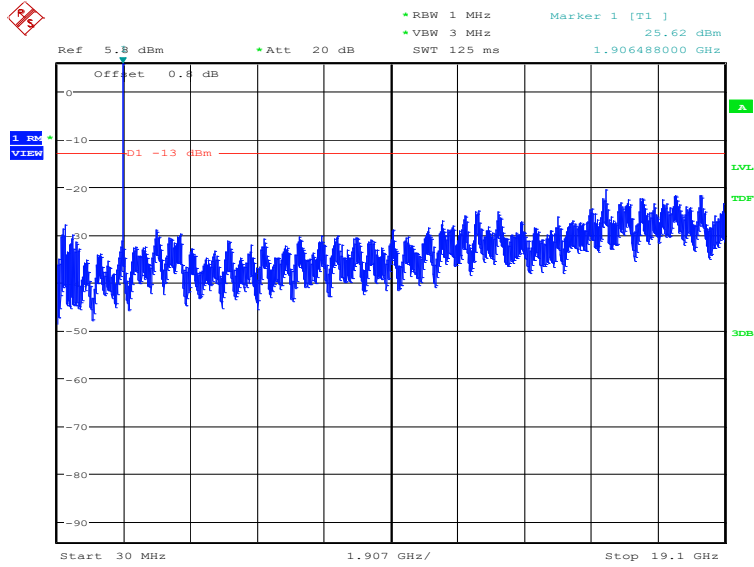


Date: 7.SBP.2020 18:09:15

### WCDMA Band V

### Channel 4132: 30MHz –8.49GHz


NOTE: peak above the limit line is the carrier frequency.

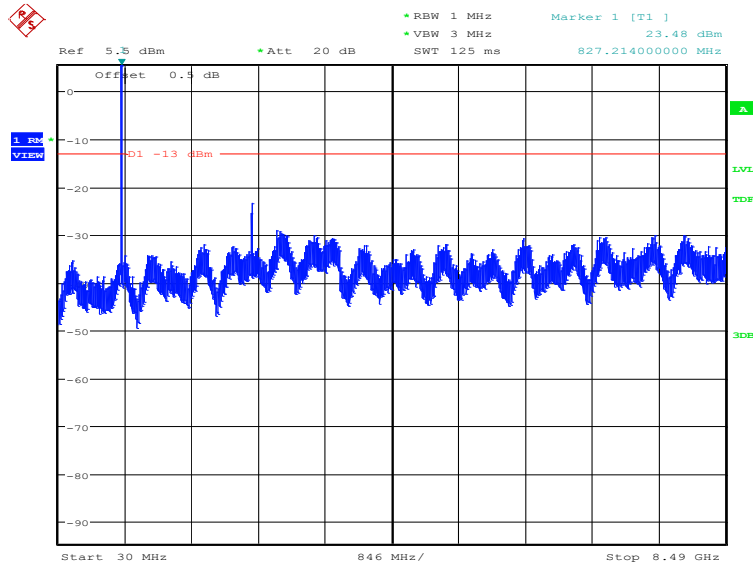

Date: 8.SEP.2020 08:07:35

### Channel 4183: 30MHz –8.49GHz


NOTE: peak above the limit line is the carrier frequency.

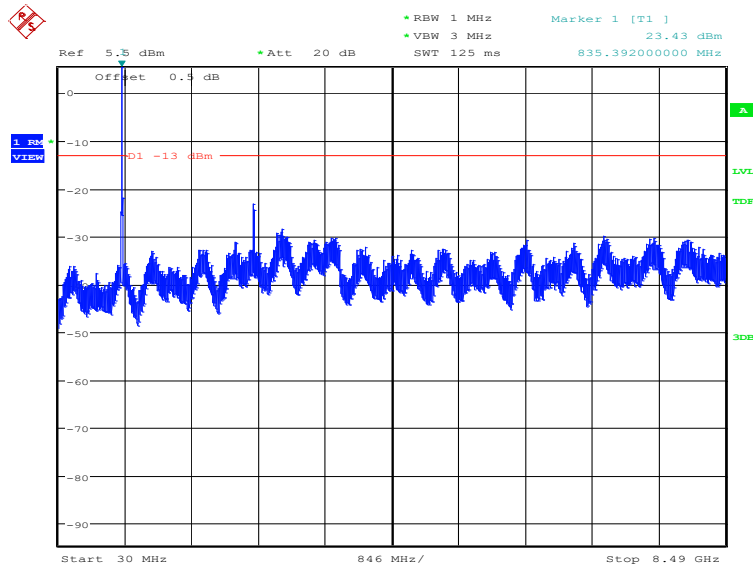

Date: 8.SEP.2020 08:08:04

### Channel 4233: 30MHz –8.49GHz

NOTE: peak above the limit line is the carrier frequency.

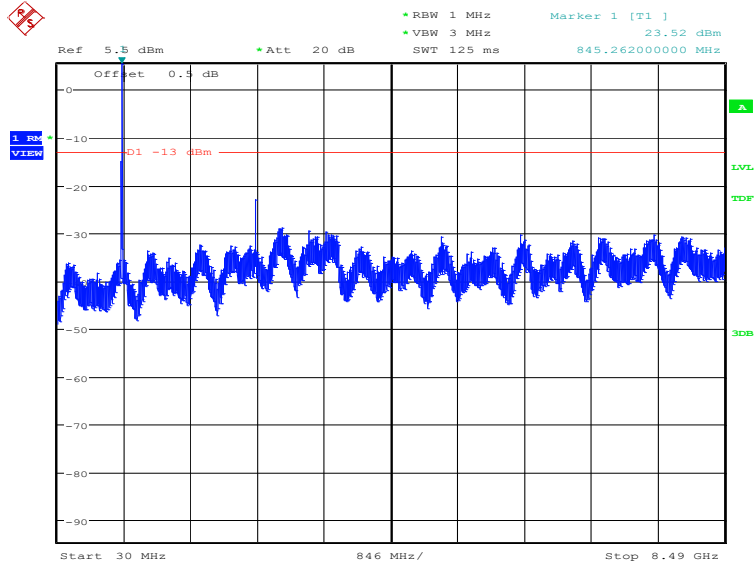


Date: 8.SPP.2020 08:08:33

**WCDMA Band IV**

**Channel 1312: 30MHz –17.55GHz**

**NOTE: peak above the limit line is the carrier frequency.**

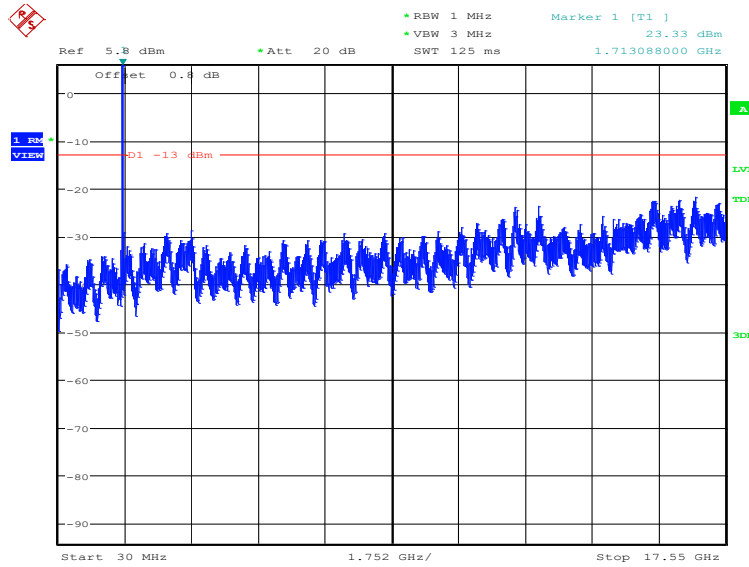


Date: 7.SEP.2020 18:10:20

**WCDMA Band IV**

**Channel 1412: 30MHz –17.55GHz**

**NOTE: peak above the limit line is the carrier frequency.**

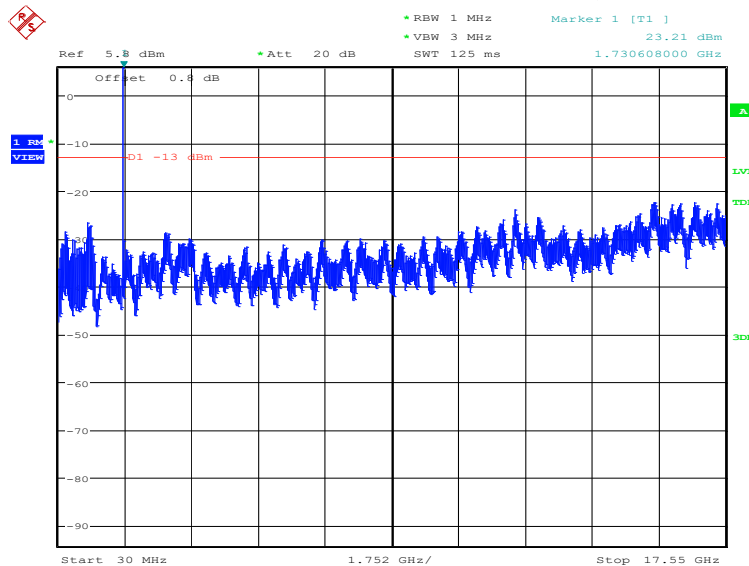


Date: 7.SEP.2020 18:10:49

### WCDMA Band IV

Channel 1513: 30MHz –17.55GHz

**NOTE: peak above the limit line is the carrier frequency.**

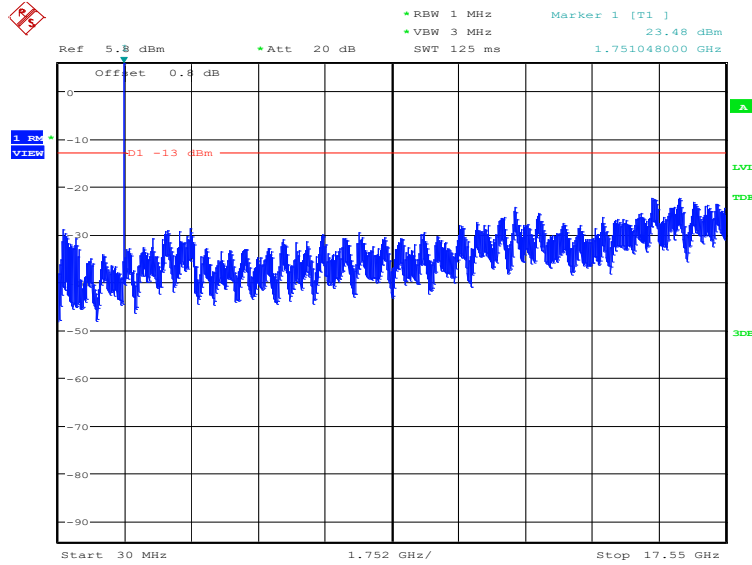

Date: 7.SEP.2020 18:11:18



## **A.8 Peak-to-Average Power Ratio**

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Record the maximum PAPR level associated with a probability of 0.1%.

### **WCDMA Band II-QPSK**

#### **Measurement result**

CH	Frequency (MHz)	PAPR (dB)
9400	1880.0	3.46

### **WCDMA Band IV-QPSK**

#### **Measurement result**

CH	Frequency (MHz)	PAPR (dB)
1412	1732.4	3.43

**\*\*\*END OF REPORT\*\*\***